

**#01\_GSM850\_GPRS (4 Tx slots)\_Right Cheek\_Ch128**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: HSL\_850\_150813 Medium parameters used :  $f = 824.2$  MHz;  $\sigma = 0.873$  S/m;

$\epsilon_r = 41.71$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(10.36, 10.36, 10.36); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch128/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.302 W/kg


**Configuration/Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.46 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.422 W/kg

**SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.203 W/kg**

Maximum value of SAR (measured) = 0.307 W/kg

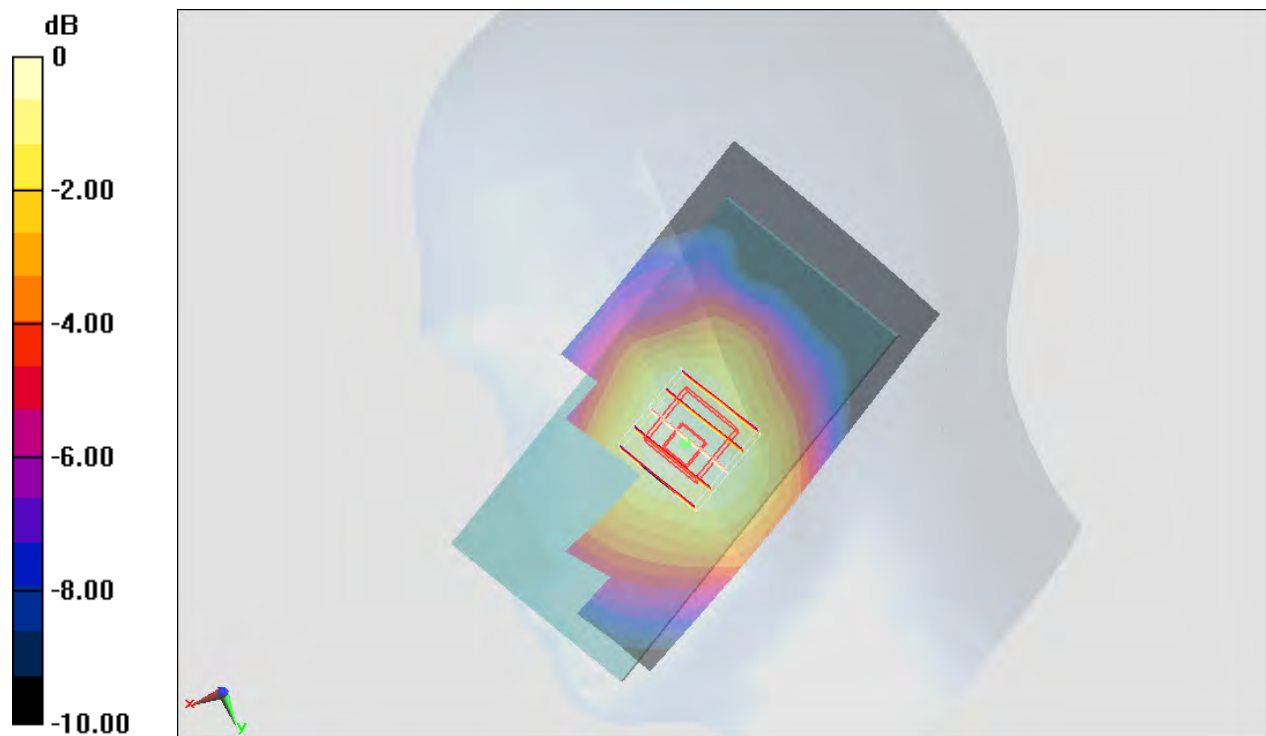

0 dB = 0.307 W/kg = -5.13 dBW/kg

**#02\_GSM1900\_GPRS (2 Tx slots)\_Left Cheek\_Ch810**

Communication System: PCS ; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium: HSL\_1900\_150814 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.456$  S/m;  $\epsilon_r = 40.809$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(8.18, 8.18, 8.18); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch810/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.175 W/kg


**Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.42 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.198 W/kg

**SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.172 W/kg

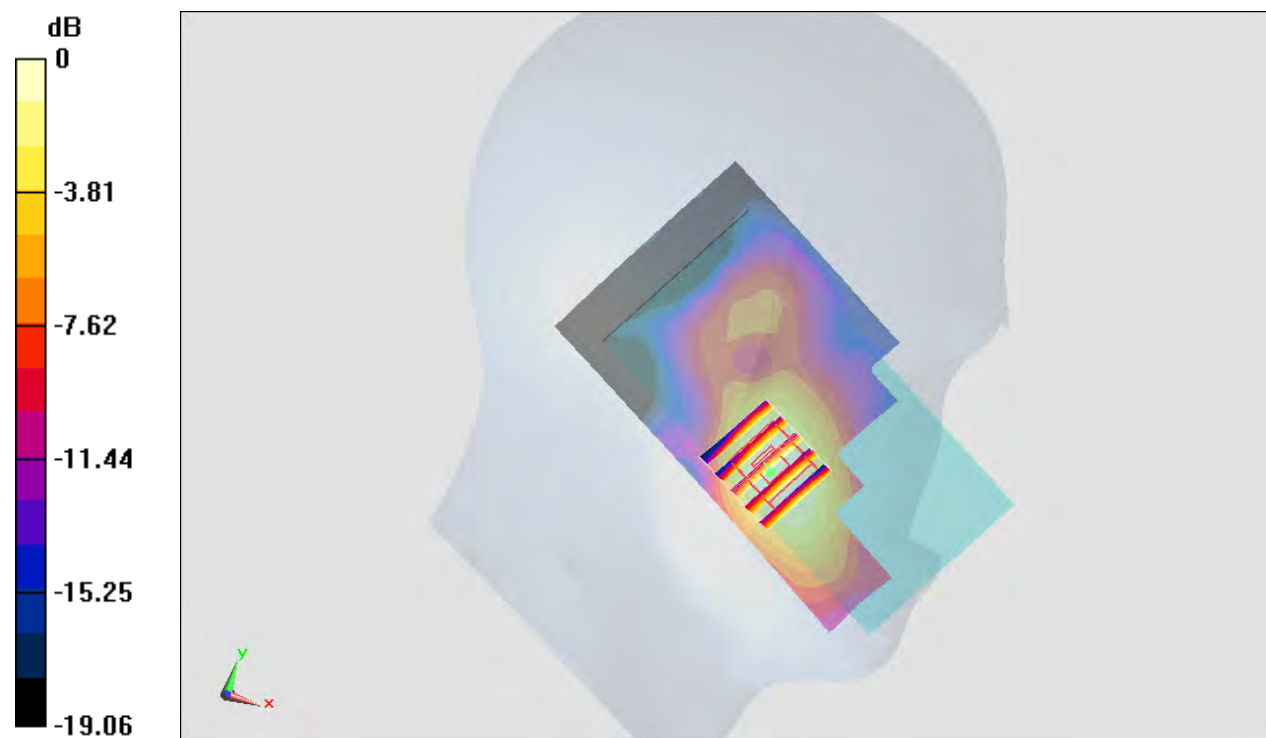

0 dB = 0.172 W/kg = -7.64 dBW/kg

**#03\_WCDMA V\_RMC 12.2Kbps\_Left Cheek\_Ch4182**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_150813 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.884$  S/m;  $\epsilon_r = 41.563$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(10.36, 10.36, 10.36); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch4182/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.640 W/kg


**Configuration/Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.16 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.691 W/kg

**SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.413 W/kg**

Maximum value of SAR (measured) = 0.645 W/kg

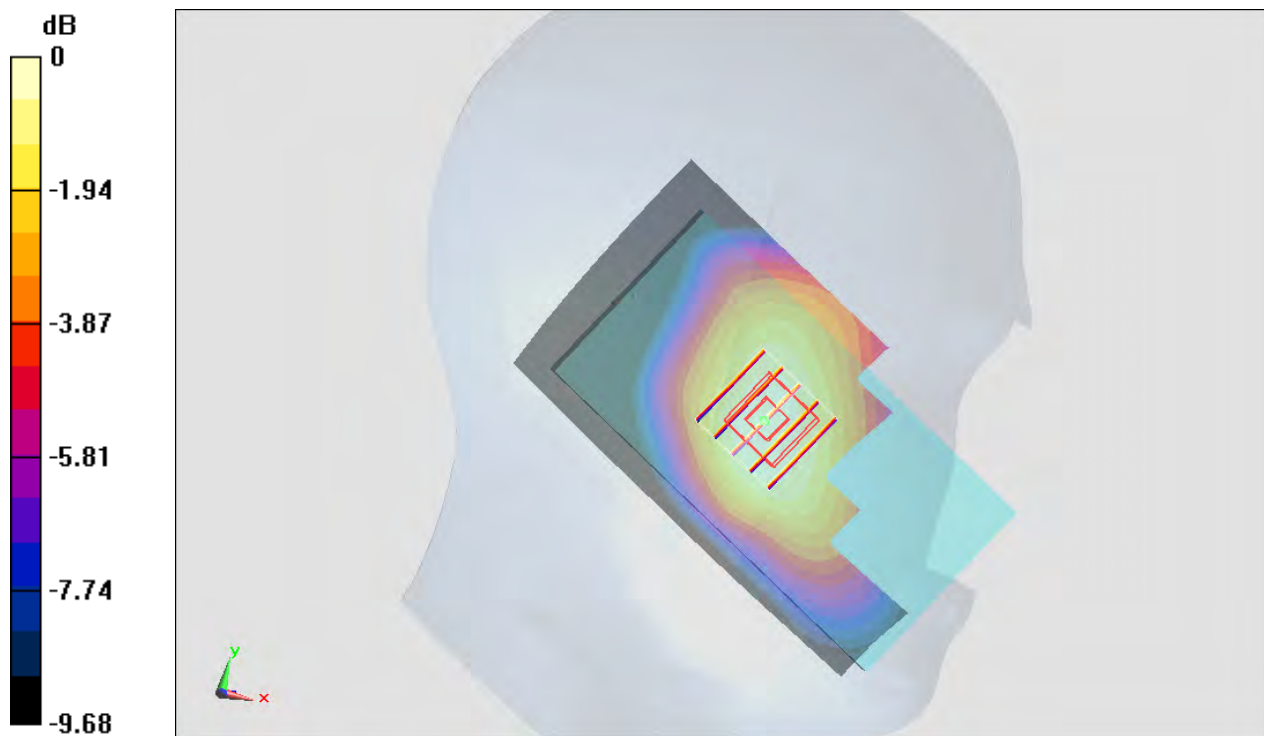

0 dB = 0.645 W/kg = -1.90 dBW/kg

**#04\_WCDMA II\_RMC 12.2Kbps\_Left Cheek\_Ch9538**

Communication System: WCDMA ; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_150813 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.422$  S/m;  $\epsilon_r = 38.318$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(8.18, 8.18, 8.18); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch9538/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.300 W/kg


**Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.63 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.336 W/kg

**SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.125 W/kg**

Maximum value of SAR (measured) = 0.277 W/kg

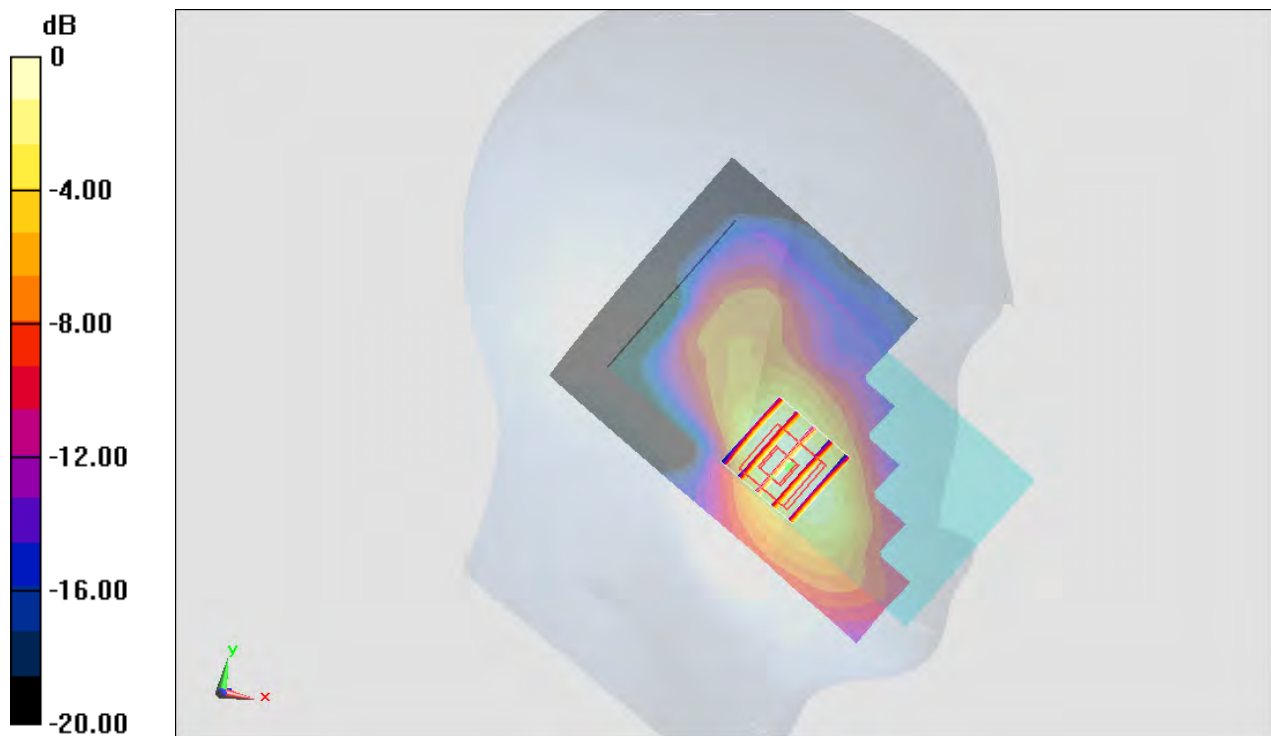

0 dB = 0.277 W/kg = -5.58 dBW/kg

**#05\_LTE Band 12\_10M\_QPSK\_1RB\_0offset\_Right Cheek\_Ch23095**

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_150817 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.858$  S/m;  $\epsilon_r = 41.719$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3955; ConvF(10.61, 10.61, 10.61); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch23095/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.160 W/kg


**Configuration/Ch23095/Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.00 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.167 W/kg

**SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.107 W/kg**

Maximum value of SAR (measured) = 0.156 W/kg

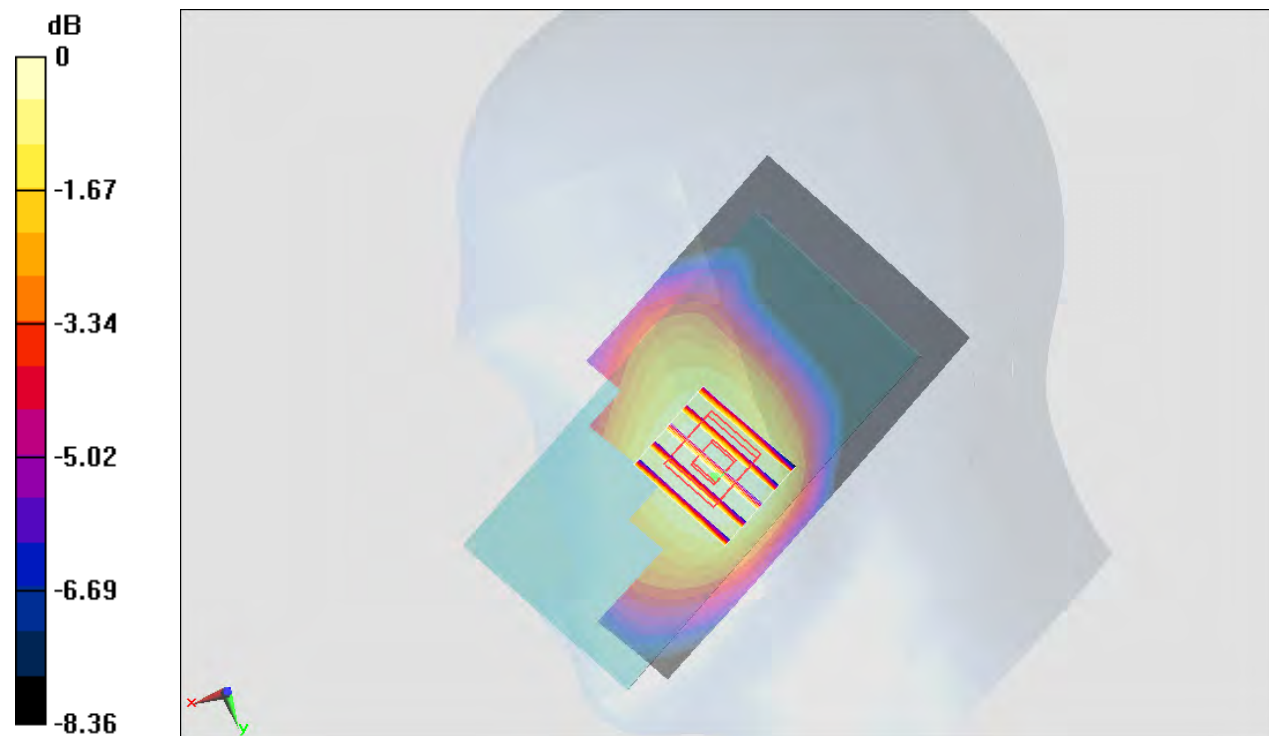

0 dB = 0.156 W/kg = -8.07 dBW/kg

**#06\_LTE Band 5\_10M\_QPSK\_1RB\_24offset\_Right Cheek\_Ch20450**

Communication System: LTE; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_150816 Medium parameters used:  $f = 829$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 42.658$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3955; ConvF(10.04, 10.04, 10.04); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch20450/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.342 W/kg


**Configuration/Ch20450/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.00 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.373 W/kg

**SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.218 W/kg**

Maximum value of SAR (measured) = 0.339 W/kg

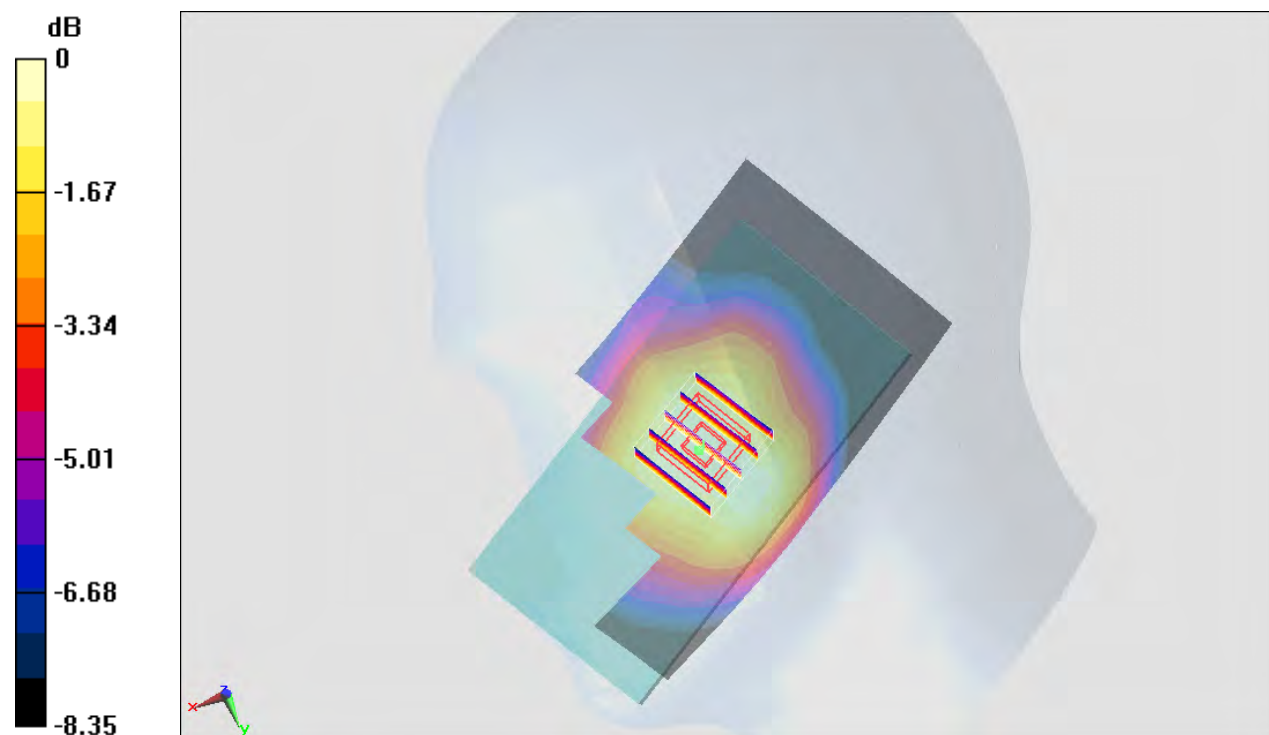

0 dB = 0.339 W/kg = -4.70 dBW/kg

**#07\_LTE Band 4\_20M\_QPSK\_1RB\_0offset\_Left Cheek\_Ch20300**

Communication System: LTE ; Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: HSL\_1750\_150814 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.359$  S/m;  $\epsilon_r = 40.503$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(8.45, 8.45, 8.45); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch20300/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.190 W/kg


**Configuration/Ch20300/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.09 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.210 W/kg

**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.089 W/kg**

Maximum value of SAR (measured) = 0.186 W/kg

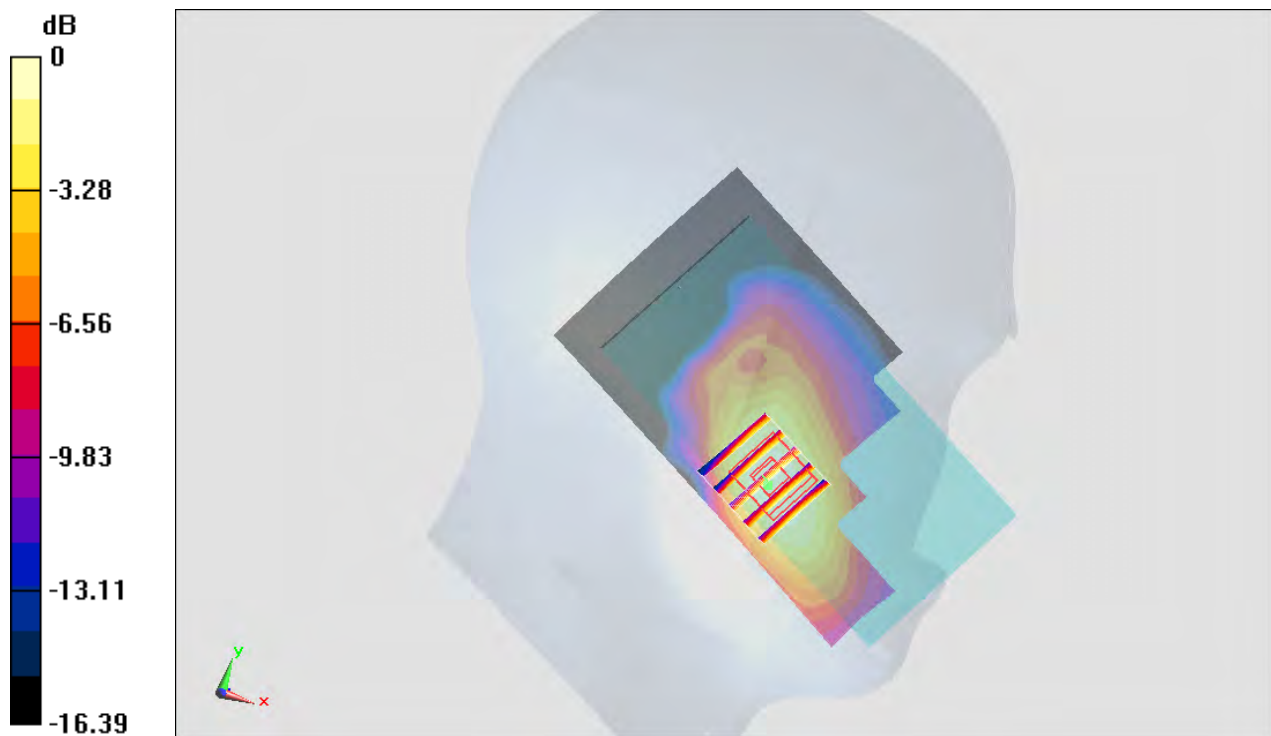

0 dB = 0.186 W/kg = -7.30 dBW/kg

**#08\_LTE Band 2\_20M\_QPSK\_50RB\_0offset\_Left Cheek\_Ch19100**

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_150812 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 39.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(7.71, 7.71, 7.71); Calibrated: 2014/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Ch19100/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.240 mW/g


**Ch19100/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.261 W/kg

**SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.103 mW/g**

Maximum value of SAR (measured) = 0.220 mW/g

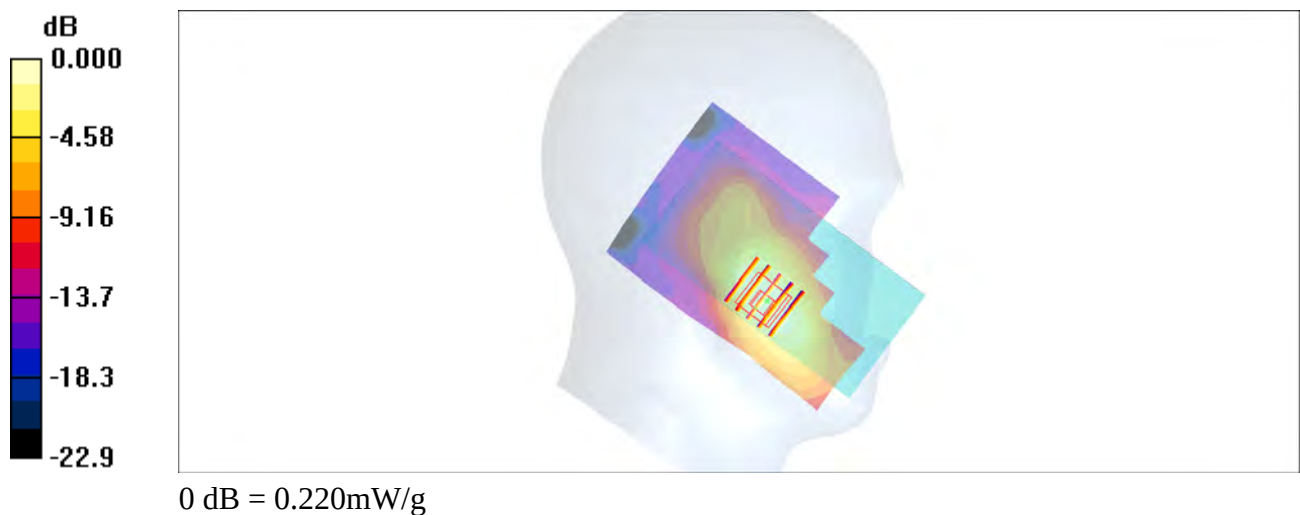

**#09\_LTE Band 7\_20M\_QPSK\_50RB\_49offset\_Left Cheek\_Ch21350**

Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL\_2600\_150816 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.865$  S/m;  $\epsilon_r = 39.582$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3955; ConvF(7.21, 7.21, 7.21); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch21350/Area Scan (81x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.315 W/kg


**Configuration/Ch21350/Zoom Scan (8x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.05 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.380 W/kg

**SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.099 W/kg**

Maximum value of SAR (measured) = 0.297 W/kg

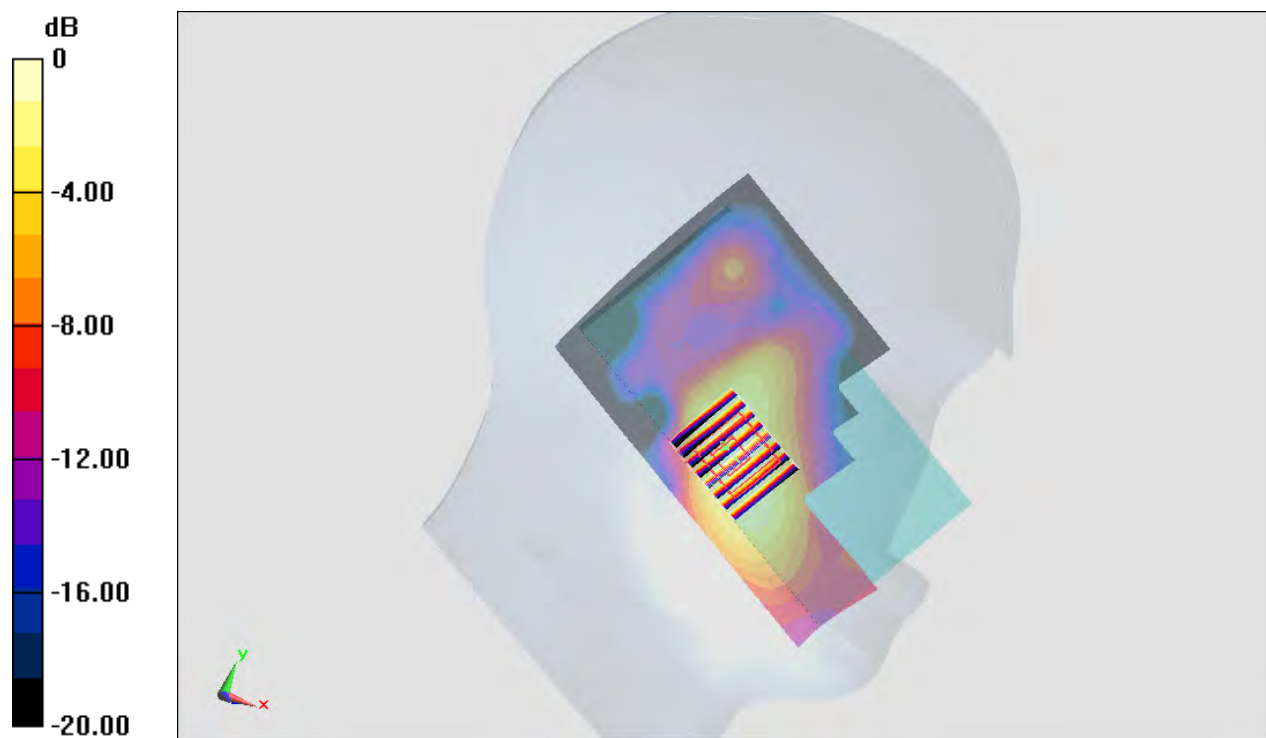

0 dB = 0.297 W/kg = -5.27 dBW/kg

**#10\_WLAN2.4GHz\_802.11b 1Mbps\_Right Cheek\_Ch11;Ant B**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.009

Medium: HSL\_2450\_150801 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.86$  S/m;  $\epsilon_r = 40.223$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3954; ConvF(7.25, 7.25, 7.25); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM LEFT; Type: QD000P40CD; Serial: TP:1718
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch11/Area Scan (81x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.828 W/kg


**Configuration/Ch11/Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.72 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.206 W/kg**

Maximum value of SAR (measured) = 0.848 W/kg

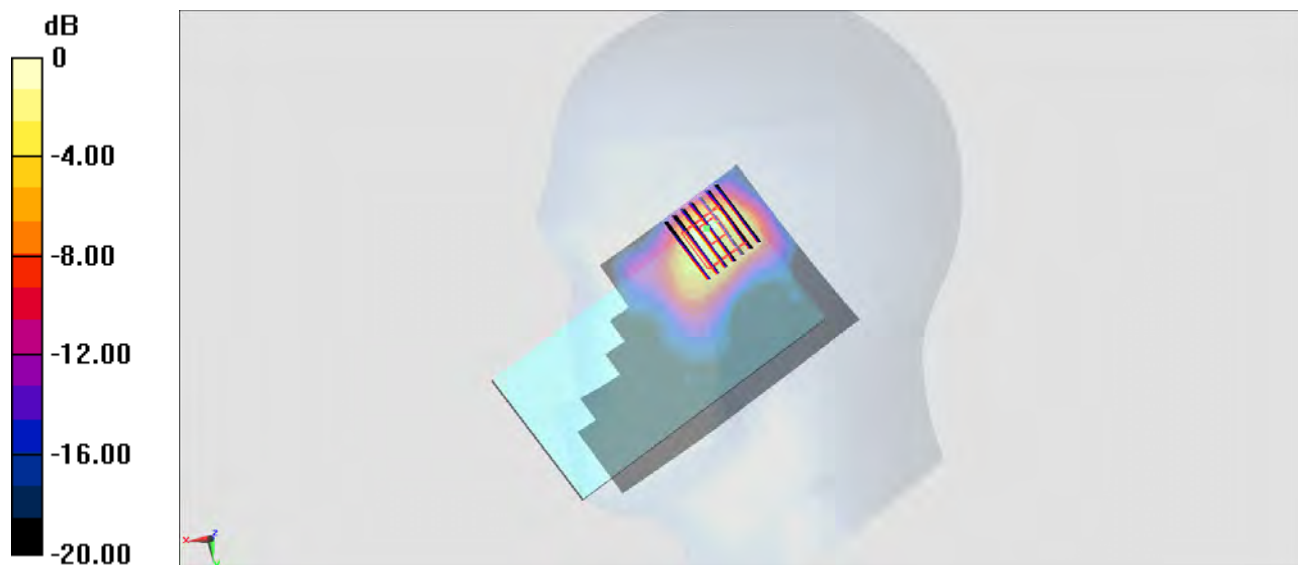

0 dB = 0.828 W/kg = -0.82 dBW/kg

**#11\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Right Cheek\_Ch58;Ant B**

Communication System: 802.11ac; Frequency: 5290 MHz; Duty Cycle: 1:1.07

Medium: HSL5G\_150807 Medium parameters used:  $f = 5290$  MHz;  $\sigma = 4.635$  S/m;  $\epsilon_r = 36.05$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3925; ConvF(5.14, 5.14, 5.14); Calibrated: 2015/5/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2015/5/22
- Phantom: SAM\_Right; Type: QD000P40CD; Serial: S/N:1801
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch58/Area Scan (101x181x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm  
Maximum value of SAR (interpolated) = 0.252 W/kg


**Configuration/Ch58/Zoom Scan (10x10x7)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 7.871 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.069 W/kg**

Maximum value of SAR (measured) = 0.733 W/kg

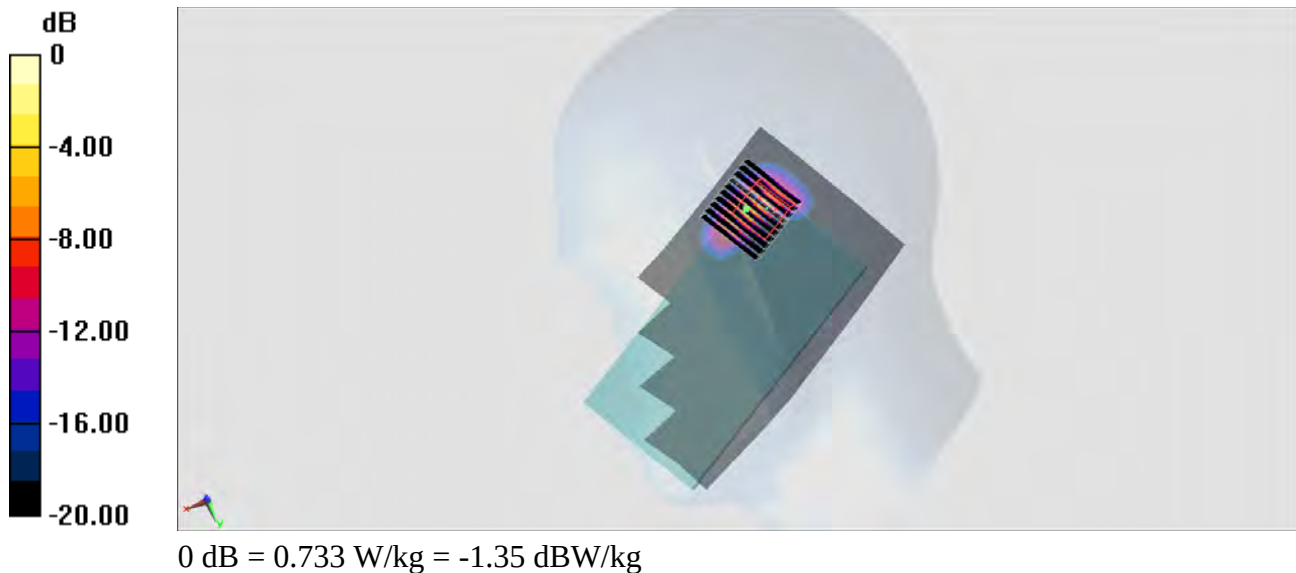

**#12\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Right Cheek\_Ch106;Ant B**

Communication System: 802.11ac; Frequency: 5530 MHz; Duty Cycle: 1:1.07

Medium: HSL5G\_150807 Medium parameters used:  $f = 5530$  MHz;  $\sigma = 4.866$  S/m;  $\epsilon_r = 35.72$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3954; ConvF(4.6, 4.6, 4.6); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM\_Right; Type: QD000P40CD; Serial: S/N:1801
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch106/Area Scan (101x181x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm  
Maximum value of SAR (interpolated) = 0.339 W/kg


**Configuration/Ch106/Zoom Scan (10x10x7)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 8.040 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.38 W/kg

**SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.079 W/kg**

Maximum value of SAR (measured) = 0.786 W/kg

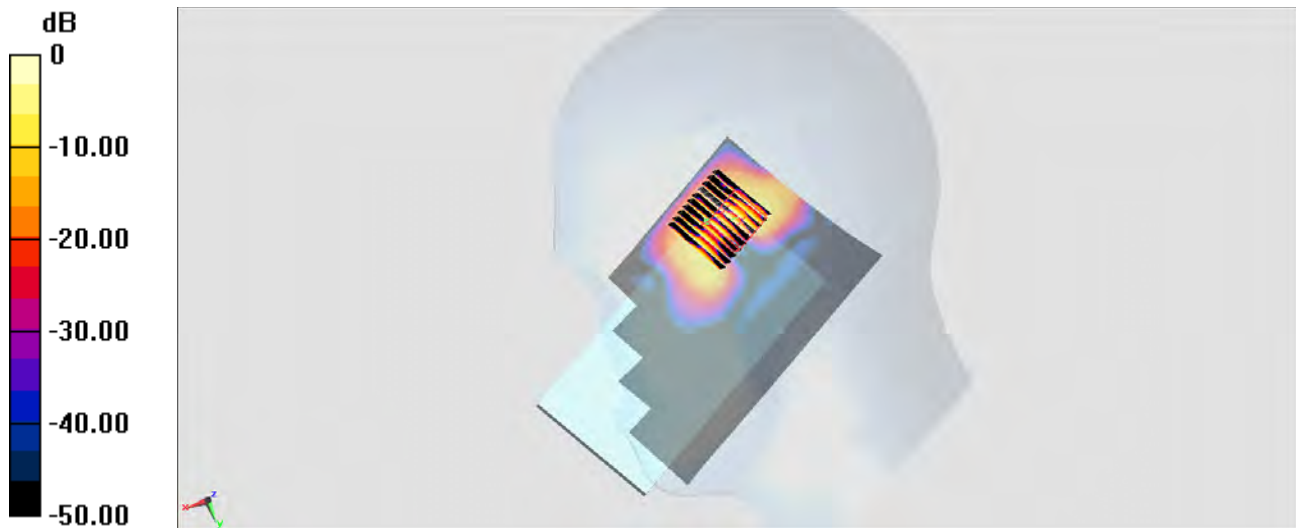

0 dB = 0.786 W/kg = -1.05 dBW/kg

**#13\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Right Cheek\_Ch155;Ant B**

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.07

Medium: HSL5G\_150808 Medium parameters used :  $f = 5775$  MHz;  $\sigma = 5.076$  S/m;  $\epsilon_r = 36.722$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3955; ConvF(4.63, 4.63, 4.63); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: SAM\_Right; Type: QD000P40CD; Serial: S/N:1801
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch155/Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.990 W/kg


**Configuration/Ch155/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.93 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.076 W/kg**

Maximum value of SAR (measured) = 0.855 W/kg

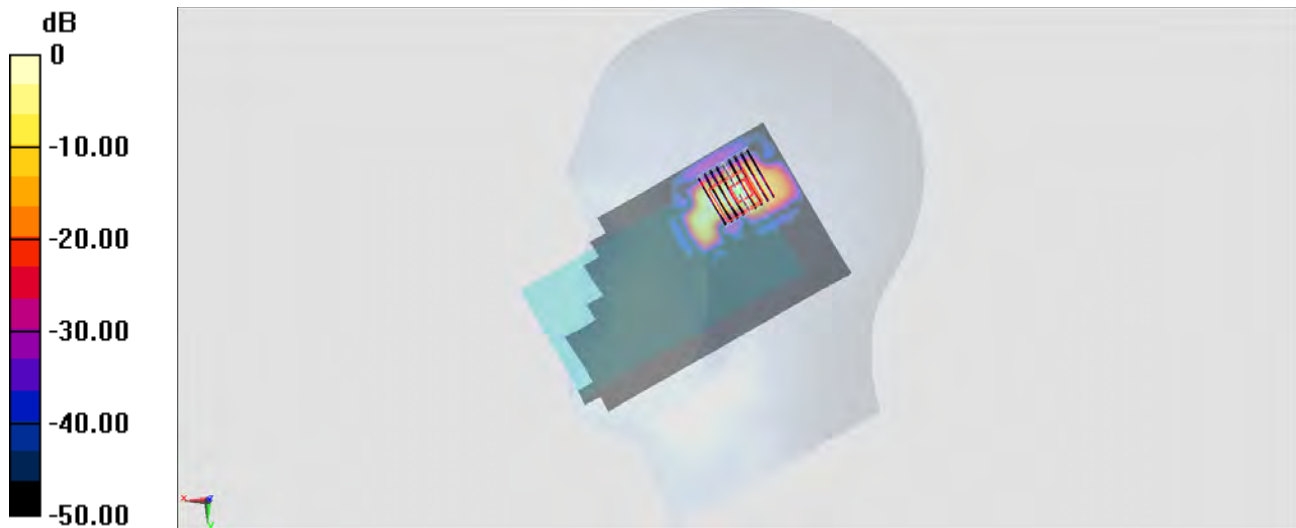

0 dB = 0.855 W/kg = -0.68 dBW/kg

**#14\_GSM850\_GPRS (4 Tx slots)\_Right Side\_10mm\_Ch128**

Communication System: GSM850 ; Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: MSL\_850\_150813 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.981$  S/m;  $\epsilon_r = 56.787$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(10.19, 10.19, 10.19); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch128/Area Scan (41x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.530 W/kg


**Configuration/Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.08 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.591 W/kg

**SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.274 W/kg**

Maximum value of SAR (measured) = 0.522 W/kg

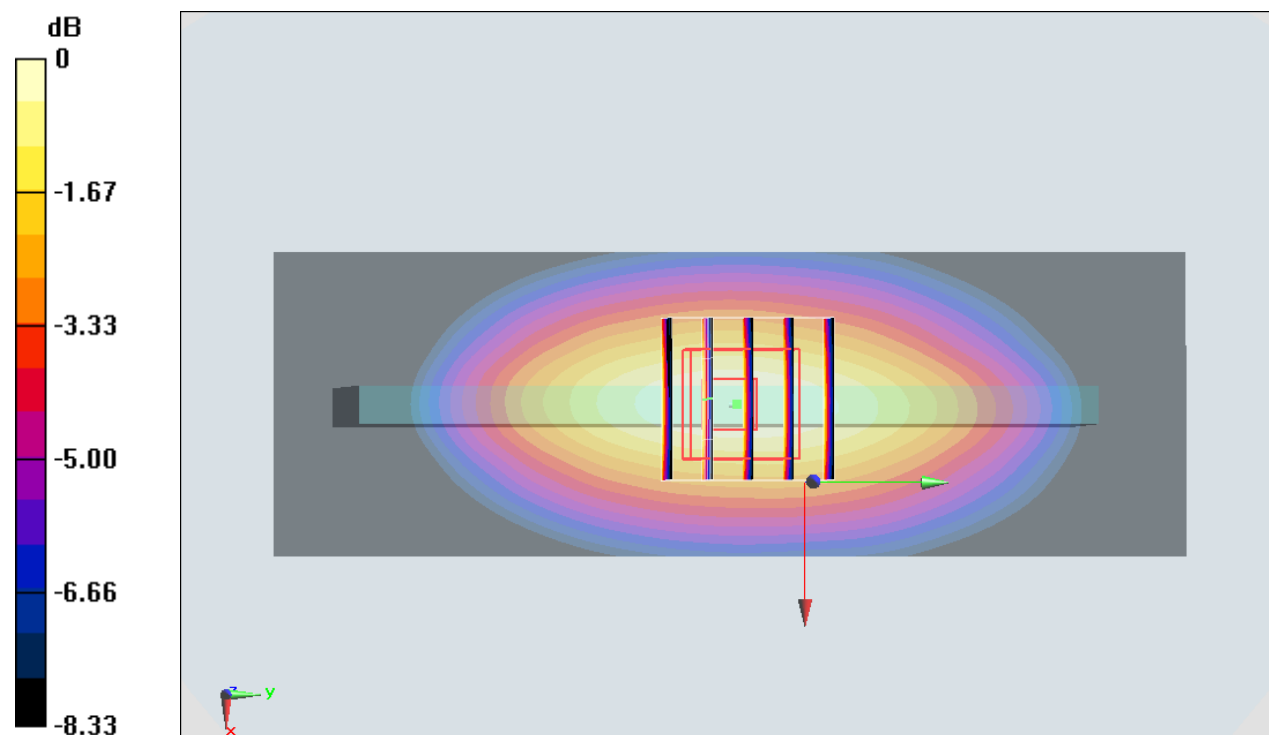

0 dB = 0.522 W/kg = -2.82 dBW/kg

**#15\_GSM1900\_GPRS (2 Tx slots)\_Bottom Side\_10mm\_Ch810**

Communication System: PCS ; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium: MSL\_1900\_150814 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.557$  S/m;  $\epsilon_r = 53.117$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(7.81, 7.81, 7.81); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch810/Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.894 W/kg


**Configuration/Ch810/Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.05 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.289 W/kg**

Maximum value of SAR (measured) = 0.829 W/kg

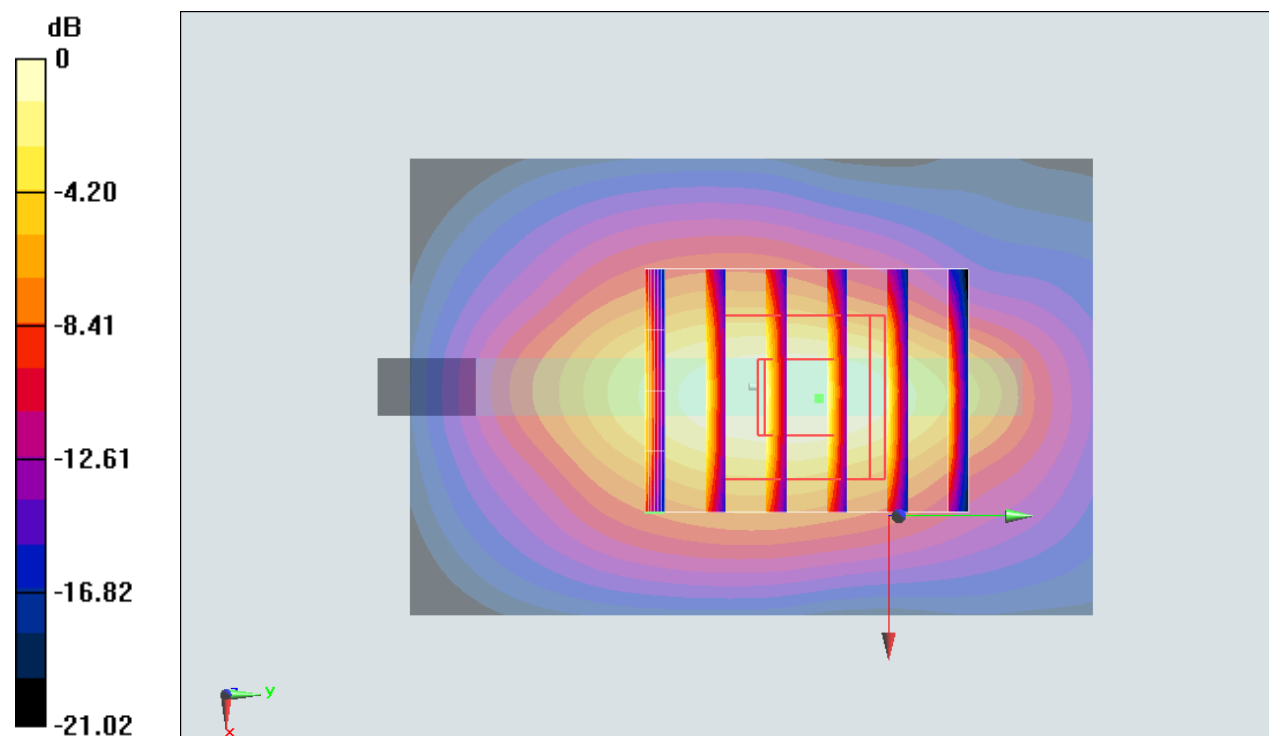

0 dB = 0.829 W/kg = -0.81 dBW/kg

**#16\_WCDMA V\_RMC 12.2Kbps\_Back\_10mm\_Ch4233**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_150813 Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.003$  S/m;  $\epsilon_r = 56.609$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(10.19, 10.19, 10.19); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch4233/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.755 W/kg


**Configuration/Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.60 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.830 W/kg

**SAR(1 g) = 0.629 W/kg; SAR(10 g) = 0.480 W/kg**

Maximum value of SAR (measured) = 0.757 W/kg

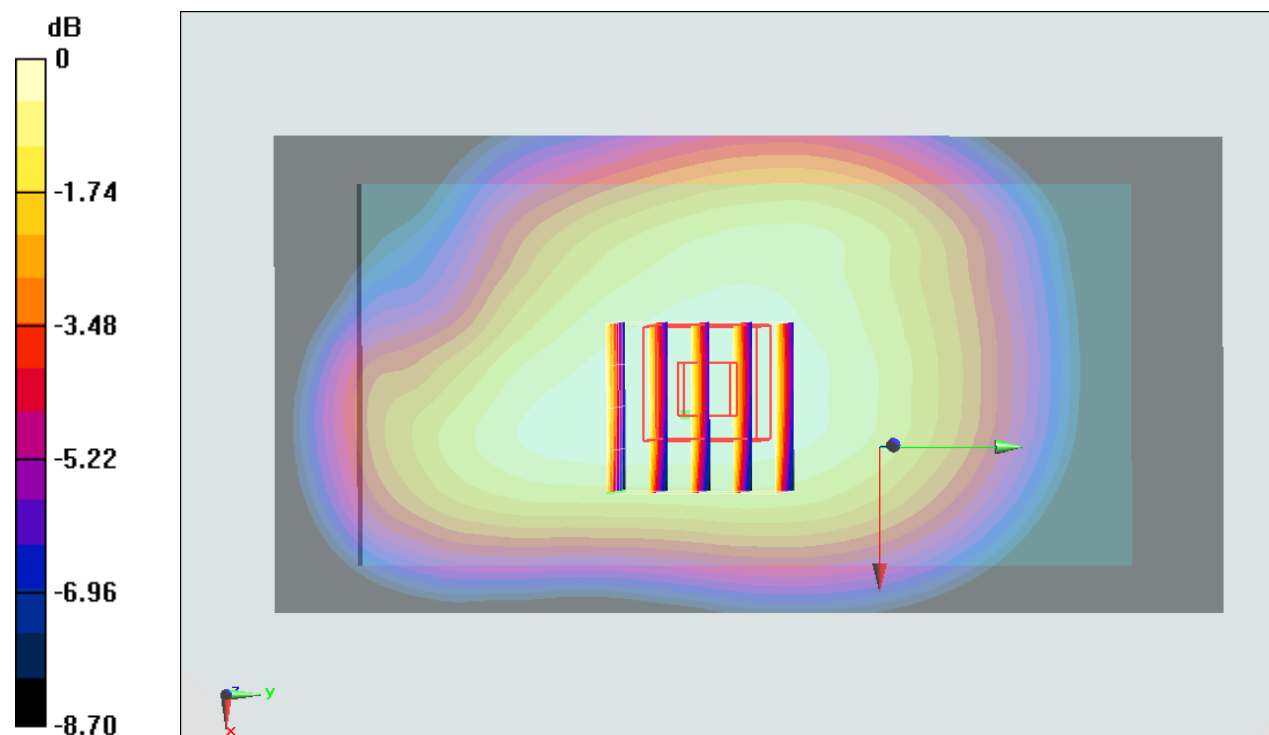

**#17\_WCDMA II\_RMC 12.2Kbps\_Bottom Side\_10mm\_Ch9400**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_150813 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.525$  S/m;  $\epsilon_r = 54.359$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(7.81, 7.81, 7.81); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch9400/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.740 W/kg


**Configuration/Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.91 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.839 W/kg

**SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.241 W/kg**

Maximum value of SAR (measured) = 0.688 W/kg

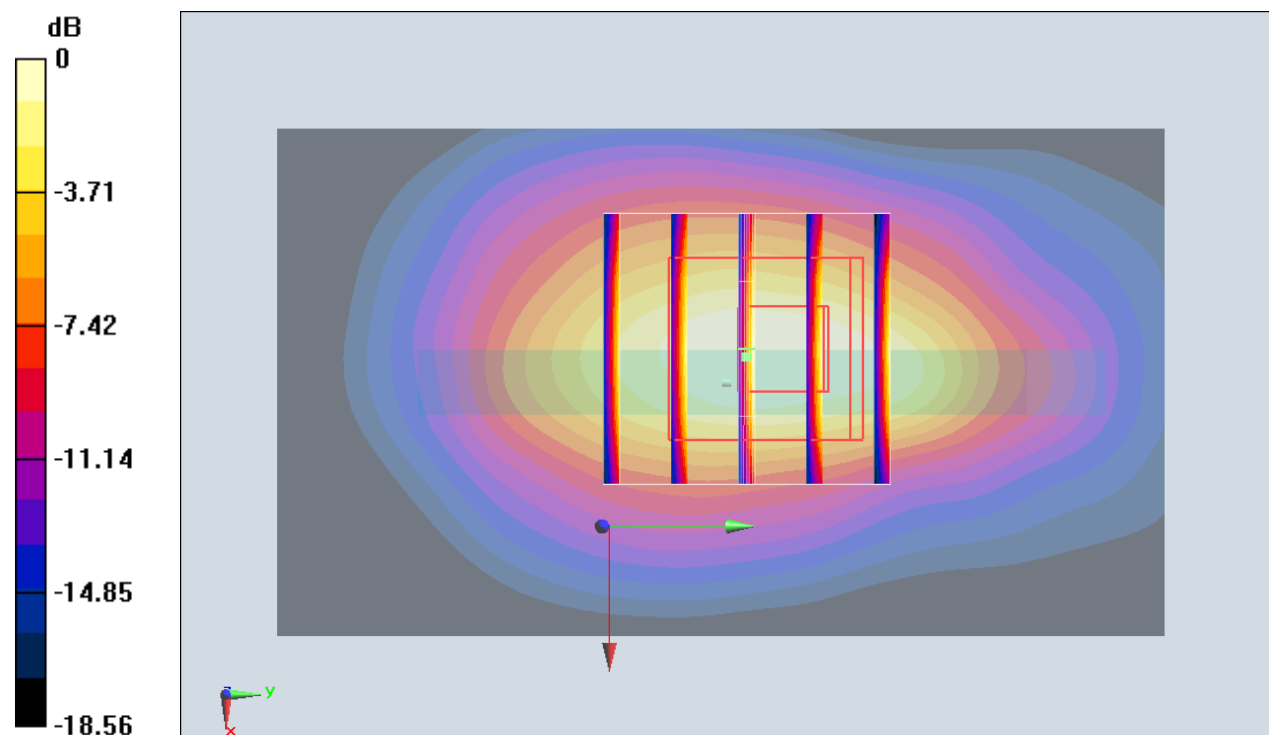

**#18\_LTE Band 12\_10M\_QPSK\_1RB\_0offset\_Back\_10mm\_Ch23095**

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_150815 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.929$  S/m;  $\epsilon_r = 58.27$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(10.35, 10.35, 10.35); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch23095/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.371 W/kg


**Configuration/Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.84 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.401 W/kg

**SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.233 W/kg**

Maximum value of SAR (measured) = 0.366 W/kg

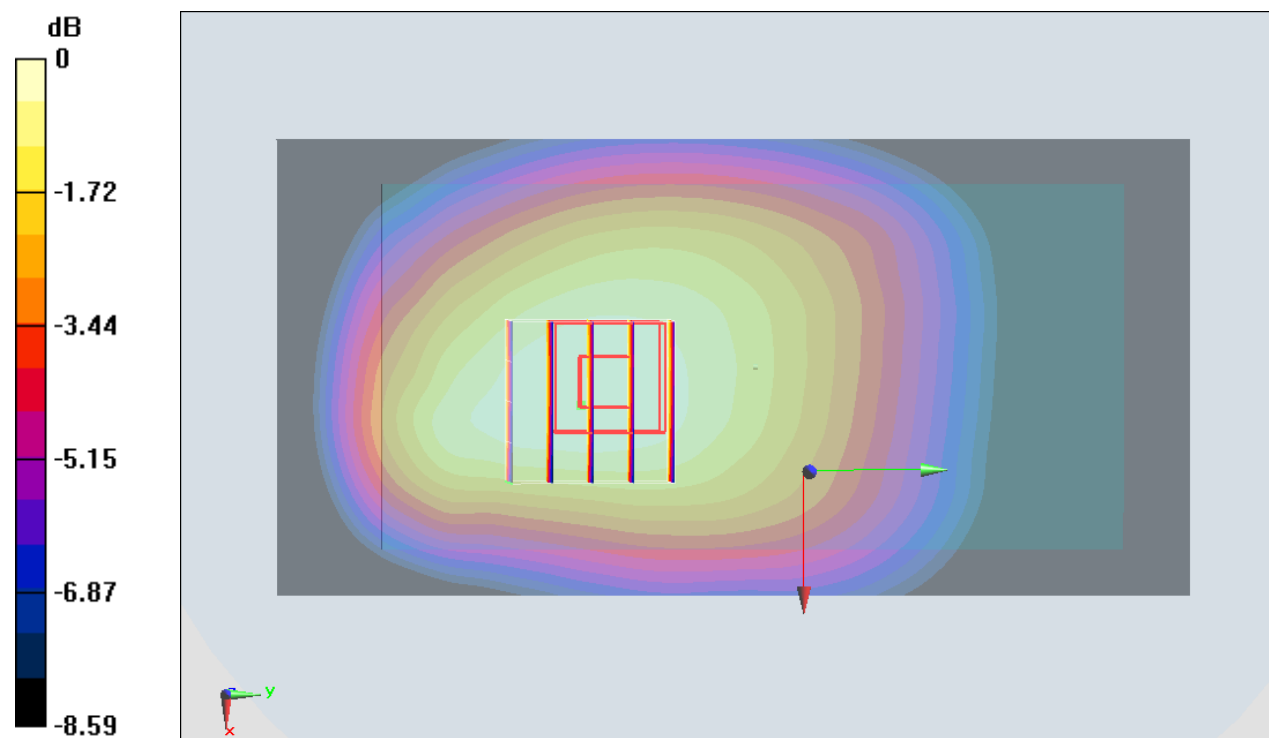

**#19\_LTE Band 5\_10M\_QPSK\_1RB\_24offset\_Right Side\_10mm\_Ch20450**

Communication System: LTE ; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_150815 Medium parameters used:  $f = 829$  MHz;  $\sigma = 0.977$  S/m;  $\epsilon_r = 56.143$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(10.19, 10.19, 10.19); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch20450/Area Scan (41x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.525 W/kg


**Configuration/Ch20450/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.18 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.601 W/kg

**SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.274 W/kg**

Maximum value of SAR (measured) = 0.530 W/kg

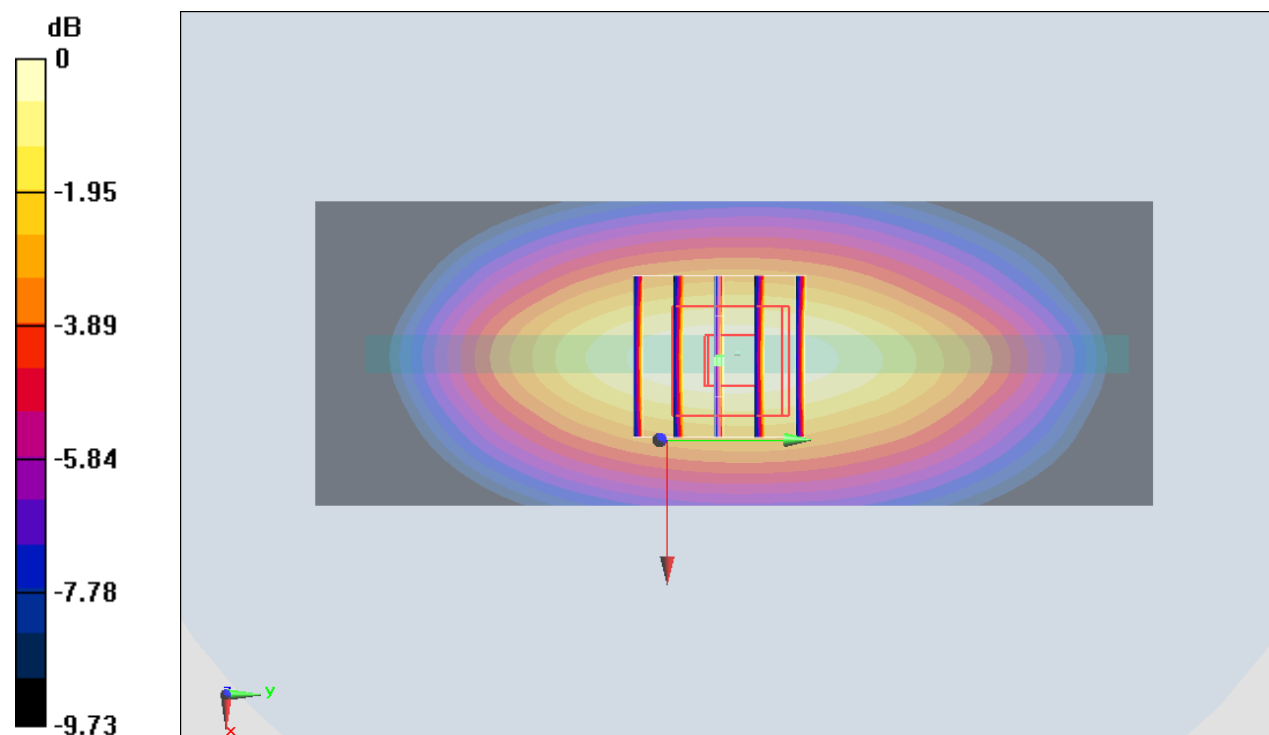

0 dB = 0.530 W/kg = -2.76 dBW/kg

**#20\_LTE Band 4\_20M\_QPSK\_50RB\_49offset\_Bottom Side\_10mm\_Ch20175**

Communication System: LTE ; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium: MSL\_1750\_150815 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.508$  S/m;  $\epsilon_r = 51.786$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(8.18, 8.18, 8.18); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch20175/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.583 W/kg


**Configuration/Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.07 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.706 W/kg

**SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.199 W/kg**

Maximum value of SAR (measured) = 0.571 W/kg

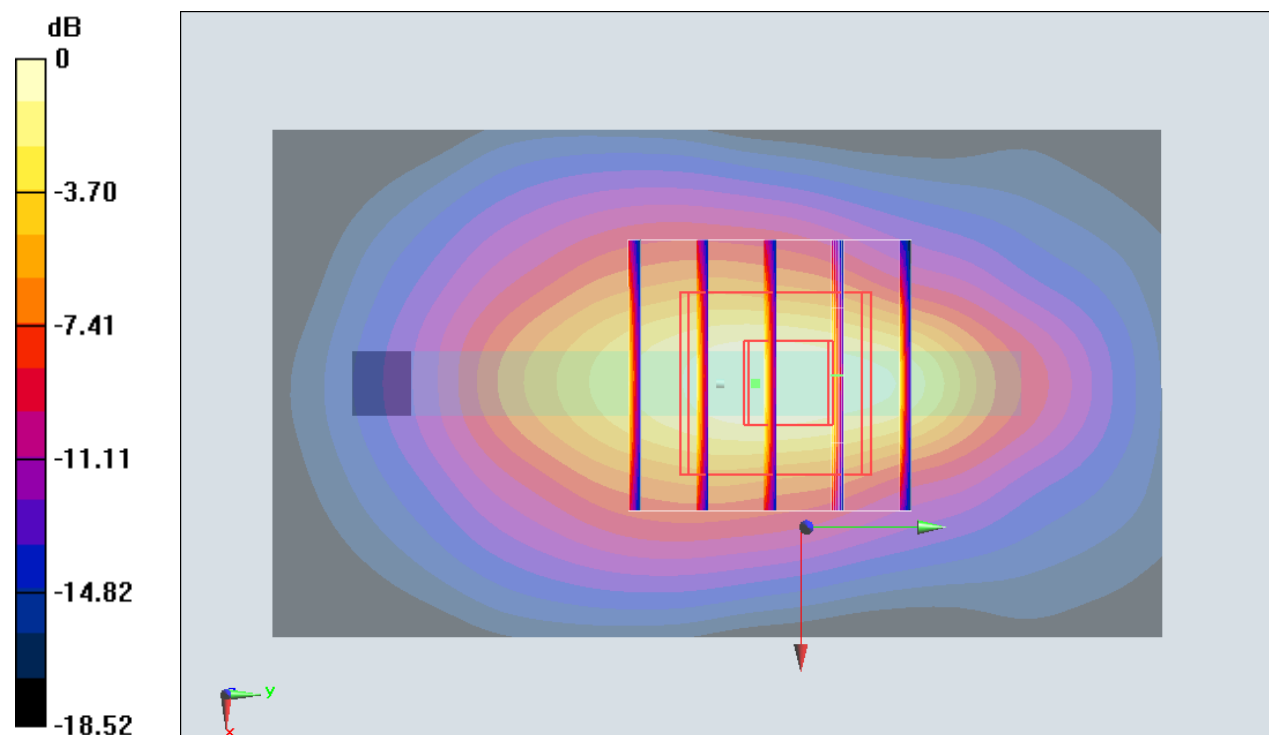

0 dB = 0.571 W/kg = -2.43 dBW/kg

**#21\_LTE Band 2\_20M\_QPSK\_50RB\_0offset\_Bottom Side\_10mm\_Ch19100**

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_150814 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.547$  S/m;  $\epsilon_r = 53.165$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(7.81, 7.81, 7.81); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch19100/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.696 W/kg


**Configuration/Ch19100/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.33 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.796 W/kg

**SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.225 W/kg**

Maximum value of SAR (measured) = 0.657 W/kg

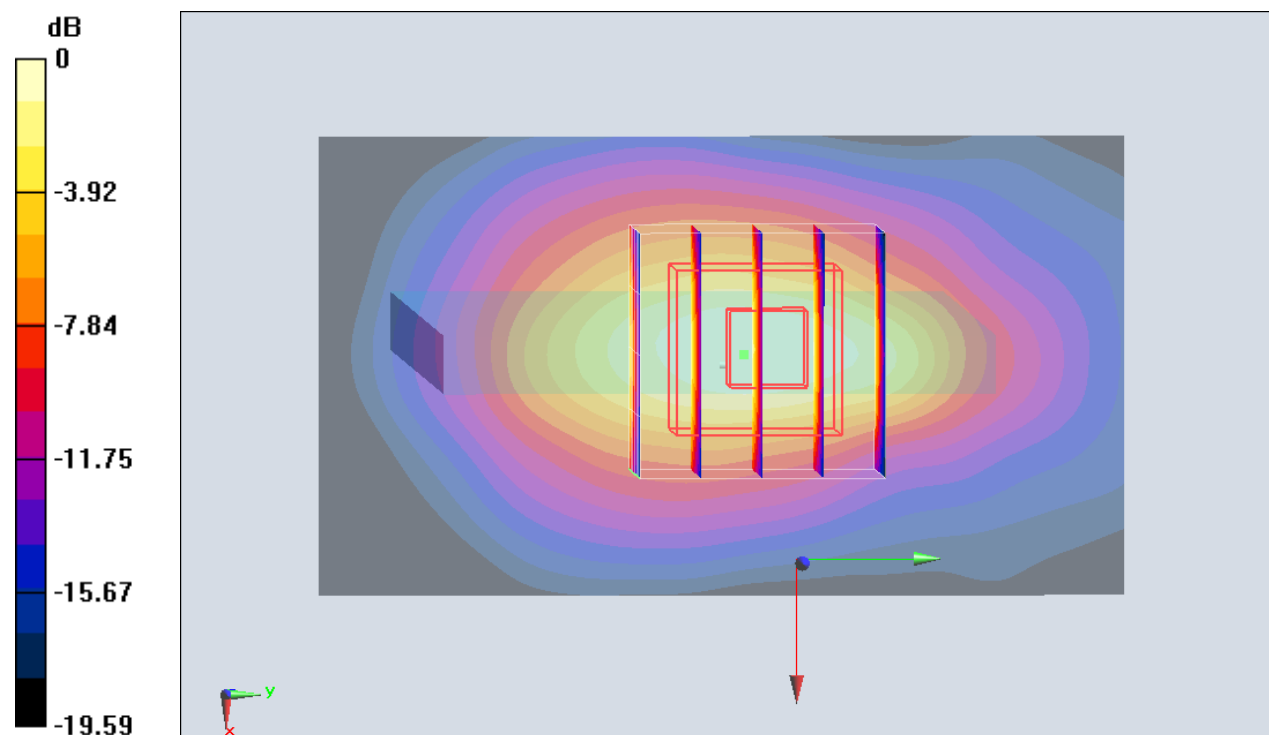

**#22\_LTE Band 7\_20M\_QPSK\_50RB\_24offset\_Bottom Side\_10mm\_Ch21100**

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: MSL\_2600\_150816 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 2.146$  S/m;  $\epsilon_r = 52.301$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3955; ConvF(7.09, 7.09, 7.09); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch21100/Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.325 W/kg


**Configuration/Ch21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.61 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.385 W/kg

**SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.096 W/kg**

Maximum value of SAR (measured) = 0.313 W/kg

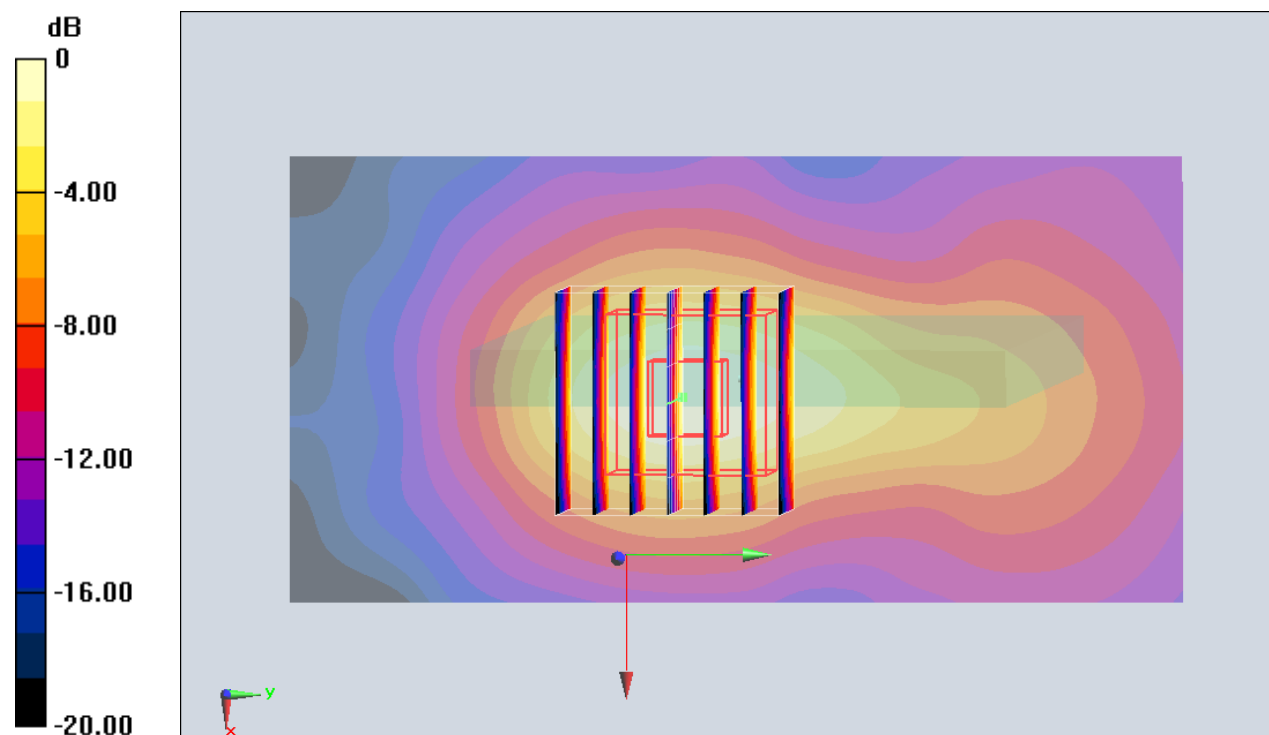

0 dB = 0.313 W/kg = -5.04 dBW/kg

**#23\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_10mm\_Ch1;Ant A**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1.009

Medium: MSL\_2450\_150731 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.937$  S/m;  $\epsilon_r = 52.185$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3954; ConvF(7.33, 7.33, 7.33); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM\_RIGHT; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch1/Area Scan (81x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.119 W/kg


**Configuration/Ch1/Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.129 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.144 W/kg

**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.046 W/kg**

Maximum value of SAR (measured) = 0.119 W/kg

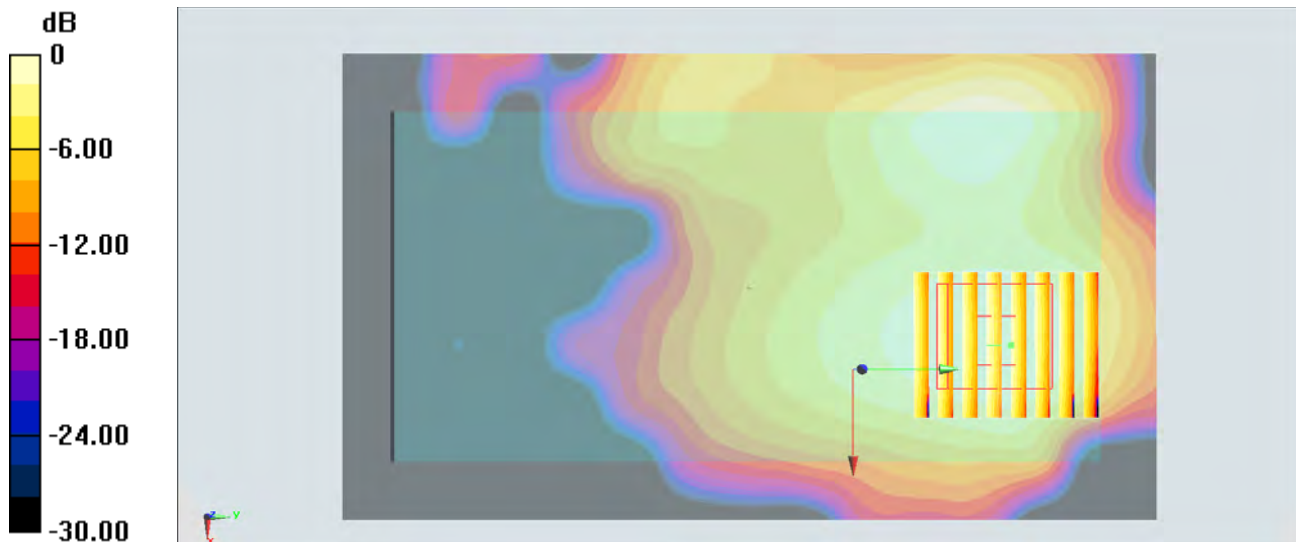

0 dB = 0.119 W/kg = -9.24 dBW/kg

**#24\_GSM850\_GPRS (4 Tx slots)\_Back\_15mm\_Ch128**

Communication System: GSM850 ; Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: MSL\_850\_150813 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.981$  S/m;  $\epsilon_r = 56.787$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(10.19, 10.19, 10.19); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch128/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.354 W/kg


**Configuration/Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.69 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.391 W/kg

**SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.225 W/kg**

Maximum value of SAR (measured) = 0.358 W/kg

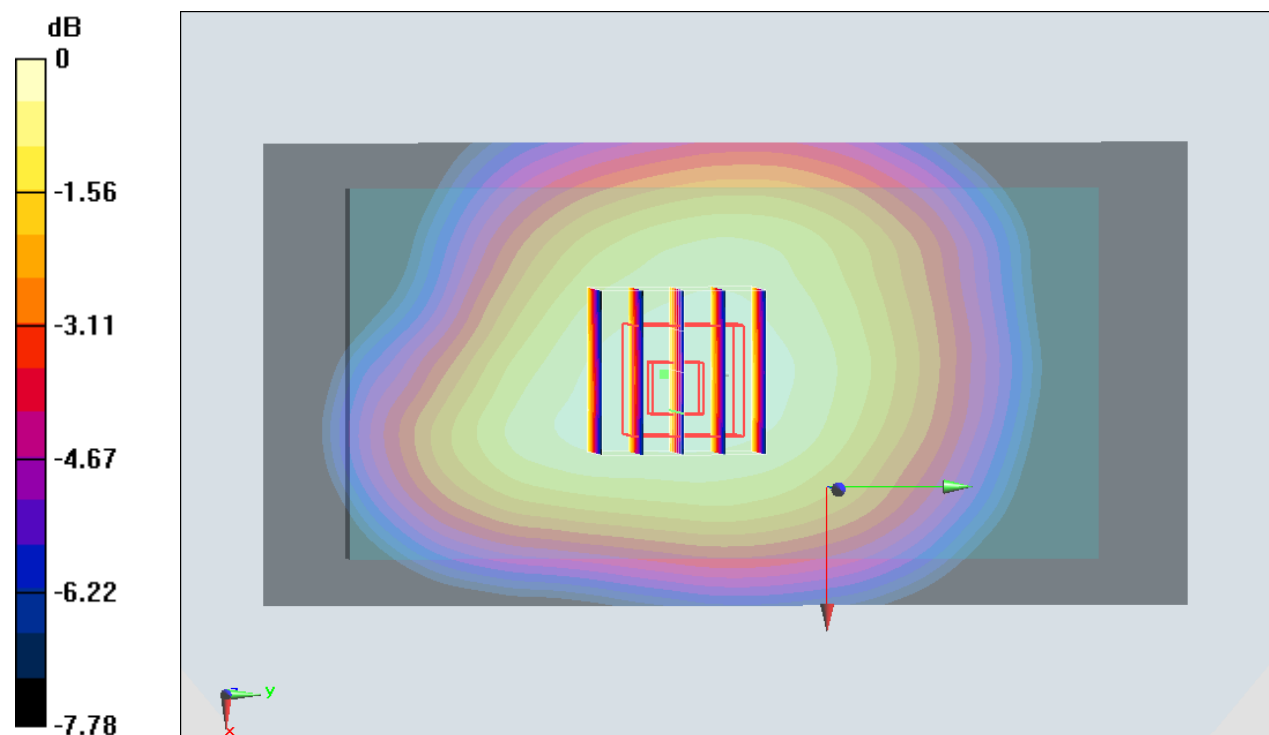

**#25\_GSM1900\_GPRS (2 Tx slots)\_Back\_15mm\_Ch810**

Communication System: PCS ; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium: MSL\_1900\_150814 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.557$  S/m;  $\epsilon_r = 53.117$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(7.81, 7.81, 7.81); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch810/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.233 W/kg


**Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.92 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.285 W/kg

**SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.094 W/kg**

Maximum value of SAR (measured) = 0.243 W/kg

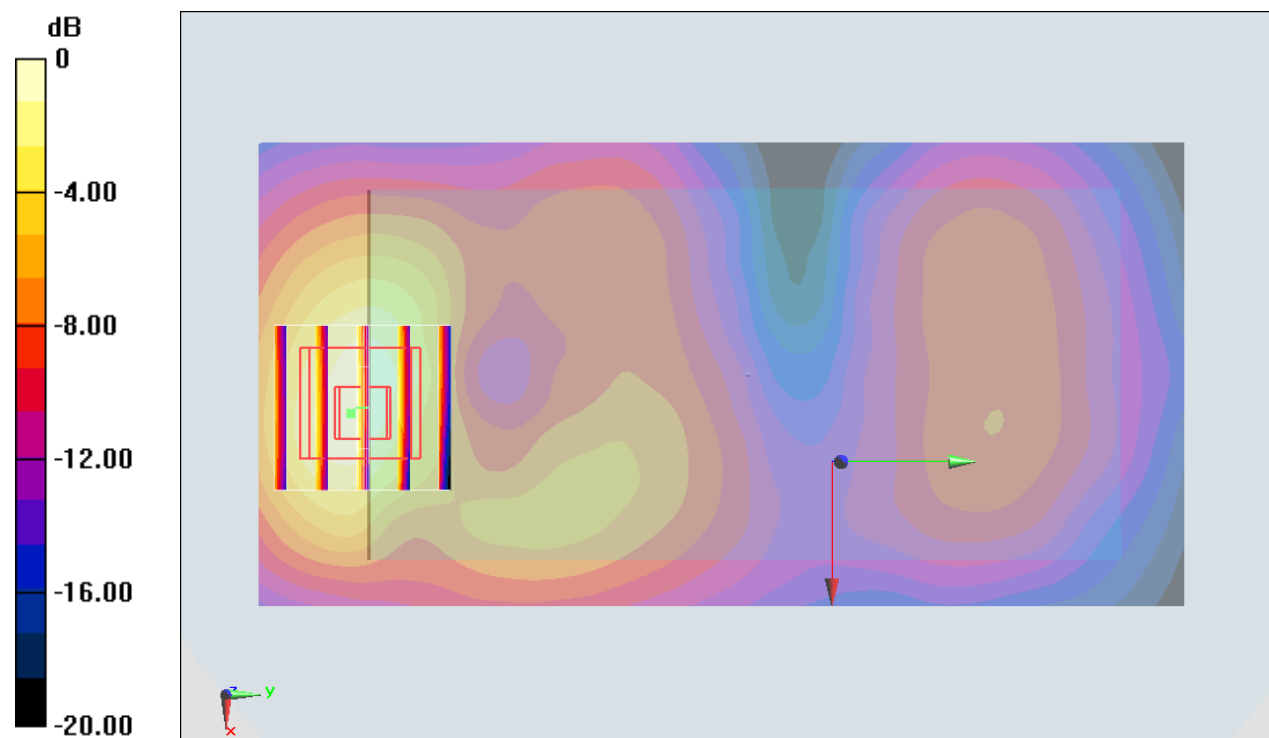

0 dB = 0.243 W/kg = -6.14 dBW/kg

**#26\_WCDMA V\_RMC 12.2Kbps\_Back\_15mm\_Ch4182**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_150813 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.993$  S/m;  $\epsilon_r = 56.678$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(10.19, 10.19, 10.19); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch4182/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.706 W/kg


**Configuration/Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.82 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.777 W/kg

**SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.445 W/kg**

Maximum value of SAR (measured) = 0.709 W/kg

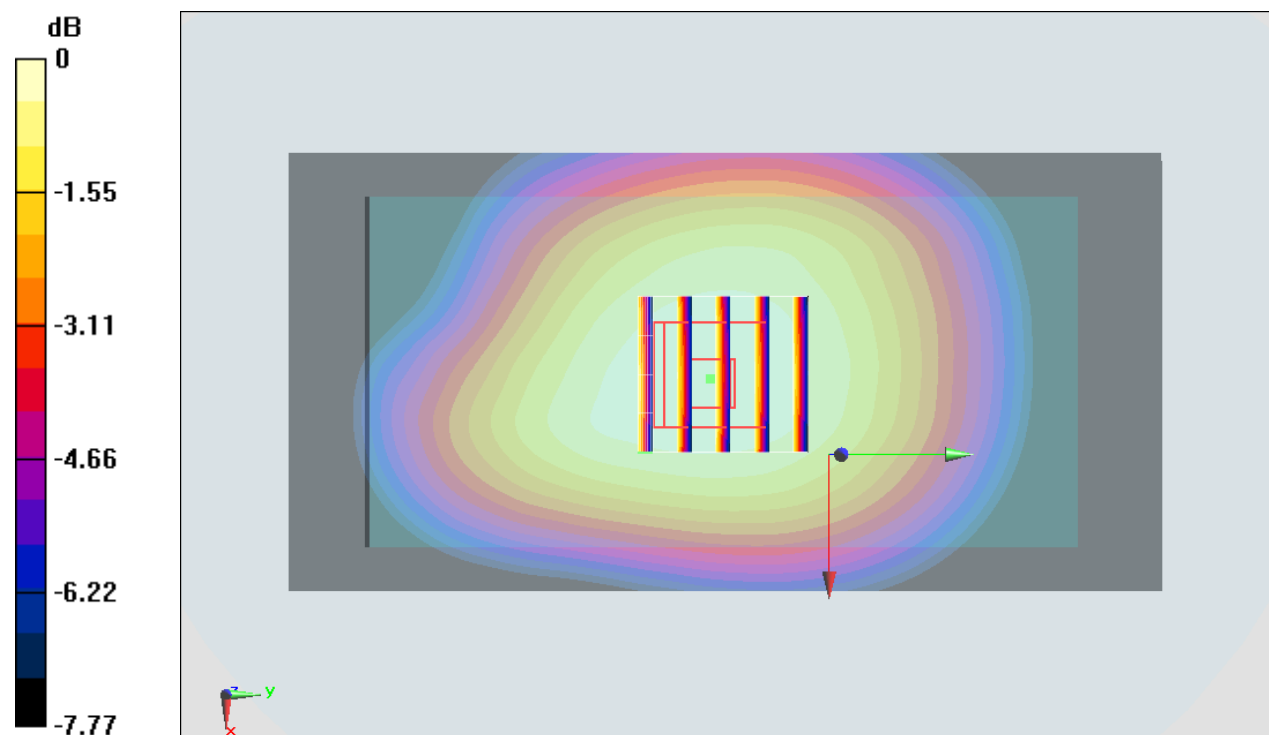

**#27\_WCDMA II\_RMC 12.2Kbps\_Back\_15mm\_Ch9538**

Communication System: WCDMA ; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_150813 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.552$  S/m;  $\epsilon_r = 54.269$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(7.81, 7.81, 7.81); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch9538/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.394 W/kg


**Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.43 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.469 W/kg

**SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.149 W/kg**

Maximum value of SAR (measured) = 0.389 W/kg

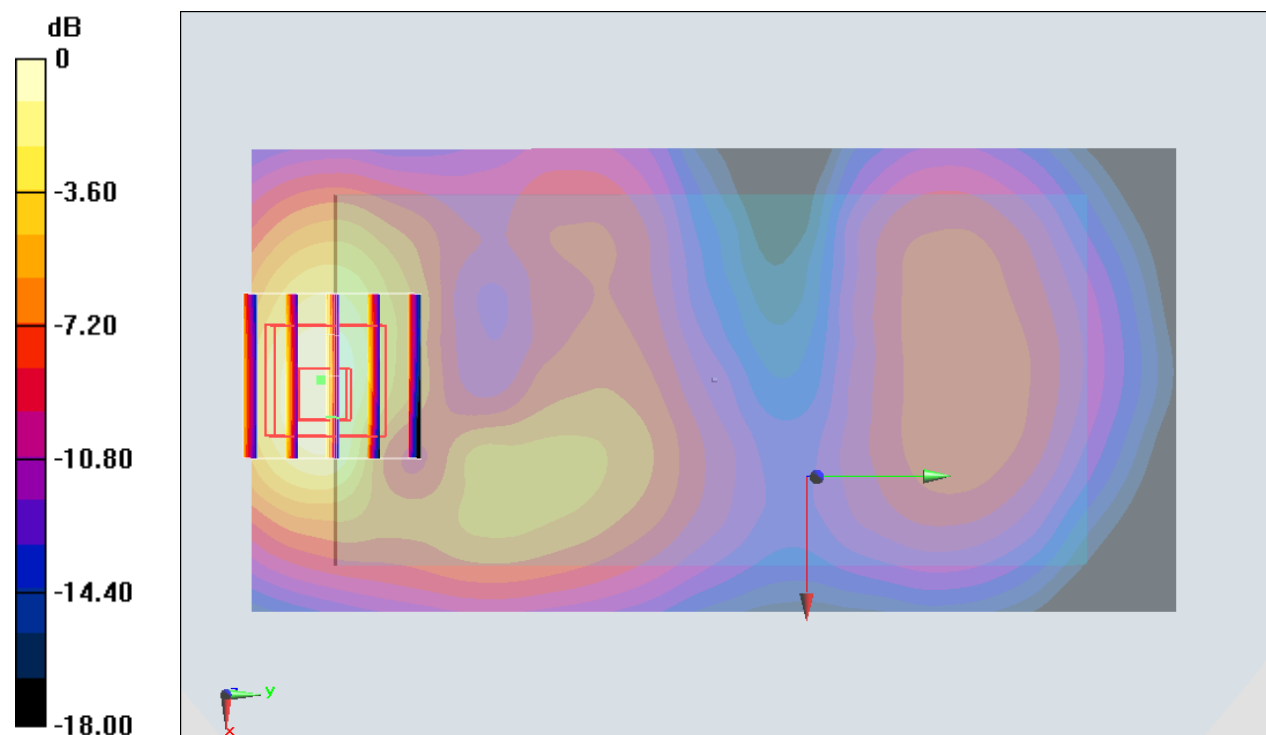

0 dB = 0.389 W/kg = -4.10 dBW/kg

**#28\_LTE Band 12\_10M\_QPSK\_1RB\_0offset\_Back\_15mm\_Ch23095**

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_150815 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.929$  S/m;  $\epsilon_r = 58.27$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(10.35, 10.35, 10.35); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch23095/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.278 W/kg


**Configuration/Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.08 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.301 W/kg

**SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.180 W/kg**

Maximum value of SAR (measured) = 0.278 W/kg

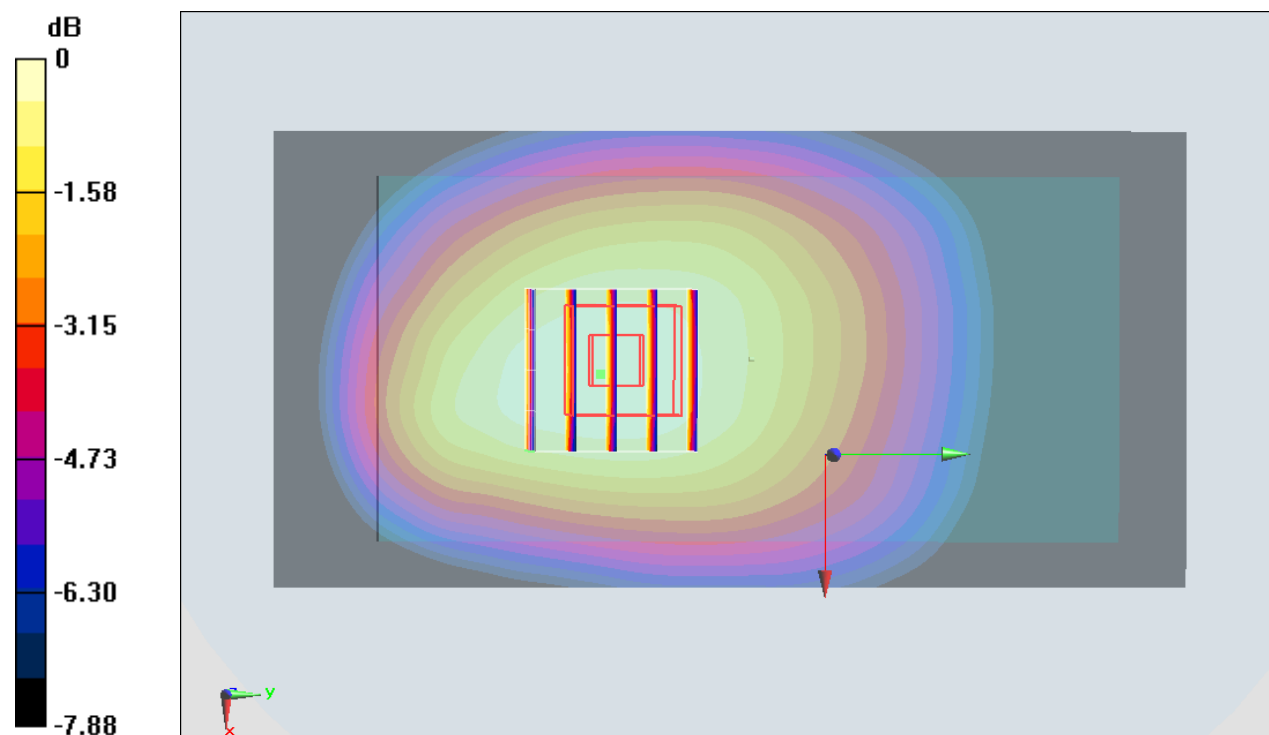

**#29\_LTE Band 5\_10M\_QPSK\_1RB\_24offset\_Back\_15mm\_Ch20450**

Communication System: LTE ; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_150815 Medium parameters used:  $f = 829$  MHz;  $\sigma = 0.977$  S/m;  $\epsilon_r = 56.143$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(10.19, 10.19, 10.19); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch20450/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.392 W/kg


**Configuration/Ch20450/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.97 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.432 W/kg

**SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.249 W/kg**

Maximum value of SAR (measured) = 0.394 W/kg

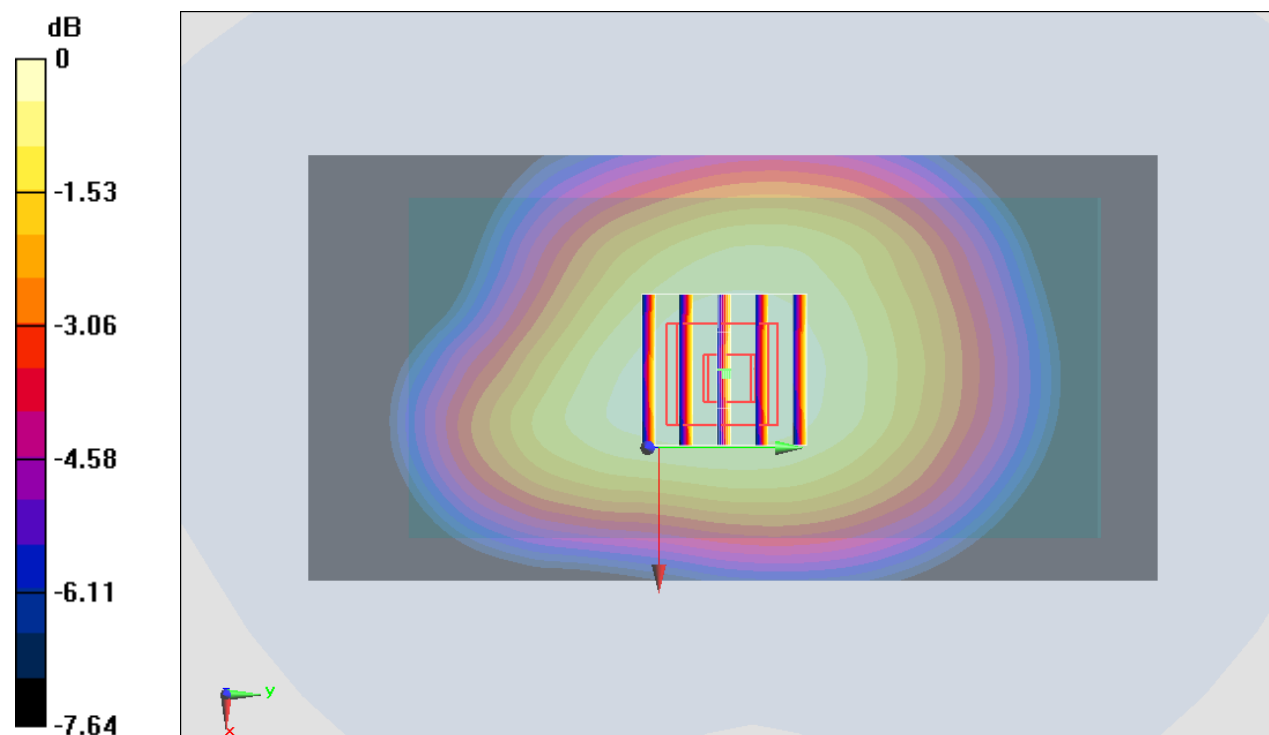

0 dB = 0.394 W/kg = -4.05 dBW/kg

**#30\_LTE Band 4\_20M\_QPSK\_1RB\_0offset\_Back\_15mm\_Ch20300**

Communication System: LTE; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_150815 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.521$  S/m;  $\epsilon_r = 51.744$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(8.18, 8.18, 8.18); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch20300/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.275 W/kg


**Configuration/Ch20300/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.73 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.365 W/kg

**SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.121 W/kg**

Maximum value of SAR (measured) = 0.308 W/kg

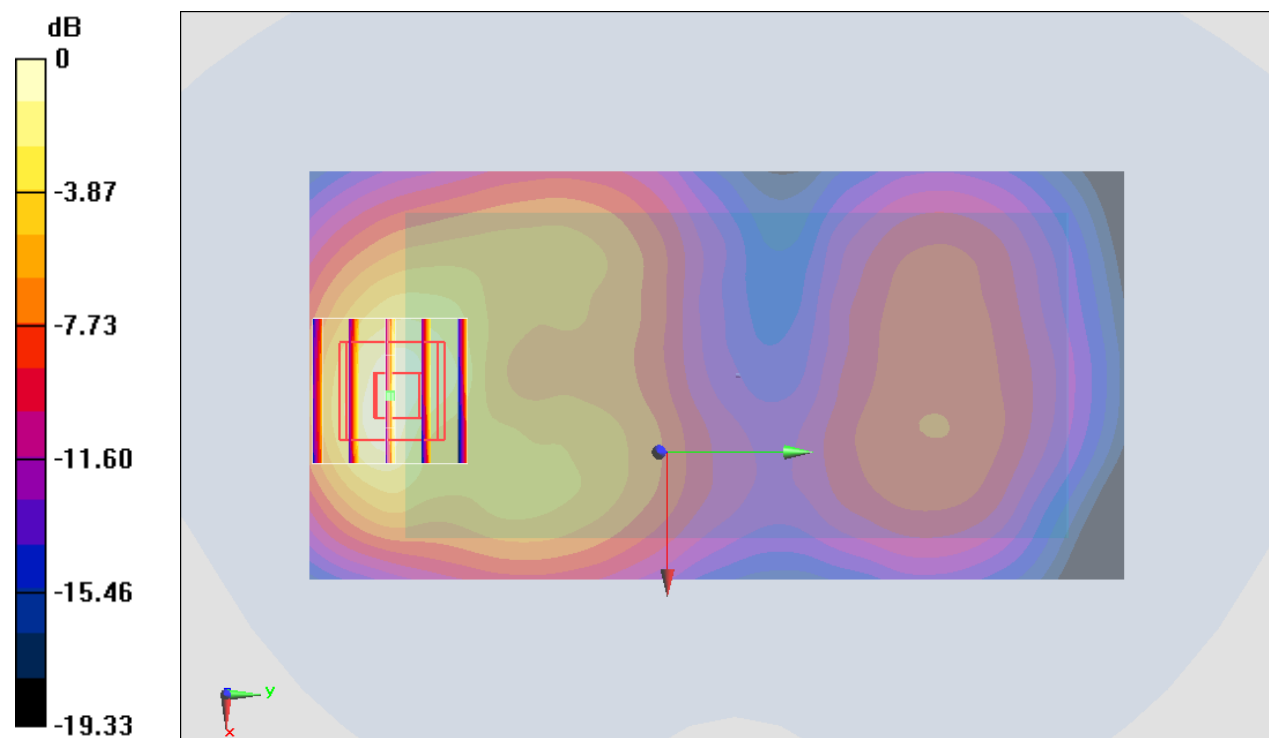

**#31\_LTE Band 2\_20M\_QPSK\_1RB\_0offset\_Back\_15mm\_Ch19100**

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_150814 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.547$  S/m;  $\epsilon_r = 53.165$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(7.81, 7.81, 7.81); Calibrated: 2014/11/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2014/11/14
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch19100/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.333 W/kg


**Configuration/Ch19100/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.97 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.382 W/kg

**SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.126 W/kg**

Maximum value of SAR (measured) = 0.323 W/kg

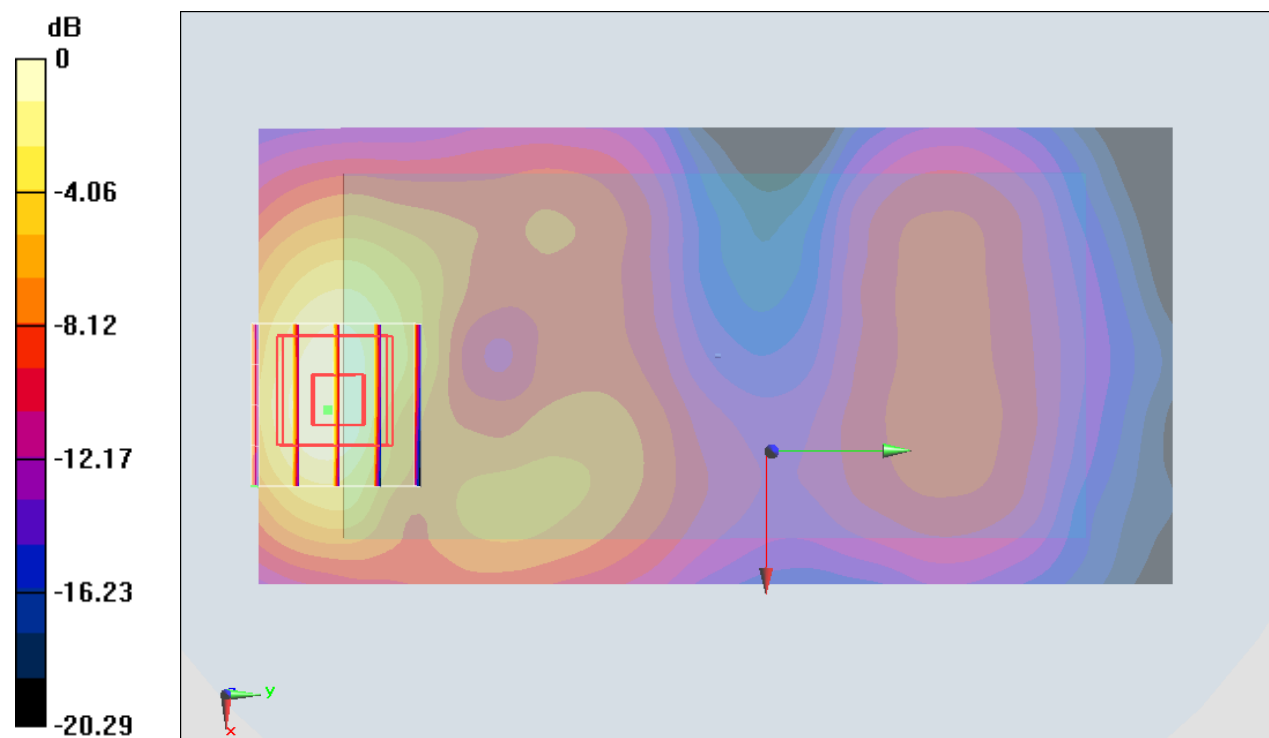

0 dB = 0.323 W/kg = -4.91 dBW/kg

**#32\_LTE Band 7\_20M\_QPSK\_50RB\_49offset\_Back\_15mm\_Ch21350**

Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: MSL\_2600\_150816 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 2.182$  S/m;  $\epsilon_r = 52.188$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3955; ConvF(7.09, 7.09, 7.09); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch21350/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.196 W/kg


**Configuration/Ch21350/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.912 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.244 W/kg

**SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.070 W/kg**

Maximum value of SAR (measured) = 0.199 W/kg

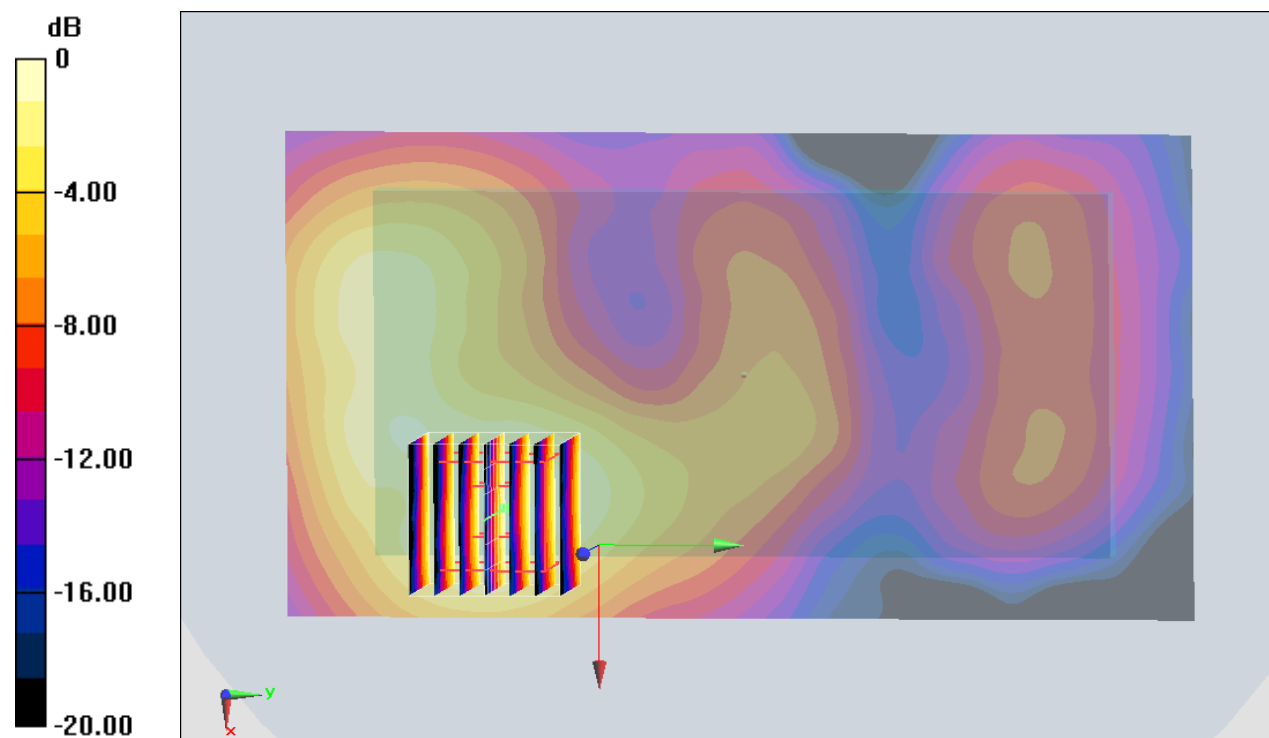

**#33\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_15mm\_Ch1;Ant A**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1.009

Medium: MSL\_2450\_150731 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.937$  S/m;  $\epsilon_r = 52.185$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3954; ConvF(7.33, 7.33, 7.33); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM\_RIGHT; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch1/Area Scan (81x141x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 0.0636 W/kg


**Configuration/Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 6.017 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0780 W/kg

**SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0644 W/kg

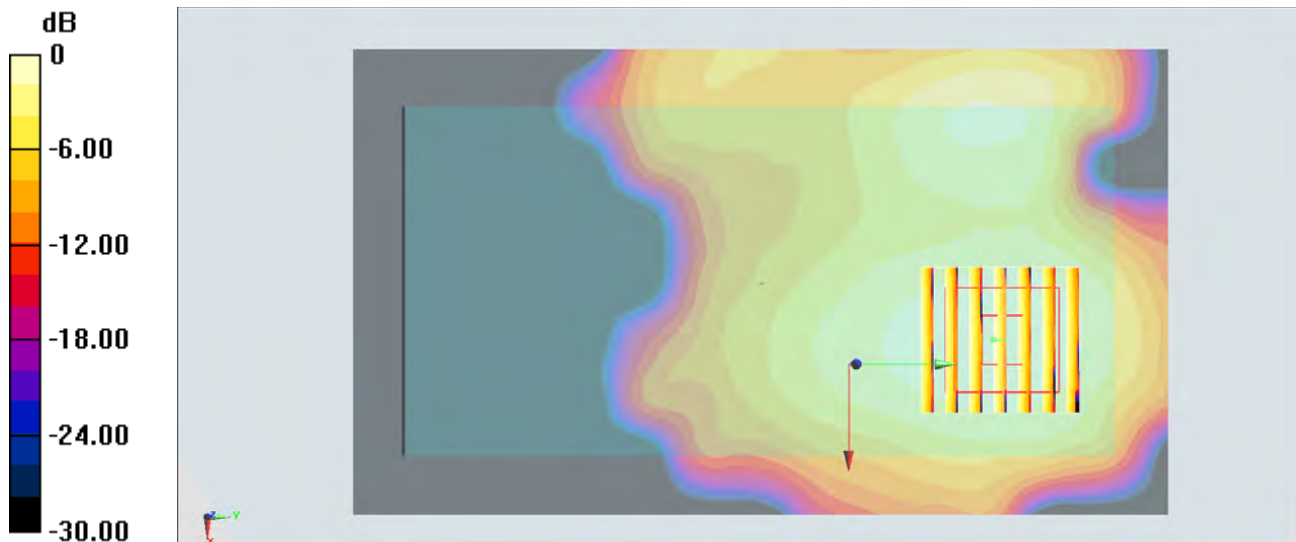

0 dB = 0.0636 W/kg = -11.97 dBW/kg

**#34\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Front\_15mm\_Ch58;Ant B**

Communication System: 802.11ac; Frequency: 5290 MHz; Duty Cycle: 1:1.07

Medium: MSL\_5G\_150802 Medium parameters used:  $f = 5290$  MHz;  $\sigma = 5.251$  S/m;  $\epsilon_r = 47.275$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3955; ConvF(4.44, 4.44, 4.44); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: S/N:1796
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch58/Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.0365 W/kg


**Configuration/Ch58/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.255 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.156 W/kg

**SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.00867 W/kg**

Maximum value of SAR (measured) = 0.0673 W/kg

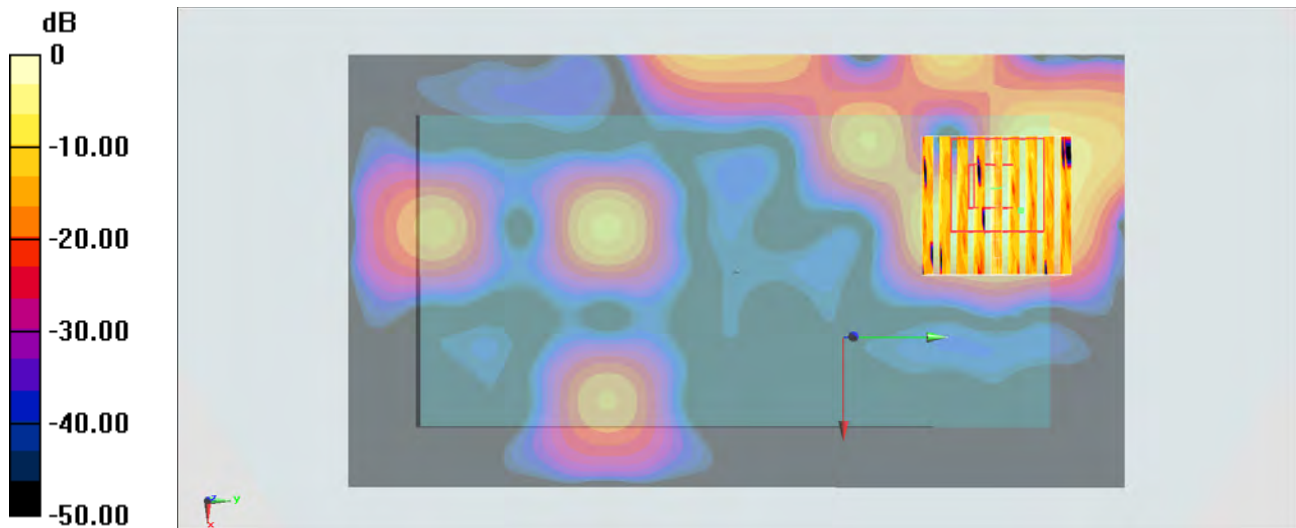

0 dB = 0.0673 W/kg = -11.72 dBW/kg

**#35\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Front\_15mm\_Ch106;Ant B**

Communication System: 802.11ac; Frequency: 5530 MHz; Duty Cycle: 1:1.07

Medium: MSL\_5G\_150802 Medium parameters used:  $f = 5530$  MHz;  $\sigma = 5.561$  S/m;  $\epsilon_r = 46.986$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3955; ConvF(4.11, 4.11, 4.11); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: S/N:1796
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch106/Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.0777 W/kg


**Configuration/Ch106/Zoom Scan (11x12x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.167 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.233 W/kg

**SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.011 W/kg**

Maximum value of SAR (measured) = 0.0902 W/kg

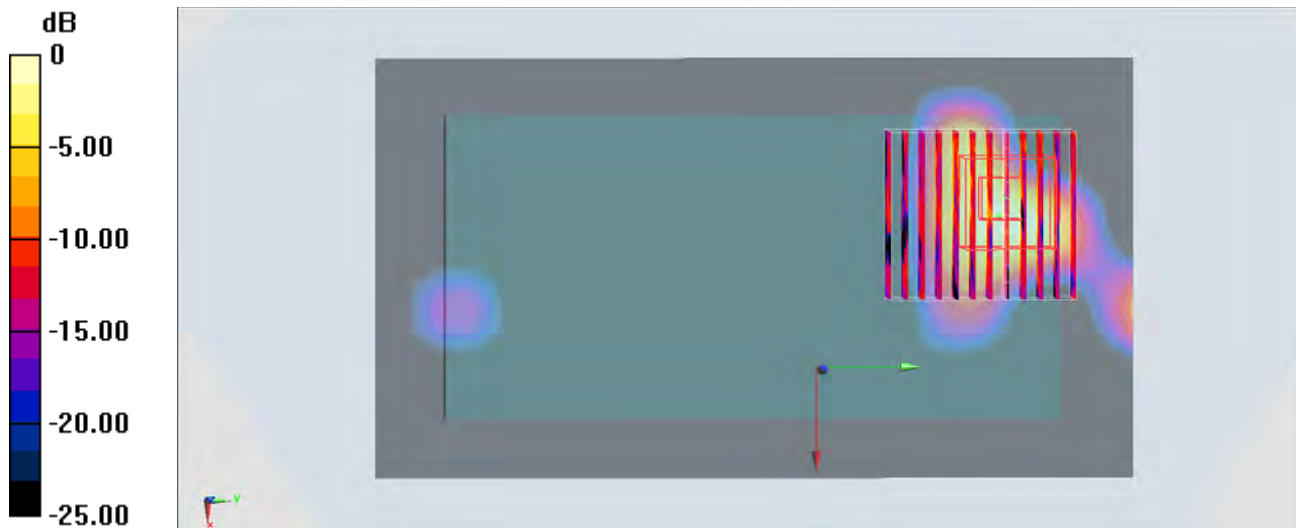

0 dB = 0.0902 W/kg = -10.45 dBW/kg

**#36\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Back\_15mm\_Ch155;Ant B**

Communication System: 802.11ac; Frequency: 5725 MHz; Duty Cycle: 1:1.07

Medium: MSL\_5G\_150802 Medium parameters used:  $f = 5725$  MHz;  $\sigma = 5.884$  S/m;  $\epsilon_r = 46.71$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3955; ConvF(4.26, 4.26, 4.26); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: S/N:1796
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch155/Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0468 W/kg


**Configuration/Ch155/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.257 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.189 W/kg

**SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.011 W/kg**

Maximum value of SAR (measured) = 0.0656 W/kg

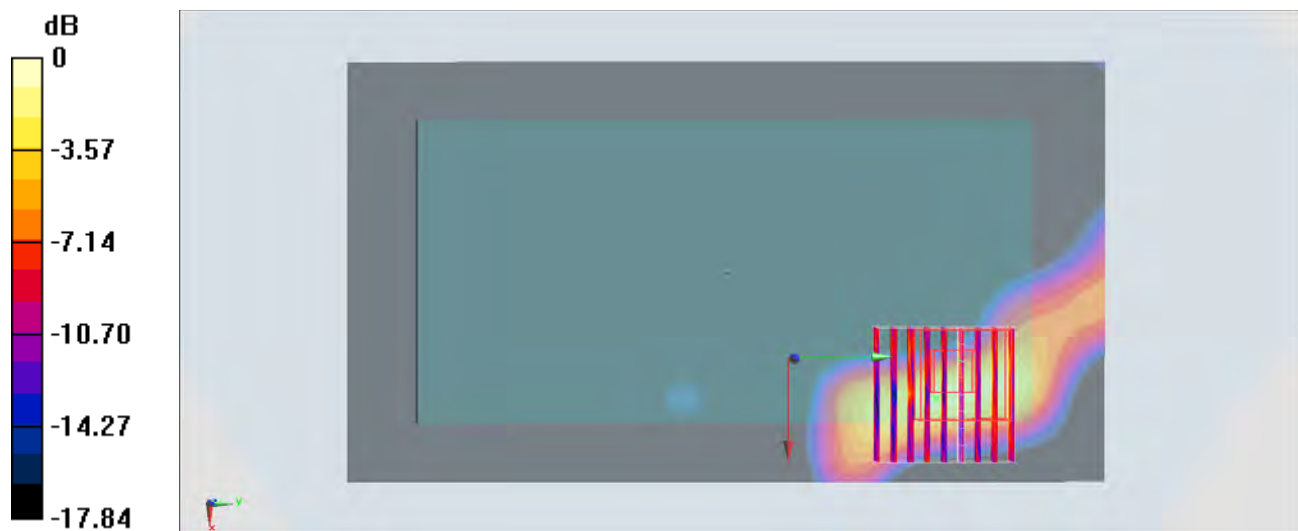

0 dB = 0.0656 W/kg = -11.83 dBW/kg