



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM Ramadan Plicanic

Approved

LD/SEMC/BGGI/NMC Mats Hansson

Checked

Company Internal
REPORT

No.

BGGIN05:139

Date

2005-05-27

Rev

A

Reference

Report issued by Accredited SAR Laboratory

for

PY7AD021022(V600i)

Date of test: 23 and 24 May 2005

Laboratory: Sony Ericsson SAR Test Laboratory
Soniericsson Mobile Communications AB
Nya Vattentornet
SE-221 82 LUND, Sweden

Testing Engineer: Ramadan Plicanic
Ramadan.Plicanic@sonyericsson.com
+46 46 19 38 62

Testing Approval Mats Hansson
Mats.Hansson@sonyericsson.com
+46 46 19 33 57

Statement of Compliance

Sony Ericsson Mobile Communications AB declares under its sole responsibility that the product

Sony Ericsson Type: AAD-3021022-BV; FCC ID: PY7AD021022; IC: 4170B-AD021022

to which this declaration relates, is in conformity with the appropriate RF exposure standards recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(None)

This laboratory is accredited to ISO/IEC 17025 (SWEDAC accreditation no. 1847).



Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. The accredited laboratory activities meet the requirements in SS-EN ISO/IEC 17025 (2000). This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Sony Ericsson encourages all feedback, both positive and negative, on this report.
© Sony Ericsson Mobile Communication AB, 2005



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Ramadan Plicanic*

Approved

Checked

LD/SEMC/BGGI/NMC *Mats Hansson*

Date

Company Internal
REPORT

No.

BGGIN 05:139

Date

Rev

Reference

050527

A

File

1 Table of contents

2	INTRODUCTION	3
3	DEVICE UNDER TEST	3
3.1	ANTENNA DESCRIPTION	3
3.2	DEVICE DESCRIPTION	3
4	TEST EQUIPMENT.....	4
4.1	DOSIMETRIC SYSTEM	4
4.2	ADDITIONAL EQUIPMENT	4
5	ELECTRICAL PARAMETERS ON THE TISSUE SIMULATING LIQUID	5
6	SYSTEM ACCURACY VERIFICATION	5
7	SAR MEASUREMENT UNCERTAINTY	6
8	TEST RESULTS	7
9	REFERENCES	8
10	APPENDIX.....	9
10.1	PHOTOGRAPHS OF THE DEVICE UNDER TEST	9
10.2	PHOTOGRAPHS OF THE DUT ON SAM TWINS PHANTOM	11
10.3	ATTACHMENT	13



Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Ramadan Plicanic*

Approved

Checked

LD/SEMC/BGGI/NMC *Mats Hansson*

Date

No.

BGGIN 05:139

Date

Rev

Reference

050527

A

File

2 Introduction

In this test report, compliance of the Sony Ericsson PY7AD021022 (V600i) portable telephone with RF safety guidelines is demonstrated. The applicable RF safety guidelines and the SAR measurement specifications used for the test are described in the *SAR Measurement Specifications of Wireless Handsets* [1].

3 Device Under Test

3.1 Antenna Description

Type	Internal	
Location	On top on the back side	
Dimensions	Max length	40 mm
	Max width	18 mm
Configuration	PIFA	

3.2 Device description

Device model	PY7AD021022 (V600i)	
Serial number	CB501456RV	
Mode	GSM1900	GSM1900 (GPRS 2 Slots)
Multiple Access Scheme	TDMA	TDMA
Maximum Output Power Setting	30.0 dBm	30.0 dBm
Factory Tolerance in Power Setting	0.5 dB	0.5 dB
Maximum Peak Output Power	30.5 dBm	30.5 dBm
Crest Factor	8	4
Transmitting Frequency Range(MHz)	1850.2 – 1909.8	
Prototype or Production Unit	Preproduction	
Device Category	Portable	
RF exposure environment	General population / uncontrolled	



Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Ramadan Plicanic*

No.

BGGIN 05:139

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGGI/NMC *Mats Hansson*

Date

050527

A

File

4 Test equipment

4.1 Dosimetric system

SAR measurements were made using the DASY4 professional system (software version 4.4) with SAM twin phantom, manufactured by Schmid & Partner Engineering AG (SPEAG). The list of calibrated equipment is given below.

Description	Serial Number	Due Date
DASY4 DAE V1	640	October, 2005
E-field probe ETDV6	1815	January, 2005
Dipole Validation Kit, D1900V2	5d002	March, 2007

4.2 Additional equipment

Description	Inventory Number	Due Date
Signal generator ESG-D4000A	INV 462935	08, 2005
Directional coupler HP778D	INV 39656	01, 2006
Power meter R&S NRVD	INV 483920	01, 2006
Power sensor R&S NRV-Z5	INV 2333	11, 2005
Power sensor R&S NRV-Z5	INV 2334	01, 2006
Termination 65N50-0-11	INV 2903	02, 2006
Network analyzer HP8753C	INV421671	09, 2005
S-parameter test set HP85047A	INV 421670	09, 2005
Dielectric probe kit HP8507D	INV 20000053	Self cal

Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Ramadan Plicanic*

No.

BGGIN 05:139

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGGI/NMC *Mats Hansson*

Date

050527

A

File

5 Electrical parameters on the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with the dielectric probe kit. These values are shown in the table below. The mass density, ρ , entered into the DASY3 software is also given. Recommended limits for permittivity ϵ_r , conductivity σ and mass density ρ are also shown.

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	ρ (g/cm ³)
1900	Head	Measured, 23/05/2005	39.5	1.47	1.00
		Recommended	40.0	1.4	1.00
1900	Body	Measured, 24/03/2005	50.8	1.48	1.00
		Recommended	53.3	1.52	1.00

6 System accuracy verification

A system accuracy verification of the DASY4 was performed using the dipole validation kit listed in section 3.1. The system verification test was conducted on the same day as the measurement of the DUT. Measurement made in ambient temperature 21.5-22.5 °C and humidity 29-33%. The obtained results are displayed in the table below.

RF noise had been measured in liquid when all RF equipment in lab was set off.
Measured value was 0.002 mW/g in 1g mass.

f (MHz)	Tissue type	Measured / Reference	SAR (W/kg) 1g/10g	Dielectric Parameters			Liquid t(°C)
				ϵ_r	σ (S/m)	ρ (g/cm ³)	
1900	Head	Measured, 23/05/2005	39.5/20.6	39.5	1.47	1.00	21.5
		Reference	39.2 /20.6	39.6	1.45	1.00	-
1900	Body	Measured, 04/05/2005	39.3/20.8	50.8	1.48	1.00	22.0
		Reference	39.6/20.9	51.6	1.58	1.00	-

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Ramadan Plicanic*

Approved

Checked

LD/SEMC/BGGI/NMC *Mats Hansson*

Date

**Company Internal
REPORT**

No.

BGGIN 05:139

Date

Rev

Reference

050527

A

File

7 SAR measurement uncertainty

SAR measurement uncertainty evaluation for Sonyericsson V600i phone

Uncertainty Component	Uncer. (%)	Prob Dist.	Div.	C _i	1900 Head	1900 Body
Measurement System						
Probe Calibration	±4.4	N	1	1	±4.4	±4.4
Axial Isotropy	±4.7	R	√3	0.5	±1.4	±1.4
Spherical Isotropy	±9.6	R	√3	0.5	±2.8	±2.8
Spatial resolution	±0.0	R	√3	1	±0.0	±0.0
Boundary effect	±5.5	R	√3	1	±3.2	±3.2
Probe linearity	±4.7	R	√3	1	±2.7	±2.7
Detection limit	±1.0	R	√3	1	±0.6	±0.6
Readout electronics	±1.0	N	1	1	±1.0	±1.0
Response time	±0.8	R	√3	1	±0.5	±0.5
Integration time	±1.4	R	√3	1	±0.8	±0.8
RF Ambient Conditions	±3.0	R	√3	1	±1.7	±1.7
Mech. Constraints of robot	±0.4	R	√3	1	±0.2	±0.2
Probe positioning	±2.9	R	√3	1	±1.7	±1.7
Extrap, interpolation and integration	±3.9	R	√3	1	±2.3	±2.3
Measurement System Uncertainty					±7.7	±7.7
Test Sample Related						
Device positioning	±6.0	N	0.89	1	±6.7	±6.7
Device holder uncertainty	±5.0	N	0.84	1	±5.9	±5.9
Power drift	±2.1/±4.2	R	√3	1	±1.2	±2.4
Test Sample Related Uncertainty					±9.0	±9.2
Phantom and Tissue Parameters						
Phantom uncertainty	±4.0	R	√3	1	±2.3	±2.3
Liquid conductivity (meas)	±5.0	R	√3	0.6	±1.7	±1.7
Liquid conductivity (target)	±5.0/±2.6	R	√3	0.6	±1.7	±0.9
Liquid Permittivity (meas)	±5.0	R	√3	0.6	±1.7	±1.7
Liquid Permittivity (target)	±1.25/±4.7	R	√3	0.6	±0.4	±1.6
Phantom and Tissue Parameters Uncertainty					±3.8	±3.8
Combined standard uncertainty					±12.4	±12.6
Extended standard uncertainty (k=2)					±24.8	±25.2



Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Ramadan Plicanic*

Approved

Checked

No.

BGGIN 05:139

Date

Rev

Reference

LD/SEMC/BGGI/NMC *Mats Hansson*

Date

050527

A

File

8 Test results

The measured 1-gram and averaged SAR values of the device against the head are provided in Tables 1 and body are provided in Tables 2. The ambient humidity and temperature of test facility were 33% - 28% and 21.5 °C – 22.5 °C respectively. The depth of the head tissue simulating liquid was 15.5cm. A base station simulator was used to control the device during the SAR measurement. The phone was supplied with full-charged battery for each measurement.

For head measurement, the device was tested on the right-hand phantom (corresponding to the right side of the head) and the left-hand phantom in two phone position, cheek (touch) and tilt (cheek + 15deg).

For body measurement phone was tested on the antenna to the phantom and back to the phantom in GPRS 2 Slots mode on 15mm distance between phone and phantom. For speech mode phone was antenna to phantom in position with 15mm distance and with connected portable hands free accessory HPM-20. For all modes, the device was tested at the lowest, middle and highest frequencies in the transmit band. For Blue Tooth mode, phone was paired with Sony Ericsson HBH-200 Blue Tooth head sets and measured on worst case speech mode body position.

Mode	Channel	Peak Output Power(dBm)	Phone Position	Liquid temp(°C)	SAR (W/kg) in 1g mass	
					Right-hand	Left-hand
GSM 1900 Head	512	30.2	Cheek	21.0/21.0	0.61	0.61
			Tilt	21.5/21.5	0.42	0.51
	661	30.3	Cheek	21.0/21.0	0.53	0.51
			Tilt	21.5/21.5	0.37	0.44
	810	30.4	Cheek	21.0/21.0	0.45	0.42
			Tilt	21.5/21.5	0.3	0.35

Table1: SAR measurement result for Sony Ericsson PY7AD021022 (V600i) telephone at highest possible output power. Measured against the head.

Mode	Channel	Power (dBm)	Phone Position	Liquid t (°C)	SAR (W/kg) in 1 g mass
GSM 1900 Body	512	30.2	Antenna to phantom, GPRS 2 Slots	21.0	0.61
			Front to phantom, GPRS 2 Slots	21.5	0.38
			Antenna to phantom, Speech	21.0	0.27
			Antenna to phantom +BT, Speech	21.5	0.28
	661	30.3	Antenna to phantom, GPRS 2 Slots	21.0	0.59
			Antenna to phantom, Speech	21.0	0.23
	810	30.4	Antenna to phantom, GPRS 2 Slots	21.0	0.47
			Antenna to phantom, Speech	21.0	0.19

Table2: SAR measurement result for Sony Ericsson PY7AD021022 (V600i) telephone at highest possible output power. Measured against the body.



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Ramadan Plicanic*

Approved

Checked

LD/SEMC/BGGI/NMC *Mats Hansson*

Date

Company Internal
REPORT

No.

BGGIN 05:139

Date

Rev

Reference

050527

A

File

9 References

- [1] R.Plicanic, "SAR Measurement Specification of Wireless Handsets", Sony Ericsson SAR Test Laboratory internal document GUG/N 03:141
- [2] Basic standard for the Measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300MHz-3GHz), European Standard EN 50361, July 2001
- [3] FCC, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radio Frequency Emissions," Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01).
- [4] IEEE, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques," Std 1528-2003, June, 2003.

**Company Internal
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Ramadan Plicanic*

No.

BGGIN 05:139

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGGI/NMC *Mats Hansson* *Date**050527**A**File*

10 Appendix

10.1 Photographs of Device Under Test



Phone Front



Phone back and battery



Phone System Contact

Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Ramadan Plicanic*

Approved

Checked

LD/SEMC/BGGI/NMC *Mats Hansson*

Date

No.

BGGIN 05:139

Date

Rev

Reference

050527

A

File



Accessories used for measurement

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Ramadan Plicanic*

Approved

Checked

LD/SEMC/BGGI/NMC *Mats Hansson*

Date

Company Internal
REPORT

No.

BGGIN 05:139

Date

Rev

Reference

050527

A

File

10.2 Photographs of DUT on SAM Twins Phantom



Cheek Phone Position



Tilt Phone Position

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Ramadan Plicanic*

Approved

Checked

LD/SEMC/BGGI/NMC *Mats Hansson*

Date

Company Internal
REPORT

No.

BGGIN 05:139

Date

Rev

Reference


050527

A

File



Speech Body Position

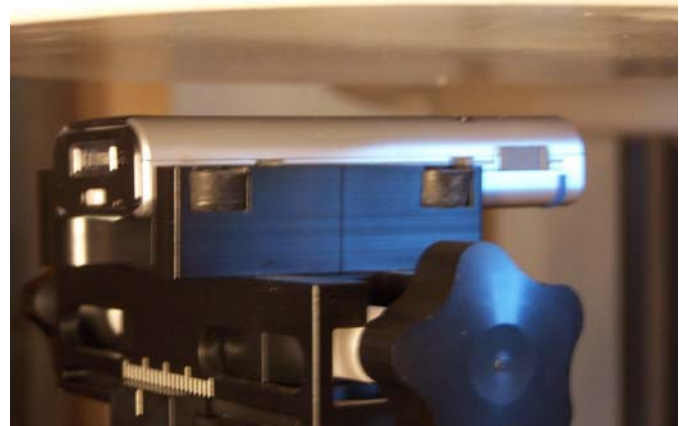

GPRS Body Position



Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Ramadan Plicanic*

Approved

Checked

No.

BGGIN 05:139

Date

Rev

Reference

LD/SEMC/BGGI/NMC *Mats Hansson* *Date*

050527

A

File

10.3 Attachment

- **Verification measurement (SAR lab, Reference)**
- **SAR Measurements Plots**
- **Probe Calibration Report**