

FCC/IC RF Test Report


APPLICANT : Sony Mobile Communications Inc.
EQUIPMENT : Smart phone
BRAND NAME : SONY
TYPE NAME : PM-0385-BV
FCC ID : PY7PM-0385
STANDARD : FCC Part 15 Subpart C §15.247
IC RSS-210 issue 8
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on May 02, 2014 and testing was completed on May 31, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification subjective to this standard	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Descriptions of Test Mode	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example	11
3 TEST RESULT	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	14
3.3 Dwell Time Measurement	21
3.4 20dB and 99% Bandwidth Measurement	24
3.5 Peak Output Power Measurement	37
3.6 Conducted Band Edges Measurement	39
3.7 Conducted Spurious Emission Measurement	46
3.8 Radiated Band Edges and Spurious Emission Measurement	65
3.9 AC Conducted Emission Measurement	105
3.10 Antenna Requirements	110
4 LIST OF MEASURING EQUIPMENT	111
5 UNCERTAINTY OF EVALUATION	113



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR450249A	Rev. 01	Initial issue of report	Jul. 14, 2014
FR450249A	Rev. 02	Update EUT Information List for SW version change as 18.4.C.1.10	Aug. 01, 2014

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	RSS-210 A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	RSS-210 A8.1(b)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	RSS-210 A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	RSS-210 A8.1(a)	20dB Bandwidth	NA	Pass	-
3.4	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	RSS-210 A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	RSS-210 A8.5	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 11.64 dB at 31.890 MHz
3.9	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 14.40 dB at 2.702 MHz
3.10	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Sony Mobile Communications Inc.
Nya Vattentorget, 22188 Lund, Sweden

1.2 Manufacturer

Arima Communication Corp.
6F., No. 866, Jhongjheng Rd., Jhonghe Dist., New Taipei City 23586, Taiwan

1.3 Product Feature of Equipment Under Test

The Equipment Under Test (hereafter called: EUT) is Smart phone supporting, GSM / WCDMA / LTE, Wi-Fi 2.4GHz 802.11b/g/n, Bluetooth with FM Receiver, ANT+, GPS, and NFC features, and below is details of information.

Product Feature	
Equipment	Smart phone
Brand Name	SONY
Type Name	PM-0385-BV
FCC ID	PY7PM-0385
GSM Operating Band(s)	GSM 850/900/1800/1900MHz
GPRS / EGPRS Multi Slot Class	GPRS Class 33, EGPRS Class 33
WCDMA Operating Band(s)	FDD Band I / II / IV / V
WCDMA Rel. Version	Rel. 9
LTE Operating Band(s)	FDD Band IV / VII / XVII
LTE Rel. Version	Rel. 8
Wi-Fi Specification	802.11b/g/n (HT20)
Bluetooth Version	v3.0 + EDR / v4.0 - LE
NFC Specification	ISO14443A / ISO14443B / Felica / ISO15693
ANT+	ANT+
Power Supply	Battery / AC Adapter / Car Charger

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 4.61 dBm (0.0029 W) Bluetooth EDR (2Mbps) : 4.61 dBm (0.0029 W) Bluetooth EDR (3Mbps) : 5.05 dBm (0.0032 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.876MHz Bluetooth EDR (2Mbps) : 1.168MHz Bluetooth EDR (3Mbps) : 1.148MHz
Antenna Type	I-FA Antenna type with gain -0.67 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

EUT Information List				
IMEI	HW Version	SW Version	S/N	Performed Test Item
IMEI : 004402452636586	A	18.4.C.1.10	ZL4416D28274	RF conducted measurement
IMEI : 004402452638509			WUJ01AYKJ8	Radiated Spurious Emission
IMEI : 004402452636123			ZL4416D28653	Conducted Emission

Accessory List	
AC Adapter	Model No. : EP800
	Type No. : CAA-0002016-US B
	S/N :
	3113W45408465 (for Radiated Spurious Emission) 3113W45408551 (for Conducted Emission)
Battery	Model No. : LIS1551ERPC
Earphone	Model No. : MH410c
	Type No. : AG-1100
	S/N :
	13511E5B0076390 (for Radiated Spurious Emission) 13511E5B00763EC (for Conducted Emission)
USB Cable	Model No. : EC450
	Type No. : AI-0700
	S/N :
	134912DC0004380 (for Radiated Spurious Emission) 134912D80008076 (for Conducted Emission)

Note:

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
Test Site No.	Sporton Site No.			IC Registration No.
	TH02-HY	CO05-HY	03CH07-HY	4086B-1

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.4-2003
- IC RSS-210 Issue 8
- IC RSS-Gen Issue 3
- NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, " Receivers Excluded from Industry Canada Requirements", only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	3.49 dBm	3.45 dBm	3.96 dBm
Ch39	2441MHz	4.61 dBm	4.61 dBm	5.05 dBm
Ch78	2480MHz	3.34 dBm	3.22 dBm	3.66 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Y plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
AC Conducted Emission	Mode 1 :GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable (Charging from Adapter) + MP3		

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

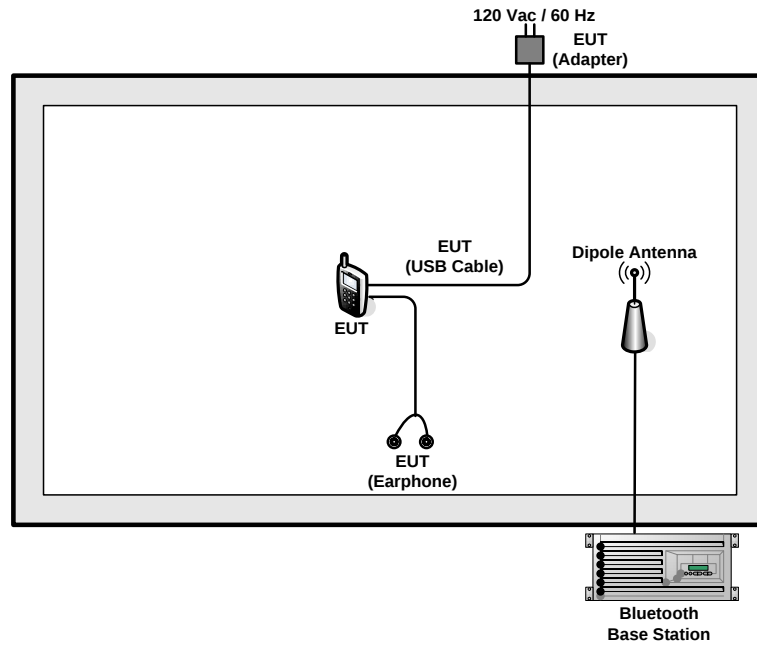

<AC Conducted Emission Mode>

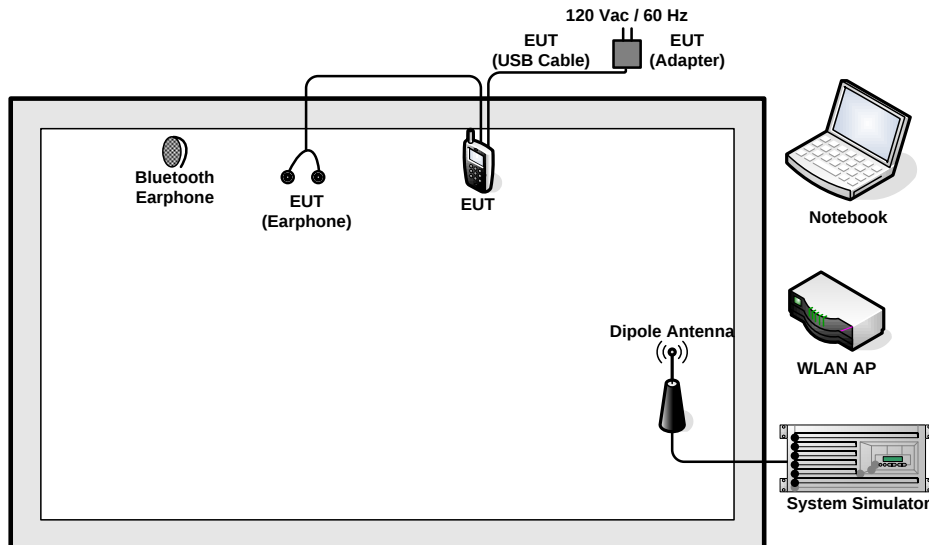

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	Unshielded, 0.75m	N/A
5.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the RF utility, "QCRT" was installed in notebook which was programmed in order to make the EUT get into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW $\geq$ 1% of the span; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.


3.1.4 Test Setup

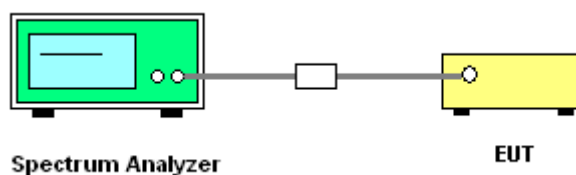


3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

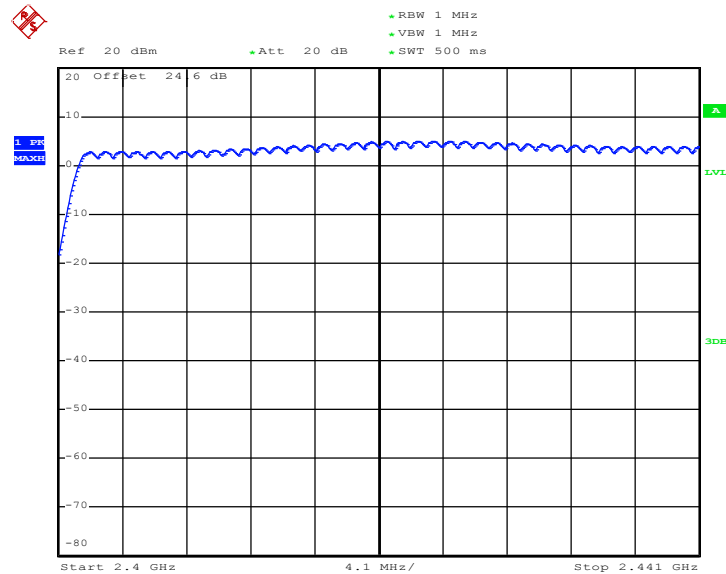

Date: 9.MAY.2014 00:06:15

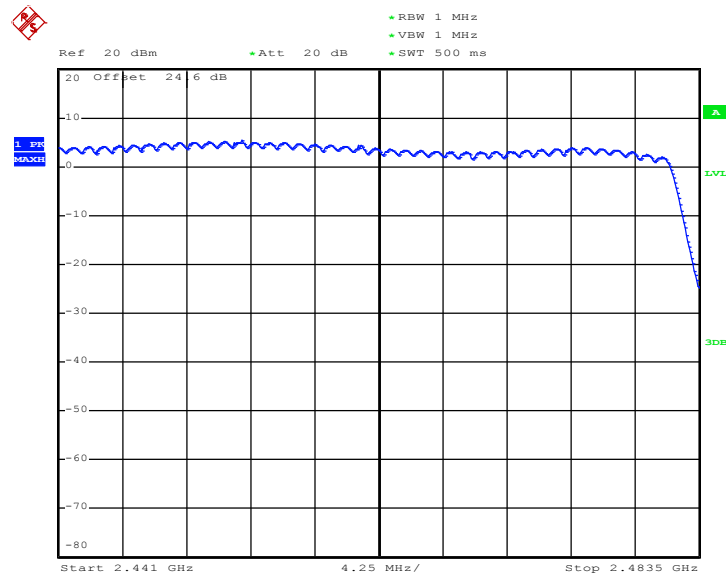

Date: 9.MAY.2014 00:09:13

Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6267	Pass
39	2441	1.002	0.6053	Pass
78	2480	1.002	0.6027	Pass


Channel Separation Plot on Channel 00 - 01

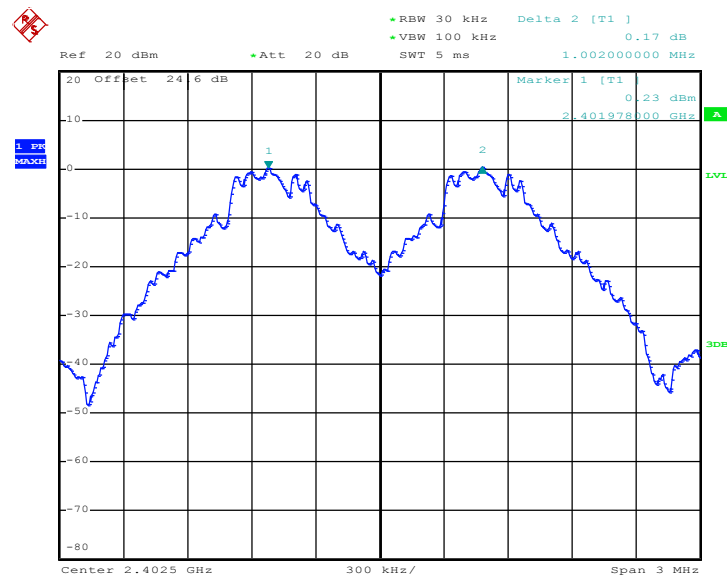

Date: 8.MAY.2014 23:18:43


Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

Channel Separation Plot on Channel 39 - 40

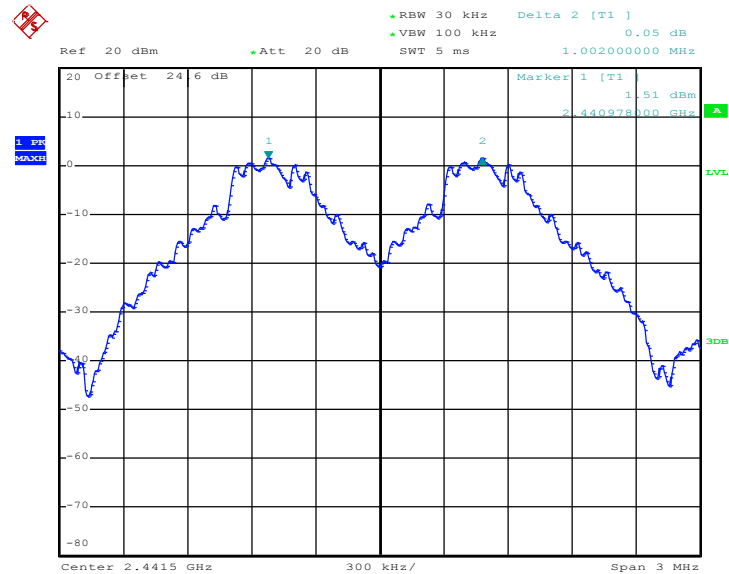

Date: 8.MAY.2014 23:19:37

Channel Separation Plot on Channel 77 - 78

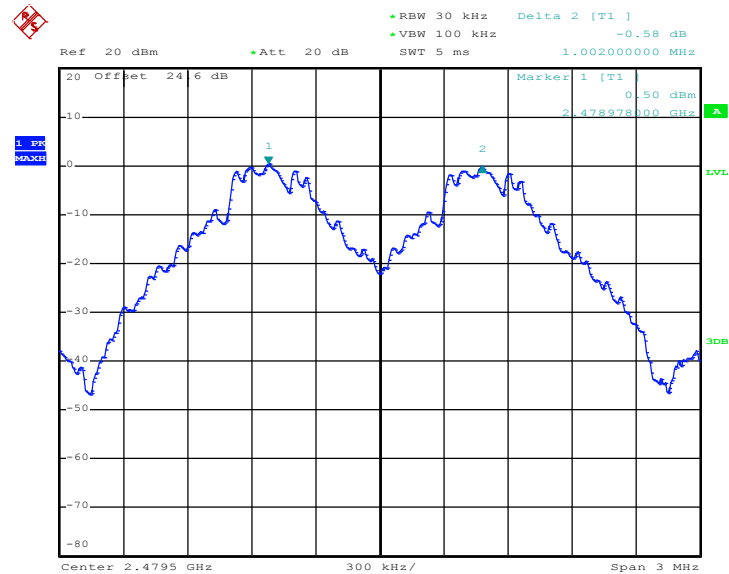


Date: 8.MAY.2014 23:20:33



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8440	Pass
39	2441	1.002	0.8440	Pass
78	2480	1.002	0.8440	Pass

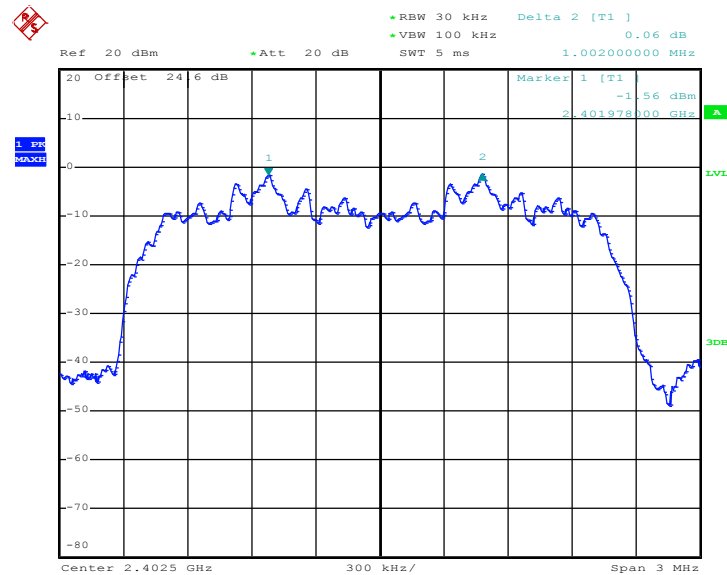
Channel Separation Plot on Channel 00 - 01

Date: 8.MAY.2014 23:22:32

Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Channel Separation Plot on Channel 39 - 40

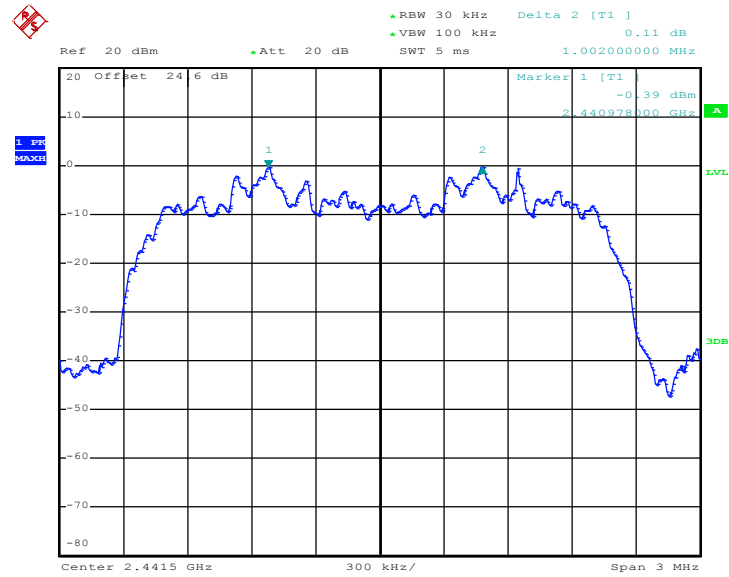

Date: 8.MAY.2014 23:23:26

Channel Separation Plot on Channel 77 - 78

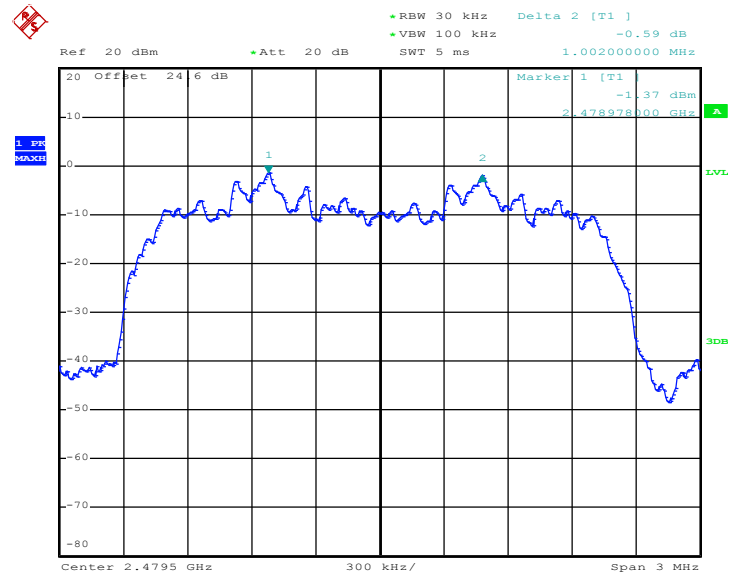


Date: 8.MAY.2014 23:24:34



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8240	Pass
39	2441	1.002	0.8240	Pass
78	2480	1.002	0.8280	Pass


Channel Separation Plot on Channel 00 - 01

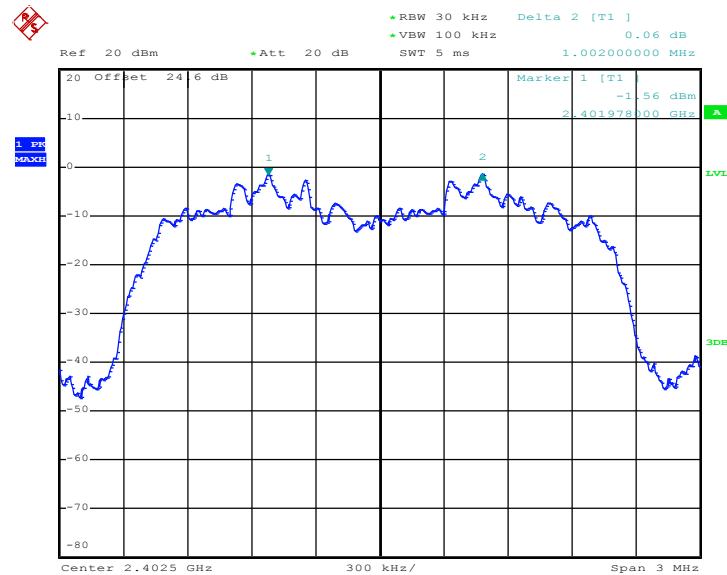

Date: 8.MAY.2014 23:25:34


Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

Channel Separation Plot on Channel 39 - 40

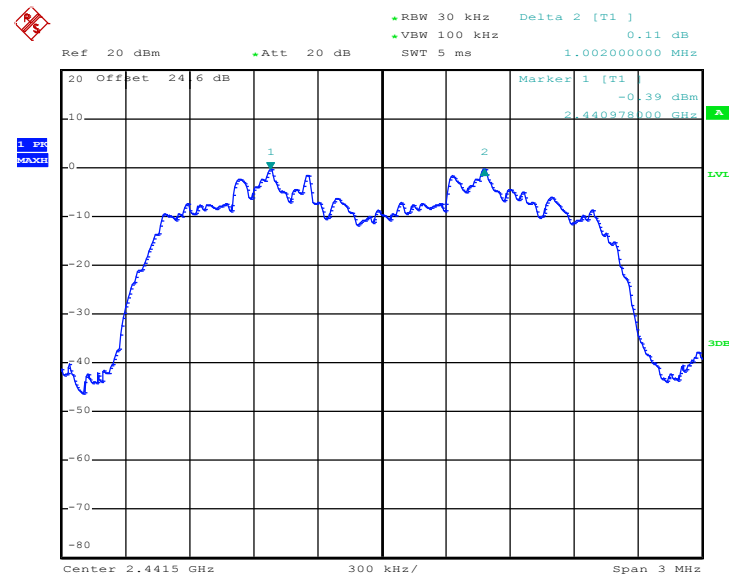

Date: 8.MAY.2014 23:26:29

Channel Separation Plot on Channel 77 - 78

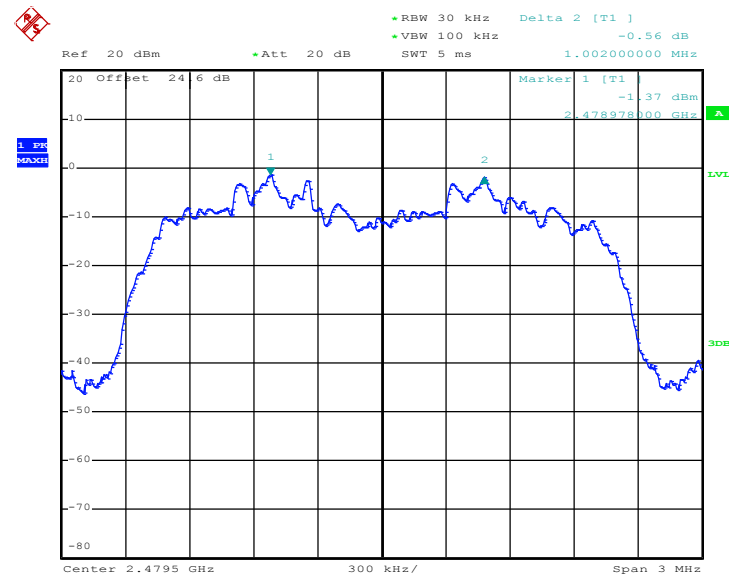

Date: 8.MAY.2014 23:27:21

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~26℃
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%


Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

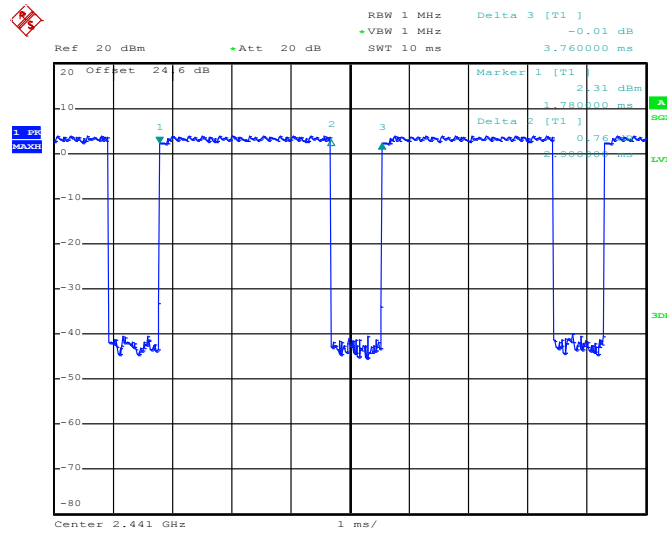

Date: 7.MAY.2014 00:00:16

Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
For 99% Bandwidth measurement, the RBW=30kHz, and VBW = 100kHz. Sweep = auto ;
Detector function = sample. Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

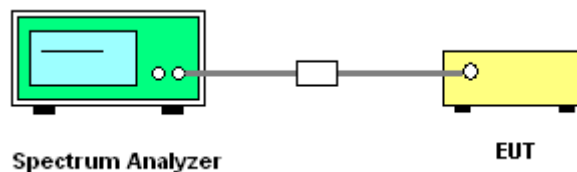




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.940
39	2441	0.908
78	2480	0.904

20 dB Bandwidth Plot on Channel 00

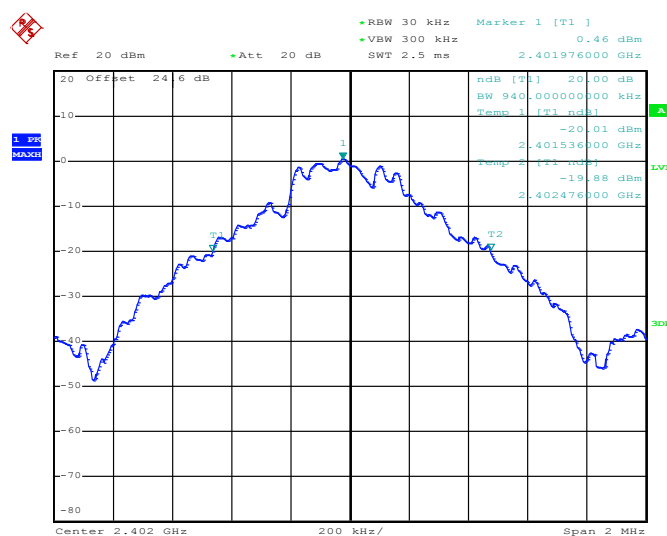


Date: 8.MAY.2014 23:29:49

Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




20 dB Bandwidth Plot on Channel 39

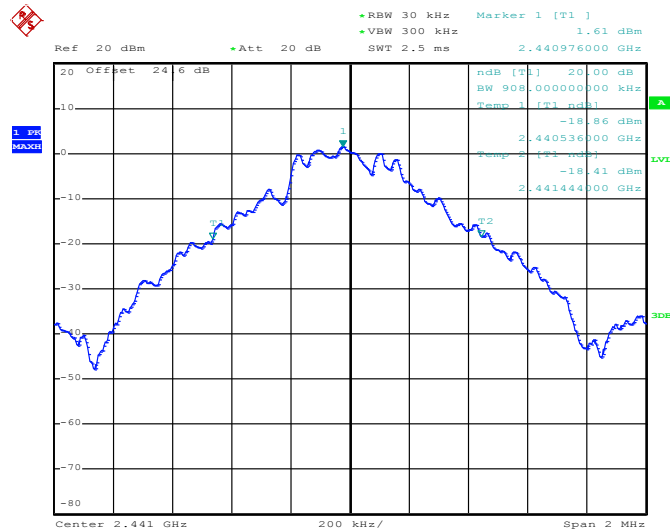

Date: 8.MAY.2014 23:28:47

20 dB Bandwidth Plot on Channel 78

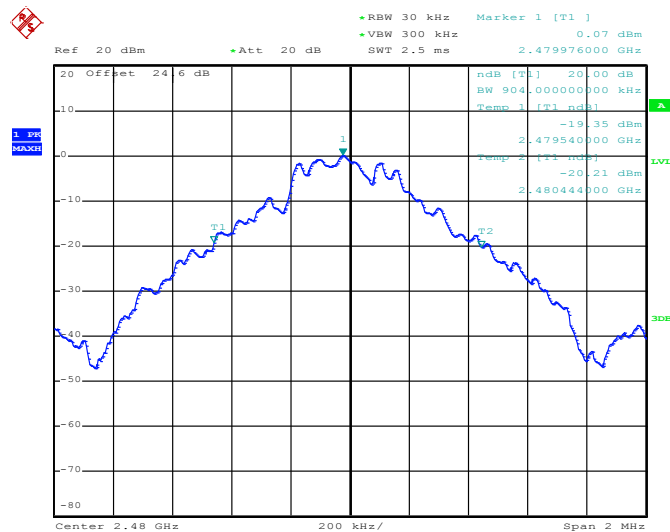


Date: 8.MAY.2014 23:29:18



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.266
39	2441	1.266
78	2480	1.266

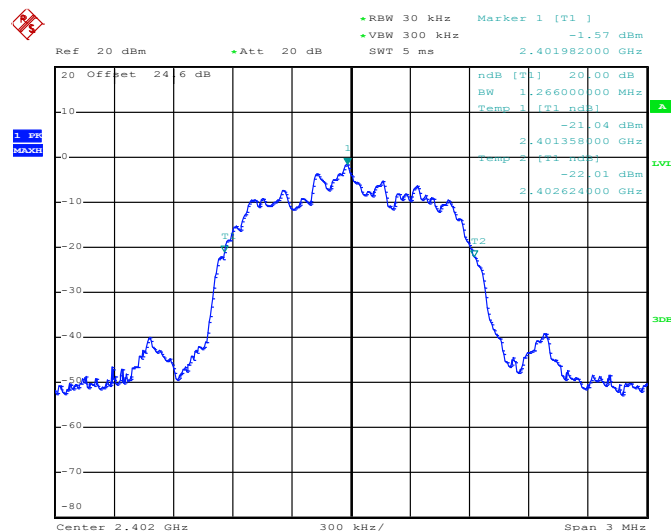
20 dB Bandwidth Plot on Channel 00

Date: 8.MAY.2014 23:32:49

Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




20 dB Bandwidth Plot on Channel 39

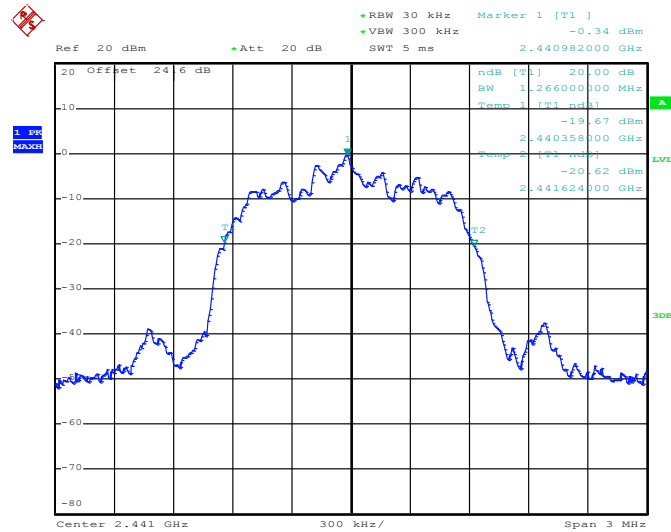

Date: 8.MAY.2014 23:31:44

20 dB Bandwidth Plot on Channel 78

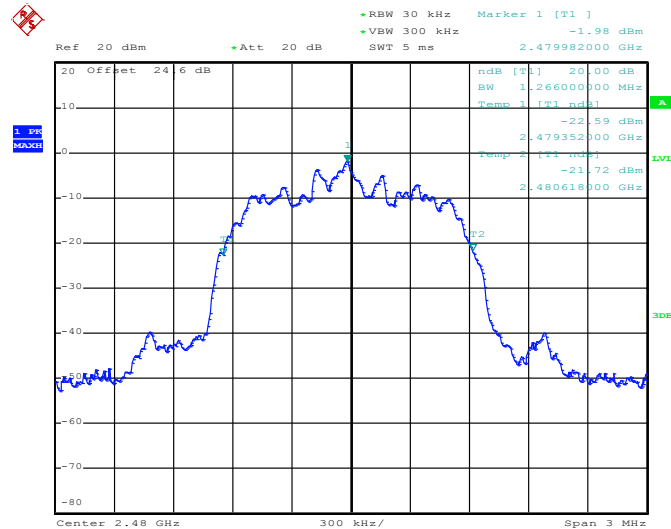


Date: 8.MAY.2014 23:32:14



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.236
39	2441	1.236
78	2480	1.242

20 dB Bandwidth Plot on Channel 00

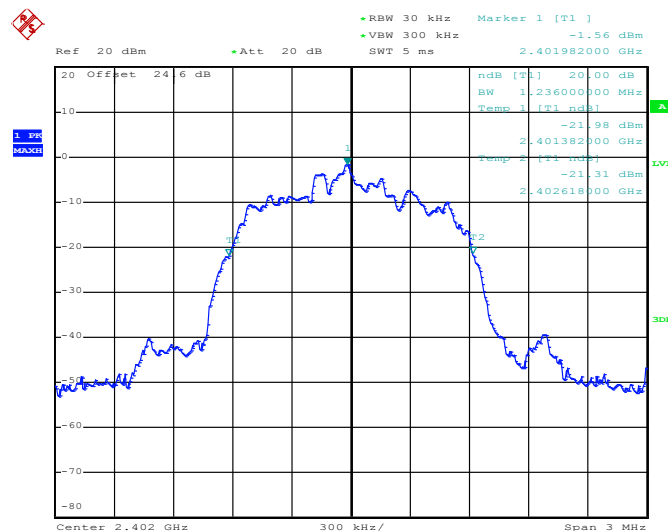


Date: 8.MAY.2014 23:33:22

Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




20 dB Bandwidth Plot on Channel 39

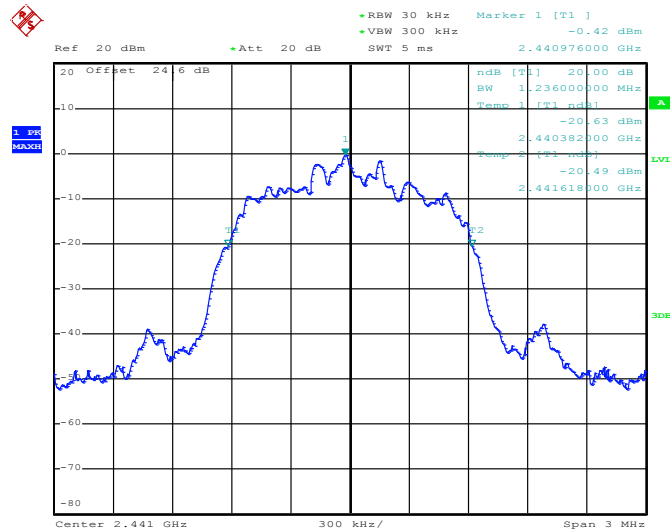

Date: 8.MAY.2014 23:33:52

20 dB Bandwidth Plot on Channel 78

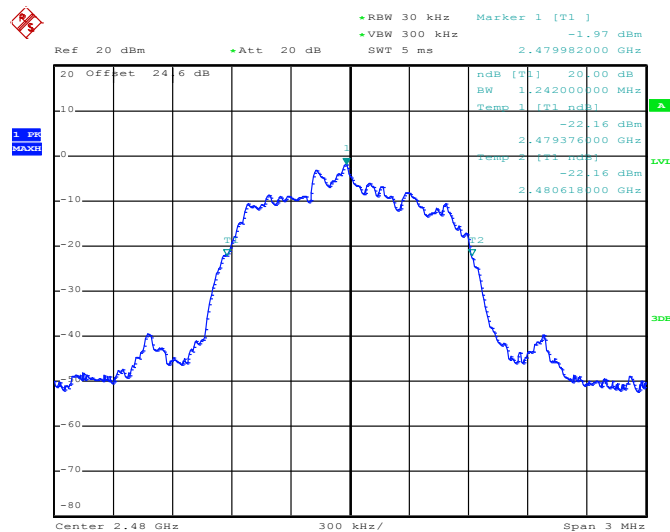


Date: 8.MAY.2014 23:34:23

3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.872
39	2441	0.872
78	2480	0.876


99% Occupied Bandwidth Plot on Channel 00

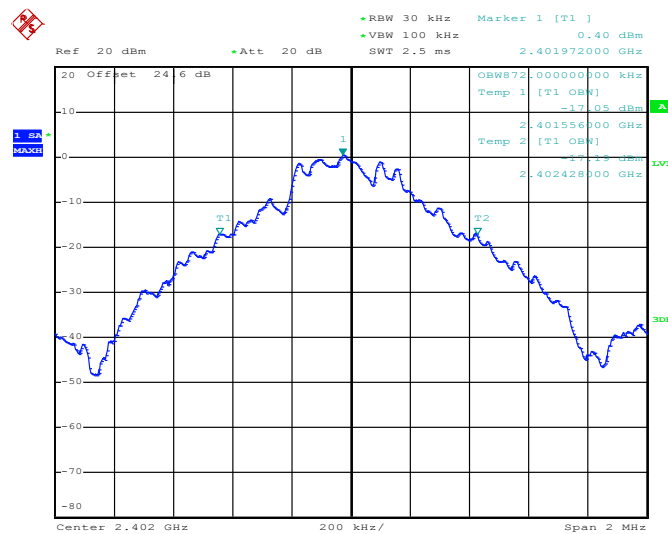

Date: 8.MAY.2014 23:37:49


Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

99% Occupied Bandwidth Plot on Channel 39

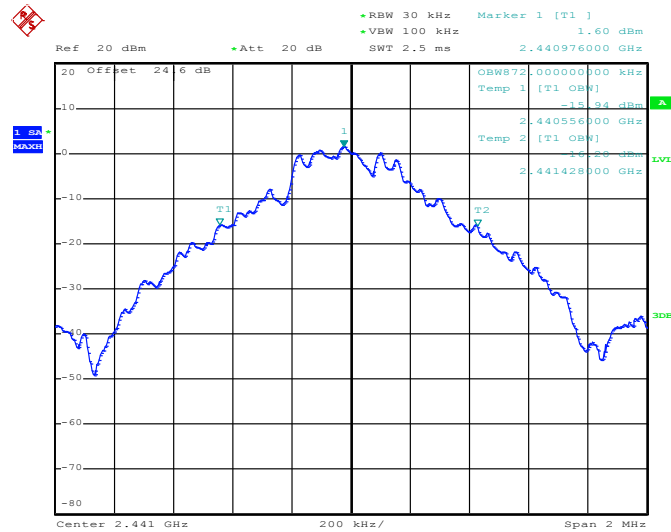

Date: 8.MAY.2014 23:38:44

99% Occupied Bandwidth Plot on Channel 78

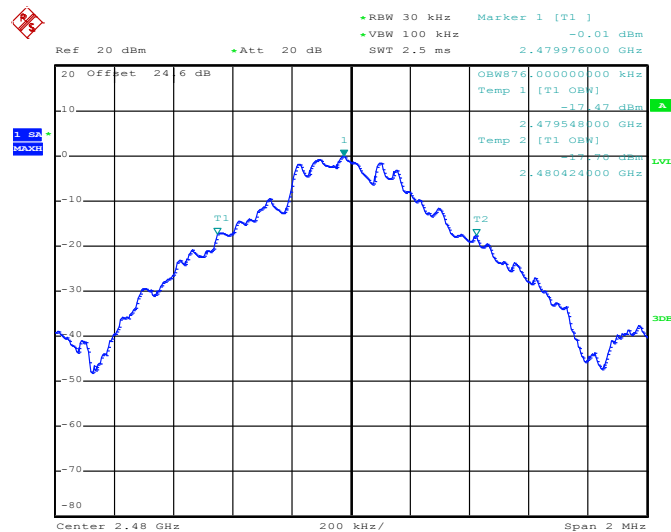


Date: 8.MAY.2014 23:36:44



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.164
39	2441	1.164
78	2480	1.168

99% Occupied Bandwidth Plot on Channel 00

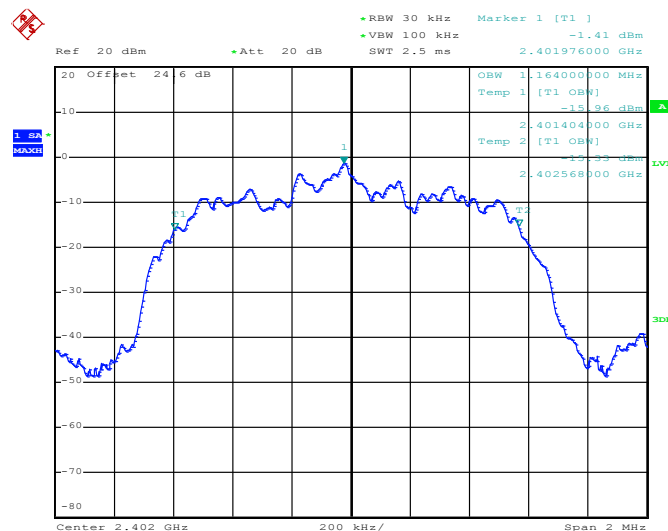


Date: 8.MAY.2014 23:42:59

Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




99% Occupied Bandwidth Plot on Channel 39

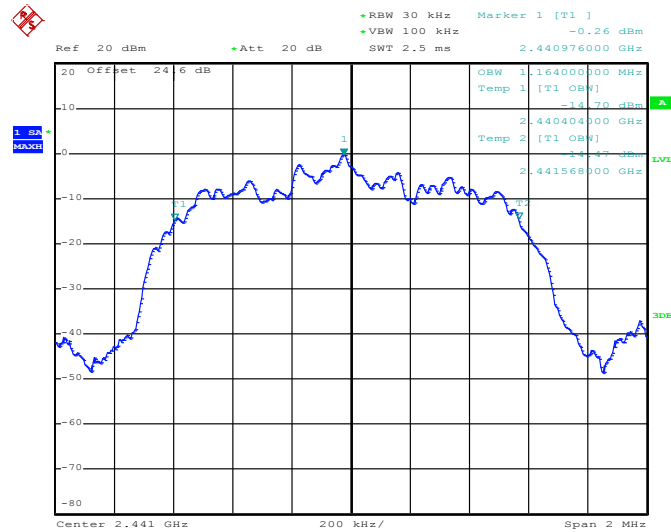

Date: 8.MAY.2014 23:40:42

99% Occupied Bandwidth Plot on Channel 78

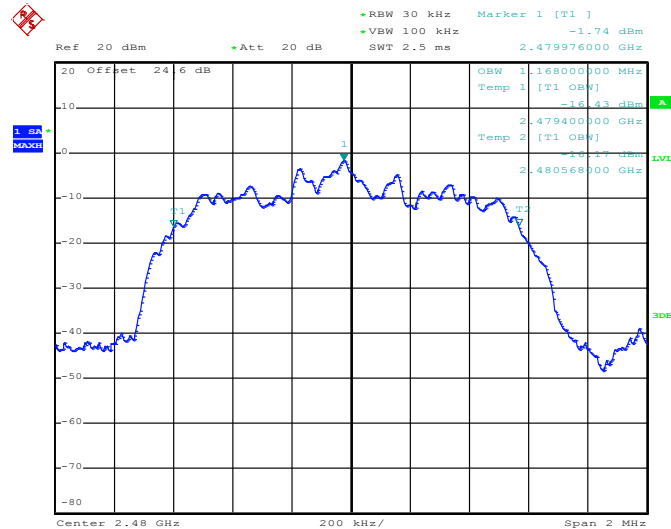


Date: 8.MAY.2014 23:41:57



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.144
39	2441	1.144
78	2480	1.148


99% Occupied Bandwidth Plot on Channel 00

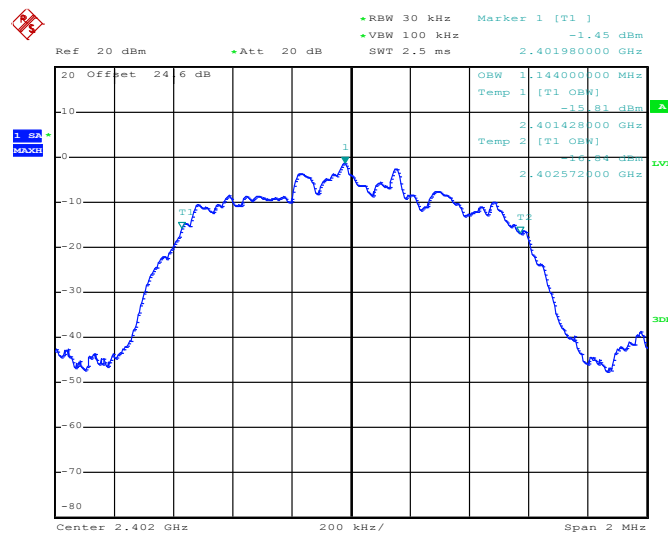

Date: 8.MAY.2014 23:45:58


Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

99% Occupied Bandwidth Plot on Channel 39

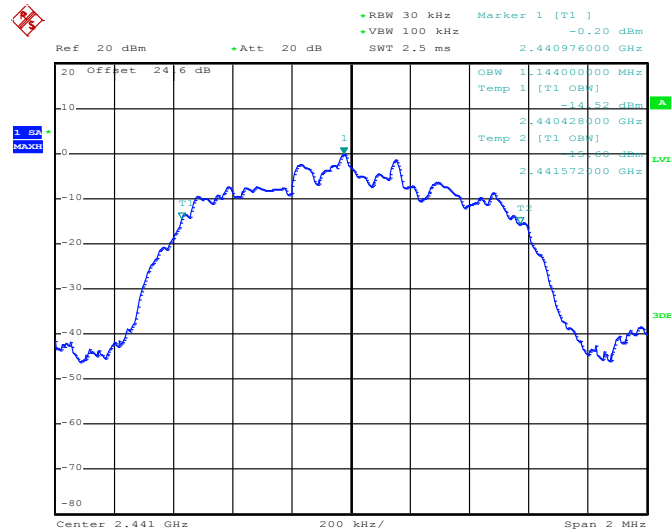

Date: 8.MAY.2014 23:43:50

99% Occupied Bandwidth Plot on Channel 78

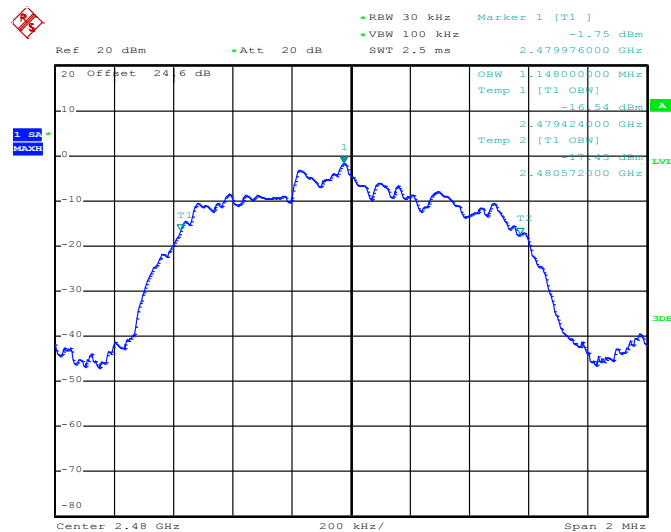

Date: 8.MAY.2014 23:45:15

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, 3Mbps and AFH are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

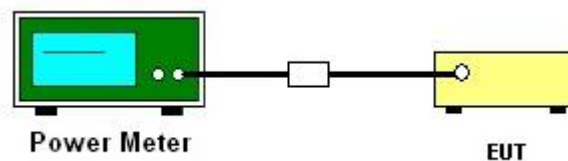

3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	3.49	20.97	Pass
39	2441	4.61	20.97	Pass
78	2480	3.34	20.97	Pass

Note: For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	3.45	20.97	Pass
39	2441	4.61	20.97	Pass
78	2480	3.22	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	3.96	20.97	Pass
39	2441	5.05	20.97	Pass
78	2480	3.66	20.97	Pass

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz ($\geq 1\%$ span=10MHz), VBW = 300kHz ($\geq$ RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

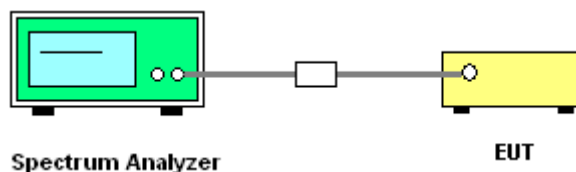




3.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Osolemio Chang

Low Band Edge Plot on Channel 00

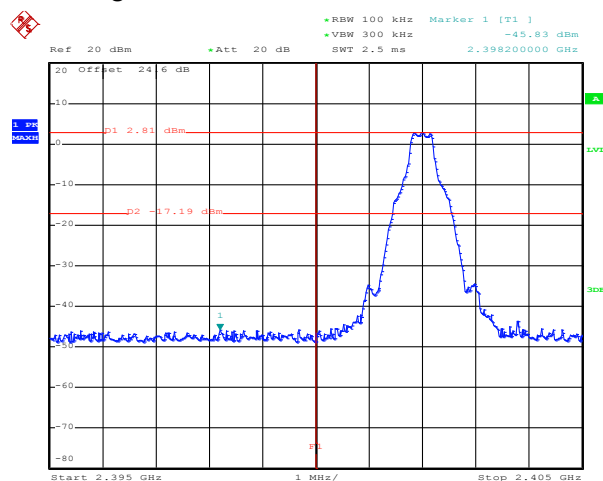

Date: 9.MAY.2014 00:22:17

High Band Edge Plot on Channel 78

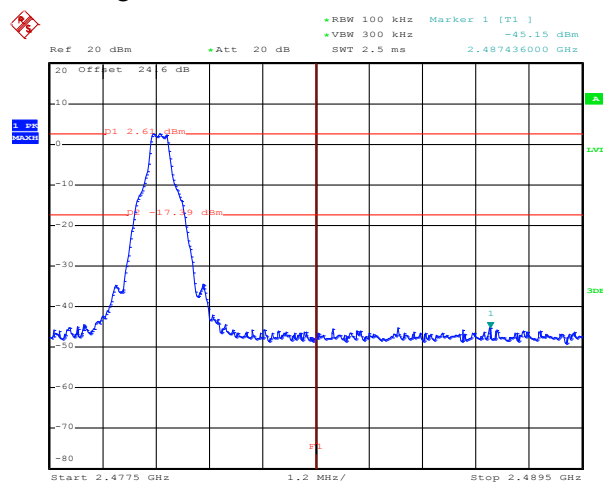


Date: 9.MAY.2014 00:23:40

Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.


Test Mode :	2Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Osolemio Chang

Low Band Edge Plot on Channel 00

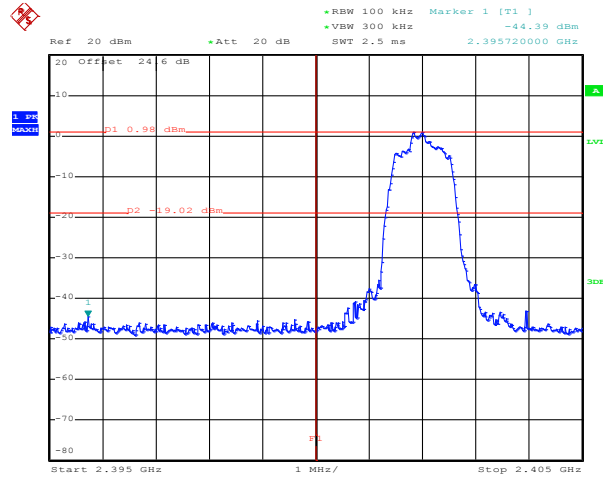

Date: 9.MAY.2014 00:25:06

High Band Edge Plot on Channel 78

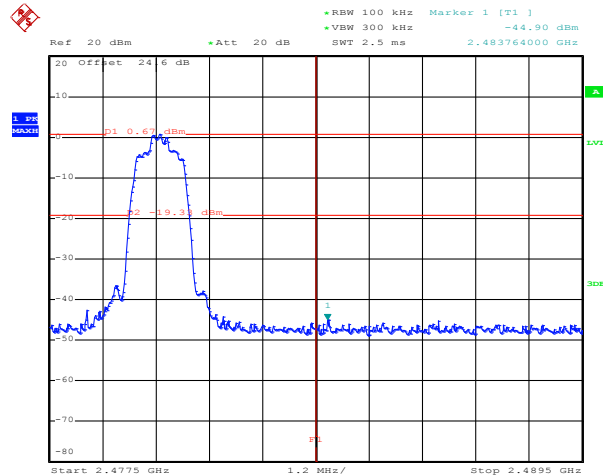


Date: 9.MAY.2014 00:26:18

Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.


Test Mode :	3Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Osolemio Chang

Low Band Edge Plot on Channel 00

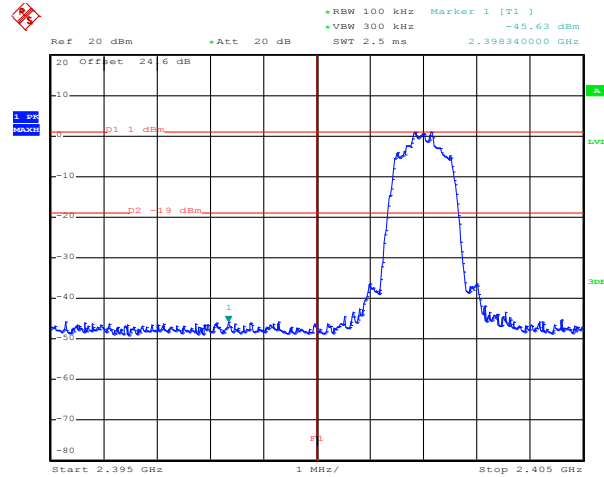

Date: 9.MAY.2014 00:27:32

High Band Edge Plot on Channel 78

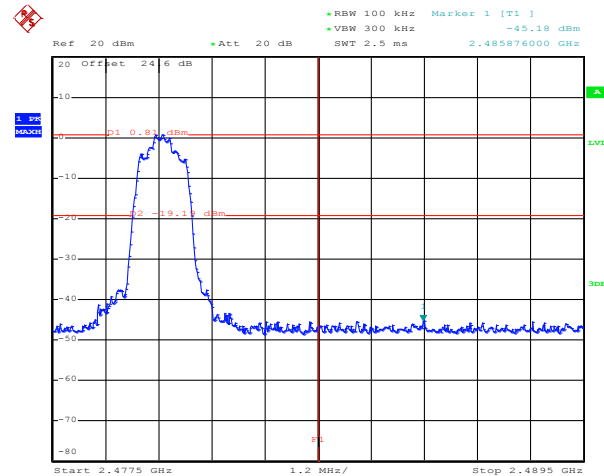


Date: 9.MAY.2014 00:28:17

Note: The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

3.6.6 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

1Mbps Hopping Mode Low Band Edge Plot

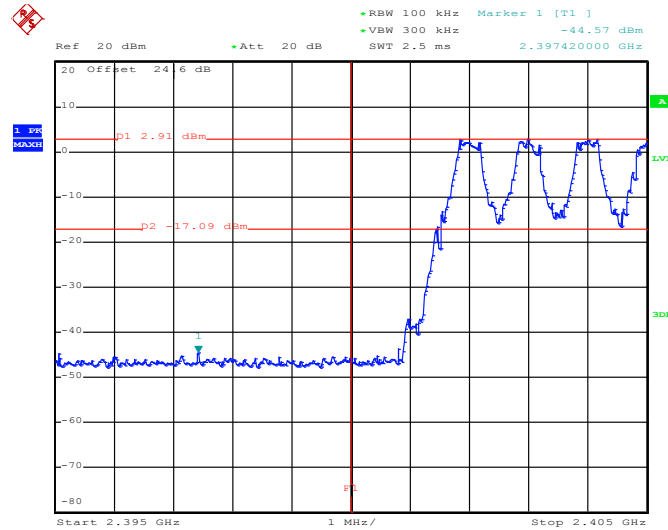

Date: 9.MAY.2014 00:11:18


1Mbps Hopping Mode High Band Edge Plot

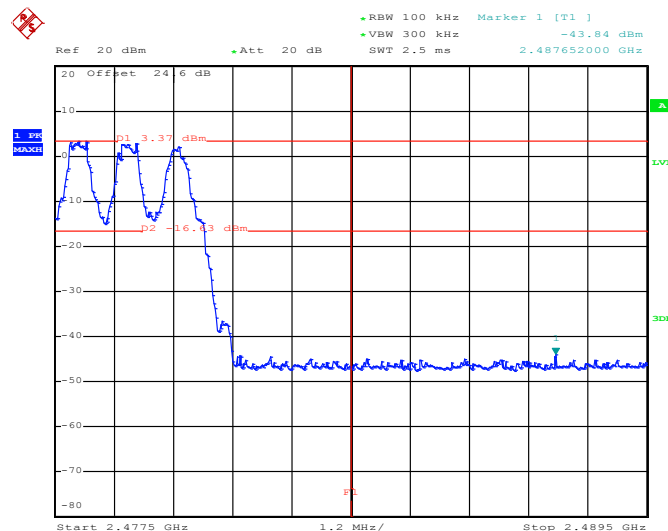


Date: 9.MAY.2014 00:12:47



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

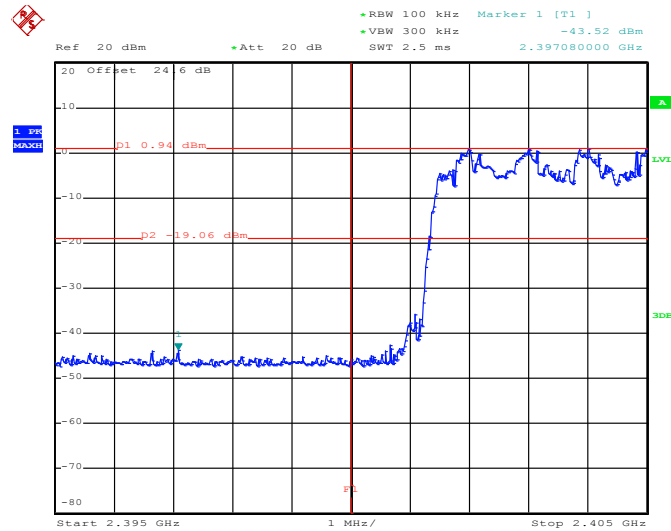2Mbps Hopping Mode Low Band Edge Plot


Date: 9.MAY.2014 00:16:13

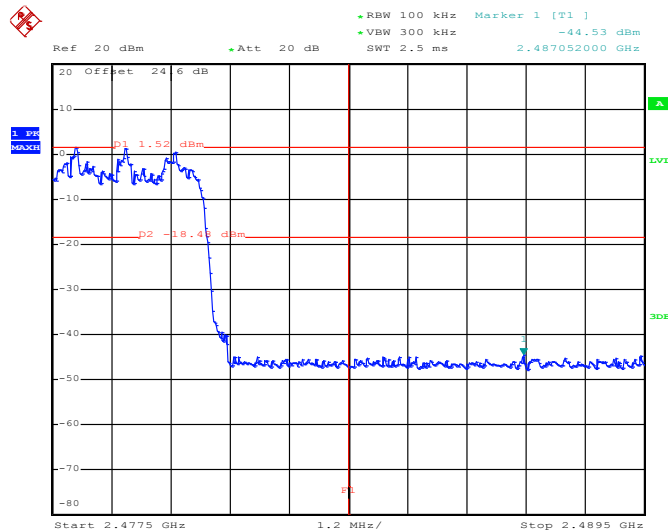2Mbps Hopping Mode High Band Edge Plot


Date: 9.MAY.2014 00:17:35



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Osolemio Chang	Relative Humidity :	50~53%

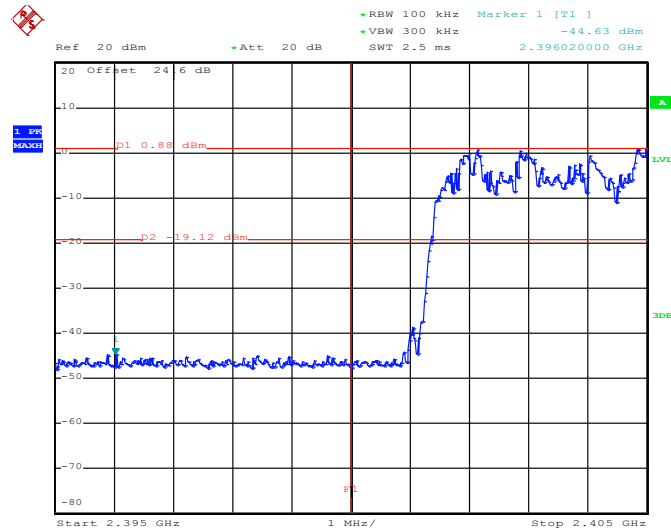3Mbps Hopping Mode Low Band Edge Plot

Date: 9.MAY.2014 00:19:28

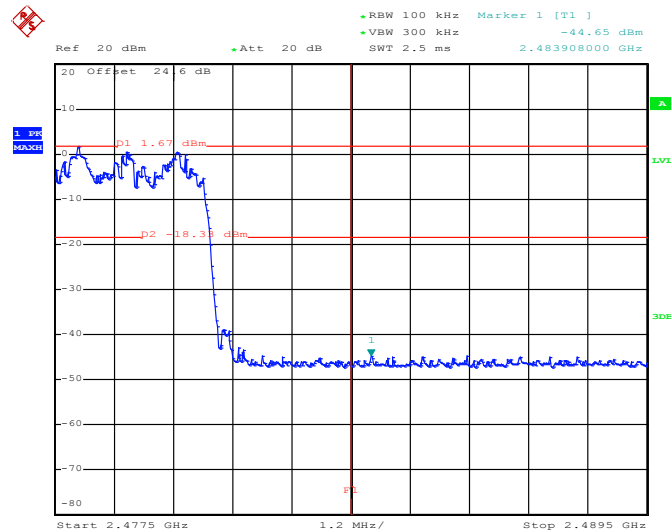3Mbps Hopping Mode High Band Edge Plot

Date: 9.MAY.2014 00:21:15

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.7.4 Test Setup

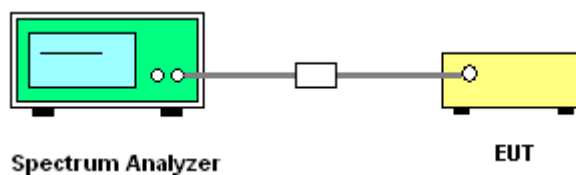

3.7.5 Test Result of Conducted Spurious Emission

Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Osolemio Chang


1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

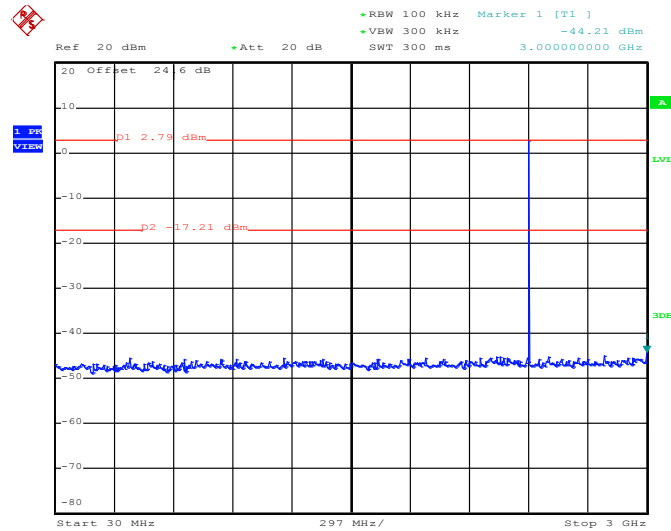

Date: 8.MAY.2014 23:47:39

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

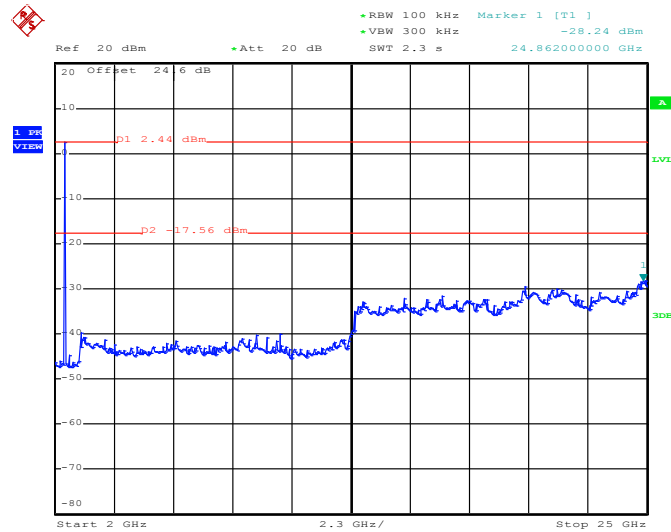
1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz


Date: 8.MAY.2014 23:48:01

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Osolemio Chang

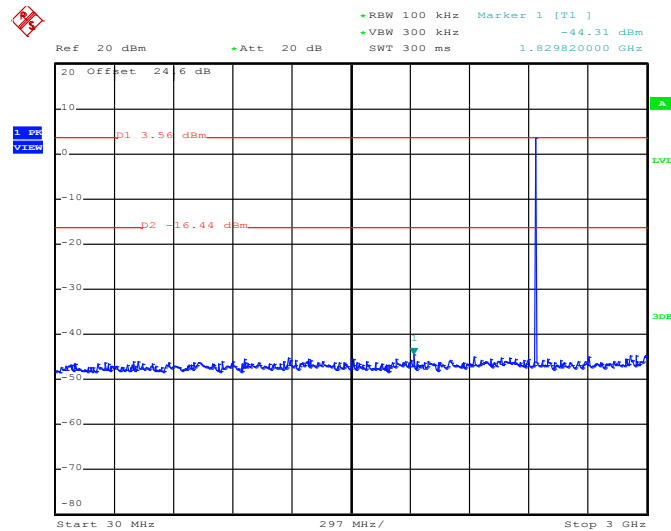1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz


Date: 8.MAY.2014 23:49:34

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

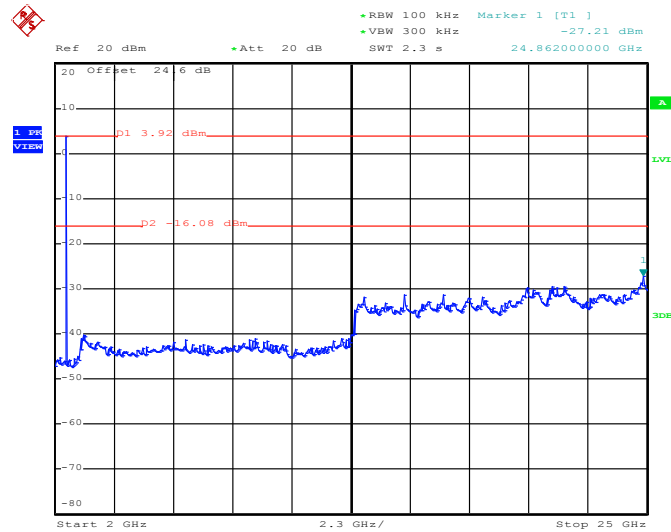1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


Date: 8.MAY.2014 23:49:56


Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Osolemio Chang


1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

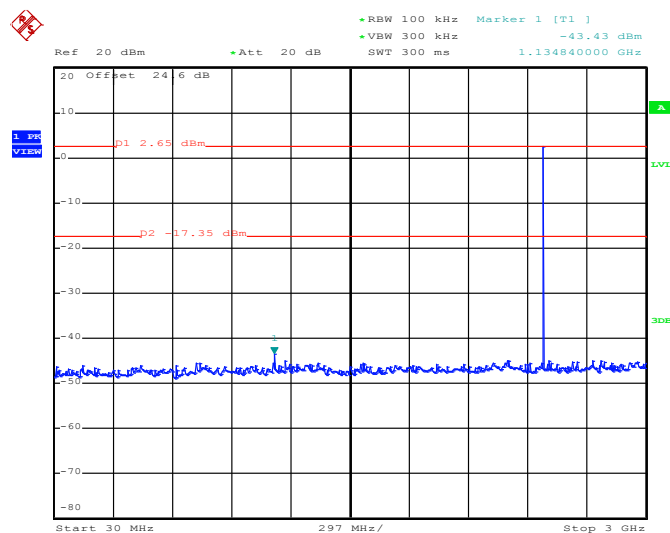

Date: 8.MAY.2014 23:50:57

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

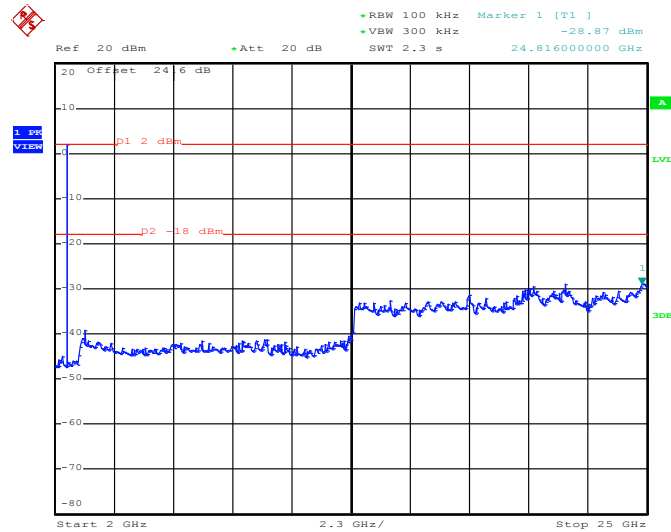
1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


Date: 8.MAY.2014 23:51:19

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Osolemio Chang

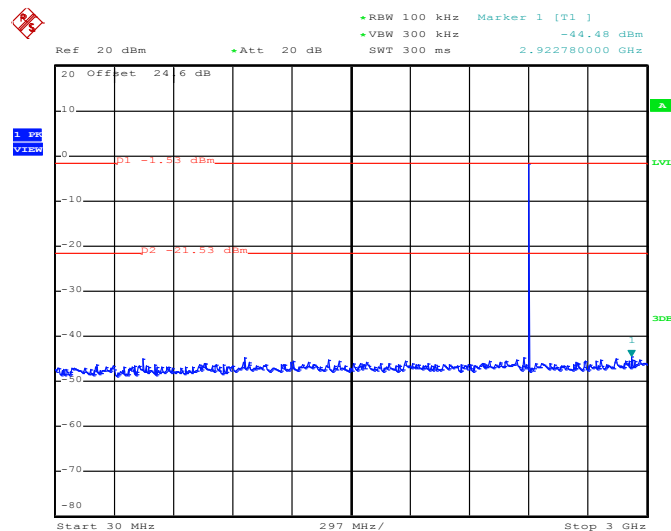2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz


Date: 8.MAY.2014 23:53:10

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

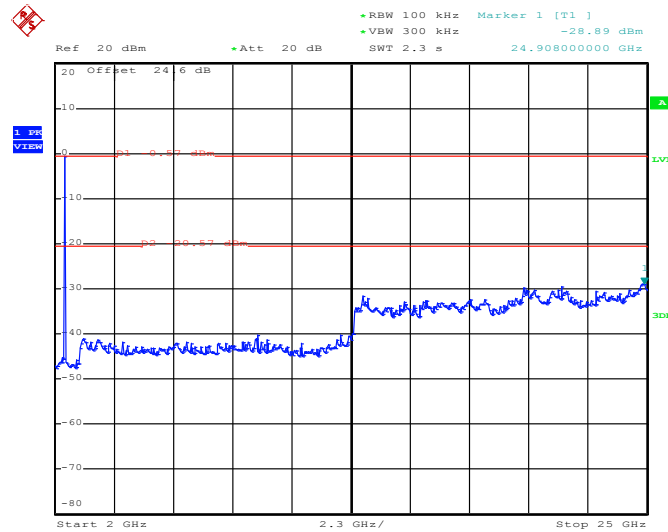
2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz


Date: 8.MAY.2014 23:53:32

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Osolemio Chang

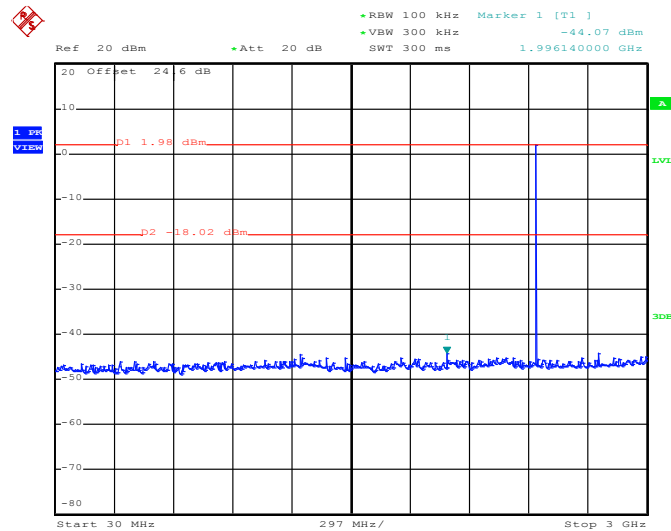2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz


Date: 8.MAY.2014 23:54:38

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

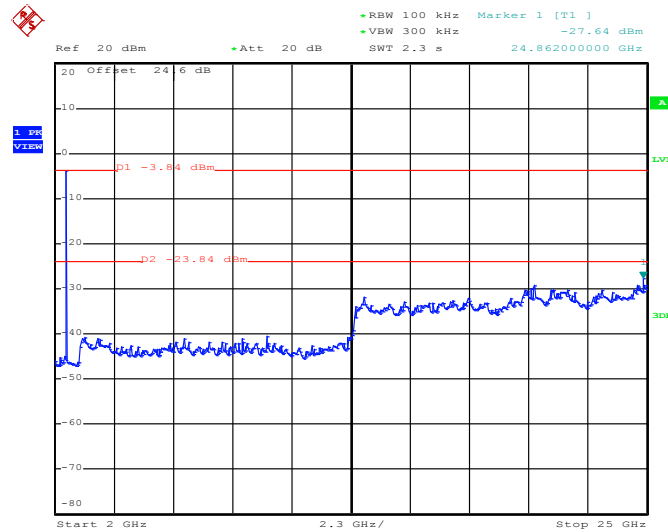
2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


Date: 8.MAY.2014 23:55:00

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Osolemio Chang

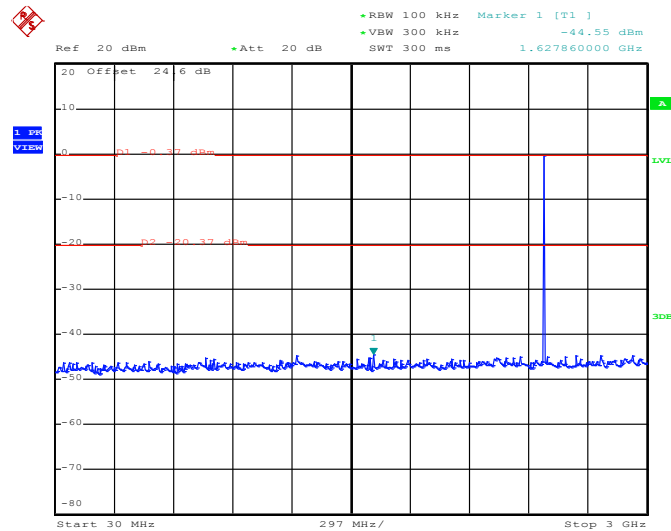2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz


Date: 8.MAY.2014 23:56:46

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

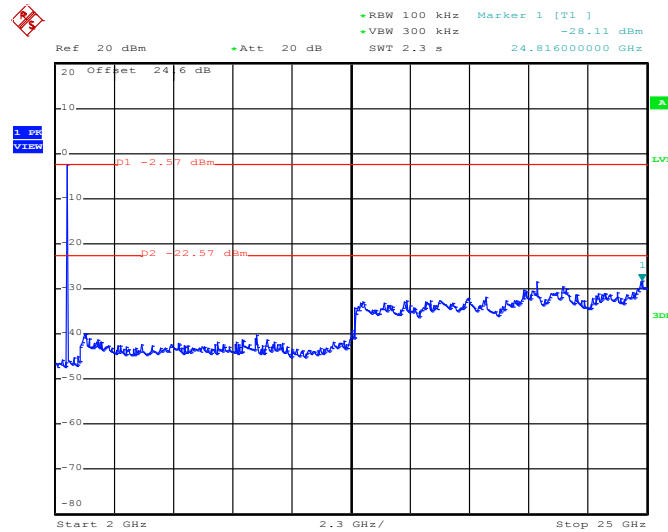2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


Date: 8.MAY.2014 23:57:08


Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Osolemio Chang


3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

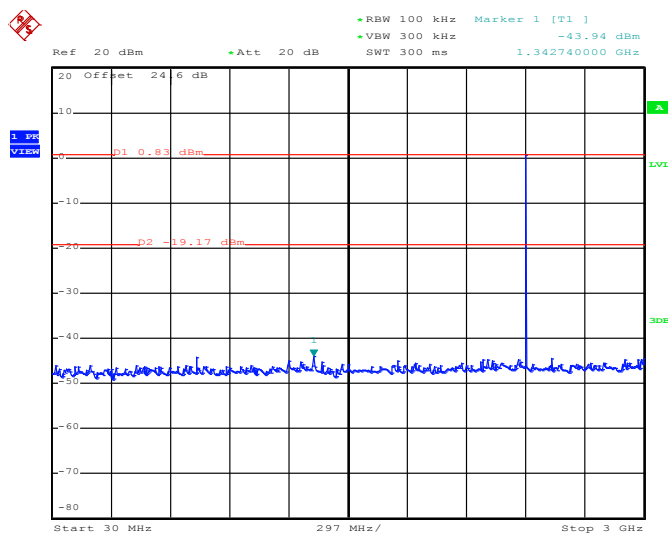

Date: 8.MAY.2014 23:58:33

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

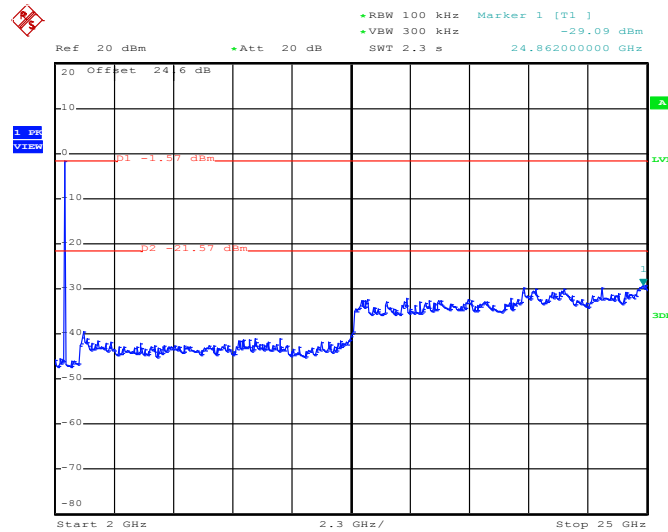
3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz


Date: 8.MAY.2014 23:58:55

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Osolemio Chang

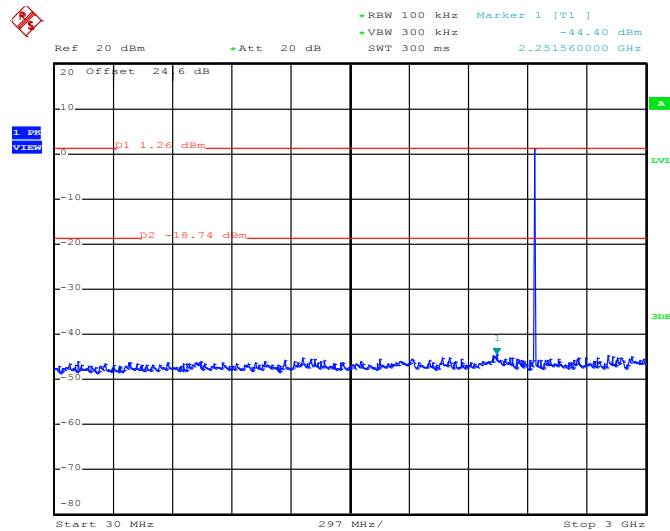3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz


Date: 8.MAY.2014 23:59:52

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

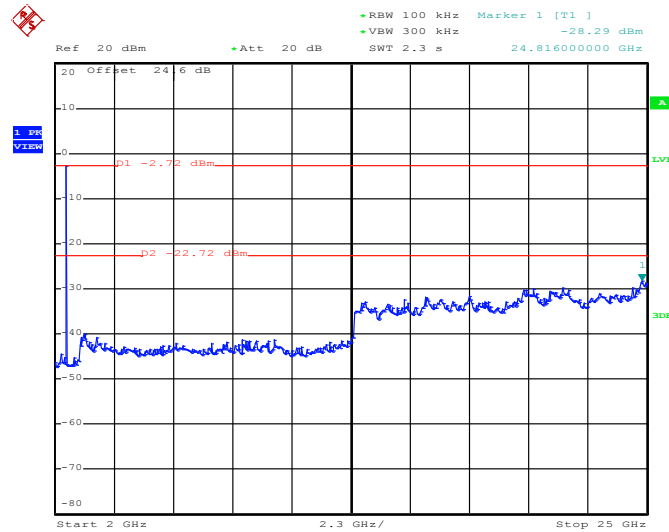3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


Date: 9.MAY.2014 00:00:14


Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Osolemio Chang


3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

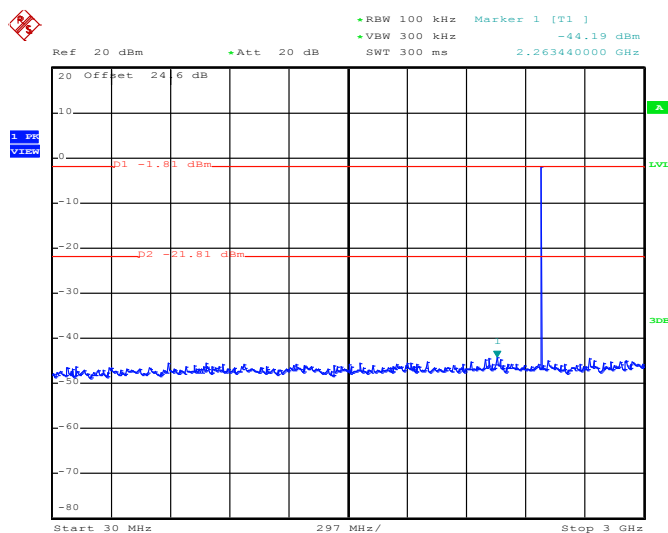

Date: 9.MAY.2014 00:00:50

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

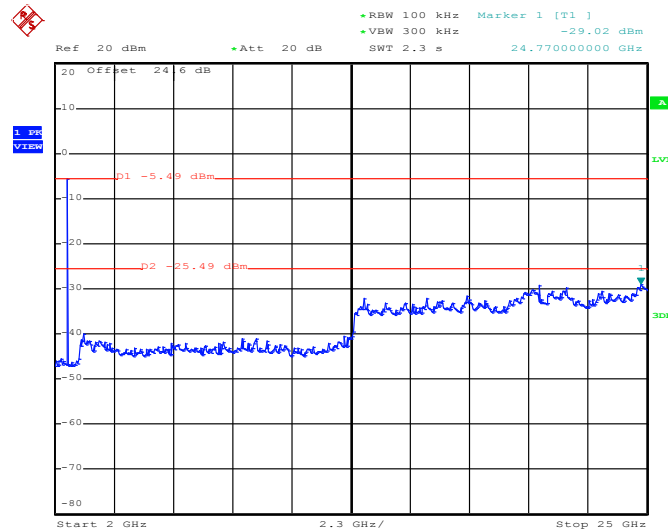3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


Date: 9.MAY.2014 00:01:12

Note:

1. The total loss is 24.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.8.3 Test Procedures


1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

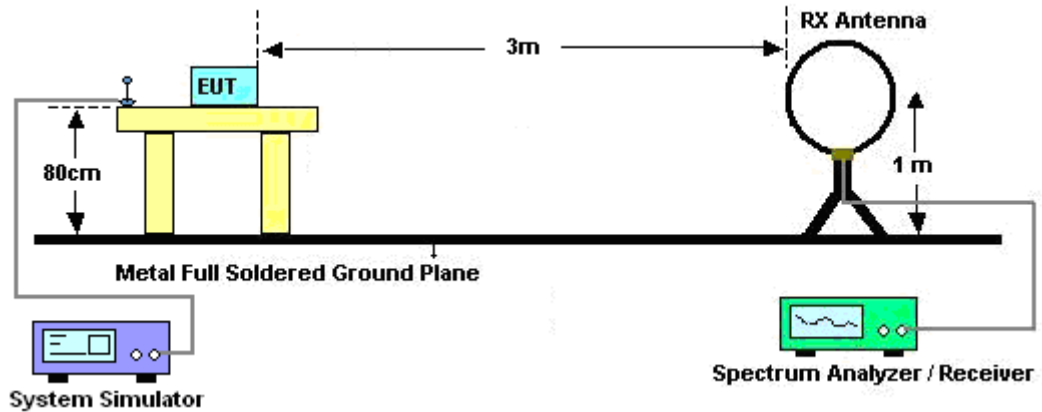

For radiated emissions from 30MHz to 1GHz

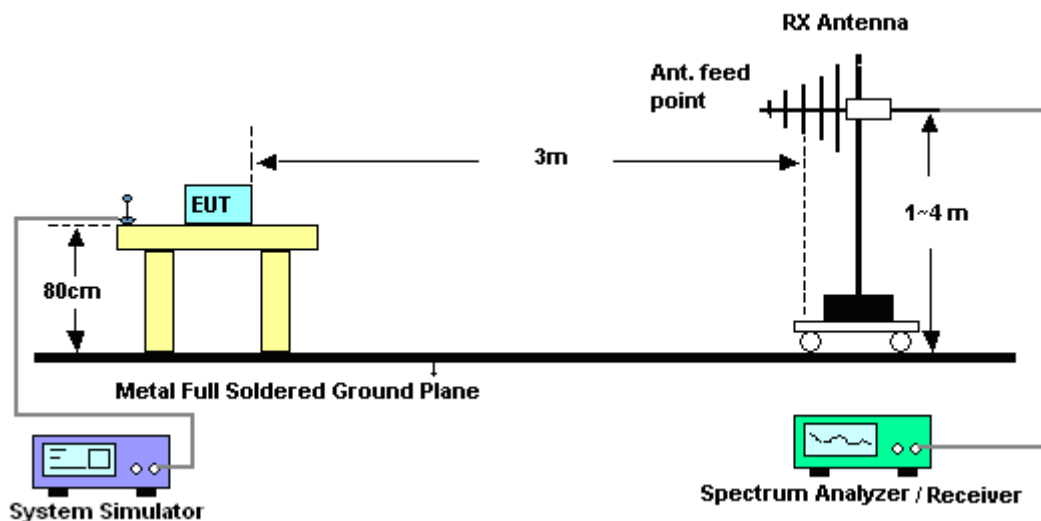

For radiated emissions above 1GHz

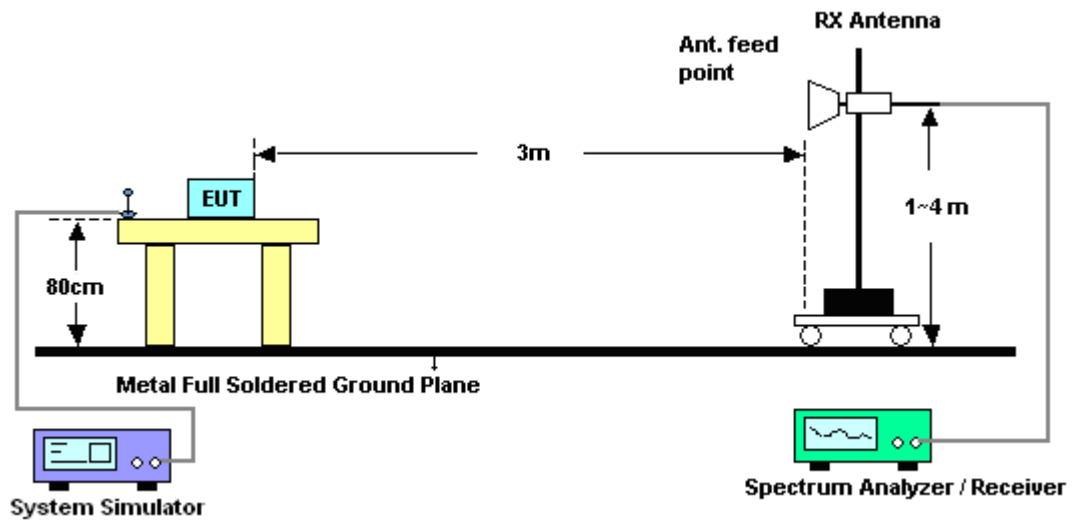


3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.8.6 Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

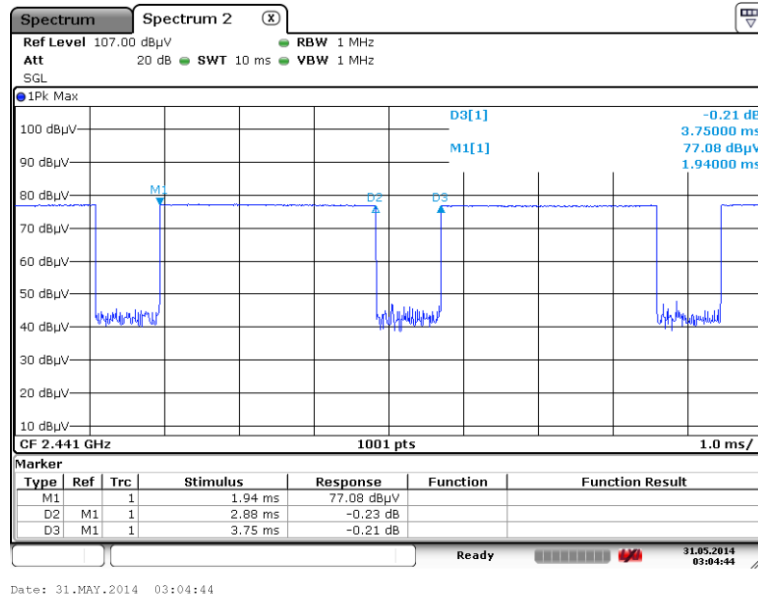

DH5 on time (Count Pulses) Plot on Channel 39

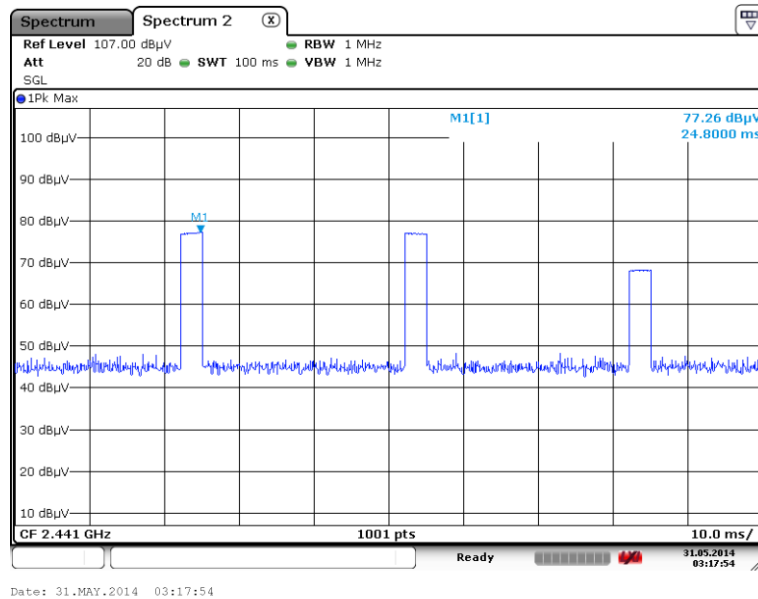


Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.




2DH5 on time (One Pulse) Plot on Channel 39

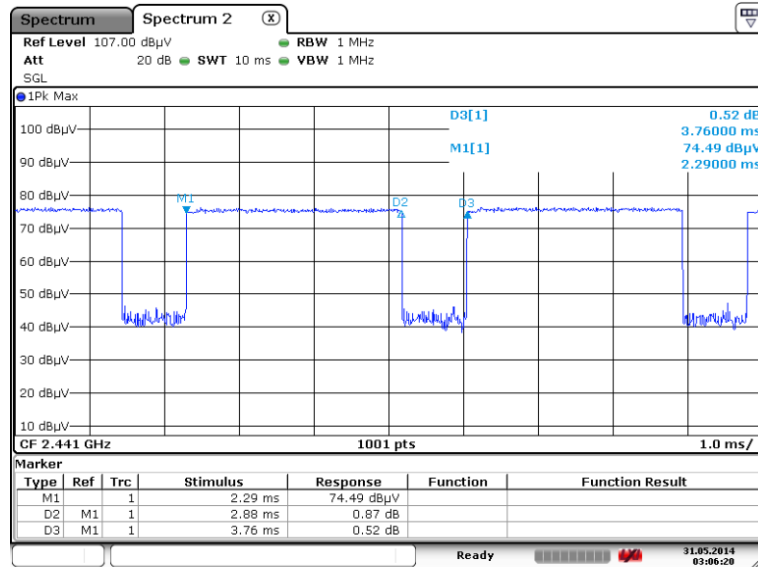

Date: 31.MAY.2014 03:06:20



2DH5 on time (Count Pulses) Plot on Channel 39

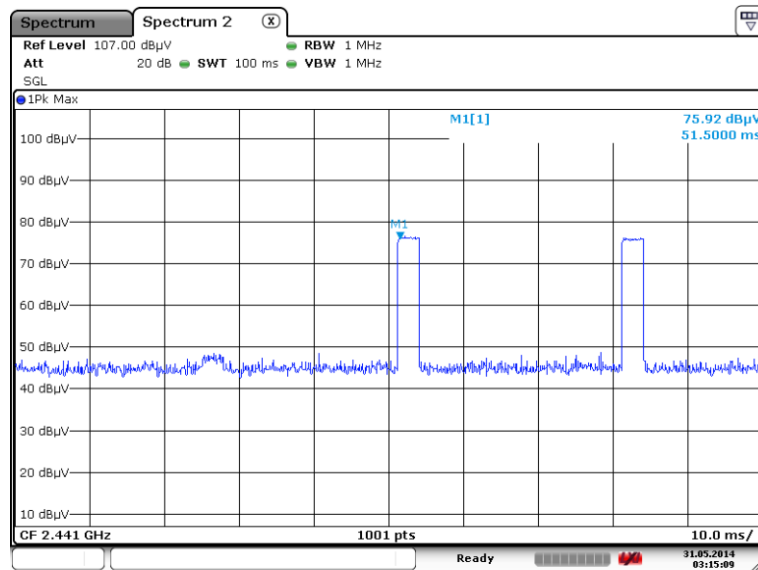

Date: 31.MAY.2014 03:15:09

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

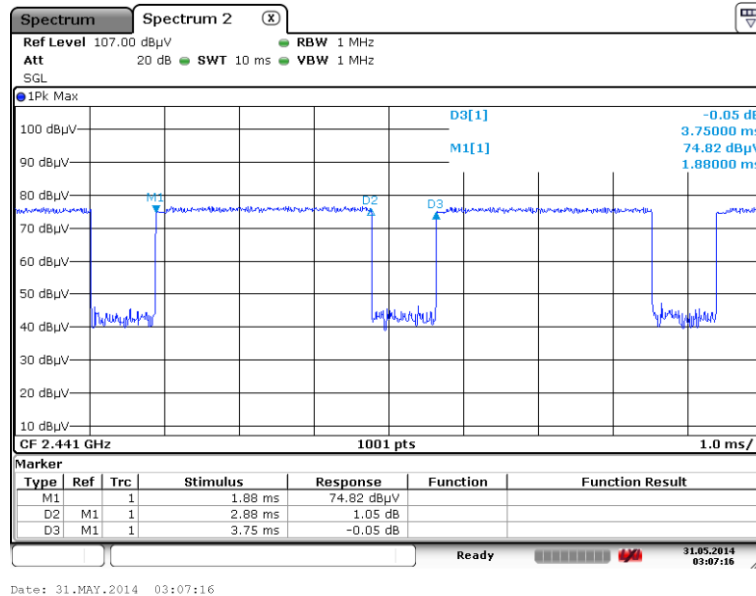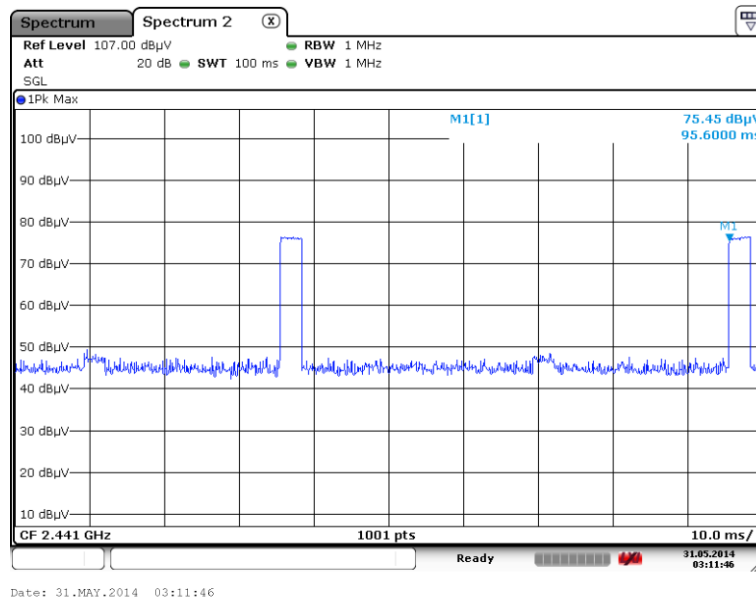3DH5 on time (One Pulse) Plot on Channel 39

3DH5 on time (Count Pulses) Plot on Channel 39

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$


Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$

3.8.7 Test Result of Radiated Spurious at Band Edges

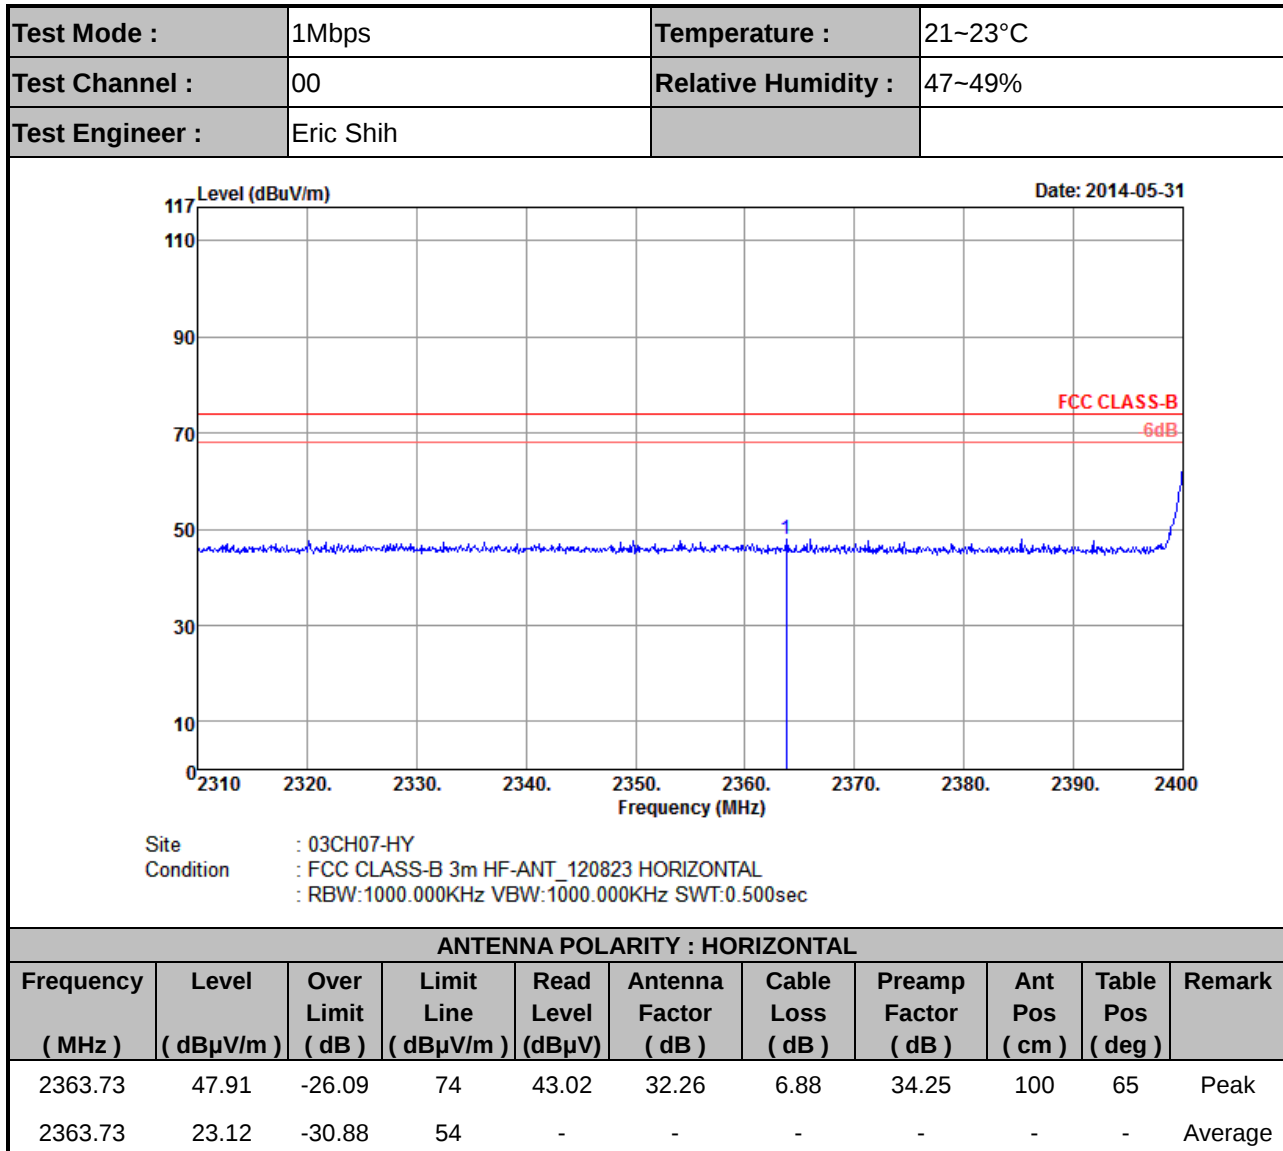


Note:

- The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from 20log (dwell time/100ms).
For example: Average level = 47.91dBuV/m – 24.79 (dB) = 23.12dBuV/m.
- Worst case measurement on 2363.73 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	1Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		

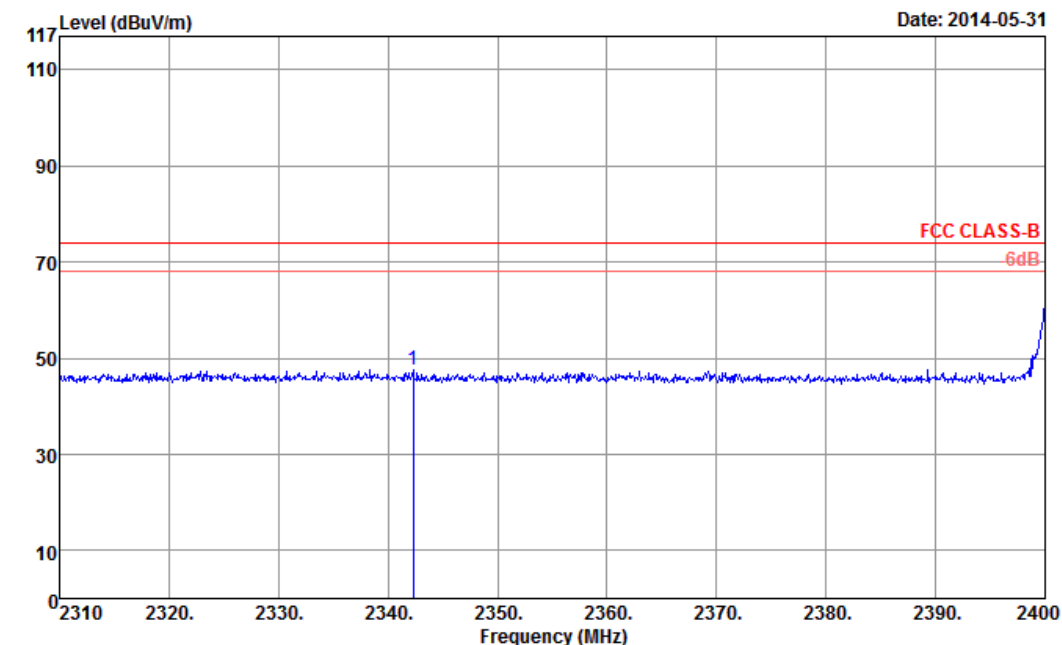

Site : 03CH07-HY
Condition : FCC CLASS-B 3m HF-ANT_120823 VERTICAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:0.500sec


ANTENNA POLARITY : VERTICAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2342.31	47.72	-26.28	74	42.89	32.24	6.84	34.25	115	357	Peak
2342.31	-24.79	-78.79	54	-	-	-	-	-	-	Average

Note: Worst case measurement on 2342.31 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	1Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		

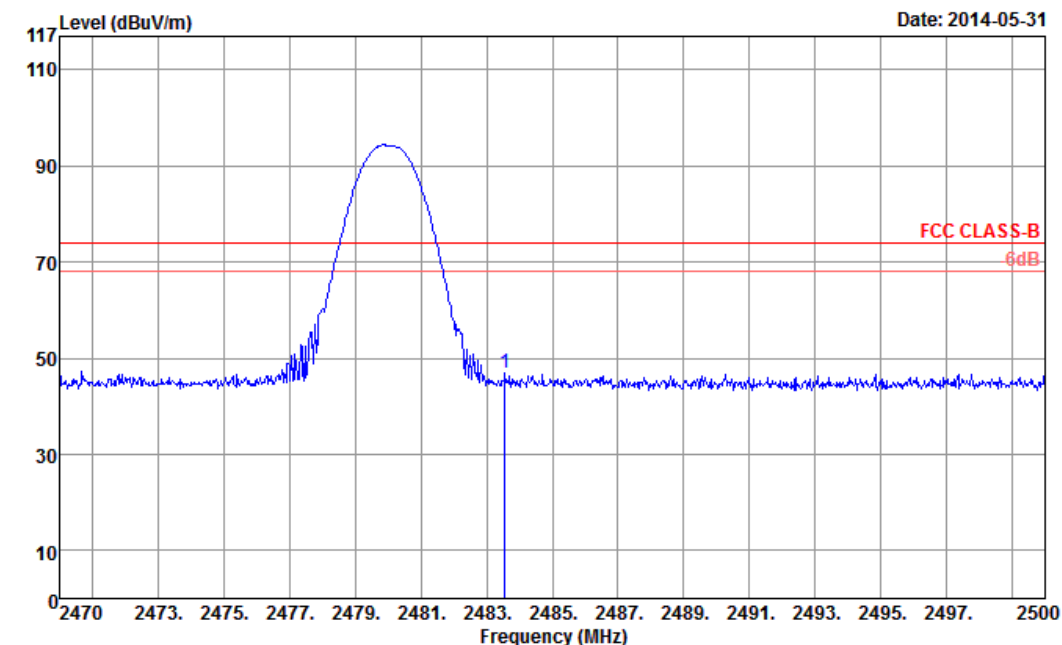

Site : 03CH07-HY
Condition : FCC CLASS-B 3m HF-ANT_120823 HORIZONTAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:Auto


ANTENNA POLARITY : HORIZONTAL

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.56	46.86	-27.14	74	41.85	32.38	7.06	34.43	118	63	Peak
2483.56	22.07	-31.93	54	-	-	-	-	-	-	Average

Note: Worst case measurement on 2483.56 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500MHz. And, 2480-2483.5MHz is within the operating band and not within the restricted band. The test result is compliance with the FCC limit line.



Test Mode :	1Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		

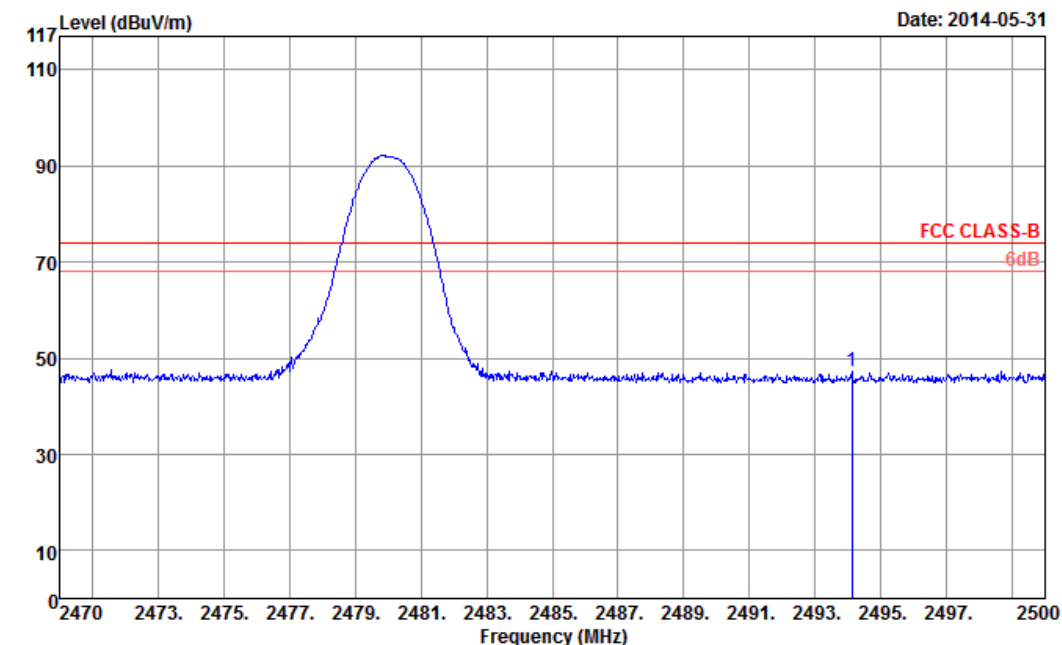

Site : 03CH07-HY
Condition : FCC CLASS-B 3m HF-ANT_120823 VERTICAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:0.500sec


ANTENNA POLARITY : VERTICAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limity Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2494.12	47.25	-26.75	74	42.27	32.4	7.06	34.48	129	13	Peak
2494.12	22.46	-31.54	54	-	-	-	-	-	-	Average

Note: Worst case measurement on 2494.12 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500MHz. And, 2480-2483.5MHz is within the operating band and not within the restricted band. The test result is compliance with the FCC limit line.



Test Mode :	2Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		

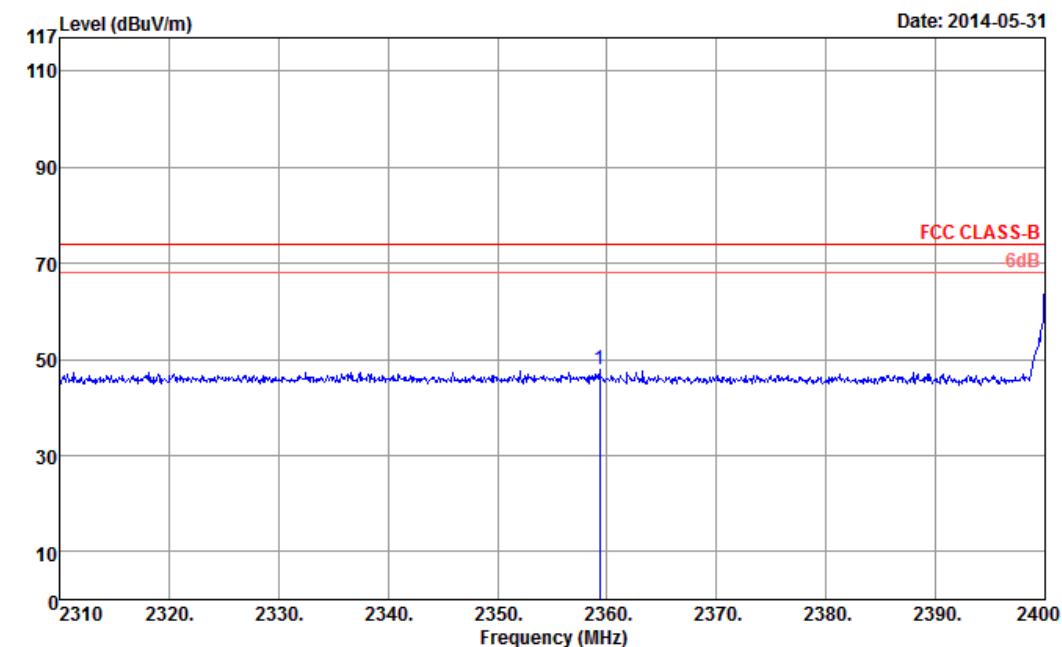

Site : 03CH07-HY
Condition : FCC CLASS-B 3m HF-ANT_120823 HORIZONTAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:0.500sec


ANTENNA POLARITY : HORIZONTAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2359.32	47.75	-26.25	74	42.86	32.26	6.88	34.25	100	65	Peak
2359.32	22.96	-31.04	54	-	-	-	-	-	-	Average

Note: Worst case measurement on 2359.32 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	2Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		

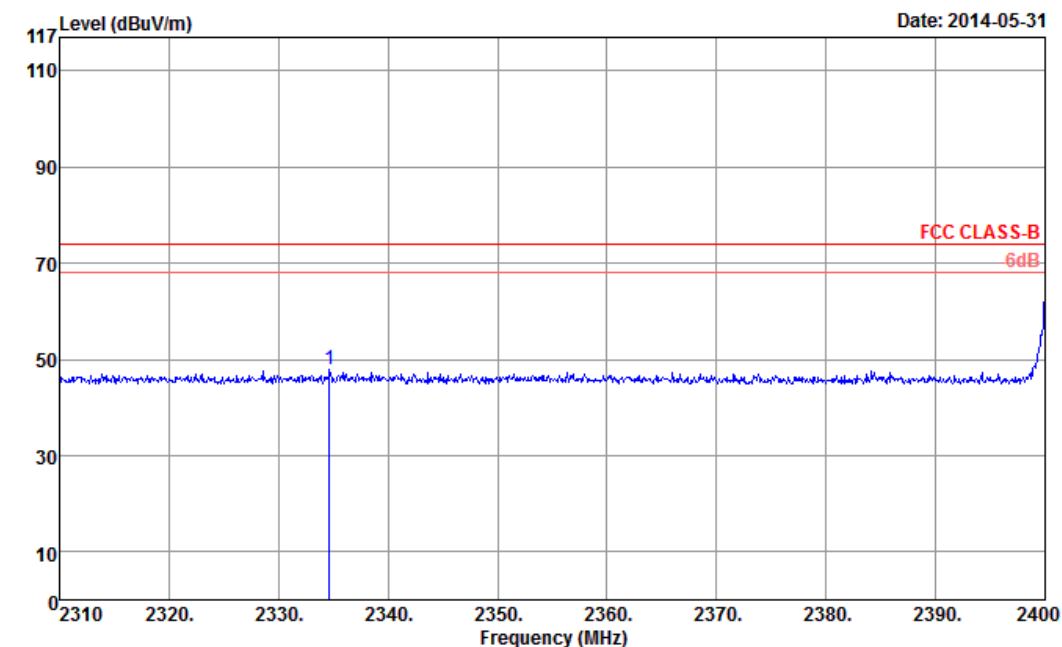

Site : 03CH07-HY
Condition : FCC CLASS-B 3m HF-ANT_120823 VERTICAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:0.500sec


ANTENNA POLARITY : VERTICAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2334.66	47.92	-26.08	74	43.06	32.24	6.84	34.22	115	357	Peak
2334.66	23.13	-30.87	54	-	-	-	-	-	-	Average

Note: Worst case measurement on 2334.66 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	2Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		

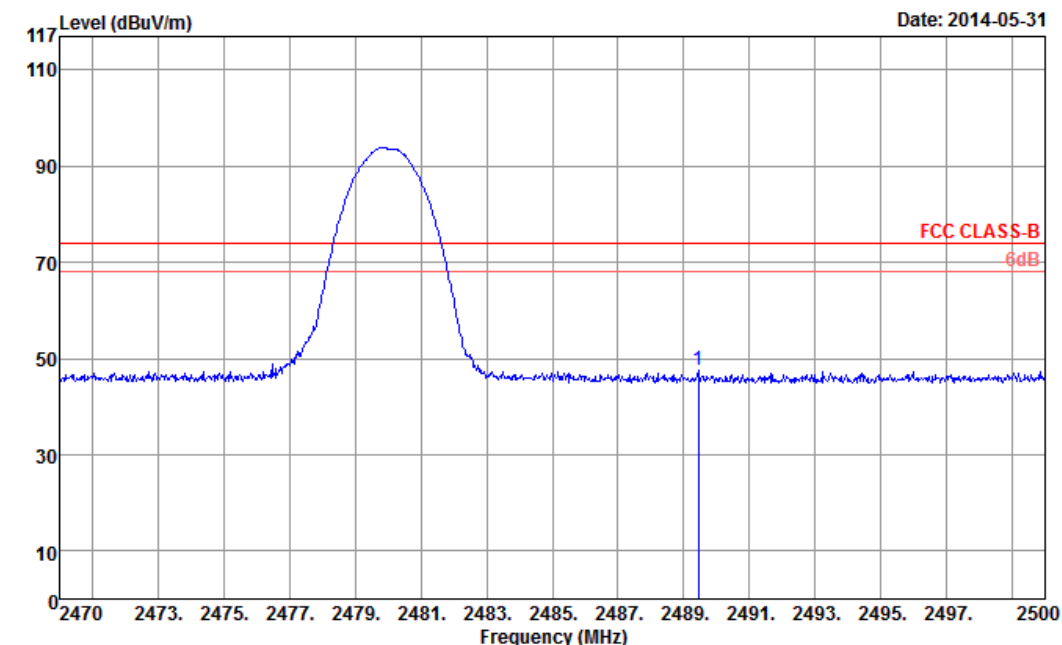


ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2489.44	47.51	-26.49	74	42.48	32.4	7.06	34.43	118	63	Peak
2489.44	22.72	-31.28	54	-	-	-	-	-	-	Average

Note: Worst case measurement on 2489.44 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500MHz. And, 2480-2483.5MHz is within the operating band and not within the restricted band. The test result is compliance with the FCC limit line.



Test Mode :	2Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		

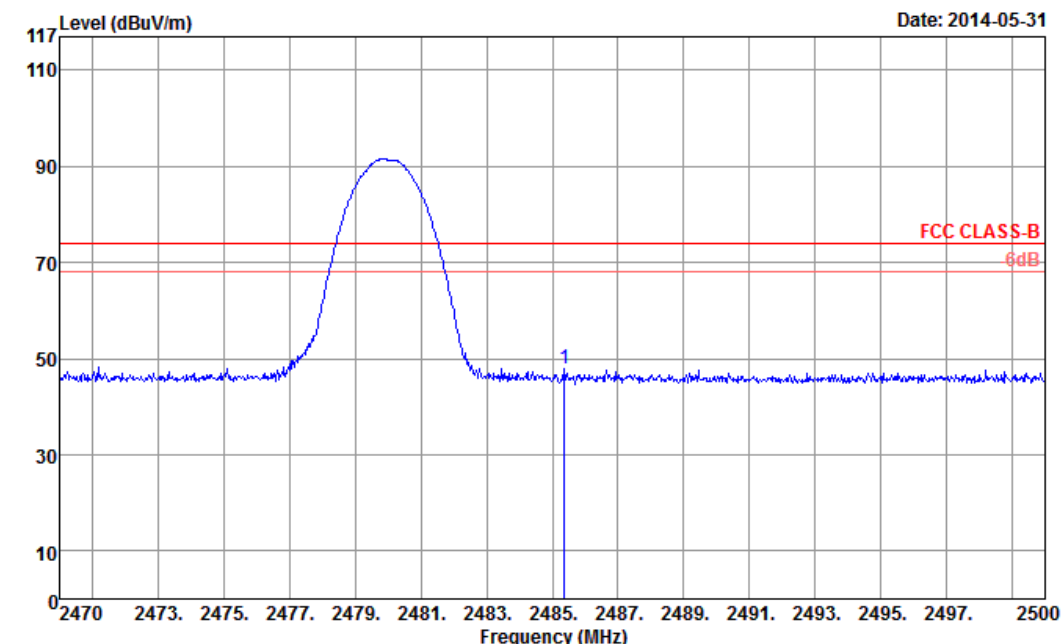

Site : 03CH07-HY
Condition : FCC CLASS-B 3m HF-ANT_120823 VERTICAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:0.500sec


ANTENNA POLARITY : VERTICAL

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limity Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2485.36	47.84	-26.16	74	42.83	32.38	7.06	34.43	129	13	Peak
2485.36	23.05	-30.95	54	-	-	-	-	-	-	Average

Note: Worst case measurement on 2485.36 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500MHz. And, 2480-2483.5MHz is within the operating band and not within the restricted band. The test result is compliance with the FCC limit line.



Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		

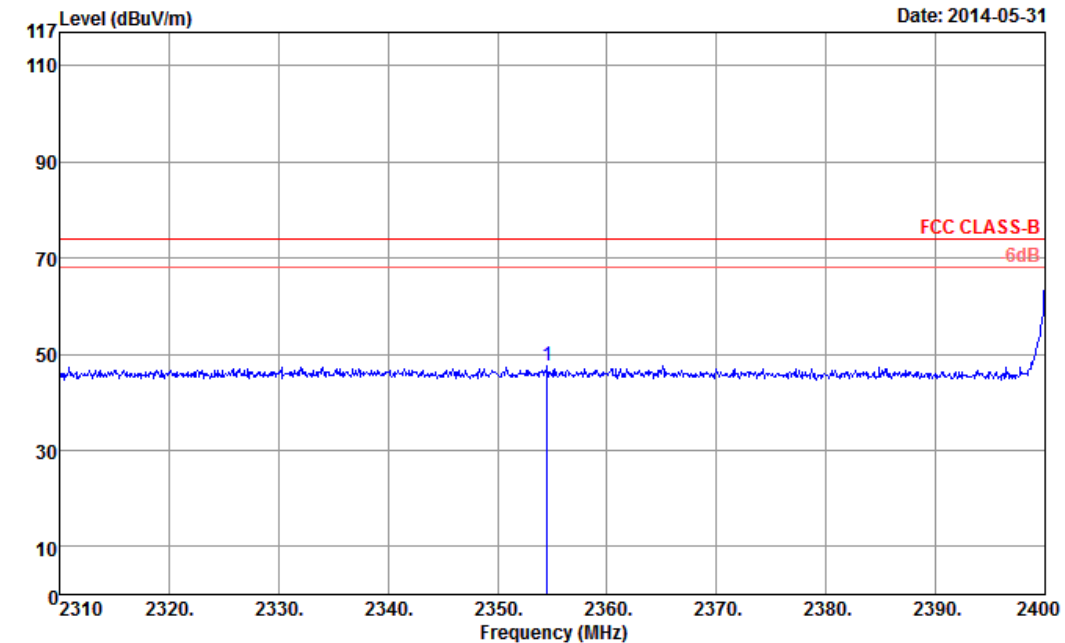

Site : 03CH07-HY
Condition : FCC CLASS-B 3m HF-ANT_120823 HORIZONTAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:0.500sec


ANTENNA POLARITY : HORIZONTAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2354.55	47.71	-26.29	74	42.86	32.26	6.84	34.25	100	65	Peak
2354.55	22.92	-31.08	54	-	-	-	-	-	-	Average

Note: Worst case measurement on 2354.55 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		

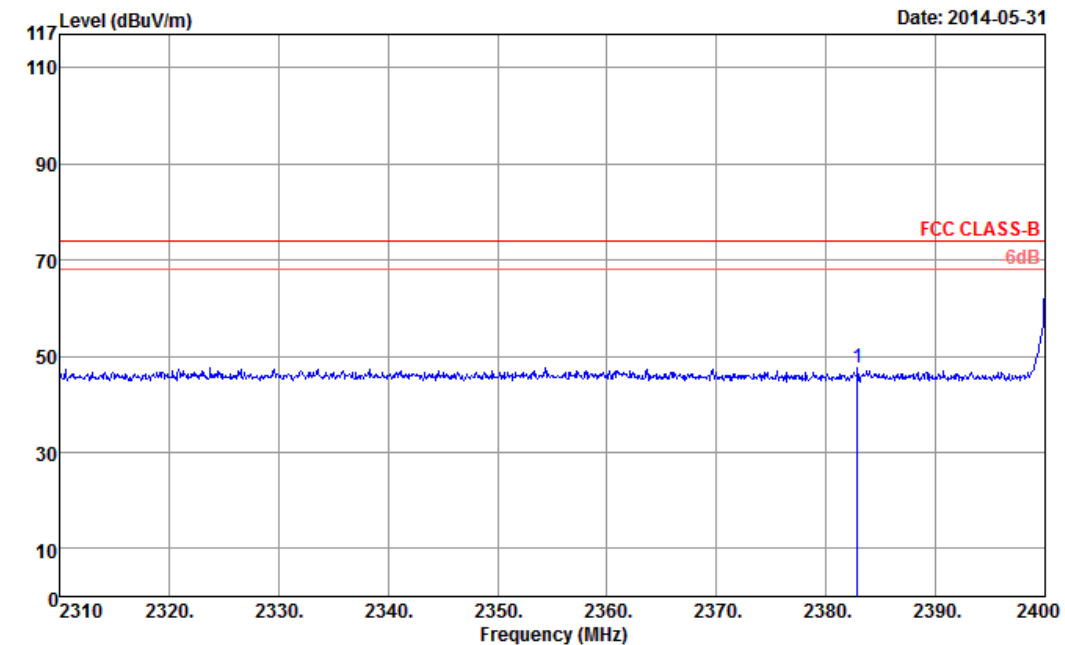

Site : 03CH07-HY
Condition : FCC CLASS-B 3m HF-ANT_120823 VERTICAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:0.500sec


ANTENNA POLARITY : VERTICAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2382.9	47.62	-26.38	74	42.7	32.28	6.91	34.27	115	357	Peak
2382.9	22.83	-31.17	54	-	-	-	-	-	-	Average

Note: Worst case measurement on 2382.9 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		

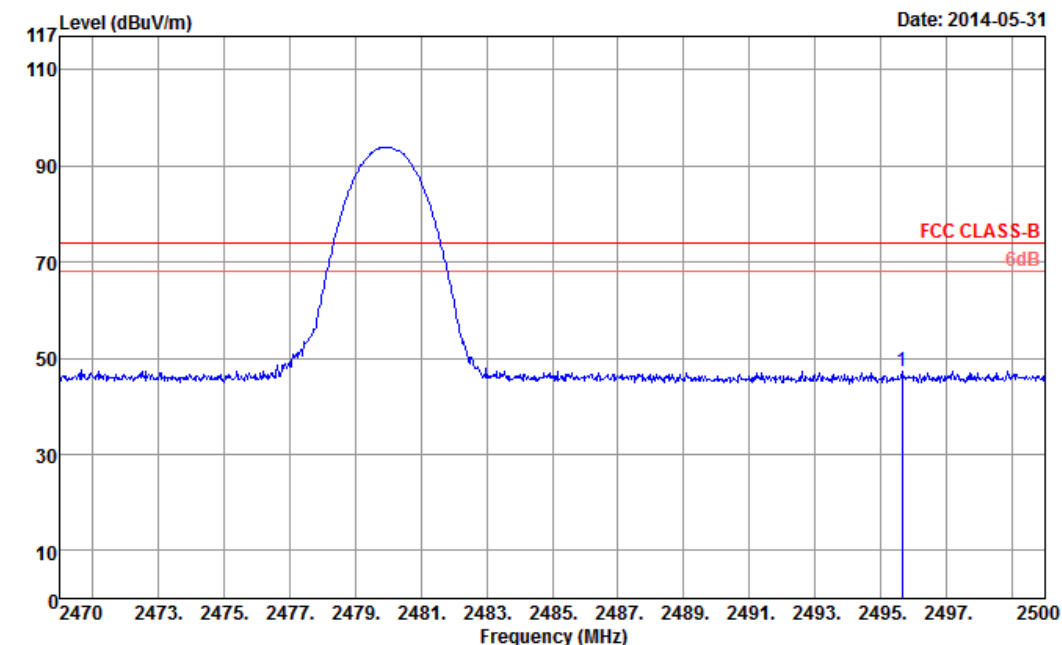

Site : 03CH07-HY
Condition : FCC CLASS-B 3m HF-ANT_120823 HORIZONTAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:0.500sec


ANTENNA POLARITY : HORIZONTAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2495.65	47.4	-26.6	74	42.42	32.4	7.06	34.48	118	63	Peak
2495.65	22.61	-31.39	54	-	-	-	-	-	-	Average

Note: Worst case measurement on 2495.65 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500MHz. And, 2480-2483.5MHz is within the operating band and not within the restricted band. The test result is compliance with the FCC limit line.



Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		

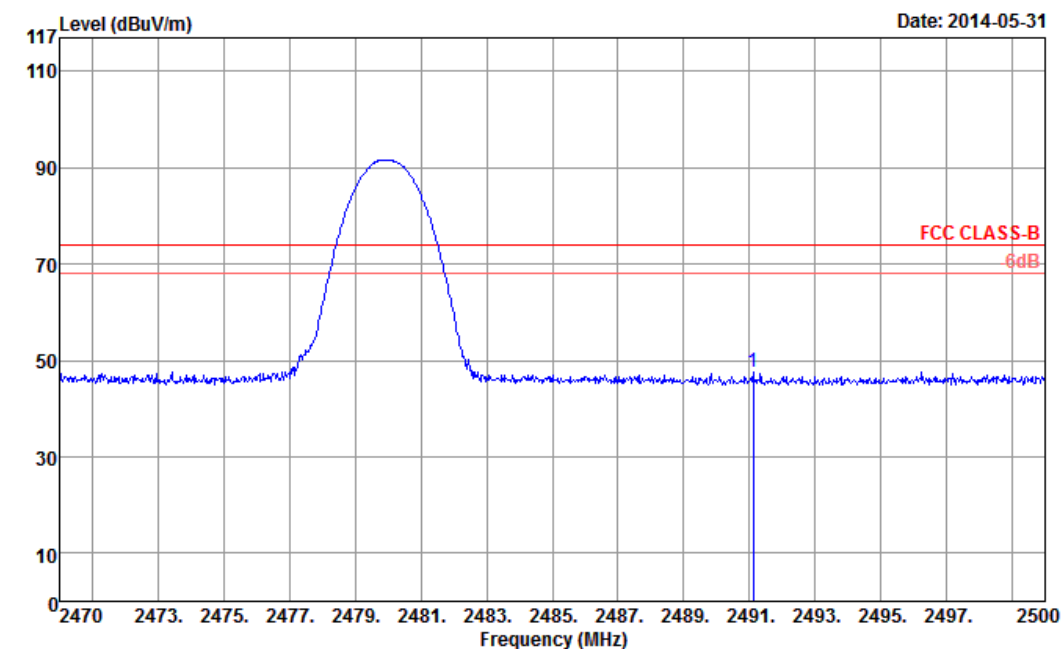

Site : 03CH07-HY
Condition : FCC CLASS-B 3m HF-ANT_120823 VERTICAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:0.500sec


ANTENNA POLARITY : VERTICAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limity Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2491.12	47.59	-26.41	74	42.56	32.4	7.06	34.43	129	13	Peak
2491.12	22.8	-31.2	54	-	-	-	-	-	-	Average

Note: Worst case measurement on 2491.12 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500MHz. And, 2480-2483.5MHz is within the operating band and not within the restricted band. The test result is compliance with the FCC limit line.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Test Mode :	1Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz and 9609 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 97.34dBuV/m – 20 (dB) = 77.34dBuV/m. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

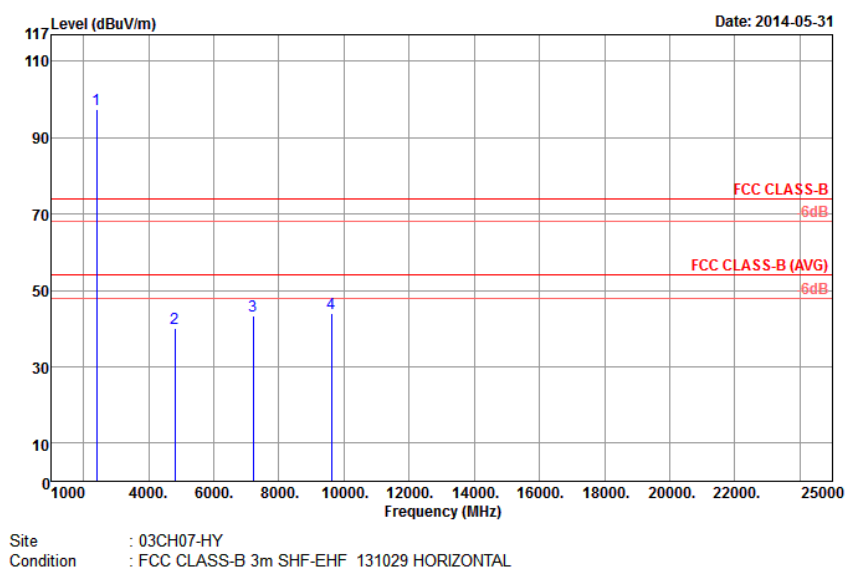
ANTENNA POLARITY : HORIZONTAL


Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	97.34	-	-	92.43	32.3	6.91	34.3	100	65	Peak
2402	72.55	-	-	-	-	-	-	-	-	Average
4803	40.21	-33.79	74	56.17	34.25	8.75	58.96	100	0	Peak
4803	15.42	-38.58	54	-	-	-	-	-	-	Average
7206	43.24	-34.1	77.34	54.46	35.6	10.81	57.63	100	0	Peak
9609	43.94	-33.4	77.34	52.32	36.6	13.7	58.68	100	0	Peak
Other harmonics are lower than background noise										

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from $20\log(\text{dwell time}/100\text{ms})$.

For example: Average level = 97.34dBuV/m – 24.79 (dB) = 72.55dBuV/m.



Test Mode :	1Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz and 9609 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 95.56dBuV/m – 20 (dB) = 75.56dBuV/m. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

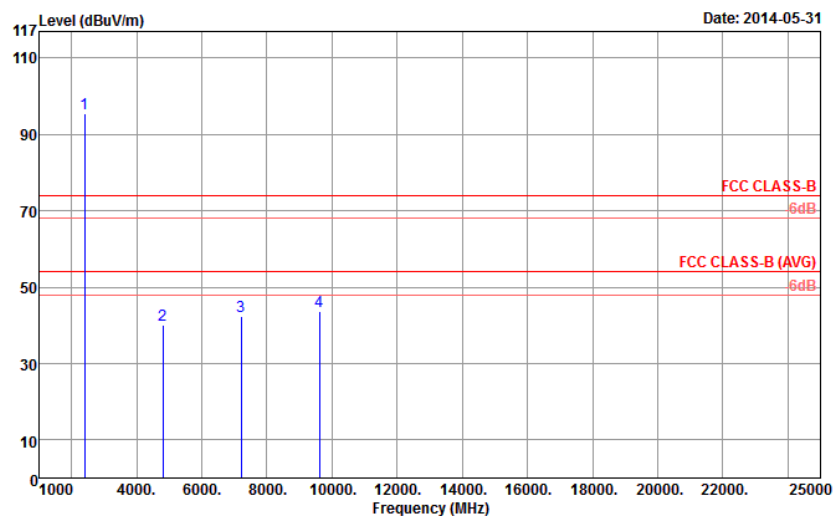

Site : 03CH07-HY
 Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL

ANTENNA POLARITY : VERTICAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	95.56	-	-	90.65	32.3	6.91	34.3	115	357	Peak
2402	70.77	-	-	-	-	-	-	-	-	Average
4803	39.96	-34.04	74	55.92	34.25	8.75	58.96	100	0	Peak
4803	15.17	-38.83	54	-	-	-	-	-	-	Average
7206	42.38	-33.18	75.56	53.6	35.6	10.81	57.63	100	0	Peak
9609	43.6	-31.96	75.56	51.98	36.6	13.7	58.68	100	0	Peak
Other harmonics are lower than background noise										



Test Mode :	1Mbps	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2442 MHz is fundamental signal which can be ignored. 2. 9765 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 94.12dBuV/m – 20 (dB) = 74.12dBuV/m 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		
Level (dBuV/m)			



Test Mode :	1Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 94.42dBuV/m – 20 (dB) = 74.42dBuV/m 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

Level (dBuV/m)

Date: 2014-05-31

Site : 03CH07-HY
Condition : FCC CLASS-B 3m SHF-EHF 131029 HORIZONTAL


ANTENNA POLARITY : HORIZONTAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	94.42	-	-	89.41	32.38	7.06	34.43	118	63	Peak
2480	69.63	-	-	-	-	-	-	-	-	Average
4959	42.11	-31.89	74	57.48	34.37	8.92	58.66	100	0	Peak
4959	17.32	-36.68	54	-	-	-	-	-	-	Average
7440	42.04	-31.96	74	53.25	35.6	11.04	57.85	100	0	Peak
7440	17.25	-36.75	54	-	-	-	-	-	-	Average
9921	43.09	-30.91	74.42	51.26	36.93	13.68	58.78	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	1Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

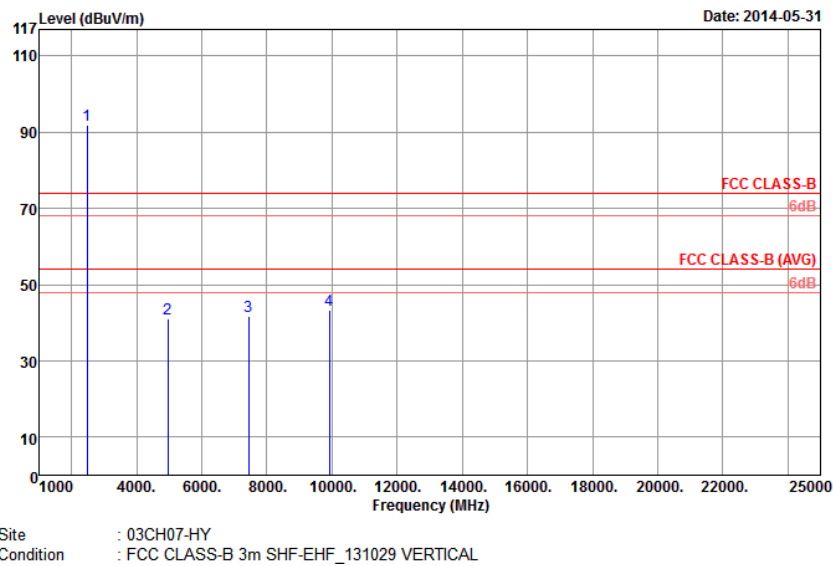


ANTENNA POLARITY : VERTICAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	92	-	-	86.99	32.38	7.06	34.43	129	13	Peak
2480	67.21	-	-	-	-	-	-	-	-	Average
4959	41.16	-32.84	74	56.53	34.37	8.92	58.66	100	0	Peak
4959	16.37	-37.63	54	-	-	-	-	-	-	Average
7440	41.59	-32.41	74	52.8	35.6	11.04	57.85	100	0	Peak
7440	16.8	-37.2	54	-	-	-	-	-	-	Average
9921	43.47	-30.53	74	51.64	36.93	13.68	58.78	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	2Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz and 9609 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 96.4dBuV/m – 20 (dB) = 76.4dBuV/m. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

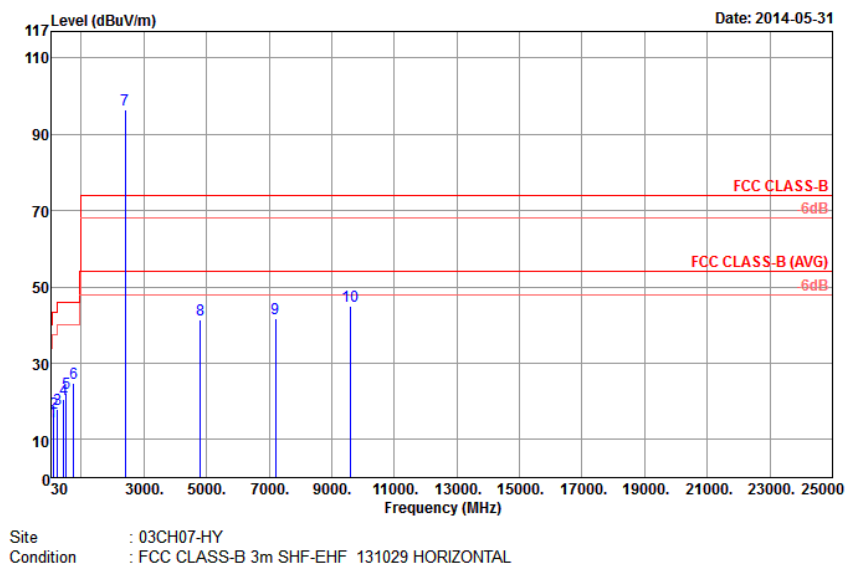

ANTENNA POLARITY : HORIZONTAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
107.49	14.65	-28.85	43.5	34.11	10.68	1.04	31.18	-	-	Peak
129.09	16.86	-26.64	43.5	34.9	11.92	1.14	31.1	-	-	Peak
240.06	17.95	-28.05	46	36.02	11.4	1.53	31	-	-	Peak
431.6	20.57	-25.43	46	32.14	16.92	2.25	30.74	-	-	Peak
512.1	22.29	-23.71	46	32.37	18.1	2.47	30.65	-	-	Peak
750.1	24.9	-21.1	46	30.14	22.1	3.06	30.4	133	20	Peak



ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	96.4	-	-	91.49	32.3	6.91	34.3	100	65	Peak
2402	71.61	-	-	-	-	-	-	-	-	Average
4803	41.43	-32.57	74	57.39	34.25	8.75	58.96	100	0	Peak
4803	16.64	-37.36	54	-	-	-	-	-	-	Average
7206	41.79	-34.61	76.4	53.01	35.6	10.81	57.63	100	0	Peak
9609	44.94	-31.46	76.4	53.32	36.6	13.7	58.68	100	0	Peak
Other harmonics are lower than background noise										




Test Mode :	2Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz and 9609 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 94.65dBuV/m – 20 (dB) = 74.65dBuV/m. 3. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		
Level (dBuV/m) <			



ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	94.65	-	-	89.74	32.3	6.91	34.3	115	357	Peak
2402	69.86	-	-	-	-	-	-	-	-	Average
4803	40.25	-33.75	74	56.21	34.25	8.75	58.96	100	0	Peak
4803	15.46	-38.54	54	-	-	-	-	-	-	Average
7206	41.85	-32.8	74.65	53.07	35.6	10.81	57.63	100	0	Peak
9609	44.57	-30.08	74.65	52.95	36.6	13.7	58.68	100	0	Peak
Other harmonics are lower than background noise										



Test Mode :	2Mbps	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2442 MHz is fundamental signal which can be ignored. 2. 9765 MHz is not within a restricted band. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

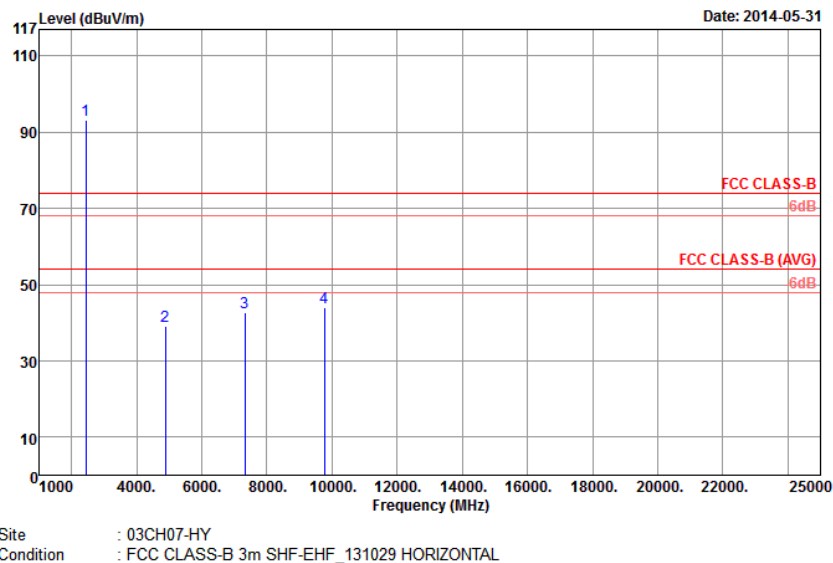


ANTENNA POLARITY : HORIZONTAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2442	93.26	-	-	88.31	32.35	6.99	34.39	100	64	Peak
2442	68.47	-	-	-	-	-	-	-	-	Average
4881	39.12	-34.88	74	54.8	34.3	8.85	58.83	100	0	Peak
4881	14.33	-39.67	54	-	-	-	-	-	-	Average
7323	42.72	-31.28	74	53.95	35.6	10.91	57.74	100	0	Peak
7323	17.93	-36.07	54	-	-	-	-	-	-	Average
9765	43.86	-30.14	74	52.12	36.78	13.69	58.73	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	2Mbps	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2442 MHz is fundamental signal which can be ignored. 2. 9765 MHz is not within a restricted band. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

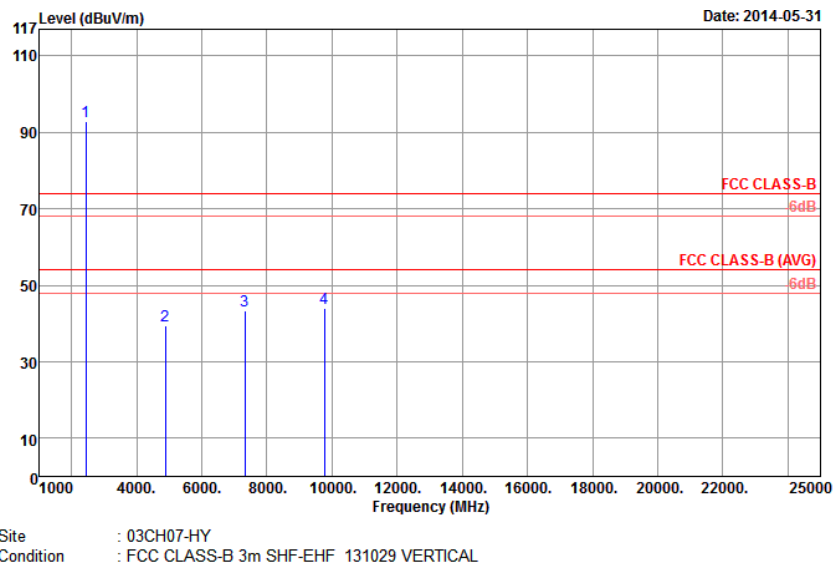


ANTENNA POLARITY : VERTICAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2442	92.88	-	-	87.93	32.35	6.99	34.39	138	352	Peak
2442	68.09	-	-	-	-	-	-	-	-	Average
4881	39.59	-34.41	74	55.27	34.3	8.85	58.83	100	0	Peak
4881	14.8	-39.2	54	-	-	-	-	-	-	Average
7323	43.43	-30.57	74	54.66	35.6	10.91	57.74	100	0	Peak
7323	18.64	-35.36	54	-	-	-	-	-	-	Average
9765	43.87	-30.13	74	52.13	36.78	13.69	58.73	100	0	Peak

Other harmonics are lower than background noise


Test Mode :	2Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

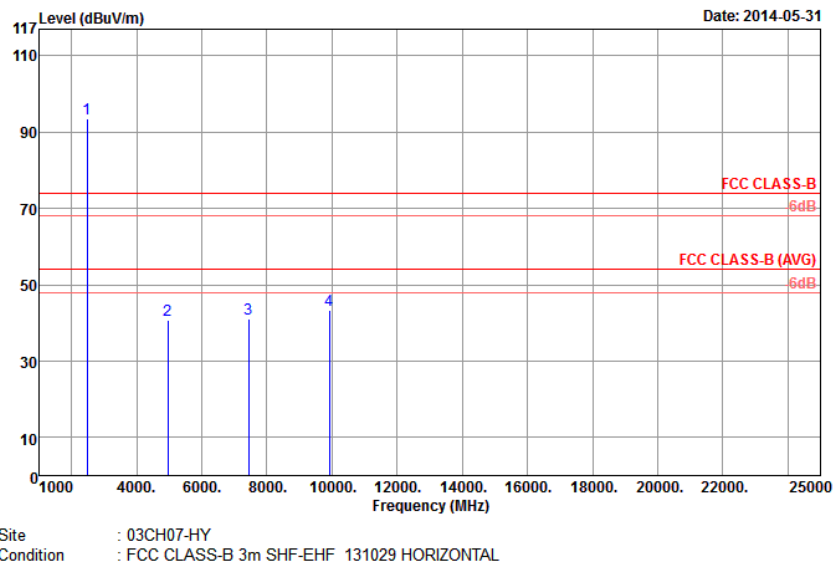

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	93.64	-	-	88.63	32.38	7.06	34.43	118	63	Peak
2480	68.85	-	-	-	-	-	-	-	-	Average
4959	40.85	-33.15	74	56.22	34.37	8.92	58.66	100	0	Peak
4959	16.06	-37.94	54	-	-	-	-	-	-	Average
7440	41.09	-32.91	74	52.3	35.6	11.04	57.85	100	0	Peak
7440	16.3	-37.7	54	-	-	-	-	-	-	Average
9921	43.43	-30.57	74	51.6	36.93	13.68	58.78	100	0	Peak
Other harmonics are lower than background noise										



Test Mode :	2Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

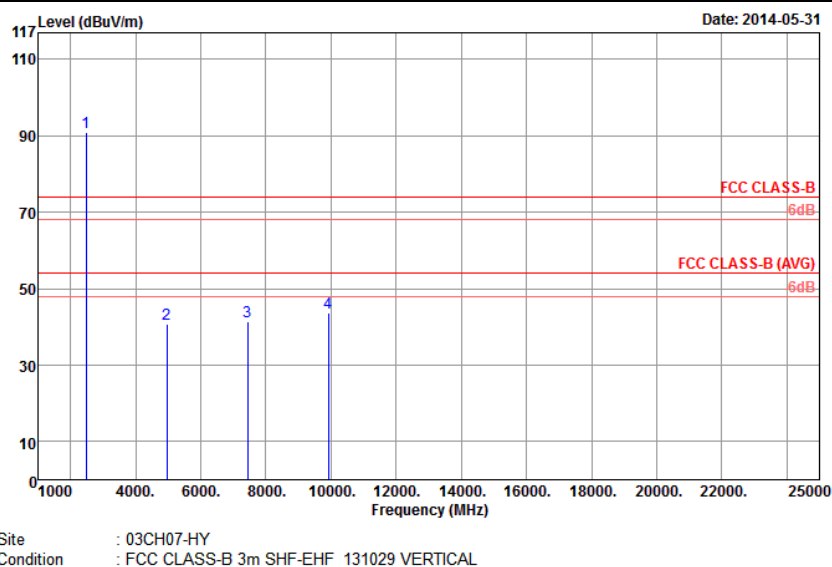


ANTENNA POLARITY : VERTICAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	90.86	-	-	85.85	32.38	7.06	34.43	129	13	Peak
2480	66.07	-	-	-	-	-	-	-	-	Average
4959	40.7	-33.3	74	56.07	34.37	8.92	58.66	100	0	Peak
4959	15.91	-38.09	54	-	-	-	-	-	-	Average
7440	41.35	-32.65	74	52.56	35.6	11.04	57.85	100	0	Peak
7440	16.56	-37.44	54	-	-	-	-	-	-	Average
9921	43.67	-30.33	74	51.84	36.93	13.68	58.78	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz and 9609 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 96.6dBuV/m – 20 (dB) = 76.6dBuV/m. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

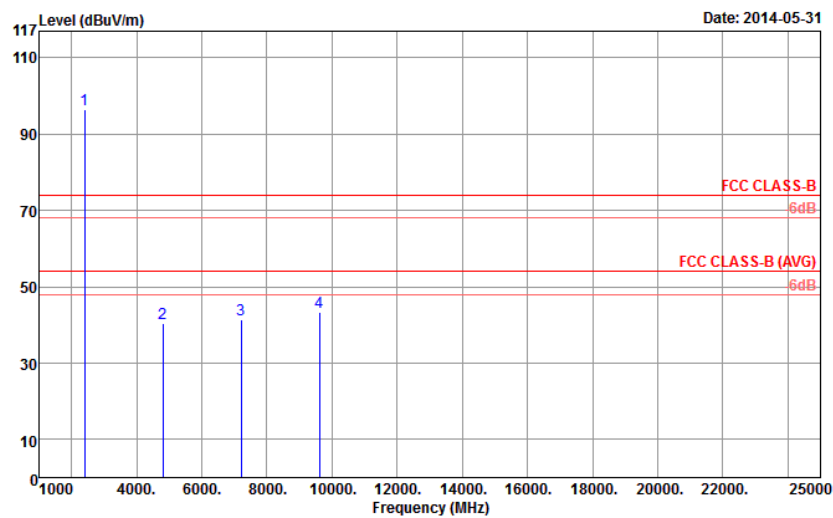

Site : 03CH07-HY
 Condition : FCC CLASS-B 3m SHF-EHF 131029 HORIZONTAL

ANTENNA POLARITY : HORIZONTAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	96.6	-	-	91.69	32.3	6.91	34.3	100	65	Peak
2402	71.81	-	-	-	-	-	-	-	-	Average
4803	40.46	-33.54	74	56.42	34.25	8.75	58.96	100	0	Peak
4803	15.67	-38.33	54	-	-	-	-	-	-	Average
7206	41.31	-32.69	76.6	52.53	35.6	10.81	57.63	100	0	Peak
9609	43.31	-30.69	76.6	51.69	36.6	13.7	58.68	100	0	Peak


Other harmonics are lower than background noise



Test Mode :	3Mbps	Temperature :	21~23℃							
Test Channel :	00	Relative Humidity :	47~49%							
Test Engineer :	Eric Shih									
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz and 9609 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 94.68dBuV/m – 20 (dB) = 74.68dBuV/m 3. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.									
117 Level (dBuV/m) 110 90 70 50 30 10 0 1000 4000 6000 8000 10000 12000 14000 16000 18000 20000 22000 25000 Frequency (MHz) Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF 131029 VERTICAL Date: 2014-05-31 FCC CLASS-B 6dB FCC CLASS-B (AVG) 6dB 1 2 3 4										
ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	94.68	-	-	89.77	32.3	6.91	34.3	115	357	Peak
2402	69.89	-	-	-	-	-	-	-	-	Average
4803	40.17	-33.83	74	56.13	34.25	8.75	58.96	100	0	Peak
4803	15.38	-38.62	54	-	-	-	-	-	-	Average
7206	42.62	-31.38	74.68	53.84	35.6	10.81	57.63	100	0	Peak
9609	43.37	-30.63	74.68	51.75	36.6	13.7	58.68	100	0	Peak
Other harmonics are lower than background noise										



Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2442 MHz is fundamental signal which can be ignored. 2. 9765 MHz is not within a restricted band. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

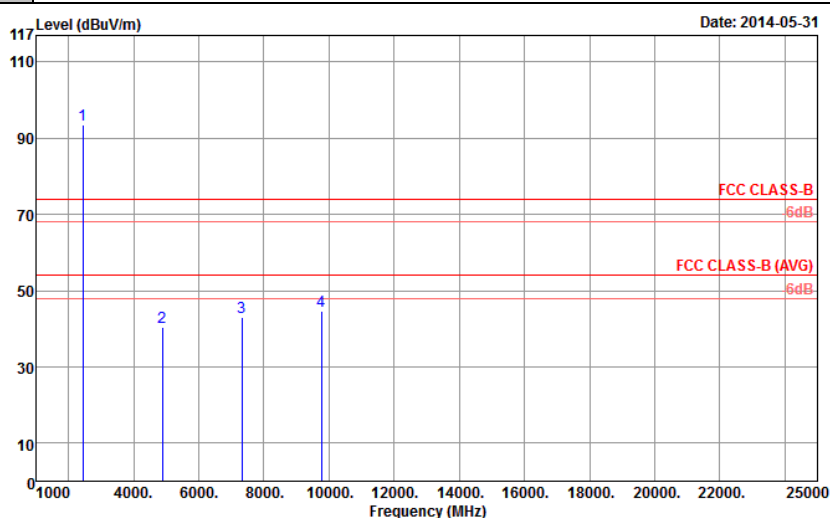

Site : 03CH07-HY
 Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL


ANTENNA POLARITY : HORIZONTAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2442	93.6	-	-	88.65	32.35	6.99	34.39	100	64	Peak
2442	68.81	-	-	-	-	-	-	-	-	Average
4881	40.37	-33.63	74	56.05	34.3	8.85	58.83	100	0	Peak
4881	15.58	-38.42	54	-	-	-	-	-	-	Average
7323	43	-31	74	54.23	35.6	10.91	57.74	100	0	Peak
7323	18.21	-35.79	54	-	-	-	-	-	-	Average
9765	44.5	-29.5	74	52.76	36.78	13.69	58.73	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2442 MHz is fundamental signal which can be ignored. 2. 9765 MHz is not within a restricted band. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

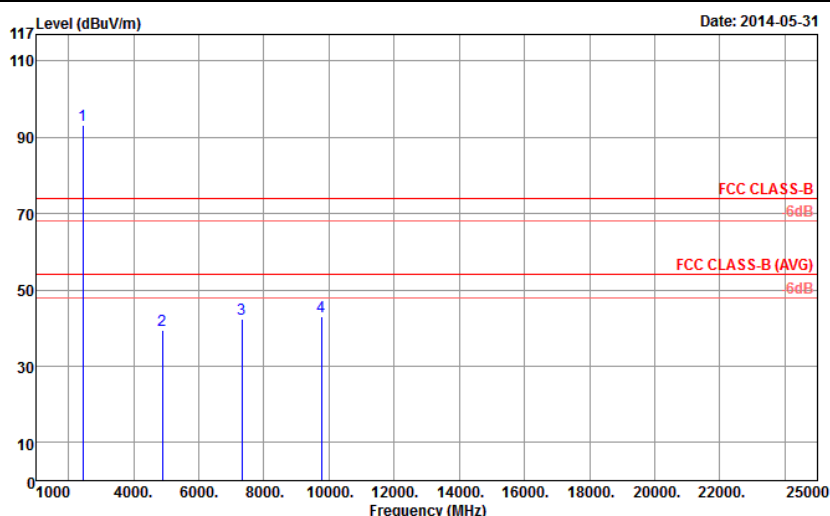

Site : 03CH07-HY
 Condition : FCC CLASS-B 3m SHF-EHF 131029 VERTICAL


ANTENNA POLARITY : VERTICAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2442	93.34	-	-	88.39	32.35	6.99	34.39	138	352	Peak
2442	68.55	-	-	-	-	-	-	-	-	Average
4881	39.48	-34.52	74	55.16	34.3	8.85	58.83	100	0	Peak
4881	14.69	-39.31	54	-	-	-	-	-	-	Average
7323	42.45	-31.55	74	53.68	35.6	10.91	57.74	100	0	Peak
7323	17.66	-36.34	54	-	-	-	-	-	-	Average
9765	42.99	-31.01	74	51.25	36.78	13.69	58.73	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

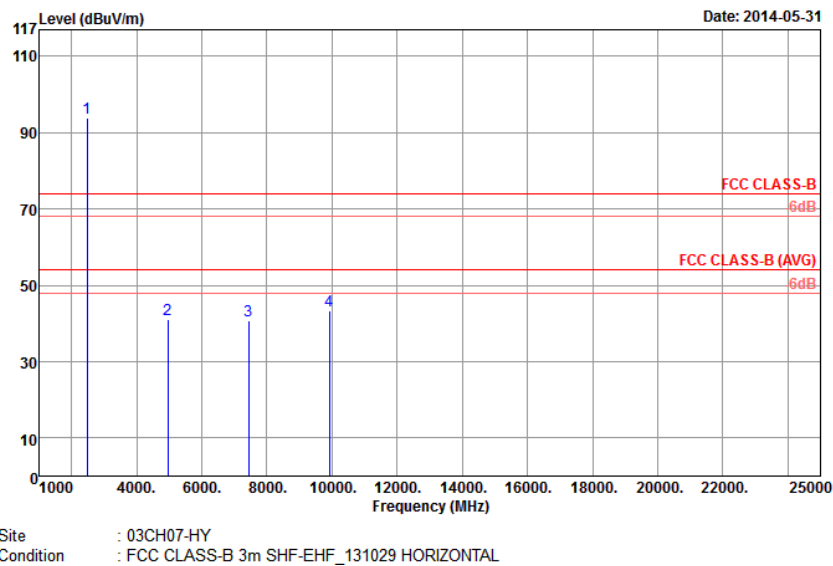


ANTENNA POLARITY : HORIZONTAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	93.73	-	-	88.72	32.38	7.06	34.43	118	63	Peak
2480	68.94	-	-	-	-	-	-	-	-	Average
4959	41.08	-32.92	74	56.45	34.37	8.92	58.66	100	0	Peak
4959	16.29	-37.71	54	-	-	-	-	-	-	Average
7440	40.77	-33.23	74	51.98	35.6	11.04	57.85	100	0	Peak
7440	15.98	-38.02	54	-	-	-	-	-	-	Average
9921	43.37	-30.63	74	51.54	36.93	13.68	58.78	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	47~49%
Test Engineer :	Eric Shih		
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band. 3. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

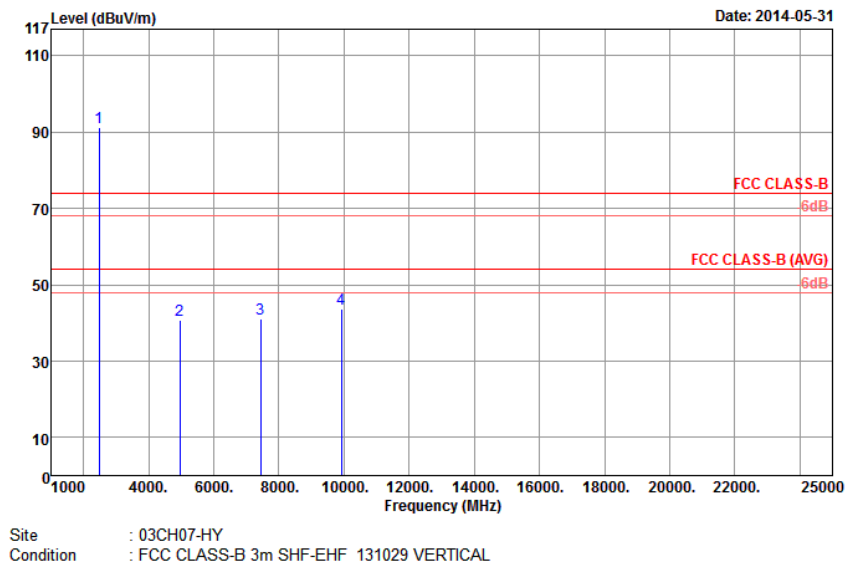

ANTENNA POLARITY : VERTICAL

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	91.23	-	-	86.22	32.38	7.06	34.43	129	13	Peak
2480	66.44	-	-	-	-	-	-	-	-	Average
4959	40.87	-33.13	74	56.24	34.37	8.92	58.66	100	0	Peak
4959	16.08	-37.92	54	-	-	-	-	-	-	Average
7440	41	-33	74	52.21	35.6	11.04	57.85	100	0	Peak
7440	16.21	-37.79	54	-	-	-	-	-	-	Average
9921	43.61	-30.39	74	51.78	36.93	13.68	58.78	100	0	Peak

Other harmonics are lower than background noise

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.9.4 Test Setup

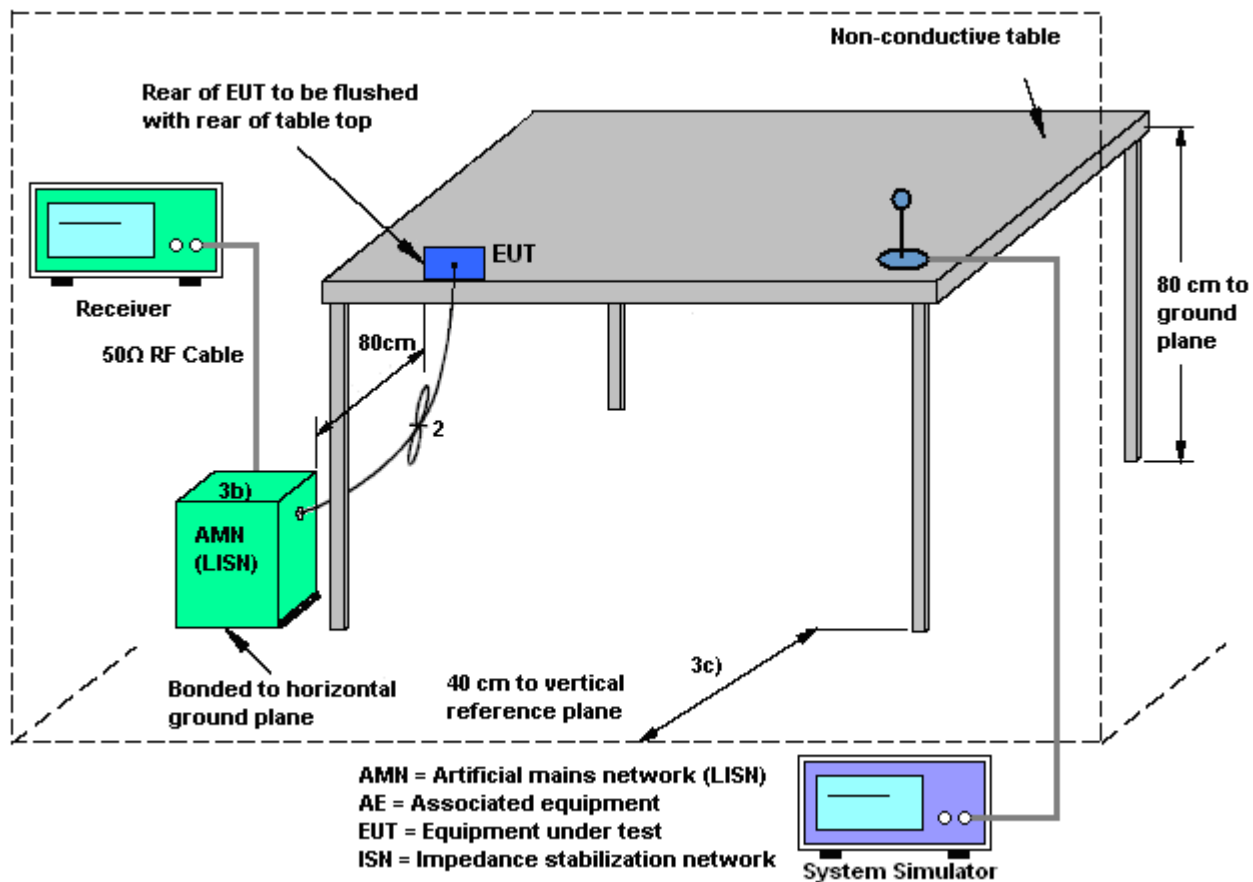

3.9.5 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable (Charging from Adapter) + MP3		

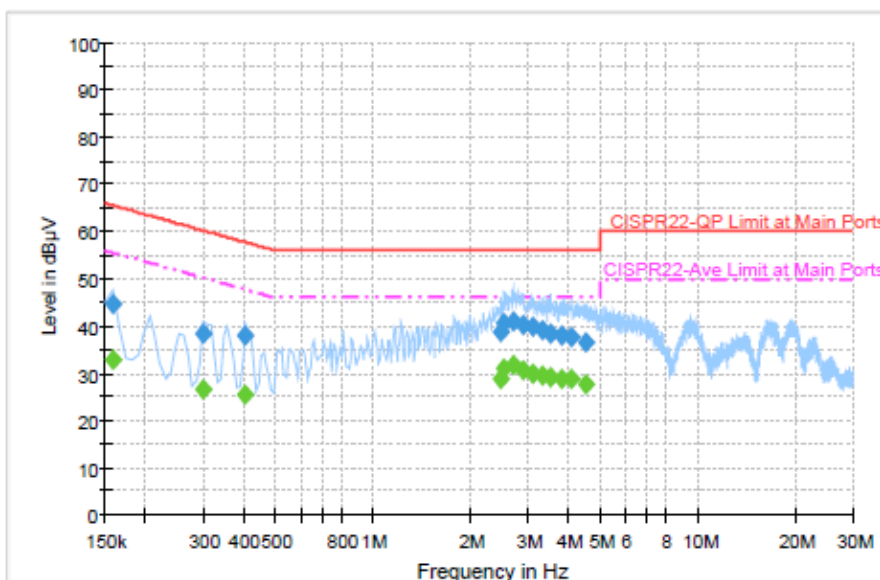

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	44.8	Off	L1	19.3	20.8	65.6
0.302000	38.3	Off	L1	19.4	21.9	60.2
0.406000	37.9	Off	L1	19.3	19.8	57.7
2.478000	38.7	Off	L1	19.5	17.3	56.0
2.542000	40.7	Off	L1	19.6	15.3	56.0
2.702000	40.9	Off	L1	19.5	15.1	56.0
2.902000	40.1	Off	L1	19.6	15.9	56.0
3.102000	39.8	Off	L1	19.6	16.2	56.0
3.310000	39.1	Off	L1	19.6	16.9	56.0
3.518000	38.5	Off	L1	19.6	17.5	56.0
3.814000	38.1	Off	L1	19.6	17.9	56.0
4.062000	37.6	Off	L1	19.6	18.4	56.0
4.502000	36.7	Off	L1	19.6	19.3	56.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable (Charging from Adapter) + MP3		

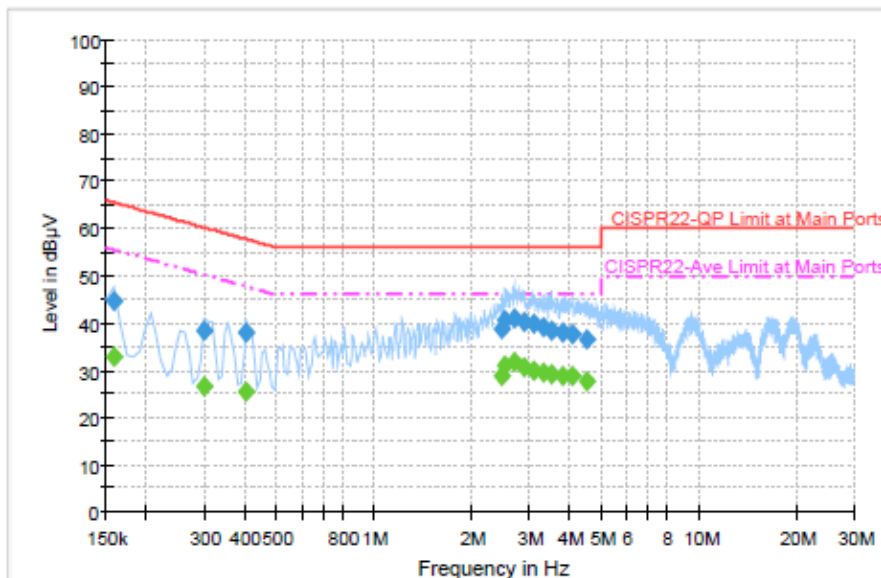
Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	32.8	Off	L1	19.3	22.8	55.6
0.302000	26.6	Off	L1	19.4	23.6	50.2
0.406000	25.5	Off	L1	19.3	22.2	47.7
2.478000	29.0	Off	L1	19.5	17.0	46.0
2.542000	30.9	Off	L1	19.6	15.1	46.0
2.702000	31.6	Off	L1	19.5	14.4	46.0
2.902000	30.7	Off	L1	19.6	15.3	46.0
3.102000	29.9	Off	L1	19.6	16.1	46.0
3.310000	29.4	Off	L1	19.6	16.6	46.0
3.518000	29.3	Off	L1	19.6	16.7	46.0
3.814000	28.9	Off	L1	19.6	17.1	46.0
4.062000	28.7	Off	L1	19.6	17.3	46.0
4.502000	27.5	Off	L1	19.6	18.5	46.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable (Charging from Adapter) + MP3		

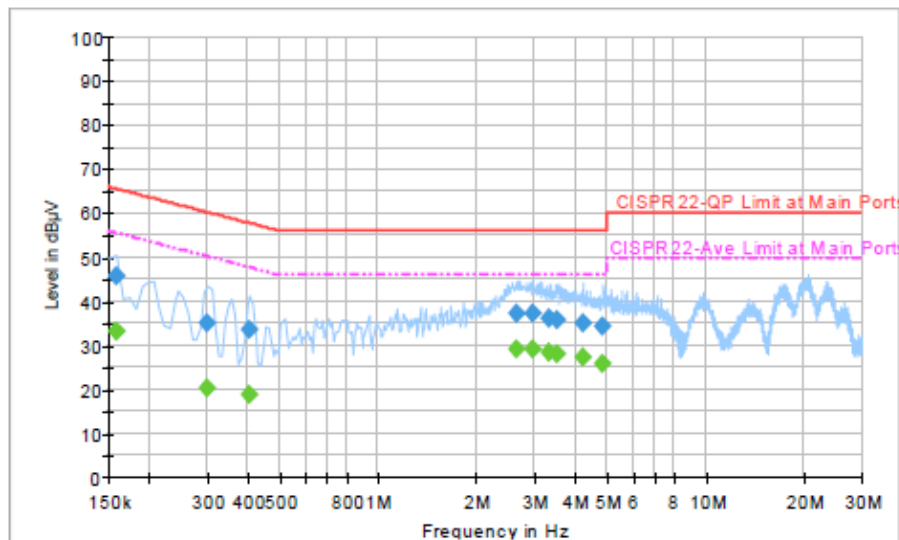
Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	45.7	Off	N	19.3	19.9	65.6
0.302000	34.9	Off	N	19.4	25.3	60.2
0.406000	33.6	Off	N	19.4	24.1	57.7
2.646000	37.3	Off	N	19.5	18.7	56.0
2.958000	37.2	Off	N	19.6	18.8	56.0
3.326000	36.2	Off	N	19.6	19.8	56.0
3.534000	35.9	Off	N	19.6	20.1	56.0
4.214000	35.1	Off	N	19.6	20.9	56.0
4.870000	34.4	Off	N	19.6	21.6	56.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	33.3	Off	N	19.3	22.3	55.6
0.302000	20.4	Off	N	19.4	29.8	50.2
0.406000	18.9	Off	N	19.4	28.8	47.7
2.646000	29.3	Off	N	19.5	16.7	46.0
2.958000	29.0	Off	N	19.6	17.0	46.0
3.326000	28.3	Off	N	19.6	17.7	46.0
3.534000	28.1	Off	N	19.6	17.9	46.0
4.214000	27.4	Off	N	19.6	18.6	46.0
4.870000	26.0	Off	N	19.6	20.0	46.0



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	May 06, 2014~ May 09, 2014	Jun. 06, 2014	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB412923 44	300MHz~40GHz	Jan. 28, 2014	May 06, 2014~ May 09, 2014	Jan. 27, 2015	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US404415 48	300MHz~40GHz	Jan. 28, 2014	May 06, 2014~ May 09, 2014	Jan. 27, 2015	Conducted (TH02-HY)
Hygrometer	Testo	608-H1	34897199	N/A	May 06, 2014	May 06, 2014~ May 09, 2014	May 05, 2015	Conducted (TH02-HY)
RF cable	WOKEN	S05	S05-13070 8-038	N/A	Jan. 22, 2014	May 06, 2014~ May 09, 2014	Jan. 21, 2015	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9 kHz~7 GHz	Sep. 06, 2013	May 31, 2014	Sep. 05, 2014	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	May 31, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30 MHz ~ 1 GHz	Oct. 10, 2013	May 31, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	860004/00 01	9 kHz~30 MHz	Jul. 03, 2012	May 31, 2014	Jul. 03, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1 GHz~18 GHz	Aug. 22, 2013	May 31, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917 0251	15GHz- 40GHz	Oct. 03, 2013	May 31, 2014	Oct. 02, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	May 31, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1 GHz~26.5 GHz	Nov. 29, 2013	May 31, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	DC~18 G	Jul. 09, 2013	May 31, 2014	Jul. 08, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	May 31, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	May 31, 2014	N/A	Radiation (03CH07-HY)
LF RF Cable	Warison+HUBER SUHNER	WCBA-WC04 NM.NM2	N/A	30MHz~1GHz	Nov. 28, 2013	May 31, 2014	Nov. 27, 2014	Radiation (03CH07-HY)
HF RF Cable	HUBER SUHNER	SUCOFLEX 104	38411/6	1GHz~26.5GHz	Nov. 28, 2013	May 31, 2014	Nov. 27, 2014	Radiation (03CH07-HY)
High Pass Filter	Microwave Circuits	H3G018G1	SN477220	3G HPF	Nov. 28, 2013	May 31, 2014	Nov. 27, 2014	Radiation (03CH07-HY)
Low Pass Filter	Wainwright Instruments GmbH	WLKS1200-8 SS	SN3	1.5G LPF	Nov. 28, 2013	May 31, 2014	Nov. 27, 2014	Radiation (03CH07-HY)
Hygrometer	Testo	608-H1	34897197	N/A	May 06, 2014	May 31, 2014	May 05, 2015	Radiation (03CH07-HY)
Test Software	Audix	E3 V6.0	N/A	N/A	N/A	May 31, 2014	N/A	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 15, 2013	May 20, 2014	Nov. 14, 2014	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2013	May 20, 2014	Dec. 11, 2014	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 04, 2013	May 20, 2014	Dec. 03, 2014	Conduction (CO05-HY)
AC Power Source	APC	APC-1000 W	N/A	N/A	N/A	May 20, 2014	N/A	Conduction (CO05-HY)
Test Software	N/A	EMC32	8.40.0	N/A	N/A	May 20, 2014	N/A	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Apr. 23, 2014	May 20, 2014	Apr. 22, 2015	Conduction (CO05-HY)
LF Cable	Shuner	RG-402	N/A	N/A	Oct. 17, 2013	May 20, 2014	Oct. 16, 2014	Conduction (CO05-HY)

Note: Test equipment calibration is traceable to the procedure of ISO17025.



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50
---	------