



# FCC/IC RF Test Report

APPLICANT : Sony Mobile Communications Inc.  
EQUIPMENT : Smart phone  
BRAND NAME : SONY  
TYPE NAME : PM-0385-BV  
FCC ID : PY7PM-0385  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)  
IC RSS-132 issue 3, RSS-133 issue 6, and RSS-139 Issue 2  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on May 02, 2014 and testing was completed on Jun. 18, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.  
TEL : 886-3-327-3456  
FAX : 886-3-328-4978  
FCC ID : PY7PM-0385

Page Number : 1 of 153  
Report Issued Date : Aug. 01, 2014  
Report Version : Rev. 02  
Report Template No.: BU5-FG22/24/27 Version 1.1  
Report Template No.: BU5-CG132/133/139 Version 1.1



## TABLE OF CONTENTS

|                                                                                       |            |
|---------------------------------------------------------------------------------------|------------|
| <b>REVISION HISTORY .....</b>                                                         | <b>3</b>   |
| <b>SUMMARY OF TEST RESULT .....</b>                                                   | <b>4</b>   |
| <b>1 GENERAL DESCRIPTION .....</b>                                                    | <b>5</b>   |
| 1.1 Applicant.....                                                                    | 5          |
| 1.2 Manufacturer .....                                                                | 5          |
| 1.3 Product Feature of Equipment Under Test .....                                     | 5          |
| 1.4 Product Specification subjective to this standard .....                           | 6          |
| 1.5 Modification of EUT .....                                                         | 7          |
| 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....        | 7          |
| 1.7 Testing Location .....                                                            | 8          |
| 1.8 Applicable Standards .....                                                        | 8          |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>                             | <b>9</b>   |
| 2.1 Test Mode.....                                                                    | 9          |
| 2.2 Connection Diagram of Test System .....                                           | 12         |
| 2.3 Support Unit used in test configuration .....                                     | 12         |
| 2.4 Measurement Results Explanation Example .....                                     | 12         |
| <b>3 TEST RESULT .....</b>                                                            | <b>13</b>  |
| 3.1 Conducted Output Power Measurement.....                                           | 13         |
| 3.2 Peak-to-Average Ratio .....                                                       | 15         |
| 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement ..... | 31         |
| 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....                        | 37         |
| 3.5 Band Edge Measurement.....                                                        | 60         |
| 3.6 Conducted Spurious Emission Measurement.....                                      | 68         |
| 3.7 Field Strength of Spurious Radiation Measurement .....                            | 123        |
| 3.8 Frequency Stability Measurement.....                                              | 146        |
| <b>4 LIST OF MEASURING EQUIPMENT .....</b>                                            | <b>151</b> |
| <b>5 UNCERTAINTY OF EVALUATION .....</b>                                              | <b>153</b> |



## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION                                                      | ISSUED DATE   |
|------------|---------|------------------------------------------------------------------|---------------|
| FG450249A  | Rev. 01 | Initial issue of report                                          | Jul. 14, 2014 |
| FG450249A  | Rev. 02 | Update EUT Information List for SW version change as 18.4.C.1.10 | Aug. 01, 2014 |
|            |         |                                                                  |               |
|            |         |                                                                  |               |
|            |         |                                                                  |               |
|            |         |                                                                  |               |
|            |         |                                                                  |               |
|            |         |                                                                  |               |
|            |         |                                                                  |               |
|            |         |                                                                  |               |
|            |         |                                                                  |               |
|            |         |                                                                  |               |
|            |         |                                                                  |               |
|            |         |                                                                  |               |
|            |         |                                                                  |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule                                         | IC Rule                                                         | Description                                   | Limit                  | Result | Remark                                     |
|----------------|--------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------|------------------------|--------|--------------------------------------------|
| 3.1            | §2.1046                                          | RSS-132 (5.4)<br>RSS-133 (6.4)<br>RSS-139 (6.4)                 | Conducted Output Power                        | Reporting Only         | PASS   | -                                          |
| 3.2            | §24.232(d)<br>§27.50(d)(5)                       | RSS-132 (5.4)<br>RSS-133 (6.4)<br>RSS-139 (6.4)                 | Peak-to-Average Ratio                         | < 13 dB                | PASS   | -                                          |
| 3.3            | §22.913(a)(2)                                    | RSS-132(5.4)<br>SRSP-503(5.1.3)                                 | Effective Radiated Power                      | < 7 Watts              | PASS   | -                                          |
|                | §24.232(c)                                       | RSS-133 (6.4)<br>SRSP-510(5.1.2)                                | Equivalent Isotropic Radiated Power           | < 2 Watts              | PASS   | -                                          |
|                | §27.50(d)(4)                                     | RSS-139 (6.4)<br>SRSP-513(5.1.2)                                | Equivalent Isotropic Radiated Power           | < 1 Watts              | PASS   | -                                          |
| 3.4            | §2.1049<br>§22.917(b)<br>§24.238(b)<br>§27.53(g) | RSS-GEN(4.6.1)<br>RSS-133(6.5)<br>RSS-139 (6.5)                 | Occupied Bandwidth                            | Reporting Only         | PASS   | -                                          |
| 3.5            | §2.1051<br>§22.917(a)<br>§24.238(a)<br>§27.53(g) | RSS-GEN(4.9)<br>RSS-132 (5.5)<br>RSS-133 (6.5)<br>RSS-139 (6.5) | Band Edge Measurement                         | < 43+10log10(P[Watts]) | PASS   | -                                          |
| 3.6            | §2.1051<br>§22.917(a)<br>§24.238(a)<br>§27.53(g) | RSS-GEN(4.9)<br>RSS-132 (5.5)<br>RSS-133 (6.5)<br>RSS-139 (6.5) | Conducted Emission                            | < 43+10log10(P[Watts]) | PASS   | -                                          |
| 3.7            | §2.1053<br>§22.917(a)<br>§24.238(a)<br>§27.53(g) | RSS-GEN(4.9)<br>RSS-132 (5.5)<br>RSS-133 (6.5)<br>RSS-139 (6.5) | Field Strength of Spurious Radiation          | < 43+10log10(P[Watts]) | PASS   | Under limit<br>18.61 dB at<br>2544.000 MHz |
| 3.8            | §2.1055<br>§22.355<br>§24.235<br>§27.54          | RSS-GEN(4.7)<br>RSS-132 (5.3)<br>RSS-133 (6.3)<br>RSS-139 (6.3) | Frequency Stability for Temperature & Voltage | < 2.5 ppm              | PASS   | -                                          |

# 1 General Description

## 1.1 Applicant

Sony Mobile Communications Inc.  
Nya Vattentorget, 22188 Lund, Sweden

## 1.2 Manufacturer

Arima Communication Corp.  
6F, No. 866, Jhongjheng Rd., Jhonghe Dist., New Taipei City 23586, Taiwan

## 1.3 Product Feature of Equipment Under Test

The Equipment Under Test (hereafter called: EUT) is Smart phone supporting, GSM / WCDMA / LTE, Wi-Fi 2.4GHz 802.11b/g/n, Bluetooth with FM Receiver, ANT+, GPS, and NFC features, and below is details of information.

| Product Feature               |                                           |
|-------------------------------|-------------------------------------------|
| Equipment                     | Smart phone                               |
| Brand Name                    | SONY                                      |
| Marketing Name                | PM-0385-BV                                |
| FCC ID                        | PY7PM-0385                                |
| GSM Operating Band(s)         | GSM 850/900/1800/1900MHz                  |
| GPRS / EGPRS Multi Slot Class | GPRS Class 33, EGPRS Class 33             |
| WCDMA Operating Band(s)       | FDD Band I / II / IV / V                  |
| WCDMA Rel. Version            | Rel. 9                                    |
| LTE Operating Band(s)         | FDD Band IV / VII / XVII                  |
| LTE Rel. Version              | Rel. 8                                    |
| Wi-Fi Specification           | 802.11b/g/n (HT20)                        |
| Bluetooth Version             | v3.0+EDR / v4.0-LE                        |
| NFC Specification             | ISO14443A / ISO14443B / Felica / ISO15693 |
| ANT+                          | ANT+                                      |
| Power Supply                  | Battery / AC Adapter / Car Charger        |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

| Product Specification subjective to this standard |                                                                                                                                                                                               |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx Frequency</b>                               | GSM850: 824.2 MHz ~ 848.8 MHz<br>GSM1900: 1850.2 MHz ~ 1909.8MHz<br>WCDMA Band V: 826.4 MHz ~ 846.6 MHz<br>WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz<br>WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz  |
| <b>Rx Frequency</b>                               | GSM850: 869.2 MHz ~ 893.8 MHz<br>GSM1900: 1930.2 MHz ~ 1989.8 MHz<br>WCDMA Band V: 871.4 MHz ~ 891.6 MHz<br>WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz<br>WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz |
| <b>Maximum Output Power to Antenna</b>            | GSM850 : 32.63 dBm<br>GSM1900 : 29.84 dBm<br>WCDMA Band V : 23.53 dBm<br>WCDMA Band IV : 23.41 dBm<br>WCDMA Band II : 23.36 dBm                                                               |
| <b>Antenna Type / Gain</b>                        | I-FA Antenna / 0.22 dBi                                                                                                                                                                       |
| <b>Type of Modulation</b>                         | GSM: GMSK<br>GPRS: GMSK<br>EDGE: GMSK / 8PSK<br>WCDMA: QPSK (Uplink)<br>HSDPA: 64QAM(Downlink)<br>HSUPA: QPSK (Uplink)                                                                        |

| EUT Information List  |            |             |              |                                        |
|-----------------------|------------|-------------|--------------|----------------------------------------|
| IMEI                  | HW Version | SW Version  | S/N          | Performed Test Item                    |
| IMEI: 004402452636057 | A          | 18.4.C.1.10 | ZL4418D28521 | RF Conducted Measurement               |
| IMEI: 004402452638442 |            |             | WUJ01AYKFA   | Radiated Spurious Emission<br>ERP Test |

| Accessory List |                             |
|----------------|-----------------------------|
| AC Adapter     | Model No. : EP800           |
|                | Type No. : CAA-0002016-US B |
|                | S/N : 3113W45408465         |
| Battery        | Model No. : LIS1551ERPC     |
| Earphone       | Model No. : MH410c          |
|                | Type No. : AG-1100          |
|                | S/N : 13511E5B0076390       |
| USB Cable      | Model No. : EC 450          |
|                | Type No. : AI-0700          |
|                | S/N : 134912DC0004380       |

**Note:**

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

| FCC Rule | System                     | Type of Modulation | Maximum ERP/EIRP (W) | Frequency Tolerance (ppm) | Emission Designator |
|----------|----------------------------|--------------------|----------------------|---------------------------|---------------------|
| Part 22  | GSM850 GPRS class 8        | GMSK               | 0.98                 | 0.0084 ppm                | 248KGXW             |
| Part 22  | GSM850 EDGE class 8        | 8PSK               | 0.29                 | 0.0096 ppm                | 250KG7W             |
| Part 22  | WCDMA Band V RMC 12.2Kbps  | QPSK               | 0.12                 | 0.0120 ppm                | 4M20F9W             |
| Part 24  | GSM1900 GPRS class 8       | GMSK               | 0.95                 | 0.0074 ppm                | 250KGXW             |
| Part 24  | GSM1900 EDGE class 8       | 8PSK               | 0.38                 | 0.0064 ppm                | 246KG7W             |
| Part 24  | WCDMA Band II RMC 12.2Kbps | QPSK               | 0.21                 | 0.0117 ppm                | 4M20F9W             |
| Part 27  | WCDMA Band IV RMC 12.2Kbps | QPSK               | 0.17                 | 0.0040 ppm                | 4M20F9W             |

## 1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

|                    |                                                                                                                                                                 |           |                     |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------------------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                                                                      |           |                     |
| Test Site Location | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |           |                     |
| Test Site No.      | Sporton Site No.                                                                                                                                                |           | IC Registration No. |
|                    | TH02-HY                                                                                                                                                         | 03CH07-HY | 4086B-1             |

## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01
- ♦ IC RSS-132 Issue 3
- ♦ IC RSS-133 Issue 6
- ♦ IC RSS-139 Issue 2
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, " Receivers Excluded from Industry Canada Requirements", only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900 and, WCDMA Band II, and WCDMA Band IV.

| Test Modes           |                                                                                                    |                                                                                                    |
|----------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Band                 | Radiated TCs                                                                                       | Conducted TCs                                                                                      |
| <b>GSM 850</b>       | <ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul> | <ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul> |
| <b>GSM 1900</b>      | <ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul> | <ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul> |
| <b>WCDMA Band V</b>  | <ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>                              | <ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>                              |
| <b>WCDMA Band II</b> | <ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>                              | <ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>                              |
| <b>WCDMA Band VI</b> | <ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>                              | <ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>                              |

**Note:** The maximum power levels are chosen to test as the worst case configuration as follows:

GPRS multi-slot class 8 mode for GMSK modulation;

EDGE multi-slot class 8 mode for 8PSK modulation;

RMC 12.2Kbps mode for WCDMA band V, WCDMA band II, and WCDMA band IV;

only these modes were used for all tests.


**Conducted Power Measurement Results:**

| Conducted Power |                         | Burst Average Power (dBm) |       |       |         |        |        |
|-----------------|-------------------------|---------------------------|-------|-------|---------|--------|--------|
| Band            |                         | GSM850                    |       |       | GSM1900 |        |        |
| Channel         |                         | 128                       | 189   | 251   | 512     | 661    | 810    |
| Frequency (MHz) |                         | 824.2                     | 836.4 | 848.8 | 1850.2  | 1880.0 | 1909.8 |
| GSM             |                         | 31.80                     | 32.36 | 32.38 | 29.78   | 29.82  | 29.45  |
| GPRS Class 8    |                         | 31.84                     | 32.39 | 32.63 | 29.79   | 29.84  | 29.47  |
| GPRS Class 10   |                         | 29.07                     | 29.41 | 29.54 | 26.85   | 26.87  | 26.46  |
| GPRS Class 11   |                         | 27.67                     | 27.80 | 28.05 | 24.79   | 24.89  | 24.50  |
| GPRS Class 33   |                         | 26.40                     | 26.51 | 26.77 | 23.74   | 23.76  | 23.42  |
| EGPRS Class 8   |                         | 27.12                     | 27.29 | 27.51 | 26.63   | 26.68  | 26.47  |
| EGPRS Class 10  |                         | 24.55                     | 24.74 | 24.91 | 24.08   | 24.16  | 23.98  |
| EGPRS Class 11  |                         | 23.30                     | 23.42 | 23.69 | 22.46   | 22.47  | 22.41  |
| EGPRS Class 33  |                         | 23.06                     | 23.35 | 23.56 | 21.37   | 21.41  | 21.05  |
| DTM 5           | GSM (GMSK, 1 Tx slot)   | 29.04                     | 29.37 | 29.52 | 26.80   | 26.82  | 26.43  |
|                 | GPRS (GMSK, 1 Tx slot)  | 29.01                     | 29.35 | 29.50 | 26.72   | 26.74  | 26.33  |
| DTM 9           | GSM (GMSK, 1 Tx slot)   | 29.03                     | 29.33 | 29.49 | 26.75   | 26.72  | 26.36  |
|                 | GPRS (GMSK, 1 Tx slot)  | 28.98                     | 29.30 | 29.47 | 26.70   | 26.68  | 26.30  |
| DTM 11          | GSM (GMSK, 1 Tx slot)   | 27.65                     | 27.77 | 27.99 | 24.72   | 24.82  | 24.46  |
|                 | GPRS (GMSK, 2 Tx slots) | 27.61                     | 27.72 | 27.94 | 24.69   | 24.77  | 24.40  |
| DTM 5           | GSM (GMSK, 1 Tx slot)   | 29.03                     | 29.32 | 29.50 | 26.79   | 26.77  | 26.40  |
|                 | EDGE (8PSK, 1 Tx slot)  | 24.50                     | 24.72 | 24.85 | 24.03   | 24.12  | 23.94  |
| DTM 9           | GSM (GMSK, 1 Tx slot)   | 29.00                     | 29.35 | 29.50 | 26.73   | 26.77  | 26.33  |
|                 | EDGE (8PSK, 1 Tx slot)  | 24.40                     | 24.62 | 24.81 | 24.01   | 24.05  | 23.90  |
| DTM 11          | GSM (GMSK, 1 Tx slot)   | 27.60                     | 27.72 | 27.96 | 24.70   | 24.80  | 24.35  |
|                 | EDGE (8PSK, 2 Tx slots) | 23.22                     | 23.35 | 23.61 | 22.41   | 22.43  | 22.35  |



| Conducted Power | Burst Average Power (dBm) |       |       |               |        |        |               |        |        |
|-----------------|---------------------------|-------|-------|---------------|--------|--------|---------------|--------|--------|
| Band            | WCDMA Band V              |       |       | WCDMA Band II |        |        | WCDMA Band IV |        |        |
| Channel         | 4132                      | 4182  | 4233  | 9262          | 9400   | 9538   | 1312          | 1413   | 1513   |
| Frequency (MHz) | 826.4                     | 836.4 | 846.6 | 1852.4        | 1880.0 | 1907.6 | 1712.4        | 1732.6 | 1752.6 |
| RMC 12.2K       | 23.43                     | 23.53 | 23.37 | 22.88         | 22.78  | 23.36  | 23.40         | 23.28  | 23.41  |
| HSDPA Subtest-1 | 22.66                     | 22.69 | 22.43 | 21.96         | 21.87  | 22.30  | 22.40         | 22.45  | 22.50  |
| HSDPA Subtest-2 | 22.50                     | 22.40 | 22.29 | 21.99         | 21.91  | 22.28  | 22.42         | 22.31  | 22.43  |
| HSDPA Subtest-3 | 21.96                     | 21.98 | 22.32 | 21.44         | 21.35  | 21.93  | 21.92         | 21.79  | 21.90  |
| HSDPA Subtest-4 | 22.15                     | 21.76 | 21.80 | 21.38         | 21.26  | 21.91  | 21.89         | 21.88  | 21.93  |
| HSUPA Subtest-1 | 22.76                     | 22.61 | 22.59 | 21.74         | 21.69  | 22.33  | 22.46         | 22.23  | 22.58  |
| HSUPA Subtest-2 | 21.78                     | 21.71 | 21.98 | 21.23         | 21.12  | 21.72  | 21.67         | 21.47  | 21.80  |
| HSUPA Subtest-3 | 21.52                     | 21.83 | 21.59 | 20.92         | 20.82  | 21.44  | 21.50         | 21.28  | 21.64  |
| HSUPA Subtest-4 | 21.97                     | 21.80 | 21.89 | 21.50         | 21.42  | 22.06  | 21.62         | 21.38  | 21.73  |
| HSUPA Subtest-5 | 22.62                     | 22.73 | 22.77 | 22.15         | 22.07  | 22.68  | 22.63         | 22.42  | 22.76  |

## 2.2 Connection Diagram of Test System

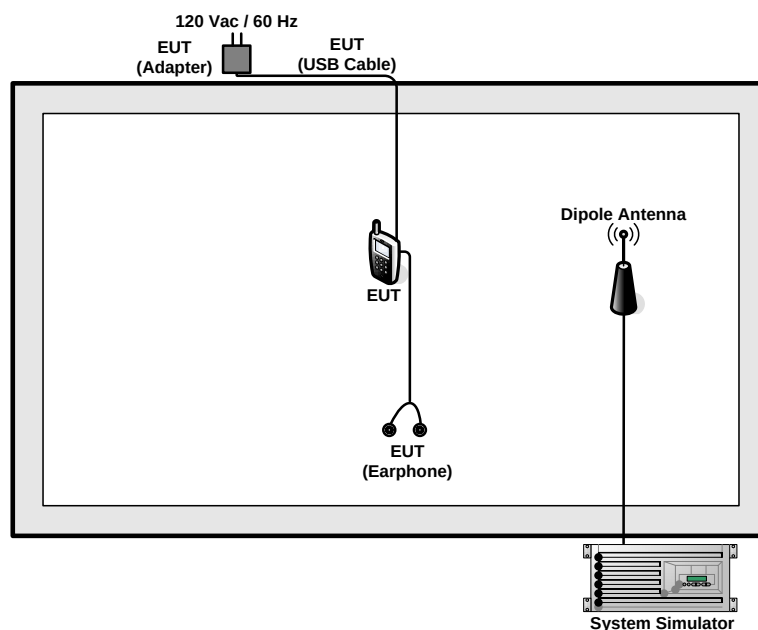

## 2.3 Support Unit used in test configuration

| Item | Equipment        | Trade Name | Model No. | FCC ID | Data Cable | Power Cord        |
|------|------------------|------------|-----------|--------|------------|-------------------|
| 1.   | System Simulator | R&S        | CMU 200   | N/A    | N/A        | Unshielded, 1.8 m |

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

*Offset(dB) = RF cable loss(dB) + attenuator factor(dB).*

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### 3.1.4 Test Setup

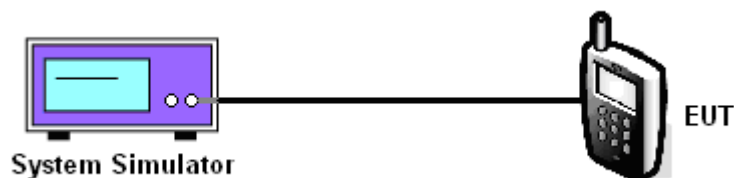

### 3.1.5 Test Result of Conducted Output Power

| Cellular Band               |                       |              |               |                       |              |               |                             |               |                |
|-----------------------------|-----------------------|--------------|---------------|-----------------------|--------------|---------------|-----------------------------|---------------|----------------|
| Modes                       | GSM850 (GPRS class 8) |              |               | GSM850 (EDGE class 8) |              |               | WCDMA Band V (RMC 12.2Kbps) |               |                |
| Channel                     | 128<br>(Low)          | 189<br>(Mid) | 251<br>(High) | 128<br>(Low)          | 189<br>(Mid) | 251<br>(High) | 4132<br>(Low)               | 4182<br>(Mid) | 4233<br>(High) |
| Frequency<br>(MHz)          | 824.2                 | 836.4        | 848.8         | 824.2                 | 836.4        | 848.8         | 826.4                       | 836.4         | 846.6          |
| Conducted<br>Power<br>(dBm) | 31.84                 | 32.39        | 32.63         | 27.12                 | 27.29        | 27.51         | 23.43                       | 23.53         | 23.37          |

| PCS Band                    |                        |              |               |                        |              |               |                              |               |                |
|-----------------------------|------------------------|--------------|---------------|------------------------|--------------|---------------|------------------------------|---------------|----------------|
| Modes                       | GSM1900 (GPRS class 8) |              |               | GSM1900 (EDGE class 8) |              |               | WCDMA Band II (RMC 12.2Kbps) |               |                |
| Channel                     | 512<br>(Low)           | 661<br>(Mid) | 810<br>(High) | 512<br>(Low)           | 661<br>(Mid) | 810<br>(High) | 9262<br>(Low)                | 9400<br>(Mid) | 9538<br>(High) |
| Frequency<br>(MHz)          | 1850.2                 | 1880         | 1909.8        | 1850.2                 | 1880         | 1909.8        | 1852.4                       | 1880          | 1907.6         |
| Conducted<br>Power<br>(dBm) | 29.79                  | 29.84        | 29.47         | 26.63                  | 26.68        | 26.47         | 22.88                        | 22.78         | 23.36          |

| AWS Band                    |                              |            |             |
|-----------------------------|------------------------------|------------|-------------|
| Modes                       | WCDMA Band IV (RMC 12.2Kbps) |            |             |
| Channel                     | 1312(Low)                    | 1413 (Mid) | 1513 (High) |
| Frequency<br>(MHz)          | 1712.4                       | 1732.6     | 1752.6      |
| Conducted<br>Power<br>(dBm) | 23.40                        | 23.28      | 23.41       |

**Note:** maximum burst average power for GPRS, and maximum average power for WCDMA.

## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.  
Record the maximum PAPR level associated with a probability of 0.1%.

### 3.2.4 Test Setup

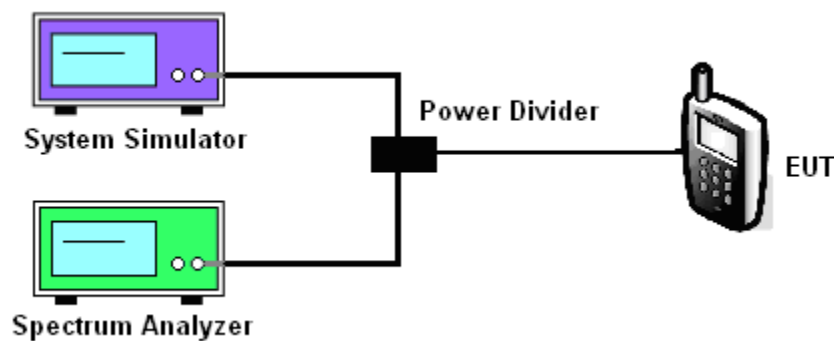

### 3.2.5 Test Result of Peak-to-Average Ratio

| Cellular Band                 |                       |              |               |                       |              |               |                                |               |                |
|-------------------------------|-----------------------|--------------|---------------|-----------------------|--------------|---------------|--------------------------------|---------------|----------------|
| Modes                         | GSM850 (GPRS class 8) |              |               | GSM850 (EDGE class 8) |              |               | WCDMA Band V<br>(RMC 12.2Kbps) |               |                |
| Channel                       | 128<br>(Low)          | 189<br>(Mid) | 251<br>(High) | 128<br>(Low)          | 189<br>(Mid) | 251<br>(High) | 4132<br>(Low)                  | 4182<br>(Mid) | 4233<br>(High) |
| Frequency (MHz)               | 824.2                 | 836.4        | 848.8         | 824.2                 | 836.4        | 848.8         | 826.4                          | 836.4         | 846.6          |
| Peak-to-Average<br>Ratio (dB) | 0.48                  | 0.44         | 0.40          | 3.16                  | 3.16         | 3.24          | 2.96                           | 3.00          | 3.04           |


| PCS Band                      |                        |              |               |                        |              |               |                                 |               |                |
|-------------------------------|------------------------|--------------|---------------|------------------------|--------------|---------------|---------------------------------|---------------|----------------|
| Modes                         | GSM1900 (GPRS class 8) |              |               | GSM1900 (EDGE class 8) |              |               | WCDMA Band II<br>(RMC 12.2Kbps) |               |                |
| Channel                       | 512<br>(Low)           | 661<br>(Mid) | 810<br>(High) | 512<br>(Low)           | 661<br>(Mid) | 810<br>(High) | 9262<br>(Low)                   | 9400<br>(Mid) | 9538<br>(High) |
| Frequency (MHz)               | 1850.2                 | 1880         | 1909.8        | 1850.2                 | 1880         | 1909.8        | 1852.4                          | 1880          | 1907.6         |
| Peak-to-Average<br>Ratio (dB) | 0.36                   | 0.24         | 0.28          | 3.20                   | 3.04         | 3.28          | 3.00                            | 3.08          | 2.88           |

| AWS Band                      |                              |            |             |
|-------------------------------|------------------------------|------------|-------------|
| Modes                         | WCDMA Band IV (RMC 12.2Kbps) |            |             |
| Channel                       | 1312(Low)                    | 1413 (Mid) | 1513 (High) |
| Frequency (MHz)               | 1712.4                       | 1732.6     | 1752.6      |
| Peak-to-Average<br>Ratio (dB) | 2.96                         | 3.20       | 3.00        |

### 3.2.6 Test Result (Plots) of Peak-to-Average Ratio


|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM 850 | Test Mode : | GPRS class 8 Link (GMSK) |
|--------|---------|-------------|--------------------------|

#### Peak-to-Average Ratio on Channel 128 (824.2 MHz)

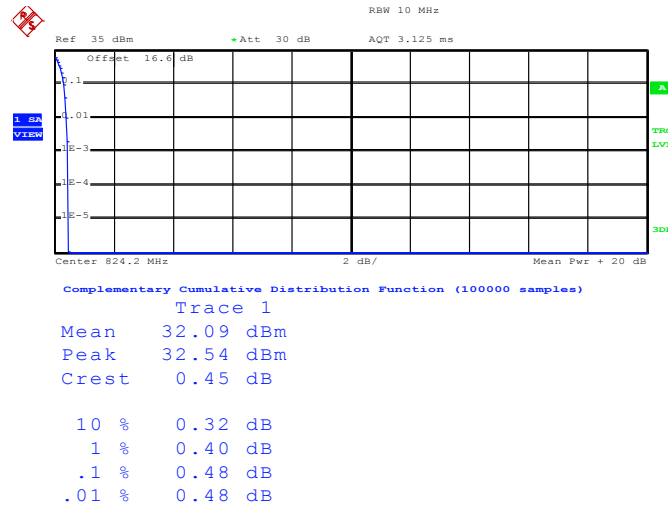

Date: 9.MAY.2014 10:24:00


#### Peak-to-Average Ratio on Channel 189 (836.4 MHz)

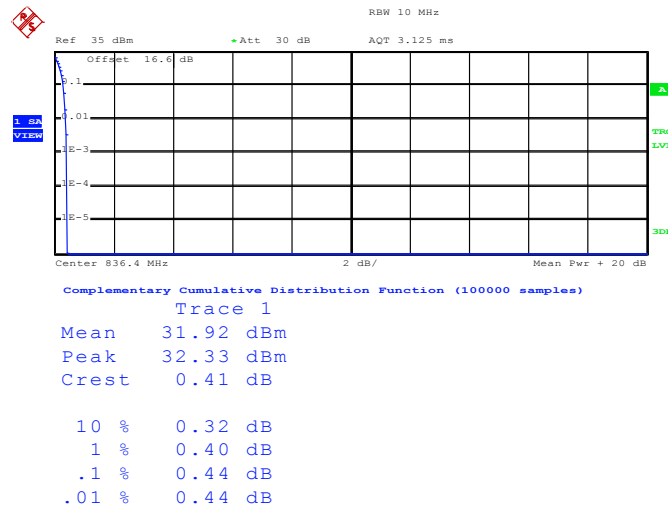

Date: 9.MAY.2014 10:24:27



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

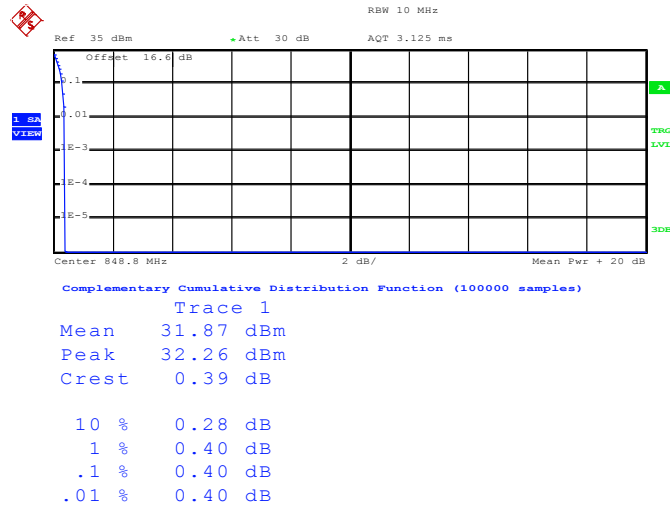


Date: 9.MAY.2014 10:24:51




|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM 850 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|---------|-------------|--------------------------|

## Peak-to-Average Ratio on Channel 128 (824.2 MHz)

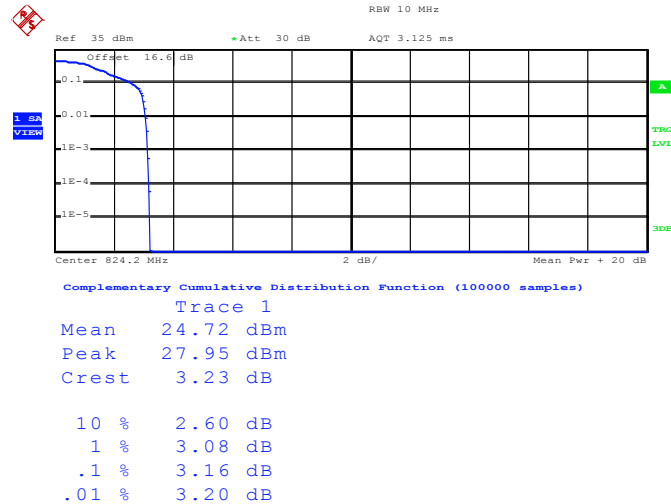

Date: 9.MAY.2014 11:35:30


## Peak-to-Average Ratio on Channel 189 (836.4 MHz)

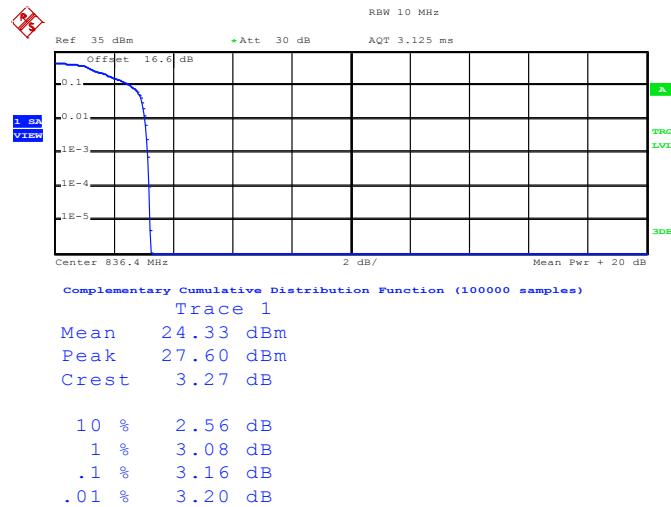

Date: 9.MAY.2014 11:36:32



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

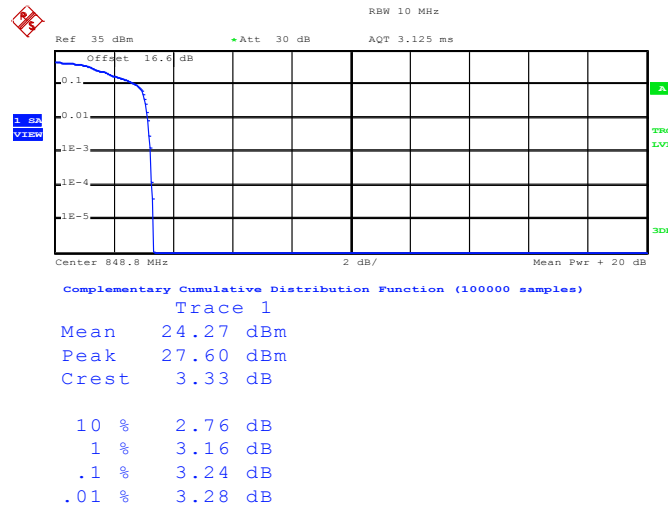


Date: 9.MAY.2014 11:37:05




|        |          |             |                          |
|--------|----------|-------------|--------------------------|
| Band : | GSM 1900 | Test Mode : | GPRS class 8 Link (GMSK) |
|--------|----------|-------------|--------------------------|

## Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

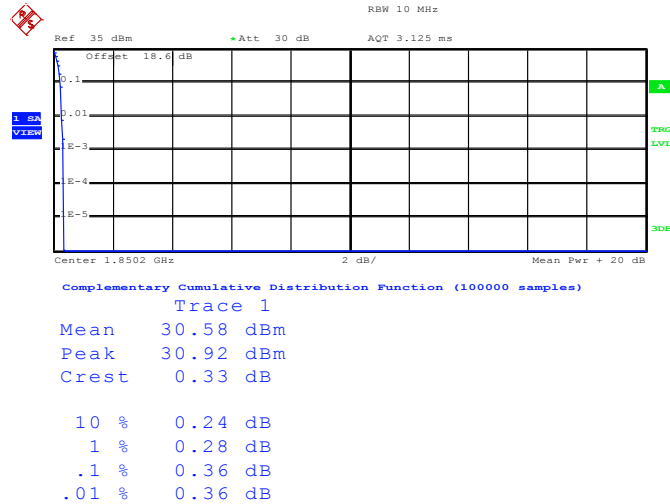

Date: 9.MAY.2014 14:51:23


## Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

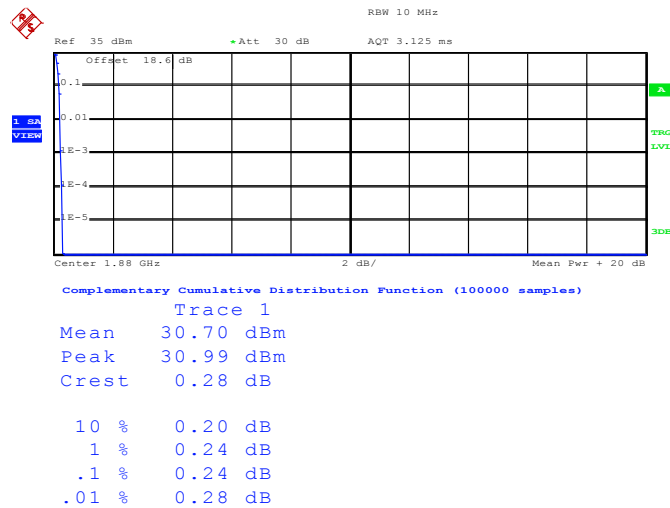

Date: 9.MAY.2014 14:51:43



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

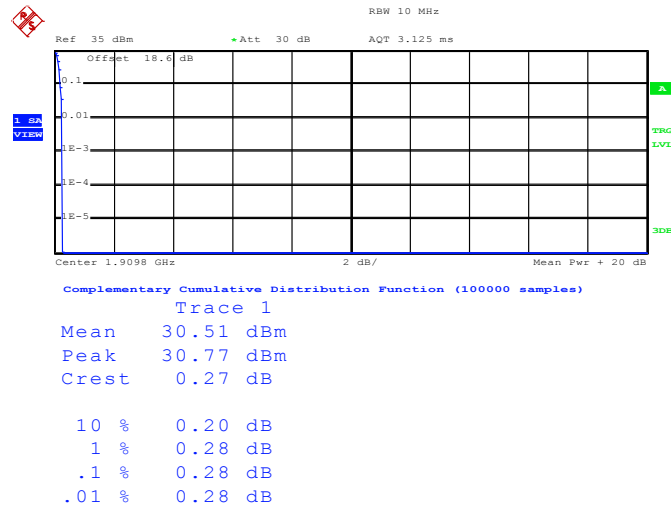


Date: 9.MAY.2014 14:52:06




|        |          |             |                          |
|--------|----------|-------------|--------------------------|
| Band : | GSM 1900 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|----------|-------------|--------------------------|

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

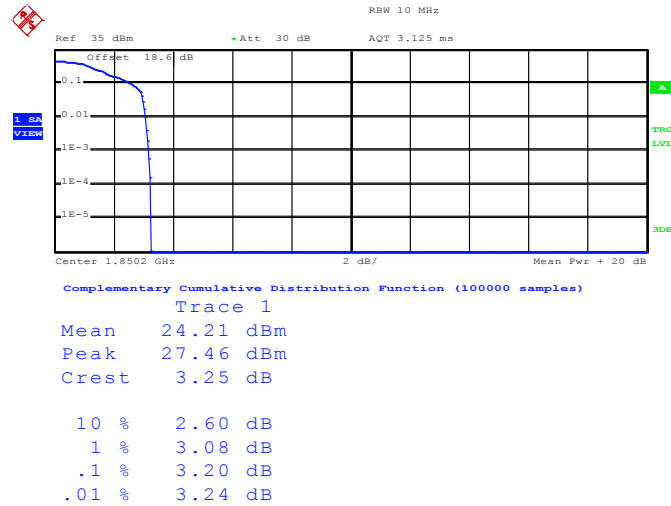

Date: 9.MAY.2014 15:46:40


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

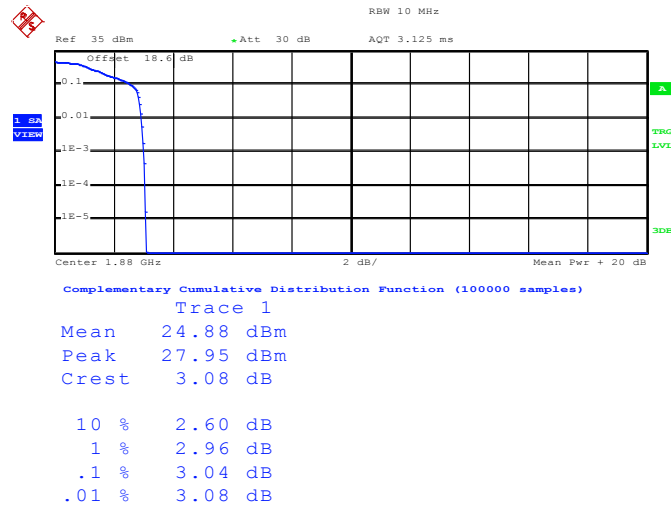

Date: 9.MAY.2014 15:47:31



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

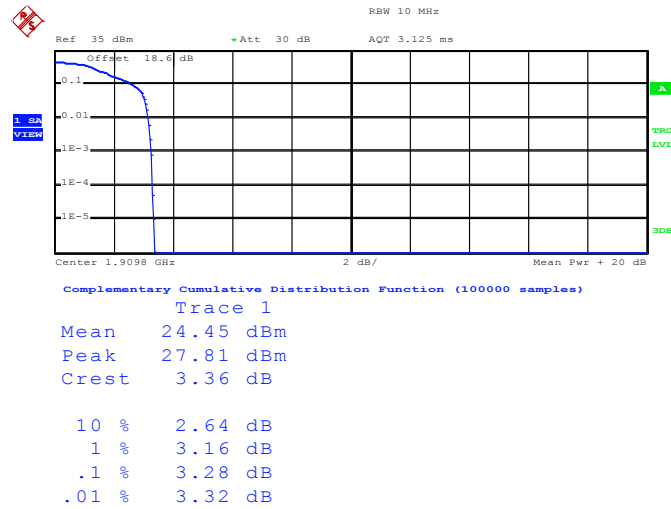


Date: 9.MAY.2014 15:48:04




|        |              |             |                          |
|--------|--------------|-------------|--------------------------|
| Band : | WCDMA Band V | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|--------------|-------------|--------------------------|

## Peak-to-Average Ratio on Channel 4132 (826.4 MHz)

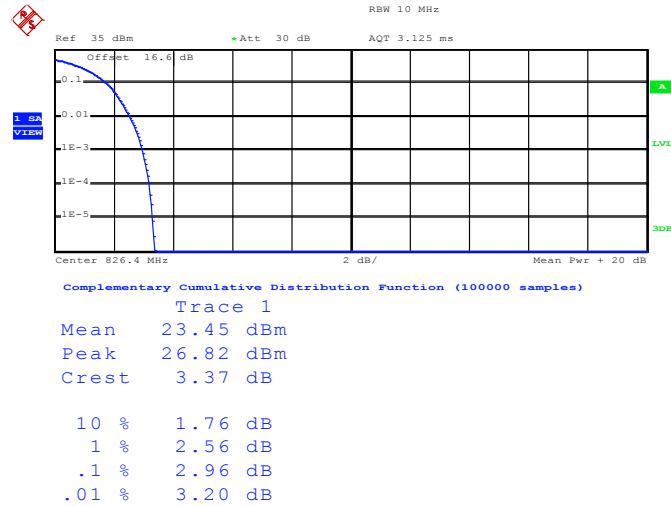

Date: 9.MAY.2014 17:56:45


## Peak-to-Average Ratio on Channel 4182 (836.4 MHz)

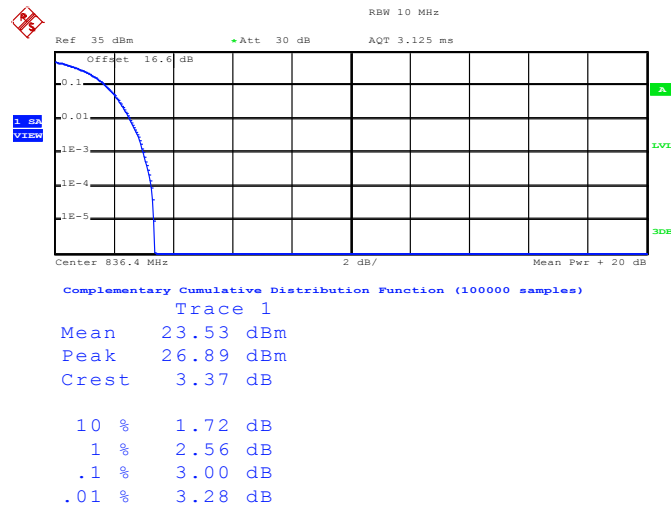

Date: 9.MAY.2014 17:57:21



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

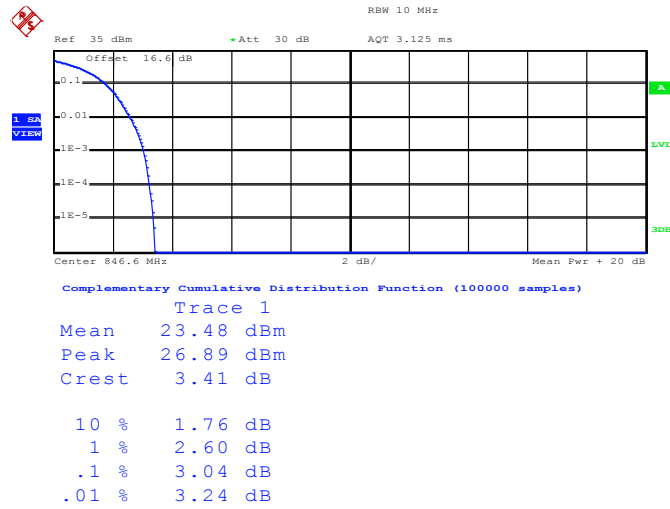


Date: 9.MAY.2014 17:57:53




|        |               |             |                          |
|--------|---------------|-------------|--------------------------|
| Band : | WCDMA Band IV | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|---------------|-------------|--------------------------|

## Peak-to-Average Ratio on Channel 1312 (1712.4 MHz)

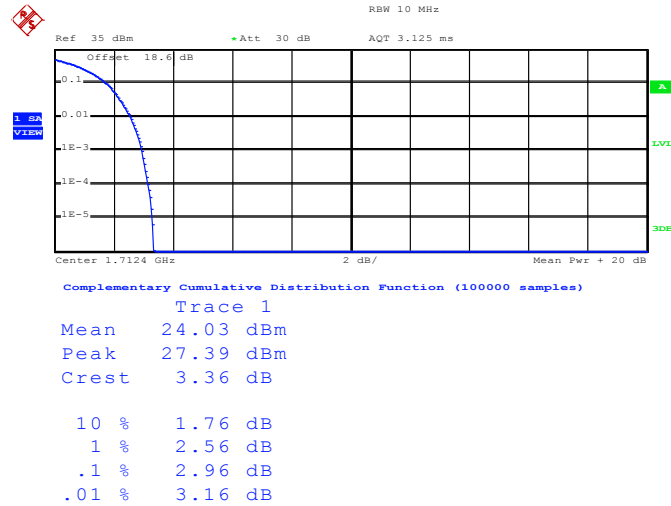

Date: 9.MAY.2014 17:17:42


## Peak-to-Average Ratio on Channel 1413 (1732.6 MHz)

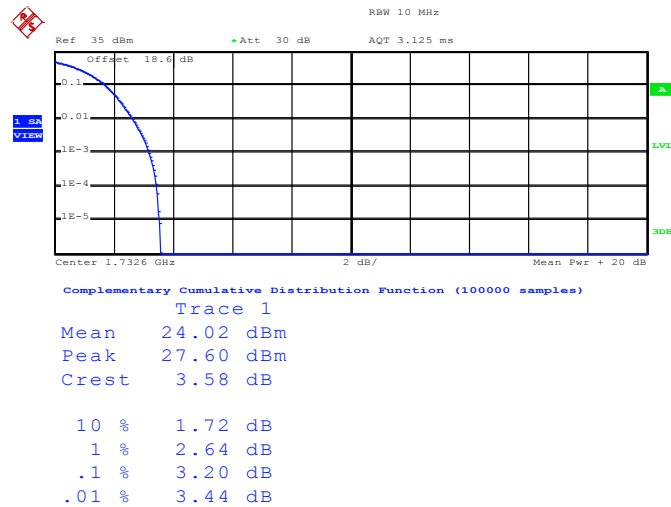

Date: 9.MAY.2014 17:18:11



Peak-to-Average Ratio on Channel 1513 (1752.6 MHz)

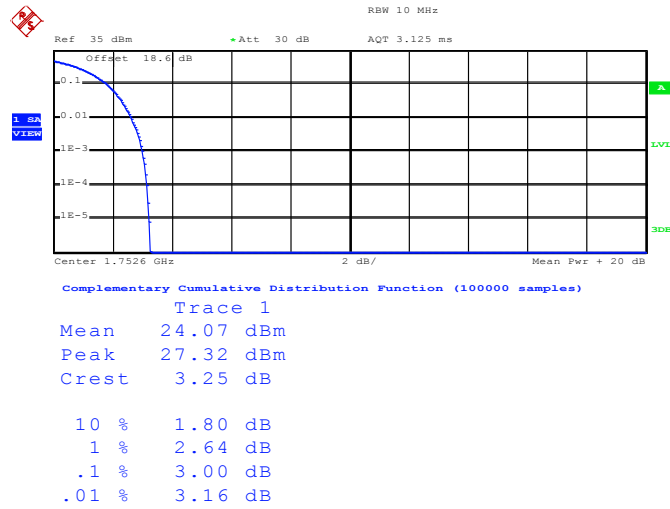


Date: 9.MAY.2014 17:18:35




|        |               |             |                          |
|--------|---------------|-------------|--------------------------|
| Band : | WCDMA Band II | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|---------------|-------------|--------------------------|

## Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

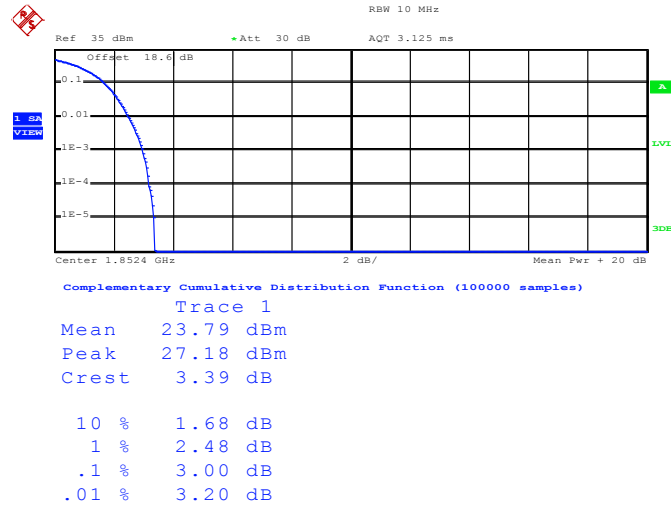

Date: 9.MAY.2014 16:26:53


## Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

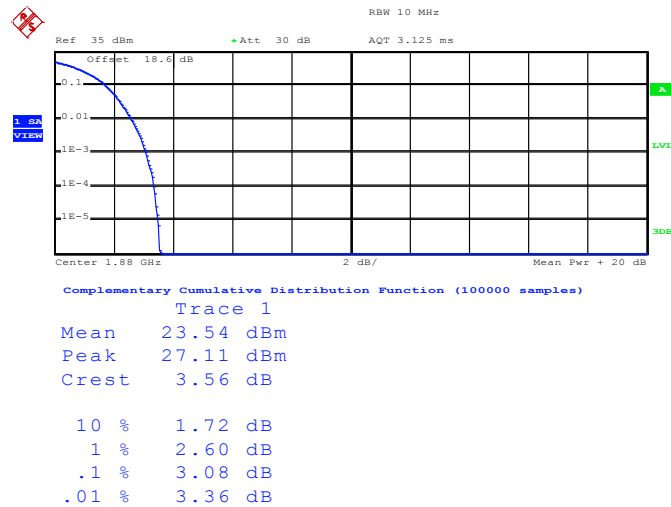

Date: 9.MAY.2014 16:27:26



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

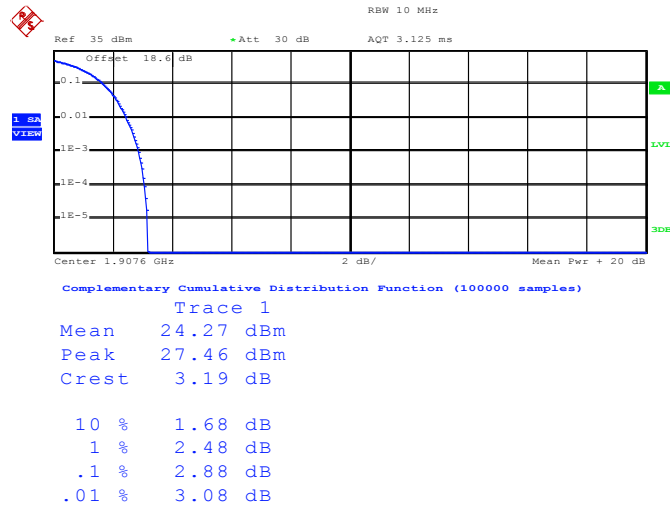

Date: 9.MAY.2014 16:27:51

### 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

#### 3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at the same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor,  $EIRP = LVL + \text{Correction factor}$  and  $ERP = EIRP - 2.15$ .

### 3.3.4 Test Setup

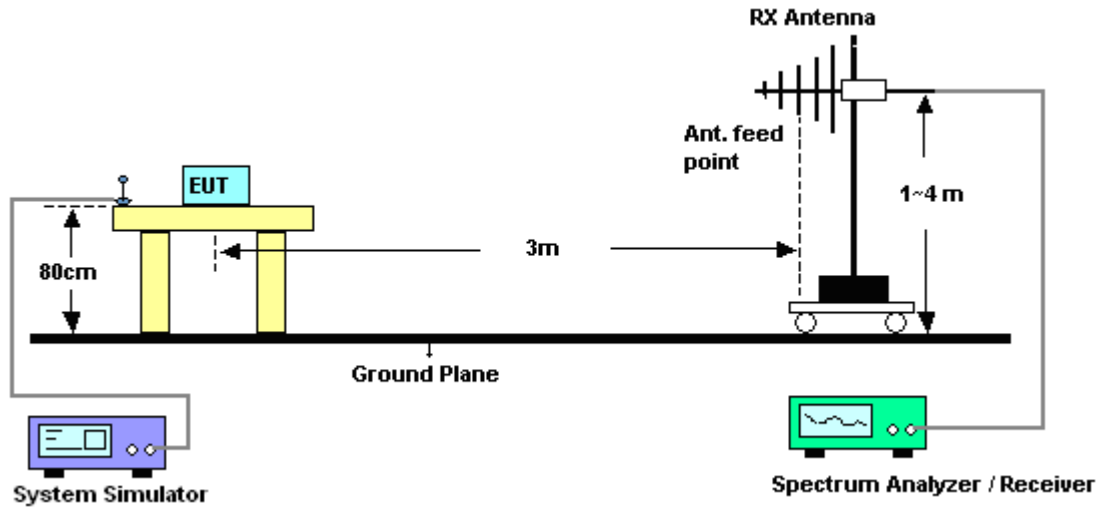

### 3.3.5 Test Result of ERP

| <b>GSM850 (GPRS class 8) Radiated Power ERP</b> |              |                           |              |            |
|-------------------------------------------------|--------------|---------------------------|--------------|------------|
| Horizontal Polarization                         |              |                           |              |            |
| Frequency<br>(MHz)                              | LVL<br>(dBm) | Correction Factor<br>(dB) | ERP<br>(dBm) | ERP<br>(W) |
| 824.20                                          | 0.52         | 31.54                     | 29.91        | 0.98       |
| 836.40                                          | -1.29        | 32.04                     | 28.60        | 0.72       |
| 848.80                                          | -2.95        | 32.59                     | 27.49        | 0.56       |
| Vertical Polarization                           |              |                           |              |            |
| Frequency<br>(MHz)                              | LVL<br>(dBm) | Correction Factor<br>(dB) | ERP<br>(dBm) | ERP<br>(W) |
| 824.20                                          | -12.40       | 32.93                     | 18.38        | 0.07       |
| 836.40                                          | -14.76       | 32.82                     | 15.91        | 0.04       |
| 848.80                                          | -17.27       | 33.62                     | 14.20        | 0.03       |

\* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

| <b>GSM850 (EDGE class 8) Radiated Power ERP</b> |              |                           |              |            |
|-------------------------------------------------|--------------|---------------------------|--------------|------------|
| Horizontal Polarization                         |              |                           |              |            |
| Frequency<br>(MHz)                              | LVL<br>(dBm) | Correction Factor<br>(dB) | ERP<br>(dBm) | ERP<br>(W) |
| 824.20                                          | -4.82        | 31.54                     | 24.57        | 0.29       |
| 836.40                                          | -6.43        | 32.04                     | 23.46        | 0.22       |
| 848.80                                          | -8.29        | 32.59                     | 22.15        | 0.16       |
| Vertical Polarization                           |              |                           |              |            |
| Frequency<br>(MHz)                              | LVL<br>(dBm) | Correction Factor<br>(dB) | ERP<br>(dBm) | ERP<br>(W) |
| 824.20                                          | -18.33       | 32.93                     | 12.45        | 0.02       |
| 836.40                                          | -19.92       | 32.82                     | 10.75        | 0.01       |
| 848.80                                          | -22.43       | 33.62                     | 9.04         | 0.01       |

\* ERP = LVL (dBm) + Correction Factor (dB) – 2.15



| WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP |              |                           |              |            |
|------------------------------------------------|--------------|---------------------------|--------------|------------|
| Horizontal Polarization                        |              |                           |              |            |
| Frequency<br>(MHz)                             | LVL<br>(dBm) | Correction Factor<br>(dB) | ERP<br>(dBm) | ERP<br>(W) |
| 826.40                                         | -8.62        | 31.44                     | 20.67        | 0.12       |
| 836.40                                         | -10.10       | 32.04                     | 19.79        | 0.10       |
| 846.60                                         | -11.77       | 32.63                     | 18.71        | 0.07       |
| Vertical Polarization                          |              |                           |              |            |
| Frequency<br>(MHz)                             | LVL<br>(dBm) | Correction Factor<br>(dB) | ERP<br>(dBm) | ERP<br>(W) |
| 826.40                                         | -21.63       | 32.78                     | 9.00         | 0.01       |
| 836.40                                         | -23.52       | 32.82                     | 7.15         | 0.01       |
| 846.60                                         | -25.91       | 33.40                     | 5.34         | 0.00       |

\* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

**3.3.6 Test Result of EIRP**

| <b>GSM1900 (GPRS class 8) Radiated Power EIRP</b> |                      |                                   |                       |                     |
|---------------------------------------------------|----------------------|-----------------------------------|-----------------------|---------------------|
| Horizontal Polarization                           |                      |                                   |                       |                     |
| <b>Frequency<br/>(MHz)</b>                        | <b>LVL<br/>(dBm)</b> | <b>Correction Factor<br/>(dB)</b> | <b>EIRP<br/>(dBm)</b> | <b>EIRP<br/>(W)</b> |
| 1850.20                                           | -15.58               | 45.34                             | 29.76                 | 0.95                |
| 1880.00                                           | -16.92               | 46.01                             | 29.09                 | 0.81                |
| 1909.80                                           | -16.86               | 45.81                             | 28.95                 | 0.79                |
| Vertical Polarization                             |                      |                                   |                       |                     |
| <b>Frequency<br/>(MHz)</b>                        | <b>LVL<br/>(dBm)</b> | <b>Correction Factor<br/>(dB)</b> | <b>EIRP<br/>(dBm)</b> | <b>EIRP<br/>(W)</b> |
| 1850.20                                           | -20.69               | 49.22                             | 28.53                 | 0.71                |
| 1880.00                                           | -22.22               | 50.42                             | 28.20                 | 0.66                |
| 1909.80                                           | -20.79               | 49.00                             | 28.21                 | 0.66                |

\* EIRP = LVL (dBm) + Correction Factor (dB)

| <b>GSM1900 (EDGE class 8) Radiated Power EIRP</b> |                      |                                   |                       |                     |
|---------------------------------------------------|----------------------|-----------------------------------|-----------------------|---------------------|
| Horizontal Polarization                           |                      |                                   |                       |                     |
| <b>Frequency<br/>(MHz)</b>                        | <b>LVL<br/>(dBm)</b> | <b>Correction Factor<br/>(dB)</b> | <b>EIRP<br/>(dBm)</b> | <b>EIRP<br/>(W)</b> |
| 1850.20                                           | -19.51               | 45.34                             | 25.83                 | 0.38                |
| 1880.00                                           | -20.46               | 46.01                             | 25.55                 | 0.36                |
| 1909.80                                           | -20.56               | 45.81                             | 25.25                 | 0.33                |
| Vertical Polarization                             |                      |                                   |                       |                     |
| <b>Frequency<br/>(MHz)</b>                        | <b>LVL<br/>(dBm)</b> | <b>Correction Factor<br/>(dB)</b> | <b>EIRP<br/>(dBm)</b> | <b>EIRP<br/>(W)</b> |
| 1850.20                                           | -24.57               | 49.22                             | 24.65                 | 0.29                |
| 1880.00                                           | -26.04               | 50.42                             | 24.38                 | 0.27                |
| 1909.80                                           | -24.84               | 49.00                             | 24.16                 | 0.26                |

\* EIRP = LVL (dBm) + Correction Factor (dB)

| <b>WCDMA Band IV (RMC 12.2Kbps) Radiated Power EIRP</b> |                      |                                   |                       |                     |
|---------------------------------------------------------|----------------------|-----------------------------------|-----------------------|---------------------|
| Horizontal Polarization                                 |                      |                                   |                       |                     |
| <b>Frequency<br/>(MHz)</b>                              | <b>LVL<br/>(dBm)</b> | <b>Correction Factor<br/>(dB)</b> | <b>EIRP<br/>(dBm)</b> | <b>EIRP<br/>(W)</b> |
| 1712.40                                                 | -20.98               | 43.22                             | 22.24                 | 0.17                |
| 1732.60                                                 | -21.56               | 43.49                             | 21.93                 | 0.16                |
| 1752.60                                                 | -21.21               | 43.54                             | 22.33                 | 0.17                |
| Vertical Polarization                                   |                      |                                   |                       |                     |
| <b>Frequency<br/>(MHz)</b>                              | <b>LVL<br/>(dBm)</b> | <b>Correction Factor<br/>(dB)</b> | <b>EIRP<br/>(dBm)</b> | <b>EIRP<br/>(W)</b> |
| 1712.40                                                 | -25.99               | 46.53                             | 20.54                 | 0.11                |
| 1732.60                                                 | -25.07               | 46.43                             | 21.36                 | 0.14                |
| 1752.60                                                 | -26.17               | 48.05                             | 21.88                 | 0.15                |

\* EIRP = LVL (dBm) + Correction Factor (dB)

| <b>WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP</b> |                      |                                   |                       |                     |
|---------------------------------------------------------|----------------------|-----------------------------------|-----------------------|---------------------|
| Horizontal Polarization                                 |                      |                                   |                       |                     |
| <b>Frequency<br/>(MHz)</b>                              | <b>LVL<br/>(dBm)</b> | <b>Correction Factor<br/>(dB)</b> | <b>EIRP<br/>(dBm)</b> | <b>EIRP<br/>(W)</b> |
| 1852.40                                                 | -22.15               | 45.37                             | 23.22                 | 0.21                |
| 1880.00                                                 | -23.16               | 46.01                             | 22.85                 | 0.19                |
| 1907.60                                                 | -22.86               | 45.87                             | 23.01                 | 0.20                |
| Vertical Polarization                                   |                      |                                   |                       |                     |
| <b>Frequency<br/>(MHz)</b>                              | <b>LVL<br/>(dBm)</b> | <b>Correction Factor<br/>(dB)</b> | <b>EIRP<br/>(dBm)</b> | <b>EIRP<br/>(W)</b> |
| 1852.40                                                 | -27.22               | 49.23                             | 22.01                 | 0.16                |
| 1880.00                                                 | -28.66               | 50.42                             | 21.76                 | 0.15                |
| 1907.60                                                 | -26.97               | 49.04                             | 22.07                 | 0.16                |

\* EIRP = LVL (dBm) + Correction Factor (dB)

### 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

#### 3.4.4 Test Setup

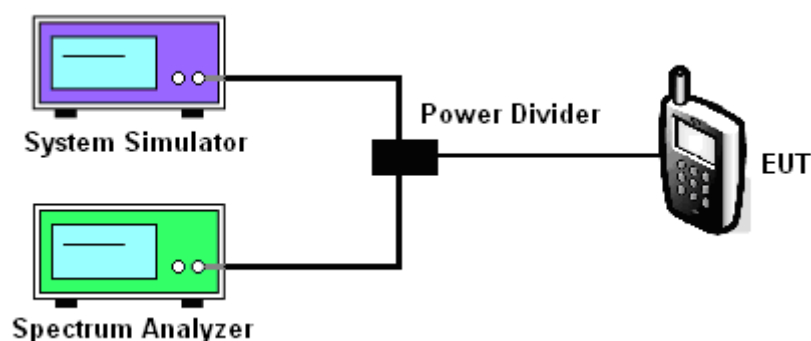

**3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth**

| Cellular Band   |                       |           |            |                       |           |            |
|-----------------|-----------------------|-----------|------------|-----------------------|-----------|------------|
| Modes           | GSM850 (GPRS class 8) |           |            | GSM850 (EDGE class 8) |           |            |
| Channel         | 128 (Low)             | 189 (Mid) | 251 (High) | 128 (Low)             | 189 (Mid) | 251 (High) |
| Frequency (MHz) | 824.2                 | 836.4     | 848.8      | 824.2                 | 836.4     | 848.8      |
| 99% OBW (kHz)   | 244.00                | 248.00    | 246.00     | 244.00                | 236.00    | 250.00     |
| 26dB BW (kHz)   | 320.00                | 308.00    | 304.00     | 288.00                | 288.00    | 296.00     |

| PCS Band        |                        |           |            |                        |           |            |
|-----------------|------------------------|-----------|------------|------------------------|-----------|------------|
| Modes           | GSM1900 (GPRS class 8) |           |            | GSM1900 (EDGE class 8) |           |            |
| Channel         | 512 (Low)              | 661 (Mid) | 810 (High) | 512 (Low)              | 661 (Mid) | 810 (High) |
| Frequency (MHz) | 1850.2                 | 1880      | 1909.8     | 1850.2                 | 1880      | 1909.8     |
| 99% OBW (kHz)   | 250.00                 | 246.00    | 246.00     | 244.00                 | 246.00    | 240.00     |
| 26dB BW (kHz)   | 316.00                 | 304.00    | 316.00     | 308.00                 | 300.00    | 304.00     |

| Cellular Band   |                             |            |             |
|-----------------|-----------------------------|------------|-------------|
| Modes           | WCDMA Band V (RMC 12.2Kbps) |            |             |
| Channel         | 4132 (Low)                  | 4182 (Mid) | 4233 (High) |
| Frequency (MHz) | 826.4                       | 836.4      | 846.6       |
| 99% OBW (MHz)   | 4.20                        | 4.20       | 4.18        |
| 26dB BW (MHz)   | 4.68                        | 4.68       | 4.68        |

| AWS Band        |                              |            |             |
|-----------------|------------------------------|------------|-------------|
| Modes           | WCDMA Band IV (RMC 12.2Kbps) |            |             |
| Channel         | 1312(Low)                    | 1413 (Mid) | 1513 (High) |
| Frequency (MHz) | 1712.4                       | 1732.6     | 1752.6      |
| 99% OBW (MHz)   | 4.18                         | 4.20       | 4.18        |
| 26dB BW (MHz)   | 4.68                         | 4.68       | 4.68        |


| PCS Band        |                              |            |             |
|-----------------|------------------------------|------------|-------------|
| Modes           | WCDMA Band II (RMC 12.2Kbps) |            |             |
| Channel         | 9262 (Low)                   | 9400 (Mid) | 9538 (High) |
| Frequency (MHz) | 1852.4                       | 1880       | 1907.6      |
| 99% OBW (MHz)   | 4.20                         | 4.18       | 4.18        |
| 26dB BW (MHz)   | 4.68                         | 4.68       | 4.68        |



## 3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM 850 | Test Mode : | GPRS class 8 Link (GMSK) |
|--------|---------|-------------|--------------------------|

## 99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

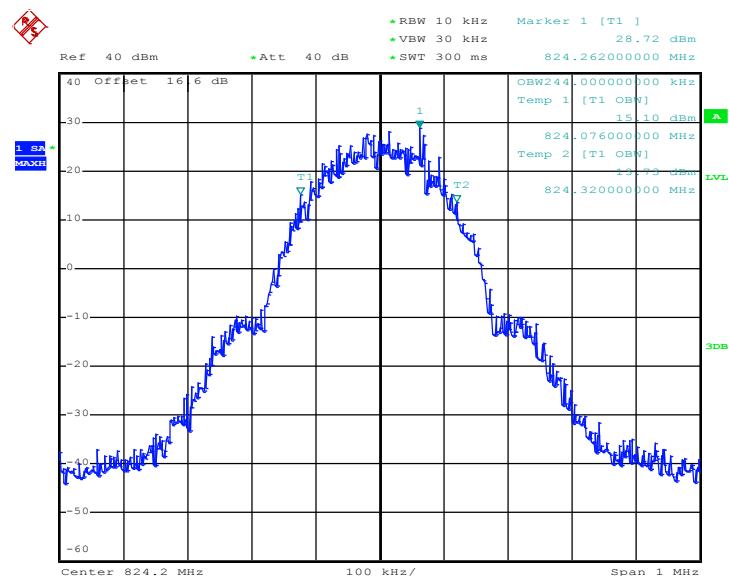


Date: 9.MAY.2014 09:55:20

## 26dB Bandwidth Plot on Channel 128 (824.2 MHz)

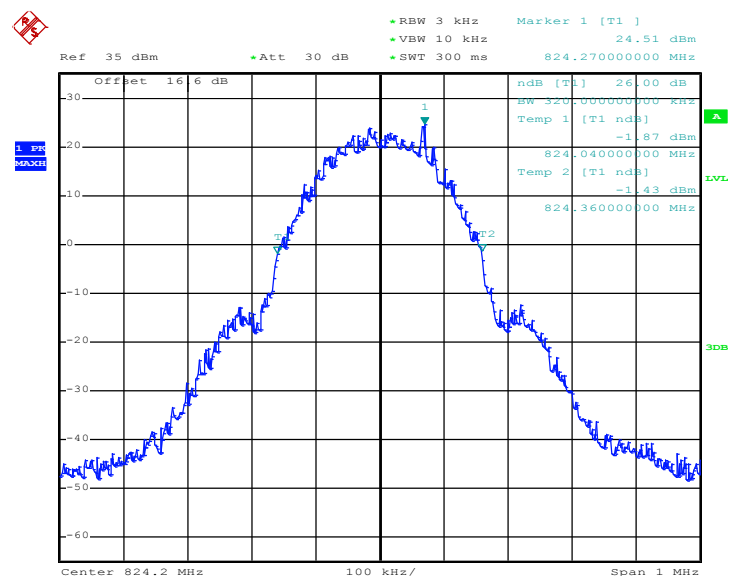


Date: 9.MAY.2014 09:52:53

### 99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

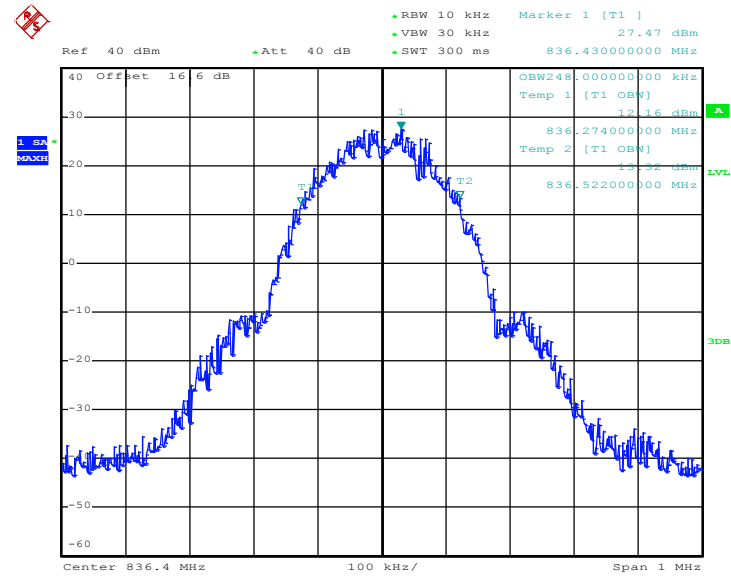


Date: 9.MAY.2014 09:55:49

### 26dB Bandwidth Plot on Channel 189 (836.4 MHz)

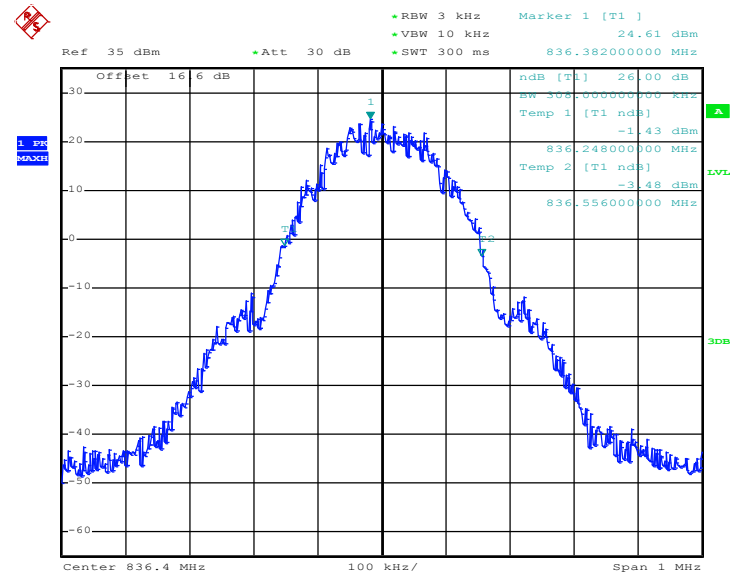


Date: 9.MAY.2014 09:53:22

### 99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

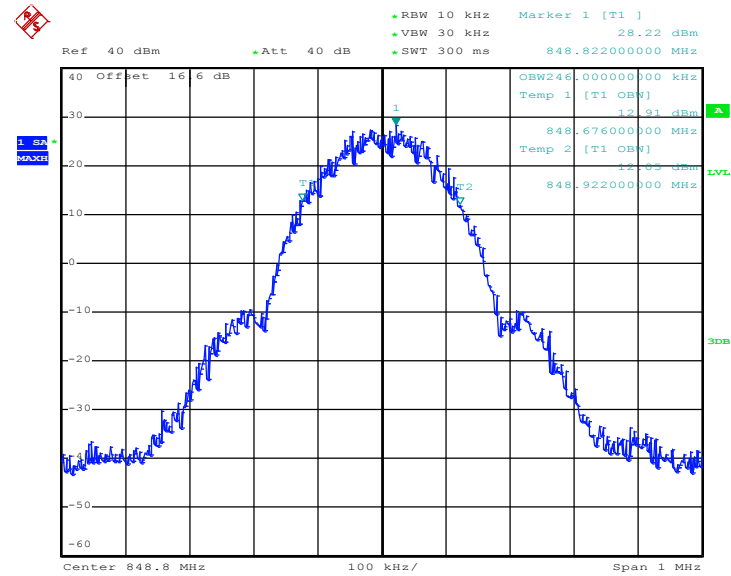

Date: 9.MAY.2014 09:59:20

### 26dB Bandwidth Plot on Channel 251 (848.8 MHz)

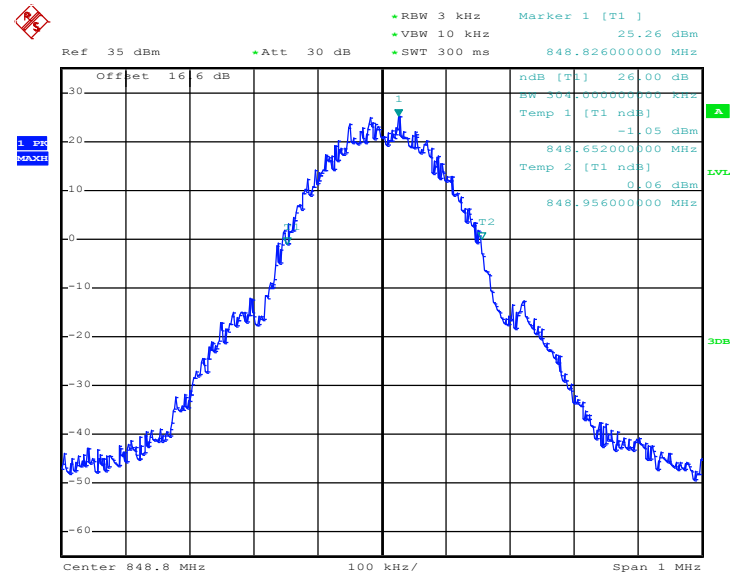


Date: 9.MAY.2014 09:53:51




|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM 850 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|---------|-------------|--------------------------|

## 99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

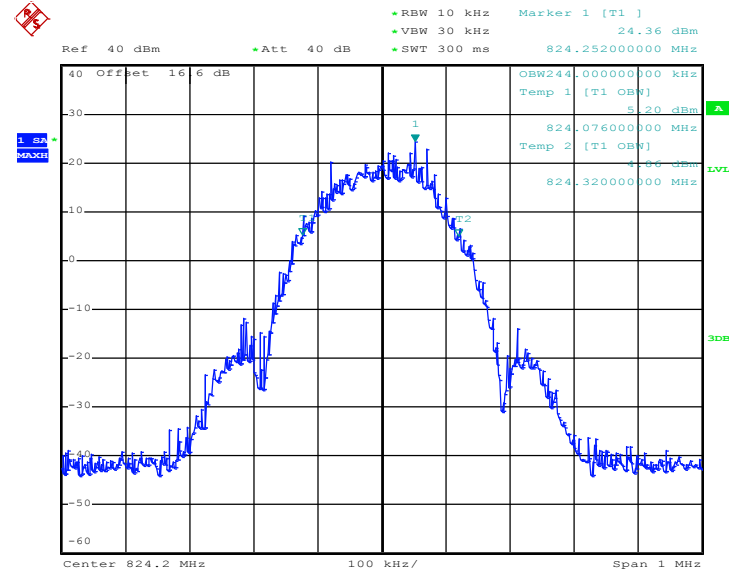


Date: 9.MAY.2014 11:13:46

## 26dB Bandwidth Plot on Channel 128 (824.2 MHz)

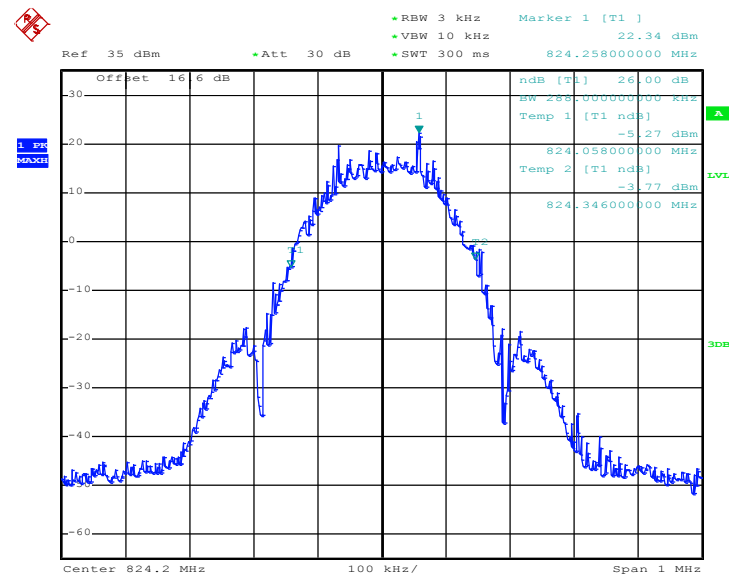


Date: 9.MAY.2014 11:11:10

### 99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

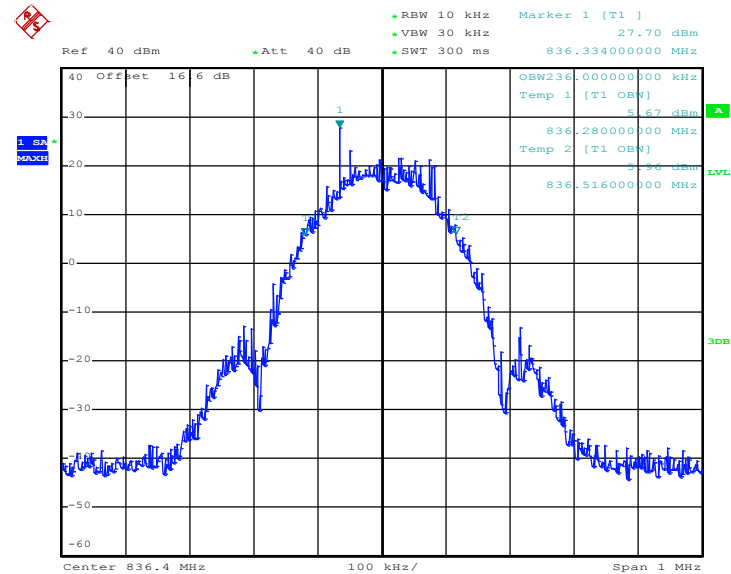


Date: 9.MAY.2014 11:14:15

### 26dB Bandwidth Plot on Channel 189 (836.4 MHz)

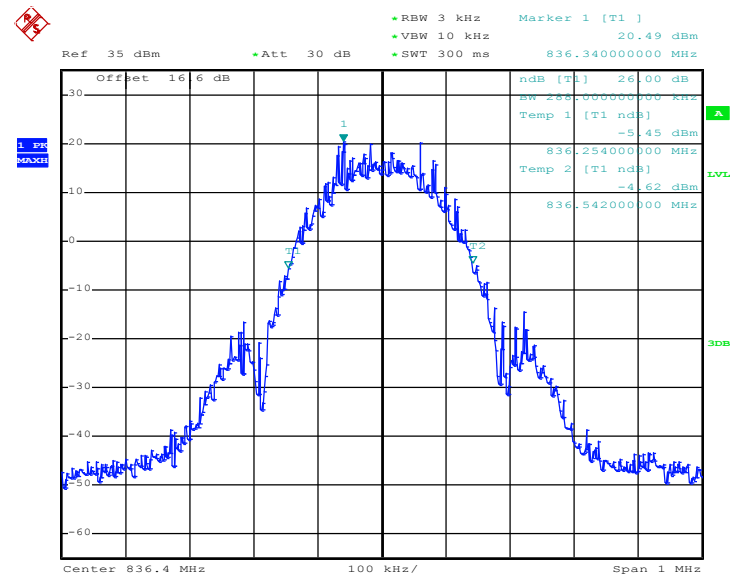


Date: 9.MAY.2014 11:11:39

### 99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

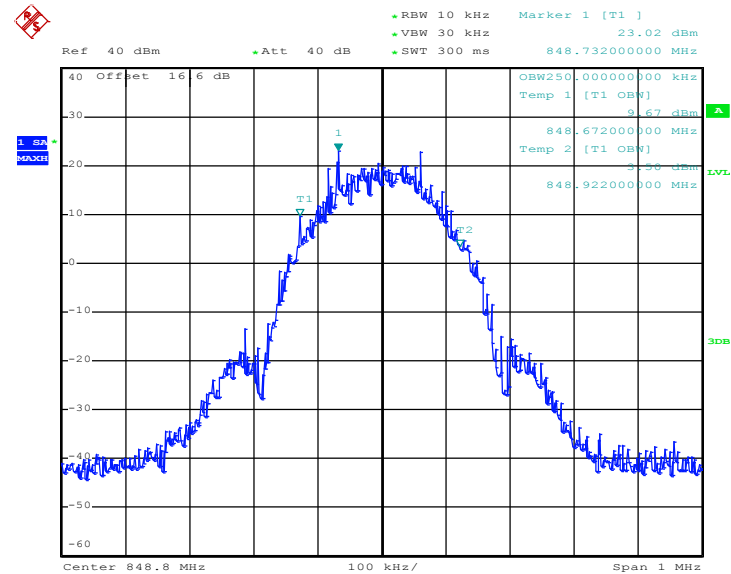

Date: 9.MAY.2014 11:14:43


### 26dB Bandwidth Plot on Channel 251 (848.8 MHz)

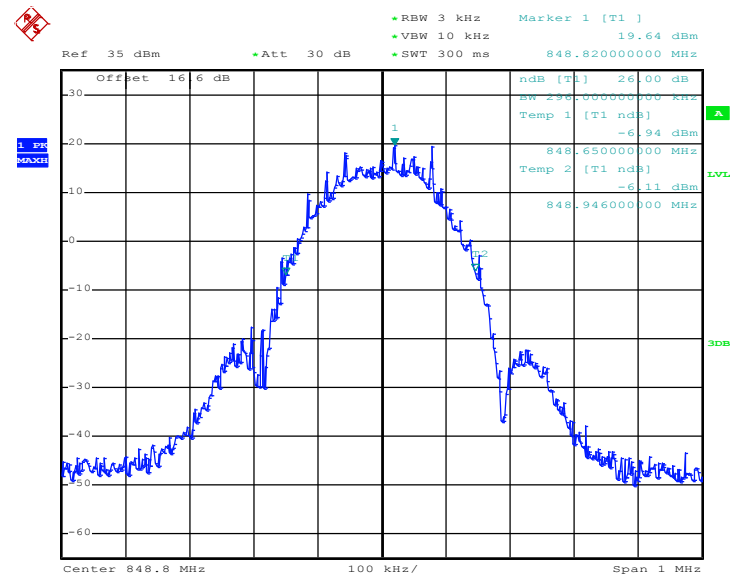

Date: 9.MAY.2014 11:12:07


|        |          |             |                          |
|--------|----------|-------------|--------------------------|
| Band : | GSM 1900 | Test Mode : | GPRS class 8 Link (GMSK) |
|--------|----------|-------------|--------------------------|

### 99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

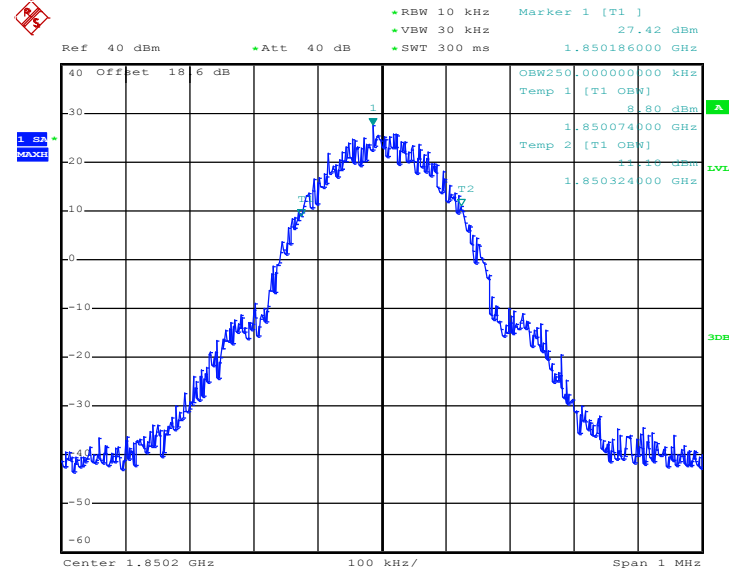


Date: 9.MAY.2014 14:32:04

### 26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

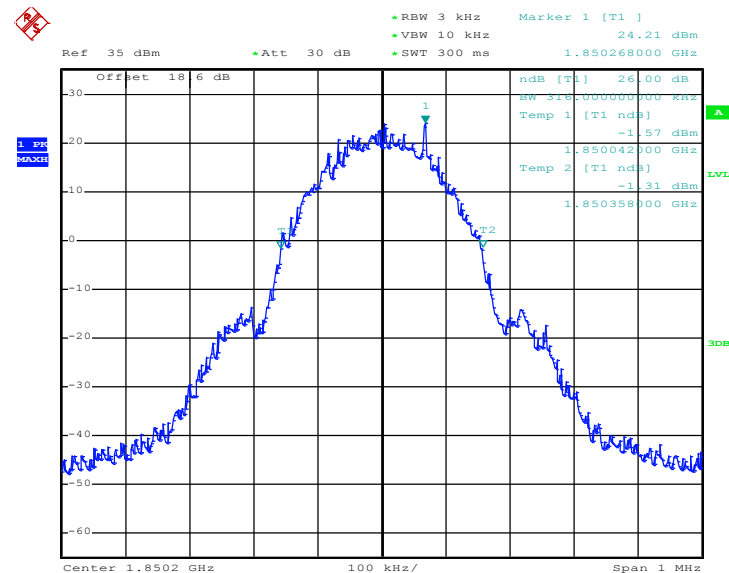


Date: 9.MAY.2014 14:22:36

### 99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

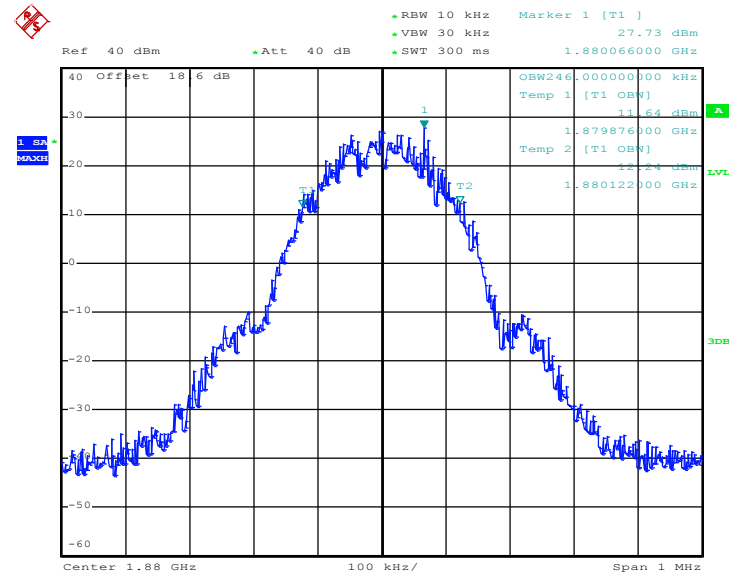


Date: 9.MAY.2014 14:32:33

### 26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

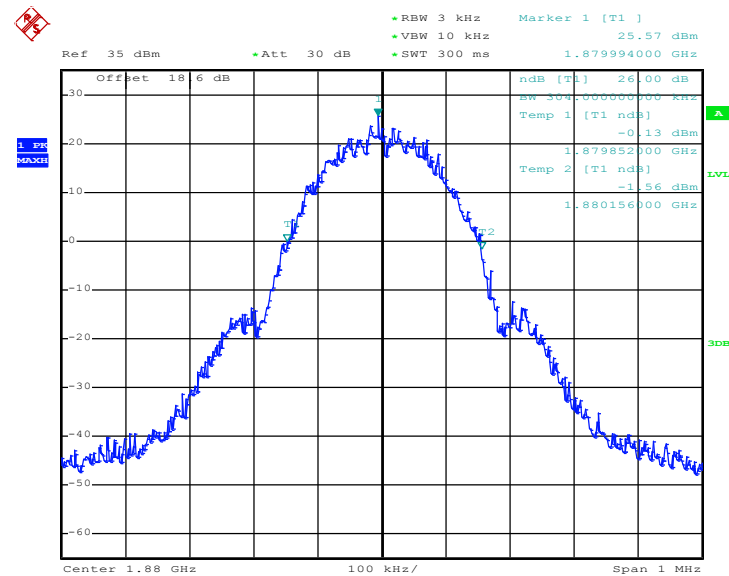


Date: 9.MAY.2014 14:23:04

### 99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

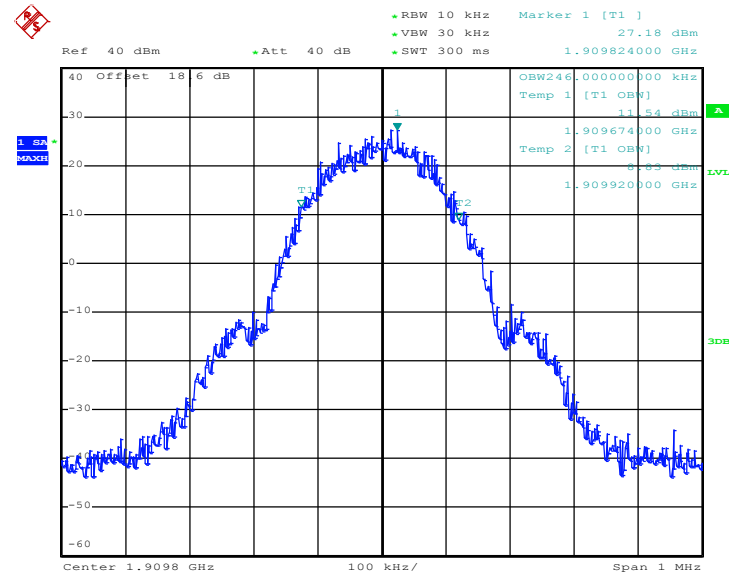

Date: 9.MAY.2014 14:33:01

### 26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

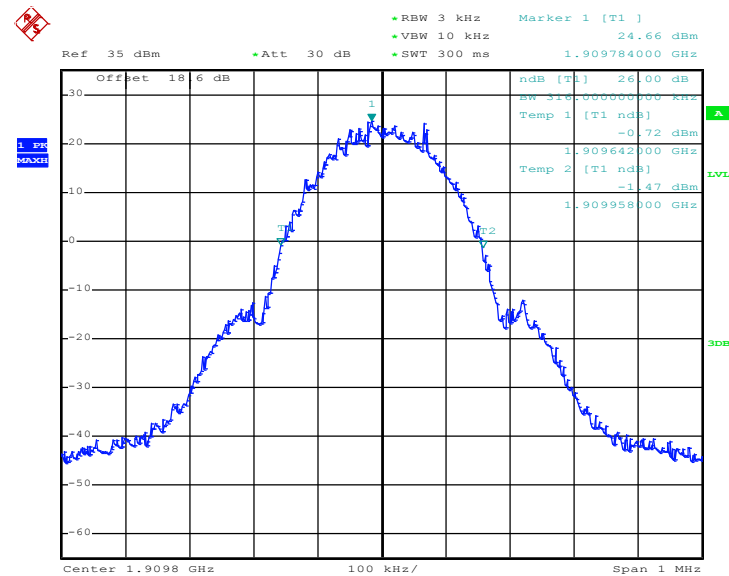


Date: 9.MAY.2014 14:31:29




|        |          |             |                          |
|--------|----------|-------------|--------------------------|
| Band : | GSM 1900 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|----------|-------------|--------------------------|

## 99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

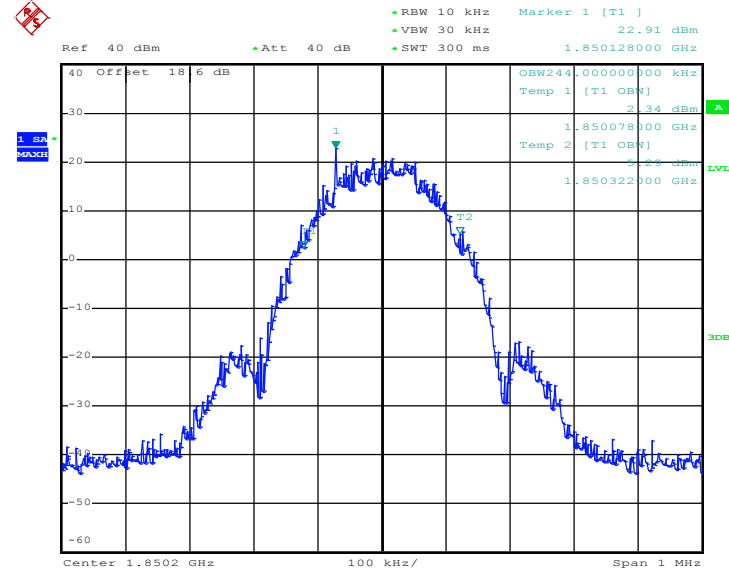

Date: 9.MAY.2014 15:16:15


## 26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

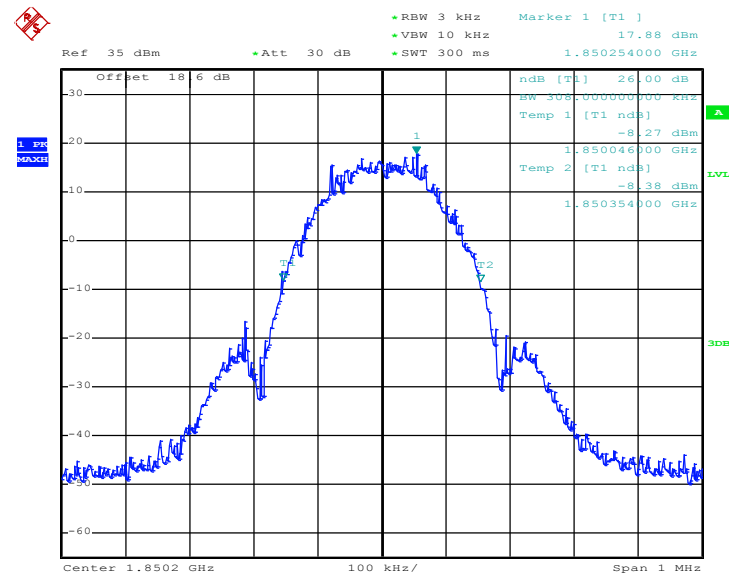

Date: 9.MAY.2014 15:12:09




## 99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

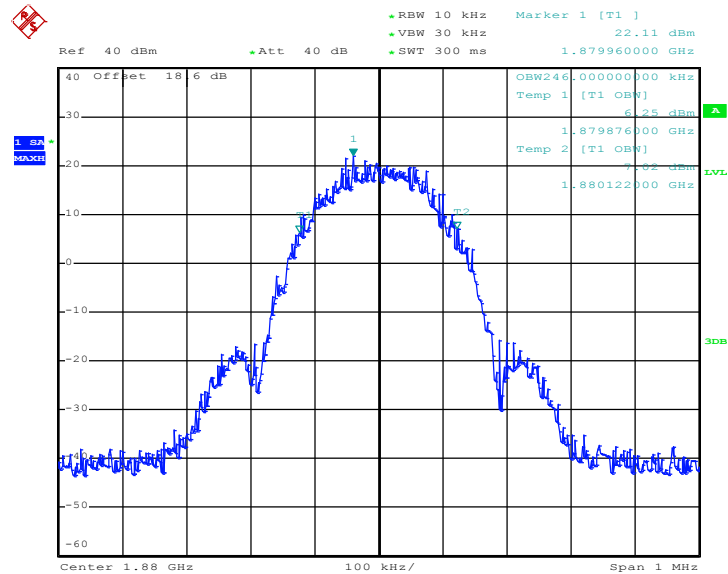


Date: 9.MAY.2014 15:16:44

## 26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

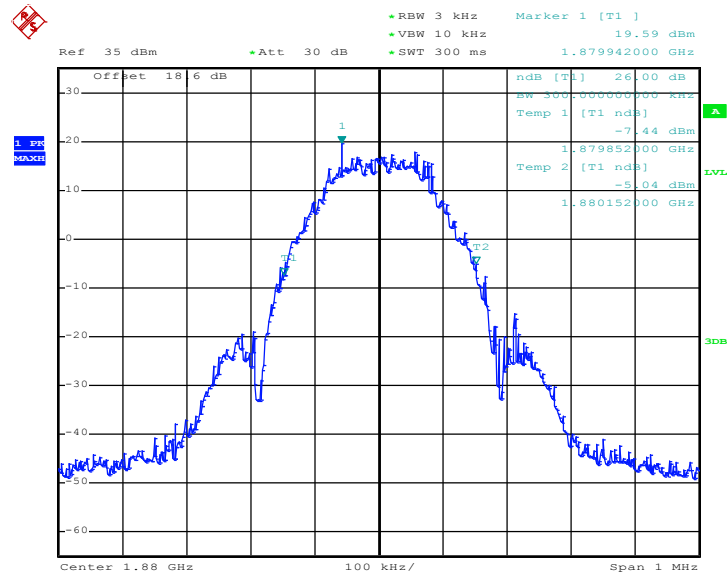


Date: 9.MAY.2014 15:12:37

### 99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

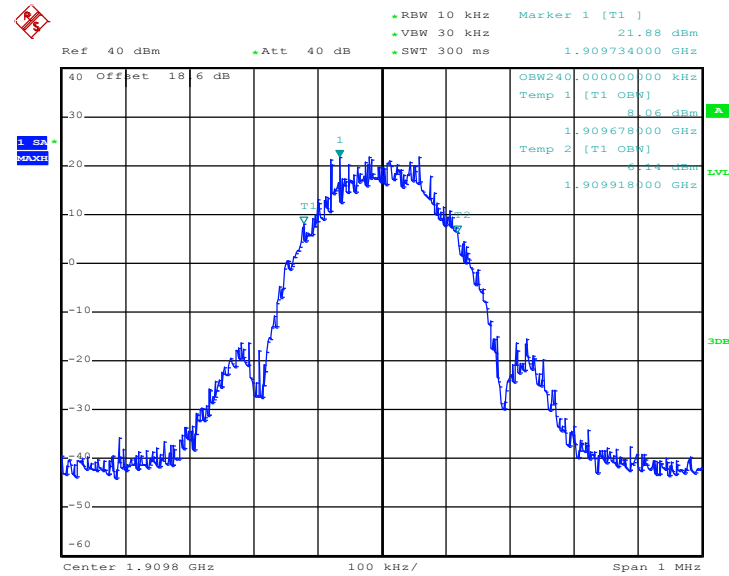

Date: 9.MAY.2014 15:17:12

### 26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

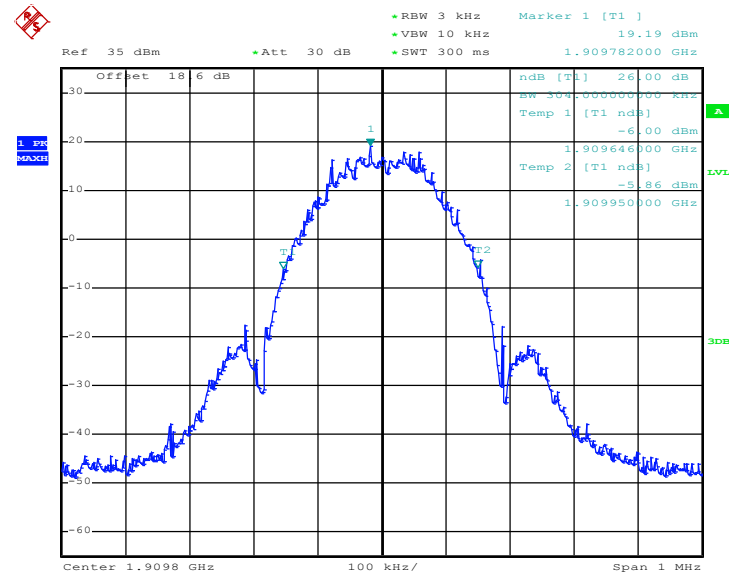


Date: 9.MAY.2014 15:15:43




|        |              |             |                          |
|--------|--------------|-------------|--------------------------|
| Band : | WCDMA Band V | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|--------------|-------------|--------------------------|

## 99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

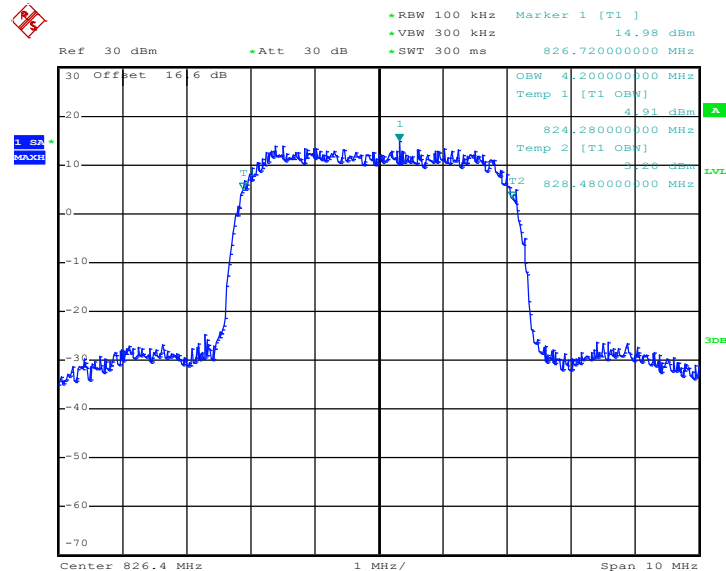


Date: 9.MAY.2014 17:26:58

## 26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

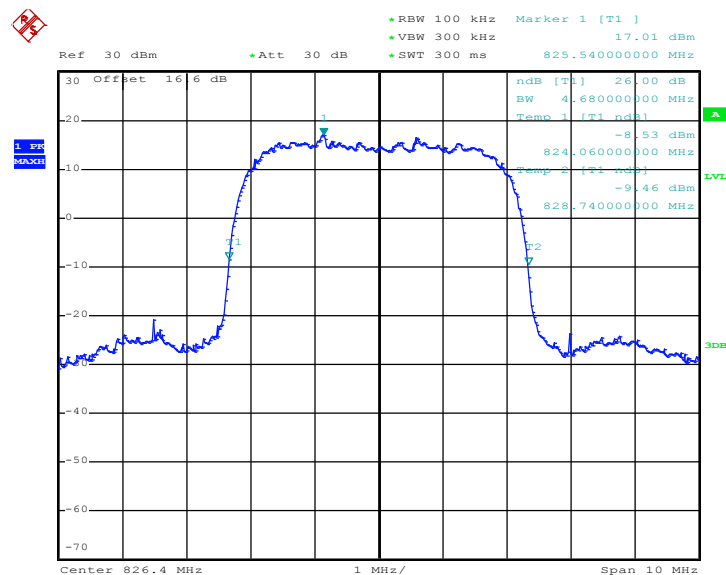


Date: 9.MAY.2014 17:22:37

### 99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

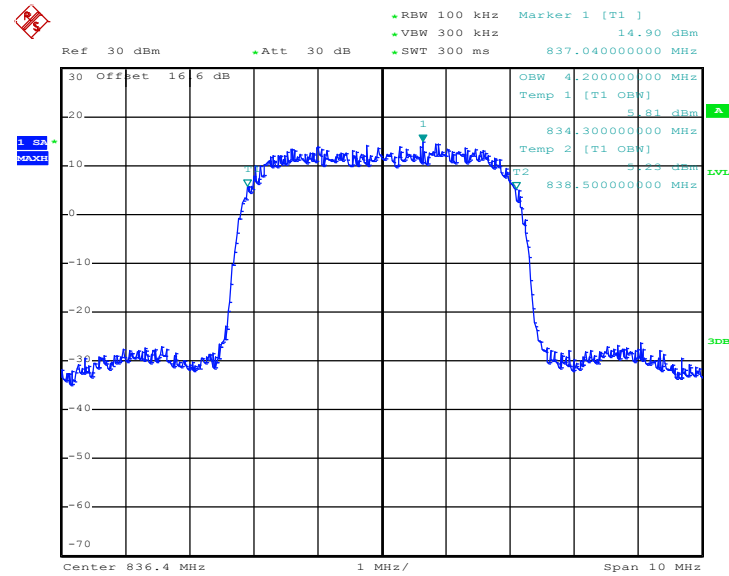

Date: 9.MAY.2014 17:27:27


### 26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

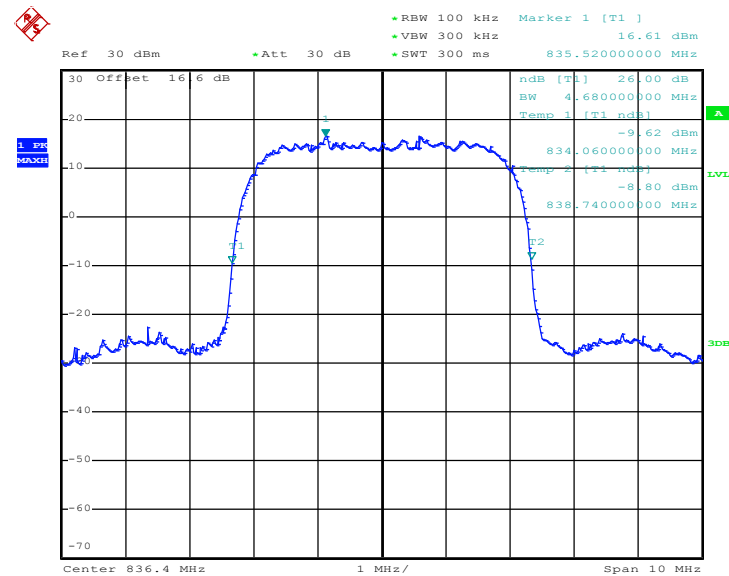

Date: 9.MAY.2014 17:23:05




### 99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

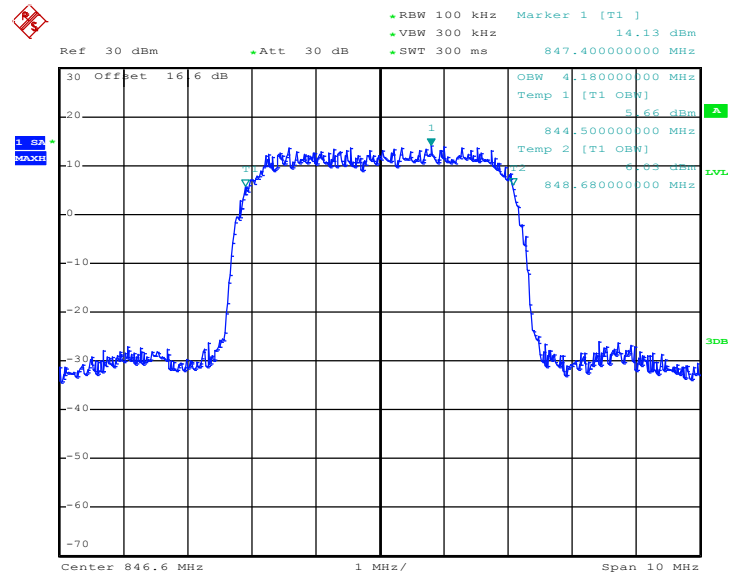

Date: 9.MAY.2014 17:27:55

### 26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

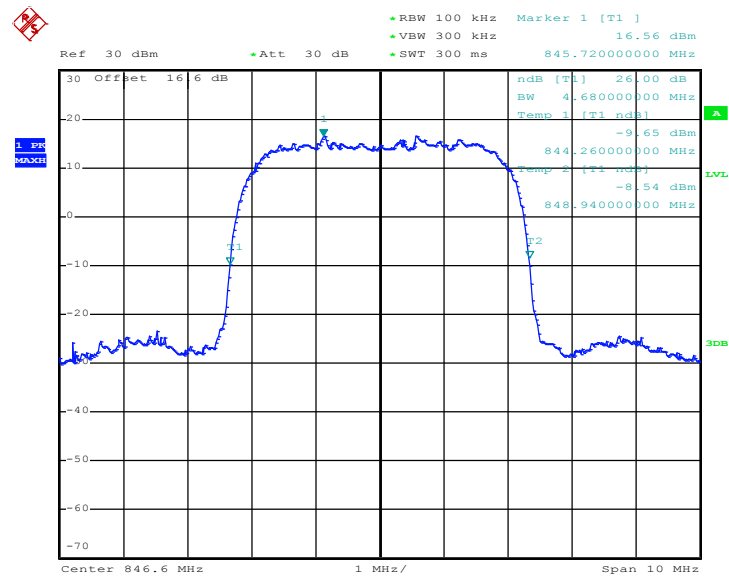


Date: 9.MAY.2014 17:23:34




|        |               |             |                          |
|--------|---------------|-------------|--------------------------|
| Band : | WCDMA Band IV | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|---------------|-------------|--------------------------|

## 99% Occupied Bandwidth Plot on Channel 1312 (1712.4 MHz)

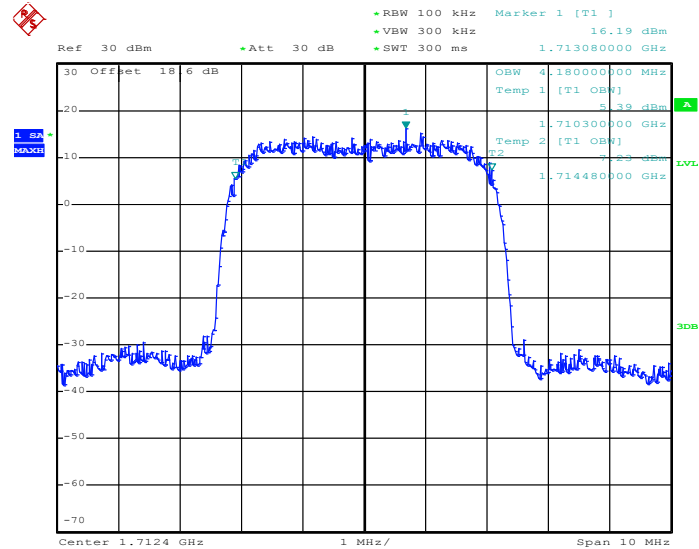

Date: 9.MAY.2014 16:53:44


## 26dB Bandwidth Plot on Channel 1312 (1712.4 MHz)

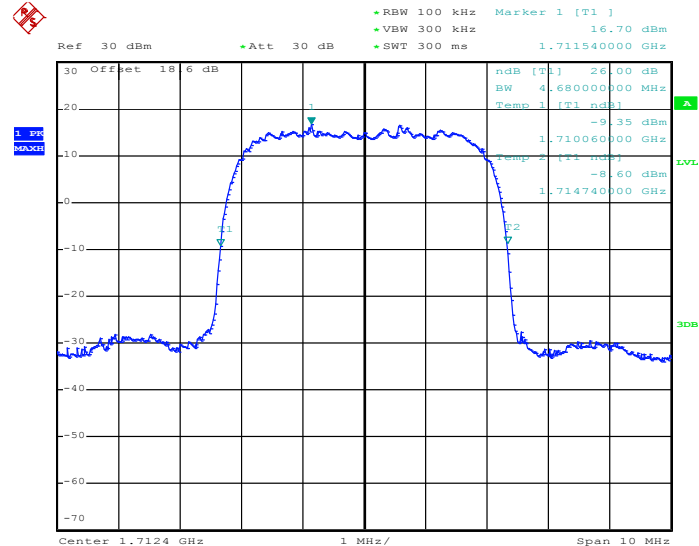

Date: 9.MAY.2014 16:47:20




## 99% Occupied Bandwidth Plot on Channel 1413 (1732.6 MHz)

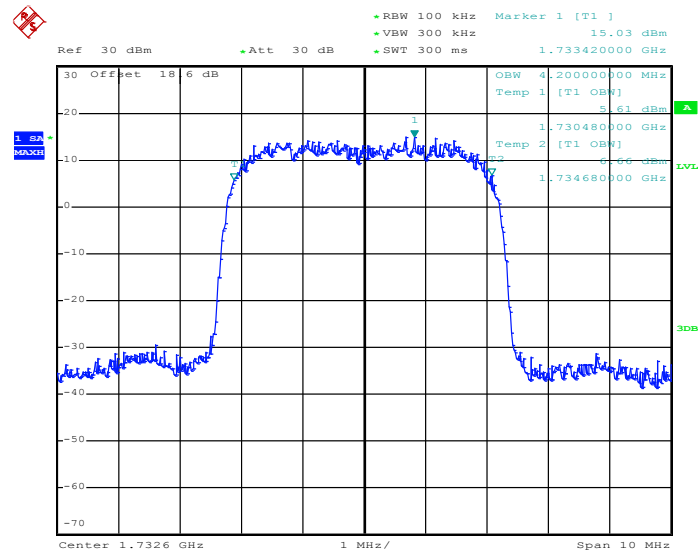

Date: 9.MAY.2014 16:54:13


## 26dB Bandwidth Plot on Channel 1413 (1732.6 MHz)

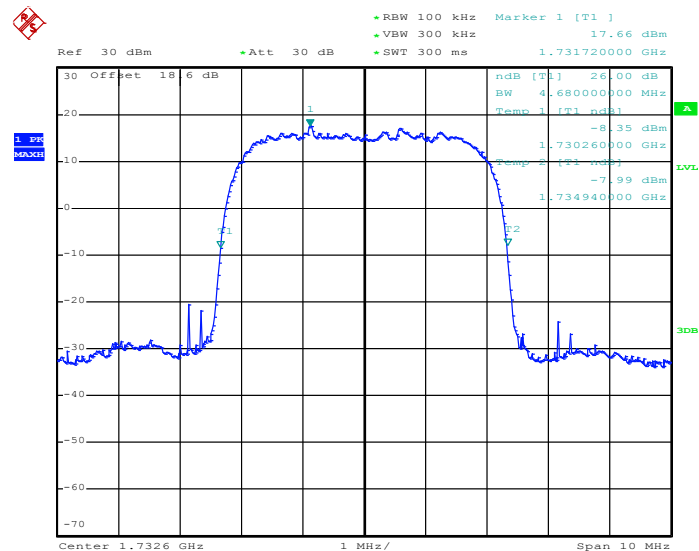

Date: 9.MAY.2014 16:51:54




## 99% Occupied Bandwidth Plot on Channel 1513 (1752.6 MHz)

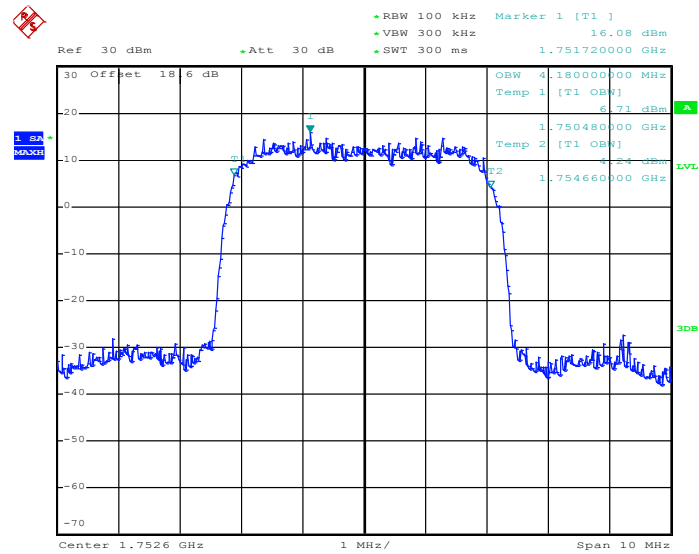


Date: 9.MAY.2014 16:54:41

## 26dB Bandwidth Plot on Channel 1513 (1752.6 MHz)

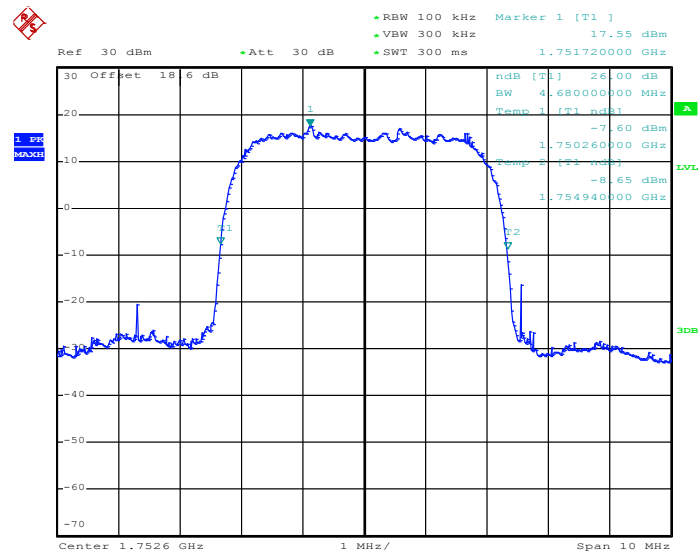


Date: 9.MAY.2014 16:52:22

|               |               |                    |                          |
|---------------|---------------|--------------------|--------------------------|
| <b>Band :</b> | WCDMA Band II | <b>Test Mode :</b> | RMC 12.2Kbps Link (QPSK) |
|---------------|---------------|--------------------|--------------------------|

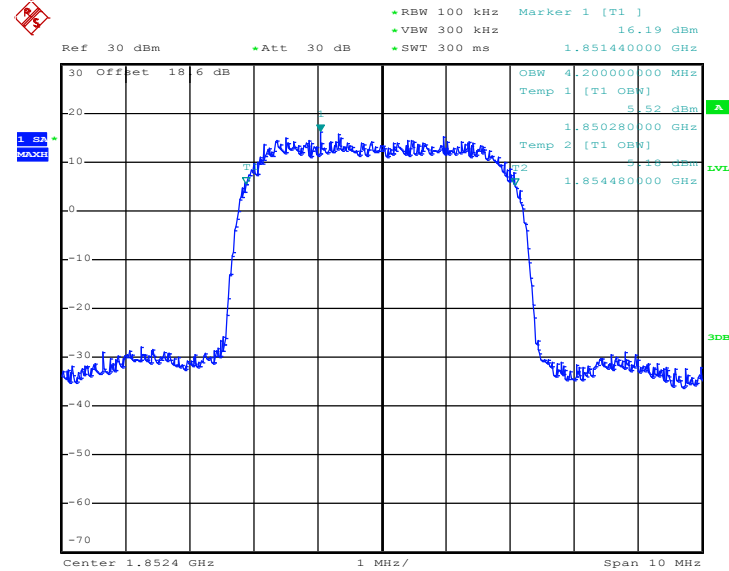
**99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)**


Date: 9.MAY.2014 16:03:33

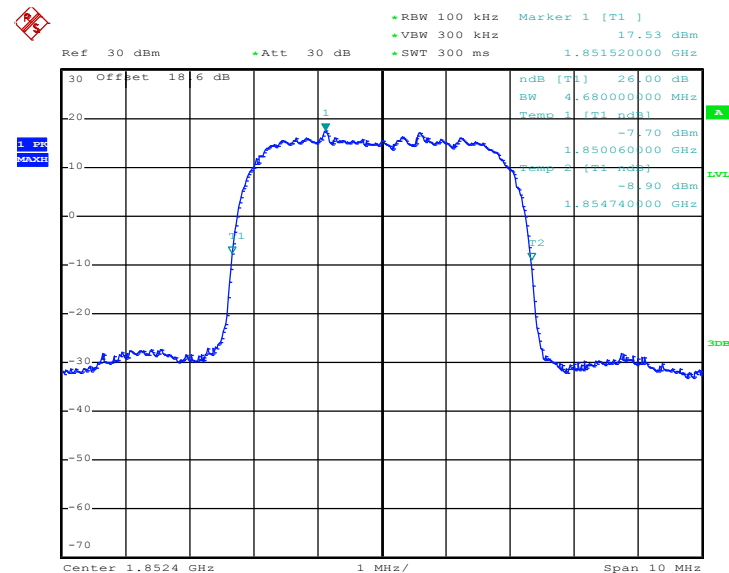**26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)**


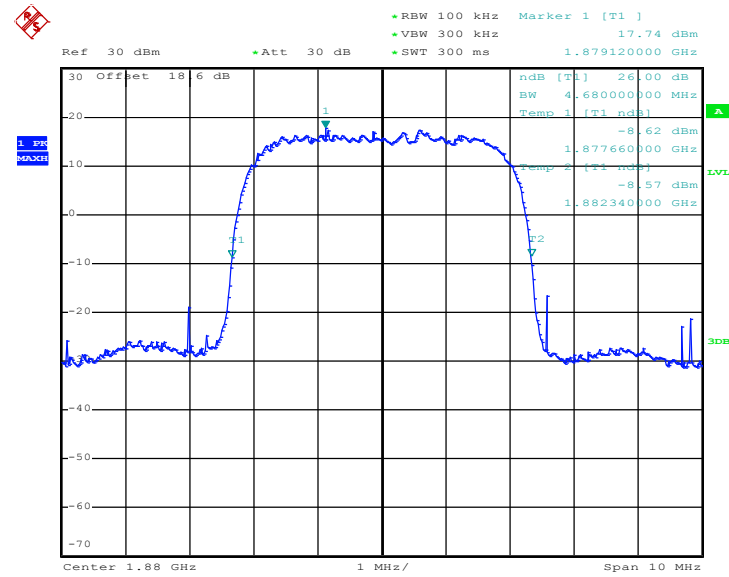
Date: 9.MAY.2014 16:01:12

### 99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

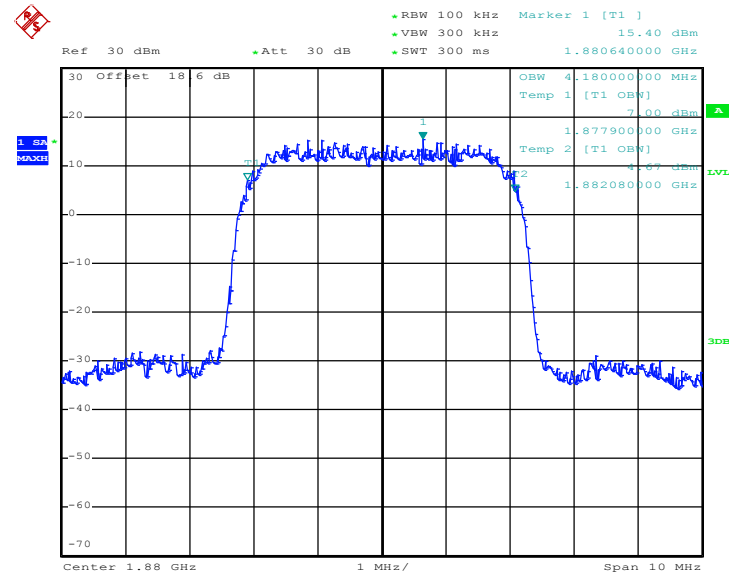


Date: 9.MAY.2014 16:04:02

### 26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)




Date: 9.MAY.2014 16:01:40

### 99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

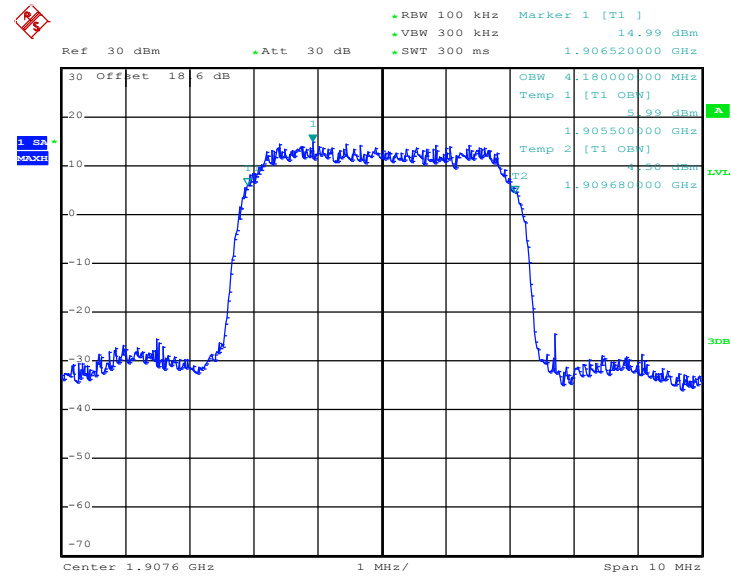

Date: 9.MAY.2014 16:04:30

### 26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

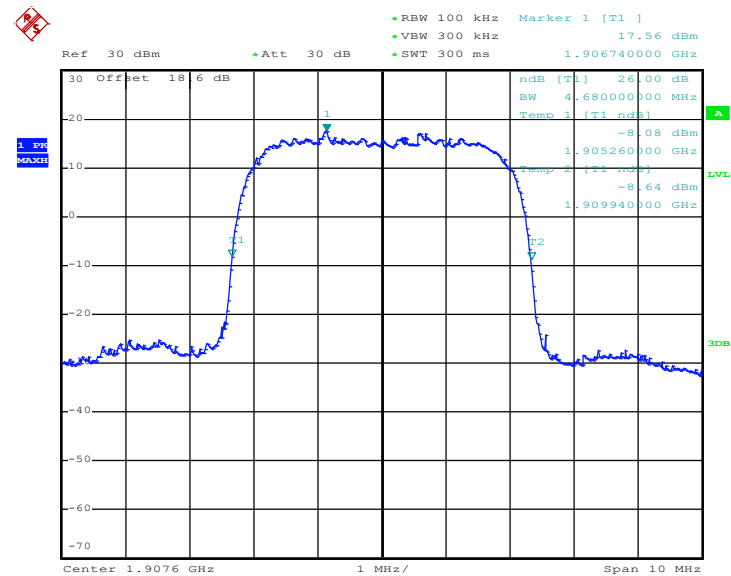

Date: 9.MAY.2014 16:02:09

### 3.5 Band Edge Measurement

#### 3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.5.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)
 
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

#### 3.5.4 Test Setup

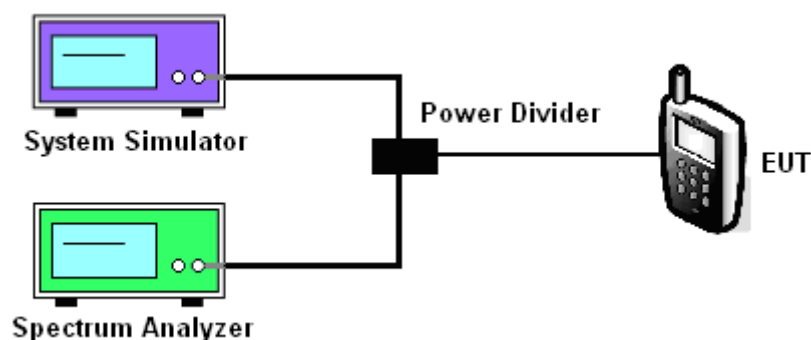




## 3.5.5 Test Result (Plots) of Conducted Band Edge


|        |        |             |                          |
|--------|--------|-------------|--------------------------|
| Band : | GSM850 | Test Mode : | GPRS class 8 Link (GMSK) |
|--------|--------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 128 (824.2 MHz)

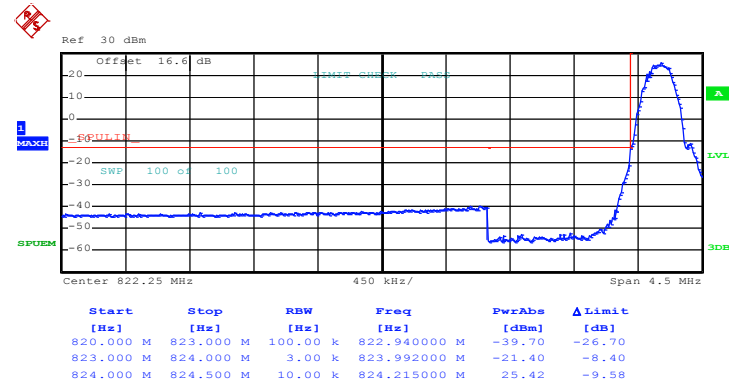

Date: 9.MAY.2014 10:18:27

## Higher Band Edge Plot on Channel 251 (848.8 MHz)

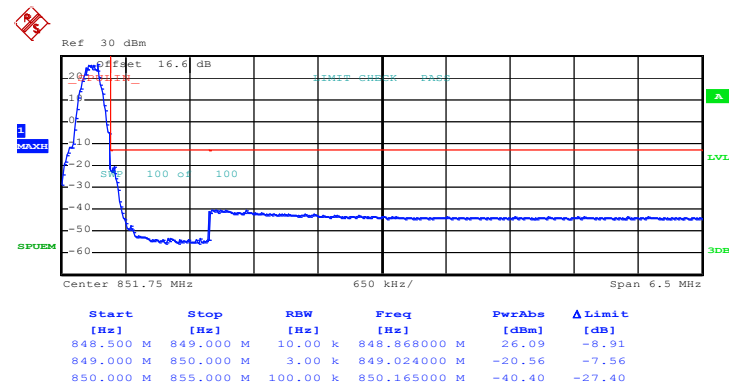


Date: 9.MAY.2014 10:13:52




|        |        |             |                          |
|--------|--------|-------------|--------------------------|
| Band : | GSM850 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|--------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 128 (824.2 MHz)

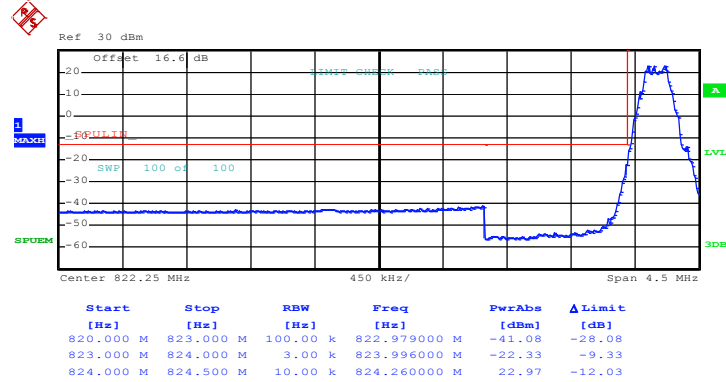

Date: 9.MAY.2014 11:31:04

## Higher Band Edge Plot on Channel 251 (848.8 MHz)

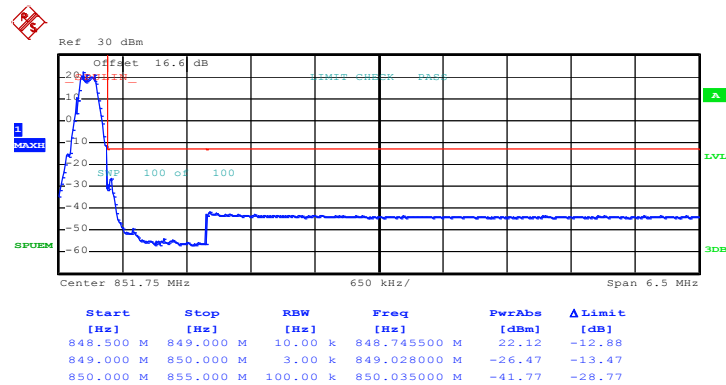


Date: 9.MAY.2014 11:18:18




|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM1900 | Test Mode : | GPRS class 8 Link (GMSK) |
|--------|---------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 512 (1850.2 MHz)

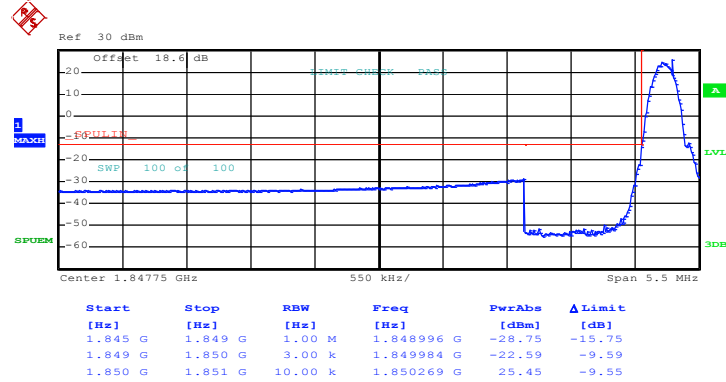

Date: 9.MAY.2014 14:47:52

## Higher Band Edge Plot on Channel 810 (1909.8 MHz)

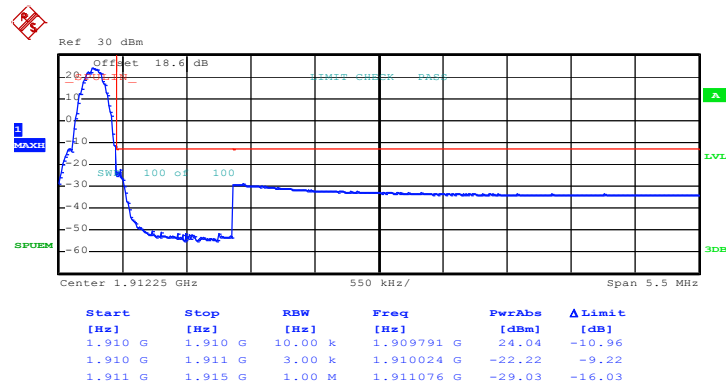


Date: 9.MAY.2014 14:42:59




|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM1900 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|---------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 512 (1850.2 MHz)

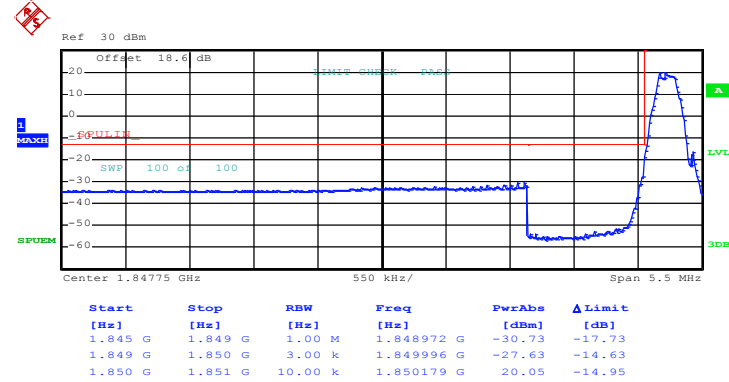

Date: 9.MAY.2014 15:42:22

## Higher Band Edge Plot on Channel 810 (1909.8 MHz)

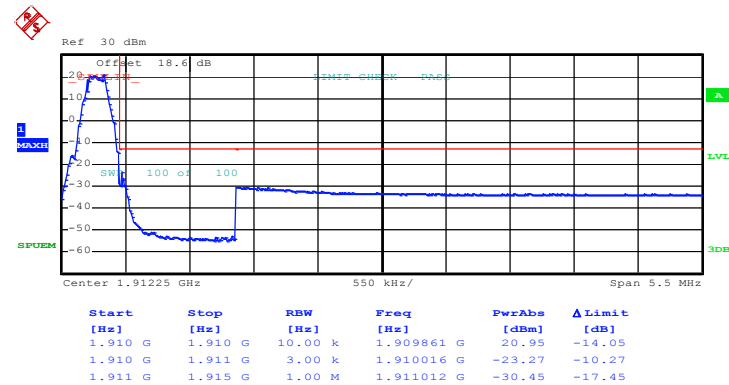


Date: 9.MAY.2014 15:39:41




|        |              |             |                          |
|--------|--------------|-------------|--------------------------|
| Band : | WCDMA Band V | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|--------------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 4132 (826.4 MHz)

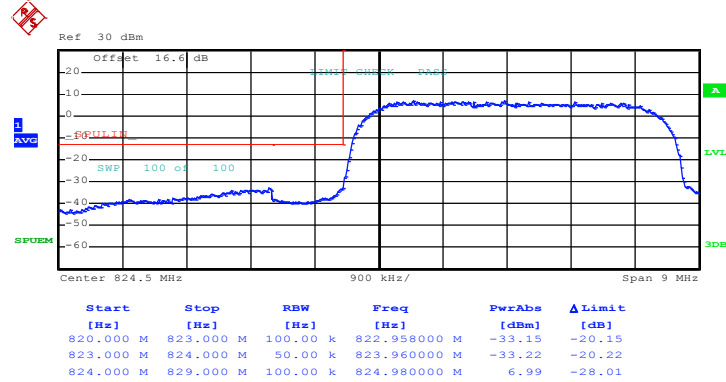

Date: 9.MAY.2014 17:38:27

## Higher Band Edge Plot on Channel 4233 (846.6 MHz)

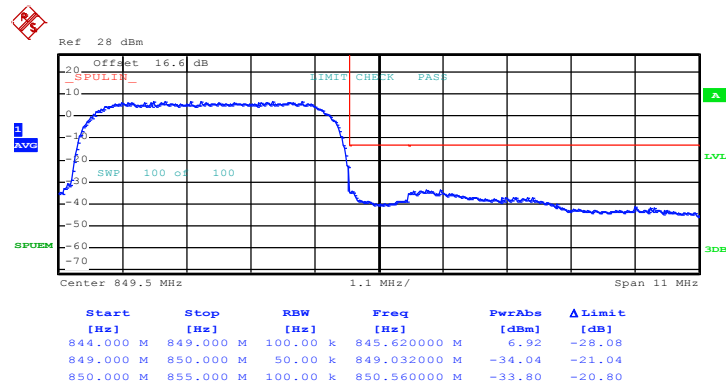


Date: 9.MAY.2014 17:33:56




|        |               |             |                          |
|--------|---------------|-------------|--------------------------|
| Band : | WCDMA Band IV | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|---------------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 1312 (1712.4 MHz)

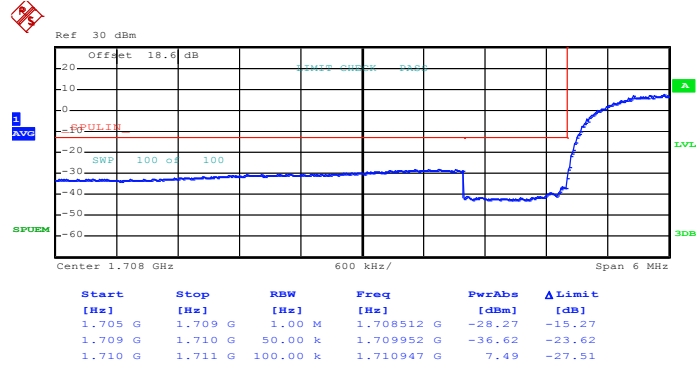

Date: 9.MAY.2014 17:08:42

## Higher Band Edge Plot on Channel 1513 (1752.6 MHz)

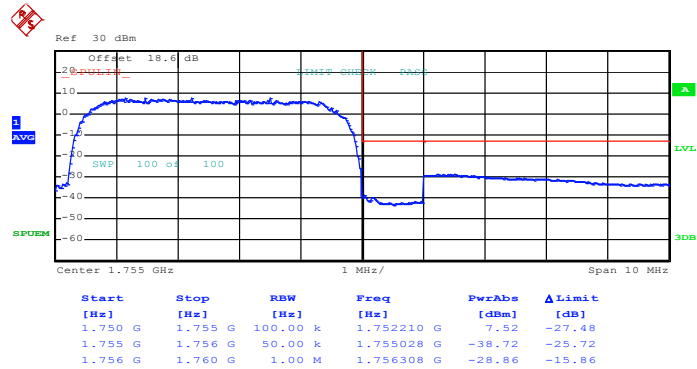


Date: 9.MAY.2014 17:02:40




|        |               |             |                          |
|--------|---------------|-------------|--------------------------|
| Band : | WCDMA Band II | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|---------------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

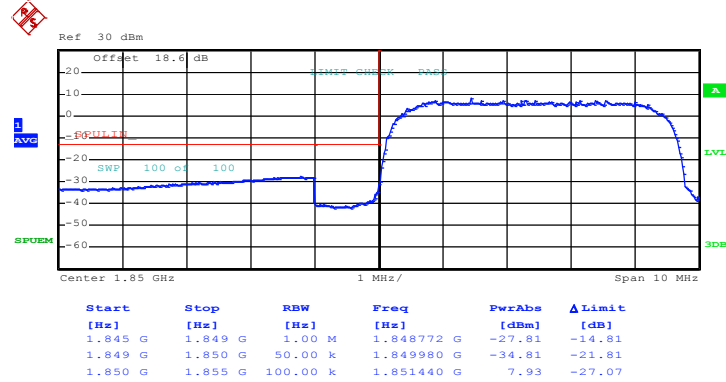

Date: 9.MAY.2014 16:13:19

## Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

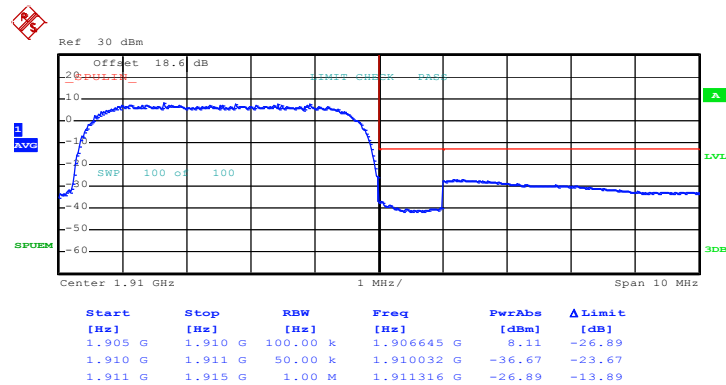

Date: 9.MAY.2014 16:08:55

## 3.6 Conducted Spurious Emission Measurement

### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures


1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13\text{dBm}$ .

### 3.6.4 Test Setup

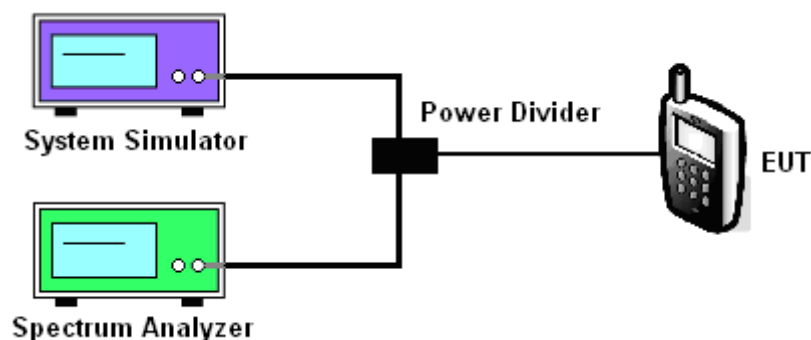


### 3.6.5 Test Result (Plots) of Conducted Spurious Emission

|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | GSM850                   | <b>Channel :</b>   | CH128     |
| <b>Test Mode :</b> | GPRS class 8 Link (GMSK) | <b>Frequency :</b> | 824.2 MHz |

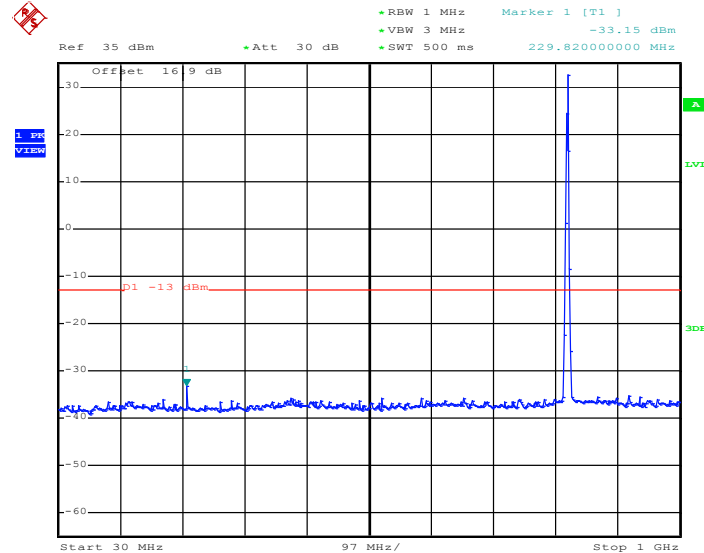**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


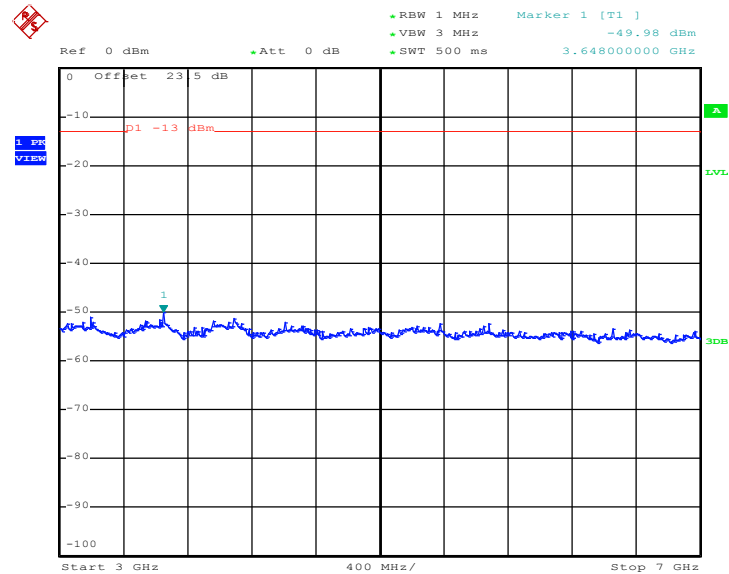
Date: 9.MAY.2014 10:39:52

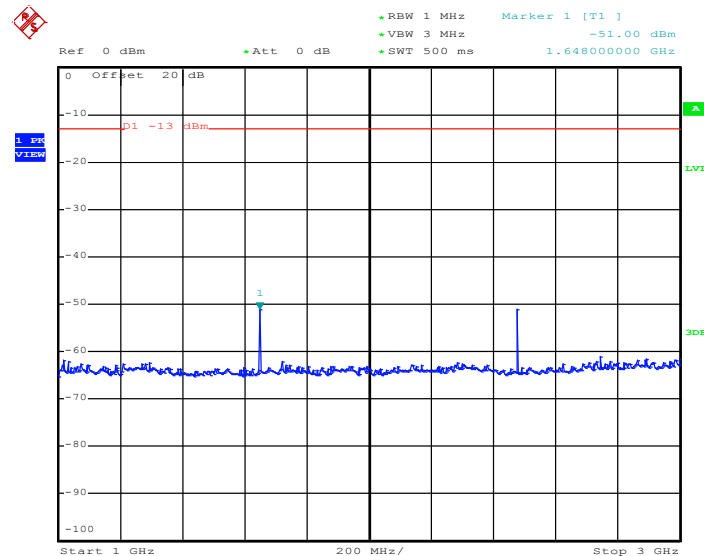**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 9.MAY.2014 10:40:02




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz




Date: 9.MAY.2014 10:40:11

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

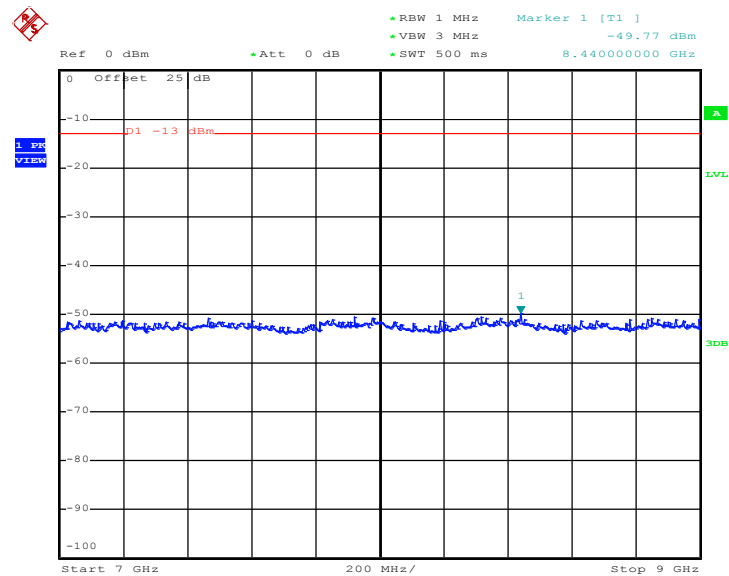


Date: 9.MAY.2014 10:40:19

|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | GSM850                   | <b>Channel :</b>   | CH189     |
| <b>Test Mode :</b> | GPRS class 8 Link (GMSK) | <b>Frequency :</b> | 836.4 MHz |

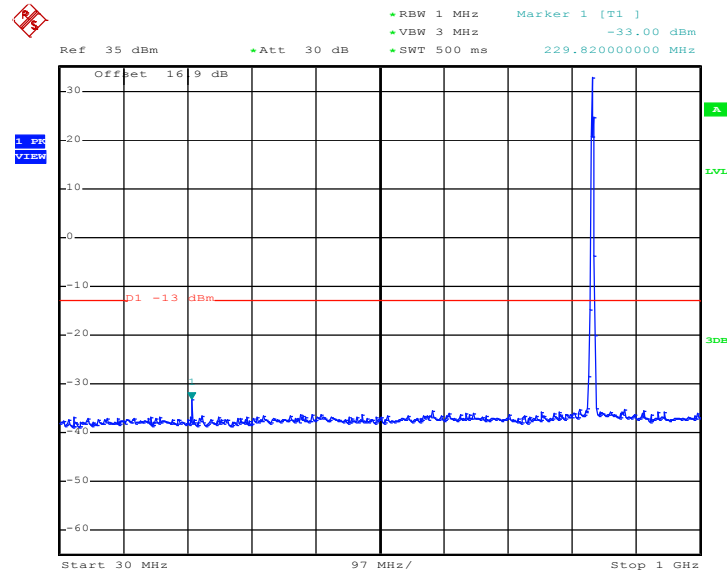
**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 9.MAY.2014 10:27:26

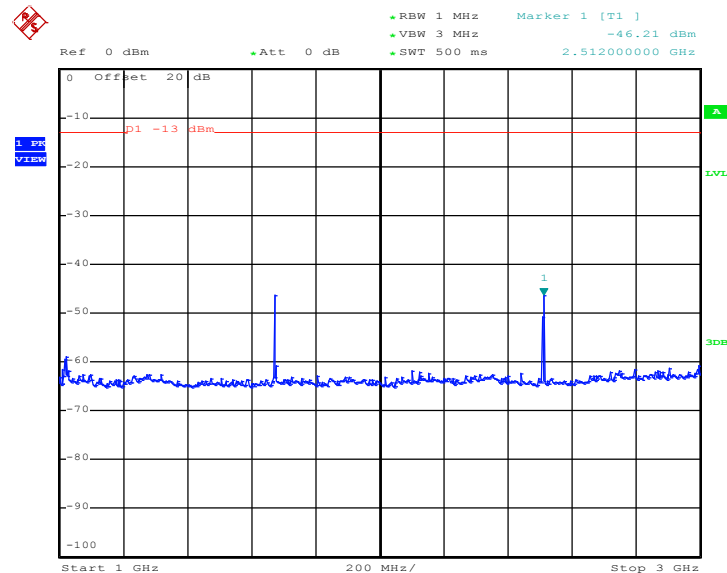**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


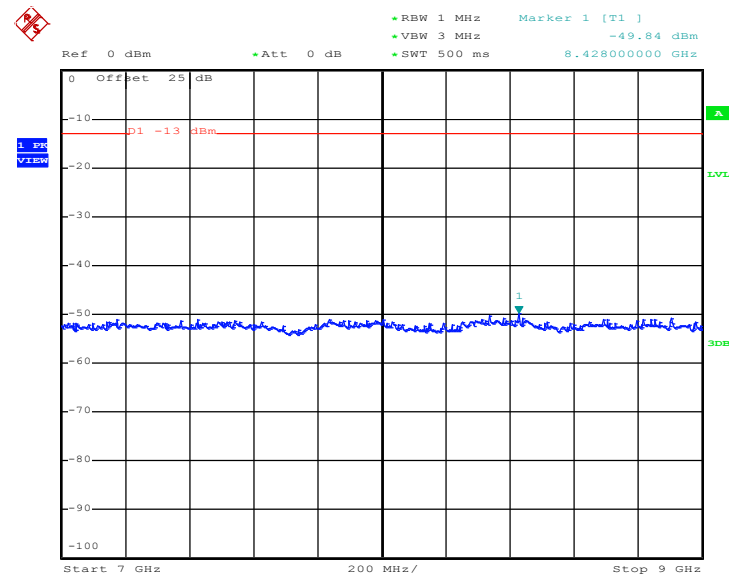
Date: 9.MAY.2014 10:27:43

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

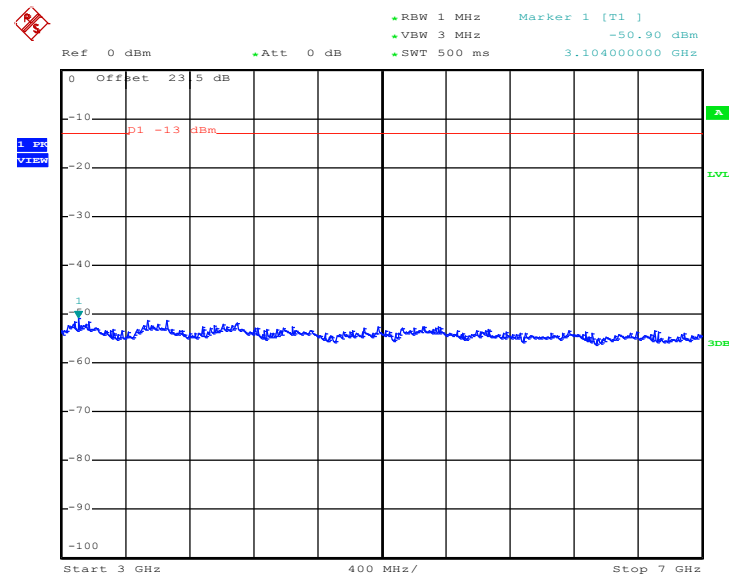


Date: 9.MAY.2014 10:27:51

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz




Date: 9.MAY.2014 10:28:00

|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | GSM850                   | <b>Channel :</b>   | CH251     |
| <b>Test Mode :</b> | GPRS class 8 Link (GMSK) | <b>Frequency :</b> | 848.8 MHz |

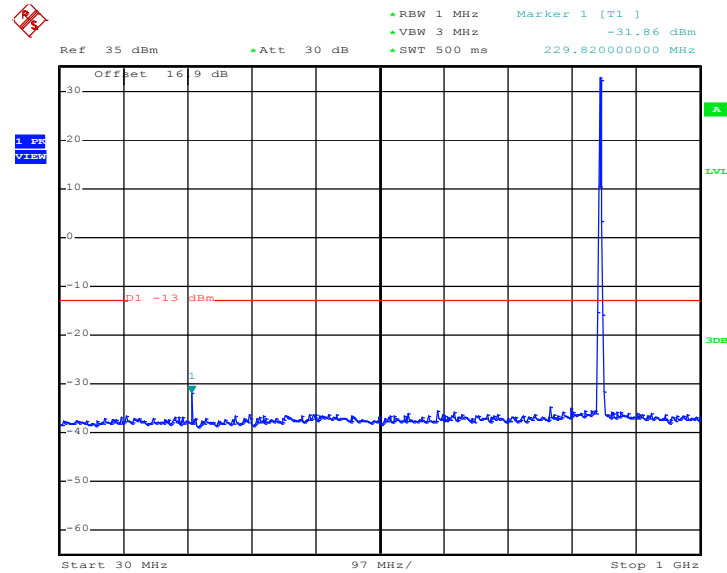**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


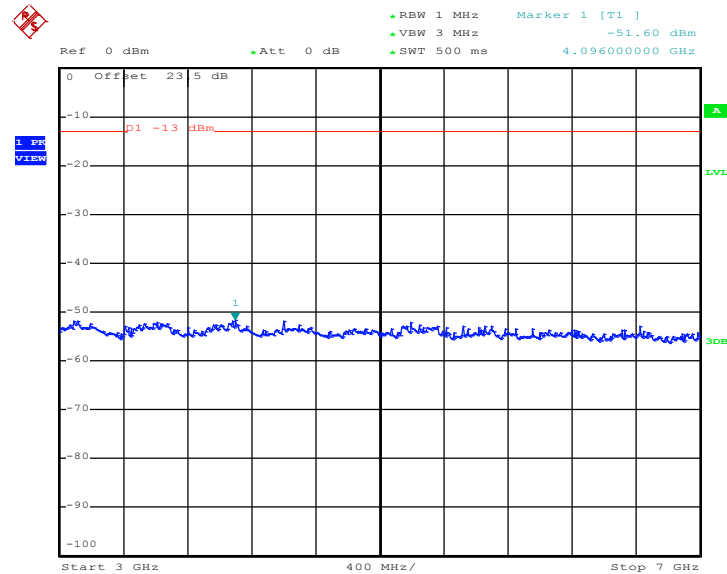
Date: 9.MAY.2014 10:41:45

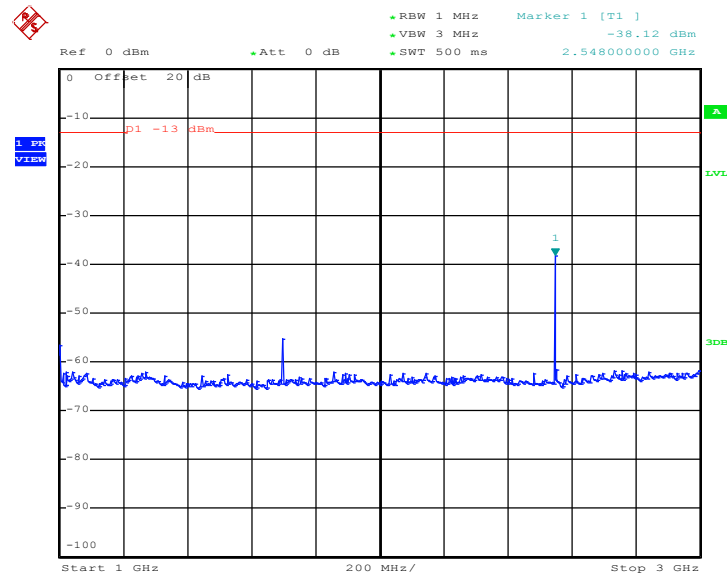**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 9.MAY.2014 10:41:56




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz




Date: 9.MAY.2014 10:42:05

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

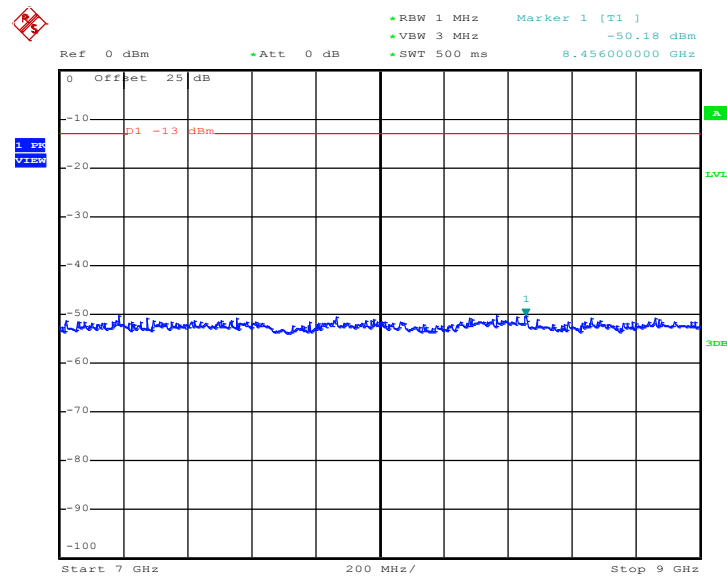


Date: 9.MAY.2014 10:42:13

|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | GSM850                   | <b>Channel :</b>   | CH128     |
| <b>Test Mode :</b> | EDGE class 8 Link (8PSK) | <b>Frequency :</b> | 824.2 MHz |

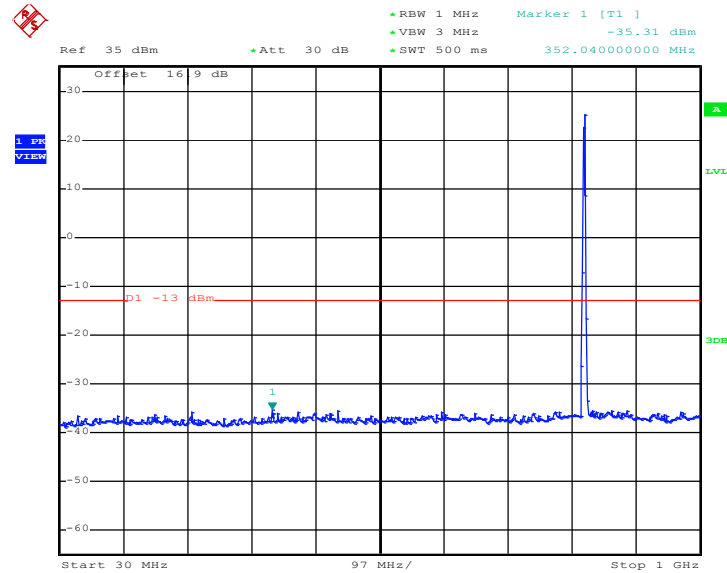
**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 9.MAY.2014 11:42:45

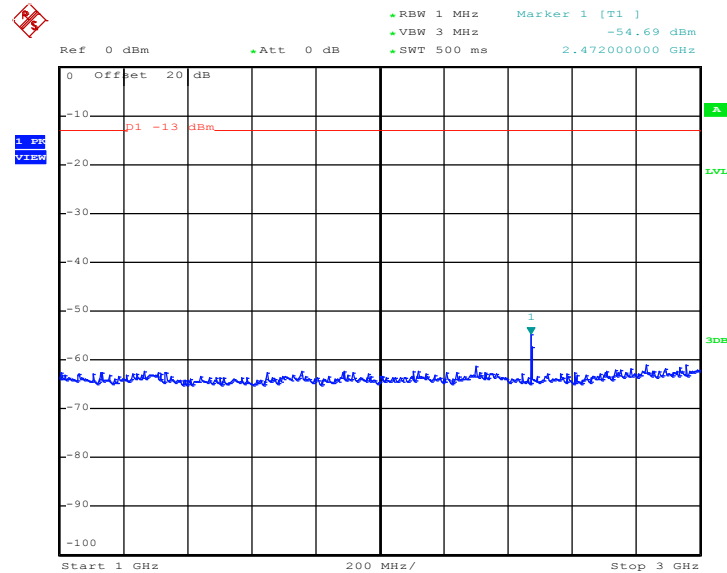**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


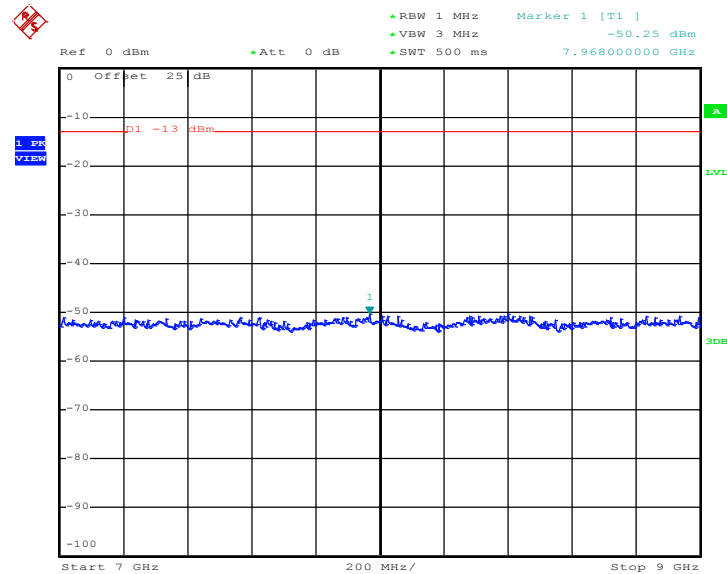
Date: 9.MAY.2014 11:42:57

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

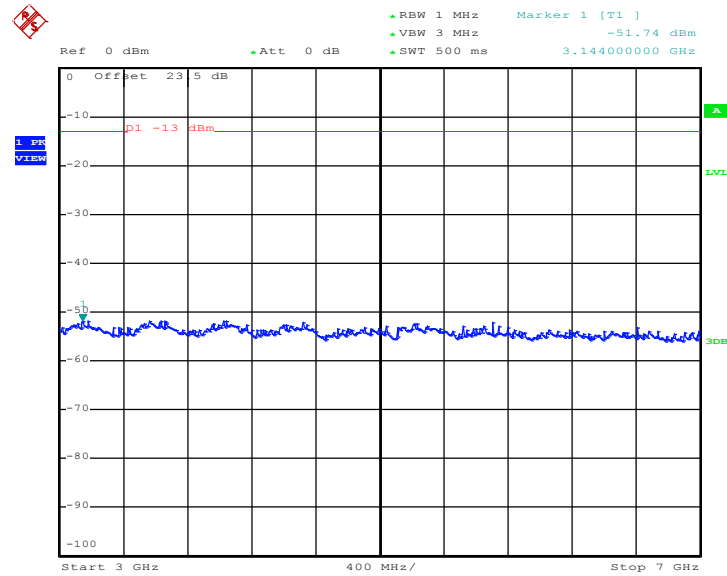


Date: 9.MAY.2014 11:43:05

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz




Date: 9.MAY.2014 11:43:14

|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | GSM850                   | <b>Channel :</b>   | CH189     |
| <b>Test Mode :</b> | EDGE class 8 Link (8PSK) | <b>Frequency :</b> | 836.4 MHz |

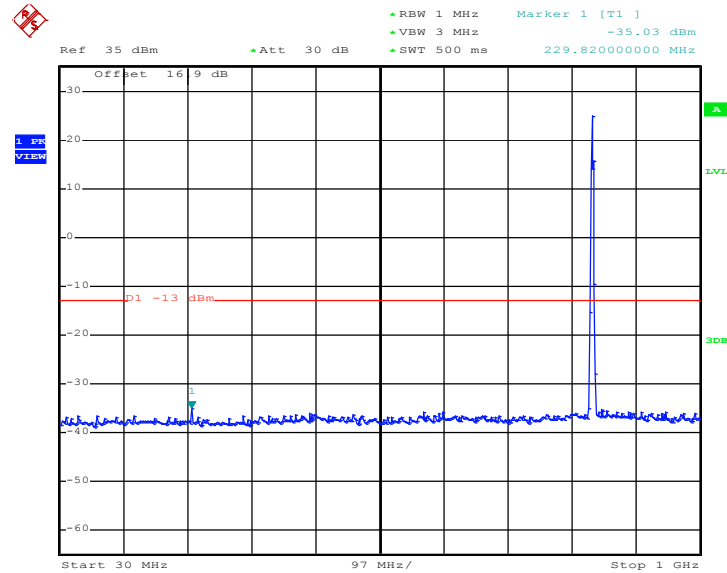**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


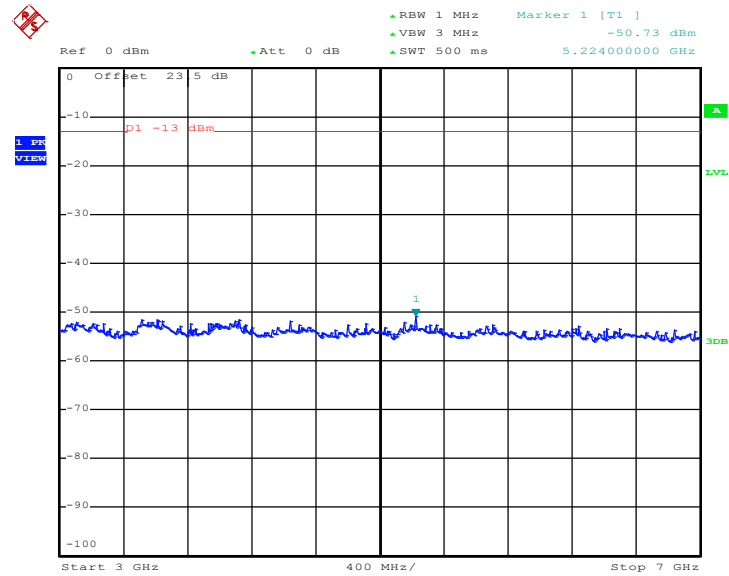
Date: 9.MAY.2014 11:39:33

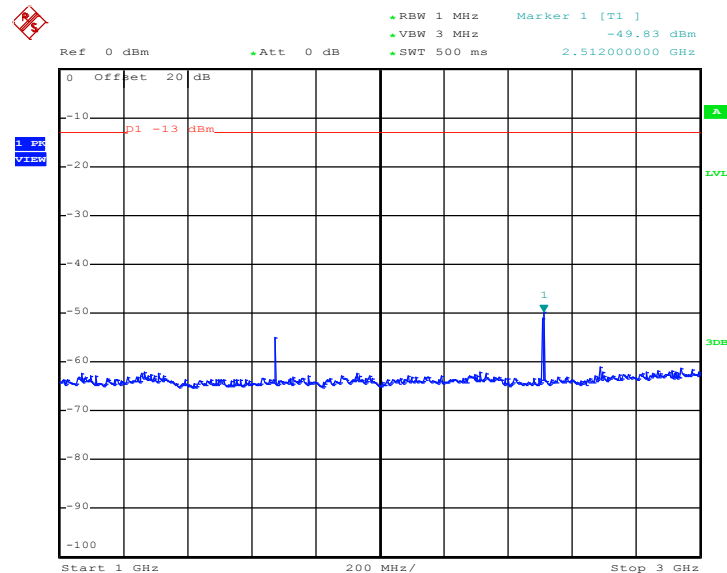**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 9.MAY.2014 11:39:43




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz




Date: 9.MAY.2014 11:39:52

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

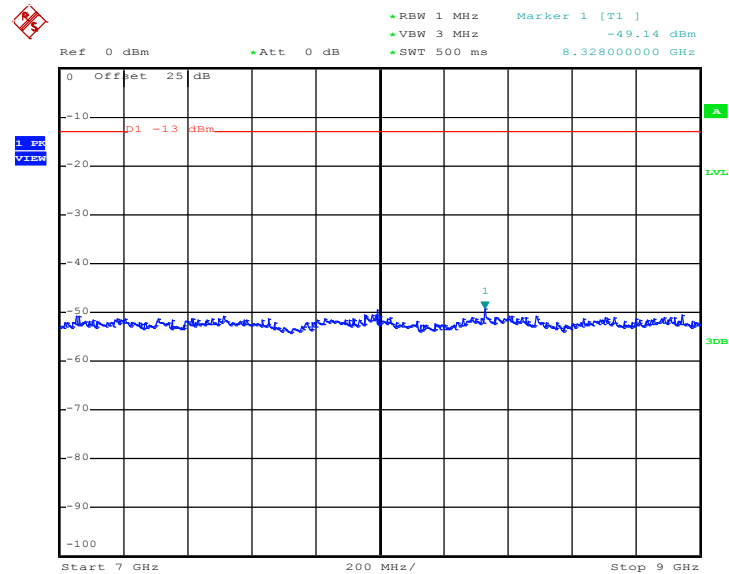


Date: 9.MAY.2014 11:40:00

|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | GSM850                   | <b>Channel :</b>   | CH251     |
| <b>Test Mode :</b> | EDGE class 8 Link (8PSK) | <b>Frequency :</b> | 848.8 MHz |

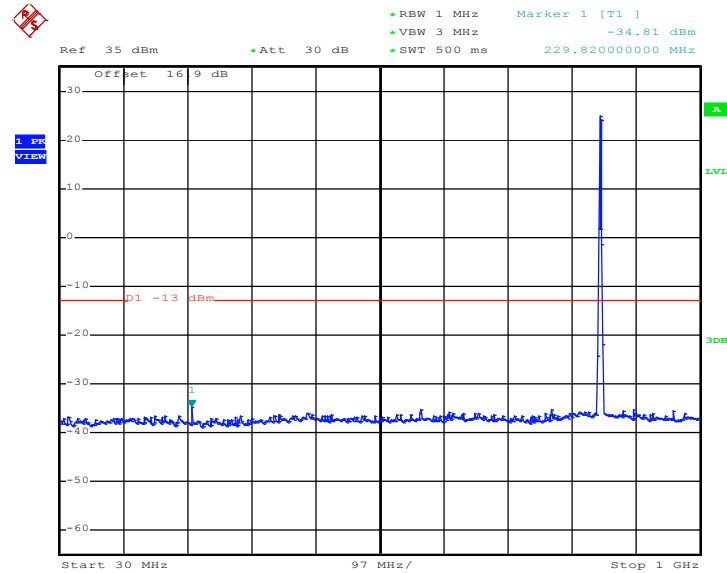**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


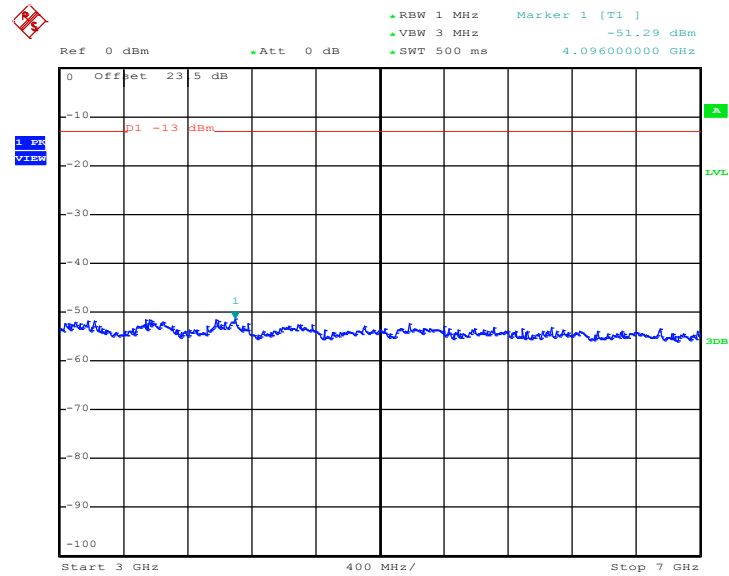
Date: 9.MAY.2014 11:44:56

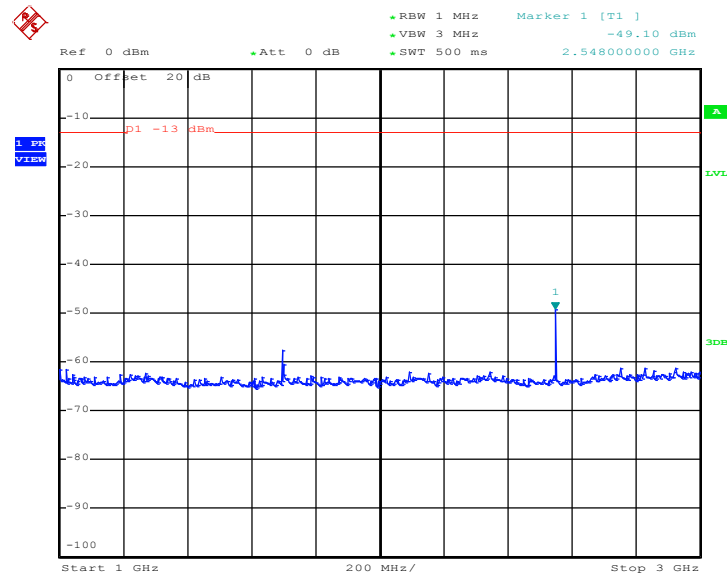**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 9.MAY.2014 11:45:08




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz




Date: 9.MAY.2014 11:45:16

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

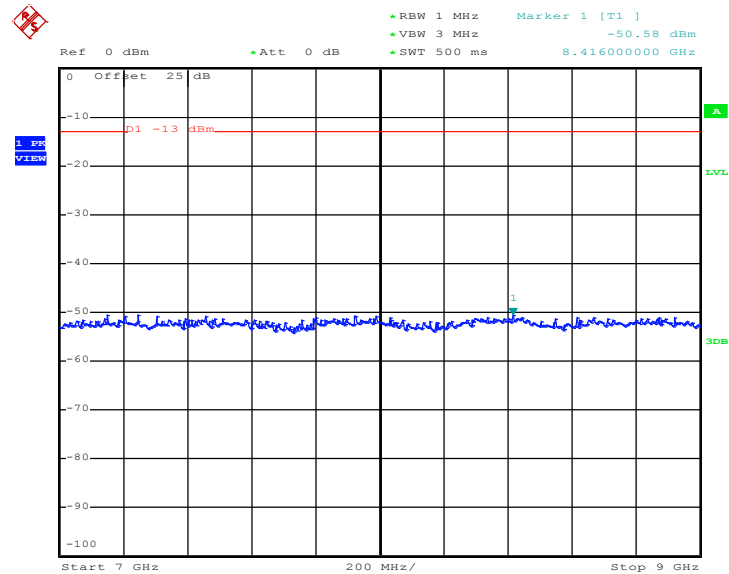


Date: 9.MAY.2014 11:45:25

|                    |                          |                    |            |
|--------------------|--------------------------|--------------------|------------|
| <b>Band :</b>      | GSM1900                  | <b>Channel :</b>   | CH512      |
| <b>Test Mode :</b> | GPRS class 8 Link (GMSK) | <b>Frequency :</b> | 1850.2 MHz |

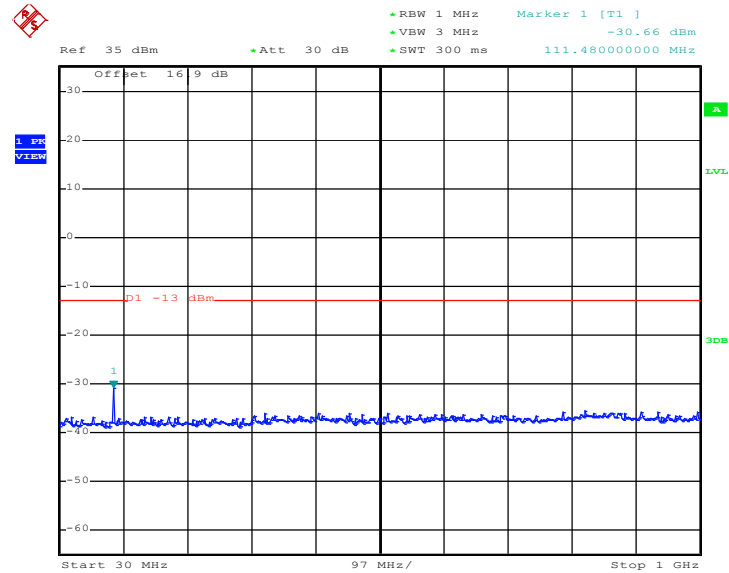**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


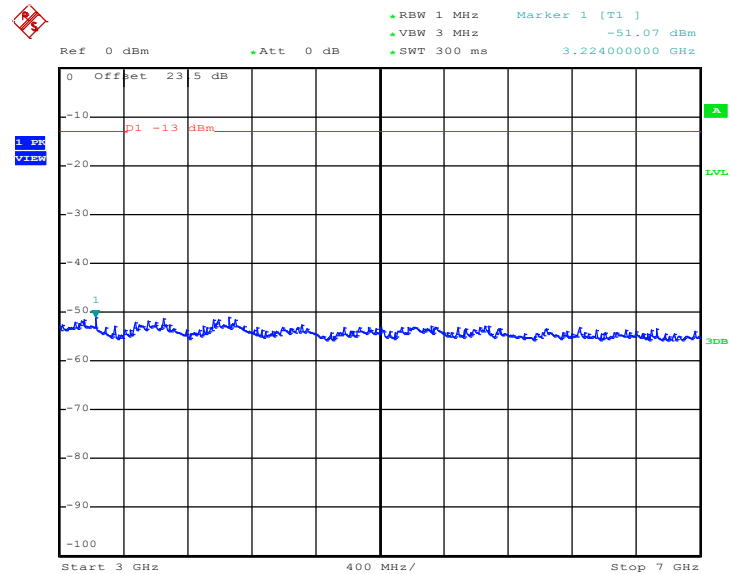
Date: 9.MAY.2014 14:57:54

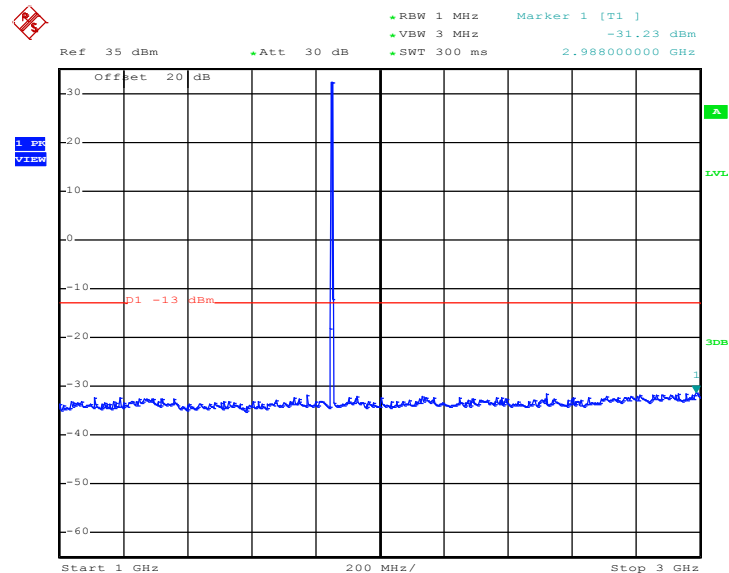**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 9.MAY.2014 14:58:03




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz



Date: 9.MAY.2014 14:58:13


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

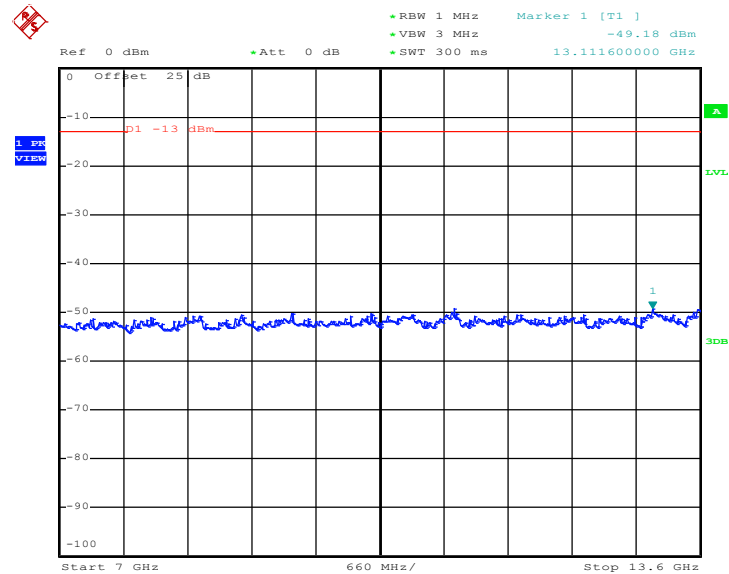

Date: 9.MAY.2014 14:58:21




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

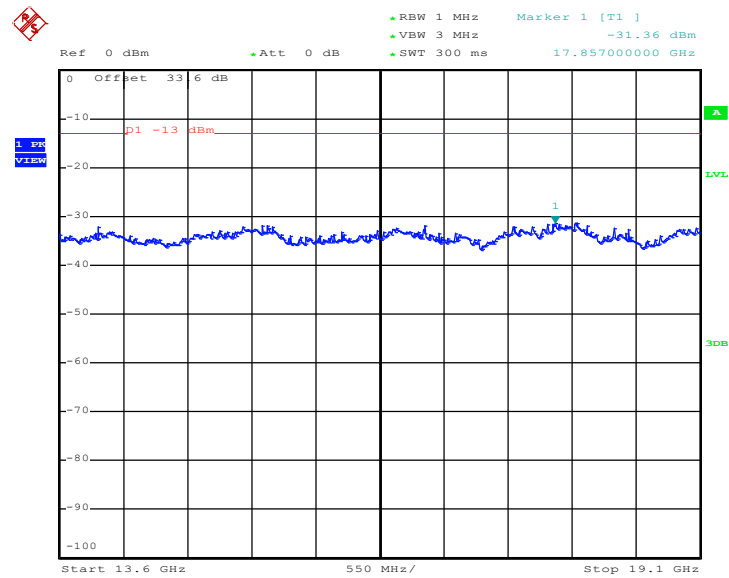


Date: 9.MAY.2014 14:58:30

|                    |                          |                    |            |
|--------------------|--------------------------|--------------------|------------|
| <b>Band :</b>      | GSM1900                  | <b>Channel :</b>   | CH661      |
| <b>Test Mode :</b> | GPRS class 8 Link (GMSK) | <b>Frequency :</b> | 1880.0 MHz |

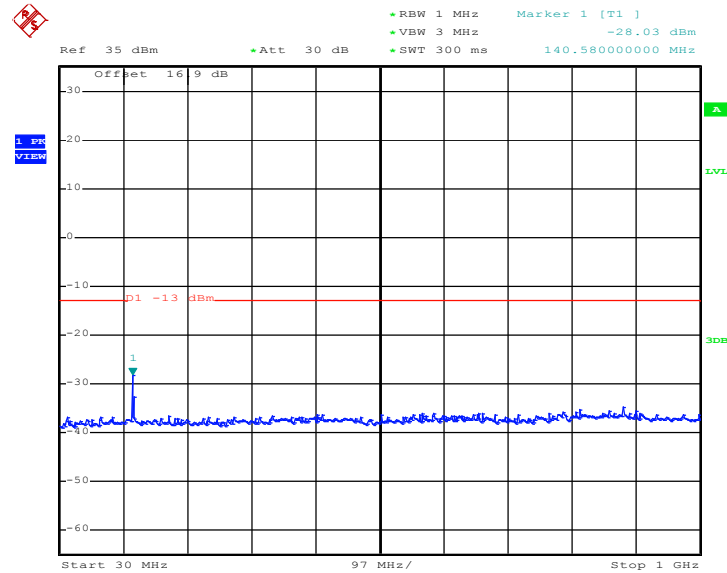
**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 9.MAY.2014 14:55:23

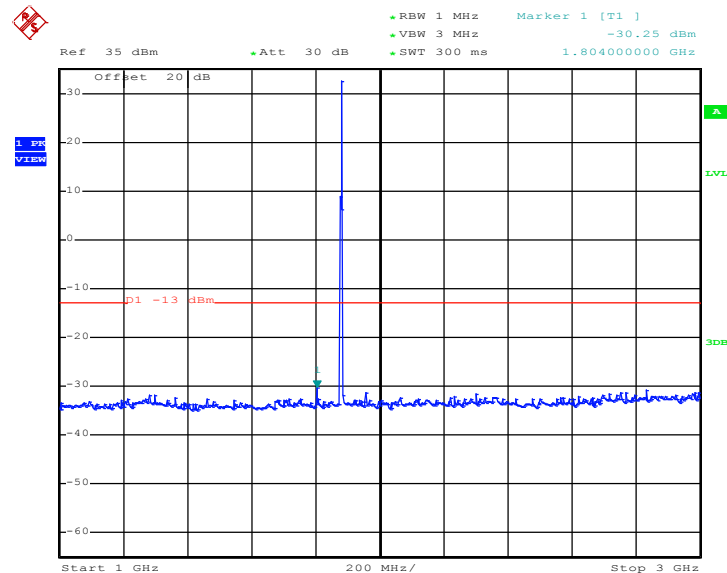**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


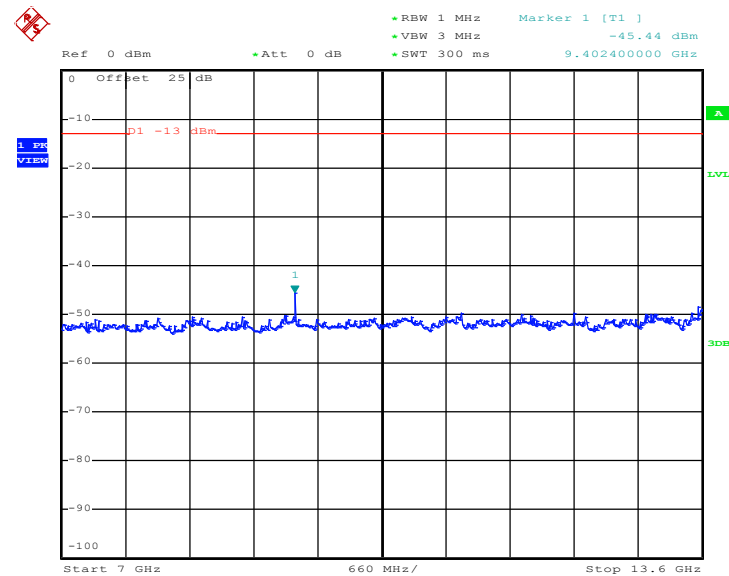
Date: 9.MAY.2014 14:55:32

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

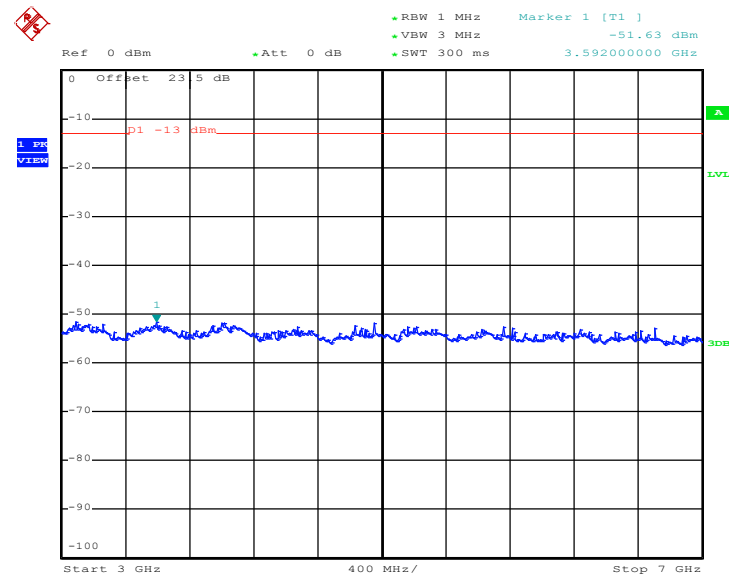


Date: 9.MAY.2014 14:55:43

### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz



Date: 9.MAY.2014 14:55:51


### Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

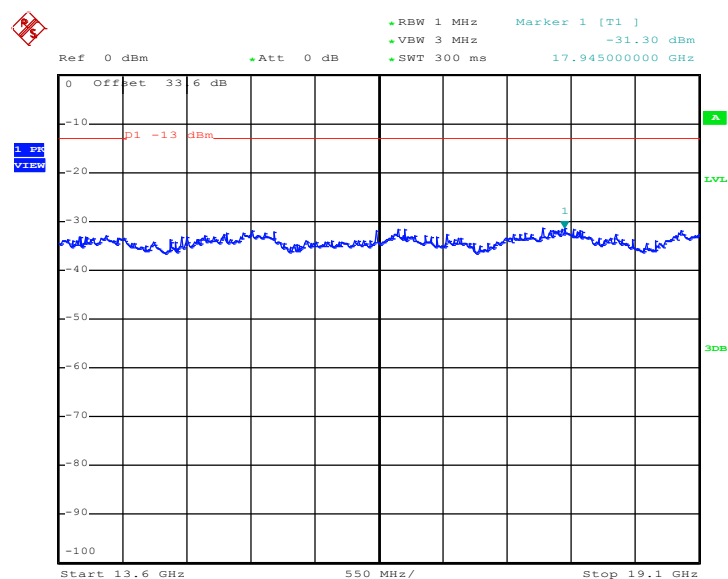

Date: 9.MAY.2014 14:56:00


|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | GSM1900                  | Channel :   | CH810      |
| Test Mode : | GPRS class 8 Link (GMSK) | Frequency : | 1909.8 MHz |

### Conducted Spurious Emission Plot between 30MHz ~ 1GHz

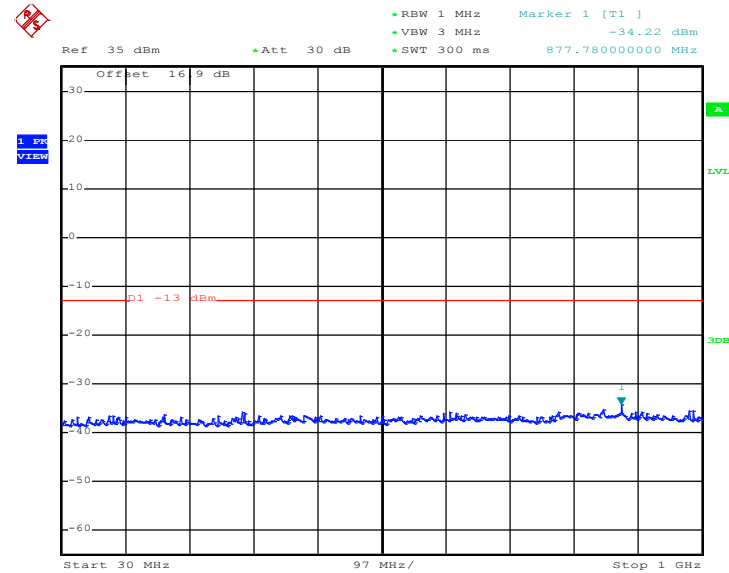

Date: 9.MAY.2014 14:59:30


### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

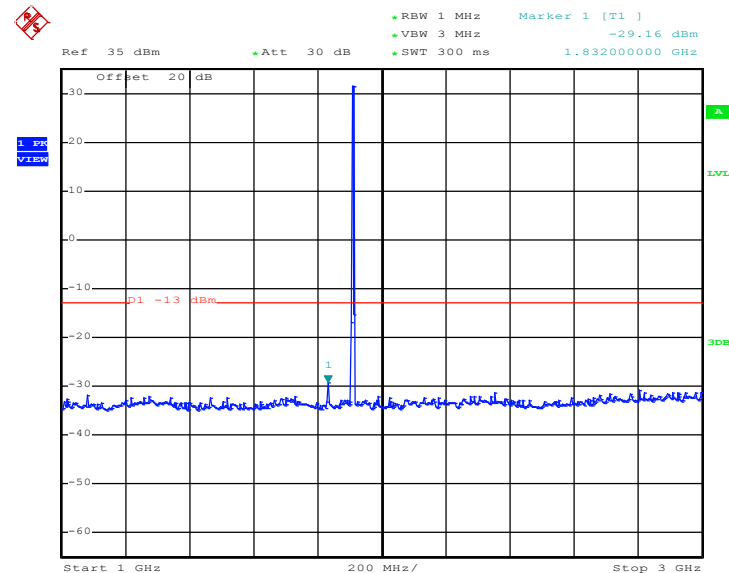

Date: 9.MAY.2014 14:59:38




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

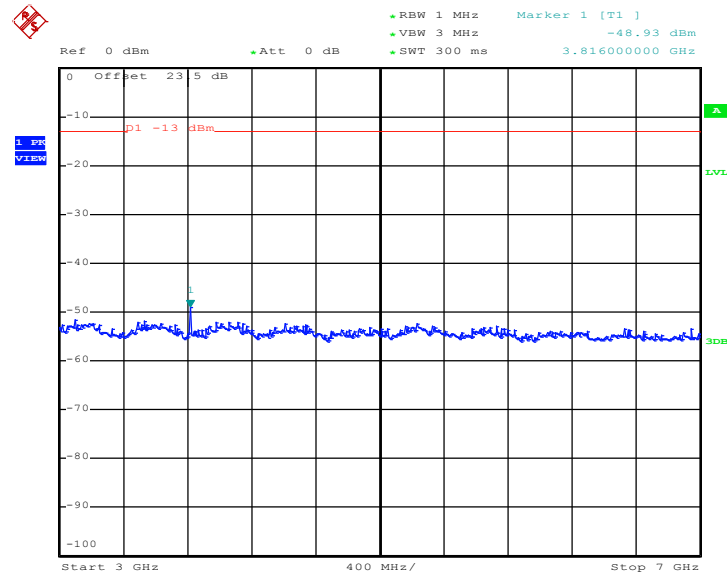


Date: 9.MAY.2014 14:59:50

### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

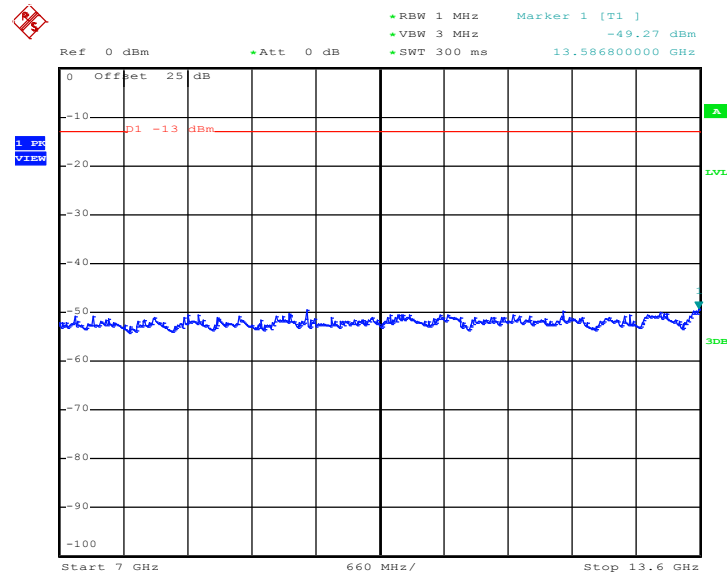


Date: 9.MAY.2014 14:59:58

### Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

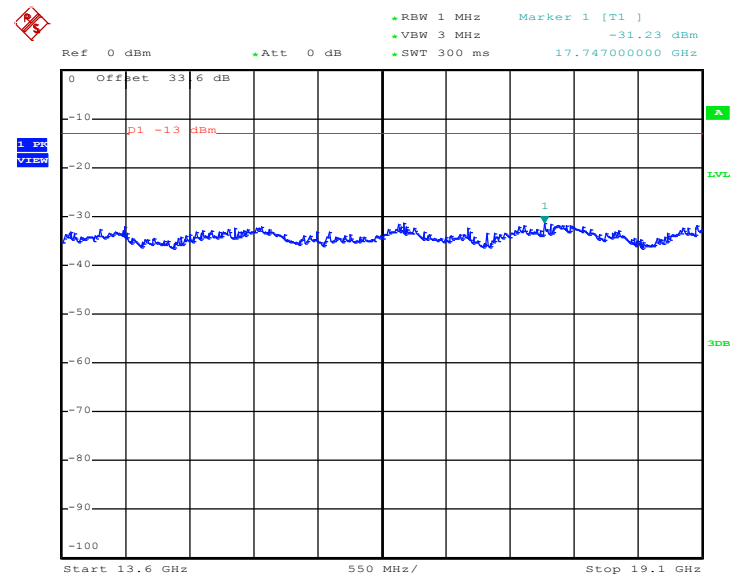


Date: 9.MAY.2014 15:00:07

|                    |                          |                    |            |
|--------------------|--------------------------|--------------------|------------|
| <b>Band :</b>      | GSM1900                  | <b>Channel :</b>   | CH512      |
| <b>Test Mode :</b> | EDGE class 8 Link (8PSK) | <b>Frequency :</b> | 1850.2 MHz |

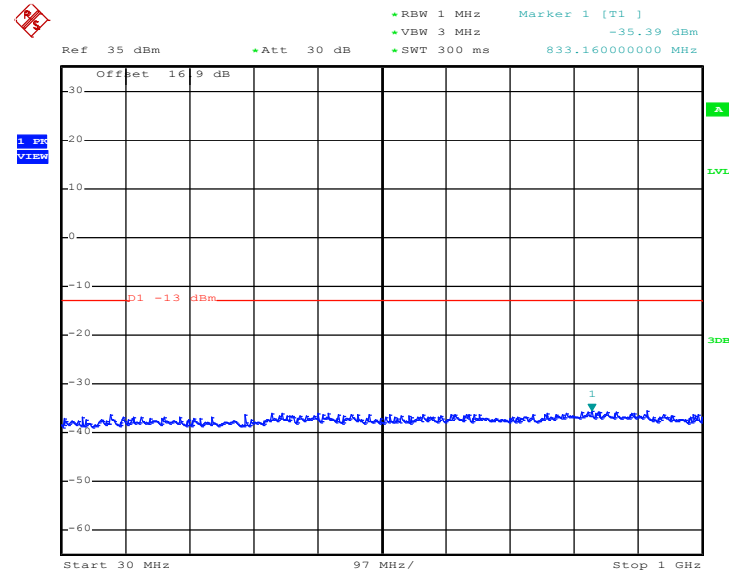**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


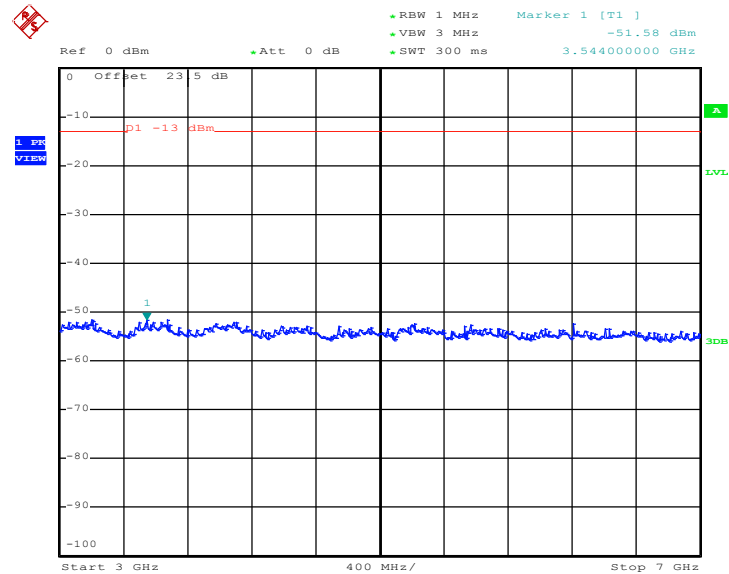
Date: 9.MAY.2014 15:52:16

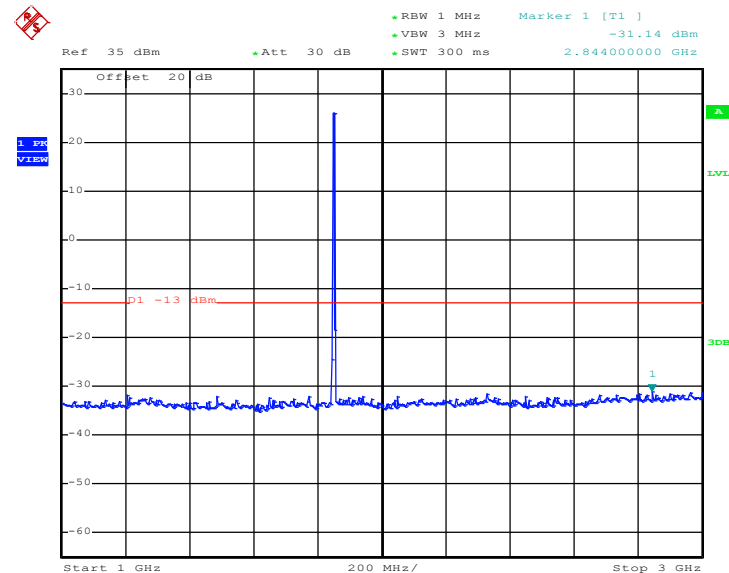**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 9.MAY.2014 15:52:24




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz




Date: 9.MAY.2014 15:52:36

### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

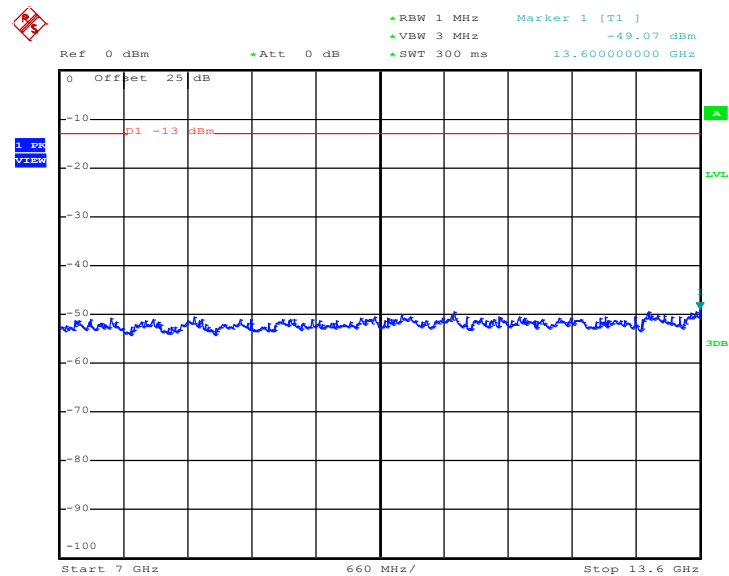


Date: 9.MAY.2014 15:52:44

### Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

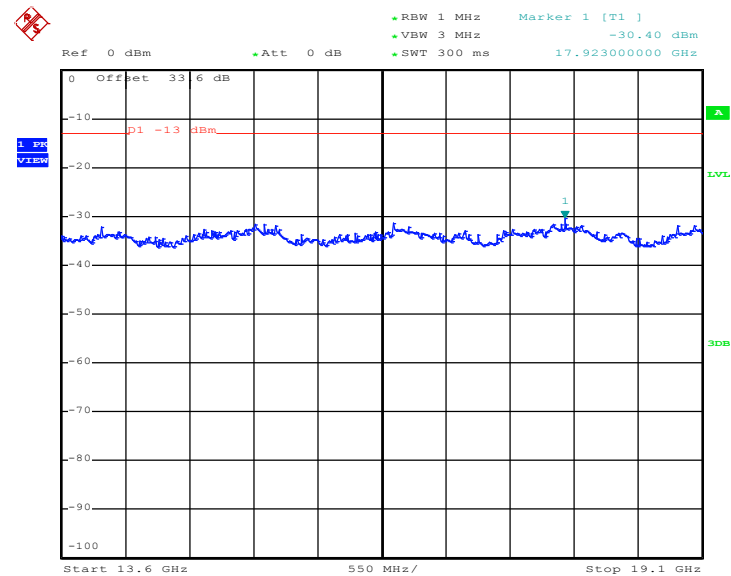


Date: 9.MAY.2014 15:52:53

|                    |                          |                    |            |
|--------------------|--------------------------|--------------------|------------|
| <b>Band :</b>      | GSM1900                  | <b>Channel :</b>   | CH661      |
| <b>Test Mode :</b> | EDGE class 8 Link (8PSK) | <b>Frequency :</b> | 1880.0 MHz |

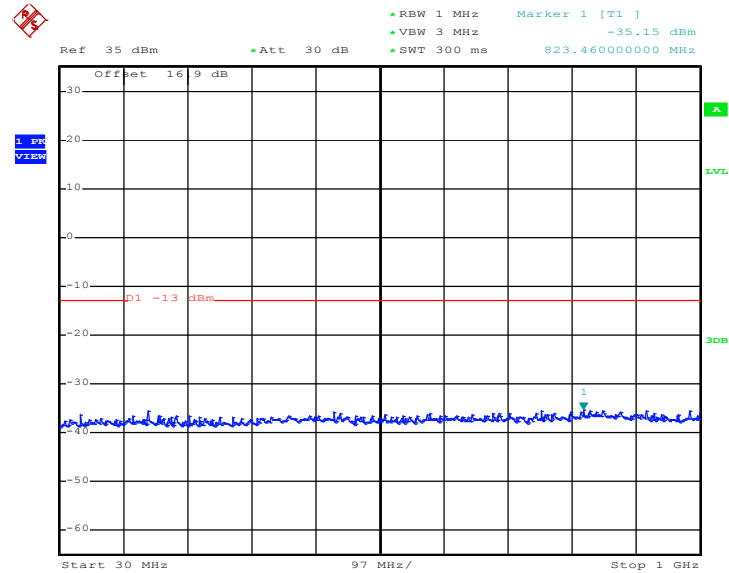**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


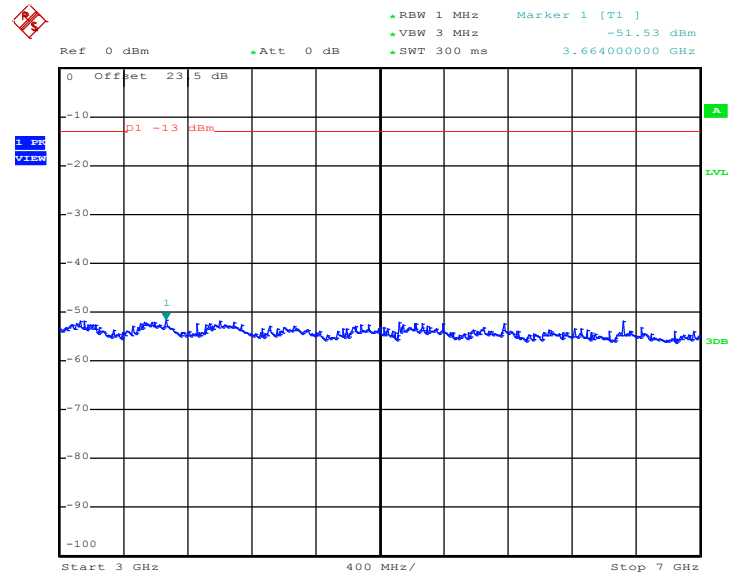
Date: 9.MAY.2014 15:50:54

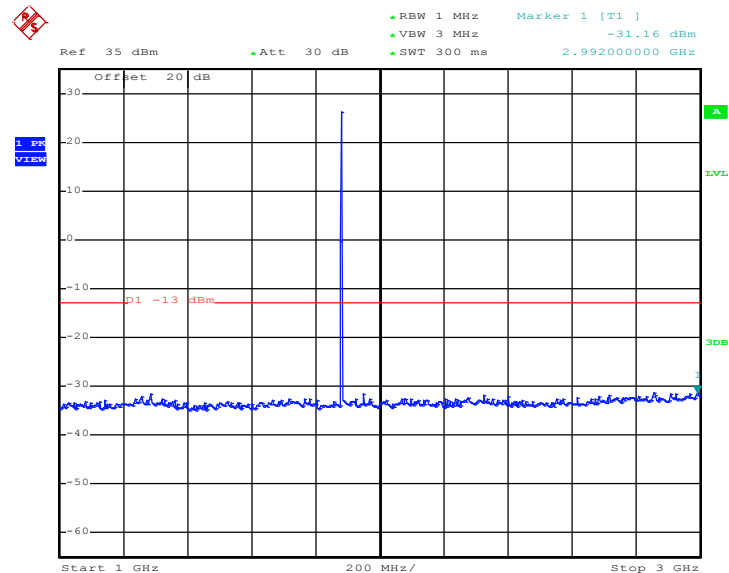**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 9.MAY.2014 15:51:03




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz



Date: 9.MAY.2014 15:51:19


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

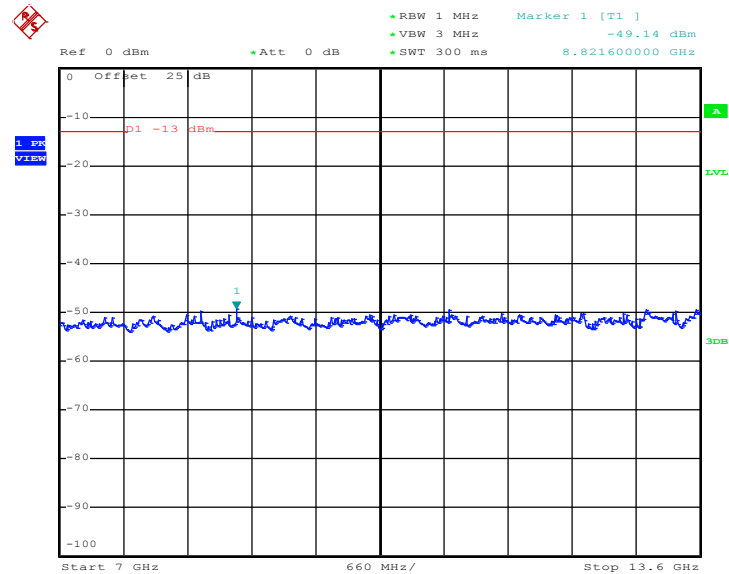

Date: 9.MAY.2014 15:51:27




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

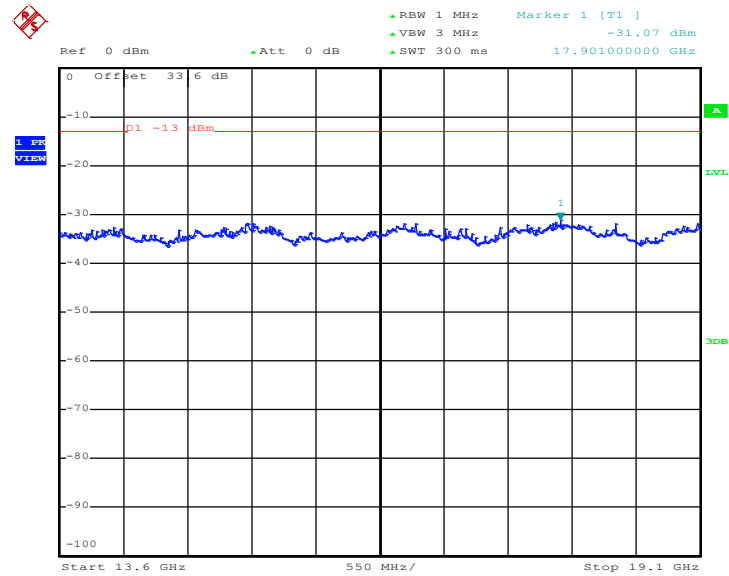


Date: 9.MAY.2014 15:51:36

|                    |                          |                    |            |
|--------------------|--------------------------|--------------------|------------|
| <b>Band :</b>      | GSM1900                  | <b>Channel :</b>   | CH810      |
| <b>Test Mode :</b> | EDGE class 8 Link (8PSK) | <b>Frequency :</b> | 1909.8 MHz |

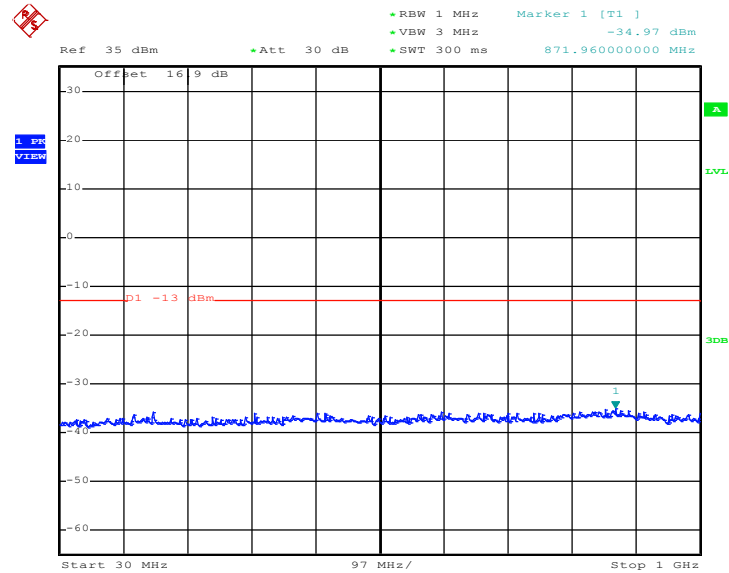**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


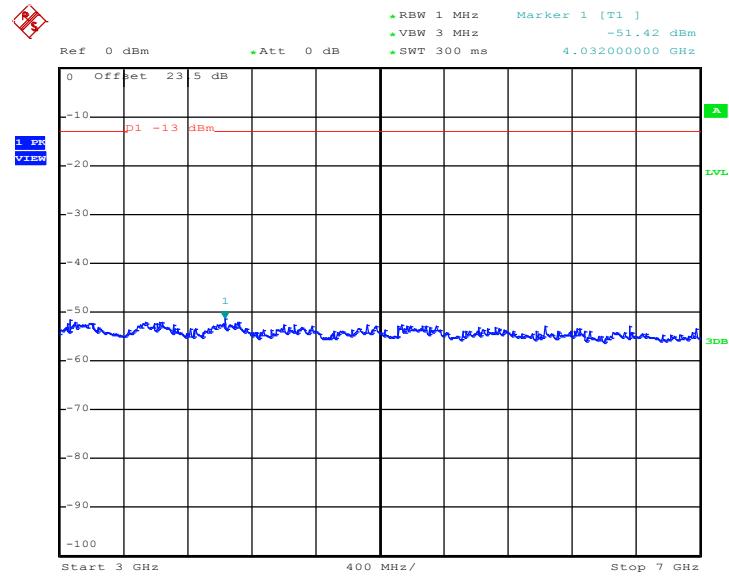
Date: 9.MAY.2014 15:54:18

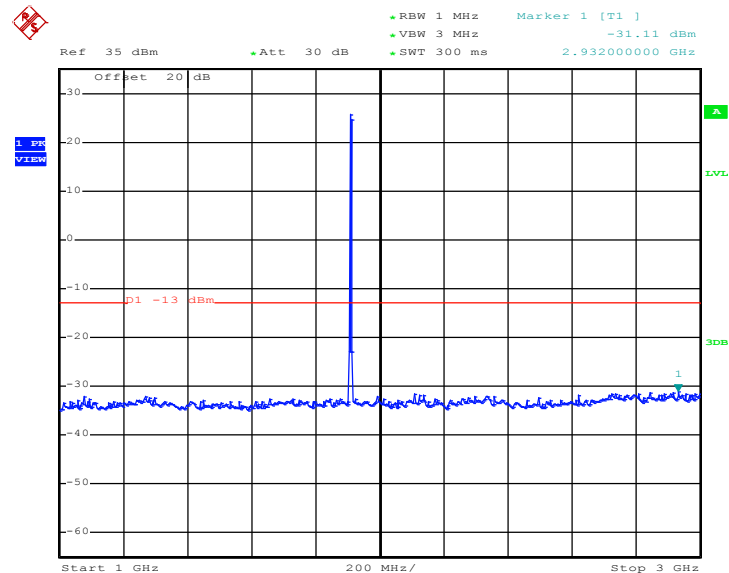**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 9.MAY.2014 15:54:26




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz




Date: 9.MAY.2014 15:54:43

### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

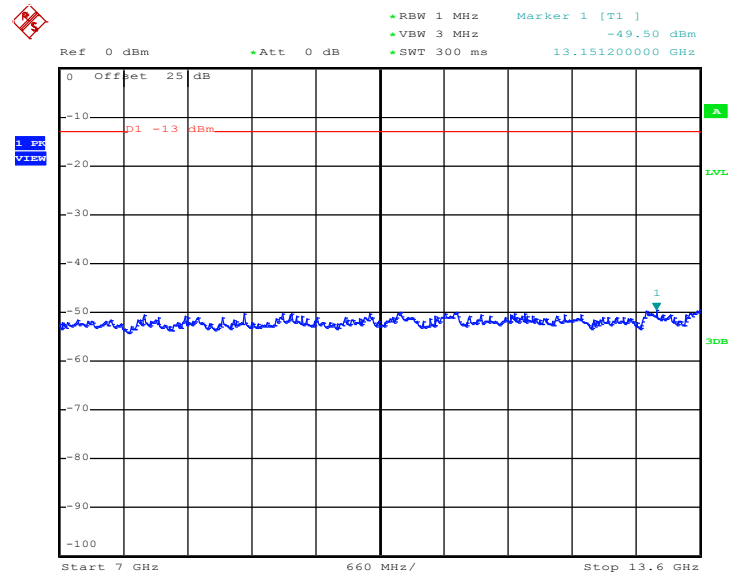


Date: 9.MAY.2014 15:54:51

### Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

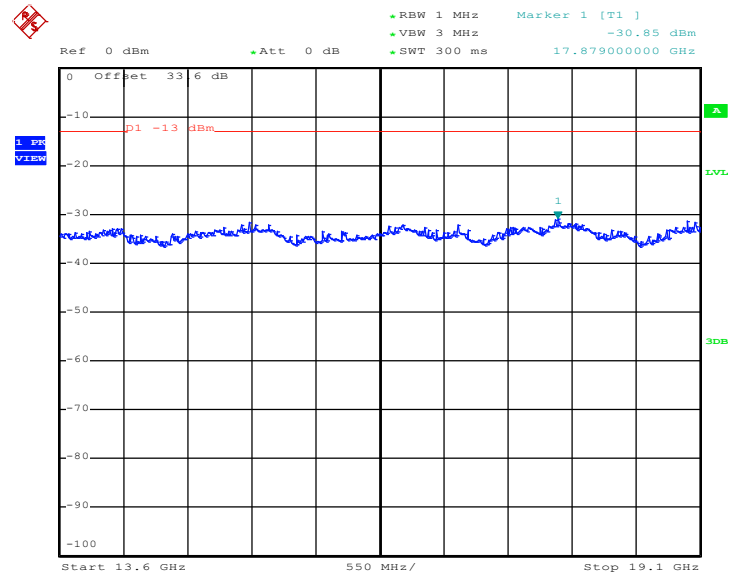


Date: 9.MAY.2014 15:55:00

|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | WCDMA Band V             | <b>Channel :</b>   | CH4132    |
| <b>Test Mode :</b> | RMC 12.2Kbps Link (QPSK) | <b>Frequency :</b> | 826.4 MHz |

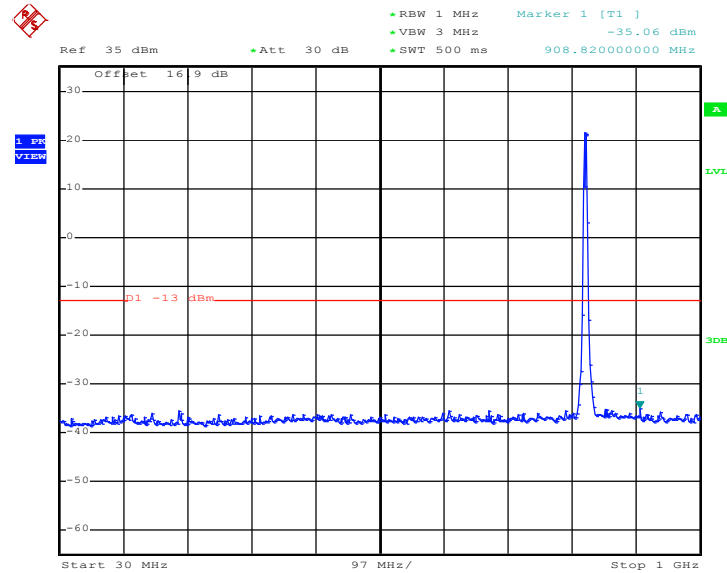**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


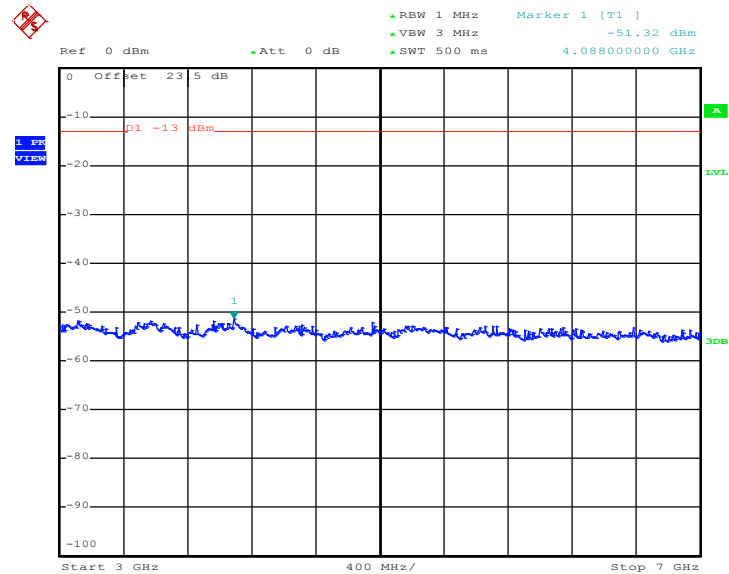
Date: 9.MAY.2014 18:03:34

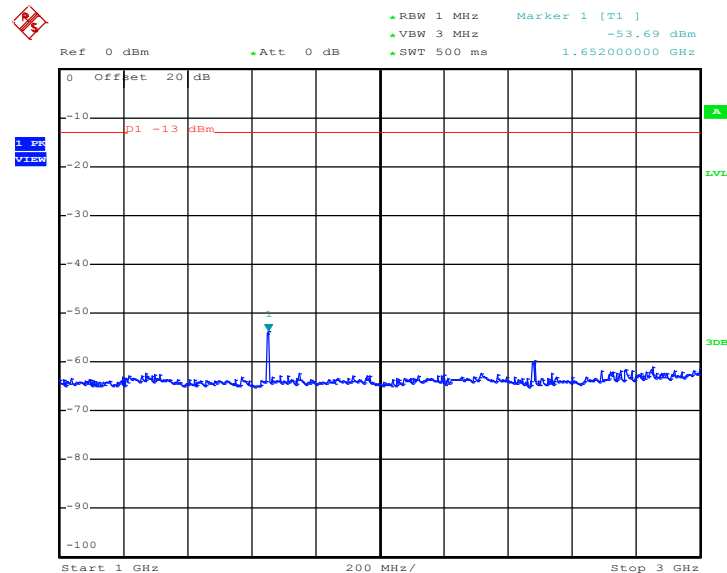**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 9.MAY.2014 18:03:44




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz




Date: 9.MAY.2014 18:03:53

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

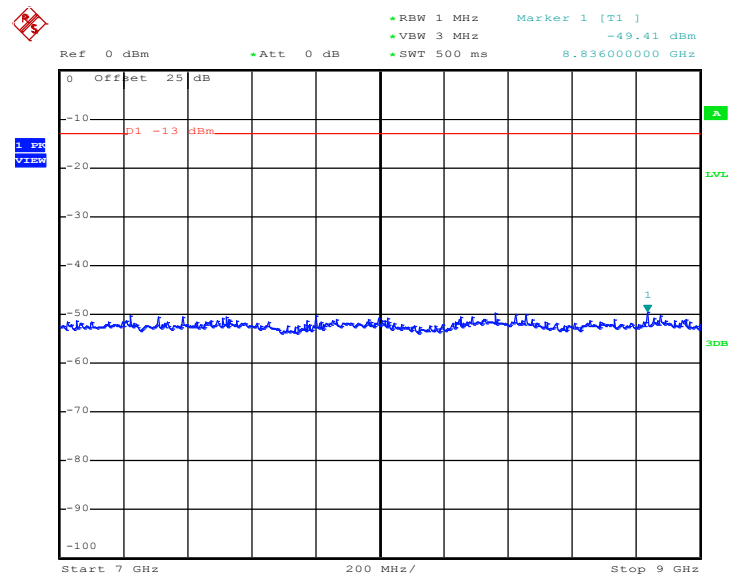


Date: 9.MAY.2014 18:04:01

|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | WCDMA Band V             | <b>Channel :</b>   | CH4182    |
| <b>Test Mode :</b> | RMC 12.2Kbps Link (QPSK) | <b>Frequency :</b> | 836.4 MHz |

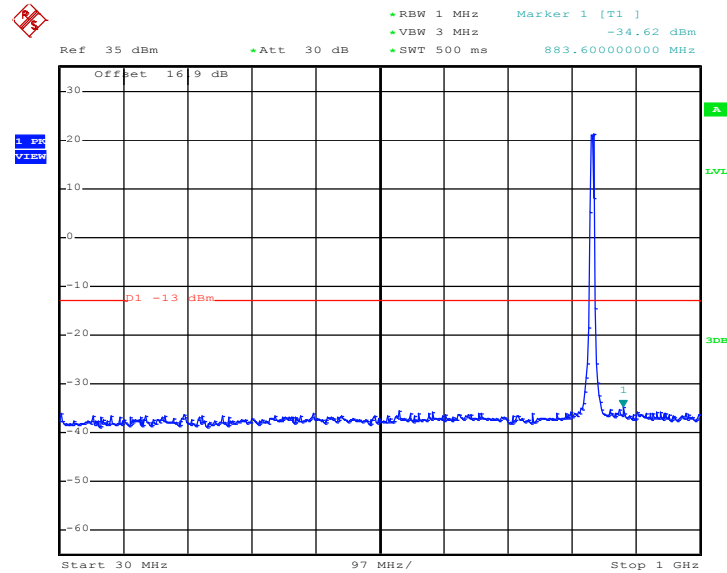
**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 9.MAY.2014 18:01:16

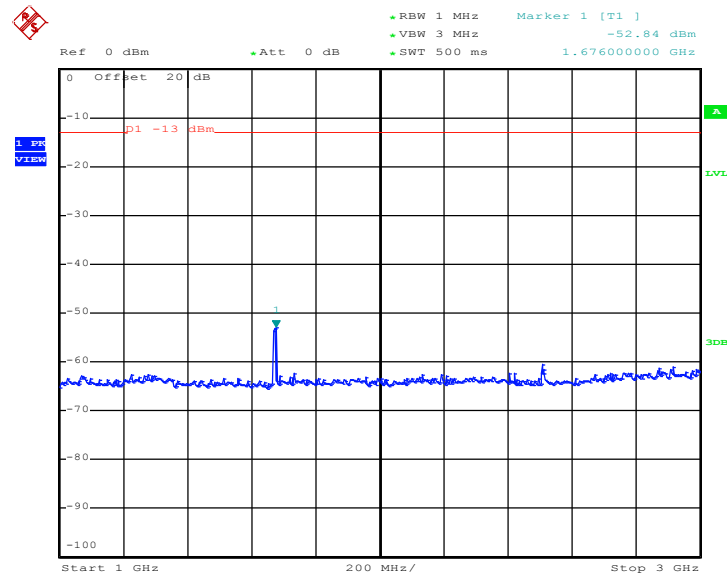**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


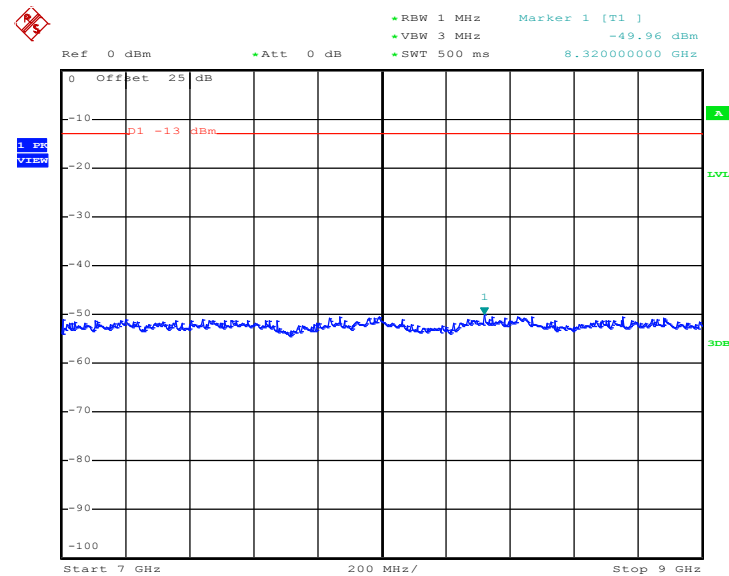
Date: 9.MAY.2014 18:01:26

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

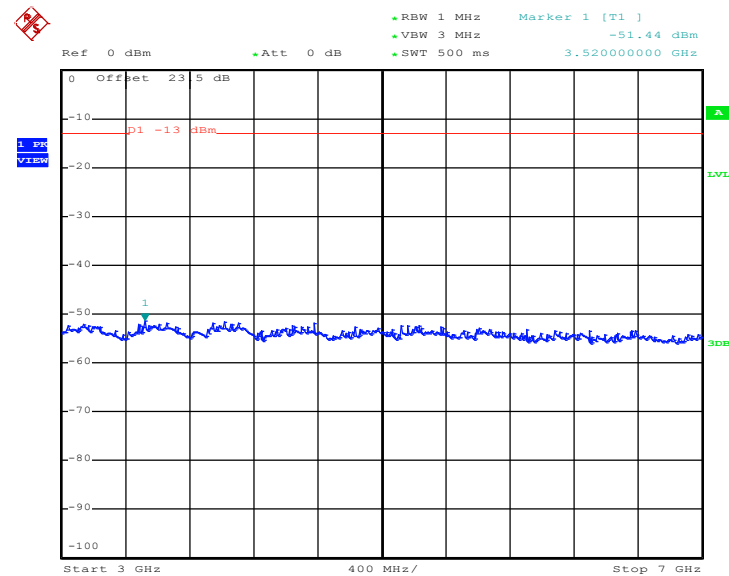


Date: 9.MAY.2014 18:01:34

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz




Date: 9.MAY.2014 18:01:43

|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | WCDMA Band V             | <b>Channel :</b>   | CH4233    |
| <b>Test Mode :</b> | RMC 12.2Kbps Link (QPSK) | <b>Frequency :</b> | 846.6 MHz |

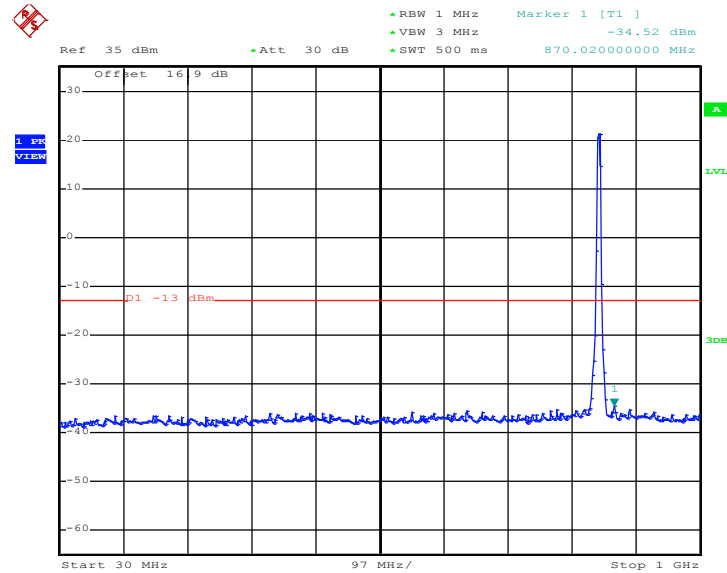
**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 9.MAY.2014 18:08:05

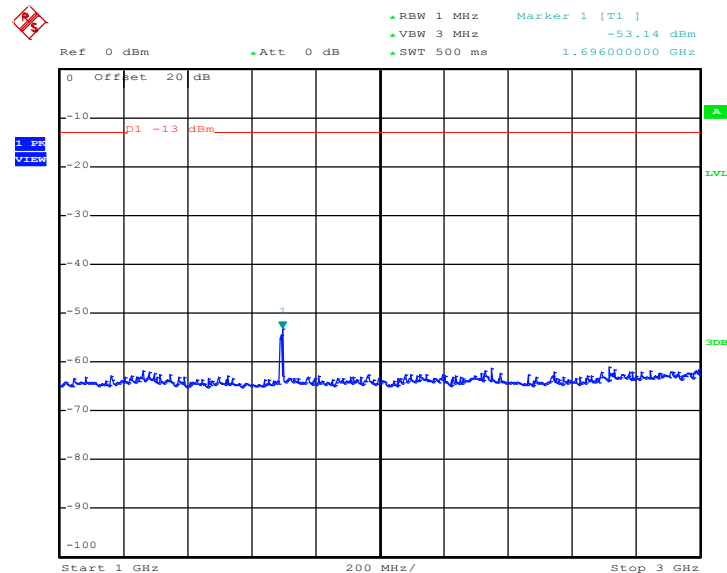**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


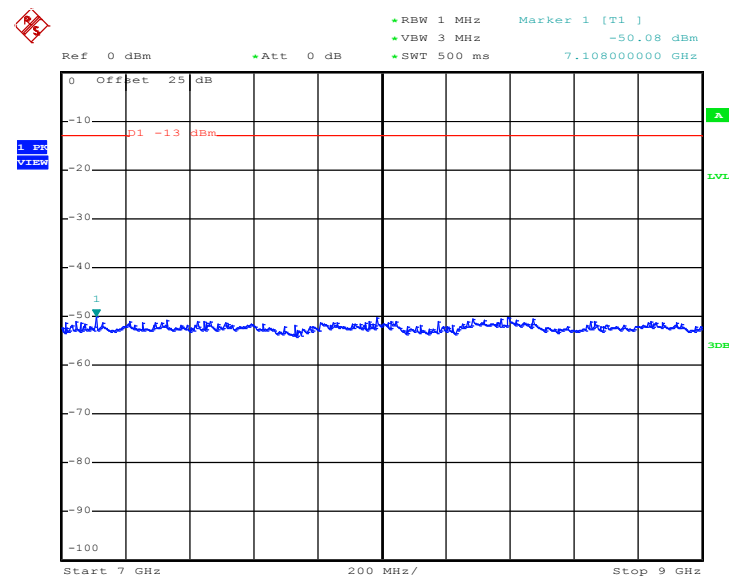
Date: 9.MAY.2014 18:08:16

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

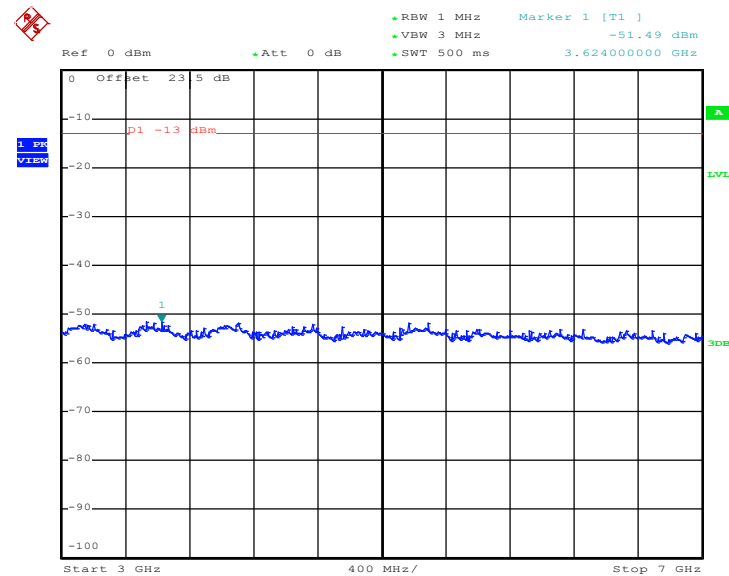

Date: 9.MAY.2014 18:08:24


### Conducted Spurious Emission Plot between 7GHz ~ 9GHz



Date: 9.MAY.2014 18:08:32


|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | WCDMA Band IV            | Channel :   | CH1312     |
| Test Mode : | RMC 12.2Kbps Link (QPSK) | Frequency : | 1712.4 MHz |

### Conducted Spurious Emission Plot between 30MHz ~ 1GHz

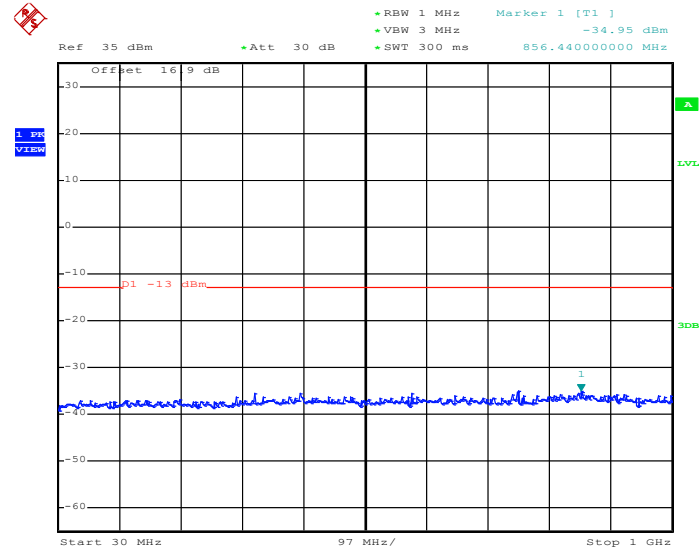


Date: 9.MAY.2014 17:13:28

### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

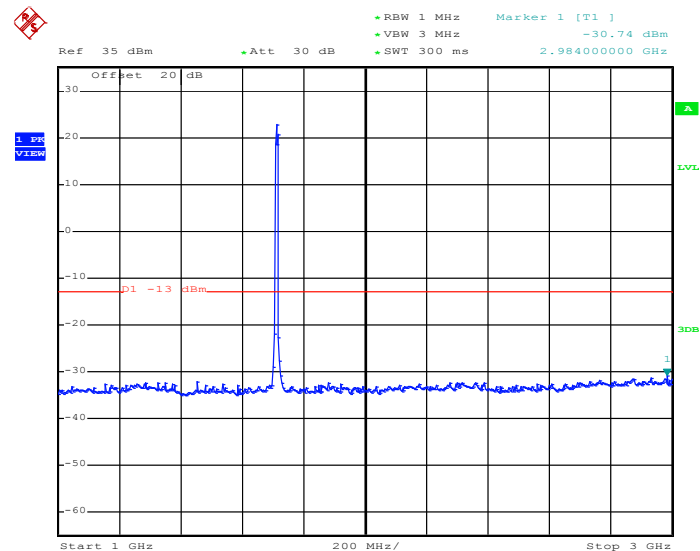


Date: 9.MAY.2014 17:13:37

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

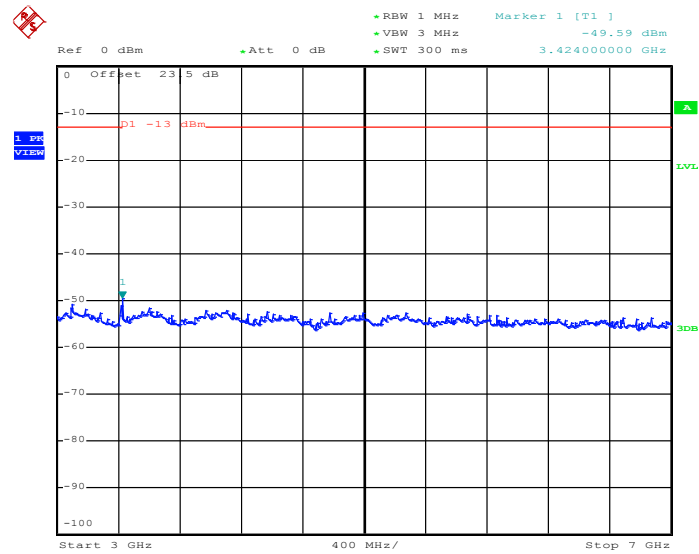

Date: 9.MAY.2014 17:13:47


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

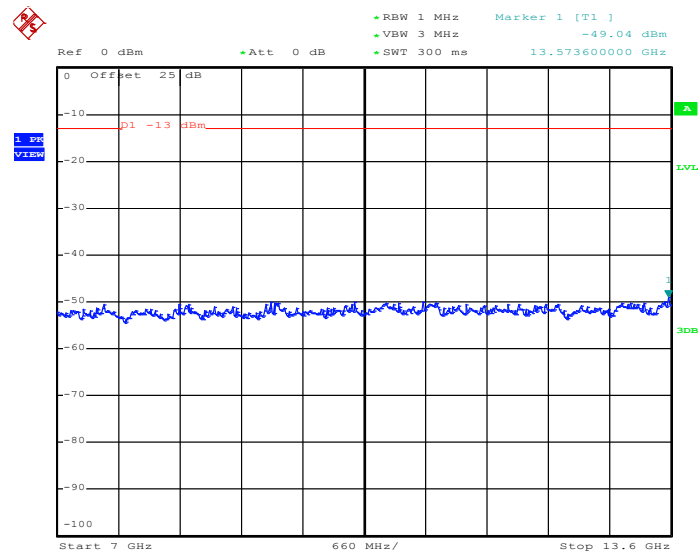

Date: 9.MAY.2014 17:13:56



Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

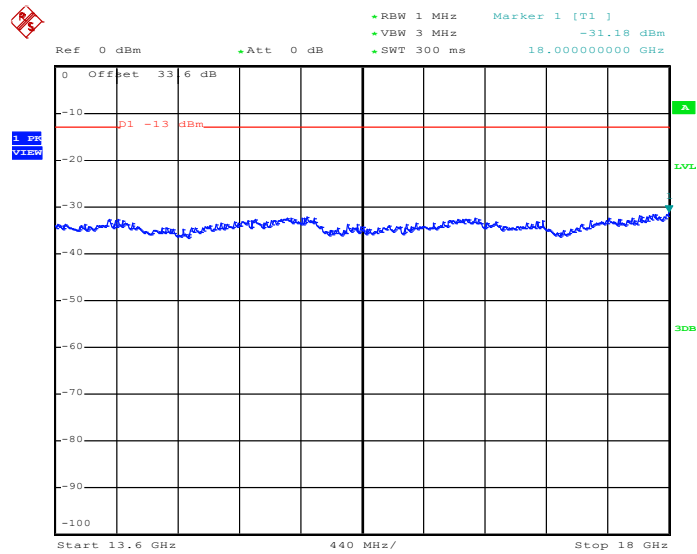


Date: 9.MAY.2014 17:14:04




|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | WCDMA Band IV            | Channel :   | CH1413     |
| Test Mode : | RMC 12.2Kbps Link (QPSK) | Frequency : | 1732.6 MHz |

## Conducted Spurious Emission Plot between 30MHz ~ 1GHz

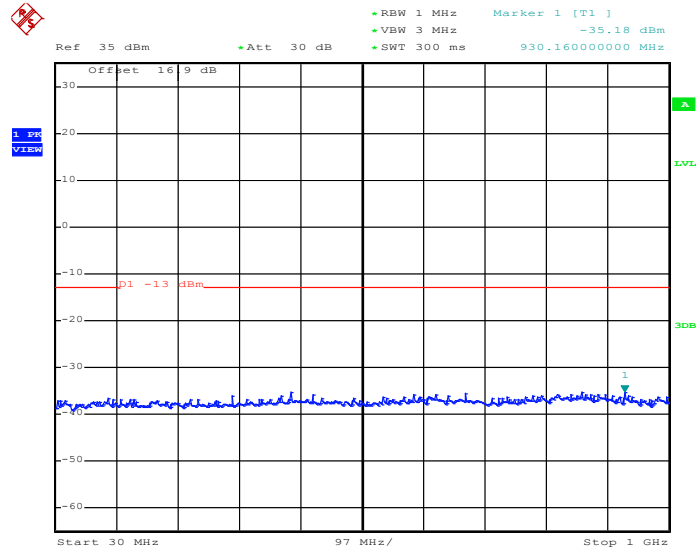


Date: 9.MAY.2014 17:11:33

## Conducted Spurious Emission Plot between 1GHz ~ 3GHz

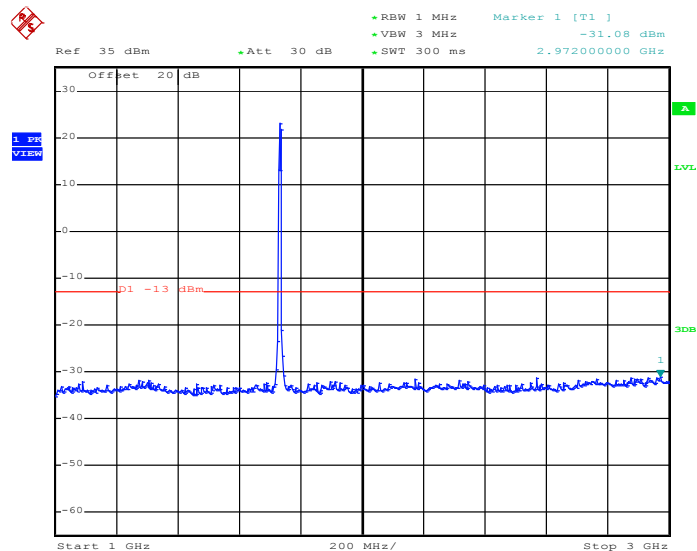


Date: 9.MAY.2014 17:11:41

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

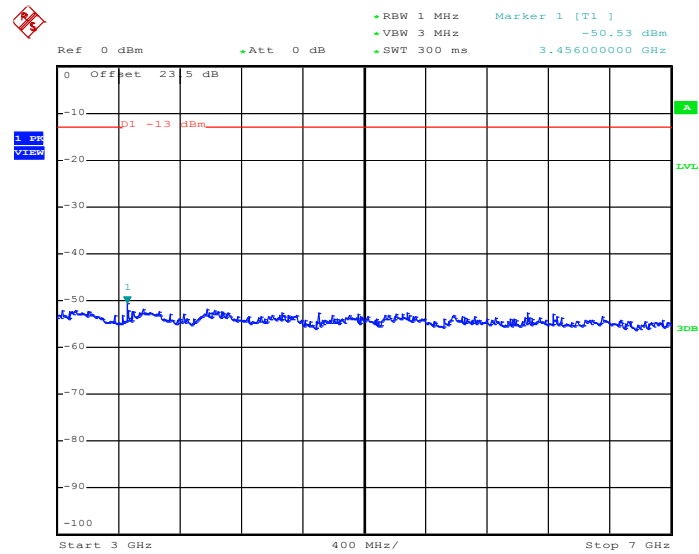

Date: 9.MAY.2014 17:11:52


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

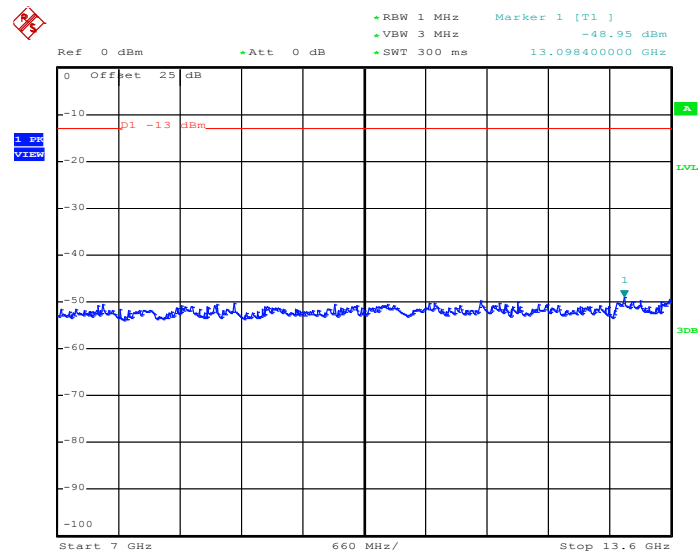

Date: 9.MAY.2014 17:12:01



Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

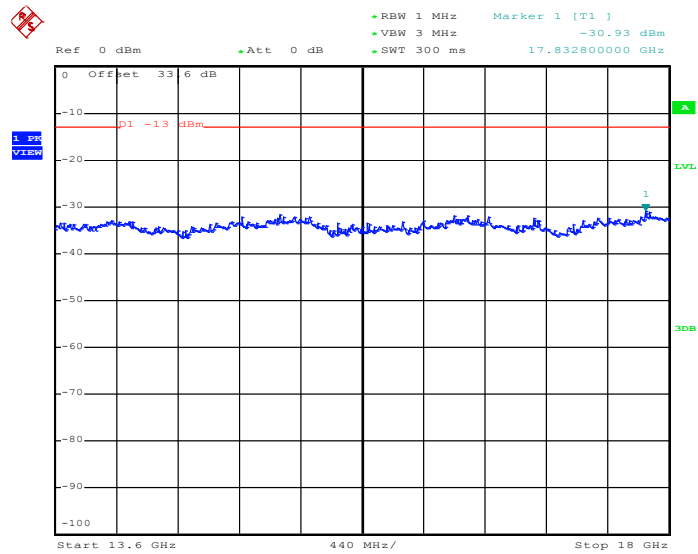


Date: 9.MAY.2014 17:12:09




|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | WCDMA Band IV            | Channel :   | CH1513     |
| Test Mode : | RMC 12.2Kbps Link (QPSK) | Frequency : | 1752.6 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

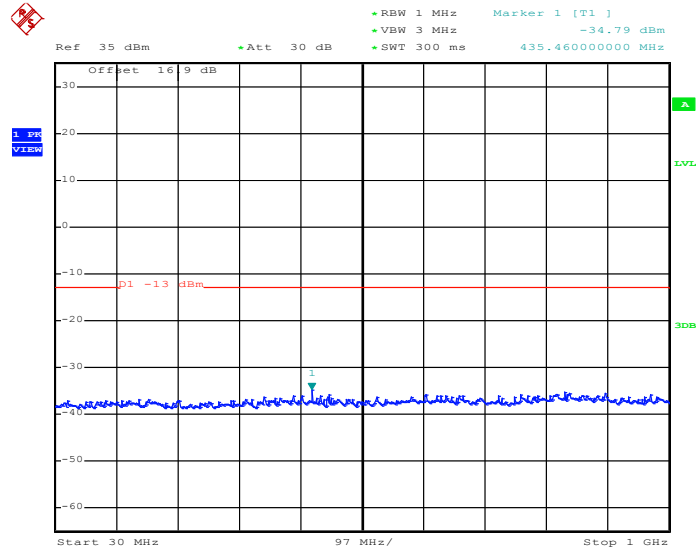


Date: 9.MAY.2014 17:15:33

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

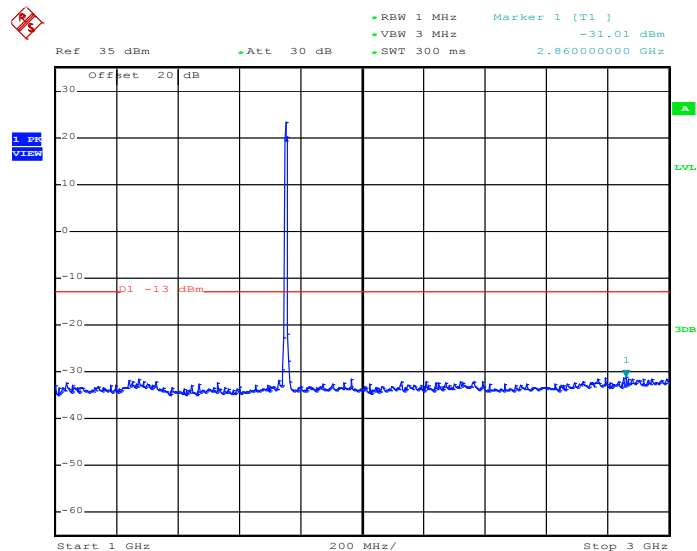


Date: 9.MAY.2014 17:15:41

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

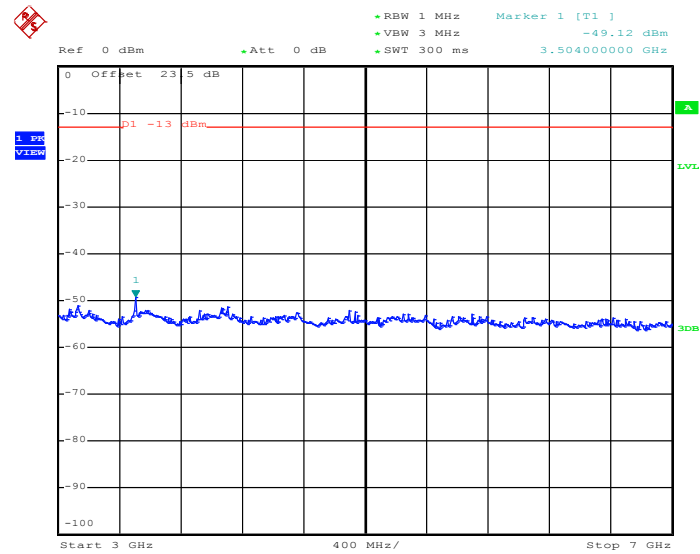

Date: 9.MAY.2014 17:15:52


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

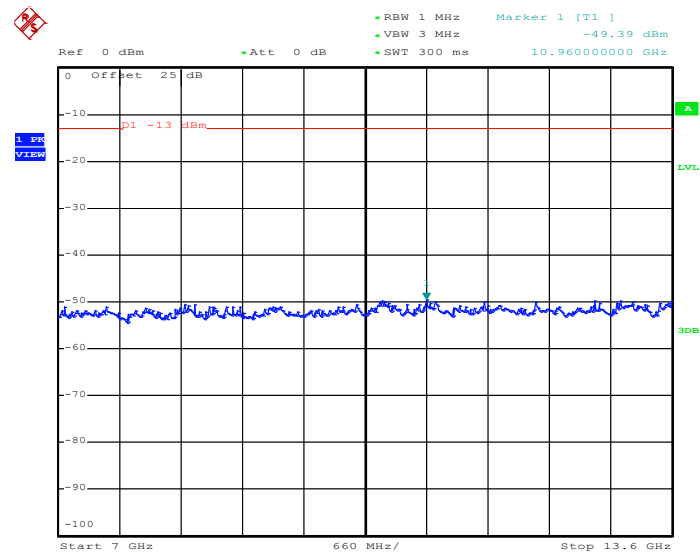

Date: 9.MAY.2014 17:16:00




Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

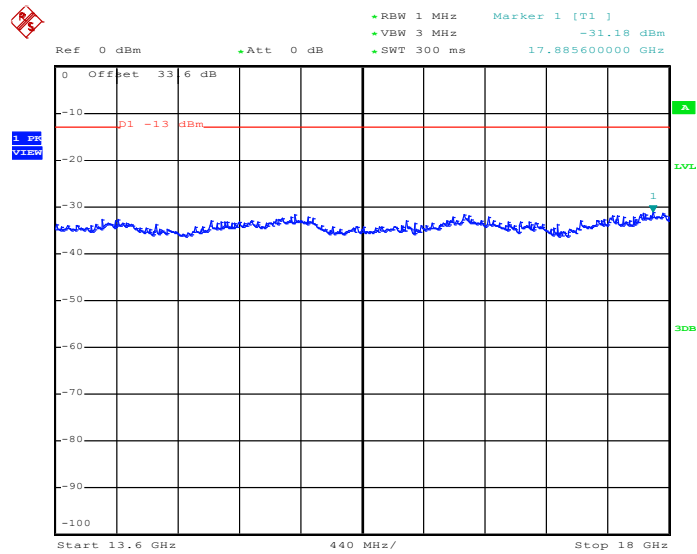


Date: 9.MAY.2014 17:16:09

|                    |                          |                    |            |
|--------------------|--------------------------|--------------------|------------|
| <b>Band :</b>      | WCDMA Band II            | <b>Channel :</b>   | CH9262     |
| <b>Test Mode :</b> | RMC 12.2Kbps Link (QPSK) | <b>Frequency :</b> | 1852.4 MHz |

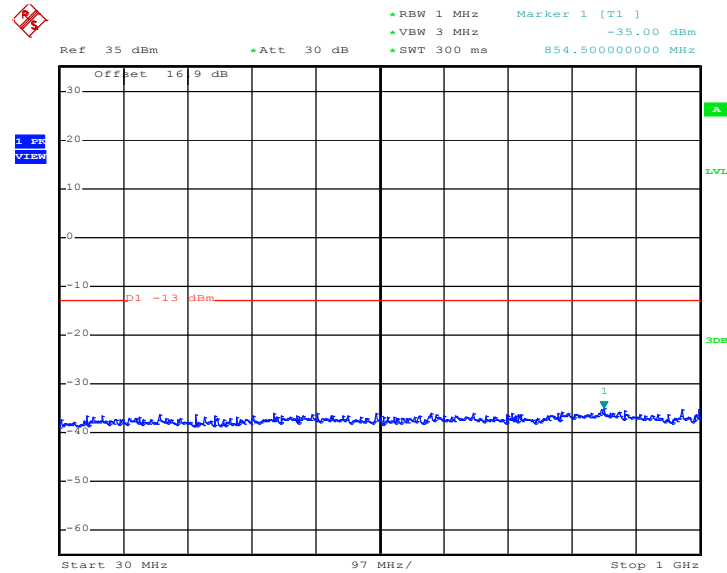
**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 9.MAY.2014 16:33:53

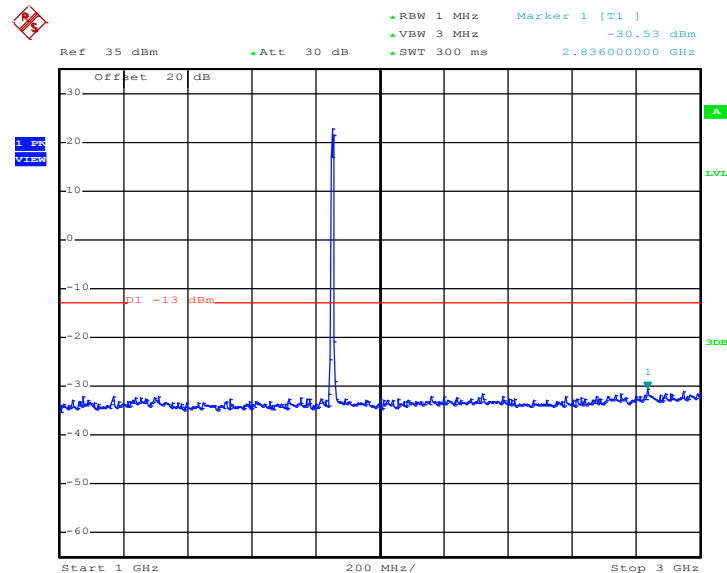**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


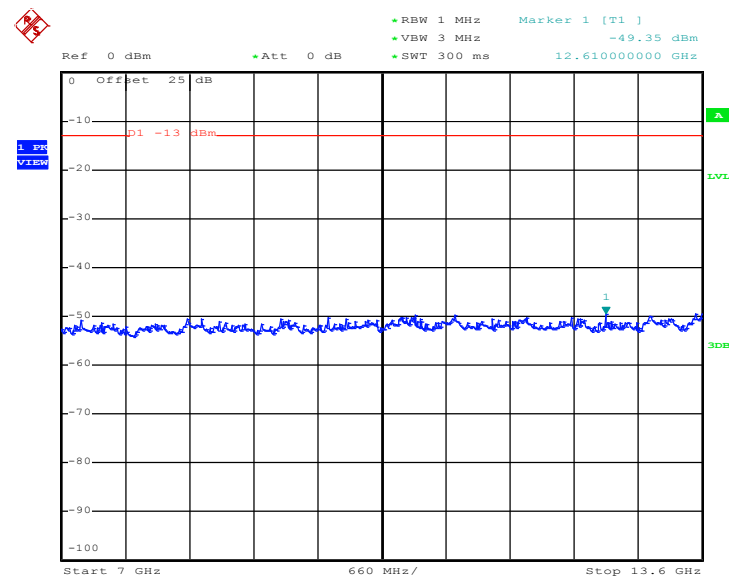
Date: 9.MAY.2014 16:34:01

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

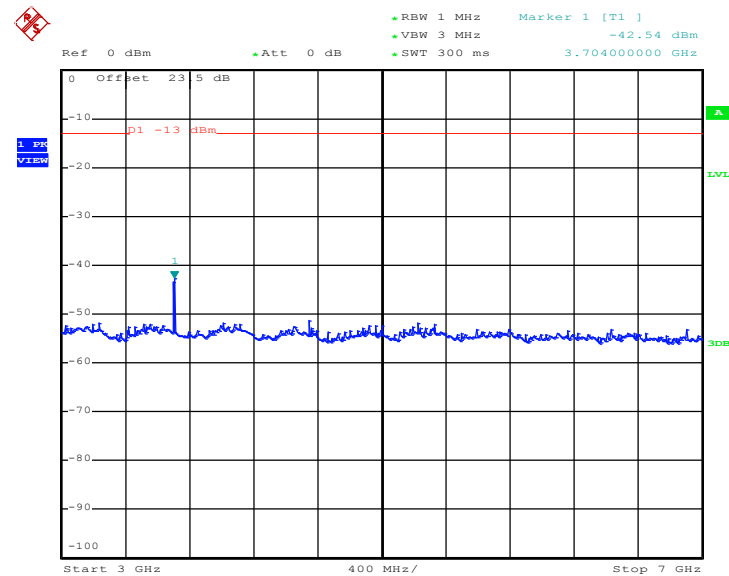

Date: 9.MAY.2014 16:34:14


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz



Date: 9.MAY.2014 16:34:23



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

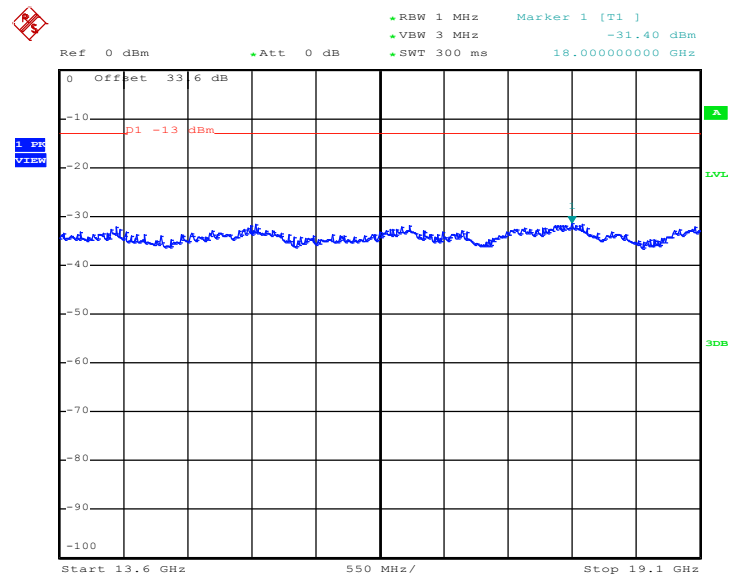


Date: 9.MAY.2014 16:34:31




|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | WCDMA Band II            | Channel :   | CH9400     |
| Test Mode : | RMC 12.2Kbps Link (QPSK) | Frequency : | 1880.0 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

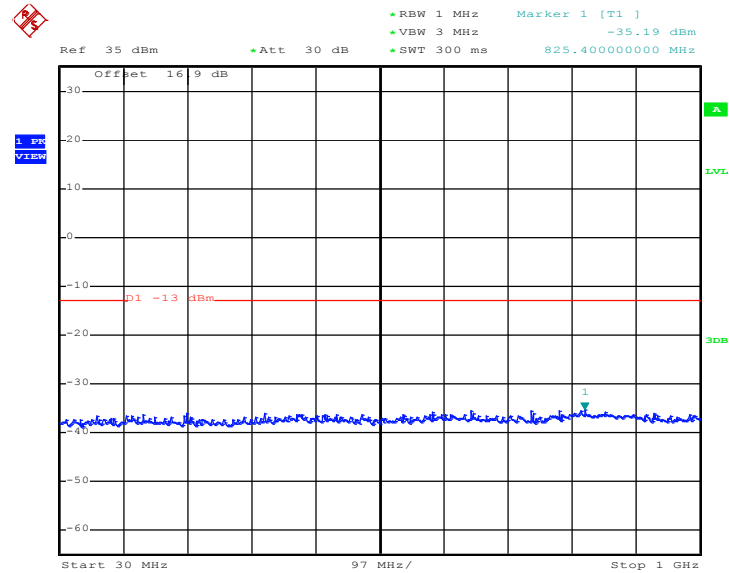


Date: 9.MAY.2014 16:30:17

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

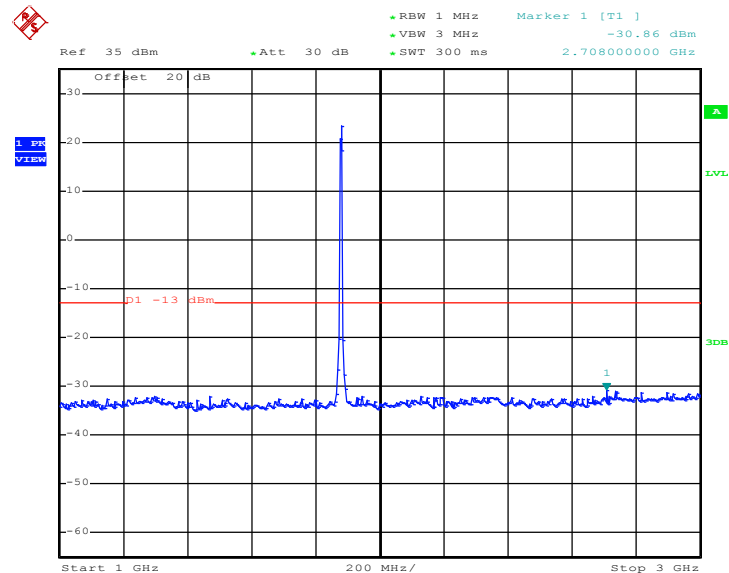


Date: 9.MAY.2014 16:30:25

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

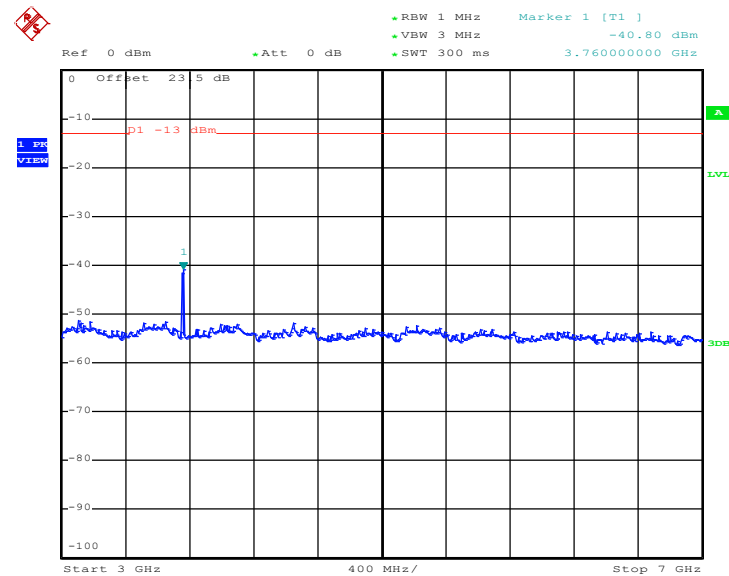


Date: 9.MAY.2014 16:30:37

### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

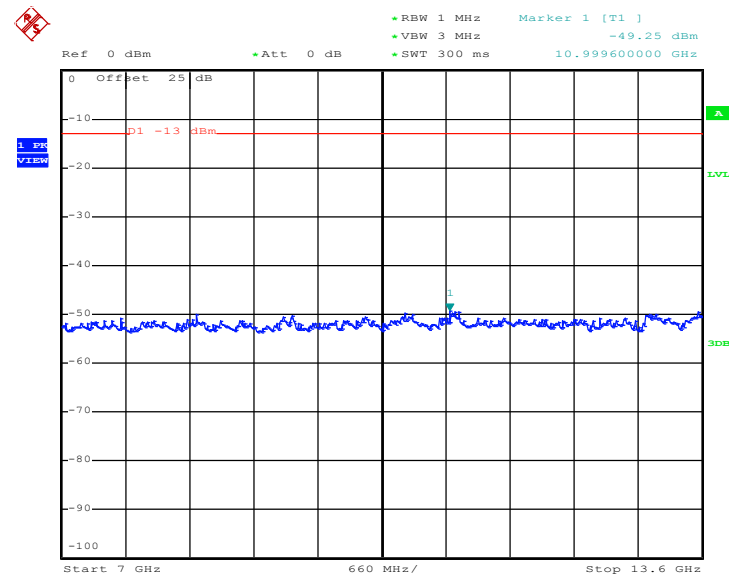


Date: 9.MAY.2014 16:30:45

### Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

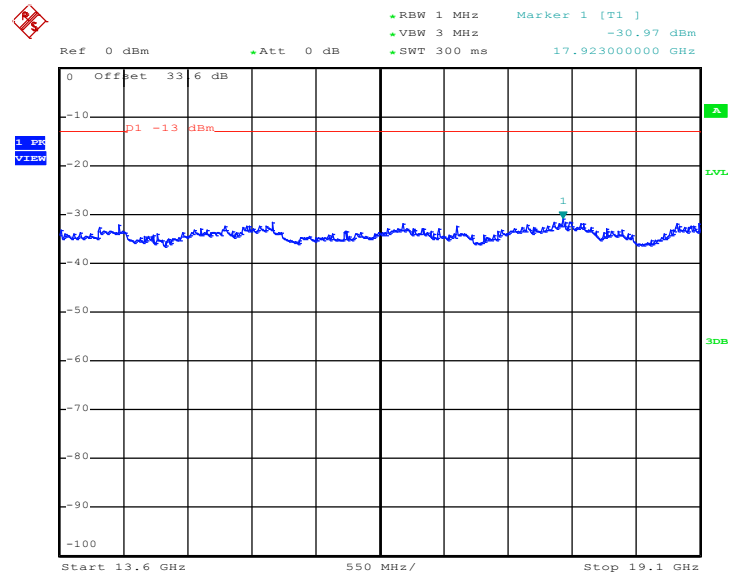


Date: 9.MAY.2014 16:30:53

|                    |                          |                    |            |
|--------------------|--------------------------|--------------------|------------|
| <b>Band :</b>      | WCDMA Band II            | <b>Channel :</b>   | CH9538     |
| <b>Test Mode :</b> | RMC 12.2Kbps Link (QPSK) | <b>Frequency :</b> | 1907.6 MHz |

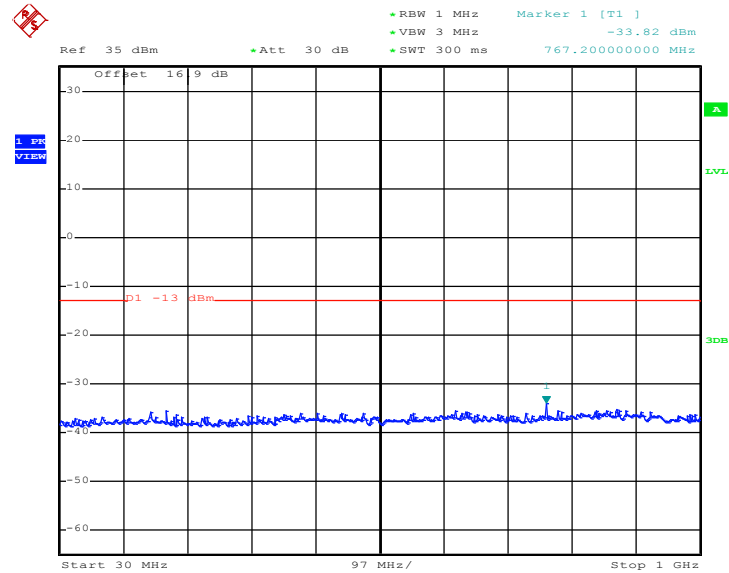
**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 9.MAY.2014 16:35:46

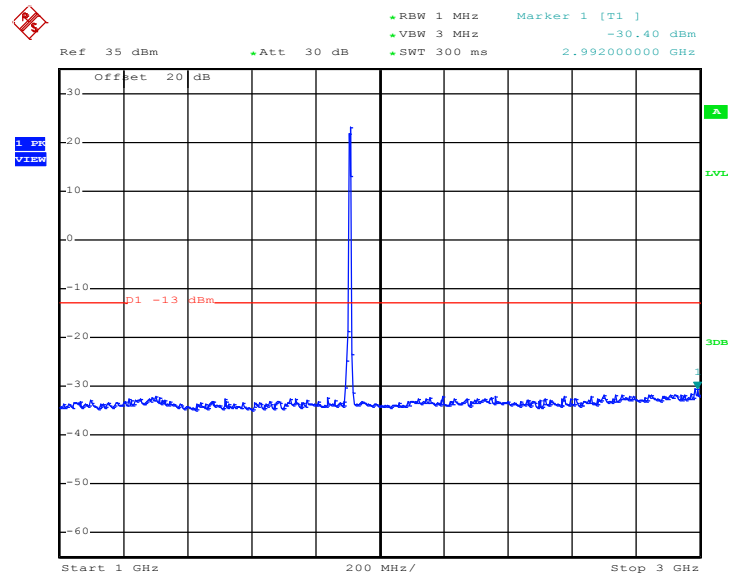**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


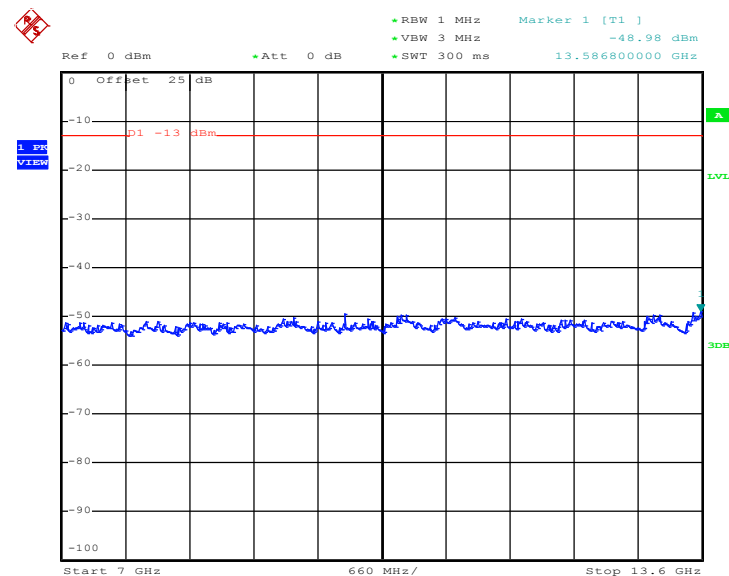
Date: 9.MAY.2014 16:35:54

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

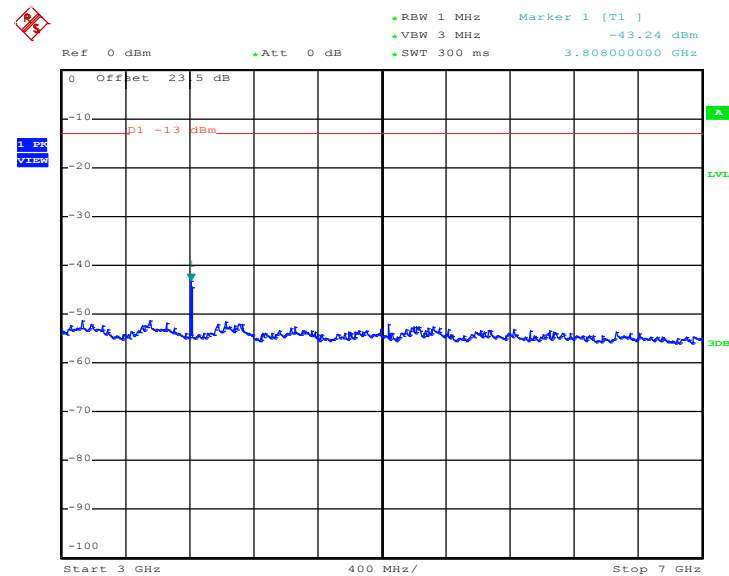

Date: 9.MAY.2014 16:36:05


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz



Date: 9.MAY.2014 16:36:13



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

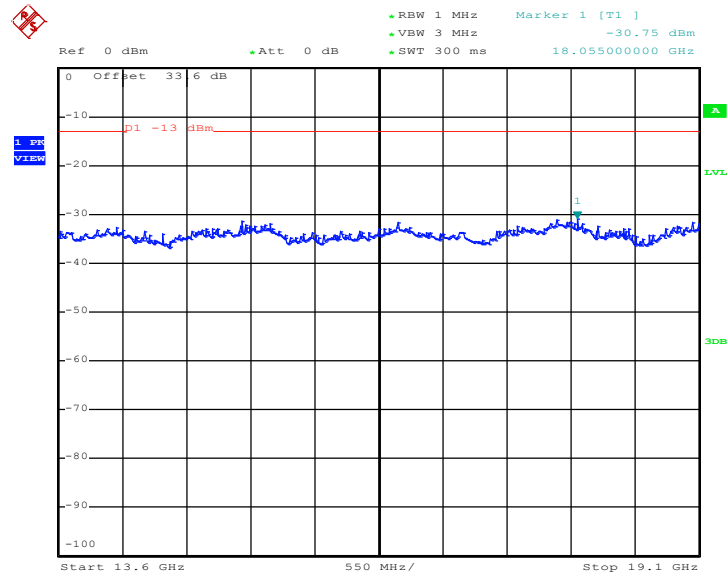

Date: 9.MAY.2014 16:36:21

## 3.7 Field Strength of Spurious Radiation Measurement

### 3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### 3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

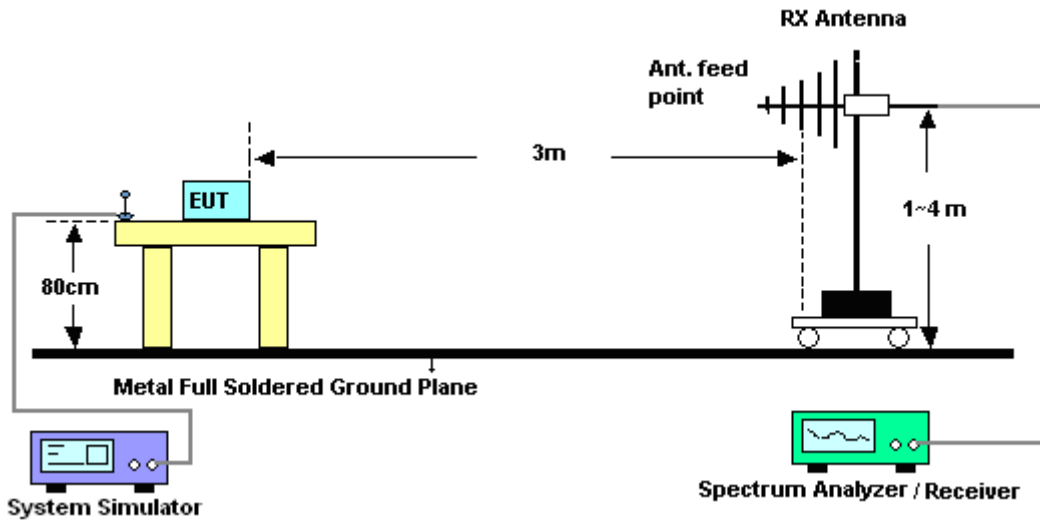

For radiated emissions above 1GHz

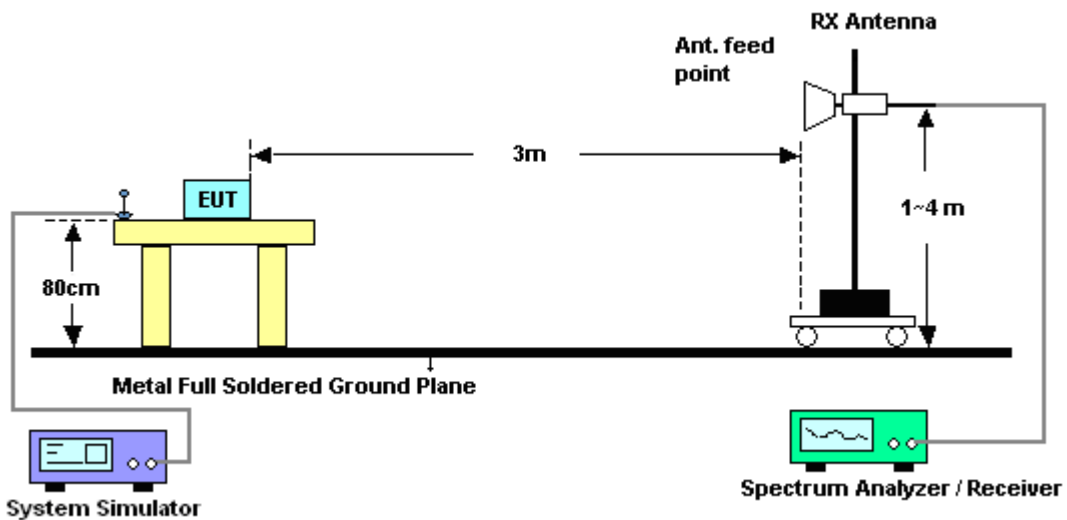

### 3.7.5 Test Result of Field Strength of Spurious Radiated

#### <Low Channel>

|                 |                                                                                  |         |                 |                    |                  |                     |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850                                                                           |         |                 |                    |                  | Temperature :       | 21~24°C         |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK)                                                         |         |                 |                    |                  | Relative Humidity : | 44~48%          |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                    |                  | Polarization :      | Horizontal      |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1648            | -52.30                                                                           | -13     | -39.30          | -61.61             | -56.3            | 1.53                | 5.53            | H            | Pass   |
| 2472            | -39.41                                                                           | -13     | -26.41          | -52.95             | -43.5            | 2.06                | 6.15            | H            | Pass   |
| 3297            | -53.65                                                                           | -13     | -40.65          | -67.92             | -59.1            | 2.48                | 7.93            | H            | Pass   |

|                 |                                                                                  |         |                 |                  |                  |                     |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|---------------------|---------------|--------------|--------|
| Band :          | GSM850                                                                           |         |                 |                  |                  | Temperature :       | 21~24°C       |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK)                                                         |         |                 |                  |                  | Relative Humidity : | 44~48%        |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                  |                  | Polarization :      | Vertical      |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                     |               |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA              | S.G.             | TX Cable            | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>(dBi) | (H/V)        |        |
| 1648            | -51.90                                                                           | -13     | -38.90          | -62.68           | -55.9            | 1.53                | 5.53          | V            | Pass   |
| 2472            | -44.01                                                                           | -13     | -31.01          | -58.06           | -48.1            | 2.06                | 6.15          | V            | Pass   |
| 3297            | -52.65                                                                           | -13     | -39.65          | -68.35           | -58.1            | 2.48                | 7.93          | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 21~24°C         |                    |                  |                |                 |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK)                                                         | Relative Humidity : | 44~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | (H/V)        |        |
| 1672            | -54.83                                                                           | -13                 | -41.83          | -63.94             | -58.7            | 1.62           | 5.49            | H            | Pass   |
| 2509            | -37.08                                                                           | -13                 | -24.08          | -50.58             | -41.2            | 2.1            | 6.22            | H            | Pass   |
| 3345            | -54.46                                                                           | -13                 | -41.46          | -68.57             | -59.5            | 3.03           | 8.07            | H            | Pass   |

|                 |                                                                                  |         |                 |                    |                  |                     |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850                                                                           |         |                 |                    |                  | Temperature :       | 21~24°C         |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK)                                                         |         |                 |                    |                  | Relative Humidity : | 44~48%          |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1672            | -51.43                                                                           | -13     | -38.43          | -62.71             | -55.3            | 1.62                | 5.49            | V            | Pass   |
| 2509            | -44.68                                                                           | -13     | -31.68          | -58.47             | -48.8            | 2.1                 | 6.22            | V            | Pass   |
| 3345            | -51.86                                                                           | -13     | -38.86          | -67.14             | -56.9            | 3.03                | 8.07            | V            | Pass   |



## &lt;High Channel&gt;

|                 |                                                                                  |                     |            |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|------------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 21~24°C    |         |         |          |            |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK)                                                         | Relative Humidity : | 44~48%     |         |         |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |            |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over       | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit      | Reading | Power   | loss     | Gain       |              |        |
|                 |                                                                                  |                     | ( dB )     | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 1696            | -57.62                                                                           | -13                 | -44.62     | -66.74  | -61.5   | 1.57     | 5.45       | H            | Pass   |
| 2544            | -31.61                                                                           | -13                 | -18.61     | -45.34  | -35.87  | 2.02     | 6.28       | H            | Pass   |
| 3395            | -53.20                                                                           | -13                 | -40.20     | -67.33  | -59.1   | 2.3      | 8.20       | H            | Pass   |

| Band :          | GSM850                                                                           |         |                 |                    |                  | Temperature :       | 21~24°C         |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Test Mode :     | GPRS class 8 Link (GMSK)                                                         |         |                 |                    |                  | Relative Humidity : | 44~48%          |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | ( H/V )      |        |
| 1696            | -55.52                                                                           | -13     | -42.52          | -66.53             | -59.4            | 1.57                | 5.45            | V            | Pass   |
| 2544            | -46.14                                                                           | -13     | -33.14          | -60.16             | -50.4            | 2.02                | 6.28            | V            | Pass   |
| 3395            | -52.30                                                                           | -13     | -39.30          | -67.94             | -58.2            | 2.3                 | 8.20            | V            | Pass   |



## &lt;Low Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 21~24°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 44~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1648            | -56.40                                                                           | -13                 | -43.40          | -65.33           | -60.4            | 1.53           | 5.53          | H            | Pass   |
| 2472            | -41.11                                                                           | -13                 | -28.11          | -54.54           | -45.2            | 2.06           | 6.15          | H            | Pass   |
| 3297            | -52.85                                                                           | -13                 | -39.85          | -66.7            | -58.3            | 2.48           | 7.93          | H            | Pass   |

| Band :          | GSM850                                                                           |         |                 |                    |                  | Temperature :       | 21~24°C         |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         |         |                 |                    |                  | Relative Humidity : | 44~48%          |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | ( H/V )      |        |
| 1648            | -54.30                                                                           | -13     | -41.30          | -65.13             | -58.3            | 1.53                | 5.53            | V            | Pass   |
| 2472            | -47.41                                                                           | -13     | -34.41          | -61.05             | -51.5            | 2.06                | 6.15            | V            | Pass   |
| 3297            | -52.65                                                                           | -13     | -39.65          | -68.09             | -58.1            | 2.48                | 7.93            | V            | Pass   |

**<Middle Channel>**

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 21~24°C         |                    |                  |                |                 |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 44~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | (H/V)        |        |
| 1672            | -57.23                                                                           | -13                 | -44.23          | -66.03             | -61.1            | 1.62           | 5.49            | H            | Pass   |
| 2509            | -39.68                                                                           | -13                 | -26.68          | -53.18             | -43.8            | 2.1            | 6.22            | H            | Pass   |
| 3345            | -53.66                                                                           | -13                 | -40.66          | -67.68             | -58.7            | 3.03           | 8.07            | H            | Pass   |

|                 |                                                                                  |                     |          |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 21~24°C  |         |         |          |            |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 44~48%   |         |         |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit    | Reading | Power   | loss     | Gain       | (H/V)        |        |
| ( dB )          | ( dB )                                                                           | ( dB )              | ( dB )   | ( dBm ) | ( dBm ) | ( dB )   | ( dBi )    |              |        |
| 1672            | -55.33                                                                           | -13                 | -42.33   | -66.46  | -59.2   | 1.62     | 5.49       | V            | Pass   |
| 2509            | -49.38                                                                           | -13                 | -36.38   | -63.01  | -53.5   | 2.1      | 6.22       | V            | Pass   |
| 3345            | -52.56                                                                           | -13                 | -39.56   | -67.84  | -57.6   | 3.03     | 8.07       | V            | Pass   |



## &lt;High Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 21~24°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 44~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1696            | -58.02                                                                           | -13                 | -45.02          | -67.13           | -61.9            | 1.57           | 5.45          | H            | Pass   |
| 2544            | -42.24                                                                           | -13                 | -29.24          | -55.89           | -46.5            | 2.02           | 6.28          | H            | Pass   |
| 3395            | -53.00                                                                           | -13                 | -40.00          | -67.32           | -58.9            | 2.3            | 8.20          | H            | Pass   |

|                 |                                                                                  |                     |          |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 21~24°C  |         |         |          |            |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 44~48%   |         |         |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit    | Reading | Power   | loss     | Gain       |              |        |
|                 |                                                                                  |                     | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 1696            | -54.42                                                                           | -13                 | -41.42   | -65.76  | -58.3   | 1.57     | 5.45       | V            | Pass   |
| 2544            | -47.94                                                                           | -13                 | -34.94   | -61.98  | -52.2   | 2.02     | 6.28       | V            | Pass   |
| 3395            | -52.30                                                                           | -13                 | -39.30   | -67.77  | -58.2   | 2.3      | 8.20       | V            | Pass   |



## &lt;Low Channel&gt;

|                 |                                                                                  |                     |            |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|------------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 21~24°C    |         |         |          |            |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK)                                                         | Relative Humidity : | 44~48%     |         |         |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |            |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over       | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit      | Reading | Power   | loss     | Gain       | (H/V)        |        |
| ( dB )          | ( dB )                                                                           | ( dB )              | ( dB )     | ( dBm ) | ( dBm ) | ( dB )   | ( dBi )    |              |        |
| 3702            | -54.61                                                                           | -13                 | -41.61     | -69.65  | -60.76  | 2.59     | 8.74       | H            | Pass   |
| 5553            | -48.99                                                                           | -13                 | -35.99     | -69.26  | -56.65  | 3.04     | 10.70      | H            | Pass   |
| 7405            | -42.68                                                                           | -13                 | -29.68     | -69.85  | -51.42  | 3.28     | 12.02      | H            | Pass   |

|                 |                                                                                  |                     |          |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 21~24°C  |         |         |          |            |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK)                                                         | Relative Humidity : | 44~48%   |         |         |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit    | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3702            | -52.96                                                                           | -13                 | -39.96   | -68.94  | -59.11  | 2.59     | 8.74       | V            | Pass   |
| 5553            | -44.63                                                                           | -13                 | -31.63   | -64.89  | -52.29  | 3.04     | 10.70      | V            | Pass   |
| 7405            | -42.12                                                                           | -13                 | -29.12   | -69.12  | -50.86  | 3.28     | 12.02      | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |         |        |         |         |                     |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|--------|---------|---------|---------------------|------------|--------------|--------|
| Band :          | GSM1900                                                                          |         |        |         |         | Temperature :       | 21~24°C    |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK)                                                         |         |        |         |         | Relative Humidity : | 44~48%     |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |        |         |         | Polarization :      | Horizontal |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |        |         |         |                     |            |              |        |
| Frequency       | ERP                                                                              | Limit   | Over   | SPA     | S.G.    | TX Cable            | TX Antenna | Polarization | Result |
|                 |                                                                                  |         | Limit  | Reading | Power   | loss                | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | ( dB ) | (dBm)   | ( dBm ) | ( dB )              | (dBi)      | (H/V)        |        |
| 3760            | -53.11                                                                           | -13     | -40.11 | -68.4   | -59.41  | 2.51                | 8.81       | H            | Pass   |
| 5636            | -48.07                                                                           | -13     | -35.07 | -68.52  | -55.78  | 2.99                | 10.70      | H            | Pass   |
| 7520            | -42.86                                                                           | -13     | -29.86 | -69.8   | -51.39  | 3.59                | 12.12      | H            | Pass   |

| Band :          | GSM1900                                                                          | Temperature :       | 21~24°C  |         |        |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|---------|--------|----------|------------|--------------|--------|
| Test Mode :     | GPRS class 8 Link (GMSK)                                                         | Relative Humidity : | 44~48%   |         |        |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Vertical |         |        |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |         |        |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over     | SPA     | S.G.   | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit    | Reading | Power  | loss     | Gain       | (H/V)        |        |
| 3760            | -51.72                                                                           | -13                 | -38.72   | -67.88  | -58.02 | 2.51     | 8.81       | V            | Pass   |
| 5636            | -43.10                                                                           | -13                 | -30.10   | -63.5   | -50.81 | 2.99     | 10.70      | V            | Pass   |
| 7520            | -40.79                                                                           | -13                 | -27.79   | -67.58  | -49.32 | 3.59     | 12.12      | V            | Pass   |



## &lt;High Channel&gt;

|                 |                                                                                  |                     |            |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|------------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 21~24°C    |         |         |          |            |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK)                                                         | Relative Humidity : | 44~48%     |         |         |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |            |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over       | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
|                 |                                                                                  |                     | Limit      | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | ( dB )     | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3817            | -51.92                                                                           | -13                 | -38.92     | -67.23  | -58.33  | 2.47     | 8.88       | H            | Pass   |
| 5726            | -47.76                                                                           | -13                 | -34.76     | -68.2   | -55.46  | 3        | 10.70      | H            | Pass   |
| 7635            | -42.12                                                                           | -13                 | -29.12     | -68.34  | -50.9   | 3.43     | 12.21      | H            | Pass   |

| Band :          | GSM1900                                                                          |         |        |         |         | Temperature :       | 21~24°C    |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|--------|---------|---------|---------------------|------------|--------------|--------|
| Test Mode :     | GPRS class 8 Link (GMSK)                                                         |         |        |         |         | Relative Humidity : | 44~48%     |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |        |         |         | Polarization :      | Vertical   |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |        |         |         |                     |            |              |        |
| Frequency       | ERP                                                                              | Limit   | Over   | SPA     | S.G.    | TX Cable            | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit  | Reading | Power   | loss                | Gain       | (H/V)        |        |
|                 |                                                                                  |         | ( dB ) | (dBm)   | ( dBm ) | ( dB )              | (dBi)      |              |        |
| 3817            | -51.31                                                                           | -13     | -38.31 | -67.81  | -57.72  | 2.47                | 8.88       | V            | Pass   |
| 5726            | -44.89                                                                           | -13     | -31.89 | -65.46  | -52.59  | 3                   | 10.70      | V            | Pass   |
| 7635            | -43.57                                                                           | -13     | -30.57 | -69.53  | -52.35  | 3.43                | 12.21      | V            | Pass   |



## &lt;Low Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 21~24°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 44~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3702            | -54.16                                                                           | -13                 | -41.16          | -69.11           | -60.31           | 2.59           | 8.74          | H            | Pass   |
| 5553            | -48.26                                                                           | -13                 | -35.26          | -68.29           | -55.92           | 3.04           | 10.70         | H            | Pass   |
| 7405            | -42.10                                                                           | -13                 | -29.10          | -69.15           | -50.84           | 3.28           | 12.02         | H            | Pass   |

|                 |                                                                                  |                     |          |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 21~24°C  |         |         |          |            |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 44~48%   |         |         |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit    | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3702            | -52.54                                                                           | -13                 | -39.54   | -68.27  | -58.69  | 2.59     | 8.74       | V            | Pass   |
| 5553            | -49.35                                                                           | -13                 | -36.35   | -69.43  | -57.01  | 3.04     | 10.70      | V            | Pass   |
| 7405            | -42.16                                                                           | -13                 | -29.16   | -69.04  | -50.9   | 3.28     | 12.02      | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 21~24°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 44~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3760            | -53.01                                                                           | -13                 | -40.01          | -68.16           | -59.31           | 2.51           | 8.81          | H            | Pass   |
| 5636            | -48.91                                                                           | -13                 | -35.91          | -69.26           | -56.62           | 2.99           | 10.70         | H            | Pass   |
| 7520            | -41.91                                                                           | -13                 | -28.91          | -69.12           | -50.44           | 3.59           | 12.12         | H            | Pass   |

|                 |                                                                                  |                     |          |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 21~24°C  |         |         |          |            |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 44~48%   |         |         |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit    | Reading | Power   | loss     | Gain       | (H/V)        |        |
| ( dB )          | ( dB )                                                                           | ( dB )              | ( dB )   | ( dBm ) | ( dBm ) | ( dB )   | ( dBi )    |              |        |
| 3760            | -52.52                                                                           | -13                 | -39.52   | -68.44  | -58.82  | 2.51     | 8.81       | V            | Pass   |
| 5636            | -48.70                                                                           | -13                 | -35.70   | -68.87  | -56.41  | 2.99     | 10.70      | V            | Pass   |
| 7520            | -42.97                                                                           | -13                 | -29.97   | -69.68  | -51.5   | 3.59     | 12.12      | V            | Pass   |

**<High Channel>**

|                 |                                                                                  |                     |            |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|------------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 21~24°C    |         |         |          |            |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 44~48%     |         |         |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |            |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over       | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
|                 |                                                                                  |                     | Limit      | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | ( dB )     | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3817            | -52.15                                                                           | -13                 | -39.15     | -67.55  | -58.56  | 2.47     | 8.88       | H            | Pass   |
| 5726            | -48.12                                                                           | -13                 | -35.12     | -68.6   | -55.82  | 3        | 10.70      | H            | Pass   |
| 7635            | -43.28                                                                           | -13                 | -30.28     | -69.32  | -52.06  | 3.43     | 12.21      | H            | Pass   |

|                 |                                                                                  |         |                 |                  |                  |                     |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|---------------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          |         |                 |                  |                  | Temperature :       | 21~24°C       |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         |         |                 |                  |                  | Relative Humidity : | 44~48%        |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                  |                  | Polarization :      | Vertical      |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                     |               |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA              | S.G.             | TX Cable            | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>(dBi) | (H/V)        |        |
| 3817            | -51.71                                                                           | -13     | -38.71          | -67.78           | -58.12           | 2.47                | 8.88          | V            | Pass   |
| 5726            | -49.10                                                                           | -13     | -36.10          | -69.39           | -56.8            | 3                   | 10.70         | V            | Pass   |
| 7635            | -43.23                                                                           | -13     | -30.23          | -69.31           | -52.01           | 3.43                | 12.21         | V            | Pass   |



## &lt;Low Channel&gt;

|                 |                                                                                  |         |                 |                  |                     |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|---------------------|----------------|---------------|--------------|--------|
| Band :          | WCDMA Band V                                                                     |         |                 |                  | Temperature :       | 21~24°C        |               |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                  | Relative Humidity : | 44~48%         |               |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                  | Polarization :      | Horizontal     |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                     |                |               |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA              | S.G.                | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm )    | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1653            | -52.00                                                                           | -13     | -39.00          | -60.89           | -56                 | 1.53           | 5.53          | H            | Pass   |
| 2479            | -53.01                                                                           | -13     | -40.01          | -66.25           | -57.1               | 2.06           | 6.15          | H            | Pass   |
| 3305            | -53.65                                                                           | -13     | -40.65          | -67.81           | -59.1               | 2.48           | 7.93          | H            | Pass   |

|                 |                                                                                  |         |                 |                  |                  |                     |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|---------------------|---------------|--------------|--------|
| Band :          | WCDMA Band V                                                                     |         |                 |                  |                  | Temperature :       | 21~24°C       |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                  |                  | Relative Humidity : | 44~48%        |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                  |                  | Polarization :      | Vertical      |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                     |               |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA              | S.G.             | TX Cable            | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>(dBi) | (H/V)        |        |
| 1653            | -53.10                                                                           | -13     | -40.10          | -64.35           | -57.1            | 1.53                | 5.53          | V            | Pass   |
| 2479            | -52.81                                                                           | -13     | -39.81          | -66.39           | -56.9            | 2.06                | 6.15          | V            | Pass   |
| 3305            | -52.95                                                                           | -13     | -39.95          | -68.42           | -58.4            | 2.48                | 7.93          | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |                     |            |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|------------|---------|---------|----------|------------|--------------|--------|
| Band :          | WCDMA Band V                                                                     | Temperature :       | 21~24°C    |         |         |          |            |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         | Relative Humidity : | 44~48%     |         |         |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |            |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over       | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
|                 |                                                                                  |                     | Limit      | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | ( dB )     | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 1672            | -54.13                                                                           | -13                 | -41.13     | -63.01  | -58     | 1.62     | 5.49       | H            | Pass   |
| 2509            | -53.68                                                                           | -13                 | -40.68     | -66.77  | -57.8   | 2.1      | 6.22       | H            | Pass   |
| 3345            | -53.66                                                                           | -13                 | -40.66     | -67.8   | -58.7   | 3.03     | 8.07       | H            | Pass   |

|                 |                                                                                  |         |                 |                    |                     |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|---------------------|----------------|-----------------|--------------|--------|
| Band :          | WCDMA Band V                                                                     |         |                 |                    | Temperature :       | 21~24°C        |                 |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                    | Relative Humidity : | 44~48%         |                 |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                    | Polarization :      | Vertical       |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                     |                |                 |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.                | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm )    | loss<br>( dB ) | Gain<br>( dBi ) | ( H/V )      |        |
| 1672            | -54.23                                                                           | -13     | -41.23          | -65.6              | -58.1               | 1.62           | 5.49            | V            | Pass   |
| 2509            | -53.28                                                                           | -13     | -40.28          | -67.32             | -57.4               | 2.1            | 6.22            | V            | Pass   |
| 3345            | -51.76                                                                           | -13     | -38.76          | -67.21             | -56.8               | 3.03           | 8.07            | V            | Pass   |



## &lt;High Channel&gt;

| Band :          | WCDMA Band V                                                                     | Temperature :       | 21~24°C         |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         | Relative Humidity : | 44~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1696            | -53.32                                                                           | -13                 | -40.32          | -62.15           | -57.2            | 1.57           | 5.45          | H            | Pass   |
| 2540            | -54.24                                                                           | -13                 | -41.24          | -67.42           | -58.5            | 2.02           | 6.28          | H            | Pass   |
| 3386            | -53.40                                                                           | -13                 | -40.40          | -67.55           | -59.3            | 2.3            | 8.20          | H            | Pass   |

| Band :          | WCDMA Band V                                                                     |         |                 |                    |                  | Temperature :       | 21~24°C         |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                    |                  | Relative Humidity : | 44~48%          |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | ( H/V )      |        |
| 1696            | -55.02                                                                           | -13     | -42.02          | -66.39             | -58.9            | 1.57                | 5.45            | V            | Pass   |
| 2540            | -54.14                                                                           | -13     | -41.14          | -67.89             | -58.4            | 2.02                | 6.28            | V            | Pass   |
| 3386            | -52.50                                                                           | -13     | -39.50          | -67.65             | -58.4            | 2.3                 | 8.20            | V            | Pass   |



## &lt;Low Channel&gt;

|                 |                                                                                  |         |                 |                  |                  |                     |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|---------------------|---------------|--------------|--------|
| Band :          | WCDMA Band IV                                                                    |         |                 |                  |                  | Temperature :       | 21~24°C       |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                  |                  | Relative Humidity : | 44~48%        |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                  |                  | Polarization :      | Horizontal    |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                     |               |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA              | S.G.             | TX Cable            | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>(dBi) | (H/V)        |        |
| 3424            | -53.27                                                                           | -13     | -40.27          | -67.44           | -57.1            | 4.48                | 8.31          | H            | Pass   |
| 5137            | -50.26                                                                           | -13     | -37.26          | -68.87           | -54.9            | 5.332               | 9.98          | H            | Pass   |
| 6850            | -43.26                                                                           | -13     | -30.26          | -69.06           | -48.5            | 6.1                 | 11.34         | H            | Pass   |

|                 |                                                                                  |         |                 |                    |                  |                     |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | WCDMA Band IV                                                                    |         |                 |                    |                  | Temperature :       | 21~24°C         |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                    |                  | Relative Humidity : | 44~48%          |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 3424            | -51.47                                                                           | -13     | -38.47          | -67.1              | -55.3            | 4.48                | 8.31            | V            | Pass   |
| 5137            | -50.56                                                                           | -13     | -37.56          | -69.29             | -55.2            | 5.332               | 9.98            | V            | Pass   |
| 6850            | -43.46                                                                           | -13     | -30.46          | -68.48             | -48.7            | 6.1                 | 11.34           | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |         |                 |                  |                  |                     |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|---------------------|---------------|--------------|--------|
| Band :          | WCDMA Band IV                                                                    |         |                 |                  |                  | Temperature :       | 21~24°C       |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                  |                  | Relative Humidity : | 44~48%        |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                  |                  | Polarization :      | Horizontal    |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                     |               |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA              | S.G.             | TX Cable            | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>(dBi) | (H/V)        |        |
| 3465            | -52.67                                                                           | -13     | -39.67          | -67.2            | -56.5            | 4.48                | 8.31          | H            | Pass   |
| 5197            | -49.86                                                                           | -13     | -36.86          | -68.75           | -54.5            | 5.332               | 9.98          | H            | Pass   |
| 6930            | -42.86                                                                           | -13     | -29.86          | -68.99           | -48.1            | 6.1                 | 11.34         | H            | Pass   |

|                 |                                                                                  |         |                 |                    |                  |                     |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | WCDMA Band IV                                                                    |         |                 |                    |                  | Temperature :       | 21~24°C         |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                    |                  | Relative Humidity : | 44~48%          |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 3465            | -51.27                                                                           | -13     | -38.27          | -67.1              | -55.1            | 4.48                | 8.31            | V            | Pass   |
| 5197            | -50.06                                                                           | -13     | -37.06          | -68.92             | -54.7            | 5.332               | 9.98            | V            | Pass   |
| 6930            | -43.46                                                                           | -13     | -30.46          | -68.55             | -48.7            | 6.1                 | 11.34           | V            | Pass   |



## &lt;High Channel&gt;

|                 |                                                                                  |         |                 |                  |                  |                     |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|---------------------|---------------|--------------|--------|
| Band :          | WCDMA Band IV                                                                    |         |                 |                  |                  | Temperature :       | 21~24°C       |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                  |                  | Relative Humidity : | 44~48%        |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                  |                  | Polarization :      | Horizontal    |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                     |               |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA              | S.G.             | TX Cable            | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>(dBi) | (H/V)        |        |
| 3505            | -51.03                                                                           | -13     | -38.03          | -65.62           | -55.3            | 4.16                | 8.43          | H            | Pass   |
| 5257            | -50.14                                                                           | -13     | -37.14          | -69.35           | -55.1            | 5.13                | 10.09         | H            | Pass   |
| 7011            | -43.02                                                                           | -13     | -30.02          | -69.71           | -48.3            | 6.15                | 11.43         | H            | Pass   |

|                 |                                                                                  |         |                 |                    |                  |                     |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | WCDMA Band IV                                                                    |         |                 |                    |                  | Temperature :       | 21~24°C         |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                    |                  | Relative Humidity : | 44~48%          |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 3505            | -51.83                                                                           | -13     | -38.83          | -67.47             | -56.1            | 4.16                | 8.43            | V            | Pass   |
| 5257            | -50.54                                                                           | -13     | -37.54          | -69.04             | -55.5            | 5.13                | 10.09           | V            | Pass   |
| 7011            | -44.32                                                                           | -13     | -31.32          | -69.86             | -49.6            | 6.15                | 11.43           | V            | Pass   |

**<Low Channel>**

|                 |                                                                                  |         |                 |                  |                  |                     |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|---------------------|---------------|--------------|--------|
| Band :          | WCDMA Band II                                                                    |         |                 |                  |                  | Temperature :       | 21~24°C       |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                  |                  | Relative Humidity : | 44~48%        |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                  |                  | Polarization :      | Horizontal    |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                     |               |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA              | S.G.             | TX Cable            | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>(dBi) | (H/V)        |        |
| 3702            | -54.08                                                                           | -13     | -41.08          | -68.9            | -60.23           | 2.59                | 8.74          | H            | Pass   |
| 5553            | -48.85                                                                           | -13     | -35.85          | -68.74           | -56.51           | 3.04                | 10.70         | H            | Pass   |
| 7405            | -41.98                                                                           | -13     | -28.98          | -69.03           | -50.72           | 3.28                | 12.02         | H            | Pass   |

|                 |                                                                                  |         |                 |                    |                  |                     |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | WCDMA Band II                                                                    |         |                 |                    |                  | Temperature :       | 21~24°C         |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                    |                  | Relative Humidity : | 44~48%          |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 3702            | -52.76                                                                           | -13     | -39.76          | -68.6              | -58.91           | 2.59                | 8.74            | V            | Pass   |
| 5553            | -48.98                                                                           | -13     | -35.98          | -68.83             | -56.64           | 3.04                | 10.70           | V            | Pass   |
| 7405            | -42.81                                                                           | -13     | -29.81          | -69.53             | -51.55           | 3.28                | 12.02           | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |                     |            |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|------------|---------|---------|----------|------------|--------------|--------|
| Band :          | WCDMA Band II                                                                    | Temperature :       | 21~24°C    |         |         |          |            |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         | Relative Humidity : | 44~48%     |         |         |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Horizontal |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |            |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over       | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
|                 |                                                                                  |                     | Limit      | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | ( dB )     | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3760            | -51.62                                                                           | -13                 | -38.62     | -66.44  | -57.92  | 2.51     | 8.81       | H            | Pass   |
| 5636            | -48.83                                                                           | -13                 | -35.83     | -69.34  | -56.54  | 2.99     | 10.70      | H            | Pass   |
| 7520            | -42.89                                                                           | -13                 | -29.89     | -69.68  | -51.42  | 3.59     | 12.12      | H            | Pass   |

|                 |                                                                                  |                     |          |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | WCDMA Band II                                                                    | Temperature :       | 21~24°C  |         |         |          |            |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         | Relative Humidity : | 44~48%   |         |         |          |            |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit    | Reading | Power   | loss     | Gain       |              |        |
|                 |                                                                                  |                     | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3760            | -50.56                                                                           | -13                 | -37.56   | -66.56  | -56.86  | 2.51     | 8.81       | V            | Pass   |
| 5636            | -49.00                                                                           | -13                 | -36.00   | -69.32  | -56.71  | 2.99     | 10.70      | V            | Pass   |
| 7520            | -42.79                                                                           | -13                 | -29.79   | -69.59  | -51.32  | 3.59     | 12.12      | V            | Pass   |



## &lt;High Channel&gt;

|                 |                                                                                  |         |                 |                  |                  |                     |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|---------------------|---------------|--------------|--------|
| Band :          | WCDMA Band II                                                                    |         |                 |                  |                  | Temperature :       | 21~24°C       |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                  |                  | Relative Humidity : | 44~48%        |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                  |                  | Polarization :      | Horizontal    |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                     |               |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA              | S.G.             | TX Cable            | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>(dBi) | (H/V)        |        |
| 3817            | -51.37                                                                           | -13     | -38.37          | -66.91           | -57.78           | 2.47                | 8.88          | H            | Pass   |
| 5726            | -48.24                                                                           | -13     | -35.24          | -68.72           | -55.94           | 3                   | 10.70         | H            | Pass   |
| 7635            | -43.46                                                                           | -13     | -30.46          | -69.41           | -52.24           | 3.43                | 12.21         | H            | Pass   |

|                 |                                                                                  |         |                 |                    |                  |                     |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | WCDMA Band II                                                                    |         |                 |                    |                  | Temperature :       | 21~24°C         |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                         |         |                 |                    |                  | Relative Humidity : | 44~48%          |              |        |
| Test Engineer : | Kai Wang, Stan Hsieh, and Ken Wu                                                 |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 3817            | -50.05                                                                           | -13     | -37.05          | -66                | -56.46           | 2.47                | 8.88            | V            | Pass   |
| 5726            | -47.86                                                                           | -13     | -34.86          | -68.31             | -55.56           | 3                   | 10.70           | V            | Pass   |
| 7635            | -43.66                                                                           | -13     | -30.66          | -69.47             | -52.44           | 3.43                | 12.21           | V            | Pass   |

### 3.8 Frequency Stability Measurement

#### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 3.8.5 Test Setup

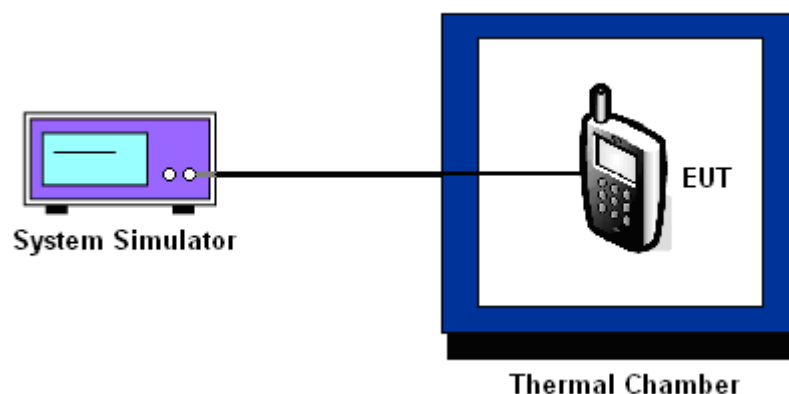

### 3.8.6 Test Result of Temperature Variation

|                      |         |                    |           |
|----------------------|---------|--------------------|-----------|
| <b>Band :</b>        | GSM 850 | <b>Channel :</b>   | 189       |
| <b>Limit (ppm) :</b> | 2.5     | <b>Frequency :</b> | 836.4 MHz |

| Temperature<br>(°C) | GPRS class 8    | EDGE class 8    | Result |
|---------------------|-----------------|-----------------|--------|
|                     | Deviation (ppm) | Deviation (ppm) |        |
| 50                  | 0.0084          | 0.0096          | PASS   |
| 40                  | 0.0048          | 0.0060          |        |
| 30                  | 0.0024          | 0.0048          |        |
| 20(Ref.)            | 0.0000          | 0.0000          |        |
| 10                  | 0.0012          | 0.0024          |        |
| 0                   | 0.0012          | 0.0048          |        |
| -10                 | 0.0036          | 0.0012          |        |
| -20                 | 0.0060          | 0.0036          |        |
| -30                 | 0.0048          | 0.0060          |        |

|                      |          |                    |            |
|----------------------|----------|--------------------|------------|
| <b>Band :</b>        | GSM 1900 | <b>Channel :</b>   | 661        |
| <b>Limit (ppm) :</b> | 2.5      | <b>Frequency :</b> | 1880.0 MHz |

| Temperature<br>(°C) | GPRS class 8    | EDGE class 8    | Result |
|---------------------|-----------------|-----------------|--------|
|                     | Deviation (ppm) | Deviation (ppm) |        |
| 50                  | 0.0074          | 0.0064          | PASS   |
| 40                  | 0.0053          | 0.0032          |        |
| 30                  | 0.0027          | 0.0037          |        |
| 20(Ref.)            | 0.0000          | 0.0000          |        |
| 10                  | 0.0011          | 0.0021          |        |
| 0                   | 0.0027          | 0.0011          |        |
| -10                 | 0.0016          | 0.0005          |        |
| -20                 | 0.0032          | 0.0021          |        |
| -30                 | 0.0048          | 0.0043          |        |

|                      |              |                    |           |
|----------------------|--------------|--------------------|-----------|
| <b>Band :</b>        | WCDMA Band V | <b>Channel :</b>   | 4182      |
| <b>Limit (ppm) :</b> | 2.5          | <b>Frequency :</b> | 836.4 MHz |

| Temperature<br>(°C) | RMC 12.2Kbps    | Result |
|---------------------|-----------------|--------|
|                     | Deviation (ppm) |        |
| 50                  | 0.0084          | PASS   |
| 40                  | 0.0048          |        |
| 30                  | 0.0108          |        |
| 20(Ref.)            | 0.0000          |        |
| 10                  | 0.0096          |        |
| 0                   | 0.0120          |        |
| -10                 | 0.0036          |        |
| -20                 | 0.0024          |        |
| -30                 | 0.0060          |        |

|                      |               |                    |            |
|----------------------|---------------|--------------------|------------|
| <b>Band :</b>        | WCDMA Band IV | <b>Channel :</b>   | 1413       |
| <b>Limit (ppm) :</b> | 2.5           | <b>Frequency :</b> | 1732.6 MHz |

| Temperature (°C) | RMC 12.2Kbps    | Result |
|------------------|-----------------|--------|
|                  | Deviation (ppm) |        |
| 50               | 0.0040          | PASS   |
| 40               | 0.0029          |        |
| 30               | 0.0012          |        |
| 20(Ref.)         | 0.0000          |        |
| 10               | 0.0017          |        |
| 0                | 0.0006          |        |
| -10              | 0.0029          |        |
| -20              | 0.0040          |        |
| -30              | 0.0035          |        |

|                      |               |                    |            |
|----------------------|---------------|--------------------|------------|
| <b>Band :</b>        | WCDMA Band II | <b>Channel :</b>   | 9400       |
| <b>Limit (ppm) :</b> | 2.5           | <b>Frequency :</b> | 1880.0 MHz |

| Temperature (°C) | RMC 12.2Kbps    | Result |
|------------------|-----------------|--------|
|                  | Deviation (ppm) |        |
| 50               | 0.0032          | PASS   |
| 40               | 0.0016          |        |
| 30               | 0.0069          |        |
| 20(Ref.)         | 0.0000          |        |
| 10               | 0.0074          |        |
| 0                | 0.0021          |        |
| -10              | 0.0016          |        |
| -20              | 0.0117          |        |
| -30              | 0.0106          |        |

**3.8.7 Test Result of Voltage Variation**

| Band & Channel          | Mode            | Voltage (Volt) | Deviation (ppm) | Limit (ppm) | Result |
|-------------------------|-----------------|----------------|-----------------|-------------|--------|
| GSM 850<br>CH189        | GPRS<br>class 8 | 4.10           | 0.0012          | 2.5         | PASS   |
|                         |                 | 3.70           | 0.0036          |             |        |
|                         |                 | BEP            | 0.0072          |             |        |
|                         | EDGE<br>class 8 | 4.10           | 0.0048          |             |        |
|                         |                 | 3.70           | 0.0036          |             |        |
|                         |                 | BEP            | 0.0060          |             |        |
| GSM 1900<br>CH661       | GPRS<br>class 8 | 4.10           | 0.0016          |             |        |
|                         |                 | 3.70           | 0.0000          |             |        |
|                         |                 | BEP            | 0.0032          |             |        |
|                         | EDGE<br>class 8 | 4.10           | 0.0000          |             |        |
|                         |                 | 3.70           | 0.0053          |             |        |
|                         |                 | BEP            | 0.0027          |             |        |
| WCDMA Band V<br>CH4182  | RMC<br>12.2Kbps | 4.10           | 0.0108          |             |        |
|                         |                 | 3.70           | 0.0120          |             |        |
|                         |                 | BEP            | 0.0012          |             |        |
| WCDMA Band IV<br>CH1413 | RMC<br>12.2Kbps | 4.10           | 0.0012          |             |        |
|                         |                 | 3.70           | 0.0029          |             |        |
|                         |                 | BEP            | 0.0023          |             |        |
| WCDMA Band II<br>CH9400 | RMC<br>12.2Kbps | 4.10           | 0.0080          |             |        |
|                         |                 | 3.70           | 0.0005          |             |        |
|                         |                 | BEP            | 0.0011          |             |        |

**Note:**

1. Normal Voltage = 3.70V.
2. Battery End Point (BEP) = 3.50V.



## 4 List of Measuring Equipment

| Instrument                | Manufacturer                | Model No.                               | Serial No.     | Characteristics    | Calibration Date | Test Date                       | Due Date      | Remark                |
|---------------------------|-----------------------------|-----------------------------------------|----------------|--------------------|------------------|---------------------------------|---------------|-----------------------|
| System Simulator          | Rohde & Schwarz             | CMU200                                  | 117995         | N/A                | Aug. 01, 2013    | May 09, 2014                    | Jul. 31, 2014 | Conducted (TH02-HY)   |
| Spectrum Analyzer         | Rohde & Schwarz             | FSP40                                   | 100055         | 9kHz~40GHz         | Jun. 07, 2013    | May 09, 2014                    | Jun. 06, 2014 | Conducted (TH02-HY)   |
| Thermal Chamber           | Ten Billion                 | TTH-D3SP                                | TBN-9307 01    | N/A                | Jul. 19, 2013    | May 09, 2014                    | Jul. 18, 2014 | Conducted (TH02-HY)   |
| Hygrometer                | Testo                       | 608-H2                                  | 41410069       | N/A                | Jul. 18, 2013    | May 09, 2014                    | Jul. 17, 2014 | Conducted (TH02-HY)   |
| Filter                    | WAINWRIGHT                  | whkx2..0/18g                            | N/A            | 2GHighPass Filter  | Nov. 28, 2013    | May 09, 2014                    | Nov. 27, 2014 | Conducted (TH02-HY)   |
| RF cable                  | WOKEN                       | SMA(M)-SMA (M) for SS405 Cable Assembly | S05-13070 3-32 | N/A                | Jul. 09, 2013    | May 09, 2014                    | Jul. 08, 2014 | Conducted (TH02-HY)   |
| Spectrum Analyzer         | Rohde & Schwarz             | FSV30                                   | 101749         | 10Hz ~ 30GHz       | Feb. 10, 2014    | Jun. 18, 2014~<br>Jun. 20, 2014 | Feb. 09, 2015 | Radiation (03CH07-HY) |
| Bilog Antenna             | Schaffner                   | CBL6111C                                | 2726           | 30MHz ~ 1GHz       | Oct. 10, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Oct. 09, 2014 | Radiation (03CH07-HY) |
| Double Ridge Horn Antenna | ESCO                        | 3117                                    | 75962          | 1GHz~18GHz         | Aug. 22, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Aug. 21, 2014 | Radiation (03CH07-HY) |
| SHF-EHF Horn Antenna      | SCHWARZBECK                 | BBHA 9170                               | BBHA9170 251   | 15GHz- 40GHz       | Oct. 03, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Oct. 02, 2014 | Radiation (03CH07-HY) |
| Preamplifier              | COM-POWER                   | PA-103A                                 | 161241         | 10 MHz ~ 1GHz      | Mar. 17, 2014    | Jun. 18, 2014~<br>Jun. 20, 2014 | Mar. 16, 2015 | Radiation (03CH07-HY) |
| Preamplifier              | Agilent                     | 8449B                                   | 3008A023 62    | 1GHz~26.5GHz       | Nov. 29, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Nov. 28, 2014 | Radiation (03CH07-HY) |
| Filter                    | Microwave Circuits          | H1G013G1                                | SN477215       | 1GHz HPF           | Nov. 28, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Nov. 27, 2014 | Radiation (03CH07-HY) |
| Filter                    | Wainwright Instruments GmbH | WHKX1.5G/1 5G-10SS                      | SN32           | 1.5GHz HPF         | Nov. 28, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Nov. 27, 2014 | Radiation (03CH07-HY) |
| Filter                    | Wainwright Instruments GmbH | WLKS1200-8 SS                           | SN3            | 1.2GHz LPF         | Nov. 28, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Nov. 27, 2014 | Radiation (03CH07-HY) |
| Filter                    | Wainwright Instruments GmbH | WHKX2.0/18 G-10SS                       | SN12           | 2GHz HPF           | Nov. 28, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Nov. 27, 2014 | Radiation (03CH07-HY) |
| Filter                    | Microwave Circuits          | H3G018G1                                | SN477220       | 3GHz HPF           | Nov. 28, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Nov. 27, 2014 | Radiation (03CH07-HY) |
| Notch Filter              | Wainwright                  | WRCT 1800/2000-20 /40-10ssk             | SN1            | GSM 1900           | Nov. 28, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Nov. 27, 2014 | Radiation (03CH07-HY) |
| Notch Filter              | Wainwright                  | WRCG 824/849/814/8 59-40 8SS            | SN35           | GSM850 / WCDMA 850 | Nov. 28, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Nov. 27, 2014 | Radiation (03CH07-HY) |



| Instrument    | Manufacturer         | Model No.        | Serial No.           | Characteristics | Calibration Date | Test Date                       | Due Date      | Remark                   |
|---------------|----------------------|------------------|----------------------|-----------------|------------------|---------------------------------|---------------|--------------------------|
| HF RF Cable   | HUBER SUHNER         | SUCOFLEX 104     | 38411/6              | 1GHz ~ 18GHz    | Nov. 28, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Nov. 27, 2014 | Radiation<br>(03CH07-HY) |
| LF RF Cable   | Warison+HUBER SUHNER | WCBA-WC04 NM.NM2 | N/A                  | 30MHz ~ 1GHz    | Nov. 28, 2013    | Jun. 18, 2014~<br>Jun. 20, 2014 | Nov. 27, 2014 | Radiation<br>(03CH07-HY) |
| Turn Table    | ChainTek             | ChainTek 3000    | N/A                  | 0 ~ 360 degree  | N/A              | Jun. 18, 2014~<br>Jun. 20, 2014 | N/A           | Radiation<br>(03CH07-HY) |
| Antenna Mast  | ChainTek             | M-400-0          | 114/80006 04/L       | N/A             | N/A              | Jun. 18, 2014~<br>Jun. 20, 2014 | N/A           | Radiation<br>(03CH07-HY) |
| Test Software | Audix                | E3               | Version 6.2009-08-24 | N/A             | N/A              | Jun. 18, 2014~<br>Jun. 20, 2014 | N/A           | Radiation<br>(03CH07-HY) |
| Hygrometer    | Testo                | 608-H1           | 34897197             | N/A             | May 06, 2014     | Jun. 18, 2014~<br>Jun. 20, 2014 | May 05, 2015  | Radiation<br>(03CH07-HY) |

**Note:** Test equipment calibration is traceable to the procedure of ISO17025.



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.50 |
|-------------------------------------------------------------------------|------|