


	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808-SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

APPENDIX A: LIQUID DEPTH


SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

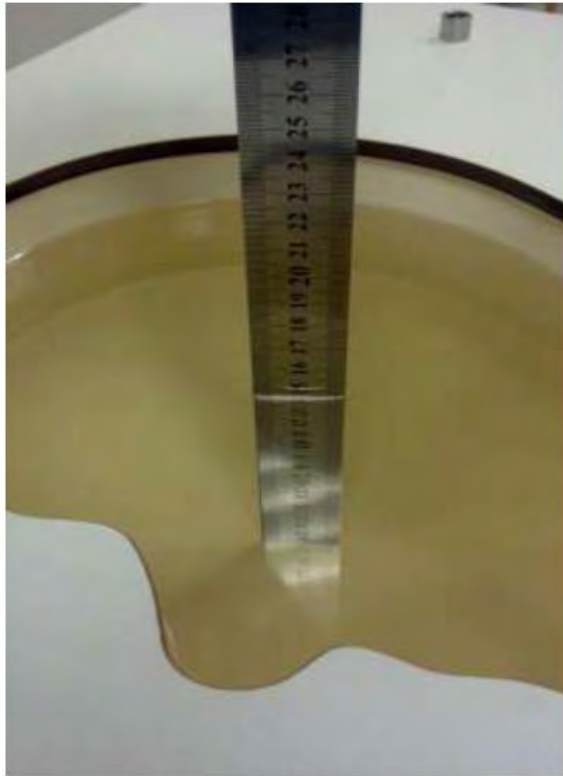


850MHz Head



850MHz Body

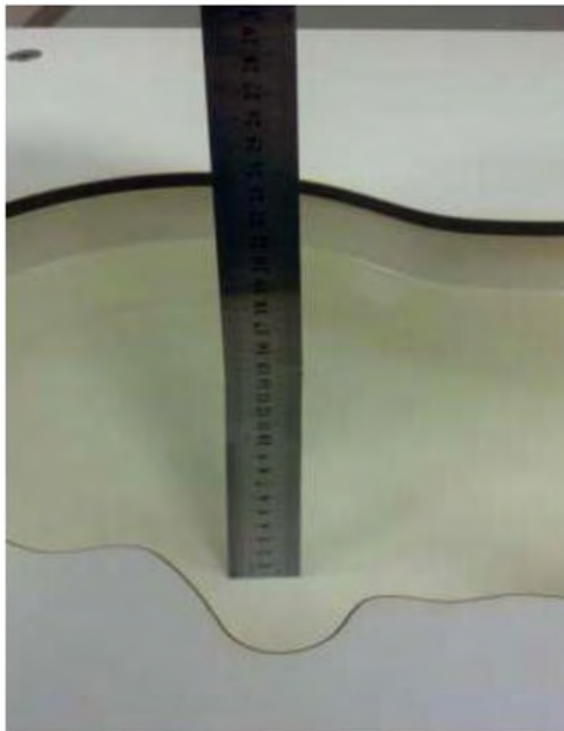


1800MHz Head

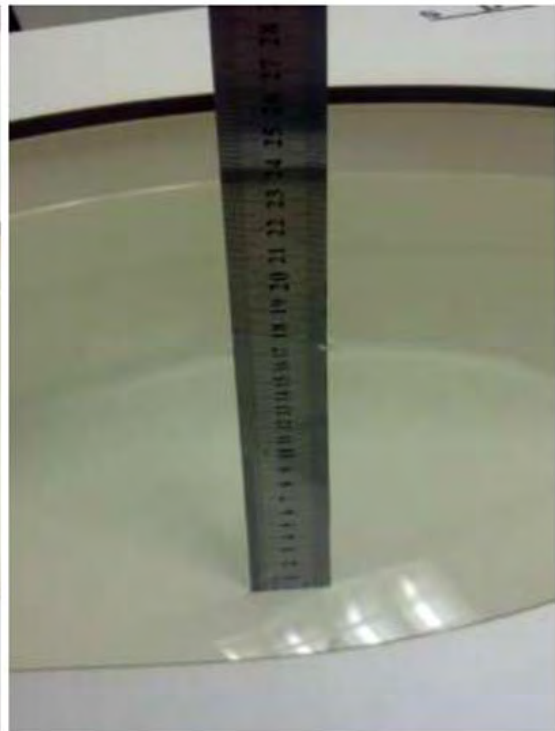

1800MHz Body

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

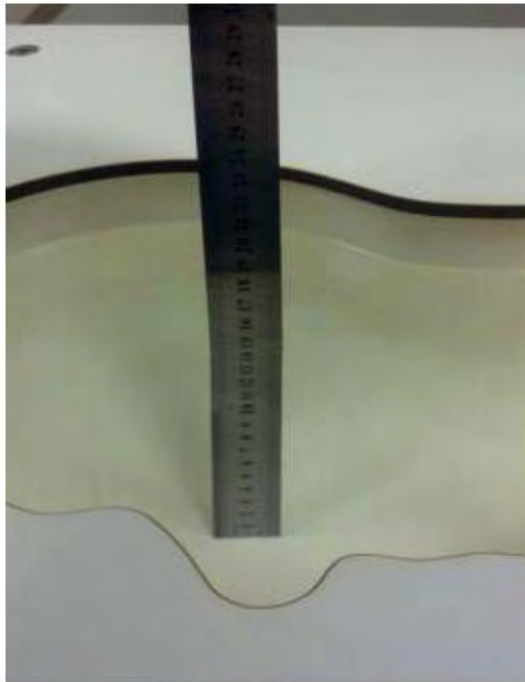

1900MHz Head



1900MHz Body



2450MHz Head



2450MHz Body

	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808-SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

APPENDIX B: SYSTEM VALIDATION RESULTS

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Date/Time: 7/26/2014 10:55:48 AM

Test Laboratory: GTA-Beijing

HSL750_System validation_20140726

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1055

Communication System: UID 0, CW; Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 42.508$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.56, 6.56, 6.56); Calibrated: 12/19/2013;
 - Modulation Compensation:
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0_1489; Type: QD000P40CC; Serial: TP:1489
- DASYS2 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Validation/Area Scan (61x201x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Reference Value = 52.63 V/m; Power Drift = -0.07 dB

Fast SAR: SAR(1 g) = 2.06 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (interpolated) = 2.37 W/kg


Configuration/Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 52.63 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.06 W/kg

SAR(1 g) = 2.02 W/kg; SAR(10 g) = 1.32 W/kg

Maximum value of SAR (measured) = 2.37 W/kg

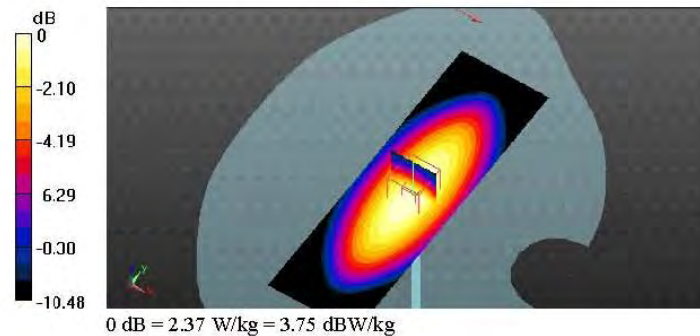

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/10/2014 10:51:25 AM

Test Laboratory: GTA-Beijing

GSM835 Head Validation_20140710

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d061

Communication System: UID 0, CW; Frequency: 835 MHz; Communication System PAR: 0 dB;
PMF: 1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.883 \text{ S/m}$; $\epsilon_r = 41.411$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6.39, 6.39, 6.39); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface), $z = 2.0, 107.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0_1488; Type: QD000P40CC; Serial: TP:1488
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/835MHz Head_VValidation/Area Scan (61x181x1): Interpolated grid:

$dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 2.63 W/kg

Configuration/835MHz Head_VValidation/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.03 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.26 W/kg; SAR(10 g) = 1.48 W/kg

Maximum value of SAR (measured) = 2.65 W/kg

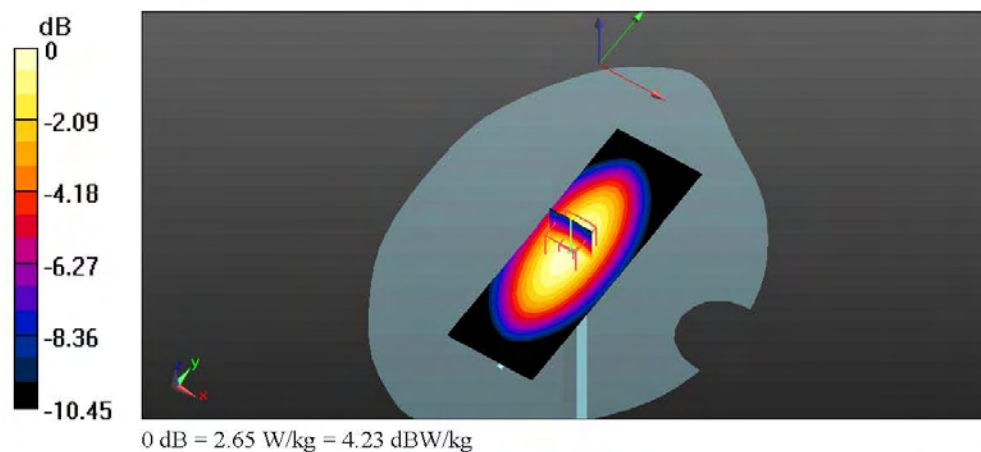

file://C:\Users\28851853\GSM835 Head Validation_20140710-1\GSM835 Head Validat... 8/2/2014

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/22/2014 11:34:47 AM

Test Laboratory: GTA-Beijing

GSM835 Head Validation_20140722

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d061

Communication System: UID 0, CW; Frequency: 835 MHz; Communication System PAR: 0 dB;
PMF: 1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.614$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6.39, 6.39, 6.39); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0_1488; Type: QD000P40CC; Serial: TP:1488
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/835MHz Head_VValidation/Area Scan (61x181x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Reference Value = 55.46 V/m; Power Drift = 0.00 dB

Fast SAR: SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.57 W/kg

Maximum value of SAR (interpolated) = 2.75 W/kg

Configuration/835MHz Head_VValidation/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 55.46 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 2.77 W/kg

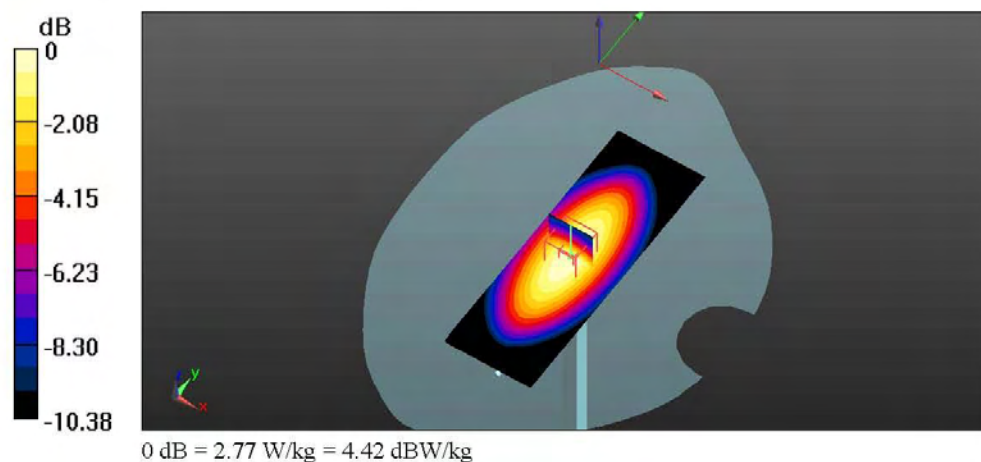

file://C:\Users\28851853\GSM835 Head Validation_20140722-1.htm

8/2/2014

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/30/2014 12:53:36 PM

Test Laboratory: GTA-Beijing

GSM835 Head Validation_20140730

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d061

Communication System: UID 0, CW; Frequency: 835 MHz; Communication System PAR: 0 dB;
PMF: 1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 43.123$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.33, 6.33, 6.33); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0_1488; Type: QD000P40CC; Serial: TP:1488
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/835MHz Head_VValidation/Area Scan (61x181x1): Interpolated grid:

$dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 2.63 W/kg


Configuration/835MHz Head_VValidation/Zoom Scan (7x7x7)/Cube 0: Measurement
grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.62 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.35 W/kg

SAR(1 g) = 2.24 W/kg; SAR(10 g) = 1.47 W/kg

Maximum value of SAR (measured) = 2.63 W/kg

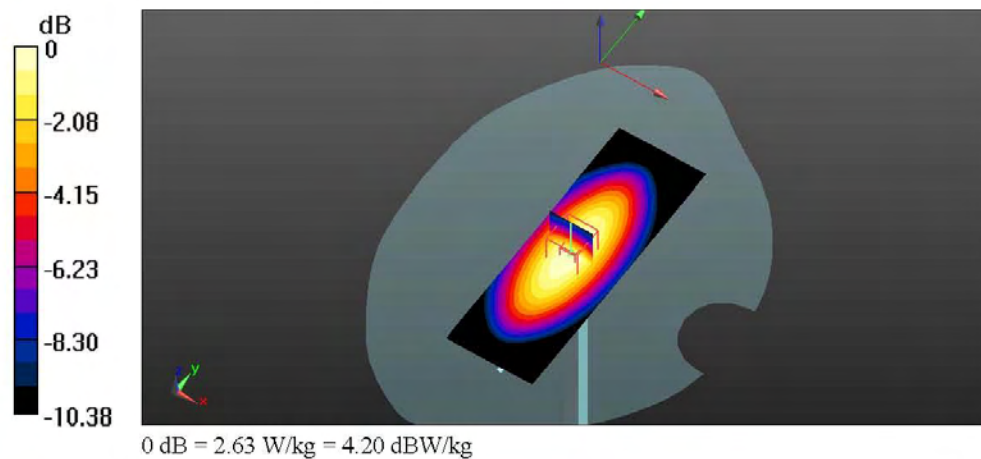

file://C:\Users\28851853\GSM835 Head Validation_20140730-1.htm

8/2/2014

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/17/2014 12:39:31 PM

Test Laboratory: GTA-Beijing

GSM1800 Head_Validation_20140717

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: SN:2d158

Communication System: UID 10000, CW; Communication System Band: D1800 (1800.0 MHz);

Frequency: 1800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.408 \text{ S/m}$; $\epsilon_r = 40.056$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3170; ConvF(5.4, 5.4, 5.4); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0_1489; Type: QD000P40CC; Serial: TP:1489
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Validation/Area Scan (61x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 11.4 W/kg


Configuration/Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 94.29 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 9.08 W/kg ; SAR(10 g) = 4.83 W/kg

Maximum value of SAR (measured) = 11.5 W/kg

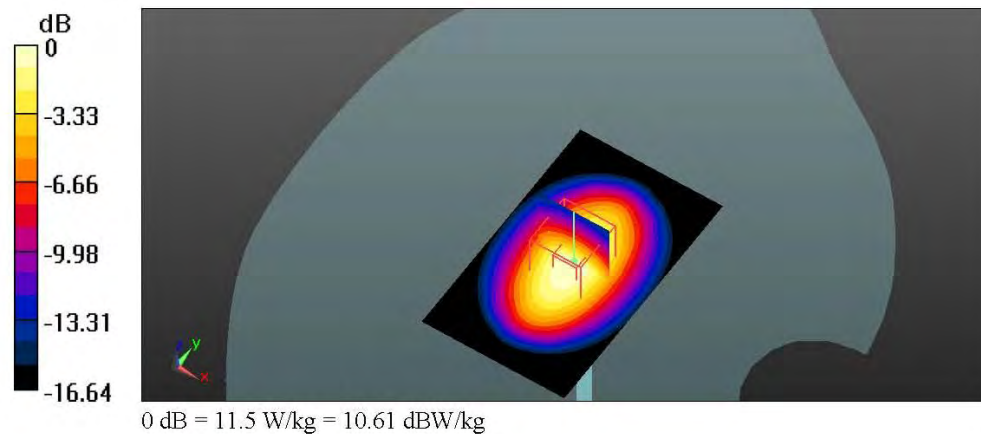

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/18/2014 2:02:21 PM

Test Laboratory: GTA-Beijing

GSM1800 Head_Validation_20140718

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: SN:2d158

Communication System: UID 10000, CW; Communication System Band: D1800 (1800.0 MHz);
Frequency: 1800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.417 \text{ S/m}$; $\epsilon_r = 39.691$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3170; ConvF(5.4, 5.4, 5.4); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0_1489; Type: QD000P40CC; Serial: TP:1489
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Validation/Area Scan (61x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 11.4 W/kg


Configuration/Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$,
 $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 93.42 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 15.8 W/kg

SAR(1 g) = 9 W/kg ; SAR(10 g) = 4.76 W/kg

Maximum value of SAR (measured) = 11.4 W/kg

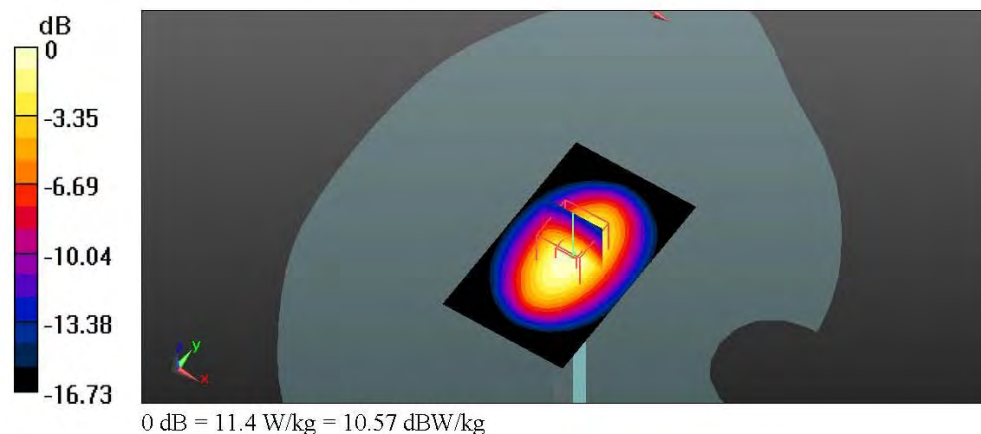

file://C:\Users\28851853\GSM1800 Head_Validation_20140718-1.htm

8/2/2014

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/20/2014 9:58:58 AM

Test Laboratory: GTA-Beijing

GSM1800 Head_Validation_20140720

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: SN:2d158

Communication System: UID 10000, CW; Communication System Band: D1800 (1800.0 MHz);
Frequency: 1800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.433 \text{ S/m}$; $\epsilon_r = 39.966$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3170; ConvF(5.4, 5.4, 5.4); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0_1489; Type: QD000P40CC; Serial: TP:1489
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Validation/Area Scan (61x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 11.5 W/kg


Configuration/Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 92.91 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 9.09 W/kg; SAR(10 g) = 4.84 W/kg

Maximum value of SAR (measured) = 11.5 W/kg

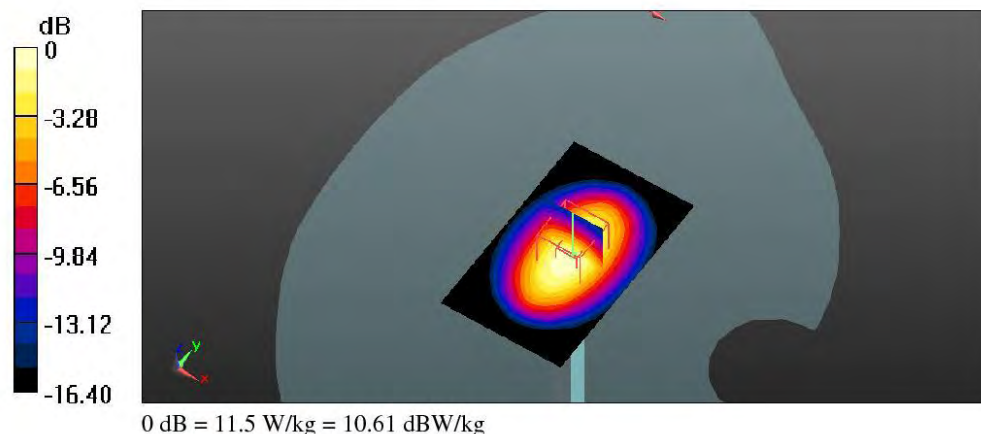

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/15/2014 3:46:01 PM

Test Laboratory: GTA-Beijing

HSL1900_System check_20140715

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d093

Communication System: UID 0, CW; Communication System Band: D1900 (1900.0 MHz);

Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 38.816$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.33, 7.33, 7.33); Calibrated: 2/21/2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn854; Calibrated: 12/16/2013
- Phantom: SAM with CRP v5.0 #1697; Type: QD000P40CD; Serial: TP1697
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (61x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 12.2 W/kg


System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.37 V/m; Power Drift = 0.21 dB

Peak SAR (extrapolated) = 18.0 W/kg

SAR(1 g) = 9.6 W/kg; SAR(10 g) = 4.94 W/kg

Maximum value of SAR (measured) = 12.3 W/kg

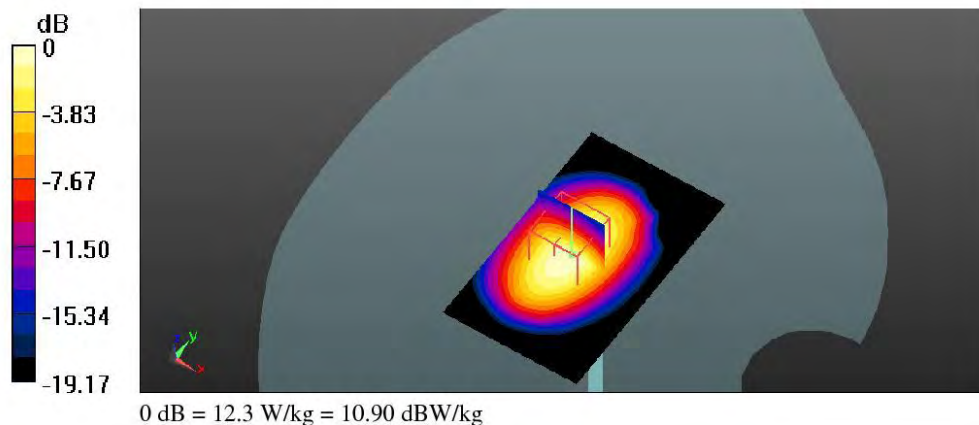

file://C:\Users\28851853\HSL1900_System check_20140715-1.htm

8/2/2014

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808-SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/17/2014 9:51:47 AM

Test Laboratory: GTA-Beijing

HSL1900_System check_20140717

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d093

Communication System: UID 0, CW; Communication System Band: D1900 (1900.0 MHz);

Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.423 \text{ S/m}$; $\epsilon_r = 38.92$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.33, 7.33, 7.33); Calibrated: 2/21/2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn854; Calibrated: 12/16/2013
- Phantom: SAM with CRP v5.0 #1697; Type: QD000P40CD; Serial: TP1697
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (61x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 12.3 W/kg


System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 84.42 V/m ; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 9.63 W/kg ; SAR(10 g) = 4.9 W/kg

Maximum value of SAR (measured) = 12.4 W/kg

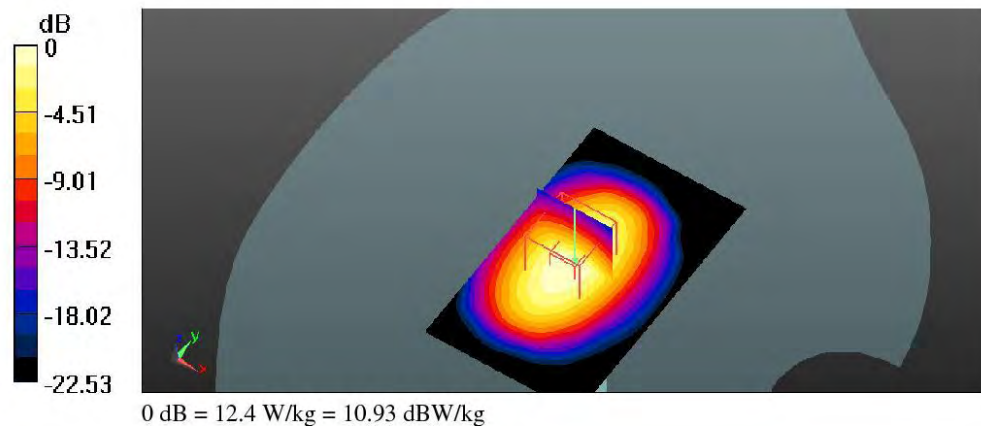

file://C:\Users\28851853\HSL1900_System check_20140717-1.htm

8/2/2014

	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808-SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/22/2014 10:21:56 AM

Test Laboratory: GTA-Beijing

HSL1900_System check_20140722

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d093

Communication System: UID 0, CW; Communication System Band: D1900 (1900.0 MHz);

Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.388 \text{ S/m}$; $\epsilon_r = 39.268$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.96, 4.96, 4.96); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn854; Calibrated: 12/16/2013
- Phantom: SAM with CRP v5.0 #1697; Type: QD000P40CD; Serial: TP1697
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

System Performance Check at Frequencies above 1 GHz/ $d=10\text{mm}$, $P_{in}=250 \text{ mW}$, $dist=3.0\text{mm}$ (ES-Probe)/Area Scan (61x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 12.8 W/kg


System Performance Check at Frequencies above 1 GHz/ $d=10\text{mm}$, $P_{in}=250 \text{ mW}$, $dist=3.0\text{mm}$ (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 88.68 V/m ; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10 W/kg ; SAR(10 g) = 5.2 W/kg

Maximum value of SAR (measured) = 12.8 W/kg

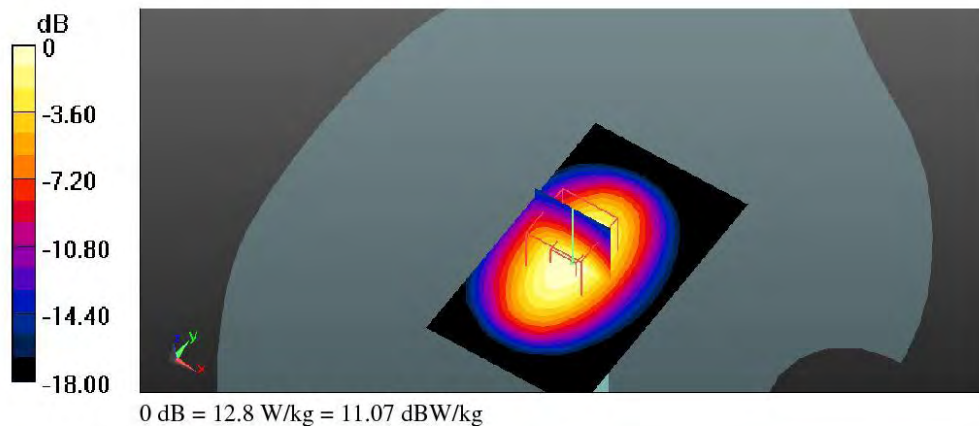

file://C:\Users\28851853\HSL1900_System check_20140722-1.htm

8/2/2014

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/31/2014 10:21:42 AM

Test Laboratory: GTA-Beijing

HSL1900_System check_20140731

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d093

Communication System: UID 0, CW; Communication System Band: D1900 (1900.0 MHz);

Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.341 \text{ S/m}$; $\epsilon_r = 38.775$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3170; ConvF(5.15, 5.15, 5.15); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1326; Calibrated: 2/14/2014
- Phantom: SAM with CRP v5.0 #1697; Type: QD000P40CD; Serial: TP1697
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (61x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 11.7 W/kg


System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 85.52 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 9.24 W/kg; SAR(10 g) = 4.82 W/kg

Maximum value of SAR (measured) = 11.8 W/kg

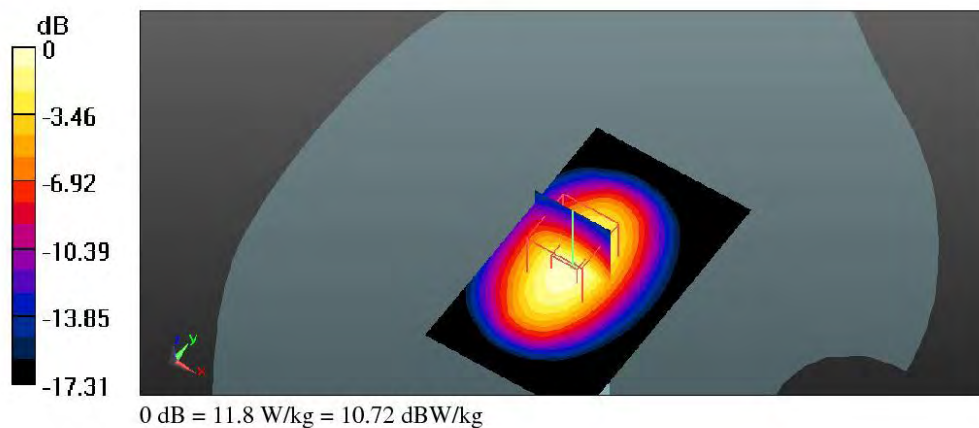

file://C:\Users\28851853\HSL1900_System check_20140731-1.htm

8/2/2014

	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808-SAR-FCC-01	
		Edition 2	Revision 0

PY7PM-0808 SAR FCC Test Report

Edition 2

Revision 0

Page 1 of 1

Date/Time: 7/28/2014 1:41:12 PM

Test Laboratory: GTA-Beijing

HSL2450_System Validation_20140728

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:806

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz);

Frequency: 2450 MHz;Communication System PAR: 0 dB; PMF: 1

Medium parameters used: f = 2450 MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.559$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.42, 4.42, 4.42); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), z = 2.0, 32.0
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0_1489; Type: QD000P40CC; Serial: TP:1489
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Validation/Area Scan (61x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 17.3 W/kg


Configuration/Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.96 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 27.0 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 5.99 W/kg

Maximum value of SAR (measured) = 17.2 W/kg

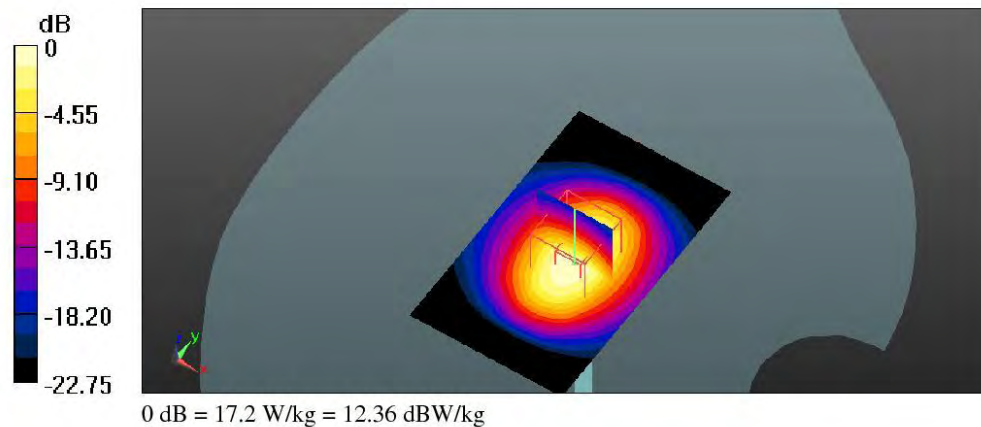

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/31/2014 2:44:13 PM

Test Laboratory: GTA-Beijing

HSL2450_System Validation_20140731

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:806

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz);
Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.884$ S/m; $\epsilon_r = 39.533$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.42, 4.42, 4.42); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0_1489; Type: QD000P40CC; Serial: TP:1489
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Validation/Area Scan (61x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 17.8 W/kg


Configuration/Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 96.61 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.11 W/kg

Maximum value of SAR (measured) = 17.3 W/kg

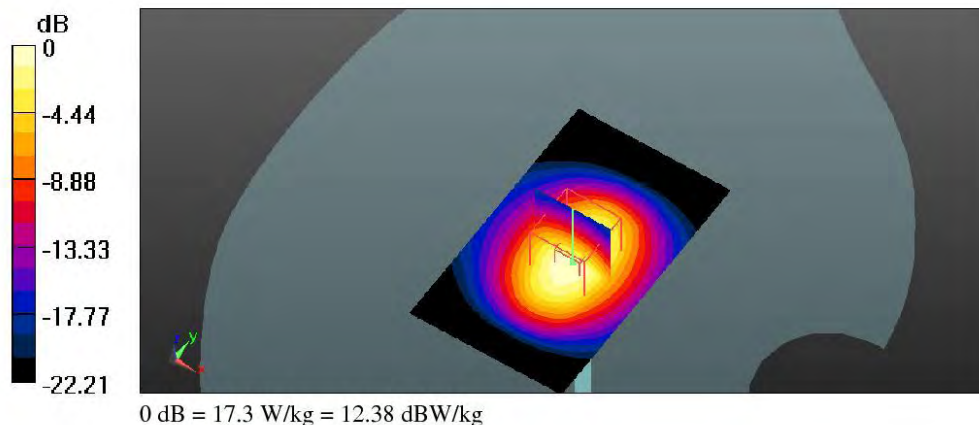

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808-SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/26/2014 4:53:52 PM

Test Laboratory: GTA-Beijing

HSL 2600_System Validation_20140726

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1025

Communication System: UID 0, CW (0); Communication System Band: D2600 (2600.0 MHz);

Frequency: 2600 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.058$ S/m; $\epsilon_r = 38.721$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.26, 4.26, 4.26); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0_1489; Type: QD000P40CC; Serial: TP:1489
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Validation/Area Scan (61x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 20.1 W/kg


Configuration/Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 101.2 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 32.2 W/kg

SAR(1 g) = 14.7 W/kg; SAR(10 g) = 6.51 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

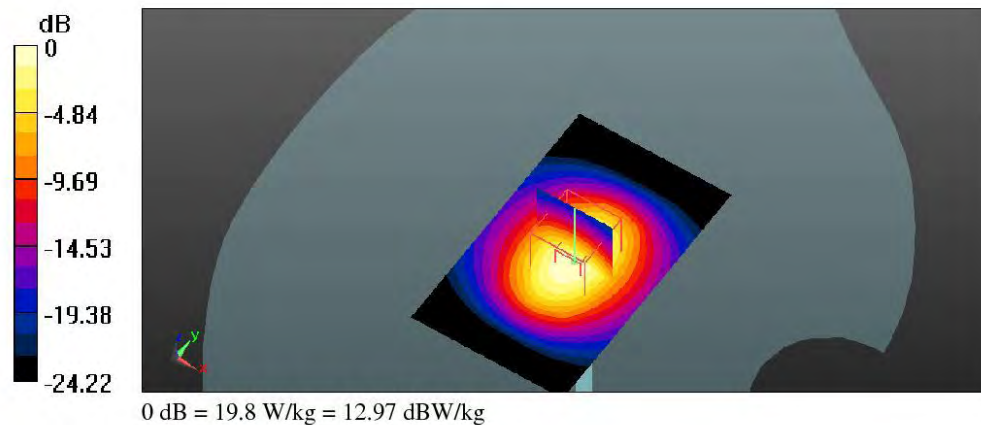

SONY	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/25/2014 4:20:05 PM

Test Laboratory: GTA-Beijing

5GHZ_Head Validation_20140725

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1061

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.833$ S/m; $\epsilon_r = 35.761$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.97, 4.97, 4.97); Calibrated: 12/20/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1326; Calibrated: 2/14/2014
- Phantom: SAM with CRP v5.0#1696; Type: QD000P40CD; Serial: TP:1696
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)_5.2G/Area Scan

(51x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 38.9 W/kg

Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)_5.2G/Zoom Scan


(7x7x7) (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 101.6 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 77.4 W/kg

SAR(1 g) = 18.7 W/kg; SAR(10 g) = 5.36 W/kg

Maximum value of SAR (measured) = 46.0 W/kg

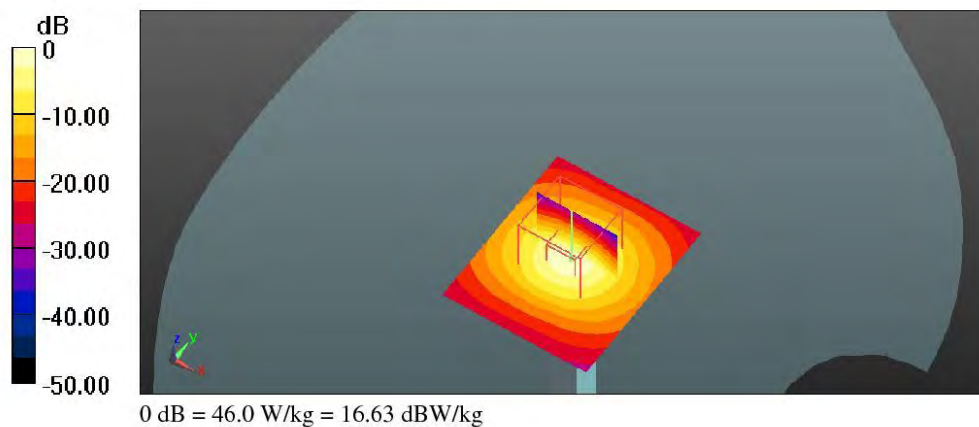

	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808-SAR-FCC-01	
PY7PM-0808 SAR FCC Test Report		Edition 2	Revision 0

Page 1 of 1

Date/Time: 7/25/2014 3:44:11 PM

Test Laboratory: GTA-Beijing

5GHZ_ Head Validation_20140725

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1061

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5500 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.139$ S/m; $\epsilon_r = 35.278$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.69, 4.69, 4.69); Calibrated: 12/20/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1326; Calibrated: 2/14/2014
- Phantom: SAM with CRP v5.0#1696; Type: QD000P40CD; Serial: TP:1696
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)_5.5G/Area Scan

(51x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 40.1 W/kg

Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)_5.5G/Zoom Scan


(7x7x7) (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 99.23 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 84.3 W/kg

SAR(1 g) = 19.1 W/kg; SAR(10 g) = 5.38 W/kg

Maximum value of SAR (measured) = 48.4 W/kg

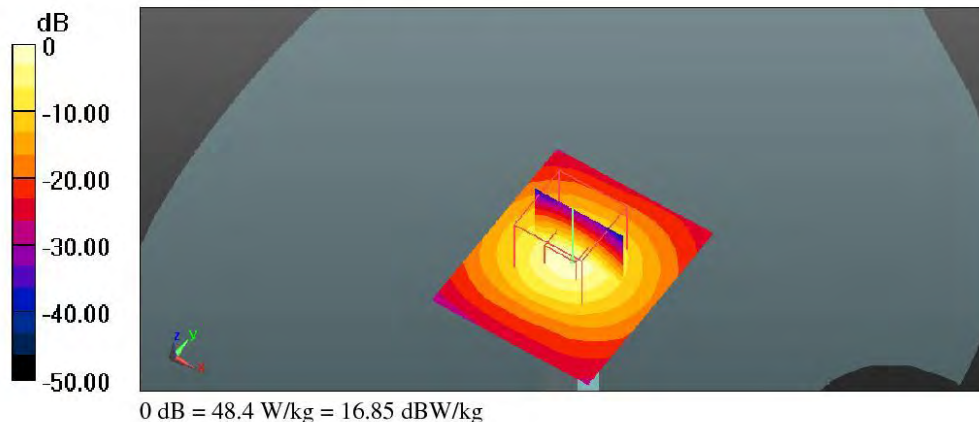

file://C:\Users\28851853\5GHZ_ Head Validation_20140725-1.htm

8/2/2014