



**FCC PART 15C
TEST REPORT
No. I14Z46714-SRD01
for
Sony Mobile Communications Inc.
GSM/WCDMA/LTE Mobile Phone
Type Name: PM-0820-BV
FCC ID: PY7PM-0820
With
Hardware Version: A
Software Version: 19.2.A.0.138
Issued Date: 2014-06-18**



Note:The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of the Ministry of Industry and Information Technology
No. 52 Hua Yuanbei Road, Haidian District, Beijing, P.R.China 100191

Tel:+86(0)10-62304633-2046, Fax:+86(0)10-62304633-2063 Email:welcome@emcite.com. www.emcite.com

CONTENTS

CONTENTS	2
1. TEST LATORATORY.....	6
1.1. TESTING LOCATION	6
1.2. PROJECT DATA	6
1.3. SIGNATURE	6
2. CLIENT INFORMATION.....	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
3.4. GENERAL DESCRIPTION.....	8
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS	10
6.1. SUMMARY OF TEST RESULTS	10
6.2. STATEMENTS.....	10
6.3. TEST CONDITIONS	10
7. TEST EQUIPMENTS UTILIZED	11
ANNEX A: MEASUREMENT RESULTS.....	12
A.1. MEASUREMENT METHOD	12
A.2. MAXIMUM PEAK OUTPUT POWER	13
A.2.1. ANTENNA GAIN.....	13
A.2.2. MAXIMUM PEAK OUTPUT POWER-CONDUCTED	13
A.2.3. MAXIMUM PEAK OUTPUT POWER-RADIATED	14
A.3. PEAK POWER SPECTRAL DENSITY	15
A.4. OCCUPIED 6dB BANDWIDTH	15
FIG.A.4.1 OCCUPIED 6dB BANDWIDTH (802.11B, CH 1).....	16
FIG.A.4.2 OCCUPIED 6dB BANDWIDTH (802.11B, CH 6).....	17
FIG.A.4.3 OCCUPIED 6dB BANDWIDTH (802.11B, CH 11).....	17
FIG.A.4.4 OCCUPIED 6dB BANDWIDTH (802.11G, CH 1).....	18
FIG.A.4.5 OCCUPIED 6dB BANDWIDTH (802.11G, CH 6).....	18
FIG.A.4.6 OCCUPIED 6dB BANDWIDTH (802.11G, CH 11)	19
FIG.A.4.7 OCCUPIED 6dB BANDWIDTH (802.11N-20MHZ, CH 1).....	19

FIG.A.4.8	OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 6)	20
FIG.A.4.9	OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 11)	20
A.5.	BAND EDGES COMPLIANCE	21
FIG.A.5.1	BAND EDGES (802.11B, CH 1)	22
FIG.A.5.2	BAND EDGES (802.11B, CH 11)	22
FIG.A.5.3	BAND EDGES (802.11G, CH 1)	23
FIG.A.5.4	BAND EDGES (802.11G, CH 11).....	23
FIG.A.5.5	BAND EDGES (802.11N-HT20, CH 1)	24
FIG.A.5.6	BAND EDGES (802.11N-HT20, CH 11).....	24
A.6.	TRANSMITTER SPURIOUS EMISSION	25
A.6.1	TRANSMITTER SPURIOUS EMISSION - CONDUCTED	25
FIG.A.6.1.1	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, CENTER FREQUENCY)	29
FIG.A.6.1.2	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 30 MHz-1 GHz).....	29
FIG.A.6.1.3	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 1 GHz-2.5 GHz).....	30
FIG.A.6.1.4	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 2.5 GHz-7.5 GHz).....	30
FIG.A.6.1.5	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 7.5 GHz-10 GHz).....	31
FIG.A.6.1.6	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 10 GHz-15 GHz).....	31
FIG.A.6.1.7	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 15 GHz-20 GHz).....	32
FIG.A.6.1.8	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 20 GHz-26 GHz).....	32
FIG.A.6.1.9	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, CENTER FREQUENCY)	33
FIG.A.6.1.10	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 30 MHz-1 GHz).....	33
FIG.A.6.1.11	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 1 GHz-2.5 GHz).....	34
FIG.A.6.1.12	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 2.5 GHz-7.5 GHz).....	34
FIG.A.6.1.13	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 7.5 GHz-10 GHz).....	35
FIG.A.6.1.14	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 10 GHz-15 GHz).....	35
FIG.A.6.1.15	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 15 GHz-20 GHz).....	36
FIG.A.6.1.16	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 20 GHz-26 GHz).....	36
FIG.A.6.1.17	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, CENTER FREQUENCY)	37
FIG.A.6.1.18	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 30 MHz-1 GHz).....	37
FIG.A.6.1.19	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 1 GHz-2.5 GHz).....	38
FIG.A.6.1.20	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 2.5 GHz-7.5 GHz).....	38
FIG.A.6.1.21	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 7.5 GHz-10 GHz).....	39
FIG.A.6.1.22	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 10 GHz-15 GHz).....	39
FIG.A.6.1.23	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 15 GHz-20 GHz).....	40
FIG.A.6.1.24	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 20 GHz-26 GHz).....	40
FIG.A.6.1.25	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, CENTER FREQUENCY).....	41
FIG.A.6.1.26	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 30 MHz-1 GHz)	41
FIG.A.6.1.27	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 1 GHz-2.5 GHz).....	42
FIG.A.6.1.28	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 2.5 GHz-7.5 GHz).....	42
FIG.A.6.1.29	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 7.5 GHz-10 GHz).....	43
FIG.A.6.1.30	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 10 GHz-15 GHz).....	43
FIG.A.6.1.31	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 15 GHz-20 GHz).....	44
FIG.A.6.1.32	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 20 GHz-26 GHz).....	44
FIG.A.6.1.33	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, CENTER FREQUENCY).....	45

FIG.A.6.1.34	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-1 GHz)	45
FIG.A.6.1.35	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 1 GHz-2.5 GHz).....	46
FIG.A.6.1.36	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 2.5 GHz-7.5 GHz).....	46
FIG.A.6.1.37	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 7.5 GHz-10 GHz).....	47
FIG.A.6.1.38	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 10 GHz-15 GHz).....	47
FIG.A.6.1.39	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 15 GHz-20 GHz).....	48
FIG.A.6.1.40	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 20 GHz-26 GHz).....	48
FIG.A.6.1.41	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, CENTER FREQUENCY).....	49
FIG.A.6.1.42	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 30 MHz-1 GHz)	49
FIG.A.6.1.43	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 1 GHz-2.5 GHz).....	50
FIG.A.6.1.44	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 2.5 GHz-7.5 GHz).....	50
FIG.A.6.1.45	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 7.5 GHz-10 GHz).....	51
FIG.A.6.1.46	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 10 GHz-15 GHz).....	51
FIG.A.6.1.47	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 15 GHz-20 GHz).....	52
FIG.A.6.1.48	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 20 GHz-26 GHz).....	52
FIG.A.6.1.49	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH1, CENTER FREQUENCY).....	53
FIG.A.6.1.50	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH1, 30 MHz-1 GHz)	53
FIG.A.6.1.51	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH1, 1 GHz-2.5 GHz).....	54
FIG.A.6.1.52	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH1, 2.5 GHz-7.5 GHz).....	54
FIG.A.6.1.53	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH1, 7.5 GHz-10 GHz).....	55
FIG.A.6.1.54	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH1, 10 GHz-15 GHz).....	55
FIG.A.6.1.55	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH1, 15 GHz-20 GHz).....	56
FIG.A.6.1.56	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH1, 20 GHz-26 GHz).....	56
FIG.A.6.1.57	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH6, CENTER FREQUENCY).....	57
FIG.A.6.1.58	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH6, 30 MHz-1 GHz)	57
FIG.A.6.1.59	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH6, 1 GHz-2.5 GHz).....	58
FIG.A.6.1.60	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH6, 2.5 GHz-7.5 GHz).....	58
FIG.A.6.1.61	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH6, 7.5 GHz-10 GHz).....	59
FIG.A.6.1.62	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH6, 10 GHz-15 GHz).....	59
FIG.A.6.1.63	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH6, 15 GHz-20 GHz).....	60
FIG.A.6.1.64	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH6, 20 GHz-26 GHz).....	60
FIG.A.6.1.65	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH11, CENTER FREQUENCY).....	61
FIG.A.6.1.66	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH11, 30 MHz-1 GHz)	61
FIG.A.6.1.67	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH11, 1 GHz-2.5 GHz).....	62
FIG.A.6.1.68	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH11, 2.5 GHz-7.5 GHz).....	62
FIG.A.6.1.69	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH11, 7.5 GHz-10 GHz).....	63
FIG.A.6.1.70	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH11, 10 GHz-15 GHz).....	63
FIG.A.6.1.71	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH11, 15 GHz-20 GHz).....	64
FIG.A.6.1.72	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH11, 20 GHz-26 GHz).....	64
A.6.2	TRANSMITTER SPURIOUS EMISSION - RADIATED	65
FIG.A.6.2.1	RADIATED SPURIOUS EMISSION (POWER): 802.11B, CH1, 2.38 GHz – 2.45GHz.....	69
FIG.A.6.2.2	RADIATED SPURIOUS EMISSION (802.11B, CH1, 1 GHz-3 GHz)	69
FIG.A.6.2.3	RADIATED SPURIOUS EMISSION (802.11B, CH1, 3 GHz-18 GHz)	70
FIG.A.6.2.4	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30 MHz-1 GHz).....	70

FIG.A.6.2.5	RADIATED SPURIOUS EMISSION (802.11B, CH6, 1 GHz-3 GHz)	71
FIG.A.6.2.6	RADIATED SPURIOUS EMISSION (802.11B, CH6, 3 GHz-18 GHz)	71
FIG.A.6.2.7	RADIATED SPURIOUS EMISSION (802.11B, CH6, 18GHz – 26.5GHz).....	72
FIG.A.6.2.8	RADIATED SPURIOUS EMISSION (POWER): 802.11B, CH11, 2.45 GHz - 2.50GHz.....	72
FIG.A.6.2.9	RADIATED SPURIOUS EMISSION (802.11B, CH11, 1 GHz-3 GHz)	73
FIG.A.6.2.10	RADIATED SPURIOUS EMISSION (802.11B, CH11, 3 GHz-18 GHz)	73
FIG.A.6.2.11	RADIATED SPURIOUS EMISSION (POWER): 802.11G, CH1, 2.38 GHz - 2.45GHz.....	74
FIG.A.6.2.12	RADIATED SPURIOUS EMISSION (802.11G, CH1, 1 GHz-3 GHz).....	74
FIG.A.6.2.13	RADIATED SPURIOUS EMISSION (802.11G, CH1, 3 GHz-18 GHz).....	75
FIG.A.6.2.14	RADIATED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-1 GHz).....	75
FIG.A.6.2.15	RADIATED SPURIOUS EMISSION (802.11G, CH6, 1 GHz-3 GHz).....	76
FIG.A.6.2.16	RADIATED SPURIOUS EMISSION (802.11G, CH6, 3 GHz-18 GHz).....	76
FIG.A.6.2.17	RADIATED SPURIOUS EMISSION (802.11G, CH6, 18GHz – 26.5GHz).....	77
FIG.A.6.2.18	RADIATED SPURIOUS EMISSION (POWER): 802.11G, CH11, 2.45 GHz - 2.50GHz.....	77
FIG.A.6.2.19	RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHz-3 GHz).....	78
FIG.A.6.2.20	RADIATED SPURIOUS EMISSION (802.11G, CH11, 3 GHz-18 GHz).....	78
FIG.A.6.2.21	RADIATED SPURIOUS EMISSION (POWER): 802.11N-HT20, CH1, 2.38 GHz - 2.45GHz. 79	
FIG.A.6.2.22	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH1, 1 GHz-3 GHz).....	79
FIG.A.6.2.23	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH1, 3 GHz-18 GHz).....	80
FIG.A.6.2.24	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH6, 30 MHz-1 GHz).....	80
FIG.A.6.2.25	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH6, 1 GHz-3 GHz).....	81
FIG.A.6.2.26	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH6, 3 GHz-18 GHz).....	81
FIG.A.6.2.27	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH6, 18GHz – 26.5GHz).....	82
FIG.A.6.2.28	RADIATED SPURIOUS EMISSION (POWER): 802.11N-HT20, CH11, 2.45 GHz - 2.50GHz82	
FIG.A.6.2.29	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH11, 1 GHz-3 GHz).....	83
FIG.A.6.2.30	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH11, 3 GHz-18 GHz).....	83
A.7. AC POWERLINE CONDUCTED EMISSION		84
FIG.A.7.1 AC POWERLINE CONDUCTED EMISSION-802.11B		85
FIG.A.7.2 AC POWERLINE CONDUCTED EMISSION-IDLE.....		86
ANNEX B: PHOTOGRAPHS OF THE TEST SET-UP		87

1. TEST LATORATORY

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: +86-10-62304633-2561
Fax: +86-10-62304633-2504

1.2. Project data

Testing Start Date: 2014-06-03
Testing End Date: 2014-06-18

1.3. Signature



Xu Zhongfei
(Prepared this test report)



Jiang Afang
(Reviewed this test report)



Xiao Li
Deputy Director of the laboratory
(Approved this test report)

2. CLIENT INFORMATION

2.1. Applicant Information

Company Name:	Sony Mobile Communications (China) Co. Ltd
Address /Post:	Sony Mobile R&D Center, No. 16, Guangshun South Street, Chaoyang District
City:	Beijing
Postal Code:	100102
Country:	China
Contact Person:	Ma, Gang
Telephone:	+86-10-58656312
Fax:	+86-10-58659049

2.2. Manufacturer Information

Company Name:	Sony Mobile Communications Inc.
Address /Post:	1-8-15 Konan, Minato-ku, Tokyo, 108-0075, Japan
City:	Tokyo
Postal Code:	108-0075
Country:	Japan

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY

EQUIPMENT(AE)

3.1. About EUT

Description	GSM 850/900/1800/1900 quad bands, GPRS, EDGE, WCDMA FDD bands 1/2/5/8, HSDPA, HSUPA, LTE FDD bands 1/3/7/8/28 Bluetooth (EDR and BLE), ANT+, WLAN (802.11 b/g/n), NFC, FM, GPS mobile phone
Type	PM-0820-BV
FCC ID	PY7PM-0820
WLAN Frequency Range	ISM Band: 2400MHz~2483.5MHz
Type of modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Internal
MAX Conducted Power	21.99dBm(OFDM)
MAX Radiated Power	24.81dBm(OFDM)

Note: Photographs of EUT are shown in ANNEX C of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN	IMEI	HW Version	SW Version
EUT8	CB5A1ZDQPP	004402452817731	A	19.2.A.0.138
EUT13	CB5A1ZDQNB	004402452818002	A	19.2.A.0.138

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Travel Charger	AC-0400-EU	32301286SEM0600.1
AE2	USB Cable	AI-0401	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of GSM/WCDMA/LTE Mobile Phone with integrated antenna and embedded battery.

The EUT supports GSM 850/900/1800/1900MHz bands, WCDMA FDD bands 1/2/5/8 and LTE FDD bands 1/3/7/8/28. It supports GPRS service with multi-slots class 33 and EGPRS service with multi-slots class 33. The HSDPA (Cat 24) and HSUPA (Cat 6) features are also supported.

It has MP3, camera, USB memory, FM radio, GPS receiver, NFC, Bluetooth (EDR, BLE), ANT+, WLAN (802.11 b/g/n) and Wi-Fi hotspot functions. For WLAN 802.11n, it supports 20MHz bandwidth on both 2.4GHz band.

It consists of normal options: USB cable and travel charger.
Manual and specifications of the EUT were provided to fulfil the test.
Samples undergoing test were selected by the client.

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	
FCC Part15	15.209 Radiated emission limits, general requirements;	Oct,
	15.247 Operation within the bands 902–928MHz,	2012
	2400–2483.5 MHz, and 5725–5850 MHz.	
	Methods of Measurement of Radio-Noise Emissions from	
ANSI C63.10	Low-Voltage Electrical and Electronic Equipment in the	2009
	Range of 9 kHz to 40 GHz	

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	P
Peak Power Spectral Density	15.247 (e)	/	P
Occupied 6dB Bandwidth	15.247 (a)	/	P
Band Edges Compliance	15.247 (d)	/	P
Transmitter Spurious Emission - Conducted	15.247 (d)	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by TMC
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

TMC has evaluated the test cases requested by the client/manufacture as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26℃
Voltage	3.8V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	2013-07-08	2014-07-07
2	Test Receiver	ESS	847151/015	Rohde & Schwarz	2013-10-30	2014-10-29
3	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2013-4-15	2014-08-12
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Calibration Due date
1	Test Receiver	ESCI	100344	Rohde & Schwarz	2013-11-8	2014-11-7
2	Test Receiver	ESCI 7	100948	Rohde & Schwarz	2013-07-19	2014-07-18
3	BiLog Antenna	VULB9163	9163-514	Schwarzbeck	2011-11-11	2014-11-10
4	Dual-Ridge Waveguide Horn Antenna	3117	00119024	ETS-Lindgren	2014-2-2	2017-2-1
5	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2011-7-1	2014-06-30
6	Loop antenna	HFH2-Z2	829324/007	Rohde & Schwarz	2011-12-21	2014-12-20
7	Semi-anechoic chamber	/	CT000332-1074	Frankonia German	/	/

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

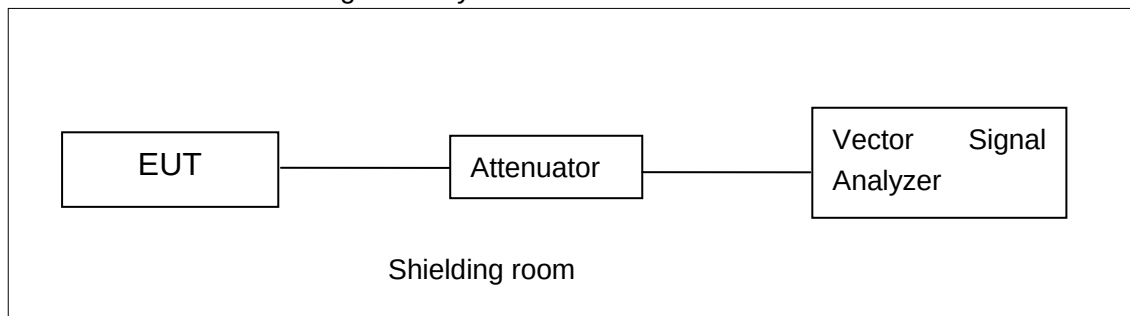
Connect the EUT to the test system as follow shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

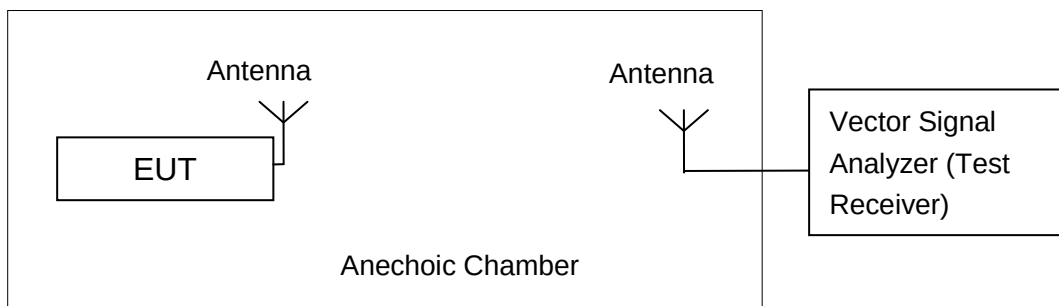


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;



The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

The measurement is made according to ANSI C63.10.

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

A.2.1. Antenna Gain

The antenna gain of the complete system is calculated by the difference of radiated power and the conducted power of the EUT.

Test	Channel		
Tnom,Vnom	Low	Middle	High
Conducted Power(dBm)	15.76	16.19	16.15
Radiated Power(dBm)	18.09	17.07	18.97
Gain(dBi)	2.33	0.88	2.82

Antenna Gain = Radiated value (with radiated sample) - Conducted values (with conducted samples)

A.2.2. Maximum Peak Output Power-conducted

Measurement Results:

802.11b mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	18.66	/	/
	2	18.89	/	/
	5.5	20.32	/	/
	11	21.59	20.82	21.99

The data rate 11Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11g	6	16.22	/	/
	9	16.25	/	/
	12	16.45	/	/
	18	16.53	/	/
	24	17.00	/	/
	36	17.02	16.70	17.67
	48	16.98	/	/
	54	16.96	/	/

The data rate 36Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	MCS0	18.35	/	/
	MCS1	18.03	/	/
	MCS2	18.00	/	/
	MCS3	18.52	18.09	19.20
	MCS4	18.43	/	/
	MCS5	18.49	/	/
	MCS6	18.45	/	/
	MCS7	18.39	/	/

The data rate MCS3 is selected as worse condition, and the following cases are performed with this condition.

Conclusion: PASS

A.2.3. Maximum Peak Output Power-Radiated

Measurement Results:

Mode	Test Result (dBm)					
	Low channel		Middle channel		High channel	
	Conducted	Radiated	Conducted	Radiated	Conducted	Radiated
802.11b	21.59	23.92	17.02	19.35	18.52	20.85
802.11g	20.82	21.7	16.70	17.58	18.09	18.97
802.11n-HT20	21.99	24.81	17.67	20.49	19.20	22.02

Radiated value = Conducted values (with conducted samples) + Antenna Gain.

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

The measurement is made according to ANSI C63.10.

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Note: Configuration information to be tested as follows:

Modulation type and data rate:

802.11b	802.11g	802.11n-HT20
11Mbps(CCK)	36Mbps(OFDM)	MCS3(OFDM)

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/3 kHz)	Conclusion
802.11b	1	-8.67	P
	6	-8.43	P
	11	-5.38	P
802.11g	1	-13.95	P
	6	-15.24	P
	11	-12.83	P
802.11n-HT20	1	-16.18	P
	6	-16.97	P
	11	-14.19	P

Conclusion: PASS

A.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

The measurement is made according to ANSI C63.10.

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

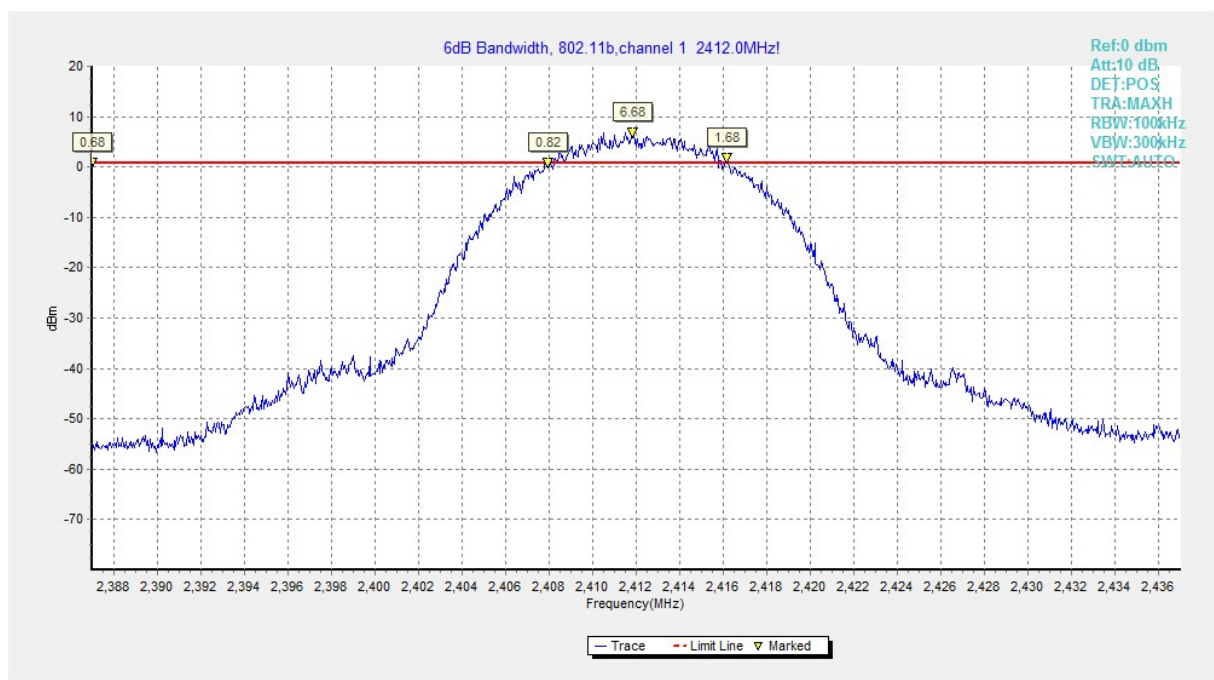
Note: Configuration information to be tested as follows:

Modulation type and data rate:

802.11b	802.11g	802.11n-HT20
11Mbps(CCK)	36Mbps(OFDM)	MCS3(OFDM)

Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth (kHz)		conclusion
802.11b	1	Fig.A.4.1	8200	P
	6	Fig.A.4.2	8600	P
	11	Fig.A.4.3	7650	P
802.11g	1	Fig.A.4.4	16450	P
	6	Fig.A.4.5	16450	P
	11	Fig.A.4.6	16450	P
802.11n-HT20	1	Fig.A.4.7	17700	P
	6	Fig.A.4.8	17650	P
	11	Fig.A.4.9	17600	P

Conclusion: PASS
Test graphs as below:

Fig.A.4.1 Occupied 6dB Bandwidth (802.11b, Ch 1)

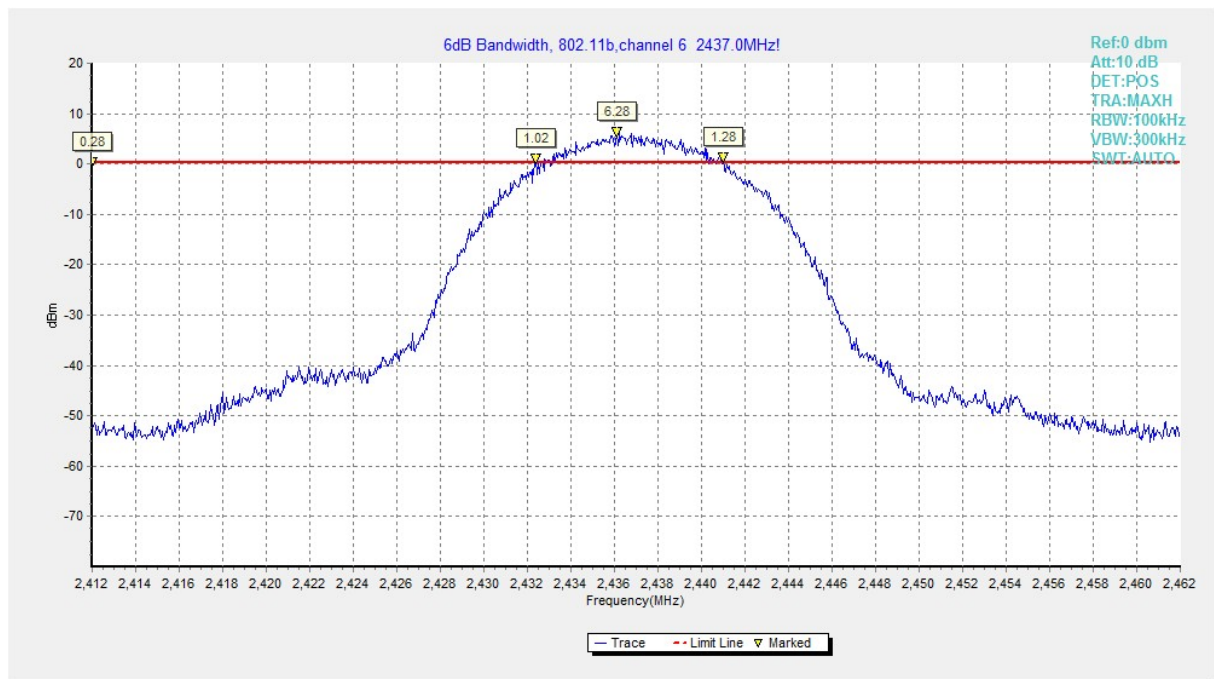


Fig.A.4.2 Occupied 6dB Bandwidth (802.11b, Ch 6)

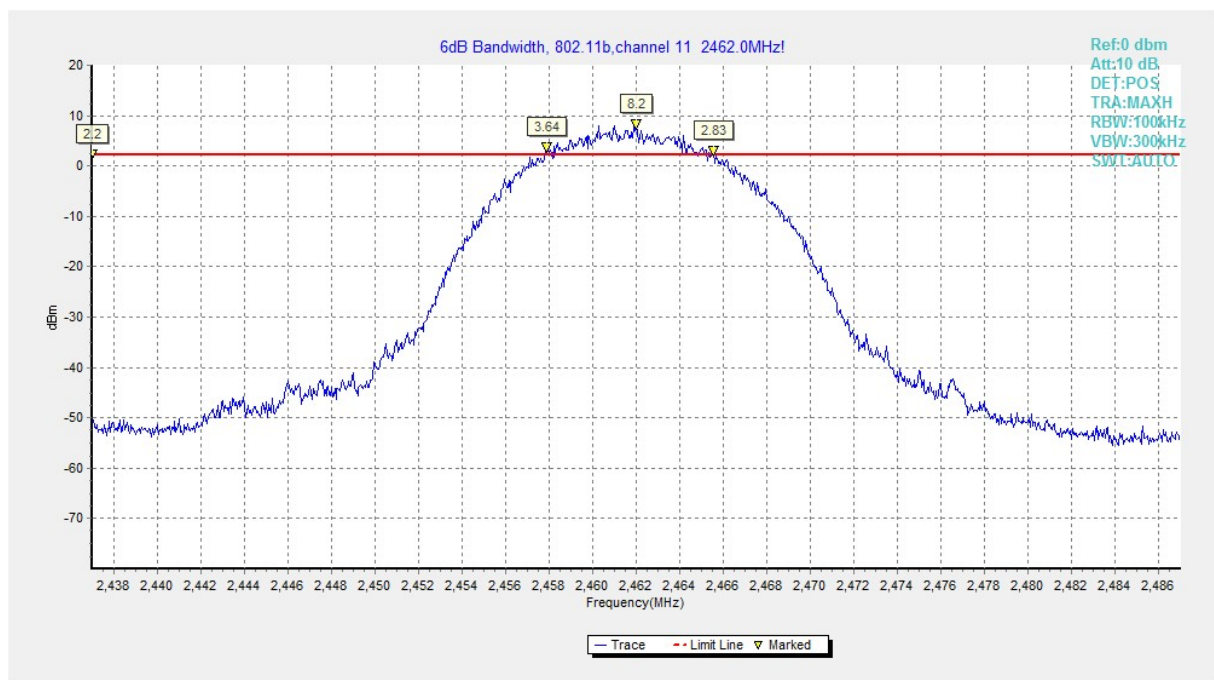


Fig.A.4.3 Occupied 6dB Bandwidth (802.11b, Ch 11)

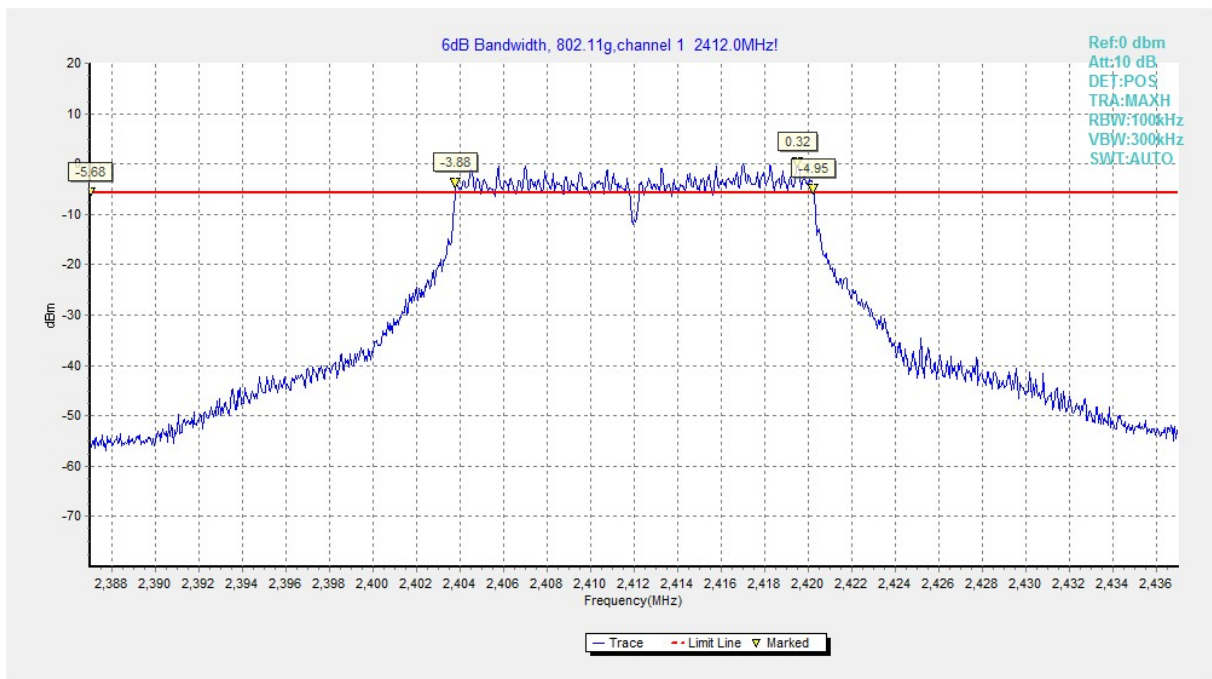


Fig.A.4.4 Occupied 6dB Bandwidth (802.11g, Ch 1)

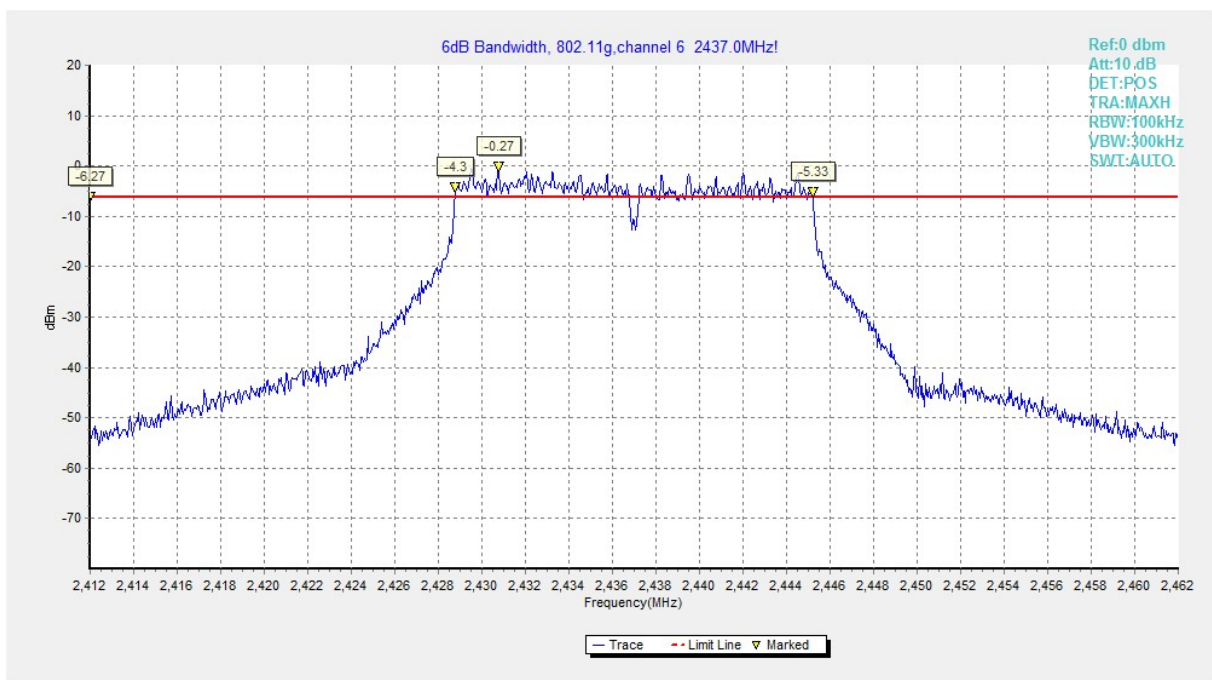


Fig.A.4.5 Occupied 6dB Bandwidth (802.11g, Ch 6)

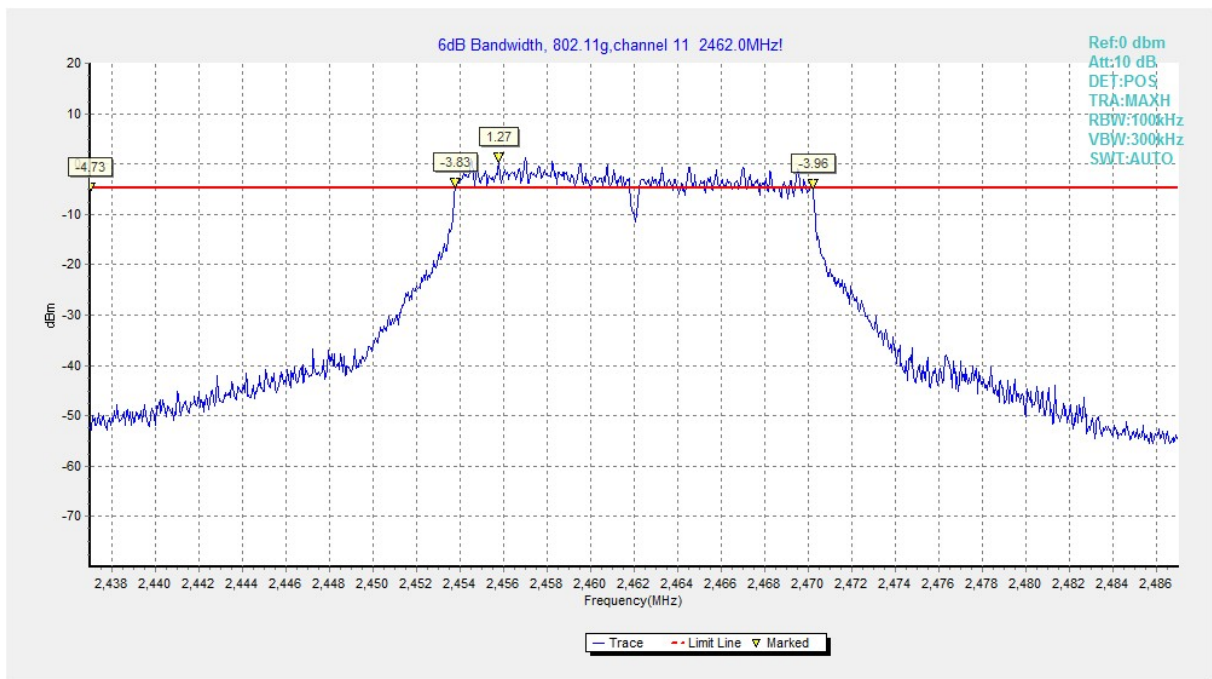


Fig.A.4.6 Occupied 6dB Bandwidth (802.11g, Ch 11)

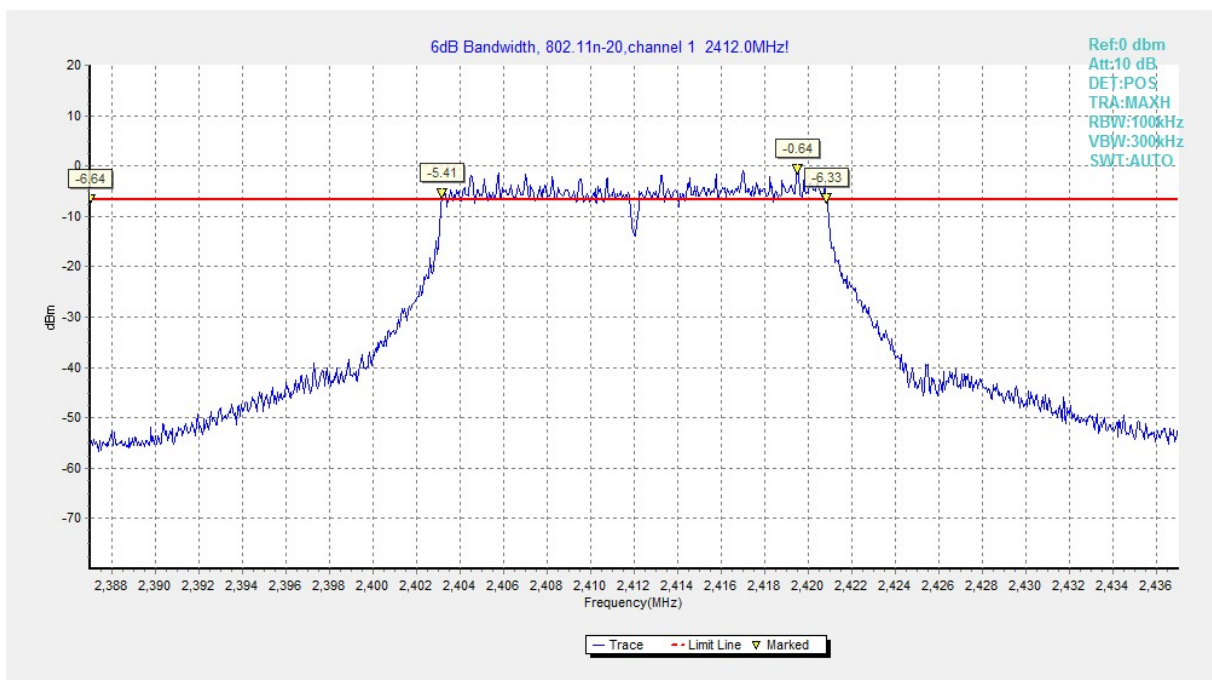


Fig.A.4.7 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 1)

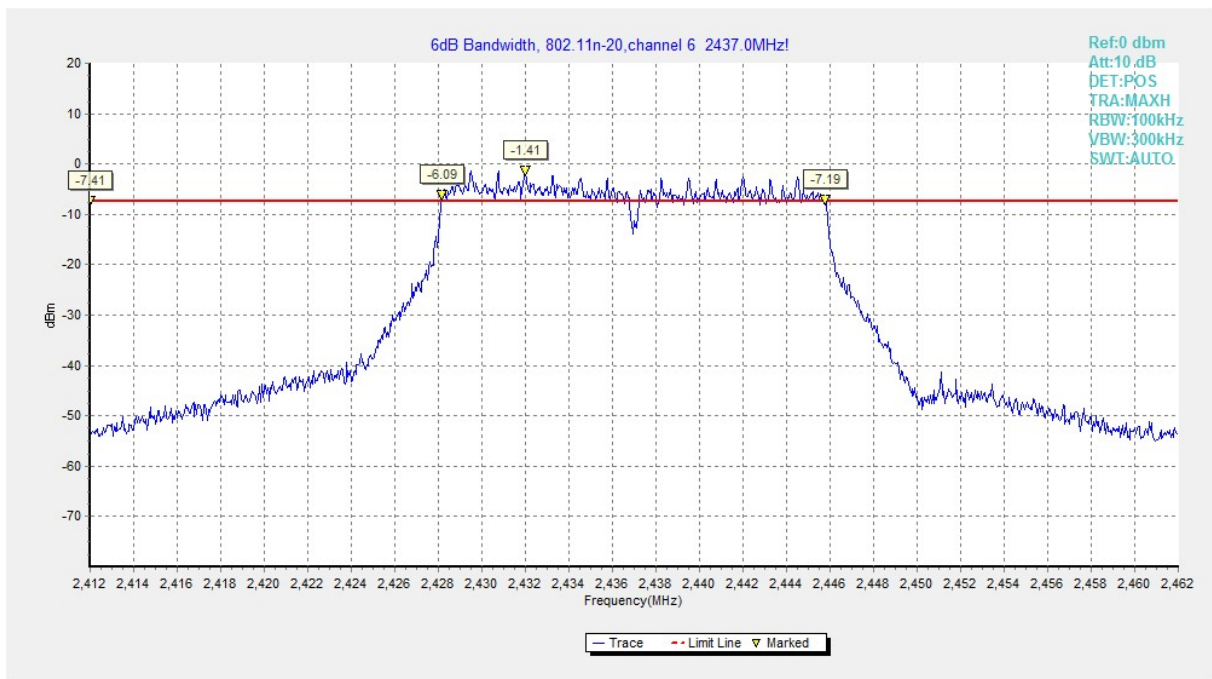


Fig.A.4.8 Occupied 6dB Bandwidth (802.11n-HT20, Ch 6)

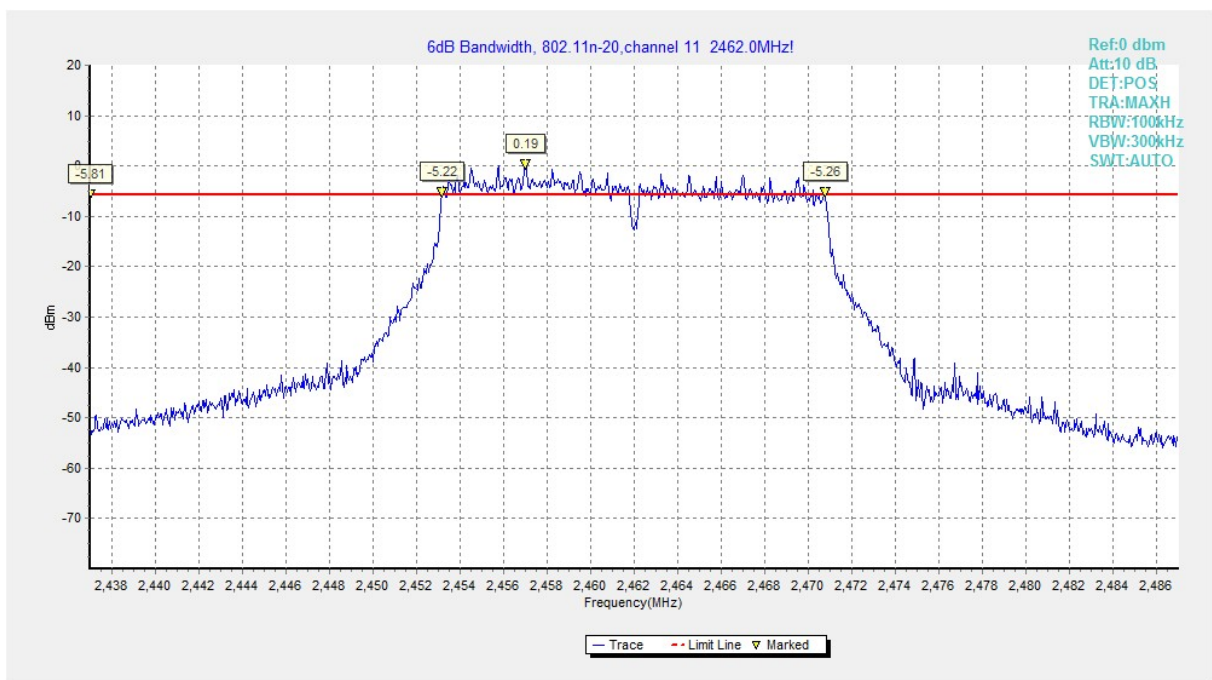


Fig.A.4.9 Occupied 6dB Bandwidth (802.11n-HT20, Ch 11)

A.5. Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

The measurement is made according to ANSI C63.10

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Note: Configuration information to be tested as follows:

Modulation type and data rate:

802.11b	802.11g	802.11n-HT20
11Mbps(CCK)	36Mbps(OFDM)	MCS3(OFDM)

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.5.1	P
	11	Fig.A.5.2	P
802.11g	1	Fig.A.5.3	P
	11	Fig.A.5.4	P
802.11n-HT20	1	Fig.A.5.5	P
	11	Fig.A.5.6	P

Conclusion: PASS

Test graphs as below: