
EMC Test Report for RM-69



T183 (EN ISO/IEC 17025)

CONTENTS

1	CUSTOMER INFORMATION	3
2	EUT AND ACCESSORY INFORMATION	4
2.1	EUT description	4
2.2	EUT and accessories	4
3	STANDARDS AND MEASUREMENT METHODS	4
4	TEST RESULTS	5
4.1	AC powerline conducted emissions	5
4.1.1	Limit	5
4.1.2	EUT operation mode	5
4.1.3	EUT test setup	5
4.1.4	Emission measurement data	6
4.2	Radiated emissions	7
4.2.1	Test method and level, 30MHz – 8000 MHz	7
4.2.2	EUT operation mode	8
4.2.3	EUT test setup	8
4.2.4	Emission measurement data, 30MHz – 8000 MHz	9

1 CUSTOMER INFORMATION

Test laboratory:	TCC Tampere Nokia Oyj Sinitaival 5 FIN-33720 TAMPERE Tel. +358 7180 08000 Fax. +358 7180 46800
FCC registration number IC file number:	94436 (June 14, 2002) IC 3608 (March 5, 2003)
Client:	Nokia Finland /Salo Nokia Oyj Joensuunkatu 7 FIN-24100 SALO BOX 86 Switchboard: +358-71-8008000 Fax.+358-71-8044277
Contact person:	Ulla Valjakka
Receipt of EUT:	25.11.2004
Date of testing:	30.11.2004
Date of report:	9.12.2004

The tests listed in this report have been done to demonstrate compliance with the applicable requirements in FCC rules Part 15 and IC standards ICES-003 and (RSS-132 and RSS-133, when applicable).

Contents approved:


Jan-Erik Lilja Senior Test Engineer

2 EUT AND ACCESSORY INFORMATION

2.1 EUT description

The EUT is a triple band (GSM900/1800/1900 EGPRS) mobile phone.

The highest internal frequency of the EUT is 3980 MHz.

2.2 EUT and accessories

The table below lists all EUTs and accessories used in the tests. Later in this test report, only numbers in the last column are used to refer to the devices in each test.

	Name	Type	S/N	HW	SW	EUT number
EUT	GSM phone	RM-69	0044005517568 26	3000	4.24	40118
	GSM phone	RM-69	0044005511756 800	3000	4.24	40117
Accessories	Battery AC charger	BL-5C AC-12	- 0675294399791 L277AA0008491	6.0 5.0	- -	40124 40121

SUMMARY OF TEST RESULTS

Section in CFR 47	Section in ICES-003 (RSS-132) [RSS-133]		Result
15.107,a	5.3	AC powerline conducted emissions	PASS
15.109,a	5.5 (6.6) [9]	Radiated emissions	PASS

3 STANDARDS AND MEASUREMENT METHODS

The tests were performed in guidance of CFR 47 Part 15 Subpart B, ANSI C63.4 (2001), ICES-003 and CISPR 22 (and RSS-132 and RSS-133, when applicable). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method".

4 TEST RESULTS

4.1 AC powerline conducted emissions

EUT	40118		
Accessories	40121, 40124		
Temp, Humidity, Air Pressure	19 °C	49 % RH	1011 mbar
Date of measurement	30.11.2004		
FCC rule part	§15.107		
ICES-003 section	5.3		
Measured by	Jari Jantunen		
Result	PASS		

4.1.1 Limit

CISPR 22 Class B limit

Frequency band (MHz)	Quasi-peak limit (dBμV)	Average limit (dBμV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5	56	46
5 – 30	60	50

4.1.2 EUT operation mode


EUT operation mode	GSM 1900, idle mode
EUT operation voltage	115V/60Hz

4.1.3 EUT test setup



Picture 1 EUT test setup

4.1.4 Emission measurement data

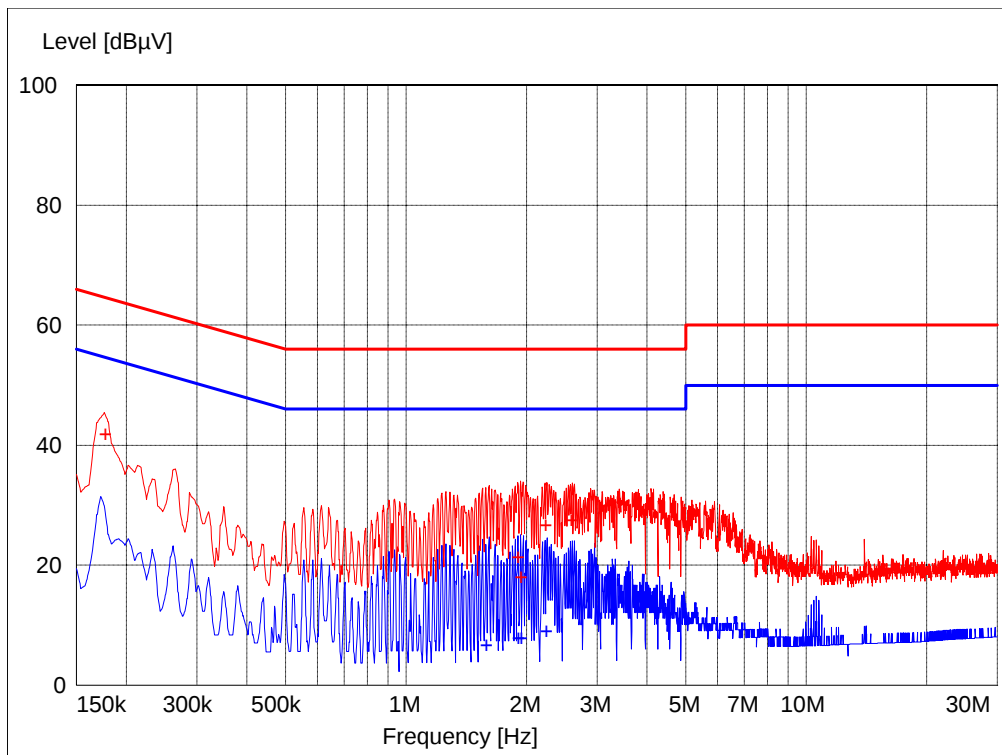

Picture 2 Emission measurement data GSM 1900, idle mode

Table 1 Emission measurement data, average detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
1.585500	6.80	10.40	46.00	39.20	AV	L1	GND
1.909500	8.00	10.40	46.00	38.00	AV	L1	GND
1.941000	7.90	10.40	46.00	38.10	AV	L1	GND
2.238000	9.00	10.50	46.00	37.00	AV	L1	GND

Table 2 Emission measurement data, quasi peak detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.177000	41.90	10.10	64.60	22.70	QP	N	GND
1.905000	21.40	10.40	56.00	34.60	QP	L1	GND
1.936500	18.10	10.40	56.00	37.90	QP	L1	GND
2.229000	26.70	10.50	56.00	29.30	QP	L1	GND
2.584500	27.60	10.50	56.00	28.40	QP	L1	GND

4.2 Radiated emissions

EUT	40117		
Accessories	40121, 40124		
Temp, Humidity, Air Pressure	23°C	45 %RH	1017 mbar
Date of measurement	8-9.12.2004		
FCC rule part	§15.109		
ICES-003 section	5.5		
RSS-132	6.6		
RSS-133	9		
Measured by	Jan-Erik Lilja		
Result	PASS		

4.2.1 Test method and level, 30MHz – 8000 MHz

The test was made according to ANSI C63.4 (2001) with following exceptions and additions:

- 1) The measurement was made in semi-anechoic chamber at measurement distance of 3m. The chamber had ferrite and absorber lining in all walls and ceiling, the floor was metal covered.
- 2) The measurement was divided in two parts; prescan and final measurement.

4.2.1.1 Prescan

- a) The EUT was set on the turntable and measuring antenna in horizontal polarization at 1m.
- b) The turntable was set to 0 degrees.
- c) The receiver was set to record the maximum level using peak detector.
- d) The antenna was raised from 1m to 4m in 1 meter steps.
- e) For each antenna height the table was rotated full turn in 30 degree steps.
- f) Antenna polarization was changed to vertical and phases b - e repeated.
- g) All suspect frequencies were recorded in a file.
- h) At every suspect frequency the turntable was rotated around, antenna scanned and the polarization changed to find the maximum levels.

4.2.1.2 Final measurement

- a) The final measurement was run at suspect frequencies only using peak, quasipeak and average detector.
- b) The turntable was rotated full turn to find out the worst azimuth.
- c) On those azimuths obtained in b, the antenna was scanned from 1m to 4m to find out the worst elevation.
- d) Phases b and c were repeated with another antenna polarization.
- e) Obtained values were reported

CISPR 22 Class B limit (3m measuring distance)

Frequency band (MHz)	Quasi-peak limit (dBμV/m)
30 – 230	40
230 – 1000	47

Class B limit (3m measuring distance)

Frequency band (MHz)	Limit ($\mu\text{V/m}$)	Limit ($\text{dB}\mu\text{V/m}$)	Detector
1000-8000	500 / 5000	54 / 74	AV / PK

4.2.2 EUT operation mode

EUT operation mode	PCS 1900 idle mode, Low, mid and high channels
EUT operation voltage	115V/60Hz

4.2.3 EUT test setup

4.2.4 Emission measurement data, 30MHz – 8000 MHz

The measurement results were obtained as described below.

$$E[\mu V / m] = U_{RX} + A_{CABLE} + AF - G_{PREAMP}$$

Where

U_{RX} receiver reading

A_{CABLE} Attenuation of the cable

AF Antenna factor

G_{PREAMP} Gain of the preamplifier

Table 3 Highest emission at channel 512

Freq [MHz]	EMI QP [dBμV/m]	EMI PK [dBμV/m]	EMI AVG [dBμV/m]	Polarization
3680.00		41.5	29.70	Vertical
7720.00		45.5	32.2	Vertical

Table 4 Highest emission at channel 661

Freq [MHz]	EMI QP [dBμV/m]	EMI PK [dBμV/m]	EMI AVG [dBμV/m]	Polarization
43.03	8.60			Vertical
54.75	9.10			Vertical
124.19	15.60			Vertical
149.80	12.10			Vertical
784.97	17.60			Vertical
3920.34		41.00	29.70	Vertical
7839.18		46.60	35.40	Vertical
7839.68		46.00	33.80	Vertical

Table 5 Highest emission at channel 810

Freq [MHz]	EMI QP [dBμV/m]	EMI PK [dBμV/m]	EMI AVG [dBμV/m]	Polarization
3980.00		41.00	28.00	Horizontal
7960.00		46.20	32.70	Horizontal