



# FCC PART 15.247 TEST REPORT

For

**Summer Infant, Inc.**

1275 Park East Drive, Woonsocket, Rhode Island, United States

**FCC ID: PZK-989T**

|                                                                                                                                                                                                                                                                                                                             |                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                                                                      | <b>Product Type:</b><br>BABY MONITOR(camera part) |
| <b>Report Number:</b> RSZ170822001-00A                                                                                                                                                                                                                                                                                      |                                                   |
| <b>Report Date:</b> 2017-10-17                                                                                                                                                                                                                                                                                              |                                                   |
| Rocky Kang                                                                                                                                                                                                                                                                                                                  |                                                   |
| <b>Reviewed By:</b> RF Engineer                                                                                                                                                                                                                                                                                             | <i>Rocky Kang</i>                                 |
| <b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen)<br>6/F., West Wing, Third Phase of Wanli Industrial<br>Building, Shihua Road, Futian Free Trade Zone,<br>Shenzhen, Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                                   |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★". This report may contain data were produced under the subcontractor and shall be marked with an asterisk "△".

## **TABLE OF CONTENTS**

|                                                                                                     |           |
|-----------------------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                                     | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                            | 4         |
| OBJECTIVE .....                                                                                     | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                                                  | 4         |
| TEST METHODOLOGY .....                                                                              | 4         |
| MEASUREMENT UNCERTAINTY .....                                                                       | 5         |
| TEST FACILITY .....                                                                                 | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                               | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                                             | 6         |
| EUT EXERCISE SOFTWARE .....                                                                         | 6         |
| SPECIAL ACCESSORIES.....                                                                            | 6         |
| EQUIPMENT MODIFICATIONS .....                                                                       | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                                            | 6         |
| EXTERNAL I/O CABLE.....                                                                             | 6         |
| BLOCK DIAGRAM OF TEST SETUP .....                                                                   | 7         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                                                | <b>8</b>  |
| <b>TEST EQUIPMENT LIST .....</b>                                                                    | <b>9</b>  |
| <b>FCC §15.247 (i) &amp; §1.1307 (b) (1) &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b> | <b>10</b> |
| APPLICABLE STANDARD .....                                                                           | 10        |
| RESULT .....                                                                                        | 10        |
| <b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>                                                      | <b>11</b> |
| APPLICABLE STANDARD .....                                                                           | 11        |
| ANTENNA CONNECTOR CONSTRUCTION .....                                                                | 11        |
| <b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>                                          | <b>12</b> |
| APPLICABLE STANDARD .....                                                                           | 12        |
| EUT SETUP .....                                                                                     | 12        |
| EMI TEST RECEIVER SETUP.....                                                                        | 12        |
| TEST PROCEDURE .....                                                                                | 12        |
| CORRECTED FACTOR & MARGIN CALCULATION .....                                                         | 13        |
| TEST RESULTS SUMMARY .....                                                                          | 13        |
| TEST DATA .....                                                                                     | 13        |
| <b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>                              | <b>16</b> |
| APPLICABLE STANDARD .....                                                                           | 16        |
| EUT SETUP .....                                                                                     | 16        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                                                   | 17        |
| TEST PROCEDURE .....                                                                                | 17        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                                                      | 17        |
| TEST RESULTS SUMMARY .....                                                                          | 17        |
| TEST DATA .....                                                                                     | 18        |
| <b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>                                             | <b>20</b> |
| APPLICABLE STANDARD .....                                                                           | 20        |
| TEST PROCEDURE .....                                                                                | 20        |
| TEST DATA .....                                                                                     | 20        |

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| <b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>              | <b>23</b> |
| APPLICABLE STANDARD .....                                              | 23        |
| TEST PROCEDURE .....                                                   | 23        |
| TEST DATA .....                                                        | 23        |
| <b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b> | <b>26</b> |
| APPLICABLE STANDARD .....                                              | 26        |
| TEST PROCEDURE .....                                                   | 26        |
| TEST DATA .....                                                        | 26        |
| <b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>  | <b>28</b> |
| APPLICABLE STANDARD .....                                              | 28        |
| TEST PROCEDURE .....                                                   | 28        |
| TEST DATA .....                                                        | 29        |
| <b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>        | <b>35</b> |
| APPLICABLE STANDARD .....                                              | 35        |
| TEST PROCEDURE .....                                                   | 35        |
| TEST DATA .....                                                        | 35        |
| <b>FCC §15.247(d) - BAND EDGES TESTING .....</b>                       | <b>36</b> |
| APPLICABLE STANDARD .....                                              | 36        |
| TEST PROCEDURE .....                                                   | 36        |
| TEST DATA .....                                                        | 36        |

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Summer Infant, Inc.*'s product, model number: 29890 TX (FCC ID: PZK-989T) or the "EUT" in this report was a *BABY MONITOR(camera part)*, which was measured approximately: 7.89 cm (L) × 6.40 cm (W) × 9.55 cm (H), rated with input voltage: DC 7.5 V from adapter.

Adapter information:

Model: P6 0750500

Input: AC100-240V~50/60Hz, 250 mA

Output: DC 7.5V, 500 mA

*\*All measurement and test data in this report was gathered from production sample serial number: 1701956 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2017-08-22.*

### Objective

This test report is prepared on behalf of *Summer Infant, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS submissions with FCC ID: PZK-989R.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

| Parameter                          | uncertainty |
|------------------------------------|-------------|
| Occupied Channel Bandwidth         | ±5%         |
| RF Output Power with Power meter   | ±0.5dB      |
| RF conducted test with spectrum    | ±1.5dB      |
| AC Power Lines Conducted Emissions | ±1.95dB     |
| All emissions, radiated            | ±4.88dB     |
| Temperature                        | ±3°C        |
| Humidity                           | ±6%         |
| Supply voltages                    | ±0.4%       |

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

Bay Area Compliance Laboratories Corp. (Shenzhen) has been accredited to ISO/IEC 17025 by CNAS(Lab code: L2408). And accredited to ISO/IEC 17025 by NVLAP(Lab code: 200707-0), the FCC Designation No. CN5001 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Shenzhen) was registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1       | 2410.875        | 11      | 2444.625        |
| 2       | 2414.250        | 12      | 2448.000        |
| 3       | 2417.625        | 13      | 2451.375        |
| 4       | 2421.000        | 14      | 2454.750        |
| 5       | 2424.375        | 15      | 2458.125        |
| 6       | 2427.750        | 16      | 2461.500        |
| 7       | 2431.125        | 17      | 2464.875        |
| 8       | 2434.500        | 18      | 2468.250        |
| 9       | 2437.875        | 19      | 2471.625        |
| 10      | 2441.250        |         |                 |

### EUT Exercise Software

No exercise software was made to the EUT tested.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------|---------------|
| /            | /           | /     | /             |

### External I/O Cable

| Cable Description                      | Length (m) | From Port | To      |
|----------------------------------------|------------|-----------|---------|
| Unshielded Undetachable DC Power Cable | 2.4        | EUT       | Adapter |

## Block Diagram of Test Setup

For conducted emission:

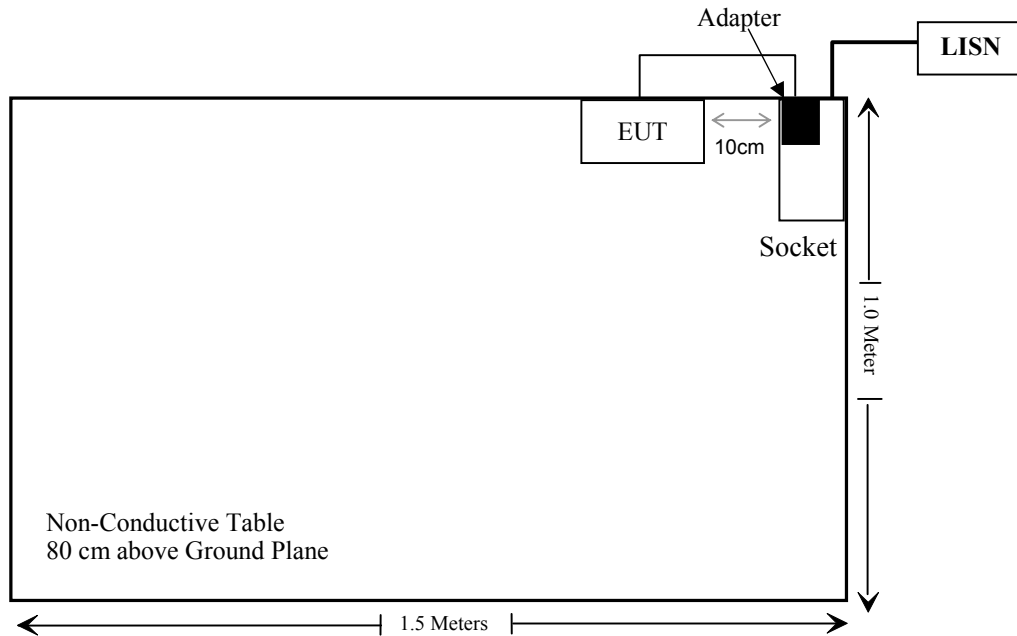

**SUMMARY OF TEST RESULTS**

| FCC Rules                               | Description of Test                | Result     |
|-----------------------------------------|------------------------------------|------------|
| §15.247 (i) & §1.1307 (b) (1) & §2.1091 | Maximum Permissible exposure (MPE) | Compliance |
| §15.203                                 | Antenna Requirement                | Compliance |
| §15.207(a)                              | AC Line Conducted Emissions        | Compliance |
| §15.205, §15.209 & §15.247(d)           | Radiated Emissions                 | Compliance |
| §15.247(a)(1)                           | 20 dB Emission Bandwidth           | Compliance |
| §15.247(a)(1)                           | Channel Separation Test            | Compliance |
| §15.247(a)(1)(iii)                      | Time of Occupancy (Dwell Time)     | Compliance |
| §15.247(a)(1)(iii)                      | Quantity of hopping channel Test   | Compliance |
| §15.247(b)(1)                           | Peak Output Power Measurement      | Compliance |
| §15.247(d)                              | Band edges                         | Compliance |

**TEST EQUIPMENT LIST**

| Manufacturer                    | Description              | Model                 | Serial Number          | Calibration Date | Calibration Due Date |
|---------------------------------|--------------------------|-----------------------|------------------------|------------------|----------------------|
| <b>Conducted Emissions Test</b> |                          |                       |                        |                  |                      |
| Rohde & Schwarz                 | EMI Test Receiver        | ESCS30                | 100176                 | 2016-10-19       | 2017-10-19           |
| Rohde & Schwarz                 | LISN                     | ENV216                | 3560.6650.12-101613-Yb | 2016-12-07       | 2017-12-07           |
| Rohde & Schwarz                 | Transient Limiter        | ESH3Z2                | DE25985                | 2017-05-21       | 2017-11-19           |
| Rohde & Schwarz                 | CE Test software         | EMC 32                | V8.53.0                | NCR              | NCR                  |
| N/A                             | Conducted Emission Cable | N/A                   | UF A210B-1-0720-504504 | 2017-05-12       | 2017-11-12           |
| <b>Radiated Emission Test</b>   |                          |                       |                        |                  |                      |
| Sunol Sciences                  | Horn Antenna             | DRH-118               | A052604                | 2014-12-29       | 2017-12-28           |
| Rohde & Schwarz                 | Signal Analyzer          | FSIQ26                | 8386001028             | 2017-04-24       | 2018-04-24           |
| Mini                            | Pre-amplifier            | ZVA-183-S+            | 5969001149             | 2017-02-14       | 2018-02-14           |
| HP                              | Amplifier                | HP8447E               | 1937A01046             | 2017-05-21       | 2017-11-19           |
| Sunol Sciences                  | Broadband Antenna        | JB1                   | A040904-2              | 2014-12-17       | 2017-12-16           |
| Rohde & Schwarz                 | EMI Test Receiver        | ESCI                  | 101120                 | 2016-12-07       | 2017-12-07           |
| Ducommun technologies           | RF Cable                 | UFA210A-1-4724-30050U | MFR64369223410-001     | 2017-05-21       | 2017-11-19           |
| Ducommun technologies           | RF Cable                 | 104PEA                | 218124002              | 2017-05-21       | 2017-11-19           |
| Ducommun technologies           | RF Cable                 | RG-214                | 1                      | 2017-05-21       | 2017-11-19           |
| Ducommun technologies           | RF Cable                 | RG-214                | 2                      | 2017-05-22       | 2017-11-22           |
| Ducommun Technologies           | Horn Antenna             | ARH-4223-02           | 1007726-04             | 2014-12-29       | 2017-12-28           |
| Ducommun Technologies           | Pre-amplifier            | ALN-22093530-01       | 991373-01              | 2017-08-03       | 2018-08-03           |
| <b>RF Conducted Test</b>        |                          |                       |                        |                  |                      |
| Agilent                         | P-Series Power Meter     | N1912A                | MY5000448              | 2016-12-05       | 2017-12-05           |
| Agilent                         | Wideband Power Sensor    | N1921A                | MY54210016             | 2016-12-05       | 2017-12-05           |
| WEINSCHL                        | 10dB Attenuator          | 5324                  | AU 3842                | 2017-05-23       | 2017-11-22           |
| Rohde & Schwarz                 | SPECTRUM ANALYZER        | FSU26                 | 200120                 | 2016-12-05       | 2017-12-05           |
| Rohde & Schwarz                 | EMI Test Receiver        | ESR                   | 1316.3003K03-101746-zn | 2017-08-19       | 2018-08-19           |
| Ducommun technologies           | RF Cable                 | RG-214                | 3                      | 2017-05-22       | 2017-11-22           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

#### Limits for General Population/Uncontrolled Exposure

| Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                          |
|-----------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz)                               | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (Minutes) |
| 0.3-1.34                                            | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34-30                                             | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30-300                                              | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1500                                            | /                             | /                             | f/1500                              | 30                       |
| 1500-100,000                                        | /                             | /                             | 1.0                                 | 30                       |

f = frequency in MHz

\* = Plane-wave equivalent power density

### Result

#### Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

| Frequency (MHz)   | Antenna Gain |           | Conducted Power |       | Evaluation Distance (cm) | Power Density (mW/cm <sup>2</sup> ) | MPE Limit (mW/cm <sup>2</sup> ) |
|-------------------|--------------|-----------|-----------------|-------|--------------------------|-------------------------------------|---------------------------------|
|                   | (dBi)        | (numeric) | (dBm)           | (mW)  |                          |                                     |                                 |
| 2410.875-2471.625 | 0            | 1.0       | 19              | 79.43 | 20                       | 0.016                               | 1                               |

Note: To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

### Result: Compliance

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Connector Construction**

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup



Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.


## Test Data

### Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 52 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Simon Wang on 2017-09-08.*

*EUT operation mode: Transmitting*

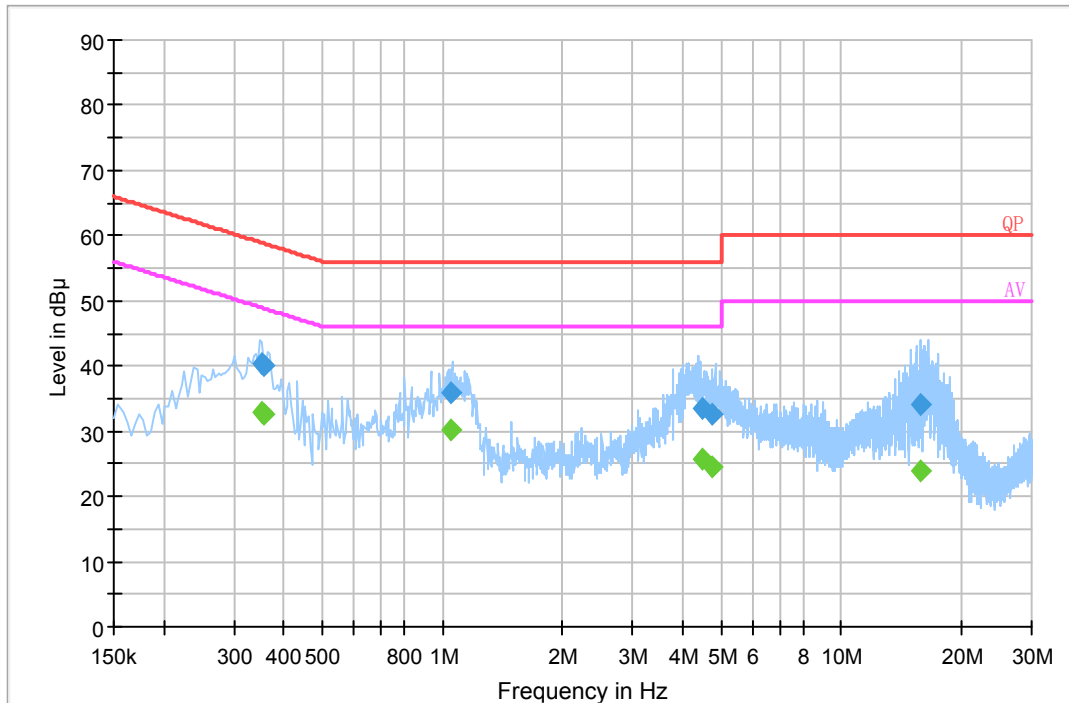**AC 120V/60 Hz, Line**

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 0.352690        | 40.4                       | 20.2                   | 58.9         | 18.5        | QP                    |
| 0.355250        | 39.9                       | 20.2                   | 58.8         | 18.9        | QP                    |
| 1.046130        | 36.0                       | 20.1                   | 56.0         | 20.0        | QP                    |
| 4.460030        | 33.5                       | 20.1                   | 56.0         | 22.5        | QP                    |
| 4.753610        | 32.6                       | 20.1                   | 56.0         | 23.4        | QP                    |
| 15.768370       | 34.0                       | 20.1                   | 60.0         | 26.0        | QP                    |
| 0.352690        | 33.0                       | 20.2                   | 48.9         | 15.9        | Ave.                  |
| 0.355250        | 32.5                       | 20.2                   | 48.8         | 16.3        | Ave.                  |
| 1.046130        | 30.2                       | 20.1                   | 46.0         | 15.8        | Ave.                  |
| 4.460030        | 25.8                       | 20.1                   | 46.0         | 20.2        | Ave.                  |
| 4.753610        | 24.6                       | 20.1                   | 46.0         | 21.4        | Ave.                  |
| 15.768370       | 24.0                       | 20.1                   | 50.0         | 26.0        | Ave.                  |

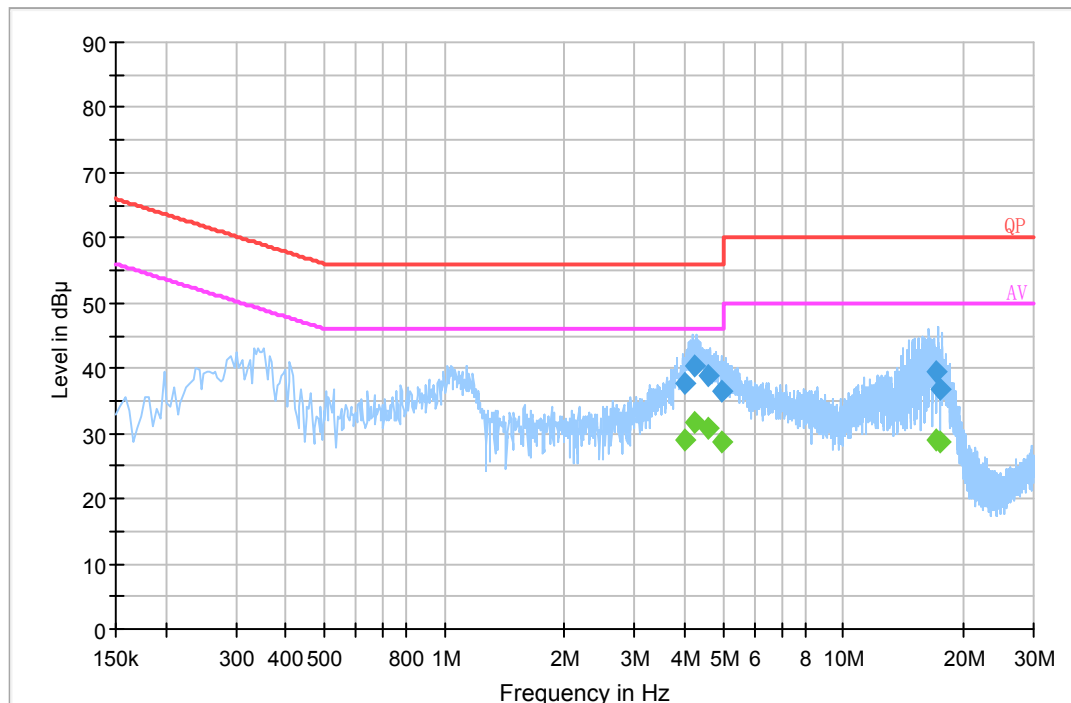**AC 120V/60 Hz, Neutral**

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 4.014630        | 37.6                       | 20.1                   | 56.0         | 18.4        | QP                    |
| 4.234010        | 40.2                       | 20.1                   | 56.0         | 15.8        | QP                    |
| 4.604610        | 39.0                       | 20.1                   | 56.0         | 17.0        | QP                    |
| 4.983570        | 36.5                       | 20.1                   | 56.0         | 19.5        | QP                    |
| 17.151190       | 39.5                       | 20.1                   | 60.0         | 20.5        | QP                    |
| 17.564110       | 36.8                       | 20.2                   | 60.0         | 23.2        | QP                    |
| 4.014630        | 29.1                       | 20.1                   | 46.0         | 16.9        | Ave.                  |
| 4.234010        | 31.7                       | 20.1                   | 46.0         | 14.3        | Ave.                  |
| 4.604610        | 30.8                       | 20.1                   | 46.0         | 15.2        | Ave.                  |
| 4.983570        | 28.8                       | 20.1                   | 46.0         | 17.2        | Ave.                  |
| 17.151190       | 29.1                       | 20.1                   | 50.0         | 20.9        | Ave.                  |
| 17.564110       | 28.6                       | 20.2                   | 50.0         | 21.4        | Ave.                  |

**Note:**

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz   | 120 kHz | QP       |
| Above 1 GHz       | 1 MHz   | 3 MHz     | /       | PK       |
|                   | 1 MHz   | 10 Hz     | /       | PK       |

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BAEL,  $U_{(L_m)}$  is less than  $U_{\text{cispr}}$ , if  $L_m$  is less than  $L_{\text{lim}}$ , it implies that the EUT complies with the limit.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

The testing was performed by Simon Wang on 2017-09-29.

EUT operation mode: Transmitting

30 MHz - 25 GHz:

| Frequency<br>(MHz)         | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Part 15.247       |                |
|----------------------------|-------------------|------------|---------------------|---------------|----------------|-----------------------------|------------------------------------|-------------------|----------------|
|                            | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBμV/m) | Margin<br>(dB) |
| Low Channel (2410.875 MHz) |                   |            |                     |               |                |                             |                                    |                   |                |
| 271.2                      | 38.98             | QP         | 63                  | 1.3           | H              | -3.8                        | 35.18                              | 46                | 10.82          |
| 2410.875                   | 76.89             | PK         | 61                  | 1.7           | H              | 33.92                       | 110.81                             | /                 | /              |
| 2410.875                   | 60.74             | Ave.       | 61                  | 1.7           | H              | 33.92                       | 94.66                              | /                 | /              |
| 2410.875                   | 74.68             | PK         | 286                 | 1.8           | V              | 33.92                       | 108.60                             | /                 | /              |
| 2410.875                   | 58.14             | Ave.       | 286                 | 1.8           | V              | 33.92                       | 92.06                              | /                 | /              |
| 2385.99                    | 32.19             | PK         | 297                 | 1.7           | H              | 33.92                       | 66.11                              | 74                | 7.89           |
| 2385.99                    | 13.95             | Ave.       | 297                 | 1.7           | H              | 33.92                       | 47.87                              | 54                | 6.13           |
| 2388.39                    | 34.11             | PK         | 199                 | 1.3           | H              | 33.92                       | 68.03                              | 74                | 5.97           |
| 2388.39                    | 14.22             | Ave.       | 199                 | 1.3           | H              | 33.92                       | 48.14                              | 54                | 5.86           |
| 2483.83                    | 37.37             | PK         | 122                 | 1.2           | H              | 34.08                       | 71.45                              | 74                | 2.55           |
| 2483.83                    | 14.30             | Ave.       | 122                 | 1.2           | H              | 34.08                       | 48.38                              | 54                | 5.62           |
| 4821.75                    | 57.35             | PK         | 72                  | 1.5           | H              | 5.84                        | 63.19                              | 74                | 10.81          |
| 4821.75                    | 40.71             | Ave.       | 72                  | 1.5           | H              | 5.84                        | 46.55                              | 54                | 7.45           |

| Frequency<br>(MHz)           | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Part 15.247       |                |
|------------------------------|-------------------|------------|---------------------|---------------|----------------|-----------------------------|------------------------------------|-------------------|----------------|
|                              | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBμV/m) | Margin<br>(dB) |
| Middle Channel (2441.25 MHz) |                   |            |                     |               |                |                             |                                    |                   |                |
| 271.2                        | 39.07             | QP         | 96                  | 1.2           | H              | -3.8                        | 35.27                              | 46                | 10.73          |
| 2441.25                      | 74.89             | PK         | 284                 | 1.1           | H              | 33.92                       | 108.81                             | /                 | /              |
| 2441.25                      | 58.18             | Ave.       | 284                 | 1.1           | H              | 33.92                       | 92.10                              | /                 | /              |
| 2441.25                      | 73.35             | PK         | 45                  | 1.7           | V              | 33.92                       | 107.27                             | /                 | /              |
| 2441.25                      | 57.47             | Ave.       | 45                  | 1.7           | V              | 33.92                       | 91.39                              | /                 | /              |
| 2379.41                      | 31.81             | PK         | 183                 | 2.3           | H              | 33.92                       | 65.73                              | 74                | 8.27           |
| 2379.41                      | 14.55             | Ave.       | 183                 | 2.3           | H              | 33.92                       | 48.47                              | 54                | 5.53           |
| 2388.83                      | 36.03             | PK         | 169                 | 2.4           | H              | 33.92                       | 69.95                              | 74                | 4.05           |
| 2388.83                      | 16.69             | Ave.       | 169                 | 2.4           | H              | 33.92                       | 50.61                              | 54                | 3.39           |
| 2483.67                      | 37.24             | PK         | 359                 | 1.9           | H              | 34.08                       | 71.32                              | 74                | 2.68           |
| 2483.67                      | 15.28             | Ave.       | 359                 | 1.9           | H              | 34.08                       | 49.36                              | 54                | 4.64           |
| 4882.50                      | 58.55             | PK         | 169                 | 1.8           | H              | 6.21                        | 64.76                              | 74                | 9.24           |
| 4882.50                      | 40.12             | Ave.       | 169                 | 1.8           | H              | 6.21                        | 46.33                              | 54                | 7.67           |
| High Channel (2471.625 MHz)  |                   |            |                     |               |                |                             |                                    |                   |                |
| 271.2                        | 39.16             | QP         | 52                  | 1.1           | H              | -3.8                        | 35.36                              | 46                | 10.64          |
| 2471.625                     | 76.47             | PK         | 223                 | 1.2           | H              | 34.08                       | 110.55                             | /                 | /              |
| 2471.625                     | 59.18             | Ave.       | 223                 | 1.2           | H              | 34.08                       | 93.26                              | /                 | /              |
| 2471.625                     | 75.34             | PK         | 349                 | 1.3           | V              | 34.08                       | 109.42                             | /                 | /              |
| 2471.625                     | 57.83             | Ave.       | 349                 | 1.3           | V              | 34.08                       | 91.91                              | /                 | /              |
| 2389.19                      | 32.87             | PK         | 91                  | 1.1           | H              | 33.92                       | 66.79                              | 74                | 7.21           |
| 2389.19                      | 14.02             | Ave.       | 91                  | 1.1           | H              | 33.92                       | 47.94                              | 54                | 6.06           |
| 2484.16                      | 37.65             | PK         | 335                 | 2.2           | H              | 34.08                       | 71.73                              | 74                | 2.27           |
| 2484.16                      | 15.77             | Ave.       | 335                 | 2.2           | H              | 34.08                       | 49.85                              | 54                | 4.15           |
| 2486.35                      | 36.46             | PK         | 197                 | 1.7           | H              | 34.08                       | 70.54                              | 74                | 3.46           |
| 2486.35                      | 15.21             | Ave.       | 197                 | 1.7           | H              | 34.08                       | 49.29                              | 54                | 4.71           |
| 4943.26                      | 57.66             | PK         | 58                  | 1.4           | H              | 6.21                        | 63.87                              | 74                | 10.13          |
| 4943.26                      | 38.21             | Ave.       | 58                  | 1.4           | H              | 6.21                        | 44.42                              | 54                | 9.58           |

**Note :**

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.

**FCC §15.247(a) (1)-CHANNEL SEPARATION TEST****Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

**Test Procedure**

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 56 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Simon Wang on 2017-09-28.*


*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots*

| Channel  | Frequency (MHz) | Channel Separation (MHz) | ≥Limit (MHz) | Result |
|----------|-----------------|--------------------------|--------------|--------|
| Low      | 2410.875        | 3.359                    | 2.387        | Pass   |
| Adjacent | 2414.250        |                          |              |        |
| Middle   | 2441.25         | 3.359                    | 2.353        | Pass   |
| Adjacent | 2444.625        |                          |              |        |
| High     | 2471.625        | 3.372                    | 2.393        | Pass   |
| Adjacent | 2468.250        |                          |              |        |


Note: Limit = 20 dB bandwidth \*2/3

### Low Channel

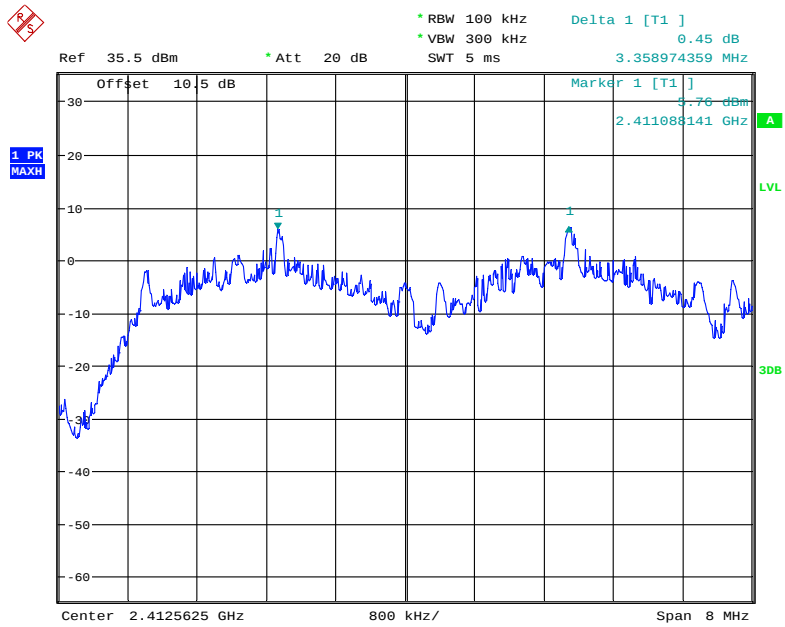


Date: 28.SEP.2017 20:33:06

### Middle Channel

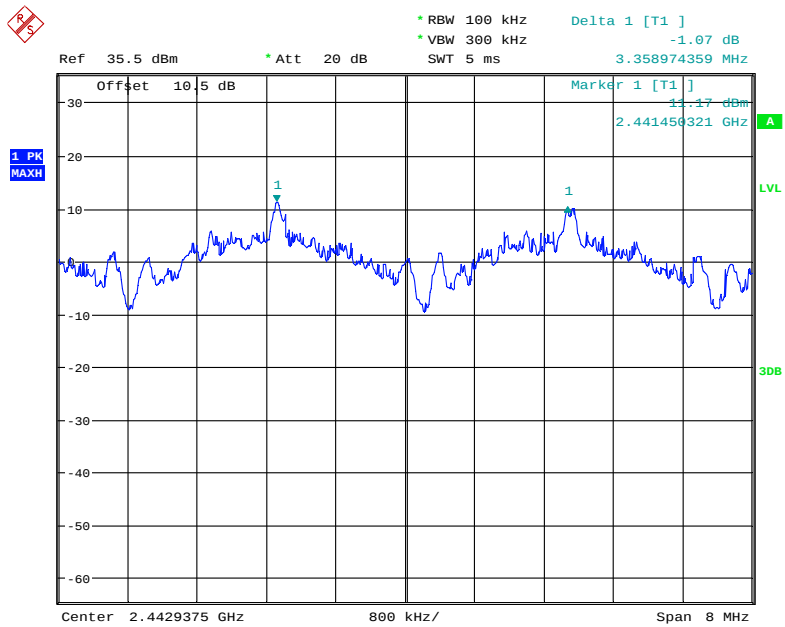

Date: 28.SEP.2017 20:37:58

High Channel

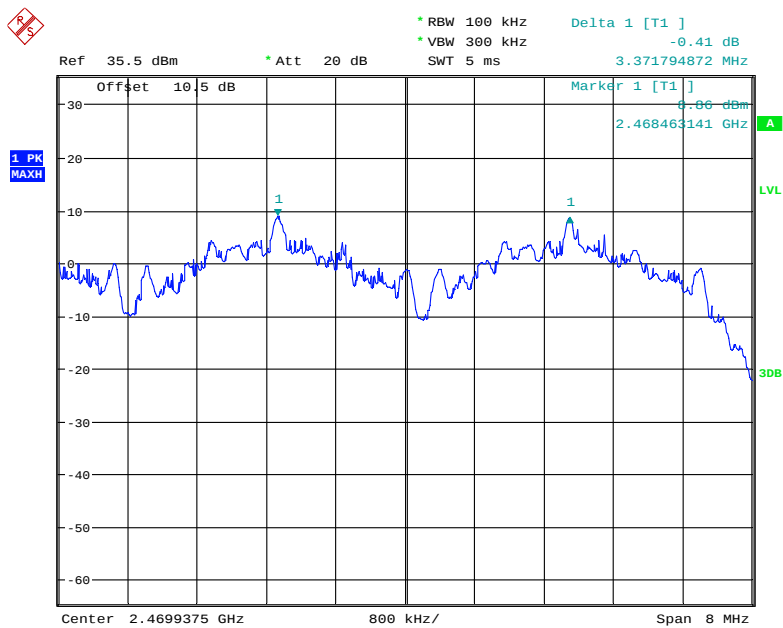

Date: 28.SEP.2017 20:49:17

**FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH****Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |


*The testing was performed by Simon Wang on 2017-09-28.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots*


| Channel | Frequency (MHz) | 20 dB Emission Bandwidth (MHz) |
|---------|-----------------|--------------------------------|
| Low     | 2410.875        | 3.58                           |
| Middle  | 2441.25         | 3.53                           |
| High    | 2471.625        | 3.59                           |

### Low Channel

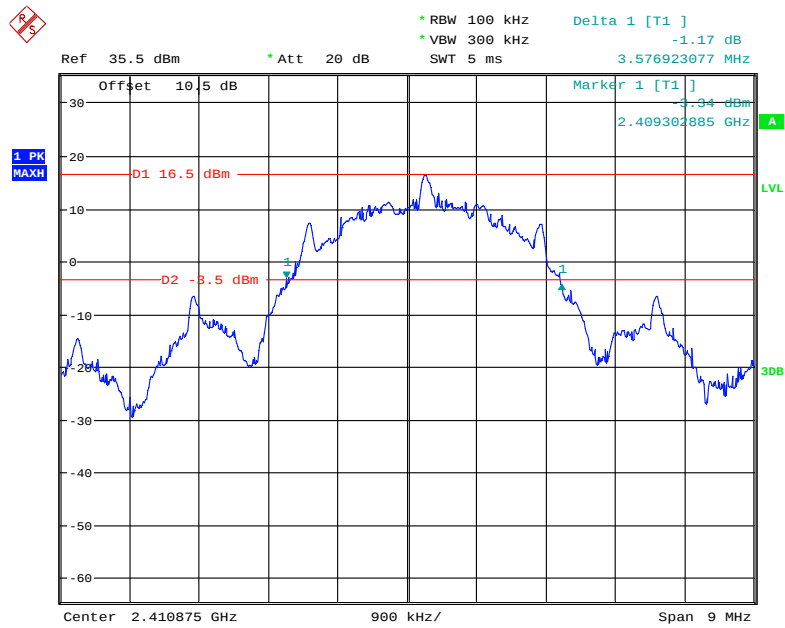


Date: 28.SEP.2017 20:02:42

### Middle Channel

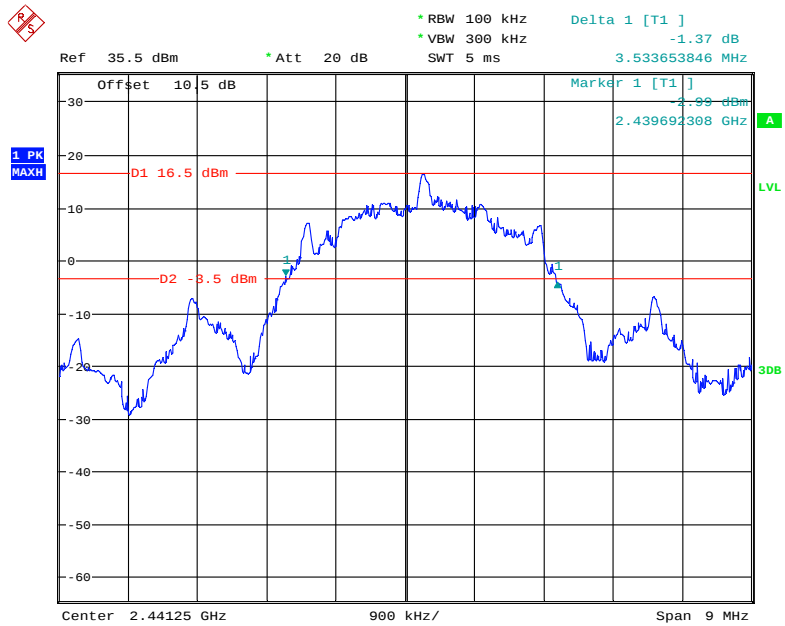

Date: 28.SEP.2017 20:03:41

### High Channel

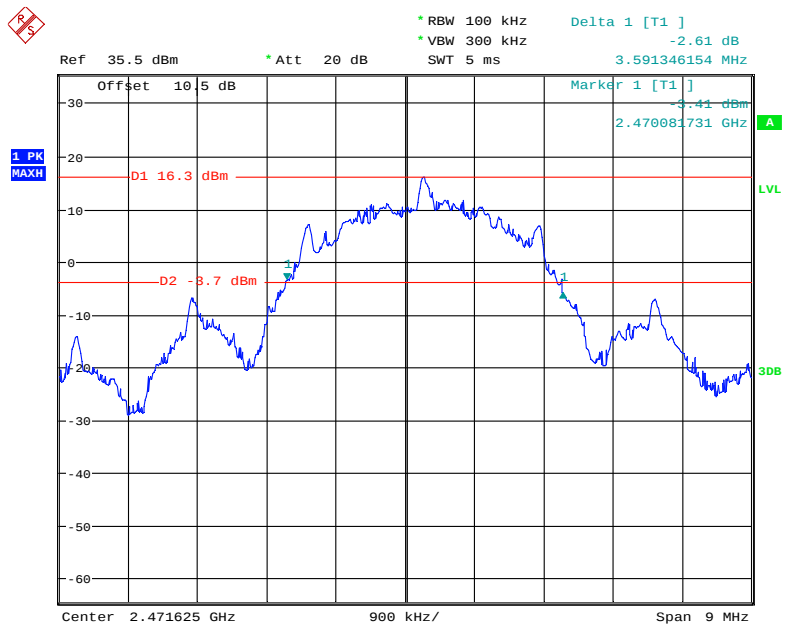

Date: 28.SEP.2017 20:05:12

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |


*The testing was performed by Simon Wang on 2017-09-28.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots*

| Frequency Range (MHz) | Number of Hopping Channel (CH) | Limit (CH) |
|-----------------------|--------------------------------|------------|
| 2400-2483.5           | 19                             | $\geq 15$  |

### Number of Hopping Channels

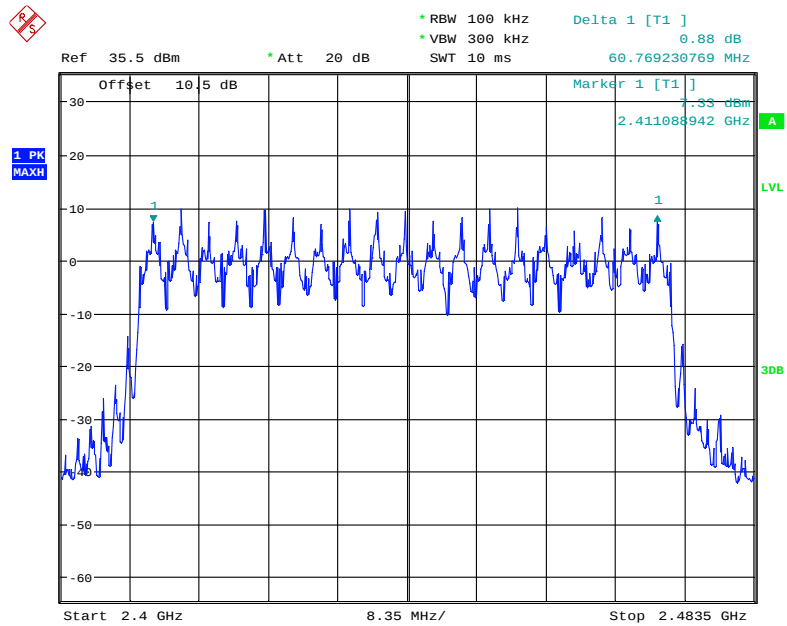

Date: 28.SEP.2017 20:20:25

## **FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**

### **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\begin{aligned} & \text{(Number of hops in the period specified in the requirements)} = \\ & \text{(number of hops on spectrum analyzer)} \times (\text{period specified in the requirements} / \text{analyzer sweep time}) \end{aligned}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

**Test Data****Environmental Conditions**

|                           |               |
|---------------------------|---------------|
| <b>Temperature:</b>       | 22~25 °C      |
| <b>Relative Humidity:</b> | 48~51 %       |
| <b>ATM Pressure:</b>      | 100~101.0 kPa |


The testing was performed by Simon Wang on 2017-09-28 and 2017-10-16.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots


| Channel                                                                                                                                                                                                                                                                                                                                                                              | Number of hops on spectrum analyzer | Number of hops in the period | Pulse Width (ms) | Dwell Time (S) | Limit (S) | Result |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|------------------------------|------------------|----------------|-----------|--------|
| Low                                                                                                                                                                                                                                                                                                                                                                                  | 3                                   | 228                          | 0.343            | 0.078          | 0.4       | Pass   |
| Middle                                                                                                                                                                                                                                                                                                                                                                               | 3                                   | 228                          | 0.343            | 0.078          | 0.4       | Pass   |
| High                                                                                                                                                                                                                                                                                                                                                                                 | 3                                   | 228                          | 0.343            | 0.078          | 0.4       | Pass   |
| <p>Note: (Number of hops in the period) =<br/>           (number of hops on spectrum analyzer) × (period specified in the requirements / analyzer sweep time) = <math>3 * (0.4 * 19) / 0.1 = 228</math><br/>           Dwell time = Pulse time * (Number of hops in the period) s<br/>           The period is 0.4 seconds multiplied by the number of hopping channels employed</p> |                                     |                              |                  |                |           |        |

## Pulse time, Low Channel

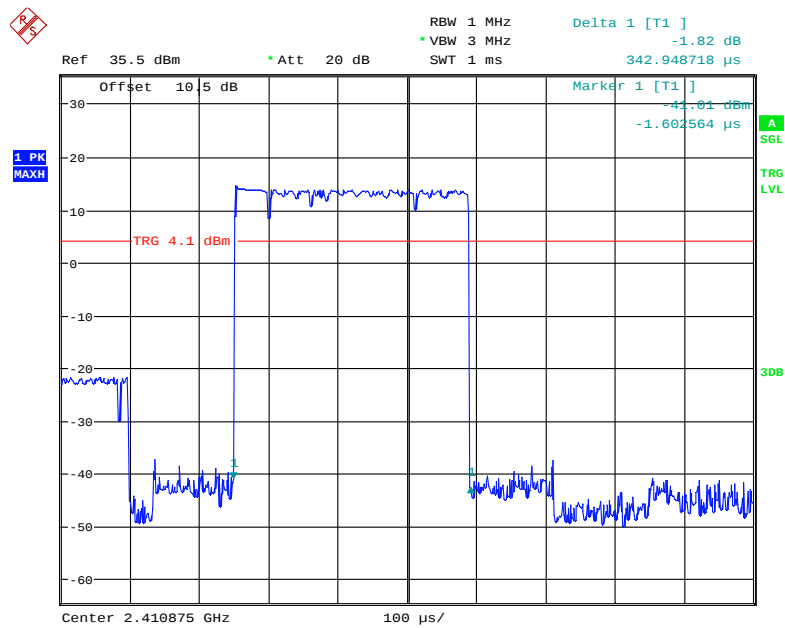


Date: 28.SEP.2017 20:54:08

## Number of hops on spectrum analyzer

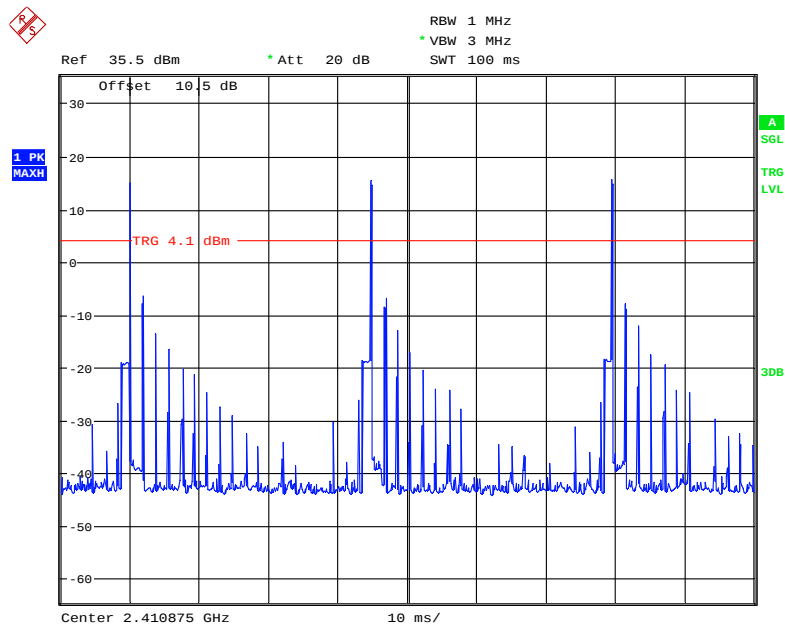


Date: 28.SEP.2017 20:55:02

### A period of 7.6s

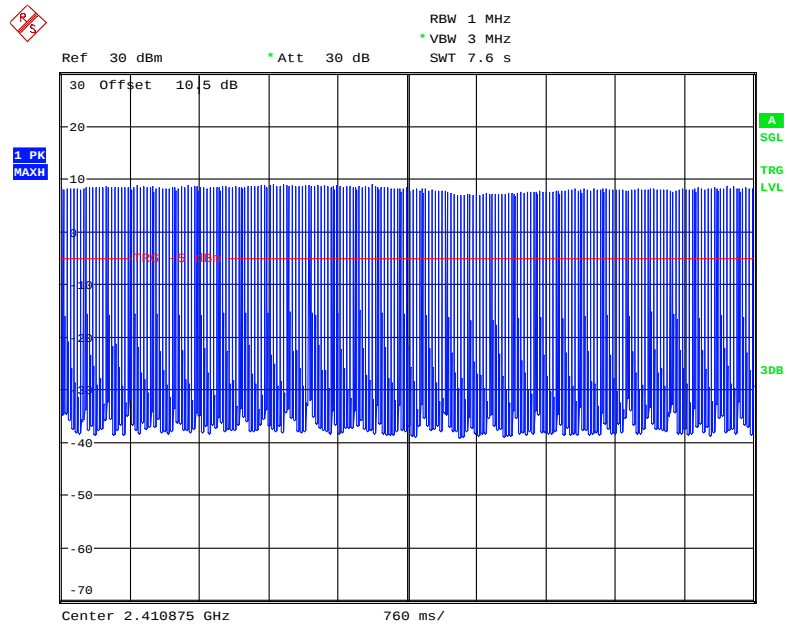


Date: 16.OCT.2017 20:34:21

### Pulse time, Middle Channel

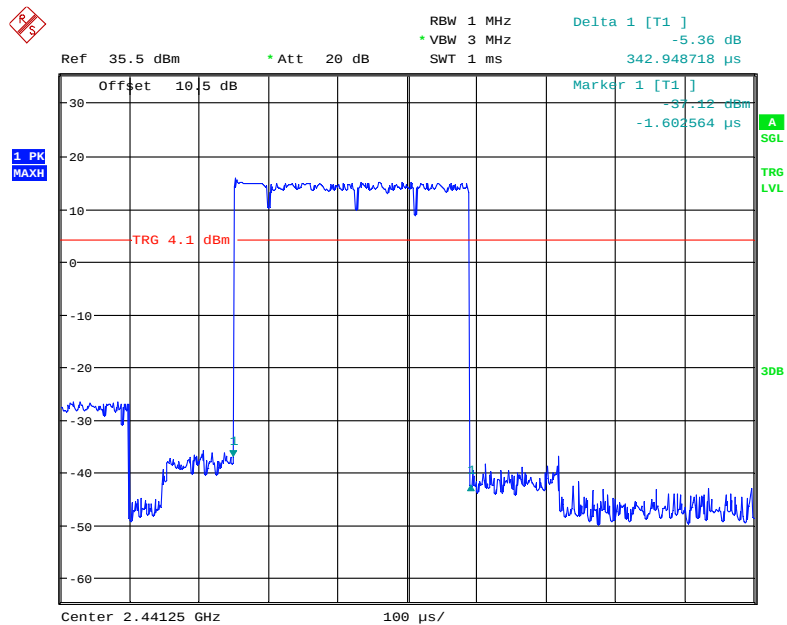


Date: 28.SEP.2017 20:57:35

### Number of hops on spectrum analyzer

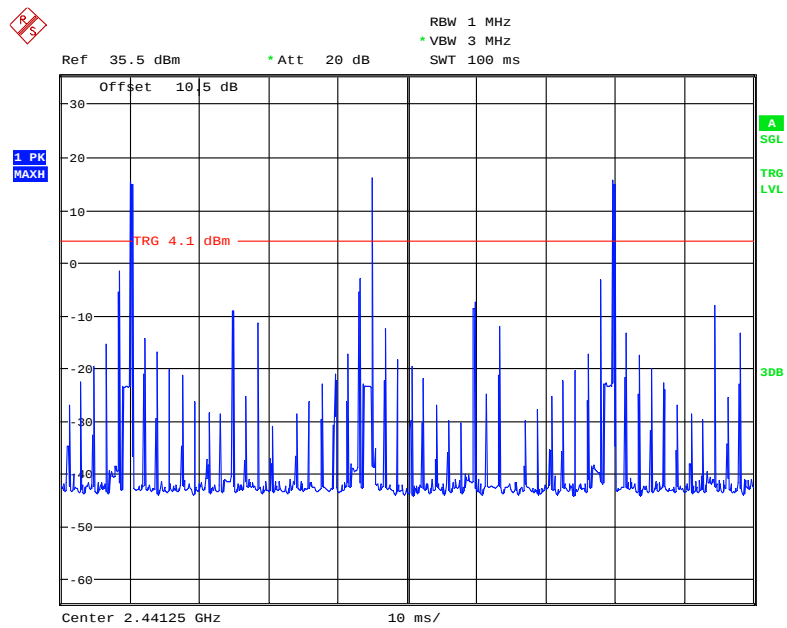


Date: 28.SEP.2017 20:56:42

### A period of 7.6s

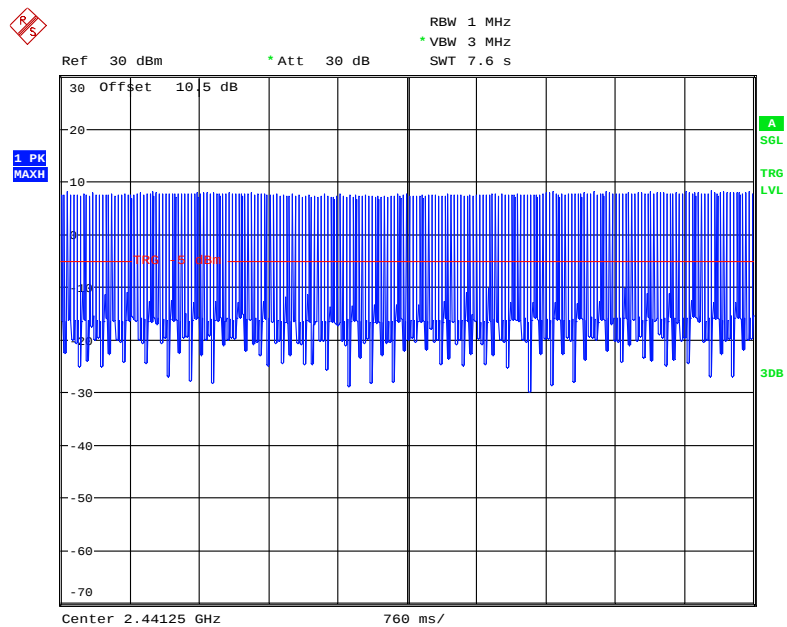


Date: 16.OCT.2017 20:35:26

### Pulse time, High Channel

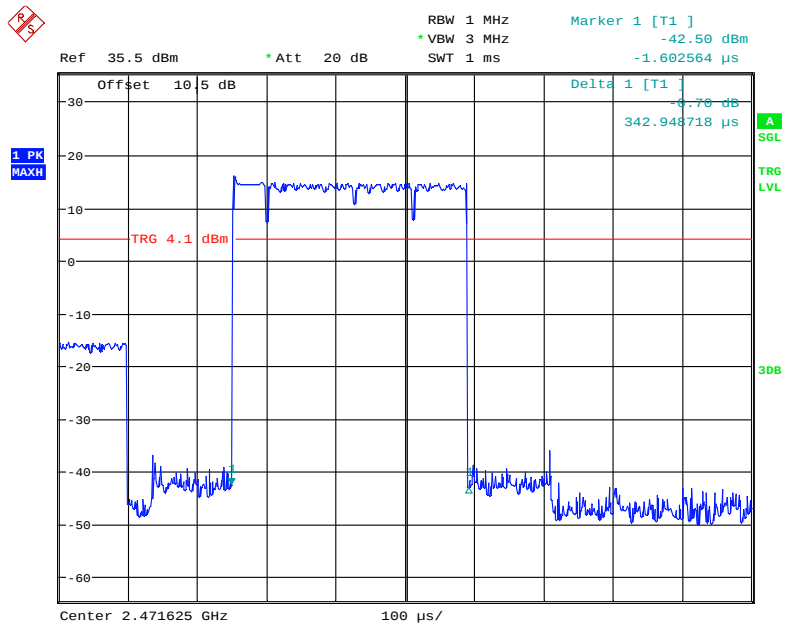


Date: 28.SEP.2017 20:57:58

### Number of hops on spectrum analyzer

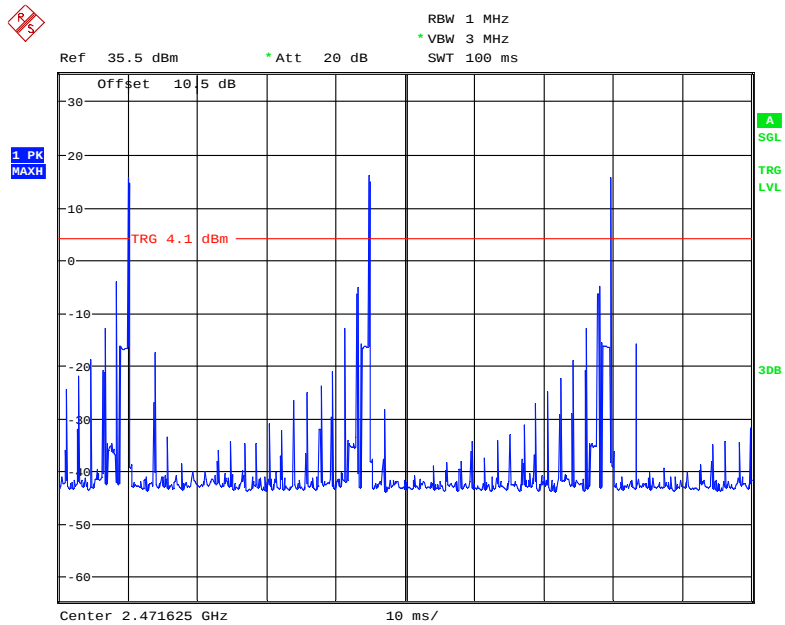

Date: 28.SEP.2017 20:58:14

A period of 7.6s

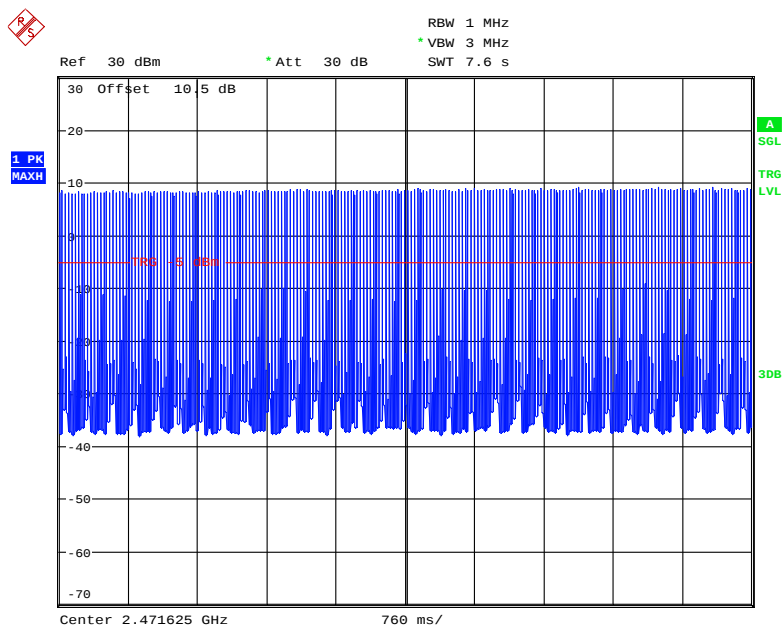

Date: 16.OCT.2017 20:36:00

**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT****Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

**Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Simon Wang on 2017-09-28.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table.*

| <b>Channel</b> | <b>Frequency (MHz)</b> | <b>Peak Output Power (dBm)</b> | <b>Limit (dBm)</b> |
|----------------|------------------------|--------------------------------|--------------------|
| Low            | 2410.875               | 18.75                          | 21                 |
| Middle         | 2441.25                | 18.86                          | 21                 |
| High           | 2471.625               | 18.74                          | 21                 |

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Data

#### Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 52 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Simon Wang on 2017-09-28.*

*EUT operation mode: Transmitting*


*Test Result: Compliance. Please refer to following plots.*

### Band Edge-Left Side

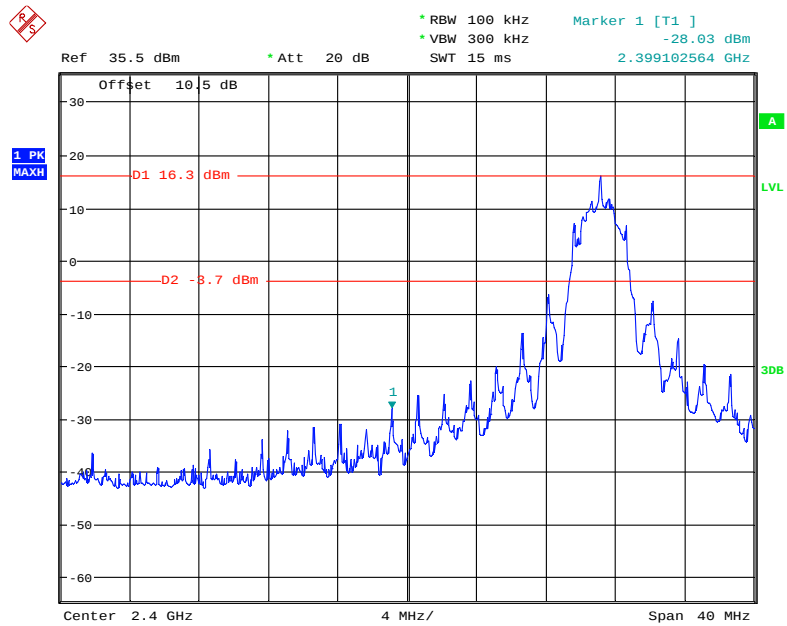

Date: 28.SEP.2017 20:00:24

### Band Edge-Right Side

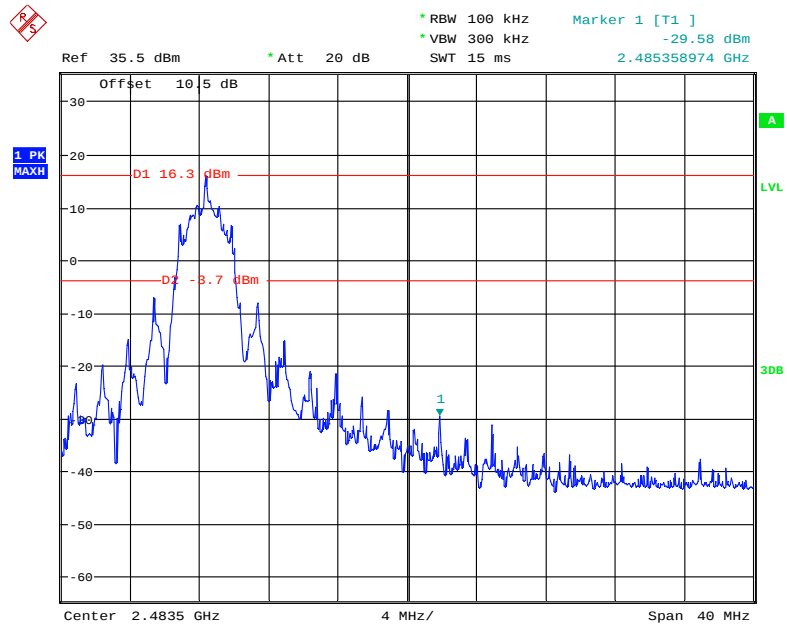

Date: 28.SEP.2017 19:58:27

\*\*\*\*\* END OF REPORT \*\*\*\*\*