



**KES Co., Ltd.**  
C-3701, Simin-daero 365-401,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-15T0002  
Page ( 1 ) of (36)

# TEST REPORT

## Part 15 Subpart C 15.247

**Equipment under test** Bluetooth Keyboard Case

**Model name** CLNK1100

**FCC ID** PZYCLNK1100

**Applicant** Core Logic, Inc.

**Manufacturer** Core Logic, Inc.

**Date of test(s)** 2015.01.07 ~ 2015.01.16

**Date of issue** 2015.01.19

**Issued to**


**Core Logic, Inc.**

11st Fl, 1-B U-Space building 660 Daewangpangy-ro, Bundang-gu,  
Seongsam-si Gyeonggi-do 463-400 korea  
Tel: +82-2-2191-0833 / Fax: +82-2-2191-0878

**Issued by**

**KES Co., Ltd.**

C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si,  
Gyeonggi-do, 431-716, Korea  
473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
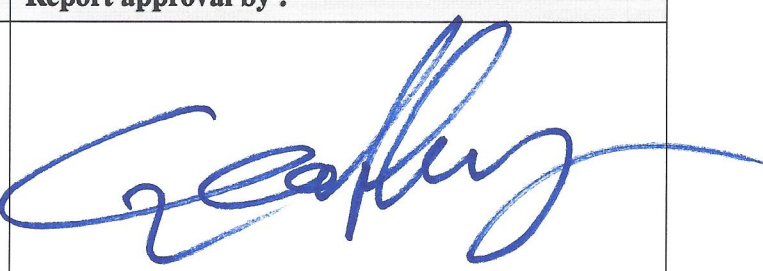
| Test and report completed by :                                                      | Report approval by :                                                                 |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |
| Hyeon-Su Jang<br>Test engineer                                                      | Jeff Do<br>Technical manager                                                         |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.



---

### Revision history

| Revision | Date of issue | Test report No. | Description |
|----------|---------------|-----------------|-------------|
| -        | 2015.01.19    | KES-RF-15T0002  | Initial     |

---

## TABLE OF CONTENTS

|             |                                                |    |
|-------------|------------------------------------------------|----|
| 1.          | General information .....                      | 4  |
| 1.1.        | EUT description .....                          | 4  |
| 1.2.        | Information about derivative model .....       | 4  |
| 1.3.        | Device modifications .....                     | 4  |
| 2.          | Summary of tests .....                         | 5  |
| 3.          | Test results .....                             | 6  |
| 3.1         | Radiated spurious emissions .....              | 6  |
| 3.2         | Conducted spurious emissions & band edge ..... | 15 |
| 3.3.        | 6 dB bandwidth .....                           | 19 |
| 3.4.        | Output power .....                             | 22 |
| 3.5.        | Power spectral density .....                   | 26 |
| 3.6.        | AC conducted emissions .....                   | 30 |
| Appendix A. | Measurement equipment .....                    | 33 |
| Appendix B. | Test setup photo .....                         | 34 |
| Appendix C. | Duty Cycle .....                               | 36 |

## 1. General information

Applicant: Core Logic, Inc.  
Applicant address: 11st FI, 1-B U-Space building 660 Daewangpangy-ro, Bundang-gu,  
Seongsam-si Gyeonggi-do 463-400 korea  
Test site: KES Co., Ltd.  
Test site address: C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea  
FCC rule part(s): 15.247  
Model: CLNK1100  
FCC ID: PZYCLNK1100  
Test device serial No.: ☐ Production ☒ Pre-production ☐ Engineering

### 1.1. EUT description

Equipment under test Bluetooth Keyboard Case  
Frequency range 2402 MHz ~ 2480 MHz  
Modulation technique GFSK  
Number of channels 40  
Antenna specification Antenna type: PCB, Peak gain: 2 dBi  
Power source DC 3.7 V(Battery)

The device contains the following capabilities: Only Bluetooth LE

### 1.2. Information about derivative model

N/A

### 1.3. Device modifications

N/A

## 2. Summary of tests

| Reference     | Parameter                                 | Test results |
|---------------|-------------------------------------------|--------------|
| 15.205 15.209 | Radiated spurious emission                | Pass         |
| 15.247(d)     | Conducted spurious emission and band edge | Pass         |
| 15.247(a)(2)  | 6 dB bandwidth                            | Pass         |
| 15.247(b)(3)  | Peak output power                         | Pass         |
| 15.247(e)     | Power spectral density                    | Pass         |
| 15.207        | AC conducted emissions                    | Pass         |

**Note:**


1. The EUT was tested per the guidance of KDB 558074 v03r02. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and/or AC line conducted testing.
2. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

### 3. Test results


#### 3.1 Radiated spurious emissions

##### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

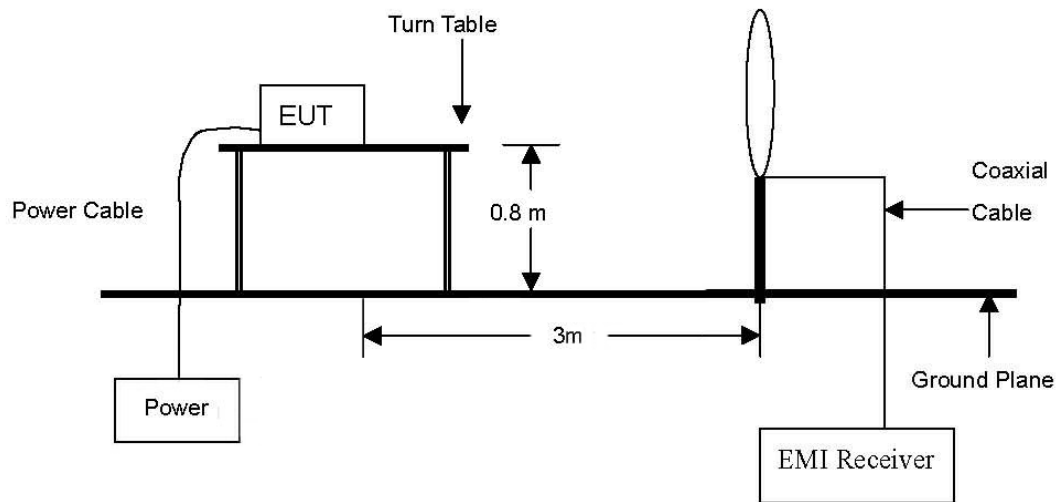

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

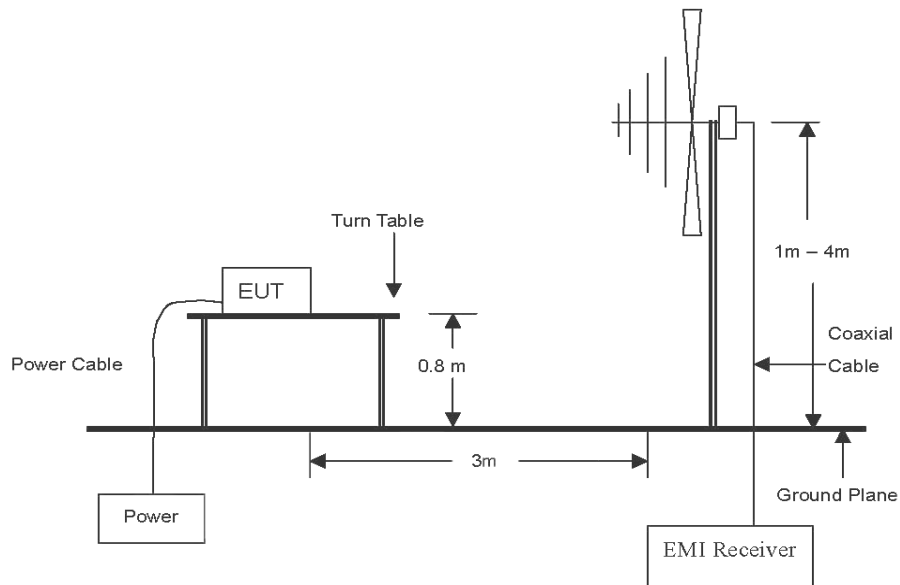

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 24 GHz emissions.

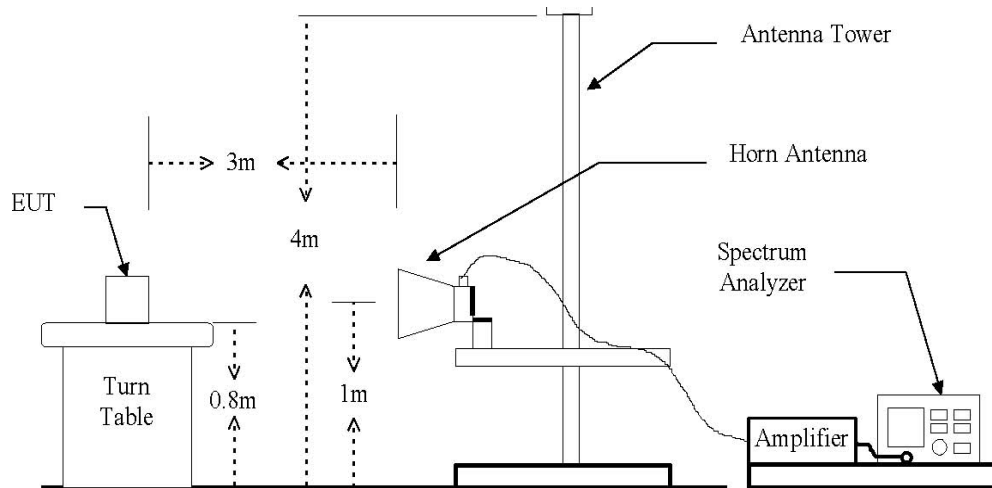

### Test procedure

KDB 558074 v03r02 – section 12.1 and 12.2.7

### Test settings

#### Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 v03r02

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 v03r02

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $> 2 \times \text{span/RBW}$ )
6. Sweep time = auto 7. Trace (RMS) averaging was performed over at least 100 traces

### Note:

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 v03r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20 dB of the respective limits were not reported.
3. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
4. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.

5. “\*” means restricted band edge.

5. Field strength( $\text{dB}\mu\text{V/m}$ ) = Level( $\text{dB}\mu\text{V}$ ) + Correction factors( $\text{dB/m}$ ) + Cable loss( $\text{dB}$ ) +  $F_d(\text{dB})$

6. Correction factors( $\text{dB/m}$ ) = Antenna factor( $\text{dB/m}$ ) + Cable loss( $\text{dB}$ ) + or Amp. gain( $\text{dB}$ )

7. Margin( $\text{dB}$ ) = Limit( $\text{dB}\mu\text{V/m}$ ) - Field strength( $\text{dB}\mu\text{V/m}$ )

8.  $F_d = 40\log(D_m / D_s)$

Where:

$F_d$  = Distance factor in dB

$D_m$  = Measurement distance in meters

$D_s$  = Specification distance in meters

### Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency (MHz) | Distance (Meters) | Radiated ( $\mu\text{V/m}$ ) |
|-----------------|-------------------|------------------------------|
| 0.009 ~ 0.490   | 300               | 2 400 / F(kHz)               |
| 0.490 ~ 1.705   | 30                | 24 000 / F(kHz)              |
| 1.705 ~ 30.0    | 30                | 30                           |
| 30 ~ 88         | 3                 | 100**                        |
| 88 ~ 216        | 3                 | 150**                        |
| 216 ~ 960       | 3                 | 200**                        |
| Above 960       | 3                 | 500                          |

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

**KES Co., Ltd.**

C-3701, Simin-daero 365-401,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-15T0002  
Page (9 ) of (36)

**Test results (Below 30 MHz)**

Mode: Bluetooth LE  
Transfer rate: 1 Mbps  
Distance of measurement: 3 meter  
Operating frequency: 2 480 MHz (Worst case)  
Channel: 39

| Frequency<br>(MHz) | Level<br>(dB $\mu$ V) | Ant. Pol. | Correction<br>factors<br>(dB/m) | F <sub>d</sub><br>(dB) | Field stren<br>gth<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|-----------------------|-----------|---------------------------------|------------------------|--------------------------------------|-------------------------|----------------|
| No signal detected |                       |           |                                 |                        |                                      |                         |                |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.

### Test results (Below 1 000 MHz)

|                          |                        |
|--------------------------|------------------------|
| Mode:                    | Bluetooth LE           |
| Transfer rate:           | 1 Mbps                 |
| Distance of measurement: | 3 meter                |
| Operating frequency:     | 2 480 MHz (Worst case) |
| Channel:                 | 39                     |

| Radiated emissions |                | Ant. | Correction factors |                 | Total           | Limit          |             |
|--------------------|----------------|------|--------------------|-----------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Pol. | Ant. factor (dB/m) | Cable loss (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 46.490             | 17.03          | V    | 12.86              | 0.71            | 30.60           | 43.50          | 12.90       |
| 176.470            | 18.49          | V    | 11.36              | 1.34            | 31.19           | 43.50          | 12.31       |
| 212.360            | 25.75          | H    | 9.77               | 1.46            | 36.98           | 43.50          | 6.52        |
| 274.440            | 16.24          | V    | 11.93              | 1.66            | 29.83           | 46.00          | 16.17       |
| 321.000            | 21.96          | H    | 13.16              | 1.82            | 36.94           | 46.00          | 9.06        |
| 404.420            | 21.82          | H    | 14.98              | 2.07            | 38.87           | 46.00          | 7.13        |
| 452.920            | 14.75          | V    | 16.22              | 2.19            | 33.16           | 46.00          | 12.84       |
| 548.950            | 19.45          | H    | 17.71              | 2.45            | 39.61           | 46.00          | 6.39        |
| 577.080            | 15.17          | V    | 18.26              | 2.53            | 35.96           | 46.00          | 10.04       |

### Note.

1. All spurious emission at channels are almost the same below 1 GHz, so that high channel was chosen at representative in final test.
2. Actual = Reading + Ant. factor + Cable loss
3. Detector mode: Quasi peak
4. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

### Test results (Above 1 000 MHz)

|                          |              |
|--------------------------|--------------|
| Mode:                    | Bluetooth LE |
| Transfer rate:           | 1 Mbps       |
| Distance of measurement: | 3 meter      |
| Operating frequency:     | 2 402 MHz    |
| Channel:                 | 0            |

| Radiated emissions |                |               | Ant. | Correction factors | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | AFCL (dB)          | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 2385.4             | 40.40          | Perak         | H    | 3.56               | 43.96           | 74.00          | 30.04       |
| 2313.2             | 46.05          | Perak         | V    | 3.28               | 49.33           | 74.00          | 24.67       |
| 4803.7             | 37.35          | Perak         | H    | 13.54              | 50.89           | 74.00          | 23.11       |
| 4804.7             | 39.40          | Perak         | V    | 13.55              | 52.95           | 74.00          | 21.05       |

|                          |              |
|--------------------------|--------------|
| Mode:                    | Bluetooth LE |
| Transfer rate:           | 1 Mbps       |
| Distance of measurement: | 3 meter      |
| Operating frequency:     | 2 442 MHz    |
| Channel:                 | 20           |

| Radiated emissions |                |               | Ant. | Correction factors | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | AFCL (dB)          | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 4885.6             | 36.13          | Perak         | H    | 14.08              | 50.21           | 74.00          | 23.79       |
| 4883.6             | 38.43          | Perak         | V    | 14.07              | 52.50           | 74.00          | 21.50       |

**KES Co., Ltd.**

C-3701, Simin-daero 365-401,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-15T0002  
Page (12 ) of (36)


Mode: Bluetooth LE  
Transfer rate: 1 Mbps  
Distance of measurement: 3 meter  
Operating frequency: 2 480 MHz  
Channel: 39

| Radiated emissions |                         |                  | Ant. | Correction factors | Total                    | Limit                   |                |
|--------------------|-------------------------|------------------|------|--------------------|--------------------------|-------------------------|----------------|
| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | AFCL<br>(dB)       | Actual<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
| 2486.5             | 39.63                   | Perak            | H    | 4.19               | 43.82                    | 74.00                   | 30.18          |
| 2488.2             | 41.72                   | Perak            | V    | 4.20               | 45.92                    | 74.00                   | 28.08          |
| 4959.5             | 35.18                   | Perak            | H    | 14.57              | 49.75                    | 74.00                   | 24.25          |
| 4959.5             | 39.53                   | Perak            | V    | 14.57              | 54.10                    | 74.00                   | 19.90          |
| 4959.5             | 25.55                   | Avg              | V    | 14.57              | 40.12                    | 54.00                   | 13.88          |


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.

## Test results band edge emissions

### - Low channel(Horizontal)

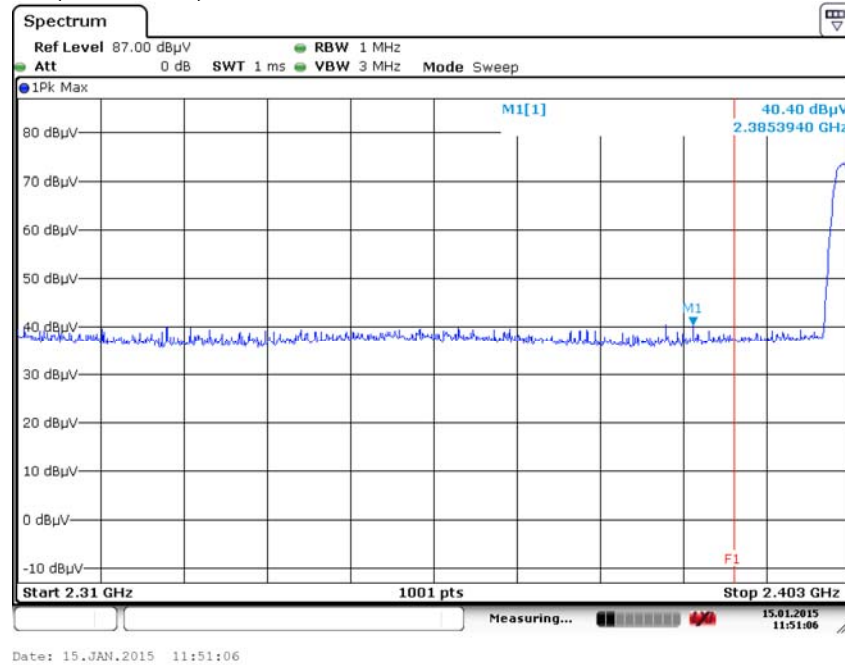


### - Low channel(Vertical)

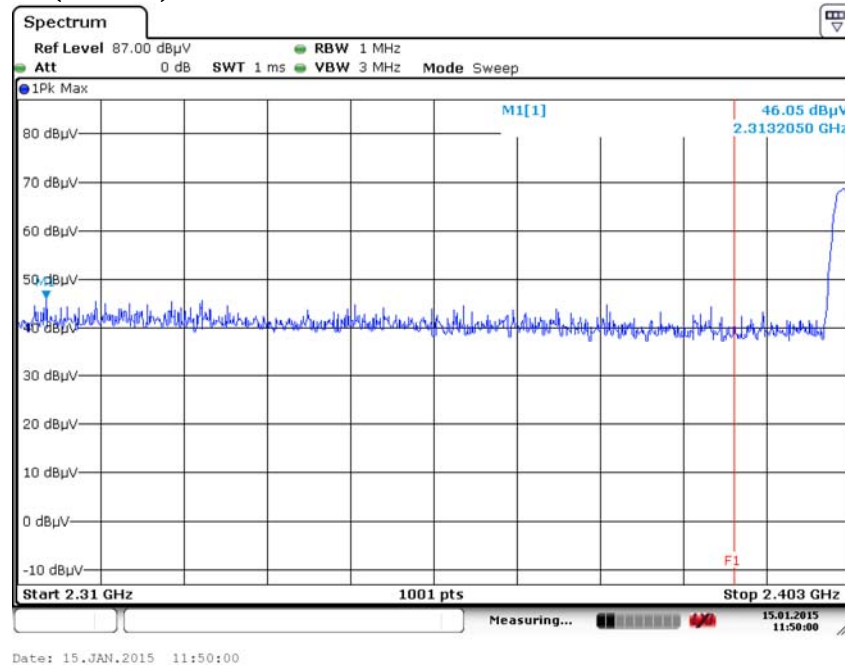


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.

- High channel(Horizontal)

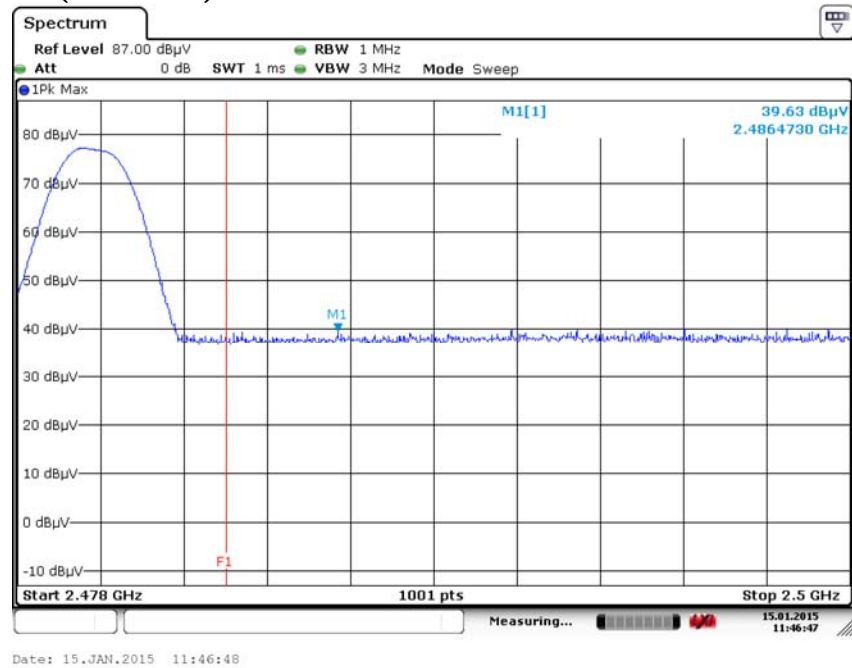


- High channel(Vertical)

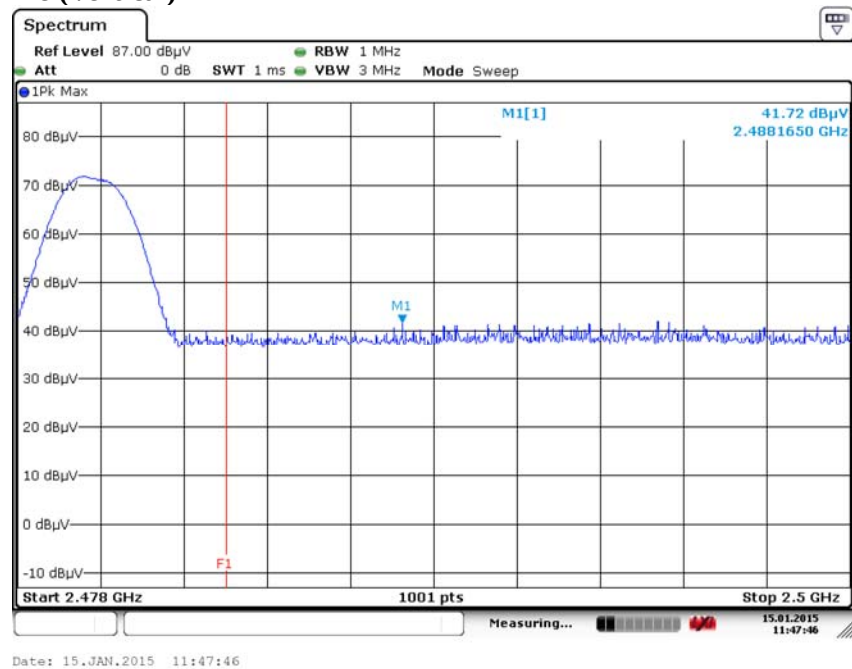

### 3.2 Conducted spurious emissions & band edge

#### Test setup



#### Test procedure

##### Band edge

KDB 558074 v03r02 – Section 11.3

##### Test setting

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100 kHz
4. VBW = 1 MHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

##### Out of band emissions

KDB 558074 v03r02 – Section 11.3

KDB 662911 v02r01 – Section E)3)b)

##### Test setting



1. Start frequency was set to 30 MHz and stop frequency was set to 25 GHz for 2.4 GHz frequencies and 40 GHz for 5 GHz frequencies (separated into two plots per channel)
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

#### Limit


According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as defined in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))

## Test results

### Low channel

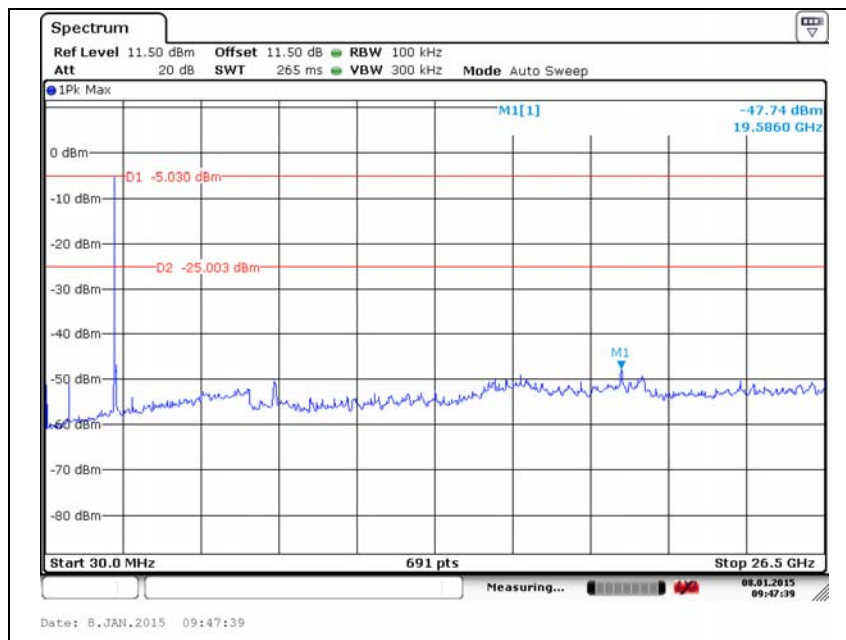
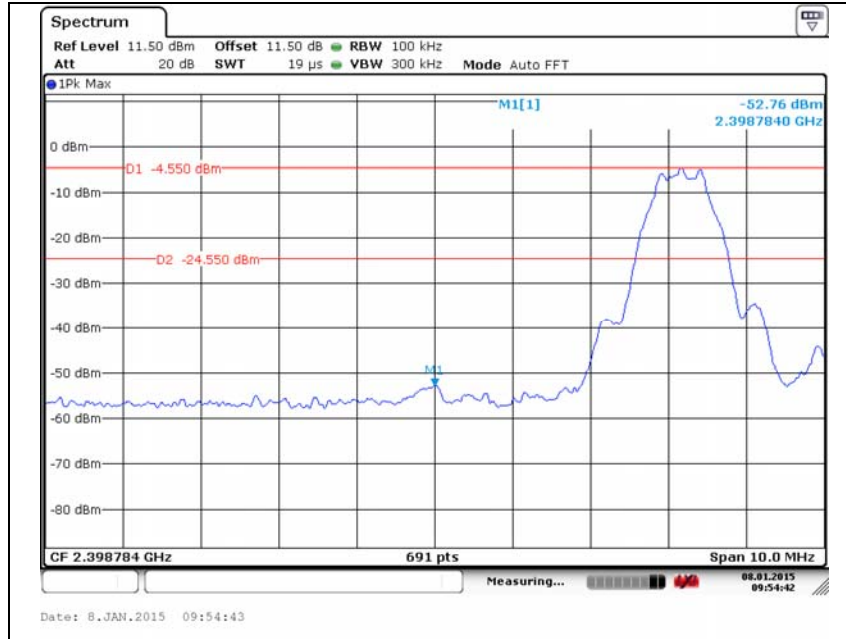


### Middle channel

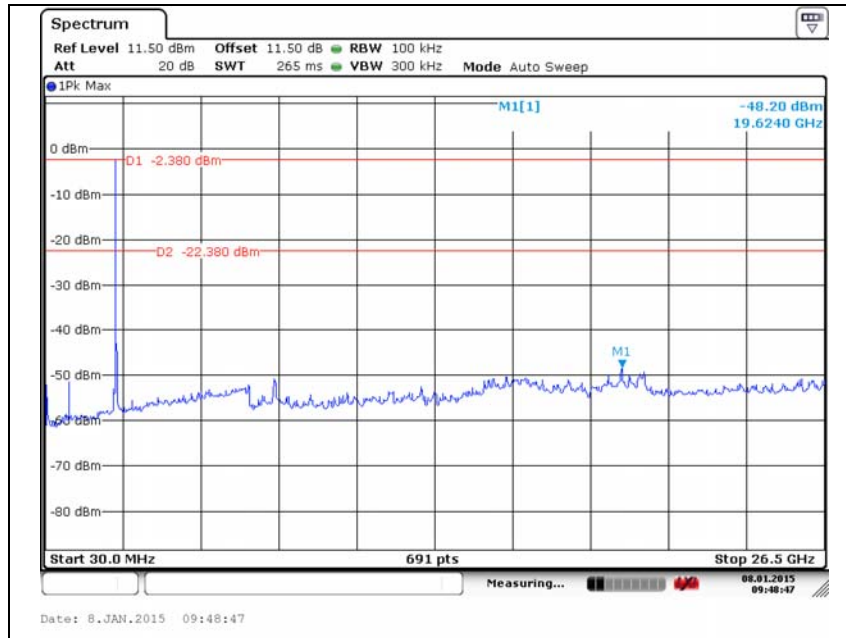


N/A

### High channel

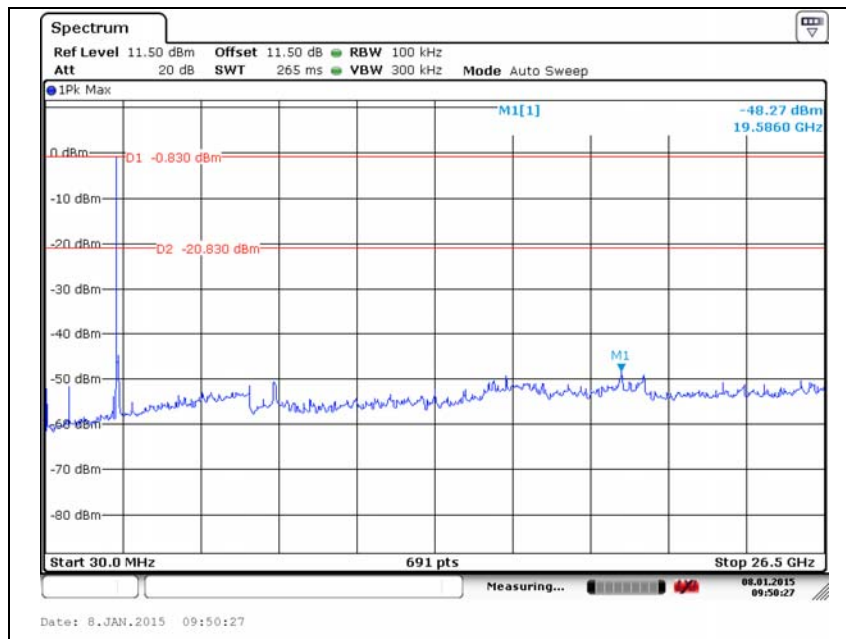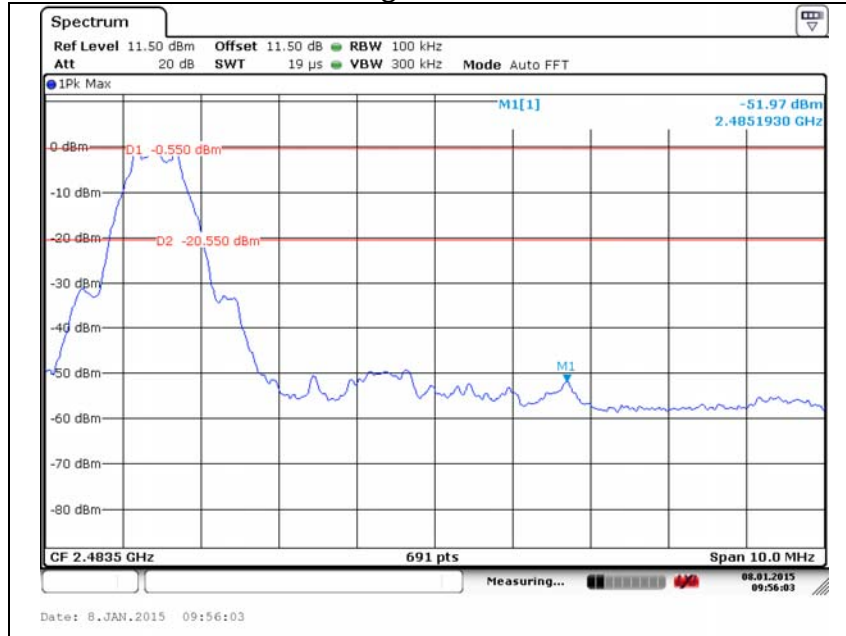

### 3.3. 6 dB bandwidth

#### Test setup



#### Test procedure

KDB 558074 v03r02 – Section 8.2 Option 1

#### Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth(VBW)  $\geq 3 \times$  RBW.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


#### Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


#### Test results

| Test Mode | Frequency(MHz) | 6 dB bandwidth(MHz) | Limit(MHz) |
|-----------|----------------|---------------------|------------|
| LE        | 2 402          | 0.690               | 0.5        |
|           | 2 442          | 0.690               |            |
|           | 2 480          | 0.699               |            |


### Low channel

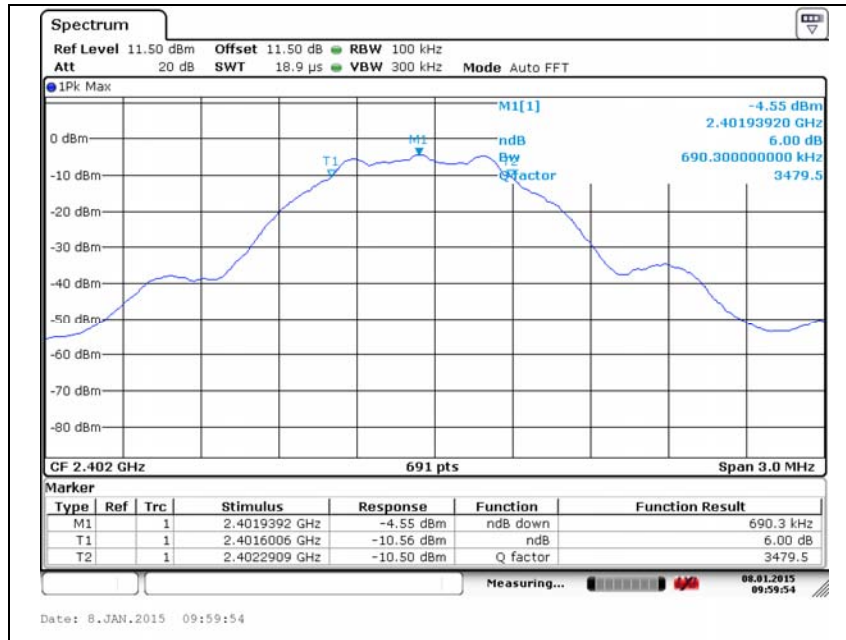

### Middle channel

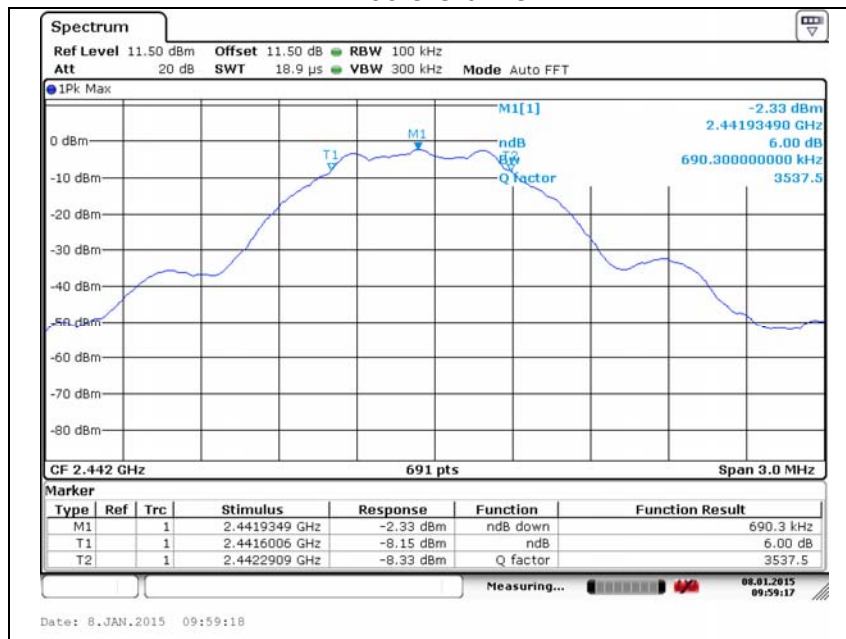


## High channel

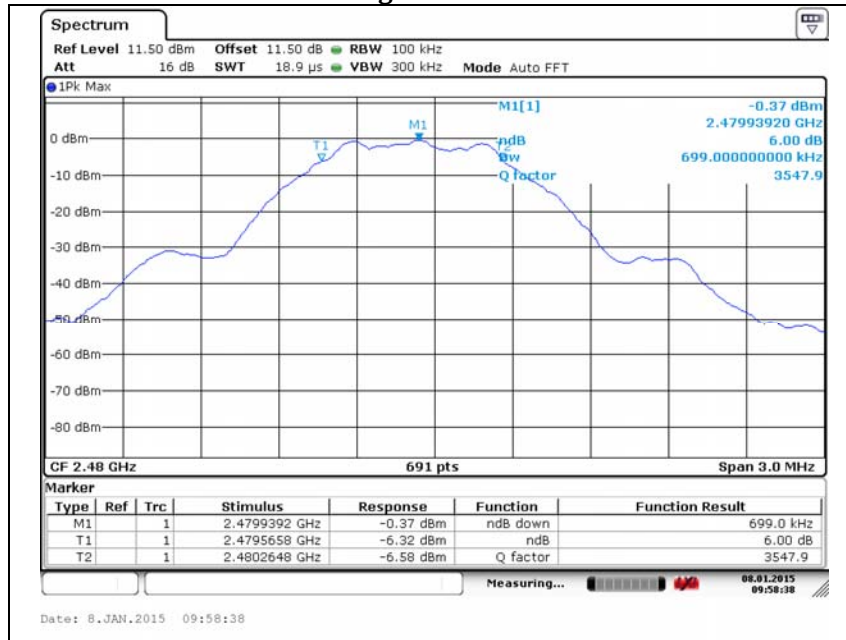

### 3.4. Output power

#### Test setup



#### Test procedure

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

KDB 558074\_v03r01 – section 9.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the  $RBW \geq DTS$  bandwidth.
- Set  $VBW \geq 3$  RBW.
- Set  $span \geq 3 \times RBW$
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

#### Limit

According to §15.247(b)(3), For systems using digital modulation in the 902~928 MHz, 2 400~2 483.5 MHz, and 5 725~5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted out-put power. Maximum Conducted Out-put Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


According to §15.247(b)(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.




**Test results**

| Test Mode | Frequency(MHz) | Conducted power (dBm) | Limit(dBm) |
|-----------|----------------|-----------------------|------------|
| LE        | 2 402          | -4.13                 | 30         |
|           | 2 442          | -1.92                 |            |
|           | 2 480          | -0.15                 |            |


### Low channel

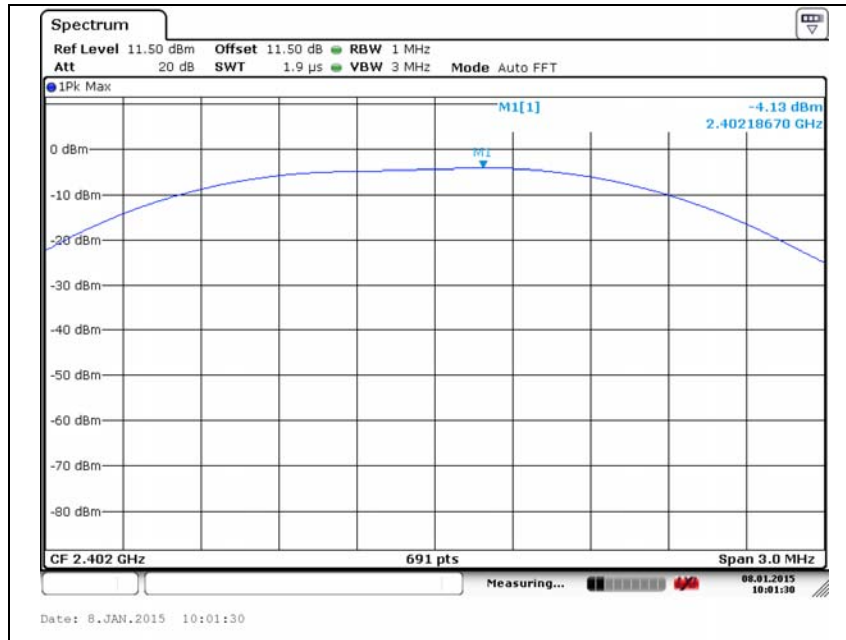

### Middle channel

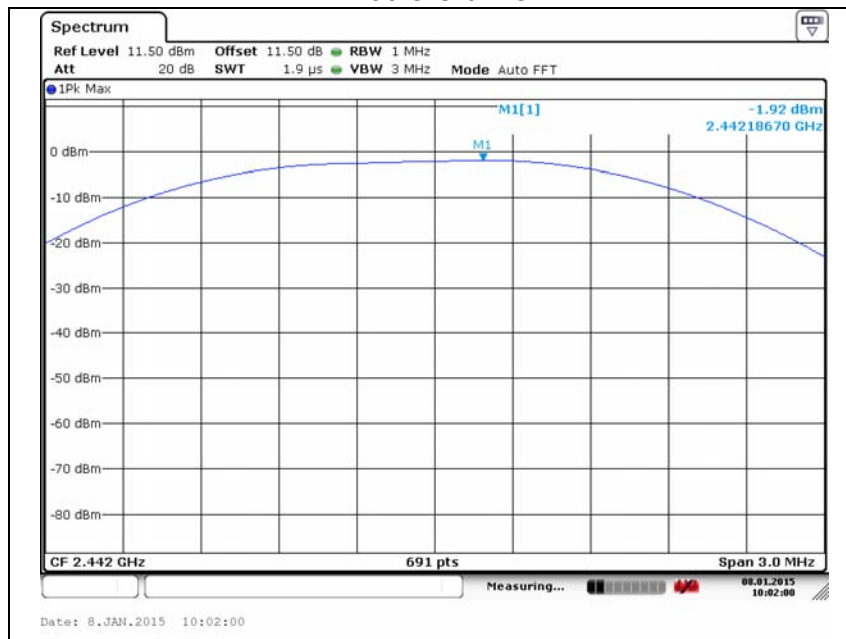


### High channel

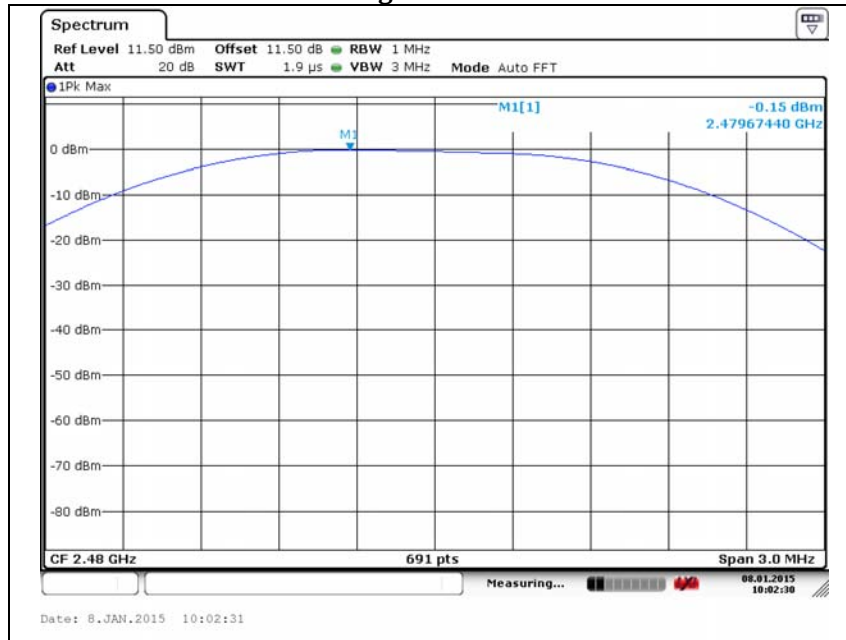

### 3.5. Power spectral density

#### Test setup



#### Test procedure

KDB 558074\_v03r02 – section 10.2

#### Measurement procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS channel bandwidth.
- Set the RBW :  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- Set the VBW  $\geq 3 \times \text{RBW}$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.
- If measured value exceeds limit, reduce RBW(no less than 3 kHz) and repeat.

#### Limit


According to §15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.




**Test results**

| Test Mode | Frequency(MHz) | Conducted power (dBm) | Limit(dBm) |
|-----------|----------------|-----------------------|------------|
| LE        | 2 402          | -13.78                | 8          |
|           | 2 442          | -11.53                |            |
|           | 2 480          | -9.75                 |            |


### Low channel

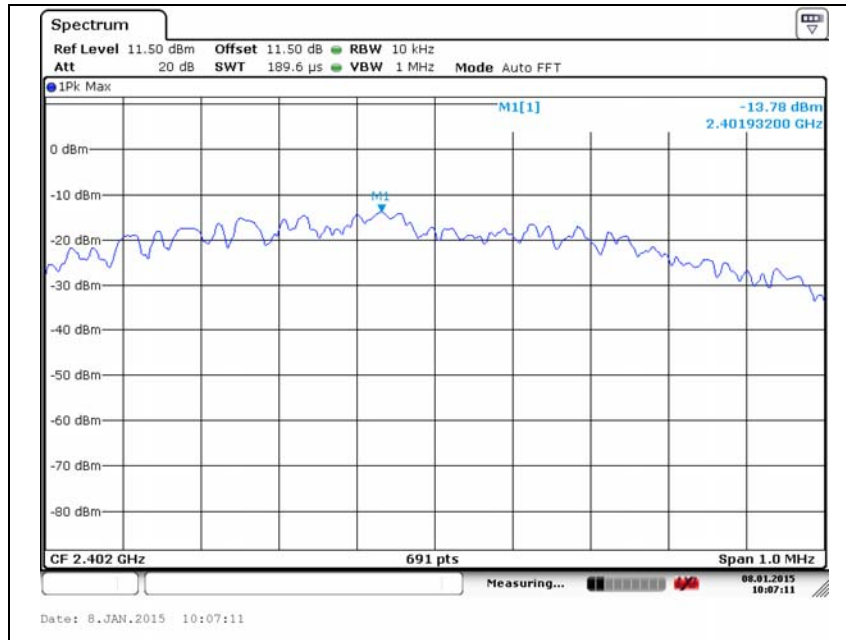

### Middle channel

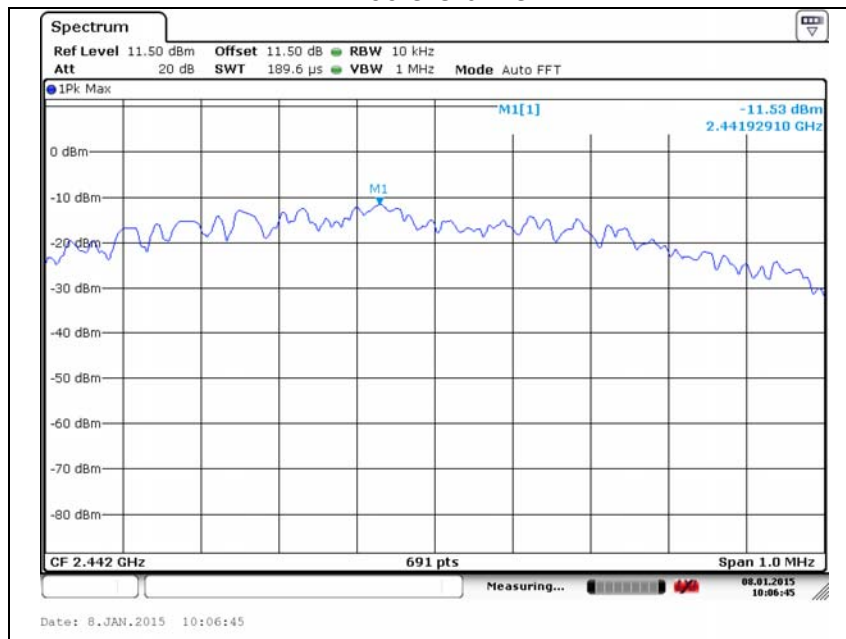

### High channel

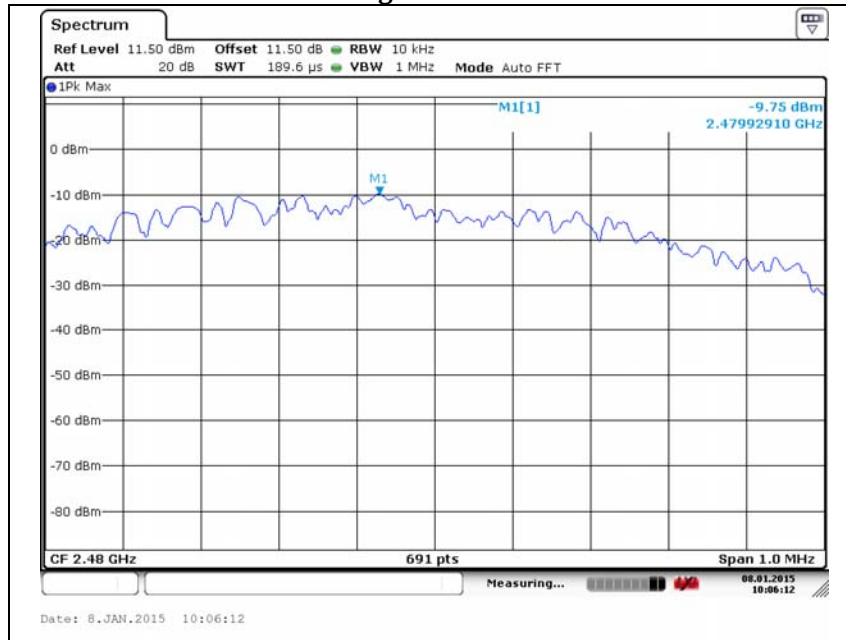

### 3.6. AC conducted emissions

#### Frequency range of measurement

150 kHz to 30 MHz

#### Instrument settings

IF Band Width: 9 kHz

#### Test procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m. Amplitude measurements were performed with a quasi-peak detector and an average detector.

#### Limit


According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

| Frequency of Emission (MHz) | Conducted limit (dBμV/m) |          |
|-----------------------------|--------------------------|----------|
|                             | Quasi-peak               | Average  |
| 0.15 – 0.50                 | 66 - 56*                 | 56 - 46* |
| 0.50 – 5.00                 | 56                       | 46       |
| 5.00 – 30.0                 | 60                       | 50       |

#### Note.

- Decreases with the logarithm of the frequency.
- All AC Conducted emission at channels are almost the same, so that high channel was chosen at representative in final test.


## Test results

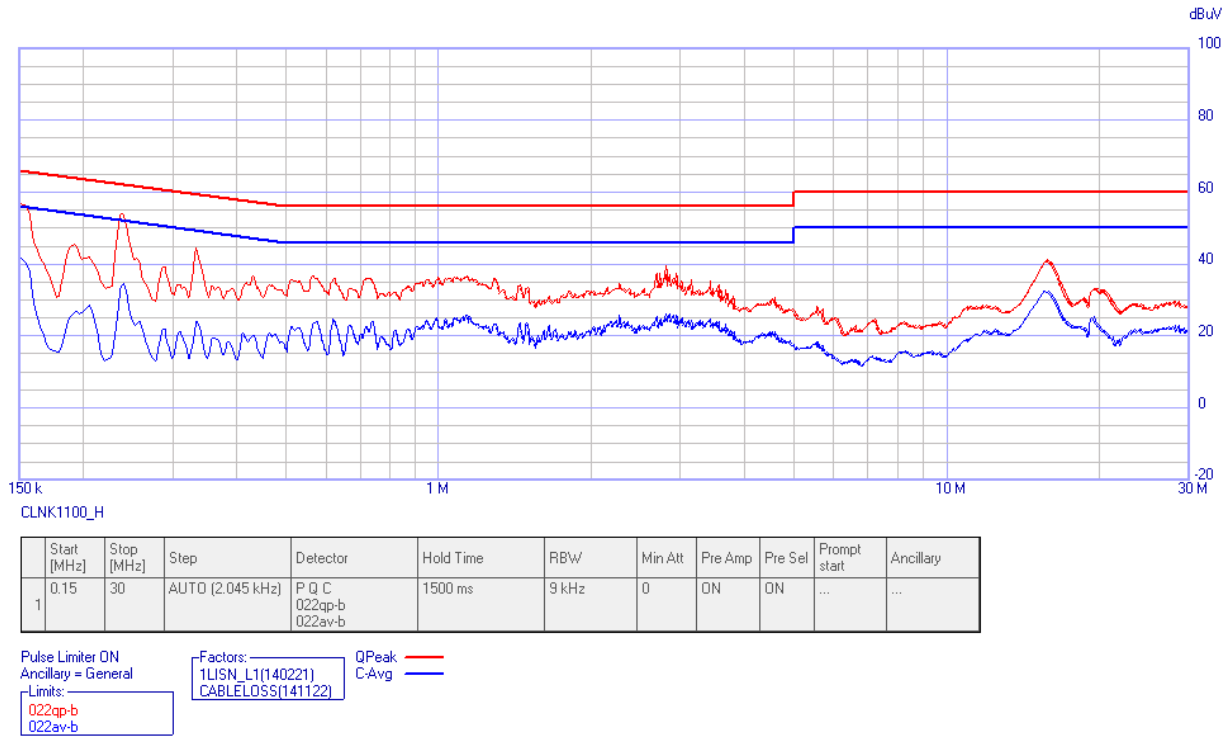

| Frequency [MHz] | Q-Peak [dBμV] | Limit [dBμV] | Margin [dB] | C-Avg [dBμV] | Limit [dBμV] | Margin [dB] | Factor (LISN) [dB] | Factor (Cable Loss) [dB] |
|-----------------|---------------|--------------|-------------|--------------|--------------|-------------|--------------------|--------------------------|
| 0.150           | 56.830        | 66.000       | -9.170      | 41.840       | 56.000       | -14.160     | 9.660              | 0.020                    |
| 0.154           | 56.060        | 65.780       | -9.720      | 40.140       | 55.780       | -15.640     | 9.660              | 0.020                    |
| 0.191           | 45.620        | 64.000       | -18.380     | 26.620       | 54.000       | -27.380     | 9.650              | 0.030                    |
| 0.238           | 53.910        | 62.170       | -8.260      | 34.000       | 52.170       | -18.170     | 9.650              | 0.030                    |
| 0.334           | 44.470        | 59.350       | -14.880     | 23.920       | 49.350       | -25.430     | 9.650              | 0.030                    |
| 0.565           | 36.830        | 56.000       | -19.170     | 23.220       | 46.000       | -22.780     | 9.650              | 0.030                    |
| 0.567           | 36.830        | 56.000       | -19.170     | 23.220       | 46.000       | -22.780     | 9.650              | 0.030                    |
| 0.725           | 36.110        | 56.000       | -19.890     | 22.030       | 46.000       | -23.970     | 9.650              | 0.040                    |
| 0.727           | 36.110        | 56.000       | -19.890     | 22.030       | 46.000       | -23.970     | 9.650              | 0.040                    |
| 1.134           | 36.560        | 56.000       | -19.440     | 25.720       | 46.000       | -20.280     | 9.650              | 0.040                    |
| 2.802           | 39.360        | 56.000       | -16.640     | 26.150       | 46.000       | -19.850     | 9.660              | 0.100                    |
| 15.762          | 41.150        | 60.000       | -18.850     | 32.570       | 50.000       | -17.430     | 9.860              | 0.280                    |

### Note: Hot Line

Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).

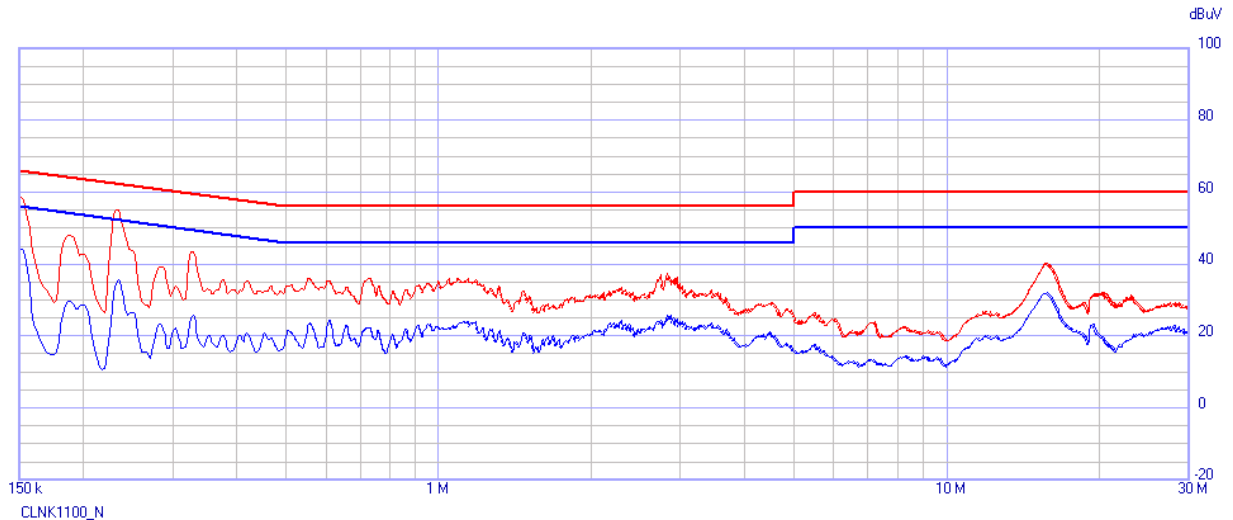

|   | Start [MHz] | Stop [MHz] | Step             | Detector                    | Hold Time | RBW   | Min Att | Pre Amp | Pre Sel | Prompt start | Ancillary |
|---|-------------|------------|------------------|-----------------------------|-----------|-------|---------|---------|---------|--------------|-----------|
| 1 | 0.15        | 30         | AUTO (2.045 kHz) | P Q C<br>022qp-b<br>022av-b | 1500 ms   | 9 kHz | 0       | ON      | ON      | ...          | ...       |

Pulse Limiter ON  
Ancillary = General

Limits:

022qp-b  
022av-b

Factors:  
1LISN\_L2(140221)  
CABLELOSS(141122)

QPeak  
C-Avg

| Frequency [MHz] | Q-Peak [dBμV] | Limit [dBμV] | Margin [dB] | C-Avg [dBμV] | Limit [dBμV] | Margin [dB] | Factor (LISN) [dB] | Factor (Cable Loss) [dB] |
|-----------------|---------------|--------------|-------------|--------------|--------------|-------------|--------------------|--------------------------|
| 0.150           | 58.800        | 66.000       | -7.200      | 44.420       | 56.000       | -11.580     | 9.660              | 0.020                    |
| 0.154           | 54.380        | 65.780       | -11.400     | 40.530       | 55.780       | -15.250     | 9.660              | 0.020                    |
| 0.187           | 48.170        | 64.180       | -16.010     | 29.510       | 54.180       | -24.670     | 9.660              | 0.030                    |
| 0.234           | 54.890        | 62.310       | -7.420      | 35.630       | 52.310       | -16.680     | 9.650              | 0.030                    |
| 0.328           | 43.310        | 59.500       | -16.190     | 25.860       | 49.500       | -23.640     | 9.640              | 0.030                    |
| 0.555           | 36.030        | 56.000       | -19.970     | 23.270       | 46.000       | -22.730     | 9.650              | 0.030                    |
| 0.733           | 36.070        | 56.000       | -19.930     | 22.160       | 46.000       | -23.840     | 9.650              | 0.040                    |
| 0.735           | 36.070        | 56.000       | -19.930     | 22.160       | 46.000       | -23.840     | 9.650              | 0.040                    |
| 1.093           | 36.040        | 56.000       | -19.960     | 22.880       | 46.000       | -23.120     | 9.650              | 0.040                    |
| 2.817           | 37.500        | 56.000       | -18.500     | 25.660       | 46.000       | -20.340     | 9.660              | 0.100                    |
| 15.678          | 40.200        | 60.000       | -19.800     | 32.070       | 50.000       | -17.930     | 9.770              | 0.280                    |

#### Note: Neutral Line

Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).

### Appendix A. Measurement equipment

| Equipment                           | Manufacturer      | Model               | Serial No. | Calibration interval | Calibration due. |
|-------------------------------------|-------------------|---------------------|------------|----------------------|------------------|
| Spectrum analyzer                   | R&S               | FSV30               | 101389     | 1 year               | 2015.04.30       |
| 8360B Series Swept Signal Generator | HP                | 83630B              | 3844A00786 | 1 year               | 2015.04.30       |
| Loop antenna                        | R&S               | HFH2-Z2.335.4711.52 | 826532     | 2 year               | 2015.04.25       |
| Trilog-broadband antenna            | Schwarzbeck       | VULB 9168           | 9168-385   | 2 year               | 2015.05.09       |
| Horn antenna                        | A.H.              | SAS-571             | 414        | 2 year               | 2015.02.28       |
| Preamplifier                        | HP                | 8449B               | 3008A00538 | 1 year               | 2015.07.23       |
| Attenuator                          | HP                | 8495B               | 110504721  | 1 year               | 2015.04.30       |
| EMI Test Receiver                   | R&S               | ESVS10              | 826008/014 | 1 year               | 2015.04.04       |
| EMI Receiver/Signal Analyzer        | Narda S.T.S / PMM | PMM 9010F           | 020WW31006 | 1 year               | 2015.04.04       |
| LISN                                | R&S               | ENV216              | 101137     | 1 year               | 2015.02.21       |

### Peripheral devices

| Device           | Manufacturer        | Model No. | Serial No.      |
|------------------|---------------------|-----------|-----------------|
| Notebook(Laptop) | Samsung Electronics | NP-QX411L | HJV993BB905283V |

## Appendix B. Test setup photo


**Radiated Emission (30MHz~1GHz)**



**Radiated Emission (Above 1GHz)**




### AC conducted Emission

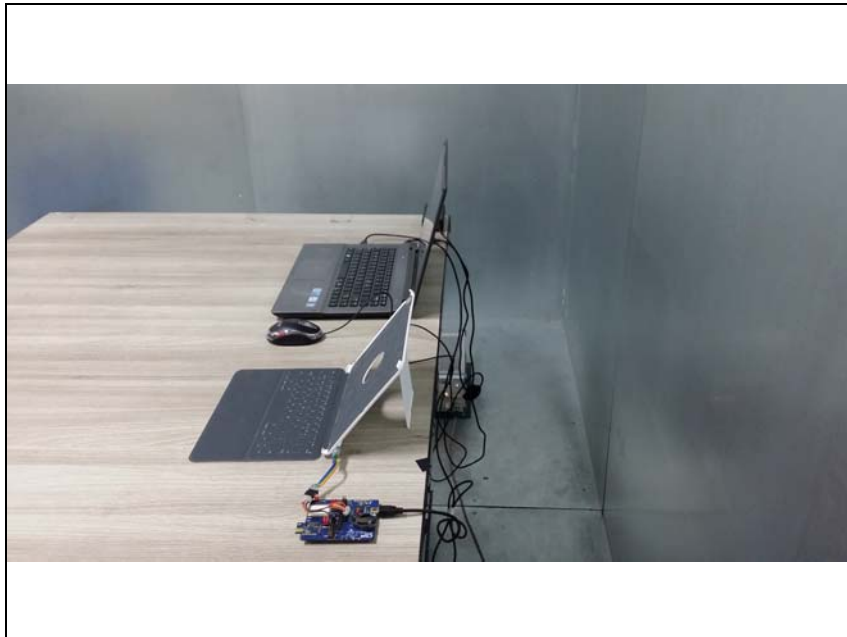

## Appendix C. Duty Cycle

| Frequency<br>(MHz) | Mode | Duty cycle(X) = $\frac{\text{Tx}_{\text{on}} \text{ time}}{\text{Tx}_{\text{on}} \text{ time} + \text{Tx}_{\text{off}} \text{ time}}$ |                                                        |       |
|--------------------|------|---------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-------|
|                    |      | Tx <sub>on</sub> time<br>(ms)                                                                                                         | Tx <sub>on</sub> time + Tx <sub>off</sub> time<br>(ms) | X     |
| 2 440              | LE   | 0.394                                                                                                                                 | 0.626                                                  | 0.629 |

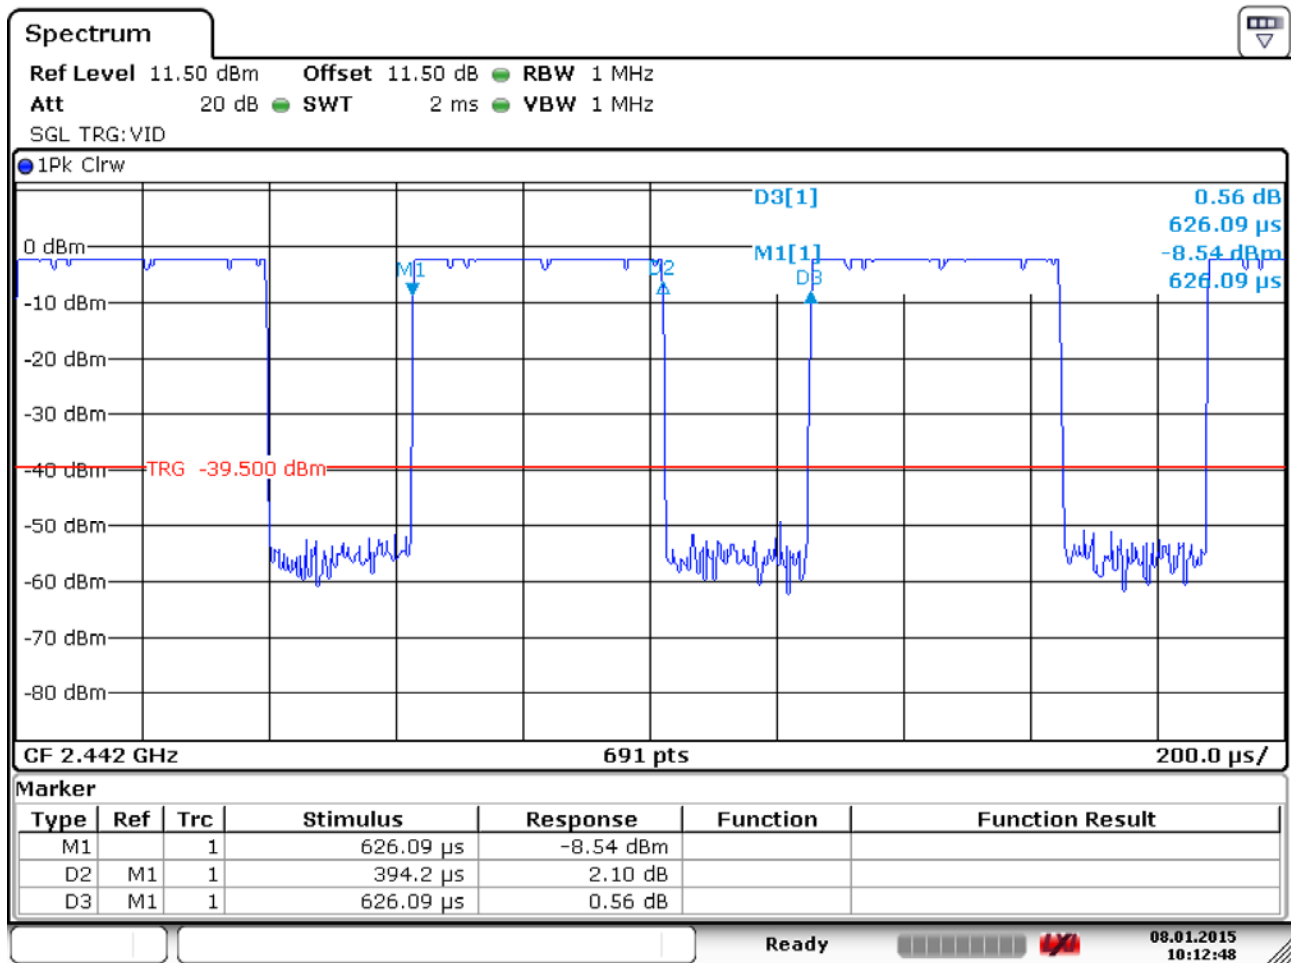

Date: 8.JAN.2015 10:12:49