
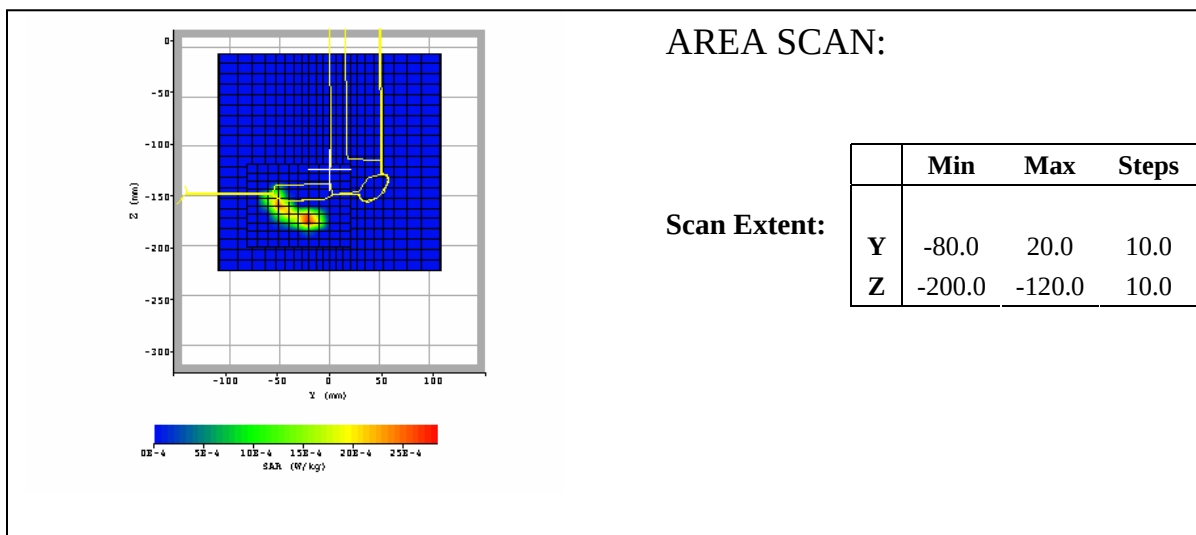


Date / Time:	3/23/2004 1:20:47 PM	Position:	Lap
Filename:	*.txt	Phantom:	HeadBox_new_spout.csv
Device Tested:	Xplore	Head Rotation:	0
Antenna:	internal	Test Frequency:	2437
Shape File:	xplor802lap.csv	Power Level:	max

Probe:	0106			
Cal File:	106_2450_BODY_802_11			
Cal Factors:		X	Y	Z
	Air	415	805	371
	DCP	19	19	19
	Lin	0.585	0.585	0.585
Amp Gain:	32			
Averaging:	6			
Batteries Replaced:	03/23/04			



Liquid:	2450
Type:	Body
Conductivity:	1.927
Relative Permittivity:	50.96
Liquid Temp (deg C):	22.0
Ambient Temp (deg C):	22.0
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.420

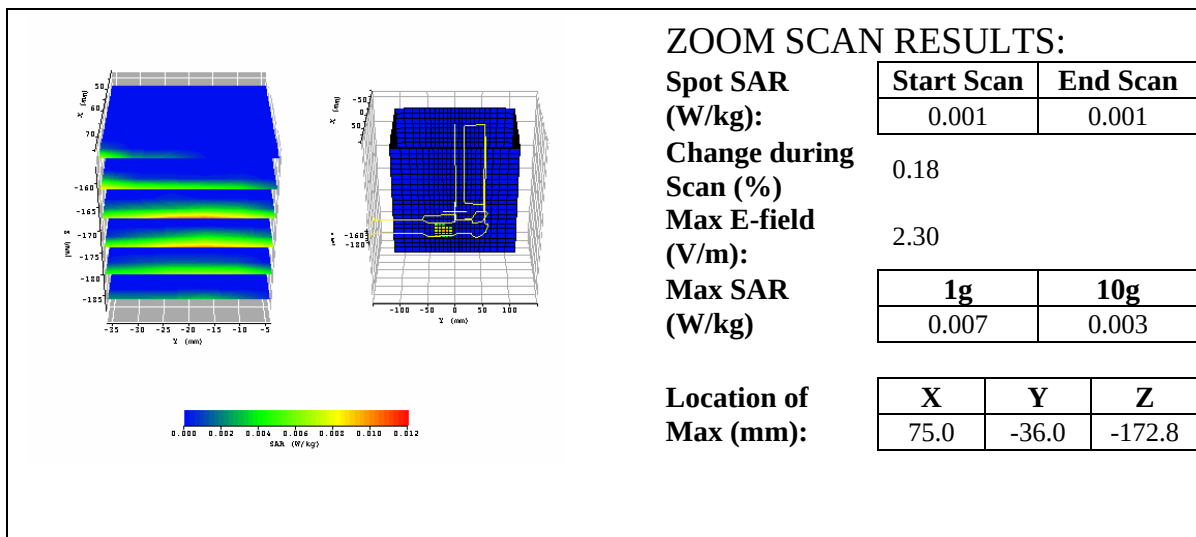

Date / Time:	3/23/2004 1:49:10 PM	Position:	rear bystander touching phantom
Filename:	*.txt	Phantom:	HeadBox_new_spout.csv
Device Tested:	Xplore	Head Rotation:	0
Antenna:	internal	Test Frequency:	2437
Shape File:	xplor802bystand.csv	Power Level:	max

Probe:	0106			
Cal File:	106_2450_BODY_802_11			
Cal Factors:		X	Y	Z
	Air	415	805	371
	DCP	19	19	19
	Lin	0.585	0.585	0.585
Amp Gain:	32			
Averaging:	6			
Batteries Replaced:	03/23/04			



Liquid:	2450
Type:	Body
Conductivity:	1.927
Relative Permittivity:	50.96
Liquid Temp (deg C):	22.0
Ambient Temp (deg C):	22.0
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.420

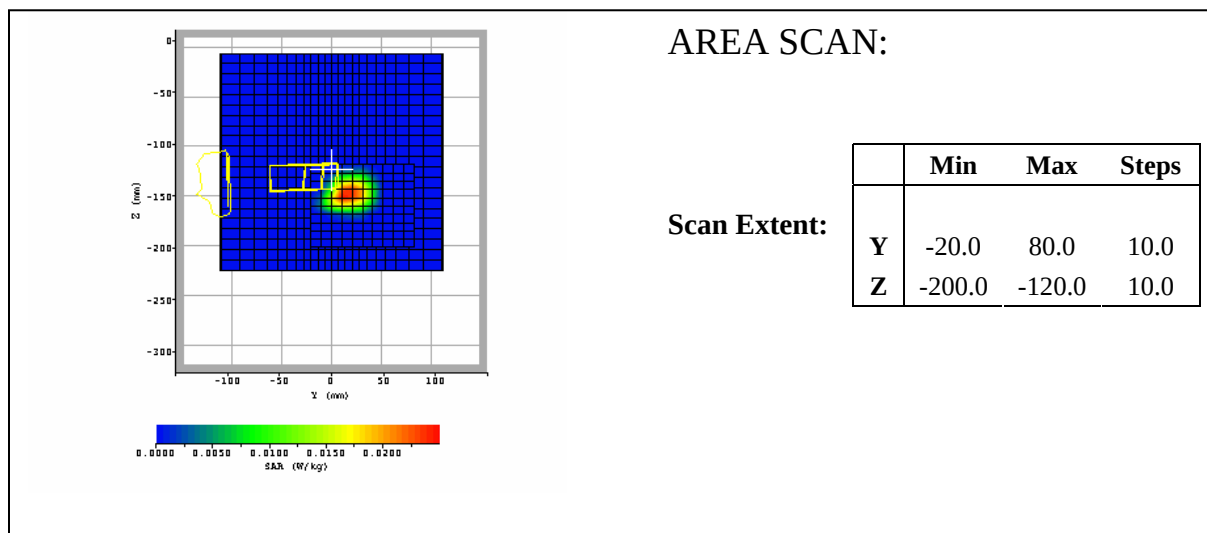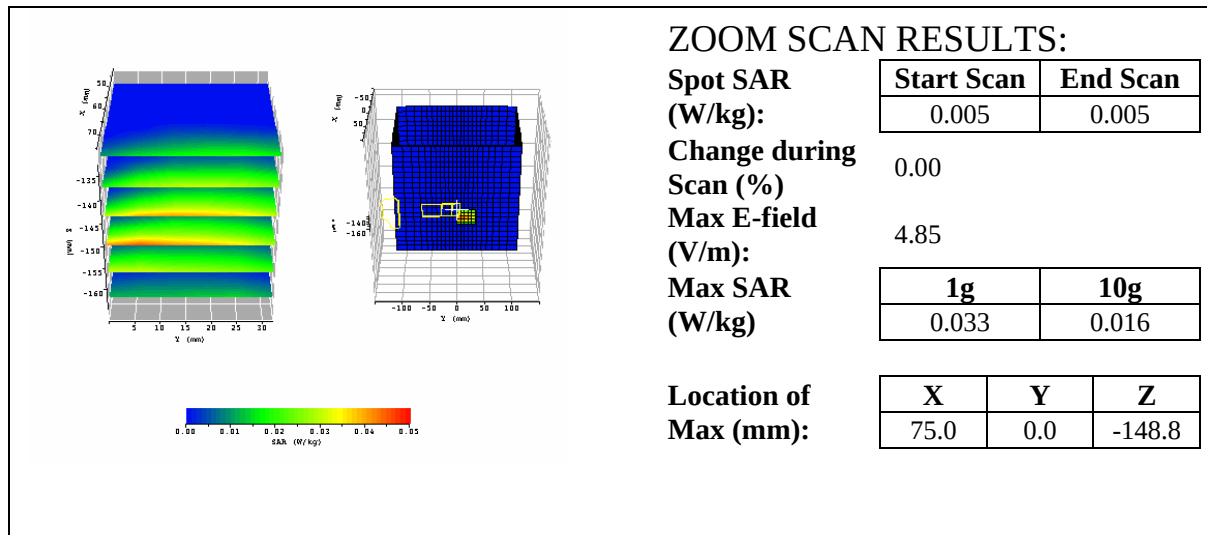

Date / Time:	3/23/2004 2:15:30 PM	Position:	rear bystander touching phantom
Filename:	*.txt	Phantom:	HeadBox_new_spout.csv
Device Tested:	Xplore	Head Rotation:	0
Antenna:	internal	Test Frequency:	2412
Shape File:	xplor802bystand.csv	Power Level:	max

Probe:	0106			
Cal File:	106_2450_BODY_802_11			
Cal Factors:		X	Y	Z
	Air	415	805	371
	DCP	19	19	19
	Lin	0.585	0.585	0.585
Amp Gain:	32			
Averaging:	6			
Batteries Replaced:	03/23/04			

Liquid:	2450
Type:	Body
Conductivity:	1.861
Relative Permittivity:	50.96
Liquid Temp (deg C):	22.0
Ambient Temp (deg C):	22.0
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.420

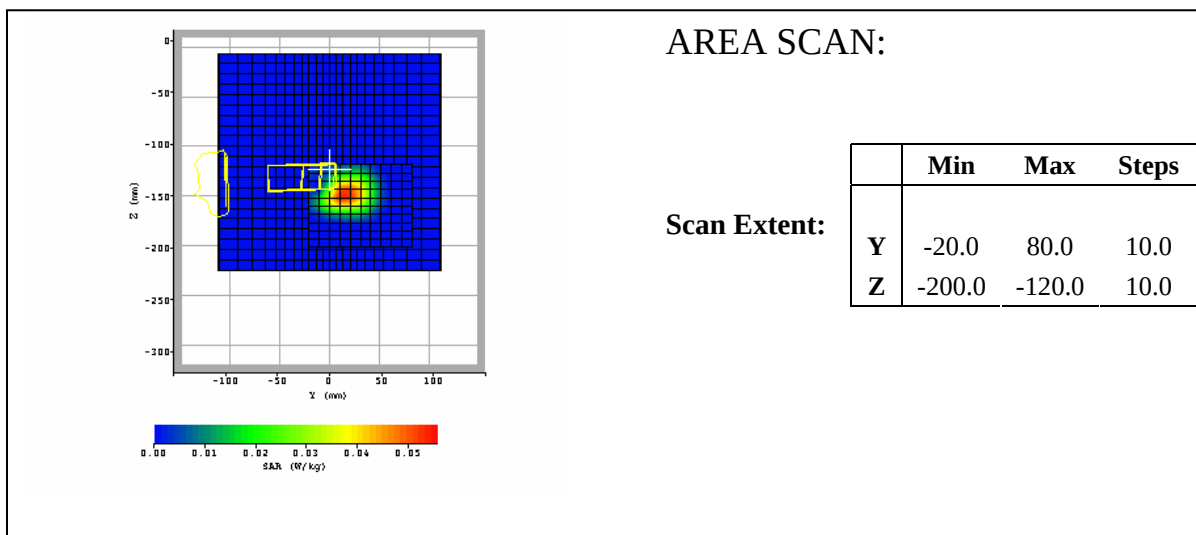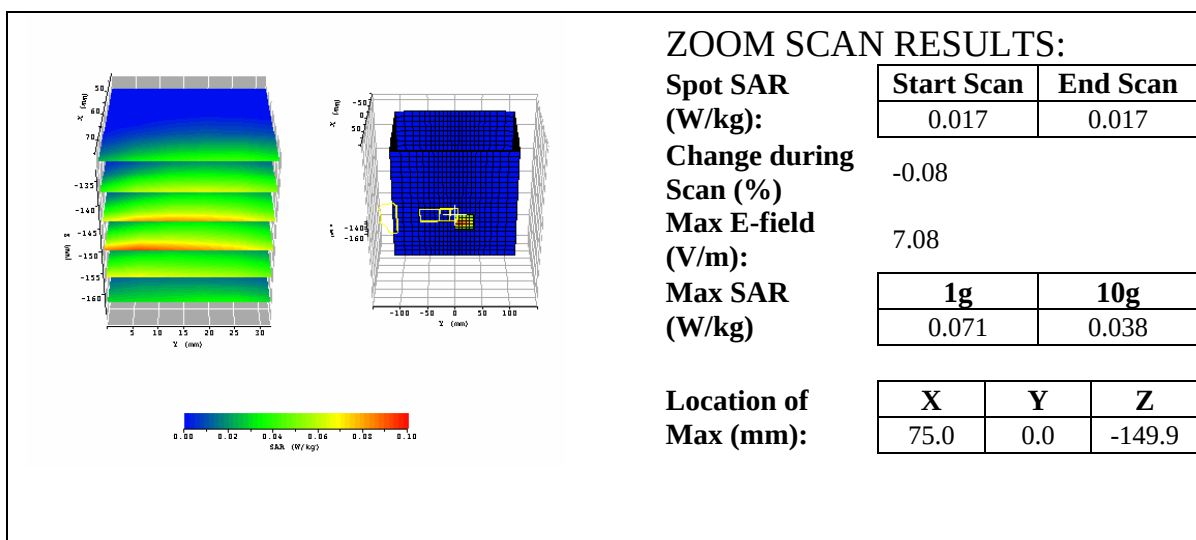

Date / Time:	3/23/2004 2:59:28 PM	Position:	rear bystander touching phantom
Filename:	*.txt	Phantom:	HeadBox_new_spout.csv
Device Tested:	Xplore	Head Rotation:	0
Antenna:	internal	Test Frequency:	2462
Shape File:	xplor802bystand.csv	Power Level:	max

Probe:	0106			
Cal File:	106_2450_BODY_802_11			
Cal Factors:		X	Y	Z
	Air	415	805	371
	DCP	19	19	19
	Lin	0.585	0.585	0.585
Amp Gain:	32			
Averaging:	6			
Batteries Replaced:	03/23/04			

Liquid:	2450
Type:	Body
Conductivity:	1.968
Relative Permittivity:	50.80
Liquid Temp (deg C):	22.0
Ambient Temp (deg C):	22.0
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.420

