



Equipment Photographs

(External)

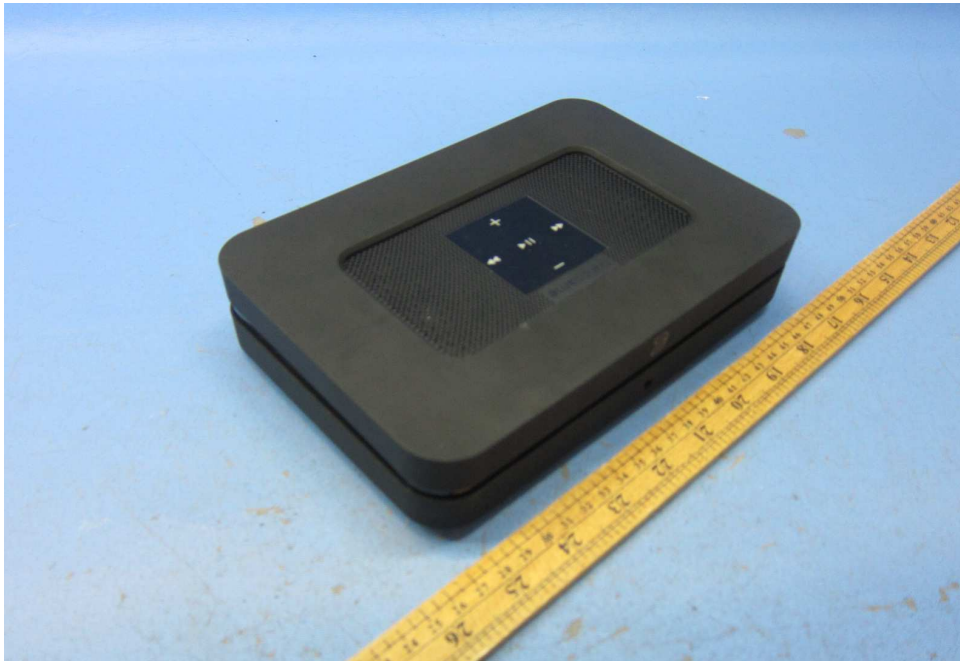


A black rectangular frame with rounded corners and a white center. The frame has a thick border and a smaller inner rectangle. The text "Label Location" is centered in the white area.

Label Location

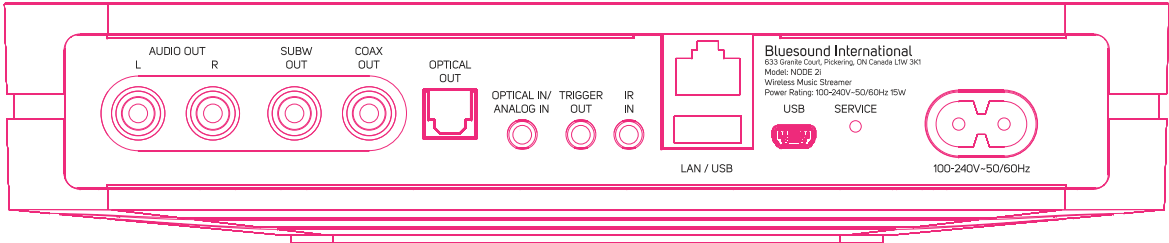


Node 2i - Rear panel plate

Finish: Black painted
Silkcreen: Pantone Gray 424C

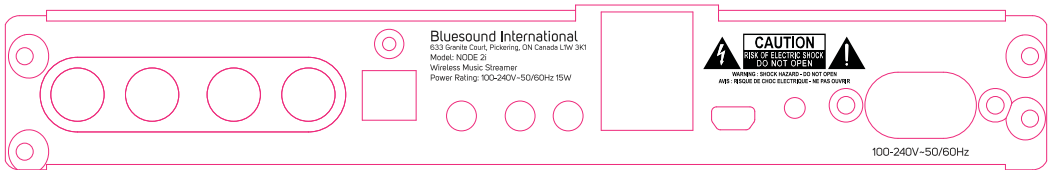

Node 2i - Rear panel bracket (Behind the rear panel plate)

Finish: Molded Black
Silkcreen: Pantone Gray 424C

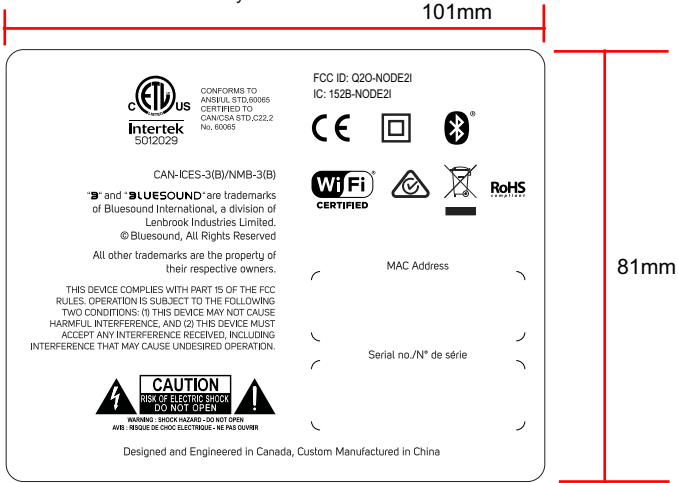

Node 2i - Nameplate

Material: 0.3T Clear PC/PET
Process:
1. Mask print Pantone Black 3 at back and apply 3M Adhesive Tape
2. Negative Silkscreen Print matte Pantone Black 3 at front

Location: On bottom panel

1	Change power rating from 0.2A to 15W	7	20180723	KK	
1	Increase the height of safety marks	6	20180705	KK	
1	Updated ETL control number to 5012029	5	20180629	KK	
1	Removed EAC logo	4	20180611	KK	
1	Added AC sign “~” to the AC voltage text	3	20180523	KK	
1	Added EAC logo	2	20180508	KK	
1	INITIAL RELEASE	1	20180406	KK	
ISSUE NO.	REVISION HISTORY		REV NO.	DATE	BY
NAD ELECTRONICS INT'L 633 GRANITE COURT, PICKERING ONTARIO L1W 3K1, CANADA TEL : (905) 831 63333 LENBROOK GROUP Copyright © 1998-2017 NAD, a member of the Lenbrook. All Rights Reserved. MODEL - ARTWORK - ISSUE NUMBER OEM PART NUMBER			NODE 2i		
ALLOWABLE TOLERANCE LINEAR ANGULAR .0 = +0.1 ± 0.15° .00 = ±0.05 .000 = +0.01		SCALE 1 : 1 UNITS Millimeters	STATUS FOR PP/MP FINISH AS SHOWN	DATE Apr 6, 2018 MODEL NODE 2i	
OUTPUT PRINT DO NOT SCALE REVISE ONLY ON CAD SYSTEM		SS PREPARATION - RIGHT READING EMULSION SIDE UP	PRINTING AS SHOWN	PART NAME Product Marking	
Prepared By Checked By Kay Kwong Jimmy Reyes		Director Development & Manufacturing Taresh Vadgama	PRINTING TOOL NUMBER	CAD FILE NAME N2i_PM_20180723.ai	