

DATE: 01 June 2010

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

AeroScout Ltd.

Equipment under test:

Exciter


EX-4200

Written by:




D. Shidlow, Documentation

Approved by:



A. Sharabi, Test Engineer

Approved by:



I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for AeroScout Ltd.

Exciter

EX-4200

FCC ID: Q3HEX3200

This report concerns:

Original Grant:

Class I change:

Class II change: X

Equipment type:

Part 15 Low Power Transmitter Below 1705 kHz

47CFR15 Section 15.207; 15.209

Application for Certification

prepared by:

David Shidlowsky
ITL (Product Testing) Ltd.
Kfar Bin Nun
D.N. Shimshon 9978000
Israel

e-mail emc@itl.co.il

Applicant for this device:

(different from "prepared by")

Reuven Amsalem
AeroScout Ltd.
3 Pekeris St.
Einstein Entrance 4th Floor
Rehovot 76702
Israel

Tel: + 972 - 8 - 936 - 9393

Fax: + 972 - 8- 936 - 8977

e-mail: Reuven.Amsalem@sbinc.com

TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION-----	7
2.1	Justification	7
2.2	EUT Exercise Software	7
2.3	Special Accessories	7
2.4	Equipment Modifications	7
2.5	Configuration of Tested System	7
3.	TEST SET-UP PHOTOS-----	8
4.	CONDUCTED EMISSION DATA -----	9
4.1	Test Specification	9
4.2	Test Procedure	9
4.3	Measured Data	9
4.4	Test Instrumentation Used, Conducted Measurement	14
5.	AVERAGE FACTOR CALCULATION-----	15
5.1	Test Instrumentation Used	16
6.	FIELD STRENGTH OF FUNDAMENTAL -----	17
6.1	Test Specification	17
6.2	Test Procedure	17
6.3	Measured Data	17
6.4	Test Instrumentation Used, Field Strength of Fundamental	19
7.	RADIATED EMISSION, 9 KHZ – 30 MHZ-----	20
7.1	Test Specification	20
7.2	Test Procedure	20
7.3	Measured Data	20
7.4	Test Instrumentation Used, Radiated Measurements	22
7.5	Field Strength Calculation	22
8.	SPURIOUS RADIATED EMISSION-----	23
8.1	Test Specification	23
8.2	Test Procedure	23
8.3	Test Data	23
8.4	Test Instrumentation Used, Radiated Measurements	24
9.	11. APPENDIX A - CORRECTION FACTORS-----	25
9.1	Correction factors for CABLE	25
9.2	Correction factors for CABLE	26
9.3	Correction factors for LOG PERIODIC ANTENNA	27
9.4	Correction factors for BICONICAL ANTENNA	28
9.5	Correction factors for ACTIVE LOOP ANTENNA	29

1. General Information

1.1 Administrative Information

Manufacturer:	AeroScout Ltd.
Manufacturer's Address:	3 Pekeris St. Einstein Entrance 4th Floor Rehovot 76702 Israel Tel: +972-8-9369393 Fax: +972-8-9365977
Manufacturer's Representative:	Leonid Gnusin Dadi Matza
Equipment Under Test (E.U.T):	Exciter
Equipment Model No.:	EX-4200
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	28.04.10
Start of Test:	28.04.10
End of Test:	28.04.10
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15 Subpart C

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The AeroScout Exciter extends the AeroScout suite to provide robust and sophisticated LF detection capabilities, using the same Wi-Fi tags that can also be accurately located in real time by the AeroScout system.

The Exciter serves as a Beacon which transmits the same message continually. The Exciter transmits the message in ASK modulation with a carrier of 125 kHz.

The Exciter triggers AeroScout's tags as they pass through a choke point to transmit a message that will be received by an AeroScout Location Receiver or 802.11 Access Point. This provides instant knowledge that a tagged asset or person passed through a gate, doorway or some other tightly defined area. The detection capabilities of the Exciter, combined with the location features of the AeroScout Location Receiver, make the AeroScout suite the most sophisticated enterprise visibility solution for a wide variety of industries.

Key features include:

- Long range LF triggering of AeroScout tags, triggering them to transmit as they pass through a defined area.

- Rugged IP65 rated enclosure for use in any hostile indoor or outdoor environment and in a wide temperature range.

- Ethernet connectivity for centralized programming, monitoring and software updates by the AeroScout system manager.

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 06, 2009).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Conducted Emission

The uncertainty for this test is ± 2 dB.

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 Justification

A C2PC is being applied due to a change in the PCB Layout. Fundamental and spurious radiated emissions were retested.

2.2 EUT Exercise Software

See original application.

2.3 Special Accessories

No special accessories were needed.

2.4 Equipment Modifications

No modifications were needed in order to achieve compliance

2.5 Configuration of Tested System

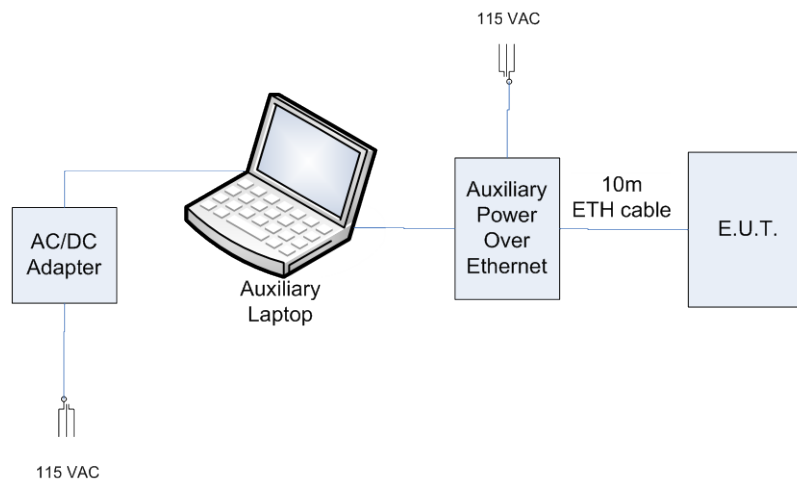


Figure 1. Configuration of Tested System

3. Test Set-up Photos



Figure 2. Radiated Emission Test 9 kHz – 30 MHz



Figure 3. Radiated Emission Test 30 -1000 MHz

4. Conducted Emission Data

4.1 Test Specification

F.C.C., Part 15, Subpart C

4.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 3.1. In order to minimize background noise interference, the conducted emission testing was performed inside a shielded room, with the E.U.T placed on an 0.8 meter high wooden table, 0.4 meter from the room's vertical wall.

The E.U.T was powered from 115 V AC / 60 Hz via a 50 Ohm / 50 μ Hn Line Impedance Stabilization Network (LISN) on the phase and neutral lines. The LISN's were grounded to the shielded room ground plane (floor), and were kept at least 0.8 meters from the nearest boundary of the E.U.T

The center of the E.U.T AC cable was folded back and forth, in order to form a bundle less than 0.40 meters and a total cable length of 1 meter.

The emission voltages at the LISN's outputs were measured using a computerized receiver, complying with CISPR 16 requirements. The specification limits are loaded to the receiver via a 3.5" floppy disk and are displayed on the receiver's spectrum display.

A frequency scan between 0.15 and 30 MHz was performed at 9 kHz I.F. band width, and using peak detection.

The spectral components having the highest level on each line were measured using a quasi-peak and average detector.

4.3 Measured Data


JUDGEMENT: Passed by 1.2 dB

The margin between the emission levels and the specification limit is, in the worst case, 1.5 dB for the phase line at 3.77 MHz and 1.2 dB at 3.88 MHz for the neutral line.

The EUT met the F.C.C. Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 4* to *Figure 7*.

TEST PERSONNEL:

Tester Signature: 

Date: 07.06.10

Typed/Printed Name: A. Sharabi

Conducted Emission

E.U.T Description Exciter
Type EX-4200
Serial Number: Not Designated

Specification: FCC Part 15, Subpart C

Lead: Phase

Detectors: Peak, Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)	Corr (dB)
1	0.195673	48.3	43.7	-20.2	34.9	-19.0	0.0
2	0.393003	45.8	42.2	-15.8	40.0	-7.9	0.0
3	1.708008	44.9	41.8	-14.2	38.0	-8.0	0.0
4	2.297070	51.4	47.2	-8.8	42.9	-3.1	0.0
5	2.691145	52.9	49.8	-6.2	43.8	-2.2	0.0
6	3.766360	50.7	48.7	-7.3	44.5	-1.5	0.0

Figure 4. Detectors: Peak, AVERAGE .

Note: QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Exciter
Type EX-4200
Serial Number: Not Designated

Specification: FCC Part 15, Subpart C
Lead: Phase
Detectors: Peak, Quasi-peak, Average

 12:24:34 APR 20, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.66 MHz
52.24 dB μ V

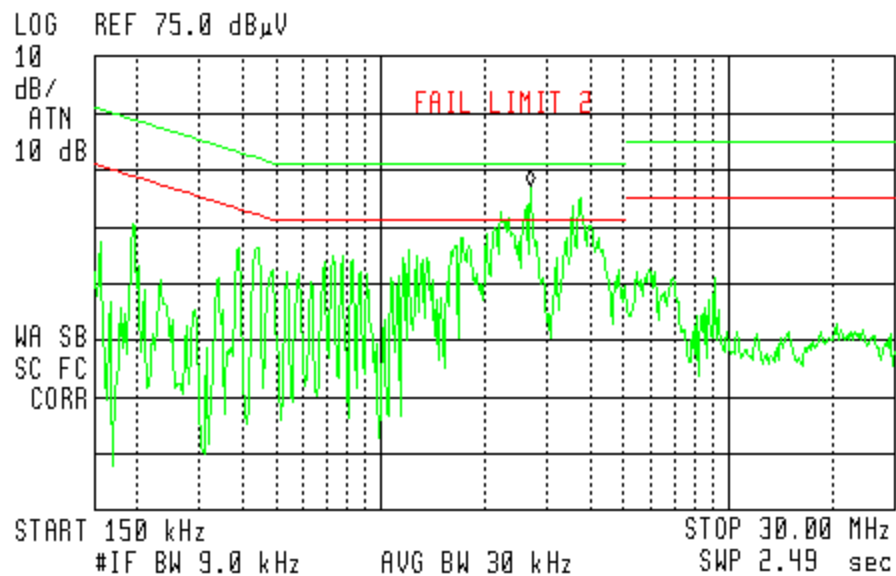


Figure 5. Detectors: Peak, Quasi-peak, Average

Note: Fail indication on the spectral plot results from peak detector level reading above the limit. This indication is for information only and it should not be interpreted as a test failure.

Conducted Emission

E.U.T Description Exciter
Type EX-4200
Serial Number: Not Designated

Specification: FCC Part 15, Subpart C
Lead: Neutral
Detectors: Peak, Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)	Corr (dB)
1	0.195639	46.2	42.3	-21.5	32.8	-21.0	0.0
2	0.396260	44.7	40.4	-17.5	37.9	-10.1	0.0
3	0.737417	37.9	35.8	-20.2	33.0	-13.0	0.0
4	2.653779	50.3	45.7	-10.3	40.3	-5.7	0.0
5	3.884033	49.8	48.2	-7.8	44.8	-1.2	0.0
6	6.919349	36.2	31.3	-28.7	20.4	-29.6	0.0

Figure 6. Detectors: Peak, AVERAGE

Note: QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Exciter
Type EX-4200
Serial Number: Not Designated

Specification: FCC Part 15, Subpart C
Lead: Neutral
Detectors: Peak, Quasi-peak, Average

 12:35:30 APR 28, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 3.78 MHz
49.78 dB μ V

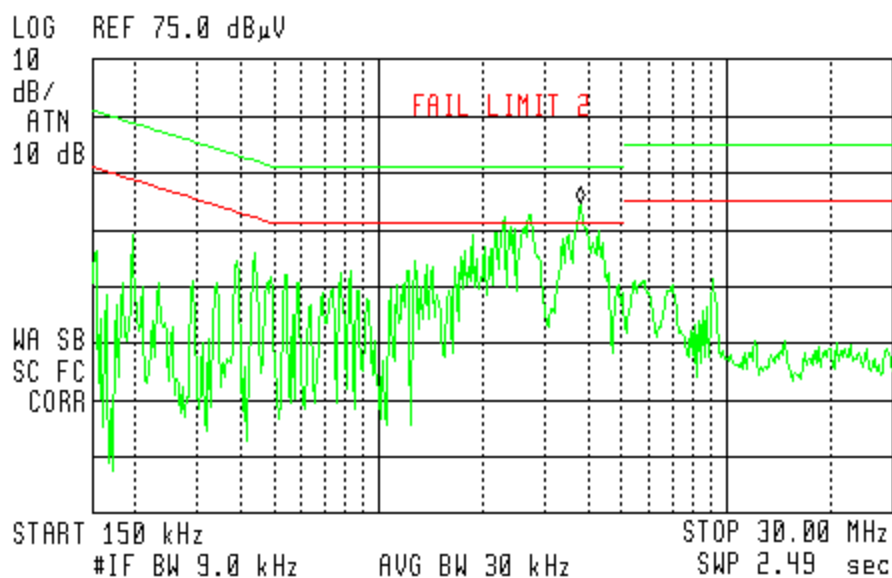


Figure 7 Conducted Emission: NEUTRAL
Detectors: Peak, Quasi-peak, Average

Note: Fail indication on the spectral plot results from peak detector level reading above the limit. This indication is for information only and it should not be interpreted as a test failure.

4.4 Test Instrumentation Used, Conducted Measurement

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
LISN	Fischer	FCC-LISN-2A	127	March 3, 2010	1 Year
LISN	Fischer	FCC-LISN-2A	128	March 3, 2010	1 Year
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1Year
RF Filter Section	HP	85420E	3705A00248	November 10, 2009	1Year
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

5. Average Factor Calculation

1. Pulse period = 720usec (worst scenario)
2. Pulse duration = 360usec (worst scenario)
3. Burst duration = 132.5msec
4. Time between bursts = 200msec
5. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$

$$\text{Average Factor} = 20 \log \left[\frac{360}{720} \times 1 \right] = -6.0\text{dB}$$

09:29:10 APR 28, 2010

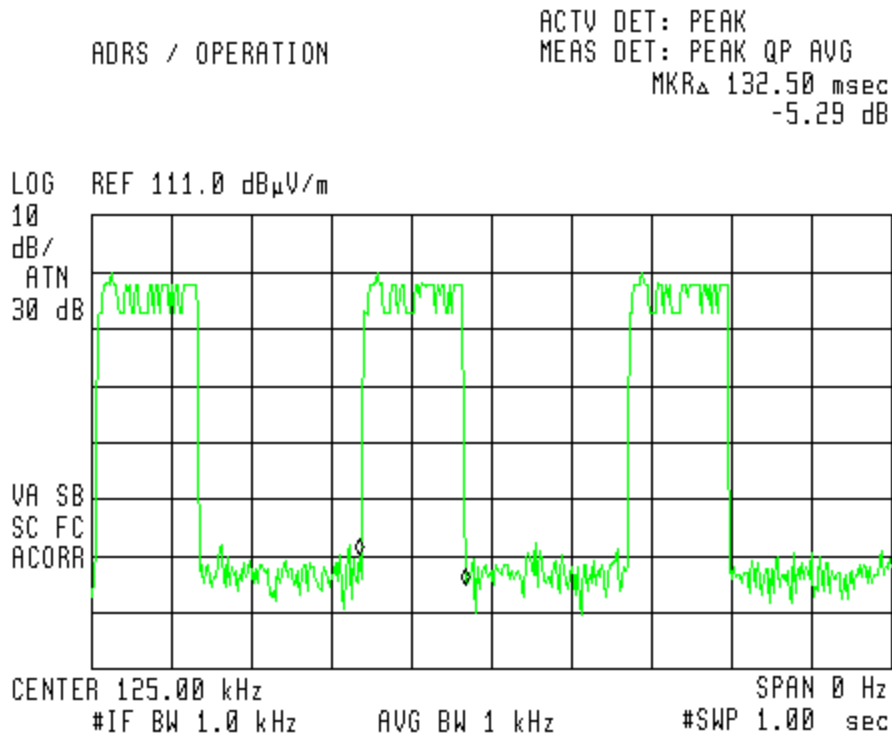


Figure 8. Transmission Burst Duration = 125 msec

5.1 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2009	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

6. Field Strength of Fundamental

6.1 Test Specification

F.C.C., Part 15, Subpart C

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (125 kHz) and Peak Detection.

The distance between the E.U.T. and test antenna was 3 meters.

The turntable and antenna were adjusted for maximum level reading on the EMI receiver. The loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter.

The average result is:

Peak Level(dB μ V/m) + Average Factor (dB)


6.3 Measured Data

JUDGEMENT: Passed by 11.08 dB

The EUT met the FCC Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 9*.

TEST PERSONNEL:

Tester Signature: 

Date: 07.06.10

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description	Exciter
Type	EX-4200
Serial Number:	Not Designated

09:44:20 APR 28, 2010

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 125.21 kHz
 100.59 dB μ V/m

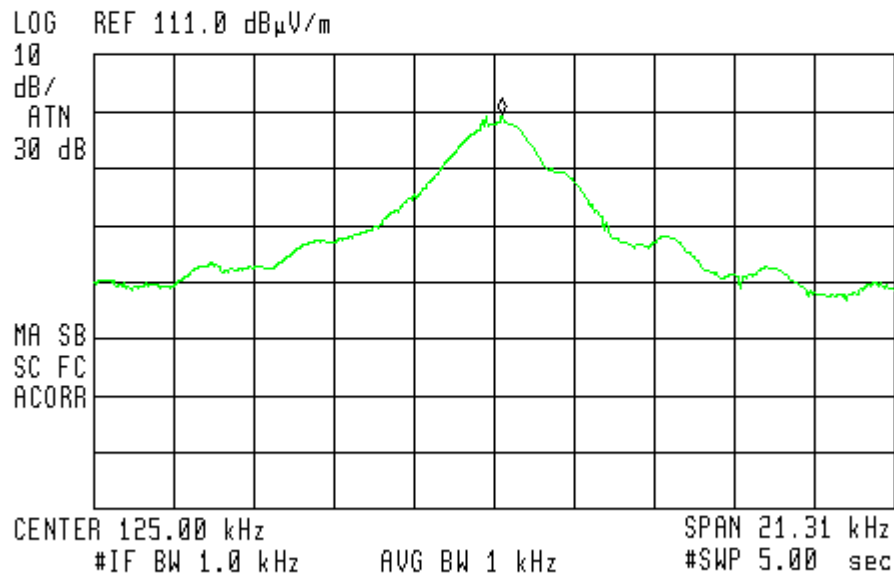


Figure 9. Field Strength of Fundamental.
Detector: Peak

Average Limit = 105.67dB μ V/m

6.4 Test Instrumentation Used, Field Strength of Fundamental

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2009	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

7. Radiated Emission, 9 kHz – 30 MHz

7.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 10 meters.


The E.U.T. was operated at the frequency of 125 kHz. This frequency was measured using a peak detector.

7.3 Measured Data

JUDGEMENT: Passed by 30.03 dB

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C, specification.

TEST PERSONNEL:

Tester Signature:  Date: 07.06.10

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description Exciter
Type EX-4200
Serial Number: Not Designated

Specification: FCC Part 15, Subpart C

Antenna: 3 meters distance

Frequency range: 9 kHz to 30 MHz

Detectors: Peak

Frequency (kHz)	Peak Reading (dB μ V/m)	Average Factor (dB)	Average Result (dB μ V/m)	Average Specification (dB μ V/m)	Margin (dB)
375.00	54.32	-6.0	48.32	96.12	-47.80
625.00	47.66	-6.0	41.66	71.69	-30.03
875.00	36.92	-6.0	30.92	68.73	-37.81
1125.00	35.81	-6.0	29.81	66.58	-36.77

**Figure 10. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2009	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

7.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]

RA: Receiver Amplitude [dB μ V]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: FS = 30.7 dB μ V (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dB μ V

No external pre-amplifiers are used.

8. Spurious Radiated Emission

8.1 Test Specification

30 - 1000 MHz, F.C.C., Part 15, Subpart C

8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1. The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.


8.3 Test Data

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

No signals were detected in the frequency range of 30 -1000 MHz.

TEST PERSONNEL:

Tester Signature: 

Date: 07.06.10

Typed/Printed Name: A. Sharabi

8.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	March 25, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 06, 2008	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

9. 11. APPENDIX A - CORRECTION FACTORS

9.1 Correction factors for CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

9.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

9.3 Correction factors for LOG PERIODIC ANTENNA

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission
Test EMI Receiver".

**9.4 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

9.5 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2