ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust

ACCREDITED
TESTING Cert No.1152.01

DATE: 30 April 2014

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

AeroScout Ltd.

Equipment under test:

Multi Sensor Tag

TAG-2000-EB

Written by: _____
R. Pinchuck, Documentation

Approved by: _____
A. Sharabi, Test Engineer

Approved by: _____
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.
This report relates only to items tested.

Measurement/Technical Report for
AeroScout Ltd.

Multi Sensor Tag

TAG-2000-EB

FCC ID: Q3HTAG2000

IC: 5115A-TAG2000

This report concerns:	Original Grant:
	Class I Change:
	Class II Change: X
Equipment type:	Digital Transmission System
Limits used:	47CFR15 Section 15.247

Measurement procedure used is KDB 558074 D01, April 1, 2013 and ANSI C63.4-2003.

Application for Certification prepared by:

R.Pinchuck
ITL (Product Testing) Ltd.
1 Batsheva St.
Lod, 7116002
Israel
e-mail Rpinchuck@itl.co.il
e-mail rpinchuck@itl.co.il

Applicant for this device: (different from "prepared by")

Reuven Amsalem
AeroScout Ltd.
3 Pekeris St.
Einstein Entrance 4th Floor
Rechovot 76702
Israel
Tel: + 972 - 8 – 936 - 9393
Fax: + 972 - 8- 936 - 8977
e-mail: reuven.amsalem@aeroscout.com

TABLE OF CONTENTS

1. GENERAL INFORMATION ---- 4
1.1 Administrative Information 4
1.2 List of Accreditations 5
1.3 Product Description 6
1.4 Test Methodology 6
1.5 Test Facility 6
1.6 Measurement Uncertainty 6

2. SYSTEM TEST CONFIGURATION---- 7
2.1 Justification....7
2.2 EUT Exercise Software 7
2.3 Special Accessories 7
2.4 Equipment Modifications 7
2.5 Configuration of Tested System 8

3. RADIATED MEASUREMENT TEST SET-UP PHOTOS---- 9

4. MAXIMUM TRANSMITTED PEAK POWER OUTPUT----11
4.1 Test procedure 11
4.2 Results table....15
4.3 Test Equipment Used; Peak Power Output....16

5. RADIATED EMISSION, 9 KHZ – 30 MHZ----17
5.1 Test Specification 17
5.2 Test Procedure....17
5.3 Measured Data....17
5.4 Test Instrumentation Used, Radiated Measurements....18
5.5 Field Strength Calculation 18

6. SPURIOUS RADIATED EMISSION 30 – 1000 MHZ ----19
6.1 Test Specification 19
6.2 Test Procedure....19
6.3 Test Data....20
6.4 Test Instrumentation Used, Radiated Measurements....21
6.5 Field Strength Calculation 21

7. SPURIOUS RADIATED EMISSION ABOVE 1 GHZ----22
7.1 Radiated Emission Above 1 GHz 22
7.2 Test Data....23
7.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz....30

8. ANTENNA GAIN/INFORMATION ----31

9. APPENDIX A - CORRECTION FACTORS----32
9.1 Correction factors for CABLE....32
9.2 Correction factors for CABLE....33
9.3 Correction factors for CABLE....34
12.6 Correction factors for LOG PERIODIC ANTENNA 35
9.4 Correction factors for LOG PERIODIC ANTENNA 36
9.5 Correction factors for BICONICAL ANTENNA 37
9.6 Correction factors for Double-Ridged Waveguide Horn....38
9.7 Correction factors for Horn Antenna....39
9.8 Correction factors for Horn Antenna....40
9.9 Correction factors for ACTIVE LOOP ANTENNA 41

1. General Information

1.1 Administrative Information

Manufacturer:	AeroScout Ltd.
Manufacturer's Address:	3 Pekeris St. Einstein Entrance 4th Floor Rechovot 76702 Israel Tel: +972-8-9369393 Fax: +972-8-9365977
Manufacturer's Representative:	Dadi Matza
Equipment Under Test (E.U.T):	Multi Sensor Tag
Equipment Model No.:	TAG-2000-EB
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	31.03.14
Start of Test:	31.03.14
End of Test:	31.03.14
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	See Section 2

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The AeroScout™ T2 Tag is a key component of the AeroScout™ Location System. These dedicated battery-powered Tags send Wi-Fi compatible messages at pre-defined intervals and can be attached to non-Wi-Fi assets in order to locate them. Tags send messages with their unique ID number that are detected by Location Receivers and used to estimate the Tag's location.

The AeroScout T2 Tag is used to be integrated to customer equipment and enables the wireless network infrastructure to locate people and assets otherwise not connected to a wireless network. The tag can be used to track people in many valuable applications - child tracking in amusement parks, security personnel in enterprises, hospital patients and many more. Various types of equipment can be tagged. These include vehicles in parking lots; inventory in a manufacturing line; containers, forklifts and other assets for efficient supply chain management; shopping carts in supermarkets; and medical equipment in hospitals.

1.4 Test Methodology

Radiated testing was performed according to the procedures in KDB 558074 D01, April 9, 2013 and in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing November 21, 2012).
I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Conducted Emission

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) 0.15 – 30 MHz:
Expanded Uncertainty (95% Confidence, K=2):
± 3.6 dB
Note: See ITL Procedure No. PM 198.

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 5.2 dB
Note: See ITL Procedure No. PM 198.

2. System Test Configuration

2.1 Justification

The product was originally authorized for FCC certification on 10/12/2009 under FCC ID Q3HTAG2000.

On 08/21/2013, a C2PC Grant was issued for FCC ID Q3HTAG2000.

The Class II Permissive Changes to the original product are as follows:

1. The capacitor CELLERGY (CLG04P020F12) was replaced with a new capacitor VISHAY Cap Tantalum 2.2mF (592D228X96BR3X2T).

2. Battery type (AA instead of 1/2AA)

3. Different plastic outer encasing is used.

2.2 EUT Exercise Software

The Tag SW uses two working mode in typical operation a receive mode for the RSSI detection and then the Transmit mode.

In the testing SW configuration the Tag was configured to be on one of the two programmable test modes

1) Continuous receive mode

2) Continuous transmit mode.

The Low frequency receiver is active in the two test mode above.

The testing of those two modes was done on three different channels.

2.3 Special Accessories

No special accessories were needed to achieve compliance.

2.4 Equipment Modifications

No modifications were needed to achieve compliance.

2.5 Configuration of Tested System



Figure 1. Configuration of Tested System

3. Radiated Measurement Test Set-up Photos

Figure 2. Radiated Emission Test

Figure 3. Radiated Emission Test

Figure 4. Radiated Emission Test

Figure 5. Radiated Emission Test

4. Maximum Transmitted Peak Power Output

4.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The E.U.T. was tested at 2412, 2437, and 2462 MHz.

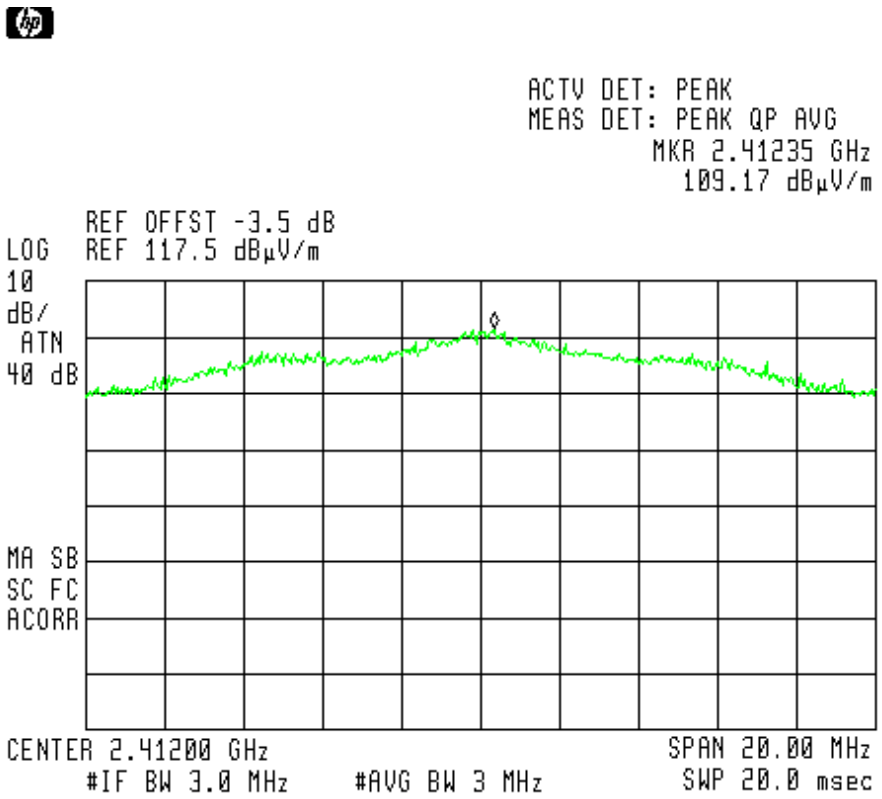

Figure 6 2412 MHz, Vertical

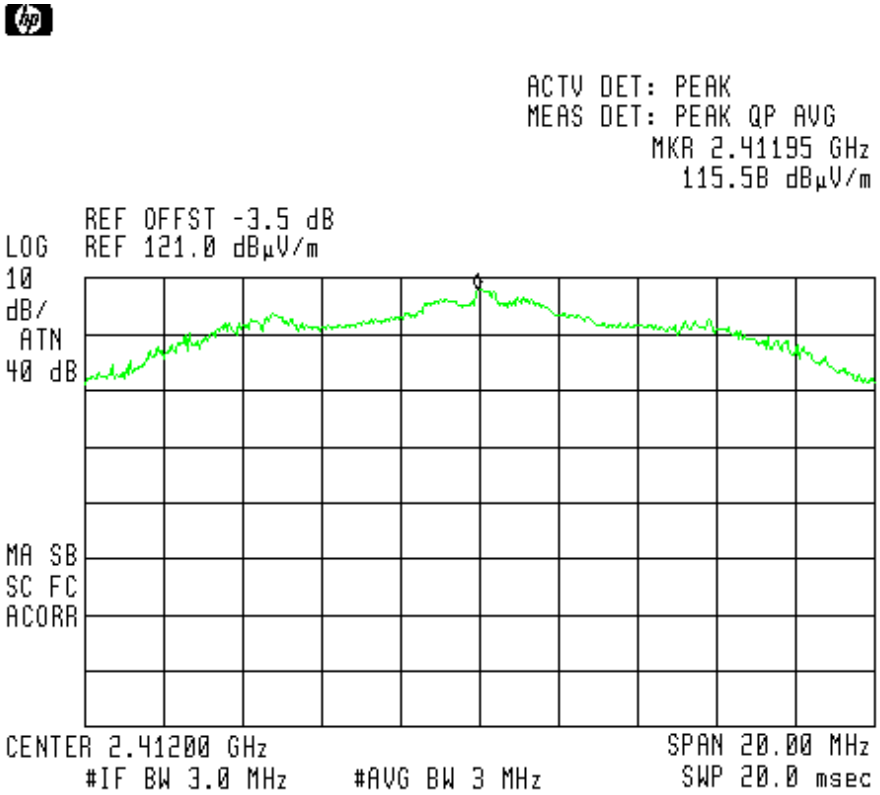

Figure 7 2412 MHz, Horizontal

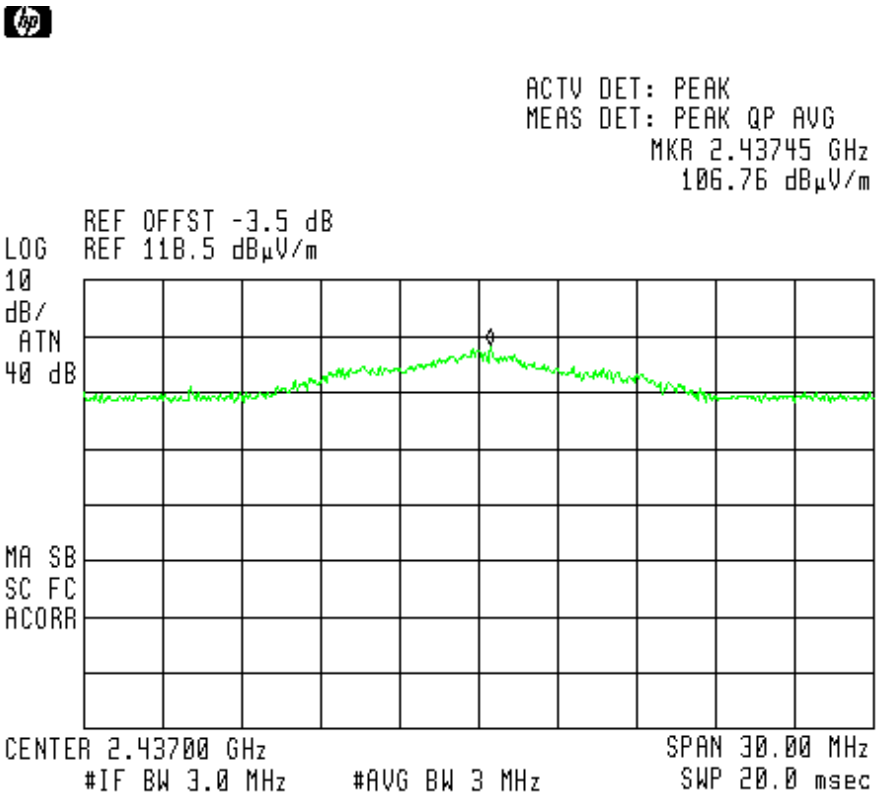

Figure 8 2437 MHz, Vertical

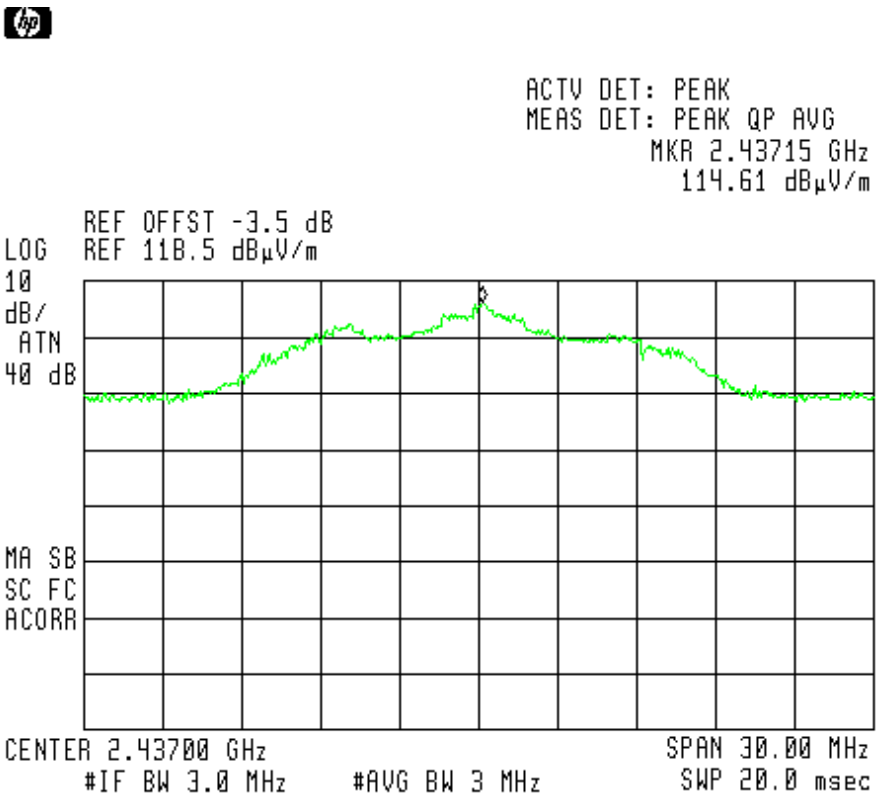

Figure 9 2437 MHz, Horizontal

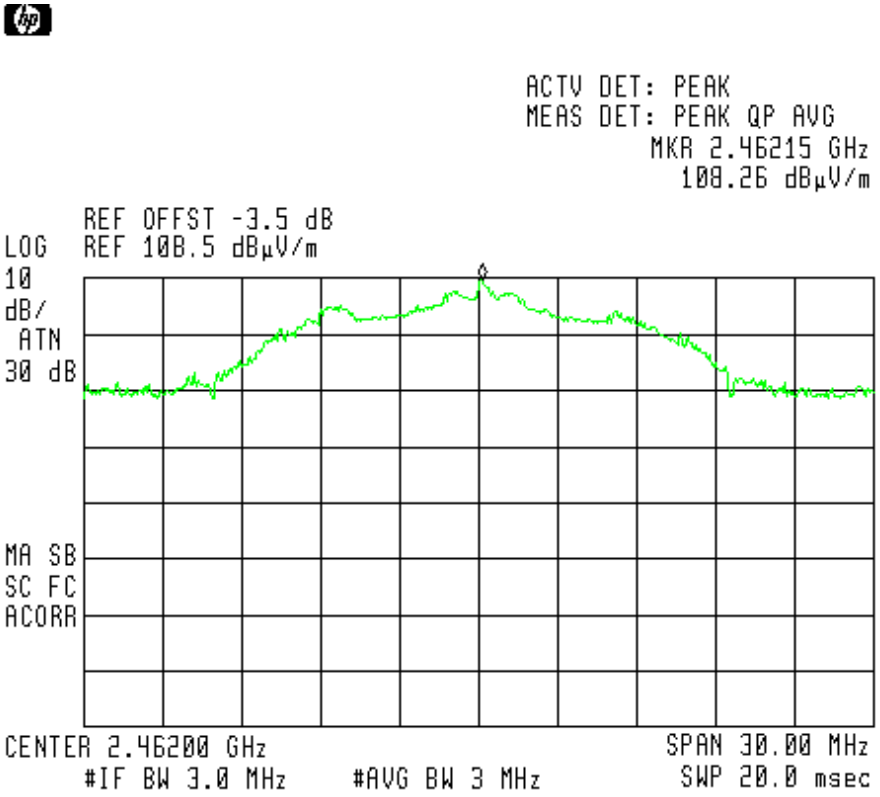

Figure 10 2462 MHz, Vertical

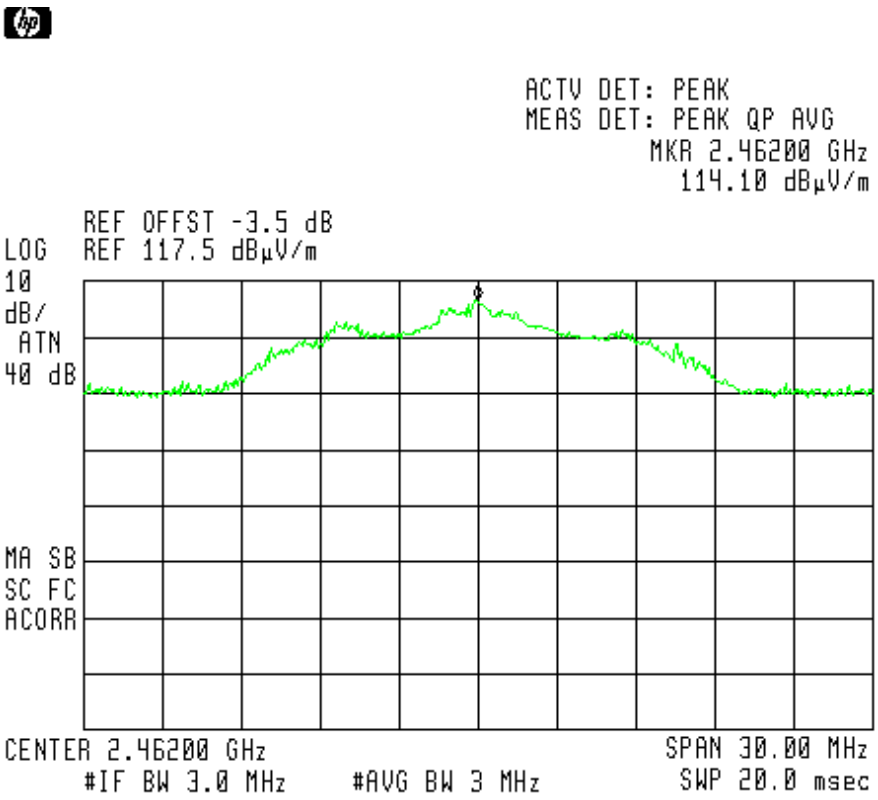

Figure 11 2462 MHz, Horizontal

4.2 Results table

E.U.T. Description: Multi Sensor Tag
Model No.: TAG-2000-EB
Serial Number: Not Designated
Specification: F.C.C. Part 15, Subpart C Section 15.247(b)

Operation Frequency (MHz)	Polarity	Power (dBuV/m)	Power (dBm)	Specification (dBm)	Margin (dB)
2412	V	109.2	14.0	30.0	-16.0
	H	115.6	20.4	30.0	-9.6
2437	V	106.8	11.6	30.0	-18.4
	H	114.6	19.4	30.0	-10.6
2462	V	108.3	13.1	30.0	-16.9
	H	114.1	18.9	30.0	-11.1

Figure 12 Maximum Peak Power Output

JUDGEMENT: Passed by 9.6dB

TEST PERSONNEL:

Tester Signature: _____ Date: 04.05.14

Typed/Printed Name: A. Sharabi

4.3 Test Equipment Used; Peak Power Output

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	January 1, 2014	1Year
RF Filter Section	HP	85420E	3705A00248	January 1, 2014	1Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 14, 2012	3 Years
Horn Antenna	ARA	SWH-28	1007	March 30, 2014	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 Year
Spectrum Analyzer	HP	8546E	3442A00275	March 2, 2014	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 13 Test Equipment Used

5. Radiated Emission, 9 kHz – 30 MHz

5.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

5.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was tested at the operating frequencies of 2412, 2437, and 2462 MHz.

5.3 Measured Data

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

The results for all three operating frequencies were the same.

The signals in the band 9 kHz – 30 MHz were below the spectrum analyzer noise level, at least 20 dB below the specification limit.

TEST PERSONNEL:

Tester Signature: _____ Date: 04.05.14

Typed/Printed Name: A. Sharabi

5.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	January 1, 2014	1 year
RF Section	HP	85420E	3705A00248	January 1, 2014	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2013	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

5.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

FS = RA + AF + CF

FS: Field Strength [dBμv/m]
RA: Receiver Amplitude [dBμv]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

Example: FS = 30.7 dBμV (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dBμV

No external pre-amplifiers are used.

6. Spurious Radiated Emission 30 – 1000 MHz

6.1 Test Specification

30 MHz-1000 MHz, F.C.C., Part 15, Subpart C

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The frequency range 30 MHz-1000 MHz was scanned and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

Turning the E.U.T on and off.
Using a frequency span less than 10 MHz.
Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

The E.U.T. was tested at the operating frequencies of 2412, 2437, and 2462 MHz.

6.3 Test Data

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C specification. The results for all three operating frequencies were the same.

The signals in the band 30 MHz – 1.0 GHz were below the spectrum analyzer noise level, at least 20 dB below the specification limit.

TEST PERSONNEL:

Tester Signature: _____ Date: 04.05.14

Typed/Printed Name: A. Sharabi

6.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	January 1, 2014	1 year
RF Section	HP	85420E	3705A00248	January 1, 2014	1 year
Antenna Bioconical	EMCO	3104	2606	August 30, 2013	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

6.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[dB\mu v/m]\ \ FS = RA + AF + CF$$

FS: Field Strength [dBμv/m]
RA: Receiver Amplitude [dBμv]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

Example: FS = 30.7 dBμV (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dBμV

No external pre-amplifiers are used.

7. Spurious Radiated Emission Above 1 GHz

7.1 Radiated Emission Above 1 GHz

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.
In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used.
In the frequency range 2.9-25.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.
The test distance was 3 meters.
The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.
Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The E.U.T. was tested at the operating frequencies of 2412, 2437, and 2462 MHz.

7.2 Test Data

JUDGEMENT: Passed by 2.2 dB

For the operation frequency of 2412 MHz, the margin between the emission level and the specification limit is 1.5 dB in the worst case at the frequency of 4822.00 MHz, vertical polarization.

For the operation frequency of 2437 MHz, the margin between the emission level and the specification limit is 1.7 dB in the worst case at the frequency of 4875.00 MHz, horizontal polarization.

For the operation frequency of 2462 MHz, the margin between the emission level and the specification limit is 2.2 dB in the worst case at the frequency of 4923.00 MHz, horizontal polarization.

The results for all modulations were the same.

The EUT met the requirements of the F.C.C. Part 15, Subpart C specification.

The details of the highest emissions are given in *Figure 14* to *Figure 19*.

TEST PERSONNEL:

Tester Signature: _____ Date: 04.05.14

Typed/Printed Name: A. Sharabi

Radiated Emission Above 1 GHz

E.U.T Description	Multi Sensor Tag
Type	TAG-2000-EB
Serial Number:	Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical
Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters
Detector: Peak
Operation Frequency: 2412 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dBµV/m)	(dB µV/m)	(dB)
2390.00	H	58.6	74.0	-15.4
2390.00	V	64.9	74.0	-9.1
4822.00	H	72.0	74.0	-2.0
4822.00	V	72.5	74.0	-1.5

Figure 14. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

"Peak Amp" includes correction factor.

* "Correction Factor" = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

** "Correction Factor" = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description Multi Sensor Tag
Type TAG-2000-EB
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical
Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters
Detector: Average
Operation Frequency: 2412 MHz

Freq. (MHz)	Polarity (H/V)	Average Amp (dBµV/m)	Average Specification (dB µV/m)	Peak. Margin (dB)
2390.00	H	42.9	54.0	-11.1
2390.00	V	41.3	54.0	-12.7
4822.00	H	40.2	54.0	-13.8
4822.00	V	40.5	54.0	-13.5

Figure 15. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

"Average Amp" includes correction factor.

* "Correction Factor" = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

** "Correction Factor" = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description	Multi Sensor Tag
Type	TAG-2000-EB
Serial Number:	Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical
Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters
Detector: Peak
Operation Frequency: 2437 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dBµV/m)	(dB µV/m)	(dB)
4875.00	H	72.3	74.0	-1.7
4875.00	V	68.0	74.0	-6.0

Figure 16. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

"Peak Amp" includes correction factor.

"Correction Factor" = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description Multi Sensor Tag
Type TAG-2000-EB
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical
Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters
Detector: Average
Operation Frequency: 2437 MHz

Freq. (MHz)	Polarity (H/V)	Average Amp (dBµV/m)	Average Specification (dB µV/m)	Peak. Margin (dB)
4875.00	H	40.5	54.0	-13.5
4875.00	V	39.8	54.0	-14.2

Figure 17. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

"Average Amp" includes correction factor.

"Correction Factor" = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description	Multi Sensor Tag
Type	TAG-2000-EB
Serial Number:	Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical
Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters
Detector: Peak
Operation Frequency: 2462 MHz

Freq. (MHz)	Polarity (H/V)	Peak Amp (dBµV/m)	Peak. Specification (dB µV/m)	Peak. Margin (dB)
2483.50	H	61.4	74.0	-12.6
2483.50	V	65.4	74.0	-8.6
4923.00	H	71.8	74.0	-2.2
4923.00	V	68.8	74.0	-5.2

Figure 18. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

"Peak Amp" includes correction factor.

* "Correction Factor" = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

** "Correction Factor" = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description Multi Sensor Tag
Type TAG-2000-EB
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical
Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters
Detector: Average
Operation Frequency: 2462 MHz

Freq. (MHz)	Polarity (H/V)	Average Amp (dBµV/m)	Average Specification (dB µV/m)	Peak. Margin (dB)
2483.50	H	47.9	54.0	-6.1
2483.50	V	45.0	54.0	-9.0
4923.00	H	39.9	54.0	-14.1
4923.00	V	40.0	54.0	-14.0

Figure 19. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

"Average Amp" includes correction factor.

* "Correction Factor" = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

** "Correction Factor" = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

7.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	January 1, 2014	1Year
RF Filter Section	HP	85420E	3705A00248	January 1, 2014	1Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 14, 2012	3 Years
Horn Antenna	ARA	SWH-28	1007	March 30, 2014	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 Year
Spectrum Analyzer	HP	8546E	3442A00275	March 2, 2014	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

8. Antenna Gain/Information

The antenna gain is -4 dBi.

9. APPENDIX A - CORRECTION FACTORS

9.1 Correction factors for CABLE

**from EMI receiver
to test antenna
at 3 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3
20.0	0.6
30.0	0.8
40.0	0.9
50.0	1.1
60.0	1.2
70.0	1.3
80.0	1.4
90.0	1.6
100.0	1.7
150.0	2.0
200.0	2.3
250.0	2.7
300.0	3.1
350.0	3.4
400.0	3.7
450.0	4.0
500.0	4.3
600.0	4.7
700.0	5.3
800.0	5.9
900.0	6.3
1000.0	6.7

FREQUENCY (MHz)	CORRECTION FACTOR (dB)
1200.0	7.3
1400.0	7.8
1600.0	8.4
1800.0	9.1
2000.0	9.9
2300.0	11.2
2600.0	12.2
2900.0	13.0

NOTES:

1. The cable type is RG-214.

2. The overall length of the cable is 27 meters.

3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

9.2 Correction factors for CABLE

from EMI receiver to test antenna at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.

2. The overall length of the cable is 10 meters.

9.3 Correction factors for CABLE

**from spectrum analyzer
to test antenna above 2.9 GHz**

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.

2. The cable is used for measurements above 2.9 GHz.

3. The overall length of the cable is 10 meters.

12.6 Correction factors for LOG PERIODIC ANTENNA

Type LPD 2010/A
at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. *Antenna serial number is 1038.*
2. *The above lists are located in file number 38M3O.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.*
3. *The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".*

9.4 Correction factors for LOG PERIODIC ANTENNA

Type SAS-200/511
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. *Antenna serial number is 253.*
2. *The above lists are located in file number SAS3M0.ANT for a 3 meter range.*
3. *The files mentioned above are located on the disk marked "Antenna Factors".*

9.5 Correction factors for BICONICAL ANTENNA

Type BCD-235/B, at 3 meter range

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.

2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

9.6 Correction factors for Double-Ridged Waveguide Horn

Model: 3115, S/N 29845
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			

9.7 Correction factors for Horn Antenna

Model: SWH-28
at 1 meter range.

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

9.8 Correction factors for Horn Antenna

Model: V637

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0

9.9 Correction factors for ACTIVE LOOP ANTENNA

Model 6502
S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2