

Meas1.Head Right Cheek WLAN 2.4G Ch11 Ant MIMO

Date: 2026/7/27

Communication System Band: WLAN(b); Frequency: 2462 MHz;Duty Cycle: 1:1.09

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.257$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.2°C Liquid Temperature:21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.638 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.07 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.775 W/kg

SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.193 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 0.605 W/kg

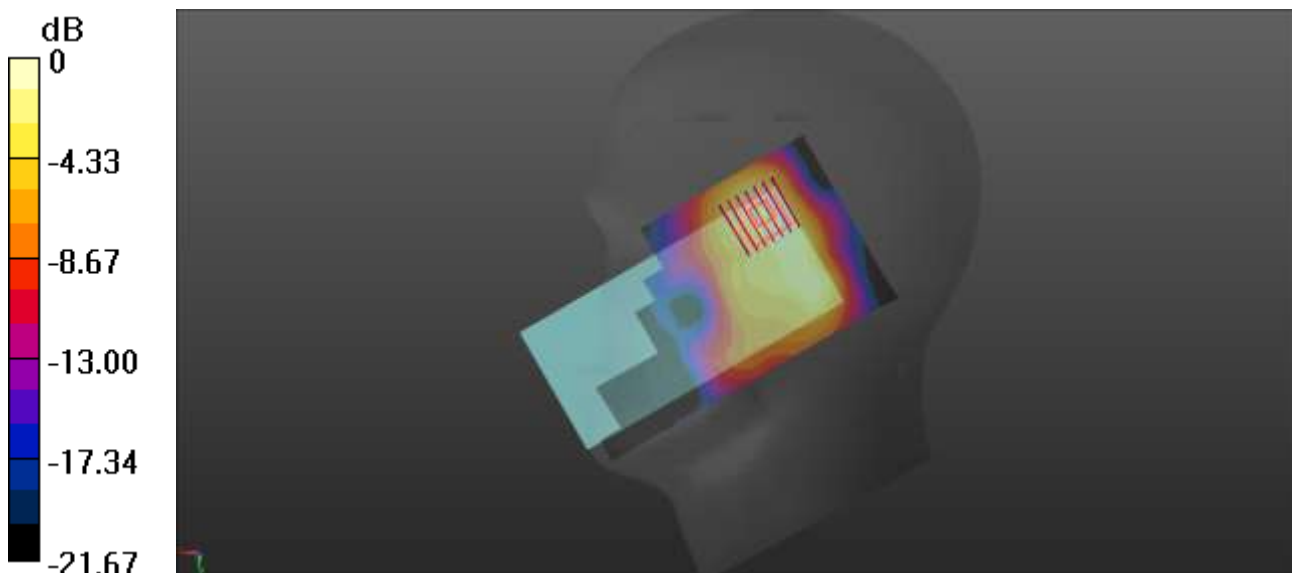

0 dB = 0.605 W/kg

Meas2.Body-worn Back Side 10mm WLAN 2.4G Ch11 Ant MIMO

Date: 2026/7/27

Communication System Band: WLAN(b); Frequency: 2462 MHz; Duty Cycle: 1:1.09

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.257$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.434 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.917 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 42.5%

Maximum value of SAR (measured) = 0.439 W/kg

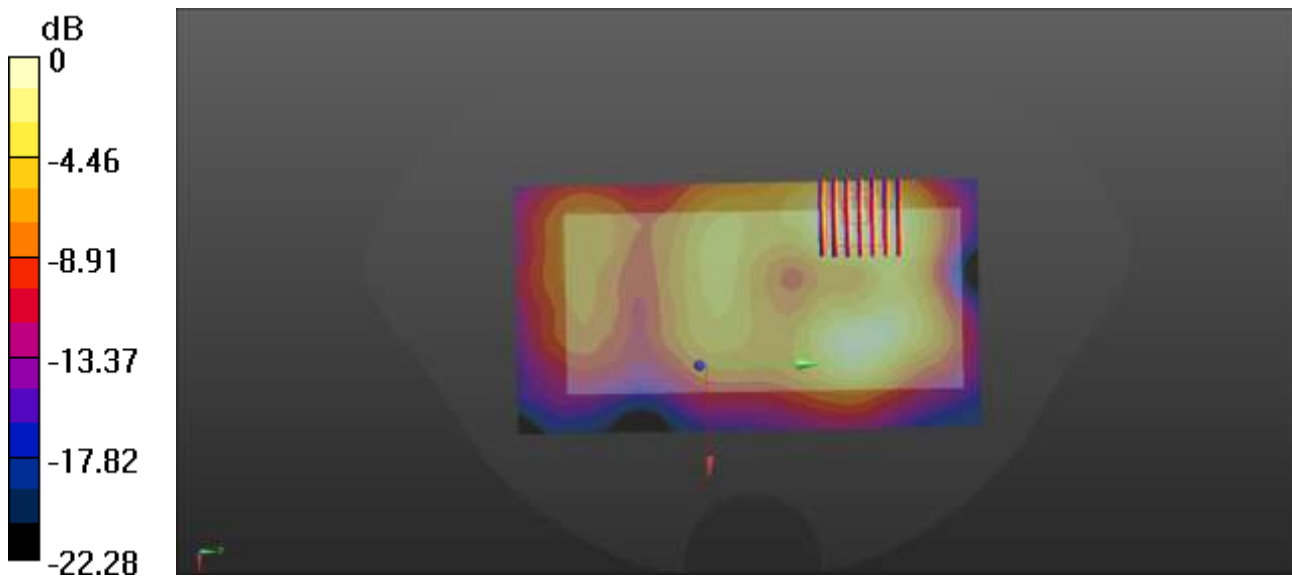

0 dB = 0.439 W/kg

Meas3.Head Right Tilt WLAN 5.2G Ch42 Ant MIMO

Date: 2026/7/28

Communication System Band: WLAN(ac)80Mhz; Frequency: 5210 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5210$ MHz; $\sigma = 4.723$ S/m; $\epsilon_r = 35.574$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.9, 4.9, 4.9); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch42/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.139 W/kg

Ch42/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.290 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.00935 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 12 mm)

Ratio of SAR at M2 to SAR at M1 = 50.8%

Maximum value of SAR (measured) = 0.0952 W/kg

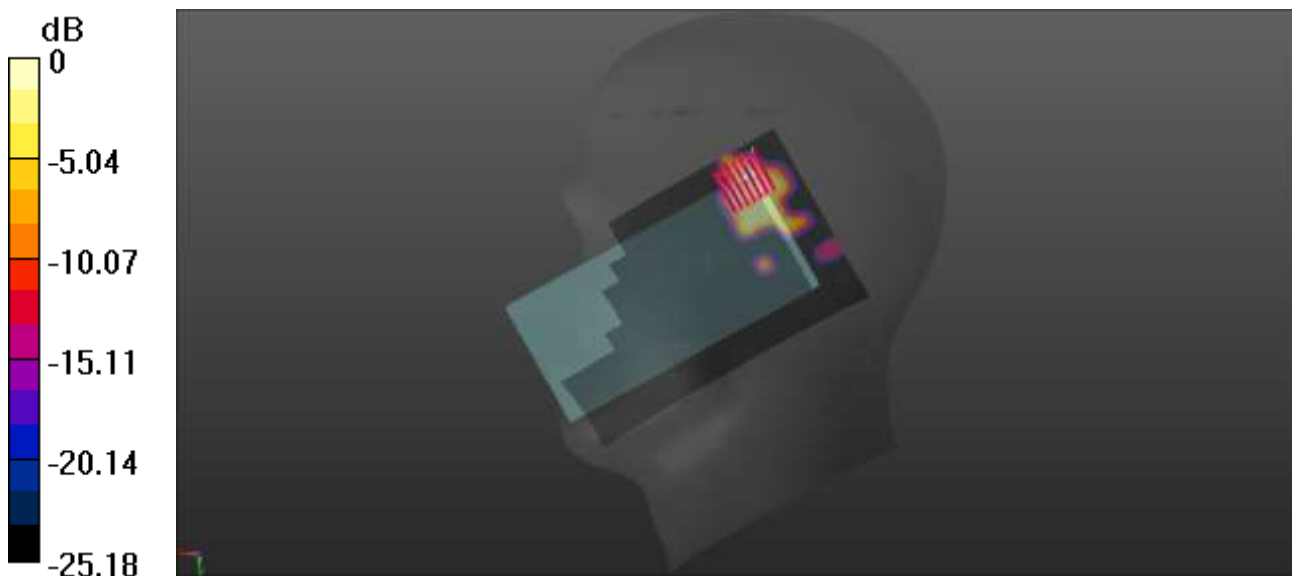

0 dB = 0.139 W/kg

Meas4.Body-worn Back Side 10mm WLAN 5.2G Ch42 Ant MIMO

Date: 2026/7/28

Communication System Band: WLAN(ac)80Mhz; Frequency: 5210 MHz;Duty Cycle: 1:1.14

Medium parameters used: $f = 5210$ MHz; $\sigma = 4.723$ S/m; $\epsilon_r = 35.574$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.6°C Liquid Temperature:21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.9, 4.9, 4.9); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch42/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.883 W/kg

Ch42/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.954 W/kg

SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.094 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.1%

Maximum value of SAR (measured) = 0.603 W/kg

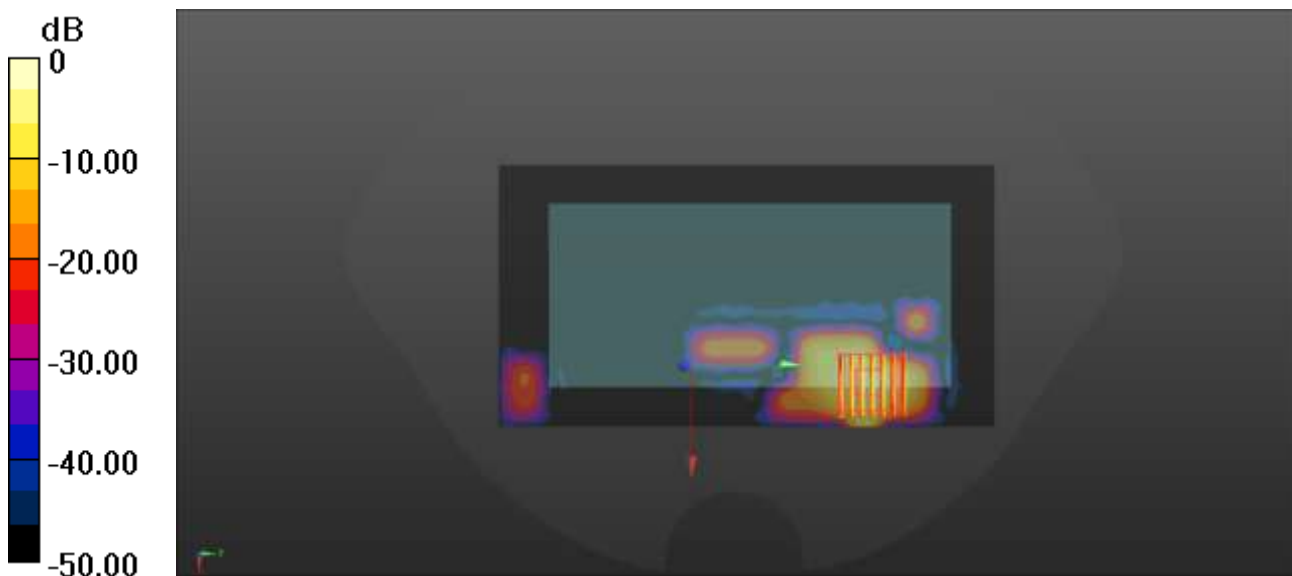

0 dB = 0.883 W/kg

Meas5.Head Right Cheek WLAN 5.3G Ch58 Ant MIMO

Date: 2026/7/29

Communication System Band: WLAN(ax) 80Mhz; Frequency: 5290 MHz;Duty Cycle: 1:1.16

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.828$ S/m; $\epsilon_r = 35.386$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.2°C Liquid Temperature:21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.9, 4.9, 4.9); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch58/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.202 W/kg

Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.214 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.017 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 0.161 W/kg

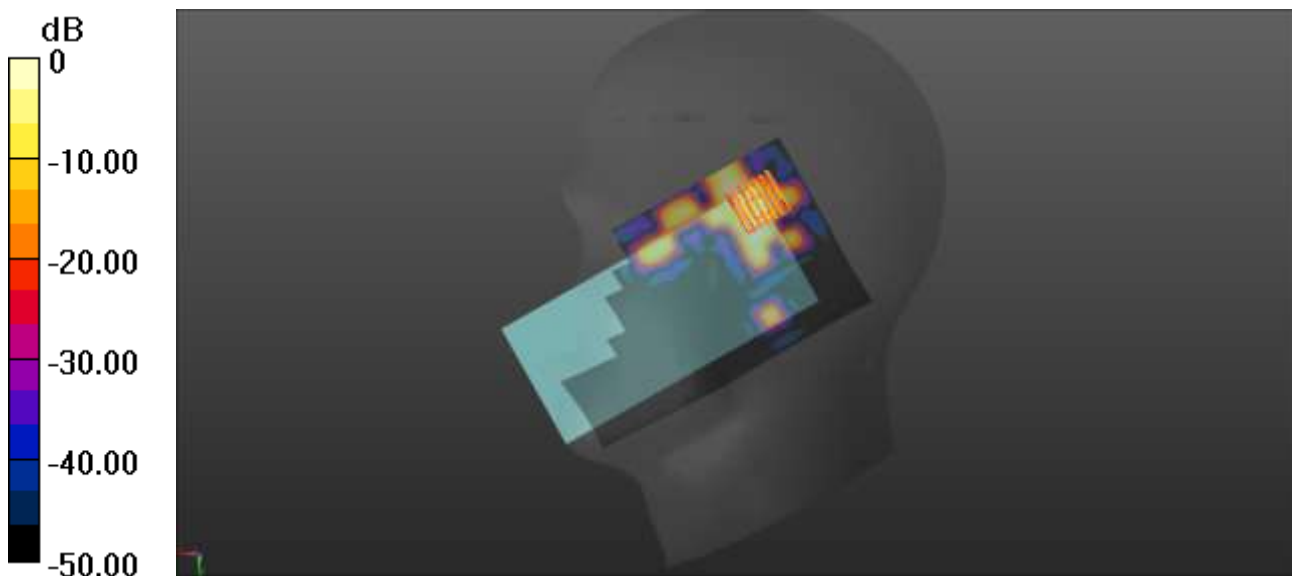

0 dB = 0.202 W/kg

Meas6.Body-worn Back Side 10mm WLAN 5.3G Ch58 Ant MIMO

Date: 2026/7/29

Communication System Band: WLAN(ax) 80Mhz; Frequency: 5290 MHz; Duty Cycle: 1:1.16

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.828$ S/m; $\epsilon_r = 35.386$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.9, 4.9, 4.9); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch58/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.14 W/kg

Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.578 W/kg; SAR(10 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 1.32 W/kg

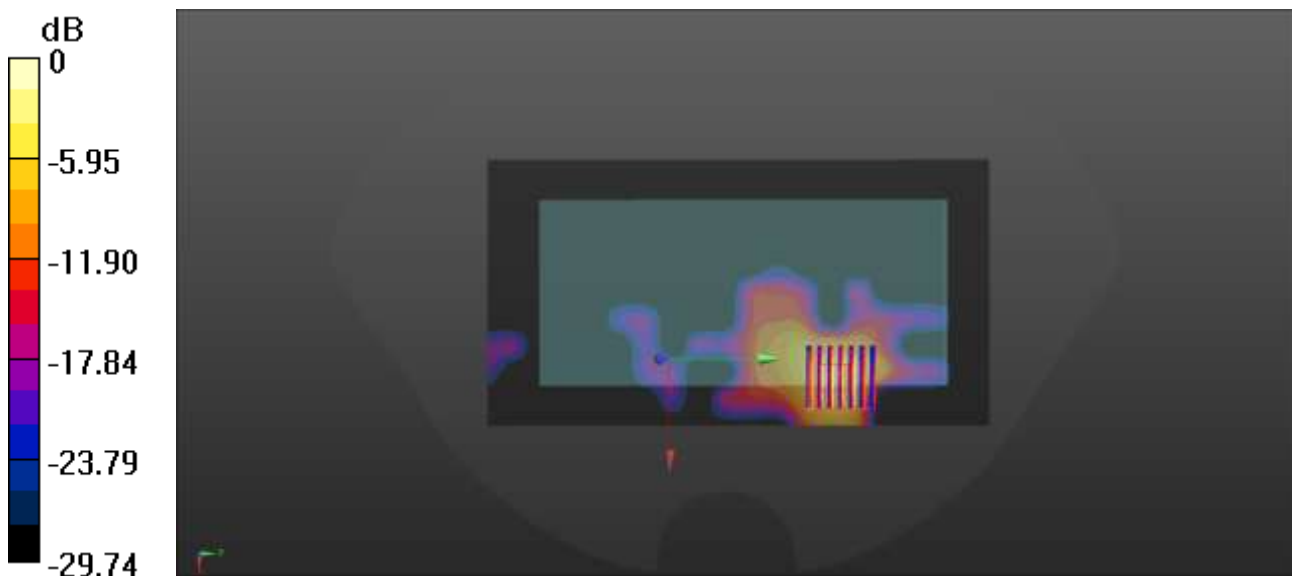

0 dB = 1.14 W/kg

Meas7.Head Right Cheek WLAN 5.6G Ch106 Ant MIMO

Date: 2026/7/30

Communication System Band: WLAN(ax)80Mhz; Frequency: 5530 MHz; Duty Cycle: 1:1.16

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.123$ S/m; $\epsilon_r = 34.831$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 21.7°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.3, 4.3, 4.3); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch106/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.290 W/kg

Ch106/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.994 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.028 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 0.242 W/kg

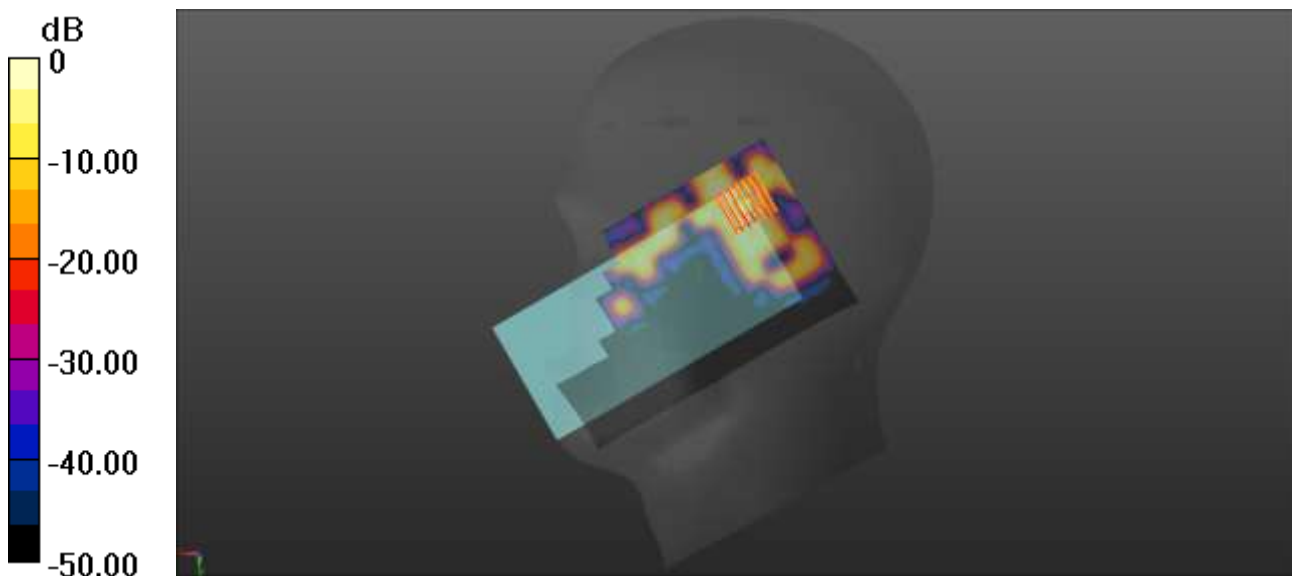

0 dB = 0.290 W/kg

Meas8.Body-worn Back Side 10mm WLAN 5.6G Ch106 Ant 1

Date: 2026/7/30

Communication System Band: WLAN(ax)80Mhz; Frequency: 5530 MHz; Duty Cycle: 1:1.16

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.123$ S/m; $\epsilon_r = 34.831$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.7°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.3, 4.3, 4.3); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch106/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.41 W/kg

Ch106/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.154 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 1.09 W/kg



0 dB = 1.41 W/kg

Meas9.Head Left Cheek WLAN 5.8G Ch159 Ant MIMO

Date: 2026/7/31

Communication System Band: WLAN(n)40Mhz; Frequency: 5795 MHz;Duty Cycle: 1:1.07

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.453$ S/m; $\epsilon_r = 34.268$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature:22.5°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.45, 4.45, 4.45); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch159/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.618 W/kg

Ch159/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.433 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 0.359 W/kg

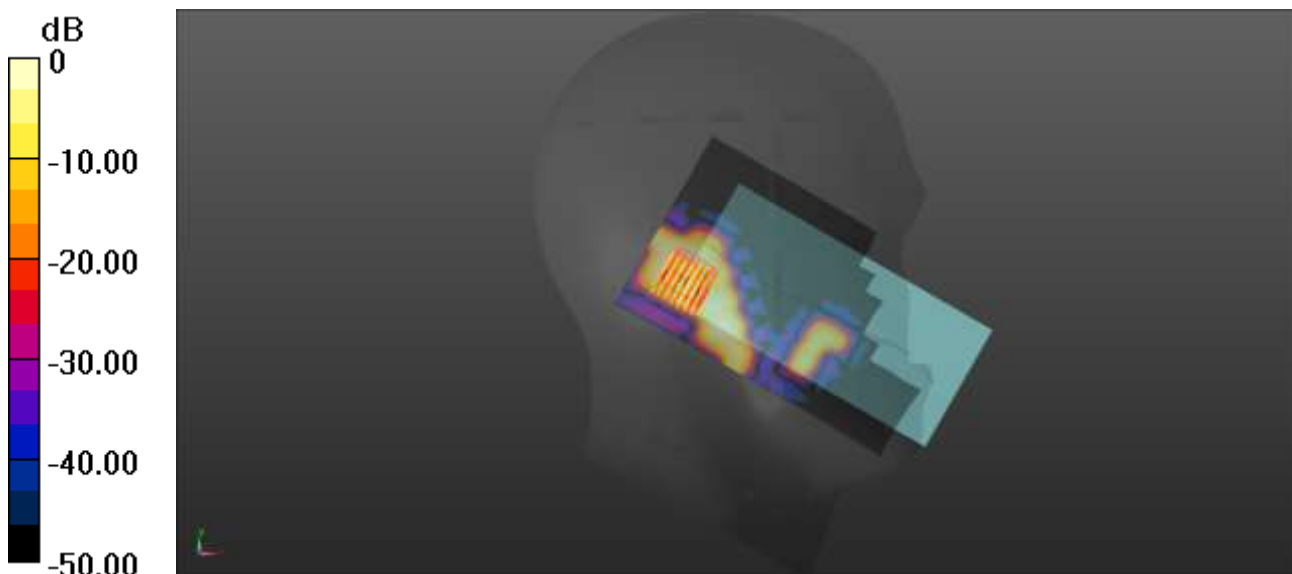

0 dB = 0.359 W/kg

Meas10.Body-worn Back Side 10mm WLAN 5.8G Ch159 Ant MIMO

Date: 2026/7/31

Communication System Band: WLAN(n)40Mhz; Frequency: 5795 MHz;Duty Cycle: 1:1.07

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.453$ S/m; $\epsilon_r = 34.268$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.45, 4.45, 4.45); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch159/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.96 W/kg

Ch159/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.3290 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.277 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 1.99 W/kg

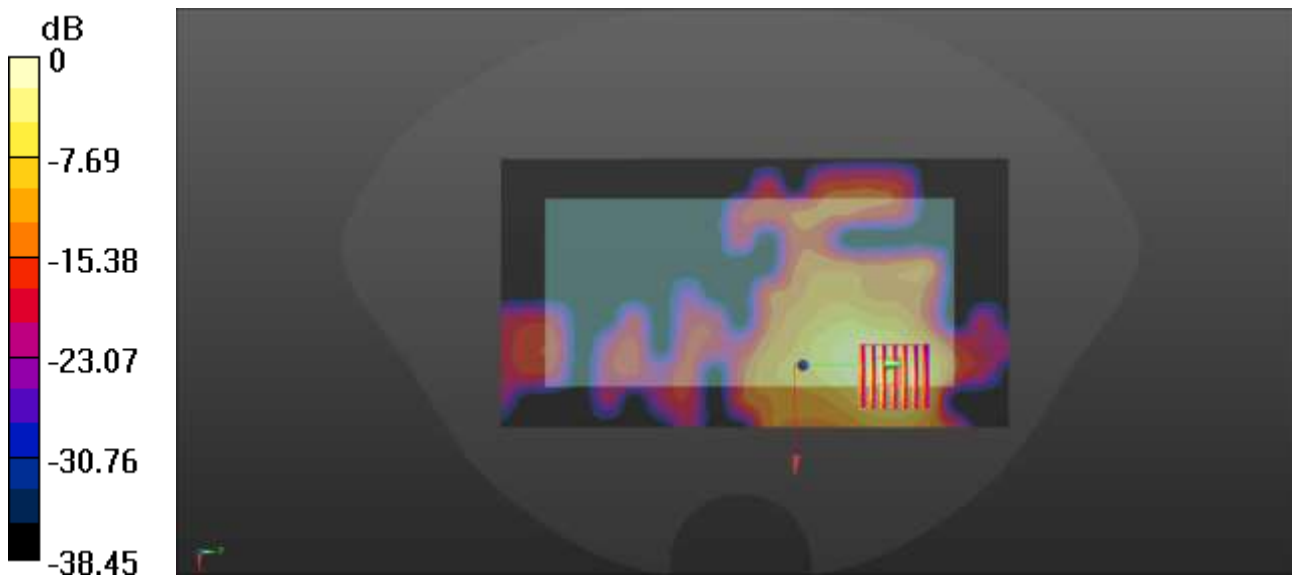

0 dB = 1.99 W/kg

Meas.11 Right Tilt WLAN 6G Ch215 Ant 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	U-NII-8	WLAN, 10731-AAC	7025.0, 215	5.6	6.52	34.0	22.3	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2026-07-12	EX3DV4 - SN7607, 2025-08-06	DAE4 Sn1711, 2025-11-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.0 x 3.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-07-12	2026-07-12
psSAR1g [W/kg]	0.079	0.047
psSAR10g [W/kg]	0.022	0.018
APD4cm ² [W/m ²]		0.394
Power Drift [dB]	0.03	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		81.5
Dist 3dB Peak [mm]		4.7

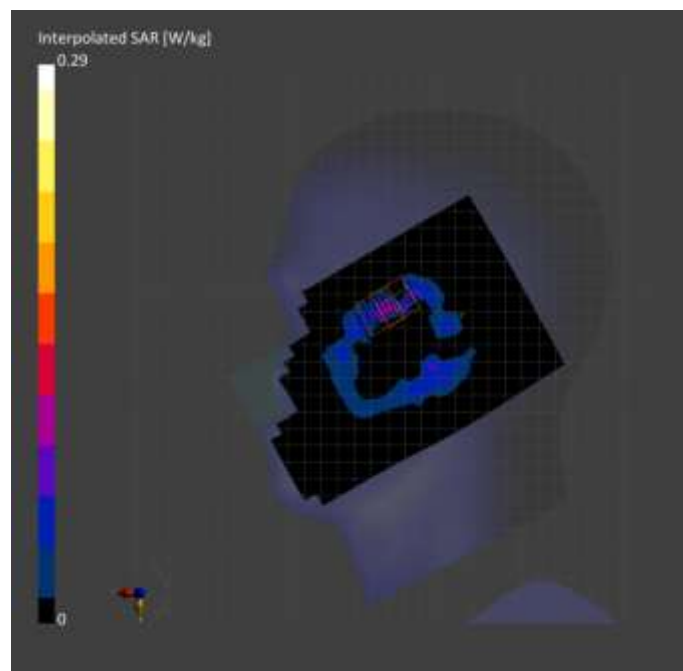

Meas.12 Body-worn Back Side 10mm WLAN 6G Ch39 Ant 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	U-NII-5	WLAN, 10731-AAC	6145.0, 39	5.6	5.73	35.1	22.3	21.5


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2026-07-12	EX3DV4 - SN7607, 2025-08-06	DAE4 Sn1711, 2025-11-11

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	119.0 x 204.0	23.8 x 23.8 x 22.0	Date	2026-07-12	2026-07-12
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	psSAR1g [W/kg]	0.164	0.170
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.054	0.054
Graded Grid	Yes	Yes	APD4cm² [W/m²]		1.23
Grading Ratio	1.5	1.4	Power Drift [dB]	-0.11	0.05
MAIA	Y	Y	Power Scaling	Disabled	Disabled
Surface Detection	VMS + 6p	VMS + 6p	Scaling Factor [dB]		
Scan Method	Measured	Measured	TSL Correction	No correction	No correction
			M2/M1 [%]		57.9
			Dist 3dB Peak [mm]		6.7

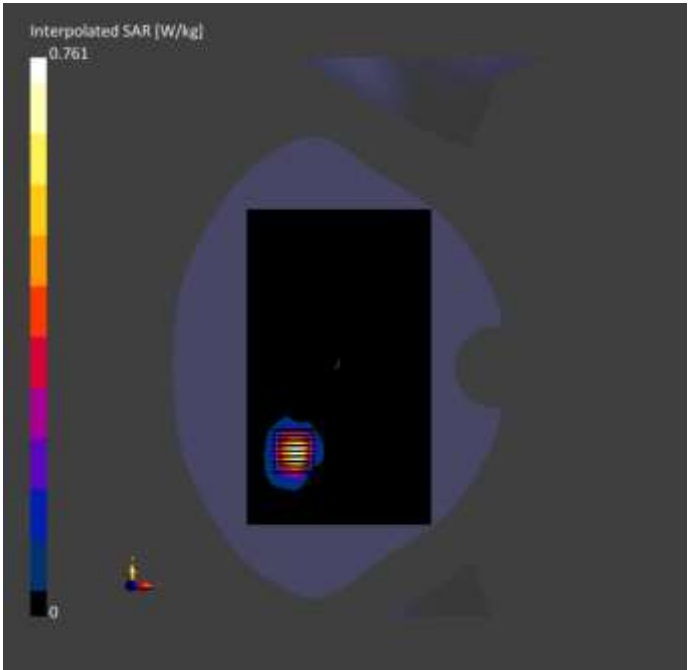

Meas13.Head Left Cheek BT Ch39

Date: 2026/7/27

Communication System Band: BT; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.787$ S/m; $\epsilon_r = 40.315$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39/Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0494 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.421 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.010 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 0.0376 W/kg

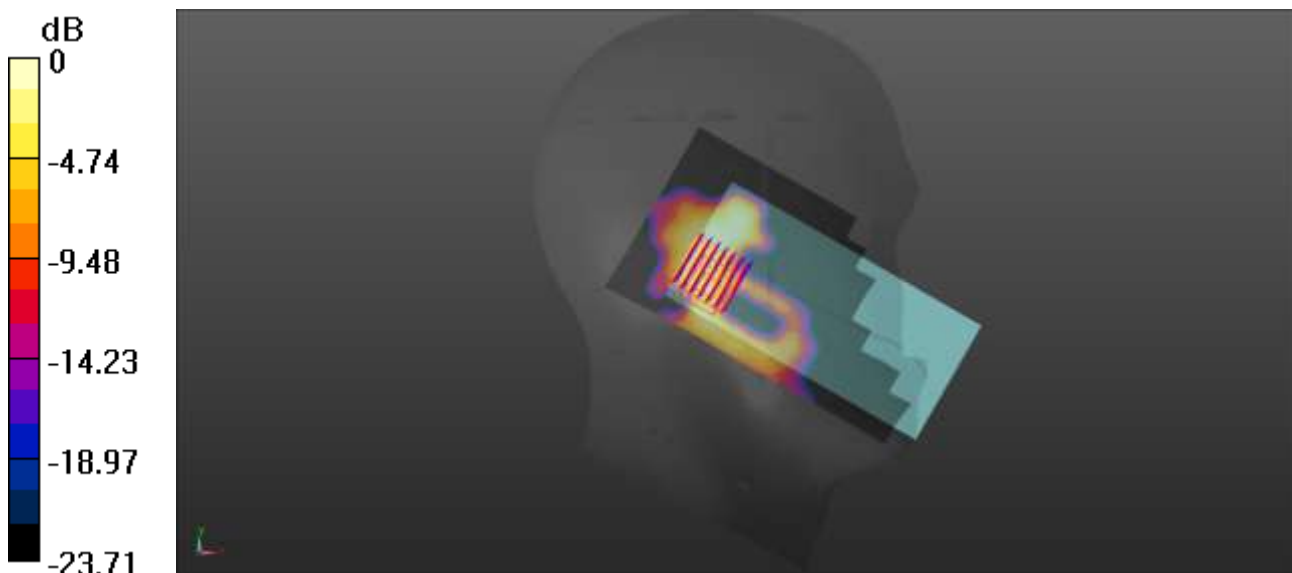

0 dB = 0.0376 W/kg

Meas14.Body-worn Back side 10mm BT Ch39

Date: 2026/7/27

Communication System Band: BT; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.787$ S/m; $\epsilon_r = 40.315$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: SN3748; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39/Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.121 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.269 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.042 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.122 W/kg

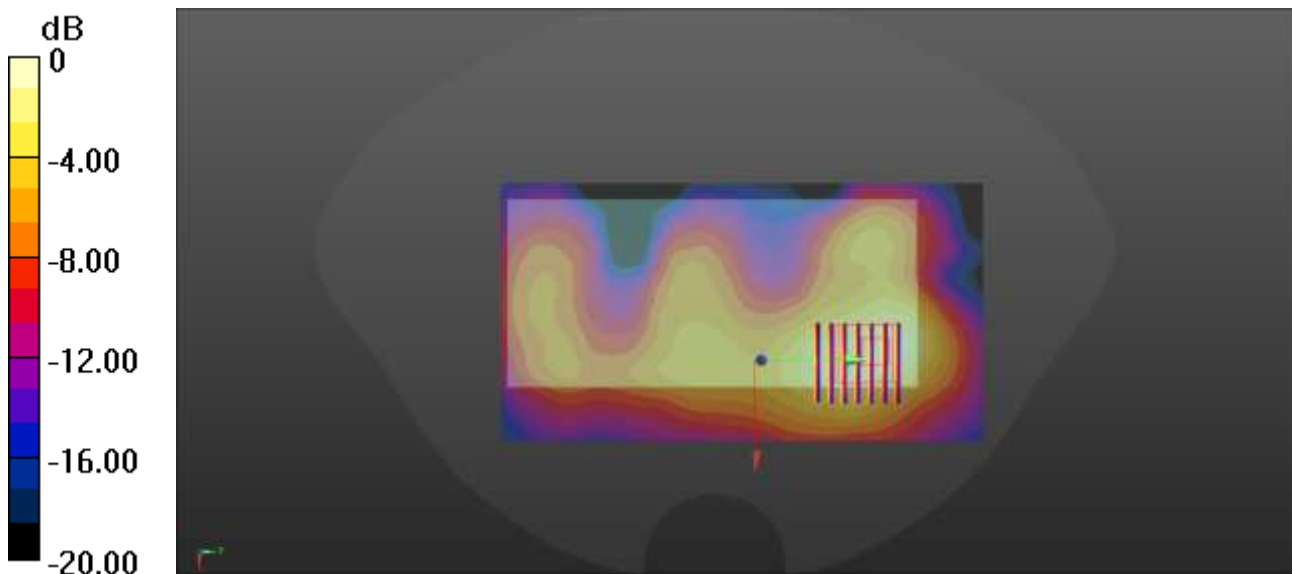

0 dB = 0.122 W/kg