FCC TEST REPORT

(PART 24)

REPORT NO.: RF141226C02-5

MODEL NO.: RS30

FCC ID: Q3N-RS30

RECEIVED: Dec. 17, 2014

TESTED: Dec. 19, 2014 ~ Jan. 14, 2015

ISSUED: Jan. 15, 2015

APPLICANT: CIPHERLAB CO., LTD

ADDRESS: 12F, 333 Dunhua S. Rd., Sec.2 Taipei, Taiwan 106

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

TABLE OF CONTENTS

RELEASE CONTROL RECORD 4
1 CERTIFICATION 5
2 SUMMARY OF TEST RESULTS 6
2.1 MEASUREMENT UNCERTAINTY 6
2.2 TEST SITE AND INSTRUMENTS 7
3 GENERAL INFORMATION 8
3.1 GENERAL DESCRIPTION OF EUT 8
3.2 CONFIGURATION OF SYSTEM UNDER TEST 9
3.3 DESCRIPTION OF SUPPORT UNITS 9
3.4 TEST ITEM AND TEST CONFIGURATION 10
3.5 EUT OPERATING CONDITIONS 11
3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS 11
4 TEST TYPES AND RESULTS 12
4.1 OUTPUT POWER MEASUREMENT 12
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT 12
4.1.2 TEST PROCEDURES 12
4.1.3 TEST SETUP 13
4.1.4 TEST RESULTS 14
4.2 FREQUENCY STABILITY MEASUREMENT 18
4.2.1 LIMITS OF FREQUENCY STABILIITY MEASUREMENT 18
4.2.2 TEST PROCEDURE 18
4.2.3 TEST SETUP 18
4.2.4 TEST RESULTS 19
4.3 OCCUPIED BANDWIDTH MEASUREMENT 20
4.3.1 TEST PROCEDURES 20
4.3.2 TEST SETUP 20
4.3.3 TEST RESULTS 21
4.4 BAND EDGE MEASUREMENT 23
4.4.1 LIMITS OF BAND EDGE MEASUREMENT 23
4.4.2 TEST SETUP 23
4.4.3 TEST PROCEDURES 23
4.4.4 TEST RESULTS 24
4.5 PEAK TO AVERAGE RATIO 26
4.5.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT 26
4.5.2 TEST SETUP 26
4.5.3 TEST PROCEDURES 26
4.5.4 TEST RESULTS 27
4.6 CONDUCTED SPURIOUS EMISSIONS 29
4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT 29
4.6.2 TEST PROCEDURE 29
4.6.3 TEST SETUP 29
4.6.4 TEST RESULTS 30
4.7 RADIATED EMISSION MEASUREMENT 48
4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT 48
4.7.2 TEST PROCEDURES 48
4.7.3 DEVIATION FROM TEST STANDARD 48
4.7.4 TEST SETUP 49
4.7.5 TEST RESULTS 50
5 PHOTOGRAPHS OF THE TEST CONFIGURATION 62

6 INFORMATION ON THE TESTING LABORATORIES 63
7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB 64

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF141226C02-5	Original release	Jan. 15, 2015

1 CERTIFICATION

PRODUCT:	Mobile Computer
MODEL:	RS30
BRAND:	CIPHERLAB
APPLICANT:	CIPHERLAB CO., LTD
TESTED:	Dec. 19, 2014 ~ Jan. 14, 2015
TEST SAMPLE:	ENGINEERING SAMPLE
STANDARDS:	**FCC Part 24, Subpart E**

The above equipment (model: UTX-3115) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch,** and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Celine Chou **, DATE :** Jan. 15, 2015

Celine Chou / Specialist

APPROVED BY : Bruce Chen **, DATE :** Jan. 15, 2015

Bruce Chen / Project Engineer

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	**TEST TYPE**	**RESULT**	**REMARK**
2.1046 24.232	Equivalent isotropically radiated power	PASS	Meet the requirement of limit.
---	Peak To Average Ratio	PASS	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -23.70dB at 3760.00MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.59 dB
	200MHz ~1000MHz	3.60 dB
	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 06, 2014	Oct. 05, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSU 43	100115	Dec. 18, 2013	Dec. 17, 2014
			Dec. 18, 2014	Dec. 17, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 26, 2014	Feb. 25, 2015
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 05, 2014	Jan. 04, 2015
			Jan. 05, 2015	Jan. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 17, 2014	Feb. 16, 2015
Preamplifier Agilent	8449B	3008A01961	Oct. 18, 2014	Oct. 17, 2015
Preamplifier Agilent	8447D	2944A10738	Oct. 18, 2014	Oct. 17, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 09, 2014	Aug. 08, 2015
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table BV ADT	TT100.	TT93021704	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021704	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Apr. 25, 2014	Apr. 24, 2015
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 4.

3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

4. The FCC Site Registration No. is 460141.

5. The IC Site Registration No. is IC7450F-4.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Mobile Computer
MODEL NO.	RS30
POWER SUPPLY	3.8Vdc (Battery) 5Vdc (Adapter)
MODULATION TYPE	**GSM, GPRS:** GMSK **EDGE:** 8PSK **WCDMA:** BPSK, QPSK **HSPDA:** BPSK **HUPDA:** QPSK
FREQUENCY RANGE	**GSM, GPRS, EDGE:** 1850.2MHz ~ 1909.8MHz **WCDMA:** 1852.4MHz ~ 1907.6MHz
MAX. EIRP POWER	**GSM:** 1339.677mW (31.27dBm) **EDGE:** 1153.453mW (30.62dBm) **WCDMA:** 223.872mW (23.50dBm)
ANTENNA TYPE	PIFA antenna with -2.28dBi gain
ANTENNC CONNECTOR	Spring
DATA CABLE	1.0m shielded USB cable without core 1.6m non-shielded snapon cable with one core
I/O PORTS	Refer to users' manual
ACCESSORY DEVICES	Adapter, Battery

NOTE:

1. The EUT consumes power from the following adapter and battery.

ADAPTER	
BRAND	Sunny COMPUTER TECHNOLOGY CO., LTD.
MODEL	SYS1460-1005
INPUT POWER	100-240Vac, 50-60Hz, 1.0A
OUTPUT POWER	5Vdc, 2A

BATTERY	
BRAND	CIPHERLAB
MODEL	BA-0093A1
POWER RATING	3.8Vdc, 3000mAh, 11.4wh

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 CONFIGURATION OF SYSTEM UNDER TEST

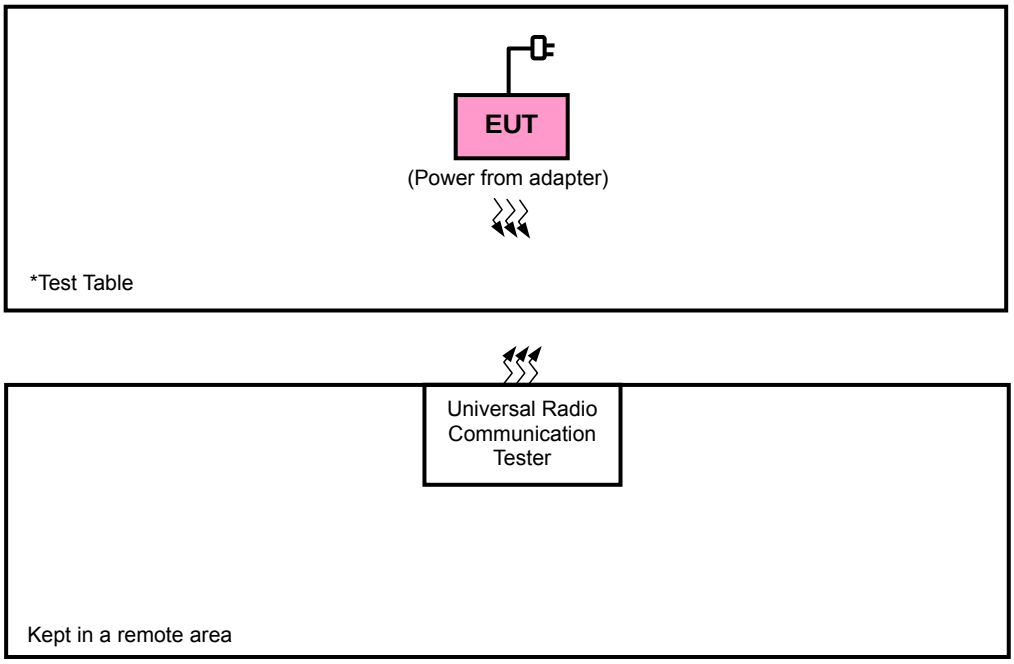

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	UNIVERSAL RADIO COMMUNICATION TESTER	R&S	CMU200	123112	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE:
1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 acted as a communication partner to transfer data.

3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports The worst case was found when positioned on Z-plane. Following channel(s) was (were) selected for the final test as listed below:

GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
-	EIRP	512 to 810	512, 661, 810	GSM, EDGE
-	FREQUENCY STABILITY	512 to 810	661	GSM
-	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM, GPRS, EDGE
-	BAND EDGE	512 to 810	512, 810	GSM, GPRS, EDGE
-	PEAK TO AVERAGE RATIO	512 to 810	512, 661, 810	GSM, GPRS, EDGE
-	CONDCUDETED EMISSION	512 to 810	512, 661, 810	GSM, GPRS, EDGE
-	RADIATED EMISSION BELOW 1GHz	512 to 810	512	GSM, EDGE
-	RADIATED EMISSION ABOVE 1GHz	512 to 810	512, 661, 810	GSM, EDGE

WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
-	ERP	9262 to 9538	9262, 9400, 9538	WCDMA
-	FREQUENCY STABILITY	9262 to 9538	9400	WCDMA
-	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA, HSUPA
-	BAND EDGE	9262 to 9538	9262, 9538	WCDMA, HSDPA, HSUPA
-	PEAK TO AVERAGE RATIO	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA, HSUPA
-	CONDCUDETED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA, HSUPA
-	RADIATED EMISSION BELOW 1GHz	9262 to 9538	9262	WCDMA
-	RADIATED EMISSION ABOVE 1GHz	9262 to 9538	9262, 9400, 9538	WCDMA

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	24deg. C, 63%RH	120Vac, 60Hz	Alan Wu
FREQUENCY STABILITY	24deg. C, 64%RH	3.9Vdc	Match Tsui
OCCUPIED BANDWIDTH	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
BAND EDGE	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
PEAK TO AVERAGE RATIO	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
CONDCUDETED EMISSION	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
RADIATED EMISSION	27deg. C, 66%RH	120Vac, 60Hz	Alan Wu

3.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP

4.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM and 5MHz for WCDMA mode.

b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.

c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G

d. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.

CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with GSM link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TEST SETUP

EIRP MEASUREMENT:

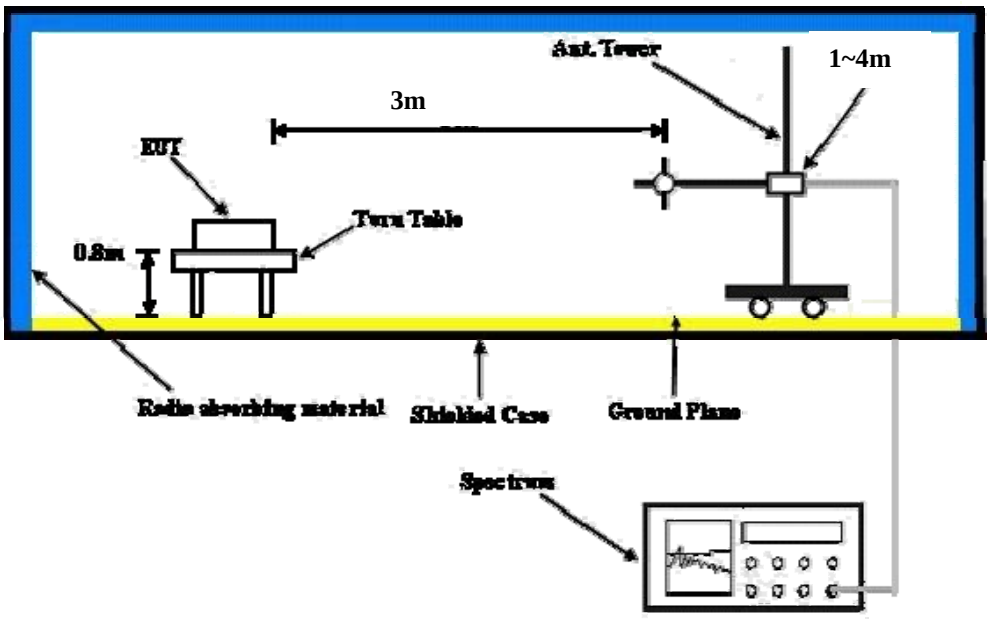

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
GSM	**28.76**	28.73	28.55
GPRS 8	28.71	28.68	28.50
GPRS 10	28.00	27.97	27.79
GPRS 11	26.32	26.29	26.11
GPRS 12	25.30	25.27	25.09
EDGE 8 (MCS1)	28.71	28.68	28.50
EDGE 10 (MCS1)	27.98	27.95	27.77
EDGE 11 (MCS1)	26.32	26.29	26.11
EDGE 12 (MCS1)	25.29	25.26	25.08
EDGE 8 (MCS9)	21.55	21.52	21.34
EDGE 10 (MCS9)	20.30	20.27	20.09
EDGE 11 (MCS9)	18.26	18.23	18.05
EDGE 12 (MCS9)	17.21	17.18	17.00

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	22.17	**22.19**	22.18
HSDPA Subtest-1	21.22	21.20	21.13
HSDPA Subtest-2	21.18	21.21	21.12
HSDPA Subtest-3	20.78	20.74	20.67
HSDPA Subtest-4	20.71	20.72	20.64
HSUPA Subtest-1	21.20	21.20	21.20
HSUPA Subtest-2	19.25	19.27	19.19
HSUPA Subtest-3	19.25	19.31	19.22
HSUPA Subtest-4	18.73	18.73	18.69
HSUPA Subtest-5	20.27	20.23	20.21

EIRP POWER (dBm)

FOR GSM MODE:

MODE	TX channel 512						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-9.74	30.09	1.07	31.16	33.00	-1.84
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-12.86	25.89	1.07	26.96	33.00	-6.04

MODE	TX channel 661						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	**1880.00**	**-9.98**	**30.15**	**1.12**	**31.27**	**33.00**	**-1.73**
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-11.64	26.84	1.12	27.96	33.00	-5.04

MODE	TX channel 810						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.80	-10.87	29.55	1.11	30.66	33.00	-2.34
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.80	-11.01	27.41	1.11	28.52	33.00	-4.48

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

FOR EDGE MODE:

MODE	TX channel 512						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-10.63	29.20	1.07	30.27	33.00	-2.73
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-13.27	25.48	1.07	26.55	33.00	-6.45

MODE	TX channel 661						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-10.86	29.27	1.12	30.39	33.00	-2.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-11.95	26.53	1.12	27.65	33.00	-5.35

MODE	TX channel 810						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	**1909.80**	**-10.91**	**29.51**	**1.11**	**30.62**	**33.00**	**-2.38**
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.80	-11.16	27.26	1.11	28.37	33.00	-4.63

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

FOR WCDMA MODE:

MODE	TX channel 9262						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	1852.40	-17.64	22.22	1.07	23.29	33.00	-9.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	1852.40	-20.24	18.49	1.07	19.56	33.00	-13.44

MODE	TX channel 9400						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	1880.00	-18.15	21.98	1.12	23.10	33.00	-9.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	1880.00	-18.86	19.62	1.12	20.74	33.00	-12.26

MODE	TX channel 9538						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	**1907.60**	**-18.02**	**22.39**	**1.11**	**23.50**	**33.00**	**-9.50**
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	1907.60	-19.55	18.85	1.11	19.96	33.00	-13.04

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILIITY MEASUREMENT

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.2.2 TEST PROCEDURE

a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.

b. EUT is connected the external power supply to control the AC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.

c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ±0.5℃ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

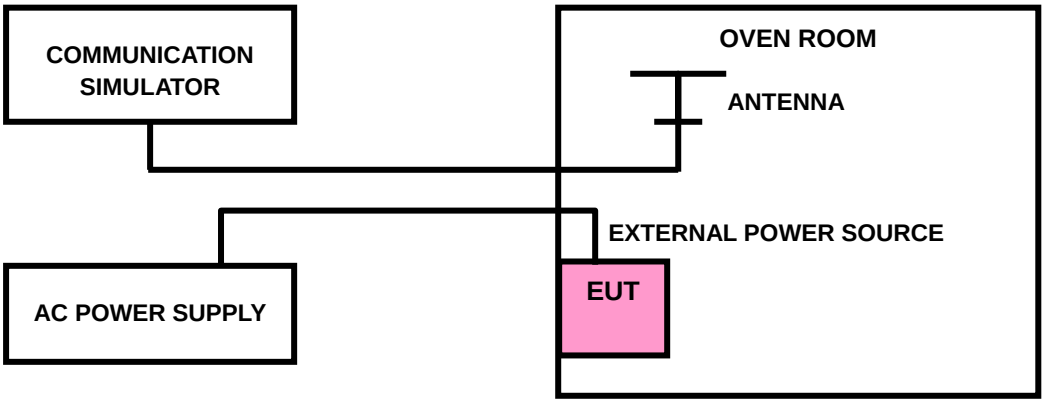

4.2.4 TEST RESULTS

FREQUENCY ERROR vs. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	GSM	WCDMA	
4.35	-0.006	-0.007	2.5
3.90	-0.007	-0.008	2.5
3.65	-0.007	-0.008	2.5

NOTE: The applicant defined the normal working voltage is from 3.65Vdc to 4.35Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (℃)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	GSM	WCDMA	
50	-0.020	-0.015	2.5
40	-0.016	-0.011	2.5
30	-0.009	-0.010	2.5
20	-0.007	-0.008	2.5
10	-0.010	-0.012	2.5
0	-0.013	-0.015	2.5
-10	-0.018	-0.020	2.5
-20	-0.019	-0.022	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 TEST SETUP

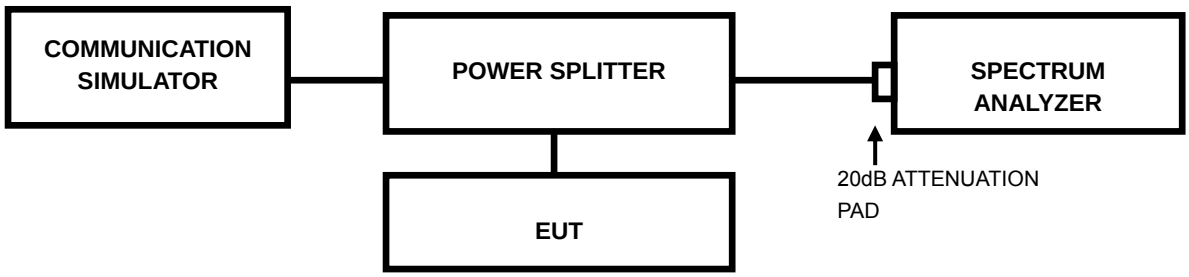

4.3.3 TEST RESULTS

CHANNEL	FREQ. (MHz)	99% OCCUPIED BANDWIDTH (kHz)			CHANNEL	FREQ. (MHz)	99% OCCUPIED BANDWIDTH (MHz)		
		GSM	GPRS	EDGE			WCDMA	HSDPA	HSUPA
512	1850.2	250	255	255	9262	1852.4	4.15	4.12	4.15
661	1880.0	260	255	265	9400	1880.0	4.15	4.18	4.15
810	1909.8	255	250	255	9538	1907.6	4.17	4.13	4.17

SPECTRUM PLOT OF WORST VALUE

GSM

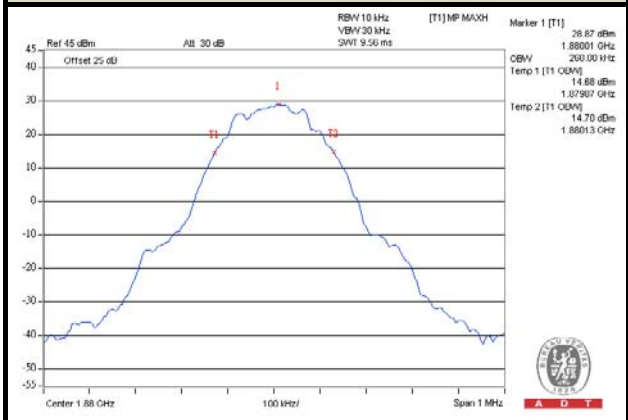

GPRS

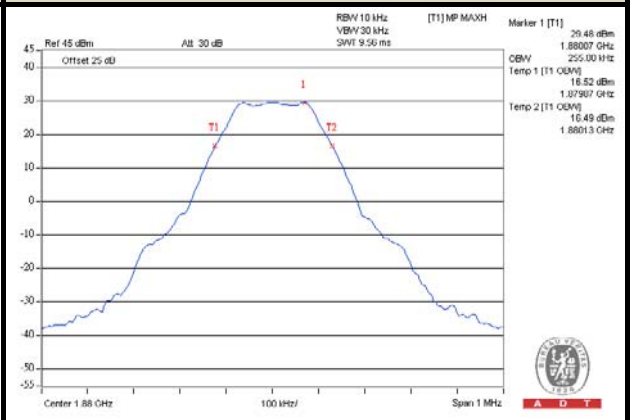

EDGE

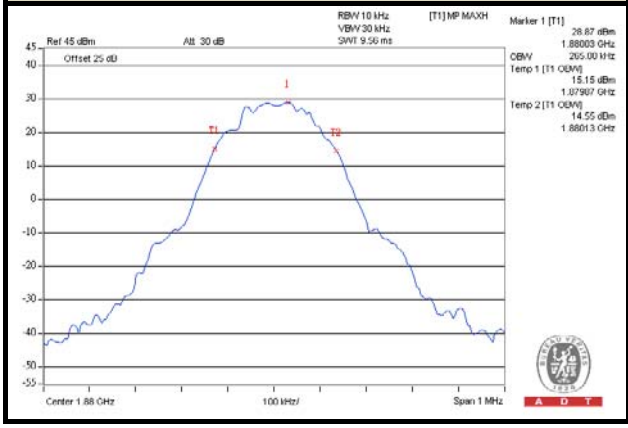

WCDMA	HSDPA
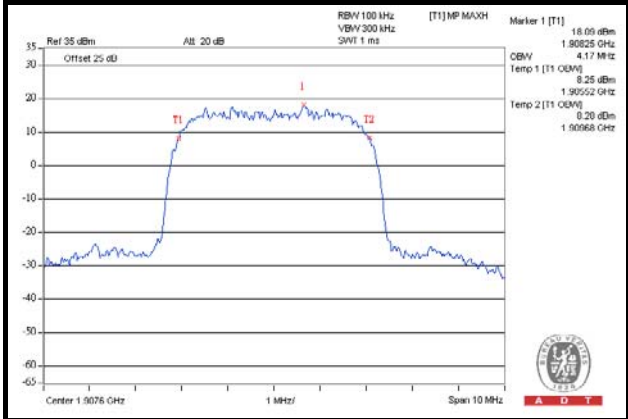	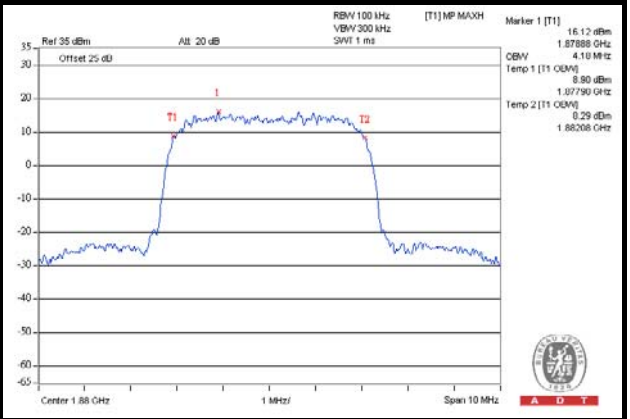
HSUPA	
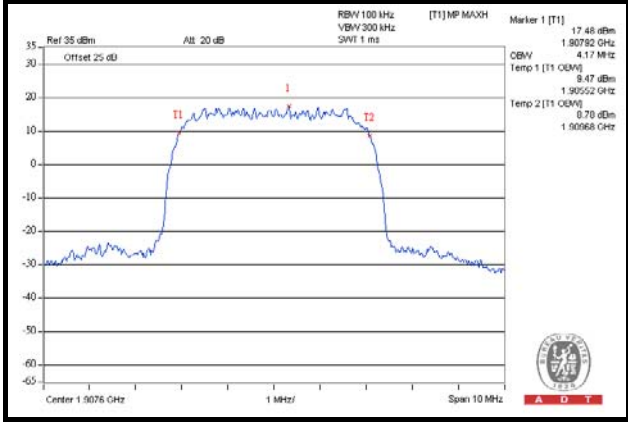	

4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 TEST SETUP

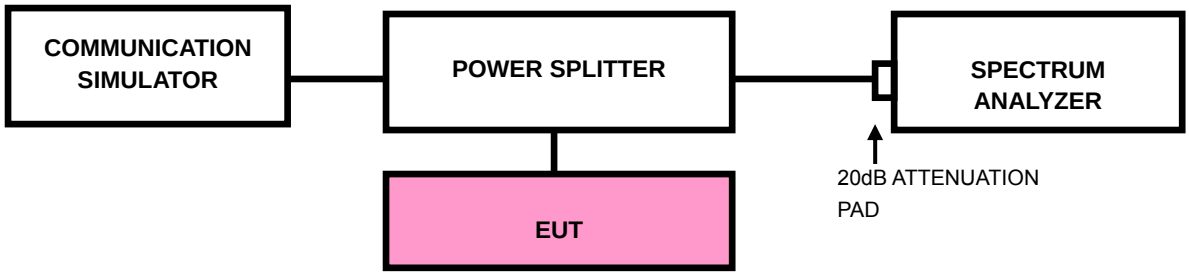

4.4.3 TEST PROCEDURES

a. All measurements were done at low and high operational frequency range.

b. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM).

c. The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA/HSDPA/HSUPA).

d. Record the max trace plot into the test report.

4.4.4 TEST RESULTS

GSM			
CHANNEL	512	CHANNEL	810
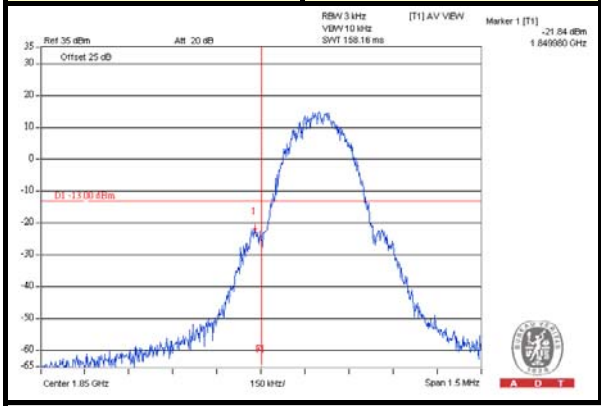		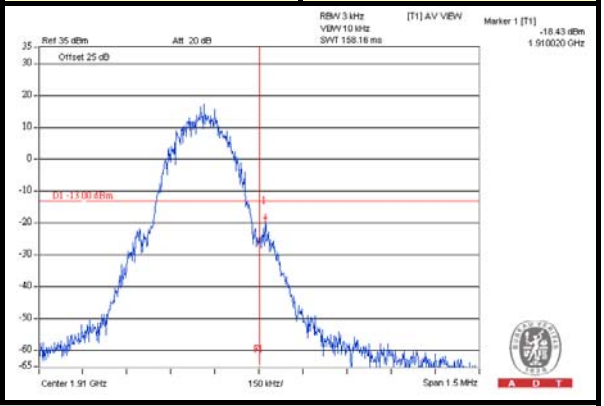	
GPRS			
CHANNEL	512	CHANNEL	810
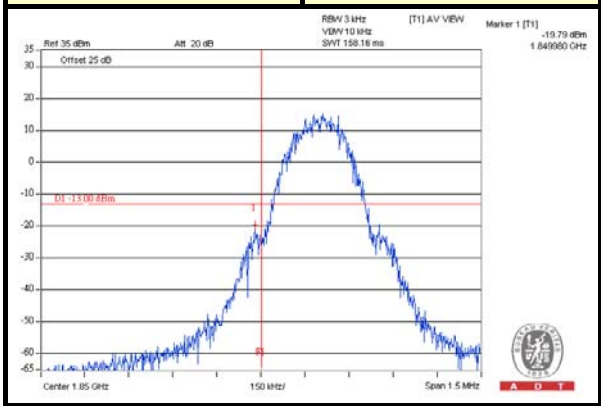		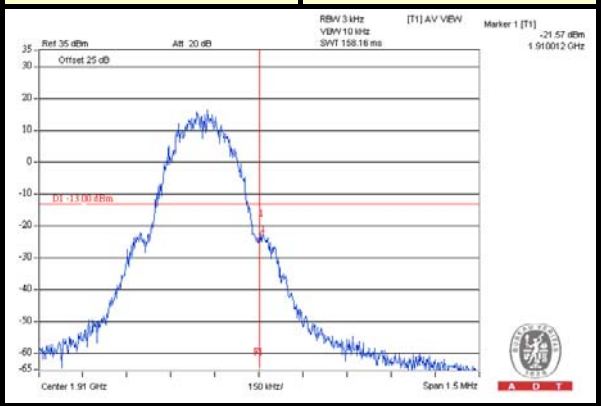	
EDGE			
CHANNEL	512	CHANNEL	810
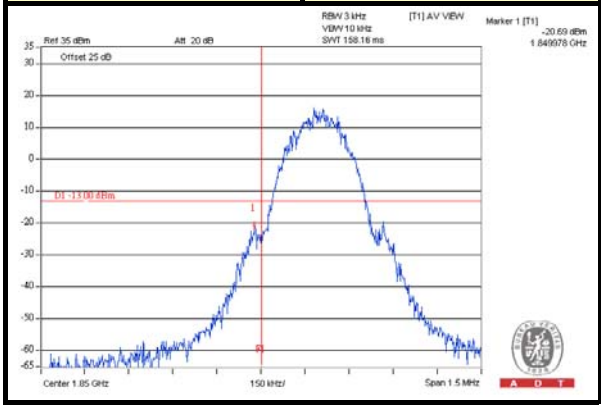		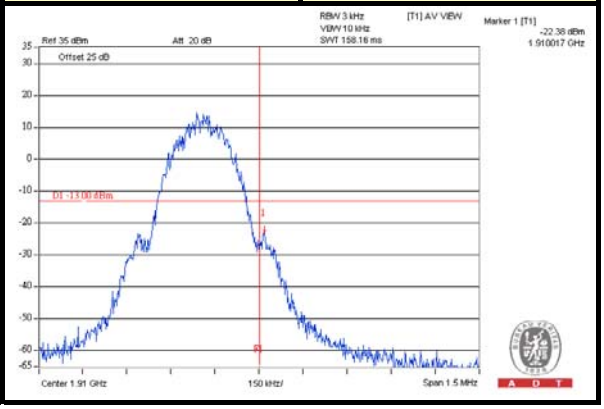	

WCDMA			
CHANNEL	9262	CHANNEL	9538
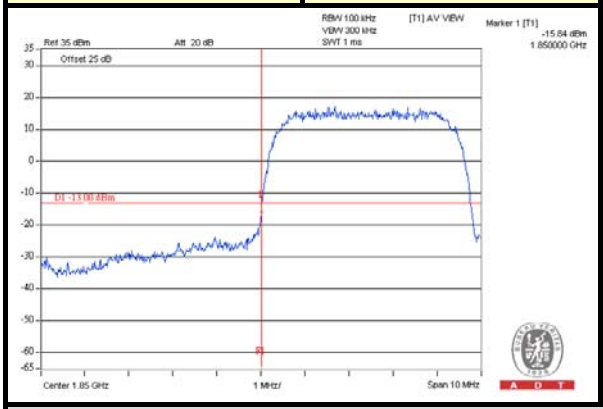		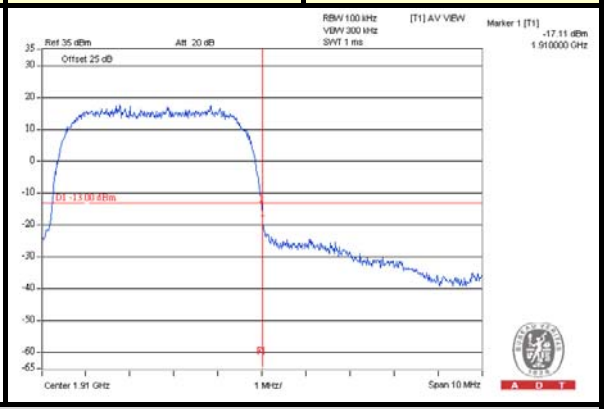	

HSDPA			
CHANNEL	9262	CHANNEL	9538
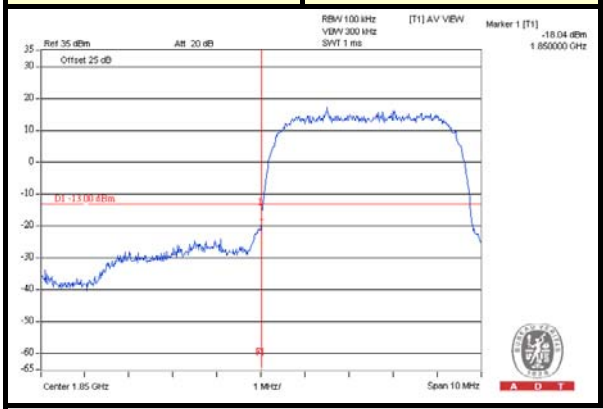		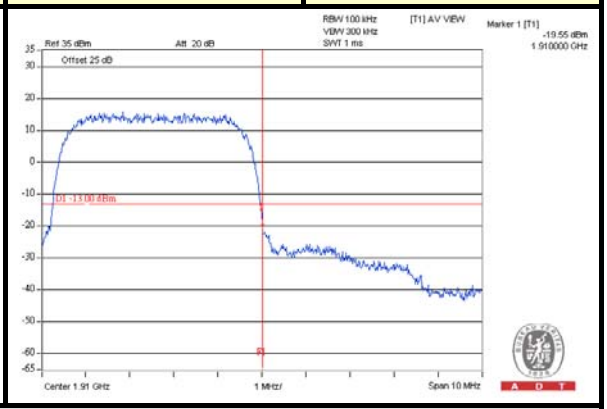	

HSUPA			
CHANNEL	9262	CHANNEL	9538
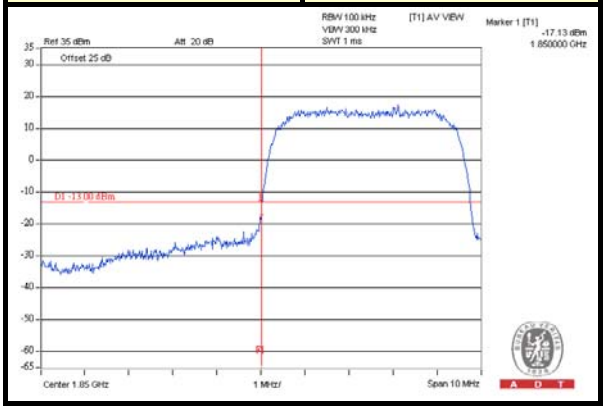		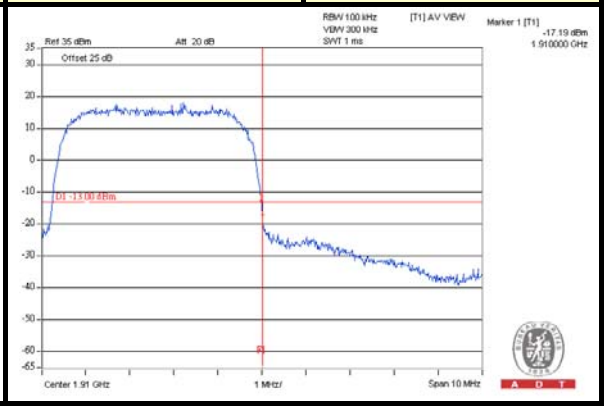	

4.5 PEAK TO AVERAGE RATIO

4.5.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.5.2 TEST SETUP

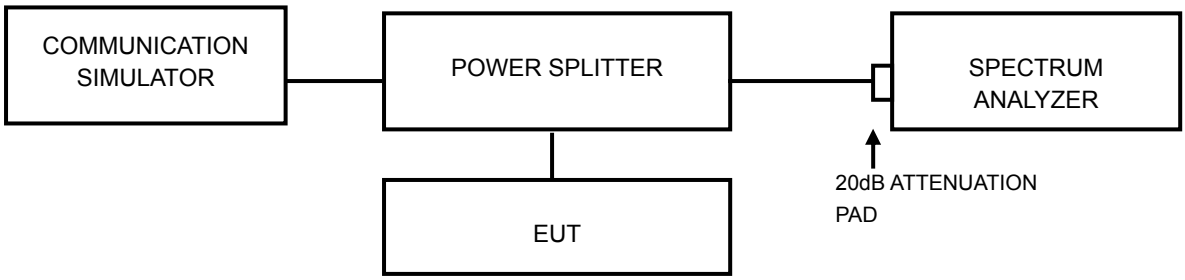

4.5.3 TEST PROCEDURES

a. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;

b. Set the number of counts to a value that stabilizes the measured CCDF curve;

c. Record the maximum PAPR level associated with a probability of 0.1%.

4.5.4 Test Results

CHANNEL	FREQ. (MHz)	Peak To Average Ratio (dB)			CHANNEL	FREQ. (MHz)	Peak To Average Ratio (dB)		
		GSM	GPRS	EDGE			WCDMA	HSDPA	HSUPA
512	1850.2	2.56	3.26	3.65	9262	1852.4	2.89	3.11	2.88
661	1880.0	3.06	2.99	4.25	9400	1880.0	3.24	3.33	3.23
810	1909.8	2.58	3.82	4.36	9538	1907.6	3.01	3.17	3.03

SPECTRUM PLOT OF WORST VALUE

GSM

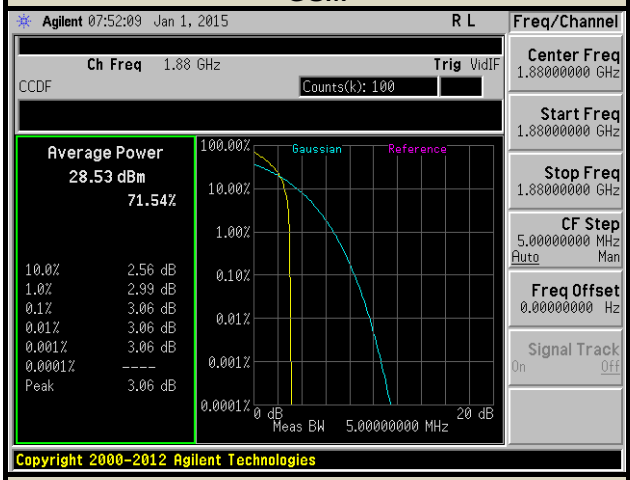

GPRS

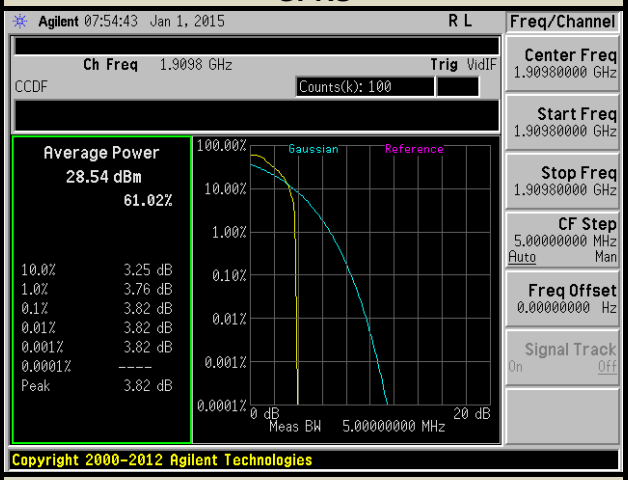

EDGE

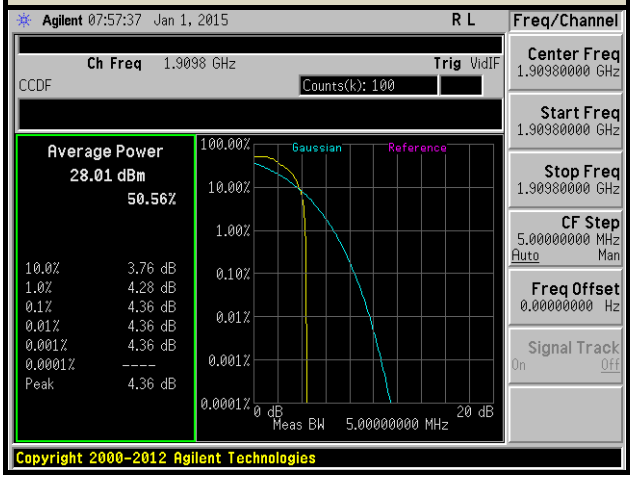

WCDMA

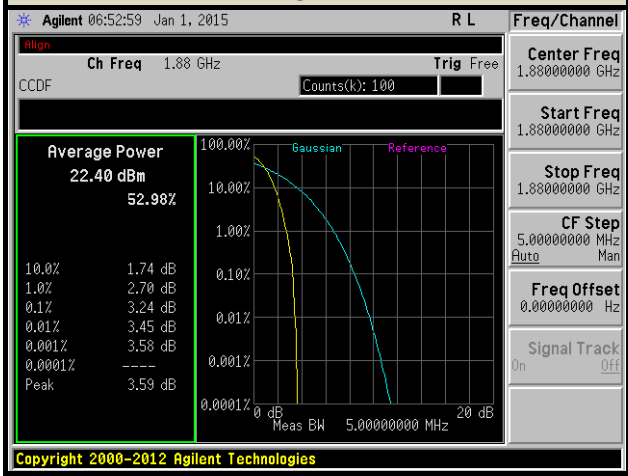

HSDPA

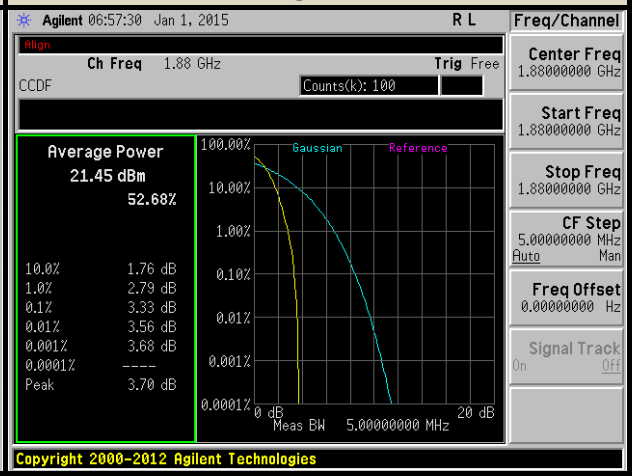

HSUPA

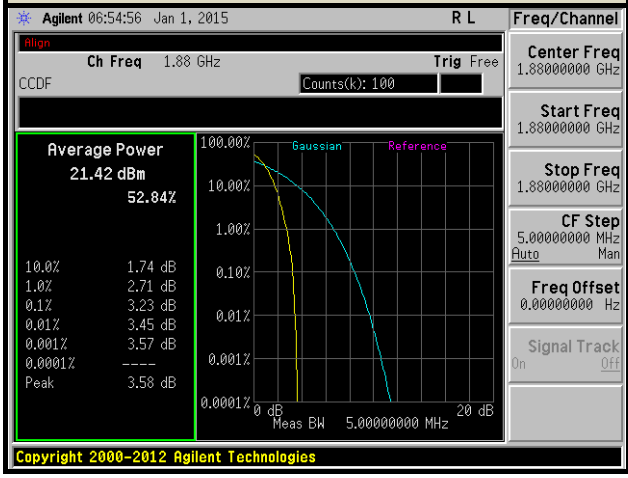

4.6 CONDUCTED SPURIOUS EMISSIONS

4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. The emission limit equal to –13dBm.

4.6.2 TEST PROCEDURE

a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.

b. Measuring frequency range is from 9 kHz to 20GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.6.3 TEST SETUP

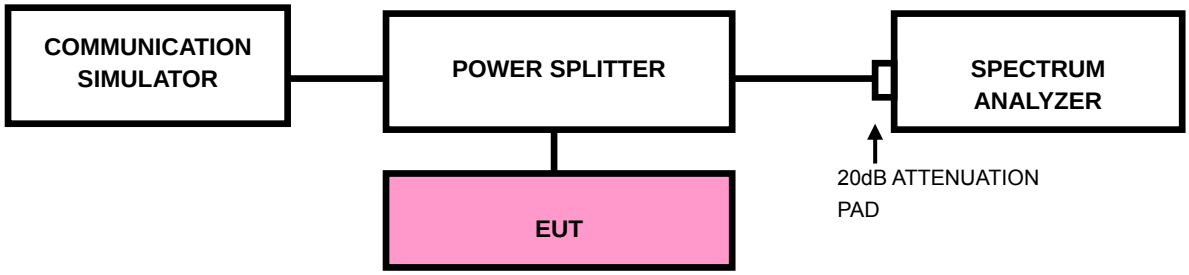

4.6.4 TEST RESULTS

GSM	
CHANNEL 512	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
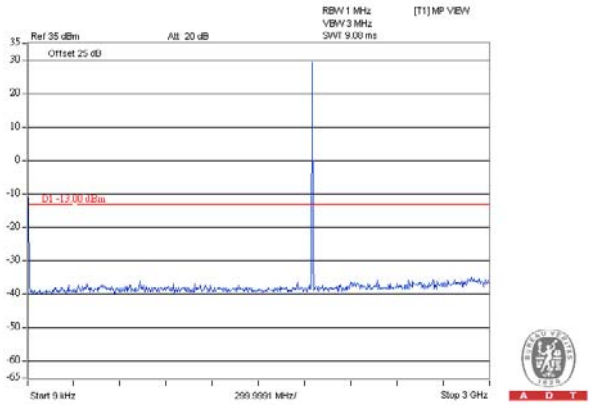	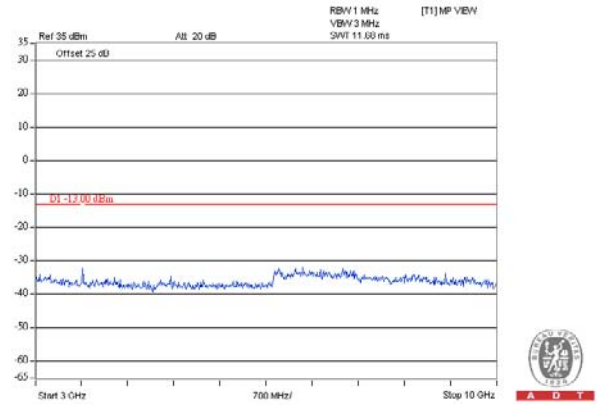
FREQUENCY RANGE : 10GHz~20GHz	
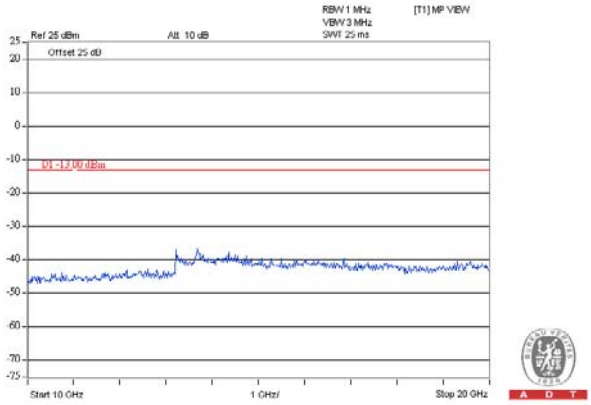	

GSM	
CHANNEL 661	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
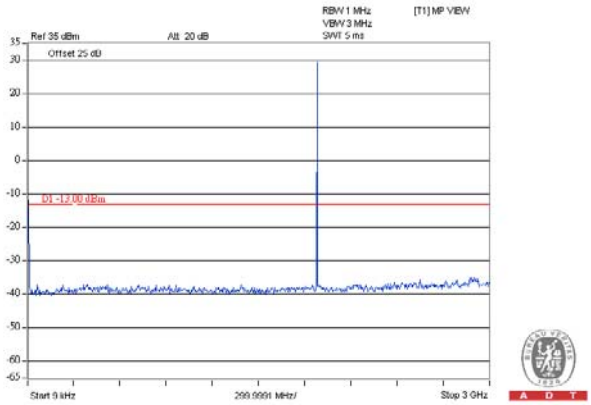	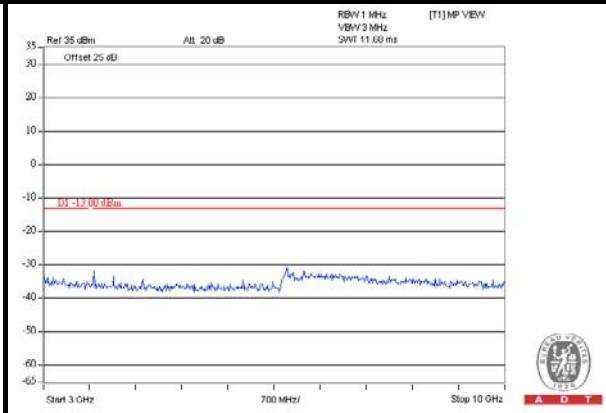
FREQUENCY RANGE : 10GHz~20GHz	
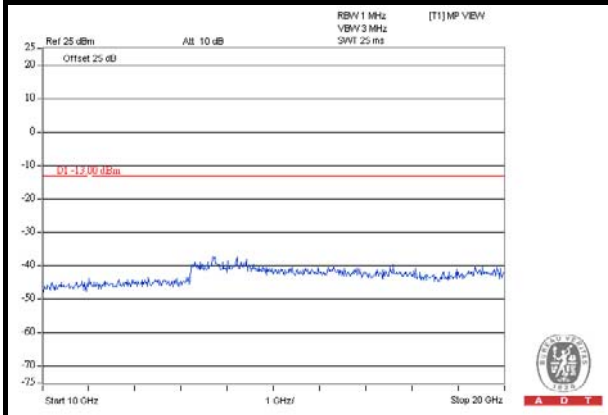	

GSM	
CHANNEL 810	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
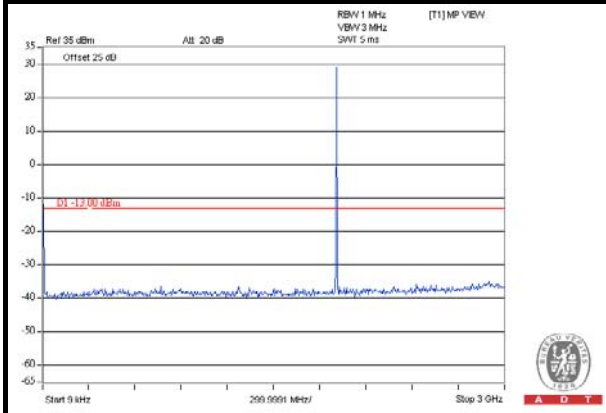	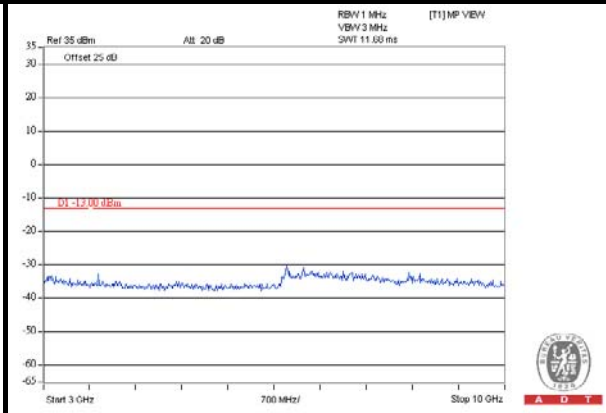
FREQUENCY RANGE : 10GHz~20GHz	
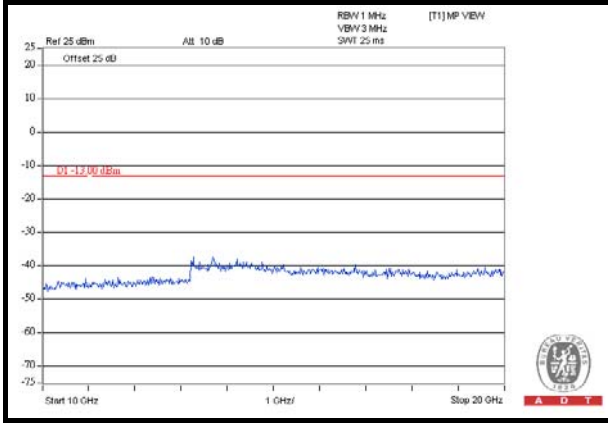	

GPRS	
CHANNEL 512	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
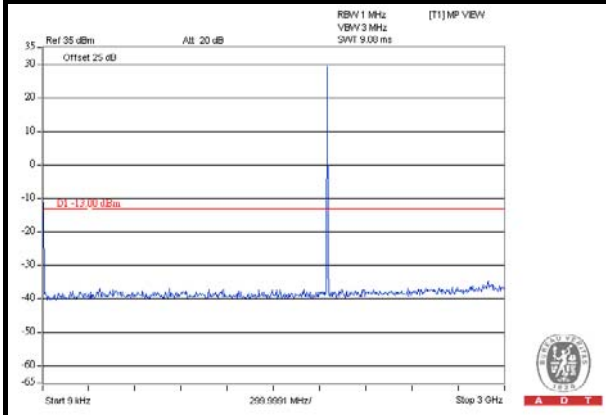	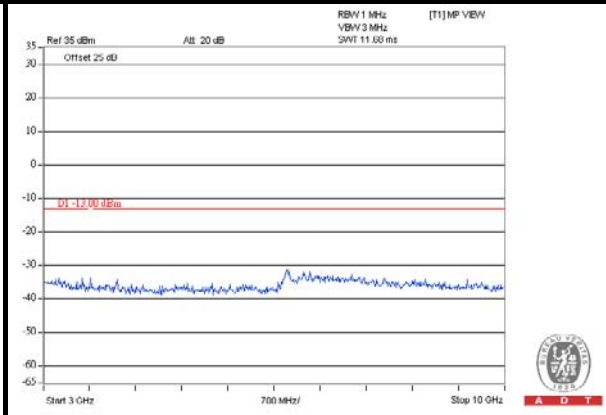
FREQUENCY RANGE : 10GHz~20GHz	
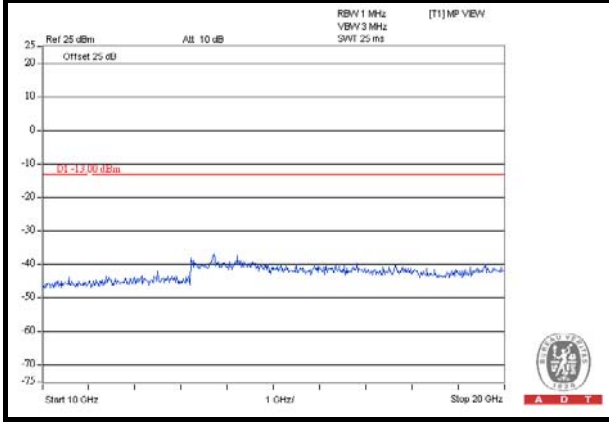	

GPRS	
CHANNEL 661	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
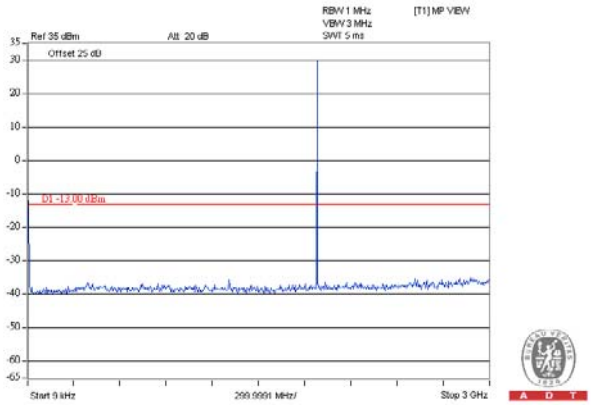	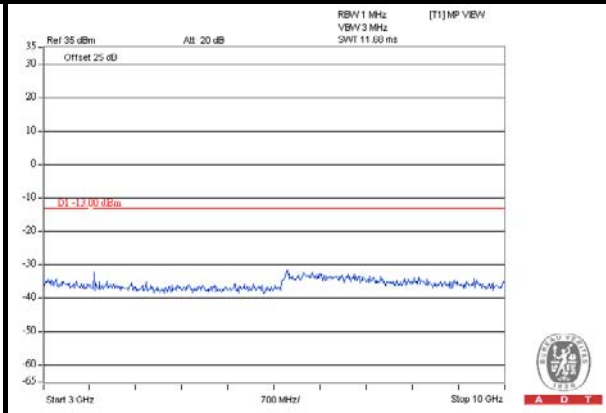
FREQUENCY RANGE : 10GHz~20GHz	
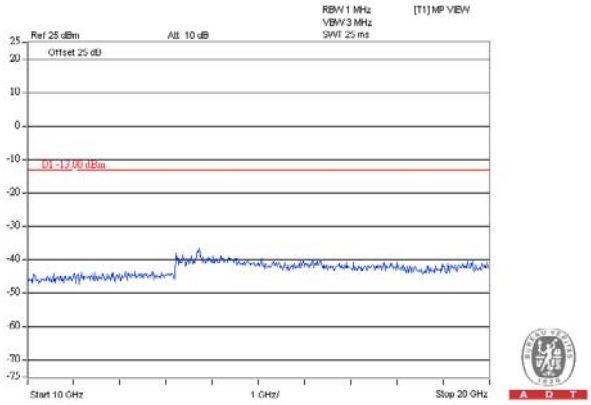	

GPRS	
CHANNEL 810	
FREQUENCY RANGE : 9kHz~3GHz	**FREQUENCY RANGE : 3GHz~10GHz**
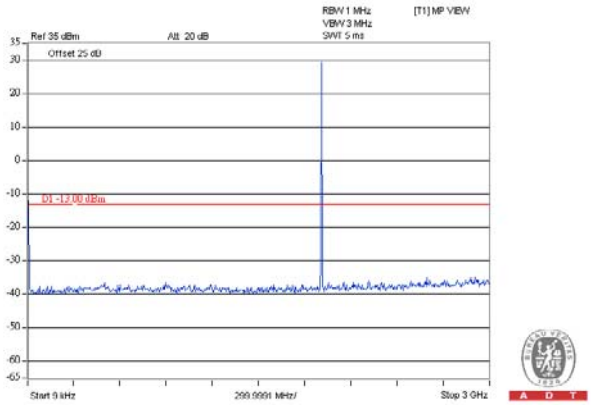	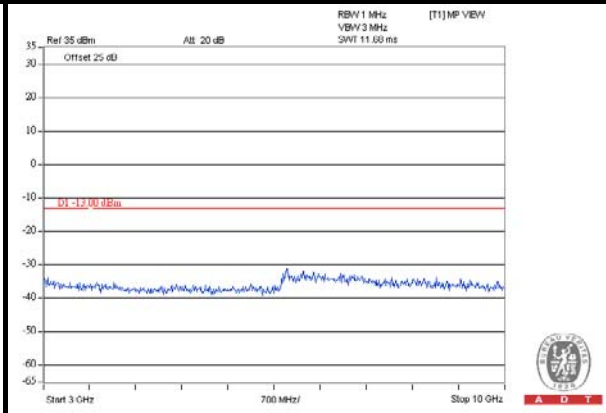
FREQUENCY RANGE : 10GHz~20GHz	
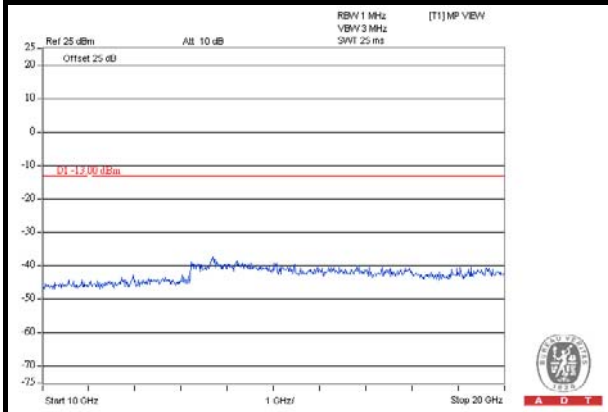	

EDGE	
CHANNEL 512	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
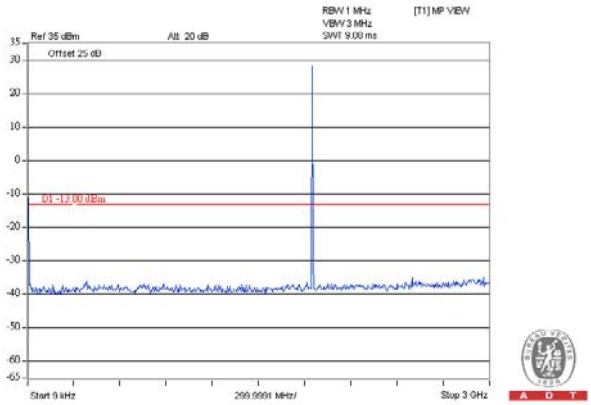	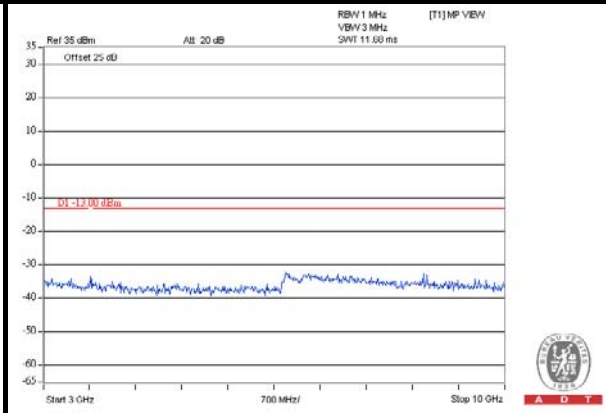
FREQUENCY RANGE : 10GHz~20GHz	
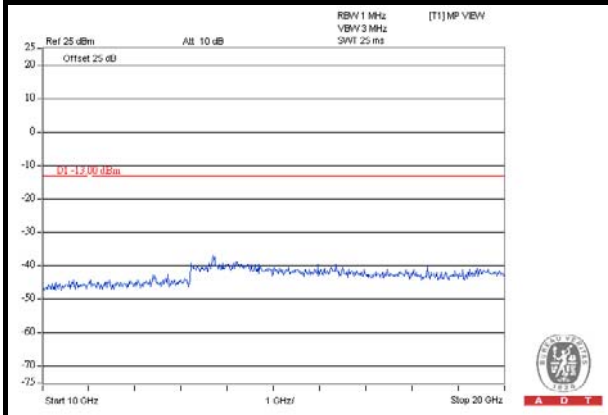	

EDGE	
CHANNEL 661	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
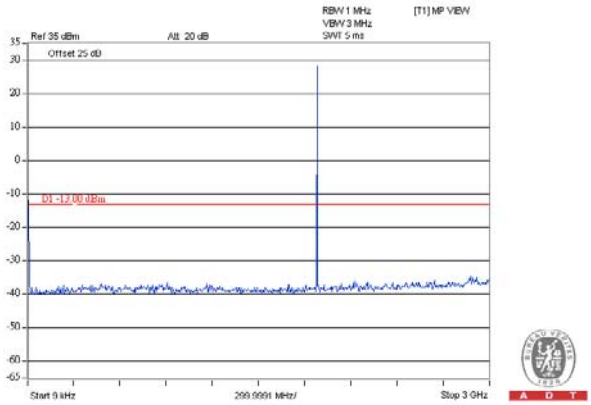	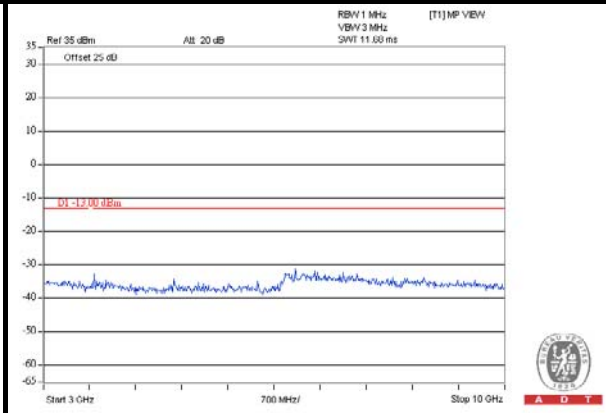
FREQUENCY RANGE : 10GHz~20GHz	
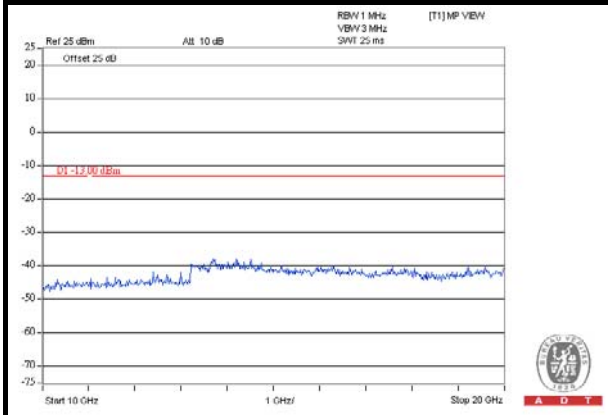	

EDGE	
CHANNEL 810	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
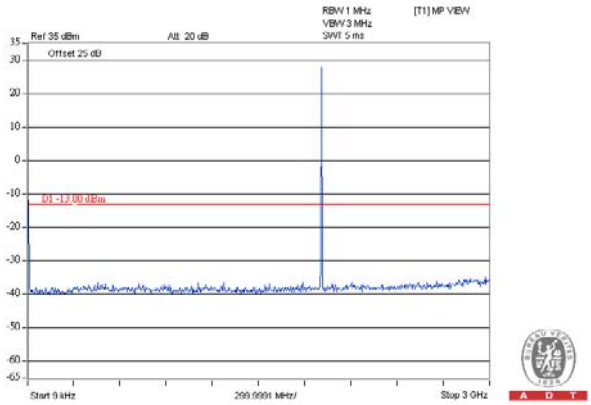	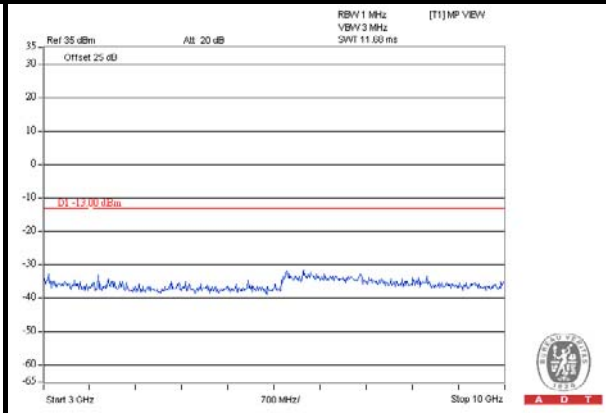
FREQUENCY RANGE : 10GHz~20GHz	
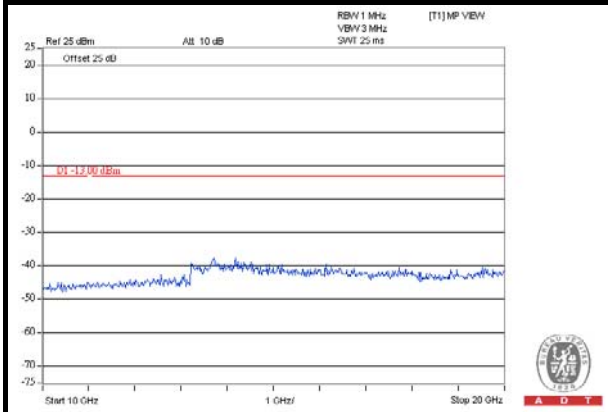	

WCDMA	
CHANNEL 9262	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
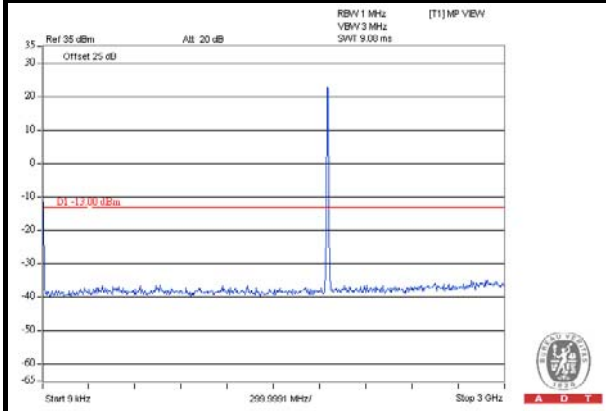	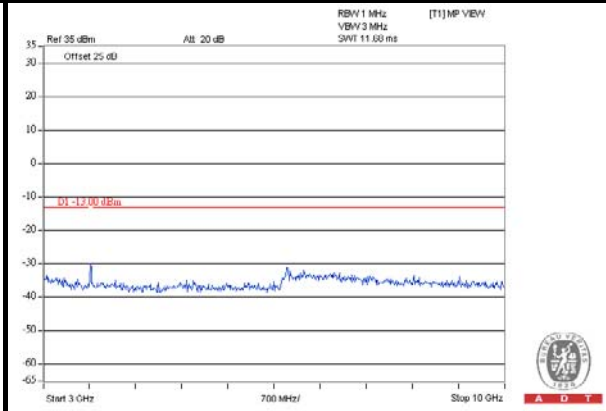
FREQUENCY RANGE : 10GHz~20GHz	
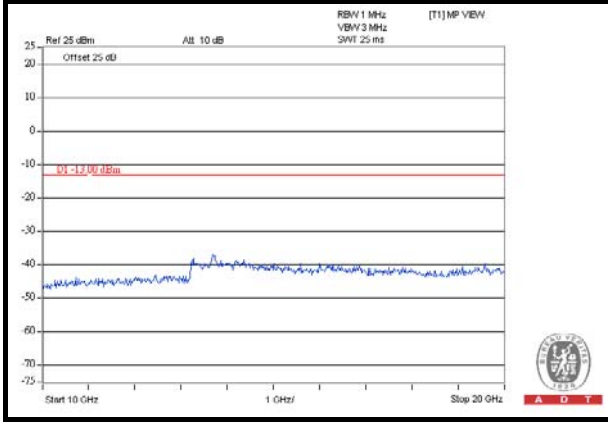	

WCDMA	
CHANNEL 9400	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
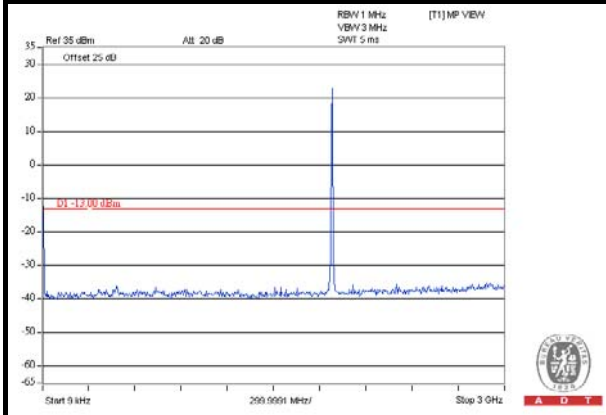	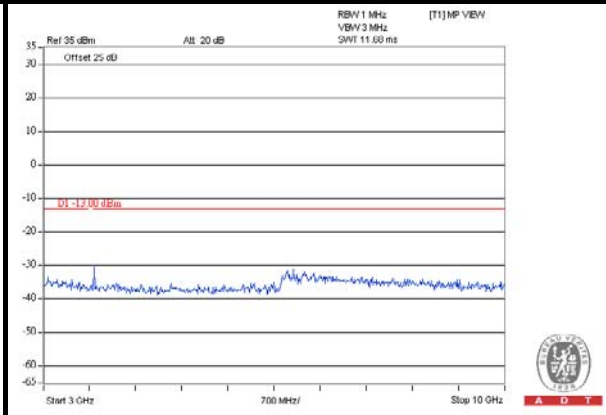
FREQUENCY RANGE : 10GHz~20GHz	
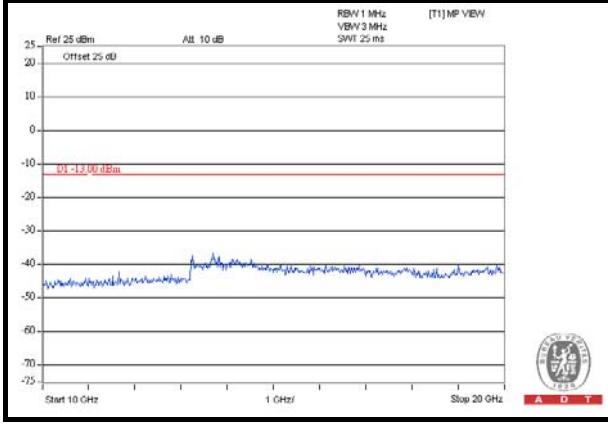	

WCDMA	
CHANNEL 9538	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
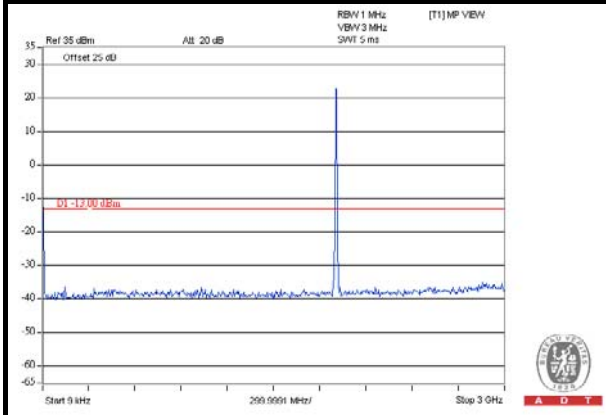	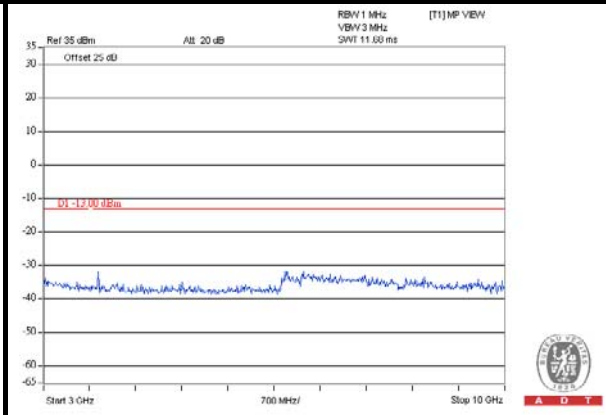
FREQUENCY RANGE : 10GHz~20GHz	
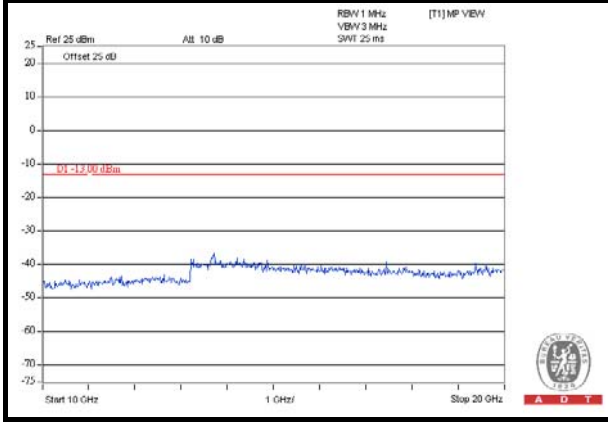	

HSDPA	
CHANNEL 9262	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
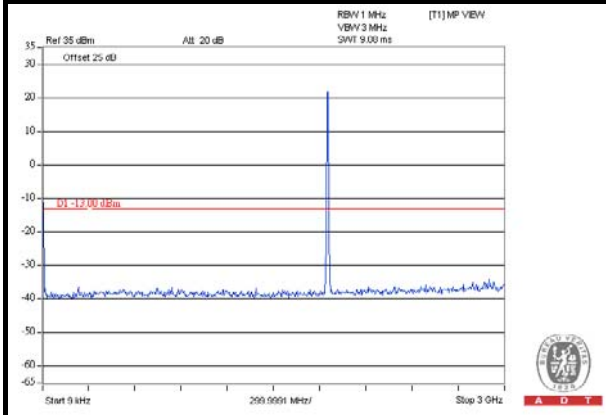	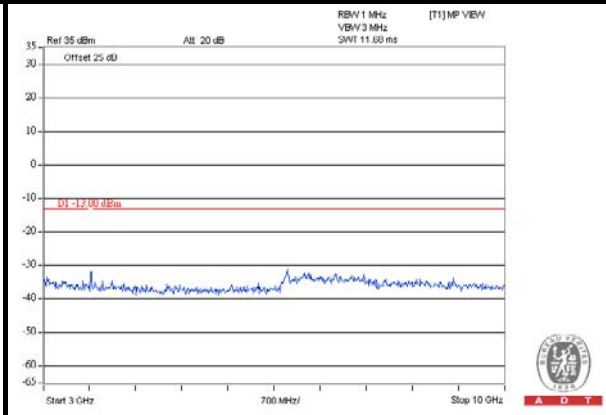
FREQUENCY RANGE : 10GHz~20GHz	
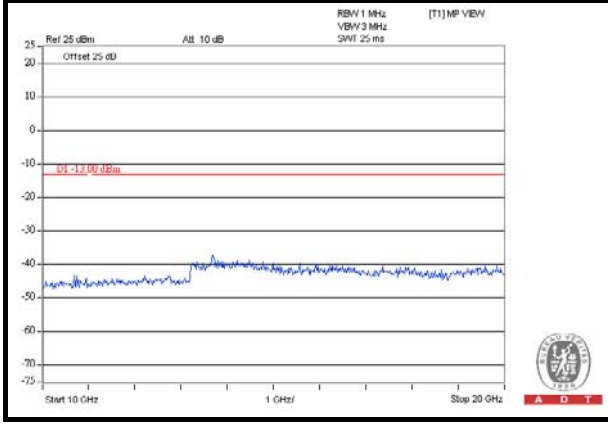	

HSDPA	
CHANNEL 9400	
FREQUENCY RANGE : 9kHz~3GHz	**FREQUENCY RANGE : 3GHz~10GHz**
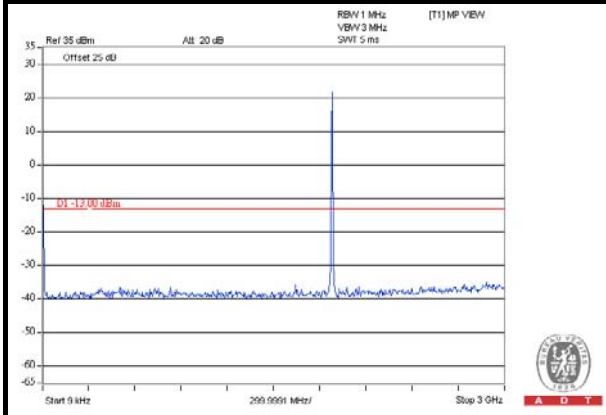	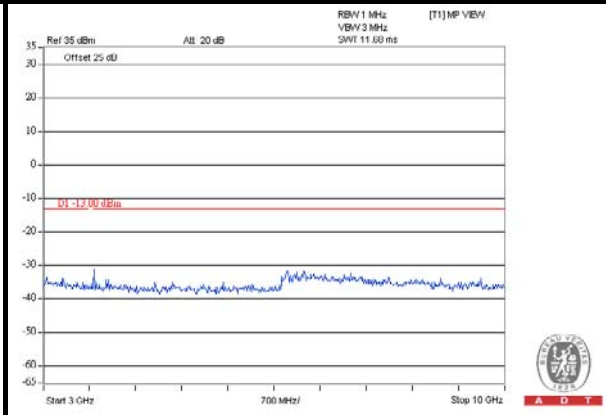
FREQUENCY RANGE : 10GHz~20GHz	
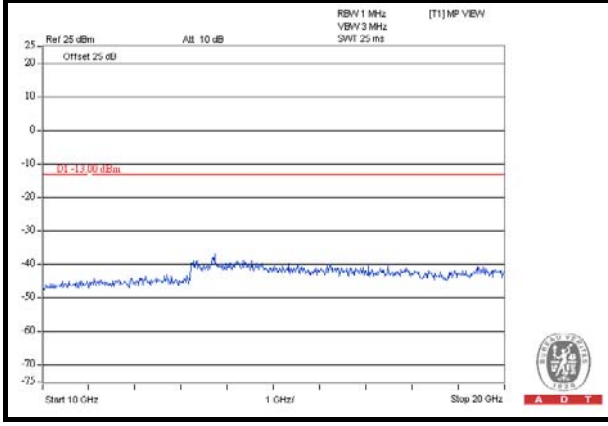	

HSDPA	
CHANNEL 9538	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
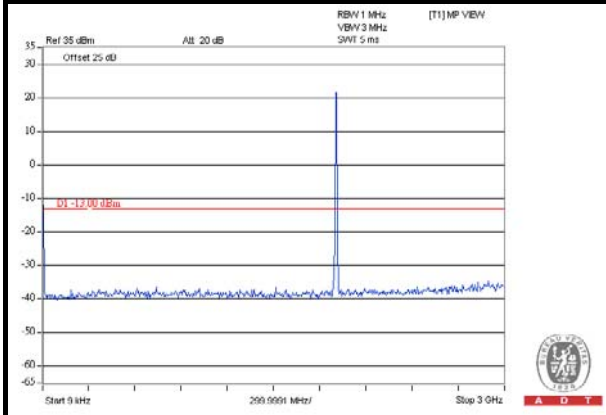	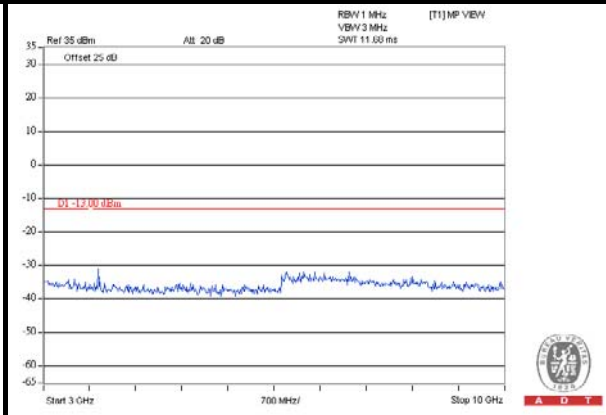
FREQUENCY RANGE : 10GHz~20GHz	
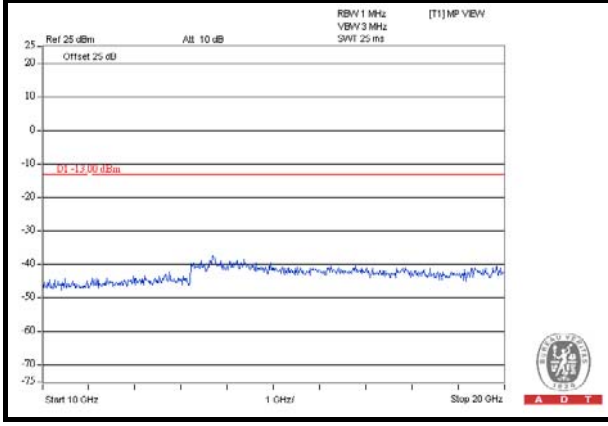	

HSUPA	
CHANNEL 9262	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
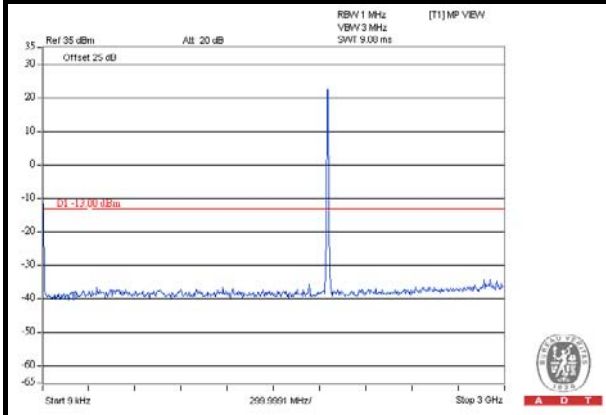	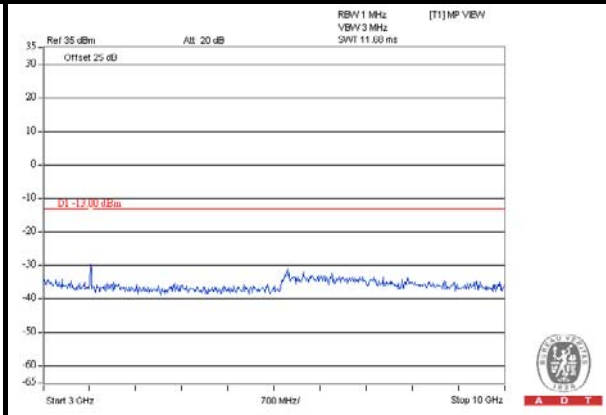
FREQUENCY RANGE : 10GHz~20GHz	
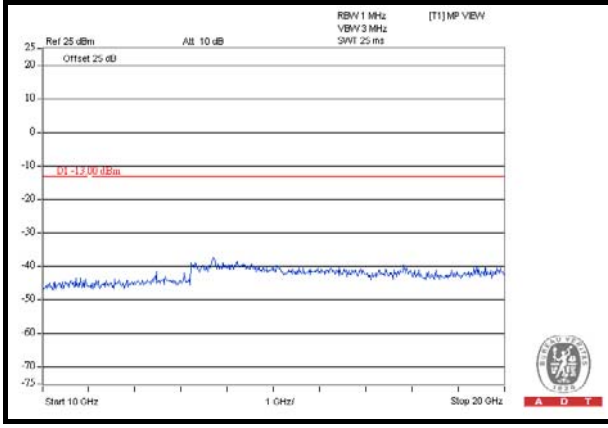	

HSUPA	
CHANNEL 9400	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
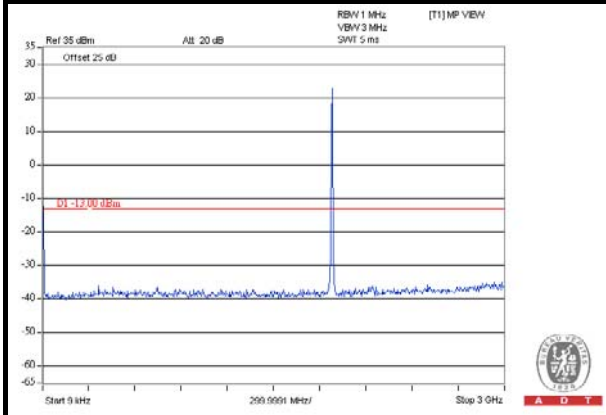	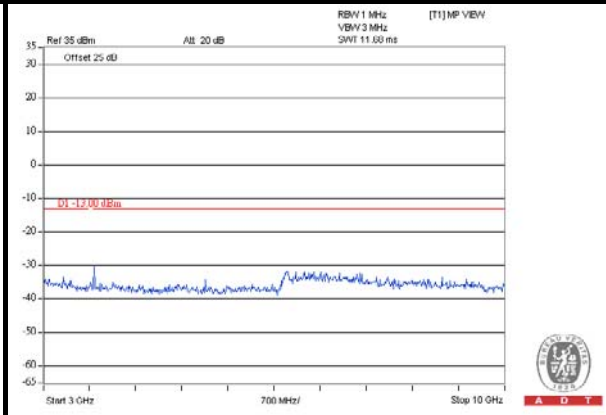
FREQUENCY RANGE : 10GHz~20GHz	
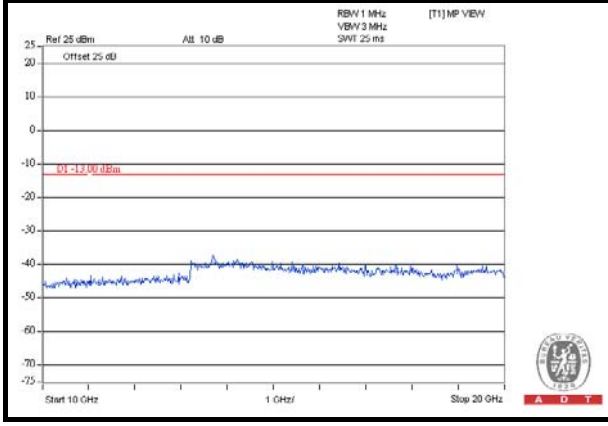	

HSUPA	
CHANNEL 9538	
FREQUENCY RANGE : 9kHz~3GHz	FREQUENCY RANGE : 3GHz~10GHz
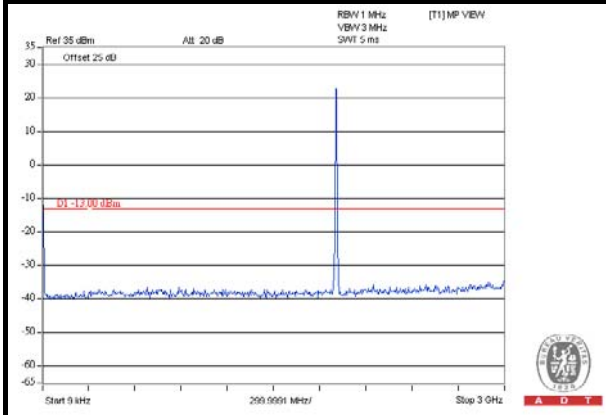	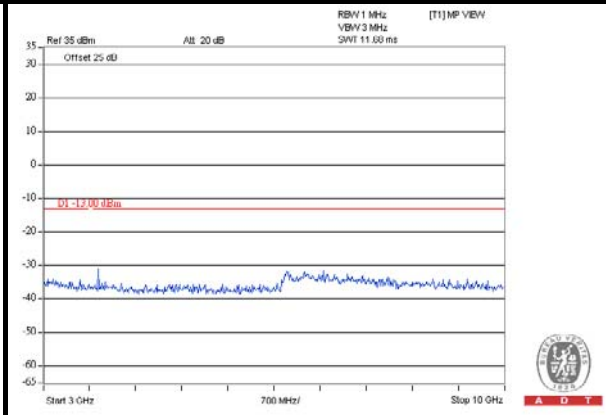
FREQUENCY RANGE : 10GHz~20GHz	
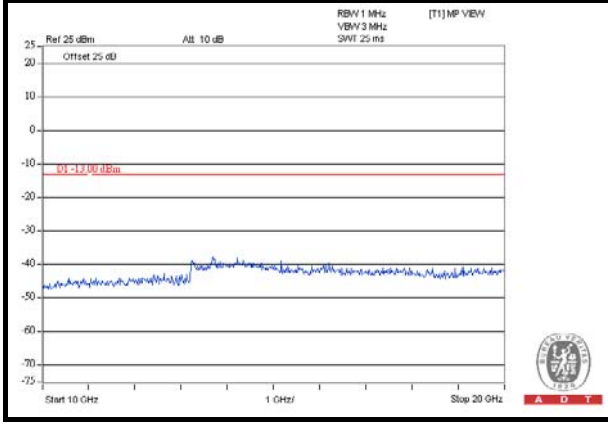	

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. The emission limit equal to –13dBm.

4.7.2 TEST PROCEDURES

a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.

b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G

c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.

d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15dBi.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.3 DEVIATION FROM TEST STANDARD

No deviation

4.7.4 TEST SETUP

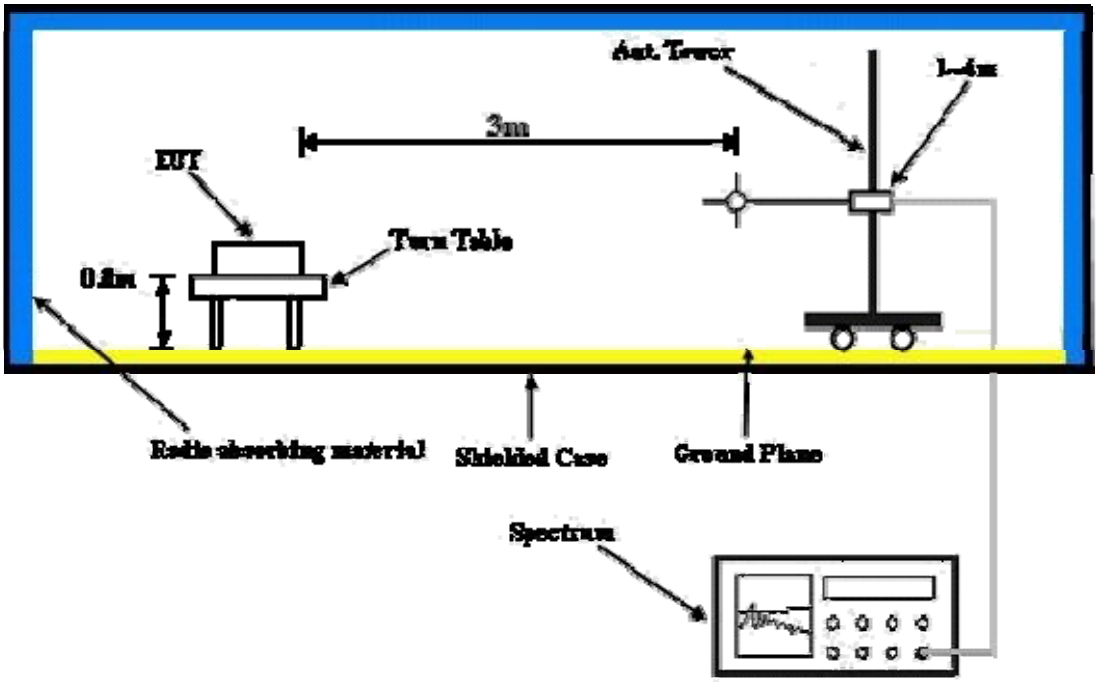

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

FOR GSM MODE

MODE	TX channel 512	**FREQUENCY RANGE**	Below 1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 66%RH	**INPUT POWER**	120Vac, 60Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	45.52	-50.40	-39.07	-9.97	-49.04	-13.00	-36.04
2	70.74	-51.39	-52.90	-4.76	-57.66	-13.00	-44.66
3	140.58	-46.81	-52.09	-0.31	-52.40	-13.00	-39.40
4	163.86	-41.98	-48.70	0.88	-47.82	-13.00	-34.82
5	227.88	-46.17	-60.07	5.43	-54.64	-13.00	-41.64
6	352.04	-62.59	-70.96	5.22	-65.74	-13.00	-52.74
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	51.34	-33.23	-30.51	-9.46	-39.97	-13.00	-26.97
2	88.20	-50.98	-56.44	0.63	-55.81	-13.00	-42.81
3	179.38	-56.30	-60.38	2.83	-57.55	-13.00	-44.55
4	270.56	-61.48	-63.53	5.29	-58.24	-13.00	-45.24
5	540.22	-59.52	-63.34	4.70	-58.64	-13.00	-45.64
6	755.56	-65.08	-63.75	4.57	-59.18	-13.00	-46.18

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

FOR EDGE MODE

MODE	TX channel 512	FREQUENCY RANGE	Below 1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 66%RH	INPUT POWER	120Vac, 60Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	41.64	-59.12	-45.55	-10.62	-56.17	-13.00	-43.17
2	86.26	-48.65	-55.48	0.09	-55.39	-13.00	-42.39
3	101.78	-47.98	-56.40	0.80	-55.60	-13.00	-42.60
4	154.16	-58.84	-63.42	0.07	-63.35	-13.00	-50.35
5	293.84	-56.73	-65.46	5.16	-60.30	-13.00	-47.30
6	792.42	-64.87	-63.55	4.12	-59.43	-13.00	-46.43
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	45.52	-45.67	-42.07	-9.97	-52.04	-13.00	-39.04
2	111.48	-50.68	-57.75	0.42	-57.33	-13.00	-44.33
3	171.62	-62.01	-63.50	1.86	-61.64	-13.00	-48.64
4	276.38	-62.14	-65.05	5.25	-59.80	-13.00	-46.80
5	301.60	-57.77	-63.43	5.14	-58.29	-13.00	-45.29
6	784.66	-64.28	-62.27	4.23	-58.04	-13.00	-45.04

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

FOR WCDMA MODE

MODE	TX channel 9262	FREQUENCY RANGE	Below 1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 66%RH	INPUT POWER	120Vac, 60Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	49.40	-42.57	-32.53	-9.85	-42.38	-13.00	-29.38
2	113.42	-52.94	-60.89	0.34	-60.55	-13.00	-47.55
3	148.34	-52.17	-56.16	-0.19	-56.35	-13.00	-43.35
4	295.78	-61.19	-69.91	5.15	-64.76	-13.00	-51.76
5	466.50	-60.18	-66.38	5.02	-61.36	-13.00	-48.36
6	518.88	-52.93	-58.67	4.80	-53.87	-13.00	-40.87
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	45.52	-32.33	-28.73	-9.97	-38.70	-13.00	-25.70
2	88.20	-50.00	-55.46	0.63	-54.83	-13.00	-41.83
3	156.10	-57.68	-58.70	0.17	-58.53	-13.00	-45.53
4	256.98	-57.84	-62.49	5.37	-57.12	-13.00	-44.12
5	352.04	-55.98	-62.66	5.22	-57.44	-13.00	-44.44
6	555.74	-55.52	-58.89	4.62	-54.27	-13.00	-41.27

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

ABOVE 1GHz

FOR GSM MODE

MODE	TX channel 512	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 66%RH	INPUT POWER	120Vac, 60Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3700.40	-55.47	-49.55	7.16	-42.39	-13.00	-29.39
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3700.40	-58.41	-51.43	7.16	-44.27	-13.00	-31.27

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

MODE	TX channel 661	**FREQUENCY RANGE**	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 66%RH	**INPUT POWER**	120Vac, 60Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3760.00	-55.29	-48.74	7.10	-41.64	-13.00	-28.64
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3760.00	-58.74	-51.32	7.10	-44.22	-13.00	-31.22

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

MODE	TX channel 810	**FREQUENCY RANGE**	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 66%RH	**INPUT POWER**	120Vac, 60Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3819.60	-55.29	-48.53	7.05	-41.48	-13.00	-28.48
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3819.60	-58.41	-50.64	7.05	-43.59	-13.00	-30.59

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

FOR EDGE MODE

MODE	TX channel 512	**FREQUENCY RANGE**	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 66%RH	**INPUT POWER**	120Vac, 60Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3700.40	-55.60	-49.68	7.16	-42.52	-13.00	-29.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3700.40	-58.83	-51.85	7.16	-44.69	-13.00	-31.69

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

MODE	TX channel 661	**FREQUENCY RANGE**	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 66%RH	**INPUT POWER**	120Vac, 60Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3760.00	-55.35	-48.80	7.10	-41.70	-13.00	-28.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3760.00	-59.16	-51.74	7.10	-44.64	-13.00	-31.64

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

MODE	TX channel 810	**FREQUENCY RANGE**	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 66%RH	**INPUT POWER**	120Vac, 60Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3819.60	-55.33	-48.57	7.05	-41.52	-13.00	-28.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3819.60	-58.66	-50.89	7.05	-43.84	-13.00	-30.84

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

FOR WCDMA MODE

MODE	TX channel 9262	**FREQUENCY RANGE**	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 66%RH	**INPUT POWER**	120Vac, 60Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3704.80	-50.69	-44.72	7.15	-37.57	-13.00	-24.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3704.80	-53.27	-46.25	7.15	-39.10	-13.00	-26.10

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

MODE	TX channel 9400	**FREQUENCY RANGE**	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 66%RH	**INPUT POWER**	120Vac, 60Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	**3760.00**	**-50.35**	**-43.80**	**7.10**	**-36.70**	**-13.00**	**-23.70**
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3760.00	-53.16	-45.74	7.10	-38.64	-13.00	-25.64

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

MODE	TX channel 9538	**FREQUENCY RANGE**	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 66%RH	**INPUT POWER**	120Vac, 60Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3815.20	-51.38	-44.58	7.06	-37.52	-13.00	-24.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	**Freq. (MHz)**	**Reading (dBm)**	**S.G Power Value (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**Limit (dBm)**	**Margin (dB)**
1	3815.20	-54.65	-46.90	7.06	-39.84	-13.00	-26.84

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab:
Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com
Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---