

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Report No.: RFBGDG-WTW-P26080445 R1

FCC ID: Q3N-UR40

Product: UHF Reader

Brand: CIPHERLAB

Model No.: UR-40

Received Date: 2026/8/20

Test Date: 2026/9/3 ~ 2026/9/8

Issued Date: 2026/10/8

Applicant: CIPHERLAB CO., LTD

Address: 12F, 333 Dunhua S. Rd., Sec.2 Taipei, Taiwan 106

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City 244, Taiwan

Test Location: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City 244, Taiwan

FCC Registration / 198487 / TW2021

Designation Number:

Approved by:

Jeremy Lin

Date:

2026/10/8

Jeremy Lin / Project Engineer

This test report consists of 49 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Annie Chang / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/>, and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description	7
3.2 Antenna Description of EUT	7
3.3 Channel List	8
3.4 Test Mode Applicability and Tested Channel Detail	9
3.5 Duty Cycle of Test Signal	9
3.6 Test Program Used and Operation Descriptions	10
3.7 Connection Diagram of EUT and Peripheral Devices	10
3.8 Configuration of Peripheral Devices and Cable Connections	10
4 Test Instruments	11
4.1 RF Output Power	11
4.2 Number of Hopping Frequency Used	11
4.3 Dwell Time on Each Channel	11
4.4 Hopping Channel Separation	11
4.5 20 dB Bandwidth	11
4.6 Conducted Out of Band Emissions	11
4.7 AC Power Conducted Emissions	12
4.8 Unwanted Emissions below 1 GHz	13
4.9 Unwanted Emissions above 1 GHz	14
5 Limits of Test Items.....	15
5.1 RF Output Power	15
5.2 Number of Hopping Frequency Used	15
5.3 Dwell Time on Each Channel	15
5.4 Hopping Channel Separation	15
5.5 20 dB Bandwidth	15
5.6 Conducted Out of Band Emissions	15
5.7 AC Power Conducted Emissions	15
5.8 Unwanted Emissions below 1 GHz	16
5.9 Unwanted Emissions above 1 GHz	16
6 Test Arrangements.....	17
6.1 RF Output Power	17
6.1.1 Test Setup	17
6.1.2 Test Procedure	17
6.2 Number of Hopping Frequency Used	18
6.2.1 Test Setup	18
6.2.2 Test Procedure	18
6.3 Dwell Time on Each Channel	19
6.3.1 Test Setup	19
6.3.2 Test Procedure	19
6.4 Hopping Channel Separation	20
6.4.1 Test Setup	20
6.4.2 Test Procedure	20
6.5 20 dB Bandwidth	21
6.5.1 Test Setup	21
6.5.2 Test Procedure	21
6.6 Conducted Out of Band Emissions	22
6.6.1 Test Setup	22
6.6.2 Test Procedure	22

6.7	AC Power Conducted Emissions	23
6.7.1	Test Setup	23
6.7.2	Test Procedure	23
6.8	Unwanted Emissions below 1 GHz	24
6.8.1	Test Setup	24
6.8.2	Test Procedure	25
6.9	Unwanted Emissions above 1 GHz	26
6.9.1	Test Setup	26
6.9.2	Test Procedure	26
7	Test Results of Test Item	27
7.1	RF Output Power	27
7.2	Number of Hopping Frequency Used	28
7.3	Dwell Time on Each Channel	29
7.4	Hopping Channel Separation	30
7.5	20 dB Bandwidth	31
7.6	Conducted Out of Band Emissions	32
7.7	AC Power Conducted Emissions	33
7.8	Unwanted Emissions below 1 GHz	35
7.9	Unwanted Emissions above 1 GHz	44
8	Pictures of Test Arrangements	48
9	Information of the Testing Laboratories	49

Release Control Record

Issue No.	Description	Date Issued
RFBDGD-WTW-P26080445	Original release.	2026/9/24
RFBDGD-WTW-P26080445 R1	Update RF Output Power.	2026/10/8

1 Certificate

Product: UHF Reader

Brand: CIPHERLAB

Test Model: UR-40

Sample Status: Engineering sample

Applicant: CIPHERLAB CO., LTD

Test Date: 2026/9/3 ~ 2026/9/8

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement procedure: ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247 (b)(2)	RF Output Power	Pass	Meet the requirement of limit.
15.247(a)(1) (i)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1) (i)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1)	Hopping Channel Separation	Pass	Meet the requirement of limit.
15.247(a)(1)	20 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -24.31 dB at 0.49425 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -5.2 dB at 263.99 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -11.8 dB at 2781.75 MHz
15.203	Antenna Requirement	Pass	Antenna connector is MMCX not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.1 dB
Dwell Time on Each Channel	-	2.18 %
Hopping Channel Separation	-	390 Hz
20 dB Bandwidth	-	960 Hz
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	3.1 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	3.24 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.76 dB
	30 MHz ~ 1 GHz	5.74 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 6 GHz	4.65 dB
	6 GHz ~ 18 GHz	5.26 dB
	18 GHz ~ 40 GHz	4.9 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	UHF Reader
Brand	CIPHERLAB
Test Model	UR-40
Status of EUT	Engineering sample
Power Supply Rating	3.635V from battery
Modulation Type	ASK
Operating Frequency	902.75 MHz ~ 927.25 MHz
Number of Channel	50
Output Power	537.032 mW (27.30 dBm)

Note:

1. The EUT consumes power from the following battery:

Item	Brand	Model	Specification
Battery	CIPHERLAB	BA-0133A0	3.635Vdc, 3100mAh, 11.27Wh

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

The antenna information is listed as below.

Brand	Model	Gain (dBi)	Frequency range	Antenna Type	Connector Type
FAVEPC INC.	FI-A0710-FCC-03	2.5	902 MHz ~ 928 MHz	PIFA	MMCX

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

3.3 Channel List

50 channels are provided to this EUT:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	902.75	13	909.25	26	915.75	39	922.25
1	903.25	14	909.75	27	916.25	40	922.75
2	903.75	15	910.25	28	916.75	41	923.25
3	904.25	16	910.75	29	917.25	42	923.75
4	904.75	17	911.25	30	917.75	43	924.25
5	905.25	18	911.75	31	918.25	44	924.75
6	905.75	19	912.25	32	918.75	45	925.25
7	906.25	20	912.75	33	919.25	46	925.75
8	906.75	21	913.25	34	919.75	47	926.25
9	907.25	22	913.75	35	920.25	48	926.75
10	907.75	23	914.25	36	920.75	49	927.25
11	908.25	24	914.75	37	921.25		
12	908.75	25	915.25	38	921.75		

3.4 Test Mode Applicability and Tested Channel Detail


Pre-Scan:	1. EUT can be used in the following ways: XYZ 3-axis. Pre-scan in these ways and find the worst case as a representative test condition.
Worst Case:	1. X/ Y/ Z Worst Condition: Y Axis for Unwanted Emission above 1GHz and Unwanted Emission below 1GHz.

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Tested Channel	Modulation
RF Output Power	0, 25, 49	ASK
Number of Hopping Frequency Used	Hopping	ASK
Dwell Time on Each Channel	Hopping	ASK
Hopping Channel Separation / 20 dB Bandwidth	0, 25, 49	ASK
Conducted Out of Band Emissions	Hopping 0, 49	ASK
AC Power Conducted Emissions	49	ASK
Unwanted Emissions below 1 GHz	0, 25, 49	ASK
Unwanted Emissions above 1 GHz	0, 25, 49	ASK

3.5 Duty Cycle of Test Signal


UHF: Duty cycle = 29.767 ms / 100 ms x 100% = 29.8%

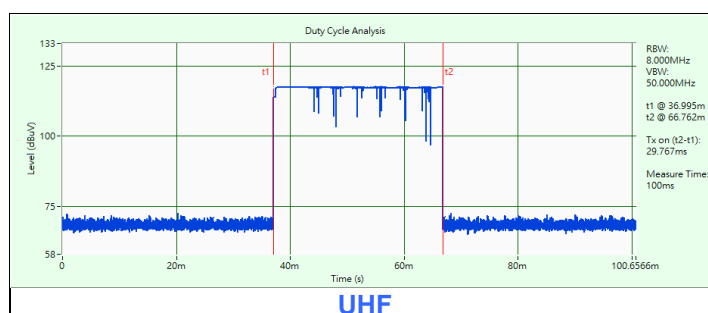

3.6 Test Program Used and Operation Descriptions

Controlling software (uhf_gun_test_tool) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

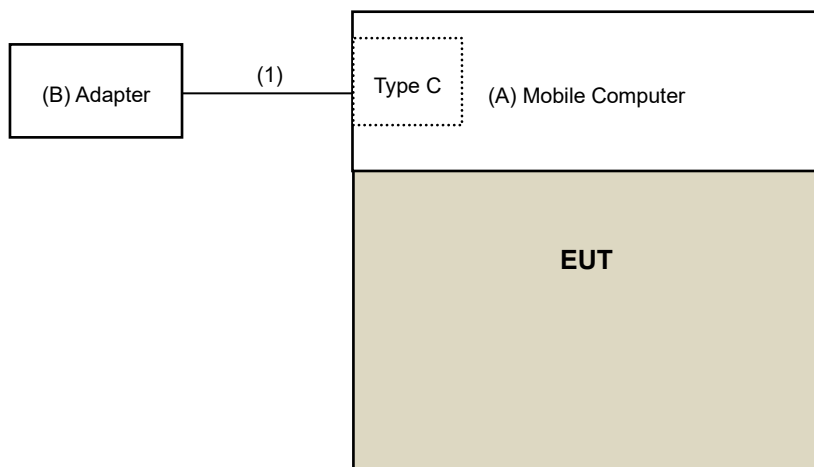

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Mobile Computer	CIPHERLAB	RS20	N/A	N/A	Supplied by applicant
B	Adapter	Belkin	WCB007dq	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	type C to C	1	1	Y	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-20	00800A1K01A-20-02	2026/5/21	2027/5/20
Pulse Power Sensor Anritsu	MA2411B	0738404	2026/5/28	2027/5/27
RF Power Meter Anritsu	ML2495A	0842014	2026/5/27	2027/5/26
Wideband Power Sensor Keysight	N1923A	MY58020002	2026/1/26	2027/1/25

Notes:

1. The test was performed in LK - Oven (Linkou).
2. Tested Date: 2026/9/8

4.2 Number of Hopping Frequency Used

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-20	00800A1K01A-20-02	2026/5/21	2027/5/20
PXA Signal Analyzer Keysight	N9030A	MY54490260	2026/7/17	2027/7/16
Signal Analyzer R&S	FSV40	101544	2026/7/2	2027/7/1
Software	BVADT_RF_Test_Software V8.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in LK - Oven (Linkou).
2. Tested Date: 2026/9/8

4.3 Dwell Time on Each Channel

Refer to section 4.2 to get the tested date and information of the instruments.

4.4 Hopping Channel Separation

Refer to section 4.2 to get the tested date and information of the instruments.

4.5 20 dB Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

4.6 Conducted Out of Band Emissions

Refer to section 4.2 to get the tested date and information of the instruments.

4.7 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance LYNICS	0900510	E1-01-305	2026/2/12	2027/2/11
		E1-01-306	2026/4/14	2027/4/13
DC LISN R&S	ESH3-Z6	100219	2026/7/9	2027/7/8
		844950/018	2026/7/9	2027/7/8
Diode Pulse Limiter Schwarzbeck	VTSD 9561 F-N	01631	2026/4/30	2027/4/29
EMI Test Receiver R&S	EPL 1000	101064	2026/4/23	2027/4/22
		101065	2026/5/4	2027/5/3
	ESR3	102412	2025/12/23	2026/12/22
High Pass Filter EMCI	150HPF-ME	113009	2026/4/30	2027/4/29
		114005	2026/4/30	2027/4/29
		114006	2026/4/30	2027/4/29
High Voltage Probe Schwarzbeck	TK9420	00982	2025/12/3	2026/12/2
LISN R&S	ENV216	101195	2026/7/9	2027/7/8
		101196	2026/3/3	2027/3/2
		101197	2026/7/3	2027/7/2
LISN Schwarzbeck	NNLK 8121	8121-731	2026/6/5	2027/6/4
		8121-00759	2026/8/11	2027/8/10
		8121-808	2026/4/23	2027/4/22
	NNLK 8129	00624	2025/10/9	2026/10/8
		8129229	2025/10/14	2026/10/13
	NSLK 8128	8128-244	2025/11/11	2026/11/10
Passive Voltage Probe R&S	ESH2-Z3	100073	2026/6/3	2027/6/2
RF Coaxial Cable PEWC	5D-FB	Cable-CO5-01	2026/1/16	2027/1/15
Software BVADT	Cond_V7.4.1.0	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou Conduction 5.
2. Tested Date: 2026/9/4

4.8 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-137	2025/9/17	2026/9/16
Coupling / Decoupling Network Schwarzbeck	CDNE-M2	00097	2026/6/2	2027/6/1
	CDNE-M3	00091	2026/3/17	2027/3/16
Loop Antenna TESEQ	HLA 6121	63620	2025/10/20	2026/10/19
MXE EMI Receiver Agilent	N9038A	MY50010158	2025/10/29	2026/10/28
Preamplifier Agilent	8447D	2944A11064	2026/2/13	2027/2/12
RF Coaxial Cable Pacific	8D-FB	Cable-CH6-02	2026/6/22	2027/6/21
Signal Analyzer R&S	FSV40	101544	2026/7/2	2027/7/1
Software BVADT	Radiated_V7.7.1.1.1	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in LK - 966 Chamber 6 (CH 6) (Linkou).
2. Tested Date: 2026/9/3

4.9 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight antenna tower fixture BV	BAF-02	6	N/A	N/A
High Pass Filter Wainwright	WHK 3.1/18G-10SS	SN 8	2026/5/20	2027/5/19
Horn Antenna EMCO	3115	00028257	2025/11/9	2026/11/8
Horn Antenna ETS-Lindgren	3117-PA	00215857	2025/11/9	2026/11/8
Horn Antenna Schwarzbeck	BBHA 9170	212	2025/10/28	2026/10/27
		BBHA9170190	2025/11/9	2026/11/8
MXE EMI Receiver Agilent	N9038A	MY50010158	2025/10/29	2026/10/28
Notch Filter Micro-Tronics	BRC50703-01	010	2026/5/20	2027/5/19
	BRM17690	005	2026/5/20	2027/5/19
Preamplifier EMCI	EMC0126545	980076	2026/2/13	2027/2/12
	EMC184045B	980175	2026/8/22	2027/8/21
		980235	2026/2/13	2027/2/12
Preamplifier HP	8449B	3008A01201	2026/2/13	2027/2/12
RF Coaxial Cable EMCI	EMC104	190801	2026/7/3	2027/7/2
		190804	2026/7/3	2027/7/2
RF Coaxial Cable EMEC	EM102-KMKM-100	02	2026/7/3	2027/7/2
RF Coaxial Cable HUBER+SUHNER	SF-104	Cable-CH6-01	2026/7/3	2027/7/2
Signal Analyzer R&S	FSV40	101042	2025/9/19	2026/9/18
		101544	2026/7/2	2027/7/1
Software BVADT	Radiated_V7.7.1.1.1	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in LK - 966 Chamber 6 (CH 6) (Linkou).
2. Tested Date: 2026/9/3

5 Limits of Test Items

5.1 RF Output Power

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

5.2 Number of Hopping Frequency Used

If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies ; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.

5.3 Dwell Time on Each Channel

If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period ; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

5.4 Hopping Channel Separation

At least 25 kHz or 20 dB hopping channel bandwidth (whichever is greater).

5.5 20 dB Bandwidth

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

5.6 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.7 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.8 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.9 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup



Note: The correction factor has already been compensated by the instrument.

6.1.2 Test Procedure

Peak Power:

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.


The power meter video bandwidth is greater than or equal to the DTS bandwidth and use a fast responding diode detector.

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Number of Hopping Frequency Used

6.2.1 Test Setup



Note: The correction factor has already been compensated by the instrument.


6.2.2 Test Procedure

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Span: The frequency band of operation. Depending on the number of channels the device supports, it could be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- d. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- e. VBW $\geq 1/10^{\text{th}}$ the RBW.
- f. Sweep: No faster than coupled (auto) time.
- g. Detector function: Peak.
- h. Trace: Max-hold.
- i. Allow the trace to stabilize

Note: Where the device shares the same channel plan (carrier frequencies and number of channels) across multiple data rates or modulation schemes then the number of channels need only be measured for one of those modulation schemes or data rates.

6.3 Dwell Time on Each Channel

6.3.1 Test Setup



Note: The correction factor has already been compensated by the instrument.


6.3.2 Test Procedure

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Span: Zero span, centered on a hopping channel.
- d. RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected transmission time per hop. And then, set VBW of spectrum analyzer to proper value.
- e. Sweep time: Set so that the start of the first transmission and end of the last transmission for the hop are clearly captured. Setting the sweep time to be slightly longer than the hopping period per channel (hopping period = $1/\text{hopping rate}$) should achieve this.
- f. Use a video trigger, where possible with a trigger delay, so that the start of the transmission is clearly observed. The trigger level might need adjustment to reduce the chance of triggering when the system hops on an adjacent channel.
- g. Detector function: Peak.
- h. Trace: Clear-write, single sweep.
- i. Place markers at the start of the first transmission on the channel and at the end of the last transmission. The dwell time per hop is the time between these two markers.

Note: Where the device shares the same hopping algorithms (dwell time, channel selection) across multiple data rates or modulation schemes then the time of occupancy need only be measured for one of those modulation schemes or data rates. If the dwell time value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in dwell time.

6.4 Hopping Channel Separation

6.4.1 Test Setup



Note: The correction factor has already been compensated by the instrument.


6.4.2 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) $\geq 1/10^{\text{th}}$ the RBW.
- Sweep: No faster than coupled (auto) time.
- Detector function: Peak.
- Trace: Max-hold.
- Allow the trace to stabilize.

Note: Where the device shares the same channel plan (carrier frequencies and number of channels) across multiple data rates or modulation schemes then the carrier separation need only be measured for one of those modulation schemes or data rates.

6.5 20 dB Bandwidth

6.5.1 Test Setup




Note: The correction factor has already been compensated by the instrument.

6.5.2 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, without going below the values in section 6.9.1 of ANSI C63.10a-2024 and video bandwidth (VBW) shall be at least three times RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
- Steps a) through c) might require iteration to adjust within the specified tolerances.
- The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- Set detection mode to peak and trace mode to max-hold.
- Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.

6.6 Conducted Out of Band Emissions

6.6.1 Test Setup



Note: The correction factor has already been compensated by the instrument.

6.6.2 Test Procedure

MEASUREMENT PROCEDURE REF


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

MEASUREMENT PROCEDURE OOB

- Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.
- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = No faster than coupled (auto) time.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.7 AC Power Conducted Emissions

6.7.1 Test Setup

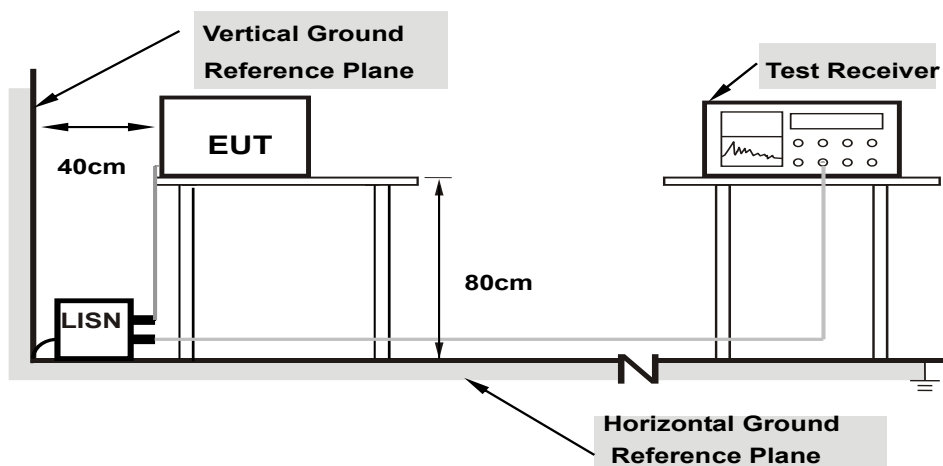

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure


- Exploratory ac power-line conducted emission measurements: The EUT shall be operated on the mid channel and in the mode with highest output power unless the fundamental operates in the AC power-line emission test range then the EUT shall be operated in the range of typical modes of operation.
- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.8 Unwanted Emissions below 1 GHz

6.8.1 Test Setup

For Radiated emission below 30 MHz

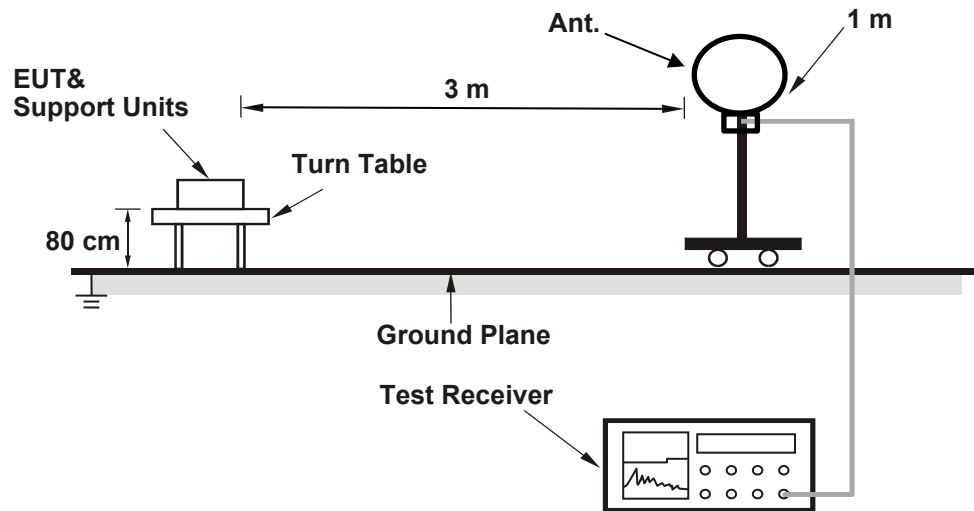

For Radiated emission above 30 MHz

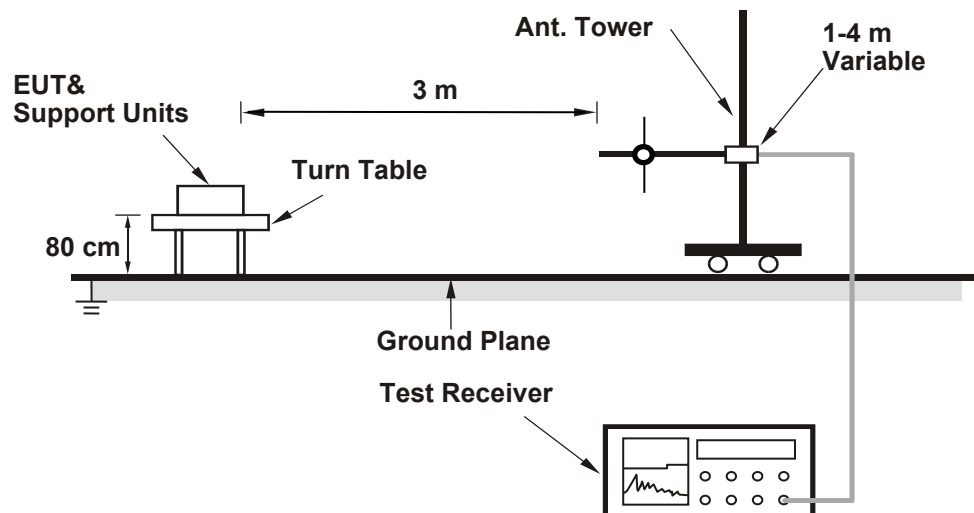

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode (however, peak detector measurements may be used to determine compliance with QP requirements), except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-peak(QP) detect function, Average(AV) detect function, Peak(PK) detect function and specified bandwidth with maximum hold mode when the test frequencies less than or equal to 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz (however, peak detector measurements may be used to determine compliance with QP requirements).
2. All modes of operation were investigated and the worst-case emissions are reported.

6.9 Unwanted Emissions above 1 GHz

6.9.1 Test Setup

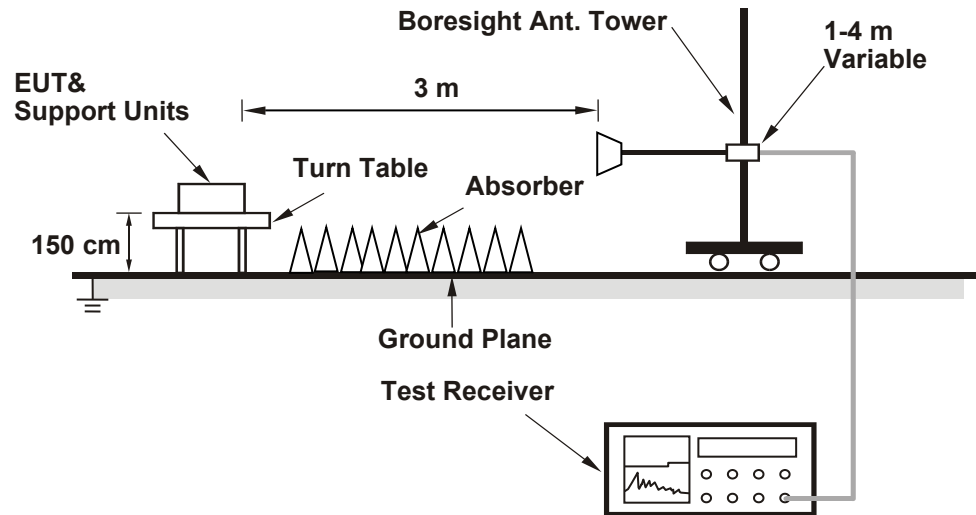

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.9.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- The maximum dwell time per 1 MHz is determined as follows:
 Maximum dwell time per 1 MHz = dwell time per 100 ms per channel × (channel separation correction + overlapping channel correction) where:
 - Channel separation correction = $[1 / \text{channel separation (MHz)}]$ for channel separation < 1 MHz, and = 1 for channel separation ≥ 1 MHz, as determined using the procedures ANSI C63.10 of 7.8.2. If the average measurements are performed on the Nth harmonic, the channel separation value is N times the separation at the fundamental frequency.
 - Overlapping channel correction = 0 when the 20 dB channel bandwidth < channel separation and = 1 for when the 20 dB channel bandwidth > channel separation.
 The average value may be determined as follows:
 From the peak value of the emission: The measured peak value in dBuV/m is corrected by $20\log(\text{maximum dwell time in 100 ms} / 100)$.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Dalen Dai
--------------	----------------	---------------------------	--------------	------------	-----------

For Peak Power

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	902.75	532.108	27.26	30	Pass
25	915.25	533.335	27.27	30	Pass
49	927.25	537.032	27.30	30	Pass


For Average Power

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	902.75	528.445	27.23
25	915.25	529.663	27.24
49	927.25	533.335	27.27

7.2 Number of Hopping Frequency Used

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Dalen Dai
--------------	----------------	---------------------------	--------------	------------	-----------

Frequency Band (MHz)	Amount of Hopping frequency	Limit	Test Result
902 ~ 928	50	≥ 50 Hopping frequencies	Pass

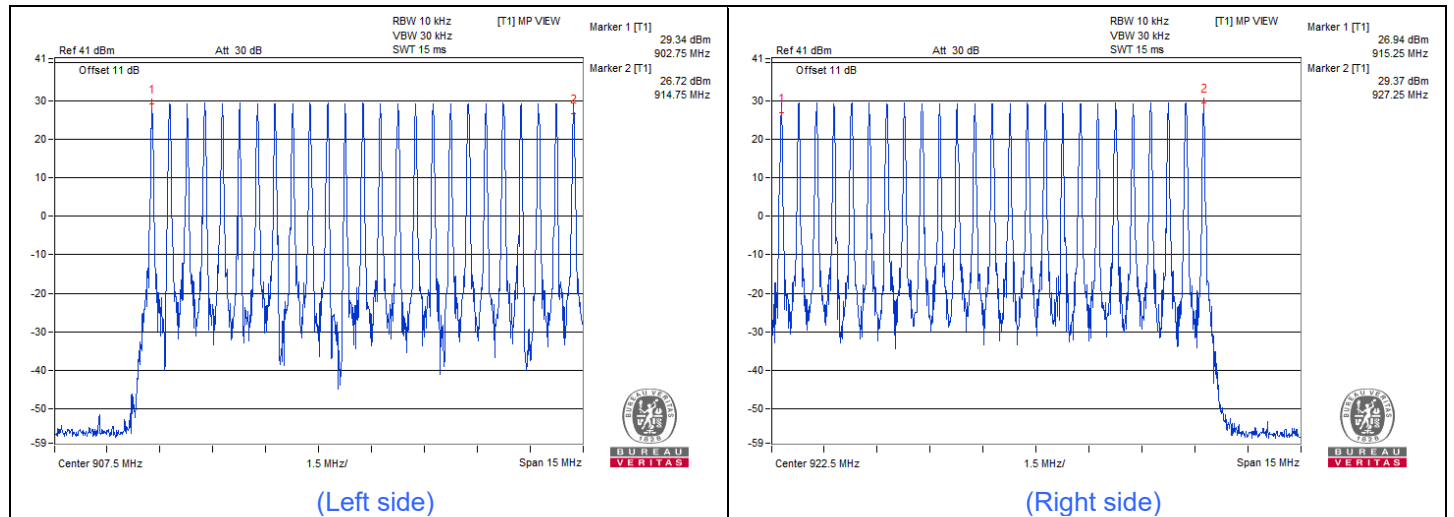


Note: There are 50 hopping frequencies in the hopping mode. On the plots, it shows that the hopping frequencies are equally spaced.

7.3 Dwell Time on Each Channel

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Dalen Dai
--------------	----------------	---------------------------	--------------	------------	-----------


Mode	Number of transmission in 20 sec	Length of transmission time (msec)	Dwell Time (msec)	Limit (msec)	Test Result
FHSS	2 times	36	72	400	Pass

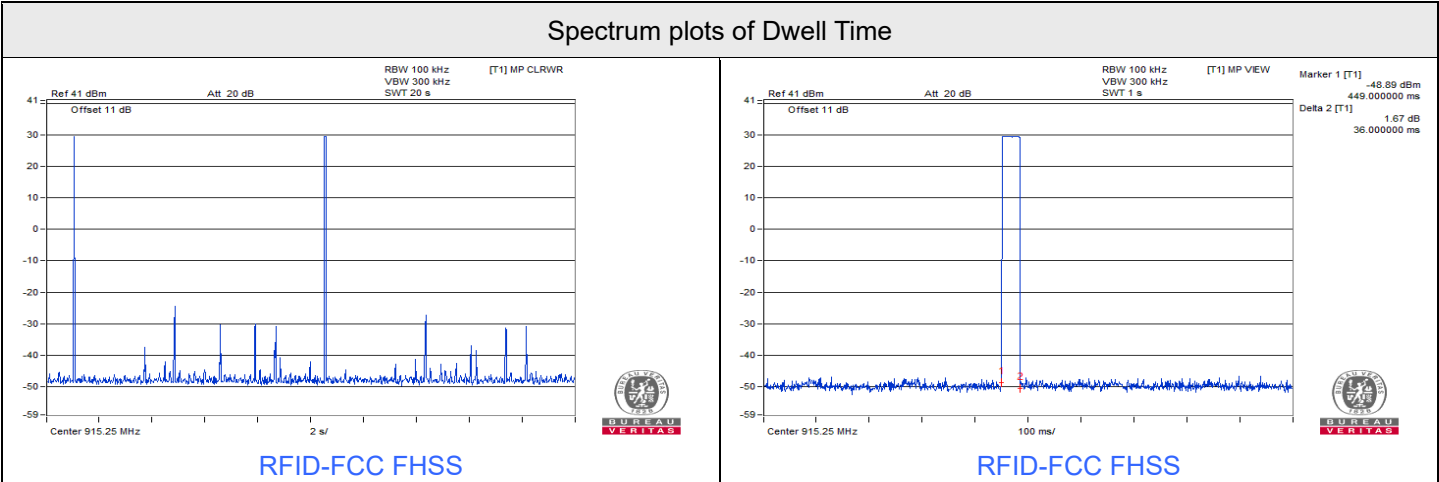

7.4 Hopping Channel Separation

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Dalen Dai
--------------	----------------	---------------------------	--------------	------------	-----------

Channel	Frequency (MHz)	Hopping Channel Separation (MHz)	Minimum Limit (MHz)	Test Result
0	902.75	0.50	0.07	Pass
25	915.25	0.50	0.08	Pass
49	927.25	0.51	0.08	Pass

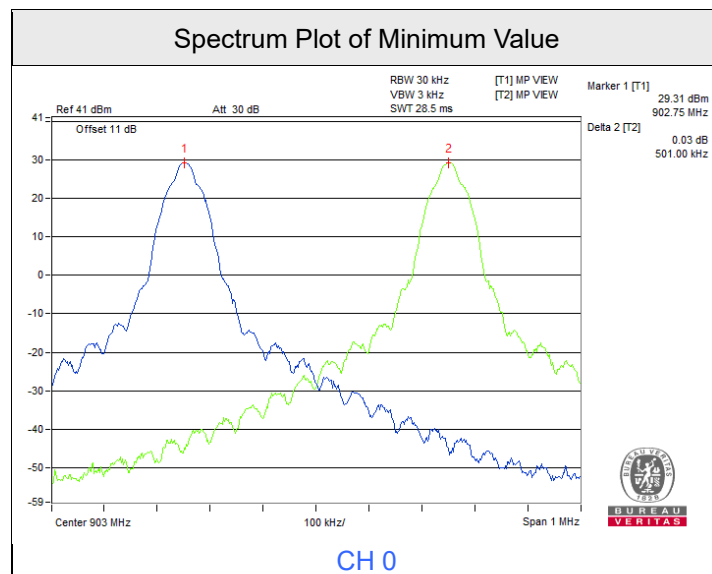


7.5 20 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Dalen Dai
--------------	----------------	---------------------------	--------------	------------	-----------


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
0	902.75	0.07	0.25	Pass
25	915.25	0.08	0.25	Pass
49	927.25	0.08	0.25	Pass

Note: 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping

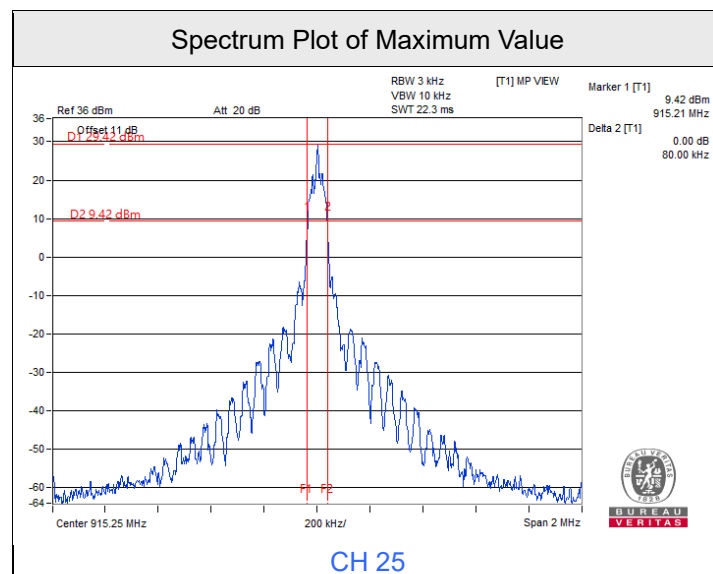

7.6 Conducted Out of Band Emissions

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Dalen Dai
--------------	----------------	---------------------------	--------------	------------	-----------

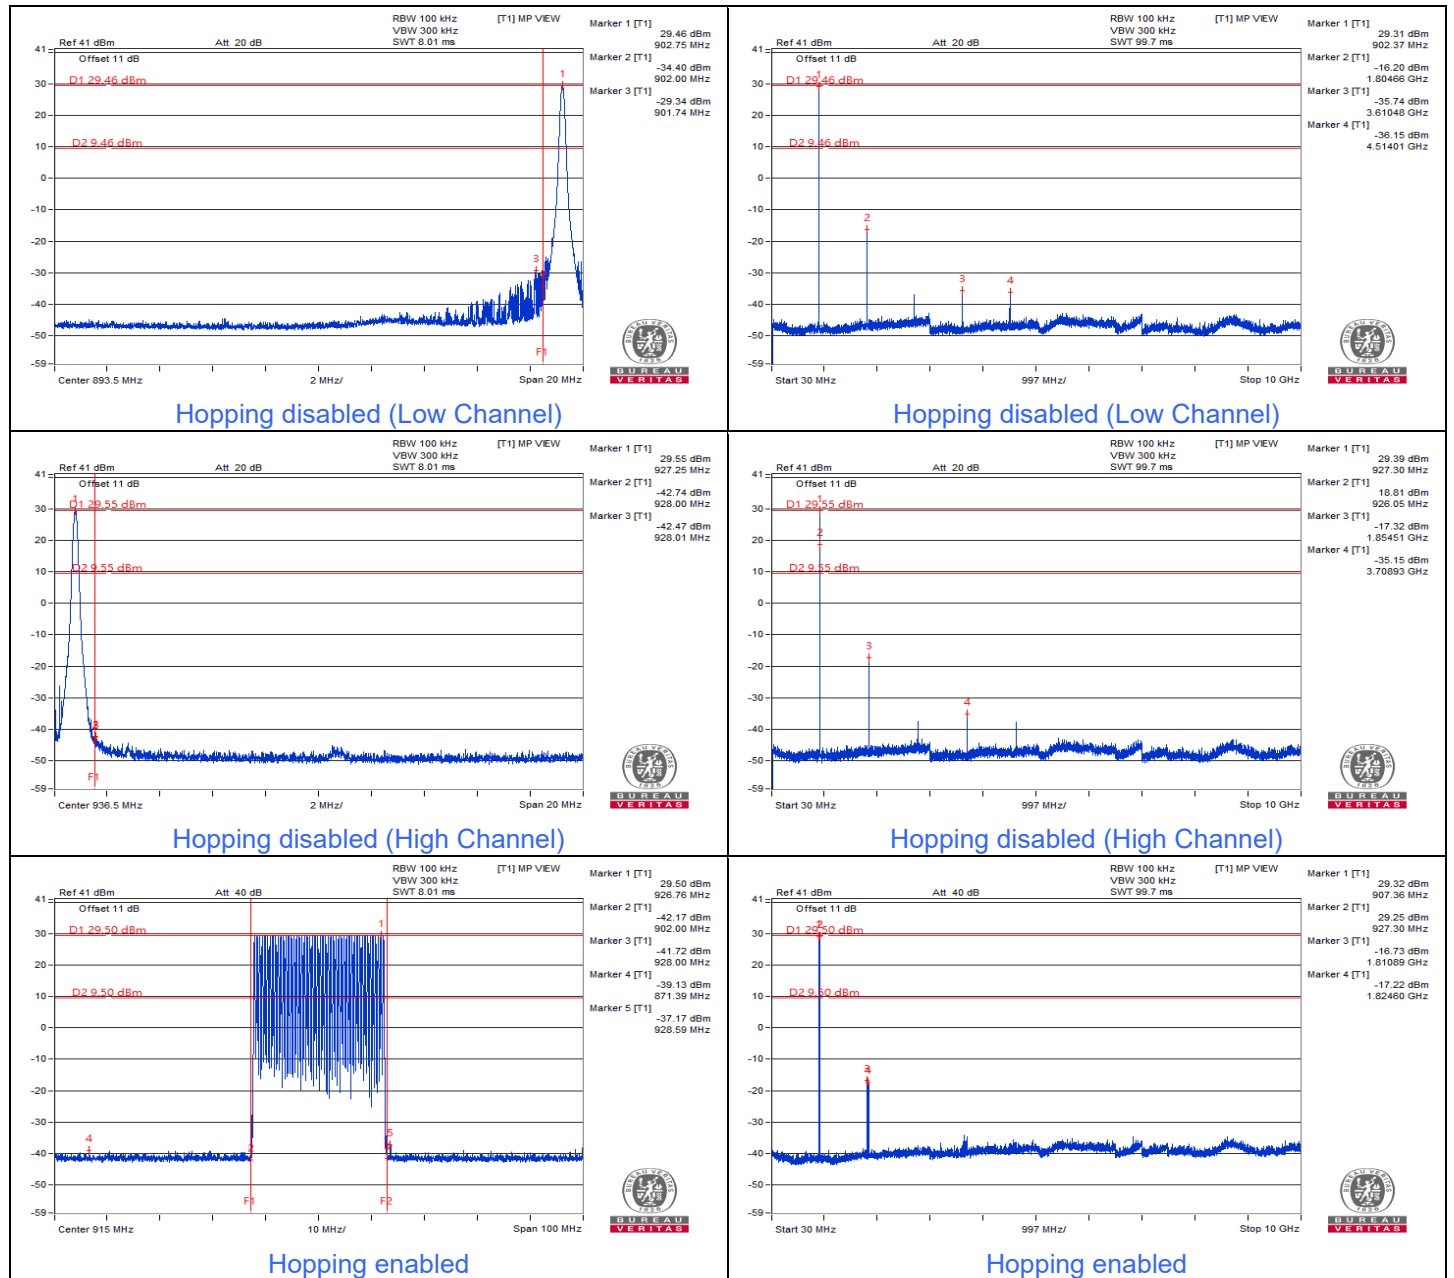


7.7 AC Power Conducted Emissions

RF Mode	UHF	Channel	CH 49 : 927.25 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Jed Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16350	9.62	18.76	2.56	28.38	12.18	65.28	55.28	-36.90	-43.10
2	0.28725	9.70	20.98	12.50	30.68	22.20	60.60	50.60	-29.92	-28.40
3	0.50550	9.76	19.21	0.39	28.97	10.15	56.00	46.00	-27.03	-35.85
4	0.93750	9.80	17.21	3.81	27.01	13.61	56.00	46.00	-28.99	-32.39
5	4.91775	10.00	18.61	0.35	28.61	10.35	56.00	46.00	-27.39	-35.65
6	6.76050	10.05	16.66	0.91	26.71	10.96	60.00	50.00	-33.29	-39.04

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

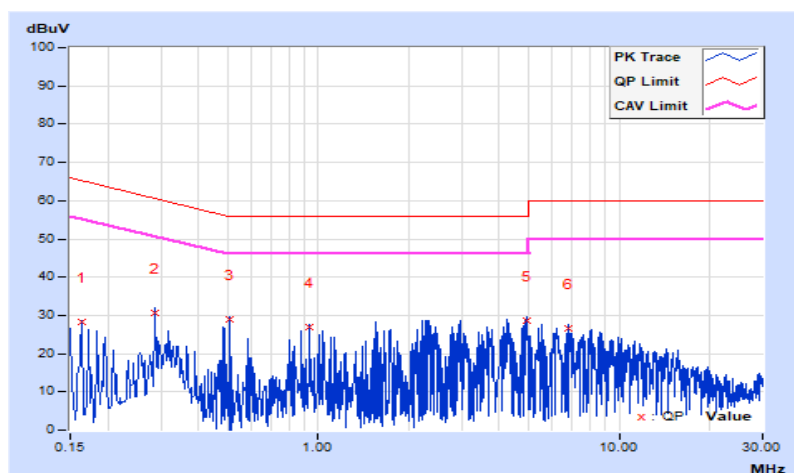


RF Mode	UHF	Channel	CH 49 : 927.25 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Jed Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17025	9.39	11.11	0.36	20.50	9.75	64.95	54.95	-44.45	-45.20
2	0.32742	9.41	14.87	4.79	24.28	14.20	59.52	49.52	-35.24	-35.32
3	0.49425	9.43	22.36	1.21	31.79	10.64	56.10	46.10	-24.31	-35.46
4	1.01625	9.46	17.07	2.76	26.53	12.22	56.00	46.00	-29.47	-33.78
5	4.88625	9.66	17.62	0.10	27.28	9.76	56.00	46.00	-28.72	-36.24
6	5.58825	9.68	16.70	0.67	26.38	10.35	60.00	50.00	-33.62	-39.65

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

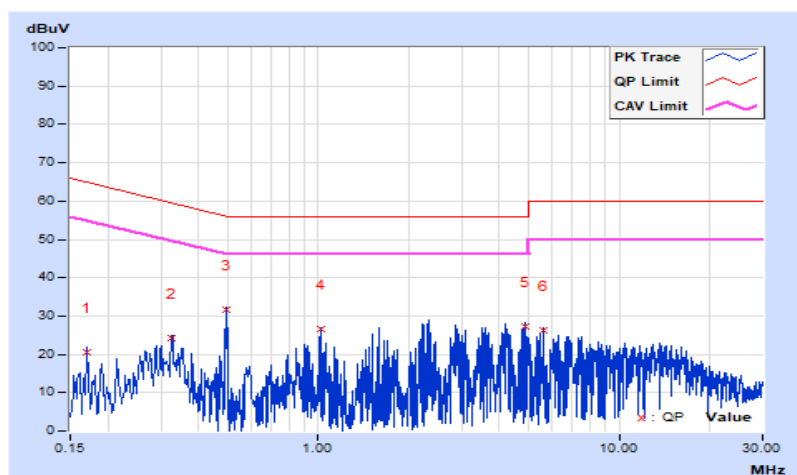

7.8 Unwanted Emissions below 1 GHz

RF Mode	UHF	Channel	CH 0 : 902.75 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	902.00	68.0 QP	105	-37.0	1.06 H	24	60.5	7.5
2	*902.75	125.0 QP			1.06 H	24	117.5	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	902.00	67.1 QP	103.6	-36.5	1.36 V	19	59.6	7.5
2	*902.75	123.6 QP			1.36 V	19	116.1	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	UHF	Channel	CH 25 : 915.25 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*915.25	126.1 QP			1.00 H	353	118.1	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*915.25	124.7 QP			1.30 V	348	116.7	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	UHF	Channel	CH 49 : 927.25 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*927.25	125.5 QP			1.02 H	348	117.3	8.2
2	928.00	64.5 QP	105.5	-41.0	1.02 H	348	56.4	8.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*927.25	124.1 QP			1.32 V	343	115.9	8.2
2	928.00	63.0 QP	104.1	-41.1	1.32 V	343	54.9	8.1

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	UHF	Channel	CH 0 : 902.75 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.46	20.9 QP	40.0	-19.1	1.64 H	54	31.4	-10.5
2	168.04	27.6 QP	43.5	-15.9	1.25 H	193	35.5	-7.9
3	263.99	38.0 QP	46.0	-8.0	1.37 H	228	44.7	-6.7
4	288.05	36.0 QP	46.0	-10.0	1.86 H	48	41.7	-5.7
5	386.61	31.8 QP	46.0	-14.2	1.94 H	169	35.1	-3.3
6	503.99	29.6 QP	46.0	-16.4	1.73 H	63	30.3	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

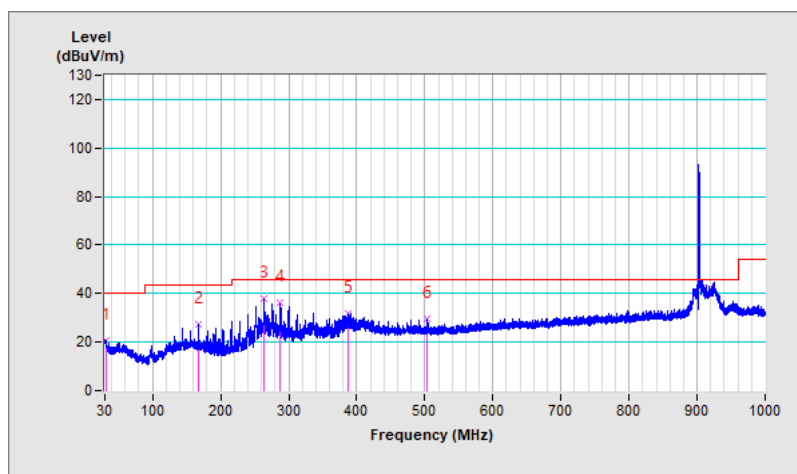


RF Mode	UHF	Channel	CH 0 : 902.75 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	61.04	21.9 QP	40.0	-18.1	1.66 V	104	31.0	-9.1
2	98.29	22.0 QP	43.5	-21.5	1.32 V	72	35.1	-13.1
3	189.68	25.2 QP	43.5	-18.3	1.45 V	281	35.0	-9.8
4	263.70	26.4 QP	46.0	-19.6	1.27 V	12	33.2	-6.8
5	442.10	27.6 QP	46.0	-18.4	1.85 V	148	29.3	-1.7
6	532.22	29.1 QP	46.0	-16.9	1.91 V	152	29.4	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

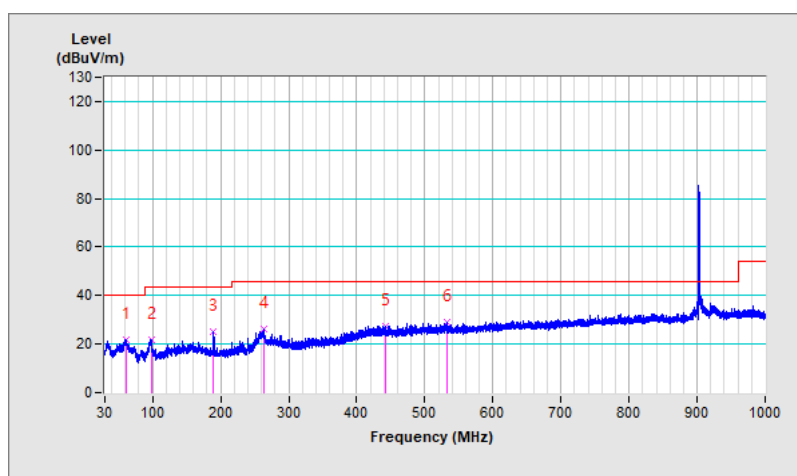


RF Mode	UHF	Channel	CH 25 : 915.25 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.10	21.0 QP	40.0	-19.0	1.73 H	214	31.2	-10.2
2	195.21	29.8 QP	43.5	-13.7	1.86 H	163	40.0	-10.2
3	263.99	40.5 QP	46.0	-5.5	1.94 H	52	47.2	-6.7
4	389.03	31.0 QP	46.0	-15.0	1.65 H	193	34.3	-3.3
5	480.42	30.3 QP	46.0	-15.7	1.23 H	48	31.4	-1.1
6	592.85	28.7 QP	46.0	-17.3	1.11 H	359	27.1	1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

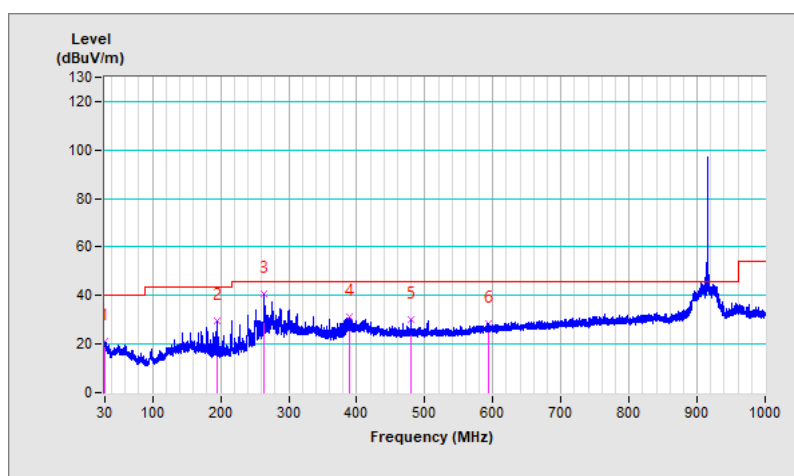


RF Mode	UHF	Channel	CH 25 : 915.25 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	58.13	21.5 QP	40.0	-18.5	1.32 V	61	30.4	-8.9
2	97.91	22.9 QP	43.5	-20.6	1.24 V	68	36.1	-13.2
3	189.77	25.6 QP	43.5	-17.9	1.56 V	163	35.4	-9.8
4	263.70	26.2 QP	46.0	-19.8	1.97 V	17	33.0	-6.8
5	431.91	27.4 QP	46.0	-18.6	1.88 V	130	29.3	-1.9
6	519.90	29.0 QP	46.0	-17.0	1.63 V	153	29.5	-0.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

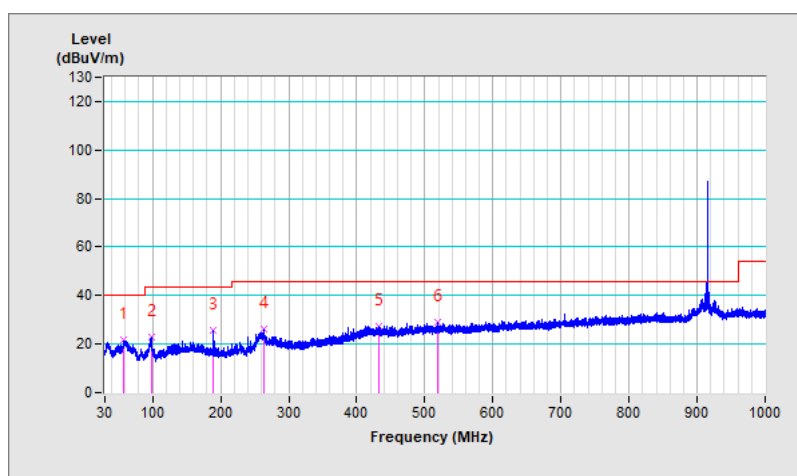


RF Mode	UHF	Channel	CH 49 : 927.25 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	21.9 QP	40.0	-18.1	1.96 H	72	32.1	-10.2
2	144.18	25.6 QP	43.5	-17.9	1.67 H	150	33.7	-8.1
3	240.22	31.6 QP	46.0	-14.4	1.84 H	206	39.7	-8.1
4	263.99	40.8 QP	46.0	-5.2	1.35 H	43	47.5	-6.7
5	299.98	35.6 QP	46.0	-10.4	1.24 H	245	41.0	-5.4
6	408.14	31.8 QP	46.0	-14.2	1.15 H	226	34.8	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

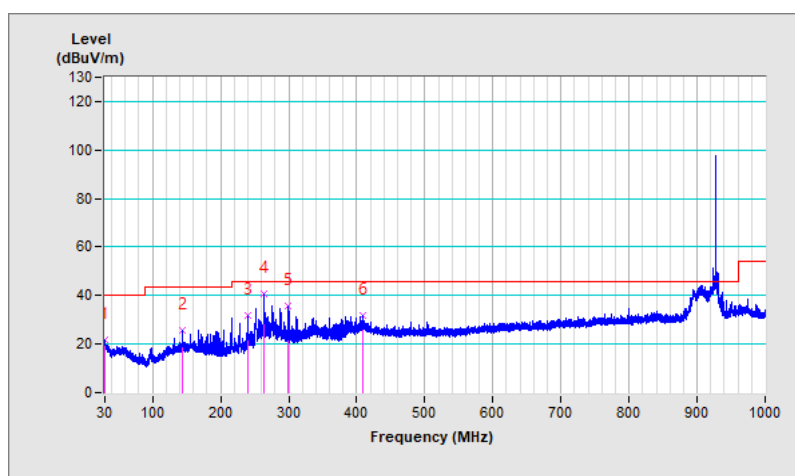


RF Mode	UHF	Channel	CH 49 : 927.25 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	60.56	22.1 QP	40.0	-17.9	1.43 V	247	31.2	-9.1
2	189.77	25.4 QP	43.5	-18.1	1.17 V	171	35.2	-9.8
3	256.91	26.1 QP	46.0	-19.9	1.32 V	11	33.3	-7.2
4	404.94	27.9 QP	46.0	-18.1	1.68 V	141	30.9	-3.0
5	474.60	29.2 QP	46.0	-16.8	1.95 V	150	30.4	-1.2
6	589.65	29.8 QP	46.0	-16.2	1.05 V	120	28.3	1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

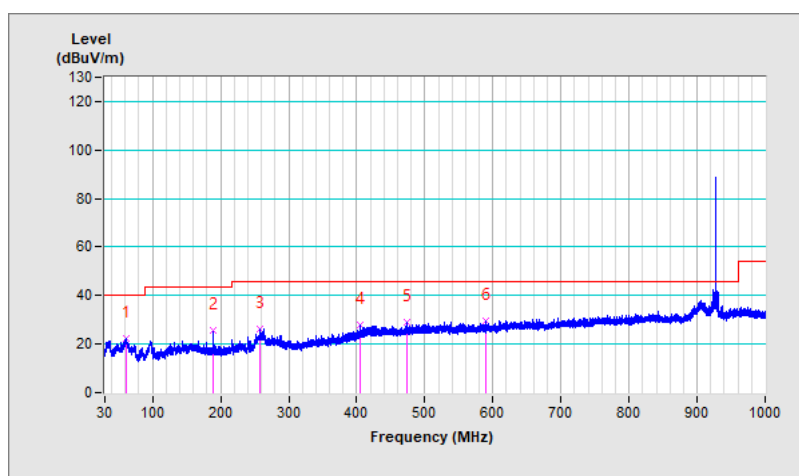

7.9 Unwanted Emissions above 1 GHz

RF Mode	UHF	Channel	CH 0 : 902.75 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2708.25	47.7 PK	74.0	-26.3	3.69 H	44	46.8	0.9
2	2708.25	37.2 AV	54.0	-16.8	3.69 H	44	36.3	0.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2708.25	52.1 PK	74.0	-21.9	2.98 V	258	51.2	0.9
2	2708.25	41.6 AV	54.0	-12.4	2.98 V	258	40.7	0.9

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- For fundamental and related emissions signals (e.g., harmonic frequencies), the average value of frequency is:
 Average = Peak value + 20 log(dwell time per 100 ms per channel * (channel separation correction + overlapping channel correction)) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{dwell time per 100 ms per channel} \times (\text{channel separation correction} + \text{overlapping channel correction}))$$

$$= 20 \log(29.767 \text{ ms} * (1 + 0) / 100 \text{ ms}) = -10.5 \text{ dB}$$

RF Mode	UHF	Channel	CH 25 : 915.25 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2745.75	47.3 PK	74.0	-26.7	3.08 H	37	46.4	0.9
2	2745.75	36.8 AV	54.0	-17.2	3.08 H	37	35.9	0.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2745.75	51.7 PK	74.0	-22.3	3.59 V	251	50.8	0.9
2	2745.75	41.2 AV	54.0	-12.8	3.59 V	251	40.3	0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. For fundamental and related emissions signals (e.g., harmonic frequencies), the average value of frequency is:
 Average = Peak value + 20 log(dwell time per 100 ms per channel * (channel separation correction + overlapping channel correction)) Where the duty cycle correction factor is calculated from following formula:
 $20 \log(\text{dwell time per 100 ms per channel} \times (\text{channel separation correction} + \text{overlapping channel correction}))$
 $= 20 \log(29.767 \text{ ms} * (1 + 0) / 100 \text{ ms}) = -10.5 \text{ dB}$

RF Mode	UHF	Channel	CH 49 : 927.25 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2781.75	48.3 PK	74.0	-25.7	1.88 H	282	47.1	1.2
2	2781.75	37.8 AV	54.0	-16.2	1.88 H	282	36.6	1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2781.75	52.7 PK	74.0	-21.3	1.39 V	136	51.5	1.2
2	2781.75	42.2 AV	54.0	-11.8	1.39 V	136	41.0	1.2


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. For fundamental and related emissions signals (e.g., harmonic frequencies), the average value of frequency is:
 Average = Peak value + 20 log(dwell time per 100 ms per channel * (channel separation correction + overlapping channel correction)) Where the duty cycle correction factor is calculated from following formula:
 20 log(dwell time per 100 ms per channel × (channel separation correction + overlapping channel correction))
 = 20 log(29.767 ms * (1 + 0) / 100 ms) = -10.5 dB

Plot of Other Emission

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

UHF Channel 49

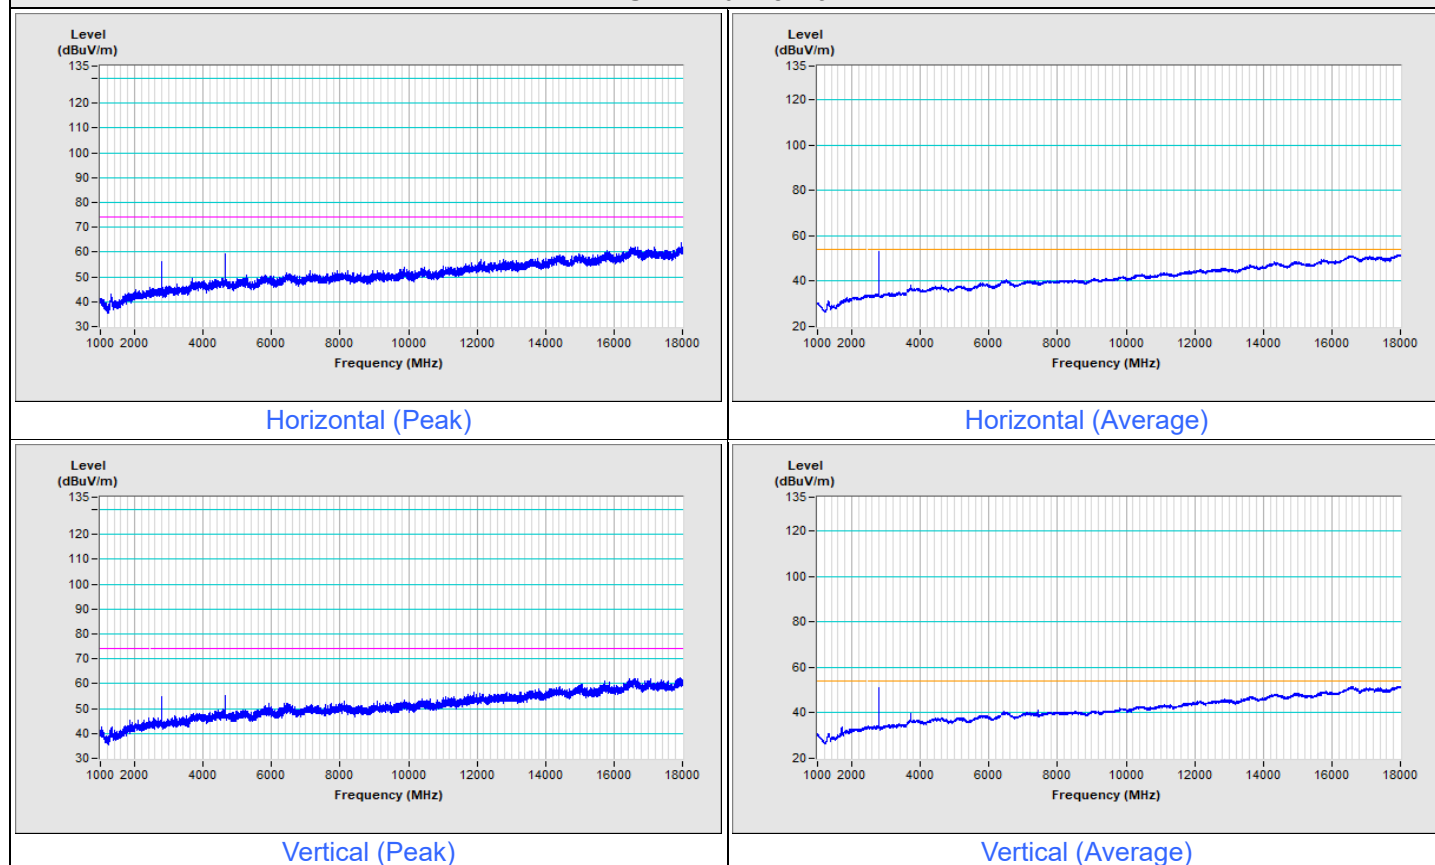

Notes:

- For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
- The frequency range 18 GHz ~ 25 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-(0)2-26052180

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-(0)3-6668565 (SIP)

Tel: 886-(0)3-5120595 (WD)

Hwa Ya EMC/RF/Safety/SAR Lab & Wenming EMC/RF Lab

Tel: 886-(0)3-3183232

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---