



TEST REPORT

For LTE Band 14

Report No..... : CHTW26075003

Project No : SHT2603040705W

FCC ID : Q5EKI60

Applicant's name : Kirisun Communication Co.,Ltd.

Address : 3rd Floor, Building A, Tongfang Information Harbour, No.11 Langshan Road, Nanshan District, Shenzhen 518057, P.R.China

Product Name : PTToc Radio

Trade Mark..... : 

Model No..... : K-I60

Listed Model(s) : GP800

Standard : **FCC CFR Title 47 Part 2**
FCC CFR Title 47 Part 90

Date of receipt of test sample.....: 2026/4/7

Date of testing.....: 2026/4/24- 2026/6/24


Date of issue.....: 2026/7/2

Result.....: **PASS**



Compiled by
(Position+Printed name+Signature) : File administrator Caspar Chen 

Supervised by
(Position+Printed name+Signature) : Project Engineer Xiaodong Zhao 

Approved by
(Position+Printed name+Signature) : RF Manager Xu Yang 

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address : Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China

Test Report Form No. : R0066

Test Report Form(s) Originator : Shenzhen Huatongwei International Inspection Co., Ltd.

Master TRF : Dated 2025-07

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. The test report merely correspond to the test sample. The authenticity of this Test Report and its contents can be verified by contacting the Laboratory, responsible for this Test Report.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Applicable Standards	3
1.2.	Report version information	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	6
3.4.	Testing Laboratory Information	6
<u>4.</u>	<u>TEST CONFIGURATION</u>	<u>7</u>
4.1.	Test frequency list	7
4.2.	Test mode	7
4.3.	Test sample information	7
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Statement of the measurement uncertainty	8
4.7.	Equipments Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	ERP	10
5.2.	Radiated Spurious Emission	11
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>15</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>16</u>
<u>8.</u>	<u>APPENDIX REPORT</u>	<u>17</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Applicable Standards

The tests were performed according to following standards:

[FCC CFR Title 47 Part 2](#): Frequency Allocations and Radio Treaty Matters; General Rules and Regulations

[FCC CFR Title 47 Part 90](#): Private Land Mobile Radio Services.

[ANSI C63.26-2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB 971168 D01 Power Meas License Digital Systems v03](#): MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2026-07-02	Original

2. Test Description

Section	Test Item	Section in CFR 47	Result #1	Test Engineer
-	Conducted Output Power	Part 2.1046	Pass*	-
-	Peak-to-Average Ratio	-	Pass*	-
-	99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049	Pass*	-
-	Band Edge	Part 2.1051 Part 90.543(c) (e)	Pass*	-
-	Conducted Spurious Emissions	Part 2.1051 Part 90.543(c) (e)	Pass*	-
-	Frequency stability vs temperature	Part 2.1055(a)(1)(b) Part 90.213	Pass*	-
-	Frequency stability vs voltage	Part 2.1055(d)(1)(2) Part 90.213	Pass*	-
5.1	ERP	Part 90.542(a)(7)	Pass	JIAXING.SI
5.2	Radiated Spurious Emissions	Part 2.1053 Part 90.543(e)(f)	Pass	JUNXU.LIN

Note:

- 1) #1: The test result does not include measurement uncertainty value
- 2) *: Refer to module FCC ID: XMR2022SC200ENA.

3. SUMMARY

3.1. Client Information

Applicant:	Kirisun Communication Co.,Ltd.
Address:	3rd Floor, Building A, Tongfang Information Harbour, No.11 Langshan Road, Nanshan District, Shenzhen 518057, P.R.China
Manufacturer:	Kirisun Communication Co.,Ltd.
Address:	3rd Floor, Building A, Tongfang Information Harbour, No.11 Langshan Road, Nanshan District, Shenzhen 518057, P.R.China
Factory:	Fujian Kirisun Communication Co., Ltd
Address:	Building C,Haixi Electronic Information Industry Incubation Base,Science and Industry Road,Hi-Tech Industry Park,Fengze District,Quanzhou,362000 Fujian,P.R.China

3.2. Product Description

Main unit information:	
Product Name:	PTToC Radio
Trade Mark:	
Model No.:	K-I60
Listed Model(s):	GP800
Power supply:	DC 7.7V from Battery
Hardware version:	V1.0
Software version:	V1.0
Accessory unit information:	
Battery information:	Model: KDC-D60-A 7.7V 2400mAh/18.48Wh
Adapter information:	Model: TPQ-236A120100UW01 Input: 100-240V~50/60Hz 0.4A Output: 12.0Vd.c., 1.0A
Rapid Charger information:	Model: KBC-TD60-1Q Input: 12Vd.c. 1000mA Output: 800mA

3.3. Radio Specification Description

Operation Band:	☒ FDD Band 14		
Operation Frequency Range:		Uplink	Downlink
	FDD Band 26	790.5 – 795.5 MHz	760.5 – 765.5 MHz
Channel bandwidth:	5MHz, 10MHz		
Power Class:	☒ Class 3 ☐ Class 4		
Uplink Modulation type:	☒ QPSK	☒ 16QAM	☐ 64QAM ☐ 256QAM
Downlink Modulation type:	☒ QPSK	☒ 16QAM	☒ 64QAM ☐ 256QAM
Antenna type	External Antenna		
Antenna Gain ^{#2}	0.94dBi		

Note:

☒: means that this feature is supported; ☐: means that this feature is not supported

#2: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, HTW lab has not verified the authenticity of its information

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China	
Contact information:	Phone: 400-963-0755 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC Registration Number	762235
	FCC Designation Number	CN1181

4. TEST CONFIGURATION

4.1. Test frequency list

TDD Band 14					
	Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	Frequency of Downlink [MHz]
	Low Range	5 [1]	23305	790.5	5305
		10 [1]	23330	793	5330
	Mid Range	5 [1]/10 [1]	23330	793	5330
	High Range	5 [1]	23355	795.5	5355
		10 [1]	23330	793	5330

4.2. Test mode

Test mode	Link mode
-----------	-----------

- 1) Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems and ANSI C63.26 with maximum output power.
- 2) Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Test configuration is as follow:

Test Items	Band	Bandwidth (MHz)		Modulation			RB #		
		5	10	QPSK	16QAM	64QAM	1	Half	Full
Radiated Spurious Emission	14	○	○	○	○	○	○	-	-
Remark	1. The mark "○" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not test. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different bandwidth, modulations and RB size/offset in exploratory test. Subsequently, only the worst case emissions (highest bandwidth, QPSK, and 1RB0) are reported.								

4.3. Test sample information

Test item	HTW sample no.
Radiated test items	YPHT26030407004

Note:

Radiated test items: Radiated Spurious Emission

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?				
✓ No				
Item	Equipment	Trade Name	Model No.	Other
1				
2				

4.5. Testing environmental condition

Voltage	VN=Nominal Voltage	DC 7.70V
Temperature	TN=Normal Temperature	25 °C
Humidity	30~60 %	
Air Pressure	950-1050 hPa	

4.6. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	Transmit Radiated Spurious Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.7. Equipments Used during the Test

● RF Test Software					
Used	Test Item	Software Name	Manufacturer	Equipment No.	Version
●	Radiated Spurious Emission	E3	AUDIX	HTWER006	V6.110407a

● Radiated Spurious Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2026/3/19	2029/3/18
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2025/8/6	2026/8/5
●	Spectrum Analyzer	Agilent	HTWE0385	N9020A	MY54486658	2025/8/6	2026/8/5
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2024/4/8	2027/4/7
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0700	VULB9163	1422	2025/4/7	2028/4/6
●	Horn Antenna	SCHWARZBECK	HTWE0126	BBHA 9120D	1011	2026/1/23	2029/1/22
●	Horn Antenna	ETS	HTWE0532	3117	240056	2025/4/14	2028/4/13
●	Horn Antenna	STEATITE	HTWE0549	QMS-00880	25661	2025/4/14	2028/4/13
●	Pre-Amplifier	CD	HTWE0071	PAP-0102	12004	2025/5/26	2026/5/25
●	Pre-Amplifier	CD	HTWE0071	PAP-0102	12004	2026/5/12	2027/5/11
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0551	SCU18F	100855	2025/5/26	2026/5/25
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0551	SCU18F	100855	2026/5/12	2027/5/11
●	Cable (Below 1G)	-	HTWE0120-01+HTWE0120-04+HTWE0120-05	-	-	2025/5/26	2026/5/25
●	Cable (Below 1G)	-	HTWE0120-01+HTWE0120-04+HTWE0120-05	-	-	2026/5/12	2027/5/11
●	Cable	-	HTWE0121-03+HTWE0121-04+HTWE0104-09	-	-	2025/5/26	2026/5/25
●	Cable	-	HTWE0121-03+HTWE0121-04+HTWE0104-09	-	-	2026/5/12	2027/5/11

● Auxiliary Equipment							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2025/8/6	2026/8/5
●	High pass filter	Wainwright	HTWE0297	WHKX3.0/18G-10SS	38	2026/4/15	2027/4/14
●	Band Stop filter	-	HTWE0039	N/A	N/A	2026/1/20	2027/1/19

5. TEST CONDITIONS AND RESULTS

5.1. ERP

LIMIT

LTE Band 14: 3W(34.77dBm) ERP

TEST PROCEDURE

1. According to the power tested in section 5.1, select the maximum power in each mode, and use the following formula to calculate the corresponding ERP.
2. $ERP = \text{conducted power} + \text{Gain(dBd)}$
 $EIRP = \text{conducted power} + \text{Gain(dBi)}$
 $ERP = EIRP - 2.15$

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

TEST DATA

Refer to the appendix


Note: Conducted power reference module FCC ID: XMR2022SC200ENA

5.2. Radiated Spurious Emission

LIMIT

- (1) Out-of-band emission limit. On any frequency outside of the frequency ranges covered by the ACP tables in this section, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10\log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz.
- (2) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610MHz shall be limited to -40dBm/MHz equivalent isotropically radiated power (EIRP) for wideband signals.

TEST CONFIGURATION

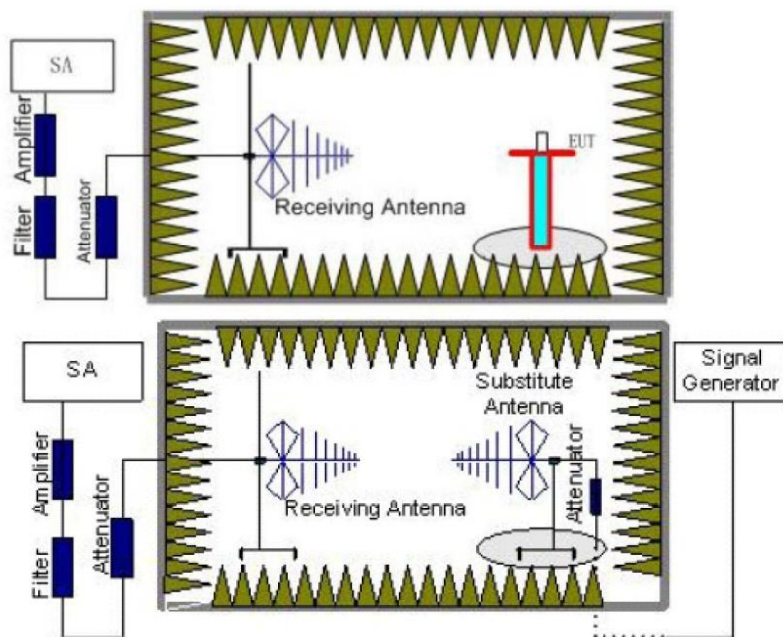

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:

Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto

Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.

- c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
 7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
 8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
 9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
 10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
 11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
 12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
 13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
 14. Provide the complete measurement results as a part of the test report.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note: only show the worse case for QPSK modulation.

LTE Band 14									
Test channel:		Low			Polarization:		Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	40.03	-71.95	27.77	1.16	30.85	-73.87	-13.00	-60.87	Peak
2	762.33	-66.09	29.22	5.66	29.07	-60.28	-13.00	-47.28	Peak
3	1664.89	-53.89	36.22	3.44	41.50	-55.73	-13.00	-42.73	Peak
4	2499.88	-58.02	39.27	4.28	41.00	-55.47	-13.00	-42.47	Peak
5	7380.08	-66.02	48.48	7.90	39.15	-48.79	-13.00	-35.79	Peak
6	10838.48	-67.01	52.52	9.00	40.83	-46.32	-13.00	-33.32	Peak
Test channel:		Low			Polarization:		Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	95.74	-70.77	25.81	1.85	30.45	-73.56	-13.00	-60.56	Peak
2	708.07	-56.42	28.68	5.46	29.15	-51.43	-13.00	-38.43	Peak
3	1664.89	-54.08	36.15	3.44	41.50	-55.99	-13.00	-42.99	Peak
4	2499.88	-52.86	39.23	4.28	41.00	-50.35	-13.00	-37.35	Peak
5	4996.14	-60.24	44.49	6.31	39.92	-49.36	-13.00	-36.36	Peak
6	10869.96	-66.86	52.67	8.98	40.78	-45.99	-13.00	-32.99	Peak

Test channel:		Mid			Polarization:		Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	42.79	-63.08	26.49	1.20	30.84	-66.23	-13.00	-53.23	Peak
2	765.02	-55.53	29.30	5.67	29.07	-49.63	-13.00	-36.63	Peak
3	1664.89	-53.68	36.22	3.44	41.50	-55.52	-13.00	-42.52	Peak
4	2499.88	-57.25	39.27	4.28	41.00	-54.70	-13.00	-41.70	Peak
5	7981.27	-64.79	48.11	8.37	39.23	-47.54	-13.00	-34.54	Peak
6	11961.82	-66.09	52.59	10.04	40.65	-44.11	-13.00	-31.11	Peak
Test channel:		Mid			Polarization:		Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-59.38	21.68	1.24	30.83	-67.29	-13.00	-54.29	Peak
2	762.33	-53.12	29.08	5.66	29.07	-47.45	-13.00	-34.45	Peak
3	1499.88	-54.59	37.76	3.23	41.50	-55.10	-13.00	-42.10	Peak
4	2499.88	-51.58	39.23	4.28	41.00	-49.07	-13.00	-36.07	Peak
5	7390.79	-65.92	48.59	7.90	39.16	-48.59	-13.00	-35.59	Peak
6	11996.57	-66.98	52.96	10.09	40.70	-44.63	-13.00	-31.63	Peak

Test channel:		High			Polarization:		Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	39.89	-72.46	27.76	1.15	30.85	-74.40	-13.00	-61.40	Peak
2	765.02	-65.41	29.30	5.67	29.07	-59.51	-13.00	-46.51	Peak
3	1664.89	-53.55	36.22	3.44	41.50	-55.39	-13.00	-42.39	Peak
4	2499.88	-57.27	39.27	4.28	41.00	-54.72	-13.00	-41.72	Peak
5	4996.14	-60.23	44.35	6.31	39.92	-49.49	-13.00	-36.49	Peak
6	10854.21	-66.87	52.56	8.99	40.80	-46.12	-13.00	-33.12	Peak
Test channel:		High			Polarization:		Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	92.76	-71.94	25.85	1.82	30.48	-74.75	-13.00	-61.75	Peak
2	765.02	-63.68	29.11	5.67	29.07	-57.97	-13.00	-44.97	Peak
3	1499.88	-54.82	37.76	3.23	41.50	-55.33	-13.00	-42.33	Peak
4	2499.88	-53.40	39.23	4.28	41.00	-50.89	-13.00	-37.89	Peak
5	7798.21	-65.22	48.56	8.12	39.38	-47.92	-13.00	-34.92	Peak
6	10713.45	-66.59	52.52	9.07	41.00	-46.00	-13.00	-33.00	Peak

6. TEST SETUP PHOTOS OF THE EUT



7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Refer to the test report No.: CHTW26065034

8. APPENDIX REPORT

Appendix: ERP

Band	Bandwidth	Modulation	Channel	RB Configuration	Result (dBm)	ERP (dBm)	Limit (dBm)	Verdict
Band14	5MHz	QPSK	23305	1RB#0	23.27	22.06	34.77	PASS
Band14	5MHz	QPSK	23305	1RB#12	23.04	21.83	34.77	PASS
Band14	5MHz	QPSK	23305	1RB#24	23.21	22.00	34.77	PASS
Band14	5MHz	QPSK	23305	25RB#0	22.23	21.02	34.77	PASS
Band14	5MHz	QPSK	23330	1RB#0	23.18	21.97	34.77	PASS
Band14	5MHz	QPSK	23330	1RB#12	23.13	21.92	34.77	PASS
Band14	5MHz	QPSK	23330	1RB#24	23.33	22.12	34.77	PASS
Band14	5MHz	QPSK	23330	25RB#0	22.22	21.01	34.77	PASS
Band14	5MHz	QPSK	23355	1RB#0	23.35	22.14	34.77	PASS
Band14	5MHz	QPSK	23355	1RB#12	23.27	22.06	34.77	PASS
Band14	5MHz	QPSK	23355	1RB#24	23.23	22.02	34.77	PASS
Band14	5MHz	QPSK	23355	25RB#0	22.36	21.15	34.77	PASS
Band14	5MHz	16QAM	23305	1RB#0	22.47	21.26	34.77	PASS
Band14	5MHz	16QAM	23305	1RB#12	22.31	21.10	34.77	PASS
Band14	5MHz	16QAM	23305	1RB#24	22.41	21.20	34.77	PASS
Band14	5MHz	16QAM	23305	25RB#0	21.16	19.95	34.77	PASS
Band14	5MHz	16QAM	23330	1RB#0	22.56	21.35	34.77	PASS
Band14	5MHz	16QAM	23330	1RB#12	22.51	21.30	34.77	PASS
Band14	5MHz	16QAM	23330	1RB#24	22.48	21.27	34.77	PASS
Band14	5MHz	16QAM	23330	25RB#0	21.27	20.06	34.77	PASS
Band14	5MHz	16QAM	23355	1RB#0	22.7	21.49	34.77	PASS
Band14	5MHz	16QAM	23355	1RB#12	22.68	21.47	34.77	PASS
Band14	5MHz	16QAM	23355	1RB#24	22.61	21.40	34.77	PASS
Band14	5MHz	16QAM	23355	25RB#0	21.29	20.08	34.77	PASS
Band14	10MHz	QPSK	23330	1RB#0	23.5	22.29	34.77	PASS
Band14	10MHz	QPSK	23330	1RB#24	23.25	22.04	34.77	PASS
Band14	10MHz	QPSK	23330	1RB#49	23.37	22.16	34.77	PASS
Band14	10MHz	QPSK	23330	50RB#0	22.27	21.06	34.77	PASS
Band14	10MHz	16QAM	23330	1RB#0	22.68	21.47	34.77	PASS
Band14	10MHz	16QAM	23330	1RB#24	22.54	21.33	34.77	PASS
Band14	10MHz	16QAM	23330	1RB#49	22.71	21.50	34.77	PASS
Band14	10MHz	16QAM	23330	50RB#0	21.27	20.06	34.77	PASS

--- End of Report ---