

Plot: 1#**DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1**

Communication System: UID 0, Generic FDD LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 39.455$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.12, 8.12, 8.12) @ 1860 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 2 1RB Low/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0798 W/kg

Face Up/LTE Band 2 1RB Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.986 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.052 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 77.2%

Maximum value of SAR (measured) = 0.0761 W/kg

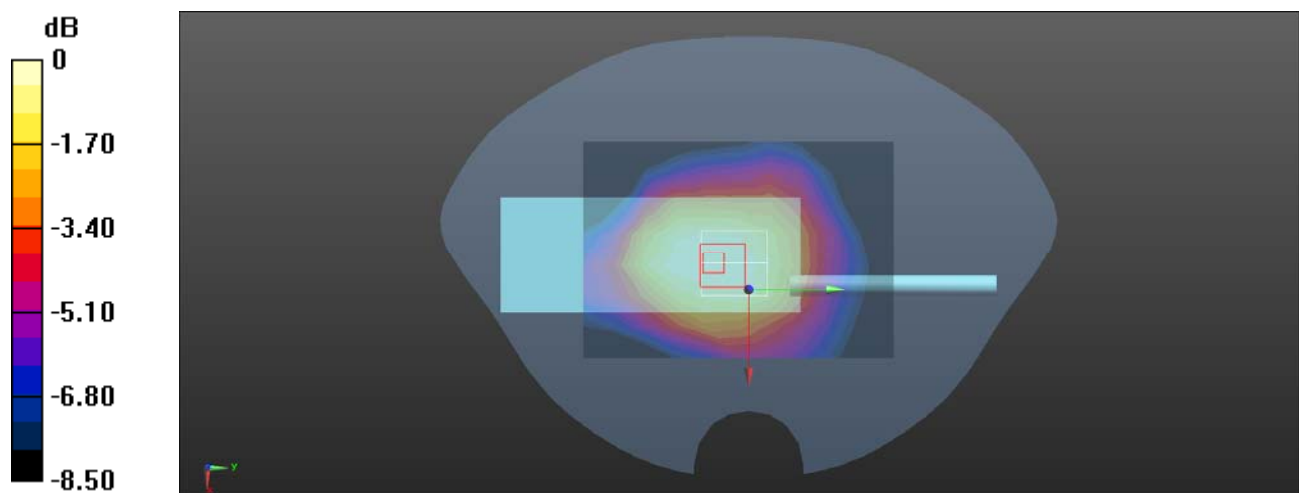

0 dB = 0.0761 W/kg = -11.19 dBW/kg

Plot: 2#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 39.455$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.12, 8.12, 8.12) @ 1860 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 2 1RB Low/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.843 W/kg

Body Back/LTE Band 2 1RB Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.50 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.525 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 69.3%

Maximum value of SAR (measured) = 0.860 W/kg

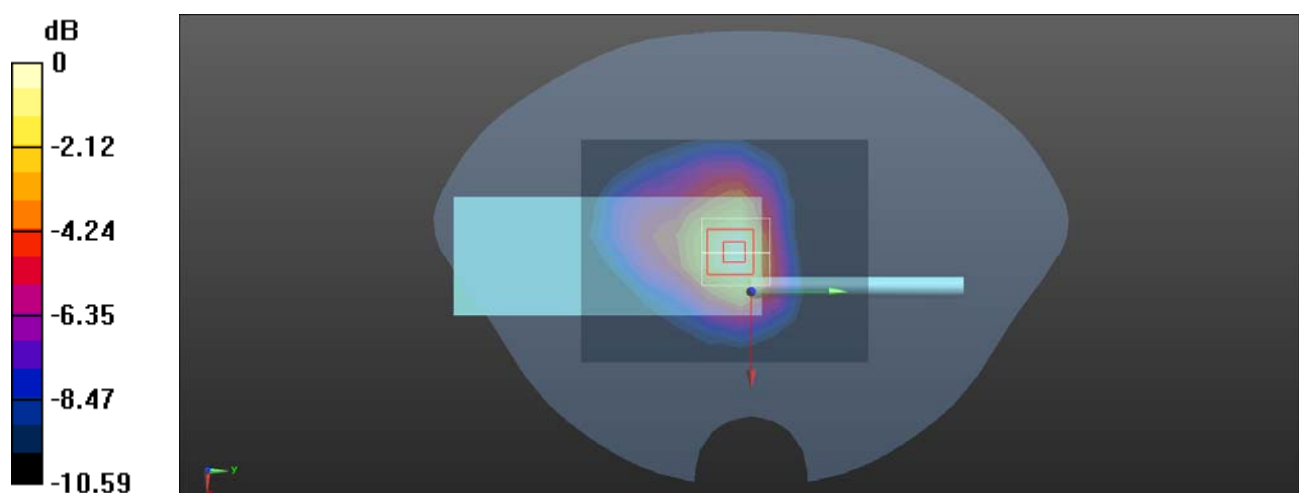

0 dB = 0.860 W/kg = -0.66 dBW/kg

Plot: 3#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 39.023$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.45, 8.45, 8.45) @ 1732.5 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 4 1RB Mid/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0761 W/kg

Face Up/LTE Band 4 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.643 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 76.2%

Maximum value of SAR (measured) = 0.0779 W/kg

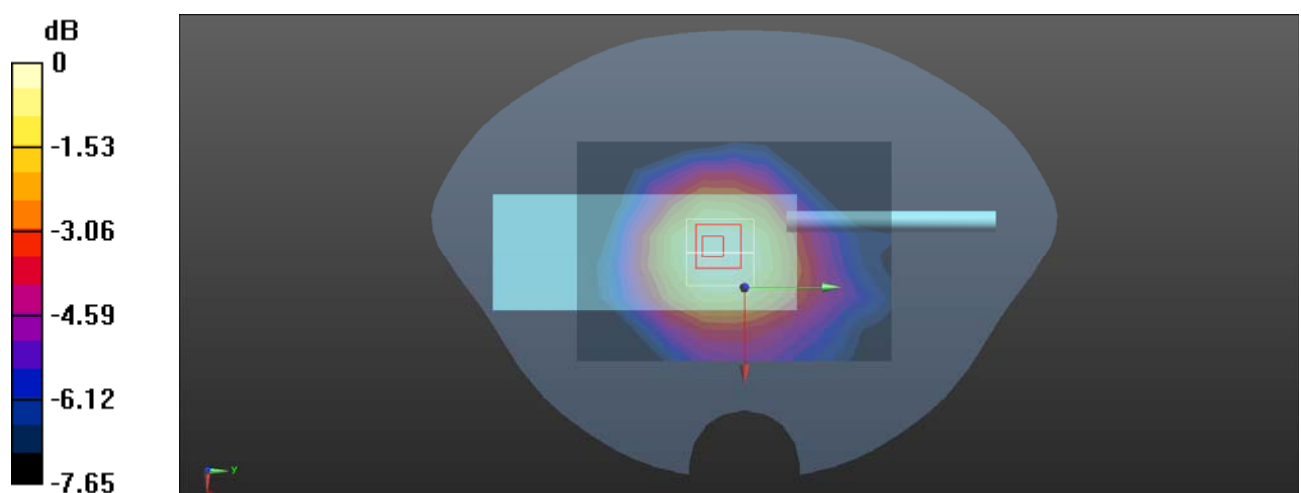

0 dB = 0.0779 W/kg = -11.08 dBW/kg

Plot: 4#**DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 39.023$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.45, 8.45, 8.45) @ 1732.5 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 4 1RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.663 W/kg

Body Back/LTE Band 4 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.63 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.682 W/kg; SAR(10 g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 70.9%

Maximum value of SAR (measured) = 0.757 W/kg

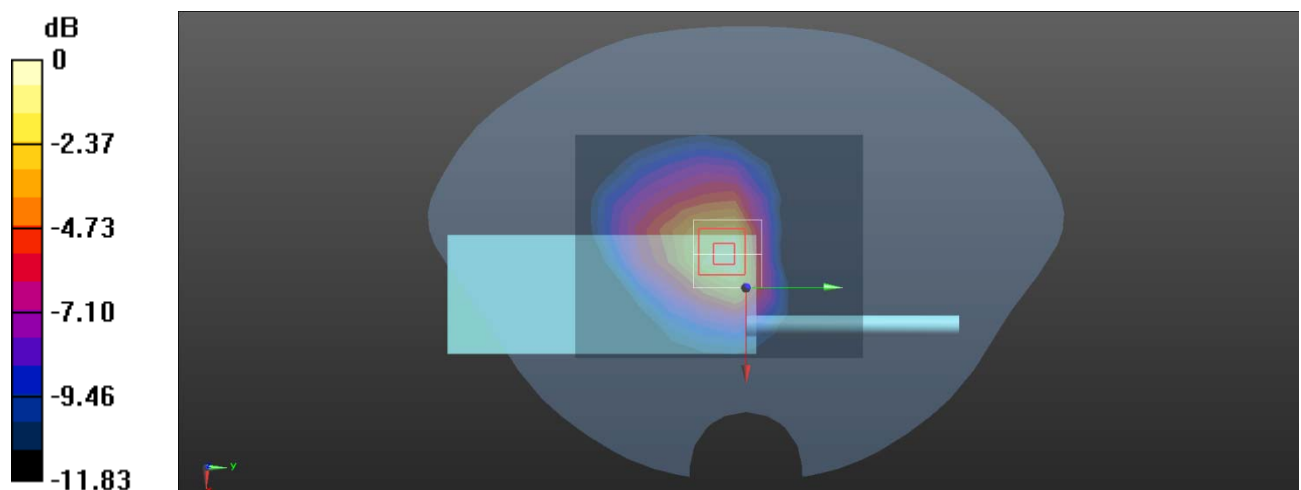

0 dB = 0.757 W/kg = -1.21 dBW/kg

Plot: 5#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 829 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 5 1RB Low/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.168 W/kg

Face Up/LTE Band 5 1RB Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.98 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 79.4%

Maximum value of SAR (measured) = 0.165 W/kg

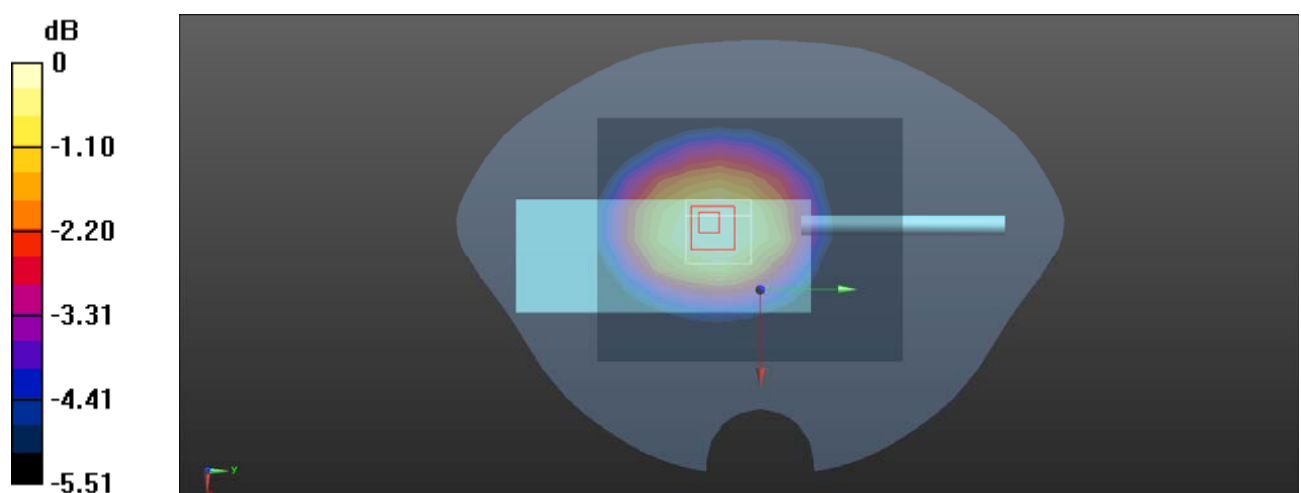

0 dB = 0.165 W/kg = -7.83 dBW/kg

Plot: 6#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 829 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 5 1RB Low/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.618 W/kg

Body Back/LTE Band 5 1RB Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.64 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.848 W/kg

SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.499 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 80.6%

Maximum value of SAR (measured) = 0.664 W/kg

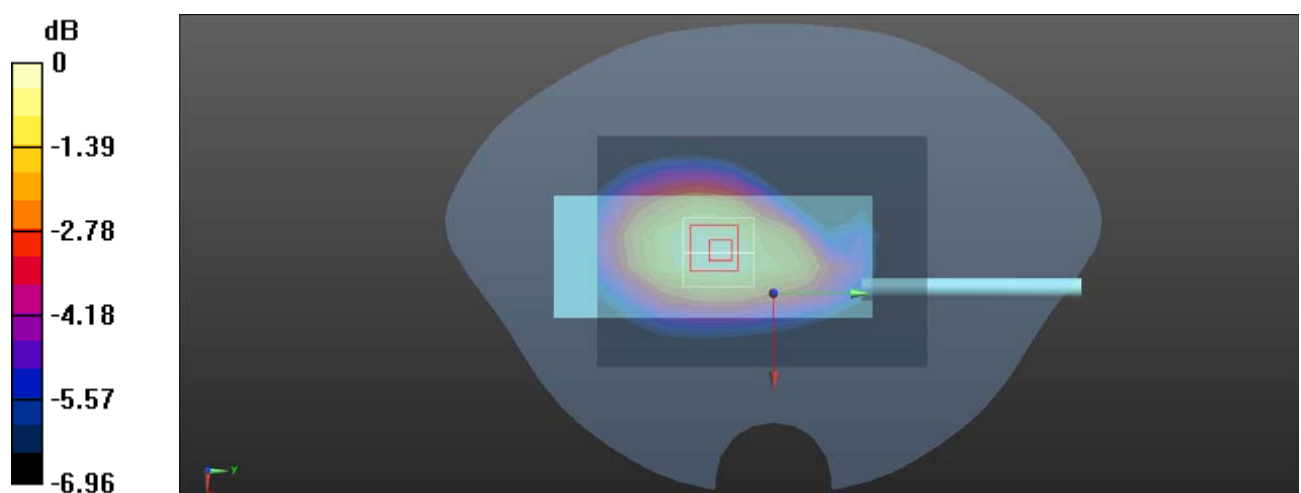

0 dB = 0.664 W/kg = -1.78 dBW/kg

Plot: 7#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, Generic FDD LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.918$ S/m; $\epsilon_r = 37.942$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.5, 7.5, 7.5) @ 2560 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 7 1RB High/Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0279 W/kg

Face Up/LTE Band 7 1RB High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.130 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 70.1%

Maximum value of SAR (measured) = 0.0275 W/kg

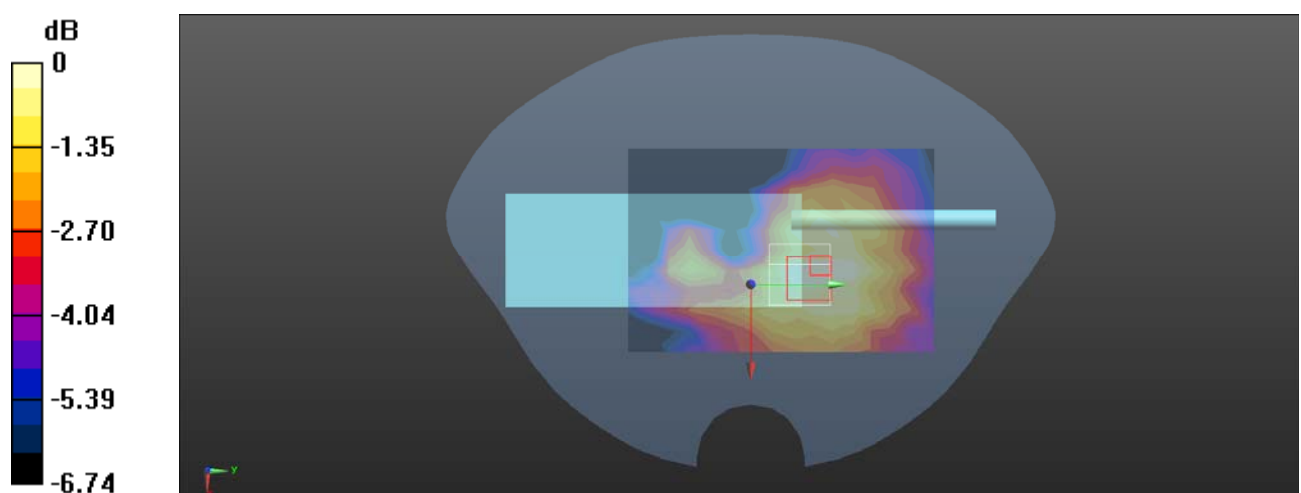

0 dB = 0.0275 W/kg = -15.61 dBW/kg

Plot: 8#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, Generic FDD LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.865$ S/m; $\epsilon_r = 37.961$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.5, 7.5, 7.5) @ 2510 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 7 1RB Low/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.35 W/kg

Body Back/LTE Band 7 1RB Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.88 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.642 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 67.2%

Maximum value of SAR (measured) = 1.25 W/kg

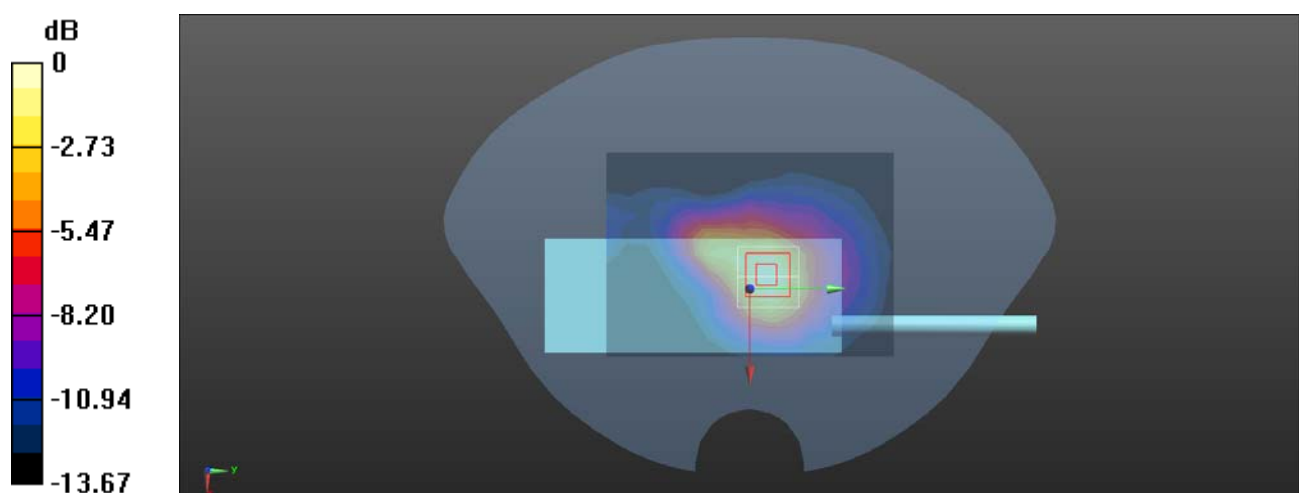

0 dB = 1.25 W/kg = 0.97 dBW/kg

Plot: 9#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, Generic FDD LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.855$ S/m; $\epsilon_r = 43.191$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 711 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 12 1RB High/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0592 W/kg

Face Up/LTE Band 12 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.701 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.046 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 78.7%

Maximum value of SAR (measured) = 0.0589 W/kg

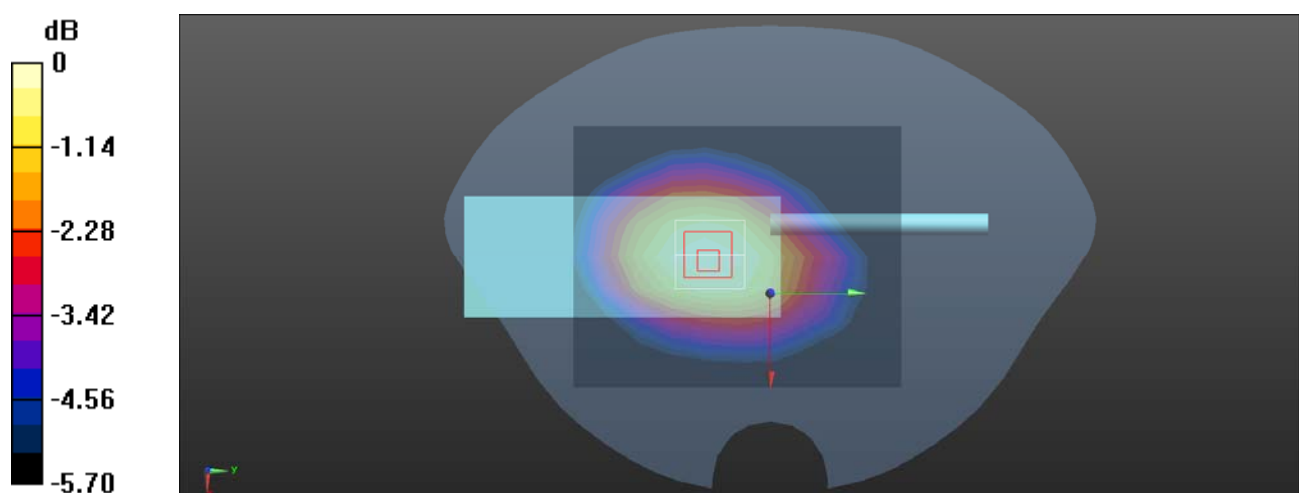

0 dB = 0.0589 W/kg = -12.30 dBW/kg

Plot: 10#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, Generic FDD LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.855 \text{ S/m}$; $\epsilon_r = 43.191$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 711 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 12 1RB High/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.451 W/kg

Body Back/LTE Band 12 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.93 V/m ; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.486 W/kg ; SAR(10 g) = 0.376 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 79.7%

Maximum value of SAR (measured) = 0.486 W/kg

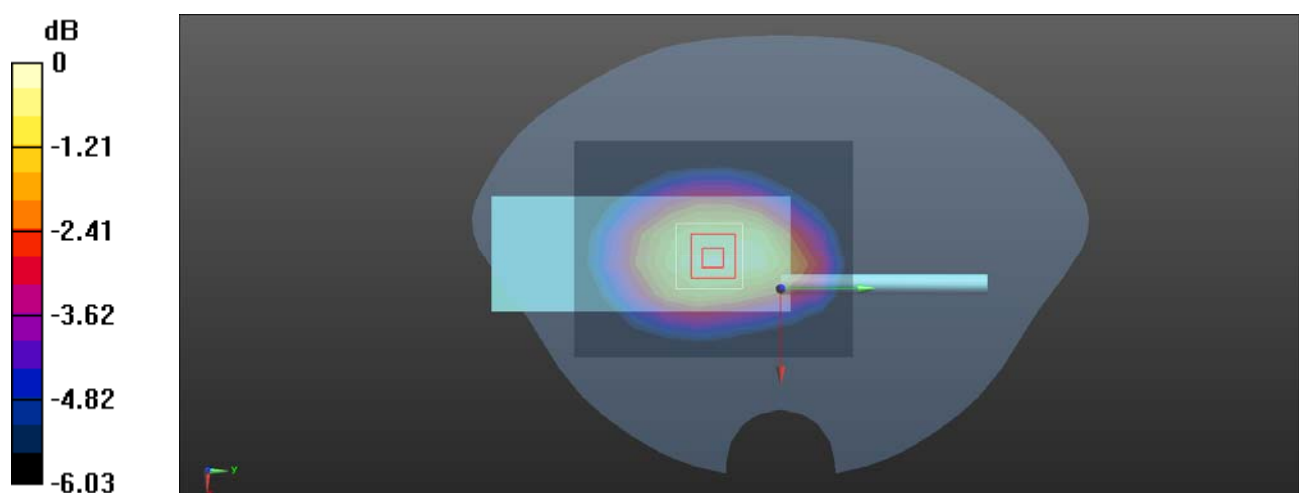

0 dB = 0.486 W/kg = -3.13 dBW/kg

Plot: 11#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, Generic FDD LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.861 \text{ S/m}$; $\epsilon_r = 42.462$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 782 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 13 1RB Mid/Area Scan (9x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.255 W/kg

Face Up/LTE Band 13 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.45 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.202 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 79.4%

Maximum value of SAR (measured) = 0.270 W/kg

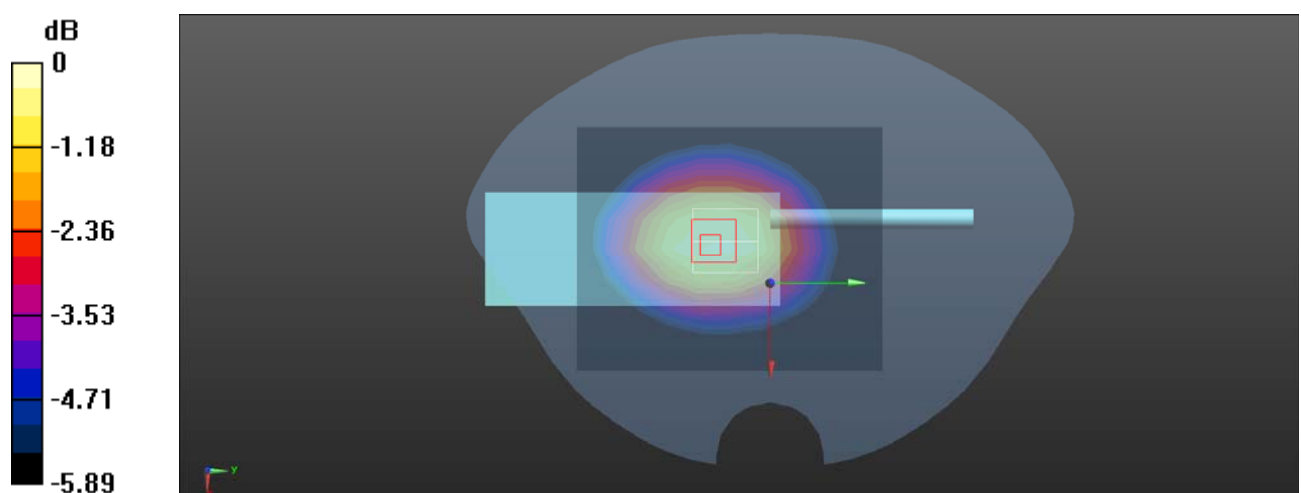

0 dB = 0.270 W/kg = -5.69 dBW/kg

Plot: 12#**DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1**


Communication System: UID 0, Generic FDD LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.861 \text{ S/m}$; $\epsilon_r = 42.462$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 782 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

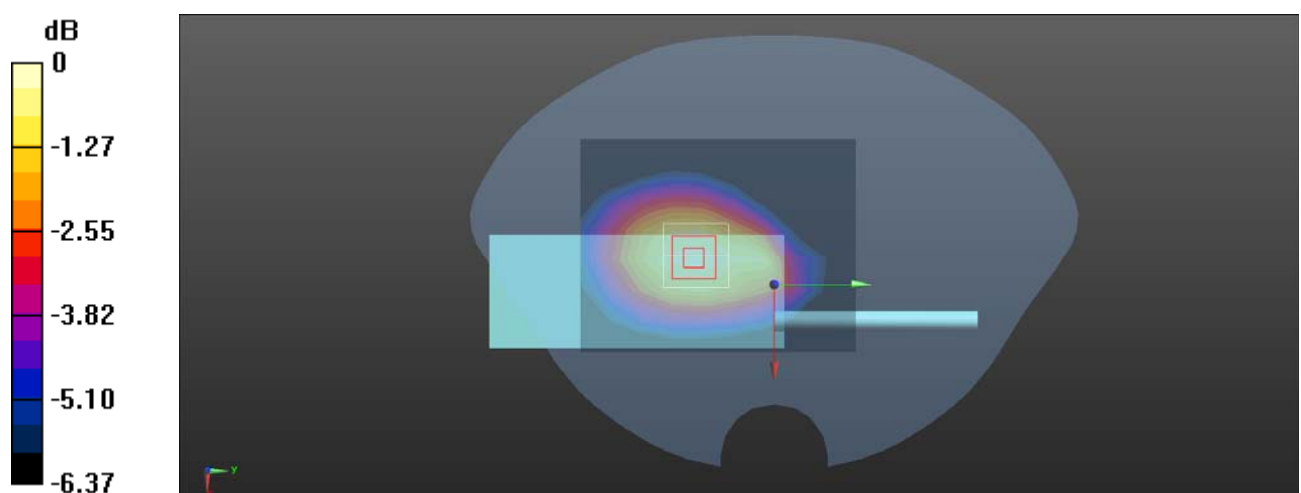Body Back/LTE Band 13 1RB Mid/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.918 W/kg **Body Back/LTE Band 13 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 27.13 V/m ; Power Drift = 0.11 dB Peak SAR (extrapolated) = 1.22 W/kg **SAR(1 g) = 0.926 W/kg ; SAR(10 g) = 0.724 W/kg** Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)Ratio of SAR at M2 to SAR at M1 = 79.6% Maximum value of SAR (measured) = 0.928 W/kg 0 dB = 0.928 W/kg = -0.32 dBW/kg

Plot: 13#**DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2462 MHz; Duty Cycle: 1:1.021

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.769$ S/m; $\epsilon_r = 37.904$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.68, 7.68, 7.68)@ 2462 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/WLAN 802.11b High/Area Scan (13x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00776 W/kg

Face Up/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.4820 V/m; Power Drift = -0.20 dB


Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.00239 W/kg; SAR(10 g) = 0.000967 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 42%

Maximum value of SAR (measured) = 0.00712 W/kg

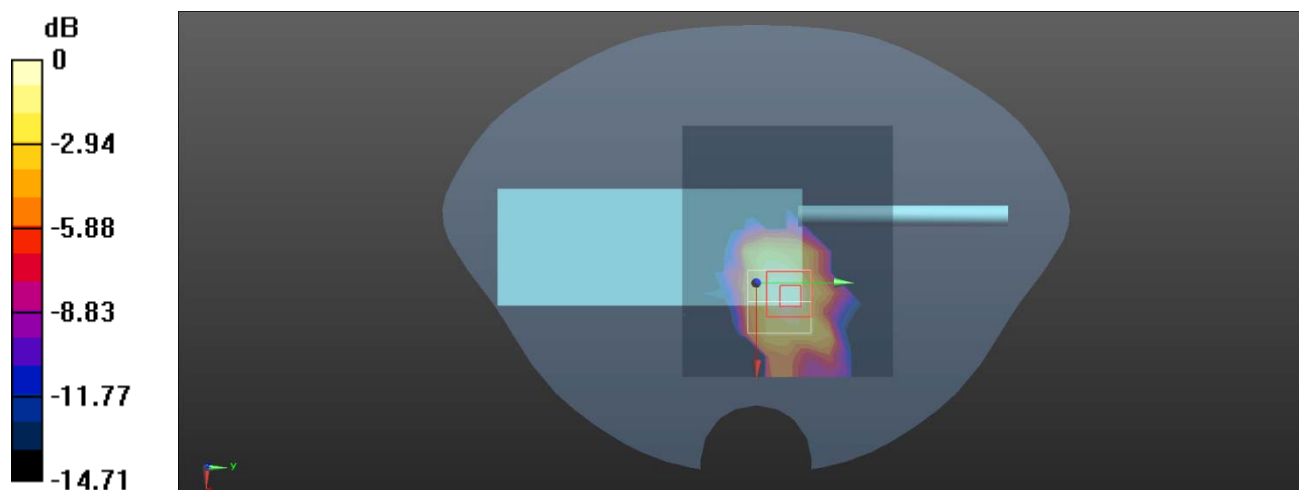

0 dB = 0.00712 W/kg = -21.48 dBW/kg

Plot: 14#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2462 MHz; Duty Cycle: 1:1.021

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.769$ S/m; $\epsilon_r = 37.904$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.68, 7.68, 7.68)@ 2462 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11b High/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0120 W/kg

Body Back/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9510 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.0160 W/kg

SAR(1 g) = 0.00155 W/kg; SAR(10 g) = 0.000199 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 46.2%

Maximum value of SAR (measured) = 0.0104 W/kg

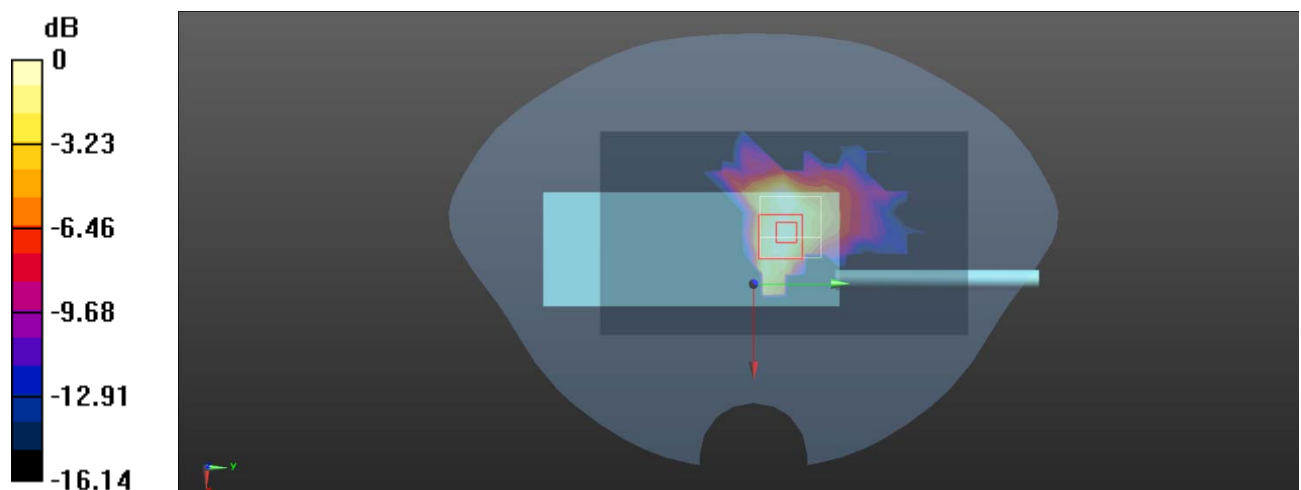

0 dB = 0.0104 W/kg = -19.83 dBW/kg

Plot: 15#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.153

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.788$ S/m; $\epsilon_r = 34.831$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.5, 5.5, 5.5) @ 5240 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/WLAN 5.2G 802.11n20 High/Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0628 W/kg

Face Up/WLAN 5.2G 802.11n20 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.776 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.184 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00533 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 14 mm)

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 0.0367 W/kg

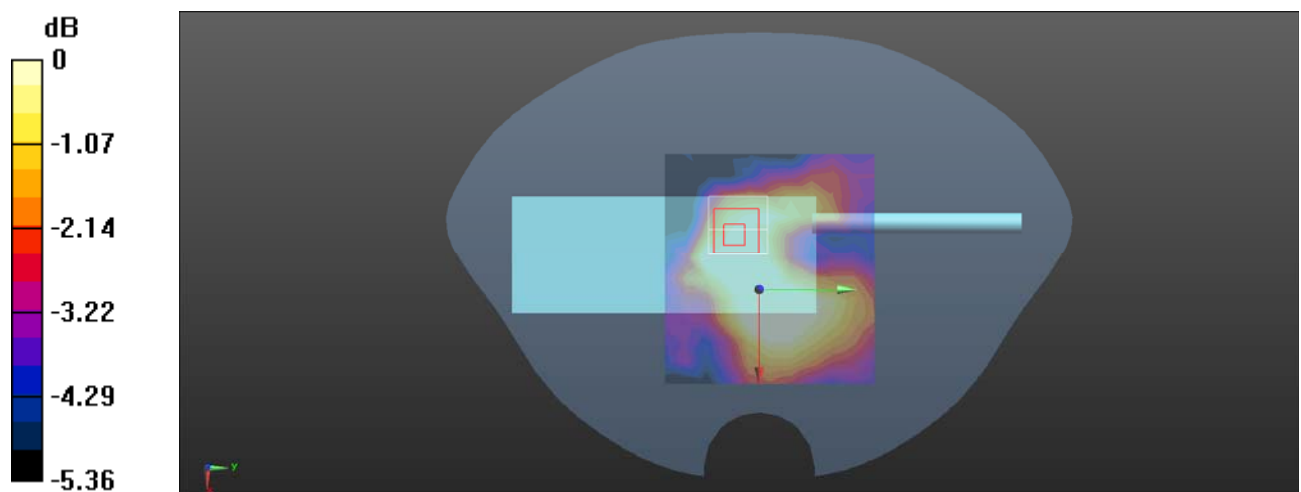

0 dB = 0.0367 W/kg = -14.35 dBW/kg

Plot: 16#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz; Duty Cycle: 1:1.143

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.175$ S/m; $\epsilon_r = 35.224$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.02, 5.02, 5.02) @ 5825 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face up/WLAN 5.8G 802.11a High/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.398 W/kg

Face up/WLAN 5.8G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.145 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.799 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.012 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 73.7%

Maximum value of SAR (measured) = 0.653 W/kg

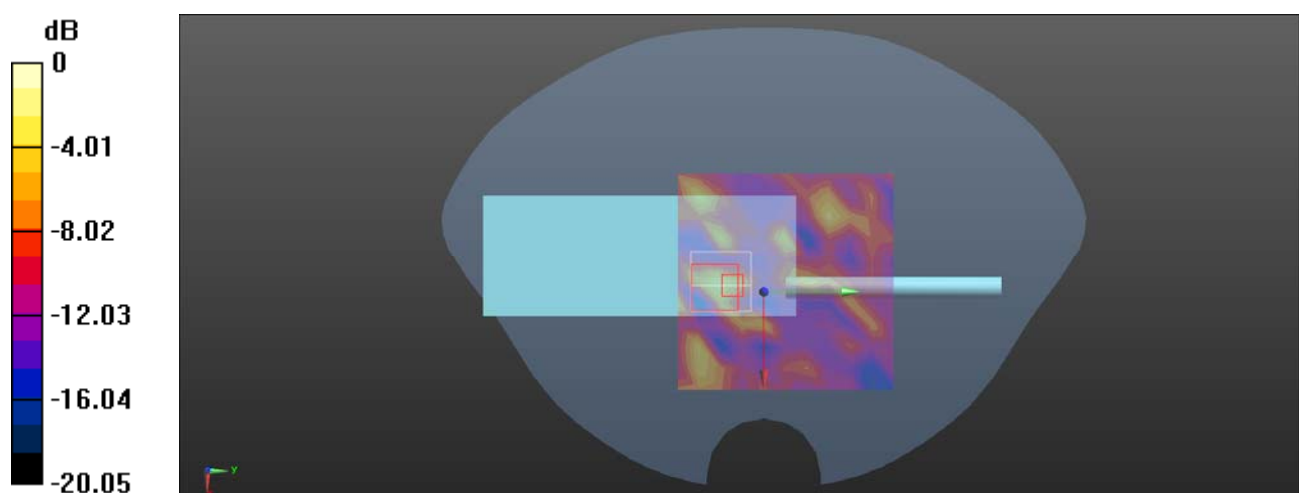

0 dB = 0.653 W/kg = -1.85 dBW/kg

Plot: 17#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1.143

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.153 \text{ S/m}$; $\epsilon_r = 35.302$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.02, 5.02, 5.02) @ 5745 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11a Low/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0293 W/kg

Body Back/WLAN 5.8G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.609 V/m ; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.00679 W/kg ; SAR(10 g) = 0.00135 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 14 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 78.3%

Maximum value of SAR (measured) = 0.0267 W/kg

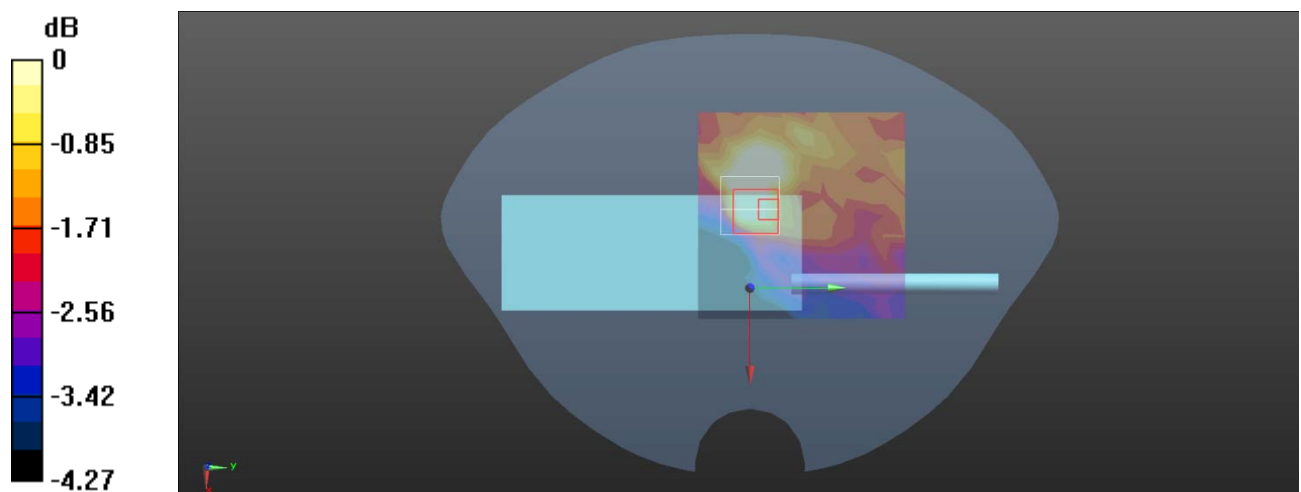

$0 \text{ dB} = 0.0267 \text{ W/kg} = -15.73 \text{ dBW/kg}$

Plot: 18#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, FM (0); Frequency: 417.488 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 417.488$ MHz; $\sigma = 0.853$ S/m; $\epsilon_r = 44.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.76, 6.76, 6.76) @ 417.488 MHz; Calibrated: 2025/1/30
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: ELI v8.0; Type: QDOVA002AA; Serial: TP:2051
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/FM 12.5kHz 417.4875MHz/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.71 W/kg

Face Up/FM 12.5kHz 417.4875MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 92.32 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 8.27 W/kg

SAR(1 g) = 6.04 W/kg; SAR(10 g) = 4.47 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 73.5%

Maximum value of SAR (measured) = 6.75 W/kg

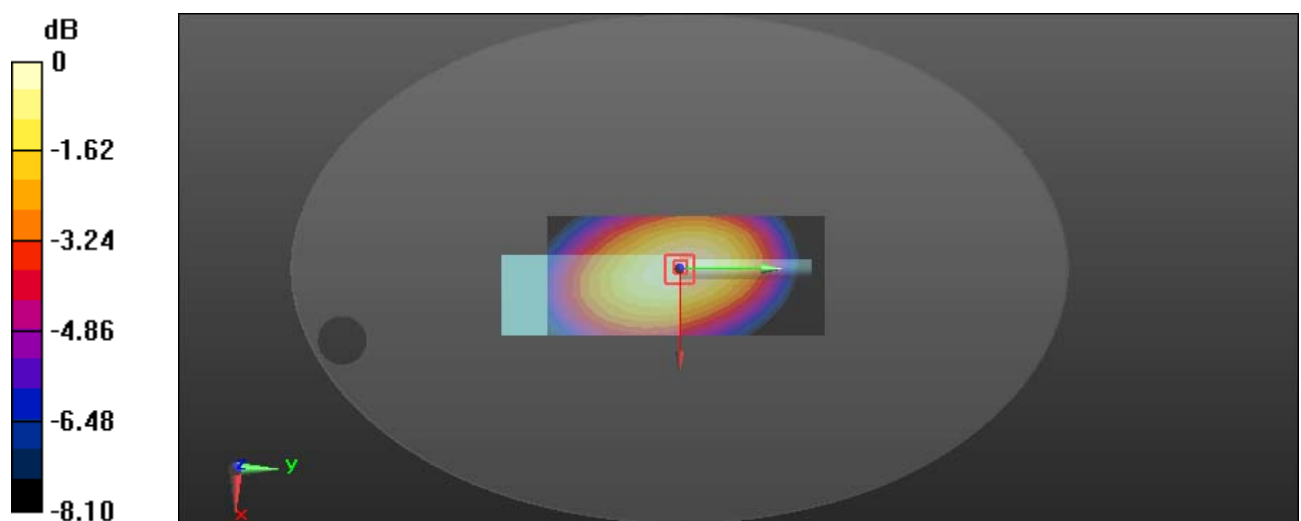

0 dB = 6.75 W/kg = 8.29 dBW/kg

Plot: 19#

DUT: Dual-mode Portable Radio; Type: TD60; Serial: 3BA4-1

Communication System: UID 0, FM (0); Frequency: 417.488 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 417.488$ MHz; $\sigma = 0.853$ S/m; $\epsilon_r = 44.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.76, 6.76, 6.76) @ 417.488 MHz; Calibrated: 2025/1/30
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: ELI v8.0; Type: QDOVA002AA; Serial: TP:2051
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/FM 12.5kHz 417.4875MHz Repeated/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 8.71 W/kg

Body Back/FM 12.5kHz 417.4875MHz Repeated/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 102.7 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 7.70 W/kg; SAR(10 g) = 5.63 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 72.9%

Maximum value of SAR (measured) = 8.86 W/kg

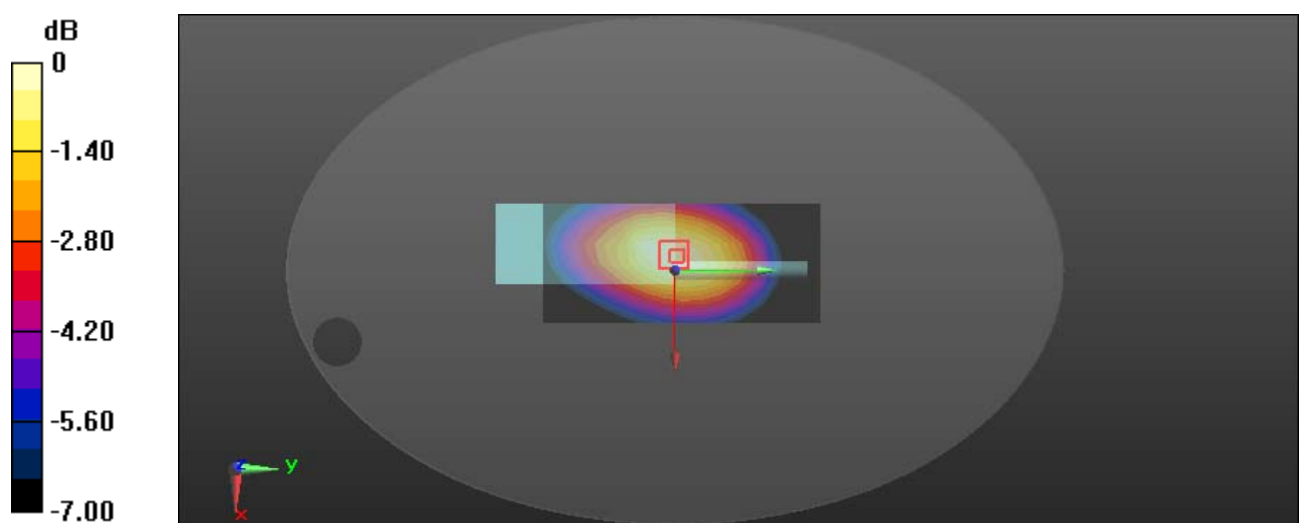

0 dB = 8.86 W/kg = 9.47 dBW/kg