



TEST REPORT

Applicant Name: Kirisun Communication Co.,Ltd.
Address: 3rd Floor, Building A, Tongfang Information Harbour, No.11
Langshan Road Nanshan District, Shenzhen 518057 China
Report Number: 2504Y26988E-RF-00D
FCC ID: Q5ETD60

Test Standard (s)

FCC PART 15.407

Sample Description

Product Name: Dual-mode Portable Radio
Model No.: TD60, TD66
Trade Mark: 
Date Received: 2025-10-16
Report Date: 2026-02-05


Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:



Roger Ling
EMC Engineer

Approved By:



Bob.Liao
EMC Engineer

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked. This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ▲. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	5
TEST METHODOLOGY	5
TEST FACILITY	5
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE AND POWER LEVEL [#]	6
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
RF EXPOSURE	11
APPLICABLE STANDARD	11
ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
AC POWER LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP	13
TEST PROCEDURE	13
CALCULATION	14
TEST DATA	14
UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CALCULATION	18
TEST DATA	18
EMISSION BANDWIDTH	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST DATA	19
OUTPUT POWER MEASUREMENT	20
APPLICABLE STANDARD	20
TEST PROCEDURE	21
TEST DATA	21
EXHIBIT A-EUT PHOTOGRAPHS	22
EXHIBIT B-TEST SETUP PHOTOGRAPHS	23

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2504Y26988E-RF-00D	Original Report	2026-02-05

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name	Dual-mode Portable Radio
Tested Model	TD60
Multiple Model	TD66
Voltage Range [#]	DC 12V from adapter DC 8.7V from desktop charger DC 7.6V from rechargeable battery
Desktop Charger Information [#]	Model:KBC-TD60-1Q Input: 12.0V === 1000mA Output: 8.7V === 1000mA
Adapter Information [#] (For Desktop Charger)	Model:TPQ-236A120100UW01 Input:100-240 V~ 50/60Hz 0.4A Output:12.0V === 1.0A
Model Difference [#] : The differences between the two models are: model name and keyboard. Please refer to DOS letter [#] and EUT External Photos for details.	

Frequency Range	5G Wi-Fi: Band 1: 5150-5250MHz; Band 4: 5725-5850MHz
Mode	802.11 a/n20/n40
Maximum Output Power [#]	5150-5250MHz:13.80dBm (It is quoted from the module report: FR741007D [#])
	5725-5850MHz: 11.96dBm (It is quoted from the module report: FR741007E [#])
Modulation Technique	OFDM
Antenna Specification [#]	Internal Antenna, Gain: 1.0 dBi (It is provided by the applicant.)
Sample Serial Number	Model TD60:3BA3-1 (CE&RSE Test), 3BA3-2 (RF Conducted Test) Model TD66:3BA2-2 (CE&RSE Test) (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition
Note: The device is belong a client device.	

Objective

This type approval report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020+Cor. 1-2023+ C63.10a-2024+Errata to C63.10a-2024 ▲, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices, KDB789033D02 General U-NII Test Procedures New Rules v02r01.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01.

Measurement Uncertainty

Parameter		Uncertainty
RF Frequency		0.064×10^{-7}
RF output power, conducted		0.3 dB
AC Power Lines Conducted Emissions		2.7 dB
Radiated Spurious Emissions	9kHz - 30MHz	2.1 dB
	30MHz - 1GHz	4.3 dB
	1GHz - 18GHz	4.9 dB
	18GHz - 26.5GHz	5.2 dB
	26.5GHz - 40GHz	4.6 dB
Temperature		1 °C
Humidity		7 %
Supply voltages		0.4 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

The device supports 802.11a/n20/n40 mode.

For 5150-5250MHz, 6 channels are provided to testing:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
36	5180	38	5190	40	5200	44	5220
46	5230	48	5240	/	/	/	/

For 802.11a/n20, Channel 36, 40 and 48 were tested.

For 802.11n40, Channel 38, 46 were tested.

For 5725-5850MHz, 7 channels are provided to testing:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
149	5745	151	5755	153	5765	157	5785
159	5795	161	5805	165	5825	/	/

For 802.11a/n20, Channel 149, 157 and 165 were tested.

For 802.11n40, Channel 151, 159 were tested.

Test Mode

Test Mode 1: Charging by Desktop Charger(TD60) + Transmitting

Test Mode 2: Charging by Adapter(TD60) + Transmitting

Note: The device has two charging methods: adapter charging and dock charging. According to the BT report's test results, the worse case is test mode 1 for AC Line Conducted Emissions and the worse case is test mode 2 for Radiated Spurious Emissions(Below 1GHz).

EUT Exercise Software and Power Level

Exercise Software:		QRCT3		
For 5150-5250MHz:				
Mode	Data Rate	Power Level		
		Lowest Channel	Middle Channel	Highest Channel
802.11 a	6Mbps	Default	Default	Default
802.11 n20	MCS0	Default	Default	Default
802.11 n40	MCS0	Default	/	Default
For 5725-5850MHz:				
Mode	Data Rate	Power Level		
		Lowest Channel	Middle Channel	Highest Channel
802.11 a	6Mbps	Default	Default	Default
802.11 n20	MCS0	Default	Default	Default
802.11 n40	MCS0	Default	/	Default

Note 1: The information in the above table is provided by the applicant.

Note 2: The worse-case data rates are determined to be as above for each mode based upon investigations by measuring the output power and PSD across all data rates, bandwidths and modulations.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Unknown	Earphone	Unknown	Unknown
Unknown	Adapter 2	HJ-0502002-US	Unknown


External I/O Cable

Cable Description	Shielding Type	Length (m)	From Port	To
DC Cable	No	1.5	Adapter 1	Desktop charger
Earphone Cable	No	1.9	EUT	Earphone
DC Cable	No	1.0	Adapter 2	EUT

Block Diagram of Test Setup


For Conducted Emission:

Test Model 1

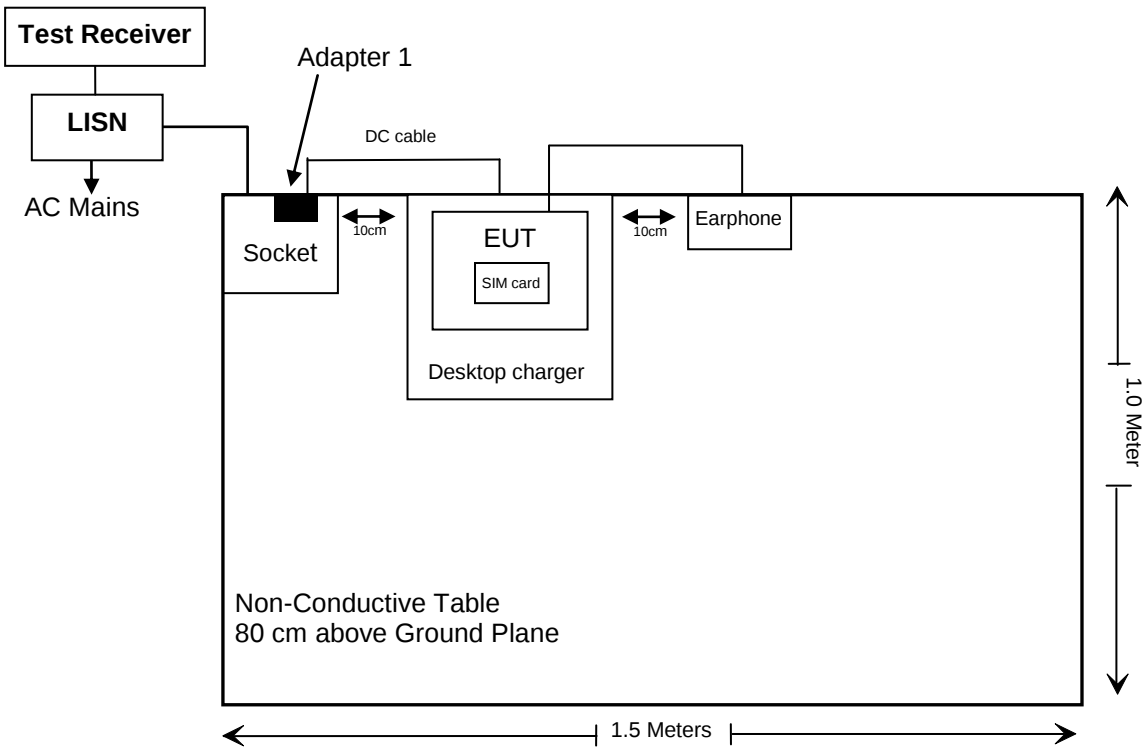


For Radiated Emission(Below 1GHz):

Test Model 2

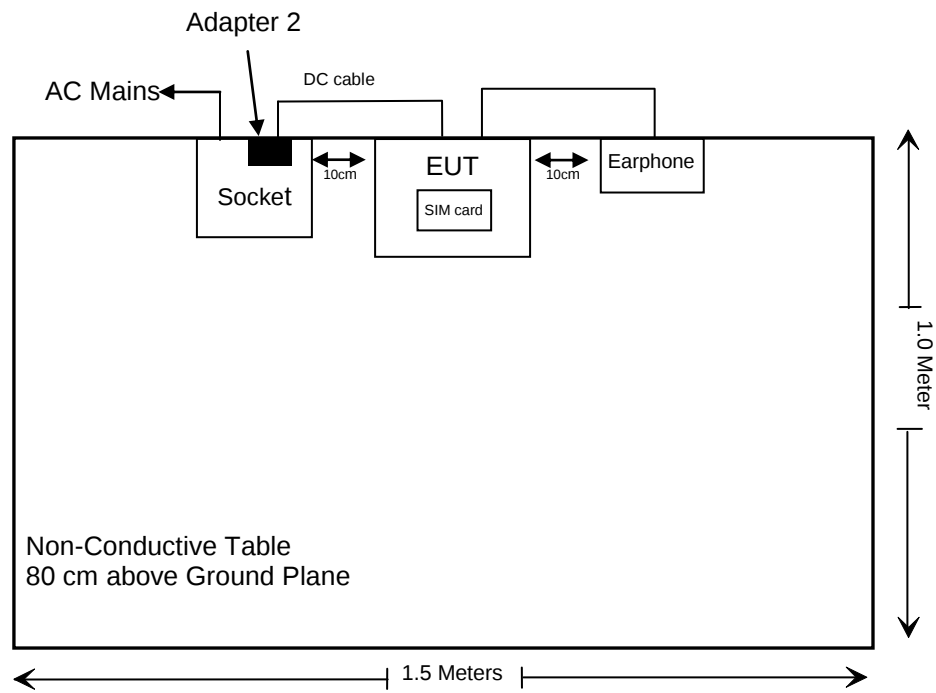

For Radiated Emission(Above 1GHz):

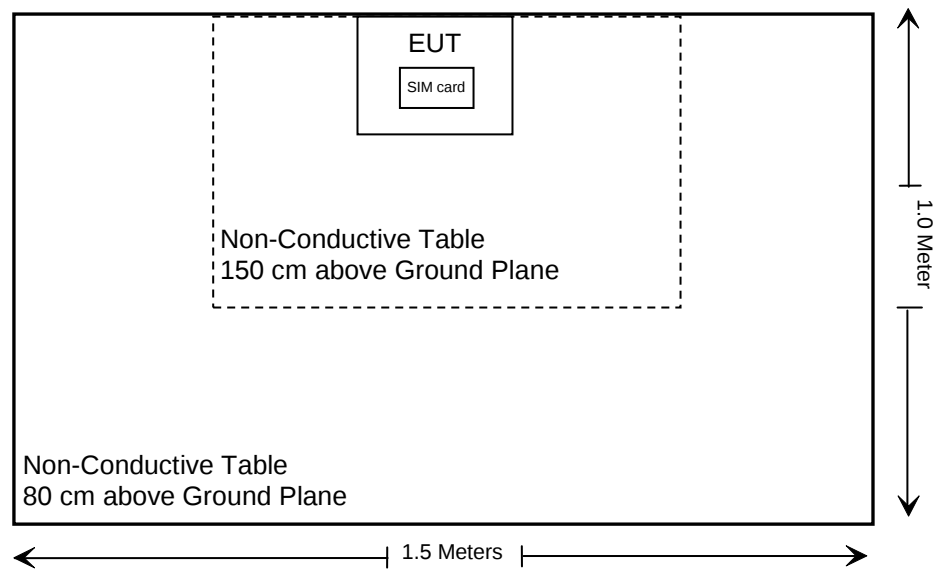

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result	Remark
§2.1093	RF Exposure(SAR)	Compliance	/
§15.203	Antenna Requirement	Compliance	/
§15.407(b)(9) §15.207(a)	AC Power Lines Conducted Emission	Compliance	/
§15.205, §15.209 §15.407(b)	Undesirable Emission & Restricted Bands	Compliance	/
§15.407(a)	Transmitter Output Power	Reporting	See note 1
§15.407(a),(e)	Emission Bandwidth (6dB Emission Bandwidth/ 99% Occupied Bandwidth)	Compliance*	See note 1
	Emission Bandwidth (26dB Emission Bandwidth)	Compliance	/
§15.407(a)	Power Spectral Density	Compliance*	See note 1
§15.407(h)(1)	Transmit Power Control (TPC)	Not Applicable	/
§15.407(h)(2)	Dynamic Frequency Selection	Not Applicable	/

Not Applicable: The client claimed that the device does not support this feature.

Note 1: The device built in a certified module(model:SC20-A[#], FCC ID: XMR201706SC20A[#], Date of Grant: 08/14/2017),per spot check, the RF parameters are identical with the module report, therefore, the RF conducted test items please refer to the module report: FR741007D[#] (Band 1)/FR741007E[#] (Band 4). (According to KDB 996369 D02 Module Q&A v02r02, Answer 1 b.)

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2025/09/17	2026/09/16
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2025/09/17	2026/09/16
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2025/09/18	2026/09/17
Rohde & Schwarz	Pulse Limiter	ESH3-Z2	100312	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.17	N0350	2025/05/30	2026/05/29
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Below 1GHz)					
Rohde & Schwarz	Test Receiver	ESR	102725	2025/09/18	2026/09/17
SONOMA INSTRUMENT	Amplifier	310N	186131	2025/03/26	2026/03/25
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2024/08/08	2027/08/07
Unknown	RF Coaxial Cable	No.12	N040	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.13	N300	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.14	N800	2025/05/30	2026/05/29
BACL	LOOP ANTENNA	1313-1A	3110711	2024/01/16	2027/01/15
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Above 1GHz)					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2025/09/17	2026/09/16
Decentest	Filter Switch Unit	DT7220FSU	DQ77927	2025/09/18	2026/09/17
Decentest	Multiplex Switch Test Control Set	DT7220CSU	DQ77924	2025/09/18	2026/09/17
A.H. Systems, inc.	Preamplifier	PAM-0118	226	2025/03/20	2026/03/19
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Unknown	RF Coaxial Cable	No.10	N050	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.11	N1000	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.19	N500	2025/05/30	2026/05/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2023/12/12	2026/12/11
BACL	Amplifier	BACL-1313-A1840	4012521	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.15	N600	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.16	N650	2025/05/30	2026/05/29
Test Software: e3 191218 (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101590	2025/09/17	2026/09/16
Anritsu	Microwave Peak Power Sensor	MA24418A	12619	2025/03/26	2026/03/25
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2025/03/26	2026/03/25

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093,

Measurement Result: Compliance. Please refer to SAR Report[#]: 2502Y05440E-20A.

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement for 5G WIFI, which was permanently attached. The antenna gain is 1.0dBi[#], fulfill the requirement of this section. Please refer to the product photos.


Result: Compliance

AC POWER LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (9)

EUT Setup

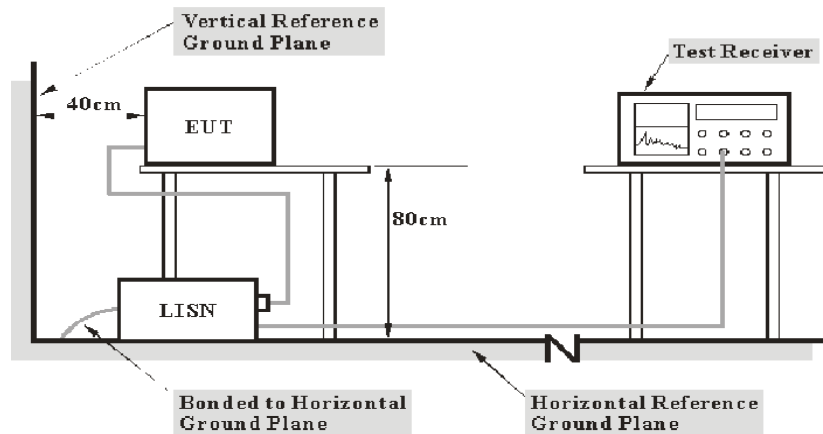

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + 10\text{dB Attenuation(Limiter)}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

Test Data

Please refer to the Attachment of “2504Y26988E-RFD-Appendix D”.

UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS

Applicable Standard

According to FCC §15.407 (b); §15.209; §15.205,


(b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:



- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

9kHz - 30MHz:

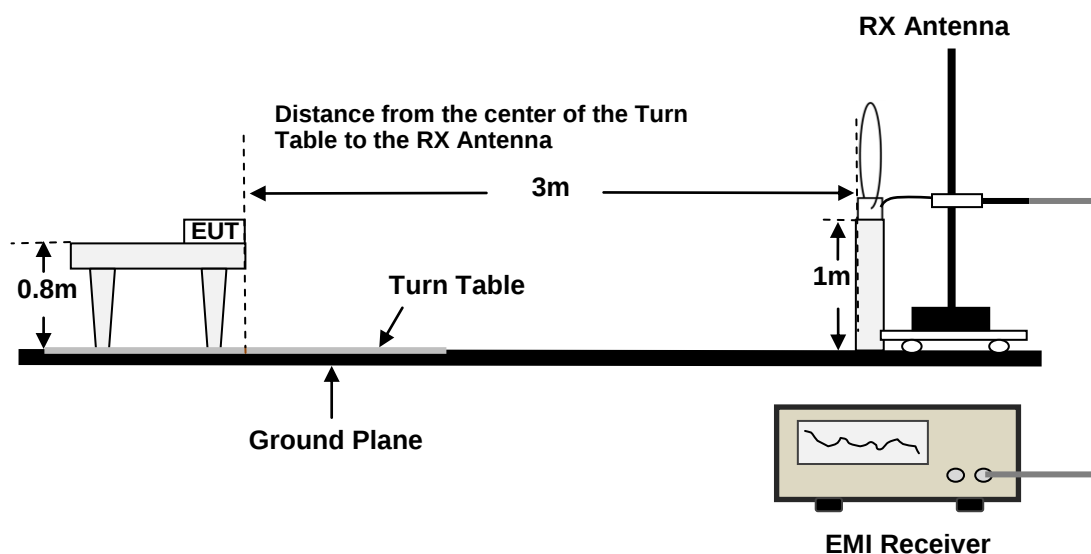

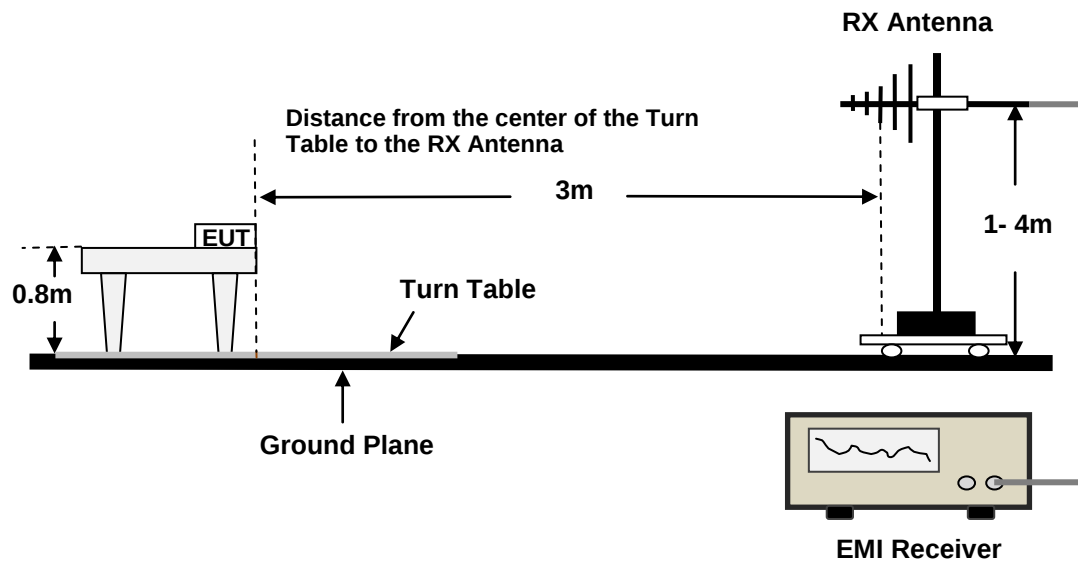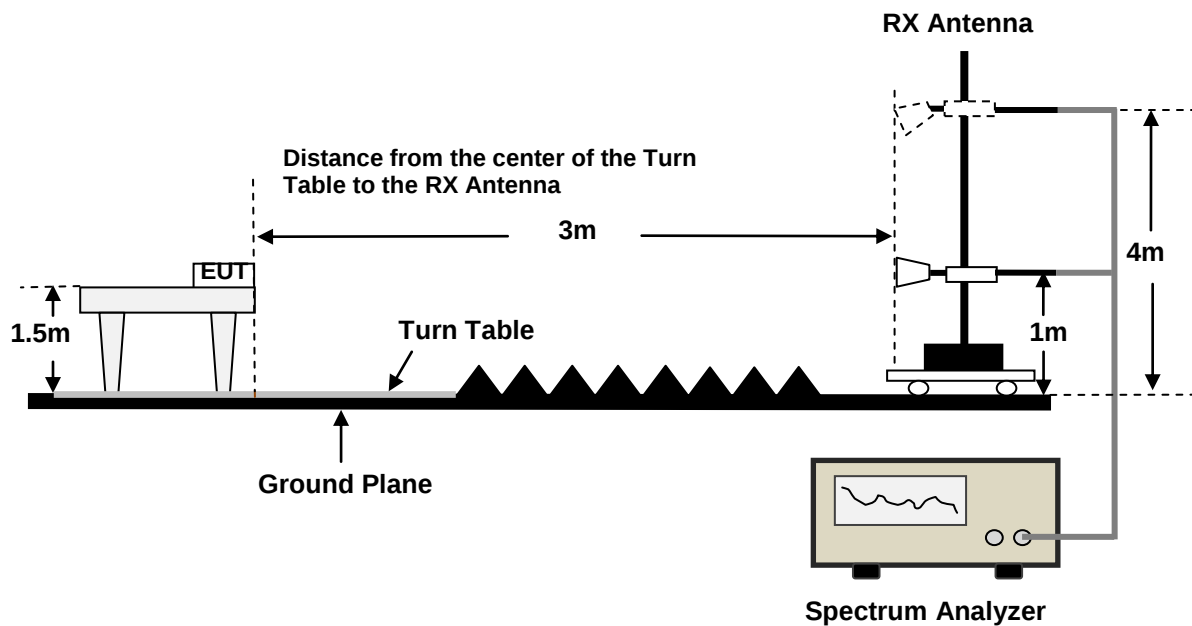30MHz - 1GHz:**Above 1GHz:**

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9kHz to 40GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz - 1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9kHz - 150kHz	PK	0.3kHz	1kHz	/	PK
	QP/AV	/	/	200Hz	QP/AV
150kHz - 30MHz	PK	10kHz	30kHz	/	PK
	QP/AV	/	/	9kHz	QP/AV
30MHz - 1000MHz	PK	100kHz	300kHz	/	PK
	QP	/	/	120kHz	QP

1GHz - 40GHz:

Pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	Peak	Any	1MHz	3MHz
Ave.	Peak	>98%	1MHz	3kHz/5kHz
		<98%	1MHz	≥1/T, no less than 3kHz

Final measurement for emission identified during the pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	Peak	Any	1MHz	3MHz
Ave.	Peak	>98%	1MHz	10Hz
		<98%	1MHz	≥1/T

Note 1: T is minimum transmission duration

Note 2: The 1GHz-18GHz testing use the notch filter.

Note 3: The band edge testing use 10dB attenuator.

Note 4: The filters and attenuators are all integrated within the filter switch unit.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Note 1: If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Note 2: For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit/Margin} = \text{Level / Corrected Amplitude} - \text{Limit}$$

$$\text{Level / Corrected Amplitude} = \text{Read Level} + \text{Factor}$$

Test Data

Please refer to the Attachment of “2504Y26988E-RFD-Appendix D”.

EMISSION BANDWIDTH

Applicable Standard

According to FCC §15.407(a),

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

According to FCC §15.407(e),

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2020 §12.5,

12.5.1 Emission bandwidth for the band 5.725 GHz to 5.85 GHz


- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

NOTE-The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

12.5.2 Emission bandwidth for all other bands

- Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- Set the VBW $>$ RBW.
- Detector = Peak.
- Trace mode = max-hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

NOTE-The automatic bandwidth measurement capability of a spectrum analyzer or an EMI receiver may be employed if it implements the functionality described in the preceding items.



Note: Offset = RF cable loss(1.0dB[#]) + Attenuator(10dB)

Test Data

Test Result: Compliance. Please refer to the Appendix.

OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.407(a),

For an indoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For an outdoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).


For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to ANSI C63.10-2020 Clause 12.4.3.2 Method PM-G.

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.



Note: Offset = RF cable loss(1.0dB[#]) + Attenuator(10dB)

Test Data

Please refer to the Attachment of “2504Y26988E-RFD-Appendix D” for spot check data.

EXHIBIT A-EUT PHOTOGRAPHS

Please refer to the Attachment No.1 2504Y26988E-RF EUT External Photos and Attachment No.2 2504Y26988E-RF EUT Internal Photos.

EXHIBIT B-TEST SETUP PHOTOGRAPHS

Please refer to the Attachment No.4 2504Y26988E-RFB Test Photos.

***** END OF REPORT *****