



TEST REPORT

Applicant Name: Kirisun Communication Co., Ltd.
Address: 3rd Floor, Building A, Tongfang Information Harbour, No.11
Langshan Road Nanshan District, Shenzhen 518057 China
Report Number: 2504Y26988E-RF-00B
FCC ID: Q5ETD60

Test Standard (s)

FCC PART 15.247

Sample Description

Product Name: Dual-mode Portable Radio
Model No.: TD60, TD66
Trade Mark:  , 
Date Received: 2025-10-16
Report Date: 2026-02-05

Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:



Roger Ling
EMC Engineer

Approved By:



Bob.Liao
EMC Engineer

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked "#" is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked. This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ▲. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	5
TEST METHODOLOGY	5
TEST FACILITY	5
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE AND POWER LEVEL [#]	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
RF EXPOSURE	11
APPLICABLE STANDARD.....	11
ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD.....	12
ANTENNA CONNECTOR CONSTRUCTION	12
AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD.....	13
EUT SETUP	13
EMI TEST RECEIVER SETUP	13
TEST PROCEDURE	13
CALCULATION	14
TEST DATA	14
RADIATED SPURIOUS EMISSIONS	15
APPLICABLE STANDARD.....	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	17
CALCULATION	17
TEST DATA	17
MAXIMUM CONDUCTED OUTPUT POWER.....	18
APPLICABLE STANDARD.....	18
TEST PROCEDURE	18
TEST DATA	18
CONDUCTED SPURIOUS EMISSION	19
APPLICABLE STANDARD.....	19
TEST PROCEDURE	19
TEST DATA	19
EXHIBIT A-EUT PHOTOGRAPHS	20
EXHIBIT B-TEST SETUP PHOTOGRAPHS	21

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2504Y26988E-RF-00B	Original Report	2026-02-05

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name	Dual-mode Portable Radio
Tested Model	TD60
Multiple Model	TD66
Voltage Range [#]	DC 12V from adapter DC 8.7V from desktop charger DC 7.6V from rechargeable battery
Desktop Charger Information [#]	Model:KBC-TD60-1Q Input: 12.0V === 1000mA Output: 8.7V === 1000mA
Adapter Information [#] (For Desktop Charger)	Model:TPQ-236A120100UW01 Input:100-240 V~ 50/60Hz 0.4A Output:12.0V === 1.0A
Model Difference [#] : The differences between the two models are: model name and keyboard. Please refer to DOS letter [#] and EUT External Photos for details.	

Frequency Range	BLE 1M: 2402-2480MHz
Data Rate	1Mbps
Maximum Output Power [#]	3.09dBm(It is quoted from the module report: FR741007B [#])
Modulation Technique	GFSK
Antenna Specification [#]	Internal Antenna, Gain: 0.43 dBi (It is provided by the applicant.)
Sample Serial Number	Model TD60:3BA3-1 (CE&RSE Test), 3BA3-2 (RF Conducted Test) Model TD66:3BA2-2 (CE&RSE Test) (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020+Cor. 1-2023+ C63.10a-2024+Errata to C63.10a-2024▲, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices, KDB 558074 D01 15.247 Meas Guidance v05r02.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA).The Certificate Number is 4297.01.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5 %
RF Frequency		0.064×10^{-7}
RF output power, conducted		0.3 dB
Unwanted Emission, conducted		1.2 dB
AC Power Lines Conducted Emissions		2.7 dB
Radiated Spurious Emissions	9kHz - 30MHz	2.1 dB
	30MHz - 1GHz	4.3 dB
	1GHz - 18GHz	4.9 dB
	18GHz - 26.5GHz	5.2 dB
Temperature		1 °C
Humidity		7 %
Supply voltages		0.4 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

For BLE, 40 channels are provided to testing:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
...	...	...	...	...	...	...	...
...	...	...	...	...	...	...	...
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

EUT was tested with Channel 0, 19 and 39.

Test Mode

Test Mode 1: Charging by Desktop Charger(TD60) + Transmitting

Test Mode 2: Charging by Adapter(TD60) + Transmitting

Note: The device has two charging methods: adapter charging and dock charging. According to the BT report's test results, the worse case is test mode 1 for AC Line Conducted Emissions and the worse case is test mode 2 for Radiated Spurious Emissions(Below 1GHz).

EUT Exercise Software and Power Level[#]

Exercise Software:	QRCT3
Power Level:	Default

Note: The information in the above table is provided by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Unknown	Earphone	Unknown	Unknown
Unknown	Adapter 2	HJ-0502002-US	Unknown


External I/O Cable

Cable Description	Shielding Type	Length (m)	From Port	To
DC Cable	No	1.5	Adapter 1	Desktop charger
Earphone Cable	No	1.9	EUT	Earphone
DC Cable	No	1.0	Adapter 2	EUT

Block Diagram of Test Setup


For Conducted Emission:

Test Model 1

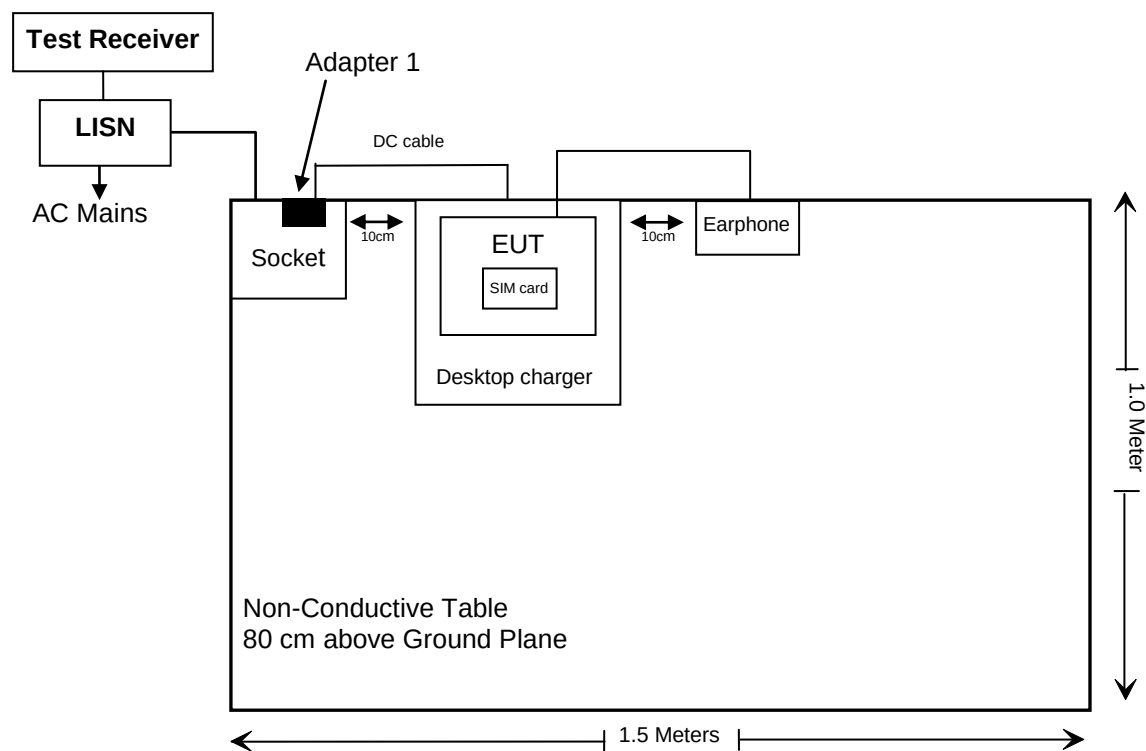


For Radiated Emission(Below 1GHz):

Test Model 2

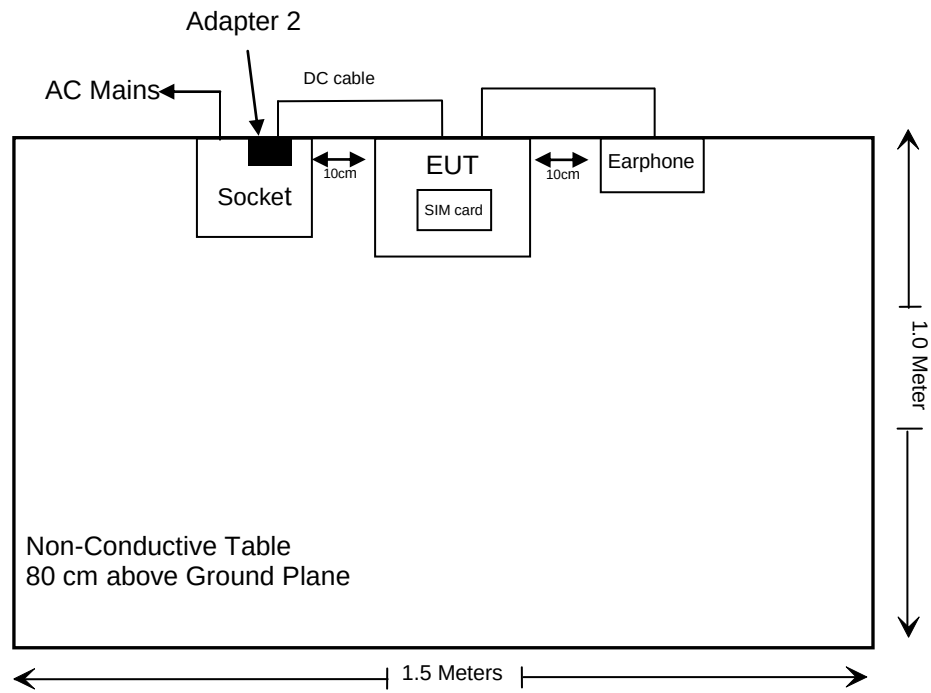

For Radiated Emission(Above 1GHz):

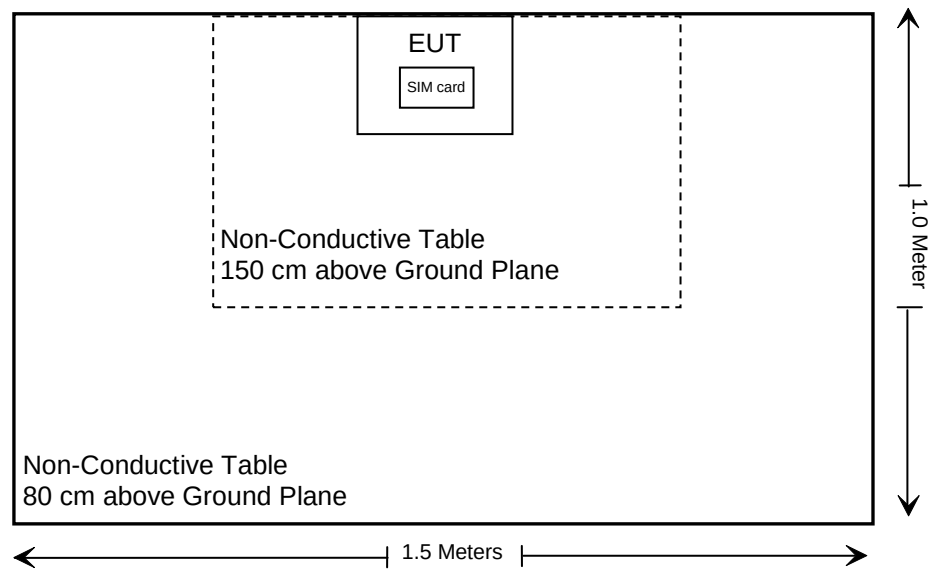

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result	Remark
§2.1093	RF Exposure(SAR)	Compliance	/
§15.203	Antenna Requirement	Compliance	/
§15.207(a)	AC Line Conducted Emissions	Compliance	/
§15.205, §15.209 §15.247(d)	Radiated Spurious Emissions	Compliance	/
§15.247(a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliance*	See note 1
§15.247(b)(3)	Maximum Conducted Output Power	Reporting	See note 1
§15.247(d)	Conducted Spurious Emission	Compliance	/
§15.247(e)	Power Spectral Density	Compliance*	See note 1

Note 1: The device built in a certified module(model:SC20-A[#], FCC ID: XMR201706SC20A[#], Date of Grant: 08/14/2017),per spot check, the RF parameters are identical with the module report, therefore, the RF conducted test items please refer to the module report: FR741007B[#].(According to KDB 996369 D02 Module Q&A v02r02, Answer 1 b.)

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2025/09/17	2026/09/16
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2025/09/17	2026/09/16
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2025/09/18	2026/09/17
Rohde & Schwarz	Pulse Limiter	ESH3-Z2	100312	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.17	N0350	2025/05/30	2026/05/29
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Below 1GHz)					
Rohde & Schwarz	Test Receiver	ESR	102725	2025/09/18	2026/09/17
SONOMA INSTRUMENT	Amplifier	310N	186131	2025/03/26	2026/03/25
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2024/08/08	2027/08/07
Unknown	RF Coaxial Cable	No.12	N040	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.13	N300	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.14	N800	2025/05/30	2026/05/29
BACL	LOOP ANTENNA	1313-1A	3110711	2024/01/16	2027/01/15
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Above 1GHz)					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2025/09/17	2026/09/16
Decentest	Filter Switch Unit	DT7220FSU	DQ77927	2025/09/18	2026/09/17
Decentest	Multiplex Switch Test Control Set	DT7220CSU	DQ77924	2025/09/18	2026/09/17
A.H. Systems, inc.	Preamplifier	PAM-0118	226	2025/03/20	2026/03/19
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Unknown	RF Coaxial Cable	No.10	N050	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.11	N1000	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.19	N500	2025/05/30	2026/05/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2023/12/12	2026/12/11
BACL	Amplifier	BACL-1313-A1840	4012521	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.15	N600	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.16	N650	2025/05/30	2026/05/29
Test Software: e3 191218 (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101590	2025/09/17	2026/09/16
Anritsu	Microwave Peak Power Sensor	MA24418A	12619	2025/03/26	2026/03/25
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2025/03/26	2026/03/25

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Measurement Result: Compliance. Please refer to SAR Report[#]: 2502Y05440E-20A.

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached. The antenna gain is 0.43 dBi[#], fulfill the requirement of this section. Please refer to the product photos.


Result: Compliance.

AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

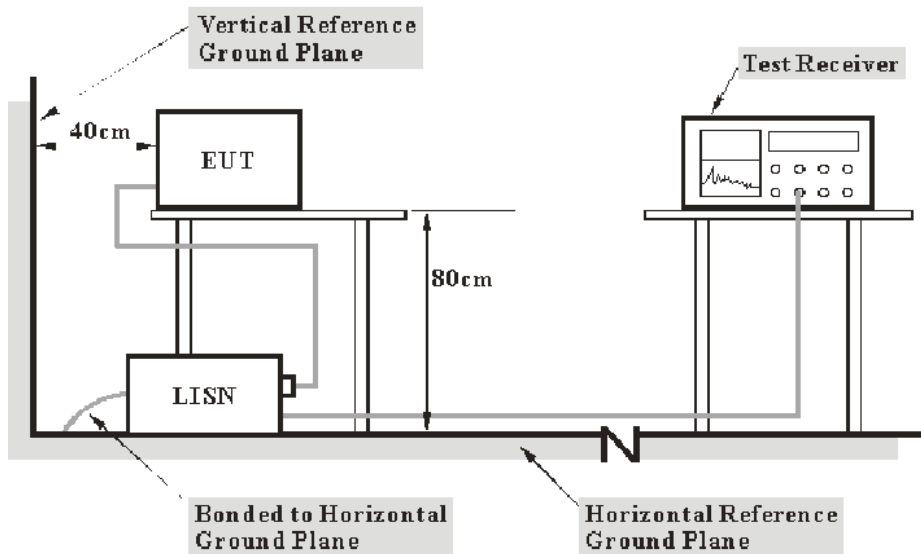

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + 10\text{dB Attenuation(Limiter)}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

Test Data

Please refer to the Attachment of “2504Y26988E-RFB-Appendix B”.


RADIATED SPURIOUS EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup


9kHz - 30MHz:

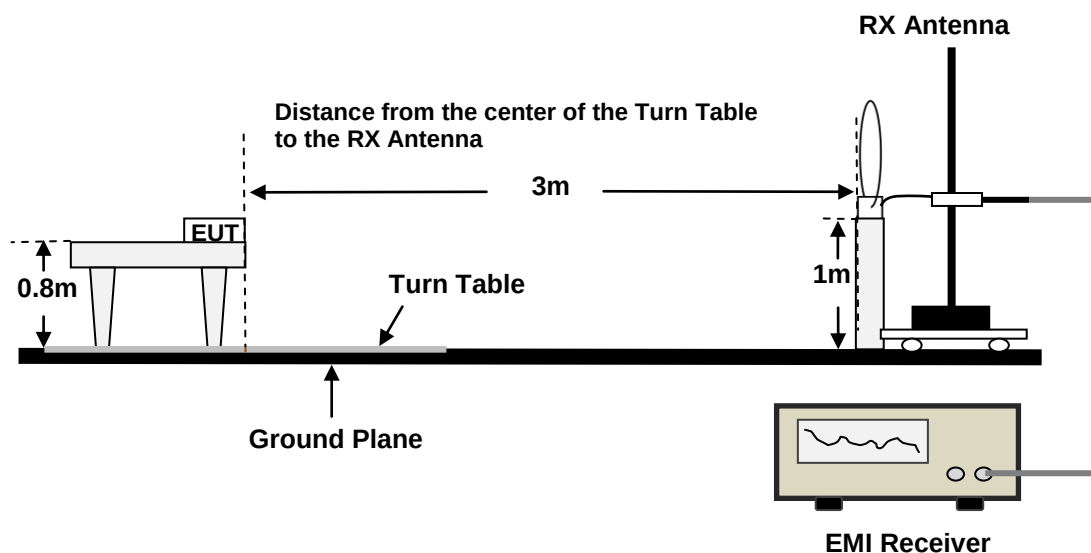

30MHz - 1GHz:

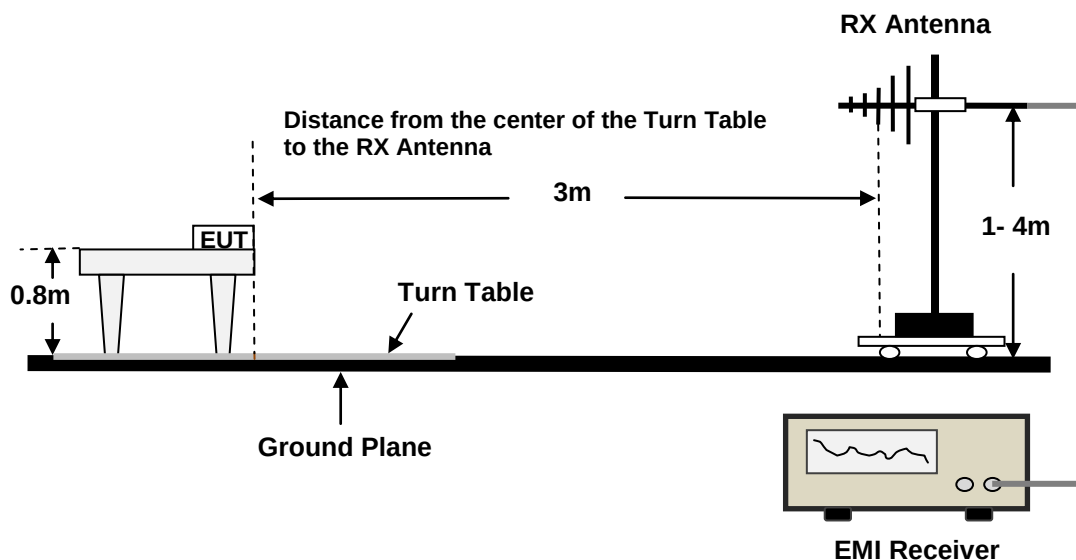

Above 1GHz:

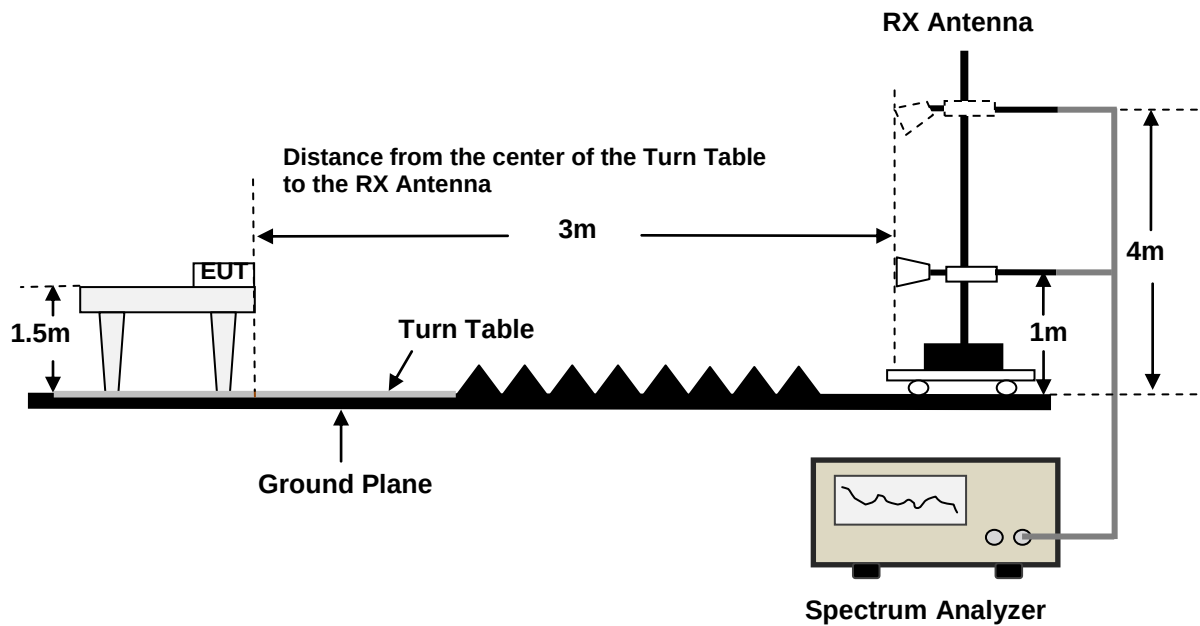

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9kHz to 25GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz - 1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9kHz - 150kHz	PK	0.3kHz	1kHz	/	PK
	QP/AV	/	/	200Hz	QP/AV
150kHz - 30MHz	PK	10kHz	30kHz	/	PK
	QP/AV	/	/	9kHz	QP/AV
30MHz - 1000MHz	PK	100kHz	300kHz	/	PK
	QP	/	/	120kHz	QP

1GHz - 25GHz:

Pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	Peak	Any	1MHz	3MHz
Ave.	Peak	>98%	1MHz	3kHz/5kHz
		<98%	1MHz	≥1/T, no less than 3kHz

Final measurement for emission identified during the pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	Peak	Any	1MHz	3MHz
Ave.	Peak	>98%	1MHz	10Hz
		<98%	1MHz	≥1/T

Note 1: T is minimum transmission duration

Note 2: The 1GHz-18GHz testing use the notch filter.

Note 3: The band edge testing use 10dB attenuator.

Note 4: The filters and attenuators are all integrated within the filter switch unit.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Note 1: If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Note 2: For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data

Please refer to the Attachment of “2504Y26988E-RFB-Appendix B”.

MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b)(3):


For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2020, section 11.9.1.2

- PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast responding diode detector. See Figure 24.



Note: Offset = RF cable loss(0.5dB[#]) + Attenuator(10dB)

Test Data

Please refer to the Attachment of “2504Y26988E-RFB-Appendix B” for spot check data.

CONDUCTED SPURIOUS EMISSION

Applicable Standard

According to FCC §15.247(d):


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2020, section 11.11

- Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution. NOTE—the number of points can also be increased for large spans to retain frequency resolution
- Set the RBW: 100 kHz
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.



Note: Offset = RF cable loss(0.5dB[#]/3.0dB[#]) + Attenuator(10dB)

The cable loss of 0.5dB[#] has been added into test result, except for test result of frequencies from 30 MHz to 25 GHz, where a maximum cable loss of 3.0dB[#] has been added.

Test Data

Please refer to the Attachment of “2504Y26988E-RFB-Appendix B”.

EXHIBIT A-EUT PHOTOGRAPHS

Please refer to the Attachment No.1 2504Y26988E-RF EUT External Photos and Attachment No.2 2504Y26988E-RF EUT Internal Photos.

EXHIBIT B-TEST SETUP PHOTOGRAPHS

Please refer to the Attachment No.4 2504Y26988E-RFB Test Photos.

***** END OF REPORT *****