



WatchGuard AP140/AP340

Hardware Guide

WatchGuard Access Point
AP140 and AP340

About This Guide

Information in this guide is subject to change without notice. Companies, names, and data used in examples herein are fictitious unless otherwise noted. No part of this guide may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of WatchGuard Technologies, Inc.

Guide revised: 7/1/2025

Copyright, Trademark, and Patent Information

Copyright © 1998 – 2025 WatchGuard Technologies, Inc. All rights reserved. All trademarks or trade names mentioned herein, if any, are the property of their respective owners.

Complete copyright, trademark, patent, and licensing information can be found in the Copyright and Licensing Guide, available online at <https://www.watchguard.com/wgrd-help/documentation/overview>.

About WatchGuard

WatchGuard® Technologies, Inc. is a global leader in network security, providing best-in-class Unified Threat Management, Next Generation Firewall, secure Wi-Fi, and network intelligence products and services to more than 75,000 customers worldwide. The company's mission is to make enterprise-grade security accessible to companies of all types and sizes through simplicity, making WatchGuard an ideal solution for Distributed Enterprises and SMBs. WatchGuard is headquartered in Seattle, Washington, with offices throughout North America, Europe, Asia Pacific, and Latin America. To learn more, visit WatchGuard.com.

For additional information, promotions and updates, follow WatchGuard on Twitter, @WatchGuard on Facebook, or on the LinkedIn Company page. Also, visit our InfoSec blog, Secplicity, for real-time information about the latest threats and how to cope with them at www.secplicity.org.

Address

255 S., King Street, Suite 1100
Seattle, WA 98104, USA

Support

www.watchguard.com/support
U.S. and Canada +877.232.3531
All Other Countries +1.206.521.3575

Sales

U.S. and Canada +1.800.734.9905
All Other Countries +1.206.613.0895

Contents

WatchGuard AP140/AP340 Hardware Guide	4
Access Point Management	4
About Your Hardware	5
Hardware Specifications	5
Environmental Requirements	6
Hardware Description	7
Bottom Panel Connections	7
LED Indicator	8
Reset Access Point to Factory-Default Settings	11
Mount and Connect the Access Point	12
Ceiling Mount (T-rail)	13
Ceiling or Wall Mount	15
Connect the Access Point	16
Power Adapter (Optional)	17
Ethernet Power Injector (Optional)	18
Notices	20
Safety Warning	20
Power Source Requirements	20
Disclaimer	20
Avis	21
Alerte de sécurité	21
Exigences relatives à la source d'alimentation	21
Clause de non-responsabilité	21
HINWEISE ZUR SICHERHEIT	22
Sicherheitshinweis	22
Anforderungen an die Stromquelle	22

Haftungsausschluss.....	22
Avisos.....	23
Advertencia de Seguridad.....	23
Requisitos de la Fuente de Alimentación.....	23
Descargo de Responsabilidad.....	23
FCC (USA).....	24
ISED / IC (Canada).....	26
United Kingdom (UKCA).....	28
European Union (CE).....	29
Brazil ANATEL Notice.....	36
CISPR 22 Statement.....	36
Mexico NOM Notice.....	36
Japan Statement.....	36
Japan VCCI Class B Statement.....	36
Taiwan NCC Statement.....	36
RoHS Statement.....	37
WEEE Statement.....	38
Limited Hardware Warranty.....	39

WatchGuard AP140/AP340 Hardware Guide

The WatchGuard AP140 and AP340 are 2x2 Wi-Fi 7 802.11be (compatible with Wi-Fi 802.11ax/ac/a/b/g/n) secure wireless access points.

- A 10 GbE LAN port provides high throughput and PoE+ (802.3at) power for the device.
- Wireless radios support up to 688 Mbps data rate on the 2.4 GHz band, 2882 Mbps on the 5 GHz band, and 5764 Mbps on the 6 GHz band.
- The AP340 includes a dedicated radio for security scanning and airspace monitoring.

The AP140 and AP340 are an ideal Wi-Fi 7 solution to support low-medium density indoor environments such as a small office or remote workers.



Access Point Management

You manage WatchGuard access points with Wi-Fi in WatchGuard Cloud. WatchGuard Cloud delivers a simplified platform for Wi-Fi management to easily deploy, configure, and report on your access points and wireless networks. Go to [Get Started with Wi-Fi in WatchGuard Cloud](#) for information on how to add a new access point to WatchGuard Cloud.

About Your Hardware

Hardware Specifications

Hardware	Description
Processor	Qualcomm IPQ5322 Quad-Core A53 at 1.5GHz
Memory	- Flash: NAND 256MB, NOR 8MB - RAM: DDR4 2GB
Radio Type and Frequency Band	- Radio 1: 2.4 GHz 2x2 802.11be/ax/b/g/n HT40 Operating frequency: 2402-2484MHz - Radio 2: 5 GHz 2x2 802.11be/ax/a/g/n/ac HT160 Operating frequency: 5150-5850MHz - Radio 3: 6 GHz 2x2 802.11be/ax/a/g/n/ac HT320 Operating frequency: 5925-7125MHz - Radio 4 (AP340 scanning radio): 2.4/5/6 GHz 2x2 Operating frequency: 2402-2482MHz / 5150-5850MHz / 5925-7125MHz
Antennas	AP140/AP340 Wi-Fi Radios 2 x 2.4 GHz internal antennas, maximum antenna gain: 4.4 dBi) 2 x 5 GHz internal antennas, maximum antenna gain: 5.6 dBi) 2 x 6 GHz internal antennas, maximum antenna gain: 5.5 dBi) AP340 Scanning Radio Antenna 7 2 x 2.4 GHz internal antennas, maximum antenna gain: 4.2 dBi 2 x 5 GHz internal antennas, maximum antenna gain: 5.2 dBi 2 x 6 GHz internal antennas, maximum antenna gain: 5.3 dBi Antenna 8 2 x 2.4 GHz internal antennas, maximum antenna gain: 4.2 dBi 2 x 5 GHz internal antennas, maximum antenna gain: 5.1 dBi 2 x 6 GHz internal antennas, maximum antenna gain: 4.9 dBi
Wireless Security	WPA3 PSK, WPA2 PSK, WPA3/WPA2 PSK, WPA3 Enterprise, WPA2 Enterprise, OWA
Ethernet Interfaces	1 x 10 GbE Ethernet port (supports 10 Gbps, 5 Gbps, 2.5 Gbps, 1Gbps)
Power Interface	PoE+ 54V DC 802.3at

Hardware	Description
	■ 12V / 2A DC in
Power Consumption	AP140: 22.3 W (maximum) AP340: 24 W (maximum)
Dimensions	190 mm x 190 mm x 39.5 mm (7.48" x 7.48" x 1.56")
Weight	AP140: 743.5 g (1.639 lb) AP340: 753.5 g (1.661 lb)

Environmental Requirements

To safely install your WatchGuard access point, we recommend that you:

- Install the device indoors
- Make sure the device has adequate clearance for air flow and cooling

Other environmental requirements:

Operating Temperature	0°C to 40°C (32°F to 104°F)
Operating Humidity	5% to 95% non-condensing
Non-operating Temperature	-40°C to 80°C (-40°F to 176°F)
Non-operating Humidity	0% to 95%, non-condensing

Hardware Description

The access point has these connections on the side and bottom panel of the device.



Bottom Panel Connections

Reset Button

Resets the access point to factory-default settings. For more information, go to [Reset Access Point to Factory-Default Settings](#).

DC 12V

If PoE power is unavailable, you can power the device with the optional 12V DC power adapter (WG9009).

LAN (10G, PoE+)

This port is a 10 GbE LAN port (supports 10 Gbps, 5 Gbps, 2.5 Gbps, 1Gbps) that connects the access point to a wired LAN connection through a switch or hub. This port also provides PoE (802.3at) power for the device.

Console

Console port for a serial connection to the device command line interface.

Kensington Security Slot

The Kensington security lock slot is for use with a security cable to secure your device.

LED Indicator



Wi-Fi in WatchGuard Cloud access points have LED indicators that can show different status conditions while booting, activation validation, feature key download, WatchGuard Cloud device registration, and the connection to WatchGuard Cloud.

The access point briefly passes through each stage until the device is connected to WatchGuard Cloud and shows a solid blue LED indicator. If the access point remains in the same state for a long period of time without a solid blue LED indicator status, there might be a network issue, activation or feature key issue, or a problem with your WatchGuard Cloud account.

Check the following table for the status of the LED indicators and how to troubleshoot the issue.

LED Color	Status	Troubleshooting
Solid Red or Orange	Device is booting	If the access point remains in this state, the access point processes might not have started, or there might be an issue with the access point firmware. ■ Disconnect and reconnect power to reboot the access point to see whether the device connects. ■ Try to log in to the access point Web UI or command line interface (CLI) to check the device status, current firmware version, and run diagnostic tests. For more information, go to Access Point Web UI or Access Point Command Line Interface.
Flashing Red or Orange (Fast: 100 milliseconds)	Validate access point activation and download feature key	If the access point remains in this state: ■ Make sure you have activated your access point with a valid device serial number and license key in your WatchGuard account. The license key must be for a WatchGuard Standard or USP Wi-Fi license for Wi-Fi in WatchGuard Cloud. ■ Make sure the access point is connected to the network and has received an IP address from DHCP. ■ Make sure the access point can connect to *.watchguard.io for product activation and feature key updates. ■ If you set up an access point behind a firewall that performs inspection on HTTPS traffic, you must add *.watchguard.io to the content inspection exception / bypass list to enable the access point to receive a feature key from WatchGuard servers. On the WatchGuard Firebox, this is enabled by default for cloud-managed Fireboxes in WatchGuard Cloud. ■ Use the access point Web UI or command line interface (CLI) to check the feature key status, download a feature key, and run diagnostic tests. For more information, go to Access Point Web UI or Access Point Command Line Interface.
Flashing Red or Orange (Medium: 500 milliseconds)	WatchGuard Cloud device registration	If the access point remains in this state: ■ Make sure access point can connect to *.watchguard.com for WatchGuard Cloud device registration. ■ For service providers, make sure you have allocated the access point from your inventory to a subscriber account. For more information, go to Access Point Allocation.

LED Color	Status	Troubleshooting
		Make sure you have added the access point to your WatchGuard Cloud subscriber account. For more information, go to Add an Access Point to WatchGuard Cloud.
Flashing Red or Orange (Slow: 2 seconds)	Connection to WatchGuard Cloud servers	If the access point remains in this state: - Make sure the access point can connect to *.watchguard.com for WatchGuard Cloud management connections and is not blocked by a firewall or other network device. - Make sure you do not have an expired MSSP license for the access point. - Check the access point allocation status to see whether the device was deallocated from the subscriber account.
Solid Blue	Successfully connected to WatchGuard Cloud	Device is online and connected to WatchGuard Cloud.
Flashing Blue	Flash LED action from WatchGuard Cloud	LED flashes blue for 60 seconds for identification.
Flashing Blue and Red	Access point failed system integrity check	If the device LEDs flash alternating blue and red every second, the device has failed a system integrity check and has rebooted in failsafe mode. You must contact WatchGuard Support to replace the device.

Reset Access Point to Factory-Default Settings

You can reset an access point to factory-default settings with the reset button on the device. Before you begin, make sure the access point is successfully booted with no solid orange or red LEDs. If the device is not successfully booted, this procedure will only reboot the access point.

To reset an access point with the reset button:

Access Point firmware v2.7 and higher

1. Use a paper clip or other small object to press the reset button through the hole on the device.
2. Press and hold the reset button for at least 10 seconds or more until all LEDs turn off.
3. Release the reset button.
4. After a few seconds, the LEDs will show solid red or orange. This indicates the device is reset, and the device will then reboot to factory-default settings.

Access Point firmware v2.6 and lower

1. Use a paper clip or other small object to press the reset button through the hole on the device.
2. Press and hold the reset button for at least 11 or more seconds.
3. Release the reset button.
4. The LEDs will turn off for a few seconds, then turn solid orange or red. This indicates the device is reset, and the device will then reboot to factory-default settings.

You can also reset the device from the access point command line interface (CLI). For more information, go to [Access Point Command Line Interface](#).

Mount and Connect the Access Point

Your package includes these items:



Cloud Managed
Indoor Access Point



T-Rail Clips
with Set Screws x2



Bracket



L-Shaped
Hexagonal Wrench



Mounting Screw Kit




The MAC address and serial number of your access point are printed on a label on the back of the device. Make sure you record this information before you mount the access point.

Ceiling Mount (T-rail)

To mount the access point on a ceiling with a t-rail system:


1. Use the outermost screw hole of the bracket to mark the distance where the T-bar should be fixed on the T-rail.

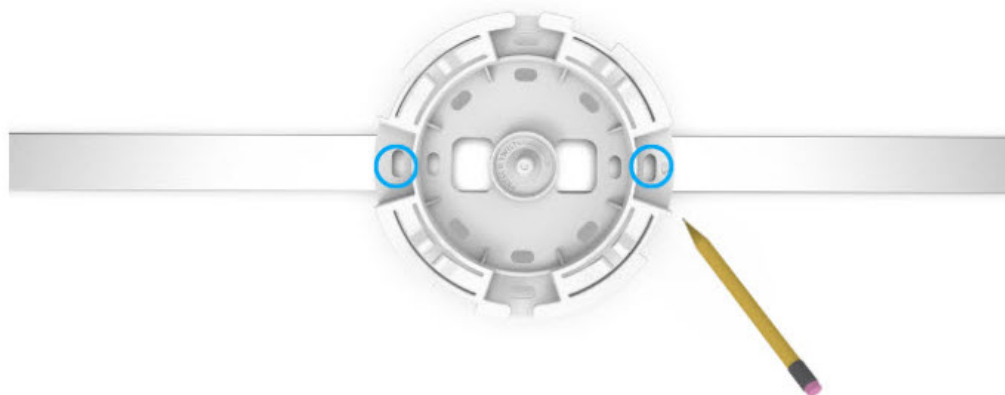


2. Loosen the fixed screws on the T-bar with the included hex wrench. Align the center screw hole of the T-bar with the position marked on the T-rail, then tighten the fixed screws on the T-bar with the hex wrench.



3. Use the short screws from the mounting screw kit to affix the bracket onto the T-bar.

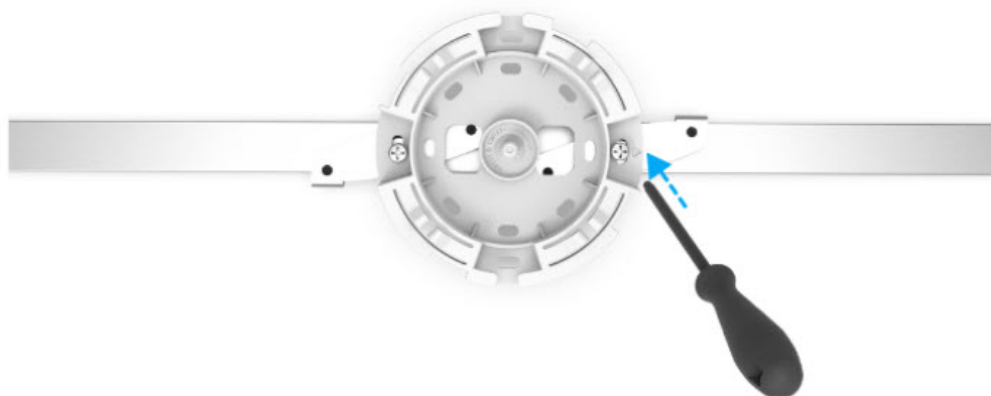


4. To mount the access point on the bracket, rotate the device clockwise 45 degrees to secure the device on the bracket.

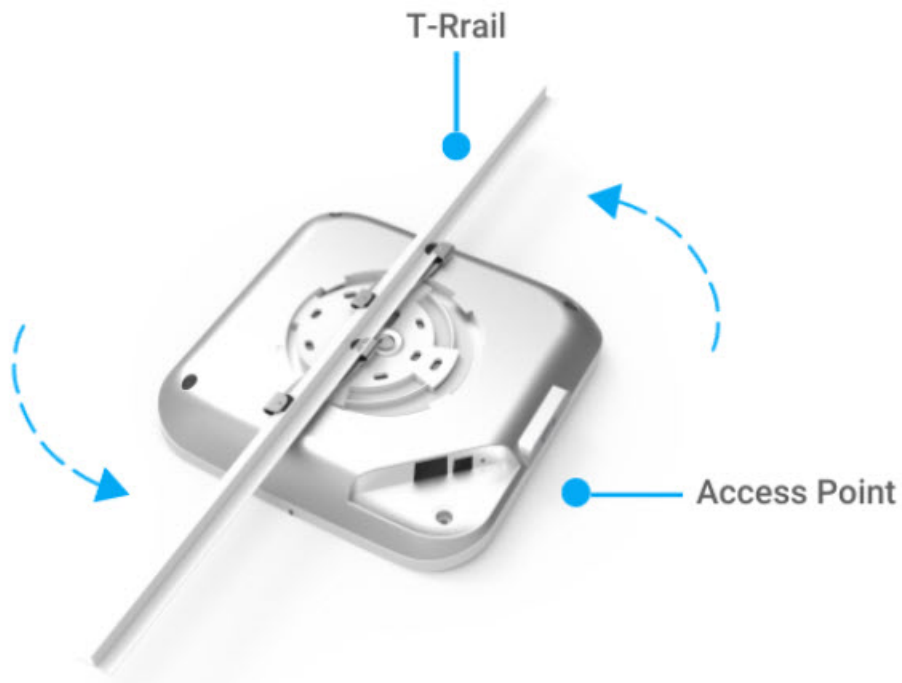


Ceiling or Wall Mount

To mount the access point directly on a ceiling or wall:

1. Determine where the access point will be placed and mark the location for the two mounting holes.
2. Drill two mounting holes and hammer the anchors into the holes until they are flush with the wall.
3. Attach the mounting bracket to the ceiling or wall with the included long screws into the anchors.

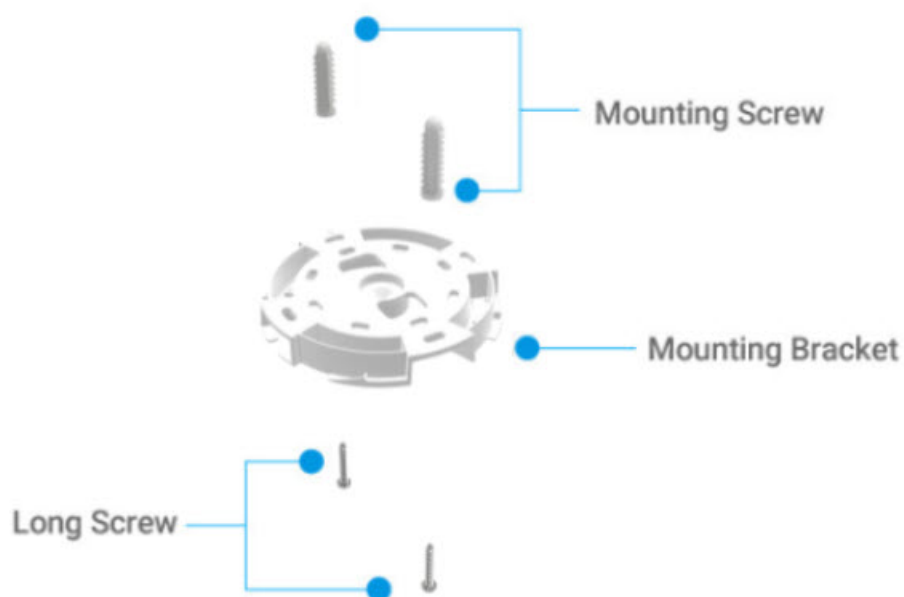


4. To mount the access point on the bracket, rotate the device clockwise 45 degrees to secure the device on the bracket.

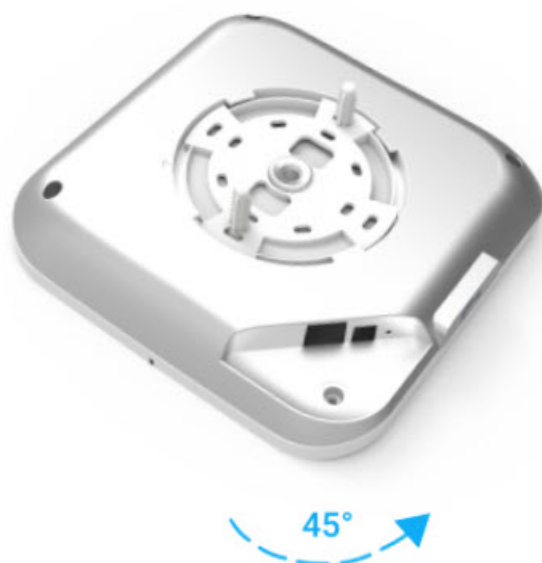

Connect the Access Point

Plug one end of the Ethernet cable from your network into the LAN (10G, PoE+) port on the bottom panel of the access point.

Make sure the other end of the Ethernet cable is connected to your network through a hub, switch, or injector with PoE+ (802.3at) power enabled.

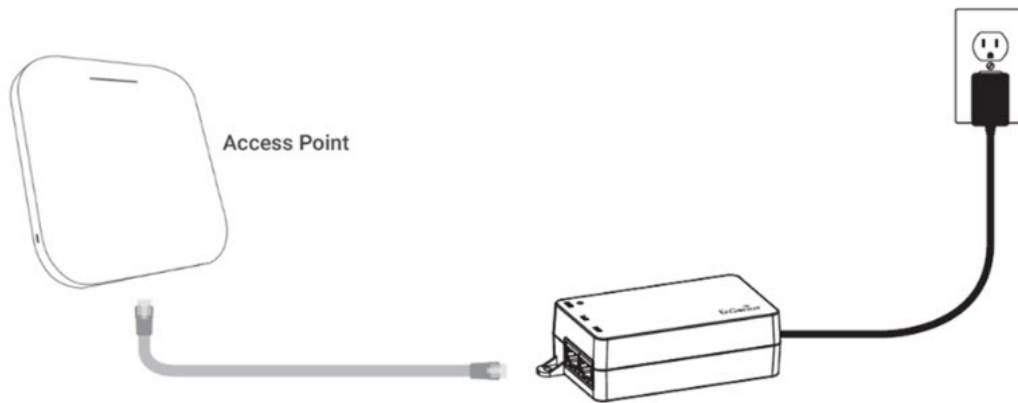

Access Point connected to PoE Injector



Access Point connected to switch with PoE+ power

Power Adapter (Optional)

An optional AC power adapter supplies 12V DC power to the device.



AC Power Adapter Specs	
WatchGuard Part Number	WG9009
AC Input Voltage Rating	100-240V, 50-60Hz
Output Voltage	DC 12V, 2.5A
Region Specific Adapter Plugs	US, UK, AU/NZ, EMEA (all included)
Temperature	Operating: 0 - 40°C (32 - 104°F) Storage: -20 - 85°C (-4 - 185°F)
Humidity	Operating: 5% - 95% Storage: 0% - 95%
Dimensions	69 mm x 32.6 mm x 49.5 mm (2.7" x 1.28" x 1.5")

Ethernet Power Injector (Optional)

You can power the access point with an optional Ethernet Power Injector. The PoE+ power injector enables you to power the access point through an existing Ethernet connection. With this device, you do not have to position your access point near a power outlet.



This device complies with IEEE 802.3at/af PoE specifications. Do not use any PoE adapters that are not IEEE 802.3at/af compliant as they may damage your device.

To connect an Ethernet Power Injector to the WatchGuard access point:

1. Plug the Ethernet Power Injector into an AC power source.
2. Connect an Ethernet cable from your network backbone (for example, a PoE-capable router, switch, or hub) to the **LAN** connector on the Ethernet Power Injector.
3. Connect an Ethernet cable from the **LAN1 PoE** Ethernet interface on the access point to the **PoE** connector on the Ethernet Power Injector.

Make sure you use CAT5/5e or higher Ethernet cables.

The table provides the specifications for the power adapter.

Ethernet Power Injector Specs	
WatchGuard Part Number	802.3at PoE+ Injector with AC cord (US/FCC) (WG8599) 802.3at PoE+ Injector with AC cord (CE) (WG8600) 802.3at PoE+ Injector with AC cord (UK) (WG8601) 802.3at PoE+ Injector with AC cord (AUS) (WG8602)
Specification	IEEE 802.3at/af
AC Input Voltage Rating	100-240VAC

Ethernet Power Injector Specs	
Input Current	0.8A max for 100VAC
Output Power	30W maximum
Ethernet Interfaces	LAN: RJ-45 for 10/100/1000/2500 Mbps data POE: RJ-45 for 10/100/1000/2500 Mbps data and power Voltage: Pin4, 5:54V, Pin7, 8:Return
Indicator	Power: Green
Temperature	Operating: 0 - 40°C (32 - 104°F) Storage: -30 - 80°C (-22 - 176°F)
Humidity	5% - 90% (Operating and storage)
Dimensions	L = 99 mm (3.9") W = 68.5 mm (2.27") H = 33 mm (1.3")
Weight	149.6 g (0.33 lbs)

Notices

All WatchGuard products are designed and tested to meet strict safety requirements. These requirements include product safety approvals and other global compliance standards. Please read these instructions carefully before operating the product, and refer to them as needed to ensure the continued safe operation of your product.

For security, privacy, legal compliance, certifications, and environmental information, visit the [WatchGuard Trust Center](#).

Safety Warning

- Do not place objects on the power cord.
- Do not obstruct the ventilation openings. These openings prevent overheating of the machine.
- Never push objects of any kind into slots or openings on this equipment. Making a contact with a voltage point or shorting out a part may result in fire or electrical shock.
- When removing or installing an device, follow the general installation safety instructions.
- This device is for indoor use only.

Power Source Requirements

This product is intended to be supplied by a Listed Power Adapter or DC power source marked "L.P.S." (or Limited Power Source or PS2) rated 12V DC, 2A minimum, maximum ambient temperature (Tma)=40°C, or supplied by a Listed PoE Adapter marked "L.P.S." (or Limited Power Source or PS2) rated 54V DC, 0.6A minimum, maximum ambient temperature (Tma)=40°C. For more information regarding approved power sources, please contact WatchGuard Technologies.

Connect the PoE interface only to PoE networks, without routing to the outside plant.

If protective earthing is used as a safeguard, the instructions shall require connection of the equipment protective earthing conductor to the installation protective earthing conductor (for example, by means of a power cord connected to a socket-outlet with earthing connection). To meet safety and electromagnetic interference (EMI) requirements, you must make sure the power source is connected to earth ground before you connect power to the access point.

Disclaimer

WatchGuard shall not be held liable if the end user alters, modify, or repairs any WatchGuard hardware appliance.

Avis

Tous les produits WatchGuard sont conçus et testés pour répondre à des exigences de sécurité strictes. Ces exigences comprennent les approbations de sécurité des produits et d'autres normes de conformité mondiales. Veuillez lire attentivement ces instructions avant d'utiliser le produit, et consultez-les si nécessaire pour assurer le fonctionnement continu et sûr de votre produit.

Alerte de sécurité

- Ne placez pas d'objets sur le cordon d'alimentation.
- Ne pas obstruer les ouvertures de ventilation. Ces ouvertures évitent la surchauffe de la machine.
- N'introduisez jamais d'objets d'aucune sorte dans les fentes ou les ouvertures de cet équipement. Établir un contact avec un point de tension ou court-circuiter une pièce peut entraîner un incendie ou un choc électrique.
- Lors du retrait ou de l'installation d'un appareil, respectez les consignes générales de sécurité d'installation.
- Cet appareil est destiné à une utilisation en intérieur uniquement.

Exigences relatives à la source d'alimentation

Ce produit est destiné à être alimenté par un adaptateur secteur répertorié ou une source d'alimentation CC portant la mention "L.P.S." (ou source d'alimentation limitée ou PS2) de 12 V CC, 2 A minimum, température ambiante maximale (Tma) = 40 °C, ou fourni par un adaptateur PoE répertorié marqué "L.P.S." (ou source d'alimentation limitée ou PS2) nominale 54 V CC, 0,6 A minimum, température ambiante maximale (Tma) = 40 °C. Pour plus d'informations sur les sources d'alimentation approuvées, veuillez contacter WatchGuard Technologies.

Connectez l'interface PoE uniquement aux réseaux PoE, sans routage vers l'installation extérieure.

Si la mise à la terre de protection est utilisée comme protection, les instructions doivent exiger la connexion du conducteur de mise à la terre de protection de l'équipement au conducteur de mise à la terre de protection de l'installation (par exemple, au moyen d'un cordon d'alimentation connecté à une prise de courant avec mise à la terre). Pour répondre aux exigences de sécurité et d'interférence électromagnétique (EMI), vous devez vous assurer que la source d'alimentation est connectée à la terre avant de connecter l'alimentation au point d'accès.

Clause de non-responsabilité

WatchGuard décline toute responsabilité si l'utilisateur final altère, modifie ou répare une appliance matérielle WatchGuard.

HINWEISE ZUR SICHERHEIT

Alle WatchGuard Produkte werden entwickelt und getestet, um strenge Sicherheitsanforderungen zu erfüllen. Diese Anforderungen umfassen Produktsicherheit Zulassungen und andere globale Compliance-Standards. Bitte lesen Sie die folgenden Anweisungen sorgfältig, bevor Sie das Produkt, und bezeichnen sie als notwendig, um den sicheren Betrieb des Geräts zu gewährleisten.

Sicherheitshinweis

- Legen Sie keine Gegenstände auf das Netzkabel.
- Verdecken Sie nicht die Lüftungsöffnungen. Diese Öffnungen verhindern eine Überhitzung der Maschine.
- Stecken Sie niemals Gegenstände jeglicher Art in die Schlitze oder Öffnungen des Geräts stecken. Der Kontakt mit einem spannungsführenden Punkt oder das Kurzschließen eines Bauteils kann zu einem Brand oder elektrischen Schlag führen.
- Beim Entfernen oder Installieren eines Gerätes, nach den allgemeinen Installation Sicherheitshinweise.
- Dieses Gerät ist nur für den Innenbereich bestimmt.

Anforderungen an die Stromquelle

Dieses Produkt ist für die Versorgung mit einem gelisteten Netzteil oder einer DC-Stromquelle mit der Kennzeichnung „L.P.S.“ vorgesehen. (oder Limited Power Source oder PS2) mit einer Nennleistung von mindestens 12 V DC, 2 A, maximale Umgebungstemperatur (Tma) = 40 °C oder über einen gelisteten PoE-Adapter mit der Kennzeichnung „L.P.S.“ (oder Limited Power Source oder PS2) Nennwert 54 V DC, 0,6 A Minimum, maximale Umgebungstemperatur (Tma) = 40 °C. Wenden Sie sich für weitere Informationen zu zugelassenen Stromquellen bitte an WatchGuard Technologies.

Verbinden Sie die PoE-Schnittstelle nur mit PoE-Netzwerken, ohne Routing zur Außenanlage.

Wenn eine Schutzerdung als Schutz verwendet wird, müssen die Anweisungen den Anschluss des Schutzerdungsleiters des Geräts an den Schutzerdungsleiter der Installation fordern (z. B. über ein Netzkabel, das an eine Steckdose mit Erdungsanschluss angeschlossen ist). Um die Sicherheits- und elektromagnetischen Interferenzanforderungen (EMI) zu erfüllen, müssen Sie sicherstellen, dass die Stromquelle geerdet ist, bevor Sie den Access Point an die Stromversorgung anschließen.

Haftungsausschluss

WatchGuard haftet nicht, wenn der Endbenutzer eine Hardware-Appliance von WatchGuard ändert, modifiziert oder repariert.

Avisos

Todos los productos WatchGuard están diseñados y probados para cumplir estrictos requisitos de seguridad. Estos requisitos incluyen aprobaciones de seguridad de productos y otros estándares de cumplimiento mundial. Lea atentamente estas instrucciones antes de utilizar el producto y consúltelas siempre que sea necesario para garantizar un funcionamiento seguro y continuo del mismo.

Advertencia de Seguridad

- No coloque objetos sobre el cable de alimentación.
- No obstruya las aberturas de ventilación. Estas aberturas evitan el sobrecalentamiento de la máquina.
- Nunca introduzca objetos de ningún tipo en las ranuras o aberturas del equipo. El contacto con puntos de voltaje o el cortocircuito de una pieza podría provocar un incendio o una descarga eléctrica.
- Al extraer o instalar un dispositivo, siga las instrucciones generales de instalación de seguridad.
- Este dispositivo es solo para uso en interiores.

Requisitos de la Fuente de Alimentación

Este producto está diseñado para ser alimentado por un Adaptador de Corriente Listado o una fuente de alimentación de CC marcada como "L.P.S." (o Fuente de Alimentación Limitada o PS2) nominal de 12 V CC, 2 A mínimo, temperatura ambiente máxima (Tma) = 40 °C, o alimentado por un Adaptador PoE Listado marcado como "L.P.S." (o Fuente de Alimentación Limitada o PS2) nominal de 54 V CC, 0,6 A mínimo, temperatura ambiente máxima (Tma) = 40 °C. Para obtener más información sobre las fuentes de alimentación aprobadas, comuníquese con WatchGuard Technologies.

Conecte la interfaz PoE solo a redes PoE, sin enrutamiento a la planta exterior.

Si se utiliza la puesta a tierra de protección como medida de seguridad, las instrucciones deben exigir la conexión del conductor de puesta a tierra de protección del equipo al conductor de puesta a tierra de protección de la instalación (por ejemplo, mediante un cable de alimentación conectado a un tomacorriente con conexión a tierra). Para cumplir con los requisitos de seguridad e interferencia electromagnética (EMI), debe asegurarse de que la fuente de alimentación esté conectada a tierra antes de conectar la alimentación al punto de acceso.

Descargo de Responsabilidad

WatchGuard no será responsable si el usuario final altera, modifica o repara cualquier dispositivo de hardware de WatchGuard.

FCC (USA)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Operations in the 5.15-5.25 GHz band are restricted to indoor usage only.

This device meets all the other requirements specified in Part 15E, Section 15.407 of the FCC Rules.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 41cm between the radiator & your body.

6ID (Low-power Indoor Access Point)

- FCC regulations restrict the operation of this device to indoor use only.
- This device is prohibited from being operated on oil platforms, cars, trains, boats, and aircraft, except it can be operated in large aircraft while flying above 10,000 feet in the 5.925-6.425 GHz band.
- Transmitters in the 5.925-7.125 GHz band are prohibited from operating to control or communicate with unmanned aircraft systems.



The FCC ID on the certification label for both the AP140 and AP340 is Q6G-AP340.

ISED / IC (Canada)

This device complies with ISED's licence-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

Caution

- (i) the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- (ii) where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 6.2.2.3 shall be clearly indicated.

Avertissement

Le guide d'utilisation des dispositifs pour réseaux locaux doit inclure des instructions précises sur les restrictions susmentionnées, notamment :

- (i) les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;
- (ii) lorsqu'il y a lieu, les types d'antennes (s'il y en a plusieurs), les numéros de modèle de l'antenne et les pires angles d'inclinaison nécessaires pour rester conforme à l'exigence de la p.i.r.e. applicable au masque d'élévation, énoncée à la section 6.2.2.3, doivent être clairement indiqués.

Radiation Exposure Statement

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 24cm between the radiator & your body.

Déclaration d'exposition aux radiations

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 24cm de distance entre la source de rayonnement et votre corps.

For indoor use only. Pour une utilisation en intérieur uniquement

IC RSS-248 Section 7 RLAN devices Requirements (for all 6E)

- Devices shall not be used for control of or communications with unmanned aircraft systems.
- Devices shall not be used on oil platforms.
- Devices shall not be used on aircraft, except for the low-power indoor access points, indoor subordinate devices, low-power client devices, and very low-power devices operating in the 5925-6425 MHz band, that may be used on large aircraft as defined in the Canadian Aviation Regulations, while flying above 3,048 metres (10,000 feet).
- Devices shall not be used on automobiles.
- Devices shall not be used on trains.
- Devices shall not be used on maritime vessels
- Les dispositifs ne doivent pas être utilisés pour commander des systèmes d'aéronef sans pilote ni pour communiquer avec de tels systèmes.
- Les dispositifs ne doivent pas être utilisés sur les plateformes de forage pétrolier.
- Les dispositifs ne doivent pas être utilisés dans les aéronefs, à l'exception des points d'accès intérieurs de faible puissance, des dispositifs subordonnés intérieurs, des dispositifs clients de faible puissance et des dispositifs de très faible puissance fonctionnant dans la bande de 5 925 à 6 425 MHz, qui peuvent être utilisés dans les gros aéronefs tel qu'il est défini dans le Règlement de l'aviation canadien, et ce, lorsqu'ils volent à une altitude supérieure à 3 048 mètres (10 000 pieds).
- Les dispositifs ne doivent pas être utilisés dans les automobiles.
- Les dispositifs ne doivent pas être utilisés dans les trains.
- Les dispositifs ne doivent pas être utilisés sur les navires maritimes.

For Indoor AP(6ID)

- Operation shall be limited to indoor use only.
- Le fonctionnement doit être limitée à une utilisation à l'intérieur seulement.



The IC ID on the certification label for both the AP140 and AP340 is 4657A-AP340.

United Kingdom (UKCA)

Importer: XXX

The device is in conformity with the relevant legislation of United Kingdom: 2017 (S.I. 2017/1206)/ Regulations 2016 (S.I. 2016/1091)/ Regulations 2016 (S.I. 2016/1101).

Standards:

- EN 300 328 V2.2.2 (2019-07)
- EN 301 893 V2.1.1 (2017-05)
- EN 303 687 V1.1.1 (2023-06)
- EN 55032:2015+A11:2020
- EN 55035:2017+A11:2020
- EN IEC 61000-3-2:2019+A1:2021
- EN 61000-3-3:2013+A2:2021+AC:2022-01
- ETSI EN 301 489-1 V2.2.3
- ETSI EN 301 489-17 V3.2.4
- EN 62311: 2020
- EN 50665:2017
- EN 50385:2017
- IEC 62368-1:2018 EN IEC 62368-1:2020+A11:2020

Radiation Exposure Statement

This equipment complies with radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

European Union (CE)

Importer: XXX

This device complies with Directive 2014/53/EU issued by the Commission of the European Community.

Standards:

- EN 55032:2015+A11:2020
- EN 55035:2017+A11:2020
- EN IEC 61000-3-2:2019+A1:2021
- EN 61000-3-3:2013+A2:2021+AC:2022-01
- ETSI EN 301 489-1 V2.2.3
- ETSI EN 301 489-17 V3.2.4
- EN 62311: 2020
- EN 50665:2017
- IEC 62368-1:2018 EN IEC 62368-1:2020+A11:2020

Wireless Standards:

- EN 300 328 V2.2.2 (2019-07)
- EN 301 893 V2.1.1 (2017-05)
- EN 303 687 V1.1.1 (2023-06)
- EN 50385:2017

Radiation Exposure Statement

This equipment complies with radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This device has software that cannot affect compliance with the Radio Equipment Directive (RED) 2014/53/EU, even if the software is changed or replaced.

This device is restricted to indoor use when operating in the 5150-5350 MHz and 5945-6425 MHz frequency range in the indicated countries.

					
AT	BE	BG	CH	CY	CZ
DE	DK	EE	EL	ES	FI
FR	HR	HU	IE	IS	IT
LI	LT	LU	LV	MT	NL
NO	PL	PT	RO	SE	SI
SK	TR	UK(NI)			

Frequency Range	Maximum Output Power (EIRP)
2400–2483.5 MHz	19.96 dBm
5150–5350 MHz	22.94 dBm
5470–5725 MHz	29.99 dBm
5945–6425 MHz	22.92 dBm

English	This product is in compliance with Directive 2014/53/EU.
Български	Този продукт е в съответствие с Директива 2014/53/ЕС.
Česky	Tento produkt je v souladu se směrnicí 2014/53/EU.
Dansk	Dette produkt er i overensstemmelse med direktiv 2014/53/EU.
Deutsch	Dieses Produkt entspricht der Richtlinie 2014/53/EU.
Eesti	See toode vastab direktiivile 2014/53/EL.
Español	Este producto cumple con la Directiva 2014/53/UE.
Ελληνική	Το προϊόν αυτό συμμορφώνεται με την Οδηγία 2014/53/ΕΕ.

Français	Ce produit est conforme à la Directive 2014/53/UE.
Hrvatski	Ovaj proizvod je u skladu s Direktivom 2014/53/EU.
Italiano	Questo prodotto è conforme alla Direttiva 2014/53/EU.
Latviski	Šis produkts atbilst Direktīvai 2014/53/EU.
Lietuvių	Šis gaminys atitinka direktyvą 2014/53/ES.
Malti	Dan il-prodott huwa konformi mad-Direttiva 2014/53/UE.
Magyar	Ez a termék megfelel a 2014/53/EU irányelvnek.
Nederlands	Dit product is in overeenstemming met Richtlijn 2014/53/EU.
Norsk	Dette produktet er i samsvar med direktiv 2014/53/EU.
Polski	Ten produkt jest zgodny z dyrektywą 2014/53/UE.
Português	Este produto está em conformidade com a Diretiva 2014/53/UE.
Rumunski	Acest produs este în conformitate cu Directiva 2014/53/UE.
Slovensky	Tento produkt je v súlade so smernicou 2014/53/EÚ.
Slovensko	Ta izdelek je v skladu z Direktivo 2014/53/EU.
Suomi	Tämä tuote on direktiivin 2014/53/EU mukainen.
Svenska	Denna produkt överensstämmer med direktiv 2014/53/EU.

Declaration of Conformity (EU)

WatchGuard Technologies Inc. hereby declares that the product(s) listed below conform to the European Union directives and standards identified in this declaration.

Product:

802.11 a/b/g/n/ac/ax/be Access Point, AP140

EU Directives:

Low Voltage (2014/35/EU)
Electromagnetic Compatibility (2014/30/EU)
Energy-related Products (2009/125/EC)
RoHS (2011/65/EU and 2015/863/EU RoHS)
WEEE Directive 2012/19/EU
The Radio Equipment Directive (2014/53/EU)

Common Standards:

EN 55032:2015+A11:2020
EN 55035:2017+A11:2020
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A2:2021+AC:2022-01
ETSI EN 301 489-1 V2.2.3
ETSI EN 301 489-17 V3.2.4
EN 62311: 2020
EN 50665:2017
IEC 62368-1:2018 EN IEC 62368-1:2020+A11:2020

Wireless Standards:

EN 300 328 V2.2.2 (2019-07)
EN 301 893 V2.1.1 (2017-05)
EN 303 687 V1.1.1 (2023-06)
EN 50385:2017

This device complies with Directive 2014/53/EU issued by the Commission of the European Community.

Manufacturer:	WatchGuard Technologies 255 S. King Street, Suite 1100, Seattle, WA 98104 USA
Radio Equipment:	802.11 a/b/g/n/ac/ax/be Access Point
Type Designation:	AP140
Specifications:	802.11 a/b/g/n/ac/ax/be (2.4GHz, 5GHz, 6GHz)
Intended Purpose:	Indoor access point
Equipment Class:	Class II
Operating temperature:	0° C to 40° C

The above device complies with the essential requirements and other relevant provisions to Directive 2014/53/EU when used for its intended purpose. This equipment may be operated in the USA, Canada, & Europe Union.

Laurence Huang

Signature
Full Name: Laurence Huang
Position: Manufacturing Program Manager



Date: June 23, 2025

Declaration of Conformity (EU)

WatchGuard Technologies Inc. hereby declares that the product(s) listed below conform to the European Union directives and standards identified in this declaration.

Product:

802.11 a/b/g/n/ac/ax/be Access Point, AP340

EU Directives:

Low Voltage (2014/35/EU)
Electromagnetic Compatibility (2014/30/EU)
Energy-related Products (2009/125/EC)
RoHS (2011/65/EU and 2015/863/EU RoHS)
WEEE Directive 2012/19/EU
The Radio Equipment Directive (2014/53/EU)

Common Standards:

EN 55032:2015+A11:2020
EN 55035:2017+A11:2020
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A2:2021+AC:2022-01
ETSI EN 301 489-1 V2.2.3
ETSI EN 301 489-17 V3.2.4
EN 62311: 2020
EN 50665:2017
IEC 62368-1:2018 EN IEC 62368-1:2020+A11:2020

Wireless Standards:

EN 300 328 V2.2.2 (2019-07)
EN 301 893 V2.1.1 (2017-05)
EN 303 687 V1.1.1 (2023-06)
EN 50385:2017

This device complies with Directive 2014/53/EU issued by the Commission of the European Community.

Manufacturer:	WatchGuard Technologies 255 S. King Street, Suite 1100, Seattle, WA 98104 USA
Radio Equipment:	802.11 a/b/g/n/ac/ax/be Access Point
Type Designation:	AP340
Specifications:	802.11 a/b/g/n/ac/ax/be (2.4GHz, 5GHz, 6GHz)
Intended Purpose:	Indoor access point
Equipment Class:	Class II
Operating temperature:	0° C to 40° C

The above device complies with the essential requirements and other relevant provisions to Directive 2014/53/EU when used for its intended purpose. This equipment may be operated in the USA, Canada, & Europe Union.

Laurence Huang

Signature
Full Name: Laurence Huang
Position: Manufacturing Program Manager



Date: June 23, 2025

Declaration of Conformity (UK)

Hereby, WatchGuard Technologies, Inc. declares that the radio equipment type AP140 is in conformity with the relevant statutory requirements of the United Kingdom.

Product:

802.11 a/b/g/n/ac/ax/be Access Point, AP140

Standards:

EN 300 328 V2.2.2 (2019-07)
EN 301 893 V2.1.1 (2017-05)
EN 303 687 V1.1.1 (2023-06)
EN 55032:2015+A11:2020
EN 55035:2017+A11:2020
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A2:2021+AC:2022-01
ETSI EN 301 489-1 V2.2.3
ETSI EN 301 489-17 V3.2.4
EN 62311: 2020
EN 50665:2017
EN 50385:2017
IEC 62368-1:2018 EN IEC 62368-1:2020+A11:2020

Manufacturer:

WatchGuard Technologies
255 S. King Street, Suite 1100, Seattle, WA
98104 USA

Radio Equipment:

802.11 a/b/g/n/ac/ax/be Access Point

Type Designation:

AP140

Specifications:

802.11 a/b/g/n/ac/ax/be (2.4GHz, 5GHz, 6GHz)

Intended Purpose:

Indoor access point

Equipment Class:

Class II

Operating temperature

0° C to 40° C

Laurence Huang

Signature

Full Name: Laurence Huang

Position: Manufacturing Program Manager

**UK
CA**

Date: June 19, 2025

Declaration of Conformity (UK)

Hereby, WatchGuard Technologies, Inc. declares that the radio equipment type AP340 is in conformity with the relevant statutory requirements of the United Kingdom.

Product:

802.11 a/b/g/n/ac/ax/be Access Point, AP340

Standards:

EN 300 328 V2.2.2 (2019-07)
EN 301 893 V2.1.1 (2017-05)
EN 303 687 V1.1.1 (2023-06)
EN 55032:2015+A11:2020
EN 55035:2017+A11:2020
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A2:2021+AC:2022-01
ETSI EN 301 489-1 V2.2.3
ETSI EN 301 489-17 V3.2.4
EN 62311: 2020
EN 50665:2017
EN 50385:2017
IEC 62368-1:2018 EN IEC 62368-1:2020+A11:2020

Manufacturer:

WatchGuard Technologies
255 S. King Street, Suite 1100, Seattle, WA
98104 USA

Radio Equipment:

802.11 a/b/g/n/ac/ax/be Access Point

Type Designation:

AP340

Specifications:

802.11 a/b/g/n/ac/ax/be (2.4GHz, 5GHz, 6GHz)

Intended Purpose:

Indoor access point

Equipment Class:

Class II

Operating temperature

0° C to 40° C

Laurence Huang

Signature

Full Name: Laurence Huang

Position: Manufacturing Program Manager



Date: June 19, 2025

Brazil ANATEL Notice

Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados.

CISPR 22 Statement

Este produto não é apropriado para uso em ambientes domésticos, pois poderá causar interferências eletromagnéticas que obrigam o usuário a tomar medidas necessárias para minimizar estas interferências.

This is a class A product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.

Mexico NOM Notice

La operación de este equipo está sujeta a las siguientes dos condiciones:

- (i) es posible que este equipo o dispositivo no cause interferencia perjudicial y
- (ii) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

Japan Statement

この装置には、電波法に基づく技術規則適合証明書の認定を受けた特定の無線装置が含まれています。

Japan VCCI Class B Statement

この装置は、情報処理装置等電波障害自主規制協議会 (VCCI) の基準に基づくクラス B 情報技術装置です。この装置は、家庭環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。取扱説明書に従って正しい取り扱いをして下さい。

Taiwan NCC Statement

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

應避免影響附近雷達系統之操作。

「本產品電磁波曝露量(MPE)標準值 $1\text{mW}/\text{cm}^2$ ，送測產品實測值為 $0.347\text{mW}/\text{cm}^2$ ，建議使用時至少距離人體 20cm 」

[警語內容]

本器材須經專業工程人員安裝及設定，始得設置使用，且不得直接販售給一般消費。

RoHS Statement

The Restriction of Hazardous Substances 2.0 (RoHS 2.0) in Electrical and Electronic Equipment Directive was passed into law by the European Union (EU). It affects manufacturers, sellers, distributors and recyclers of electrical and electronic equipment containing lead, cadmium, mercury, hexavalent chrome, polybrominated diphenylether (PBDE), polybrominated biphenyl (PBB), Bis (2-ethylhexyl) phthalate (DEHP), Butyl benzyl phthalate (BBP), Dibutyl phthalate (DBP) and Diisobutyl phthalate (DIBP). After June 4, 2015 the use of these materials are banned in new products sold in Europe.

WatchGuard declares that all products listed herein comply with European Union RoHS Directive (RoHS 2.0 2011/65/EU and 2015/863/EU) requirements taking the following Annex III exemptions: [stating the list of exemptions, 6(c) ,7(a) ,7(C)-1].

Access Points: AP130, AP140, AP230W, AP330, AP340, AP332CR, AP430CR, AP432, AP440

Firebox: N5V, T25, T25-W, T45, T45-PoE, T45-W-PoE, T45-CW, T85-PoE, T115-W, T125, T125-W, T145, T145-W, T185, M290, M295, M390, M395, M495, M590, M595, M690, M695

Substances Listed	Limit
Cadmium(Cd)	≤ 0.01% (100 ppm)
Hexa-valent Chromium (Cr6+)	≤ 0.1% (1000 ppm)
Lead (Pb)	≤ 0.1% (1000 ppm) *
Mercury (Hg)	≤ 0.1% (1000 ppm)
Polybrominated biphenyls (PBB)	≤ 0.1% (1000 ppm)
Polybrominated diphenylethers (PBDE or PBBE)	≤ 0.1% (1000 ppm)
Bis (2-ethylhexyl) phthalate (DEHP)	≤ 0.1% (1000 ppm)
Butyl benzyl phthalate (BBP)	≤ 0.1% (1000 ppm)
Dibutyl phthalate (DBP)	≤ 0.1% (1000 ppm)
Diisobutyl phthalate (DIBP)	≤ 0.1% (1000 ppm)

* (contains Lead > 0.1% by weight because of exempted applications)

7a lead in high melting temperature type solders (i.e. lead based alloys containing 85 % by weight or more lead)

7(c) I. Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezo electronic devices, or in a glass or ceramic matrix compound.

WEEE Statement

WatchGuard asks that all our products to be recycled at the end of their current use to comply with local waste compliance requirements.

WatchGuard supports the EU Waste Electrical and Electronic Equipment (WEEE) Directive (2012/19/EU). That means that WEEE may not be disposed as unsorted municipal waste but is to be collected separately.

WatchGuard products are therefore labeled with this symbol:



The WEEE symbol on your WatchGuard equipment indicates that it should not be disposed of by the end user with unsorted municipal waste, but in a manner consistent with required EU Directives, and the local transposition of the Directive in the end user's jurisdiction. The symbol is placed per CENELEC standard EN50419.

WEEE may contain hazardous substances which may negatively affect the environment and human health when disposed of through normal channels. Batteries that are not enclosed in the waste equipment must be separated from it and disposed of separately before being handed in at a collection point. Old batteries, and in certain cases also the waste equipment, can likewise be returned free of charge to the point of sale. You are responsible for deleting any personal data on the waste equipment. WatchGuard is committed to reduce the negative environmental and human health effects of WEEE which will help prevent potential negative consequences for the environment and human health. If you are a consumer please use your local recycling option. This is usually your municipal refuse site.

Limited Hardware Warranty

This Limited Hardware Warranty (the “Warranty”) applies to the enclosed hardware product, not including any associated software, which is licensed pursuant to a separate end-user license agreement and warranty (the “Product”). BY USING THE PRODUCT, YOU (either an individual or a single entity) AGREE TO THE TERMS HEREOF.

If you do not agree to these terms, please return this package, along with proof of purchase, to the authorized dealer from which you purchased it for a full refund. WatchGuard Technologies, Inc. (“WatchGuard”) and you agree as set forth below or on the reverse side of this card, as applicable.

1. **LIMITED WARRANTY.** WatchGuard warrants that upon delivery and for one (1) year thereafter (the “Warranty Period”): (a) the Product will be free from material defects in materials and workmanship, and (b) the Product, when properly installed and used for its intended purpose and in its intended operating environment, will perform substantially in accordance with WatchGuard applicable specifications.

This warranty does not apply to any Product that has been: (i) altered, repaired or modified by any party other than WatchGuard except for the replacement or inclusion of specified components authorized in, and performed in strict accordance with, documentation provided by WatchGuard; or (ii) damaged or destroyed by force majeure events, accidents, power spikes or similar events or by any intentional, reckless or negligent acts or omissions of any party. You may have additional warranties with respect to the Product from the manufacturers of Product components. However, you agree not to look to WatchGuard for, and hereby release WatchGuard from any liability for, performance of, enforcement of, or damages or other relief on account of, any such warranties or any breach thereof.

2. **REMEDIES.** If any Product does not comply with the WatchGuard warranties set forth in Section 1 above, WatchGuard will, following the receipt of the product you claim is defective and at its option, either (a) repair the Product, or (b) replace the Product with a like or similar product; provided, that you will be responsible for returning the Product and for all costs of shipping and handling. Repair or replacement of the Product shall not extend the Warranty Period. Any Product, component, part or other item replaced by WatchGuard becomes the property of WatchGuard. WatchGuard shall not be responsible for return of or damage to any software, firmware, information or data contained in, stored on, or integrated with any returned Products.
3. **DISCLAIMER AND RELEASE.** THE WARRANTIES, OBLIGATIONS AND LIABILITIES OF WATCHGUARD, AND YOUR REMEDIES, SET FORTH IN PARAGRAPHS 1 AND 2 ABOVE ARE EXCLUSIVE AND IN SUBSTITUTION FOR, AND YOU HEREBY WAIVE, DISCLAIM AND RELEASE ANY AND ALL OTHER WARRANTIES, OBLIGATIONS AND LIABILITIES OF WATCHGUARD AND ALL OTHER RIGHTS, CLAIMS AND REMEDIES YOU MAY HAVE AGAINST WATCHGUARD, EXPRESS OR IMPLIED, ARISING BY LAW OR OTHERWISE, WITH RESPECT TO ANY NONCONFORMANCE OR DEFECT IN THE PRODUCT (INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ANY IMPLIED WARRANTY ARISING FROM COURSE OF PERFORMANCE, COURSE OF DEALING, OR USAGE OF TRADE, ANY WARRANTY OF NONINFRINGEMENT, ANY WARRANTY OF UNINTERRUPTED OR ERROR-FREE OPERATION, ANY OBLIGATION, LIABILITY, RIGHT, CLAIM OR REMEDY IN TORT, WHETHER OR NOT

ARISING FROM THE NEGLIGENCE (WHETHER ACTIVE, PASSIVE OR IMPUTED) OR FAULT OF WATCHGUARD OR FROM PRODUCT LIABILITY, STRICT LIABILITY OR OTHER THEORY, AND ANY OBLIGATION, LIABILITY, RIGHT, CLAIM OR REMEDY FOR LOSS OR DAMAGE TO, OR CAUSED BY OR CONTRIBUTED TO BY, THE PRODUCT).

4. **LIMITATION AND LIABILITY.** WATCHGUARD'S LIABILITY (WHETHER ARISING IN CONTRACT (INCLUDING WARRANTY), TORT (INCLUDING ACTIVE, PASSIVE OR IMPUTED NEGLIGENCE AND STRICT LIABILITY AND FAULT) OR OTHER THEORY) WITH REGARD TO ANY PRODUCT WILL IN NO EVENT EXCEED THE PURCHASE PRICE PAID BY YOU FOR SUCH PRODUCT. THIS SHALL BE TRUE EVEN IN THE EVENT OF THE FAILURE OF ANY AGREED REMEDY. IN NO EVENT WILL WATCHGUARD BE LIABLE TO YOU OR ANY THIRD PARTY (WHETHER ARISING IN CONTRACT (INCLUDING WARRANTY), TORT (INCLUDING ACTIVE, PASSIVE OR IMPUTED NEGLIGENCE AND STRICT LIABILITY AND FAULT) OR OTHER THEORY) FOR COST OF COVER OR FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES (INCLUDING WITHOUT LIMITATION LOSS OF PROFITS, BUSINESS, OR DATA) ARISING OUT OF OR IN CONNECTION WITH THIS WARRANTY OR THE USE OF OR INABILITY TO USE THE PRODUCT, EVEN IF WATCHGUARD HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THIS SHALL BE TRUE EVEN IN THE EVENT OF THE FAILURE OF ANY AGREED REMEDY.
5. **MISCELLANEOUS PROVISIONS.** This Warranty will be governed by the laws of the state of Washington, U.S.A., without reference to its choice of law rules. The provisions of the 1980 United Nations Convention on Contracts for the International Sales of Goods, as amended, shall not apply. You agree not to directly or indirectly transfer the Product or use of the product or associated documentation to any country to which such transfer would be prohibited by the U.S. Export laws and regulations. If any provision of this Warranty is found to be invalid or unenforceable, then the remainder shall have full force and effect and the invalid provision shall be modified or partially enforced to the maximum extent permitted by law to effectuate the purpose of this Warranty. This is the entire agreement between WatchGuard and you relating to the Product, and supersedes any prior purchase order, communications, advertising or representations concerning the Product AND BY USING THE PRODUCT YOU AGREE TO THESE TERMS. IF THE PRODUCT IS BEING USED BY AN ENTITY, THE INDIVIDUAL INDICATING AGREEMENT TO THESE TERMS BY USING THE PRODUCT REPRESENTS AND WARRANTS THAT (A) SUCH INDIVIDUAL IS DULY AUTHORIZED TO ACCEPT THE WARRANTY ON BEHALF OF THE ENTITY AND TO BIND THE ENTITY TO THE TERMS OF THIS WARRANTY; (B) THE ENTITY HAS THE FULL POWER, CORPORATE OR OTHERWISE, TO ENTER INTO THE WARRANTY AND PERFORM ITS OBLIGATIONS UNDER THE WARRANTY AND; (C) THE WARRANTY AND THE PERFORMANCE OF THE ENTITY'S OBLIGATIONS UNDER THE WARRANTY DO NOT VIOLATE ANY THIRD-PARTY AGREEMENT TO WHICH THE ENTITY IS A PARTY.

No change or modification of the Warranty will be valid unless it is in writing and is signed by WatchGuard.

