



WATCHGUARD TECHNOLOGIES, INC. TEST REPORT

FOR THE

INTERNET FIREWALL, XP2E6W

FCC PART 15 SUBPART C SECTIONS 15.247, 15.207 & 15.209,
SUBPART B SECTIONS 15.107 & 15.109 CLASS B,
SUBPART B SECTION 15.109 CLASS A (DIGITAL) AND RSS-210

COMPLIANCE

DATE OF ISSUE: NOVEMBER 11, 2005

PREPARED FOR:

Watchguard Technologies, Inc.
505 Fifth Avenue South, Suite 500
Seattle, WA 98104-3892

PREPARED BY:

Mary Ellen Clayton
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

P.O. No.: 251470
W.O. No.: 83764

Date of test: October 4 - November 10, 2005

Report No.: FC05-069

This report contains a total of 99 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc. The results in this report apply only to the items tested, as identified herein.

TABLE OF CONTENTS

Administrative Information	4
FCC to Canada Standard Correlation Matrix.....	5
Conditions for Compliance	5
Approvals.....	5
Equipment Under Test (EUT) Description	6
FCC 15.31(e) Voltage Variation.....	6
FCC 15.31(m) Number Of Channels	6
FCC 15.33(a) Frequency Ranges Tested	6
FCC 15.35 Analyzer Bandwidth Settings.....	6
FCC 15.203 Antenna Requirements	6
FCC 15.205 Restricted Bands.....	6
EUT Operating Frequency	6
Equipment Under Test (EUT) Description	7
Equipment Under Test	7
Peripheral Devices	7
Report of Measurements	9
Table 1: FCC 15.107 Six Highest Conducted Emission Levels	9
Table 2: FCC 15.109 Six Highest Radiated Emission Levels	10
Table 3: FCC 15.109 Six Highest Digital Radiated Emission Levels	11
Table 4: FCC 15.207 Six Highest Conducted Emission Levels	12
FCC 15.247(a)(2) Occupied Bandwidth 6dB	13
FCC 15.247(a)(2) Occupied Bandwidth 26dB	19
Table 5: FCC 15.247(b)(2) RF Power Output	25
Table 6: FCC 15.247(d) Six Highest Spurious Emission Levels	26
Table 7: FCC 15.247(d)/15.209 Six Highest Radiated Emission Levels	27
FCC 15.247(d) Bandedge	28
Table 8: FCC 15.247(e) Peak Power Spectral Density	36
Temperature And Humidity During Testing.....	43
EUT Setup.....	43
Correction Factors.....	43
Table A: Sample Calculations	43
Test Instrumentation and Analyzer Settings	44
Spectrum Analyzer Detector Functions	44
Peak.....	44
Quasi-Peak	44
Average	44
EUT Testing.....	45
Mains Conducted Emissions.....	45
Antenna Conducted Emissions	45
Radiated Emissions.....	45
Appendix A: Test Setup Photographs.....	46
Photograph Showing Mains Conducted Emissions	47

Photograph Showing Mains Conducted Emissions	48
Photograph Showing Radiated Emissions	49
Photograph Showing Radiated Emissions	50
Photograph Showing Direct Connect Test Setup.....	51
EUT Setup.....	52
Appendix B: Test Equipment List	53
Appendix C: Measurement Data Sheets	54

ADMINISTRATIVE INFORMATION

DATE OF TEST: October 4 - November 10, 2005

DATE OF RECEIPT: October 4, 2005

MANUFACTURER: Watchguard Technologies, Inc.
505 Fifth Avenue South, Suite 500
Seattle, WA 98104-3892

REPRESENTATIVE: George Stults

TEST LOCATION: CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

TEST METHOD: ANSI C63.4 (2003), DA 02-2138 August 30, 2002, DA 00-705 March 30, 2000, KDB Publication No. 558074, RSS GEN and RSS-212

PURPOSE OF TEST: To demonstrate the compliance of the Internet Firewall, XP2E6W, with the requirements for FCC Part 15 Subpart C Sections 15.247, 15.207, 15.209, Subpart B 15.107 and 15.109 Class B, Subpart B Section 15.109 Class A (Digital) and RSS-210 devices.

FCC TO CANADA STANDARD CORRELATION MATRIX

Canadian Standard	Canadian Section	FCC Standard	FCC Section	Test Description
RSS GEN	7.1.4	47CFR	15.203	Antenna Connector Requirements
RSS GEN	7.2.1	47CFR	15.35(c)	Pulsed Operation
RSS GEN	7.2.2	47CFR	15.207	AC Mains Conducted Emissions Requirement
RSS 210	2.1	47CFR	15.215(c)	Frequency Stability Recommendation
RSS 210	2.2	47CFR	15.205	Restricted Bands of Operation
RSS 210	2.6	47CFR	15.209	General Radiated Emissions Requirement
RSS 210	A8.2(1)	47CFR	15.247(a)(2)	Minimum 6dB Bandwidth
RSS 210	A8.2(2)	47CFR	15.247(e)	Peak Power Spectral Density
RSS 210	A8.4(4)	47CFR	15.247(b)(3)	RF Power Output
RSS 210	A8.4(5)	47CFR	15.247(c)(1)	Directional Gain Requirements
RSS 210	A8.4(6)	47CFR	15.247(c)(2)	Beam Steering Antennas
RSS 210	A8.5	47CFR	15.247(d)	Spurious Emissions
	IC 3082-D		784962	Site File No.

Notes: Rule Sections for RSS 210 are taken from RSS 210 Issue 6

CONDITIONS FOR COMPLIANCE

No modifications to the EUT were necessary to comply.

APPROVALS


Steve Behm, Director of Engineering Services

QUALITY ASSURANCE:




Joyce Walker, Quality Assurance Administrative Manager

TEST PERSONNEL:



Mike Wilkinson, Lab Manager



Randy Clark, EMC Engineer

EQUIPMENT UNDER TEST (EUT) DESCRIPTION

The customer declares the EUT tested by CKC Laboratories was representative of a production unit.

FCC 15.31(e) Voltage Variations

No detectable change.

FCC 15.31(m) Number Of Channels

This device was tested on three channels.

FCC 15.33(a) Frequency Ranges Tested

15.107 Conducted Emissions: 150 kHz – 30 MHz

15.109 Radiated Emissions: 30 MHz – 12.5 GHz

15.207 Conducted Emissions: 150 kHz – 30 MHz

15.209/15.247 Radiated Emissions: 9 kHz – 26 GHz

FCC SECTION 15.35: ANALYZER BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	26 GHz	1 MHz

FCC 15.203 Antenna Requirements

The antenna has a reverse polarity SMA connector; therefore the EUT complies with Section 15.203 of the FCC rules.

FCC 15.205 Restricted Bands

The fundamental operating frequency lies outside the restricted bands and therefore complies with the requirements of Section 15.205 of the FCC rules. Any spurious emission coming from the EUT was investigated to determine if any portion lies inside the restricted band. If any portion of a spurious emissions signal was found to be within a restricted band, investigation was performed to ensure compliance with Section 15.209.

EUT Operating Frequency

The EUT was operating at 2412MHz – 2462MHz.

EQUIPMENT UNDER TEST (EUT) DESCRIPTION

The customer declares the EUT tested by CKC Laboratories was representative of a production unit.

EQUIPMENT UNDER TEST

AC Adapter for EUT

Manuf: Globtek
Model: GT-41052-1512
Serial: NA

Internet Firewall

Manuf: WatchGuard Technologies, Inc.
Model: XP2E6W
Serial: 100405-001

AC Adapter for EUT

Manuf: Leader Electronics Inc.
Model: 1415-2120125-WP
Serial: NA

PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s):

Host PC

Manuf: Toshiba
Model: PT810U
Serial: 60748626U

AC Adapter for Host PC

Manuf: Toshiba
Model: PA2444U
Serial: 1359480

Internet Firewall

Manuf: WatchGuard Technologies, Inc.
Model: R6264S
Serial: 808005596-6641

Internet Firewall

Manuf: WatchGuard Technologies, Inc.
Model: MF16S32E10
Serial: 706600002-6EF8

Internet Firewall

Manuf: WatchGuard Technologies, Inc.
Model: MF16S32E10
Serial: 706600207-AD99

Internet Firewall

Manuf: WatchGuard Technologies, Inc.
Model: MF16S32E10
Serial: 110

Laptop PC

Manuf: Toshiba
Model: PA1230U XCD
Serial: 02792218-3

Laptop PC

Manuf: Dell
Model: D600
Serial: 79GSC51

USB/Wireless Network Adapter

Manuf: Linksys
Model: WUSB54GS
Serial: MI0004C09761

REPORT OF MEASUREMENTS

The following tables report the six highest worst case levels recorded during the tests performed on the EUT. All readings taken are peak readings unless otherwise noted. The data sheets from which these tables were compiled are contained in Appendix C.

Table 1: FCC 15.107 Six Highest Conducted Emission Levels

FREQUENCY MHz	METER READING dBμV	CORRECTION FACTORS				CORRECTED READING dBμV	SPEC LIMIT dBμV	MARGIN dB	NOTES
		Cable dB	Lisn dB	HPF dB	Att dB				
0.190724	37.5	0.1	0.3	0.2	10.2	48.3	54.0	-5.7	W-G
2.118999	27.1	0.2	0.4	0.1	10.3	38.1	46.0	-7.9	B-L
2.416690	27.5	0.3	0.4	0.1	10.3	38.6	46.0	-7.4	B-G
2.450712	29.8	0.3	0.3	0.1	10.3	40.8	46.0	-5.2	B-G
2.552777	28.1	0.3	0.3	0.1	10.3	39.1	46.0	-6.9	B-G
2.654843	27.0	0.3	0.3	0.1	10.3	38.0	46.0	-8.0	W-G

Test Method: ANSI C63.4 (2003)
Spec Limit: FCC Part 15 Subpart B Section 15.107 Class B

NOTES: B = Black Lead
W = White Lead
G = Globetek Power Supply
L = Leader Power Supply

COMMENTS: EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b @ 11MBs. Frequency Range Investigated: 150 kHz to 30 MHz. Temperature: 65°F, Relative Humidity: 32%.

Table 2: FCC 15.109 Six Highest Radiated Emission Levels

FREQUENCY MHz	METER READING dBμV	CORRECTION FACTORS				CORRECTED READING dBμV/m	SPEC LIMIT dBμV/m	MARGIN dB	NOTES
		Ant dB	Amp dB	Cable dB	Dist dB				
125.018	48.3	11.2	-26.7	2.5		35.3	43.5	-8.2	V
200.443	52.9	8.3	-26.5	3.3		38.0	43.5	-5.5	V
324.898	49.1	13.5	-26.4	4.3		40.5	46.0	-5.5	V
375.044	46.5	14.8	-26.7	4.8		39.4	46.0	-6.6	H
1170.050	50.7	24.7	-35.7	6.8		46.5	54.0	-7.5	V
1320.005	51.1	25.2	-35.5	7.3		48.1	54.0	-5.9	V

Test Method: ANSI C63.4 (2003)
Spec Limit: FCC Part 15 Subpart B Section 15.109 Class B
Test Distance: 3 Meters

NOTES: H = Horizontal Polarization
V = Vertical Polarization

COMMENTS: EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b Rx. Frequency Range Investigated: 30 MHz to 12.5 GHz. Temperature: 65°F, Relative Humidity: 32%.

Table 3: FCC 15.109 Six Highest Digital Radiated Emission Levels

FREQUENCY MHz	METER READING dBμV	CORRECTION FACTORS				CORRECTED READING dBμV/m	SPEC LIMIT dBμV/m	MARGIN dB	NOTES
		Ant dB	Amp dB	Cable dB	Dist dB				
47.817	57.1	8.9	-26.8	1.6	-10.0	30.8	39.1	-8.3	V
55.325	57.0	7.1	-26.8	1.7	-10.0	29.0	39.1	-10.1	V
200.443	52.9	8.3	-26.5	3.3	-10.0	28.0	43.5	-15.5	V
324.898	49.1	13.5	-26.4	4.3	-10.0	30.5	46.4	-15.9	V
1319.950	52.7	25.2	-35.5	7.3	-10.0	39.7	49.5	-9.8	V
1584.022	48.4	26.2	-35.2	8.0	-10.0	37.4	49.5	-12.1	V

Test Method: ANSI C63.4 (2003)
Spec Limit: FCC Part 15 Subpart B Section 15.109 Class A
Test Distance: 3 Meters

NOTES: V = Vertical Polarization

COMMENTS: EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b @ 11MBs. Rx. Frequency Range Investigated: 30 MHz to 2.0 GHz. Highest frequency used or generated is 266 MHz. Temperature: 65°F, Relative Humidity: 32%. All readings are with Globtek supply - Verified that the Globtek was worst case over the Leader supply.

Table 4: FCC 15.207 Six Highest Conducted Emission Levels


FREQUENCY MHz	METER READING dB μ V	CORRECTION FACTORS				CORRECTED READING dB μ V	SPEC LIMIT dB μ V	MARGIN dB	NOTES
		Cable dB	Lisn dB	HPF dB	Att dB				
0.190724	37.5	0.1	0.3	0.2	10.2	48.3	54.0	-5.7	W-G
2.118999	27.1	0.2	0.4	0.1	10.3	38.1	46.0	-7.9	B-L
2.416690	27.5	0.3	0.4	0.1	10.3	38.6	46.0	-7.4	B-G
2.450712	29.8	0.3	0.3	0.1	10.3	40.8	46.0	-5.2	B-G
2.552777	28.1	0.3	0.3	0.1	10.3	39.1	46.0	-6.9	B-G
2.654843	27.0	0.3	0.3	0.1	10.3	38.0	46.0	-8.0	W-G

Test Method: ANSI C63.4 (2003)
Spec Limit: FCC Part 15 Subpart C Section 15.207


NOTES:
B = Black Lead
W = White Lead
G = Globetek Power Supply
L = Leader Power Supply

COMMENTS: EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b @ 11MBs. Low Channel = 2412 MHz. Frequency Range Investigated: 150 kHz to 30 MHz. Temperature: 65°F, Relative Humidity: 32%.


FCC 15.247(a)(2) OCCUPIED BANDWIDTH 6dB LOW 802.11b

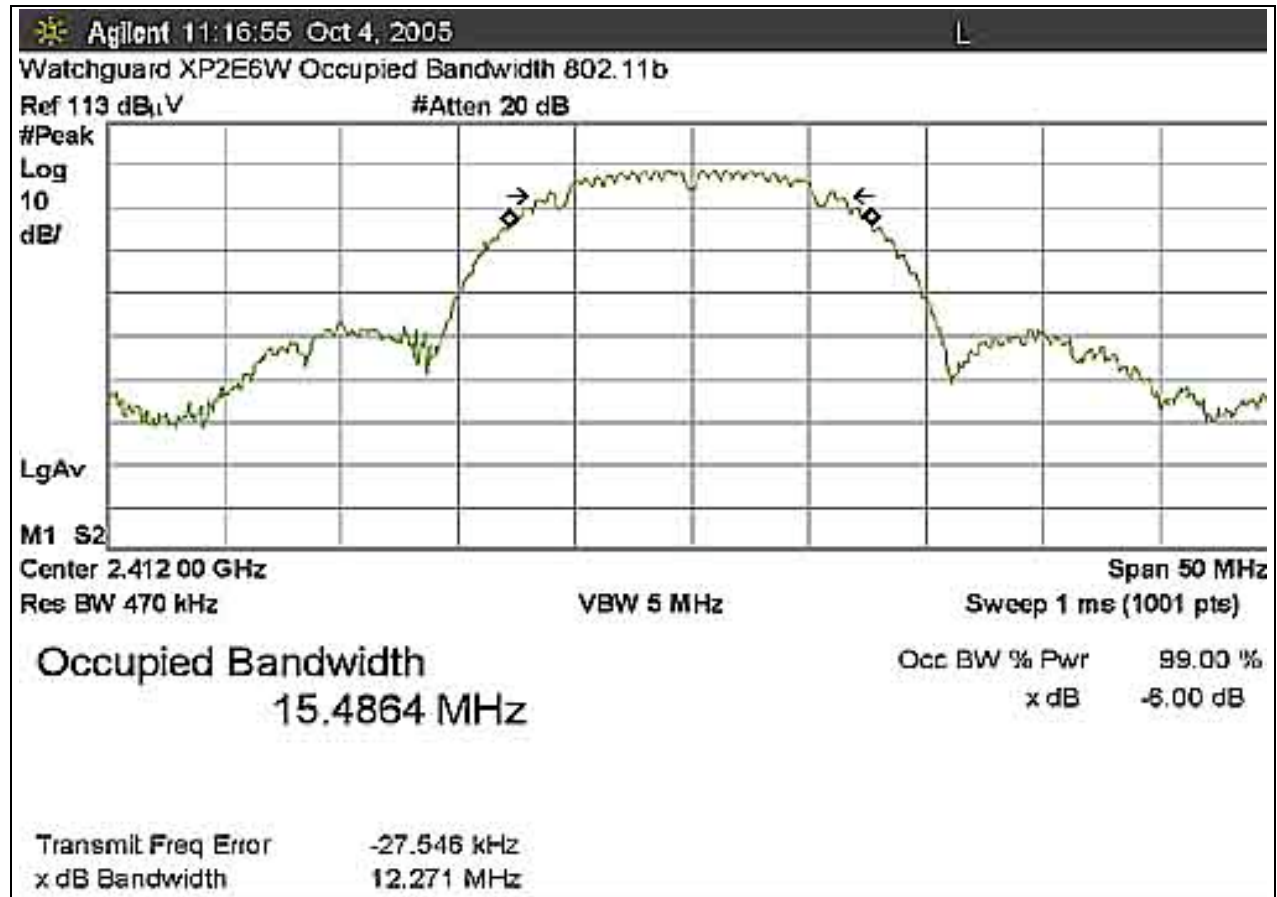


FCC 15.247(a)(2) OCCUPIED BANDWIDTH 6dB MID 802.11b

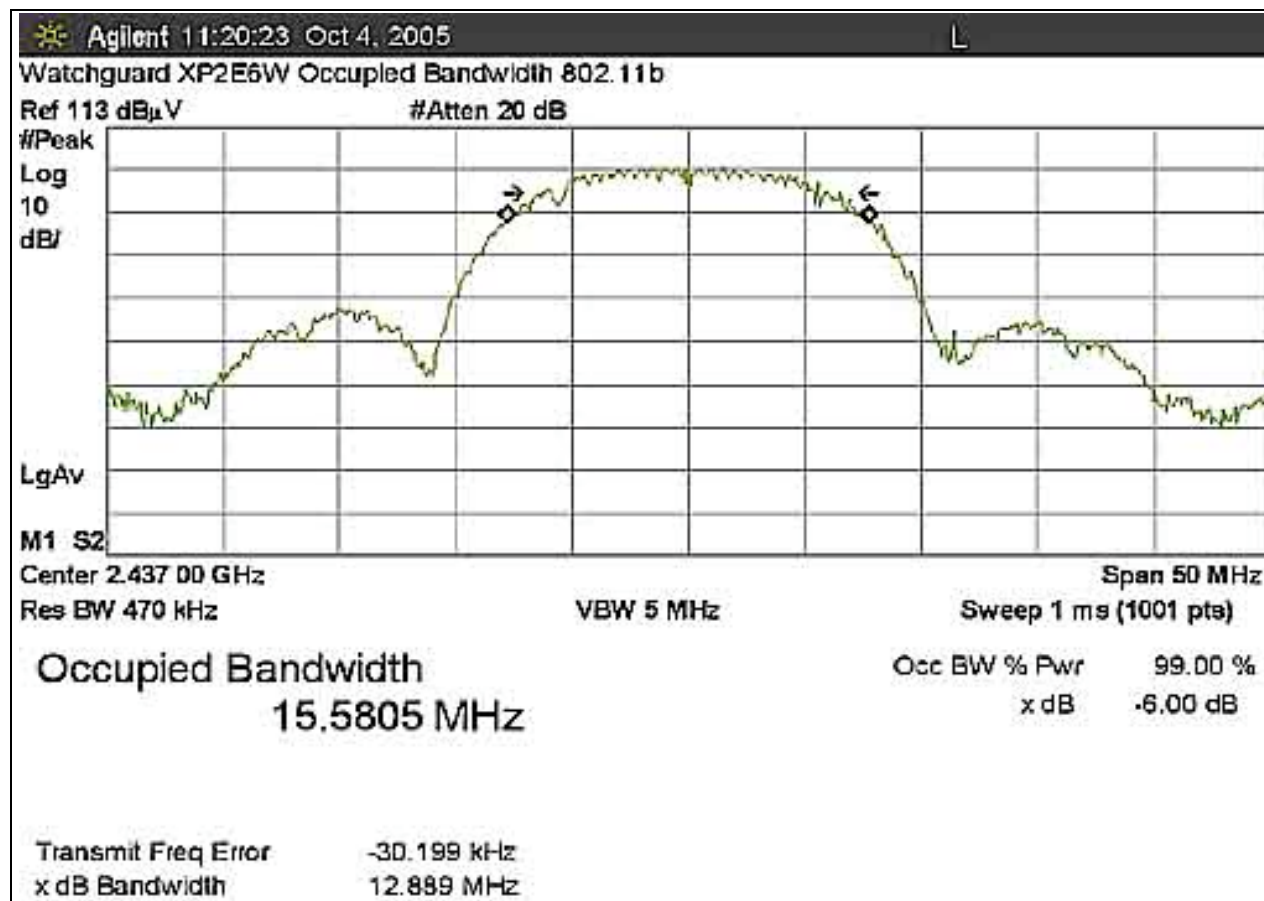


FCC 15.247(a)(2) OCCUPIED BANDWIDTH 6dB HIGH 802.11b

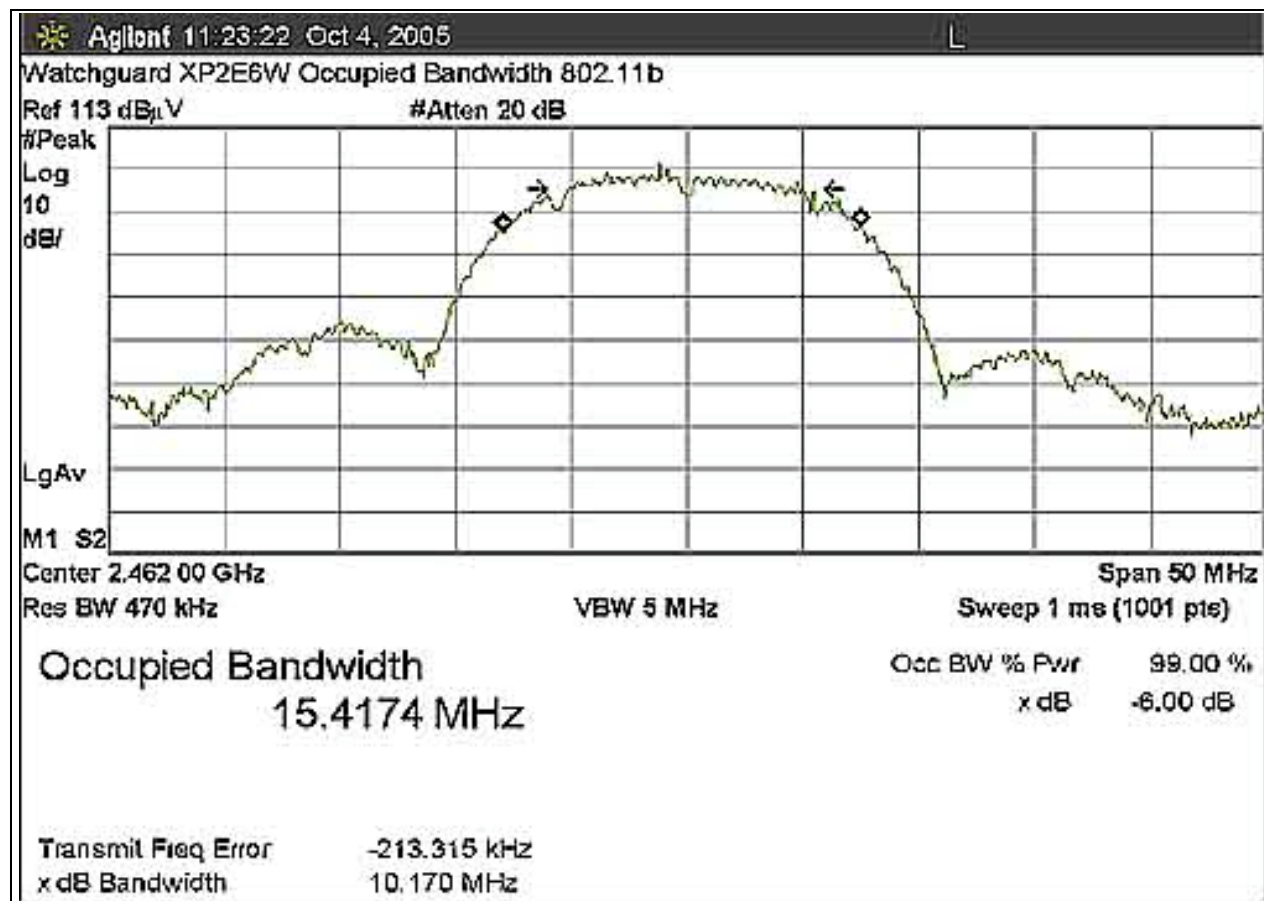


FCC 15.247(a)(2) OCCUPIED BANDWIDTH 6dB LOW 802.11g

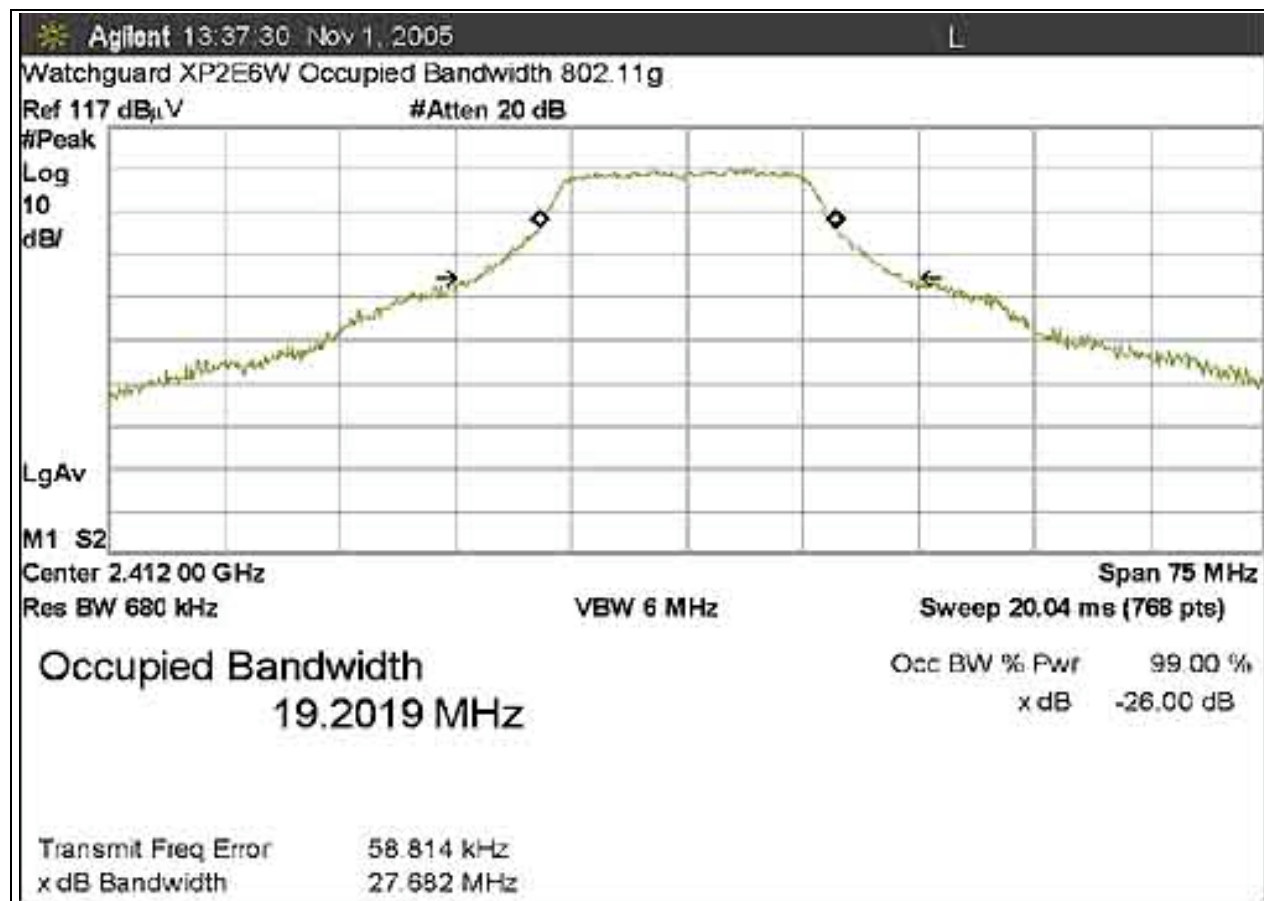


FCC 15.247(a)(2) OCCUPIED BANDWIDTH 6dB MID 802.11g

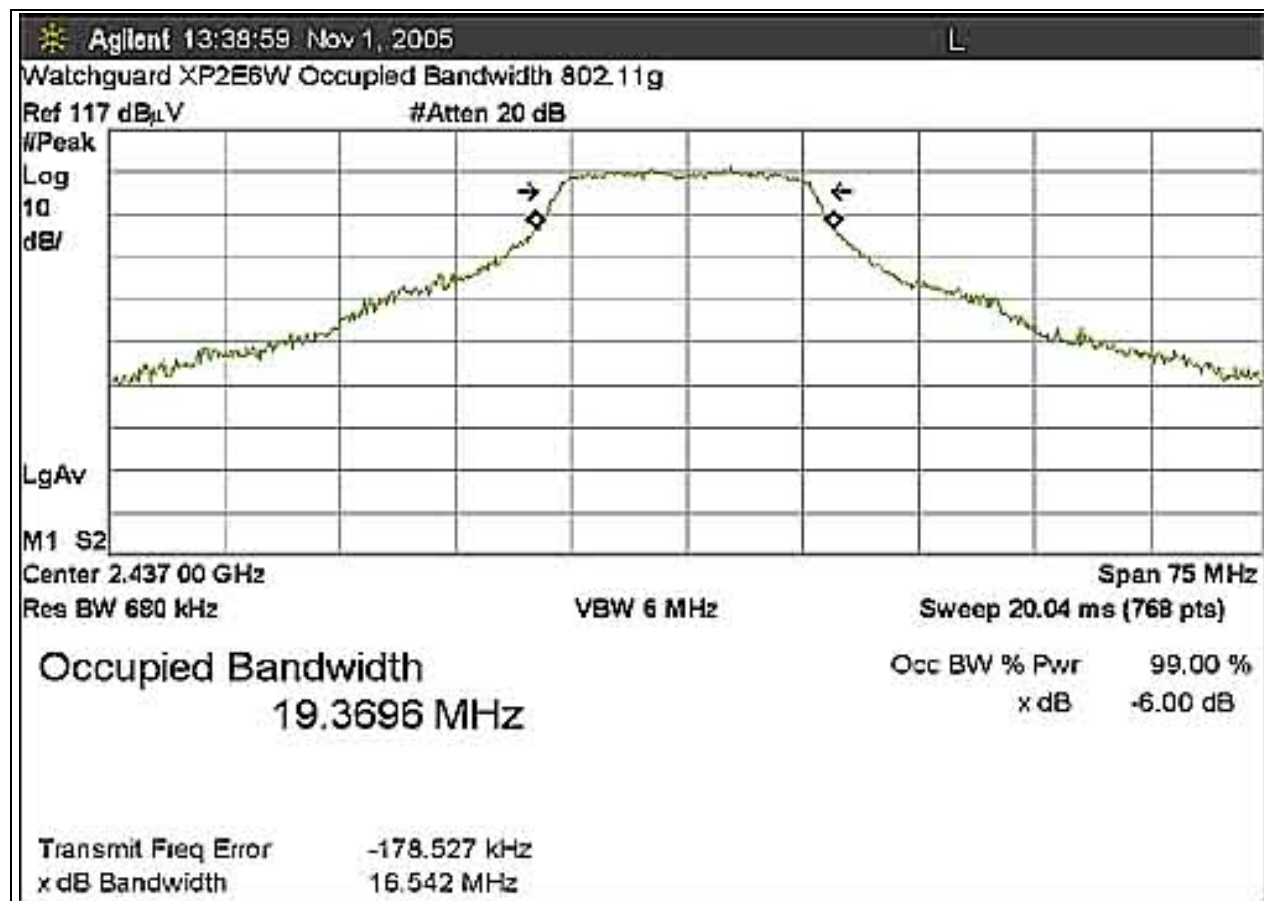


FCC 15.247(a)(2) OCCUPIED BANDWIDTH 6dB HIGH 802.11g

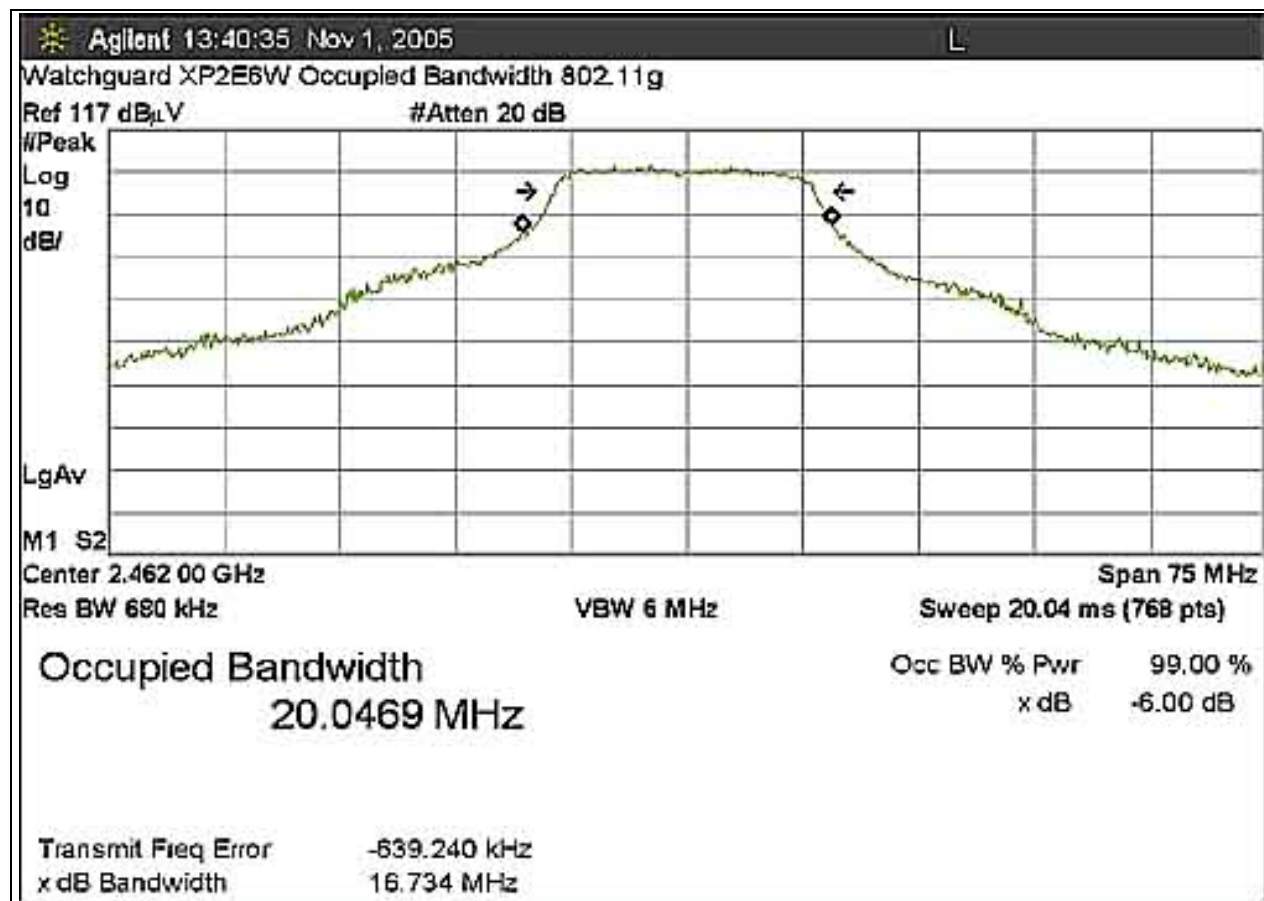


FCC 15.247(a)(2) OCCUPIED BANDWIDTH 26dB LOW 802.11b

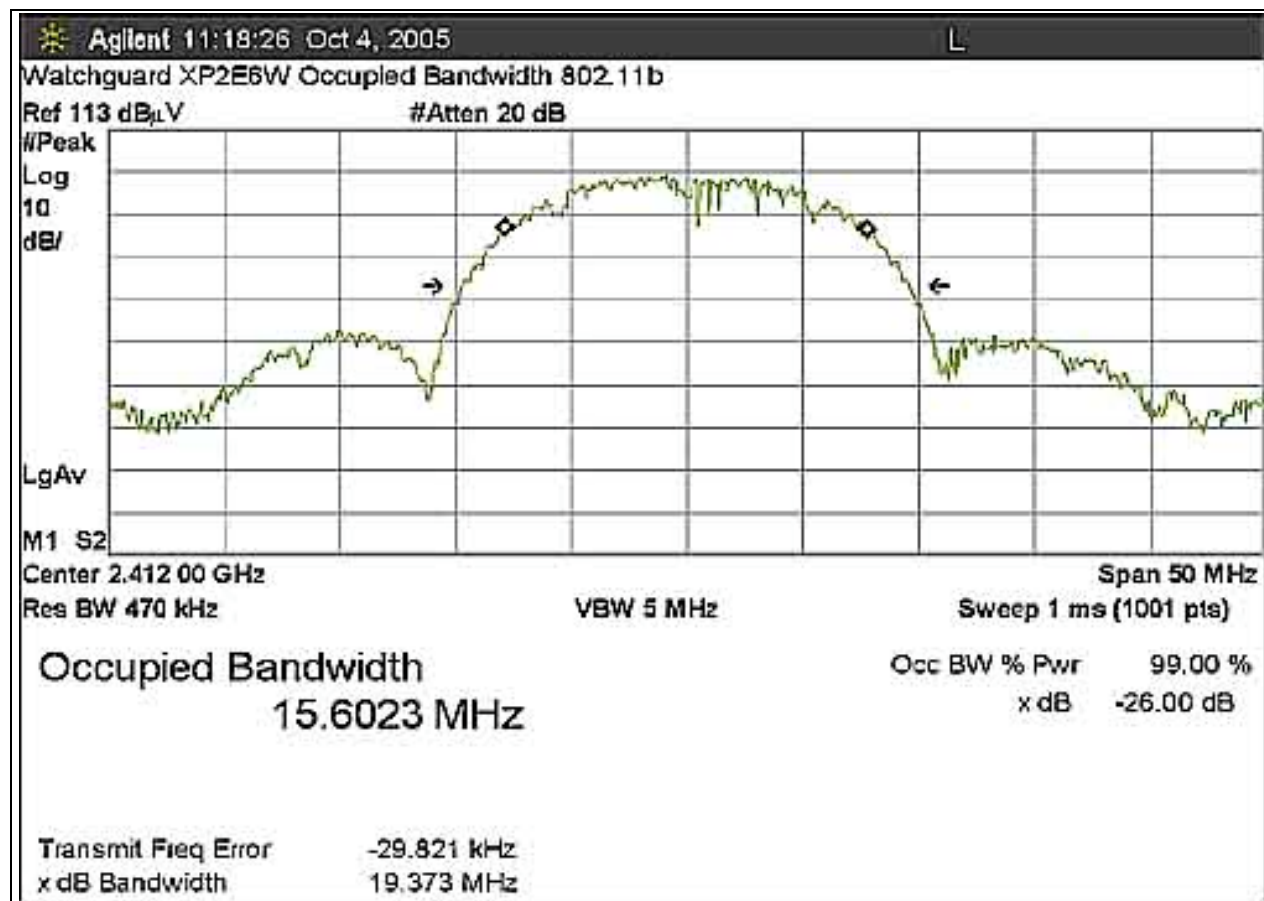


FCC 15.247(a)(2) OCCUPIED BANDWIDTH 26dB MID 802.11b

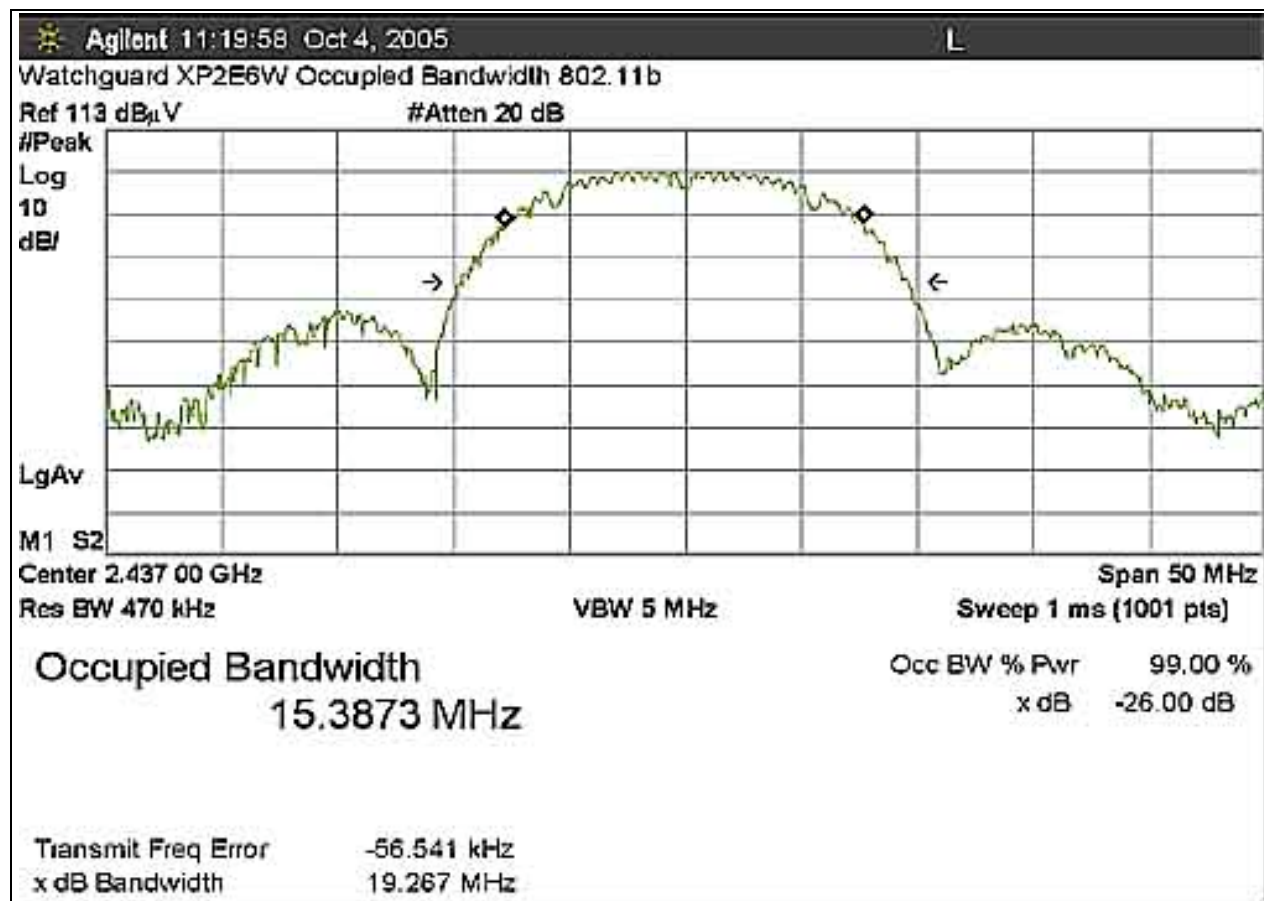


FCC 15.247(a)(2) OCCUPIED BANDWIDTH 26dB HIGH 802.11b

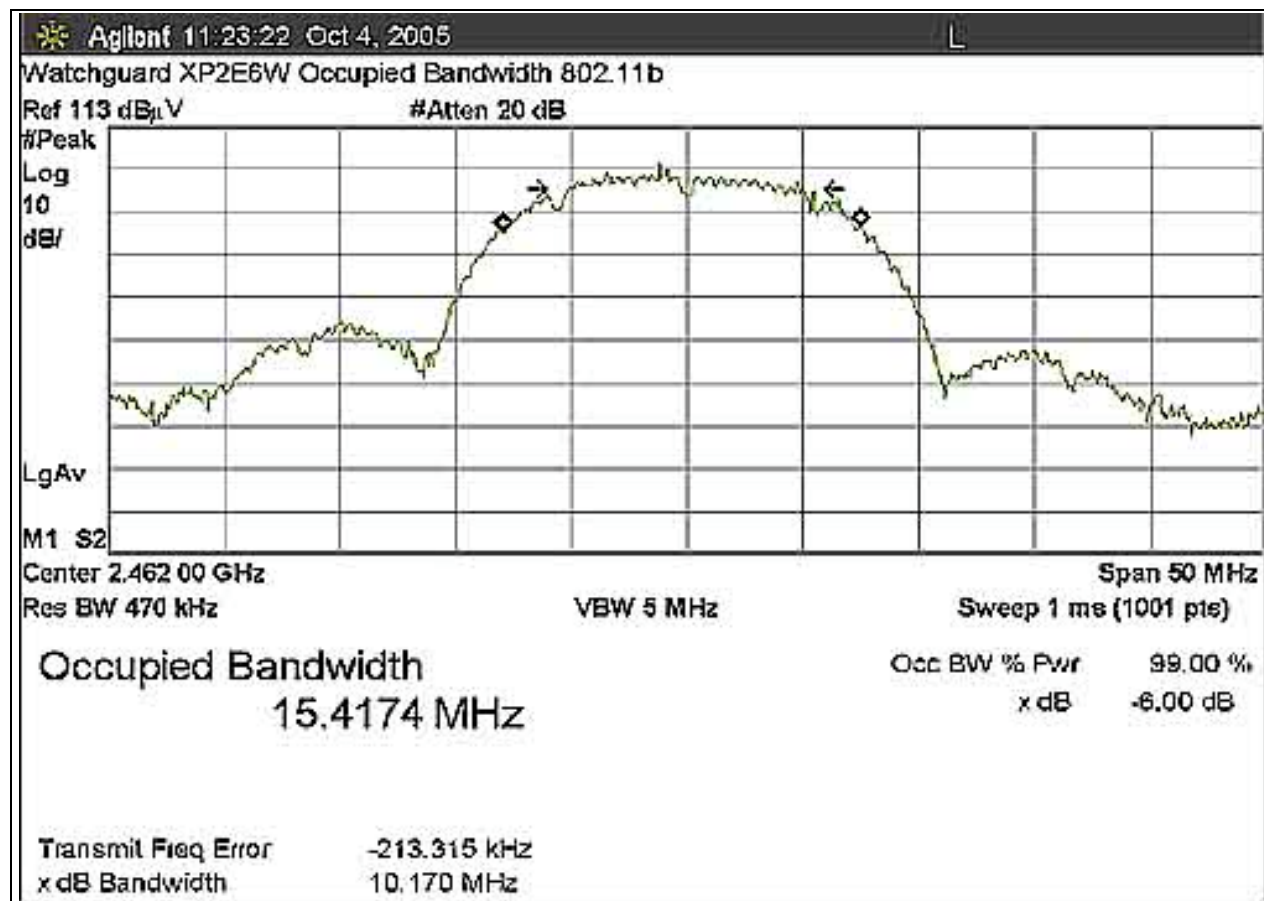

FCC 15.247(a)(2) OCCUPIED BANDWIDTH 26dB LOW 802.11g

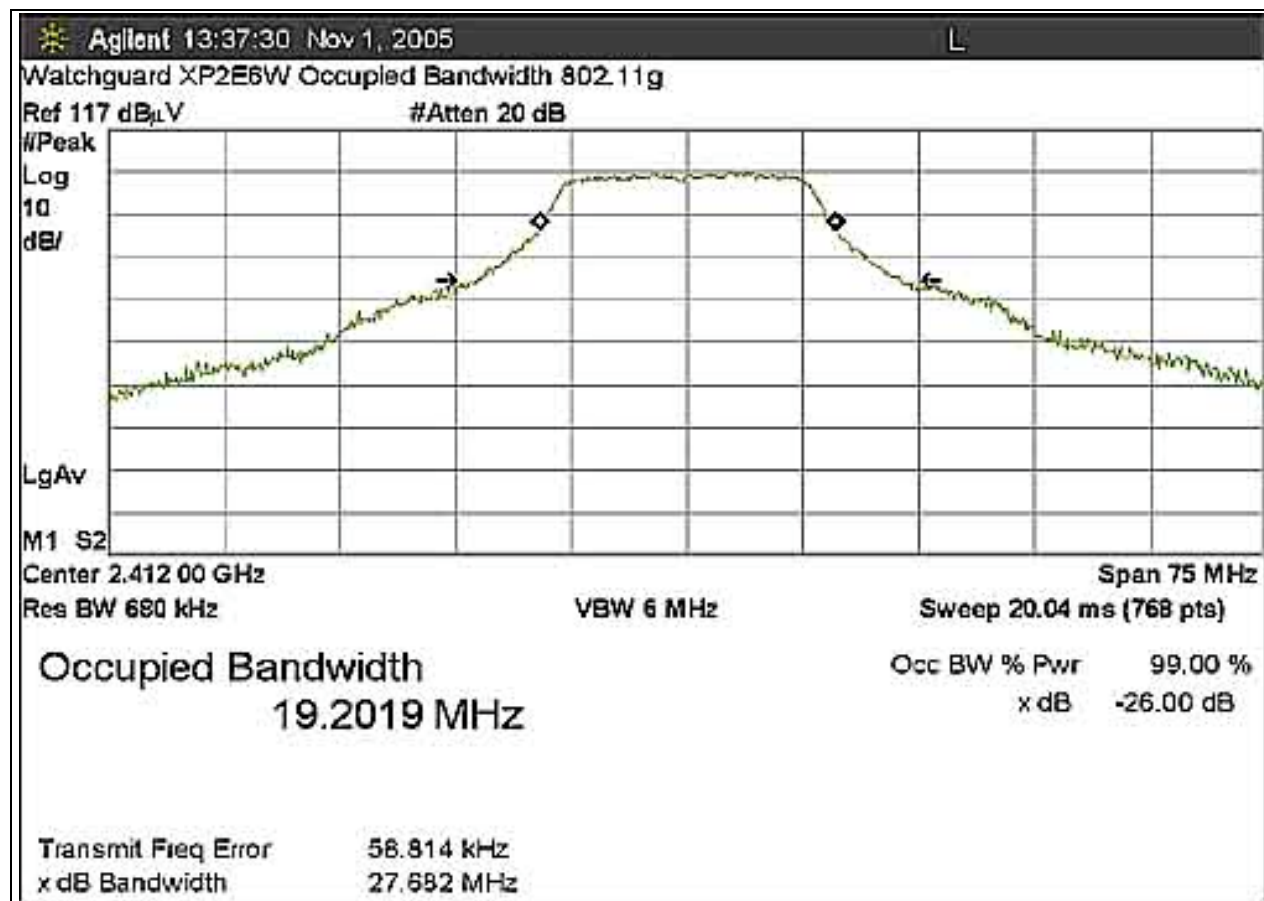

FCC 15.247(a)(2) OCCUPIED BANDWIDTH 26dB MID 802.11g

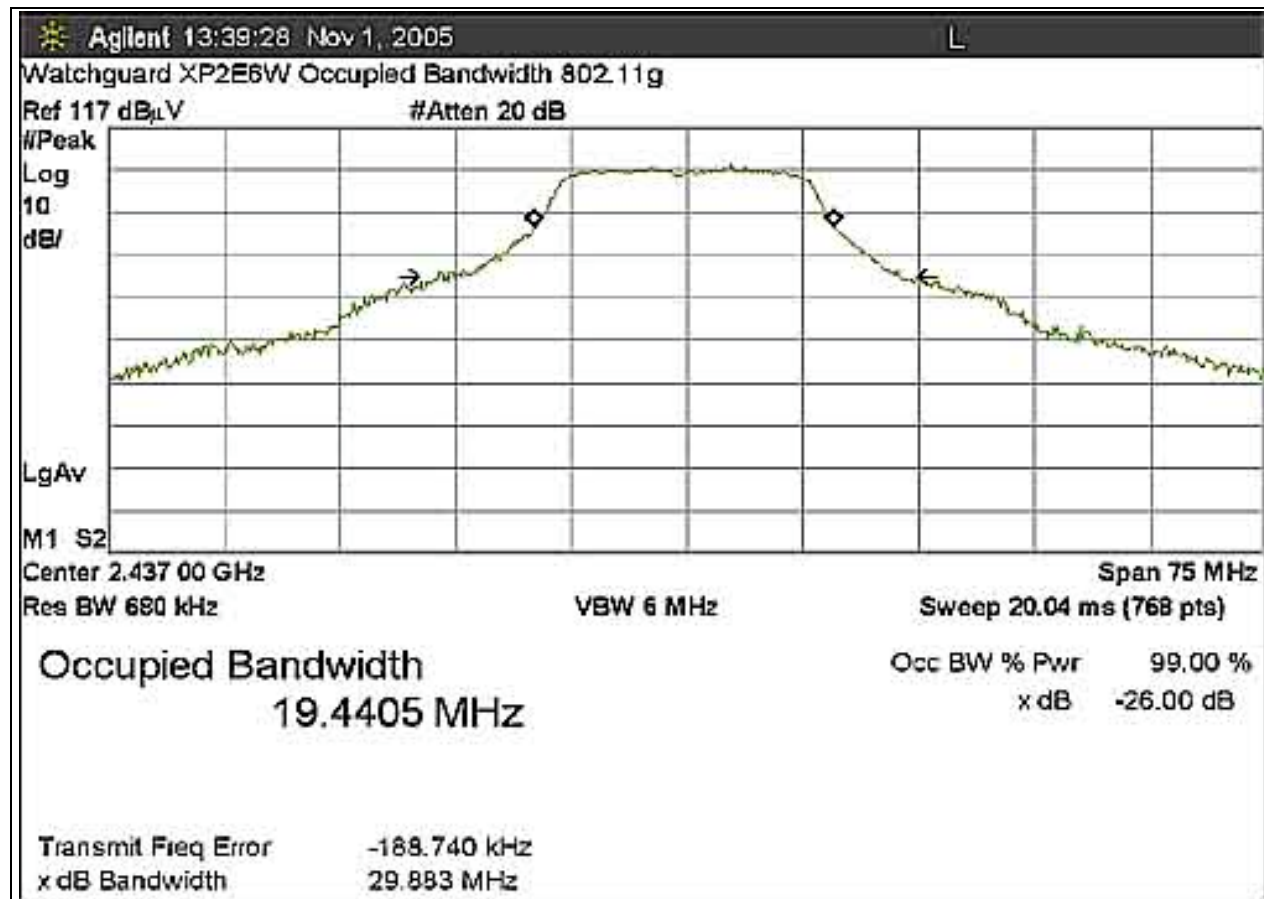

FCC 15.247(a)(2) OCCUPIED BANDWIDTH 26dB HIGH 802.11g

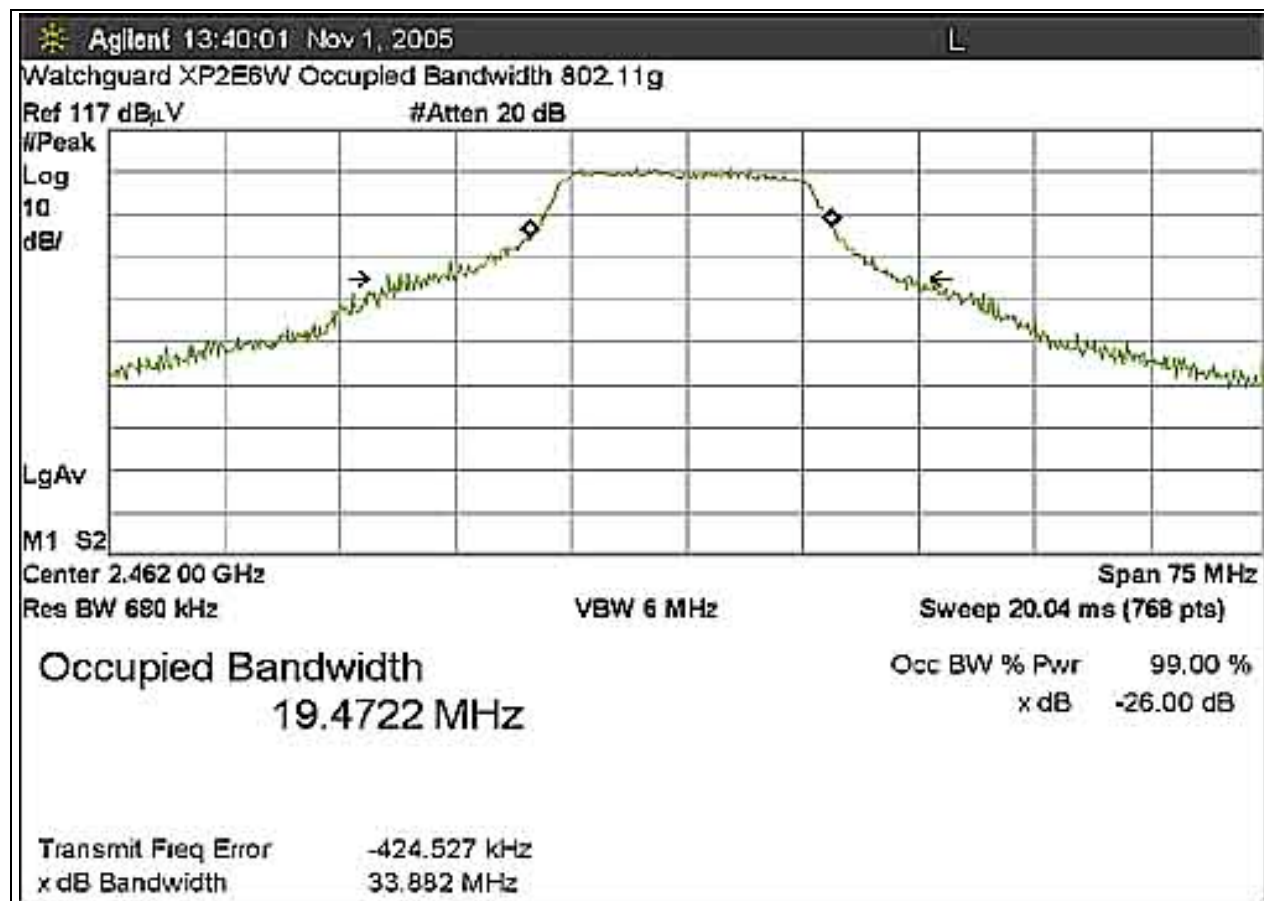


Table 5: FCC 15.247(b)(2) RF Power Output

FREQUENCY MHz	METER READING dBμV	CORRECTION FACTORS				CORRECTED READING dBμV/m	SPEC LIMIT dBμV/m	MARGIN dB	NOTES
		Att dB	Cable dB	Corr dB	Dist dB				
2412.000	119.8	10.0	1.0	5.3		136.1	137.0	-0.9	R-g
2412.000	118.4	10.0	1.0	2.9		132.3	137.0	-4.7	R-b
2437.000	119.9	10.0	1.0	5.3		136.2	137.0	-0.8	R-g
2437.000	119.1	10.0	1.0	2.9		133.0	137.0	-4.0	R-b
2462.000	120.1	10.0	1.0	5.3		136.4	137.0	-0.6	R-g
2462.000	118.1	10.0	1.0	2.9		132.0	137.0	-5.0	R-b

Test Method: ANSI C63.4 (2003)
Spec Limit: FCC Part 15 Subpart C Sections 15.247(b)(3)

NOTES:
R = RF Output
b = 802.11b
g = 802.11g

COMMENTS: EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074. EUT Operational Mode: 802.11b @ 11MBs. Correction factor used $10 \cdot \text{LOG}(\text{EBW}/\text{RBW}) = 2.88$ dB. Also tested in Operational Mode: 802.11g @ 54MBs. Correction factor used $10 \cdot \text{LOG}(\text{EBW}/\text{RBW}) = 5.31$ dB. Frequency Range Investigated: Carrier. Temperature: 65°F, Relative Humidity: 32%.

Table 6: FCC 15.247(d) Six Highest Spurious Emission Levels

FREQUENCY MHz	METER READING dBμV	CORRECTION FACTORS				CORRECTED READING dBμV	SPEC LIMIT dBμV	MARGIN dB	NOTES
		Cable dB	Att dB						
2397.10000	72.7	1.0	10.0			83.7	98.0	-14.3	R-bL
2400.00000	84.0	1.0	10.0			95.0	100.0	-5.0	R-gL
2412.41700	104.3	1.0	10.0			115.3	118.0	-2.7	R-bL
2484.50000	72.6	1.0	10.0			83.6	100.0	-16.4	R-gH
2462.00000	105.9	1.0	10.0			116.9	118.0	-1.1	R-bH
2483.50000	74.4	1.0	10.0			85.4	100.0	-14.6	R-gH

Test Method: ANSI C63.4 (2003)
Spec Limit: FCC Part 15 Subpart C Sections 15.247(d)

NOTES:
R = RF Output
b = 802.11b
g = 802.11g
L = Low
H = High

COMMENTS: EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074. EUT Mode: 802.11b @ 11MBs and EUT Mode: 802.11g @ 54MBs. EUT Channel: Low. EUT Port: Left. Frequency Range Investigated: 9kHz to 26GHz. Temperature: 65°F, Relative Humidity: 32%.

Table 7: FCC 15.247(d)/15.209 Six Highest Radiated Emission Levels


FREQUENCY MHz	METER READING dBμV	CORRECTION FACTORS				CORRECTED READING dBμV/m	SPEC LIMIT dBμV/m	MARGIN dB	NOTES
		Amp dB	Ant dB	Cable dB					
200.020	53.2	-26.5	8.3	3.3		38.3	43.5	-5.2	V-gM
200.424	52.8	0.0	0.0	0.0		37.9	43.5	-5.6	V-bH
200.443	52.9	0.0	0.0	0.0		38.0	43.5	-5/5	V-bM
324.898	49.1	0.0	0.0	0.0		40.5	46.0	-5.5	V-bL
2385.000	46.6	-34.6	29.1	10.1		51.2	54.0	-2.8	VA-gL
4924.000	34.2	-34.3	34.1	15.6		49.6	54.0	-4.4	VA-gH

Test Method: ANSI C63.4 (2003)
Spec Limit: FCC Part 15 Subpart C Sections 15.247(d)/15.209
Test Distance: 3 Meters


NOTES:
A = Average Reading
V = Vertical Polarization
b = 802.11b
g = 802.11g
L = Low
M = Mid
H = High

COMMENTS: EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11bg. Low, Mid and High transmit channel investigated and noted for each reading. Data represents both operational modes of EUT. Low channel = 2412 MHz, Mid channel = 2437 MHz, High channel = 2462 MHz. Frequency Range Investigated: 30 MHz to 26 GHz. **No signals observed above 5 GHz.** Temperature: 65°F, Relative Humidity: 32%.


FCC 15.247(d) BANDEDGE LOW 802.11b

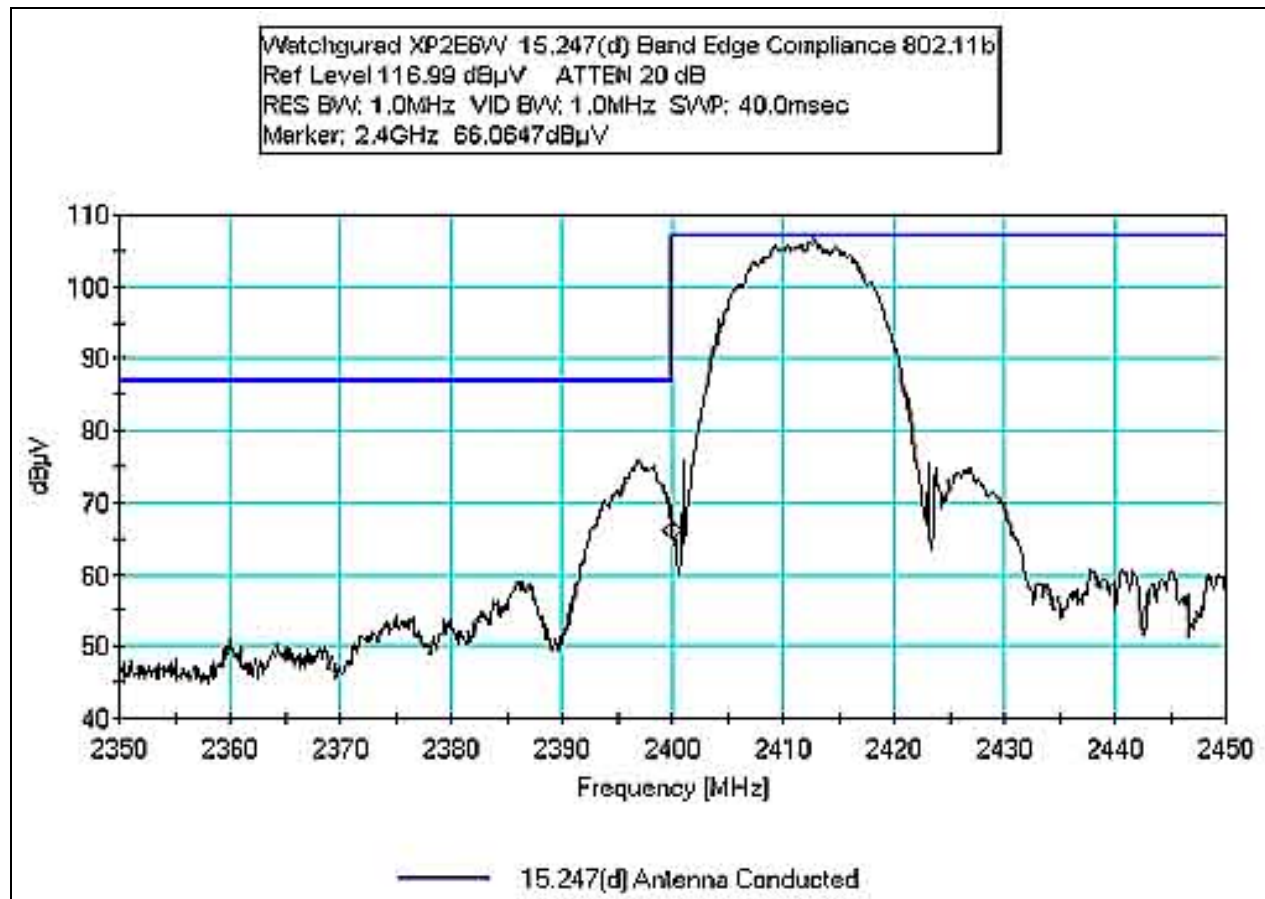


FCC 15.247(d) BANDEDGE HIGH 802.11b

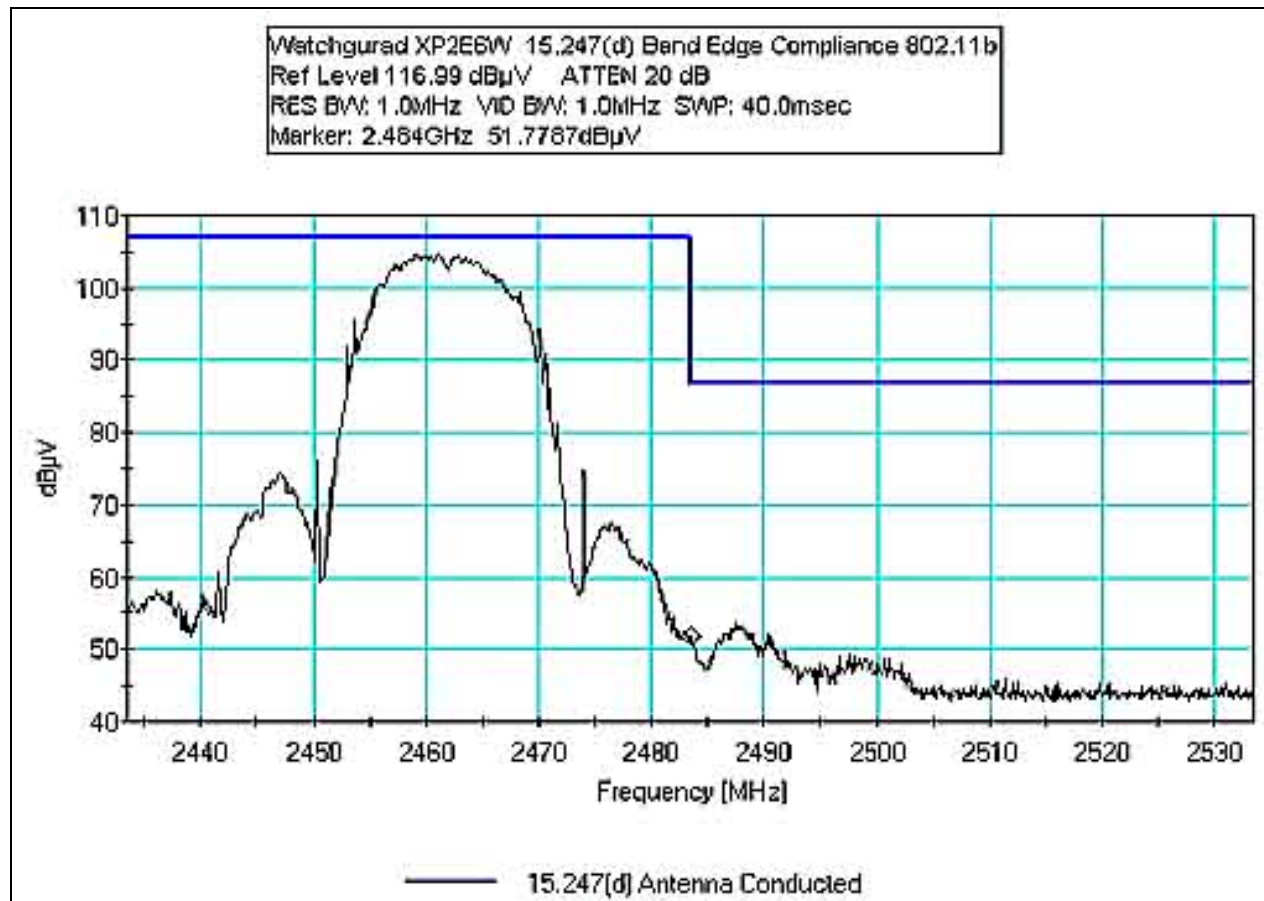


FCC 15.247(d) BANDEDGE LOW OATS 802.11b

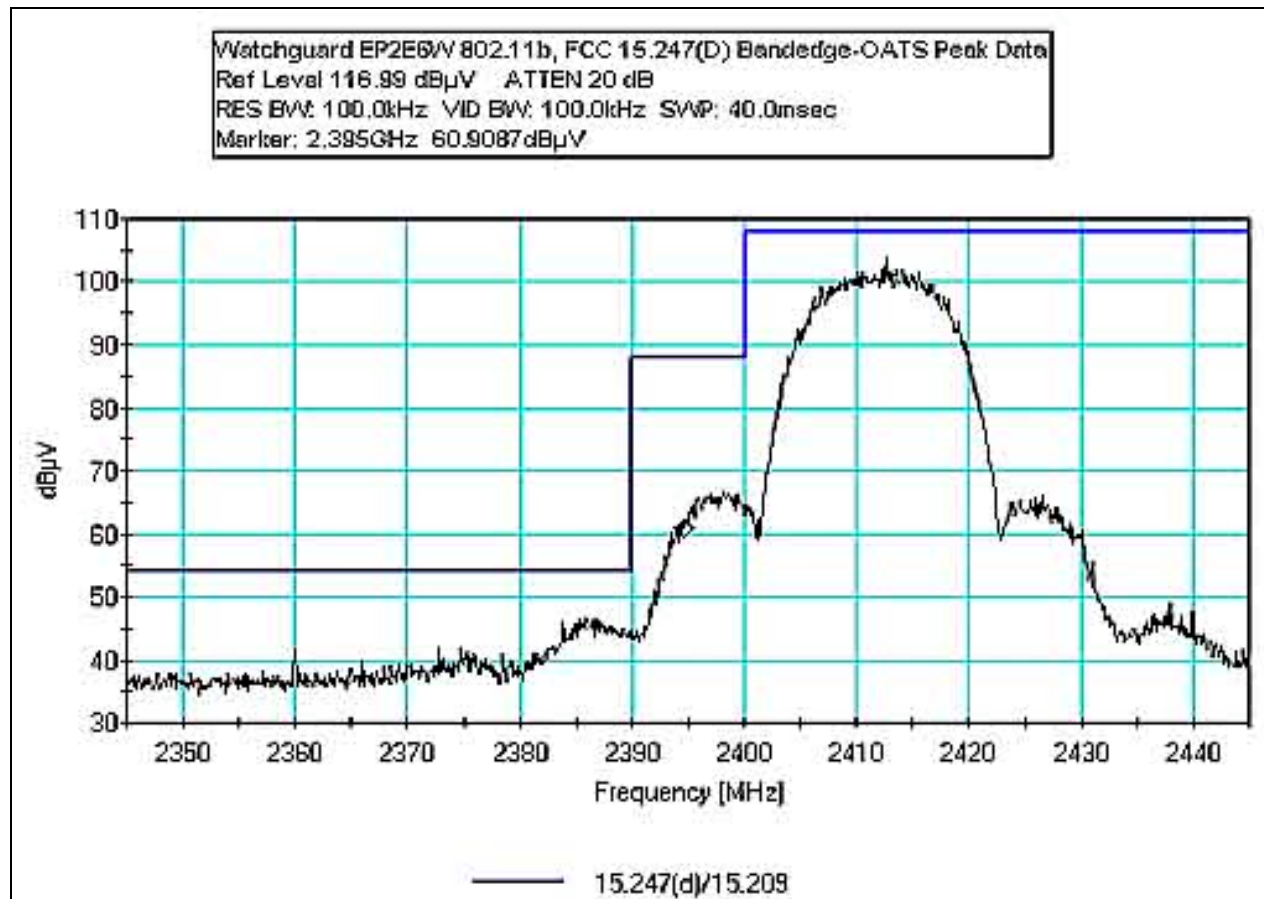


FCC 15.247(d) BANDEDGE HIGH OATS 802.11b

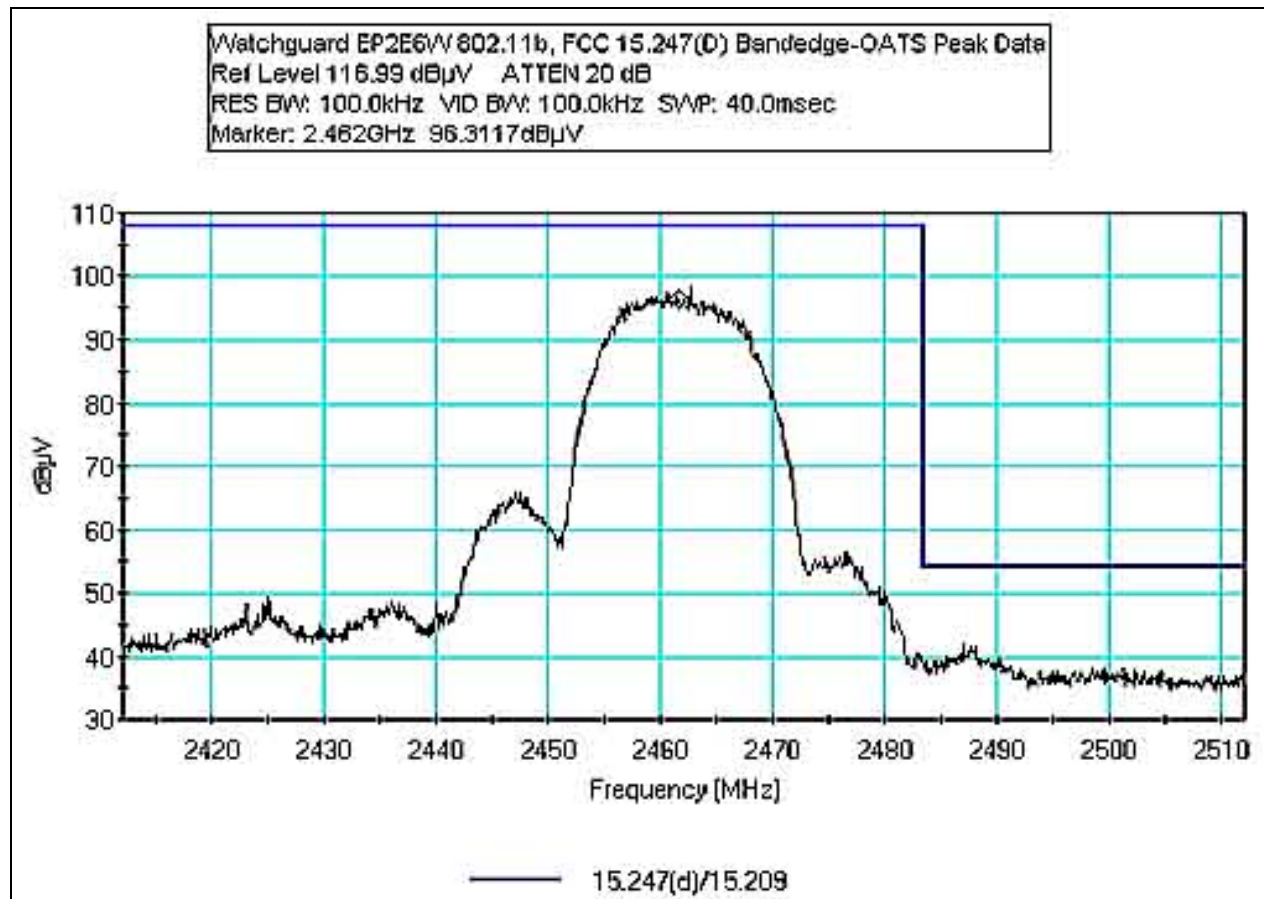


FCC 15.247(d) BANDEDGE LOW 802.11g

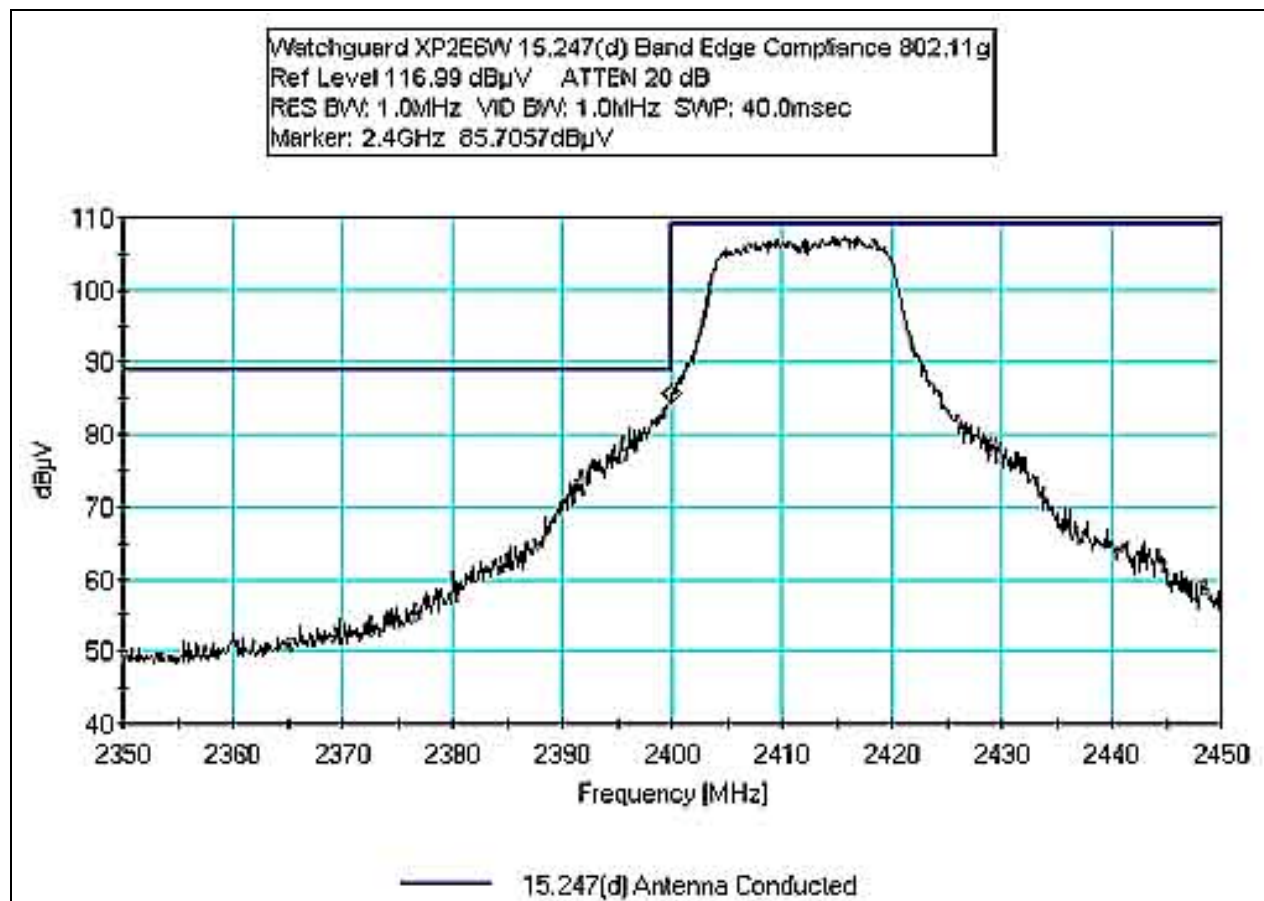

FCC 15.247(d) BANDEDGE HIGH 802.11g

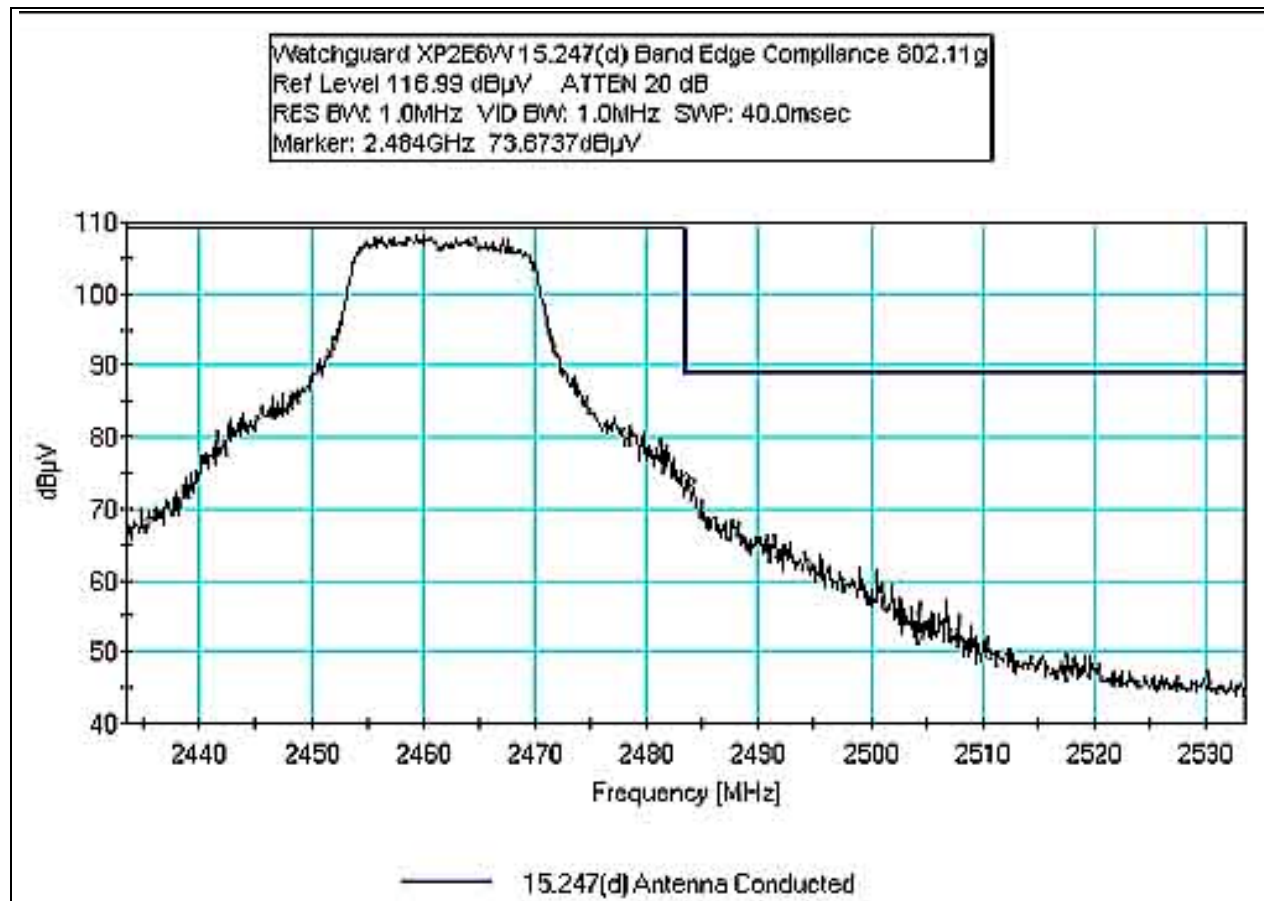

FCC 15.247(d) BANDEDGE LOW OATS 802.11g

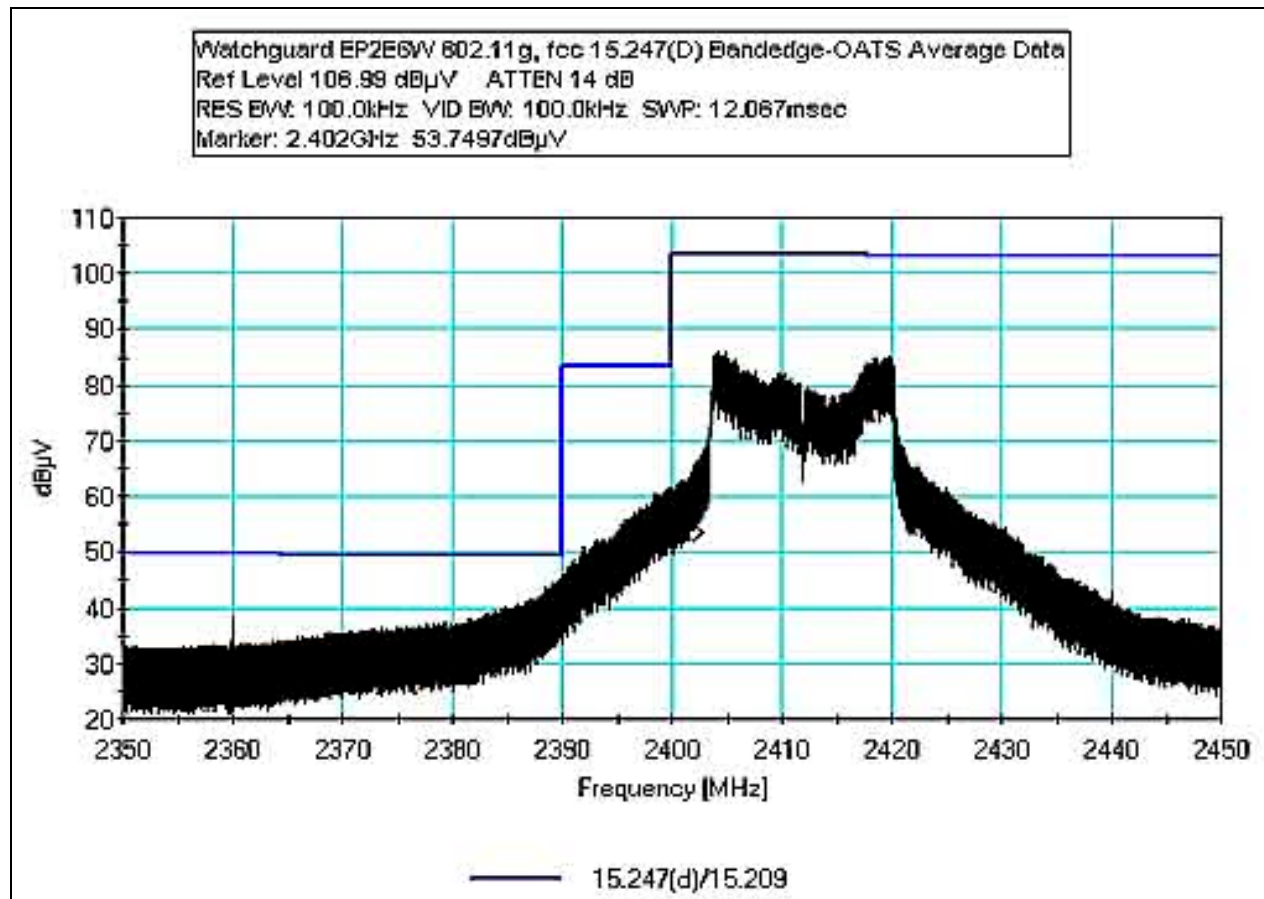

FCC 15.247(d) BANDEDGE HIGH OATS 802.11g

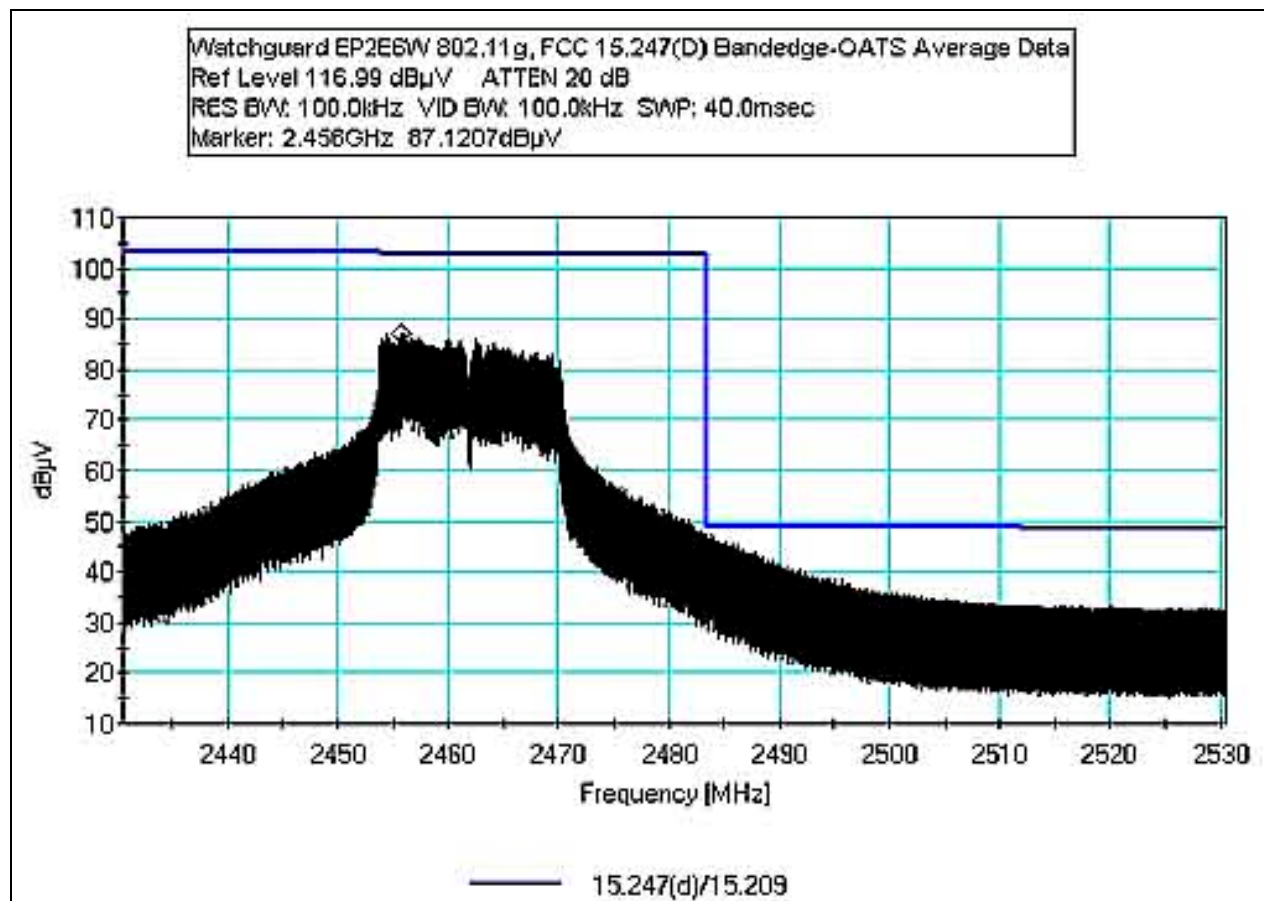


Table 8: FCC 15.247(e) Peak Power Spectral Density


FREQUENCY MHz	METER READING dBμV	CORRECTION FACTORS				CORRECTED READING dBμV	SPEC LIMIT dBμV	MARGIN dB	NOTES
		Cable dB	Corr dB	Att dB					
2410.47000	84.2	1.0	107.0	10.0		-11.8	8.0	-19.8	R-g
2412.90000	86.1	1.0	107.0	10.0		-9.9	8.0	-17.9	R-b
2437.27000	84.7	1.0	107.0	10.0		-11.3	8.0	-19.3	R-g
2439.88000	89.5	1.0	107.0	10.0		-6.5	8.0	-14.5	R-b
2463.84000	85.6	1.0	107.0	10.0		-10.4	8.0	-18.4	R-g
2465.40000	88.5	1.0	107.0	10.0		-7.5	8.0	-15.5	R-b

Test Method: ANSI C63.4 (2003)
Spec Limit: FCC Part 15 Subpart C Sections 15.247(e)


NOTES:
R = RF Output
b = 802.11b
g = 802.11g

COMMENTS: EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074. EUT Mode: 802.11b @ 11MBs and EUT Mode: 802.11g @ 54MBs EUT Port: Left. Frequency Range Investigated: Carrier. Temperature: 65°F, Relative Humidity: 32%.


FCC 15.247(e) POWER SPECTRAL DENSITY LOW 802.11b

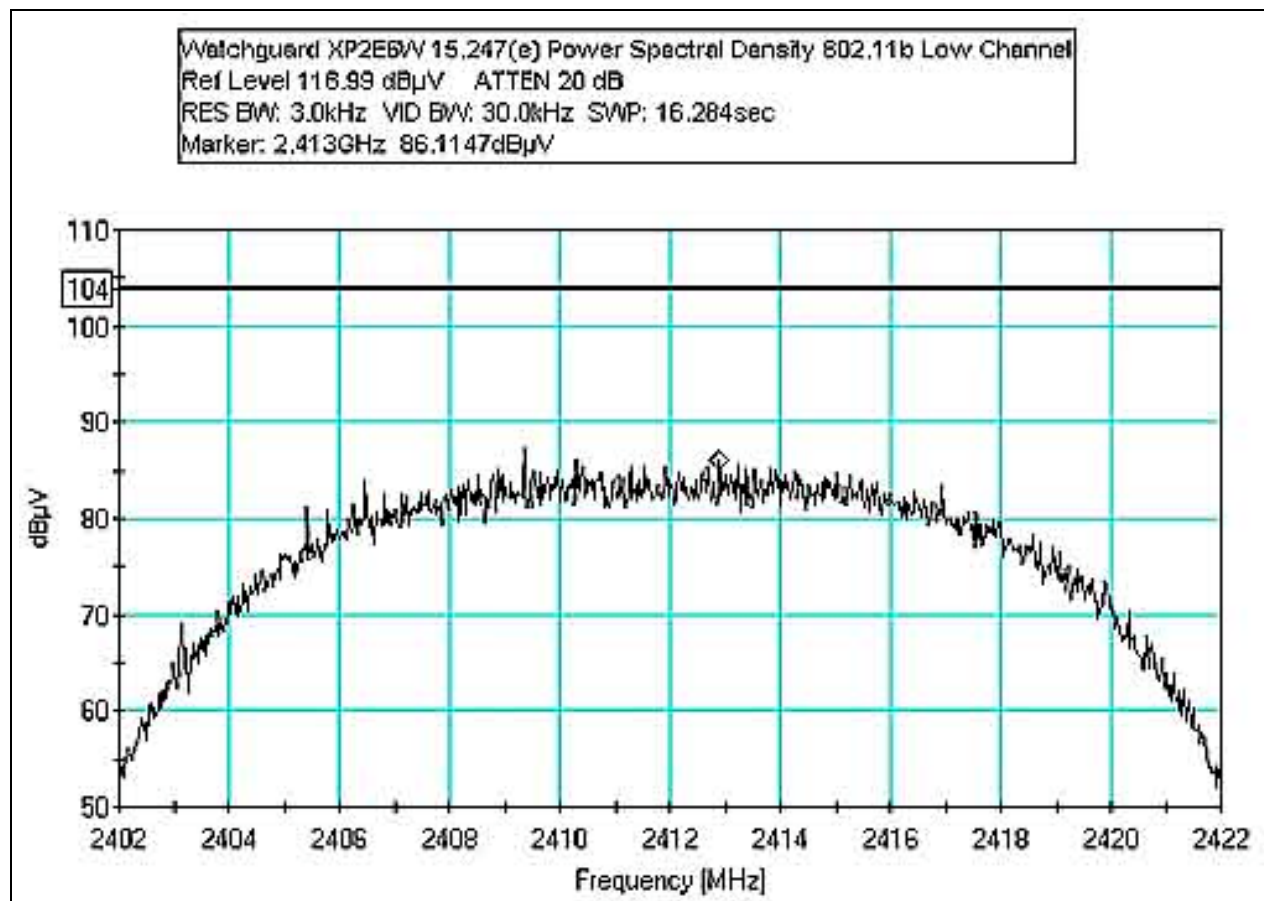


FCC 15.247(e) POWER SPECTRAL DENSITY MID 802.11b

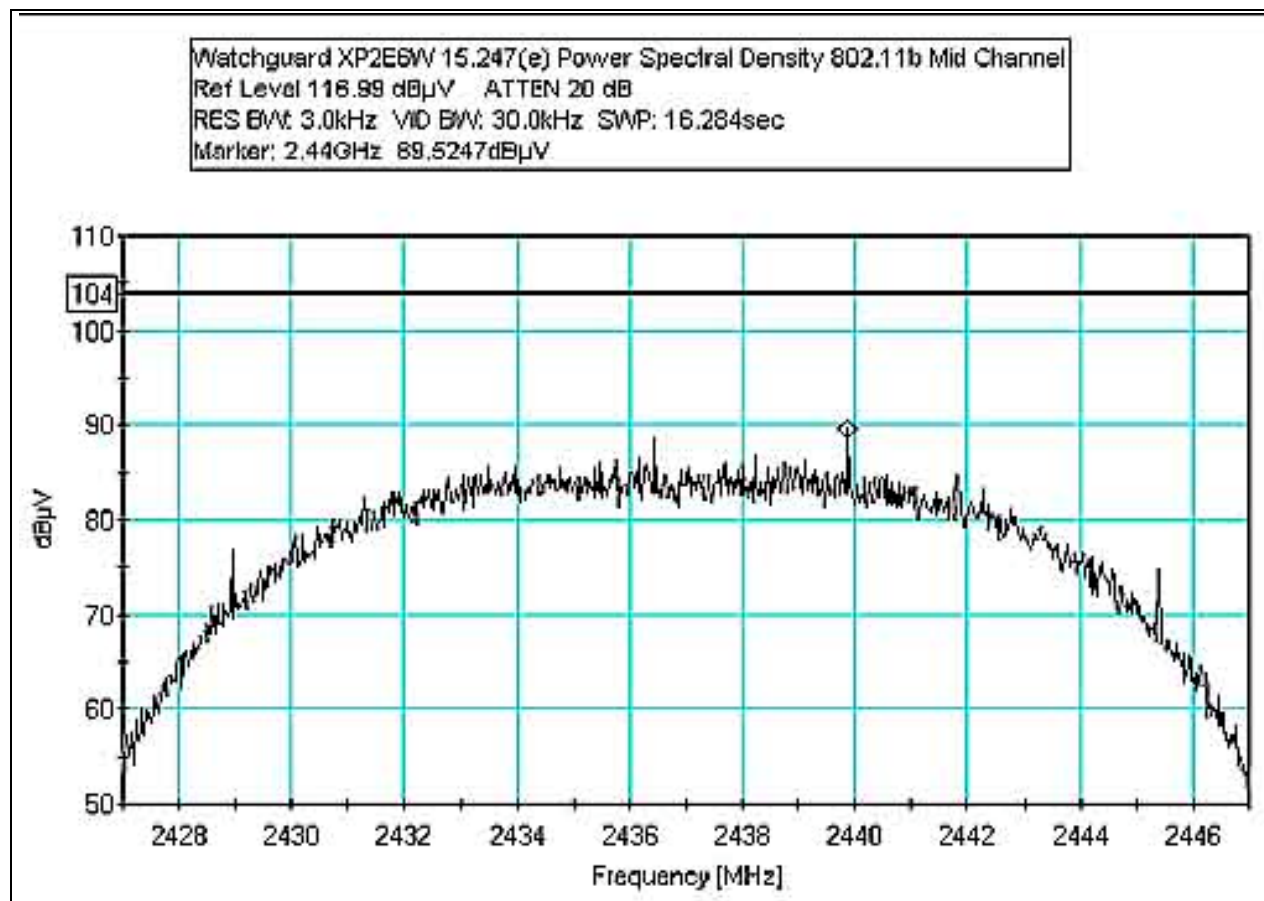


FCC 15.247(e) POWER SPECTRAL DENSITY HIGH 802.11b

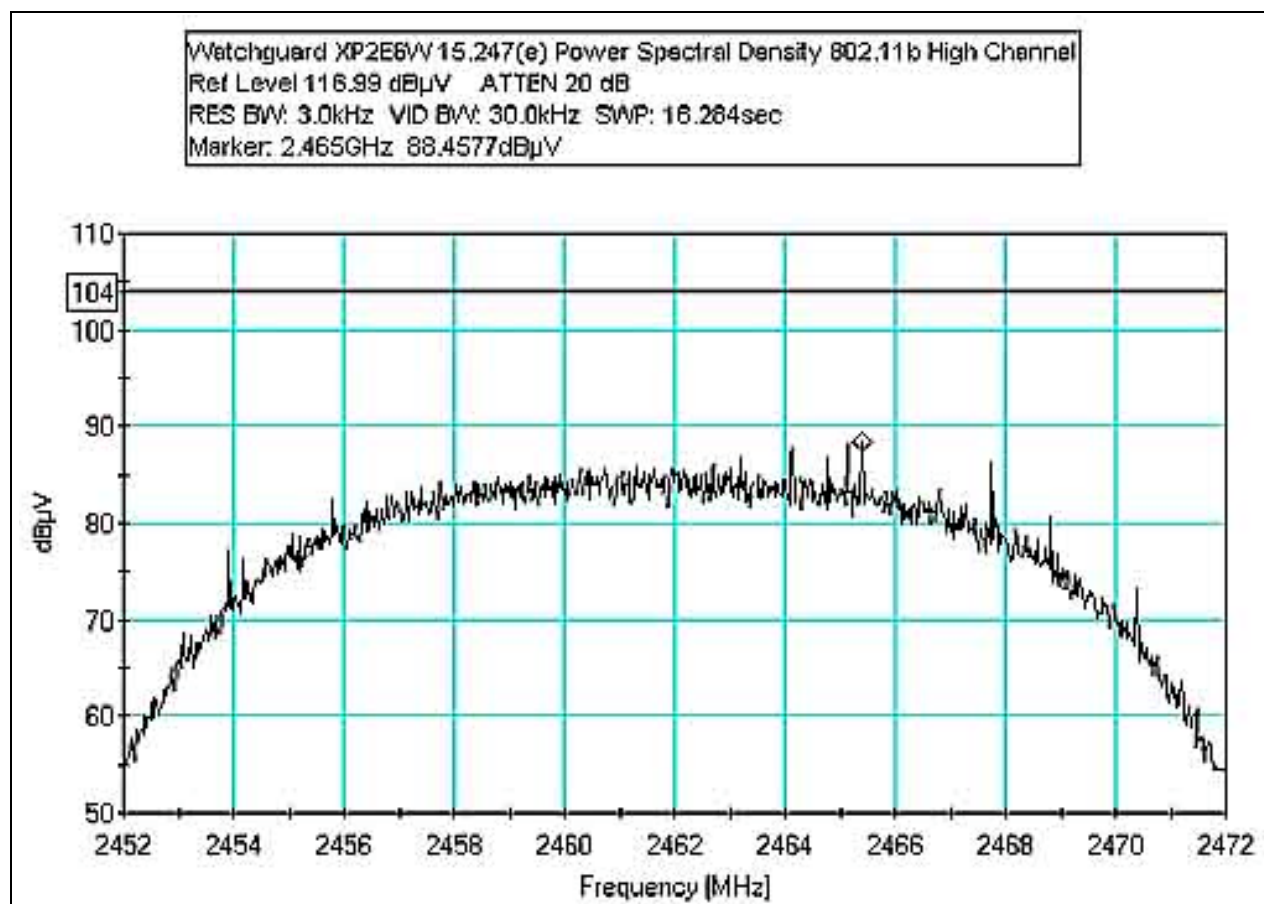


FCC 15.247(e) POWER SPECTRAL DENSITY LOW 802.11g

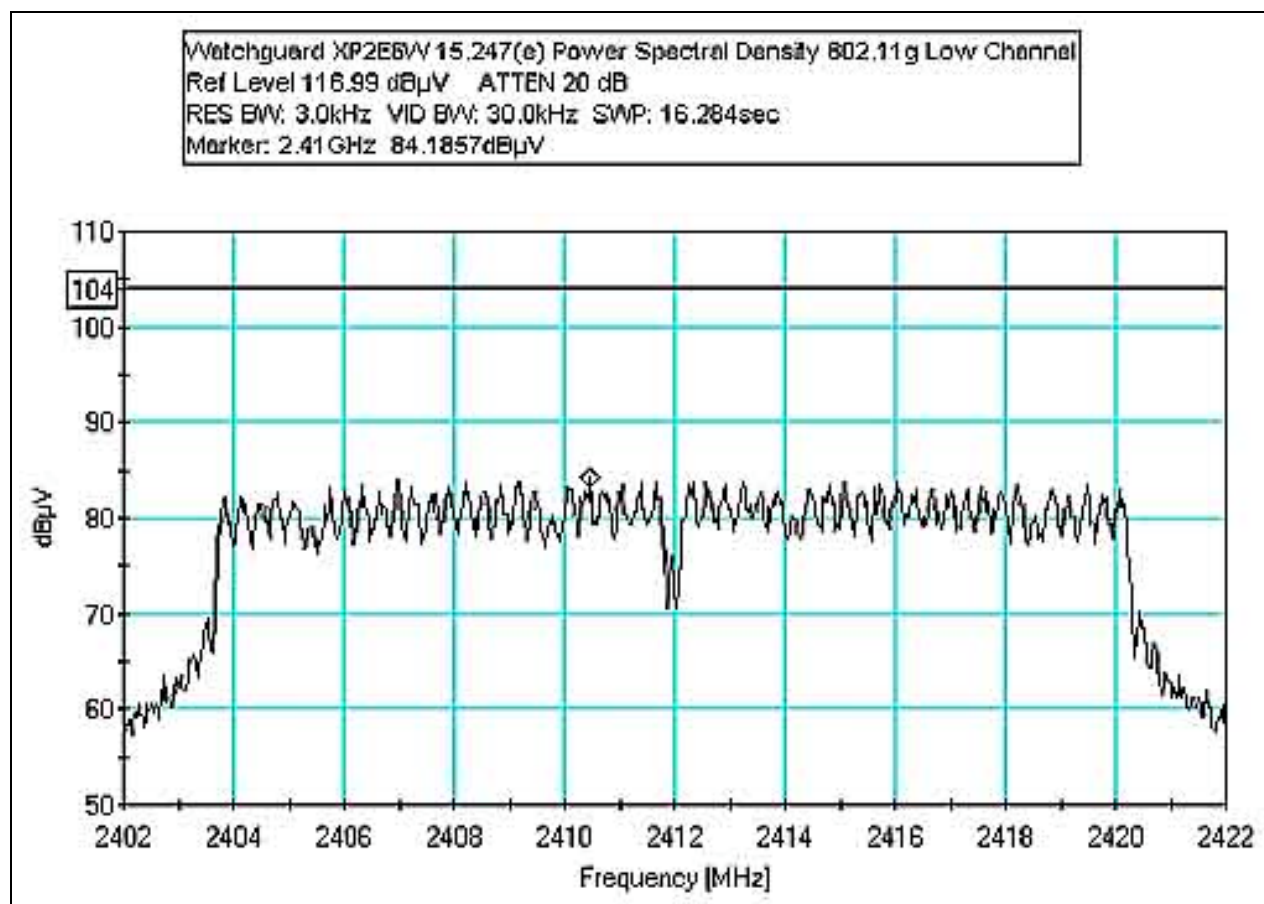

FCC 15.247(e) POWER SPECTRAL DENSITY MID 802.11g

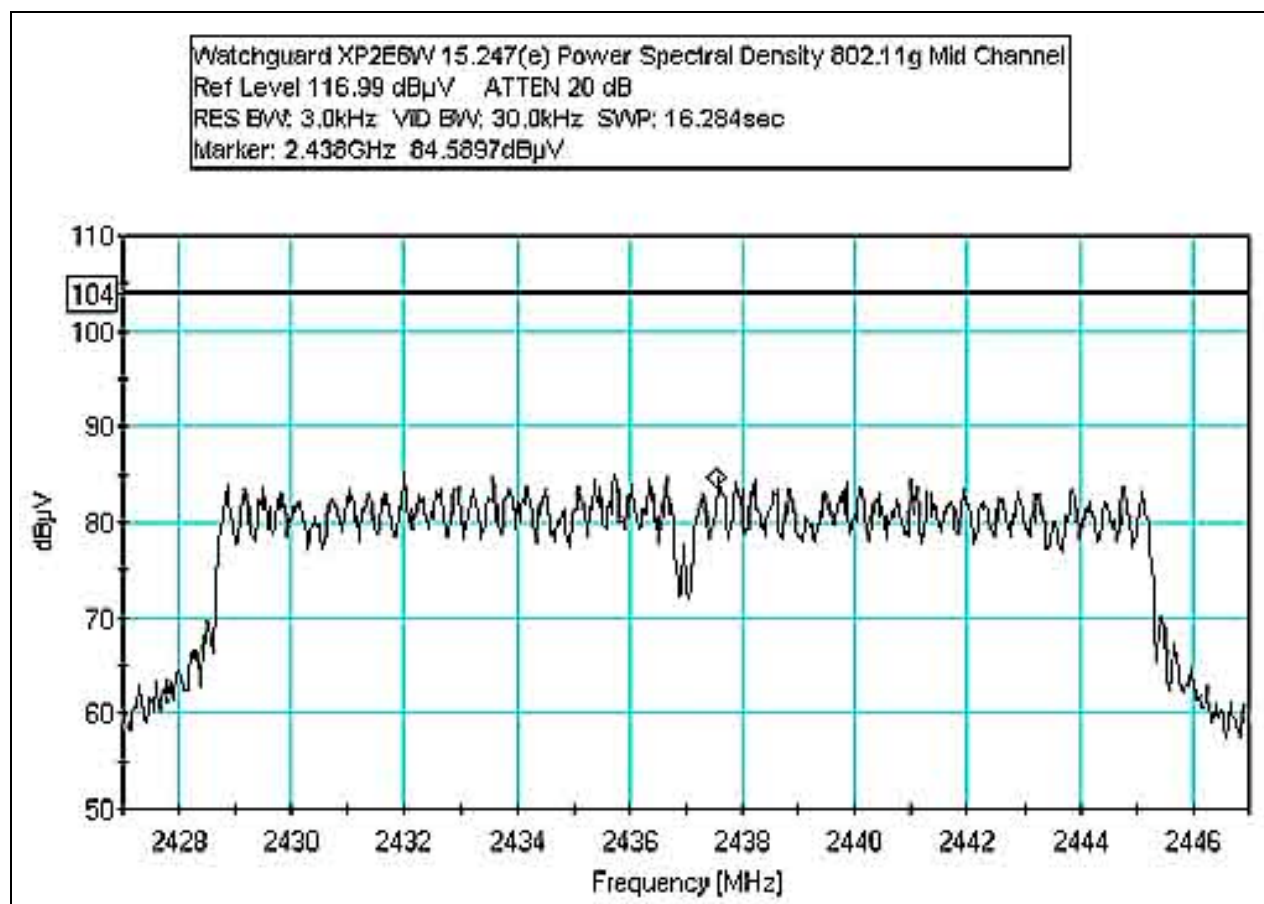

FCC 15.247(e) POWER SPECTRAL DENSITY HIGH 802.11g

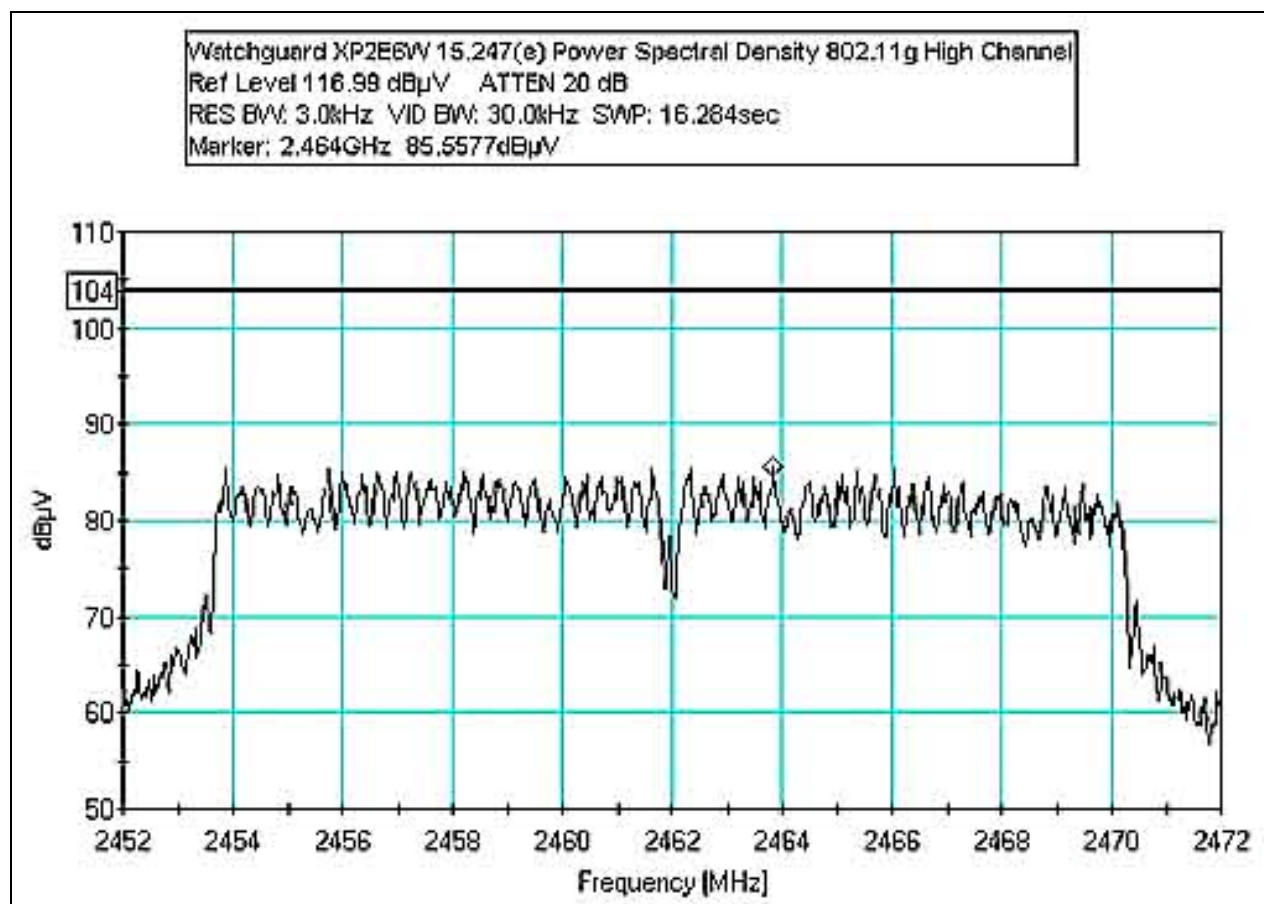

TEMPERATURE AND HUMIDITY DURING TESTING

The temperature during testing was within +15°C and + 35°C.

The relative humidity was between 20% and 75%.

EUT SETUP

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the photographs in Appendix A. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables. The corrected data was then compared to the applicable emission limits to determine compliance.

The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available I/O ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. I/O cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The radiated and conducted emissions data of the EUT was taken with the HP Spectrum Analyzer. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in Table A.

Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula in Table A. This reading was then compared to the applicable specification limit to determine compliance.

TABLE A: SAMPLE CALCULATIONS		
	Meter reading	(dB μ V)
+	Antenna Factor	(dB)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	(dB μ V/m)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed in Table A were used to collect both the radiated and conducted emissions data for the EUT. For radiated measurements from 9 kHz to 30 MHz, the magnetic loop antenna was used. For radiated measurements from 30 to 1000 MHz, the biconilog antenna was used. The horn antenna was used for frequencies above 1000 MHz. Conducted emissions tests required the use of the FCC type LISNs.

The HP spectrum analyzer was used for all measurements. Table B shows the analyzer bandwidth settings that were used in designated frequency bands. For conducted emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used. A 10 dB external attenuator was also used during conducted tests, with internal offset correction in the analyzer. During radiated testing, the measurements were made with 0 dB of attenuation, a reference level of 97 dB μ V, and a vertical scale of 10 dB per division.

SPECTRUM ANALYZER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the Tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "Peak" mode. Whenever a "Quasi-Peak" or "Average" reading is listed as one of the six highest readings, this is indicated as a "Q" or an "A" in the appropriate table. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the Spectrum Analyzer or test engineer recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature of the analyzer called "peak hold," the analyzer had the ability to measure transients or low duty cycle transient emission peak levels. In this mode the analyzer made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

When the true peak values exceeded or were within 2 dB of the specification limit, quasi-peak measurements were taken using the HP Quasi-Peak Adapter for the HP Spectrum Analyzer. The detailed procedure for making quasi peak measurements contained in the HP Quasi-Peak Adapter manual were followed.

Average

For certain frequencies, average measurements may be made using the spectrum analyzer. To make these measurements, the test engineer reduces the video bandwidth on the analyzer until the modulation of the signal is filtered out. At this point the analyzer is set into the linear mode and the scan time is reduced.

EUT TESTING

Mains Conducted Emissions

During conducted emissions testing, the EUT was located on a wooden table measuring approximately 80 cm high, 1 meter deep, and 1.5 meters in length. One wall of the room where the EUT was located has a minimum 2 meter by 2 meter conductive plane. The EUT was mounted on the wooden table 40 cm away from the conductive plane, and 80 cm from any other conductive surface.

The vertical metal plane used for conducted emissions was grounded to the earth. Power to the EUT was provided through a LISN. The LISN was grounded to the ground plane. All other objects were kept a minimum of 80 cm away from the EUT during the conducted test.

The LISNs used were 50 μ H/+50 ohms. A 30 to 50 second sweep time was used for automated measurements in the frequency bands of 150 kHz to 500 kHz, and 500 kHz to 30 MHz. All readings within 20 dB of the limit were recorded, and those within 6 dB of the limit were examined with additional measurements using a slower sweep time.

Antenna Conducted Emissions

For measuring the signal strength on the RF output port of the EUT, the spectrum analyzer was connected directly to the EUT. The sweep time of the analyzer was adjusted so that the spectrum analyzer readings were always in a calibrated range. All readings within 20 dB of the limit were recorded.

Radiated Emissions

The EUT was mounted on a nonconductive, rotating table 80 cm above the conductive grid. The nonconductive table dimensions were 1 meter by 1.5 meters.

During the preliminary radiated scan, the EUT was powered up and operating in its defined FCC test mode. For radiated measurements from 9 kHz to 30 MHz, the magnetic loop antenna was used. The frequency range of 30 MHz to 1000 MHz was scanned with the biconilog antenna located about 1.5 meter above the ground plane in the vertical polarity. During this scan, the turntable was rotated and all peaks at or near the limit were recorded. A scan of the FM band from 88 to 110 MHz was then made using a reduced resolution bandwidth and frequency span. The biconilog antenna was changed to the horizontal polarity and the above steps were repeated. For frequencies exceeding 1000 MHz, the horn antenna was used. Care was taken to ensure that no frequencies were missed within the FM and TV bands. An analysis was performed to determine if the signals that were at or near the limit were caused by an ambient transmission. If unable to determine by analysis, the equipment was powered down to make the final determination if the EUT was the source of the emission.

A thorough scan of all frequencies was made manually using a small frequency span, rotating the turntable and raising and lowering the antenna from one to four meters as needed. The test engineer maximized the readings with respect to the table rotation, antenna height and configuration of EUT. Maximizing of the EUT was achieved by monitoring the spectrum analyzer on a closed circuit television monitor.

APPENDIX A


TEST SETUP PHOTOGRAPHS

PHOTOGRAPH SHOWING MAINS CONDUCTED EMISSIONS



Mains Conducted Emissions - Front View

PHOTOGRAPH SHOWING MAINS CONDUCTED EMISSIONS

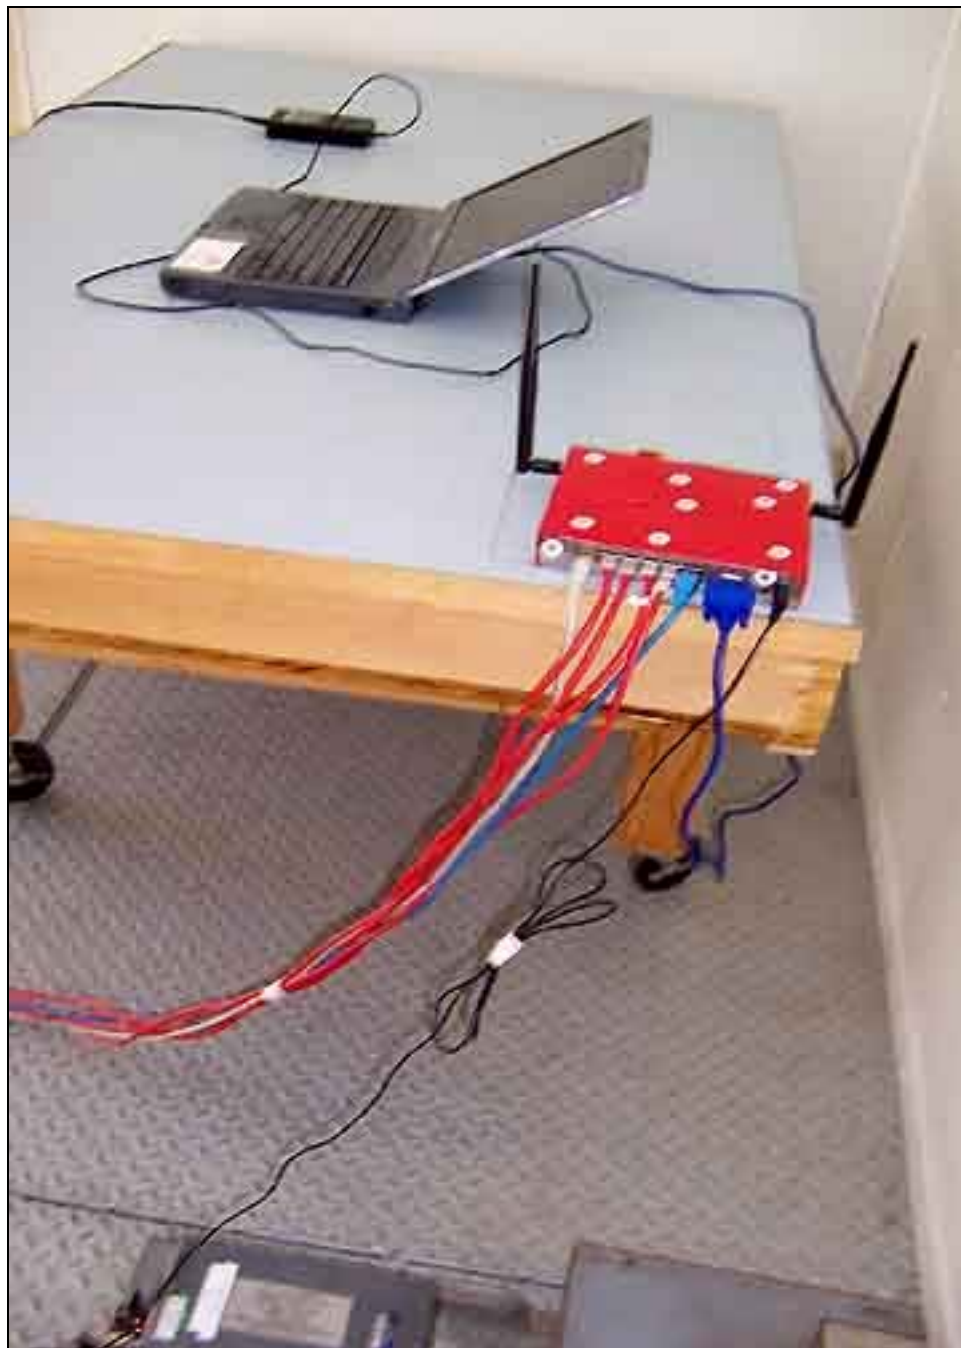

Mains Conducted Emissions - Side View

PHOTOGRAPH SHOWING RADIATED EMISSIONS




Radiated Emissions - Front View

PHOTOGRAPH SHOWING RADIATED EMISSIONS




Radiated Emissions - Back View

PHOTOGRAPH SHOWING DIRECT CONNECT TEST SETUP

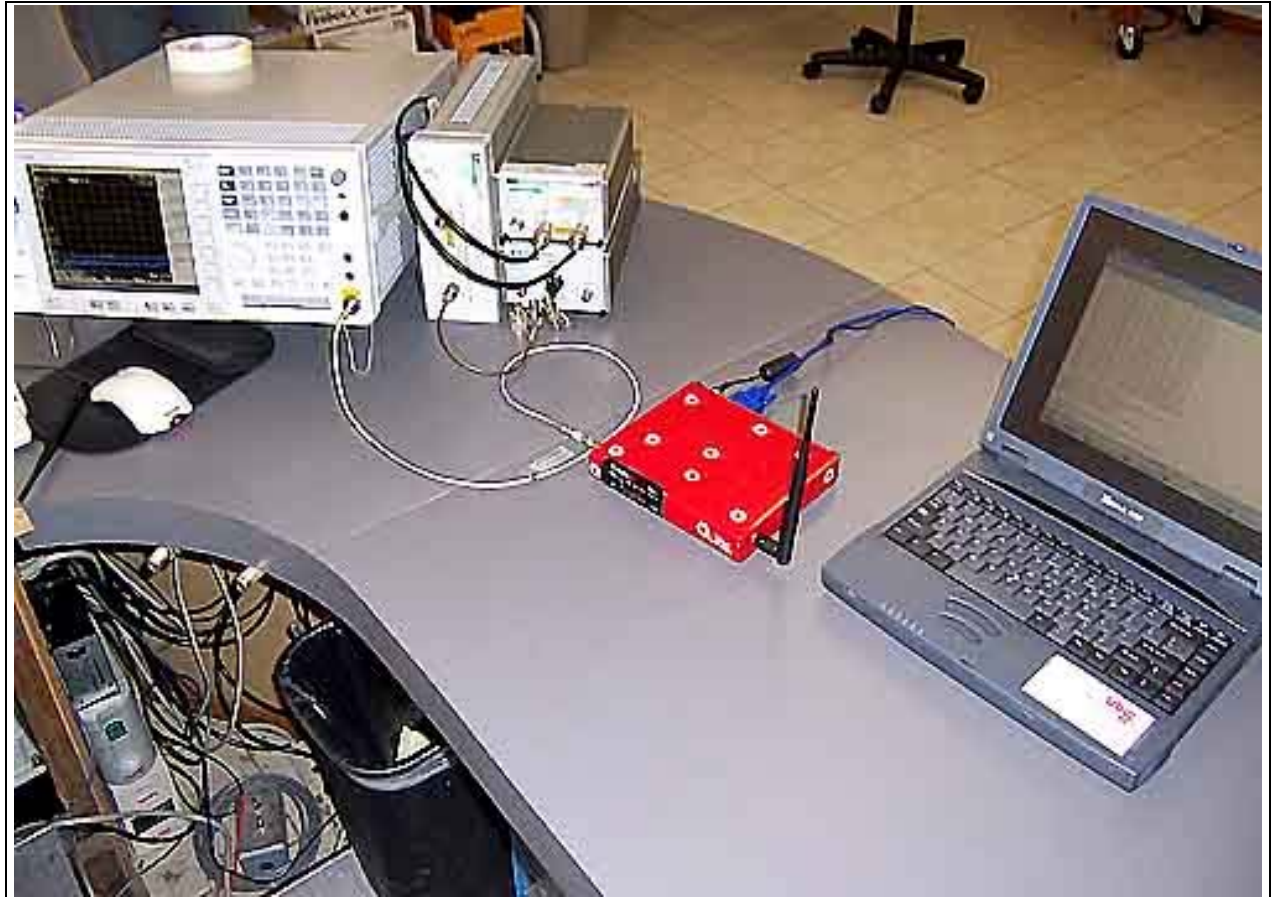

EUT SETUP

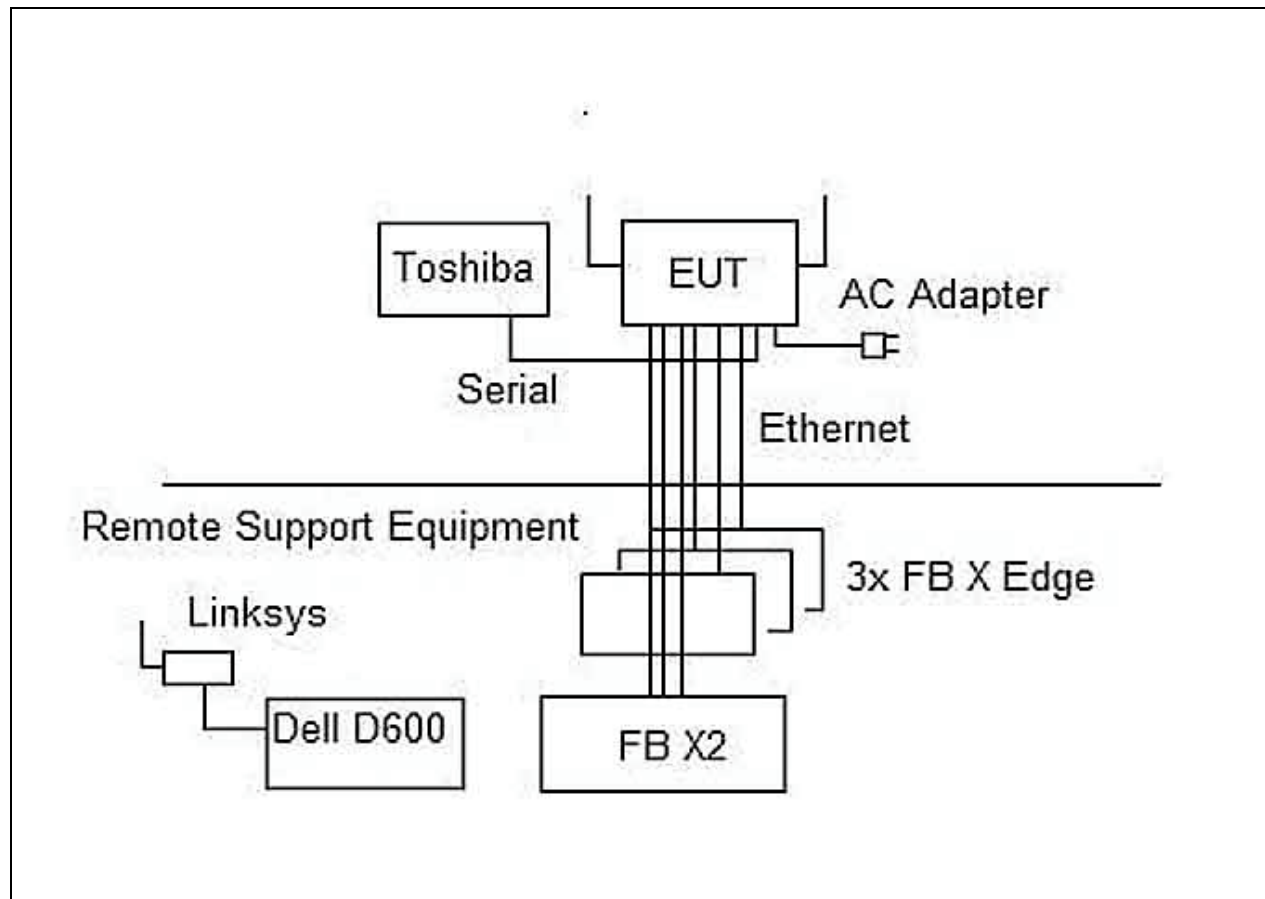

APPENDIX B

TEST EQUIPMENT LIST

FCC 15.107 & 15.207

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
150kHz HP Filter TTE	G7754	04/20/2004	04/20/2006	02608
LISN, 8028-50-TS-24-BNC	8379276, 280	06/03/2005	06/03/2007	1248 & 1249
10 dB Attenuator 10W	None	08/18/2005	08/18/2007	P04255

FCC 15.109

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Chase CBL6111C Bilog	2456	06/07/2005	06/07/2007	01991
EMCO 3115 Horn Antenna	9307-4085	04/29/2005	04/29/2007	00656
HP 8447D Preamp	1937A02604	03/11/2005	03/11/2007	00099
HP 8449B Preamp	3008A00301	12/14/2004	12/14/2006	2010

FCC 15.247(b)(3), 15.247(d) & 15.247(e)

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Cable, Pasternack 36"	NA	02/08/2005	02/08/2007	P05202
Weinchel 10dB attenuator	C8597	10/01/2004	10/01/2006	P02139

FCC 15.247(d) & 15.209

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/12/2005	01/12/2007	02660
Chase CBL6111C Bilog	2456	06/07/2005	06/07/2007	01991
EMCO 3115 Horn Antenna	9307-4085	04/29/2005	04/29/2007	00656
ARA MWH-1826/B Horn Antenna	1005	11/05/2004	11/05/2006	02046
HP 8447D Preamp	1937A02604	03/11/2005	03/11/2007	00099
HP 8449B Preamp	3008A00301	12/14/2004	12/14/2006	2010

APPENDIX C
MEASUREMENT DATA SHEETS

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **FCC 15.107(a) Class B - AVE**
 Work Order #: **83764**
 Test Type: **Conducted Emissions**
 Equipment: **Internet Firewall**
 Manufacturer: WatchGuard Technologies, Inc.
 Model: XP2E6W
 S/N: 100405-001

Date: 10/6/2005
 Time: 10:53:05 AM
 Sequence#: 8
 Tested By: Mike Wilkinson
 120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480
Internet Firewall	WatchGuard Technologies, Inc.	R6264S	808005596-6641
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600002-6EF8
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600207-AD99
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	110
Laptop PC	Toshiba	PA1230U XCD	02792218-3
Laptop PC	Dell	D600	79GSC51
USB/Wireless Network Adapter	Linksys	WUSB54GS	MI0004C09761

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b @ 11MBs. Frequency Range Investigated: 150 kHz to 30 MHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable - Internal + cab	T2=LISN Insertion Loss s/n276
T3=HP Filter AN02608	T4=ATT 10d B Site D Conducted

Measurement Data:


Reading listed by margin.

Test Lead: Black

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	2.451M	29.8	+0.3	+0.3	+0.1	+10.3	+0.0	40.8	46.0	-5.2	Black
2	2.553M	28.1	+0.3	+0.3	+0.1	+10.3	+0.0	39.1	46.0	-6.9	Black
3	2.417M	27.5	+0.3	+0.4	+0.1	+10.3	+0.0	38.6	46.0	-7.4	Black
4	2.685M	25.4	+0.3	+0.3	+0.1	+10.3	+0.0	36.4	46.0	-9.6	Black

5	2.697M	25.4	+0.3	+0.3	+0.1	+10.3	+0.0	36.4	46.0	-9.6	Black
6	3.059M	25.1	+0.3	+0.3	+0.1	+10.3	+0.0	36.1	46.0	-9.9	Black
7	627.774k	25.0	+0.1	+0.3	+0.3	+10.3	+0.0	36.0	46.0	-10.0	Black
8	881.457k	24.7	+0.1	+0.3	+0.2	+10.3	+0.0	35.6	46.0	-10.4	Black
9	4.126M	24.4	+0.3	+0.4	+0.1	+10.3	+0.0	35.5	46.0	-10.5	Black
10	2.621M	24.2	+0.3	+0.3	+0.1	+10.3	+0.0	35.2	46.0	-10.8	Black
11	3.072M	24.2	+0.3	+0.3	+0.1	+10.3	+0.0	35.2	46.0	-10.8	Black
12	1.604M	23.8	+0.2	+0.4	+0.1	+10.3	+0.0	34.8	46.0	-11.2	Black
13	3.327M	23.8	+0.3	+0.3	+0.1	+10.3	+0.0	34.8	46.0	-11.2	Black
14	2.770M	23.6	+0.3	+0.3	+0.1	+10.3	+0.0	34.6	46.0	-11.4	Black
15	3.386M	23.6	+0.3	+0.3	+0.1	+10.3	+0.0	34.6	46.0	-11.4	Black

CKC Laboratories Date: 10/6/2005 Time: 10:53:05 AM Watchguard WO#: 83764
FCC 15.107(a) Class B - AVE Test Lead: Black 120V 60Hz Sequence#: 8
WatchGuard Technologies, Inc. MN XP2E6W

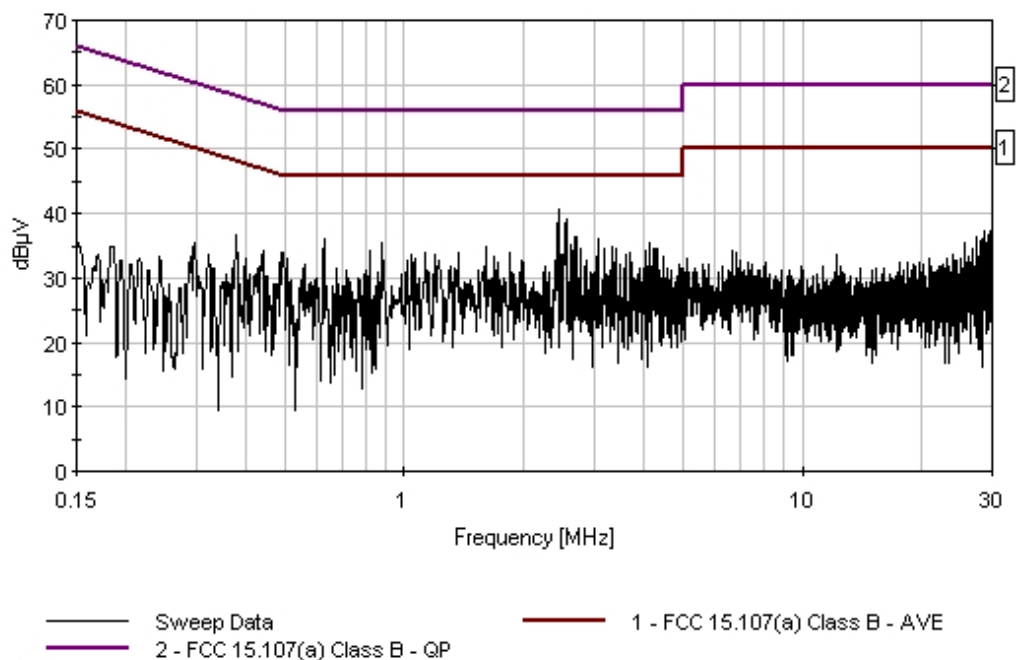

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **FCC 15.107(a) Class B - AVE**
 Work Order #: **83764**
 Test Type: **Conducted Emissions**
 Equipment: **Internet Firewall**
 Manufacturer: WatchGuard Technologies, Inc.
 Model: XP2E6W
 S/N: 100405-001

Date: 10/6/2005
 Time: 11:03:17 AM
 Sequence#: 9
 Tested By: Mike Wilkinson
 120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480
Internet Firewall	WatchGuard Technologies, Inc.	R6264S	808005596-6641
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600002-6EF8
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600207-AD99
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	110
Laptop PC	Toshiba	PA1230U XCD	02792218-3
Laptop PC	Dell	D600	79GSC51
USB/Wireless Network Adapter	Linksys	WUSB54GS	MI0004C09761

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b @ 11Mbps. Rx. Frequency Range Investigated: 150 kHz to 30 MHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable - Internal + cab	T2=LISN Insertion Loss s/n280
T3=HP Filter AN02608	T4=ATT 10d B Site D Conducted

Measurement Data:


Reading listed by margin.

Test Lead: White

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	190.724k	37.5	+0.1	+0.3	+0.2	+10.2	+0.0	48.3	54.0	-5.7	White
2	2.655M	27.0	+0.3	+0.3	+0.1	+10.3	+0.0	38.0	46.0	-8.0	White
3	2.557M	25.7	+0.3	+0.3	+0.1	+10.3	+0.0	36.7	46.0	-9.3	White
4	1.137M	25.6	+0.2	+0.3	+0.2	+10.3	+0.0	36.6	46.0	-9.4	White

5	1.009M	24.6	+0.2	+0.3	+0.2	+10.3	+0.0	35.6	46.0	-10.4	White
6	2.995M	24.3	+0.3	+0.3	+0.1	+10.3	+0.0	35.3	46.0	-10.7	White
7	3.301M	24.1	+0.3	+0.3	+0.1	+10.3	+0.0	35.1	46.0	-10.9	White
8	1.541M	24.1	+0.2	+0.3	+0.1	+10.3	+0.0	35.0	46.0	-11.0	White
9	915.479k	23.9	+0.2	+0.2	+0.2	+10.3	+0.0	34.8	46.0	-11.2	White
10	4.530M	23.8	+0.3	+0.3	+0.1	+10.3	+0.0	34.8	46.0	-11.2	White
11	248.900k	29.6	+0.1	+0.2	+0.3	+10.3	+0.0	40.5	51.8	-11.3	White
12	4.173M	23.6	+0.3	+0.4	+0.1	+10.3	+0.0	34.7	46.0	-11.3	White
13	686.678k	23.7	+0.1	+0.2	+0.3	+10.3	+0.0	34.6	46.0	-11.4	White
14	4.233M	23.5	+0.3	+0.4	+0.1	+10.3	+0.0	34.6	46.0	-11.4	White
15	506.331k	23.5	+0.1	+0.3	+0.2	+10.3	+0.0	34.4	46.0	-11.6	White
16	3.178M	23.4	+0.3	+0.3	+0.1	+10.3	+0.0	34.4	46.0	-11.6	White
17	3.871M	23.3	+0.3	+0.4	+0.1	+10.3	+0.0	34.4	46.0	-11.6	White
18	4.216M	23.1	+0.3	+0.4	+0.1	+10.3	+0.0	34.2	46.0	-11.8	White
19	4.279M	23.1	+0.3	+0.4	+0.1	+10.3	+0.0	34.2	46.0	-11.8	White
20	4.114M	23.0	+0.3	+0.4	+0.1	+10.3	+0.0	34.1	46.0	-11.9	White

CKC Laboratories Date: 10/6/2005 Time: 11:03:17 AM Watchguard WVO#: 83764
 FCC 15.107(a) Class B - AVE Test Lead: White 120V 60Hz Sequence#: 9
 WatchGuard Technologies, Inc. MN XP2E6V

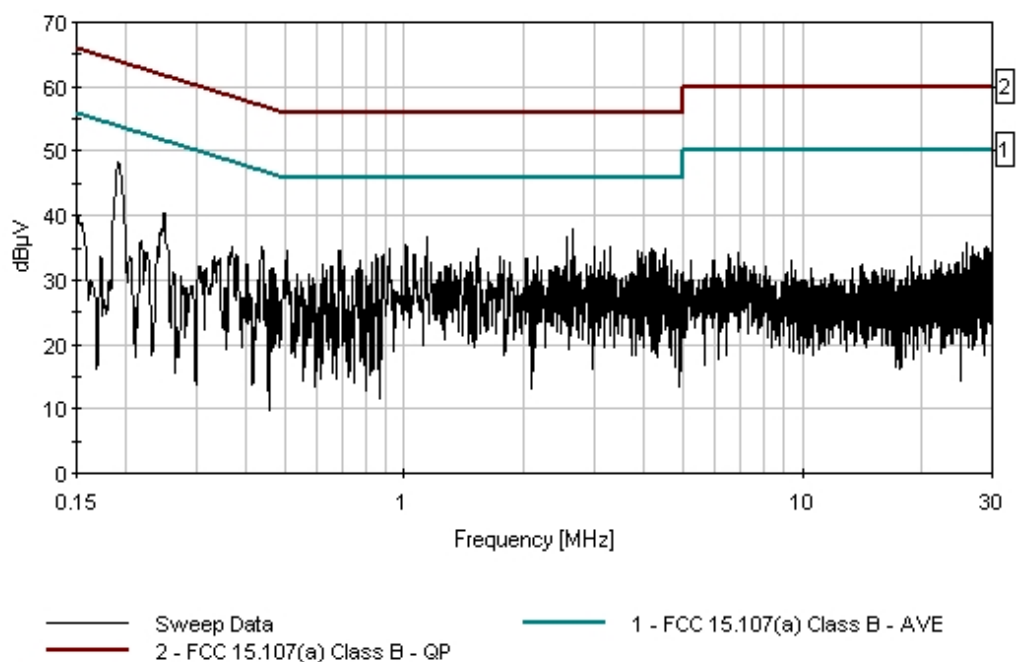

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **FCC 15.107(a) Class B - AVE**
 Work Order #: **83764**
 Test Type: **Conducted Emissions**
 Equipment: **Internet Firewall**
 Manufacturer: WatchGuard Technologies, Inc.
 Model: XP2E6W
 S/N: 100405-001

Date: 10/6/2005
 Time: 11:39:15 AM
 Sequence#: 15
 Tested By: Mike Wilkinson
 120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001
AC Adapter for EUT	Leader Electronics Inc.	1415-2120125-WP	none

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480
Internet Firewall	WatchGuard Technologies, Inc.	R6264S	808005596-6641
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600002-6EF8
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600207-AD99
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	110
Laptop PC	Toshiba	PA1230U XCD	02792218-3
Laptop PC	Dell	D600	79GSC51
USB/Wireless Network Adapter	Linksys	WUSB54GS	MI0004C09761

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b @ 11Mbps. Rx. Frequency Range Investigated: 150 kHz to 30 MHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable - Internal + cab	T2=LISN Insertion Loss s/n276
T3=HP Filter AN02608	T4=ATT 10d B Site D Conducted

Measurement Data:


Reading listed by margin.

Test Lead: Black

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	2.119M	27.1	+0.2	+0.4	+0.1	+10.3	+0.0	38.1	46.0	-7.9	Black
2	160.908k	33.6	+0.1	+0.4	+1.7	+10.2	+0.0	46.0	55.4	-9.4	Black
3	3.569M	24.9	+0.3	+0.4	+0.1	+10.3	+0.0	36.0	46.0	-10.0	Black
4	1.137M	24.9	+0.2	+0.3	+0.2	+10.3	+0.0	35.9	46.0	-10.1	Black

5	631.410k	24.7	+0.1	+0.3	+0.3	+10.3	+0.0	35.7	46.0	-10.3	Black
6	1.013M	24.7	+0.2	+0.3	+0.2	+10.3	+0.0	35.7	46.0	-10.3	Black
7	3.518M	24.1	+0.3	+0.4	+0.1	+10.3	+0.0	35.2	46.0	-10.8	Black
8	3.310M	24.1	+0.3	+0.3	+0.1	+10.3	+0.0	35.1	46.0	-10.9	Black
9	4.501M	24.0	+0.3	+0.4	+0.1	+10.3	+0.0	35.1	46.0	-10.9	Black
10	722.311k	23.9	+0.1	+0.3	+0.3	+10.3	+0.0	34.9	46.0	-11.1	Black
11	1.966M	23.8	+0.2	+0.4	+0.1	+10.3	+0.0	34.8	46.0	-11.2	Black
12	911.226k	23.6	+0.2	+0.3	+0.2	+10.3	+0.0	34.6	46.0	-11.4	Black
13	2.021M	23.6	+0.2	+0.4	+0.1	+10.3	+0.0	34.6	46.0	-11.4	Black
14	3.727M	23.5	+0.3	+0.4	+0.1	+10.3	+0.0	34.6	46.0	-11.4	Black
15	3.829M	23.5	+0.3	+0.4	+0.1	+10.3	+0.0	34.6	46.0	-11.4	Black
16	3.926M	23.3	+0.3	+0.4	+0.1	+10.3	+0.0	34.4	46.0	-11.6	Black
17	3.467M	23.2	+0.3	+0.4	+0.1	+10.3	+0.0	34.3	46.0	-11.7	Black
18	509.240k	23.1	+0.1	+0.3	+0.2	+10.3	+0.0	34.0	46.0	-12.0	Black
19	2.221M	22.9	+0.2	+0.4	+0.1	+10.3	+0.0	33.9	46.0	-12.1	Black
20	2.383M	22.7	+0.3	+0.4	+0.1	+10.3	+0.0	33.8	46.0	-12.2	Black

CKC Laboratories Date: 10/6/2005 Time: 11:39:15 AM Watchguard WO#: 83764
 FCC 15.107(a) Class B - AVE Test Lead: Black 120V 60Hz Sequence#: 15
 WatchGuard Technologies, Inc. MN XP2E6V

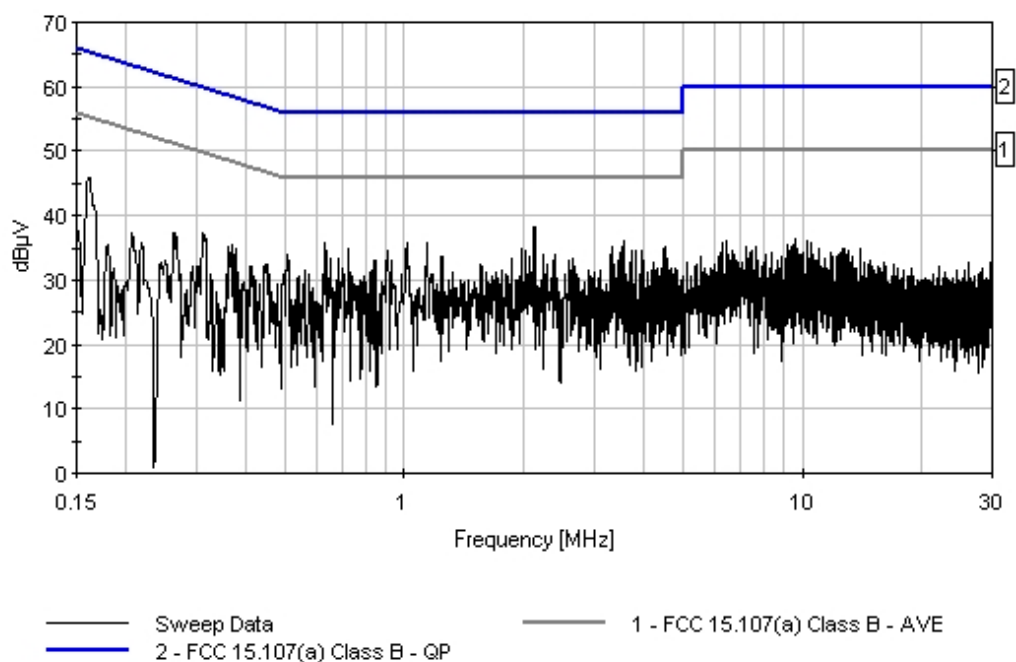

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **FCC 15.107(a) Class B - AVE**
 Work Order #: **83764**
 Test Type: **Conducted Emissions**
 Equipment: **Internet Firewall**
 Manufacturer: WatchGuard Technologies, Inc.
 Model: XP2E6W
 S/N: 100405-001

Date: 10/6/2005
 Time: 11:34:09 AM
 Sequence#: 14
 Tested By: Mike Wilkinson
 120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001
AC Adapter for EUT	Leader Electronics Inc.	1415-2120125-WP	none

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480
Internet Firewall	WatchGuard Technologies, Inc.	R6264S	808005596-6641
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600002-6EF8
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600207-AD99
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	110
Laptop PC	Toshiba	PA1230U XCD	02792218-3
Laptop PC	Dell	D600	79GSC51
USB/Wireless Network Adapter	Linksys	WUSB54GS	MI0004C09761

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b @ 11MBs. Rx. Frequency Range Investigated: 150 kHz to 30 MHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable - Internal + cab	T2=LISN Insertion Loss s/n280
T3=HP Filter AN02608	T4=ATT 10d B Site D Conducted


Measurement Data: Reading listed by margin.

Test Lead: White

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	629.956k	26.2	+0.1	+0.2	+0.3	+10.3	+0.0	37.1	46.0	-8.9	White
2	2.123M	25.8	+0.2	+0.3	+0.1	+10.3	+0.0	36.7	46.0	-9.3	White
3	505.604k	24.9	+0.1	+0.3	+0.2	+10.3	+0.0	35.8	46.0	-10.2	White
4	889.962k	25.0	+0.1	+0.2	+0.2	+10.3	+0.0	35.8	46.0	-10.2	White

5	1.013M	24.8	+0.2	+0.3	+0.2	+10.3	+0.0	35.8	46.0	-10.2	White
6	212.540k	31.7	+0.1	+0.3	+0.1	+10.2	+0.0	42.4	53.1	-10.7	White
7	1.239M	24.3	+0.2	+0.3	+0.2	+10.3	+0.0	35.3	46.0	-10.7	White
8	160.908k	32.3	+0.1	+0.3	+1.7	+10.2	+0.0	44.6	55.4	-10.8	White
9	485.242k	24.5	+0.1	+0.3	+0.2	+10.3	+0.0	35.4	46.2	-10.8	White
10	2.795M	23.9	+0.3	+0.3	+0.1	+10.3	+0.0	34.9	46.0	-11.1	White
11	2.170M	23.6	+0.2	+0.3	+0.1	+10.3	+0.0	34.5	46.0	-11.5	White
12	646.682k	23.4	+0.1	+0.2	+0.3	+10.3	+0.0	34.3	46.0	-11.7	White
13	852.481k	23.4	+0.1	+0.2	+0.3	+10.3	+0.0	34.3	46.0	-11.7	White
14	2.374M	23.2	+0.3	+0.3	+0.1	+10.3	+0.0	34.2	46.0	-11.8	White
15	2.536M	22.9	+0.3	+0.3	+0.1	+10.3	+0.0	33.9	46.0	-12.1	White
16	475.788k	23.0	+0.1	+0.3	+0.2	+10.3	+0.0	33.9	46.4	-12.5	White
17	1.188M	22.4	+0.2	+0.3	+0.2	+10.3	+0.0	33.4	46.0	-12.6	White
18	2.072M	22.5	+0.2	+0.3	+0.1	+10.3	+0.0	33.4	46.0	-12.6	White
19	2.017M	22.4	+0.2	+0.3	+0.1	+10.3	+0.0	33.3	46.0	-12.7	White
20	2.463M	22.3	+0.3	+0.3	+0.1	+10.3	+0.0	33.3	46.0	-12.7	White

CKC Laboratories Date: 10/6/2005 Time: 11:34:09 AM Watchguard WVO#: 83764
 FCC 15.107(a) Class B - AVE Test Lead: White 120V 60Hz Sequence#: 14
 WatchGuard Technologies, Inc. MN XP2E6V

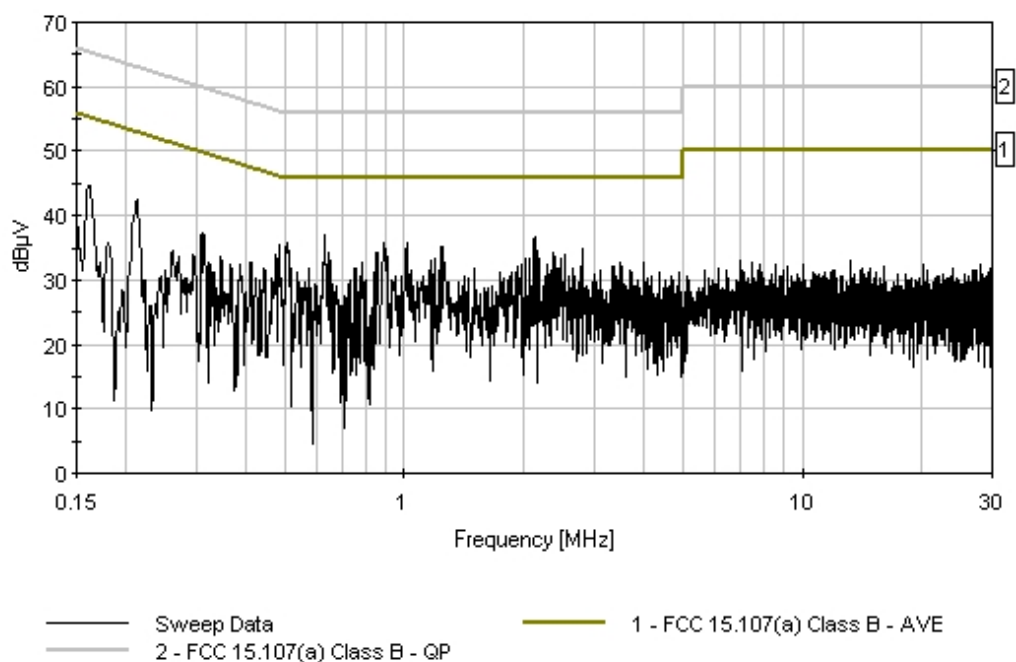

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**

Specification: **15.109 CLASS B**

Work Order #: **83764**

Date: 10/5/2005

Test Type: **Radiated Scan**

Time: 15:35:35

Equipment: **Internet Firewall**

Sequence#: 6

Manufacturer: WatchGuard Technologies, Inc.

Tested By: Mike Wilkinson

Model: XP2E6W

S/N: 100405-001

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480
Internet Firewall	WatchGuard Technologies, Inc.	R6264S	808005596-6641
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600002-6EF8
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600207-AD99
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	110
Laptop PC	Toshiba	PA1230U XCD	02792218-3
Laptop PC	Dell	D600	79GSC51
USB/Wireless Network Adapter	Linksys	WUSB54GS	MI0004C09761

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b Rx. Frequency Range Investigated: 30 MHz to 12.5 GHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Amp - S/N 604	T2=Bilog Site D
T3=Cable - 10 Meter	T4=Amp - S/N 301
T5=Horn AN 00656 1-18 GHz (Mariposa)	T6=Cable - 3 Meter to bulkhead
T7=Cable 35' Blue SMA CKC P1352	

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	T5	T6	T7						
			dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	324.898M	49.1	-26.4	+13.5	+4.3		+0.0	40.5	46.0	-5.5	Vert
2	200.443M	52.9	-26.5	+8.3	+3.3		+0.0	38.0	43.5	-5.5	Vert
3	1320.005M	51.1	+0.0	+0.0	+0.0	-35.5	+0.0	48.1	54.0	-5.9	Vert
			+25.2	+3.6	+3.7						

4	375.044M	46.5	-26.7	+14.8	+4.8		+0.0	39.4	46.0	-6.6	Horiz
5	1170.050M	50.7	+0.0	+0.0	+0.0	-35.7	+0.0	46.5	54.0	-7.5	Vert
			+24.7	+3.4	+3.4						
6	125.018M	48.3	-26.7	+11.2	+2.5		+0.0	35.3	43.5	-8.2	Vert
7	500.037M	40.7	-27.3	+17.4	+5.5		+0.0	36.3	46.0	-9.7	Vert
8	250.025M	46.4	-26.0	+12.0	+3.6		+0.0	36.0	46.0	-10.0	Vert
9	400.897M	41.6	-26.8	+15.4	+5.1		+0.0	35.3	46.0	-10.7	Vert
10	500.044M	39.2	-27.3	+17.4	+5.5		+0.0	34.8	46.0	-11.2	Horiz
11	1187.750M	46.2	+0.0	+0.0	+0.0	-35.7	+0.0	42.2	54.0	-11.8	Vert
			+24.8	+3.4	+3.5						
12	250.040M	42.2	-26.0	+12.0	+3.6		+0.0	31.8	46.0	-14.2	Horiz
13	399.980M	36.9	-26.8	+15.4	+5.1		+0.0	30.6	46.0	-15.4	Horiz
14	200.452M	42.7	-26.5	+8.3	+3.3		+0.0	27.8	43.5	-15.7	Horiz
15	625.029M	31.8	-27.6	+19.4	+6.2		+0.0	29.8	46.0	-16.2	Vert
16	350.031M	37.6	-26.5	+14.2	+4.5		+0.0	29.8	46.0	-16.2	Horiz
17	350.038M	36.8	-26.5	+14.2	+4.5		+0.0	29.0	46.0	-17.0	Vert

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **15.109 CLASS A (Digital)**
 Work Order #: **83764** Date: 10/5/2005
 Test Type: **Radiated Scan** Time: 14:51:29
 Equipment: **Internet Firewall** Sequence#: 7
 Manufacturer: WatchGuard Technologies, Inc. Tested By: Mike Wilkinson
 Model: XP2E6W
 S/N: 100405-001

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001
AC Adapter for EUT	Leader Electronics Inc.	1415-2120125-WP	none

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480
Internet Firewall	WatchGuard Technologies, Inc.	R6264S	808005596-6641
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600002-6EF8
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600207-AD99
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	110
Laptop PC	Toshiba	PA1230U XCD	02792218-3
Laptop PC	Dell	D600	79GSC51
USB/Wireless Network Adapter	Linksys	WUSB54GS	MI0004C09761

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b @ 11Mbps. Rx. Frequency Range Investigated: 30 MHz to 2.0 GHz. Highest frequency used or generated is 266 MHz. Temperature: 65°F, Relative Humidity: 32%. All readings are with Globtek supply - Verified that the Globtek was worst case over the Leader supply

Transducer Legend:

T1=Amp - S/N 604	T2=Bilog Site D
T3=Cable - 10 Meter	T4=Amp - S/N 301
T5=Horn AN 00656 1-18 GHz (Mariposa)	T6=Cable 35' Blue SMA CKC P1352
T7=Cable - 3 Meter to bulkhead	

Measurement Data:		Reading listed by margin.					Test Distance: 3 Meters				
#	Freq	Rdng	T1 T5	T2 T6	T3 T7	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	47.817M	57.1	-26.8	+8.9	+1.6		-10.0	30.8	39.1	-8.3	Vert

2	1319.950M	52.7	+0.0 +25.2	+0.0 +3.7	+0.0 +3.6	-35.5	-10.0	39.7	49.5	-9.8	Vert
3	55.325M	57.0	-26.8	+7.1	+1.7		-10.0	29.0	39.1	-10.1	Vert
4	1584.022M	48.4	+0.0 +26.2	+0.0 +4.1	+0.0 +3.9	-35.2	-10.0	37.4	49.5	-12.1	Vert
5	200.443M	52.9	-26.5	+8.3	+3.3		-10.0	28.0	43.5	-15.5	Vert
6	324.898M	49.1	-26.4	+13.5	+4.3		-10.0	30.5	46.4	-15.9	Vert
7	375.044M	46.5	-26.7	+14.8	+4.8		-10.0	29.4	46.4	-17.0	Horiz
8	1319.970M	44.3	+0.0 +25.2	+0.0 +3.7	+0.0 +3.6	-35.5	-10.0	31.3	49.5	-18.2	Horiz
9	125.018M	48.3	-26.7	+11.2	+2.5		-10.0	25.3	43.5	-18.2	Vert
10	1056.186M	49.5	+0.0 +24.3	+0.0 +3.2	+0.0	-35.9	-10.0	31.1	49.5	-18.4	Vert
11	1056.010M	45.4	+0.0 +24.3	+0.0 +3.2	+0.0 +3.2	-35.9	-10.0	30.2	49.5	-19.3	Horiz
12	500.037M	40.7	-27.3	+17.4	+5.5		-10.0	26.3	46.4	-20.1	Vert
13	250.025M	46.4	-26.0	+12.0	+3.6		-10.0	26.0	46.4	-20.4	Vert
14	400.897M	41.6	-26.8	+15.4	+5.1		-10.0	25.3	46.4	-21.1	Vert
15	500.044M	39.2	-27.3	+17.4	+5.5		-10.0	24.8	46.4	-21.6	Horiz
16	250.040M	42.2	-26.0	+12.0	+3.6		-10.0	21.8	46.4	-24.6	Horiz
17	200.452M	42.7	-26.5	+8.3	+3.3		-10.0	17.8	43.5	-25.7	Horiz
18	399.980M	36.9	-26.8	+15.4	+5.1		-10.0	20.6	46.4	-25.8	Horiz
19	625.029M	31.8	-27.6	+19.4	+6.2		-10.0	19.8	46.4	-26.6	Vert
20	350.031M	37.6	-26.5	+14.2	+4.5		-10.0	19.8	46.4	-26.6	Horiz
21	350.038M	36.8	-26.5	+14.2	+4.5		-10.0	19.0	46.4	-27.4	Vert

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**

Specification: **FCC 15.207 - AVE**

Work Order #: **83764**

Test Type: **Conducted Emissions**

Equipment: **Internet Firewall**

Manufacturer: WatchGuard Technologies, Inc.

Model: XP2E6W

S/N: 100405-001

Date: 10/6/2005

Time: 10:53:05 AM

Sequence#: 8

Tested By: Mike Wilkinson

120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480
Internet Firewall	WatchGuard Technologies, Inc.	R6264S	808005596-6641
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600002-6EF8
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600207-AD99
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	110
Laptop PC	Toshiba	PA1230U XCD	02792218-3
Laptop PC	Dell	D600	79GSC51
USB/Wireless Network Adapter	Linksys	WUSB54GS	MI0004C09761

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b @ 11MBs. Low Channel = 2412 MHz. Frequency Range Investigated: 150 kHz to 30 MHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable - Internal + cab	T2=LISN Insertion Loss s/n276
T3=HP Filter AN02608	T4=ATT 10d B Site D Conducted


Measurement Data: Reading listed by margin.

Test Lead: Black

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	2.451M	29.8	+0.3	+0.3	+0.1	+10.3	+0.0	40.8	46.0	-5.2	Black
2	2.553M	28.1	+0.3	+0.3	+0.1	+10.3	+0.0	39.1	46.0	-6.9	Black
3	2.417M	27.5	+0.3	+0.4	+0.1	+10.3	+0.0	38.6	46.0	-7.4	Black
4	2.685M	25.4	+0.3	+0.3	+0.1	+10.3	+0.0	36.4	46.0	-9.6	Black

5	2.697M	25.4	+0.3	+0.3	+0.1	+10.3	+0.0	36.4	46.0	-9.6	Black
6	3.059M	25.1	+0.3	+0.3	+0.1	+10.3	+0.0	36.1	46.0	-9.9	Black
7	627.774k	25.0	+0.1	+0.3	+0.3	+10.3	+0.0	36.0	46.0	-10.0	Black
8	881.457k	24.7	+0.1	+0.3	+0.2	+10.3	+0.0	35.6	46.0	-10.4	Black
9	4.126M	24.4	+0.3	+0.4	+0.1	+10.3	+0.0	35.5	46.0	-10.5	Black
10	2.621M	24.2	+0.3	+0.3	+0.1	+10.3	+0.0	35.2	46.0	-10.8	Black
11	3.072M	24.2	+0.3	+0.3	+0.1	+10.3	+0.0	35.2	46.0	-10.8	Black
12	1.604M	23.8	+0.2	+0.4	+0.1	+10.3	+0.0	34.8	46.0	-11.2	Black
13	3.327M	23.8	+0.3	+0.3	+0.1	+10.3	+0.0	34.8	46.0	-11.2	Black
14	2.770M	23.6	+0.3	+0.3	+0.1	+10.3	+0.0	34.6	46.0	-11.4	Black
15	3.386M	23.6	+0.3	+0.3	+0.1	+10.3	+0.0	34.6	46.0	-11.4	Black

CKC Laboratories Date: 10/6/2005 Time: 10:53:05 AM Watchguard WO#: 83764
FCC 15.207 - AVE Test Lead: Black 120V 60Hz Sequence#: 8
WatchGuard Technologies, Inc. MN XP2E6W

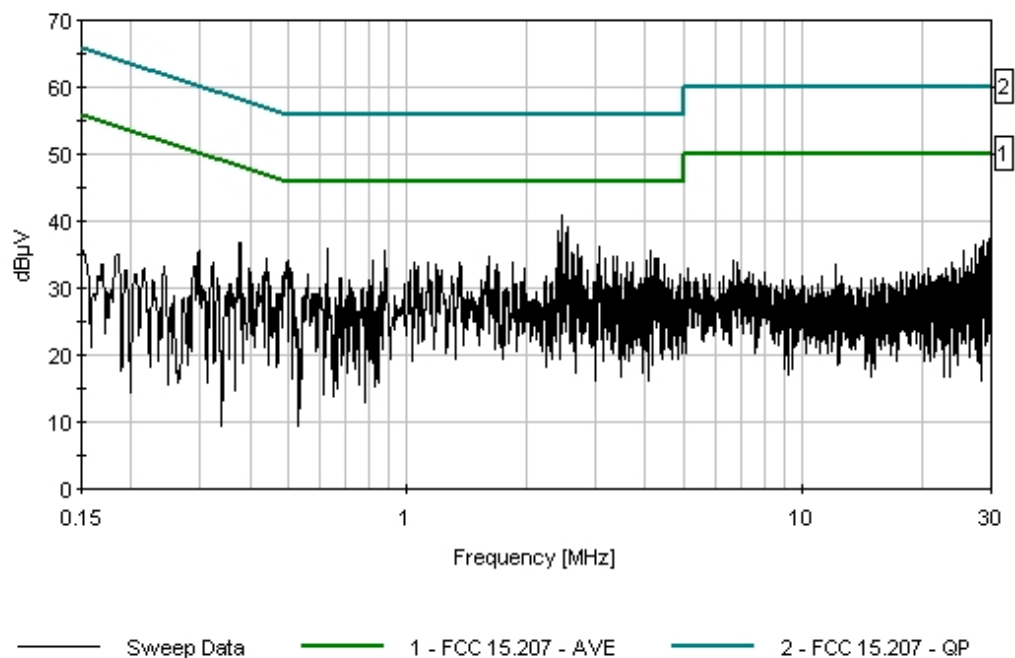

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**

Specification: **FCC 15.207 - AVE**

Work Order #: **83764**

Test Type: **Conducted Emissions**

Equipment: **Internet Firewall**

Manufacturer: WatchGuard Technologies, Inc.

Model: XP2E6W

S/N: 100405-001

Date: 10/6/2005

Time: 11:03:17 AM

Sequence#: 9

Tested By: Mike Wilkinson

120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480
Internet Firewall	WatchGuard Technologies, Inc.	R6264S	808005596-6641
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600002-6EF8
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600207-AD99
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	110
Laptop PC	Toshiba	PA1230U XCD	02792218-3
Laptop PC	Dell	D600	79GSC51
USB/Wireless Network Adapter	Linksys	WUSB54GS	MI0004C09761

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b @ 11MBs. Low Channel = 2412 MHz. Frequency Range Investigated: 150 kHz to 30 MHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable - Internal + cab	T2=LISN Insertion Loss s/n280
T3=HP Filter AN02608	T4=ATT 10d B Site D Conducted


Measurement Data: Reading listed by margin.

Test Lead: White

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	190.724k	37.5	+0.1	+0.3	+0.2	+10.2	+0.0	48.3	54.0	-5.7	White
2	2.655M	27.0	+0.3	+0.3	+0.1	+10.3	+0.0	38.0	46.0	-8.0	White
3	2.557M	25.7	+0.3	+0.3	+0.1	+10.3	+0.0	36.7	46.0	-9.3	White
4	1.137M	25.6	+0.2	+0.3	+0.2	+10.3	+0.0	36.6	46.0	-9.4	White

5	1.009M	24.6	+0.2	+0.3	+0.2	+10.3	+0.0	35.6	46.0	-10.4	White
6	2.995M	24.3	+0.3	+0.3	+0.1	+10.3	+0.0	35.3	46.0	-10.7	White
7	3.301M	24.1	+0.3	+0.3	+0.1	+10.3	+0.0	35.1	46.0	-10.9	White
8	1.541M	24.1	+0.2	+0.3	+0.1	+10.3	+0.0	35.0	46.0	-11.0	White
9	915.479k	23.9	+0.2	+0.2	+0.2	+10.3	+0.0	34.8	46.0	-11.2	White
10	4.530M	23.8	+0.3	+0.3	+0.1	+10.3	+0.0	34.8	46.0	-11.2	White
11	248.900k	29.6	+0.1	+0.2	+0.3	+10.3	+0.0	40.5	51.8	-11.3	White
12	4.173M	23.6	+0.3	+0.4	+0.1	+10.3	+0.0	34.7	46.0	-11.3	White
13	686.678k	23.7	+0.1	+0.2	+0.3	+10.3	+0.0	34.6	46.0	-11.4	White
14	4.233M	23.5	+0.3	+0.4	+0.1	+10.3	+0.0	34.6	46.0	-11.4	White
15	506.331k	23.5	+0.1	+0.3	+0.2	+10.3	+0.0	34.4	46.0	-11.6	White
16	3.178M	23.4	+0.3	+0.3	+0.1	+10.3	+0.0	34.4	46.0	-11.6	White
17	3.871M	23.3	+0.3	+0.4	+0.1	+10.3	+0.0	34.4	46.0	-11.6	White
18	4.216M	23.1	+0.3	+0.4	+0.1	+10.3	+0.0	34.2	46.0	-11.8	White
19	4.279M	23.1	+0.3	+0.4	+0.1	+10.3	+0.0	34.2	46.0	-11.8	White
20	4.114M	23.0	+0.3	+0.4	+0.1	+10.3	+0.0	34.1	46.0	-11.9	White

CKC Laboratories Date: 10/6/2005 Time: 11:03:17 AM Watchguard WVO#: 83764
FCC 15.207 - AVE Test Lead: White 120V 60Hz Sequence#: 9
WatchGuard Technologies, Inc. MN XP2E6V

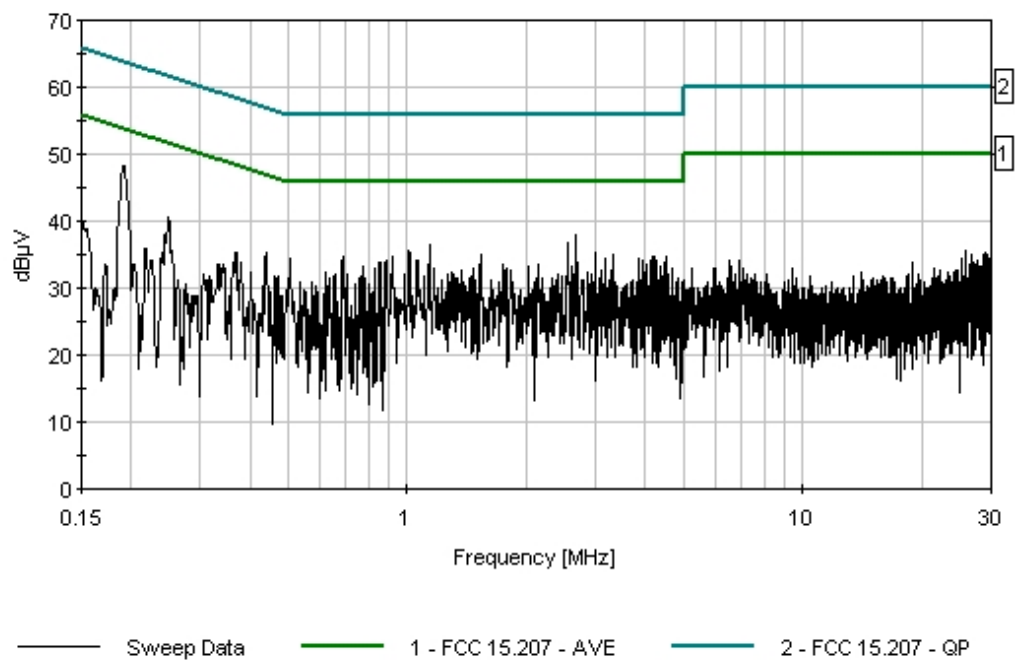

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**

Specification: **FCC 15.207 - AVE**

Work Order #: **83764**

Date: 10/6/2005

Test Type: **Conducted Emissions**

Time: 11:39:15 AM

Equipment: **Internet Firewall**

Sequence#: 15

Manufacturer: WatchGuard Technologies, Inc.

Tested By: Mike Wilkinson

Model: XP2E6W

120V 60Hz

S/N: 100405-001

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001
AC Adapter for EUT	Leader Electronics Inc.	1415-2120125-WP	none

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480
Internet Firewall	WatchGuard Technologies, Inc.	R6264S	808005596-6641
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600002-6EF8
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600207-AD99
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	110
Laptop PC	Toshiba	PA1230U XCD	02792218-3
Laptop PC	Dell	D600	79GSC51
USB/Wireless Network Adapter	Linksys	WUSB54GS	MI0004C09761

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b @ 11MBs. Low Channel = 2412 MHz. Frequency Range Investigated: 150 kHz to 30 MHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable - Internal + cab	T2=LISN Insertion Loss s/n276
T3=HP Filter AN02608	T4=ATT 10d B Site D Conducted


Measurement Data: Reading listed by margin.

Test Lead: Black

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	2.119M	27.1	+0.2	+0.4	+0.1	+10.3	+0.0	38.1	46.0	-7.9	Black
2	160.908k	33.6	+0.1	+0.4	+1.7	+10.2	+0.0	46.0	55.4	-9.4	Black
3	3.569M	24.9	+0.3	+0.4	+0.1	+10.3	+0.0	36.0	46.0	-10.0	Black
4	1.137M	24.9	+0.2	+0.3	+0.2	+10.3	+0.0	35.9	46.0	-10.1	Black

5	631.410k	24.7	+0.1	+0.3	+0.3	+10.3	+0.0	35.7	46.0	-10.3	Black
6	1.013M	24.7	+0.2	+0.3	+0.2	+10.3	+0.0	35.7	46.0	-10.3	Black
7	3.518M	24.1	+0.3	+0.4	+0.1	+10.3	+0.0	35.2	46.0	-10.8	Black
8	3.310M	24.1	+0.3	+0.3	+0.1	+10.3	+0.0	35.1	46.0	-10.9	Black
9	4.501M	24.0	+0.3	+0.4	+0.1	+10.3	+0.0	35.1	46.0	-10.9	Black
10	722.311k	23.9	+0.1	+0.3	+0.3	+10.3	+0.0	34.9	46.0	-11.1	Black
11	1.966M	23.8	+0.2	+0.4	+0.1	+10.3	+0.0	34.8	46.0	-11.2	Black
12	911.226k	23.6	+0.2	+0.3	+0.2	+10.3	+0.0	34.6	46.0	-11.4	Black
13	2.021M	23.6	+0.2	+0.4	+0.1	+10.3	+0.0	34.6	46.0	-11.4	Black
14	3.727M	23.5	+0.3	+0.4	+0.1	+10.3	+0.0	34.6	46.0	-11.4	Black
15	3.829M	23.5	+0.3	+0.4	+0.1	+10.3	+0.0	34.6	46.0	-11.4	Black
16	3.926M	23.3	+0.3	+0.4	+0.1	+10.3	+0.0	34.4	46.0	-11.6	Black
17	3.467M	23.2	+0.3	+0.4	+0.1	+10.3	+0.0	34.3	46.0	-11.7	Black
18	509.240k	23.1	+0.1	+0.3	+0.2	+10.3	+0.0	34.0	46.0	-12.0	Black
19	2.221M	22.9	+0.2	+0.4	+0.1	+10.3	+0.0	33.9	46.0	-12.1	Black
20	2.383M	22.7	+0.3	+0.4	+0.1	+10.3	+0.0	33.8	46.0	-12.2	Black

CKC Laboratories Date: 10/6/2005 Time: 11:39:15 AM Watchguard WVO#: 83764
 FCC 15.207 - AVE Test Lead: Black 120V 60Hz Sequence#: 15
 WatchGuard Technologies, Inc. MN XP2E6V

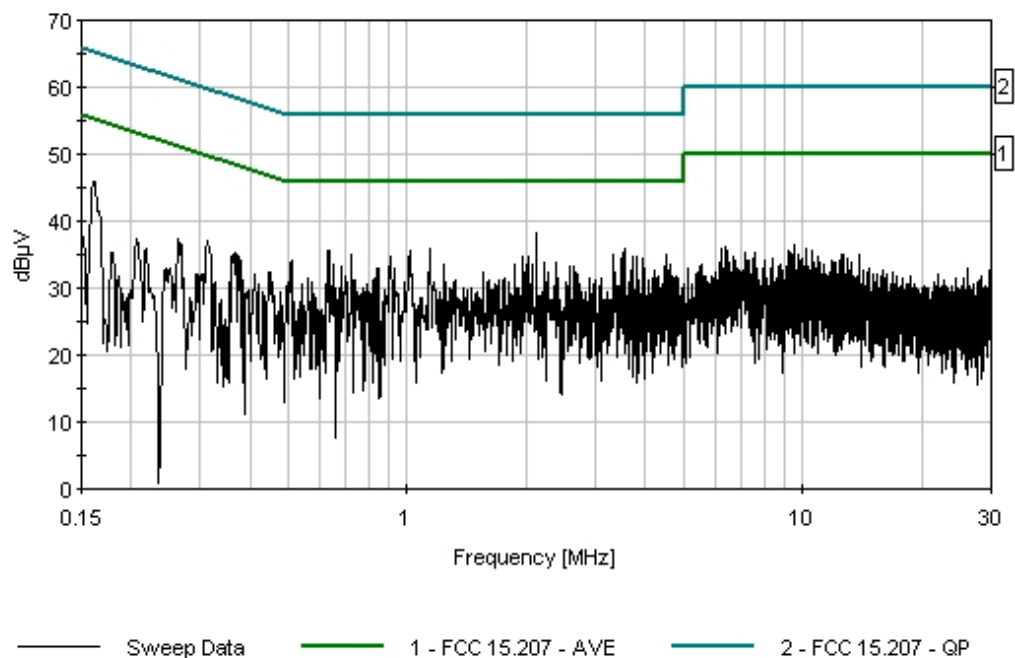

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**

Specification: **FCC 15.207 - AVE**

Work Order #: **83764**

Date: 10/6/2005

Test Type: **Conducted Emissions**

Time: 11:34:09 AM

Equipment: **Internet Firewall**

Sequence#: 14

Manufacturer: WatchGuard Technologies, Inc.

Tested By: Mike Wilkinson

Model: XP2E6W

120V 60Hz

S/N: 100405-001

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001
AC Adapter for EUT	Leader Electronics Inc.	1415-2120125-WP	none

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480
Internet Firewall	WatchGuard Technologies, Inc.	R6264S	808005596-6641
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600002-6EF8
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600207-AD99
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	110
Laptop PC	Toshiba	PA1230U XCD	02792218-3
Laptop PC	Dell	D600	79GSC51
USB/Wireless Network Adapter	Linksys	WUSB54GS	MI0004C09761

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. The EUT wireless card is pinging uni-directionally via 802.11b (11 Mb/sec) to an external Dell D600 Support PC using a Linksys wireless usb adapter. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11b @ 11MBs. Low Channel = 2412 MHz. Frequency Range Investigated: 150 kHz to 30 MHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable - Internal + cab	T2=LISN Insertion Loss s/n280
T3=HP Filter AN02608	T4=ATT 10d B Site D Conducted


Measurement Data: Reading listed by margin.

Test Lead: White

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	629.956k	26.2	+0.1	+0.2	+0.3	+10.3	+0.0	37.1	46.0	-8.9	White
2	2.123M	25.8	+0.2	+0.3	+0.1	+10.3	+0.0	36.7	46.0	-9.3	White
3	505.604k	24.9	+0.1	+0.3	+0.2	+10.3	+0.0	35.8	46.0	-10.2	White
4	889.962k	25.0	+0.1	+0.2	+0.2	+10.3	+0.0	35.8	46.0	-10.2	White

5	1.013M	24.8	+0.2	+0.3	+0.2	+10.3	+0.0	35.8	46.0	-10.2	White
6	212.540k	31.7	+0.1	+0.3	+0.1	+10.2	+0.0	42.4	53.1	-10.7	White
7	1.239M	24.3	+0.2	+0.3	+0.2	+10.3	+0.0	35.3	46.0	-10.7	White
8	160.908k	32.3	+0.1	+0.3	+1.7	+10.2	+0.0	44.6	55.4	-10.8	White
9	485.242k	24.5	+0.1	+0.3	+0.2	+10.3	+0.0	35.4	46.2	-10.8	White
10	2.795M	23.9	+0.3	+0.3	+0.1	+10.3	+0.0	34.9	46.0	-11.1	White
11	2.170M	23.6	+0.2	+0.3	+0.1	+10.3	+0.0	34.5	46.0	-11.5	White
12	646.682k	23.4	+0.1	+0.2	+0.3	+10.3	+0.0	34.3	46.0	-11.7	White
13	852.481k	23.4	+0.1	+0.2	+0.3	+10.3	+0.0	34.3	46.0	-11.7	White
14	2.374M	23.2	+0.3	+0.3	+0.1	+10.3	+0.0	34.2	46.0	-11.8	White
15	2.536M	22.9	+0.3	+0.3	+0.1	+10.3	+0.0	33.9	46.0	-12.1	White
16	475.788k	23.0	+0.1	+0.3	+0.2	+10.3	+0.0	33.9	46.4	-12.5	White
17	1.188M	22.4	+0.2	+0.3	+0.2	+10.3	+0.0	33.4	46.0	-12.6	White
18	2.072M	22.5	+0.2	+0.3	+0.1	+10.3	+0.0	33.4	46.0	-12.6	White
19	2.017M	22.4	+0.2	+0.3	+0.1	+10.3	+0.0	33.3	46.0	-12.7	White
20	2.463M	22.3	+0.3	+0.3	+0.1	+10.3	+0.0	33.3	46.0	-12.7	White

CKC Laboratories Date: 10/6/2005 Time: 11:34:09 AM Watchguard WVO#: 83764
 FCC 15.207 - AVE Test Lead: White 120V 60Hz Sequence#: 14
 WatchGuard Technologies, Inc. MN XP2E6V

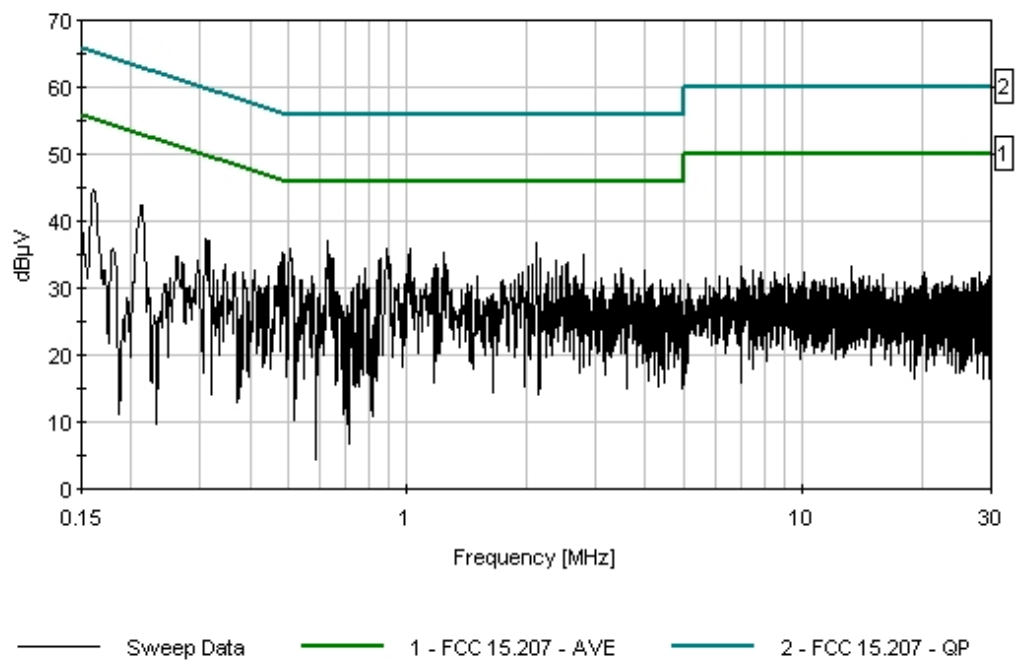

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**

Specification: **15.247(b)(3)**

Work Order #: **83764**

Test Type: **Conducted Emissions**

Equipment: **Internet Firewall**

Manufacturer: WatchGuard Technologies, Inc.

Model: XP2E6W

S/N: 100405-001

Date: 11/1/2005

Time: 12:28:57

Sequence#: 1

Tested By: Randal Clark

120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074. EUT Operational Mode: 802.11b @ 11MBs. Correction factor used $10 \cdot \log(EBW/RBW) = 2.88$ dB. Frequency Range Investigated: Carrier. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Att 10dB AN02139	T2=Cable 40 GHz 36"
T3=Corr BW Correction	

Measurement Data:

Reading listed by margin.

Test Lead: RF Output

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	Dist dB	Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	2437.000M	119.1	+10.0	+1.0	+2.9	+0.0		133.0	137.0	-4.0	RF Ou
2	2412.000M	118.4	+10.0	+1.0	+2.9	+0.0		132.3	137.0	-4.7	RF Ou
3	2462.000M	118.1	+10.0	+1.0	+2.9	+0.0		132.0	137.0	-5.0	RF Ou

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**

Specification: **15.247(b)(3)**

Work Order #: **83764**

Test Type: **Conducted Emissions**

Equipment: **Internet Firewall**

Manufacturer: WatchGuard Technologies, Inc.

Model: XP2E6W

S/N: 100405-001

Date: 11/1/2005

Time: 14:16:50

Sequence#: 1

Tested By: Randal Clark

120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074 EUT Operational Mode: 802.11g @ 54MBs Correction factor used $10 \cdot \log(EBW/RBW) = 5.31$ dB Frequency Range Investigated: Carrier Temperature: 65°F, Relative Humidity: 32%

Transducer Legend:

T1=Att 10dB AN02139	T2=Cable 40 GHz 36"
T3=Corr BW Correction	

Measurement Data:

Reading listed by margin.

Test Lead: RF Output

Measurement Data			Reading noted by Margin				Test Setup: RF Output				
#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	Dist dB	Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	2462.000M	120.1	+10.0	+1.0	+5.3		+0.0	136.4	137.0	-0.6	RF Out
2	2437.000M	119.9	+10.0	+1.0	+5.3		+0.0	136.2	137.0	-0.8	RF Out
3	2412.000M	119.8	+10.0	+1.0	+5.3		+0.0	136.1	137.0	-0.9	RF Out

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **15.247(d) Antenna Conducted**
 Work Order #: **83764**
 Test Type: **Conducted Emissions**
 Equipment: **Internet Firewall**
 Manufacturer: WatchGuard Technologies, Inc.
 Model: XP2E6W
 S/N: 100405-001

Date: 11/1/2005
 Time: 14:25:45
 Sequence#: 3
 Tested By: Randal Clark
 120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074. EUT Mode: 802.11b @ 11MBs EUT Channel: Low. EUT Port: Left. Frequency Range Investigated: 9kHz to 26GHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable 40 GHz 36"	T2=Att 10dB AN02139
---------------------	---------------------


Measurement Data: Reading listed by margin.

Test Lead: RF Output

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	2412.417M	104.3	+1.0	+10.0		+0.0	115.3	118.0	-2.7	RF Ou
2	2397.100M	72.7	+1.0	+10.0		+0.0	83.7	98.0	-14.3	RF Ou
3	2397.100M	72.4	+1.0	+10.0		+0.0	83.4	98.0	-14.6	RF Ou
4	24124.170M	51.7	+3.8	+10.6		+0.0	66.1	98.0	-31.9	RF Ou
5	2487.900M	55.1	+1.0	+10.0		+0.0	66.1	98.0	-31.9	RF Ou
6	14474.500M	51.0	+2.7	+10.4		+0.0	64.1	98.0	-33.9	RF Ou
7	19299.330M	49.0	+3.3	+10.5		+0.0	62.8	98.0	-35.2	RF Ou
8	21711.750M	47.6	+3.3	+10.6		+0.0	61.5	98.0	-36.5	RF Ou
9	16886.920M	48.1	+2.9	+10.4		+0.0	61.4	98.0	-36.6	RF Ou

10	7237.250M	47.8	+1.9	+10.1	+0.0	59.8	98.0	-38.2	RF Ou
11	12062.080M	47.1	+2.4	+10.3	+0.0	59.8	98.0	-38.2	RF Ou
12	9649.667M	46.9	+2.2	+10.2	+0.0	59.3	98.0	-38.7	RF Ou
13	4824.833M	43.7	+1.5	+10.0	+0.0	55.2	98.0	-42.8	RF Ou

CKC Laboratories Date: 11/1/2005 Time: 14:25:45 Watchguard WO#: 83764
15.247(d) Antenna Conducted Test Lead: RF Output 120V 60Hz Sequence#: 3
WatchGuard Technologies, Inc. M/N XP2E6V

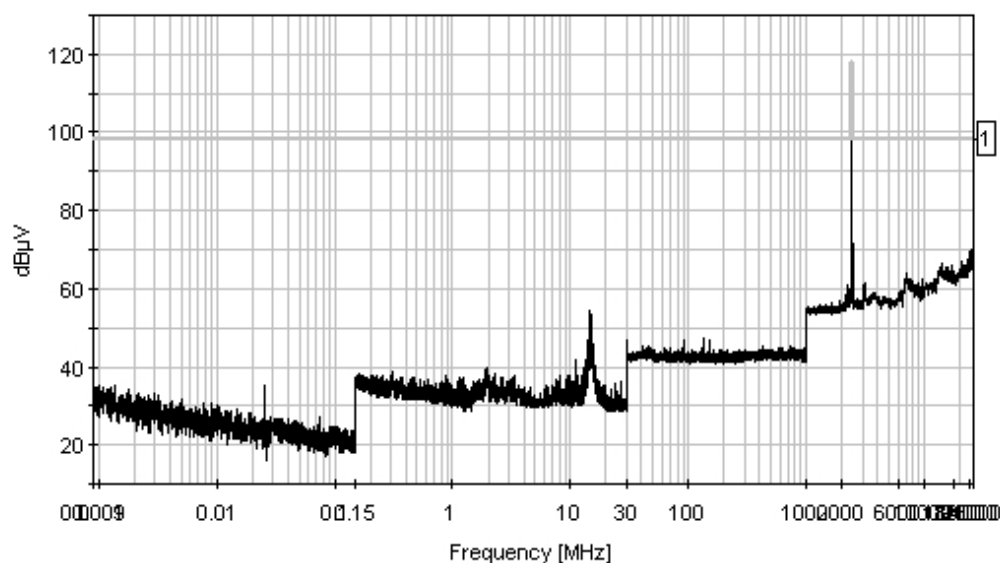

— Sweep Data — 1 - 15.247(d) Antenna Conducted

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **15.247(d) Antenna Conducted**
 Work Order #: **83764**
 Test Type: **Conducted Emissions**
 Equipment: **Internet Firewall**
 Manufacturer: WatchGuard Technologies, Inc.
 Model: XP2E6W
 S/N: 100405-001

Date: 10/4/2005
 Time: 14:45:00
 Sequence#: 2
 Tested By: Randal Clark
 120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074. EUT Mode: 802.11b @ 11MBs. EUT Channel: Mid. EUT Port: Left. Frequency Range Investigated: 9kHz to 26GHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable 40 GHz 36"	T2=Att 10dB AN02139
---------------------	---------------------


Measurement Data:

Reading listed by margin.

Test Lead: RF Output

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB		Dist dB	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	2435.880M	104.7	+1.0	+10.0		+0.0	115.7	114.0 Carrier	+1.7	RF Ou
2	9747.870M	58.4	+2.2	+10.1		+0.0	70.7	94.0	-23.3	RF Ou
3	24178.460M	54.9	+3.8	+10.6		+0.0	69.3	94.0	-24.7	RF Ou
4	9747.870M	54.5	+2.2	+10.1		+0.0	66.8	94.0	-27.2	RF Ou
5	17327.530M	52.0	+3.0	+10.5		+0.0	65.5	94.0	-28.5	RF Ou
6	21567.040M	51.6	+3.3	+10.6		+0.0	65.5	94.0	-28.5	RF Ou
7	19987.300M	51.4	+3.3	+10.6		+0.0	65.3	94.0	-28.7	RF Ou
8	7307.640M	46.9	+1.9	+10.1		+0.0	58.9	94.0	-35.1	RF Ou
9	4871.760M	43.2	+1.5	+10.0		+0.0	54.7	94.0	-39.3	RF Ou

CKC Laboratories Date: 10/4/2005 Time: 14:45:00 Watchguard WO#: 83764
 15.247(d) Antenna Conducted Test Lead: RF Output 120V 60Hz Sequence#: 2
 WatchGuard Technologies, Inc. M/N XP2E6V

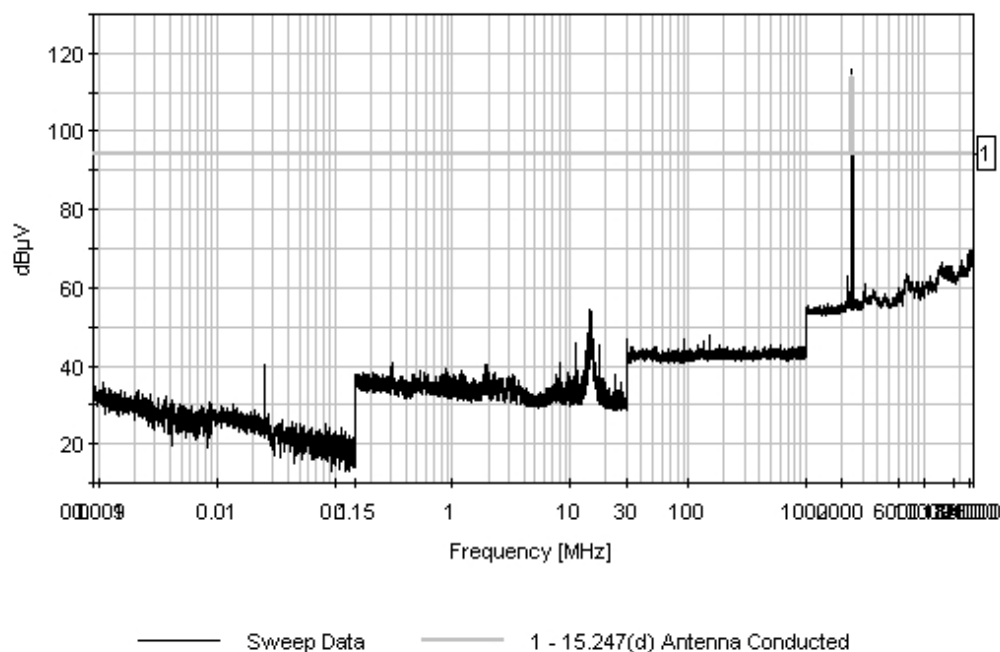

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **15.247(d) Antenna Conducted**
 Work Order #: **83764**
 Test Type: **Conducted Emissions**
 Equipment: **Internet Firewall**
 Manufacturer: WatchGuard Technologies, Inc.
 Model: XP2E6W
 S/N: 100405-001

Date: 11/1/2005
 Time: 14:26:33
 Sequence#: 4
 Tested By: Randal Clark
 120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074. EUT Mode: 802.11b @ 11MBs. EUT Channel: High. EUT Port: Left. Frequency Range Investigated: 9kHz to 26GHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable 40 GHz 36"	T2=Att 10dB AN02139
---------------------	---------------------


Measurement Data: Reading listed by margin.

Test Lead: RF Output

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB		Dist dB	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	2462.000M	105.9	+1.0	+10.0		+0.0	116.9	118.0	-1.1	RF Ou
2	9847.965M	56.4	+2.2	+10.2		+0.0	68.8	98.0	-29.2	RF Ou
3	2487.900M	55.5	+1.0	+10.0		+0.0	66.5	98.0	-31.5	RF Ou
4	24619.960M	50.7	+3.9	+10.6		+0.0	65.2	98.0	-32.8	RF Ou
5	14771.760M	51.8	+2.8	+10.3		+0.0	64.9	98.0	-33.1	RF Ou
6	22157.960M	49.6	+3.4	+10.6		+0.0	63.6	98.0	-34.4	RF Ou
7	19695.770M	49.5	+3.4	+10.5		+0.0	63.4	98.0	-34.6	RF Ou
8	17233.770M	49.2	+2.9	+10.5		+0.0	62.6	98.0	-35.4	RF Ou

9	7385.930M	48.1	+1.9	+10.1	+0.0	60.1	98.0	-37.9	RF Ou
10	12309.960M	44.8	+2.5	+10.3	+0.0	57.6	98.0	-40.4	RF Ou
11	4923.930M	43.4	+1.5	+10.0	+0.0	54.9	98.0	-43.1	RF Ou

CKC Laboratories Date: 11/1/2005 Time: 14:26:33 Watchguard WO#: 83764
15.247(d) Antenna Conducted Test Lead: RF Output 120V 60Hz Sequence#: 4
WatchGuard Technologies, Inc. M/N XP2E6V

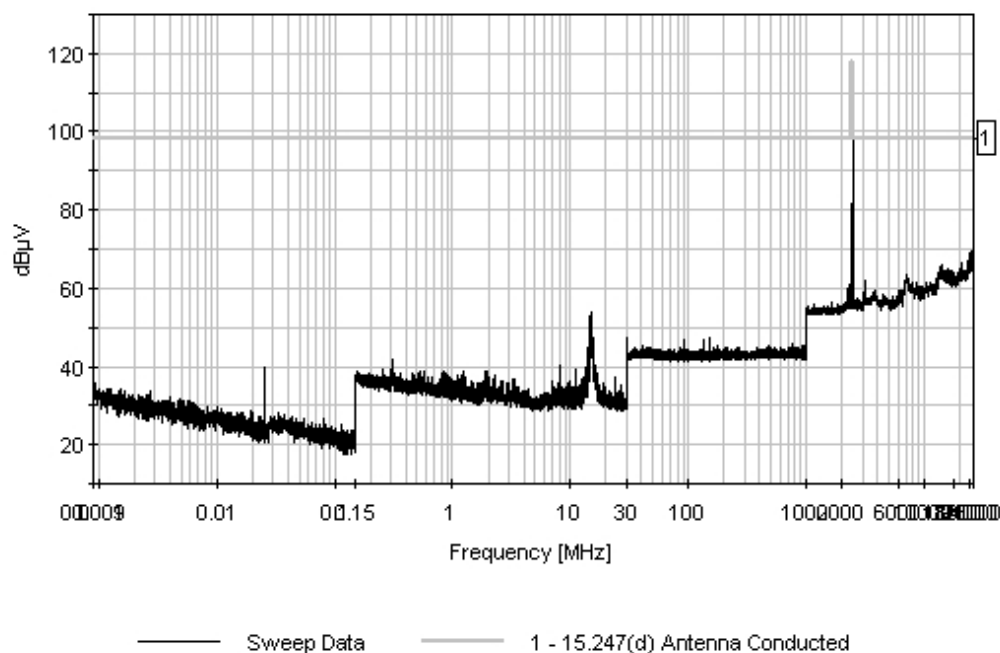

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **15.247(d) Antenna Conducted**
 Work Order #: **83764** Date: 11/1/2005
 Test Type: **Conducted Emissions** Time: 14:59:09
 Equipment: **Internet Firewall** Sequence#: 20
 Manufacturer: WatchGuard Technologies, Inc. Tested By: Randal Clark
 Model: XP2E6W 120V 60Hz
 S/N: 100405-001

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074. EUT Mode: 802.11g @ 54MBs. EUT Channel: Low. EUT Port: Left. Frequency Range Investigated: 9kHz to 26GHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable 40 GHz 36"	T2=Att 10dB AN02139
---------------------	---------------------

Measurement Data:


Reading listed by margin.

Test Lead: RF Output

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB		Dist dB	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	2412.000M	107.4	+1.0	+10.0		+0.0	118.4	120.0 Carrier	-1.6	RF Ou
2	2400.000M	84.0	+1.0	+10.0		+0.0	95.0	100.0	-5.0	RF Ou
3	24123.600M	53.3	+3.8	+10.6		+0.0	67.7	100.0	-32.3	RF Ou
4	13977.610M	51.3	+2.7	+10.3		+0.0	64.3	100.0	-35.7	RF Ou
5	9650.900M	51.2	+2.2	+10.2		+0.0	63.6	100.0	-36.4	RF Ou
6	13759.260M	49.7	+2.7	+10.4		+0.0	62.8	100.0	-37.2	RF Ou
7	14475.300M	48.4	+2.7	+10.4		+0.0	61.5	100.0	-38.5	RF Ou
8	21711.900M	46.4	+3.3	+10.6		+0.0	60.3	100.0	-39.7	RF Ou
9	7236.600M	48.1	+1.9	+10.1		+0.0	60.1	100.0	-39.9	RF Ou

10	19299.700M	46.2	+3.3	+10.5	+0.0	60.0	100.0	-40.0	RF Ou
11	16887.500M	46.3	+2.9	+10.4	+0.0	59.6	100.0	-40.4	RF Ou
12	12063.100M	45.3	+2.4	+10.3	+0.0	58.0	100.0	-42.0	RF Ou
13	4824.400M	42.7	+1.5	+10.0	+0.0	54.2	100.0	-45.8	RF Ou

CKC Laboratories Date: 11/1/2005 Time: 14:59:09 Watchguard WVO#: 83764
15.247(d) Antenna Conducted Test Lead: RF Output 120V 60Hz Sequence#: 20
WatchGuard Technologies, Inc. MN XP2E6V

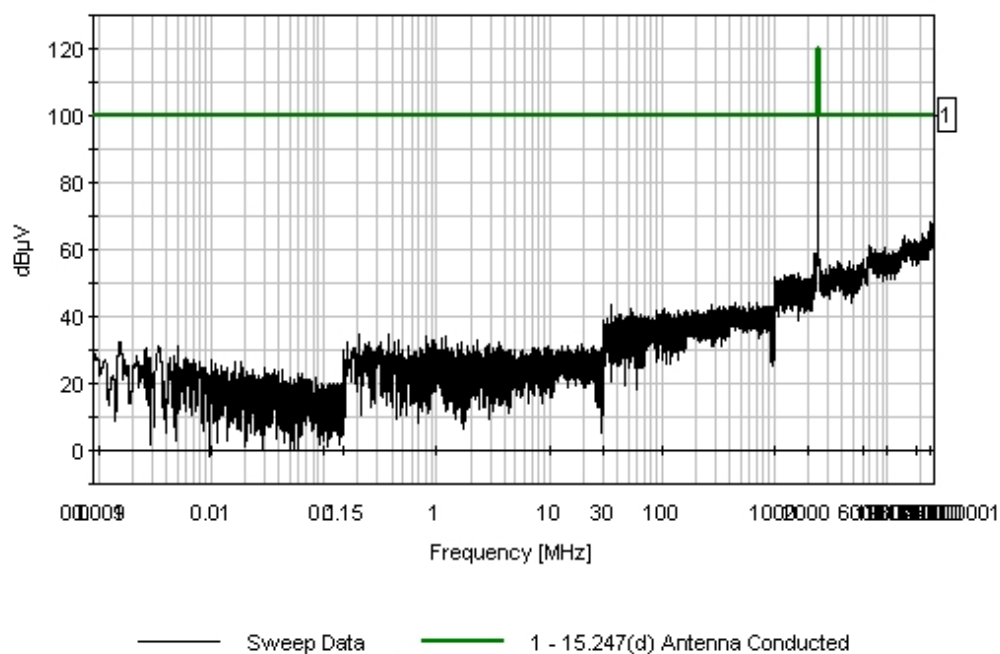

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **15.247(d) Antenna Conducted**
 Work Order #: **83764**
 Test Type: **Conducted Emissions**
 Equipment: **Internet Firewall**
 Manufacturer: WatchGuard Technologies, Inc.
 Model: XP2E6W
 S/N: 100405-001

Date: 11/1/2005
 Time: 15:07:31
 Sequence#: 21
 Tested By: Randal Clark
 120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074. EUT Mode: 802.11g @ 54MBs. EUT Channel: Mid. EUT Port: Left. Frequency Range Investigated: 9kHz to 26GHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:


T1=Cable 40 GHz 36"	T2=Att 10dB AN02139
---------------------	---------------------

Measurement Data: Reading listed by margin. Test Lead: RF Output

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB		Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	2437.000M	107.4	+1.0	+10.0		+0.0	118.4	120.0	-1.6	RF Ou
								Carrier		
2	24367.600M	51.0	+3.9	+10.6		+0.0	65.5	100.0	-34.5	RF Ou
3	9747.600M	51.3	+2.2	+10.1		+0.0	63.6	100.0	-36.4	RF Ou
4	2240.000M	52.4	+1.0	+10.0		+0.0	63.4	100.0	-36.6	RF Ou
5	2233.400M	52.1	+1.0	+10.0		+0.0	63.1	100.0	-36.9	RF Ou
6	19494.200M	48.8	+3.4	+10.5		+0.0	62.7	100.0	-37.3	RF Ou
7	17057.600M	49.2	+2.9	+10.4		+0.0	62.5	100.0	-37.5	RF Ou
8	21930.900M	48.0	+3.3	+10.6		+0.0	61.9	100.0	-38.1	RF Ou

9	14620.900M	47.2	+2.7	+10.3	+0.0	60.2	100.0	-39.8	RF Ou
10	7310.000M	46.0	+1.9	+10.1	+0.0	58.0	100.0	-42.0	RF Ou
11	12184.200M	44.3	+2.5	+10.3	+0.0	57.1	100.0	-42.9	RF Ou
12	4873.300M	42.3	+1.5	+10.0	+0.0	53.8	100.0	-46.2	RF Ou

CKC Laboratories Date: 11/1/2005 Time: 15:07:31 Watchguard WVO#: 83764
15.247(d) Antenna Conducted Test Lead: RF Output 120V 60Hz Sequence#: 21
WatchGuard Technologies, Inc. MN XP2E6V

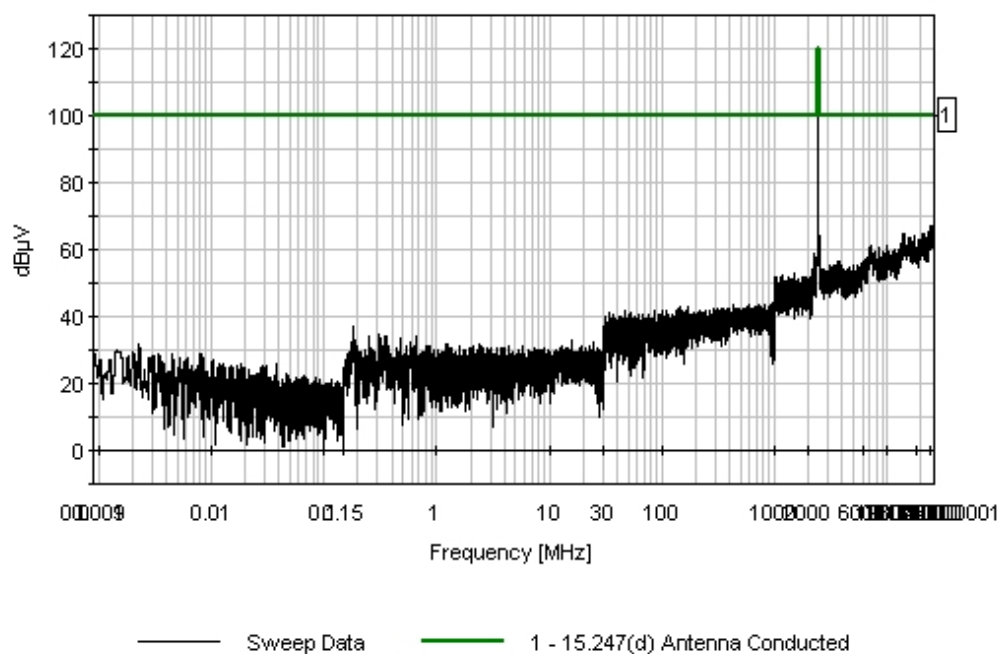

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **15.247(d) Antenna Conducted**
 Work Order #: **83764**
 Test Type: **Conducted Emissions**
 Equipment: **Internet Firewall**
 Manufacturer: WatchGuard Technologies, Inc.
 Model: XP2E6W
 S/N: 100405-001

Date: 11/1/2005
 Time: 14:53:52
 Sequence#: 19
 Tested By: Randal Clark
 120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074. EUT Mode: 802.11g @ 54MBs EUT Channel: High. EUT Port: Left. Frequency Range Investigated: 9kHz to 26GHz. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable 40 GHz 36"	T2=Att 10dB AN02139
---------------------	---------------------


Measurement Data: Reading listed by margin.

Test Lead: RF Output

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	Dist dB	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	2462.000M	107.7	+1.0	+10.0	+0.0	118.7	120.0	-1.3	RF Ou
2	2483.500M	74.4	+1.0	+10.0	+0.0	85.4	100.0	-14.6	RF Ou
3	2484.500M	72.6	+1.0	+10.0	+0.0	83.6	100.0	-16.4	RF Ou
4	2483.686M	66.2	+1.0	+10.0	+0.0	77.2	100.0	-22.8	RF Ou
5	2450.147M	81.0	+1.0	+10.0	+0.0	92.0	120.0	-28.0	RF Ou
6	9848.800M	56.0	+2.2	+10.2	+0.0	68.4	100.0	-31.6	RF Ou
7	24637.600M	48.8	+3.9	+10.6	+0.0	63.3	100.0	-36.7	RF Ou
8	22172.800M	47.8	+3.4	+10.6	+0.0	61.8	100.0	-38.2	RF Ou
9	17243.200M	48.2	+2.9	+10.5	+0.0	61.6	100.0	-38.4	RF Ou

10	19708.000M	47.1	+3.4	+10.5	+0.0	61.0	100.0	-39.0	RF Ou
11	14778.400M	47.4	+2.8	+10.3	+0.0	60.5	100.0	-39.5	RF Ou
12	12313.600M	46.0	+2.5	+10.2	+0.0	58.7	100.0	-41.3	RF Ou
13	7394.400M	46.1	+1.9	+10.1	+0.0	58.1	100.0	-41.9	RF Ou
14	4929.600M	42.9	+1.5	+10.0	+0.0	54.4	100.0	-45.6	RF Ou

CKC Laboratories Date: 11/1/2005 Time: 14:53:52 Watchguard WVO#: 83764
15.247(d) Antenna Conducted Test Lead: RF Output 120V 60Hz Sequence#: 19
WatchGuard Technologies, Inc. MN XP2E6V

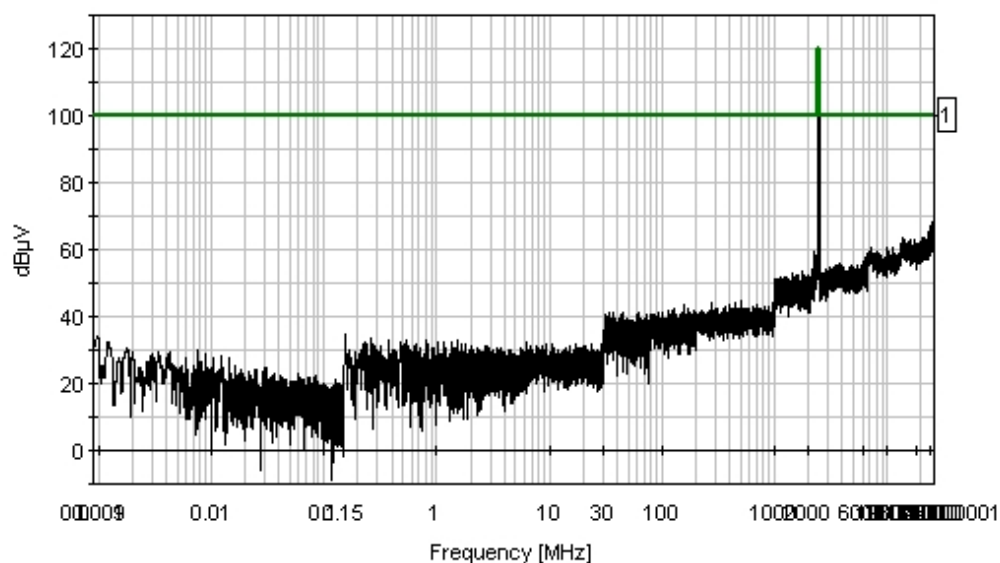

— Sweep Data — 1 - 15.247(d) Antenna Conducted

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**

Specification: **15.247(d)/15.209**

Work Order #: **83764**

Date: 11/2/2005

Test Type: **Radiated Scan**

Time: 14:47:08

Equipment: **Internet Firewall**

Sequence#: 6

Manufacturer: WatchGuard Technologies, Inc.

Tested By: Mike Wilkinson

Model: XP2E6W

S/N: 100405-001

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480
Internet Firewall	WatchGuard Technologies, Inc.	R6264S	808005596-6641
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600002-6EF8
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	706600207-AD99
Internet Firewall	WatchGuard Technologies, Inc.	MF16S32E10	110
Laptop PC	Toshiba	PA1230U XCD	02792218-3
Laptop PC	Dell	D600	79GSC51
USB/Wireless Network Adapter	Linksys	WUSB54GS	MI0004C09761

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. The EUT is running Montavista Linux. A Toshiba 8100 is connected using shielded serial cable to the EUT serial port at 115k to initialize the unit as needed and monitor ping status. All 6 EUT wan/Lan ports are pinging bi-directionally to external support PC's via UTP Cat 5 ethernet cables. Three ethernet cables are going to three separate WatchGuard FB X Edge units, and three ethernet cables are going to a single WatchGuard X2 unit. EUT Operational Mode: 802.11bg. Low, Mid and High transmit channel investigated and noted for each reading. Data represents both operational modes of EUT Low channel = 2412 MHz, Mid channel = 2437 MHz, High channel = 2462 MHz. Frequency Range Investigated: 30 MHz to 26 GHz. **No signals observed above 5 GHz.** Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Amp - S/N 604	T2=Bilog Site D
T3=Cable - 10 Meter	T4=Horn AN 00656 1-18 GHz (Mariposa)
T5=Amp - S/N 301	T6=Cable 35' Blue SMA CKC P1352
T7=Cable - 3 Meter to bulkhead	

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	T5	T6	T7						
			dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	2385.000M	46.6	+0.0	+0.0	+0.0	+29.1	+0.0	51.2	54.0	-2.8	Vert
	Ave		-34.6	+5.2	+4.9				Low Channel-g		
2	4924.000M	34.2	+0.0	+0.0	+0.0	+34.1	+0.0	49.6	54.0	-4.4	Vert
	Ave		-34.3	+8.2	+7.4				High Channel-g		

3	200.020M	53.2	-26.5 +0.0	+8.3 +0.0	+3.3 +0.0	+0.0	+0.0	38.3	43.5 Mid Channel-g	-5.2	Vert
4	200.443M	52.9	+0.0	+0.0	+0.0		+0.0	38.0	43.5 Mid Channel-b	-5.5	Vert
5	324.898M	49.1	+0.0	+0.0	+0.0		+0.0	40.5	46.0 Low Channel-b	-5.5	Vert
6	200.424M	52.8	+0.0	+0.0	+0.0		+0.0	37.9	43.5 High Channel-b	-5.6	Vert
7	200.450M	52.2	+0.0	+0.0	+0.0		+0.0	37.3	43.5 Low Channel-b	-6.2	Vert
8	324.991M	48.3	-26.4 +0.0	+13.5 +0.0	+4.3 +0.0	+0.0	+0.0	39.7	46.0 Low Channel-g	-6.3	Vert
9	199.991M	52.0	-26.5 +0.0	+8.3 +0.0	+3.3 +0.0	+0.0	+0.0	37.1	43.5 Low Channel-g	-6.4	Vert
10	4823.000M Ave	32.6	+0.0 -34.4	+0.0 +8.1	+0.0 +7.3	+34.0	+0.0	47.6	54.0 Low Channel-g	-6.4	Vert
11	4874.040M Ave	32.2	+0.0 -34.3	+0.0 +8.2	+0.0 +7.3	+34.1	+0.0	47.5	54.0 Mid Channel-g	-6.5	Vert
12	199.600M	51.9	-26.5 +0.0	+8.3 +0.0	+3.3 +0.0	+0.0	+0.0	37.0	43.5 High Channel-g	-6.5	Vert
13	375.044M	46.5	+0.0	+0.0	+0.0		+0.0	39.4	46.0 Mid Channel-b	-6.6	Horiz
14	4874.000M Ave	32.0	+0.0 -34.3	+0.0 +8.2	+0.0 +7.3	+34.1	+0.0	47.3	54.0 Mid Channel-b	-6.7	Vert
15	4924.000M Ave	31.9	+0.0 -34.3	+0.0 +8.2	+0.0 +7.4	+34.1	+0.0	47.3	54.0 High Channel-b	-6.7	Vert
16	325.035M	47.2	-26.4 +0.0	+13.5 +0.0	+4.3 +0.0	+0.0	+0.0	38.6	46.0 Mid Channel-g	-7.4	Vert
17	4824.000M Ave	31.1	+0.0 -34.4	+0.0 +8.1	+0.0 +7.3	+34.0	+0.0	46.1	54.0 Low Channel-b	-7.9	Vert
18	125.018M	48.3	+0.0	+0.0	+0.0		+0.0	35.3	43.5 Low Channel-b	-8.2	Vert
19	375.020M	43.5	+0.0	+0.0	+0.0		+0.0	36.4	46.0 Low Channel-b	-9.6	Horiz
20	500.037M	40.7	+0.0	+0.0	+0.0		+0.0	36.3	46.0 Low Channel-b	-9.7	Vert
21	324.930M	44.8	+0.0	+0.0	+0.0		+0.0	36.2	46.0 Mid Channel-b	-9.8	Vert
22	250.025M	46.4	+0.0	+0.0	+0.0		+0.0	36.0	46.0 Low Channel-b	-10.0	Vert
23	125.024M	46.1	+0.0	+0.0	+0.0		+0.0	33.1	43.5 Mid Channel-b	-10.4	Vert
24	324.910M	44.0	+0.0	+0.0	+0.0		+0.0	35.4	46.0 High Channel-b	-10.6	Vert
25	400.897M	41.6	+0.0	+0.0	+0.0		+0.0	35.3	46.0 Low Channel-b	-10.7	Vert
26	124.984M	45.5	-26.7 +0.0	+11.2 +0.0	+2.5 +0.0	+0.0	+0.0	32.5	43.5 Mid Channel-g	-11.0	Vert
27	500.044M	39.2	+0.0	+0.0	+0.0		+0.0	34.8	46.0 Mid Channel-b	-11.2	Horiz

28	375.045M	41.6	+0.0	+0.0	+0.0		+0.0	34.5	46.0	-11.5	Vert
									Low Channel-b		
29	250.021M	44.8	+0.0	+0.0	+0.0		+0.0	34.4	46.0	-11.6	Vert
									Mid Channel-b		
30	250.020M	44.8	+0.0	+0.0	+0.0		+0.0	34.4	46.0	-11.6	Horiz
									Low Channel-b		
31	125.018M	43.7	+0.0	+0.0	+0.0		+0.0	30.7	43.5	-12.8	Vert
									High Channel-b		
32	124.600M	43.6	-26.7	+11.2	+2.5	+0.0	+0.0	30.6	43.5	-12.9	Vert
			+0.0	+0.0	+0.0				High Channel-g		
33	400.754M	39.1	+0.0	+0.0	+0.0		+0.0	32.8	46.0	-13.2	Vert
									High Channel-b		
34	250.006M	42.9	+0.0	+0.0	+0.0		+0.0	32.5	46.0	-13.5	Vert
									High Channel-b		
35	250.040M	42.2	+0.0	+0.0	+0.0		+0.0	31.8	46.0	-14.2	Horiz
									Mid Channel-b		
36	400.855M	37.0	+0.0	+0.0	+0.0		+0.0	30.7	46.0	-15.3	Vert
									Mid Channel-b		
37	399.980M	36.9	+0.0	+0.0	+0.0		+0.0	30.6	46.0	-15.4	Horiz
									High Channel-b		
38	200.452M	42.7	+0.0	+0.0	+0.0		+0.0	27.8	43.5	-15.7	Horiz
									High Channel-b		
39	350.031M	37.6	+0.0	+0.0	+0.0		+0.0	29.8	46.0	-16.2	Horiz
									Mid Channel-b		
40	625.029M	31.8	+0.0	+0.0	+0.0		+0.0	29.8	46.0	-16.2	Vert
									Low Channel-b		
41	124.991M	40.0	-26.7	+11.2	+2.5	+0.0	+0.0	27.0	43.5	-16.5	Vert
			+0.0	+0.0	+0.0				Low Channel-g		
42	375.036M	36.6	+0.0	+0.0	+0.0		+0.0	29.5	46.0	-16.5	Horiz
									High Channel-b		
43	350.038M	36.8	+0.0	+0.0	+0.0		+0.0	29.0	46.0	-17.0	Vert
									Low Channel-b		
44	2488.041M	31.4	+0.0	+0.0	+0.0	+29.3	+0.0	36.6	54.0	-17.4	Vert
	Ave		-34.5	+5.4	+5.0				High Channel-b		
^	2488.040M	48.4	+0.0	+0.0	+0.0	+29.3	+0.0	53.6	54.0	-0.4	Vert
			-34.5	+5.4	+5.0				High Channel-b		
46	2385.800M	31.4	+0.0	+0.0	+0.0	+29.1	+0.0	36.0	54.0	-18.0	Vert
	Ave		-34.6	+5.2	+4.9				Low Channel-b		
^	2385.800M	50.2	+0.0	+0.0	+0.0	+29.1	+0.0	54.8	54.0	+0.8	Vert
			-34.6	+5.2	+4.9				Low Channel-b		

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **15.247(e) Peak Power Spectral Density**
 Work Order #: **83764**
 Test Type: **Conducted Emissions**
 Equipment: **Internet Firewall**
 Manufacturer: WatchGuard Technologies, Inc.
 Model: XP2E6W
 S/N: 100405-001

Date: 10/4/2005
 Time: 16:51:05
 Sequence#: 5
 Tested By: Randal Clark
 120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074. EUT Mode: 802.11b @ 11MBs. EUT Port: Left. Frequency Range Investigated: Carrier. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable 40 GHz 36"	T2=dBm to dBuV
T3=Att 10dB AN02139	

Measurement Data: Reading listed by margin. Test Lead: RF Output

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	Dist dB	Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	2439.880M	89.5	+1.0	+107.0	+10.0	+0.0		-6.5	8.0	-14.5	RF Ou
2	2465.400M	88.5	+1.0	+107.0	+10.0	+0.0		-7.5	8.0	-15.5	RF Ou
3	2412.900M	86.1	+1.0	+107.0	+10.0	+0.0		-9.9	8.0	-17.9	RF Ou

Test Location: CKC Laboratories • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Watchguard**
 Specification: **15.247(e) Peak Power Spectral Density**
 Work Order #: **83764**
 Test Type: **Conducted Emissions**
 Equipment: **Internet Firewall**
 Manufacturer: WatchGuard Technologies, Inc.
 Model: XP2E6W
 S/N: 100405-001

Date: 11/1/2005
 Time: 13:40:21
 Sequence#: 5
 Tested By: Randal Clark
 120V 60Hz

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
AC Adapter for EUT	Globtek	GT-41052-1512	none
Internet Firewall*	WatchGuard Technologies, Inc.	XP2E6W	100405-001

Support Devices:

Function	Manufacturer	Model #	S/N
Host PC	Toshiba	PT810U	60748626U
AC Adapter for Host PC	Toshiba	PA2444U	1359480

Test Conditions / Notes:

EUT is a wireless Firewall with VPN support. EUT is communicating with support equipment. One EUT antenna is directly connected to spectrum analyzer. Transmit power test performed in accordance with KDB 558074. EUT Mode: 802.11g @ 54MBs. EUT Port: Left. Frequency Range Investigated: Carrier. Temperature: 65°F, Relative Humidity: 32%.

Transducer Legend:

T1=Cable 40 GHz 36"	T2=dBm to dBuV
T3=Att 10dB AN02139	

Measurement Data: Reading listed by margin. Test Lead: RF Output

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	2463.840M	85.6	+1.0	+107.0	+10.0	+0.0	-10.4	8.0	-18.4	RF Ou
2	2437.270M	84.7	+1.0	+107.0	+10.0	+0.0	-11.3	8.0	-19.3	RF Ou
3	2410.470M	84.2	+1.0	+107.0	+10.0	+0.0	-11.8	8.0	-19.8	RF Ou