



FCC/IC Test Report

FOR:

3SI Security Systems
Model Name: AT140704US

Product Description:
Asset Tracking and Alert Device

FCC ID: Q6KAT140704A
IC ID: 5043A-AT140704A

47 CFR Part 95
RSS-210 Issue 8; RSS-Gen Issue 4

TEST REPORT #: EMC-3SISE-038-14001_FCC_95_Rev1
DATE: 2014-12-15



FCC listed:
A2LA Accredited

IC recognized #
3462B-1

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

TABLE OF CONTENTS

1	Assessment	3
2	Administrative Data	4
2.1	Identification of the Testing Laboratory Issuing the EMC Test Report	4
2.2	Identification of the Client	4
2.3	Identification of the Manufacturer	4
3	Equipment under Test (EUT)	5
3.1	Specification of the Equipment under Test	5
3.2	Identification of the Equipment Under Test (EUT)	6
3.3	Identification of Accessory equipment	6
4	Subject Of Investigation	7
5	Summary of Measurement Results	8
6	Radiated Measurement Procedure	9
6.1	RF Output Power	10
6.1.1	References:	10
6.1.2	Limits	10
6.1.3	Test Result:	10
6.1.4	Test Plot	11
6.2	Occupied Bandwidth	12
6.2.1	References:	12
6.2.2	Limits:	12
6.2.3	Test Result:	12
6.3	Modulation Characteristics	14
6.4	Transmit Spectrum Mask	14
6.4.1	References:	14
6.4.2	Measurement Settings	14
6.4.3	Test Conditions	14
6.4.4	Test Plot: 216.475 Beacon per FCC 95 Mask	15
6.5	Frequency Tolerance	16
6.5.1	References:	16
6.5.2	Limits:	16
6.5.3	Results:	16
6.6	Transmitter Spurious Emissions- Radiated	17
6.6.1	216.475 MHz Beacon	17
7	Test Equipment	20
8	BLOCK DIAGRAMS	21
9	Revision History	23


Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	CETECOM™
Date :	2014-12-15	IC ID: 5043A- AT140704A	

1 Assessment


The following device was evaluated against the applicable criteria specified in FCC rules Parts 95 of Title 47 of the Code of Federal Regulations and Industry Canada Standards RSS 210 Annex 4 and no deviations were ascertained during the course of the tests performed.

Company	Description	Model #
3SI Security Systems	Asset tracking and alert devices	AT140704US

This report is reviewed by:

2014-12-15	Compliance	Franz Engert (Manager Compliance)	 Digitally signed by Franz Engert DN: cn=Franz Engert, c=US, o=CETECOM, ou=Compliance, email=franz.engert@cetecom. com Date: 2014.12.15 19:29:06 -08'00'
Date	Section	Name	Signature

Responsible for the Report:

2014-12-15	Compliance	James Donnellan (Senior EMC Test Engineer)	 Digitally signed by James Donnellan DN: cn=James Donnellan, c=US, o=Cetecom Inc., ou=Compliance, email=james.donnellan@cetecom. com Date: 2014.12.15 10:28:26 -08'00'
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section3.

CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc. USA.

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Franz Engert
Responsible Project Leader:	Deepak Kumar

2.2 Identification of the Client

Applicant's Name:	3SI Security Systems
Street Address:	2055 N Brown Road, Suite 225, Lawrenceville
City/Zip Code	GA 30043
Country	USA
Contact Person:	Waldemar Sierocinski
Phone No.	954-214-5398
Fax:	954-214-5398
e-mail:	Waldemar_Sierocinski@3sisecurity.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as above.
Manufacturers Address:	
City/Zip Code	
Country	

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Marketing Name / Description:	Asset Tracking and Alert Device
Model Number:	AT140704US
FCC-ID :	Q6KAT140704A
IC Cert Number:	5043A-AT140704A
HW / SW Revision :	P2 / 12.1.18203
Product Description:	Asset Tracking and Alert Device equipped with 3G cellular radio module, beacon radio and GPS
Type(s) of Modulation:	no modulation, pulsed CW at 20% duty cycle, repetition rate 1 Hz
Frequency Range / number of channels:	1 channel, center at 216.475 MHz
Antenna info:	internal, PCB trace loop antenna (around pcb perimeter)
Output Power:	ERP: -8.2 dBm
Other Radios	• 3G radio module GSM: 850/1900 & UMTS FDD: Band II/Band V • GPS 1575.42 MHz
Power supply	Battery Pack 3.7V DC;
operating temperature range	-20°C to 60°C
Prototype / Production unit	Prototype

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

3.2 Identification of the Equipment Under Test (EUT)

EUT #	Serial Number	HW Version	SW Version	Notes	Cetecom ID
1	IMEI: 354676050448264	(P2)	12.1.18147	RT REVB # 7	-
2	IMEI 354676050452894	(P2)	12.1.18147	RT REVB #8	-
3	Support Board	-	N/A	AEBP1#69	-

3.3 Identification of Accessory equipment

AE #	Type	PN	Notes
1	3.7 V Li-ion Battery Pack	52010556 T	-
4	GPS/GSM Multi Band Combo Antenna	S/N 0018110	Model AU-3S

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

4 **Subject Of Investigation**

The objective of the evaluation documented in this report was to assess if the performance of the EUT meets the relevant requirements specified in in FCC rules 95 of Title 47 of the Code of Federal Regulations and Industry Canada Standards RSS 210 Issue 8.

- 47 CFR 2: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communication Commission: Frequency allocations and radio treaty matters; general rules and regulations.
- 47 CFR 95: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communication Commission: Personal Radio Services.
- RSS-GEN, issue 4: General Requirements and Information for the Certification of Radio Apparatus
- RSS 210, issue 8: Spectrum Management and Telecommunications – Radio Standards Specification; License-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

This test report is to support a request for new equipment authorization under the FCC-ID: Q6KAT140704A and IC-ID: 5043A-AT140704A

All testing was performed on the product samples referred to in Section 3 as EUT.

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

5 Summary of Measurement Results

Test Specification	Test Case	Temperature and Voltage Conditions	Pass	Fail	NA	NP	Result
FCC §95.639 & RSS-210 A4.3	RF Output Power	Nominal	■	□	□	□	Complies
§95.633(d) (3) RSS Gen Sect. 6.6	Occupied Bandwidth	Nominal	■	□	□	□	Complies
§95.635 (2) (i) RSS210 A4.3 Mask D (a)	Transmit Spectrum Mask	Nominal	■	□	□	□	Complies
FCC §95.629 (2) RSS-210 A5.3	Frequency Tolerance	Nominal & Extreme	■	□	□	□	Complies
§95.635 (2) (ii) RSS Gen 6.13	Radiated Spurious Emissions	Nominal	■	□	□	□	Complies
§95.635 (2) RSS210 A4.3 Mask D	Conducted Spurious Emissions	Nominal	□	□	■	□	Note 1


Note: NA = Not Applicable; NP = Not Performed

Note 1: EUT contains an integral antenna.

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	CETECOM™
Date :	2014-12-15	IC ID: 5043A- AT140704A	

6 Radiated Measurement Procedure

Ref: TIA-603C 2004 -2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

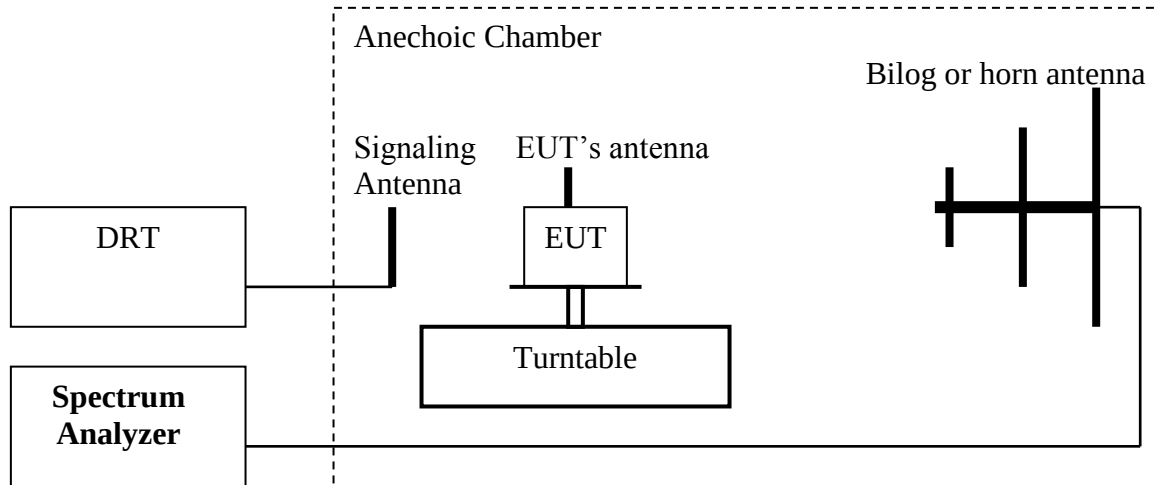

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
2. Configure the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the ERP using the following equation:

$$\mathbf{ERP\ (dBm) = LVL\ (dBm) + LOSS\ (dB)}$$
8. Determine the EIRP using the following equation:

$$\mathbf{EIRP\ (dBm) = ERP\ (dBm) + 2.14\ (dB)}$$
9. Measurements are to be performed with the EUT set to the low, middle and high channels.
Spectrum analyzer settings: RBW=VBW=3MHz

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

6.1 RF Output Power

6.1.1 References:

FCC: Part 95.639, IC: RSS-210, A4.3

6.1.2 Limits

FCC: Part 95.639 (e): 100 mW (20 dBm)

RSS-210, A4.3: The peak output power shall not exceed 100 mW or 160 mW e.i.r.p.

Test Conditions:

Tnom: 23.4 °C; Vnom: 3.7 V dc


6.1.3 Test Result:

Frequency (MHz)	Max Peak Output Power- Conducted (dBm)	Radiated ERP (dBm)
216.475	N/A	-8.2
Measurement Uncertainty: ±3dB		

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	CETECOM TM
Date :	2014-12-15	IC ID: 5043A- AT140704A	

6.1.4 Test Plot

ERP 216.475 MHz Beacon.

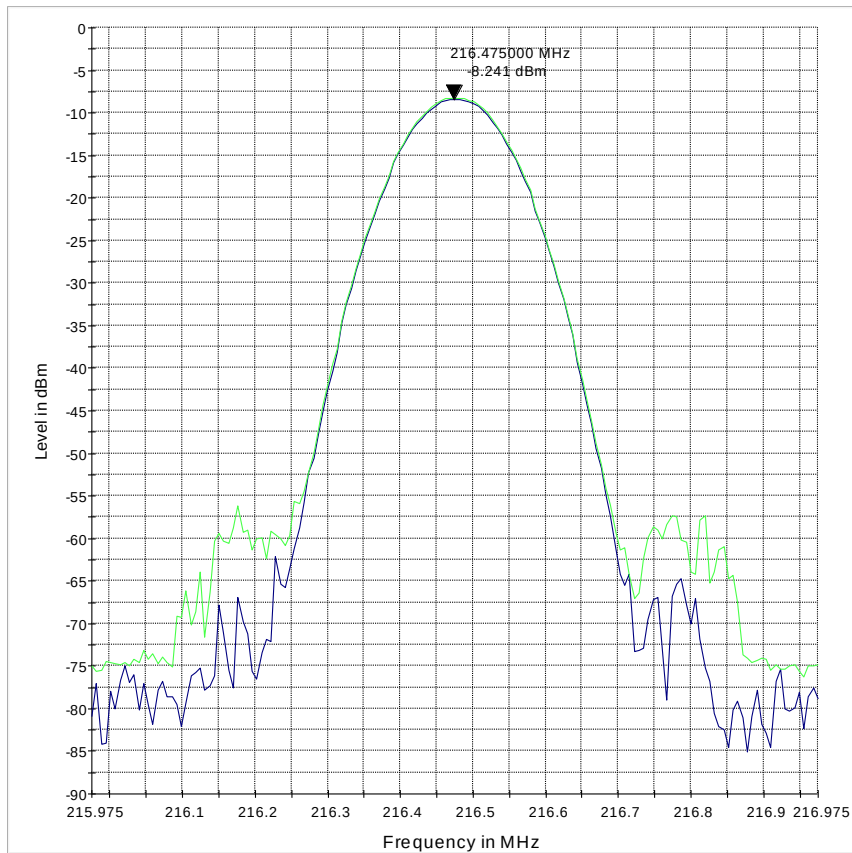

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

6.2 Occupied Bandwidth

6.2.1 References:

FCC: 95.629

RSS-GEN, 6.6

6.2.2 Limits:

FCC part 95.629 LPRS transmitter frequencies. (c) Extra band channels. (1) The following table indicates extra band frequencies. The channel bandwidth is 50 kHz.

6.2.3 Test Result:

Channel	Frequency (MHz)	99% Occupied Bandwidth	26 dB Emission Bandwidth
1	216.475	22.1 Hz	29.8 Hz

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

6.3 Modulation Characteristics

The manufacturer has indicated that the signal has no modulation.

6.4 Transmit Spectrum Mask

6.4.1 References:

RSS 210 Annex 4 Mask D

- (a) At least 30 dB; for emissions 25 kHz to 35 kHz removed from the channel center frequency; and
- (b) At least $55 + 10 \log 10(P)$ dB or to Table 2 limits, whichever is less stringent; for emissions more than 35 kHz removed from the channel center frequency.

FCC 95.635 (2) (ii) Emissions for LPRS transmitters operating on extra band channels (50 kHz) shall be attenuated below the unmodulated carrier in accordance with the following:

- (i) Emissions 25 kHz to 35 kHz from the channel center frequency: at least 30 dB; and
- (ii) Emissions more than 35 kHz away from the channel center frequency: at least $43 + 10 \log(\text{carrier power in watts})$ dB.

6.4.2 Measurement Settings

For emissions measurement 25 kHz to 35 kHz from center frequency:

RBW=500 Hz for measurements

VBW=RBW or 3x RBW

Span= 100 kHz or sufficient to capture the entire frequency range to be investigated

For emissions measurement more than 35 kHz away from the channel center frequency:

RBW=100 kHz for measurements < 1GHz

RBW=1MHz for measurements > 1GHz

VBW=RBW or 3x RBW

Span= Entire range of measuring antenna or in segment

Detector: Peak- Max Hold

Peak- Max Hold

Sweep time: Auto.


6.4.3 Test Conditions

Tnom: 23°C

Vnom: 3.7 V dc

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	CETECOM™ 
Date :	2014-12-15	IC ID: 5043A- AT140704A	


6.4.4 Test Plot: 216.475 Beacon per FCC 95 Mask

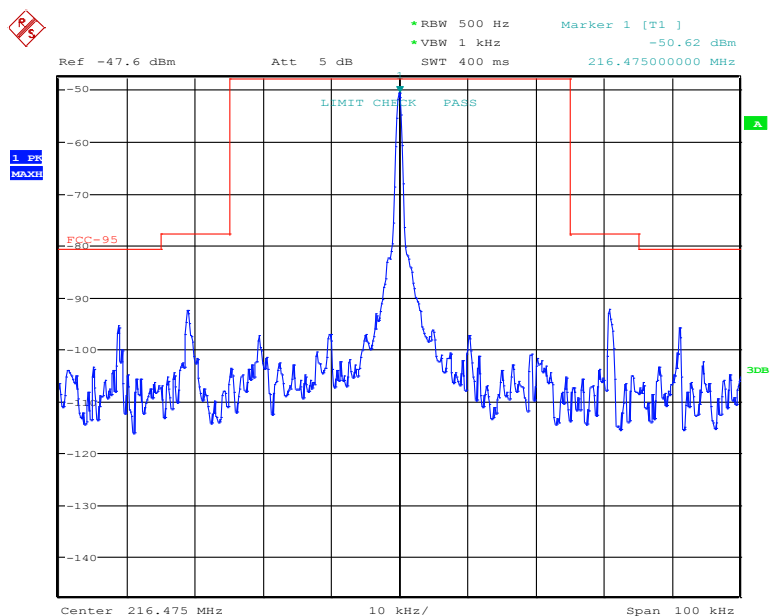

low

Date: 4.NOV.2014 17:06:05

Plot 216.475 Per RSS 210 Mask

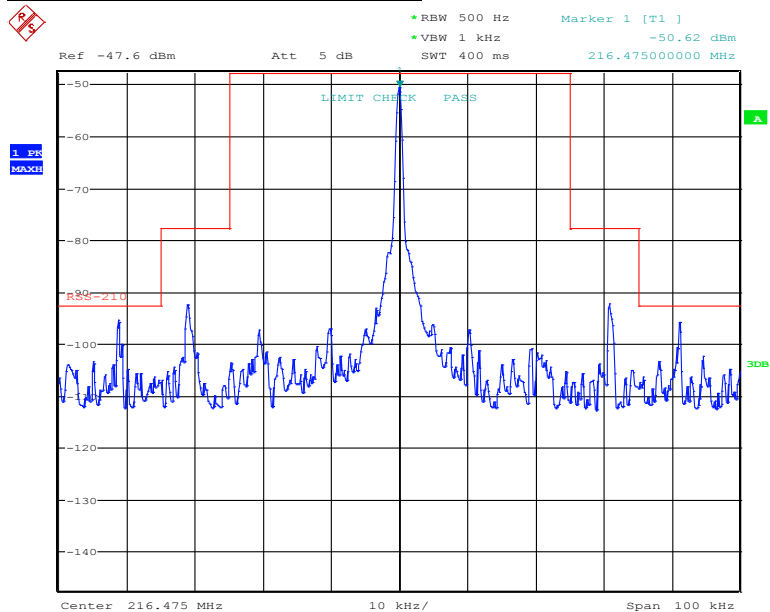

low

Date: 4.NOV.2014 18:04:49

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

6.5 Frequency Tolerance

6.5.1 References:

FCC: 95.629

6.5.2 Limits:

LPRS transmitters operating on extra band channels must be maintained within a frequency stability of 50 parts per Million.

6.5.3 Results:

Expected Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (MHz)	Frequency Error (ppm)
Temperature			
50	216.4749199	8.0128E-05	-0.370148978
40	216.4749038	9.6154E-05	-0.444180621
30	216.4749215	7.8526E-05	-0.362748585
20	216.4749471	5.2885E-05	-0.244300728
10	216.4749631	3.6859E-05	-0.170269084
0	216.4750064	-6.41E-06	0.02961081
-10	216.4750577	-5.7692E-05	0.266506525
-20	216.4750721	-7.2115E-05	0.333133156
-25	216.4750994	-9.9359E-05	0.458986026
-30	216.4751074	-0.000107372	0.496001848

Temp 21 C and Voltage at +/- 15% of Mfg rated voltage Per RSS 210

Temperature / Voltage	Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)
nominal T and V	216.4749343	6.57055E-05	-0.303524656
nominal T and low V 3.15	216.4749322	6.7815E-05	-0.313269431
nominal T and low V 4.25	216.4749358	6.4166E-05	-0.296412981

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	CETECOM™
Date :	2014-12-15	IC ID: 5043A- AT140704A	

6.6 Transmitter Spurious Emissions- Radiated

6.6.1 216.475 MHz Beacon


6.6.1.1 References

FCC: CFR Part 95

6.6.1.2 Test Result:

Horizontal and Vertical Polarizations, Worst case for all channels


6.6.1.2.1 Test Results 9KHz – 30 MHz

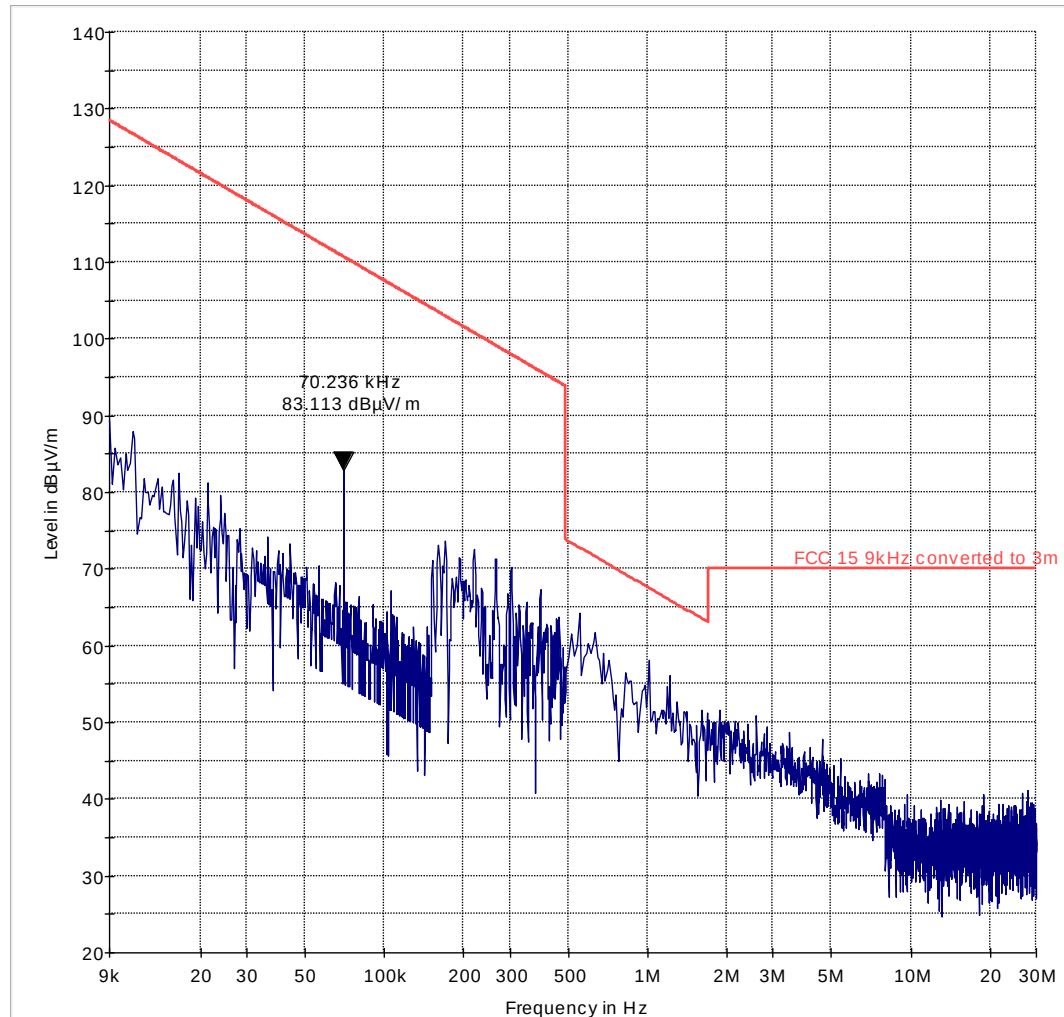

— FCC 15 9kHz converted to 3m — Preview Result 1-PK+

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	CETECOM TM
Date :	2014-12-15	IC ID: 5043A- AT140704A	


6.6.1.2.2 Test Result 30 MHz - 1 GHz:

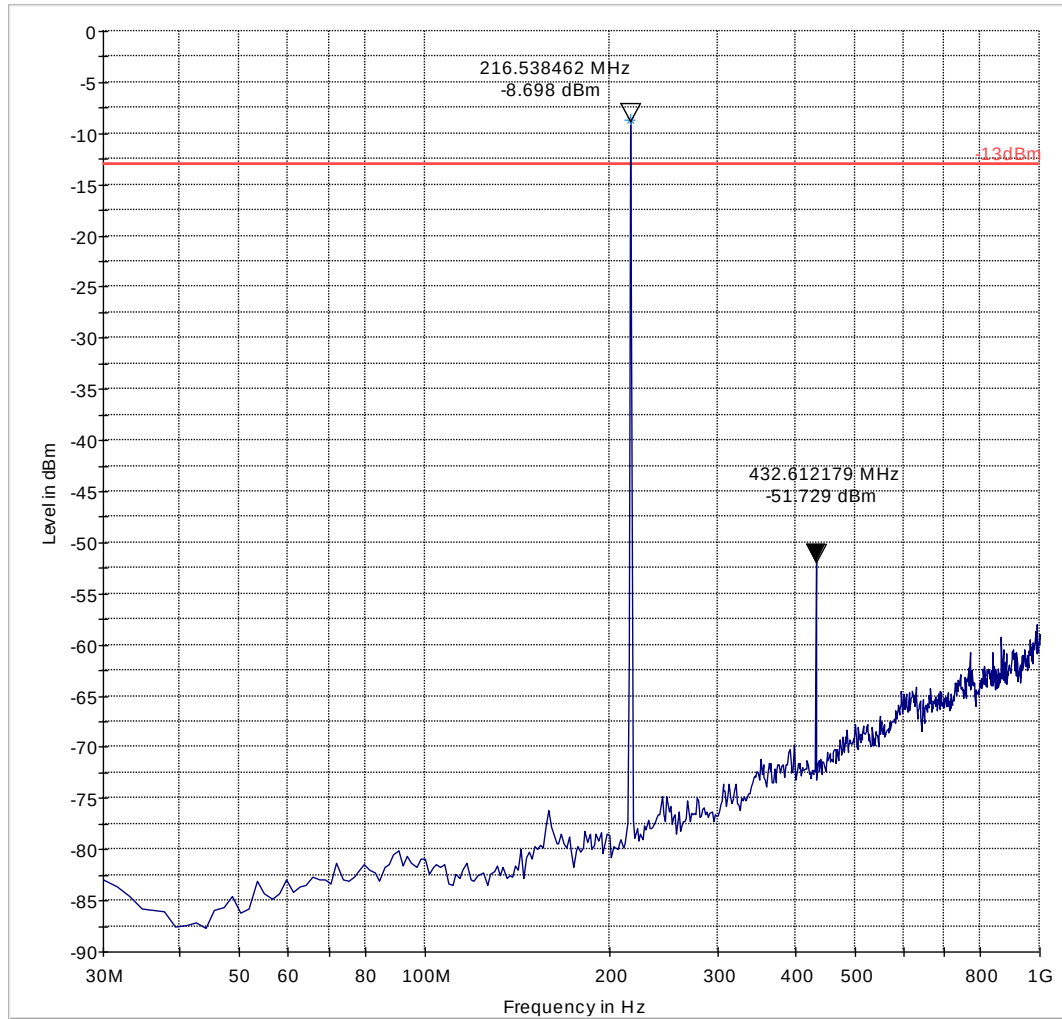

— -13dBm — Preview Result 1-PK+ * Data Reduction Result 1 [2]-PK+

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

6.6.1.2.3 Test Result 1 GHz – 6 GHz:

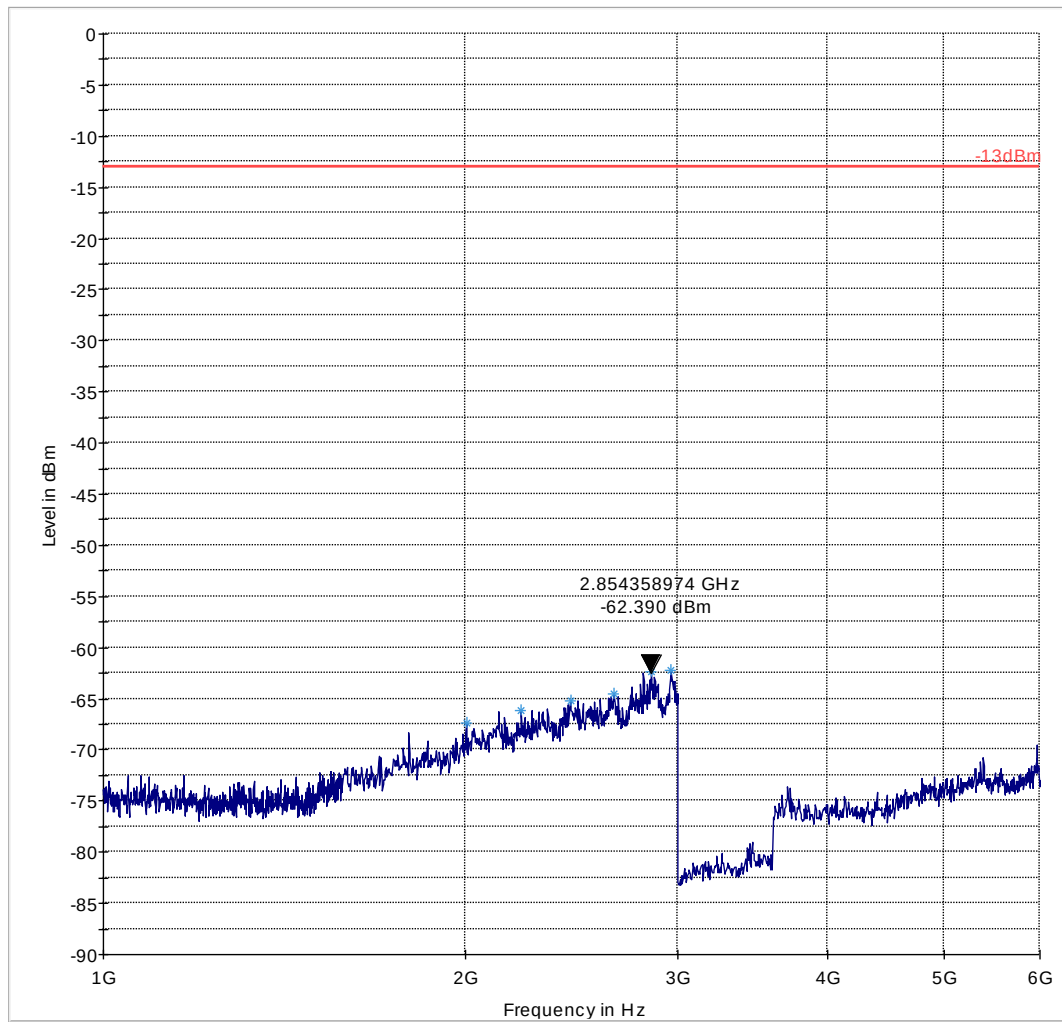

— -13dBm
 — Preview Result 1-PK+
 * Data Reduction Result 1 [3]-PK+


Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	
Date :	2014-12-15	IC ID: 5043A- AT140704A	

7 Test Equipment


No.	Equipment Name	Manufacturer	Type/model	Serial No.	Cal Date	Cal Interval
3m Semi- Anechoic Chamber:						
	Turn table	EMCO	2075	N/A	N/A	N/A
	MAPS Position Controller	ETS Lindgren	2092	0004-1510	N/A	N/A
	Antenna Mast	EMCO	2075	N/A	N/A	N/A
	Relay Switch Unit	Rohde&Schwarz	RSU	338964/001	N/A	N/A
	EMI Receiver/Analyzer	Rohde&Schwarz	ESU 40	100251	Sep 2013	2 Year
	1500MHz HP Filter	Filtek	HP12/1700	14c48	N/A	N/A
	2800 MHZ HP Filter	Filtek	HP12/2800	14C47	N/A	N/A
	Pre-Amplifier	Miteq	JS40010260	340125	N/A	N/A
	Binconilog Antenna	EMCO	3141	0005-1186	Apr 2012	3 Years
	Horn Antenna	EMCO	3115	35114	Mar 2012	3 Years
Ancillary equipment						
	Spectrum Analyzer	Rohde&Schwarz	FSU	200256	Jun 2013	2 Years
	Multimeter	Klein Tools	MM200	CET-0002	Oct 2013	1 Years
	Vector Signal Generator	Rohde&Schwarz	SMU200A	101935	Feb 2013	2 Years
	Signal Generator	Rohde&Schwarz	SMP04	100151	Jun 2013	2 Years
	Thermometer Humidity	Dickson	SM320	09309168	Jul 2014	1 Year
	Temperature Chamber	Test Equity	115	150384	N/A	N/A
	DC Power Supply	HP	E3610A	KR83023316	N/A	N/A

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	CETECOM™
Date :	2014-12-15	IC ID: 5043A- AT140704A	

8 BLOCK DIAGRAMS

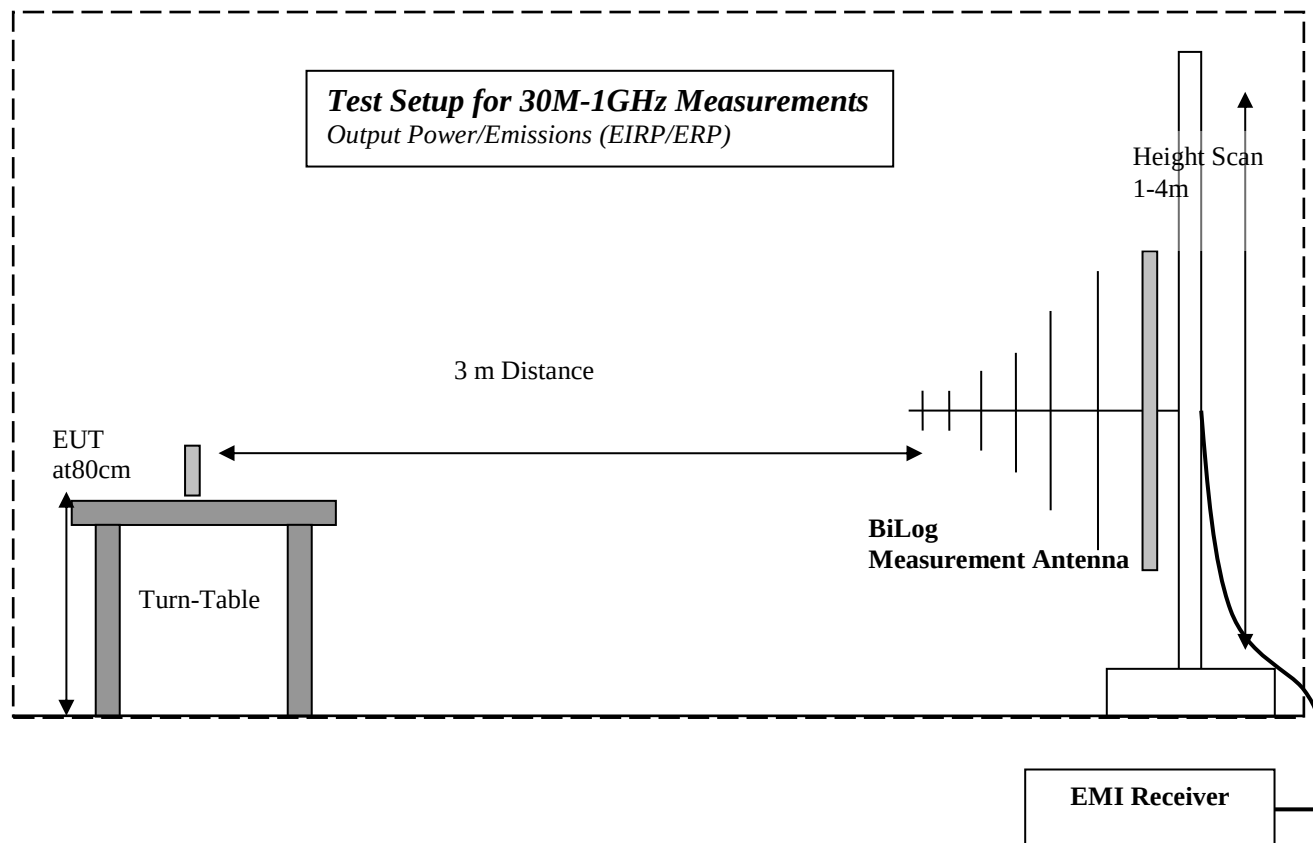

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	CETECOM TM
Date :	2014-12-15	IC ID: 5043A- AT140704A	

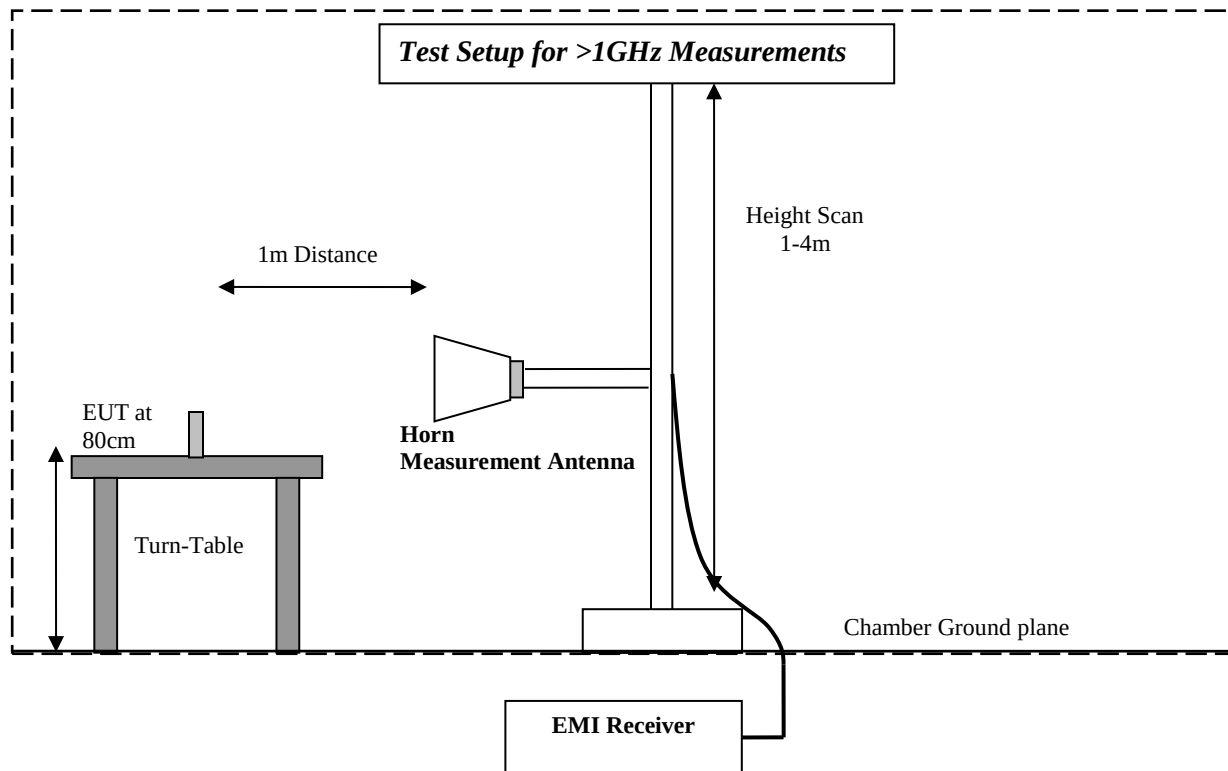

Report #:	EMC-3SISE-038-14001_FCC_95_Rev1	FCC ID: Q6KAT140704A	CETECOM TM 
Date :	2014-12-15	IC ID: 5043A- AT140704A	

9 Revision History

Date	Report Name	Changes to report	Report prepared by
2014-12-03	EMC_3SISE-038-14001-ATM_FCC_95	Official Release	James Donnellan
2014-12-15	EMC_3SISE-038-14001-ATM_FCC_95_Rev1	Rev 1. Updated RSS-Gen to issue 4	James Donnellan