






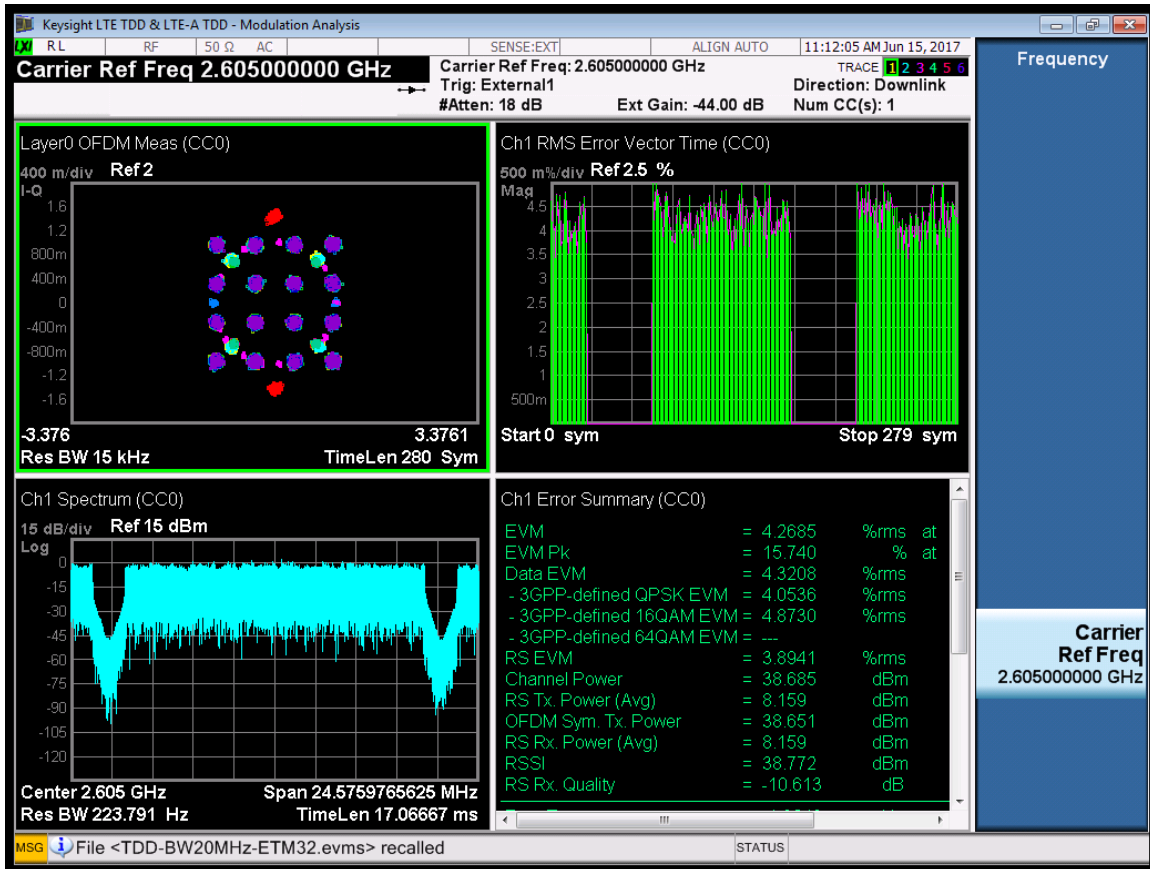


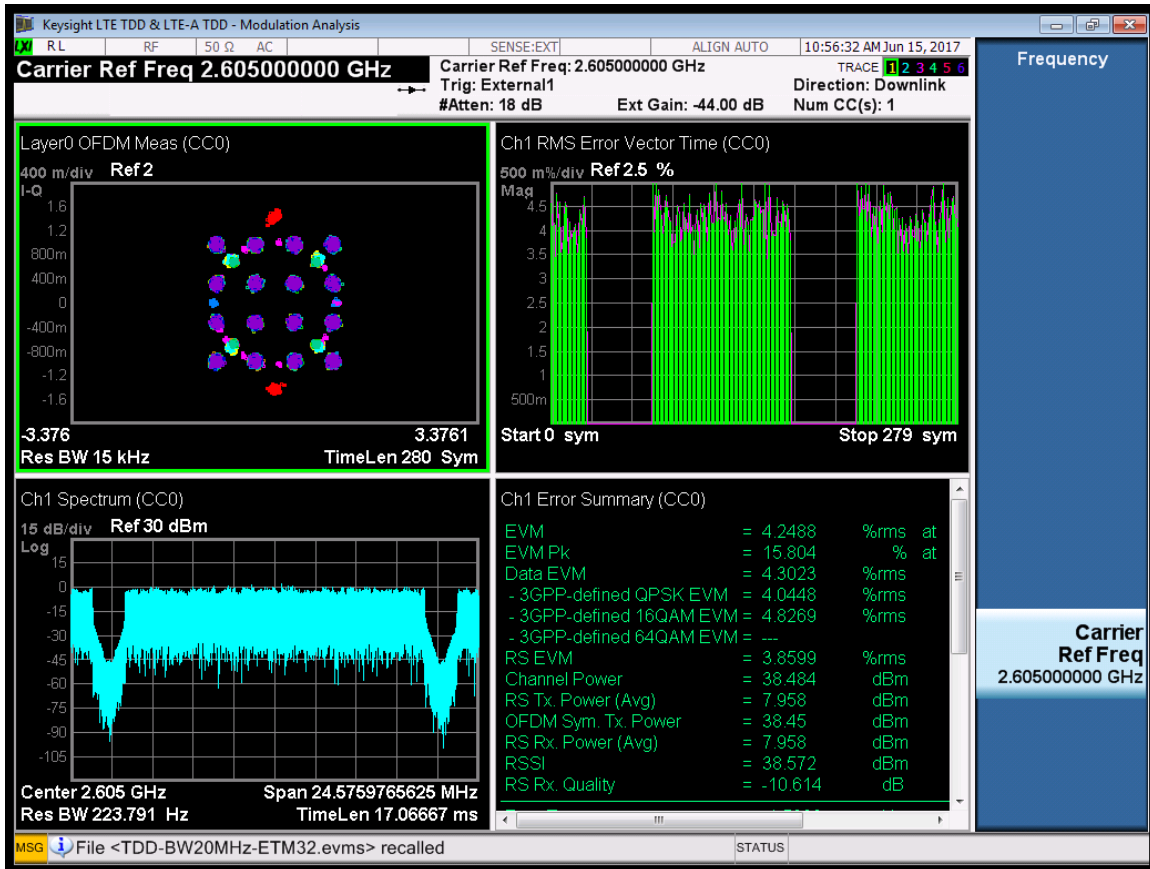


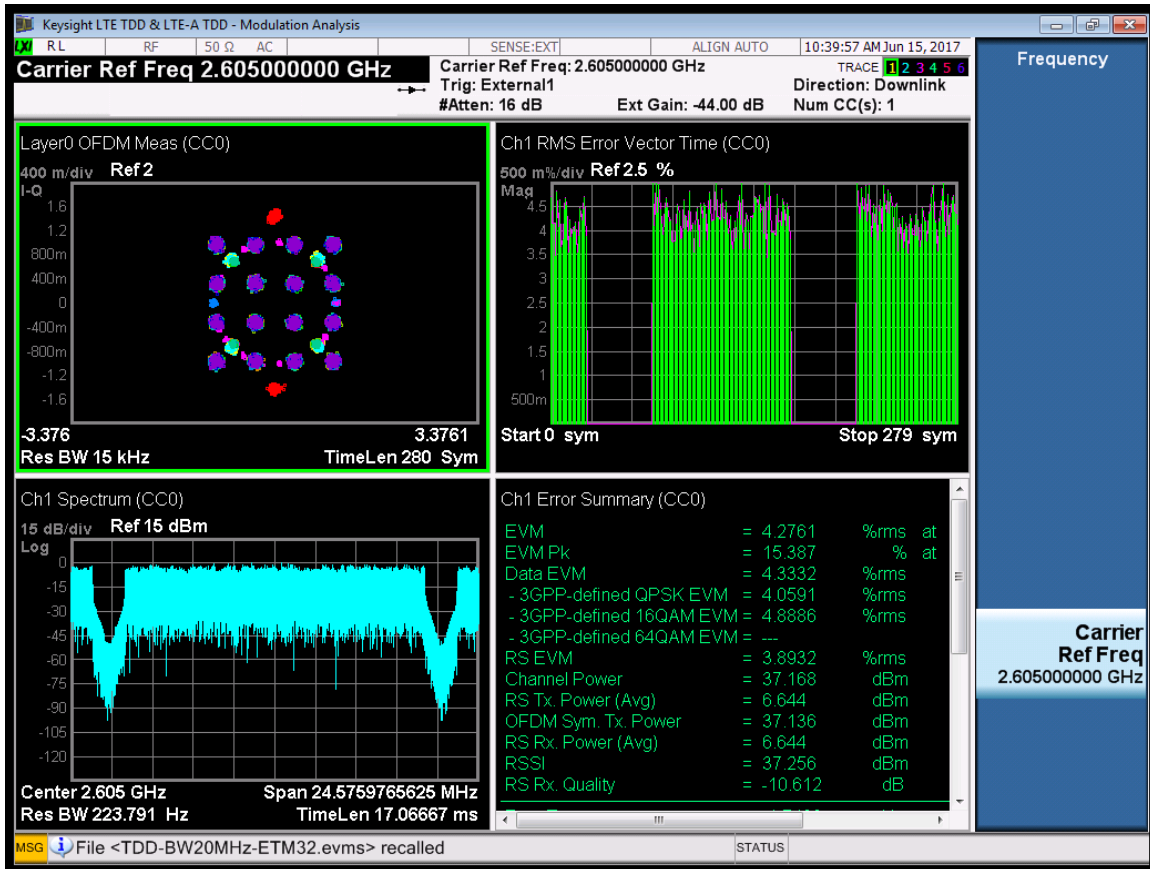


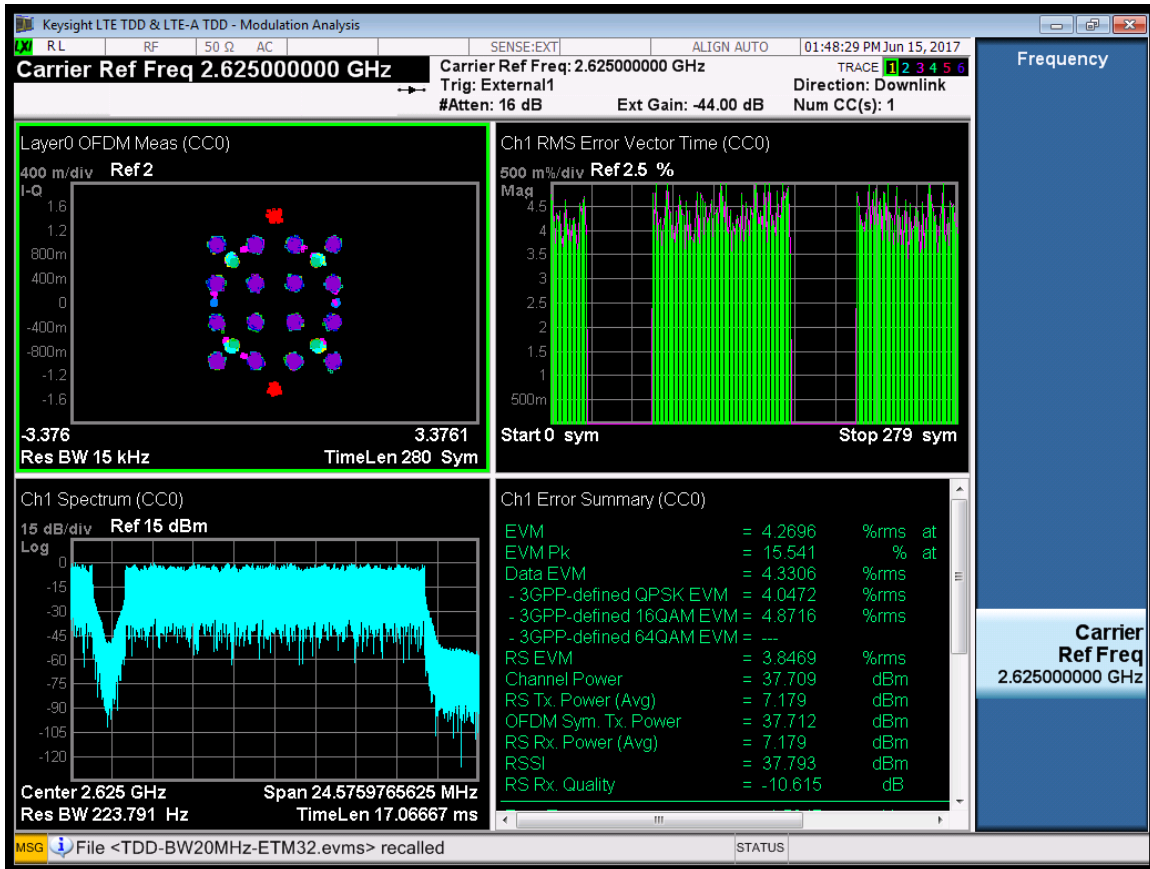


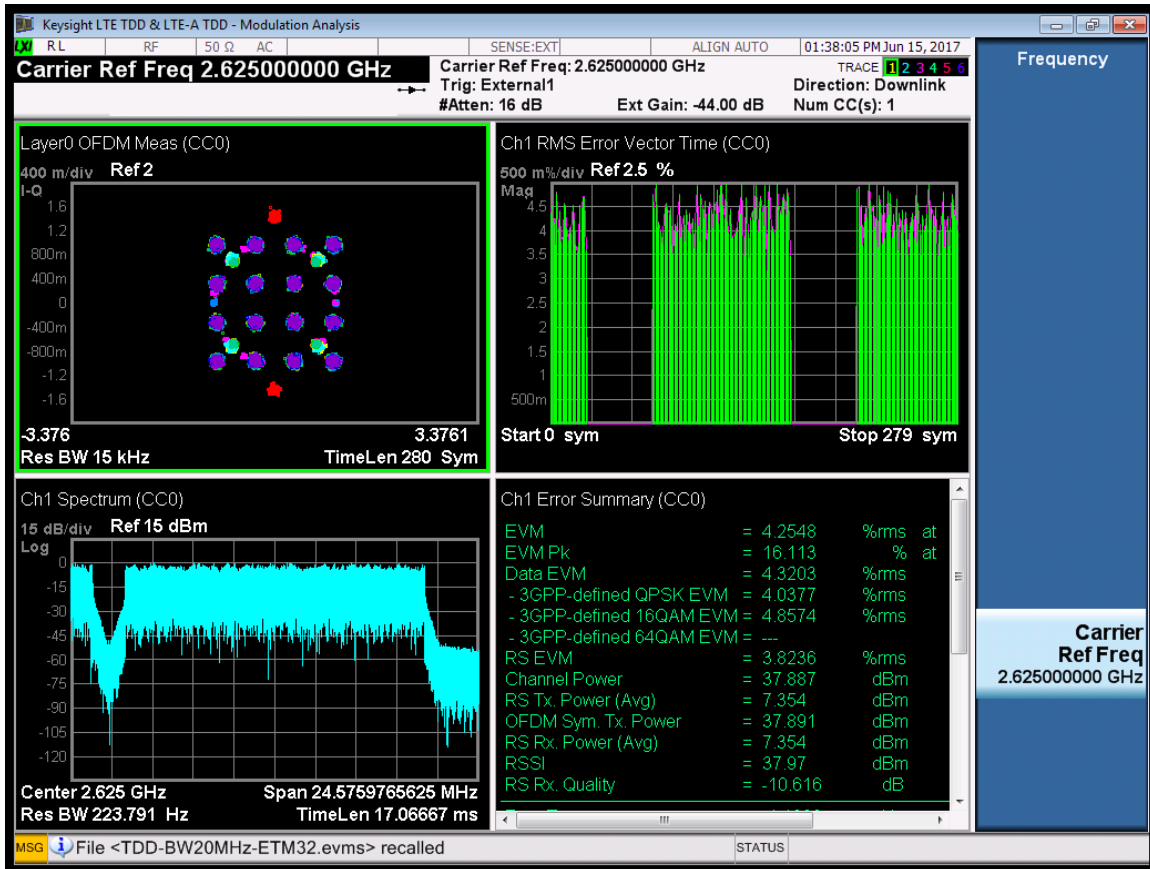


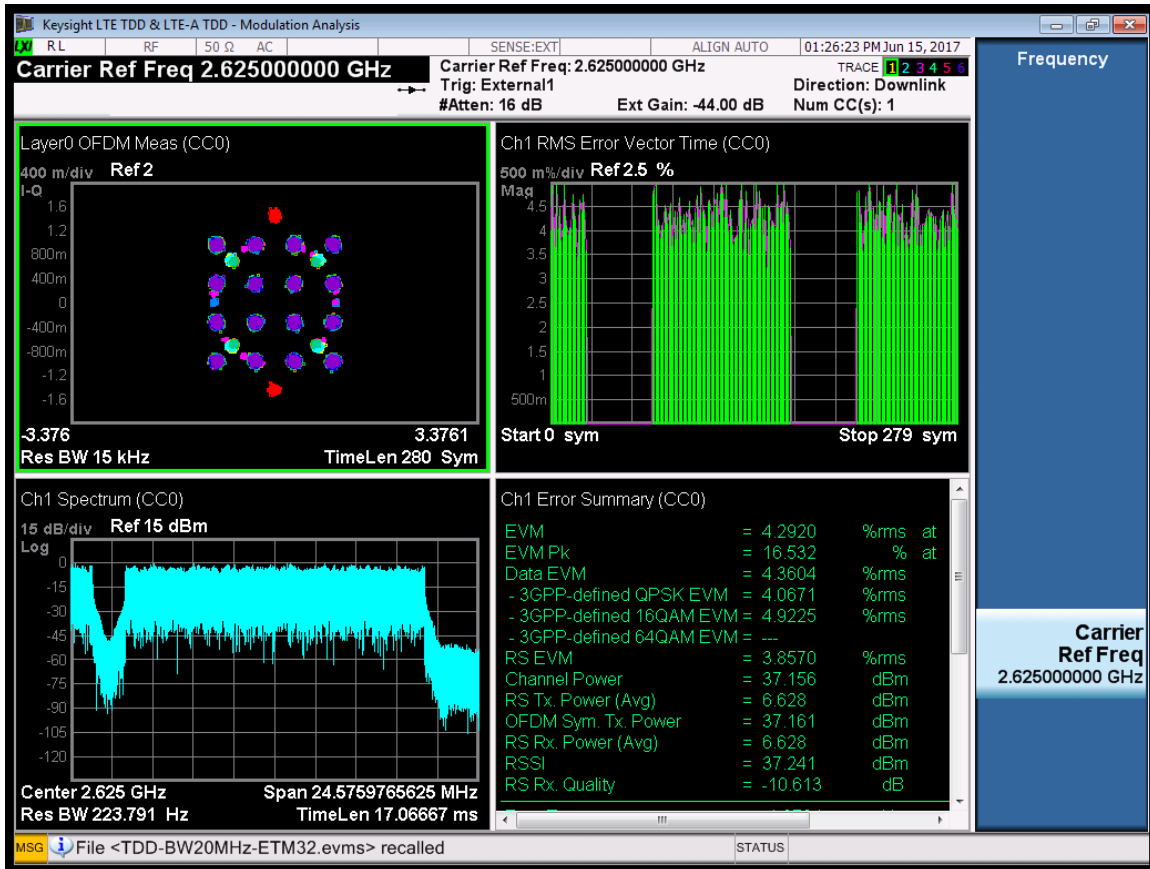


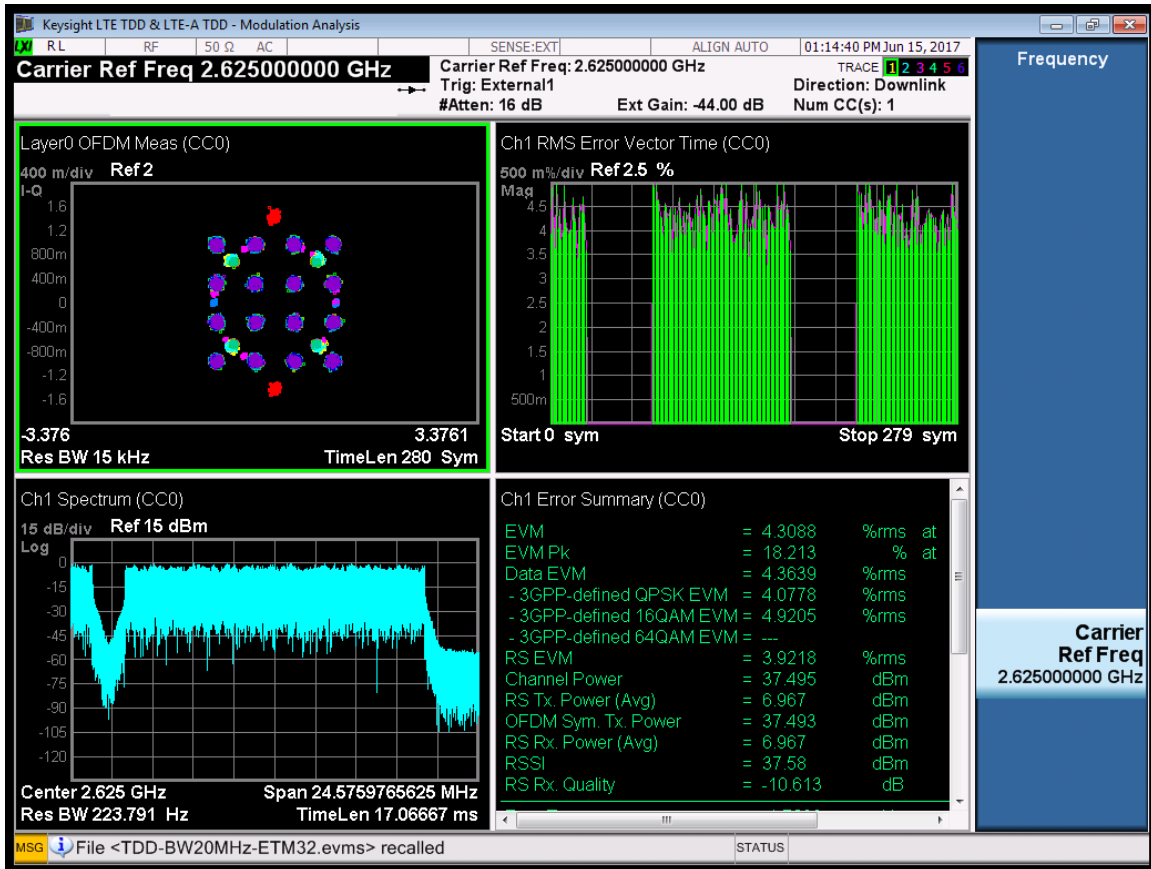


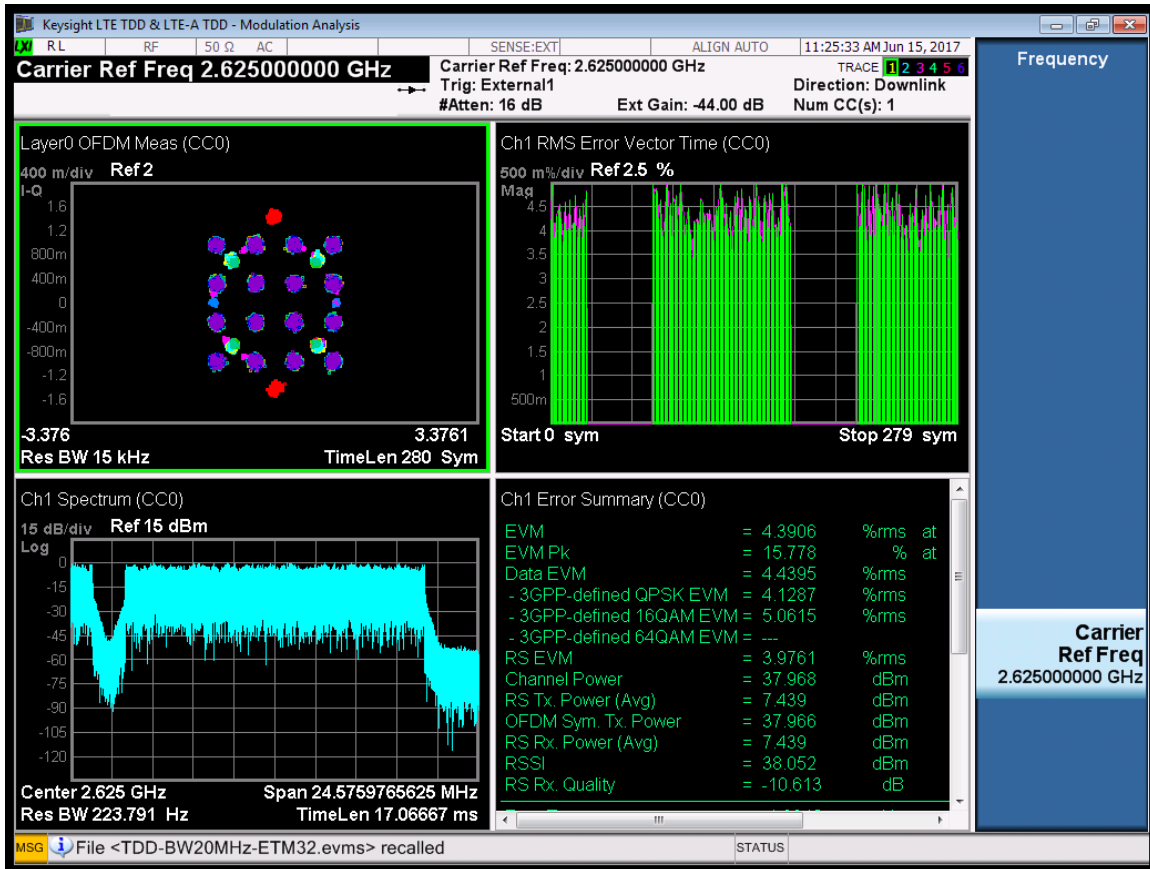


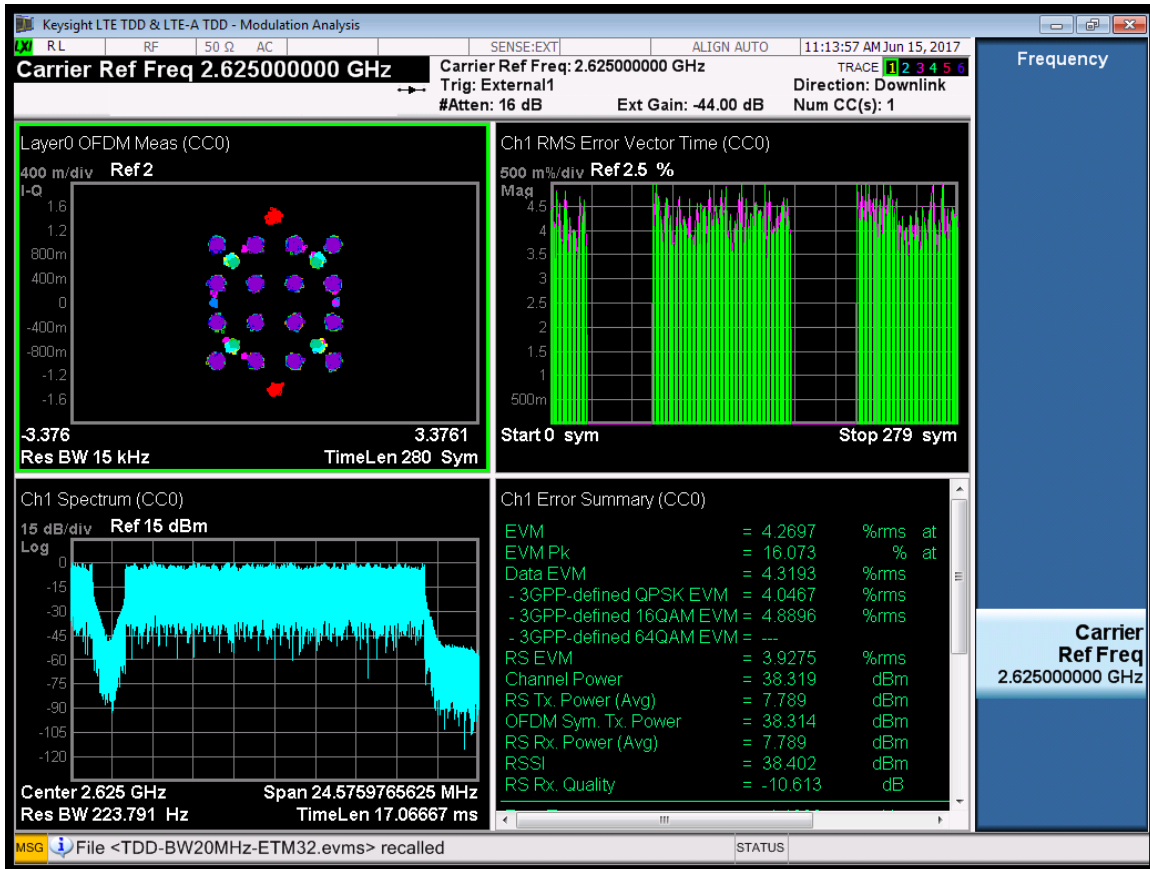


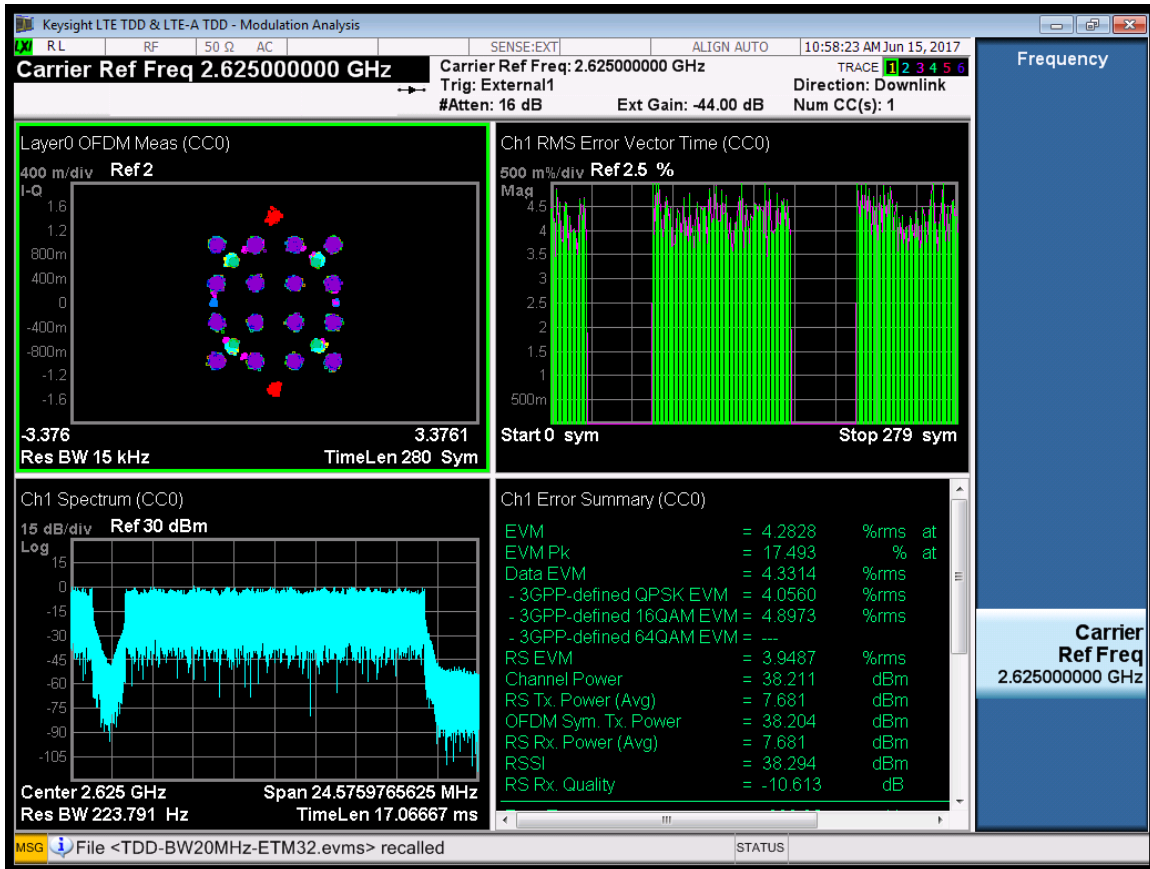


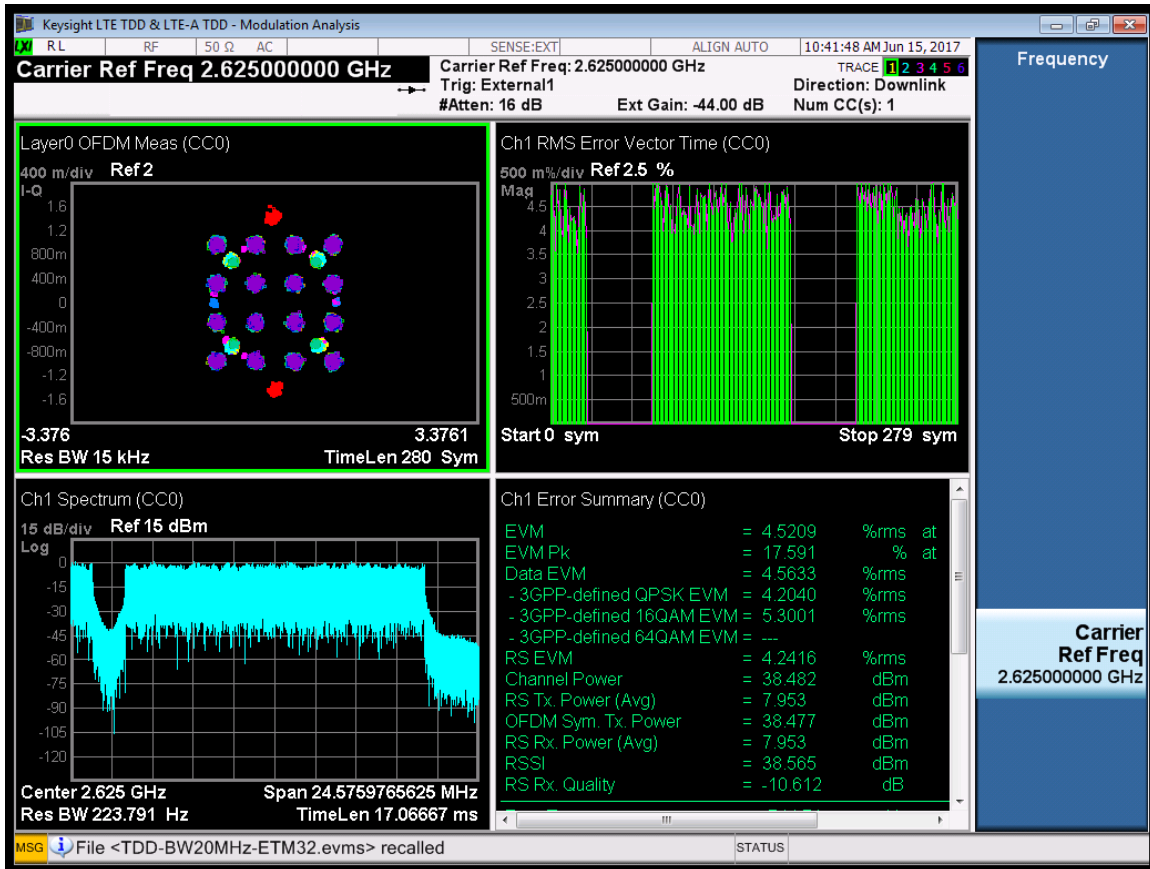


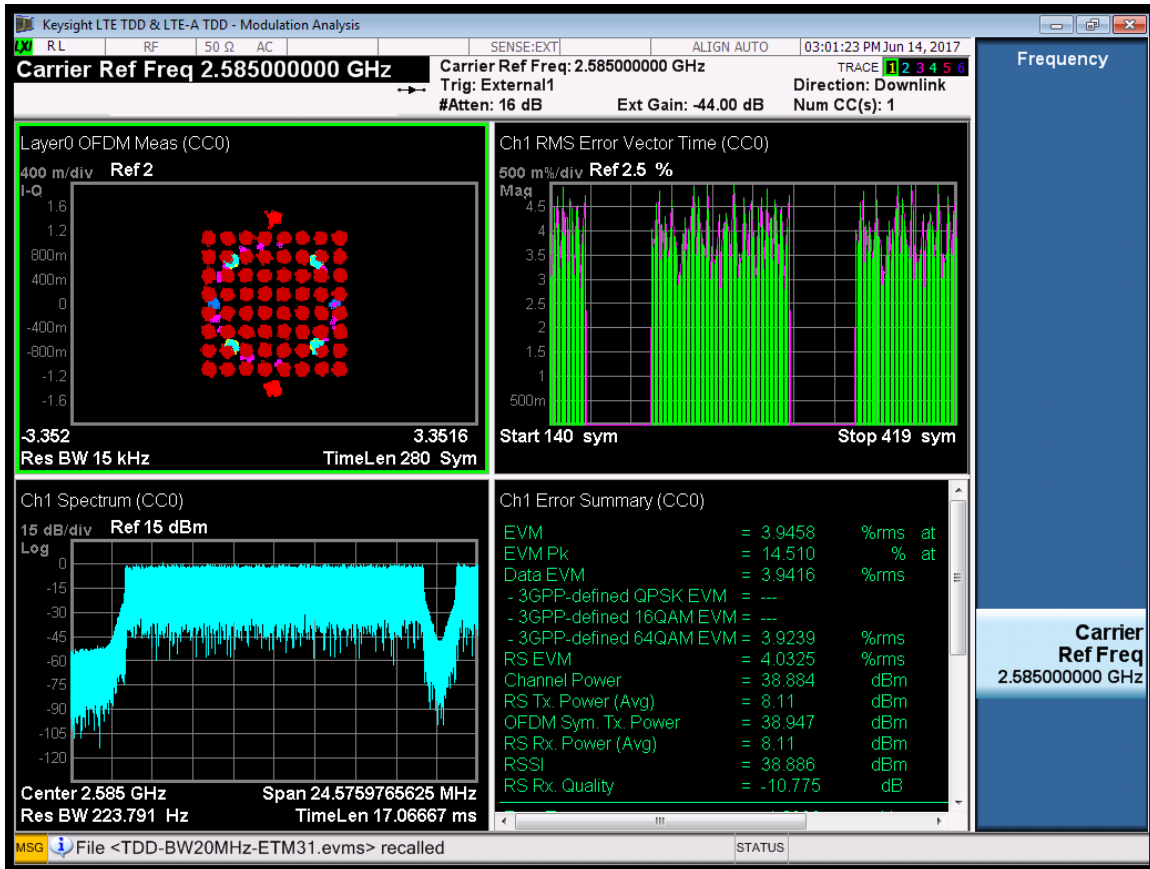


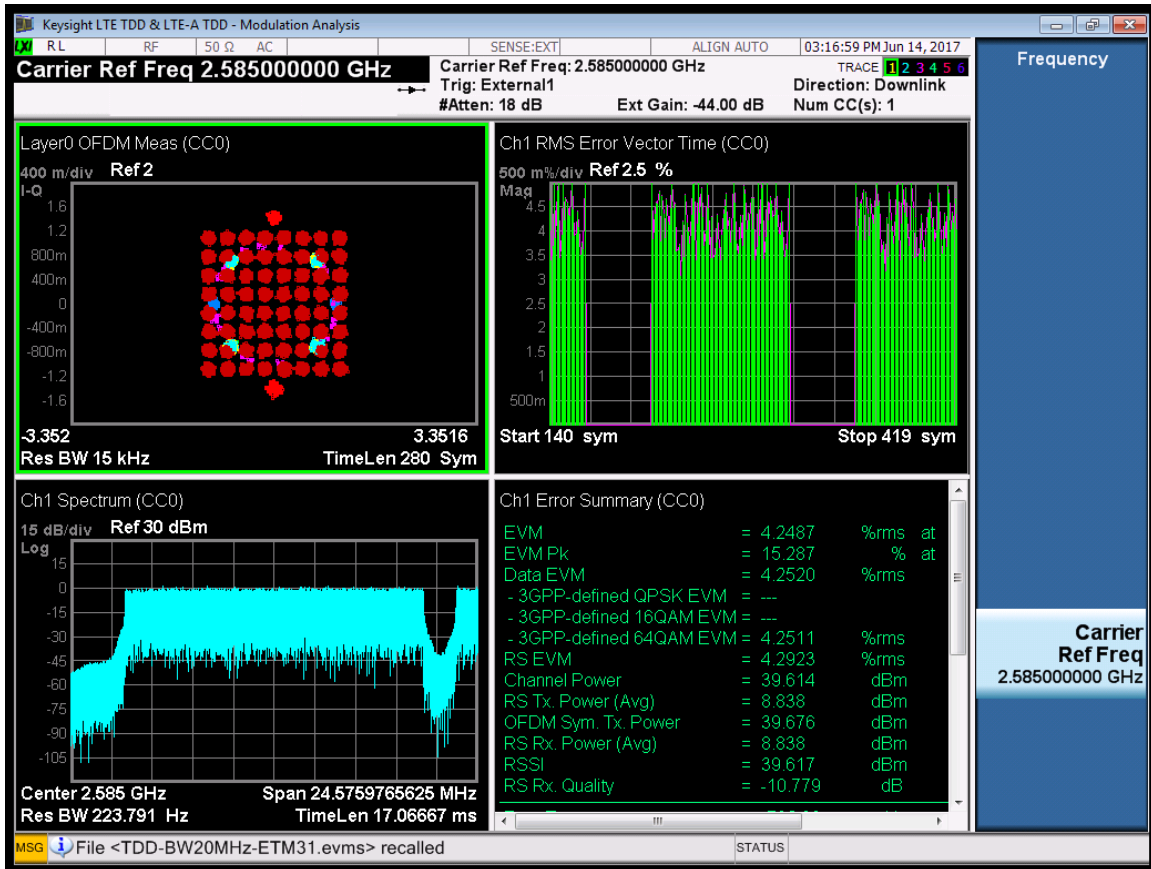


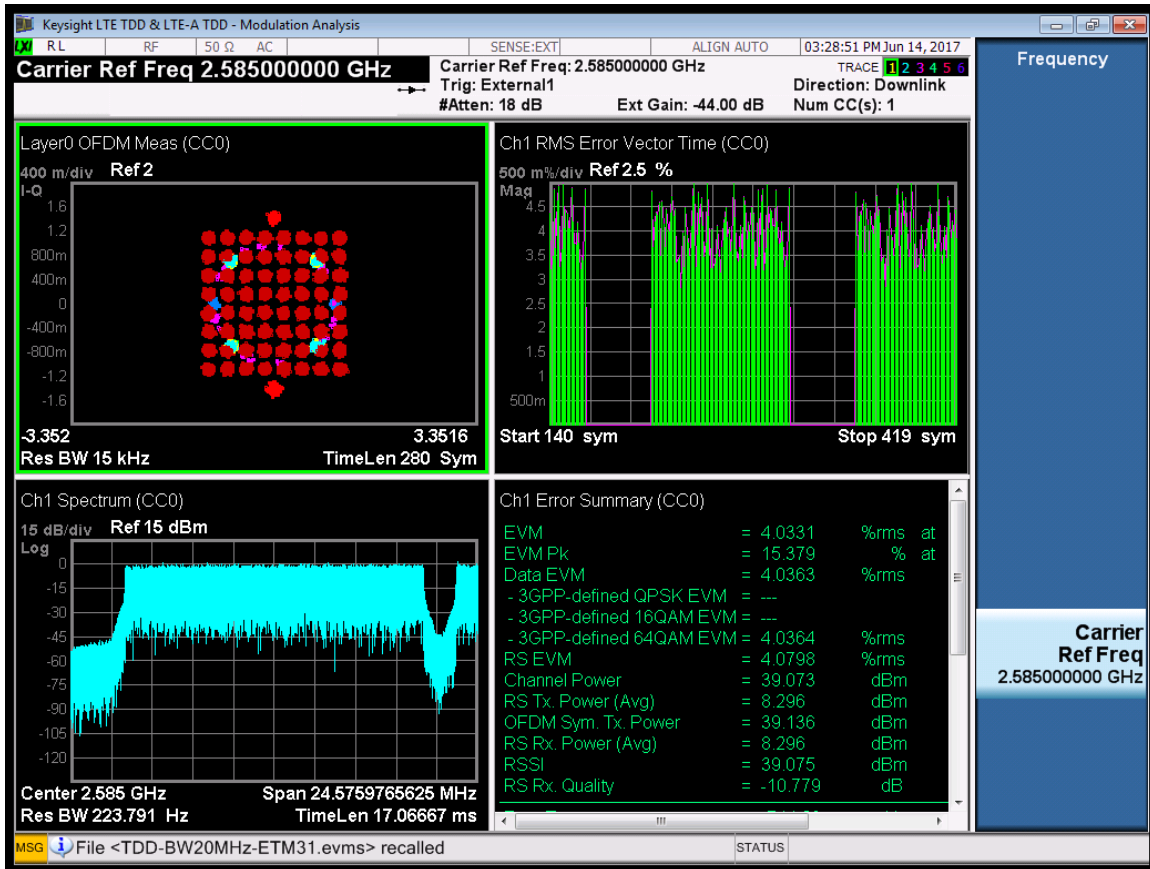


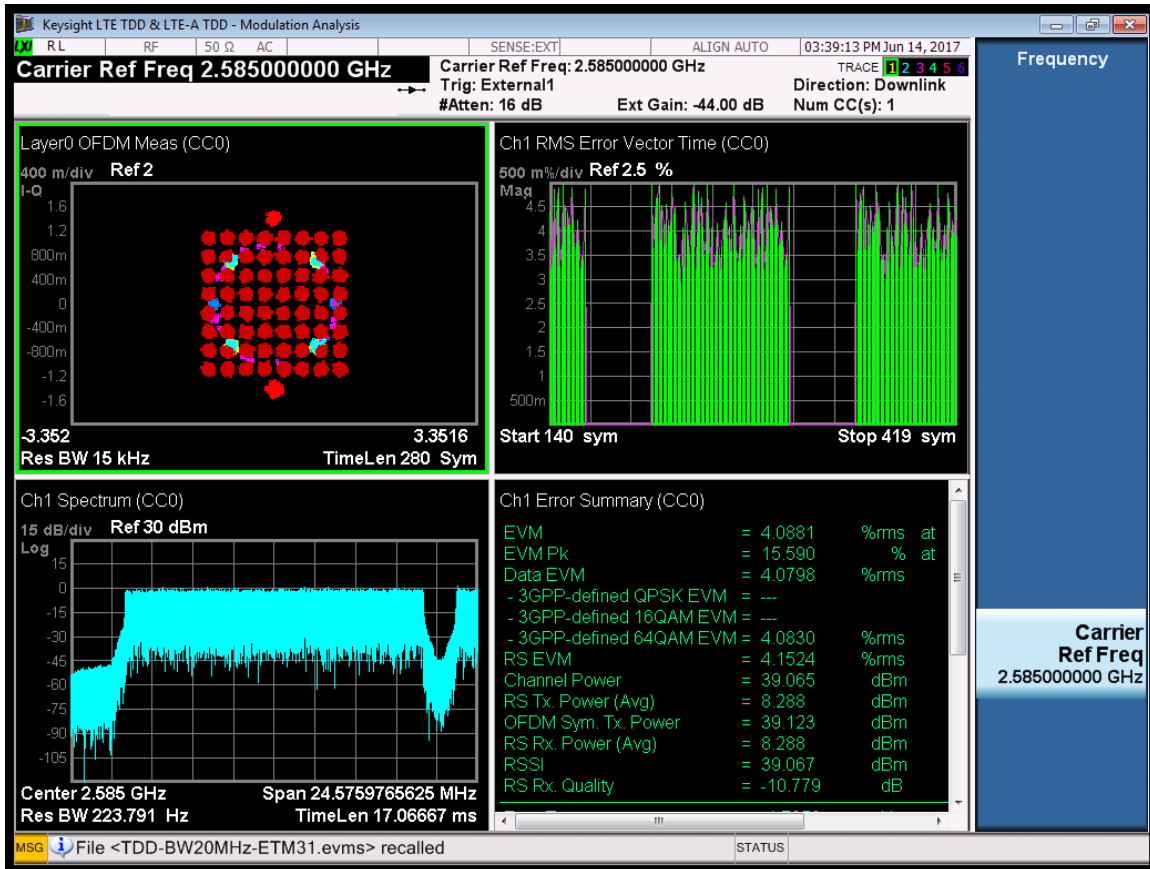


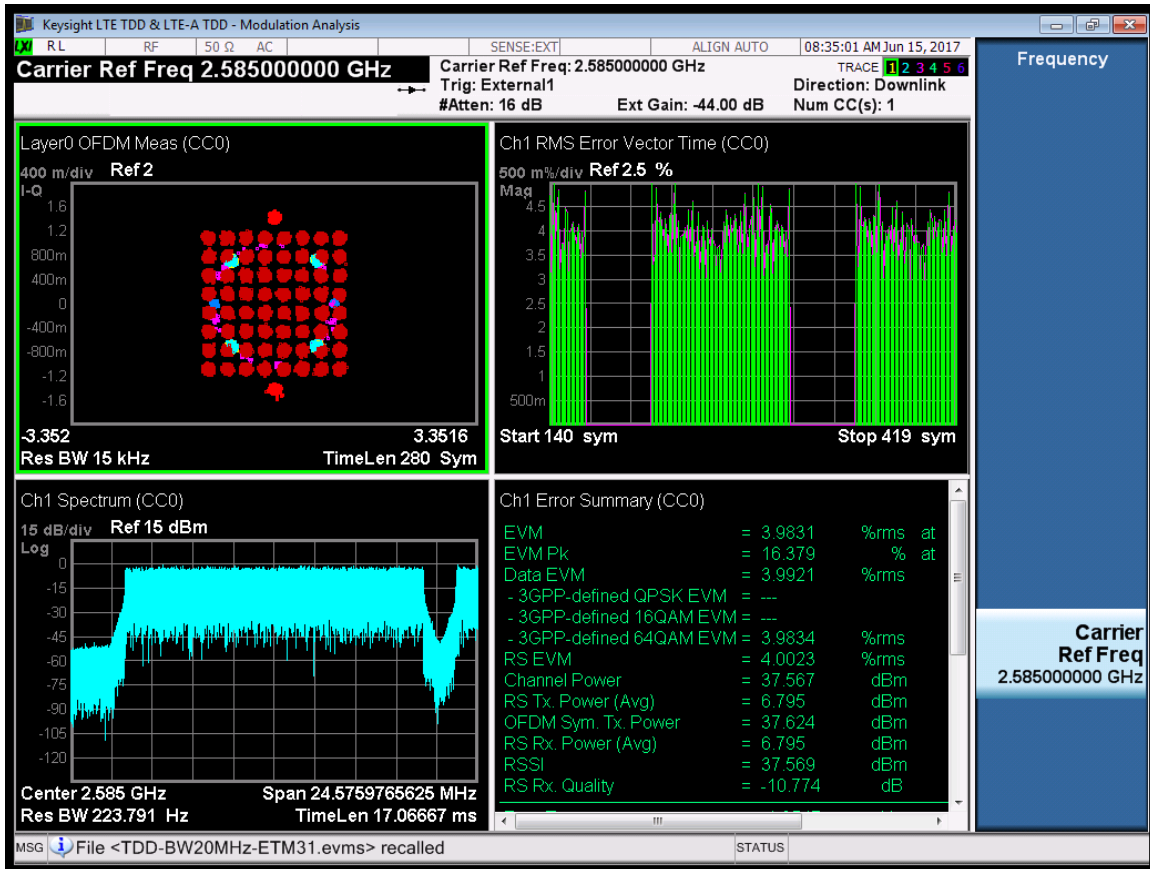


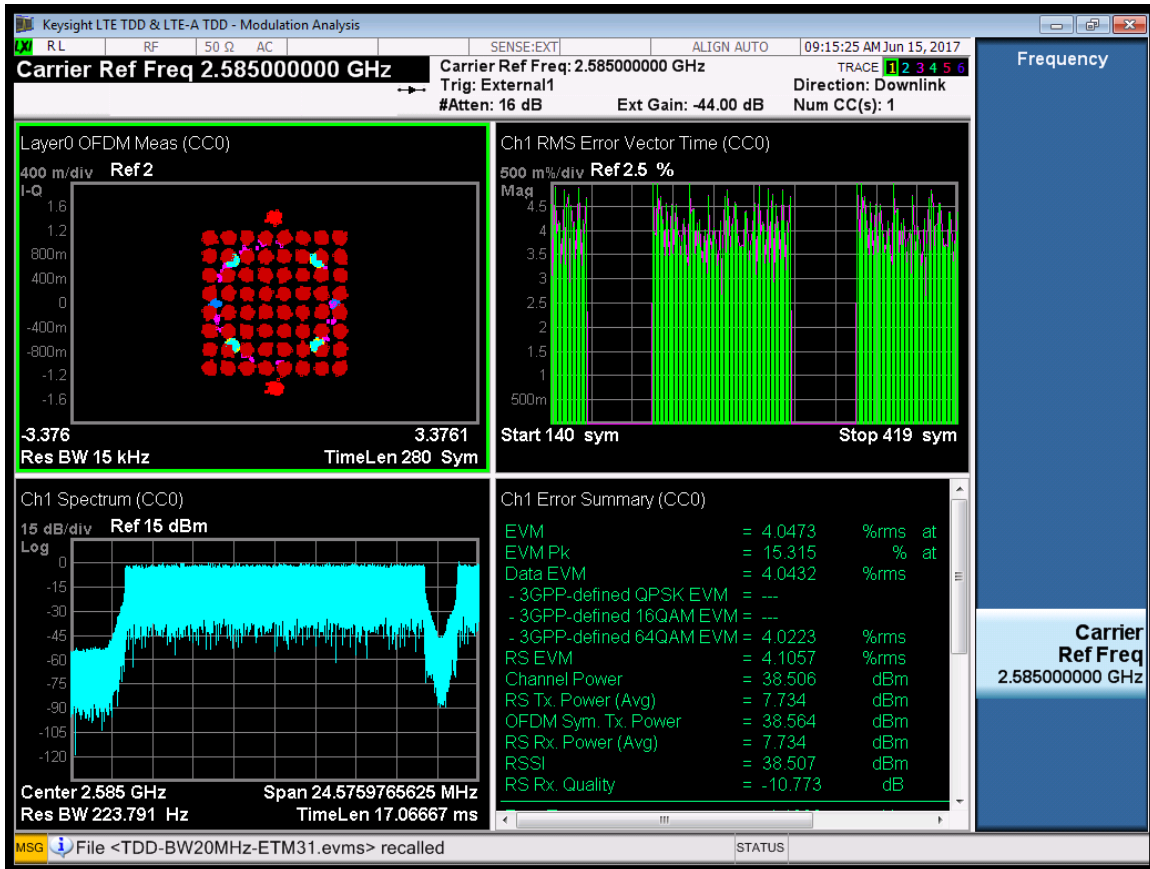


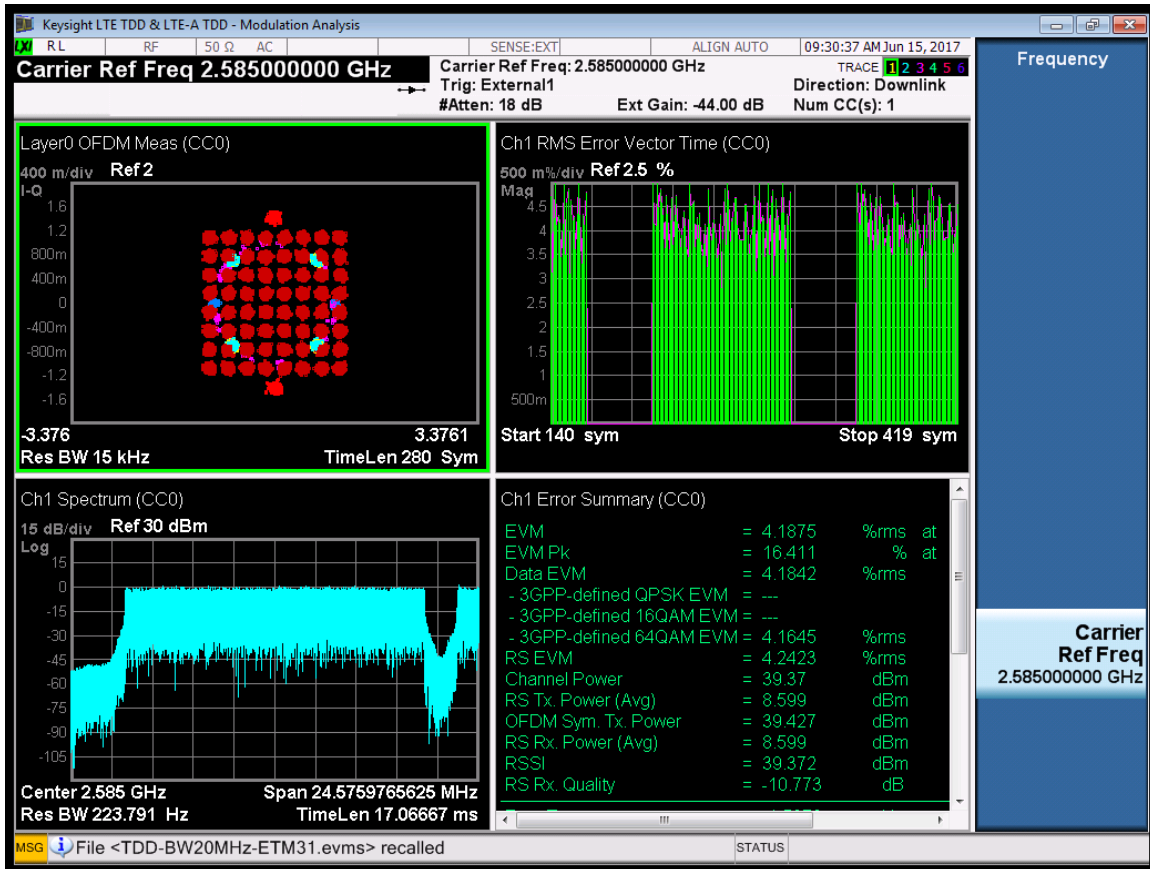


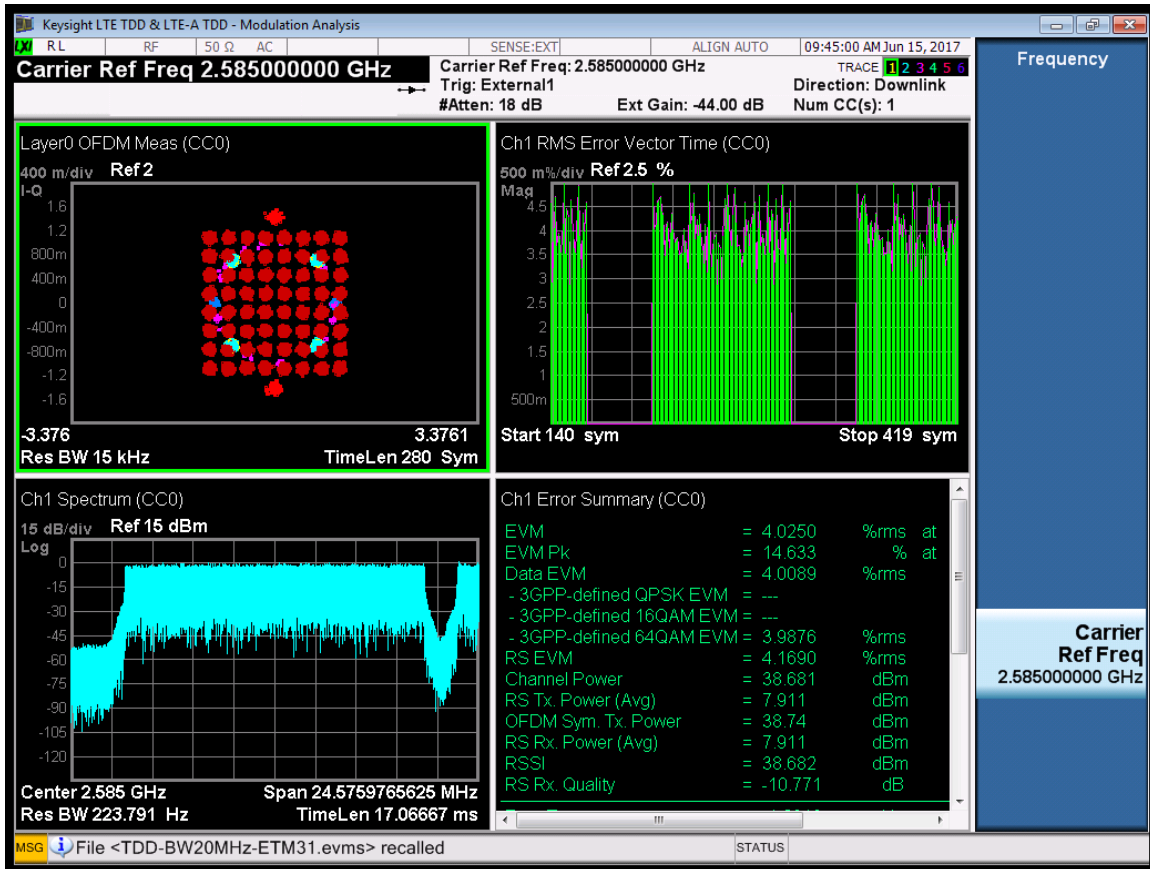


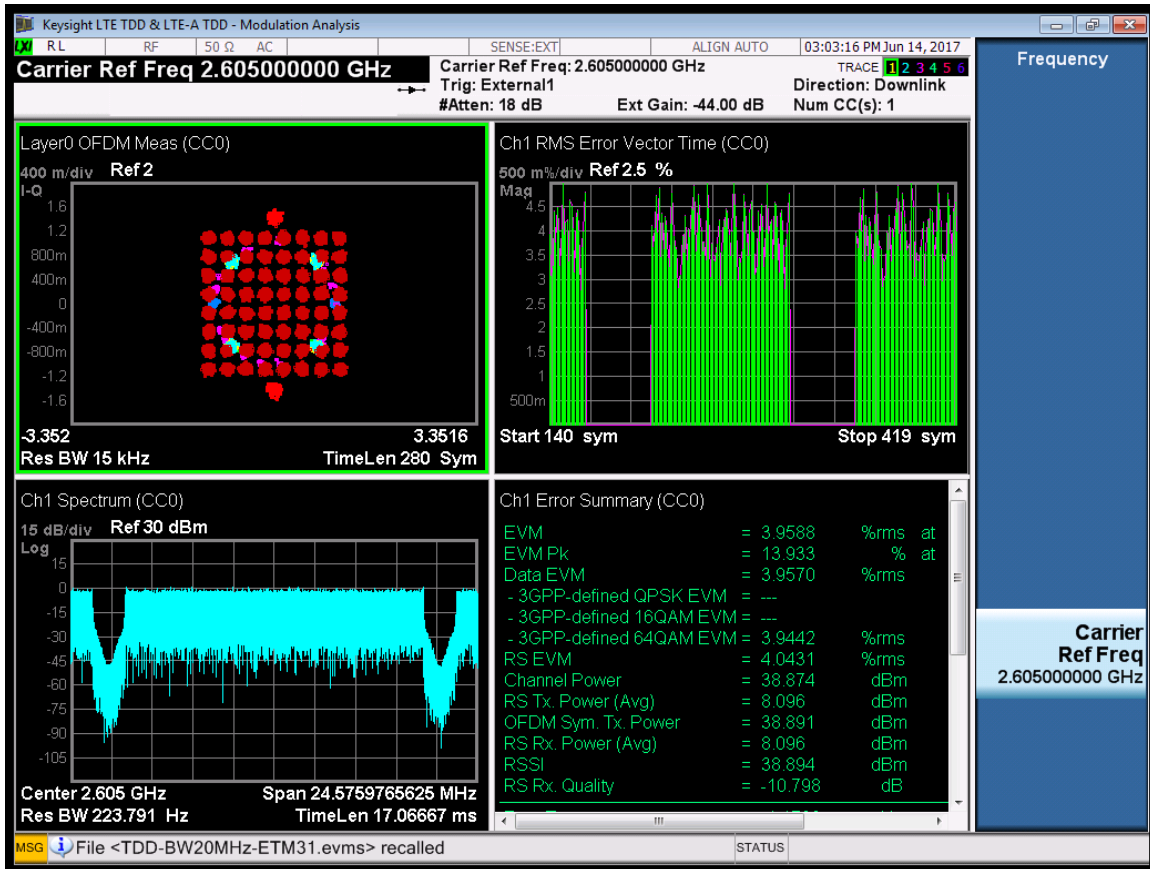


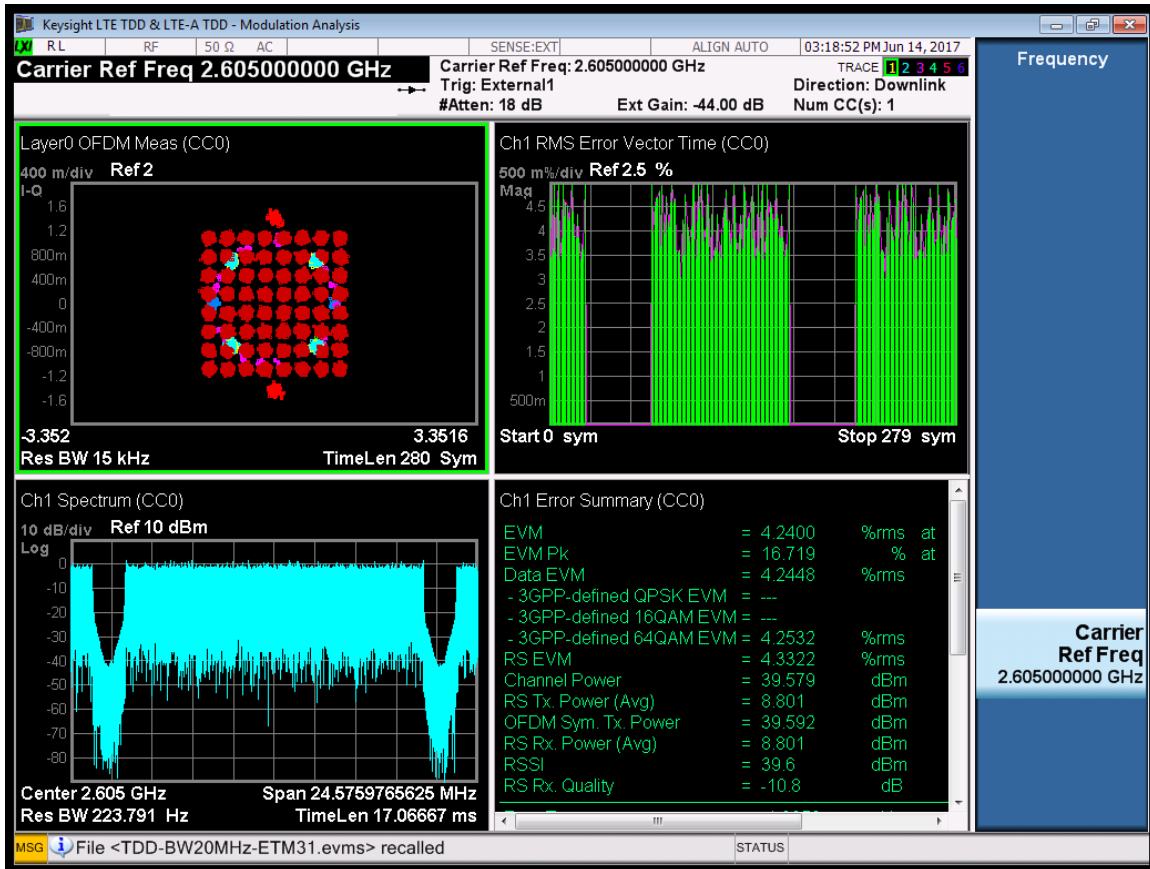


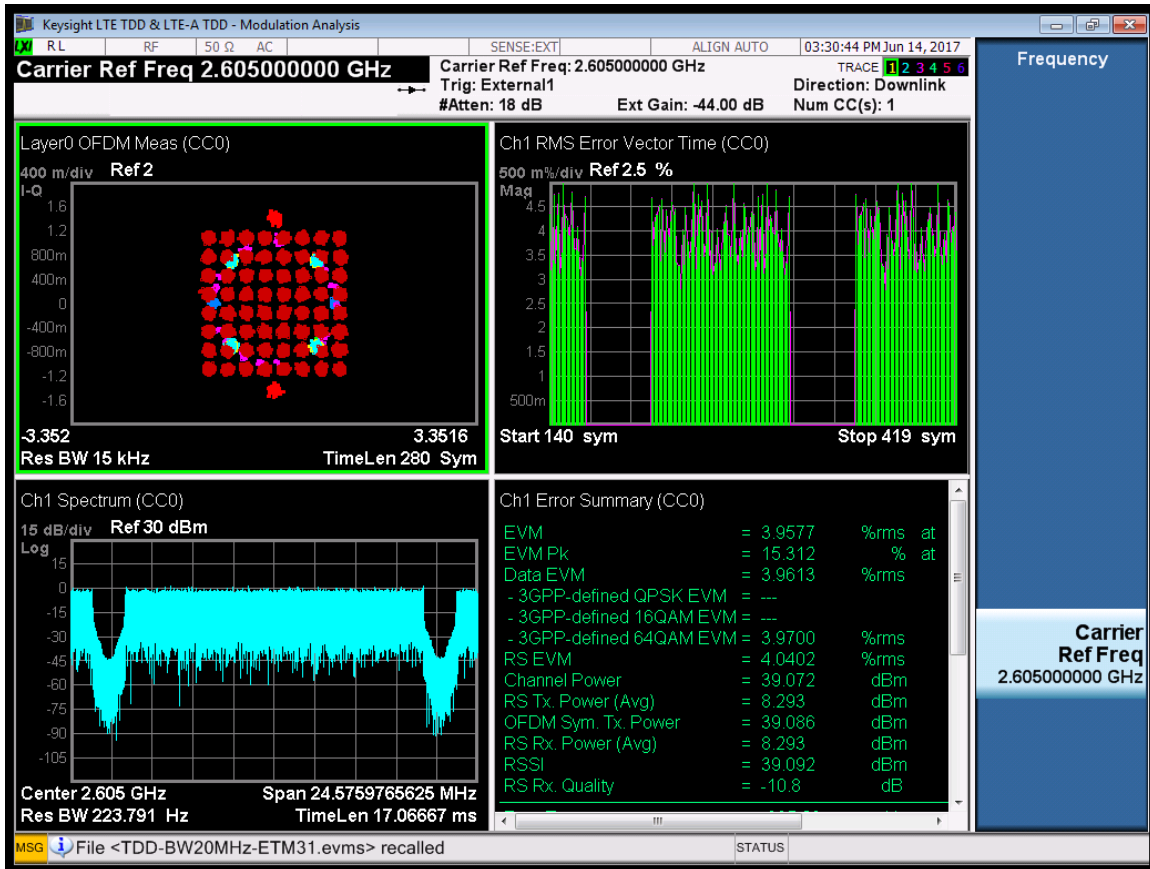


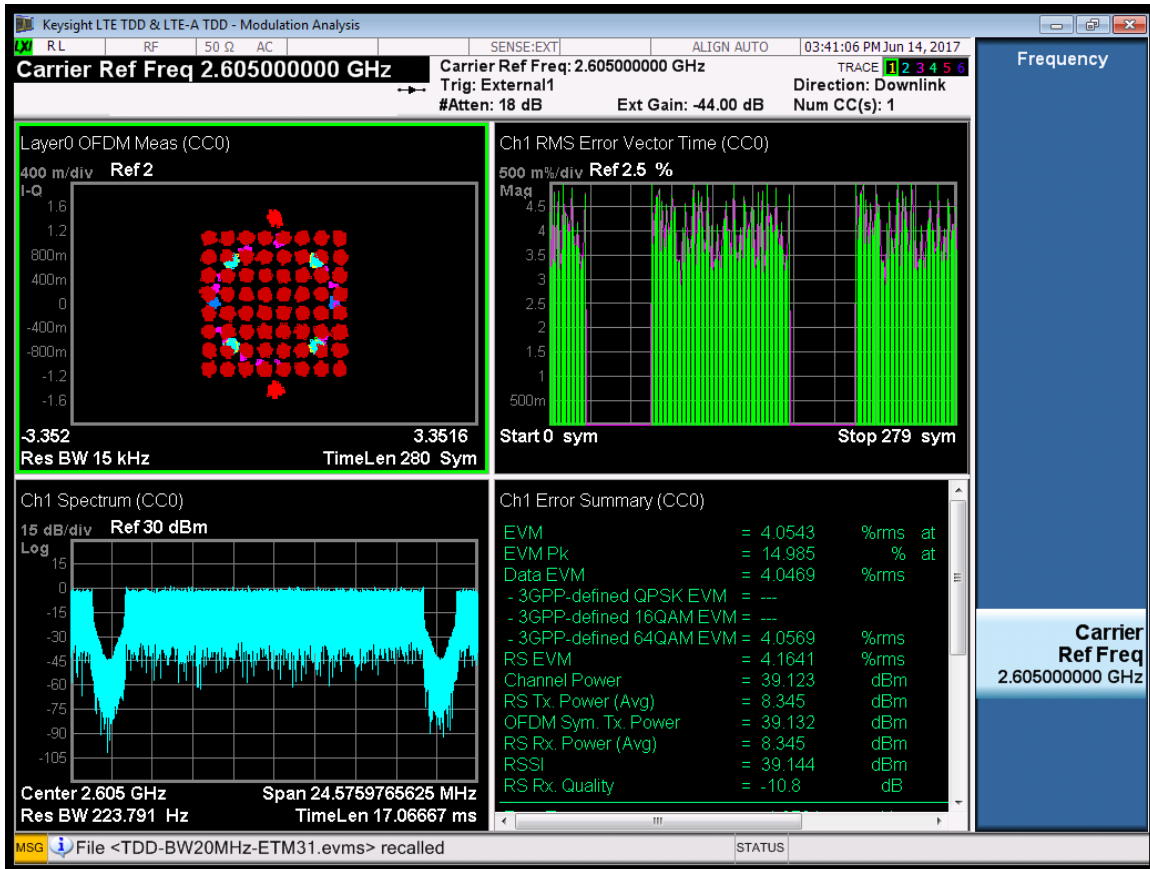


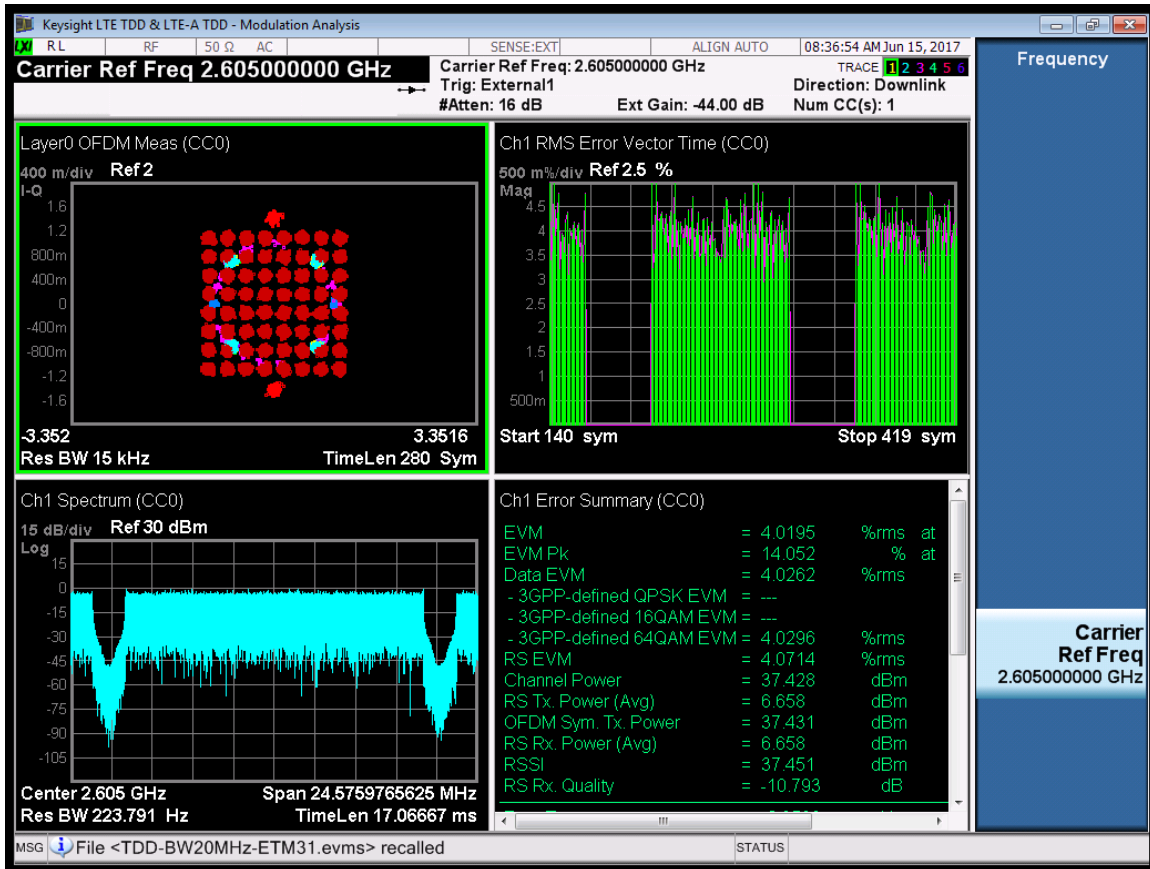


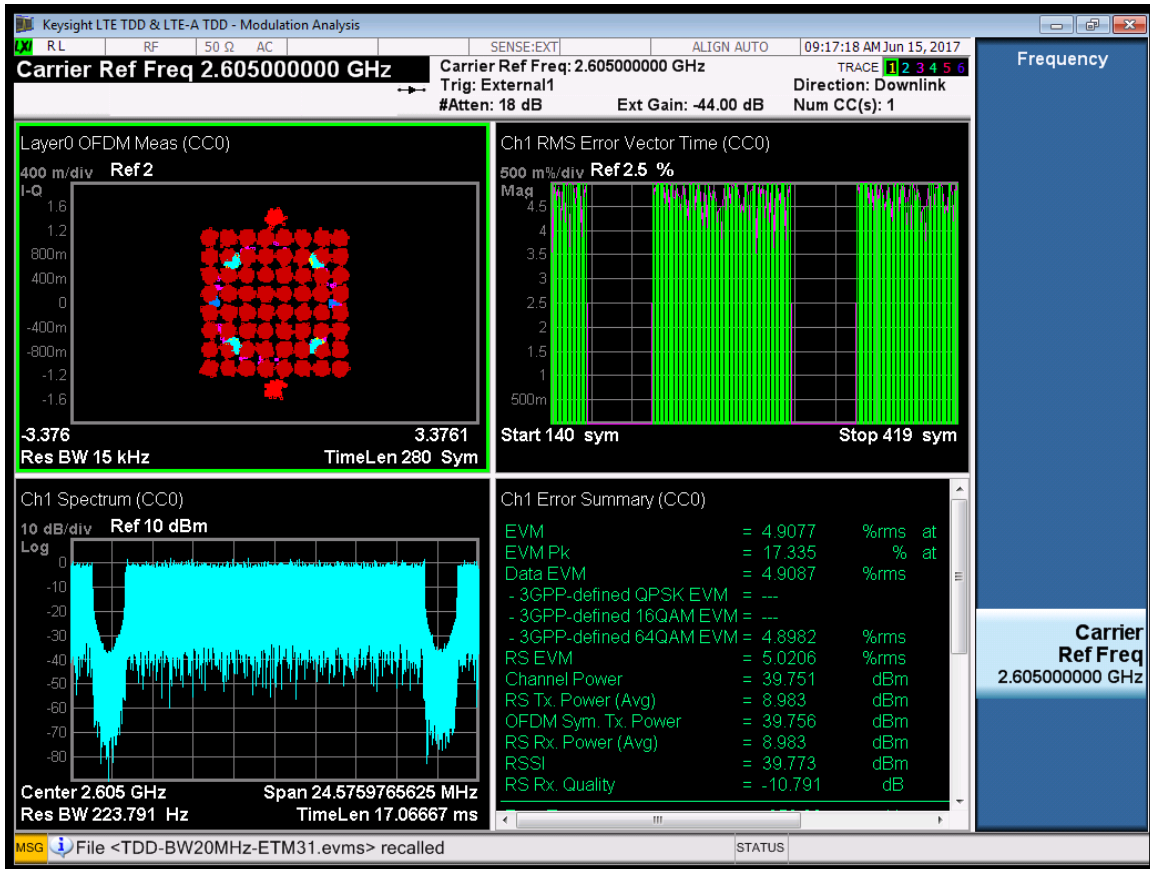


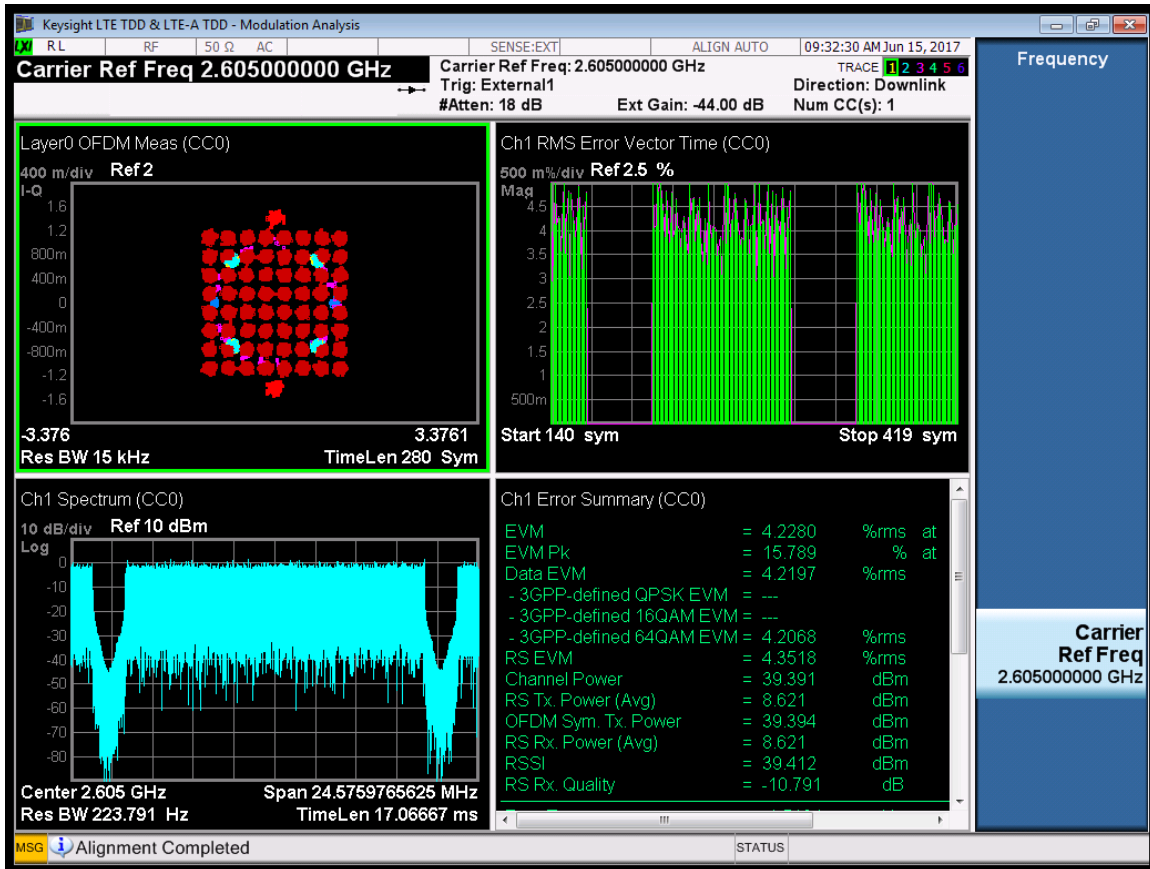


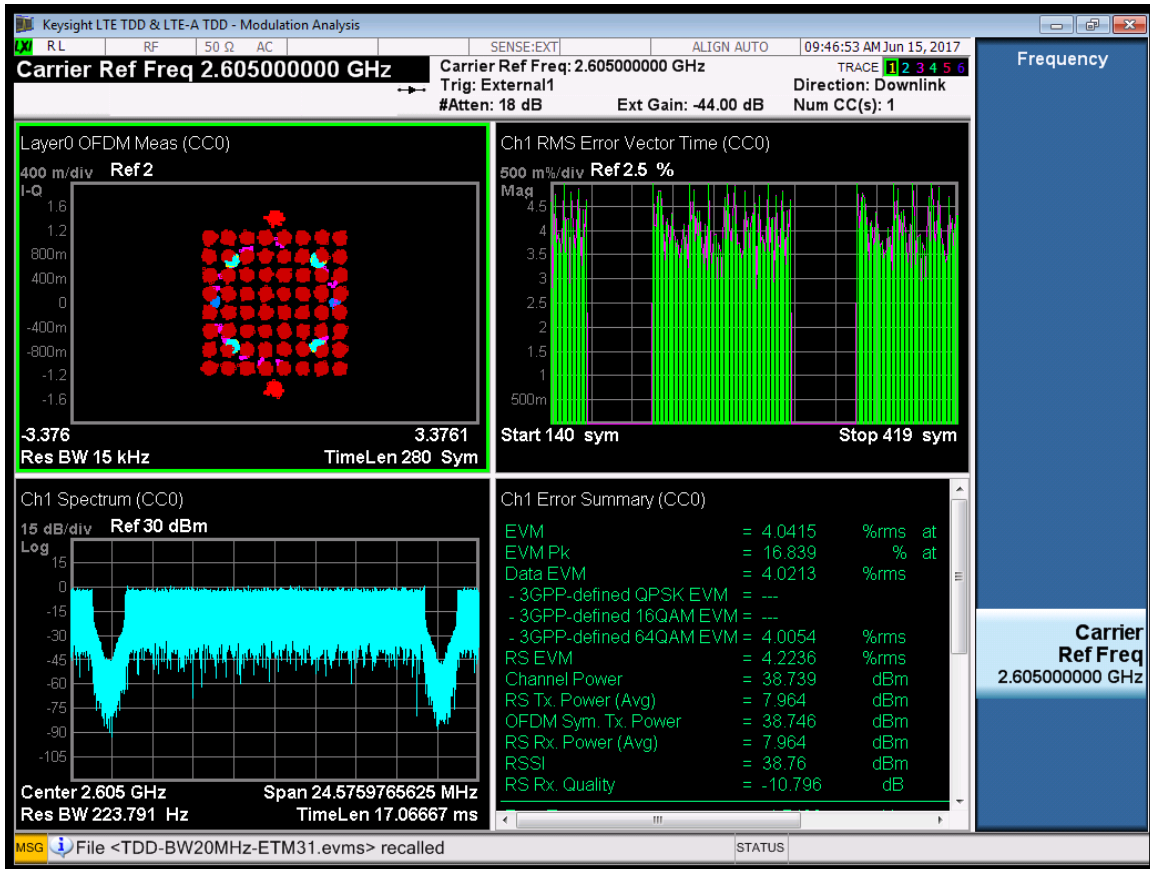


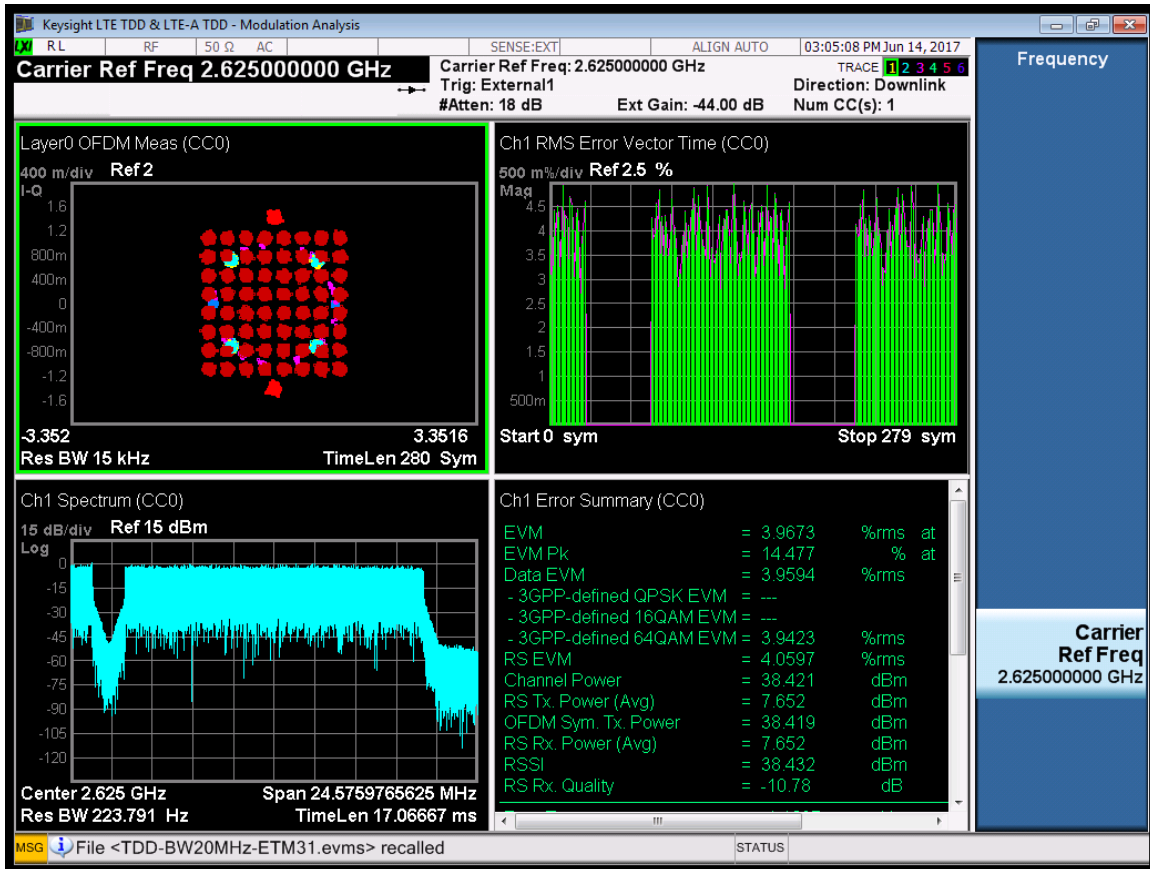


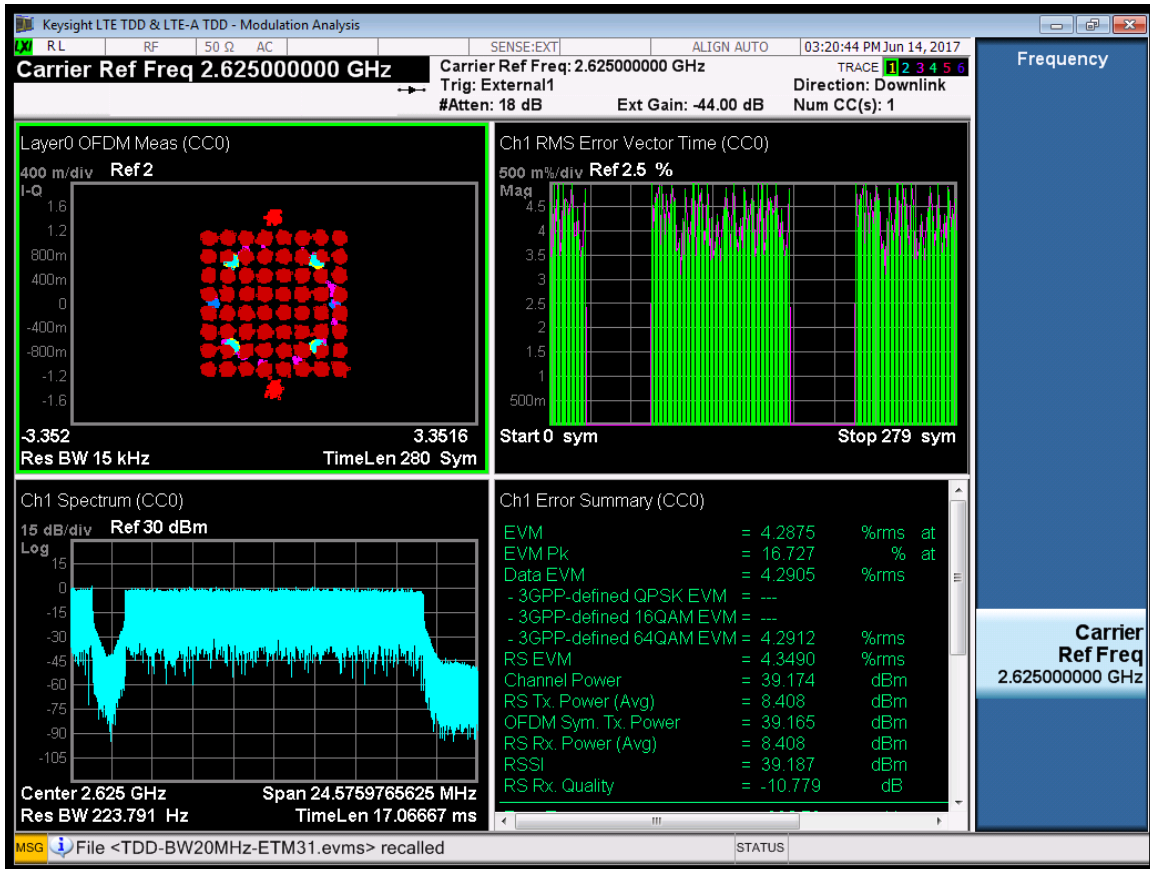


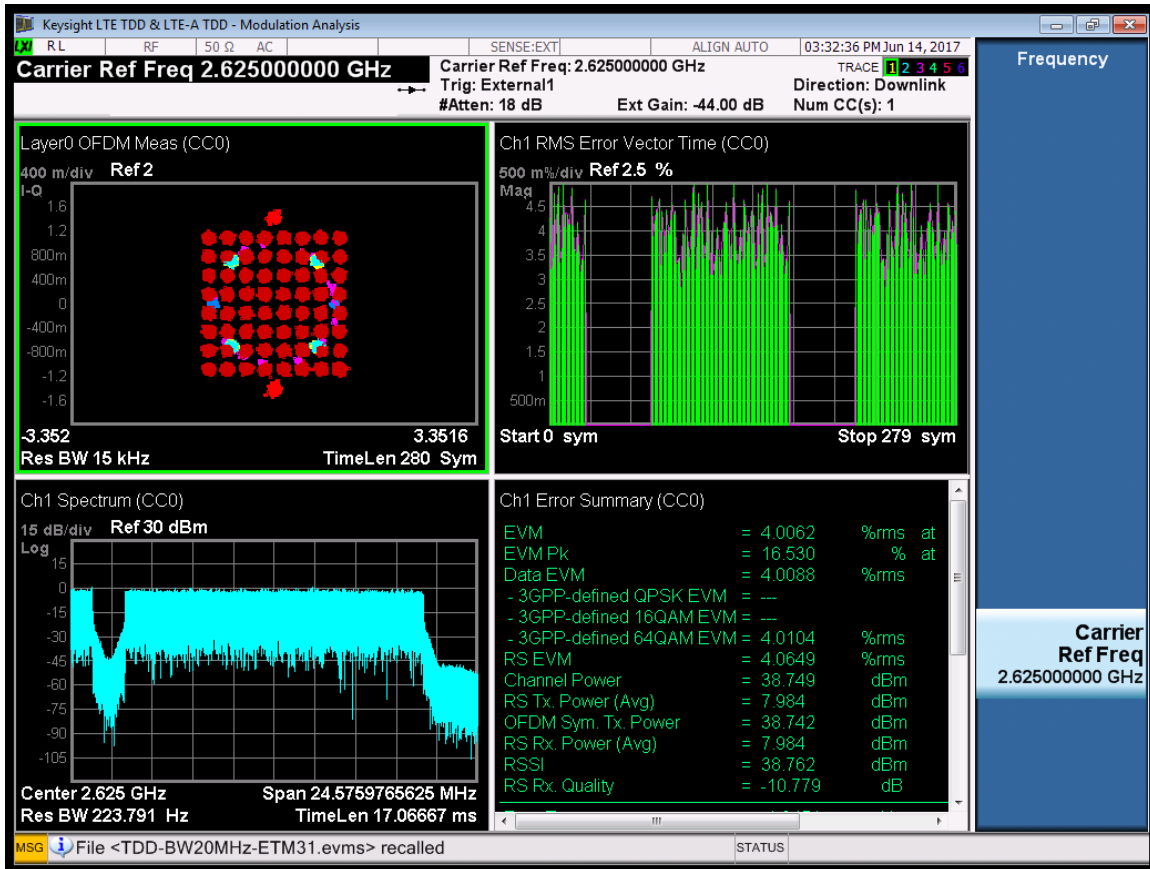


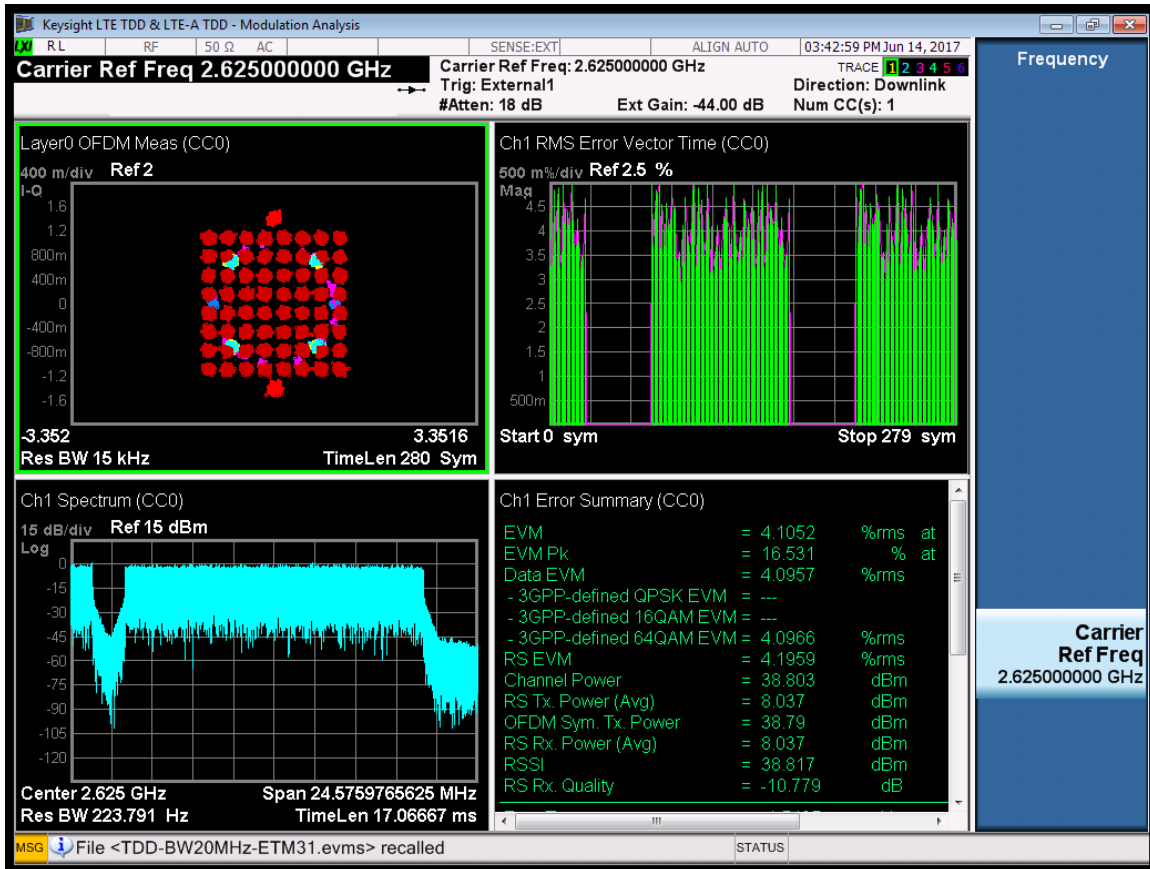

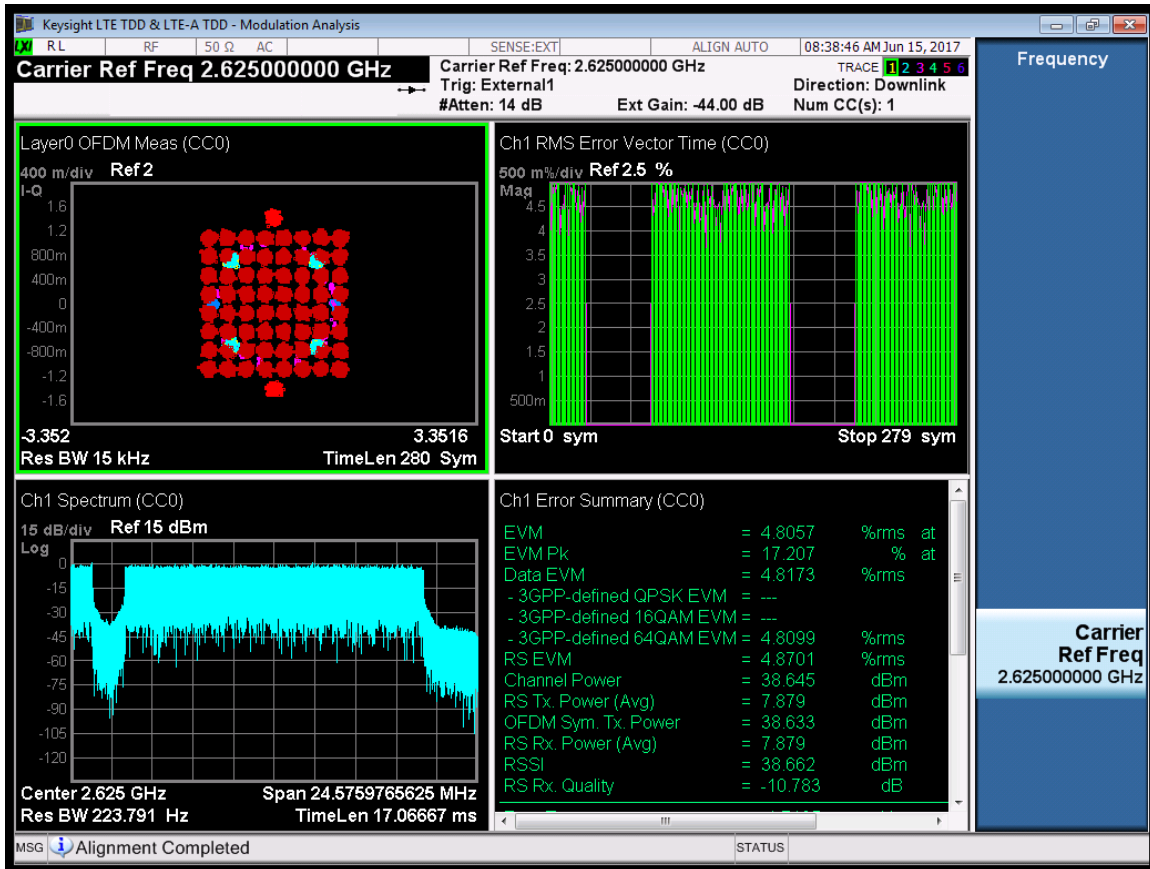

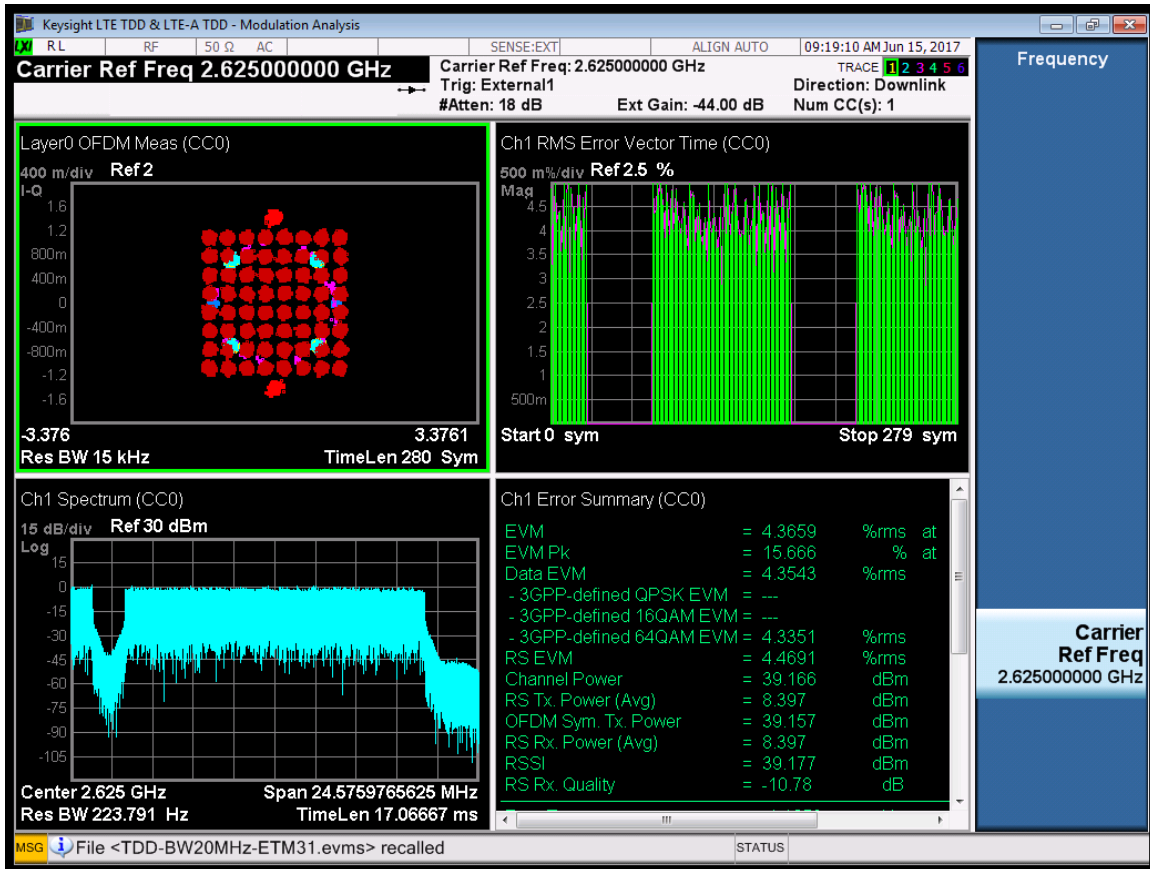

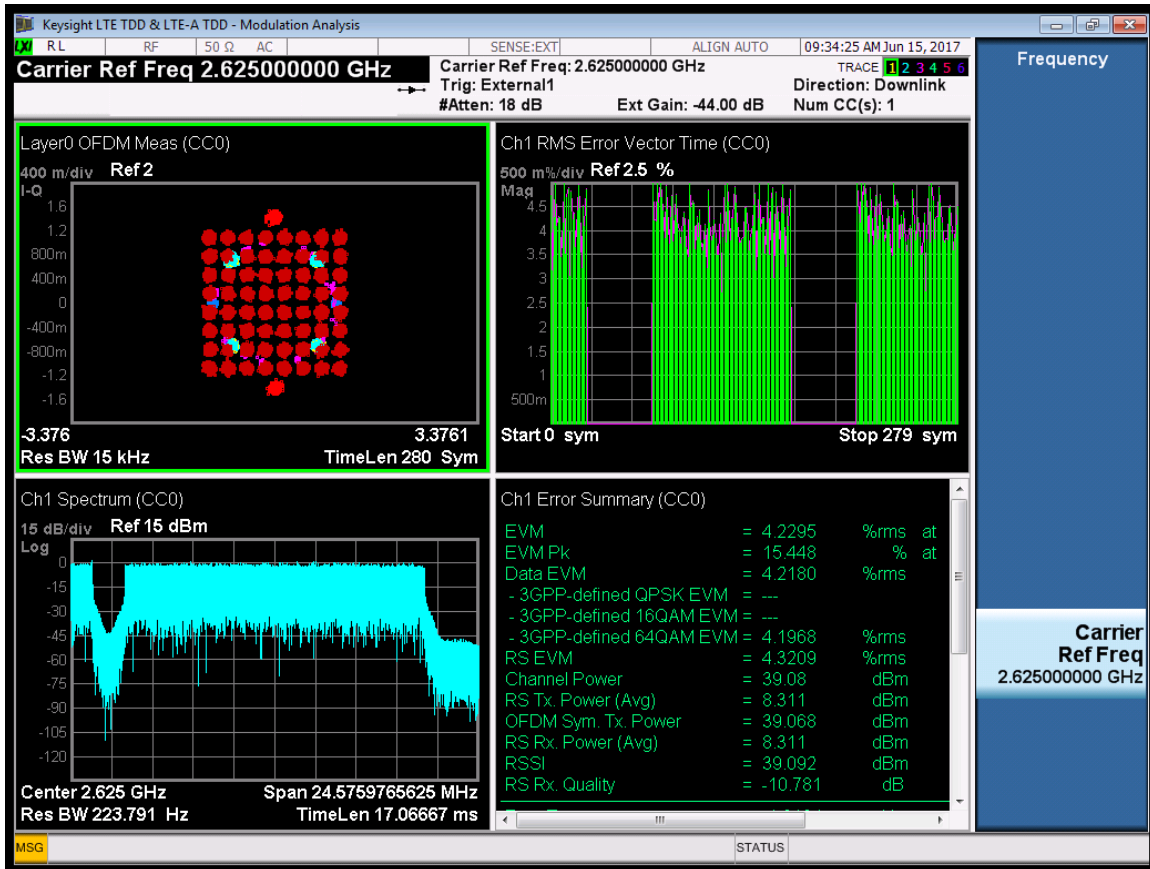

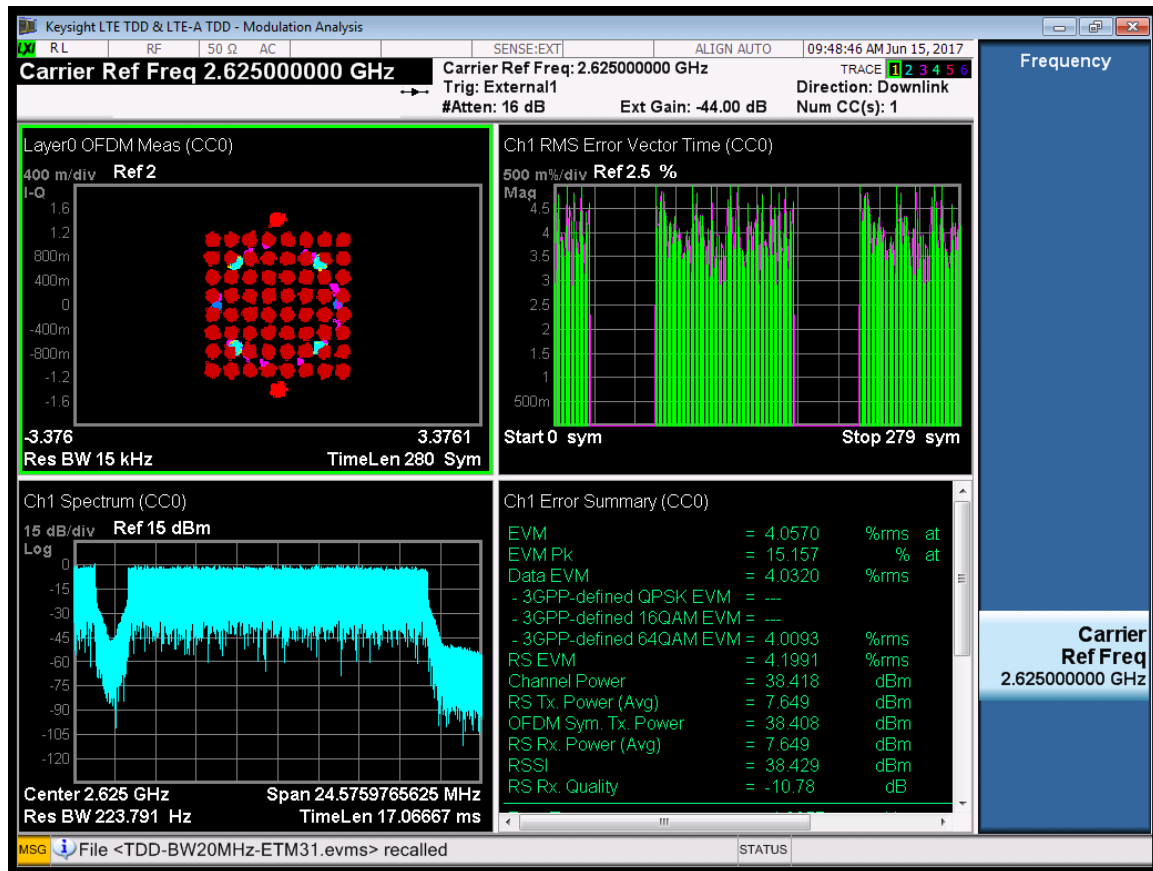

## 6 OCCUPIED BANDWIDTH

**Applicable Standard:** FCC §2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power.

### Test Equipment List and Details:

| Manufacturer | Description                  | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|------------------------------|--------|---------------|------------------|----------------------|
| Agilent      | MXA Series Spectrum Analyzer | N9020A | MY54500713    | 2017.03.15       | 2018.03.15           |

**\*statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

## Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. 99%Power bandwidth was recorded.

## Environmental Conditions

|                    |          |
|--------------------|----------|
| Temperature:       | 20 ° C   |
| Relative Humidity: | 53%      |
| ATM Pressure:      | 1009mbar |


**Test Result:** Pass


**Test Mode:** Transmitting LTE


## Test Data


Channel Bandwidth: 20M+20M+20M


| Port | Carrier Freq.<br>c1+c2+c3(MHz) | Occupied Bandwidth(MHz) |       |       |
|------|--------------------------------|-------------------------|-------|-------|
|      |                                | QPSK                    | 16QAM | 64QAM |
| 0    | 2585+2605+2625                 | 57.10                   | 57.26 | 57.48 |
| 1    |                                | 57.09                   | 57.25 | 57.48 |
| 2    |                                | 57.10                   | 57.26 | 57.50 |
| 3    |                                | 57.10                   | 57.26 | 57.50 |
| 4    |                                | 57.11                   | 57.26 | 57.50 |
| 5    |                                | 57.09                   | 57.24 | 57.49 |
| 6    |                                | 57.11                   | 57.27 | 57.51 |
| 7    |                                | 57.10                   | 57.25 | 57.49 |

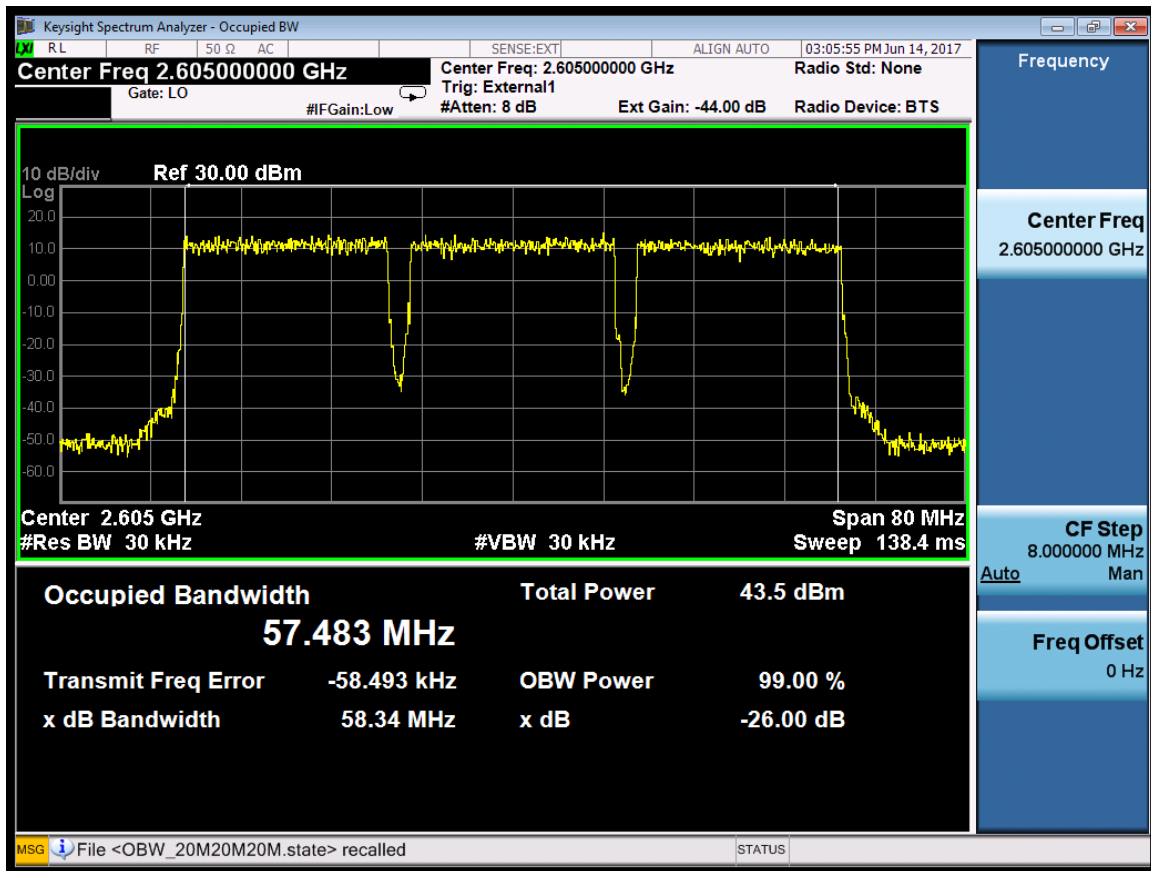


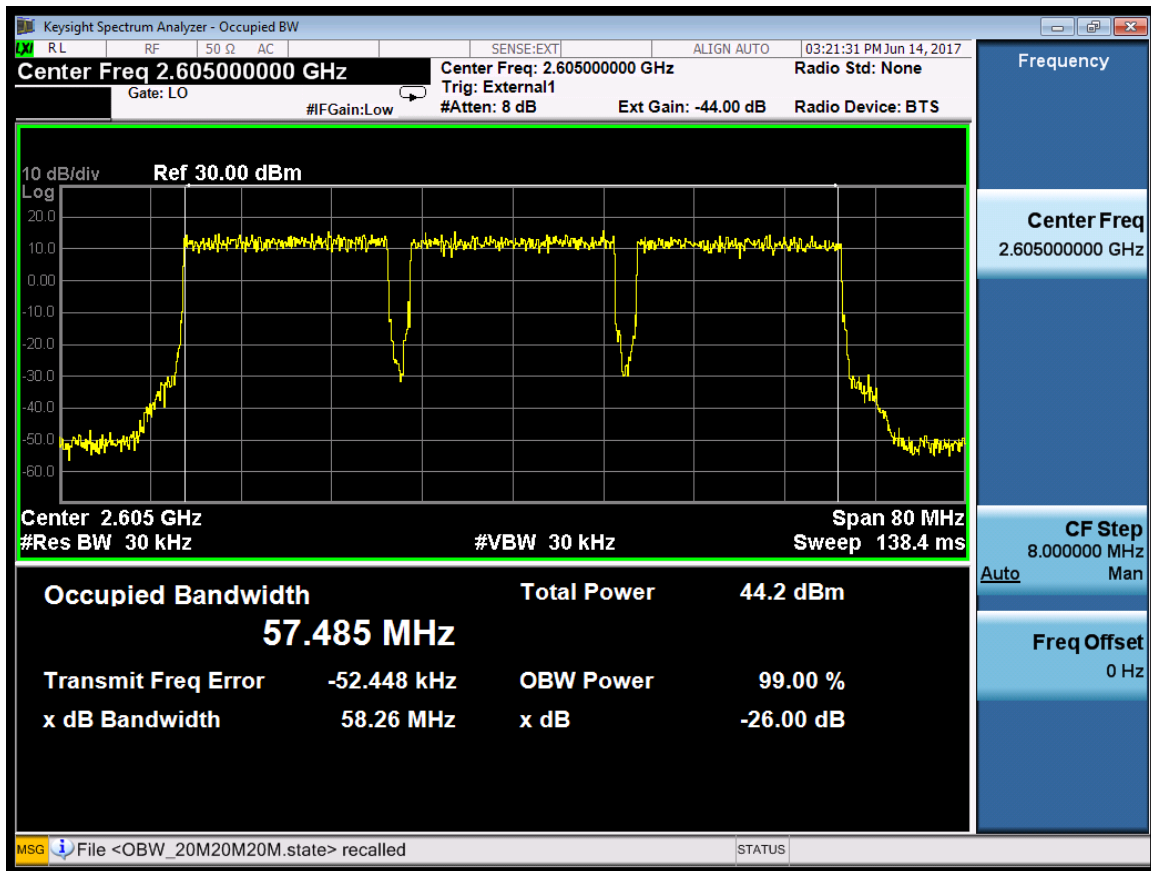


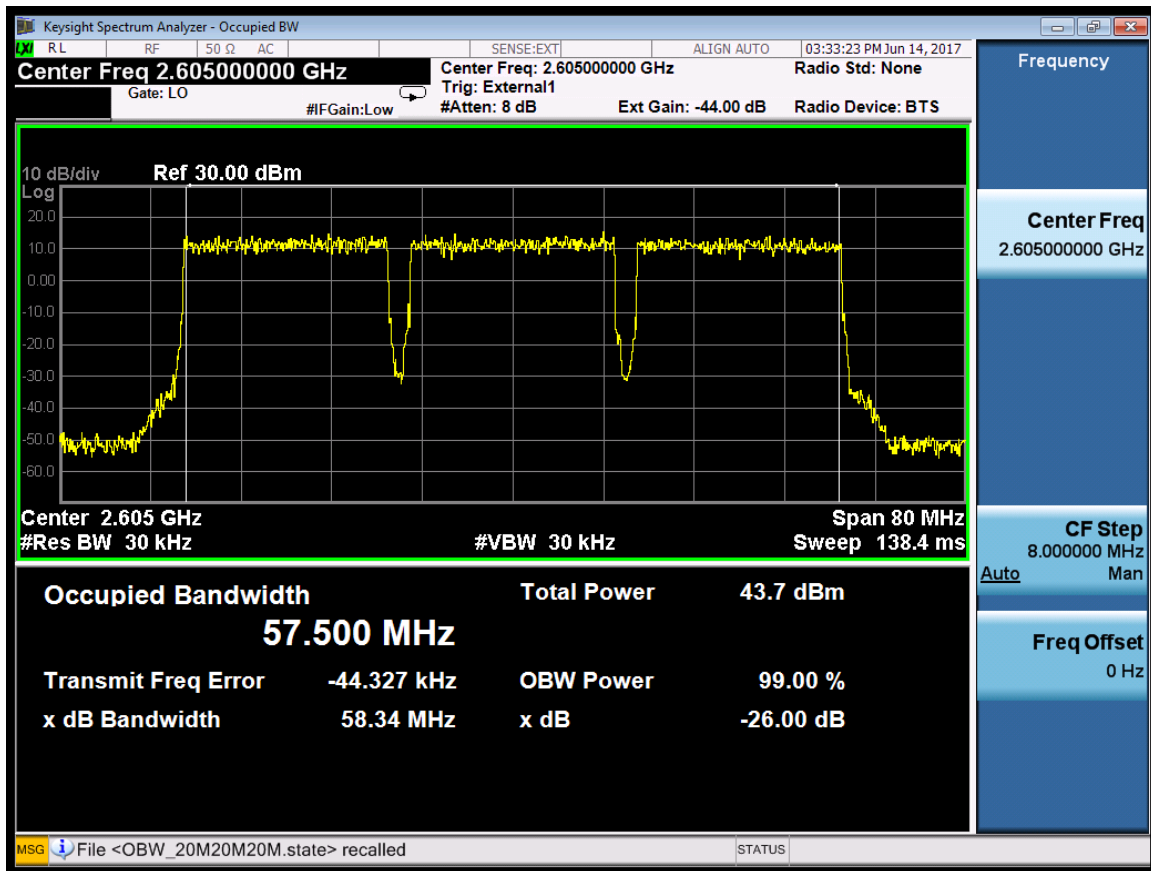


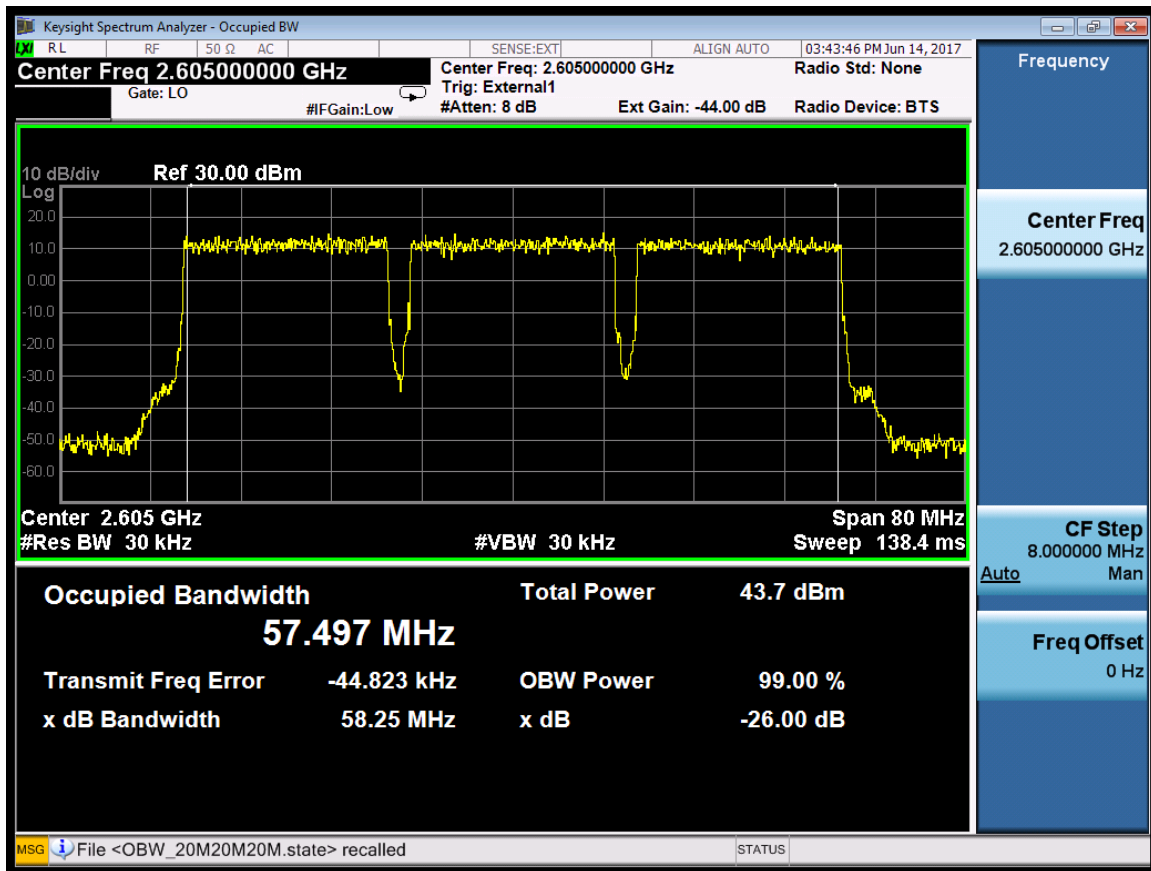

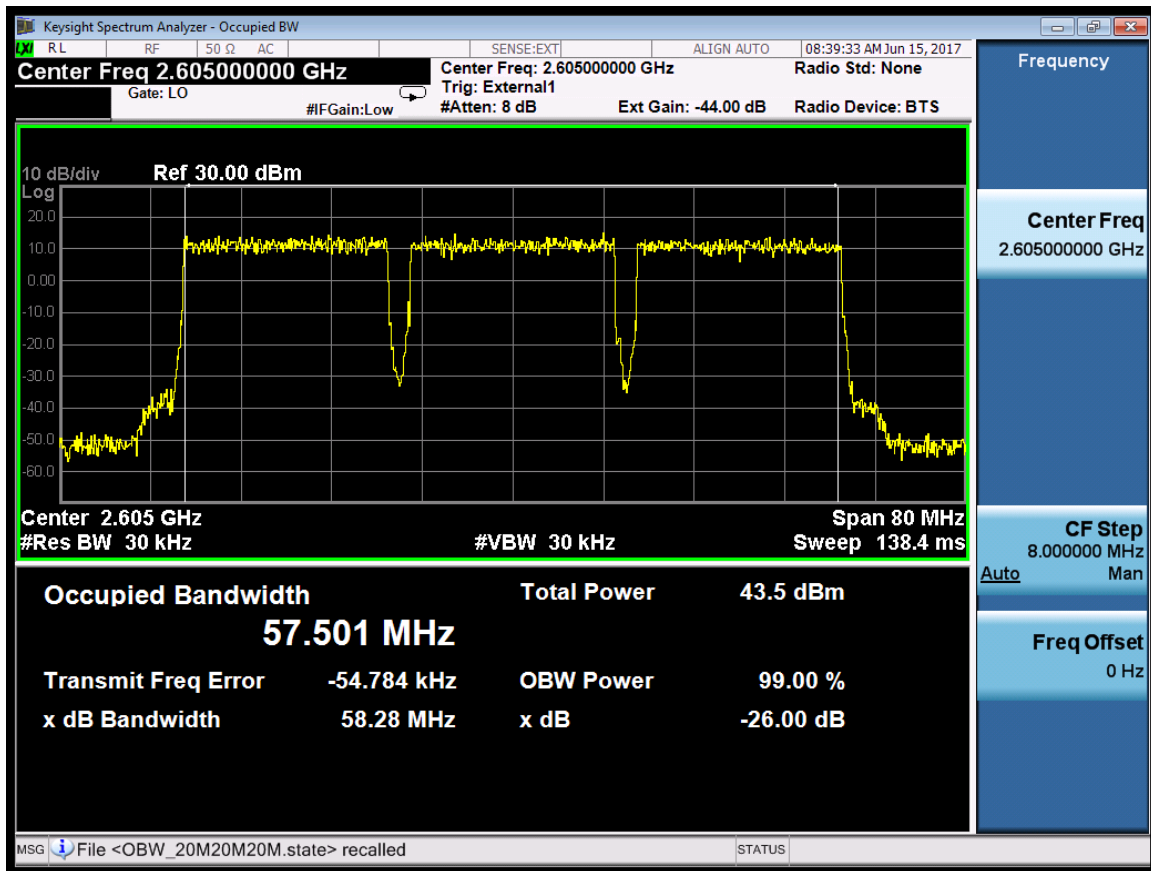

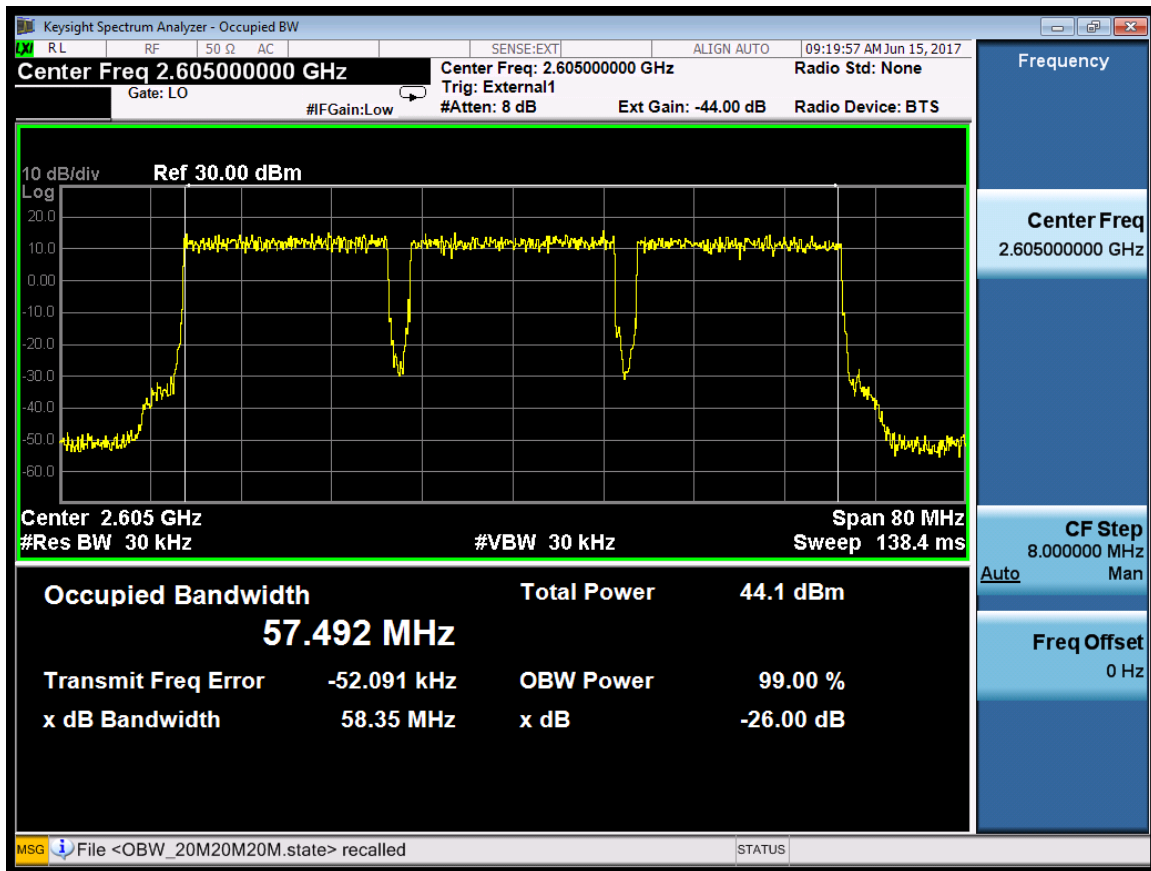

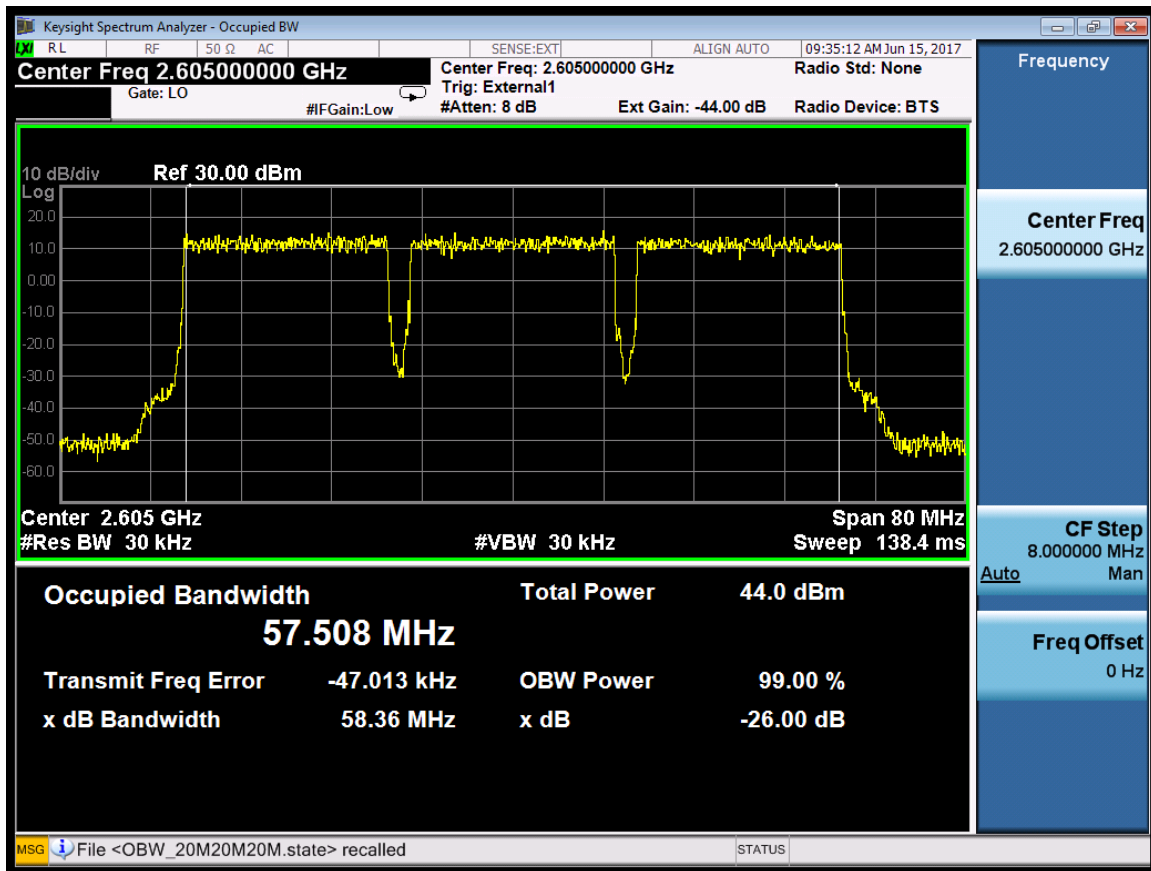

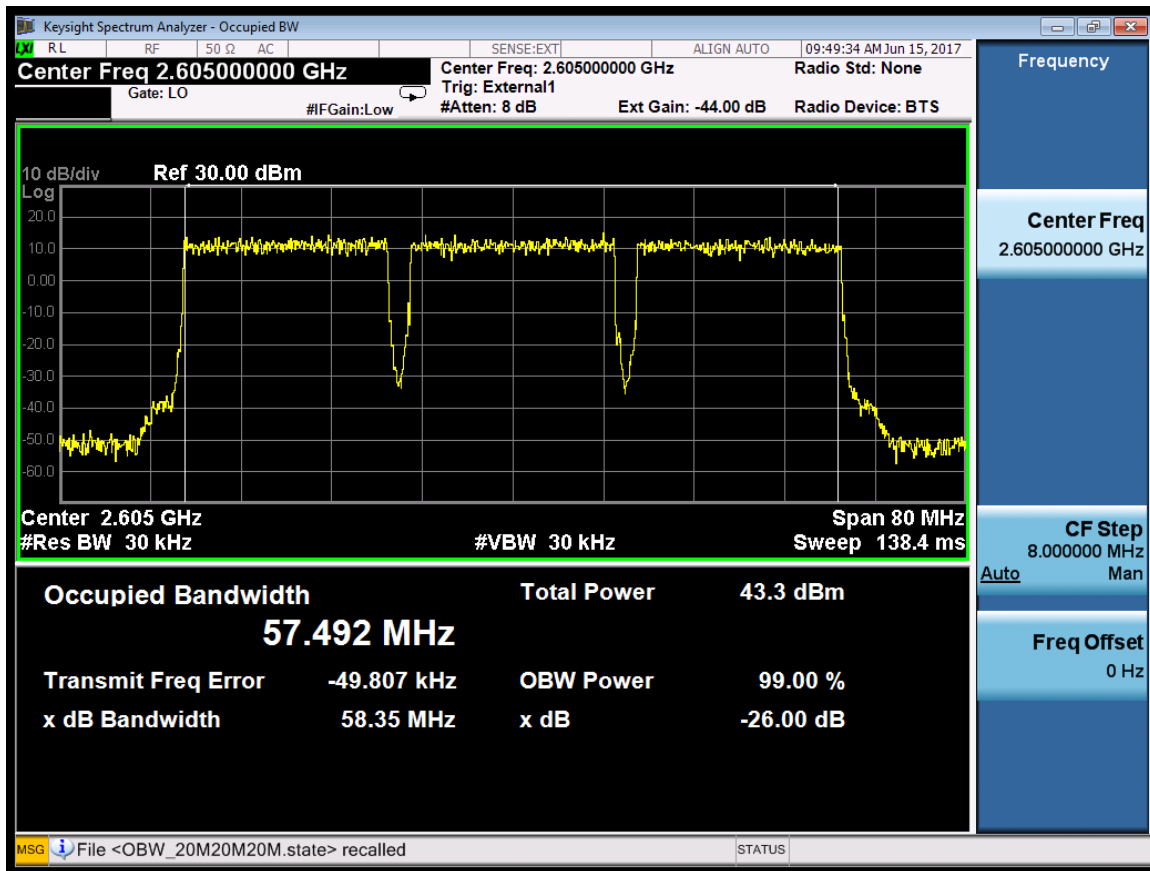

## 7 SPURIOUS EMISSIONS AT PORTENNA TERMINALS

**Applicable Standard:** FCC§2.1051, §27.53

For digital base stations, the attenuation shall be not less than  $43 + 10 \log(P)$  dB, unless a documented interference complaint is received from an adjacent channel licensee with an overlapping Geographic Service Area. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS No.1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Provided applicable deadline, then the following additional attenuation requirements shall apply.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in §2.1051.


## Test Equipment List and Details

| Manufacturer | Description                  | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|------------------------------|--------|---------------|------------------|----------------------|
| Agilent      | MXA Series Spectrum Analyzer | N9020A | MY54500713    | 2017.03.15       | 2018.03.15           |
| Agilent      | MXA Series Spectrum Analyze  | N9030A | MY53310566    | 2017.03.15       | 2018.03.15           |

**\*statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

## Test Procedure

EUT Setup:

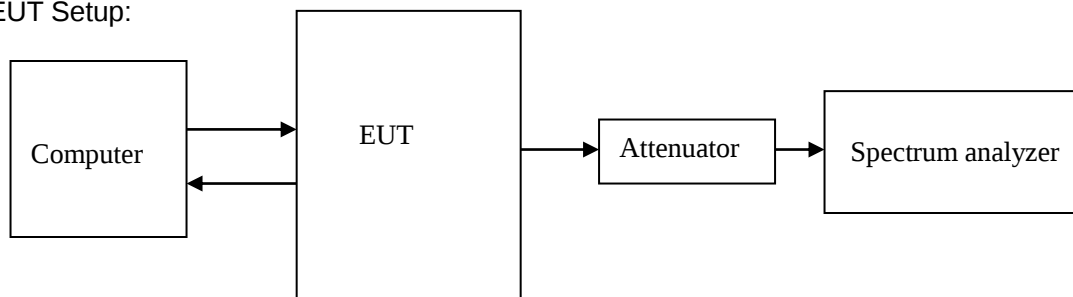

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.

Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

## Test Data Environmental Conditions

|                    |       |
|--------------------|-------|
| Temperature:       | 20 °C |
| Relative Humidity: | 53 %  |

|               |           |
|---------------|-----------|
| ATM Pressure: | 1009 mbar |
|---------------|-----------|

**Test Result:** Pass

**Test Mode:** Transmitting LTE

**Test Data:**

Channel Bandwidth: 20M+20M+20M

| Port | Carrier Freq.<br>c1+c2+c3(MHz) | Spurious Emissions |           |           |        |           |           |        |           |           |
|------|--------------------------------|--------------------|-----------|-----------|--------|-----------|-----------|--------|-----------|-----------|
|      |                                | QPSK               |           |           | 16QAM  |           |           | 64QAM  |           |           |
|      |                                | 9k-10G             | 10G-26.5G | Band Edge | 9k-10G | 10G-26.5G | Band Edge | 9k-10G | 10G-26.5G | Band Edge |
| 0    | 2585+2605+2625                 | -37.71             | -32.12    | -15.81    | -37.4  | -32.23    | -18.65    | -37.72 | -32.3     | -16.78    |
| 1    |                                | -36.77             | -32.24    | -16.76    | -37.55 | -32.29    | -18.54    | -37.74 | -32.02    | -14.04    |
| 2    |                                | -37.12             | -32.34    | -17.14    | -37.57 | -32.15    | -18.9     | -37.71 | -32.19    | -16.1     |
| 3    |                                | -37.99             | -32.02    | -17.52    | -37.63 | -32.03    | -18.88    | -37.51 | -32.08    | -15.32    |
| 4    |                                | -37.94             | -32.13    | -17.16    | -38.07 | -32.2     | -18.07    | -37.38 | -32.21    | -16.53    |
| 5    |                                | -37.47             | -32.29    | -17.23    | -37.27 | -32.1     | -17.57    | -37.59 | -32.45    | -13.93    |
| 6    |                                | -37.8              | -32.19    | -17.48    | -37.38 | -32.29    | -17.67    | -37.63 | -32.1     | -15.16    |
| 7    |                                | -37.36             | -32.29    | -17.28    | -37.86 | -32.52    | -17.36    | -37.62 | -32.29    | -17.42    |

