TESTING
CNAS L3572

SAR TEST REPORT

Issued to

ZTE Corporation

For

Dual-Band GSM and Dual-Band WCDMA Digital Mobile Phone

Model Name	:	ZTE V6000
Trade Name	:	ZTE 中兴
Brand Name	:	ZTE 中兴
FCC ID	:	Q78-V6000
Standard	:	FCC Oet65 Supplement C Jun.2001 47CFR 2.1093 ANSI C95.1-1999 IEEE 1528-2003
MAX SAR	:	Head: 1.149W/kg Body: 1.109W/kg
Test date	:	2012-1-29 to 2012-1-30&2012-2-13
Issue date	:	2012-2-13

Shenzhen MORLAB Communication Technology Co., Ltd.

MORLAB Products Quality Certification • Services Certification • GLOBAL SERVICE • O. M. System Certification • Certification

Tested by	Zhu Zhan	*Approved by*	Wei Yanqun	*Review by*	Samuel. Peng
	Zhu Zhan				
Date	2012.2.13	*Date*	2012.2.13	*Date*	2012.2.13

CTIA Authorized Test Lab LAB CODE 200813-0 IEEE 1725 OTA | OFTA 電訊管理局 | ilac-MRA | TAF | GCF | Bluetooth BQTF | FCC Reg. No. 741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it , or a certified copy there of prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his GPRSer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

TESTING LABORATORY 4

1.1. Identification of the Responsible Testing Laboratory 4

1.2. Identification of the Responsible Testing Location 4

1.3. Accreditation Certificate 4

1.4. List of Test Equipments 4

2. TECHNICAL INFORMATION 5

2.1. Identification of Applicant 5

2.2. Identification of Manufacturer 5

2.3. Equipment Under Test (EUT) 5

2.3.1. Photographs of the EUT 5

2.3.2. Identification of all used EUT 5

2.4. Applied Reference Documents 6

2.5. Device Category and SAR Limits 6

2.6. Test Environment/Conditions 7

3. SPECIFIC ABSORPTION RATE (SAR) 8

3.1. Introduction 8

3.2. SAR Definition 8

4. SAR MEASUREMENT SETUP 9

4.1. The Measurement System 9

4.2. Probe 9

4.3. Probe Calibration Process 11

4.3.1 Dosimetric Assessment Procedure 11

4.3.2 Free Space Assessment Procedure 11

4.3.2 Temperature Assessment Procedure 11

4.4. Phantom 12

4.5. Device Holder 12

5. TISSUE SIMULATING LIQUIDS 13

6. UNCERTAINTY ASSESSMENT 15

6.1. UNCERTAINTY EVALUATION FOR HANDSET SAR TEST 15

6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK 16

7. SAR MEASUREMENT EVALUATION 18

7.1. System Setup 18
7.2. Validation Results 19
8. OPERATIONAL CONDITIONS DURING TEST **20**
8.1. Informations on the testing 20
8.2. Body-worn Configurations 21
8.3. Measurement procedure 21
8.4. Description of interpolation/extrapolation scheme 22
9. 3G MEASUREMENT PROCEDURES **23**
9.1. Procedures Used To Establish Test Signal 23
9.2. SAR Measurement Conditions for WCDMA 23
9.3. Output Power Verification 23
9.4. Measurement Of Conducted Peak Output Power. 24
10. WIRELESS HOT SPOT SAR EVALUATION PROCEDURES **28**
11. TEST RESULTS LIST **29**
12. SCALED SAR LIST **33**
13. MULTIPLE TRANSMITTERS EVALUATION **36**
ANNEX A EUT SETUP PHOTOS **37**
ANNEX B GRAPH TEST RESULTS **42**

Change History		
Issue	Date	Reason for change
1.0	Feb. 7, 2012	First edition
2.0	Feb. 13, 2012	Correct the wrong statements, channels, values, frequency in the report, keep the values and channels consistent with EMI report, add Head SAR evaluation of WLAN.
3.0	Feb. 15, 2012	Correct the convF of Wlan Head SAR, correct channels and frequency.
4.0	Feb. 16, 2012	Add Scaled SAR List
5.0	Feb. 16, 2012	Check and correct scaled SAR, refine the form
6.0	Feb. 17, 2012	Correct scaling factor and scaled SAR
7.0	Feb.20, 2012	Correct conducted power to comply with RF report.

Testing Laboratory

1.1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China
Responsible Test Lab Manager:	Mr. Shu Luan
Telephone:	+86 755 86130268
Facsimile:	+86 755 86130218

1.2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China

1.3. Accreditation Certificate

Accredited Testing Laboratory:	No. CNAS L3572

1.4. List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Rohde&Schwarz (CMU200, SN:105894)	2011-9-26	1year
3	Voltmeter	Keithley (2000, SN:1000572)	2011-9-24	1year
4	Synthetizer	Rohde&Schwarz (SML_03, SN:101868)	2011-9-24	1year
5	Amplifier	Nucl udes (ALB216, SN:10800)	2011-9-24	1year
6	Power Meter	Rohde&Schwarz (NRVD, SN:101066)	2011-9-24	1year
7	Probe	Satimo (SN:SN_3708_EP80)	2011-9-24	1year
8	Phantom	Satimo (SN:SN_36_08_SAM62)	2011-9-24	1year
9	Liquid	Satimo (Last Calibration: 2012-1-17)	N/A	N.A
10	Dipole 835MHz	Satimo (SN 36/08 DIPC 99)	2011-9-24	1year
11	Dipole 1900MHz	Satimo (SN 36/08 DIPF 102)	2011-9-24	1year
12	Dipole 2450MHz	Satimo (SN 36/08 DIPF 103)	2011-9-24	1year

2. Technical Information

Note: the following data is based on the information by the applicant.

2.1. Identification of Applicant

Company Name:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,Nanshan District,Shenzhen,Guangdong,P.R.China

2.2. Identification of Manufacturer

Company Name:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,Nanshan District,Shenzhen,Guangdong,P.R.China

2.3. Equipment Under Test (EUT)

Model Name:	ZTE V6000
Trade Name:	ZTE 中兴
Brand Name:	ZTE 中兴
Hardware Version:	QB7211AV1BMB_D
Software Version:	QB7211_31_Z0_C_TSECD313A_05
Frequency Bands:	GSM 850MHz / PCS 1900MHz; WCDMA 850MHz/1900MHz; WIFI802.11 B/G/N; Bluetooth
Modulation Mode:	GSM/GPRS: GMSK; EDGE: 8PSK WIFI802.11B: DSSS; WIFI802.11G: OFDM
Multislot Class	GPRS: Multislot Class 12; EDGE: Multislot Class 12
Antenna type:	Fixed Internal Antenna
Development Stage:	Identical prototype
Battery Model:	Li3712T42P3h475248
Battery specification:	1200mAh3.7V

2.3.1. Photographs of the EUT

Please see for photographs of the EUT.

2.3.2. Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	QB7211AV1BMB_D	QB7211_31_Z0_C_TSECD313A_05

2.4. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	**47 CFR§2.1O93**	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	**FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)**	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields
3	**ANSI C95.1-1999**	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz
4	**IEEE 1528-2003**	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

2.5. Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.6. Test Environment/Conditions

Normal Temperature (NT):	20 ... 25 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa
Test frequency:	GSM 850MHz PCS 1900MHz
	WCDMA 850MHz WCDMA1900MHz
	WIFI 802.11B
Operation mode:	Call established
Power Level:	GSM 850 MHz Maximum output power(level 5)
	PCS 1900 MHz Maximum output power(level 0)
	WCDMA Maximum output power
	WIFI Maximum output power

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.
The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 125, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz ,or to 9262, 9400 and 9538 respectively in the case of WCDMA 19000, or to 4132, 4175 and 4233 respectively in the case of WCDMA 850. The EUT is commanded to operate at maximum transmitting power.
During WIFI SAR test, the EUT was located at channel 1, 6, 13. And EUT was commanded to operate at maximum transmitting power.
The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.
The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.
For SAR testing, EUT is in GPRS/EDGE or WCDMA link mode. In GPRS/EDGE link mode, its crest factor is 2, because EUT is set in GPRS/EDGE multi-slot class 12 with 4 uplink slots. In WCDMA and WIFI mode, its crest factor is 1.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. ρ). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt}\left(\frac{dW}{dm}\right) = \frac{d}{dt}\left(\frac{dW}{\rho dv}\right)$$

SAR is expressed in units of Watts per kilogram (W/kg)
SAR measurement can be either related to the temperature elevation in tissue by

$$\mathbf{SAR} = C\frac{\delta T}{\delta t}$$

, where C is the specific head capacity, δ T is the temperature rise and δ t the exposure duration, or related to the electrical field in the tissue by

$$\mathbf{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement Setup

4.1. The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.

The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2. Probe

For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 6.5 mm
- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm
  (repeatability better than +/- 1mm)

- Probe linearity: ＜0.25 dB
- Axial Isotropy: ＜0.25 dB
- Spherical Isotropy: ＜0.25 dB
- Calibration range: 835to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and suface normal line:1ess than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 622091 annexe technique using reference guide at the five frequencies.

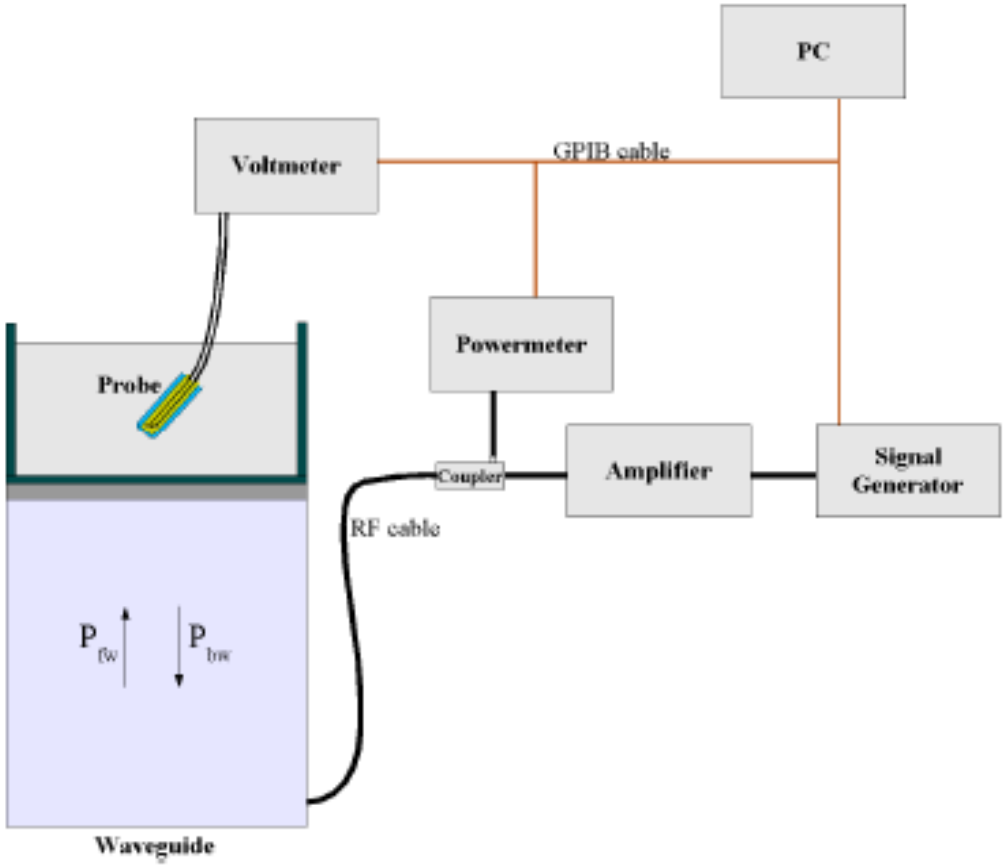

$$SAR = \frac{4\,(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-(2z/\delta)}$$

Where :
Pfw = Forward Power
Pbw = Backward Power
a and b = Waveguide dimensions
ı = Skin depth
Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO
After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

CF(N)=SAR(N)/Vlin(N) (N=1,2,3)

The linearised output voltage Vlin(N) is obtained from the displayed output voltage V(N) using

Vlin(N)=V(N)*(1+V(N)/DCP(N)) (N=1,2,3)

where DCP is the diode compression point in mV.

4.3. Probe Calibration Process

4.3.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm2) using an with CALISAR, Antenna proprietary calibration system.

4.3.2 Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm2.

4.3.2 Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C\frac{\Delta T}{\Delta t}$$

Where:

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm3 for brain tissue)

4.4. Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

5. Tissue Simulating Liquids

Simulant liquids that are used for testing at frequencies of 850, 1900MHz and 2450MHz. which are made mainly of sugar, salt and water solutions may be left in the phantoms. Approximately 20litres are needed for an upright head compared to about 25 litres for a horizontal bath phantom. The liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is (head SAR) or from the flat phantom to the liquid top surface (body SAR) is 15cm.

Following are the recipes for one liter of head and body tissue simulating liquid for frequency band 835 MHz, 1900 MHz and 2450 MHz.

Ingredients (% by weight)	Frequency Band 835MHz		Frequency Band 1900MHz		Frequency Band 2450MHz	
Tissue Type	Head	Body	Head	Body	Head	Body
Water	41.45	52.4	54.9	40.4	62.7	73.2
Salt(NaCl)	1.45	1.4	0.18	0.5	0.5	0.04
Sugar	56.0	45.0	0.0	58.0	0.0	0.0
HEC	1.0	1.0	0.0	1.0	0.0	0.0
Bactericide	0.1	0.1	0.0	0.1	0.0	0.0
Triton	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	44.92	0.0	36.8	0.0
Acticide SPX	0.0	0.0	0.0	0.0	0.0	26.7
Dielectric Constant	42.45	56.1	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.91	0.95	1.42	1.45	1.88	1.78

Recipes for Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 23.0~23.8°C, humidity: 54~60%.			
/	**Frequency**	**Permittivity ε**	**Conductivity σ (S/m)**
Target value	835 MHZ	41.5	0.90
Validation value (Jan. 29)	835 MHZ	41.675999	0.894409
Target value	1900 MHZ	40	1.40
Validation value (Jan. 30)	1900 MHZ	38.509998	1.436111
Target value	2450 MHz	39.7	1.93
Validation value (Feb. 13)	2450 MHz	39.622857	1.964313

For body-worn measurements, the device was tested against flat phantom representing the user body. Under measurement phone was put on in the phone holder.

Table 2: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 23.0~23.8°C, humidity: 54~60%.			
/	**Frequency**	**Permittivity ε**	**Conductivity σ (S/m)**
Target value	835 MHz	55.2	0.97
Validation value (Jan. 29)	835 MHz	55.709999	0.9809033
Target value	1900 MHz	53.3	1.52
Validation value (Jan. 30)	1900 MHz	52.548876	1.553978
Target value	2450 MHz	52.7	1.95
Validation value (Jan. 30)	2450 MHz	52.548876	1.974257

6. Uncertainty Assessment

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

6.1. UNCERTAINTY EVALUATION FOR HANDSET SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+- %)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.76	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algoritms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test sample Related									
Test sample positioning	E.4.2.1	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1.1	5.00	N	1	1	1	5.00	5.00	N-1
Output power Power drift - SAR drift measurement	6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞

Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				11.55	10.67	
Expanded Uncertainty (95% Confidence interval)			K=2				23.11	21.33	

6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.76	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algoritms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	∞

Input power and SAR drift measurement	8,6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	$\sqrt{3}$	0.64	0.43	1.85	1.24	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	$\sqrt{3}$	0.6	0.49	3.46	2.83	M
Combined Standard Uncertainty			RSS				8.83	8.37	
Expanded Uncertainty (95% Confidence interval)			K=2				17.66	16.73	

7. SAR Measurement Evaluation

7.1. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz, 1900 MHz and 2450MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

Equipments:

name	Type and specification
Signal generator	E4433B
Directional coupler	450MHz-3GHz
Amplifier	3W 502(10-2500MHz)
Reference dipole	835MHz:SN 36/08 DIPC 99 1900MHz:SN 36/08 DIPF 102 2450MHz:SN 36/08 DIPF 103

System Verification Setup Block Diagram

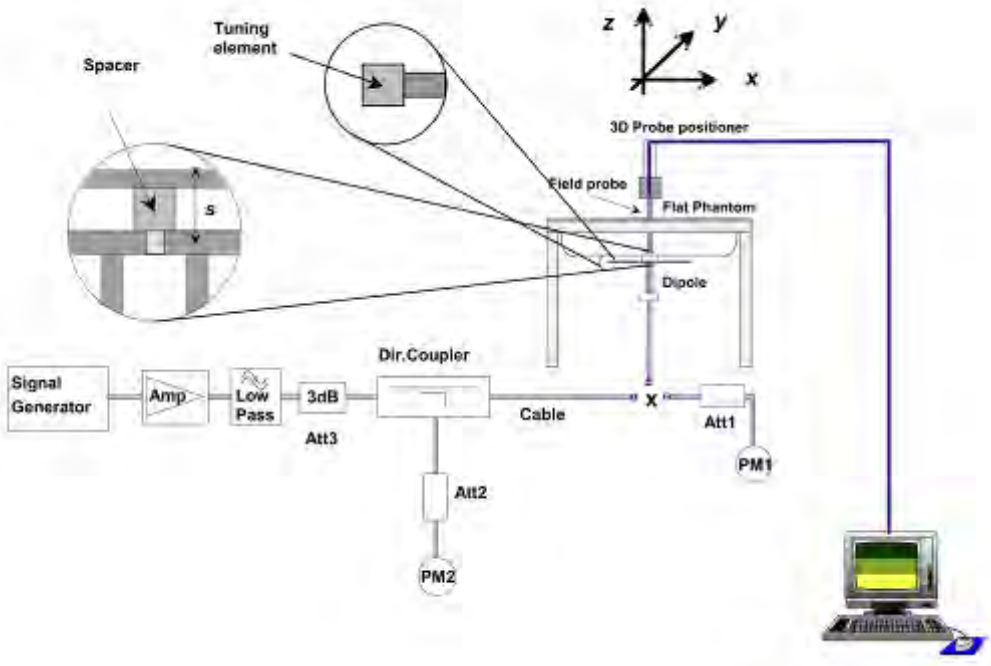

7.2. Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %.

Cal. On Jan.29, 2012

Frequency	835MHz(Head)	835MHz(Body)
Target value（1g）	9.714 W/Kg	9.714 W/Kg
250 mW input power	2.478 W/Kg	2.386 W/Kg
Test value（1g）	9.912 W/Kg	9.544W/Kg

Cal. On Jan.30, 2012

Frequency	1900MHz(Head)	1900MHz(Body)	2450MHz(Body)
Target value（1g）	39.89 W/Kg	39.89 W/Kg	52.4 W/Kg
250 mW input power	9.455 W/Kg	9.740 W/Kg	12.789 W/Kg
Test value（1g）	37.820 W/Kg	38.960 W/Kg	51.156 W/Kg

Cal. On Feb.13, 2012

Frequency	2450MHz(Head)
Target value（1g）	52.4 W/Kg
250 mW input power	12.443 W/Kg
Test value（1g）	49.772W/Kg

Note: System checks the specific test data please see page 157~168

8. Operational Conditions During Test

8.1. Informations on the testing

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

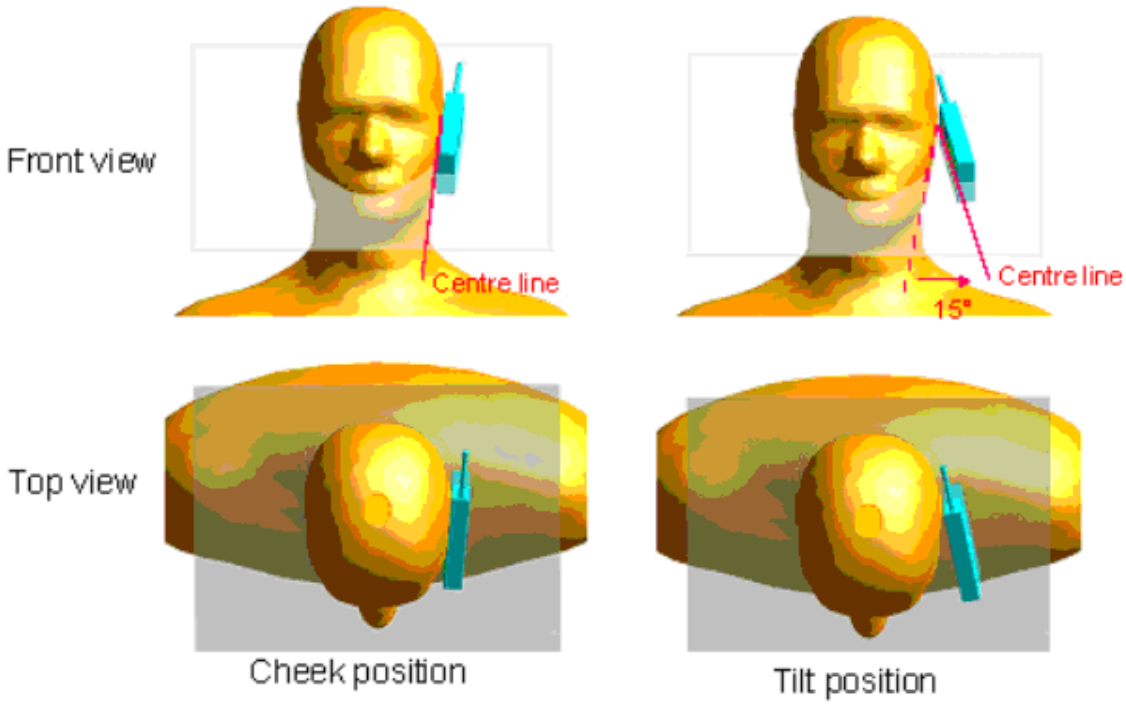

Description of the “cheek” position:
The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the “tilted” position:
The mobile phone is well placed in the “cheek” position as described above. Then the mobile phone is moved outward away from the month by an angle of 15 degrees or until contact with the ear lost.

Remark: Please refer to Appendix B for the test setup photos.

8.2. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

The depth of the body tissue was 15.1cm. The distance between the back of the device and the bottom of the flat phantom is 1.5cm(taking into account of the IEEE 1528 and the place of the antenna)

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

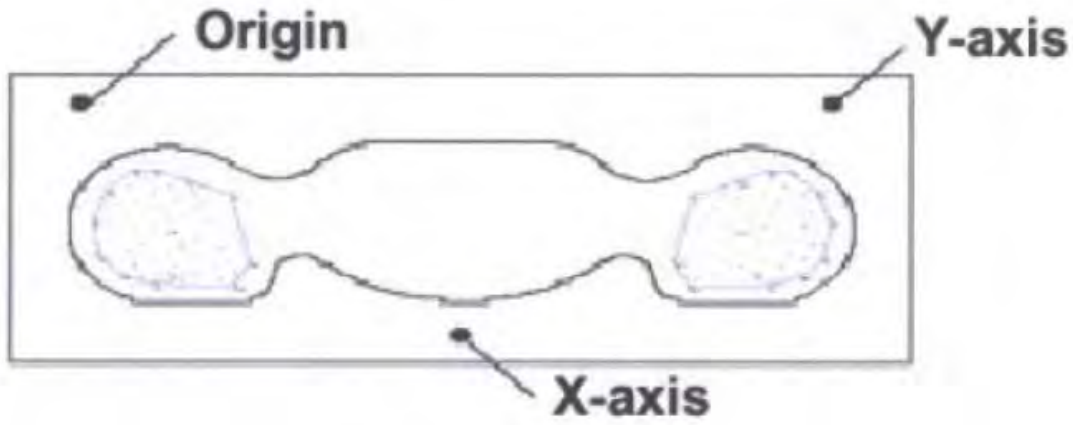

SAR Measurement Points in Area Scan

8.3. Measurement procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

8.4. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

9. 3G MEASUREMENT PROCEDURES

9.1. Procedures Used To Establish Test Signal

The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more then 5% occurred, the tests were repeated.

9.2. SAR Measurement Conditions for WCDMA

These procedures were followed according to FCC KDB 941225, October, 2007.

9.3. Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC(transmit power control) set to all “1s”. Results for all applicable physical channel configurations (DPCCH, DPDCH and spreading codes) should be tabulated in the test report. All configurations that are not supported by the EUT or cannot be measured due to technical or equipment limitations should be clearly identified.

9.4. Measurement Of Conducted Peak Output Power.

1. WCDMA Conducted peak output power

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	22.46	22.66	22.57	22.63	22.45	22.65
HSDPA	1	22.42	22.64	22.40	22.55	22.39	22.61
	2	22.43	22.61	22.39	22.53	22.38	22.59
	3	21.95	21.12	21.93	22.07	21.41	22.12
	4	21.93	21.11	21.92	22.05	21.85	21.11

Band	Channel	Power Drift (%)
WCDMA 850	4132	-0.80
	4175	/
	4233	/
WCDMA 1900	9262	0.50
	9400	1.22
	9538	-1.18

2. GSM Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power (dBm)	Power Drift (%)
GSM 850	128	824.2	32.55	/
	190	836.6	32.99	/
	251	848.8	33.31	-1.92
PCS 1900	512	1850.2	28.02	/
	661	1880.0	28.25	-3.01
	810	1909.8	28.19	/

2. GPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	31.69	31.67	31.67	31.90
	190	836.6	31.36	31.37	31.36	31.51
	251	848.8	30.52	30.56	30.55	31.65
PCS 1900	512	1850.2	27.48	27.46	27.46	27.85
	661	1880.0	27.32	27.32	27.33	27.83
	810	1909.8	25.81	25.80	25.83	25.98

GPRS Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)				Power Drift (%)
			Slot 1	Slot 2	Slot 3	Slot 4	Slot 4
GSM 850	128	824.2	22.69	25.65	27.41	28.89	-1.62
	190	836.6	22.36	25.35	27.10	28.50	
	251	848.8	21.52	24.54	26.29	28.64	
PCS 1900	512	1850.2	18.48	21.44	23.20	24.84	-1.80
	661	1880.0	18.32	21.30	23.07	24.82	
	810	1909.8	16.81	19.78	21.57	22.97	

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up2Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Correct Factor	-9.00dB	-6.02dB	-4.26dB	-3.01dB

Note: 1. Correct Factor=10*log (Duty Cycle)

2. Average Power= Peak Power+ Correct Factor

3. EDGE Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	27.62	27.65	27.63	27.73
	190	836.6	27.36	27.35	27.35	27.83
	251	848.8	27.59	27.54	27.55	27.88
PCS 1900	512	1850.2	25.22	25.20	25.20	25.23
	661	1880.0	24.08	24.47	24.07	24.75
	810	1909.8	23.75	24.25	24.32	24.34

EDGE Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)				Power Drift (%)
			Slot 1	Slot 2	Slot 3	Slot 4	Slot 4
GSM 850	128	824.2	18.62	21.63	23.37	24.72	
	190	836.6	18.36	21.33	23.09	24.82	
	251	848.8	18.59	21.52	23.29	24.87	-0.44
PCS 1900	512	1850.2	16.22	19.18	20.94	22.22	-0.82
	661	1880.0	15.08	18.45	19.81	21.74	
	810	1909.8	14.75	18.23	20.06	21.33	

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up2Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Correct Factor	-9.00dB	-6.02dB	-4.26dB	-3.01dB

Note: 1. Correct Factor=10*log (Duty Cycle)

2. Average Power= Peak Power+ Correct Factor

4. Wifi peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			Power Drift (%)
			802.11B (DSSS)	802.11G (OFDM)	802.11N (OFDM)	802.11B (DSSS)
WiFi	1	2412	12.52	10.21	6.54	/
	6	2437	11.93	9.37	6.27	-1.71
	11	2462	10.61	8.87	6.36	/

5. Bluetooth peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			GFSK	Π/4-DQPSK	8-DPSK
BT	0	2402	6.894	8.779	6.554
	38	2441	6.170	7.863	5.246
	79	2480	4.657	6.296	4.386

10.Wireless Hot Spot SAR Evaluation Procedures

This Portable Devices with Wireless Router function. And the SAR evaluation procedures accord with KDB 941225 D06 Hot Spot SAR v01.

1. SAR must be tested for all surfaces and edges (side) with a transmitting antenna with in 2.5 cm from that surface or edge, at a test separation distance of 10 mm, in the wireless modes that support wireless routing.
2. Edge configurations:

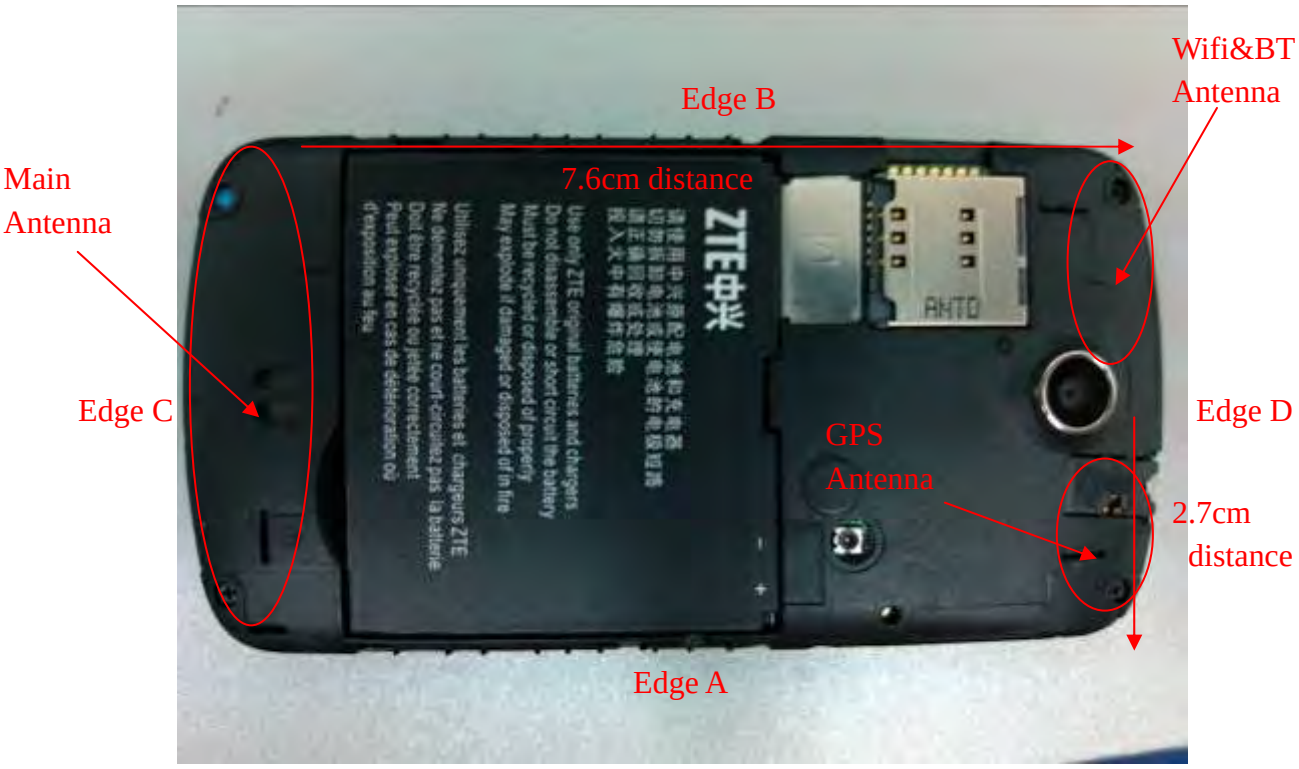

3. WCDMA&GSM antenna is located at edge C, the distance between WCDMA&GSM antenna and edge D is 7.6cm larger than 2.5cm. acording with KDB941225 D06, the SAR measurement of edge D of WCDMA and GSM are not required.

4. Wifi antenna is located at edge D, the distance between wifi antenna and edge A is 2.7 cm large than 2.5 cm and the distance between wifi antenna and edge C, is larger than 2.5cm. acording with KDB941225 D06, the SAR measurement of edge A&C, are not required.

11.Test Results List

Summary of Measurement Results (GSM 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom Configurations		Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
				Device Test channel,		
				Channel 128	Channel 190	Channel 251
Right Side Of Head		Cheek/Touch	Internal	/	/	0.610
		Ear/Tilt	Internal	/	/	0.373
Left Side Of Head		Cheek/Touch	Internal	/	/	0.513
		Ear/Tilt	Internal	/	/	0.204
Body (10mm Separation)	GSM	Back upward	Internal	/	/	0.725
		Face Upward	Internal	/	/	0.488
	GPRS	Back upward	Internal	0.704	/	/
		Face Upward	Internal	0.385	/	/
		EDGE A	Internal	0.136	/	/
		EDGE B	Internal	0.152	/	/
		EDGE C	Internal	0.347	/	/
		EDGE D	Internal	/	/	/
	EDGE	Back upward	Internal	/	/	0.640

Note:

1. The highest power channel is 251 for GSM/ EDGE mode, and 128 for GPRS mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.

2. KDB 648474: “Among the channels required for normal testing, SAR must be measured on the highest output channel in all wireless modes and exposure conditions applicable to that unlicensed transmitter. If the SAR measured on the highest output channel is < 50% of the SAR limit, SAR evaluation for the other required channels is unnecessary. Otherwise, all required configurations must be tested according to the normal procedures required for that transmitter.”

Summary of Measurement Results (GSM 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom Configurations		Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
				Device Test channel,		
				Channel 512	Channel 661	Channel 810
Right Side Of Head		Cheek/Touch	Internal	/	0.789	/
		Ear/Tilt	Internal	/	0.546	/
Left Side Of Head		Cheek/Touch	Internal	/	0.707	/
		Ear/Tilt	Internal	/	0.492	/
Body (10mm Separation)	GSM	Back upward	Internal	/	0.457	/
		Face Upward	Internal	/	0.270	/
	GPRS	Back upward	Internal	0.432	/	/
		Face Upward	Internal	0.244	/	/
		EDGE A	Internal	0.081	/	/
		EDGE B	Internal	0.202	/	/
		EDGE C	Internal	0.363	/	/
		EDGE D	Internal	/		/
	EDGE	Back upward	Internal	0.309	/	/

Note: The highest power channel is 512 for GPRS/EDGE mode and 661 for the GSM mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.

Summary of Measurement Results (WCDMA 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
			Device Test channel		
			Channel 4132	Channel 4175	Channel 4233
Right Side Of Head	Cheek/Touch	Internal	/	0.567	/
	Ear/Tilt	Internal	/	0.381	/
Left Side Of Head	Cheek/Touch	Internal	/	0.589	/
	Ear/Tilt	Internal	/	0.376	/
Body (10mm Separation)	Back upward	Internal	/	0.318	/
	Face Upward	Internal	/	0.243	/
	EDGE A	Internal	/	0.514	/
	EDGE B	Internal	/	0.109	/
	EDGE C	Internal	/	0.278	/
	EDGE D	Internal	/		/

Note: The highest power channel is 4175 for WCDMA 850MHz mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.

Summary of Measurement Results (WCDMA 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
			Device Test channel		
			Channel 9262	Channel 9400	Channel 9538
Right Side Of Head	Cheek/Touch	Internal	1.034	1.149	1.110
	Ear/Tilt	Internal	/		0.649
Left Side Of Head	Cheek/Touch	Internal	1.084	0.935	0.996
	Ear/Tilt	Internal	/		0.599
Body (10mm Separation)	Back upward	Internal	1.048	1.072	1.109
	Face Upward	Internal	/	/	0.716
	EDGE A	Internal	/	/	0.203
	EDGE B	Internal	/	/	0.564
	EDGE C	Internal	/	/	0.507
	EDGE D	Internal	/	/	/

Note: The highest power channel is 9538 for WCDMA 1900MHz mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required. In the “back upward” configuration, SAR value is larger than 0.8W/Kg, other channels, 9262 and 9400 should be tested.

Summary of Measurement Results (WLAN 802.11B Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
			Device Test channel		
			Channel 1	Channel 6	Channel 11
Right Side Of Head	Cheek/Touch	Internal	0.185	/	/
	Ear/Tilt	Internal	0.138	/	/
Left Side Of Head	Cheek/Touch	Internal	0.154	/	/
	Ear/Tilt	Internal	0.085	/	/
Body (10mm Separation)	Back upward	Internal	0.135	/	/
	Face Upward	Internal	0.098	/	/
	EDGE A	Internal	/	/	/
	EDGE B	Internal	0.107	/	/
	EDGE C	Internal	/	/	/
	EDGE D	Internal	0.132	/	/

Note：

1. The highest power channel is 1 at 802.1B mode, refer to KDB 648474, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.

2. WCDMA&GSM antenna is located at edge C, the distance between WCDMA&GSM antenna and edge D is 7.6cm larger than 2.5cm. acording with KDB941225 D06, the SAR measurement of edge D of WCDMA and GSM are not required.

3. Wifi antenna is located at edge D, the distance between wifi antenna and edge A is 2.7 cm large than 2.5 cm, the distance between wifi antenna and edge C, is 7.6cm, larger than 2.5cm. acording to KDB941225 D06, the Wifi SAR measurement of edge A&C, are not required.

12. Scaled SAR List

The tune-up power tolerance is as below.

Band	Power
GSM 850 band	PCL = 5, PWR = 33± 1 dBm
PCS 1900 band	PCL = 0, PWR = 27 ± 2 dBm
WCMDA 850 band	MAX PWR = 22 +1/-3dBm
WCDMA 1900 band	MAX PWR = 22 +1/-3dBm

Scaling Factor = Tune-up Maximum Power (Watt) / Measured Maximum Power (Watt)

Scaled SAR = Measure SAR * Scaling Factor

Scaled SAR of GSM 850MHz Band

Phantom Configurations	Device Test Positions	Channel	Test SAR×Scaling Factor= Scaled SAR		
			Meas.SAR	Scaling Factor	Scaled SAR
Right Side Of Head	Cheek/Touch	High	0.610	**1.172**	0.715
	Ear/Tilt		0.373		0.437
Left Side Of Head	Cheek/Touch		0.513		0.601
	Ear/Tilt		0.204		0.239
Body	Back upward		0.725		0.850
	Face Upward		0.488		0.572

Scaling Factor=10^3.4/10^3.31=**1.172**

Scaled SAR of GSM 1900MHz Band

Phantom Configurations	Device Test Positions	Channel	Test SAR×Scaling Factor= Scaled SAR		
			Meas.SAR	Scaling Factor	Scaled SAR
Right Side Of Head	Cheek/Touch	Middle	0.789	**1.189**	0.938
	Ear/Tilt		0.546		0.649
Left Side Of Head	Cheek/Touch		0.707		0.841
	Ear/Tilt		0.492		0.585
Body	Back upward		0.457		0.543
	Face Upward		0.270		0.321

Scaling Factor=10^2.9/10^2.825=**1.189**

Scaled SAR of WCDMA 850MHz Band

Phantom Configurations	Device Test Positions	Channel	Test SAR×Scaling Factor= Scaled SAR		
			Meas.SAR	Scaling Factor	Scaled SAR
Right Side Of Head	Cheek/Touch	Middle	0.567	**1.081**	0.613
	Ear/Tilt		0.381		0.412
Left Side Of Head	Cheek/Touch		0.589		0.637
	Ear/Tilt		0.376		0.406
Body	Back upward		0.318		0.344
	Face Upward		0.243		0.263
	EDGE A		0.514		0.556
	EDGE B		0.109		0.118
	EDGE C		0.278		0.301

Scaling Factor=10^2.3/10^2.266=**1.081**

Scaled SAR of WCDMA 1900MHz Band

Phantom Configurations	Device Test Positions	Channel	Test SAR×Scaling Factor= Scaled SAR		
			Meas.SAR	Scaling Factor	Scaled SAR
Right Side Of Head	Cheek/Touch	Low	1.034	**1.089**	1.126
Left Side Of Head	Cheek/Touch		1.084		1.180
Body	Back upward		1.048		1.141

Scaling Factor=10^2.3/10^2.263=**1.089** (9262)

Phantom Configurations	Device Test Positions	Channel	Test SAR×Scaling Factor= Scaled SAR		
			Meas.SAR	Scaling Factor	Scaled SAR
Right Side Of Head	Cheek/Touch	Middle	1.149	**1.135**	1.304
Left Side Of Head	Cheek/Touch		0.935		1.061
Body	Back upward		1.072		1.217

Scaling Factor=10^2.3/10^2.245=**1.135** (9400)

Phantom Configurations	Device Test Positions	Channel	Test SAR×Scaling Factor= Scaled SAR		
			Meas.SAR	Scaling Factor	Scaled SAR
Right Side Of Head	Cheek/Touch	High	1.110	**1.084**	1.203
	Ear/Tilt		0.649		0.704
Left Side Of Head	Cheek/Touch		0.996		1.080
	Ear/Tilt		0.599		0.649
Body	Back upward		1.109		1.202
	Face Upward		0.716		0.776
	EDGE A		0.203		0.220
	EDGE B		0.564		0.611
	EDGE C		0.507		0.550

Scaling Factor=10^2.3/10^2.265=**1.084** (9538)

Note: Please refer to Page 29 to 32 for Measured SAR， Page 24 to 27 for Measured Maximum Power,

13. Multiple Transmitters Evaluation

The are three transmitters build in EUT, As follwing :

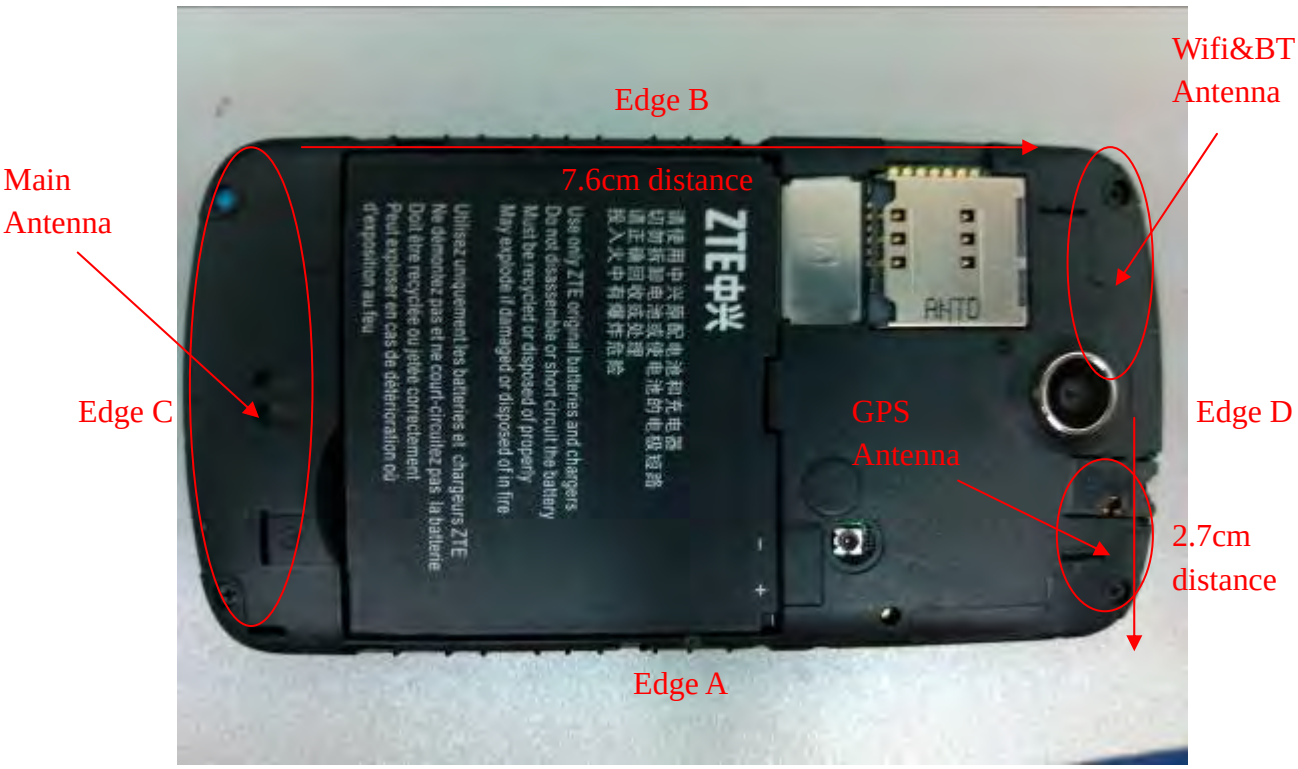

1. The Wifi mode Head Max. 1-g SAR vauel is **0.185**W/Kg, and the Main Antenna Head Max. 1-g SAR vauel is **1.149**W/Kg, the sum of 1-g SAR vauel is **1.334** W/Kg less than 1.6W/Kg ;
   The Wifi mode Body Max. 1-g SAR vauel is **0.135**W/Kg, and the Main Antenna Body Max. 1-g SAR vauel is **1.109**W/Kg, the sum of 1-g SAR vauel is **1.244** W/Kg less than 1.6W/Kg.
   According with KDB 648474 D01, when the sum of the 1-g SAR is <1.6 W/kg for all simultaneous transmitting antennas, and the Simultaneous Transmission SAR is not required.
2. The distance between Main Antenna and WIFI antenna is 7.6cm.
3. The GSM and WCDMA can't simultaneous transmitting.
4. The BT Max. Peak output power is 8.779dBm (7.55mW) less than 12.25mW, and the distance between BT antenna and main antenna is 6.1 cm larger than 2.5 cm. Accord with KDB 648474 D01, Bluetooth Stand-alone SAR is not required.

Annex A EUT Setup Photos

1 EUT Left Head Touch Cheek Position

2 EUT Left Head Tilt15 Position

3 EUT Right Head Touch Cheek Position

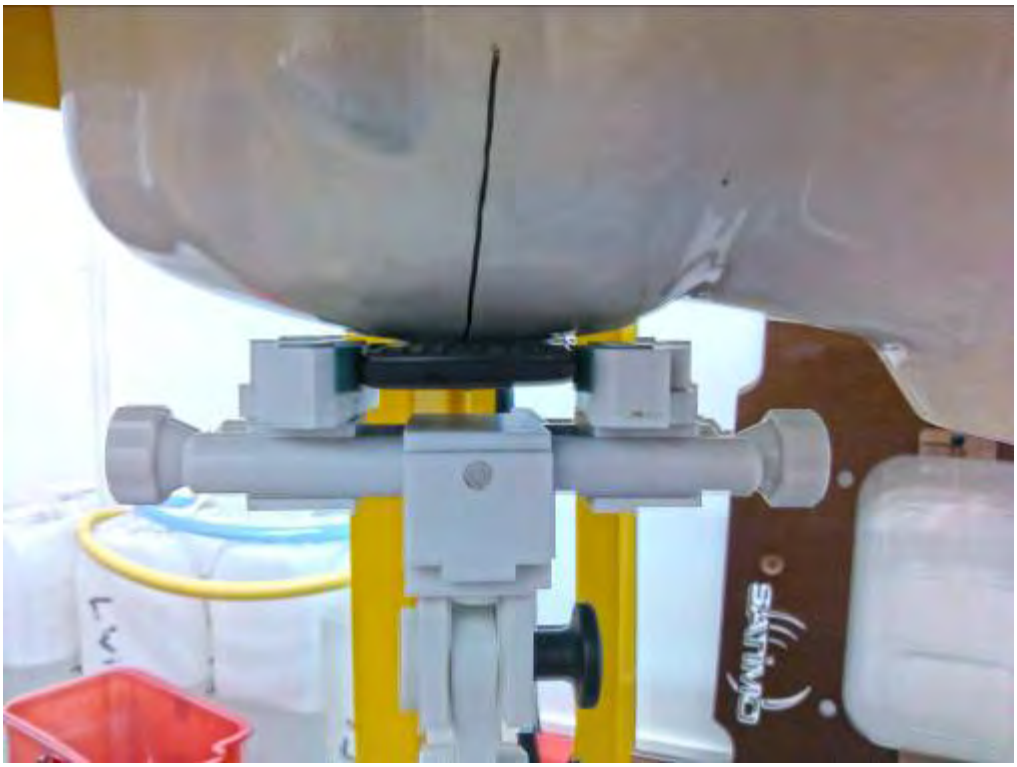

4 EUT Right Head Tilt15 Position

5 Side Position

6 Edge A

7 Edge B

8 Edge C

9 Edge D

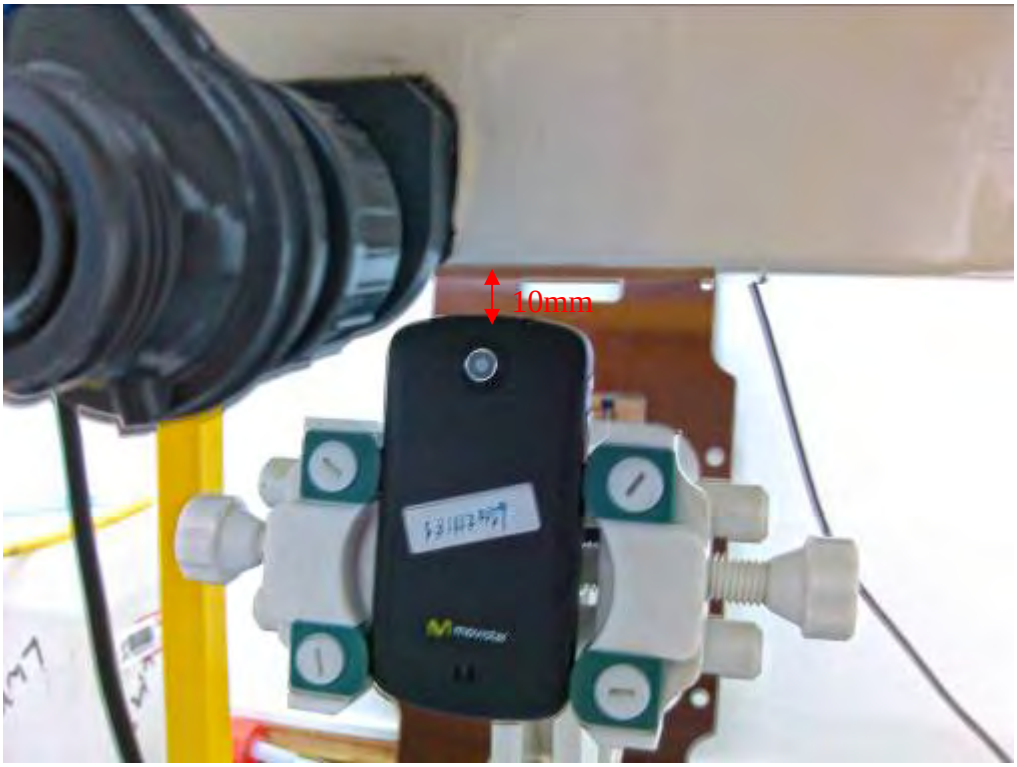

Liquid Level Photo

Annex B Graph Test Results

BAND	PARAMETERS
GSM850	Measurement 1: Right Head with Cheek device position on High Channel in GSM mode Measurement 2: Right Head with Tilt device position on High Channel in GSM mode Measurement 3: Left Head with Cheek device position on High Channel in GSM mode Measurement 4: Left Head with Tilt device position on High Channel in GSM mode Measurement 5: Validation Plane with Body device position on High Channel in GSM mode Measurement 6: Validation Plane with Body device position on High Channel in GSM mode Measurement 7: Validation Plane with Body device position on Low Channel in GPRS mode Measurement 8: Validation Plane with Body device position on Low Channel in GPRS mode Measurement 9: Validation Plane with Body device position on Low Channel in GPRS mode Measurement 10: Validation Plane with Body device position on Low Channel in GPRS mode Measurement 11: Validation Plane with Body device position on Low Channel in GPRS mode Measurement 12: Validation Plane with Body device position on High Channel in EDGE mode
GSM1900	Measurement 13: Right Head with Cheek device position on Middle Channel in GSM mode Measurement 14: Right Head with Tilt device position on Middle Channel in GSM mode Measurement 15: Left Head with Cheek device position on Middle Channel in GSM mode Measurement 16: Left Head with Tilt device position on Middle Channel in GSM mode Measurement 17: Validation Plane with Body device position on Middle Channel in GSM mode Measurement 18: Validation Plane with Body device position on Middle Channel in GSM mode Measurement 19: Validation Plane with Body device position on Low Channel in GPRS mode Measurement 20: Validation Plane with Body device position on Low Channel in GPRS mode

	Measurement 21: Validation Plane with Body device position on Low Channel in GPRS mode Measurement 22: Validation Plane with Body device position on Low Channel in GPRS mode Measurement 23: Validation Plane with Body device position on Low Channel in GPRS mode Measurement 24: Validation Plane with Body device position on Low Channel in EDGE mode
WCDMA 850	Measurement 25: Right Head with Cheek device position on Middle Channel in CDMA mode Measurement 26: Right Head with Tilt device position on Middle Channel in CDMA mode Measurement 27: Left Head with Cheek device position on Middle Channel in CDMA mode Measurement 28: Left Head with Tilt device position on Middle Channel in CDMA mode Measurement 29: Validation Plane with Body device position on Middle Channel in CDMA mode Measurement 30: Validation Plane with Body device position on Middle Channel in CDMA mode Measurement 31: Validation Plane with Body device position on Middle Channel in CDMA mode Measurement 32: Validation Plane with Body device position on Middle Channel in CDMA mode Measurement 33: Validation Plane with Body device position on Middle Channel in CDMA mode
WCDMA 1900	Measurement 34: Right Head with Cheek device position on Low Channel in CDMA mode Measurement 35: Right Head with Cheek device position on Middle Channel in CDMA mode Measurement 36: Right Head with Cheek device position on High Channel in CDMA mode Measurement 37: Right Head with Tilt device position on High Channel in CDMA mode Measurement 38: Left Head with Cheek device position on Low Channel in CDMA mode Measurement 39: Left Head with Cheek device position on Middle Channel in CDMA mode Measurement 40: Left Head with Cheek device position on High Channel in CDMA mode Measurement 41: Left Head with Tilt device position on High Channel in CDMA mode Measurement 42: Validation Plane with Body device position on Low Channel in CDMA mode

	Measurement 43: Validation Plane with Body device position on Middle Channel in CDMA mode Measurement 44: Validation Plane with Body device position on High Channel in CDMA mode Measurement 45: Validation Plane with Body device position on High Channel in CDMA mode Measurement 46: Validation Plane with Body device position on High Channel in CDMA mode Measurement 47: Validation Plane with Body device position on High Channel in CDMA mode Measurement 48: Validation Plane with Body device position on High Channel in CDMA mode
WIFI 802.11B	Measurement 49: Right Head with Cheek device position on Low Channel in DSSS mode Measurement 50: Right Head with Tilt device position on Low Channel in DSSS mode Measurement 51: Left Head with Cheek device position on Low Channel in DSSS mode Measurement 52: Left Head with Tilt device position on Low Channel in DSSS mode Measurement 53: Validation Plane with Body device position on Low Channel in DSSS mode Measurement 54: Validation Plane with Body device position on Low Channel in DSSS mode Measurement 55: Validation Plane with Body device position on Low Channel in DSSS mode Measurement 56: Validation Plane with Body device position on Low Channel in DSSS mode

MEASUREMENT 1

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 8 minutes 31 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift (%)	-1.920000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.4°C
ConvF:	28.479, 25.214, 27.196
Crest factor:	1:8

SURFACE SAR	VOLUME SAR
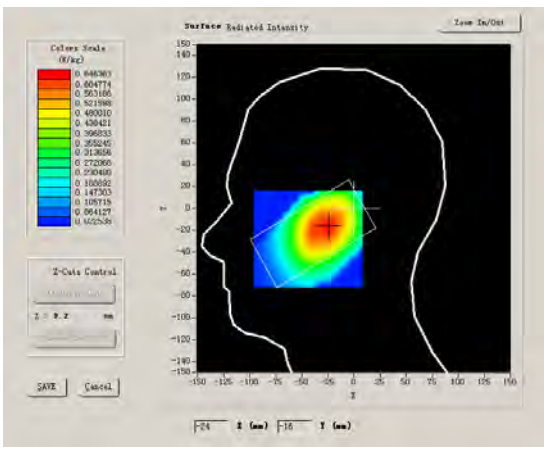	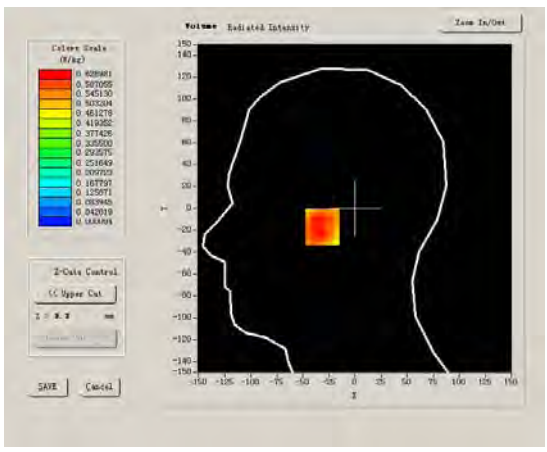

Maximum location: X=-25.00, Y=-17.00

SAR 10g (W/Kg)	0.429463
SAR 1g (W/Kg)	0.610248

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6154	0.4475	0.3525	0.2540	0.1811	0.1321

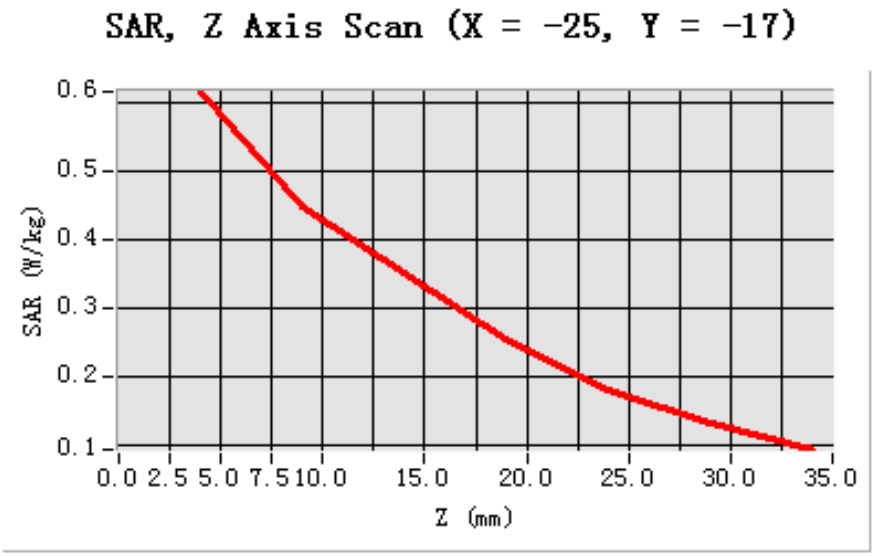

3D sceen shot	Hot spot position
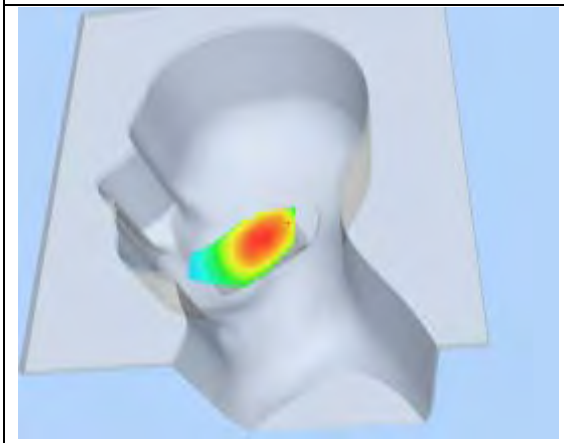	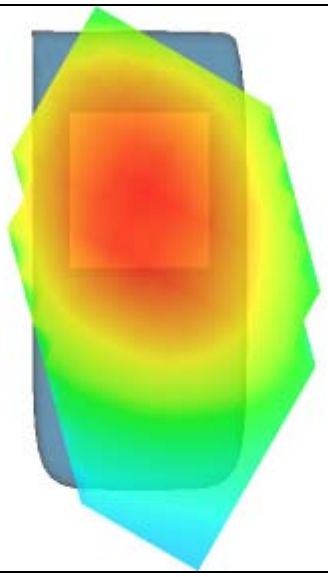

MEASUREMENT 2

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 7 minutes 27 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift (%)	-0.270000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.4°C
ConvF:	28.479, 25.214, 27.196
Crest factor:	1:8

SURFACE SAR	VOLUME SAR
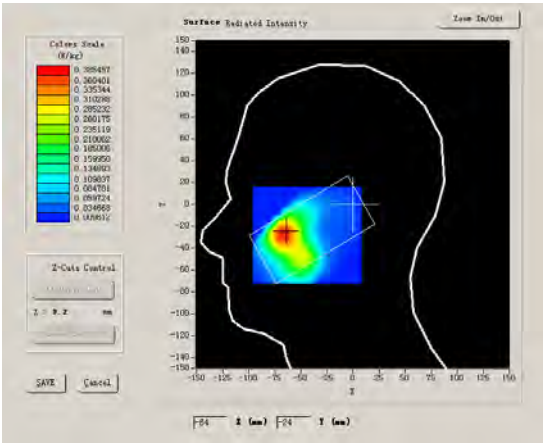	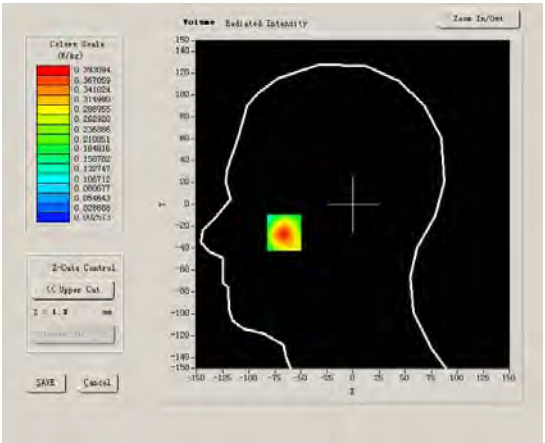

Maximum location: X=-66.00, Y=-26.00

SAR 10g (W/Kg)	0.188401
SAR 1g (W/Kg)	0.373034

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3931	0.1831	0.0911	0.0429	0.0220	0.0111

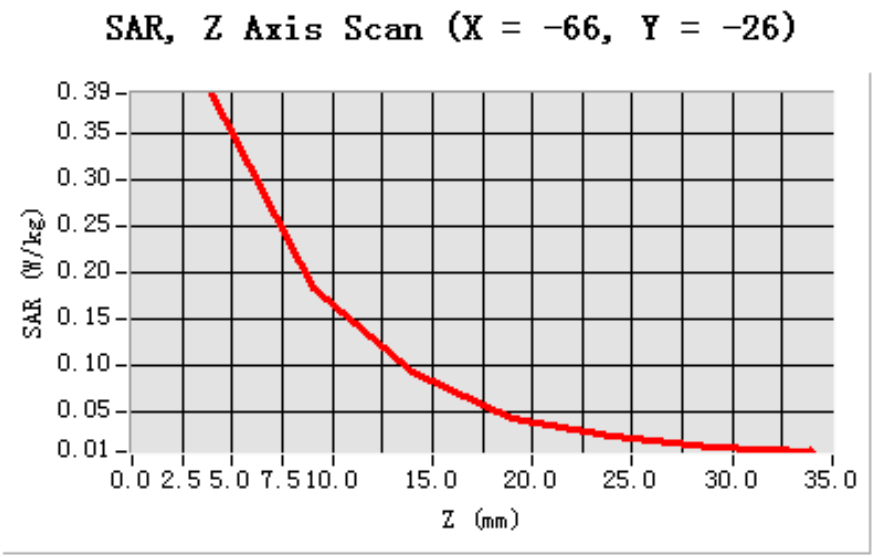

3D sceen shot	Hot spot position
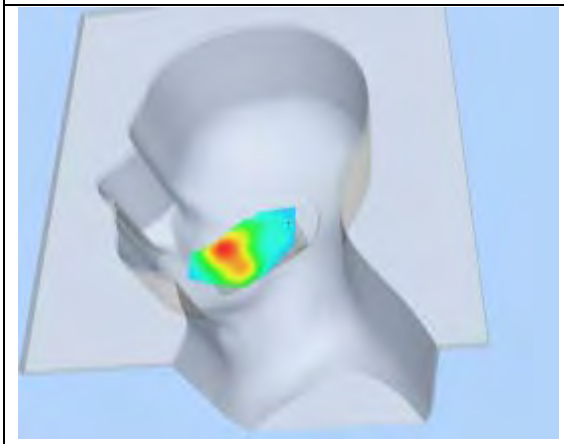	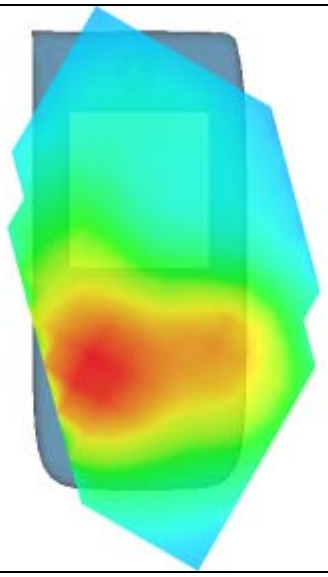

MEASUREMENT 3

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 7 minutes 59 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift (%)	-1.850000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.4°C
ConvF:	28.479, 25.214, 27.196
Crest factor:	1:8

SURFACE SAR	VOLUME SAR
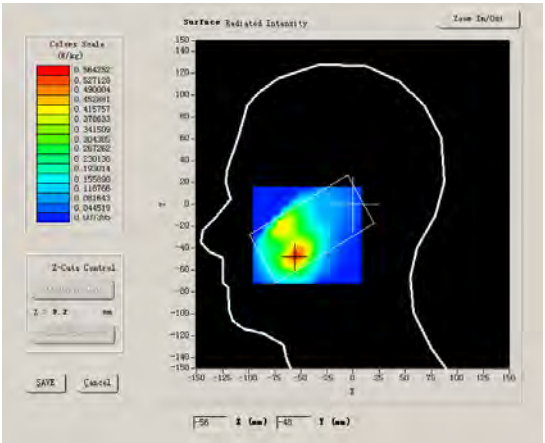	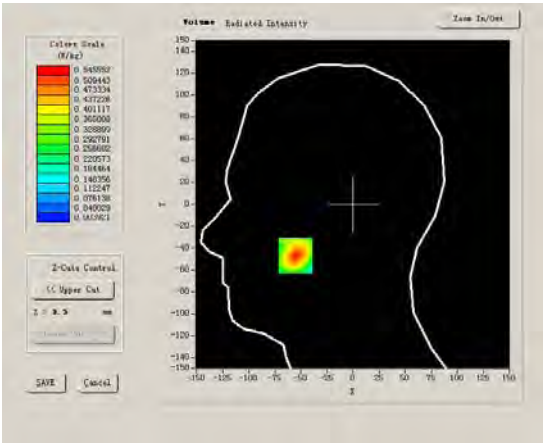

Maximum location: X=-55.00, Y=-47.00

SAR 10g (W/Kg)	0.250811
SAR 1g (W/Kg)	0.512761

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5456	0.2522	0.1195	0.0559	0.0290	0.0125

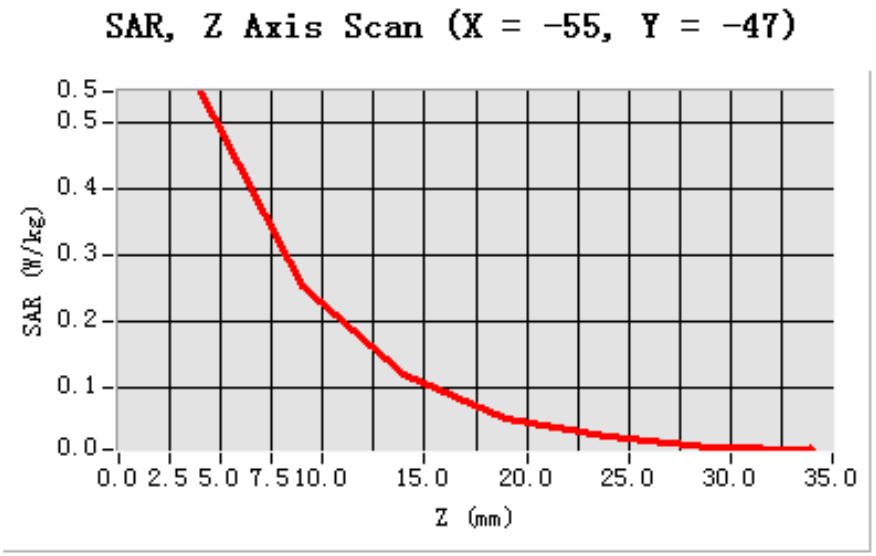

3D sceen shot	Hot spot position
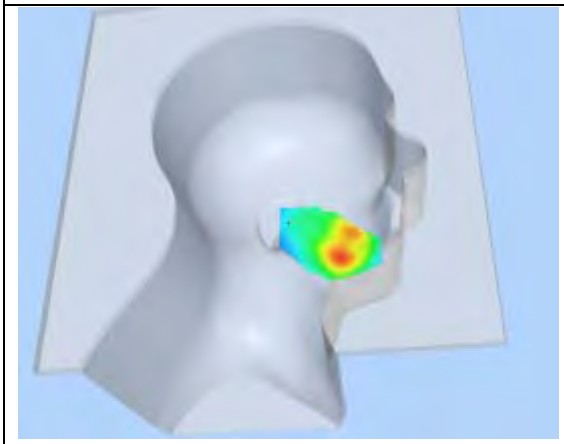	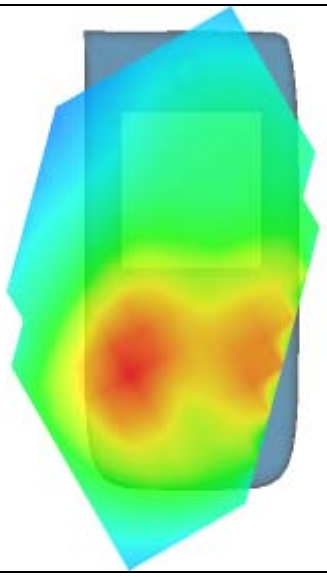

MEASUREMENT 4

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 8 minutes 7 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift (%)	2.000000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.4°C
ConvF:	28.479, 25.214, 27.196
Crest factor:	1:8

SURFACE SAR	VOLUME SAR
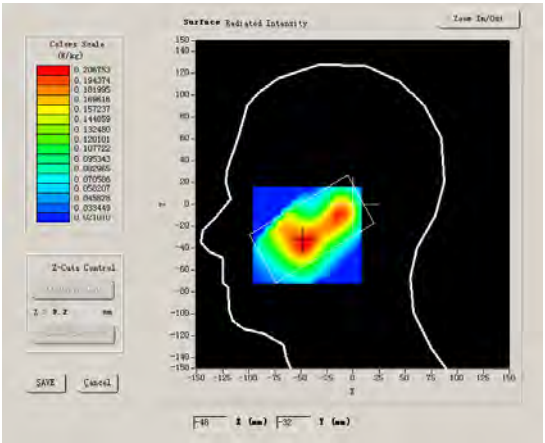	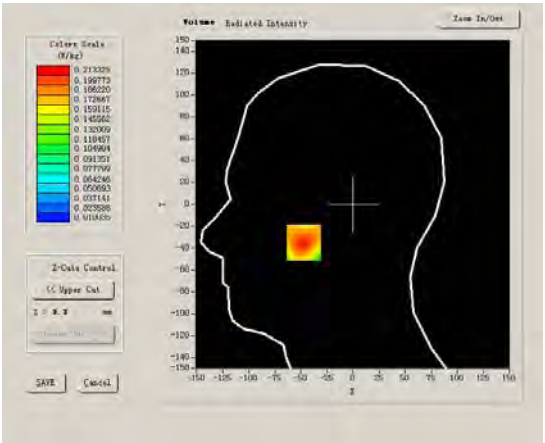

Maximum location: X=-47.00, Y=-35.00

SAR 10g (W/Kg)	0.124184
SAR 1g (W/Kg)	0.204286

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2133	0.1279	0.0808	0.0533	0.0320	0.0197

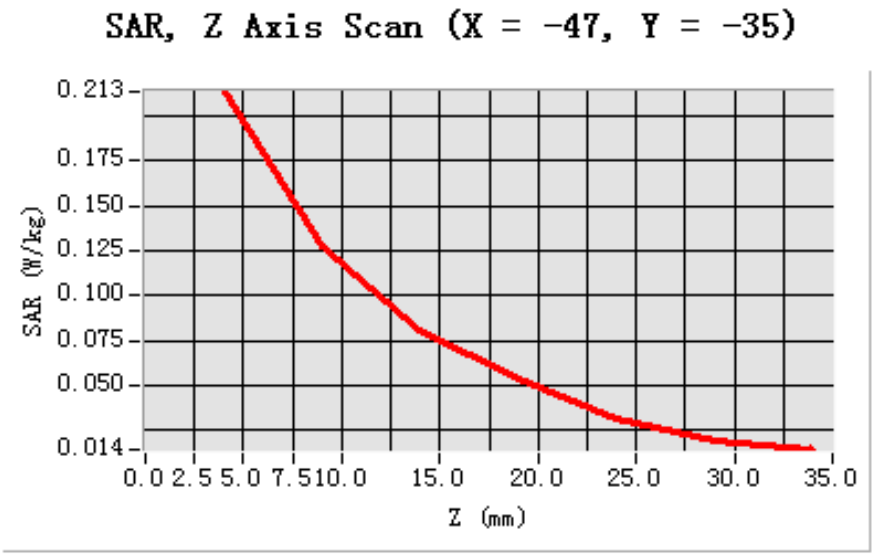

3D sceen shot	Hot spot position
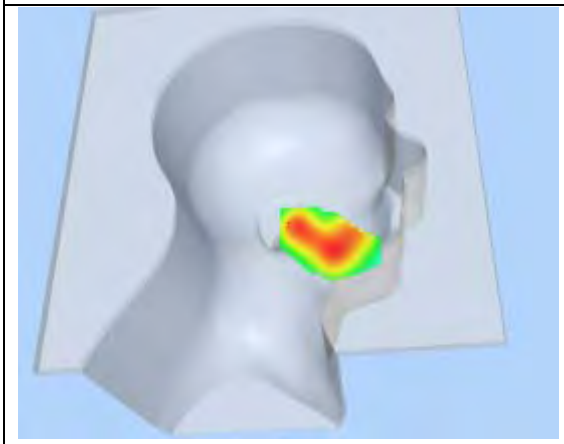	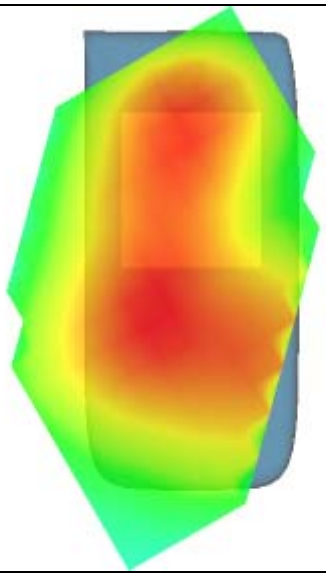

MEASUREMENT 5

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 1 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-2.640000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.4°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:8

SURFACE SAR	VOLUME SAR
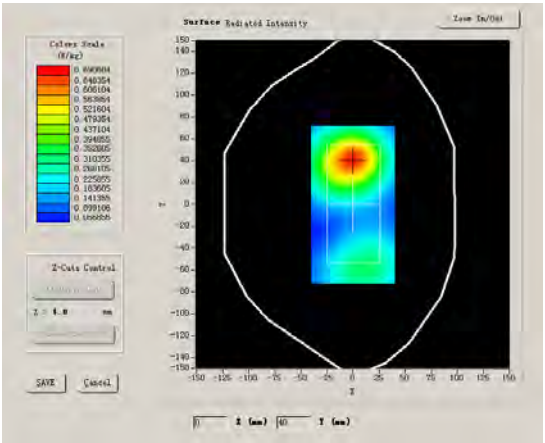	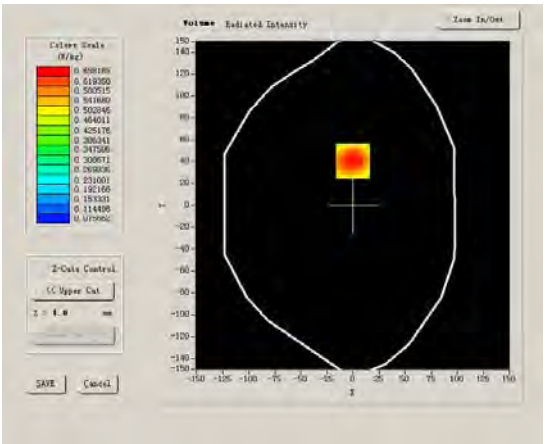

Maximum location: X=0.00, Y=41.00

SAR 10g (W/Kg)	0.473130
SAR 1g (W/Kg)	0.725381

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7473	0.4749	0.3299	0.2456	0.1874	0.1446

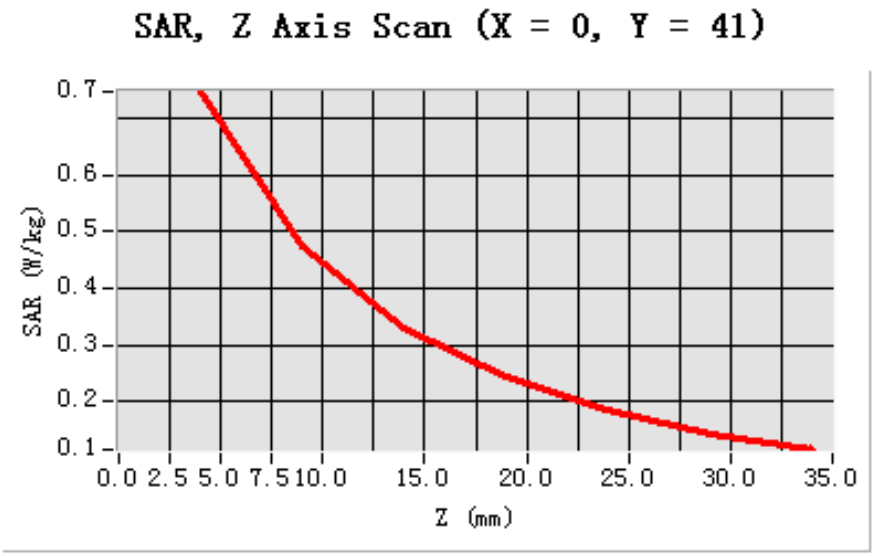

3D sceen shot	Hot spot position
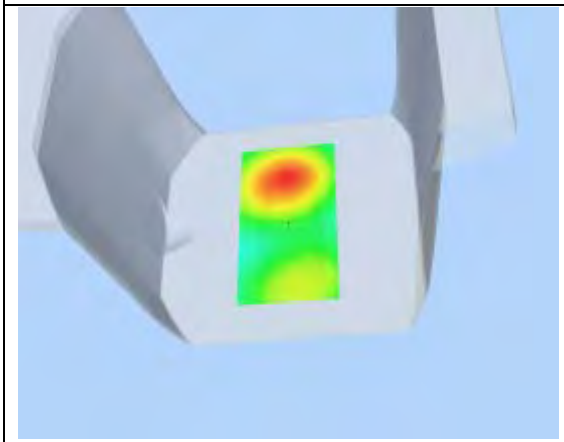	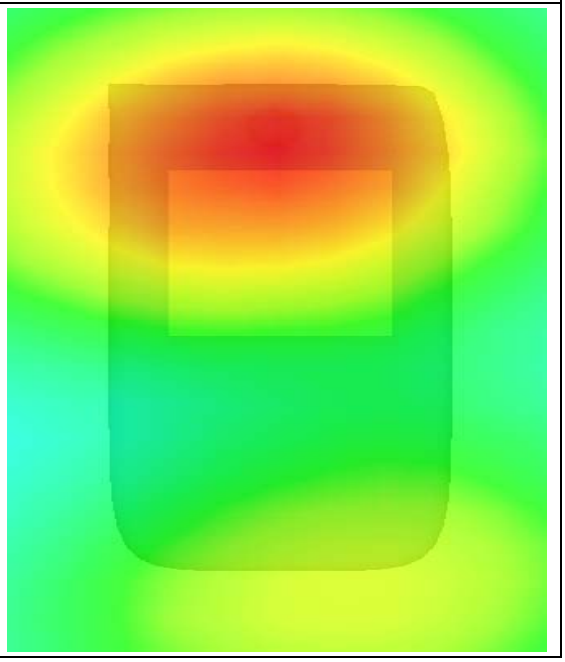

MEASUREMENT 6

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	1.630000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.4°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:8

SURFACE SAR	VOLUME SAR
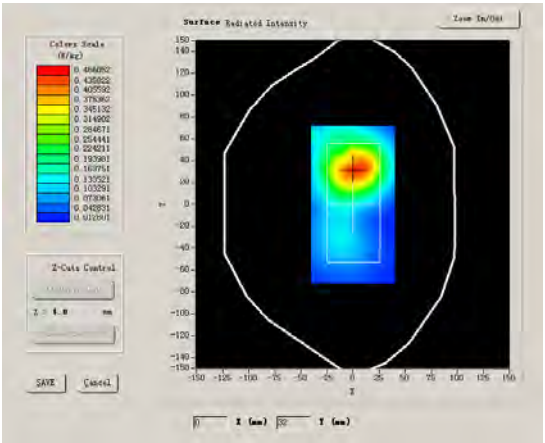	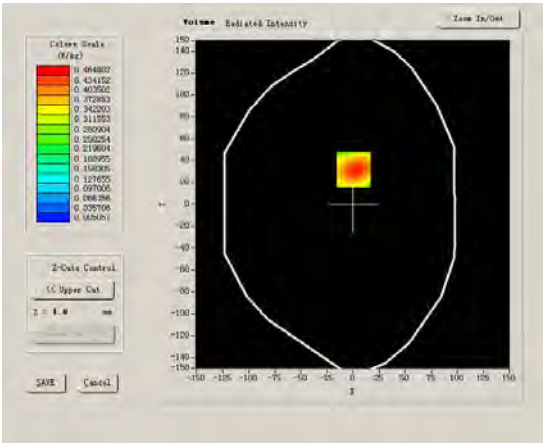

Maximum location: X=1.00, Y=32.00

SAR 10g (W/Kg)	0.260819
SAR 1g (W/Kg)	0.488244

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5061	0.2432	0.1248	0.0635	0.0345	0.0194

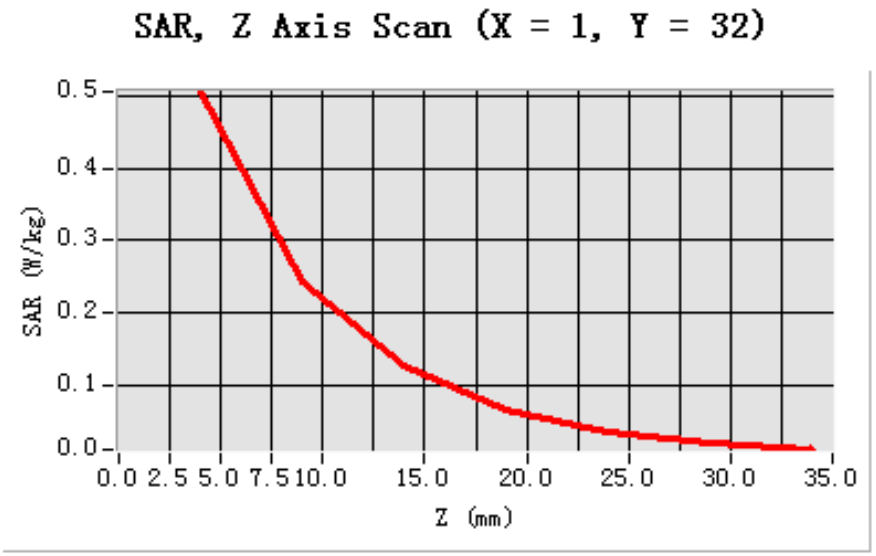

3D sceen shot	Hot spot position
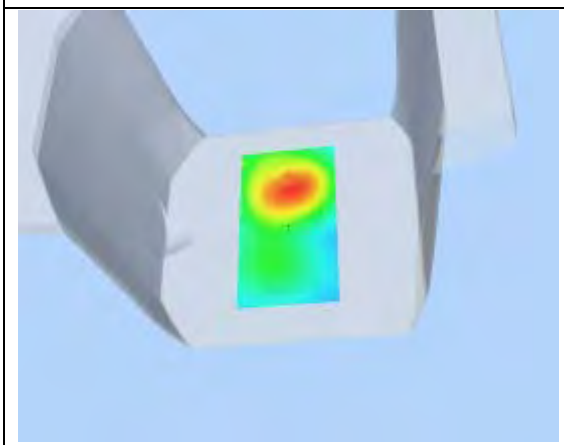	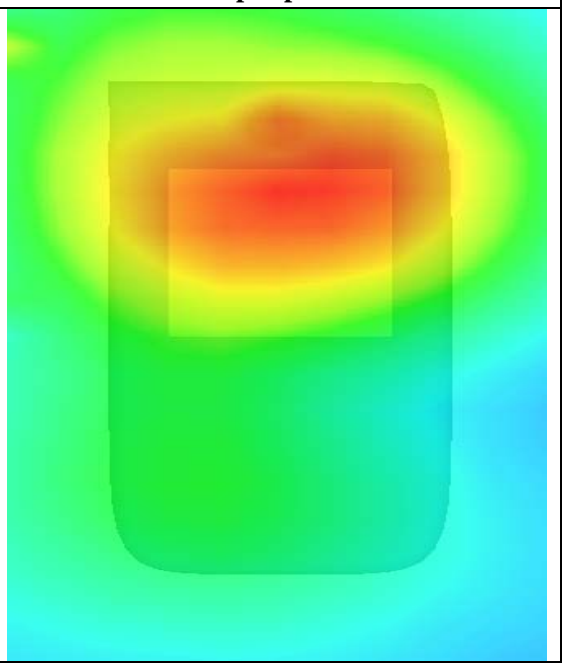

MEASUREMENT 7

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.20012
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.480000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.4°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2

SURFACE SAR	VOLUME SAR
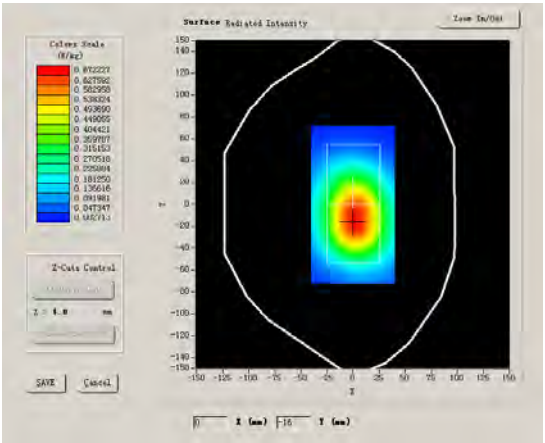	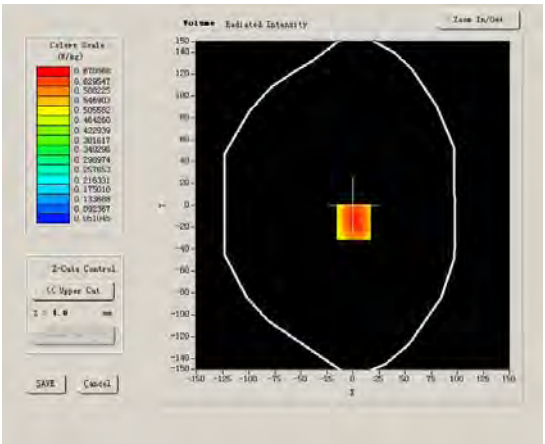

Maximum location: X=1.00, Y=-15.00

SAR 10g (W/Kg)	0.474628
SAR 1g (W/Kg)	0.703832

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7365	0.5135	0.3549	0.2476	0.1723	0.1189

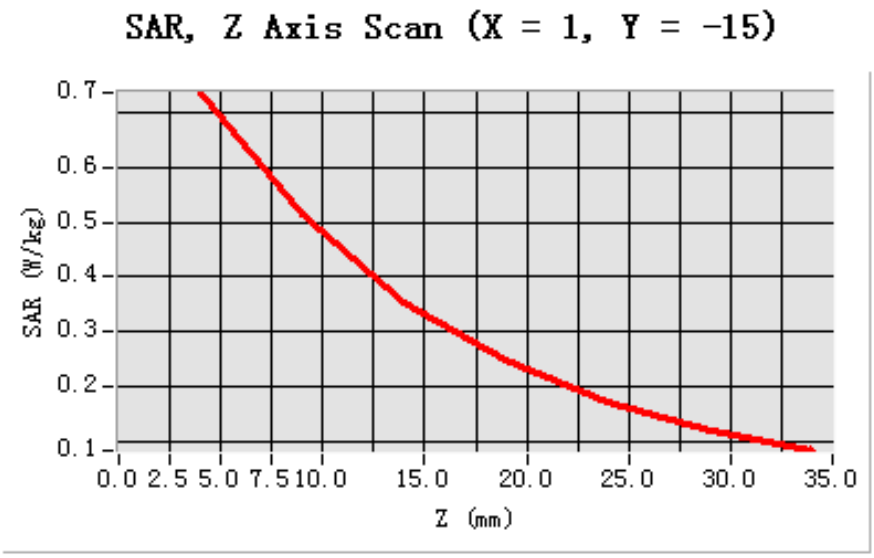

3D sceen shot	Hot spot position
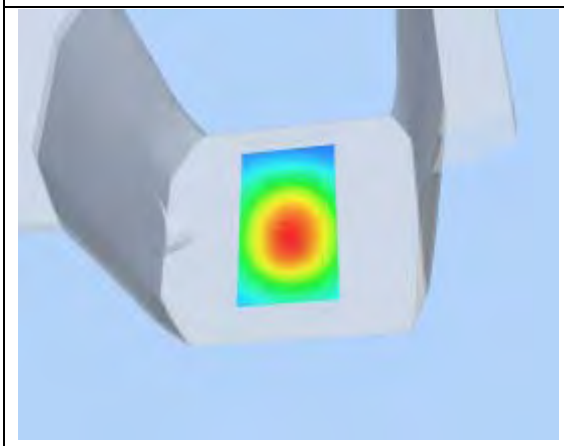	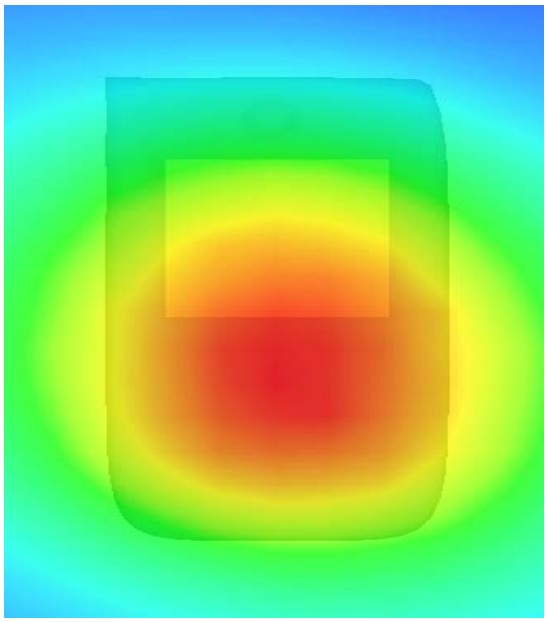

MEASUREMENT 8

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 4 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel):

Frequency (MHz)	824.20012
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.370000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.4°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2

SURFACE SAR	VOLUME SAR
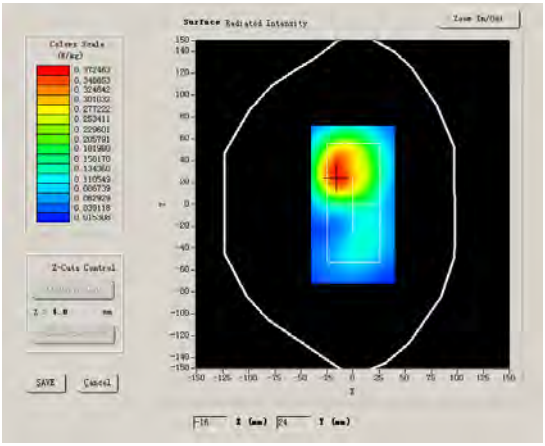	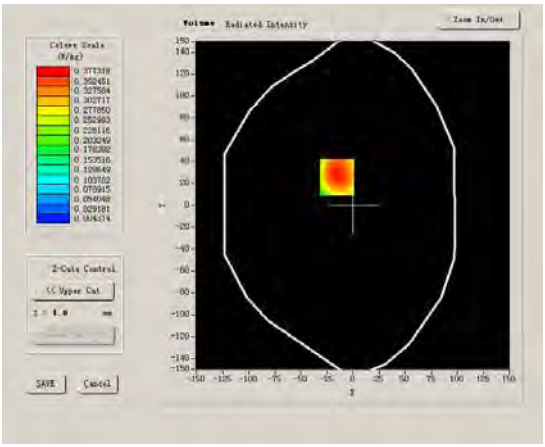

Maximum location: X=-15.00, Y=26.00

SAR 10g (W/Kg)	0.206241
SAR 1g (W/Kg)	0.385211

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4109	0.2025	0.1048	0.0537	0.0288	0.0158

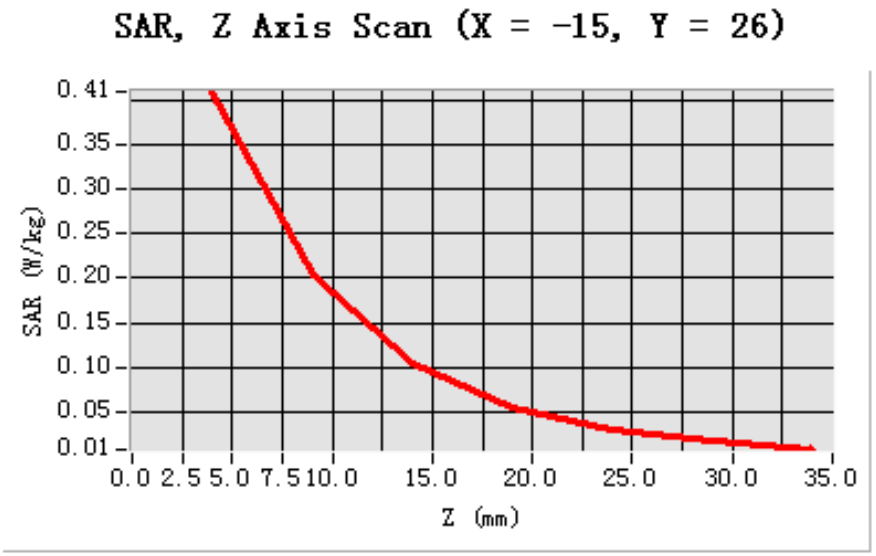

3D sceen shot	Hot spot position
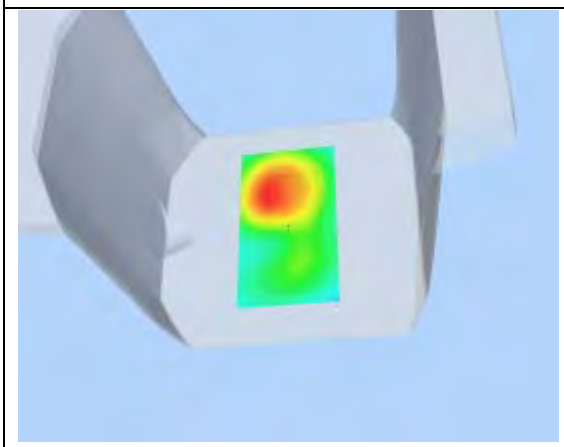	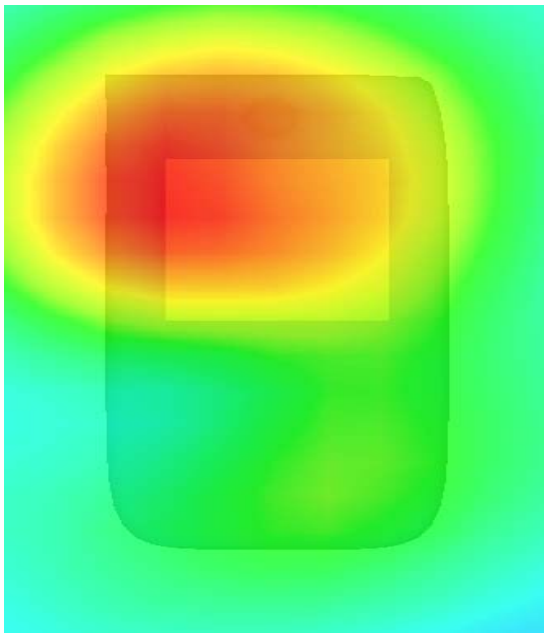

MEASUREMENT 9

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 6 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.014999
Relative permittivity	21.332850
Conductivity (S/m)	1.005962
Power drift (%)	-1.620000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

SURFACE SAR	VOLUME SAR
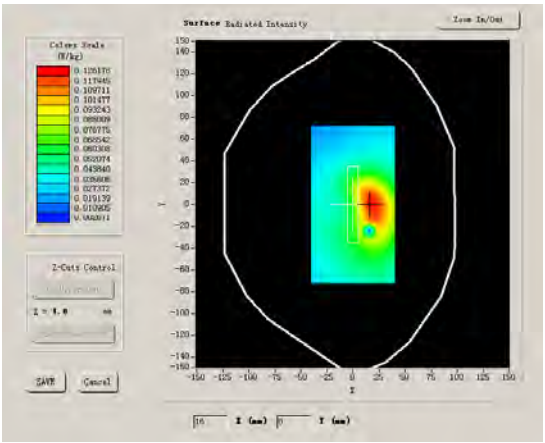	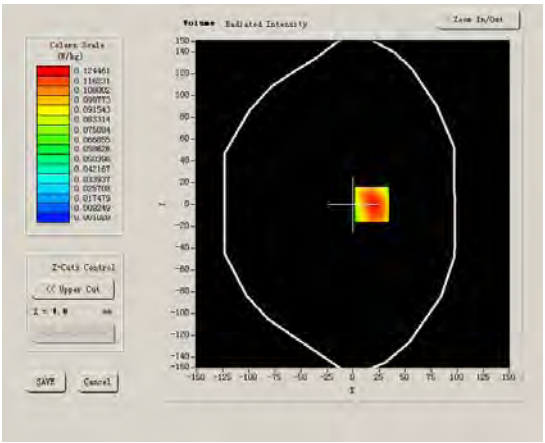

Maximum location: X=18.00, Y=0.00

SAR 10g (W/Kg)	0.084234
SAR 1g (W/Kg)	0.136156

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1413	0.0877	0.0547	0.0367	0.0235	0.0150

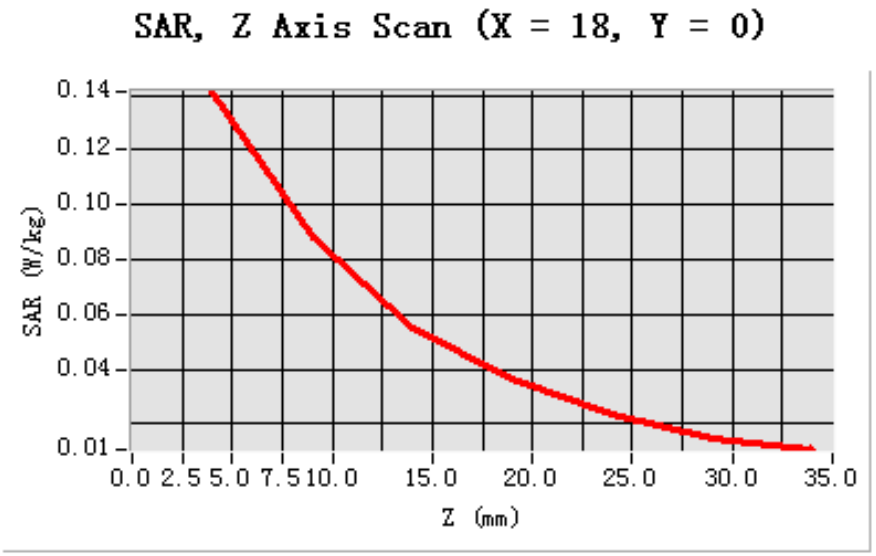

3D sceen shot	Hot spot position
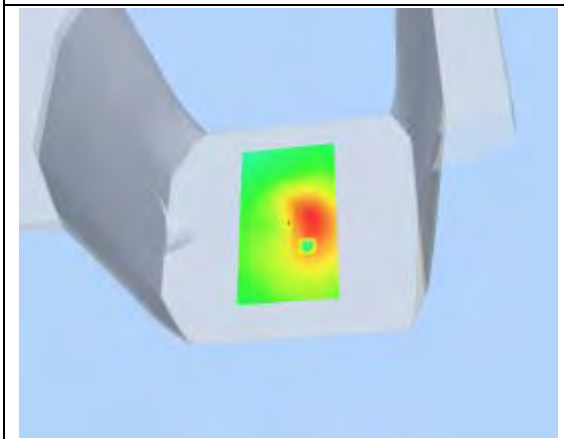	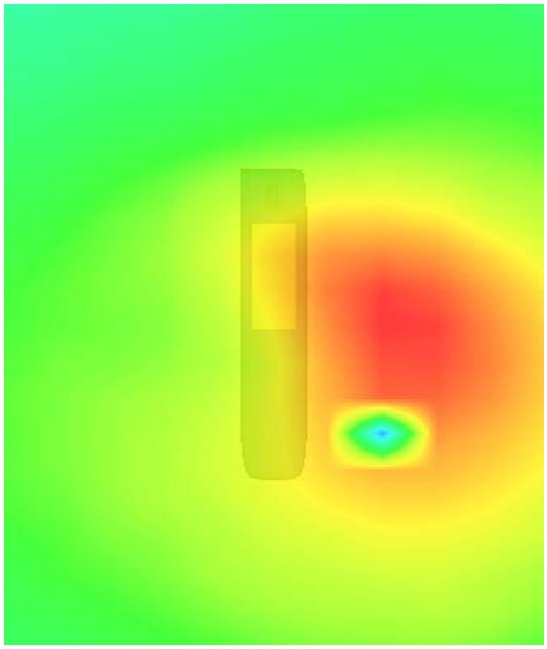

MEASUREMENT 10

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.014999
Relative permittivity	21.332850
Conductivity (S/m)	1.005962
Power drift (%)	-1.230000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

SURFACE SAR	VOLUME SAR
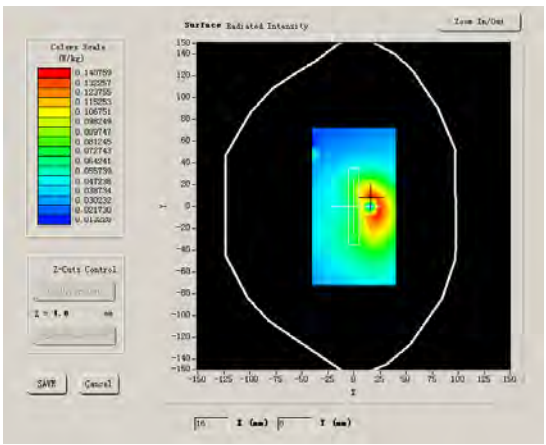	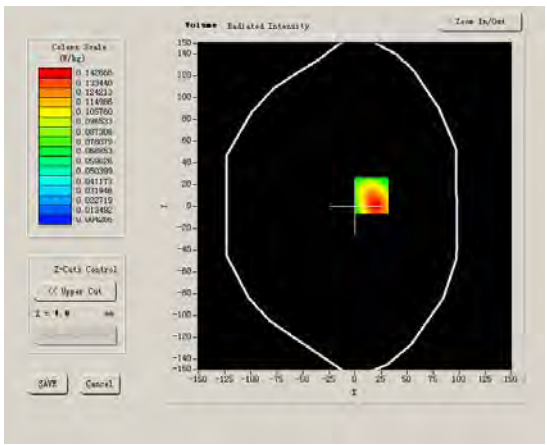

Maximum location: X=16.00, Y=10.00

SAR 10g (W/Kg)	0.090615
SAR 1g (W/Kg)	0.151654

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1526	0.0910	0.0573	0.0383	0.0250	0.0165

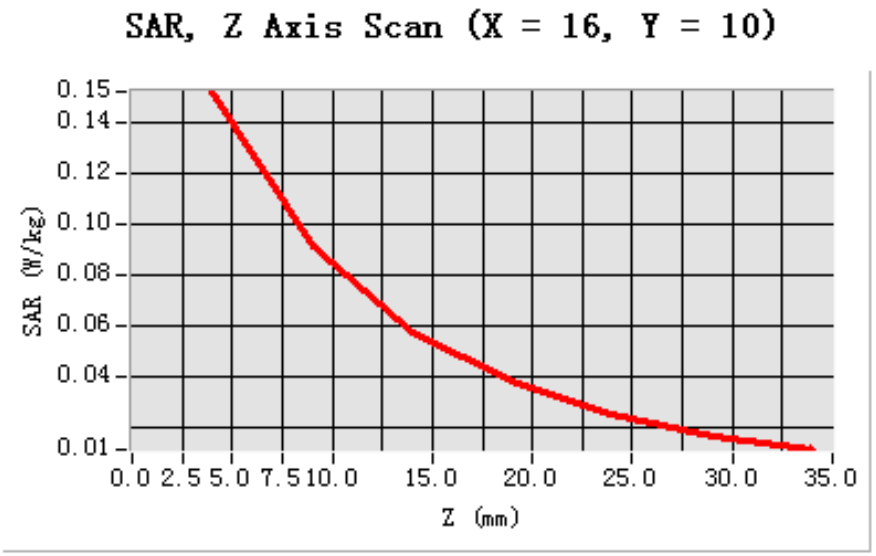

3D sceen shot	Hot spot position
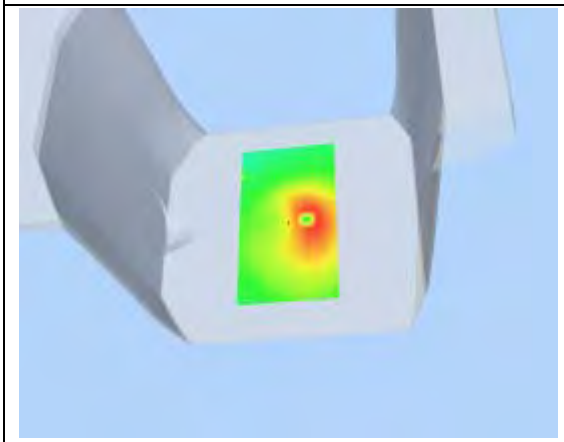	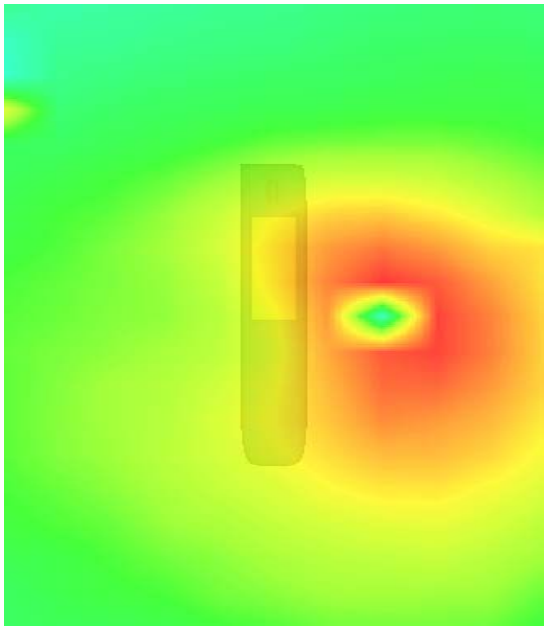

MEASUREMENT 11

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.014999
Relative permittivity	21.332850
Conductivity (S/m)	1.005962
Power drift (%)	2.070000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

SURFACE SAR	VOLUME SAR
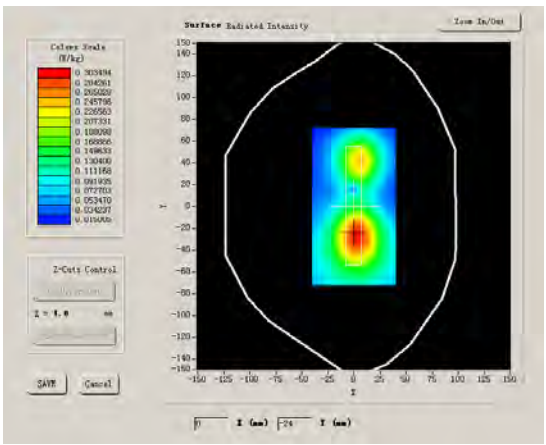	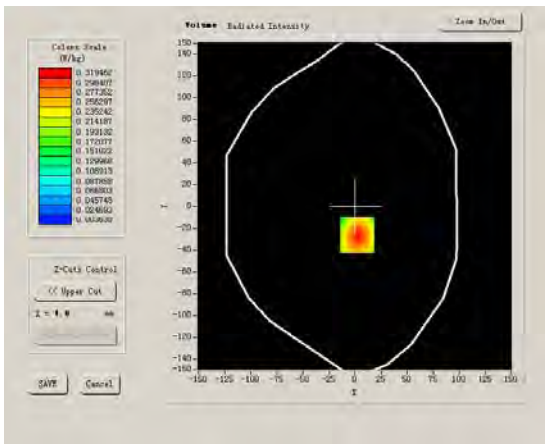

Maximum location: X=2.00, Y=-26.00

SAR 10g (W/Kg)	0.166357
SAR 1g (W/Kg)	0.346938

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3269	0.1539	0.0776	0.0390	0.0195	0.0106

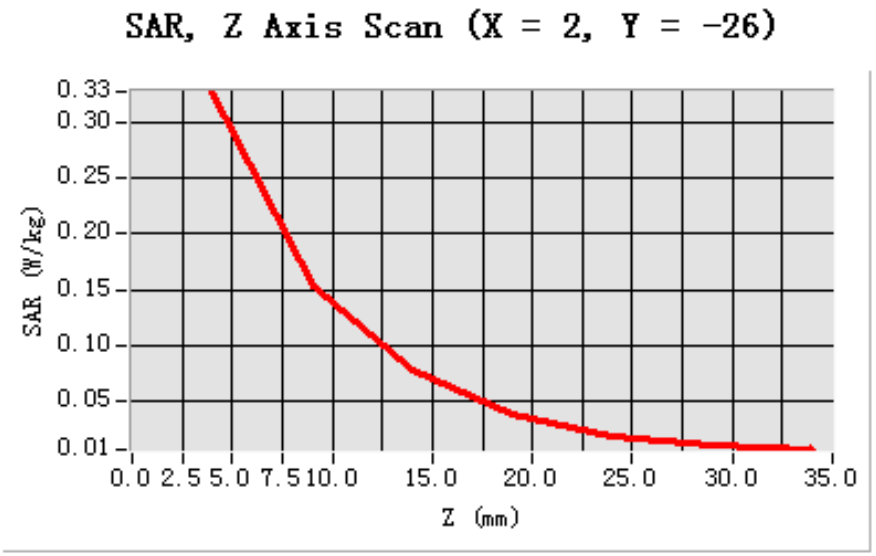

3D sceen shot	Hot spot position
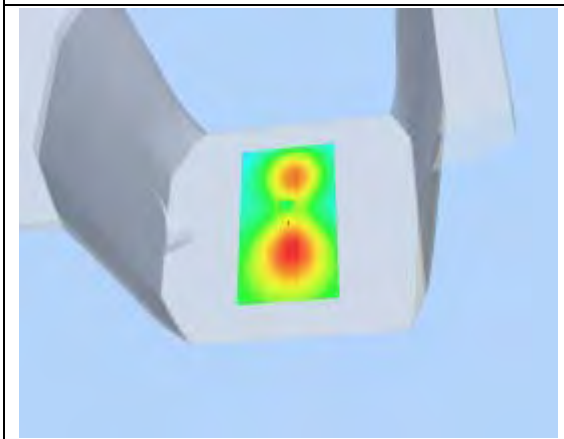	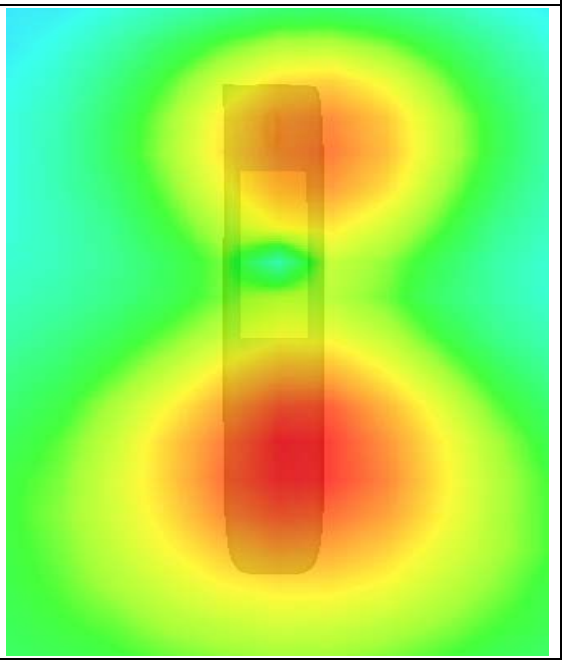

MEASUREMENT 12

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	EDGE

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	54.014999
Relative permittivity	21.332850
Conductivity (S/m)	1.005962
Power drift (%)	0.440000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

SURFACE SAR	VOLUME SAR
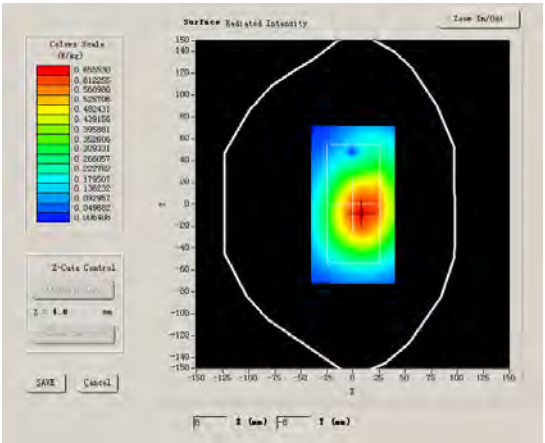	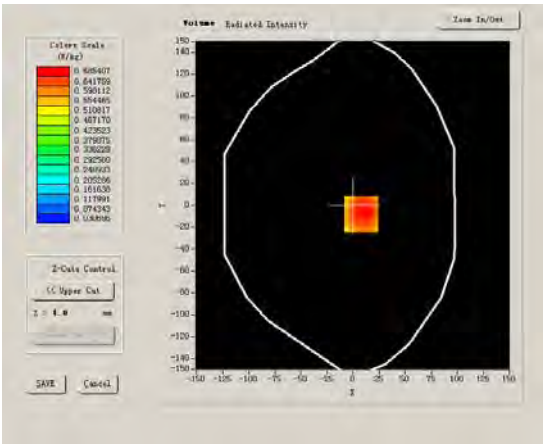

Maximum location: X=8.00, Y=-8.00

SAR 10g (W/Kg)	0.454134
SAR 1g (W/Kg)	0.639757

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6854	0.4932	0.3534	0.2492	0.1776	0.1278

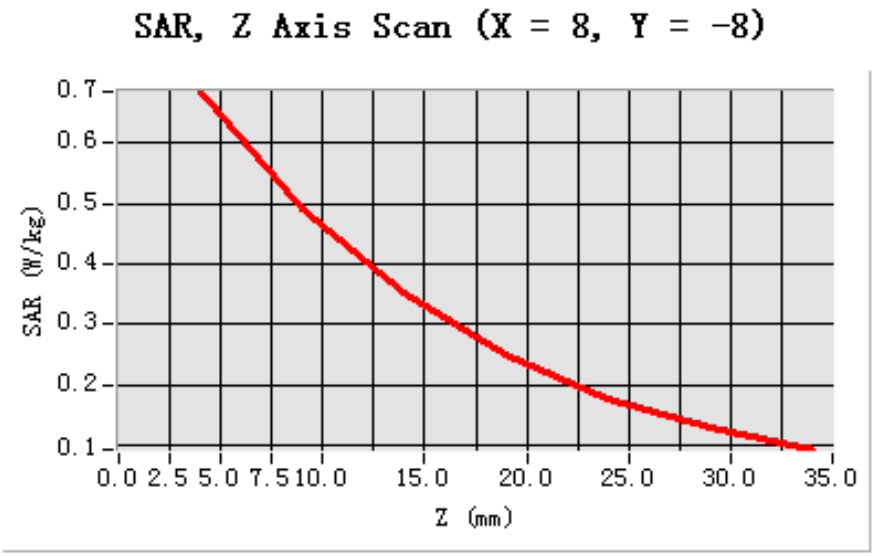

3D sceen shot	Hot spot position
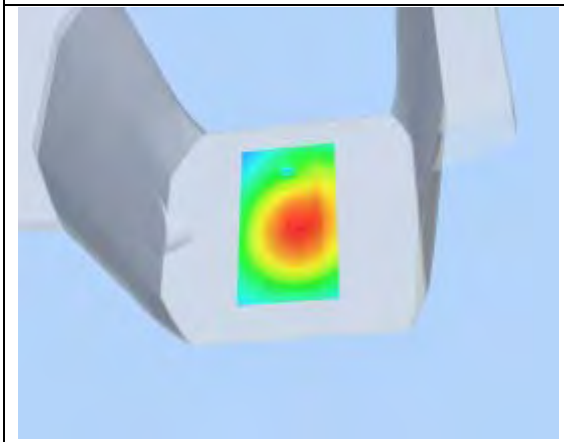	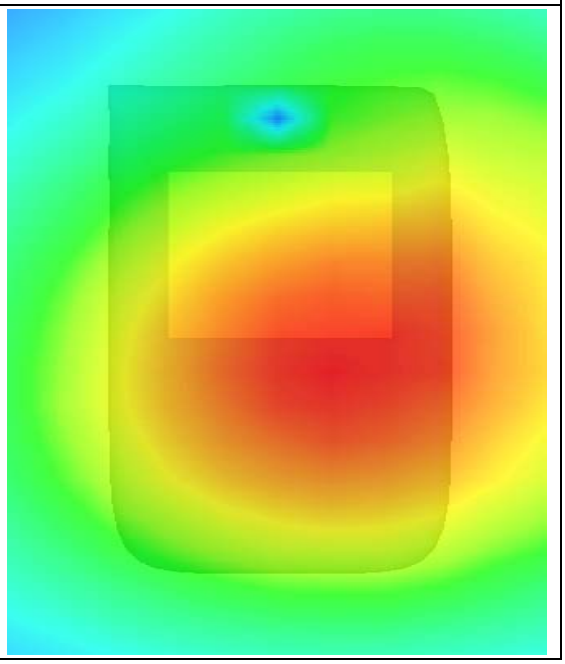

MEASUREMENT 13

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 8 minutes 21 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000
Conductivity (S/m)	1.436111
Power drift (%)	-1.100000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.6°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

SURFACE SAR	VOLUME SAR
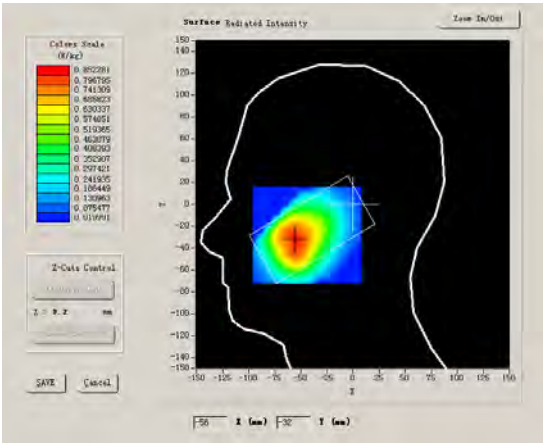	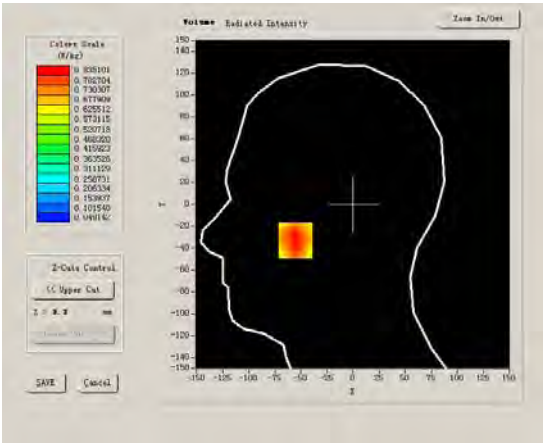

Maximum location: X=-55.00, Y=-33.00

SAR 10g (W/Kg)	0.440788
SAR 1g (W/Kg)	0.789454

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.8151	0.5691	0.4090	0.2821	0.2032	0.1445

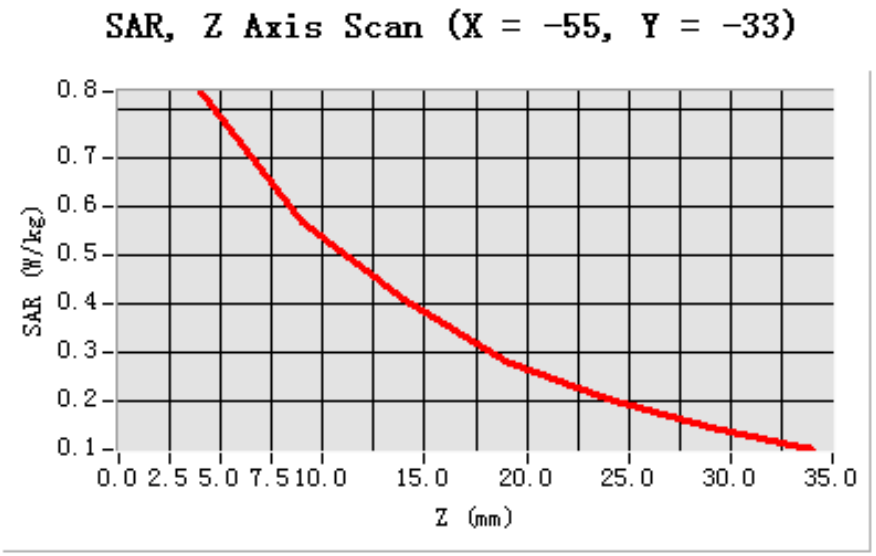

3D sceen shot	Hot spot position
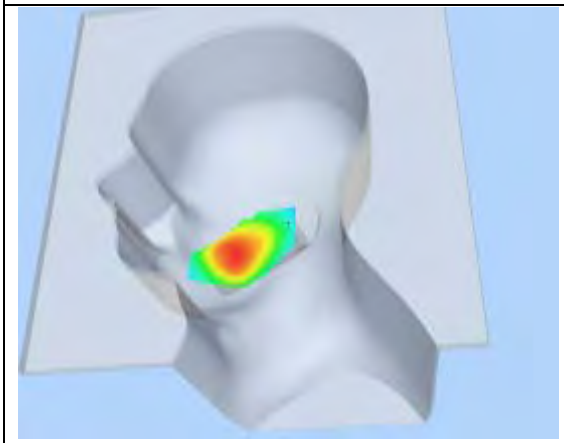	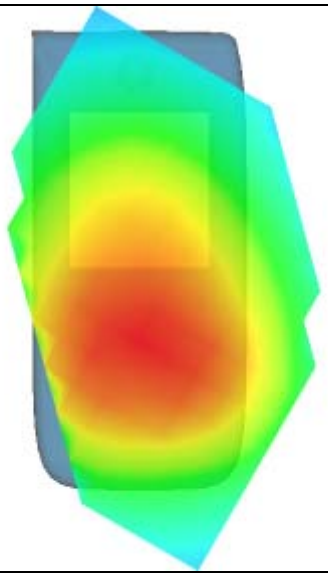

MEASUREMENT 14

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 7 minutes 59 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000
Conductivity (S/m)	1.436111
Power drift (%)	1.030000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.6°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

SURFACE SAR	VOLUME SAR
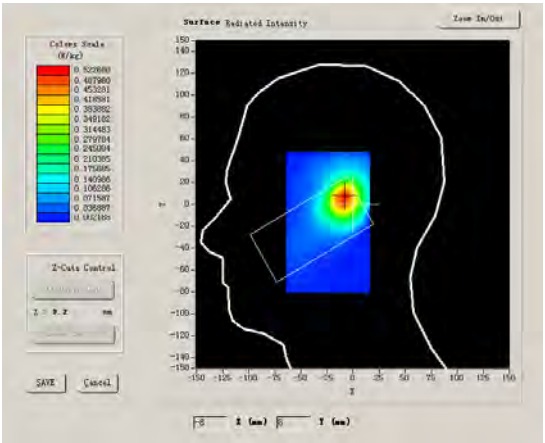	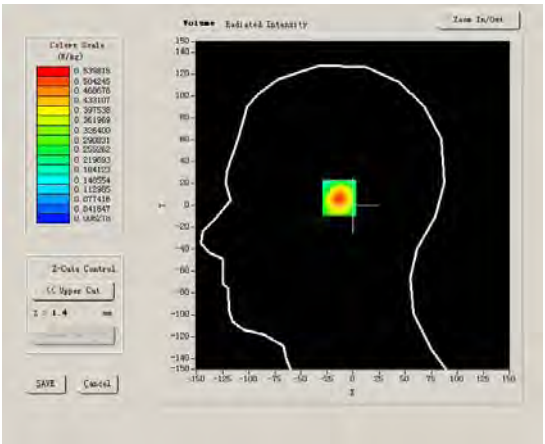

Maximum location: X=-8.00, Y=7.00

SAR 10g (W/Kg)	0.300358
SAR 1g (W/Kg)	0.545972

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5865	0.3369	0.2020	0.1194	0.0711	0.0434

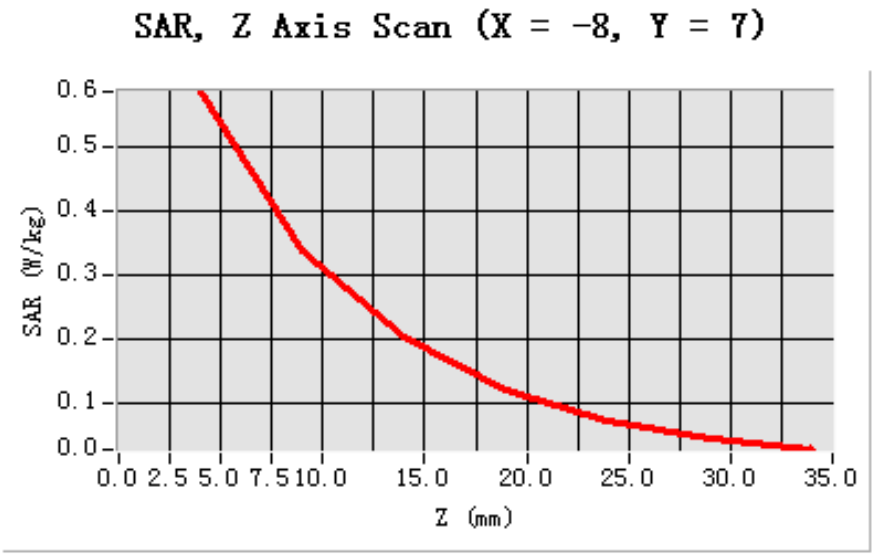

3D sceen shot	Hot spot position
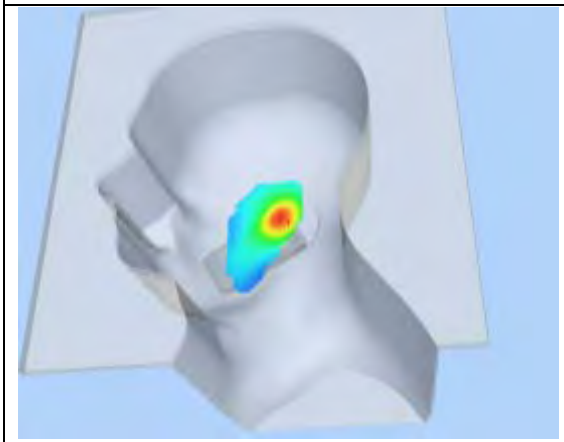	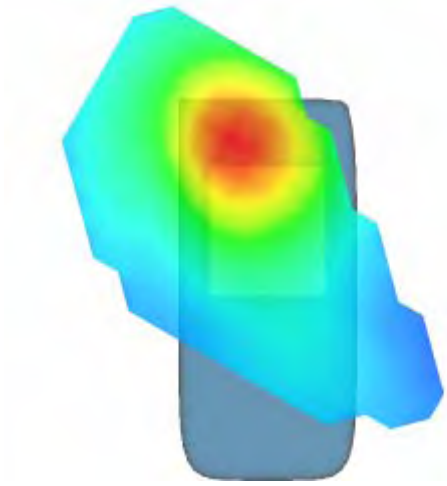

MEASUREMENT 15

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 8 minutes 21 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000
Conductivity (S/m)	1.436111
Power drift (%)	0.420000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.6°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

SURFACE SAR	VOLUME SAR
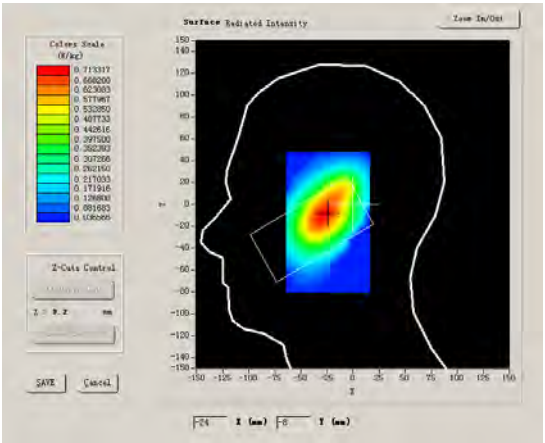	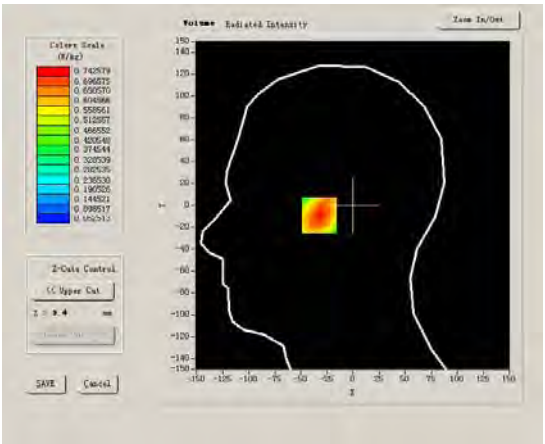

Maximum location: X=-28.00, Y=-9.00

SAR 10g (W/Kg)	0.471648
SAR 1g (W/Kg)	0.706796

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7426	0.5198	0.3659	0.2602	0.1879	0.1326

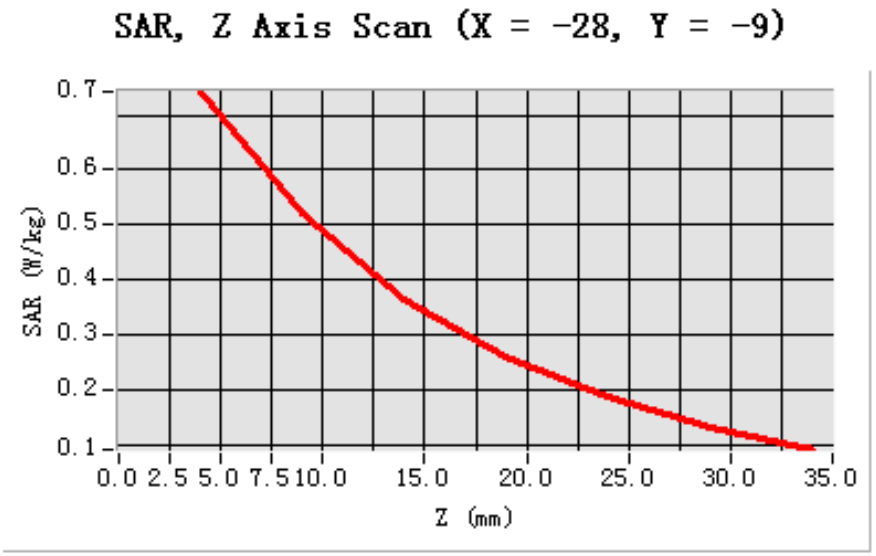

3D sceen shot	Hot spot position
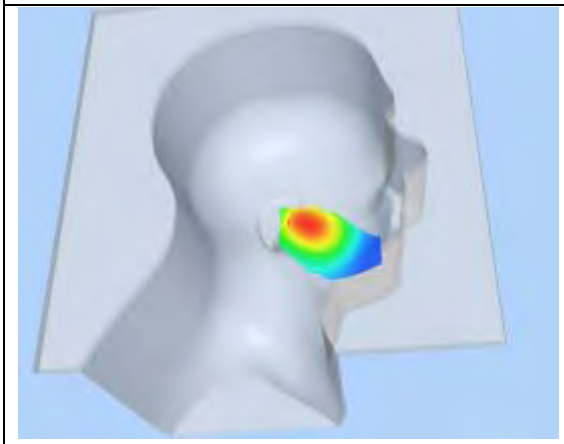	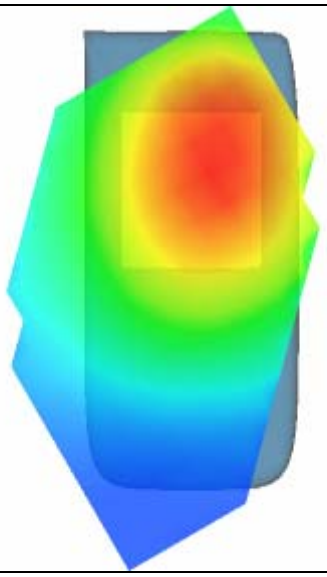

MEASUREMENT 16

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 7 minutes 20 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000
Conductivity (S/m)	1.436111
Power drift (%)	-3.010000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.6°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

SURFACE SAR	VOLUME SAR
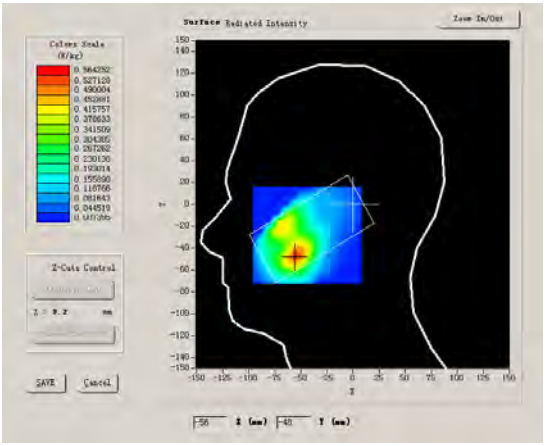	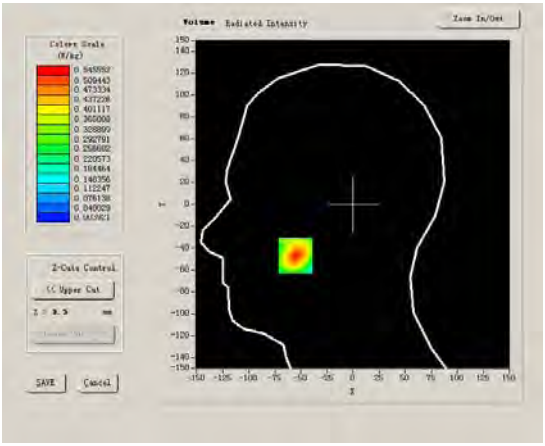

Maximum location: X=-55.00, Y=-47.00

SAR 10g (W/Kg)	0.259012
SAR 1g (W/Kg)	0.491979

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5225	0.2606	0.1362	0.0679	0.0346	0.0175

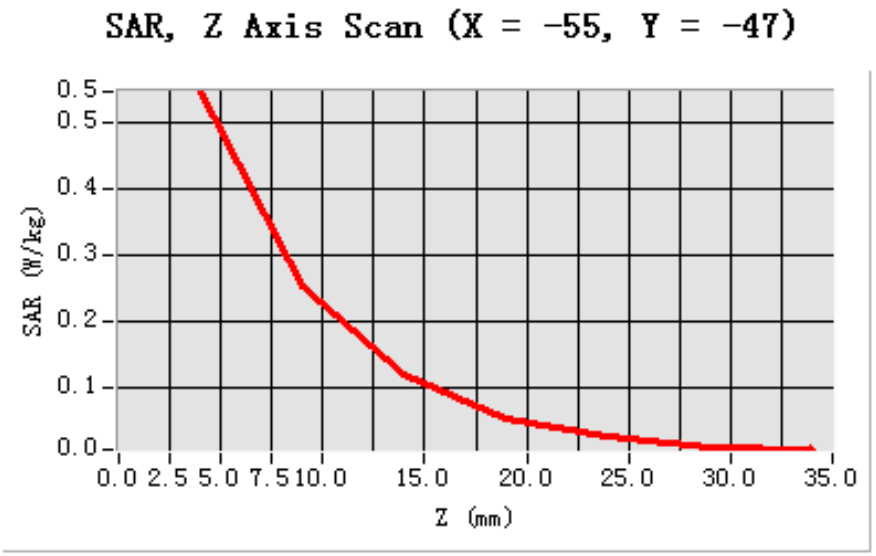

3D sceen shot	Hot spot position
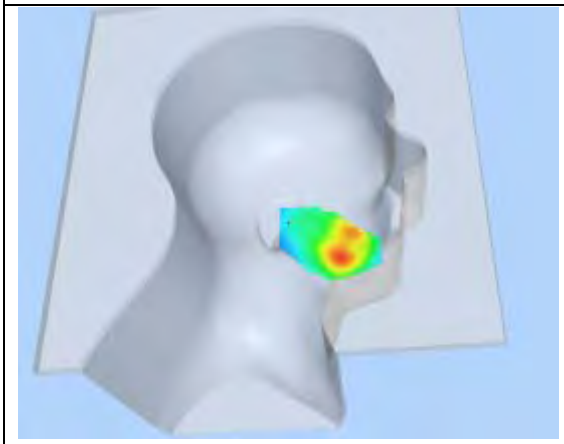	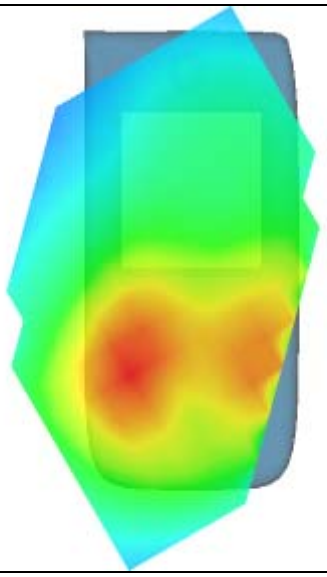

MEASUREMENT 17

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-1.590000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

SURFACE SAR	VOLUME SAR
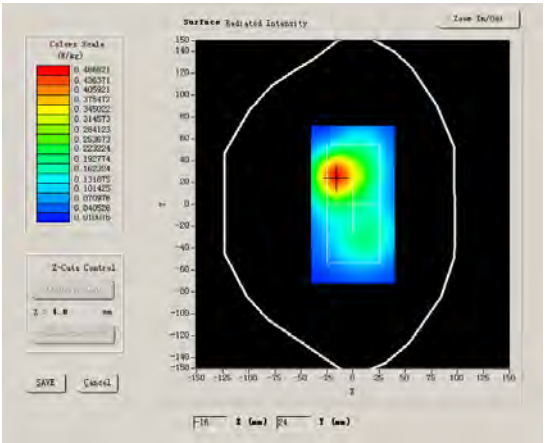	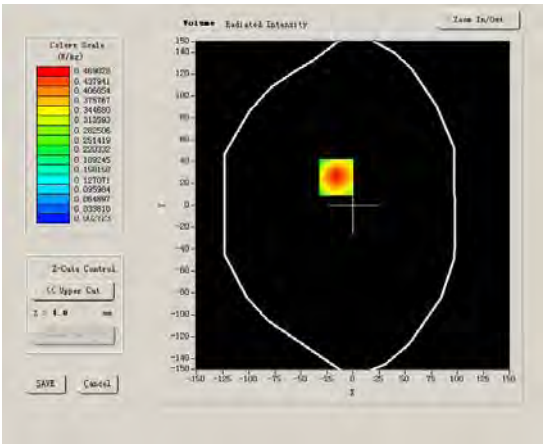

Maximum location: X=-16.00, Y=26.00

SAR 10g (W/Kg)	0.240097
SAR 1g (W/Kg)	0.457210

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4799	0.2306	0.1143	0.0559	0.0267	0.0150

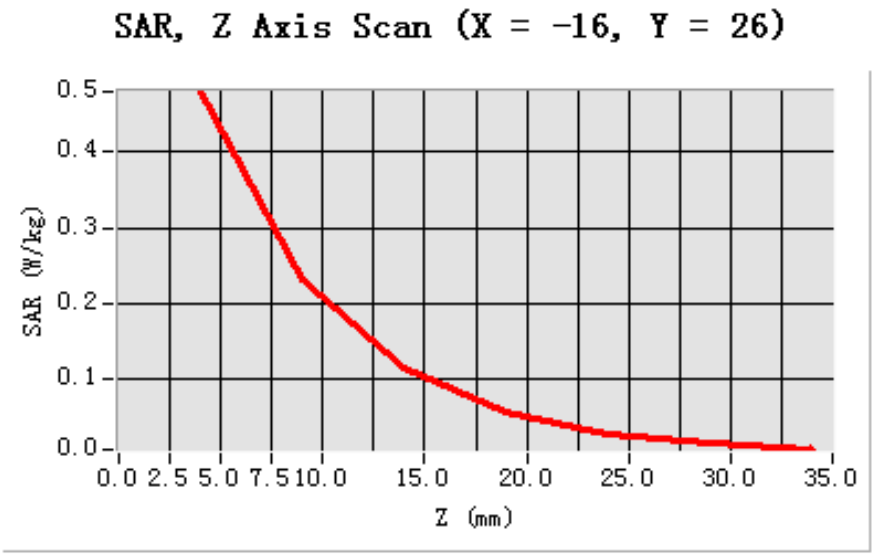

3D sceen shot	Hot spot position
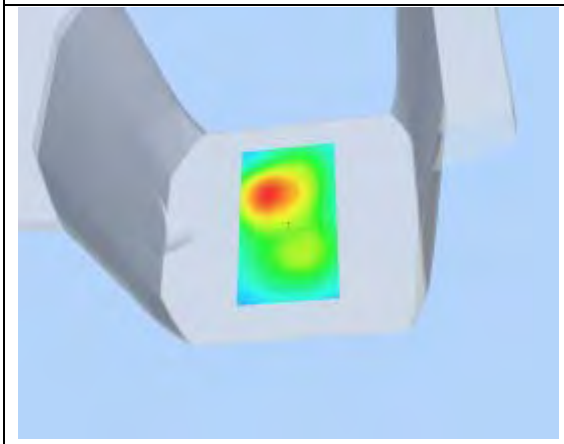	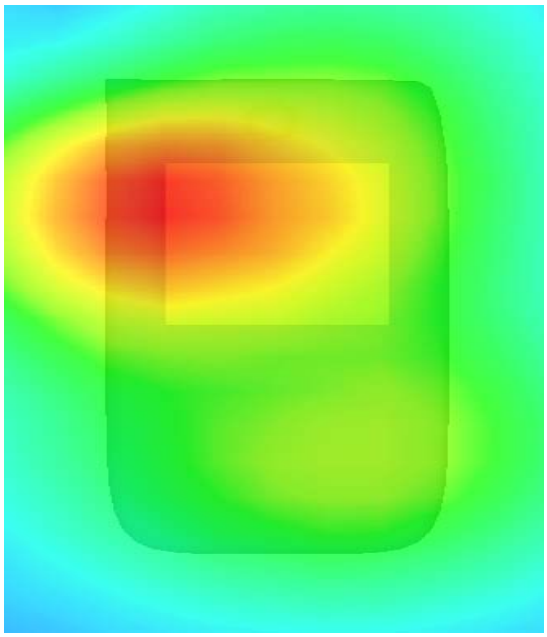

MEASUREMENT 18

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 2 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-0.410000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

SURFACE SAR	VOLUME SAR
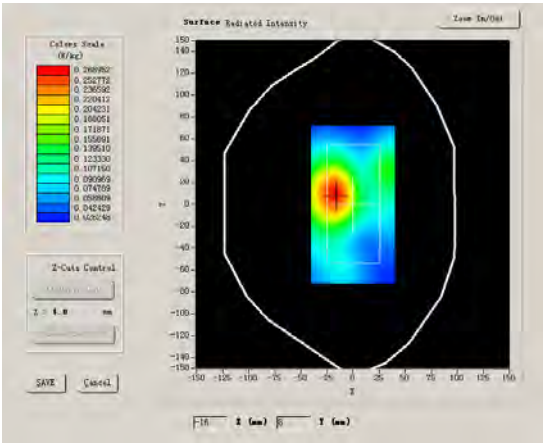	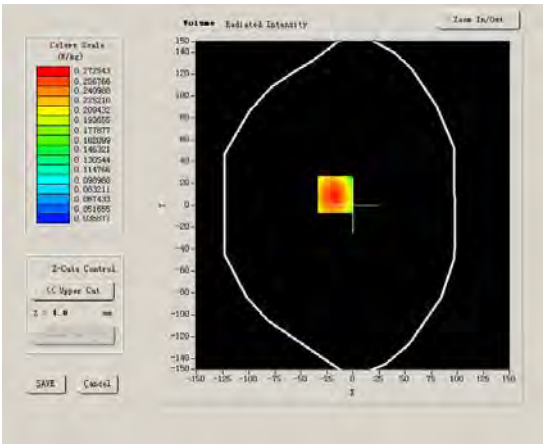

Maximum location: X=-17.00, Y=10.00

SAR 10g (W/Kg)	0.188446
SAR 1g (W/Kg)	0.269824

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2789	0.1909	0.1450	0.1146	0.0918	0.0743

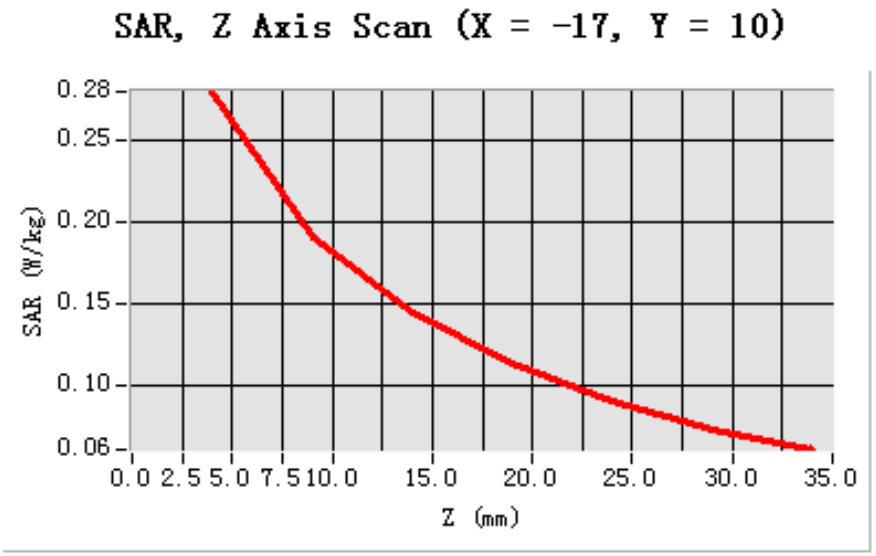

3D sceen shot	Hot spot position
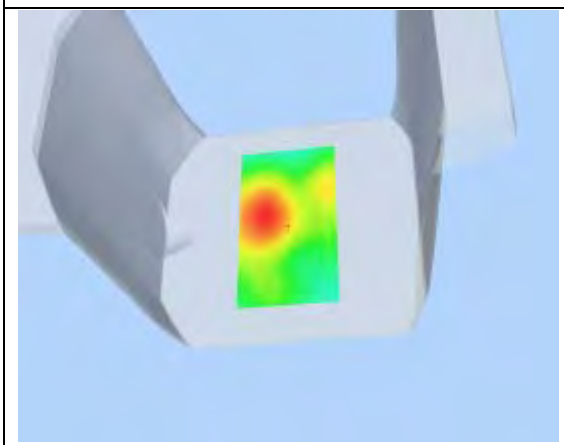	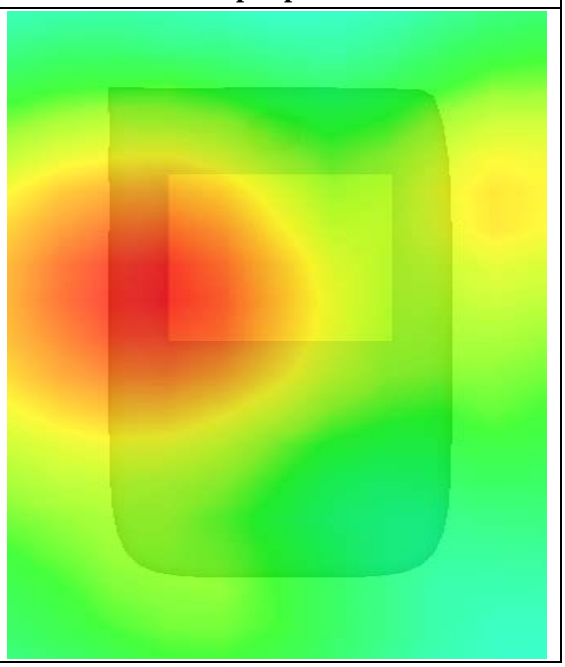

MEASUREMENT 19

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-1.800000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR	VOLUME SAR
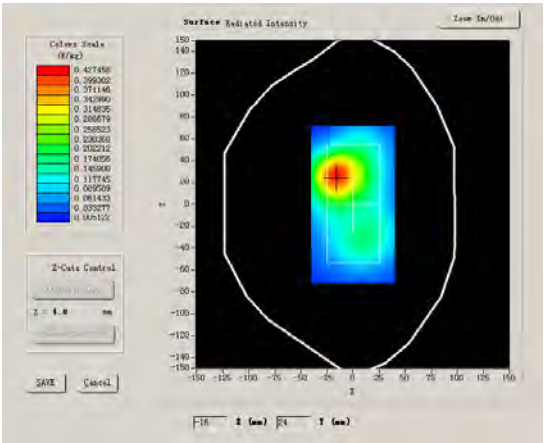	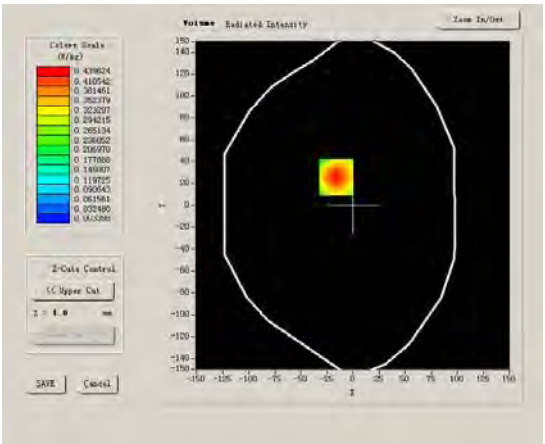

Maximum location: X=-16.00, Y=26.00

SAR 10g (W/Kg)	0.226594
SAR 1g (W/Kg)	0.431514

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4499	0.2209	0.1070	0.0535	0.0262	0.0134

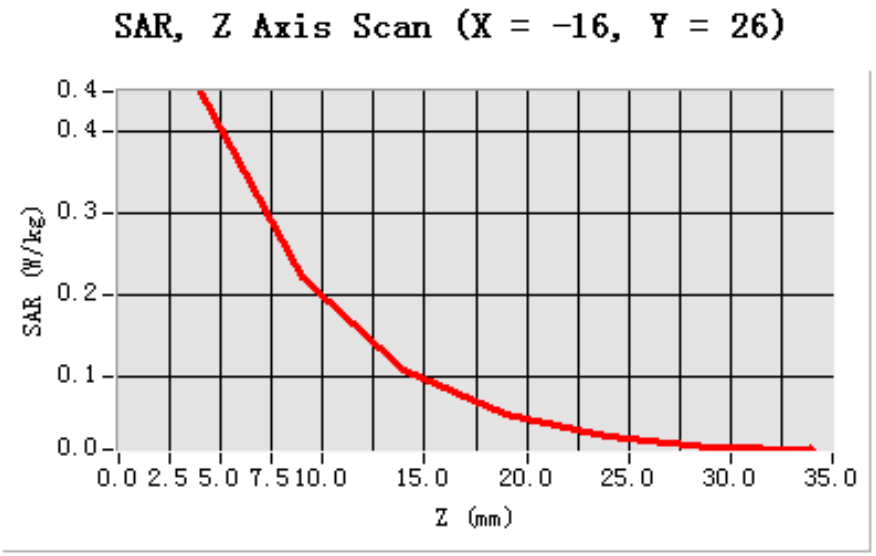

3D sceen shot	Hot spot position
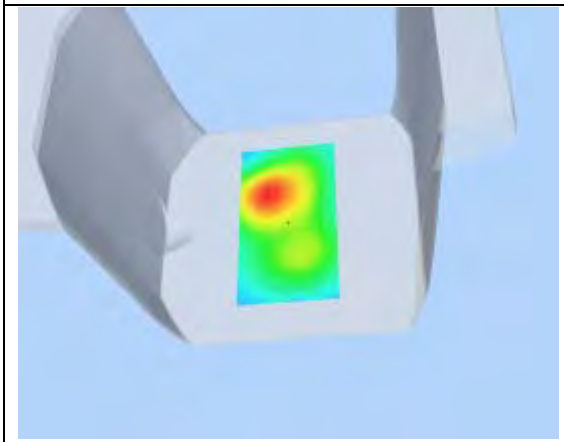	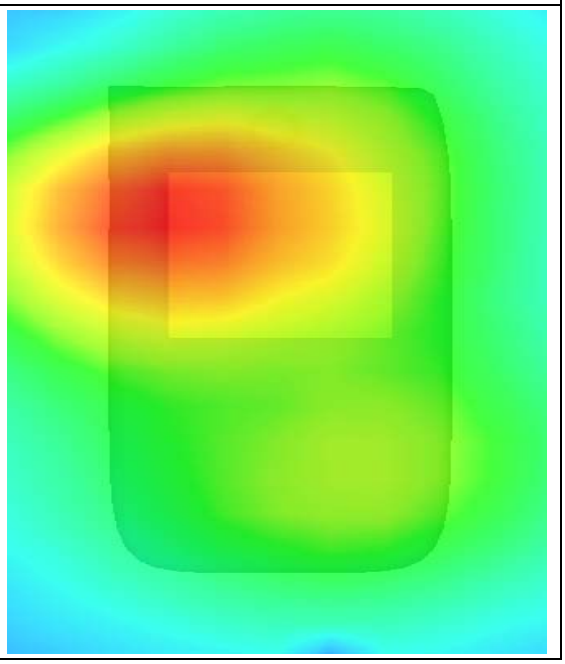

MEASUREMENT 20

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 8 minutes 57 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	0.230000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR	VOLUME SAR
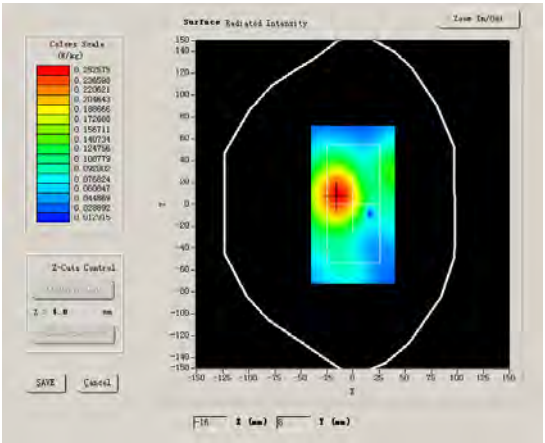	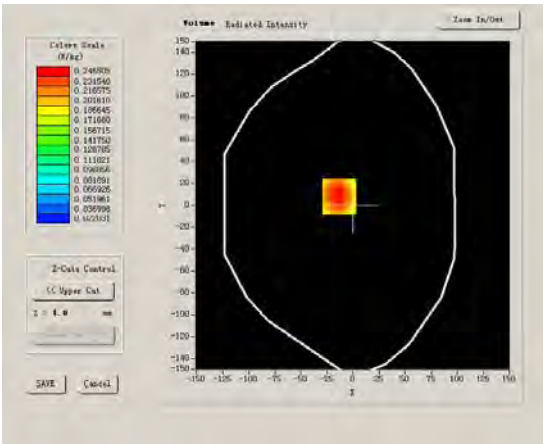

Maximum location: X=-13.00, Y=8.00

SAR 10g (W/Kg)	0.169458
SAR 1g (W/Kg)	0.244218

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2522	0.1771	0.1305	0.1058	0.0839	0.0693

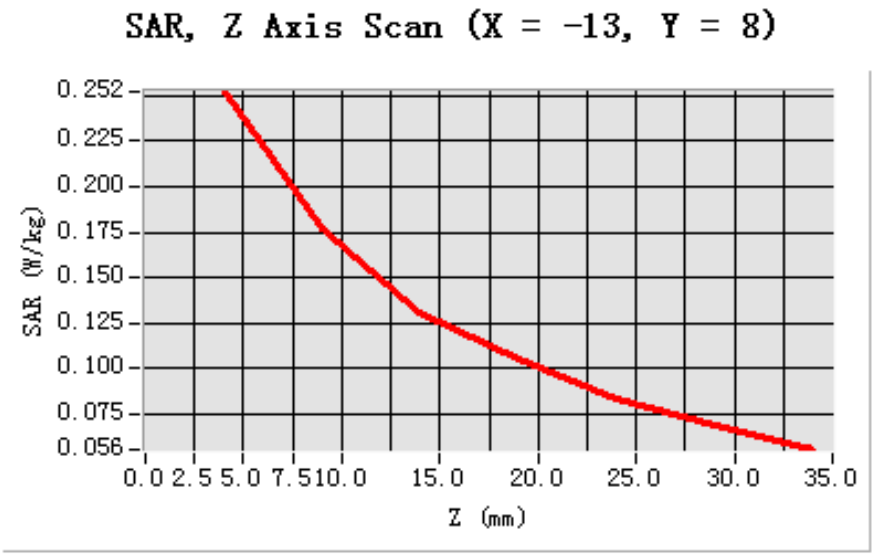

3D sceen shot	Hot spot position
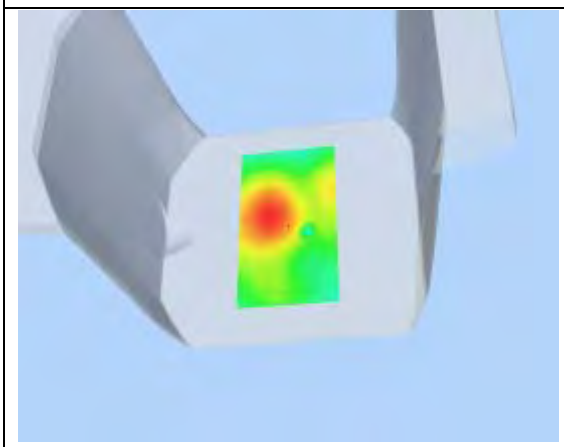	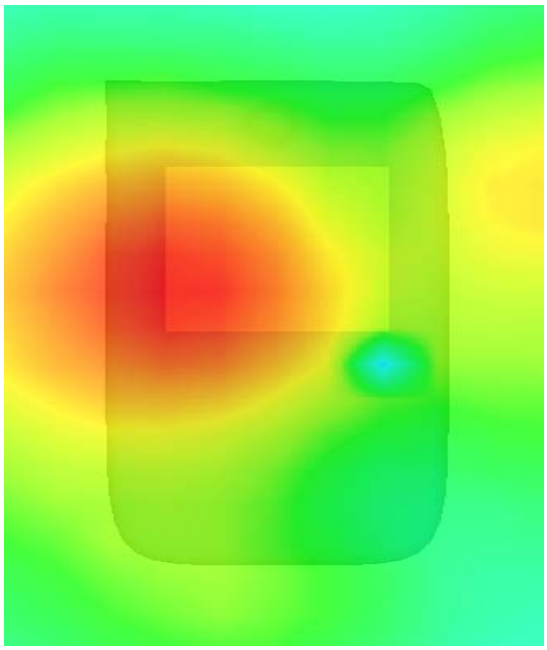

MEASUREMENT 21

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 8 minutes 54 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	0.190000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR	VOLUME SAR
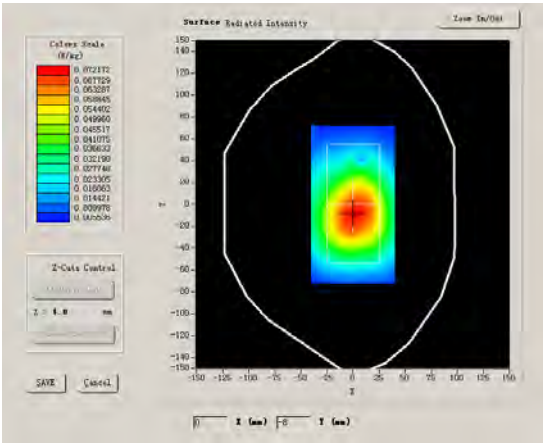	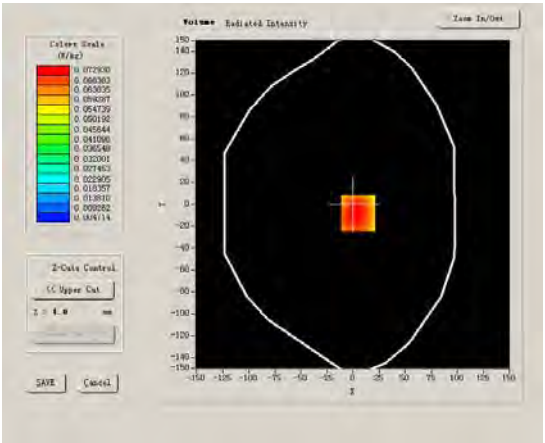

Maximum location: X=5.00, Y=-8.00

SAR 10g (W/Kg)	0.059902
SAR 1g (W/Kg)	0.080876

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0799	0.0670	0.0523	0.0433	0.0352	0.0269

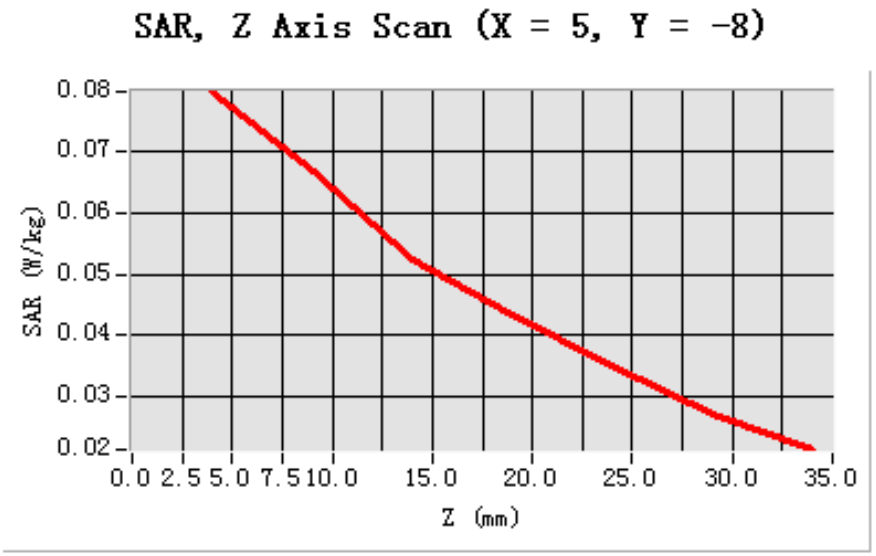

3D sceen shot	Hot spot position
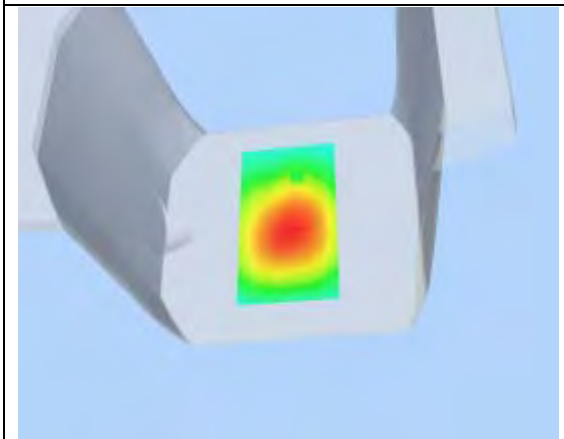	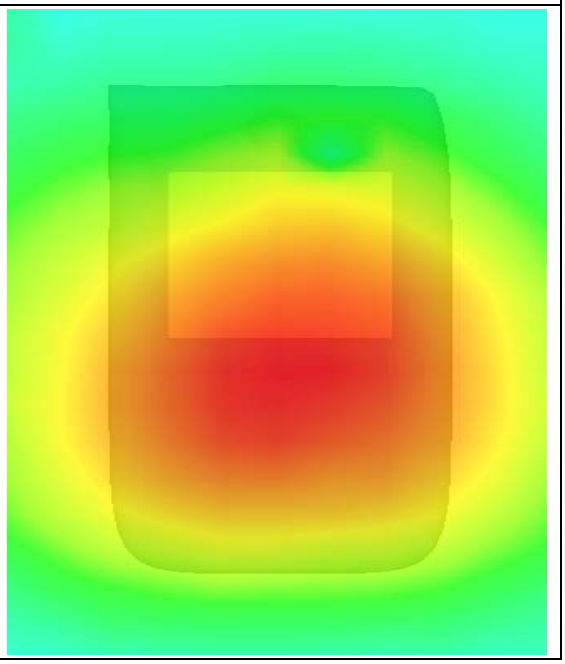

MEASUREMENT 22

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 8 minutes 57 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	1.030000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR	VOLUME SAR
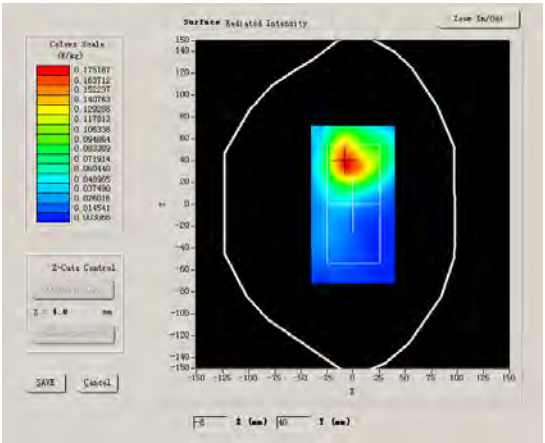	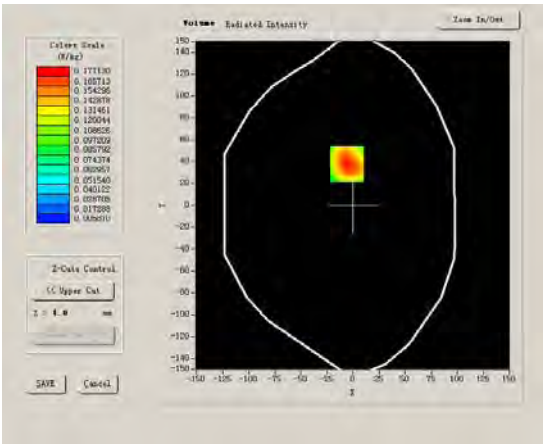

Maximum location: X=-6.00, Y=38.00

SAR 10g (W/Kg)	0.115308
SAR 1g (W/Kg)	0.202280

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2126	0.1234	0.0691	0.0400	0.0244	0.0149

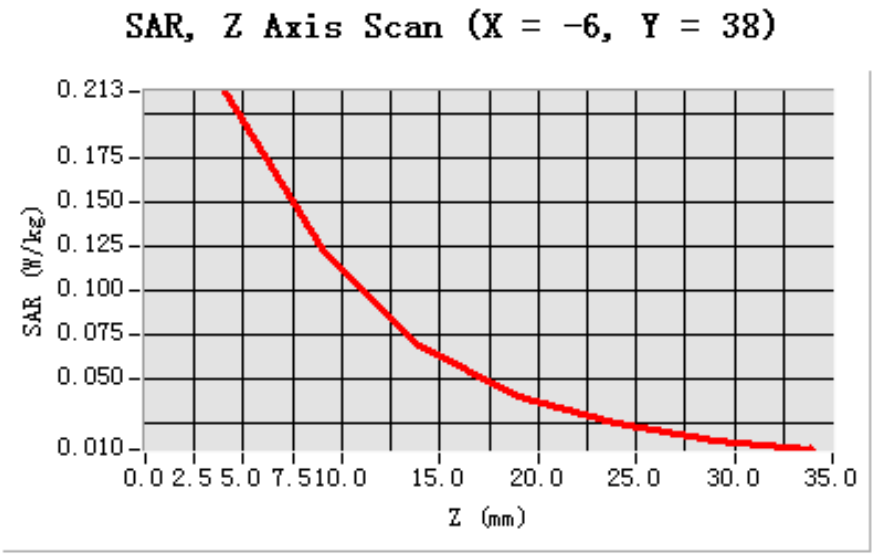

3D sceen shot	Hot spot position
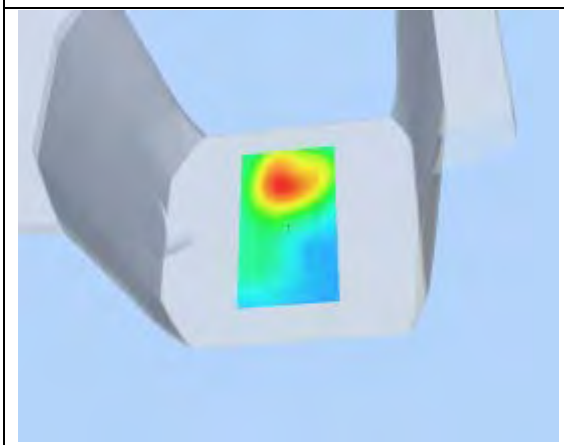	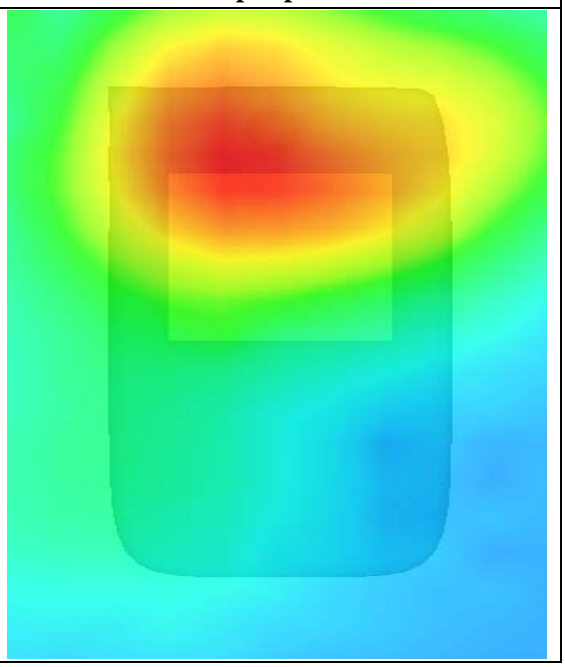

MEASUREMENT 23

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 8 minutes 57 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	0.630000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR	VOLUME SAR
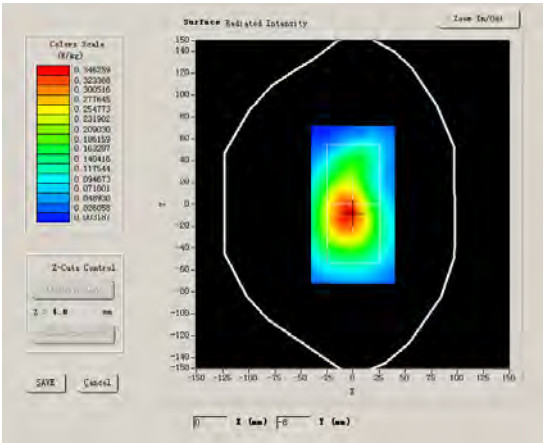	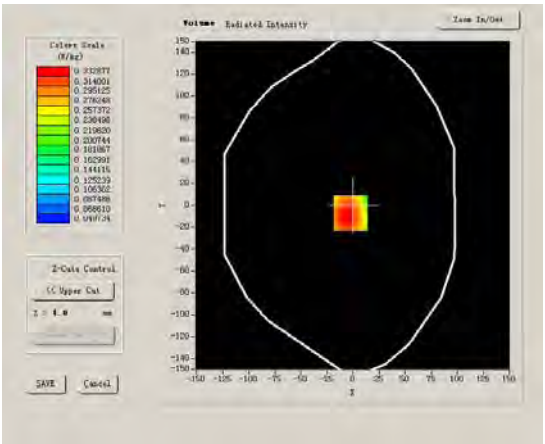

Maximum location: X=-2.00, Y=-7.00

SAR 10g (W/Kg)	0.275871
SAR 1g (W/Kg)	0.362573

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3643	0.3005	0.2380	0.1962	0.1597	0.1237

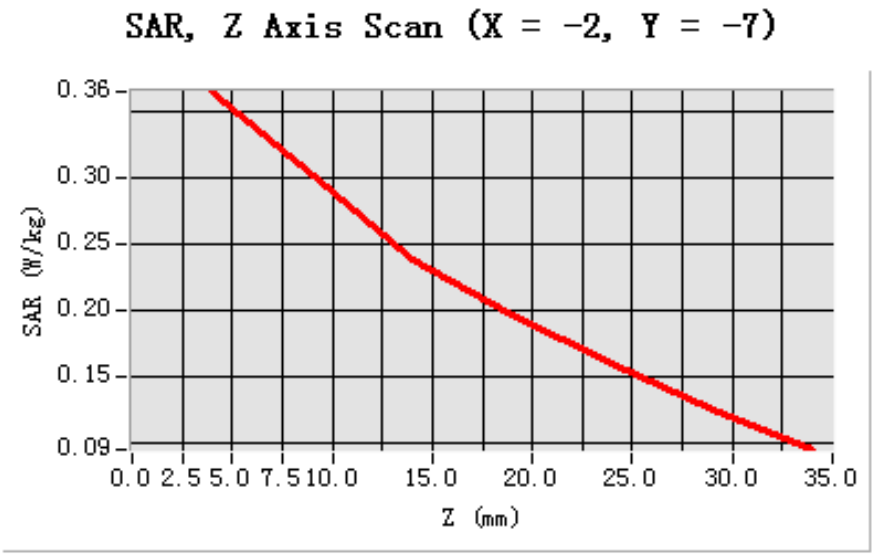

3D sceen shot	Hot spot position
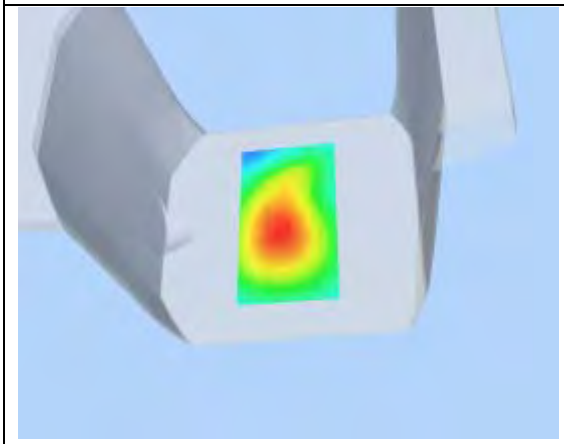	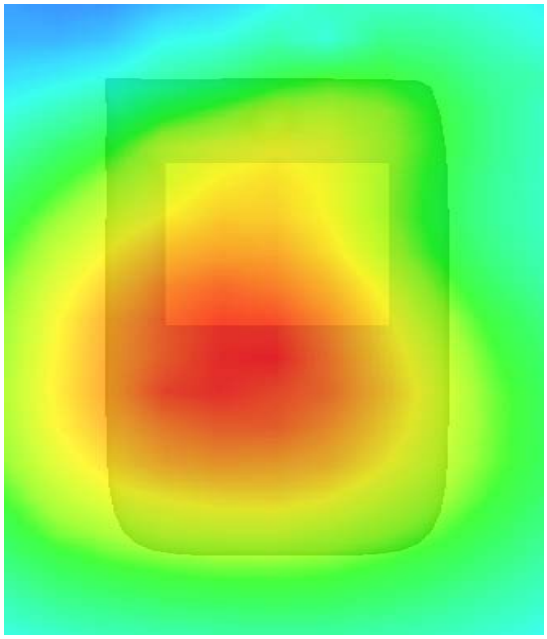

MEASUREMENT 24

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	EDGE

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-0.820000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR	VOLUME SAR
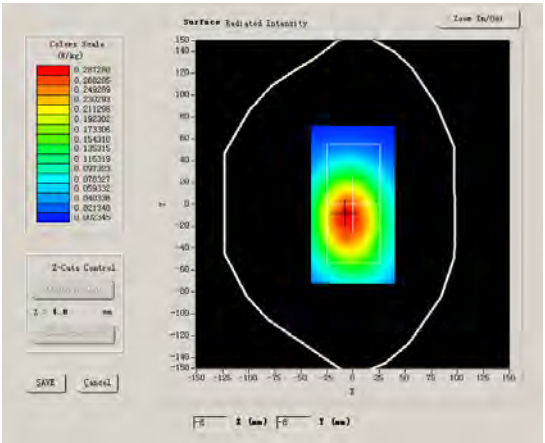	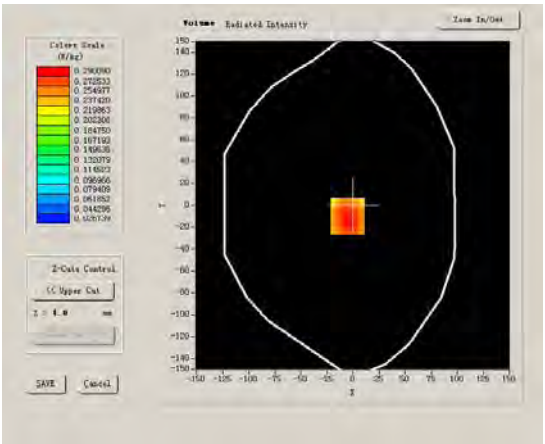

Maximum location: X=-5.00, Y=-10.00

SAR 10g (W/Kg)	0.212169
SAR 1g (W/Kg)	0.309493

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3143	0.2292	0.1651	0.1135	0.0816	0.0572

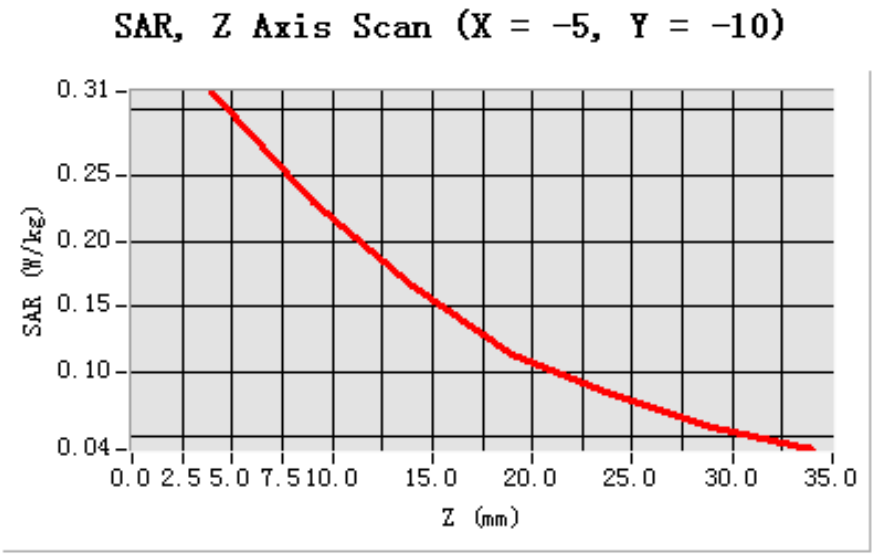

3D sceen shot	Hot spot position
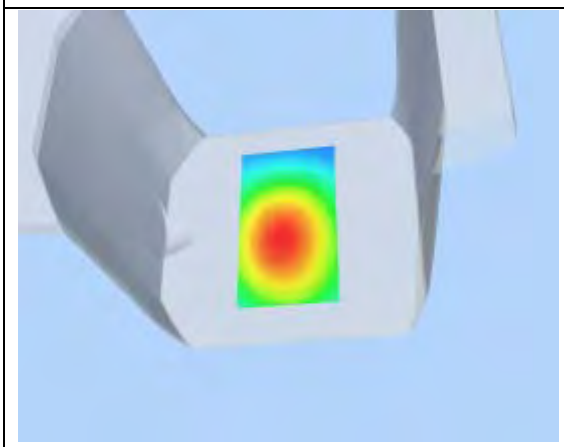	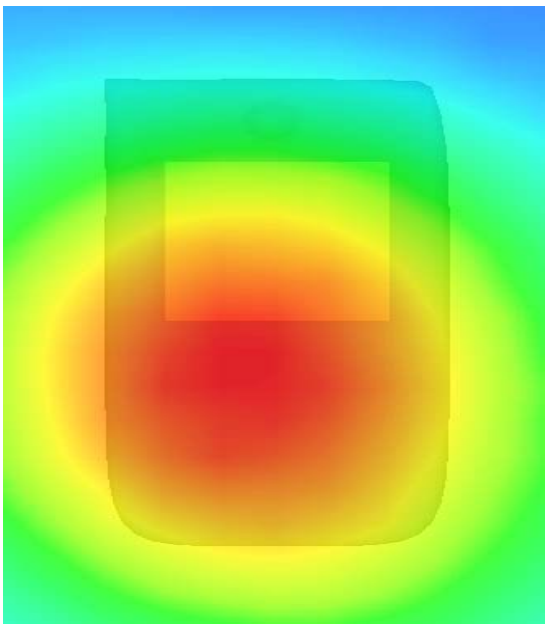

MEASUREMENT 25

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 8 minutes 9 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	0.614460
Power drift (%)	-0.800000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.4°C
ConvF:	28.479, 25.214, 27.196
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
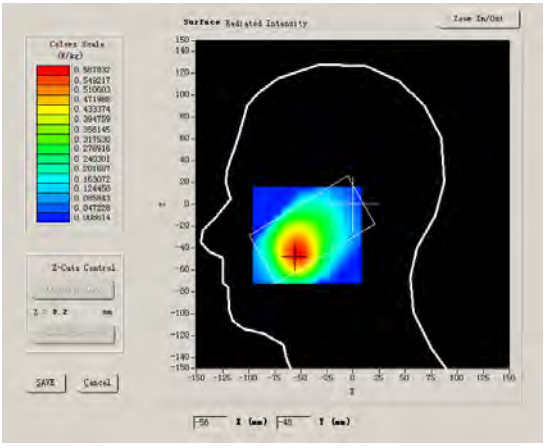	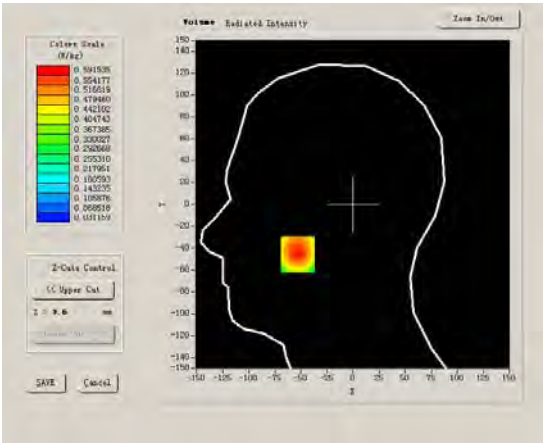

Maximum location: X=-53.00, Y=-46.00

SAR 10g (W/Kg)	0.379388
SAR 1g (W/Kg)	0.567168

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5915	0.4090	0.2899	0.2006	0.1417	0.0984

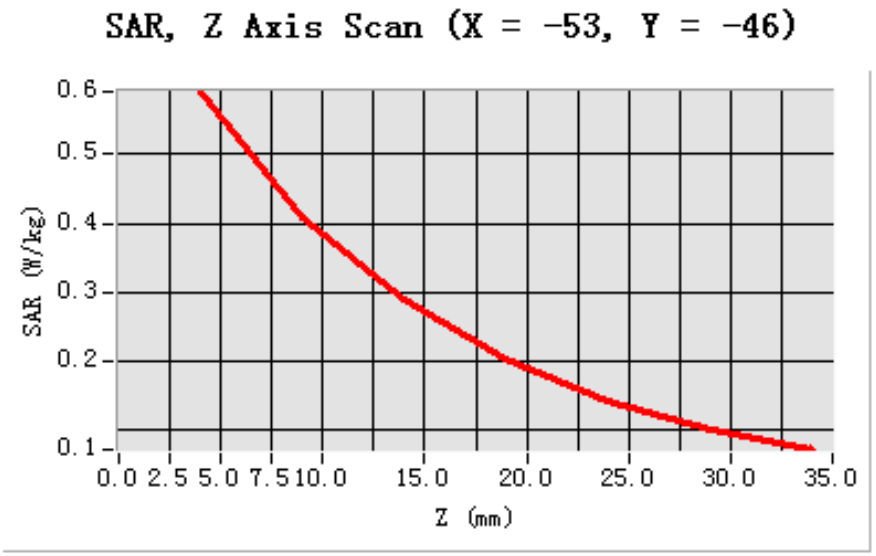

3D sceen shot	Hot spot position
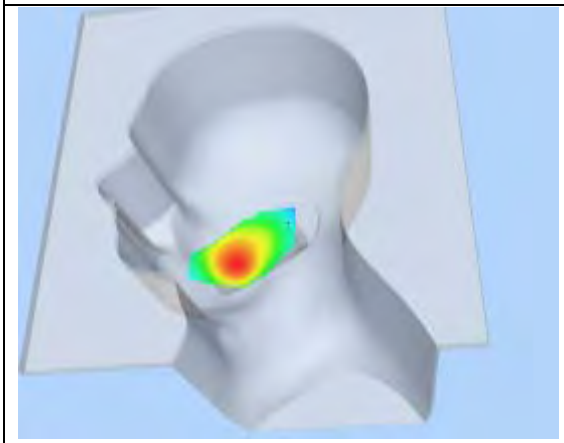	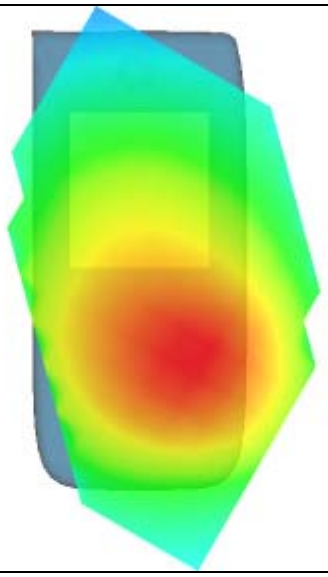

MEASUREMENT 26

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 7 minutes 34 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	0.614460
Power drift (%)	0.460000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.4°C
ConvF:	28.479, 25.214, 27.196
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
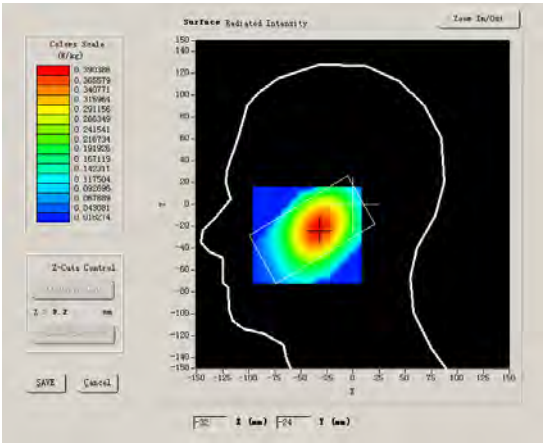	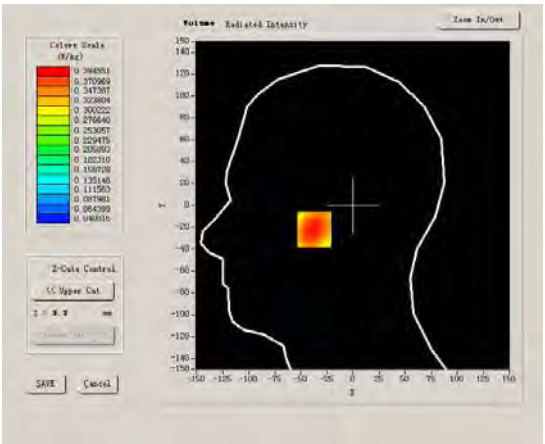

Maximum location: X=-33.00, Y=-22.00

SAR 10g (W/Kg)	0.272636
SAR 1g (W/Kg)	0.380847

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3946	0.2956	0.2234	0.1651	0.1221	0.0880

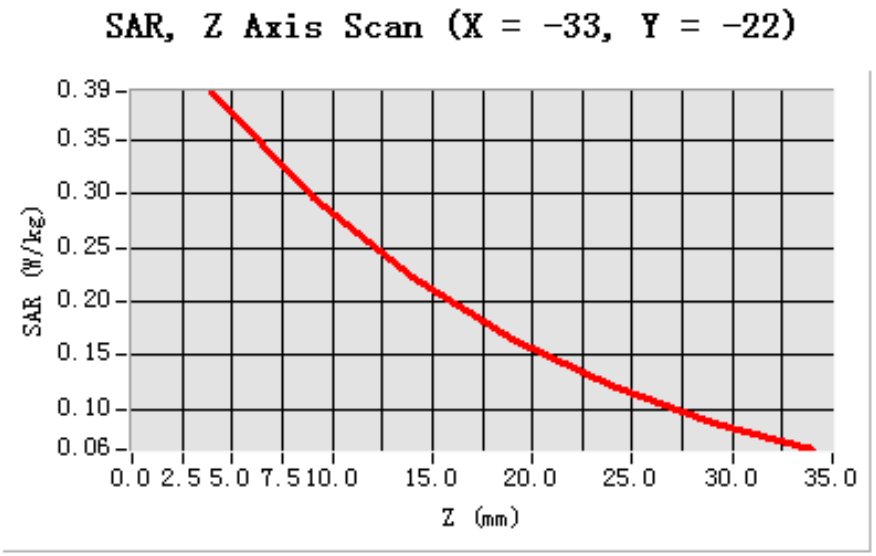

3D sceen shot	Hot spot position
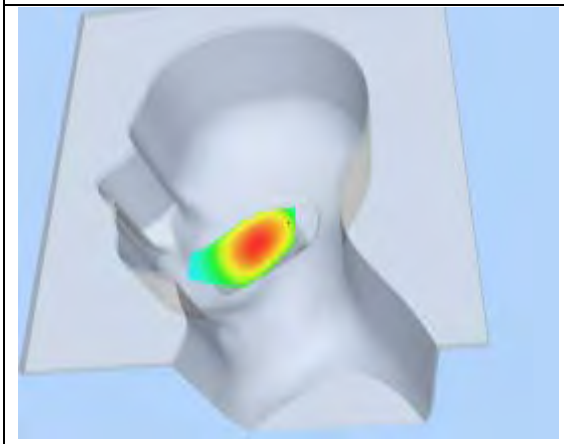	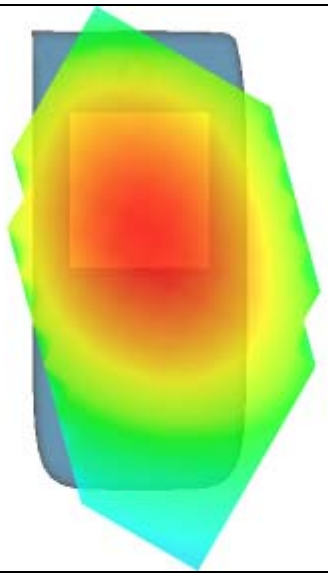

MEASUREMENT 27

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 7 minutes 59 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	0.614460
Power drift (%)	-0.390000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.4°C
ConvF:	28.479, 25.214, 27.196
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
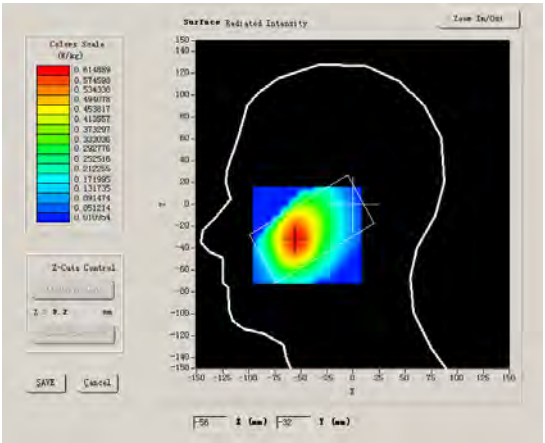	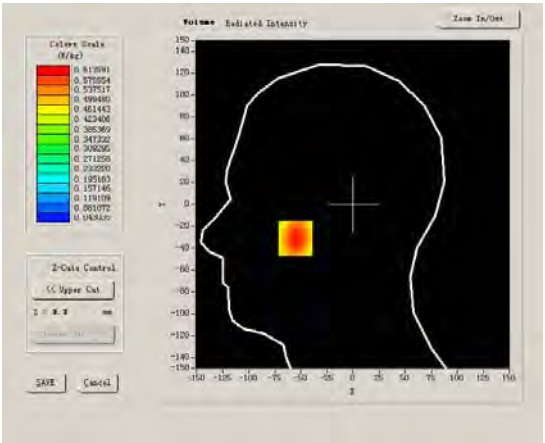

Maximum location: X=-55.00, Y=-31.00

SAR 10g (W/Kg)	0.404004
SAR 1g (W/Kg)	0.588915

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6136	0.4371	0.3140	0.2231	0.1574	0.1113

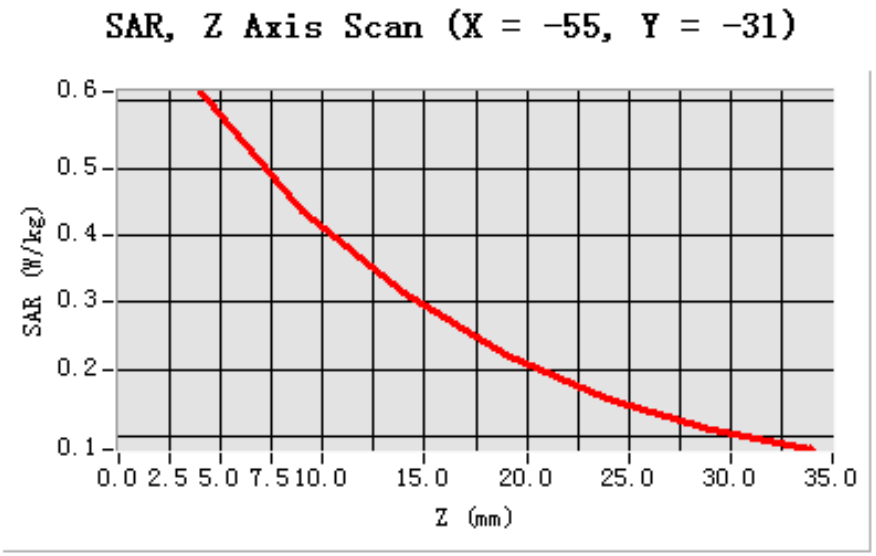

3D sceen shot	Hot spot position
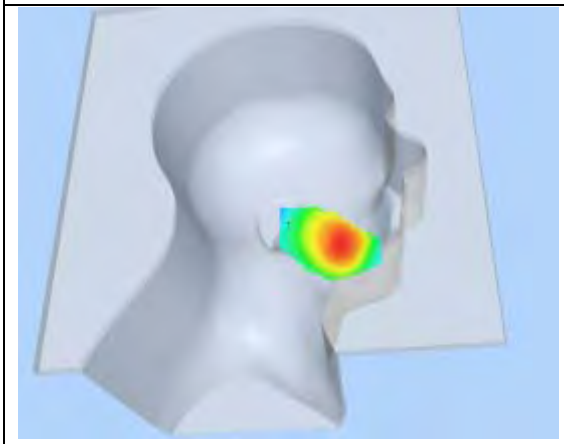	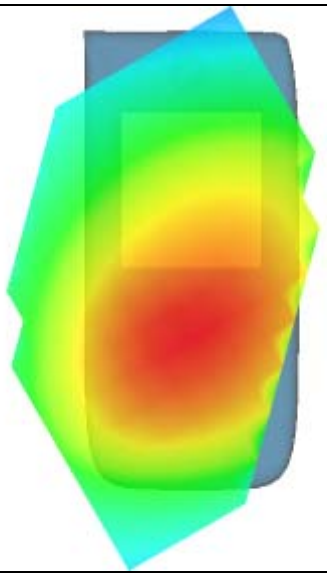

MEASUREMENT 28

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 7 minutes 35 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	0.614460
Power drift (%)	0.240000
Ambient Temperature:	22.2°C
Liquid Temperature:	22.4°C
ConvF:	28.479, 25.214, 27.196
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
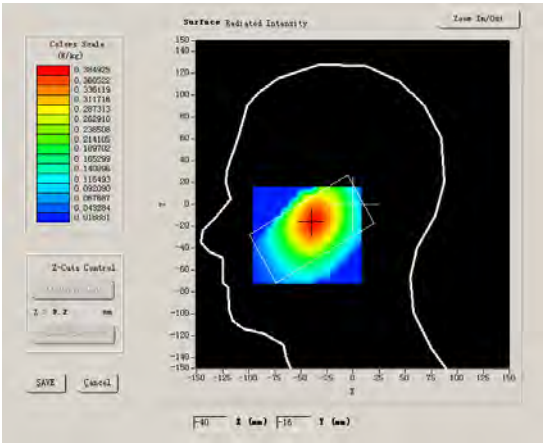	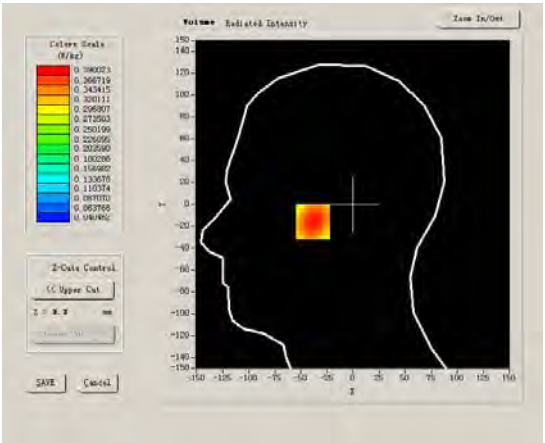

Maximum location: X=-38.00, Y=-16.00

SAR 10g (W/Kg)	0.269316
SAR 1g (W/Kg)	0.375690

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3900	0.2950	0.2226	0.1644	0.1202	0.0854

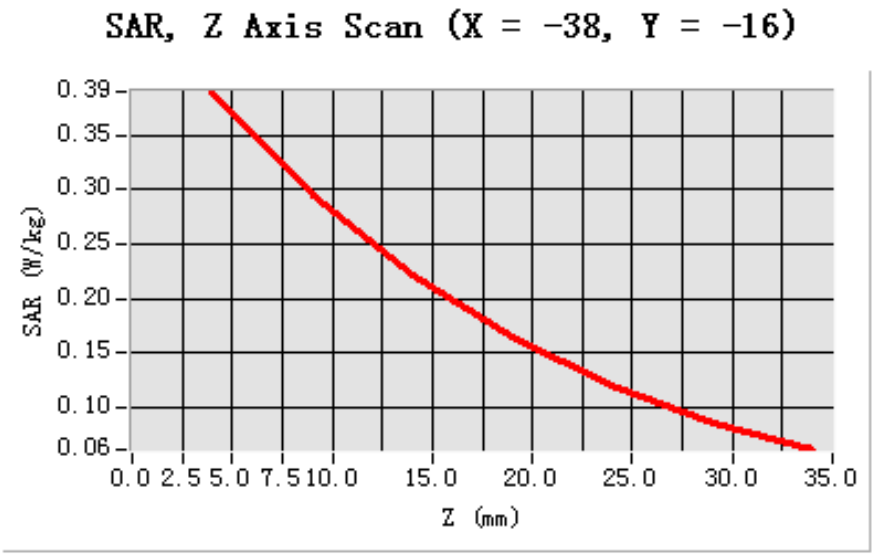

3D sceen shot	Hot spot position
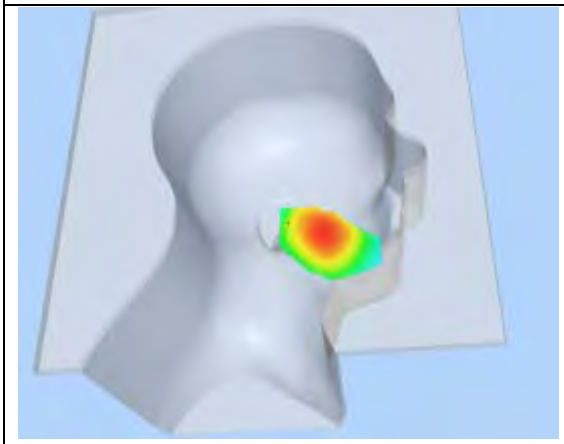	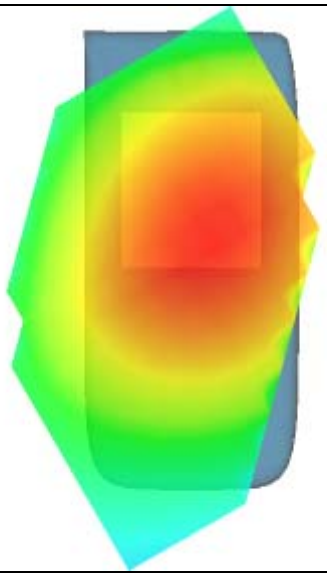

MEASUREMENT 29

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 14 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	0.737401
Power drift (%)	0.170000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
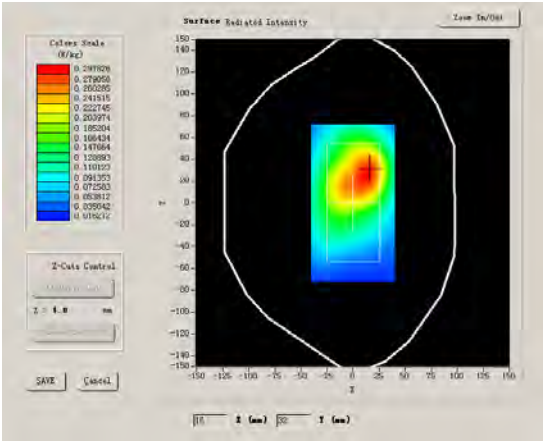	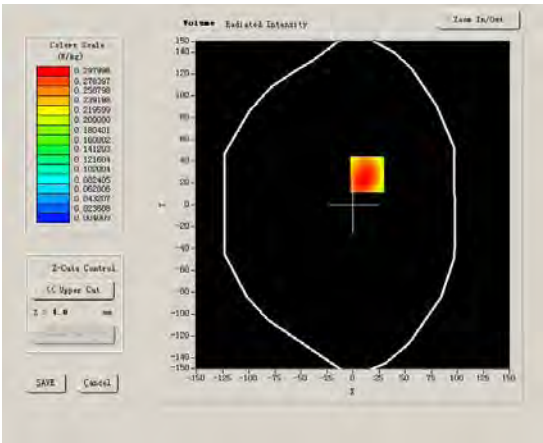

Maximum location: X=14.00, Y=28.00

SAR 10g (W/Kg)	0.177560
SAR 1g (W/Kg)	0.318499

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3245	0.1669	0.0879	0.0455	0.0245	0.0129

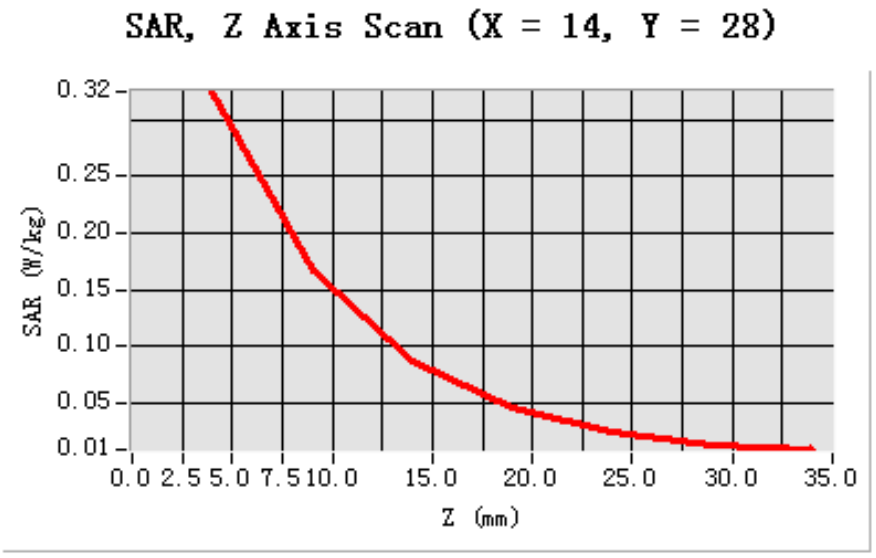

3D sceen shot	Hot spot position
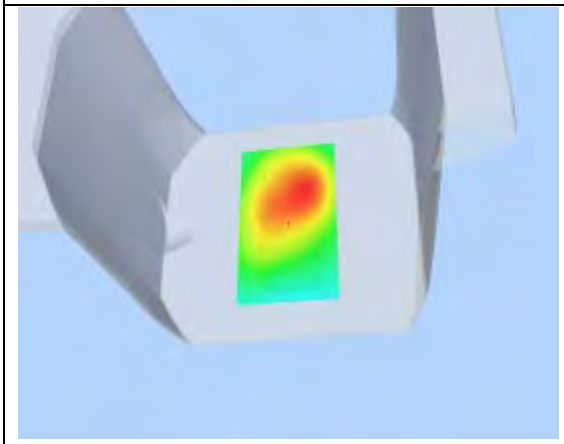	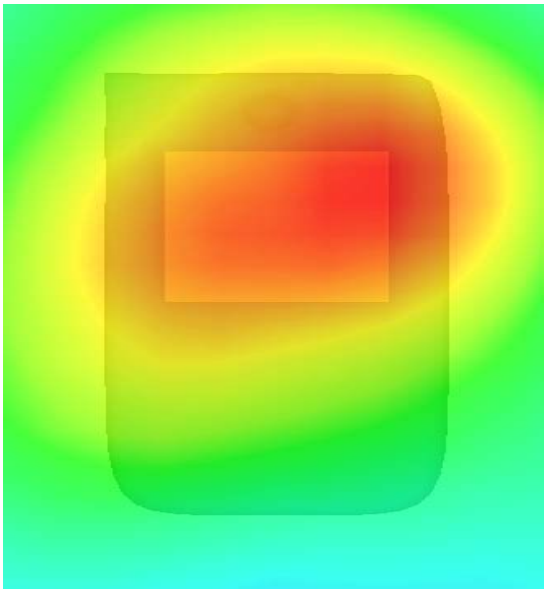

MEASUREMENT 30

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 14 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	0.737401
Power drift (%)	0.310000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
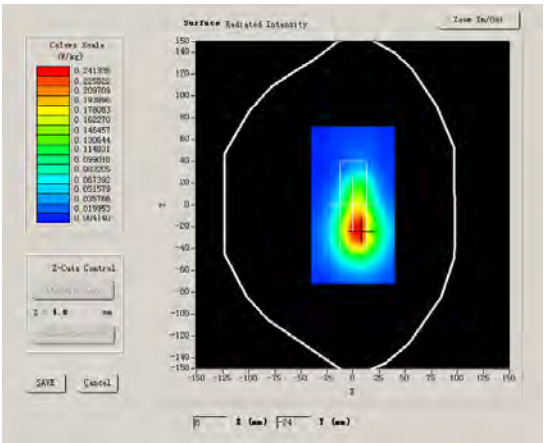	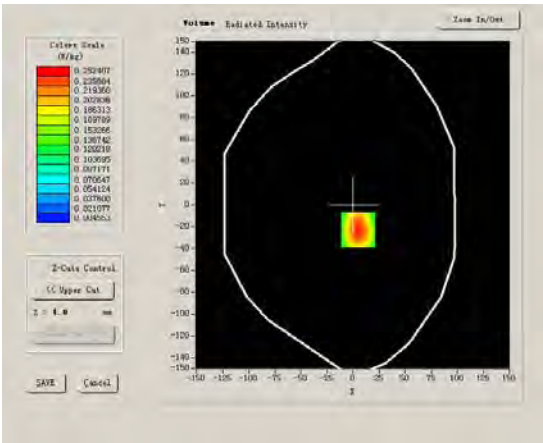

Maximum location: X=5.00, Y=-23.00

SAR 10g (W/Kg)	0.138390
SAR 1g (W/Kg)	0.243646

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2583	0.1459	0.0849	0.0488	0.0292	0.0174

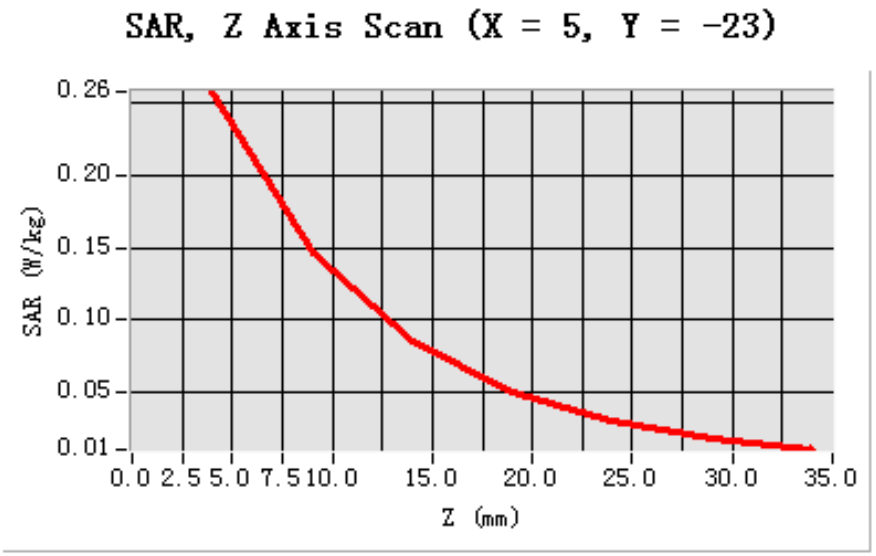

3D sceen shot	Hot spot position
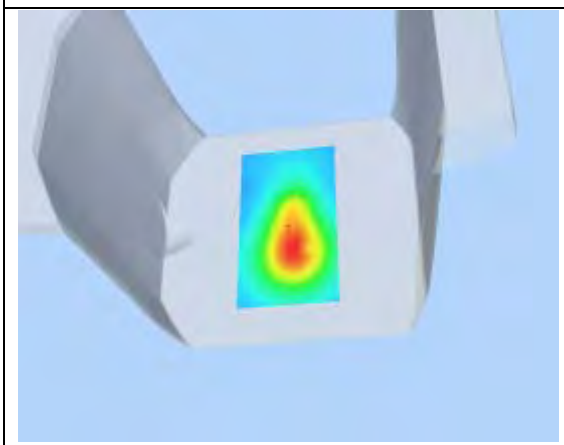	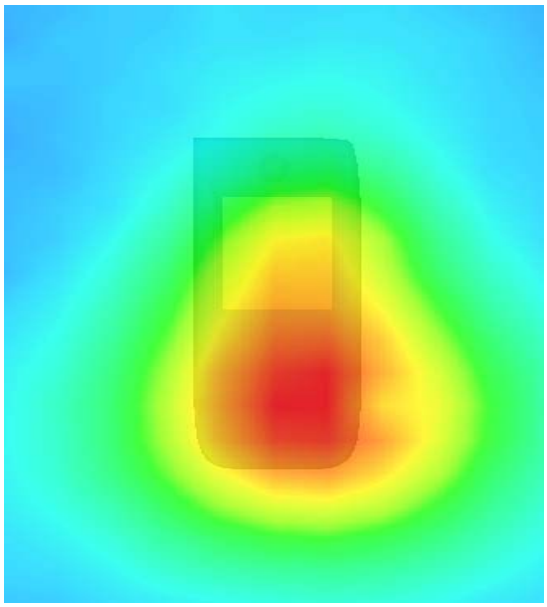

MEASUREMENT 31

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 14 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	0.737401
Power drift (%)	0.330000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
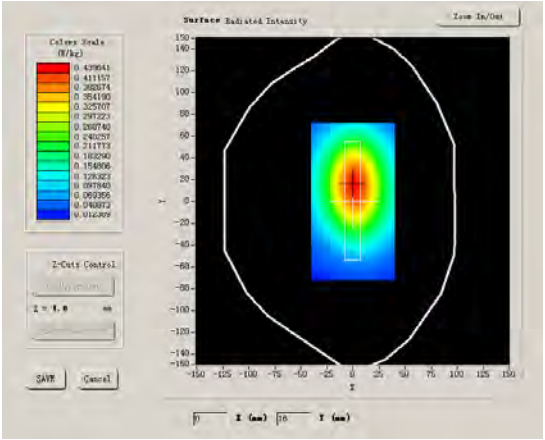	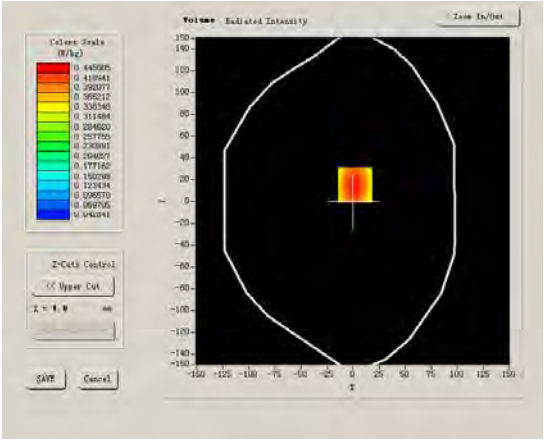

Maximum location: X=2.00, Y=15.00

SAR 10g (W/Kg)	0.346168
SAR 1g (W/Kg)	0.513981

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5350	0.3670	0.2556	0.1802	0.1266	0.0908

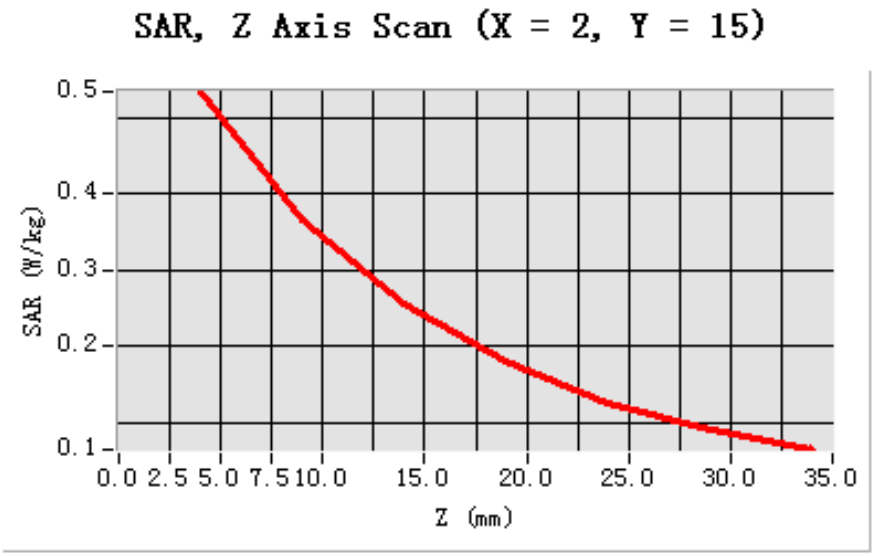

3D sceen shot	Hot spot position
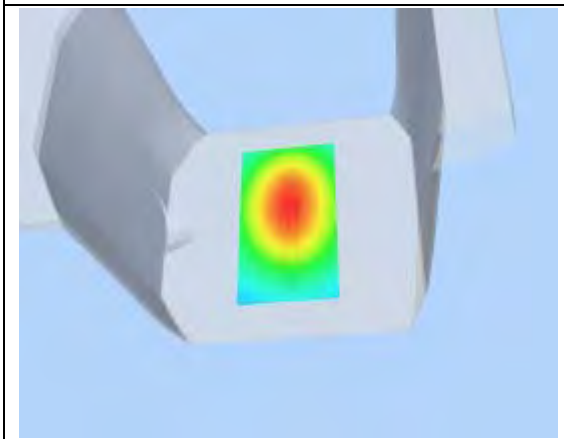	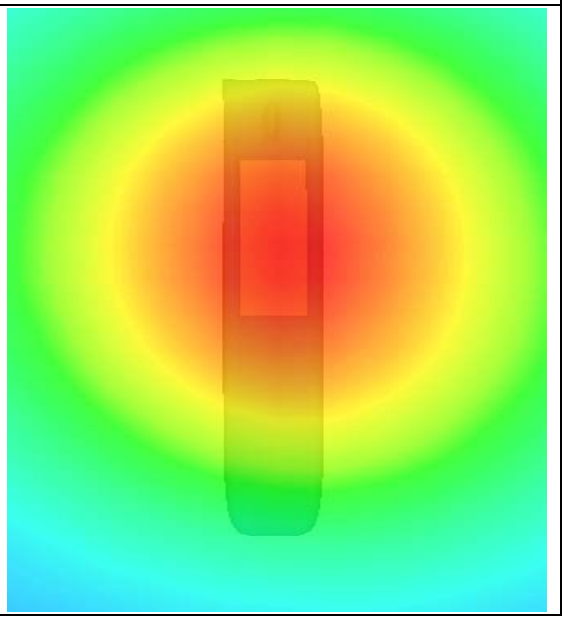

MEASUREMENT 32

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	0.737401
Power drift (%)	0.600000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
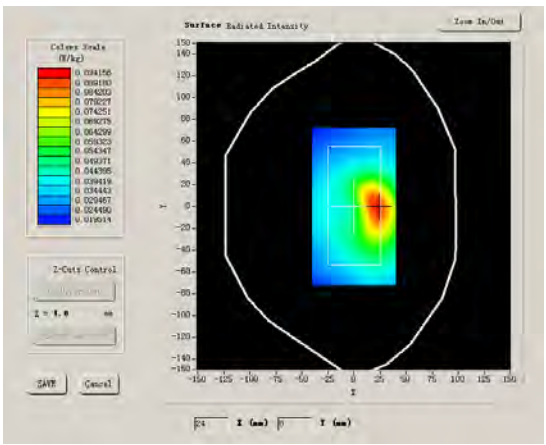	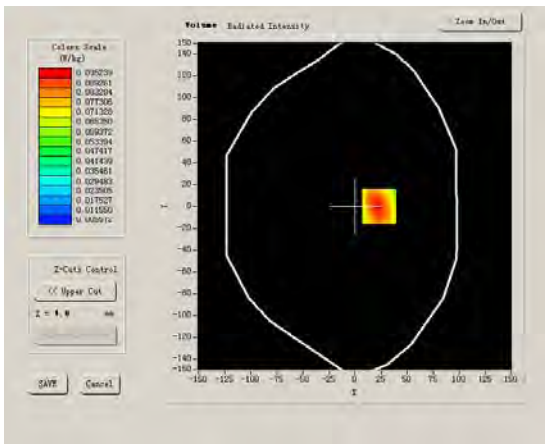

Maximum location: X=23.00, Y=0.00

SAR 10g (W/Kg)	0.068229
SAR 1g (W/Kg)	0.109468

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1143	0.0712	0.0453	0.0299	0.0203	0.0137

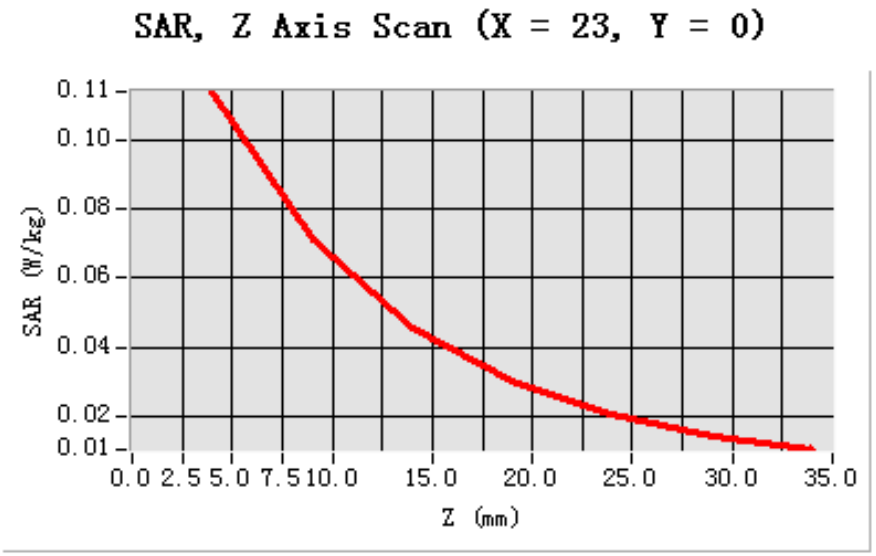

3D sceen shot	Hot spot position
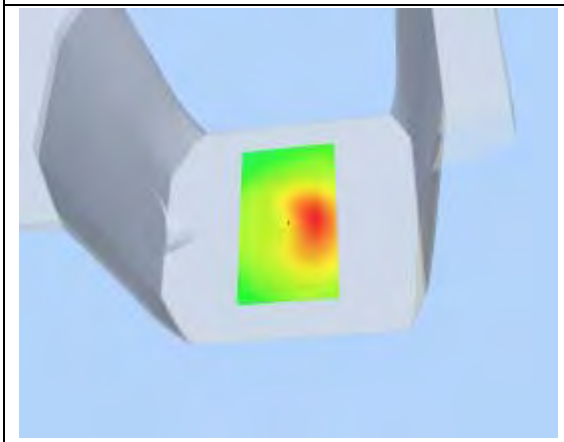	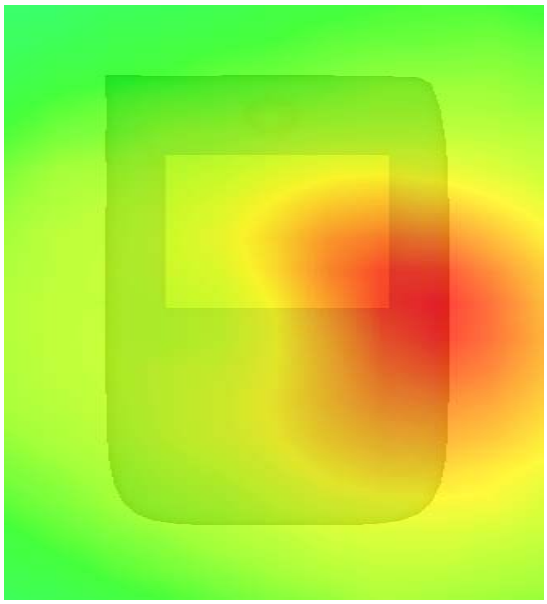

MEASUREMENT 33

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	0.737401
Power drift (%)	0.600000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
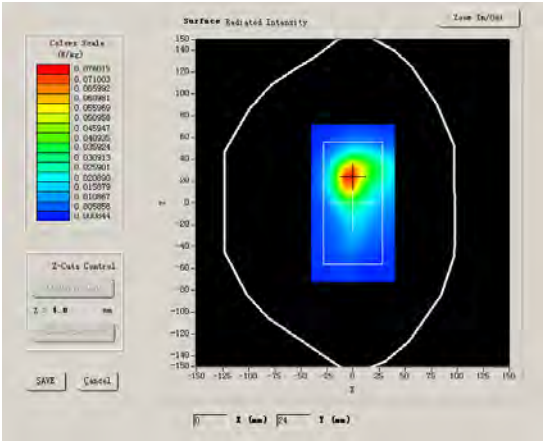	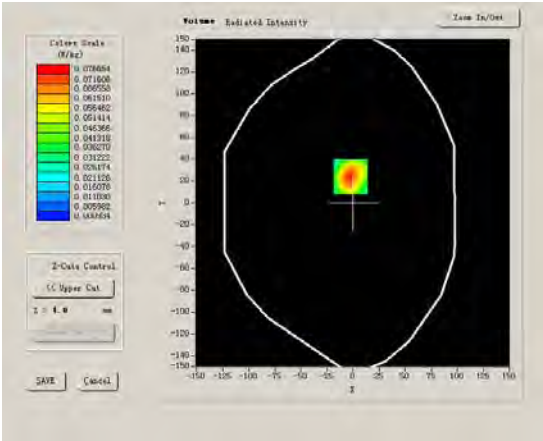

Maximum location: X=3.00, Y=10.00

SAR 10g (W/Kg)	0.151534
SAR 1g (W/Kg)	0.278445

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1970	0.1248	0.0779	0.0503	0.0327	0.0208

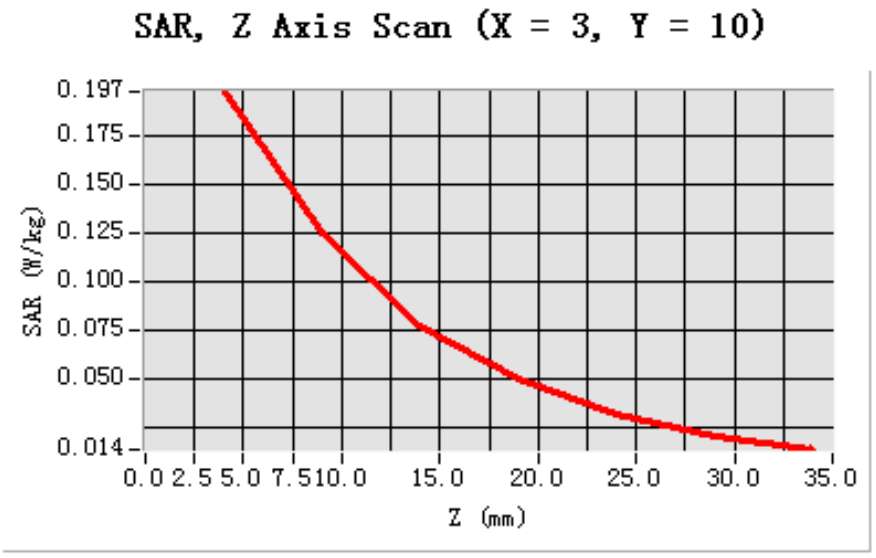

3D sceen shot	Hot spot position
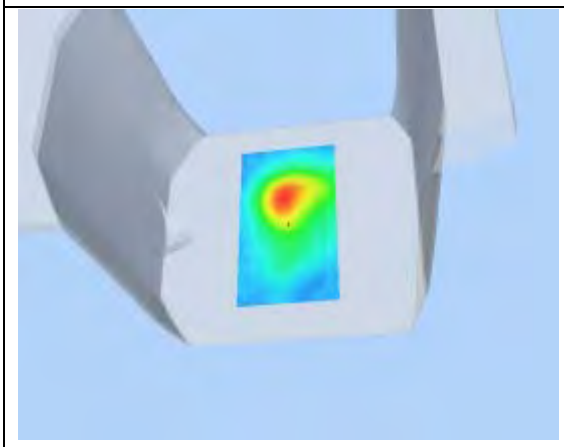	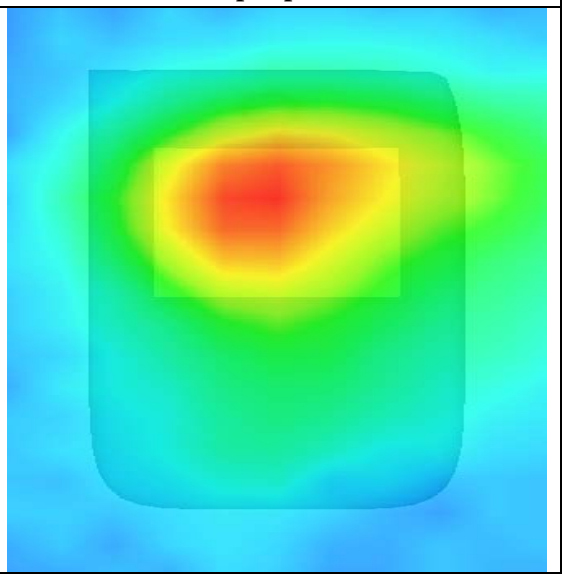

MEASUREMENT 34

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 13 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	39.980000
Relative permittivity	13.170000
Conductivity (S/m)	1.355047
Power drift (%)	0.500000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
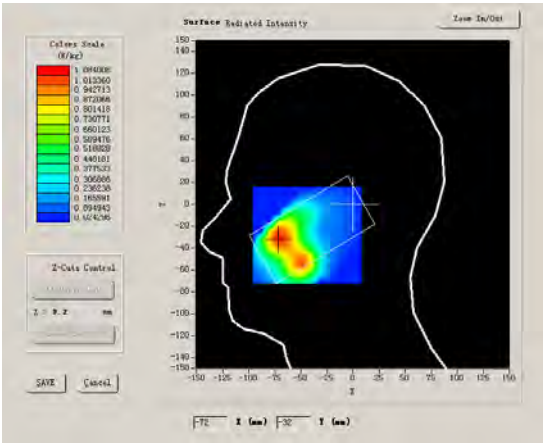	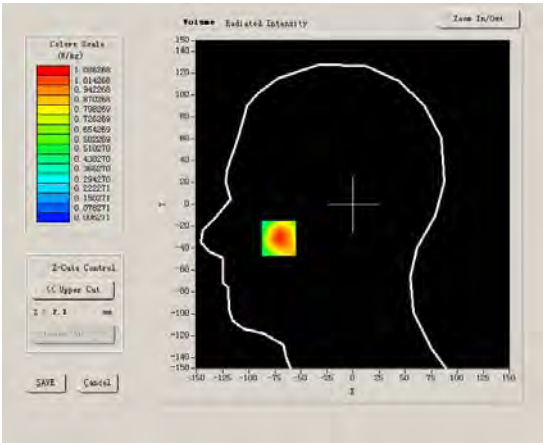

Maximum location: X=-71.00, Y=-31.00

SAR 10g (W/Kg)	0.535693
SAR 1g (W/Kg)	1.033965

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0863	0.5217	0.2502	0.1209	0.0607	0.0310

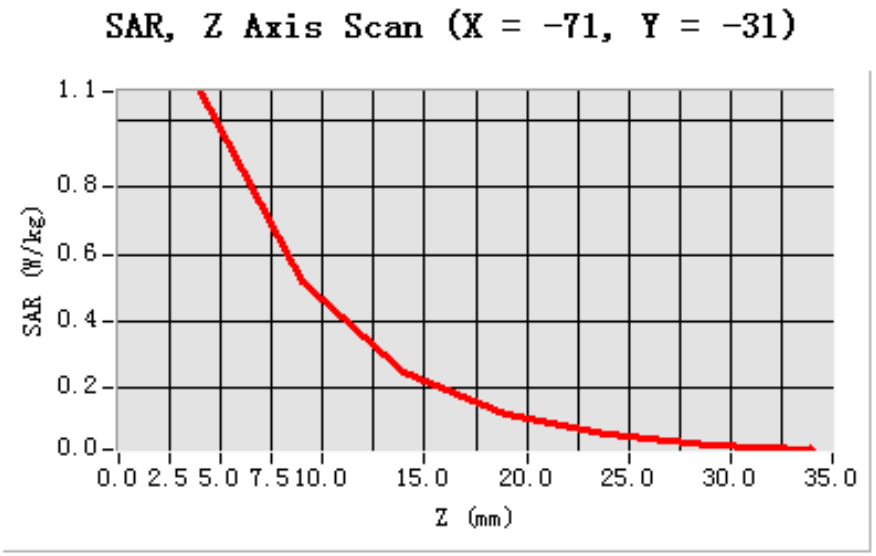

3D sceen shot	Hot spot position
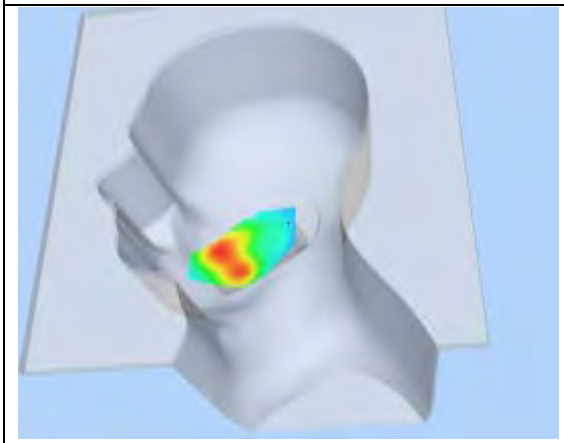	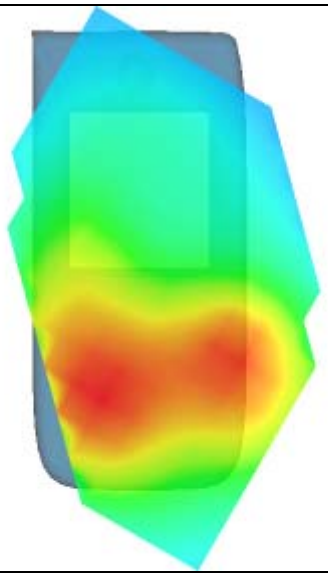

MEASUREMENT 35

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 13 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 9400):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	1.381800
Power drift (%)	1.220000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
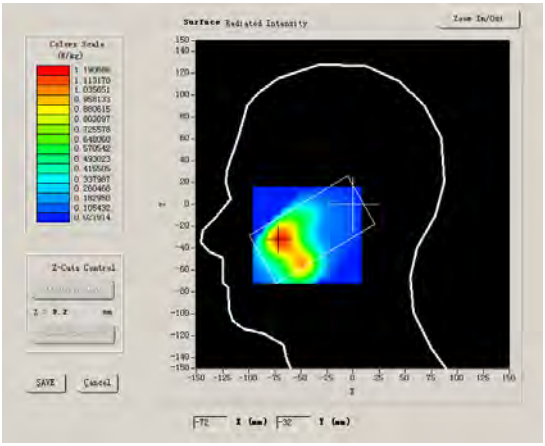	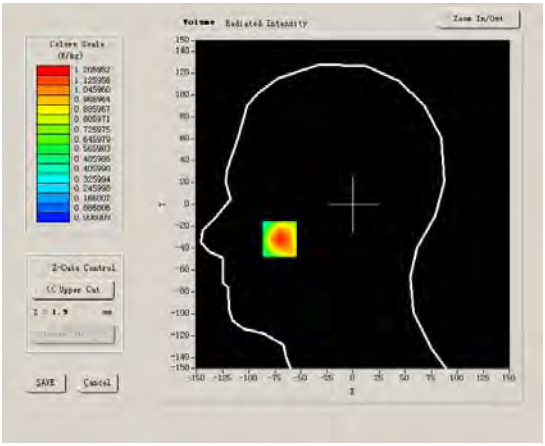

Maximum location: X=-70.00, Y=-32.00

SAR 10g (W/Kg)	0.589658
SAR 1g (W/Kg)	1.149468

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.2060	0.5600	0.2670	0.1284	0.0635	0.0325

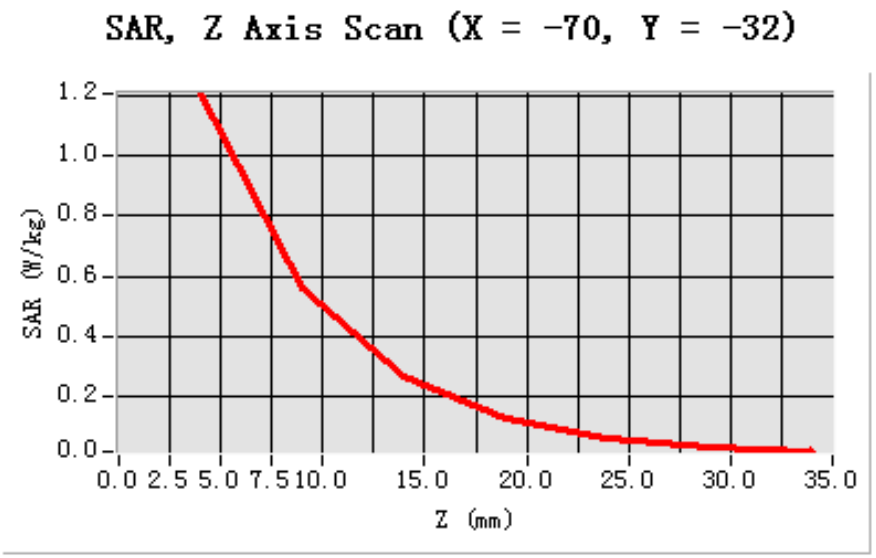

3D sceen shot	Hot spot position
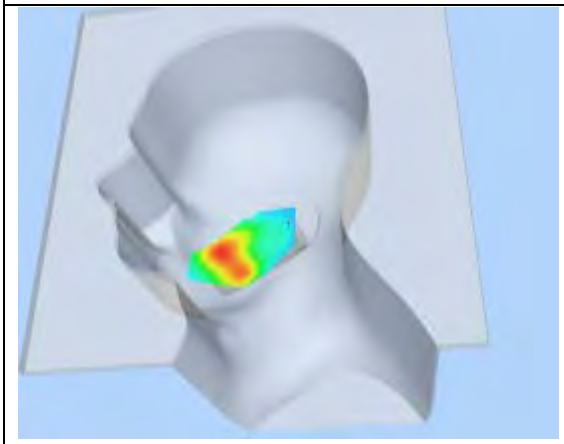	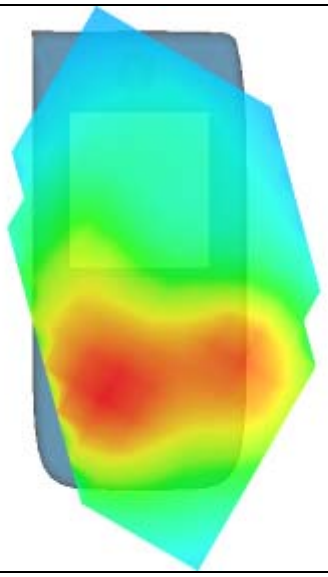

MEASUREMENT 36

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 13 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	39.799999
Relative permittivity	13.380000
Conductivity (S/m)	1.417537
Power drift (%)	-1.180000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
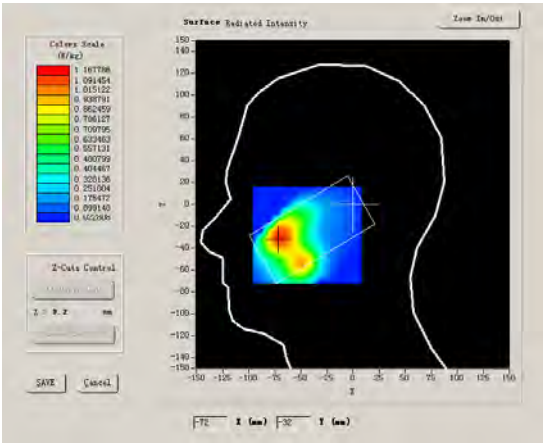	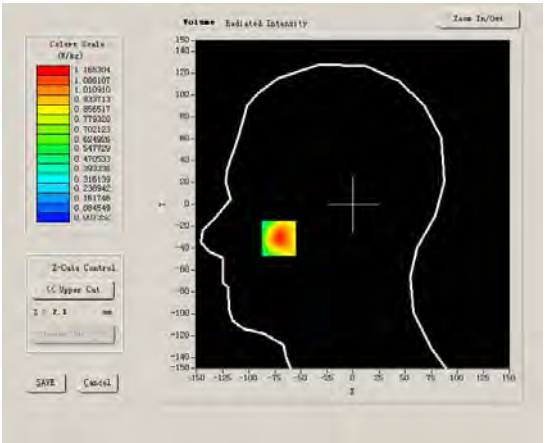

Maximum location: X=-71.00, Y=-31.00

SAR 10g (W/Kg)	0.573478
SAR 1g (W/Kg)	1.109744

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.1653	0.5482	0.2605	0.1262	0.0639	0.0339

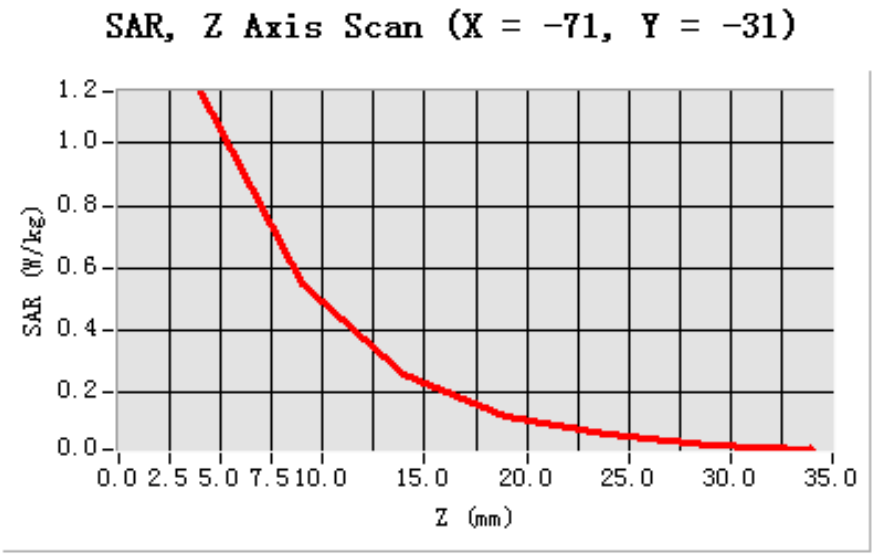

3D sceen shot	Hot spot position
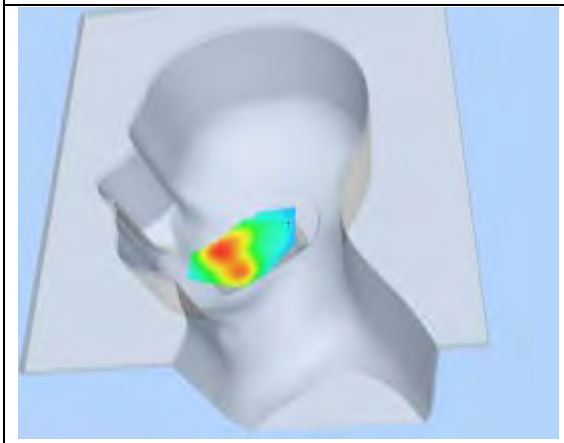	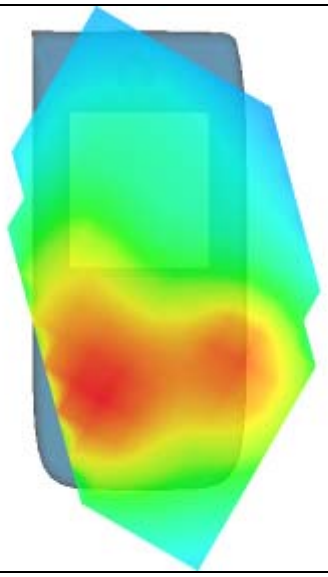

MEASUREMENT 37

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 13 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	39.799999
Relative permittivity	13.380000
Conductivity (S/m)	1.417537
Power drift (%)	-1.060000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
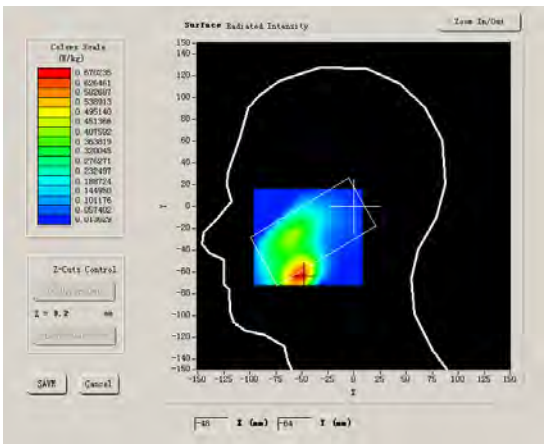	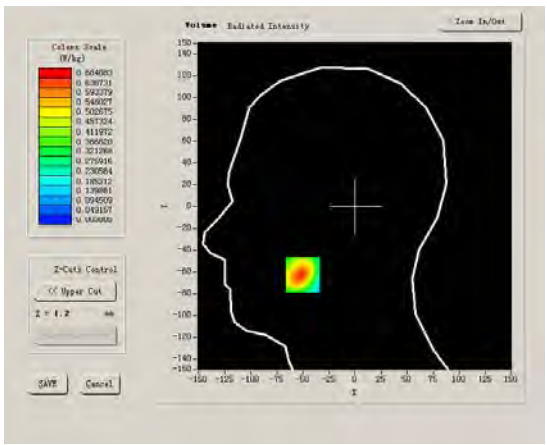

Maximum location: X=-50.00, Y=-63.00

SAR 10g (W/Kg)	0.315161
SAR 1g (W/Kg)	0.648716

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6841	0.3083	0.1463	0.0714	0.0328	0.0181

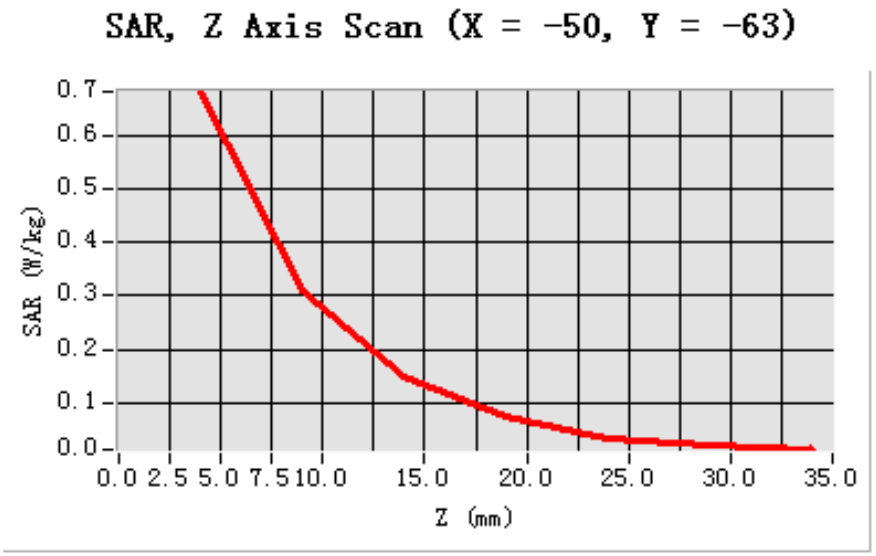

3D sceen shot	Hot spot position
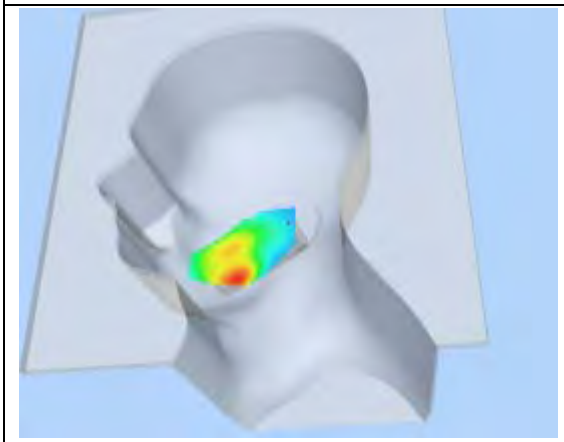	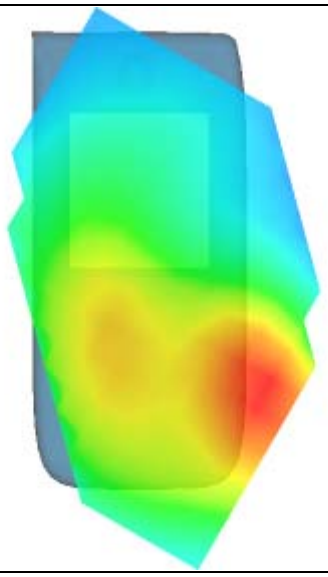

MEASUREMENT 38

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 8 minutes 16 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1900
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	1.381800
Power drift (%)	-0.050000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
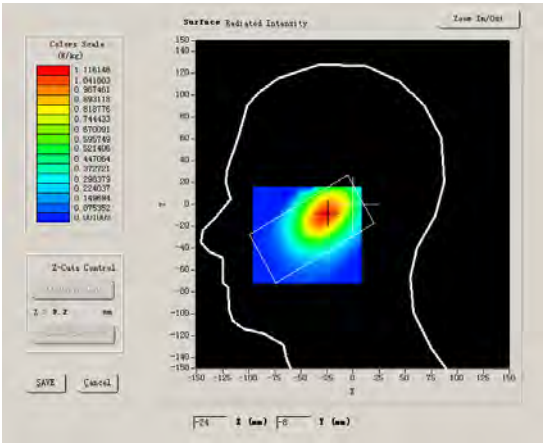	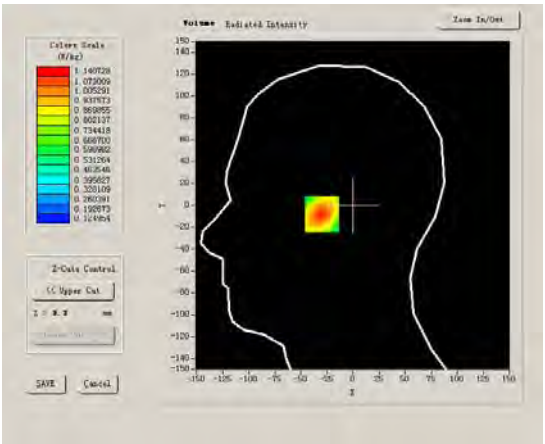

Maximum location: X=-25.00, Y=-8.00

SAR 10g (W/Kg)	0.735202
SAR 1g (W/Kg)	1.084288

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.1407	0.7915	0.6010	0.4534	0.3564	0.2952

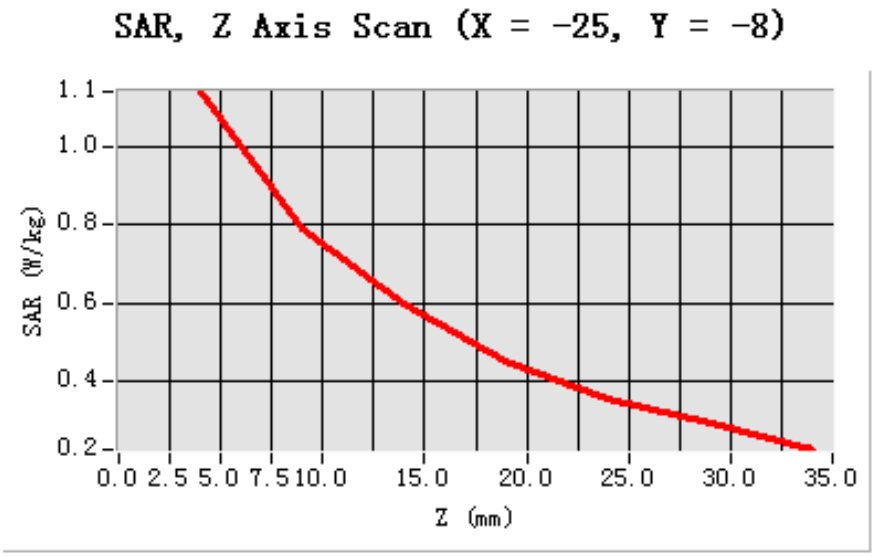

3D sceen shot	Hot spot position
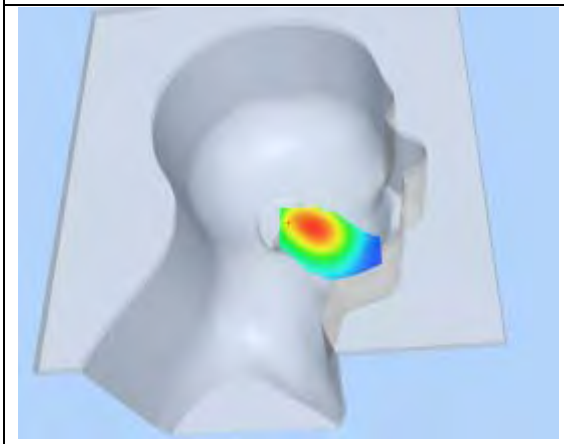	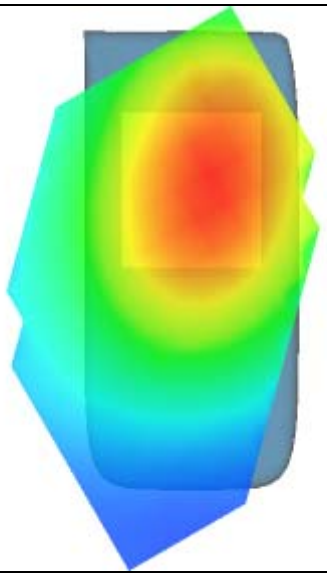

MEASUREMENT 39

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 8 minutes 15 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1900
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 9400):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	1.381800
Power drift (%)	-0.120000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
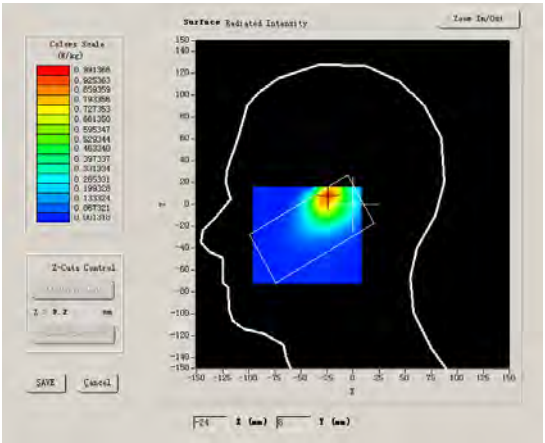	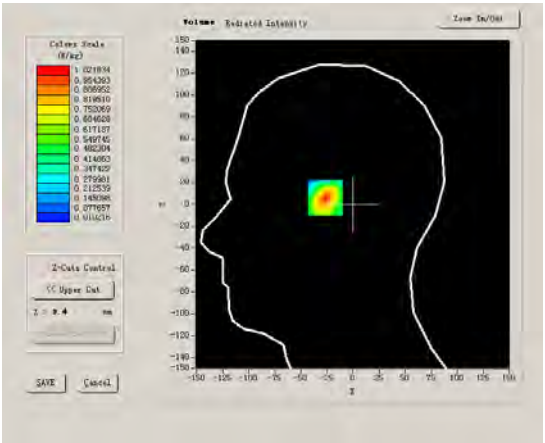

Maximum location: X=-24.00, Y=8.00

SAR 10g (W/Kg)	0.481924
SAR 1g (W/Kg)	0.935300

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0218	0.5453	0.3151	0.1748	0.0995	0.0593

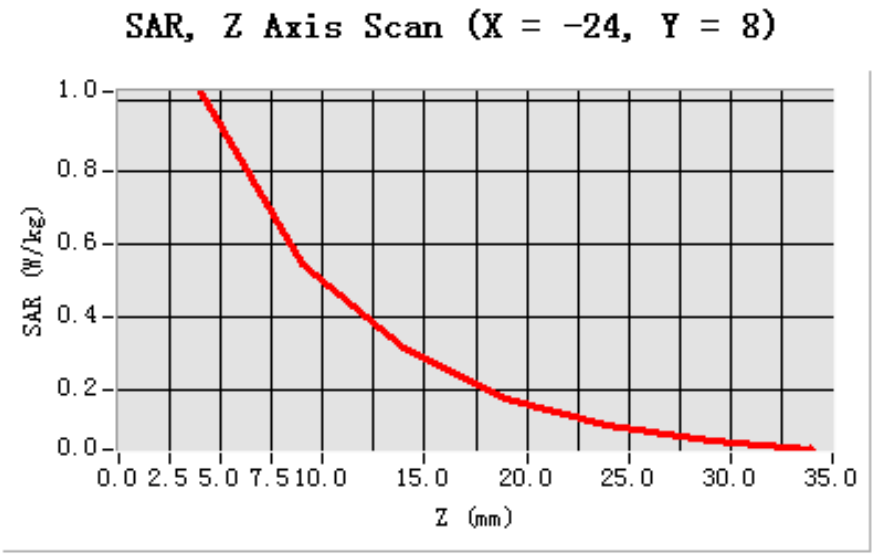

3D sceen shot	Hot spot position
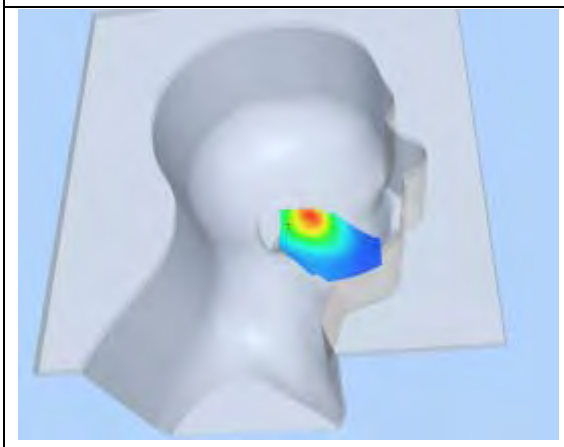	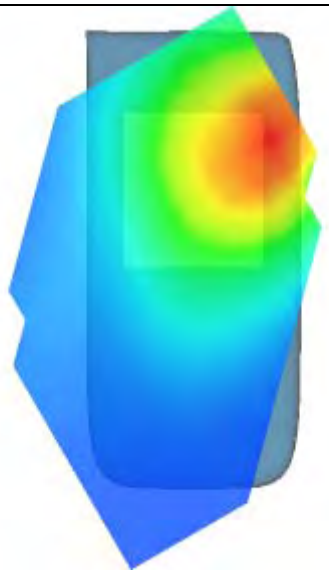

MEASUREMENT 40

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 8 minutes 17 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	1.381800
Power drift (%)	0.270000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
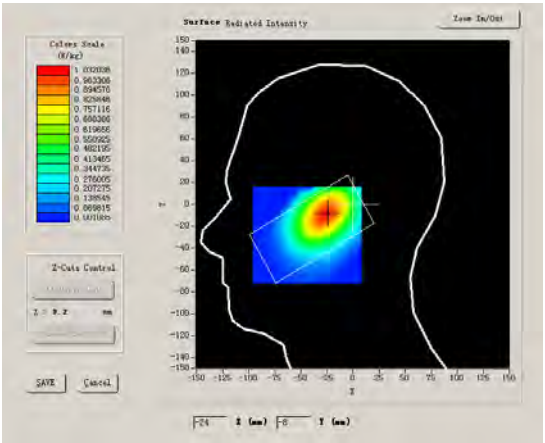	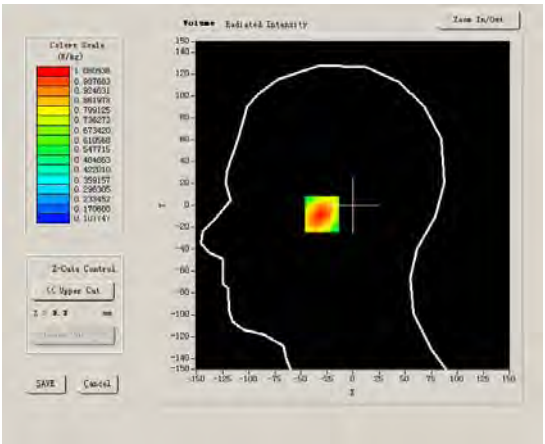

Maximum location: X=-25.00, Y=-8.00

SAR 10g (W/Kg)	0.683398
SAR 1g (W/Kg)	0.996432

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0505	0.7436	0.5607	0.4101	0.3251	0.2626

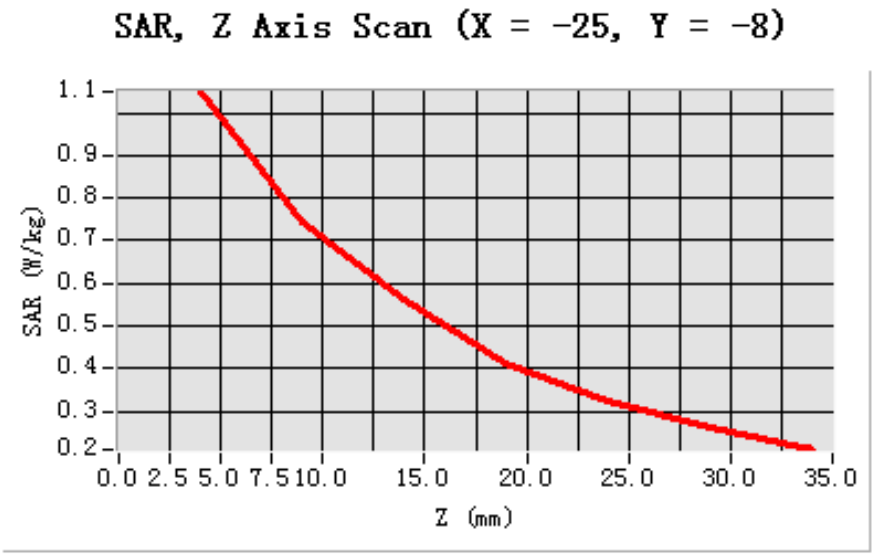

3D sceen shot	Hot spot position
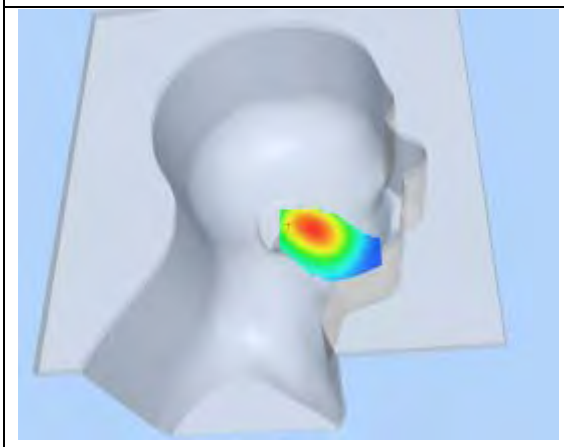	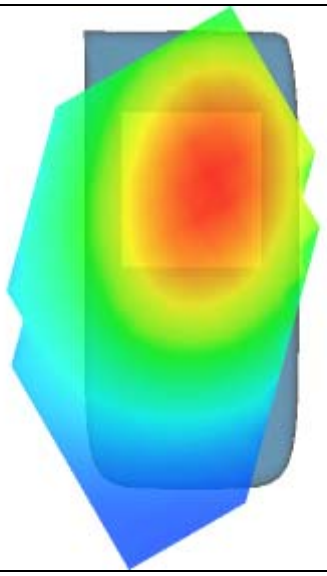

MEASUREMENT 41

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 8 minutes 17 seconds

A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	1.381800
Power drift (%)	0.180000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
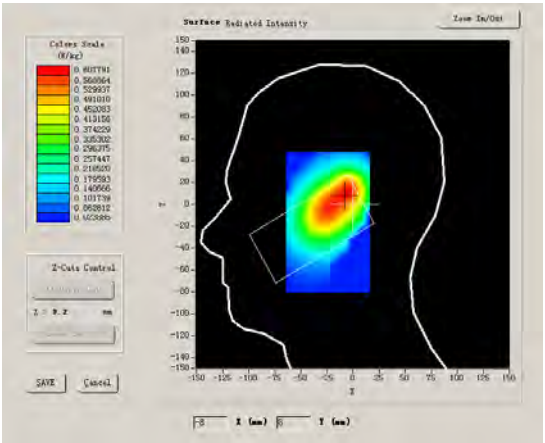	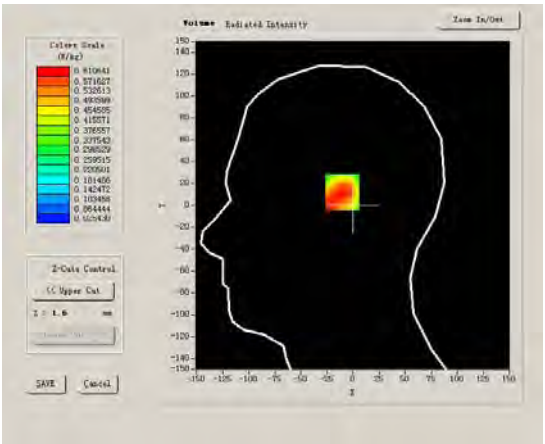

Maximum location: X=-6.00, Y=12.00

SAR 10g (W/Kg)	0.384848
SAR 1g (W/Kg)	0.599273

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6106	0.3898	0.2516	0.1673	0.1158	0.0782

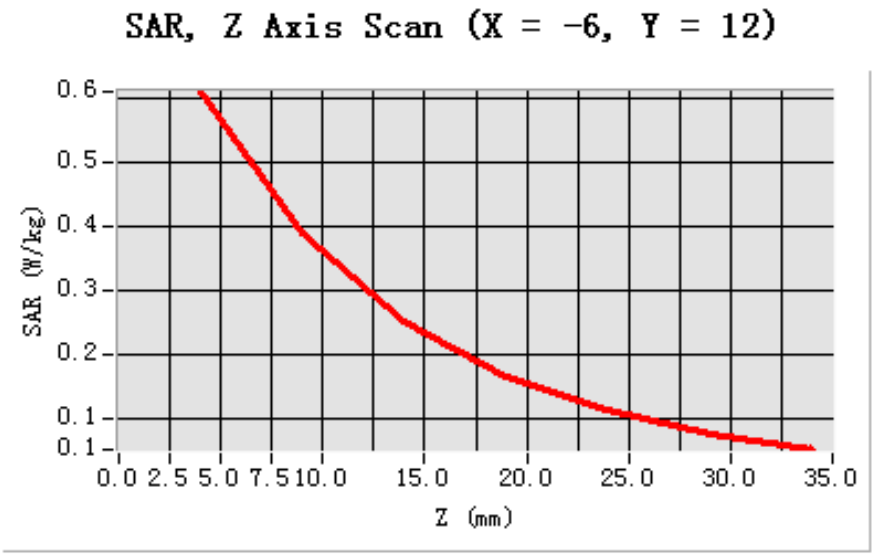

3D sceen shot	Hot spot position
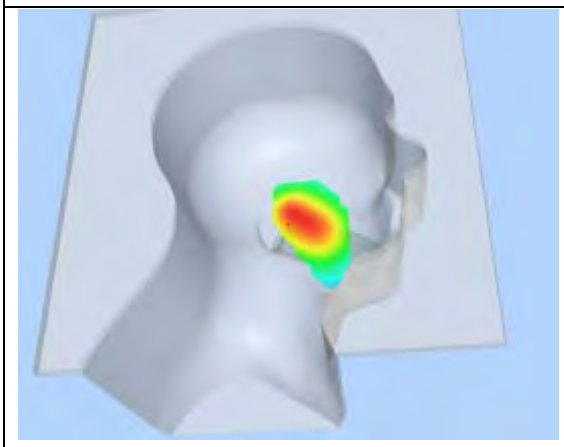	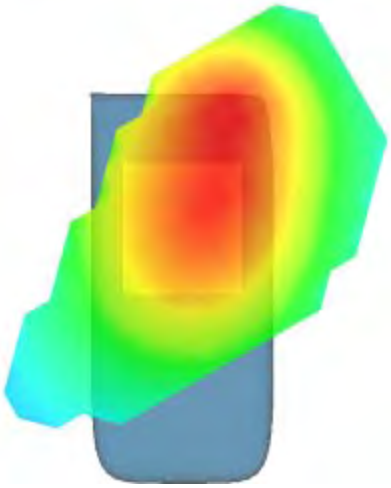

MEASUREMENT 42

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.633572
Power drift (%)	-0.260000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
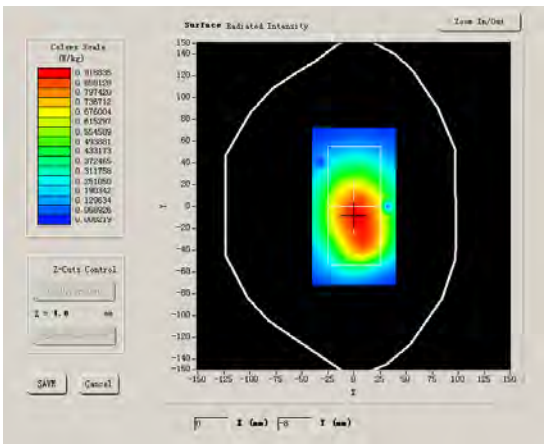	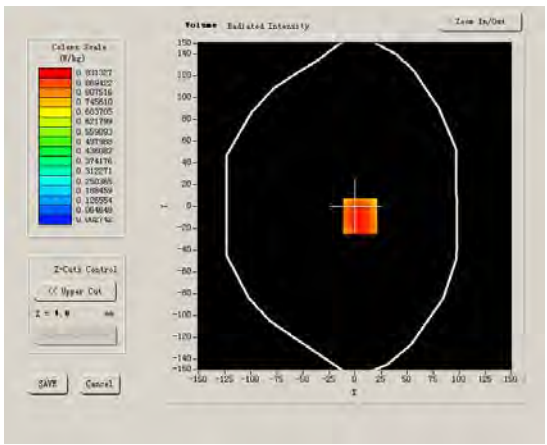

Maximum location: X=5.00, Y=-9.00

SAR 10g (W/Kg)	0.724649
SAR 1g (W/Kg)	1.048072

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0807	0.7479	0.5623	0.4307	0.3135	0.2251

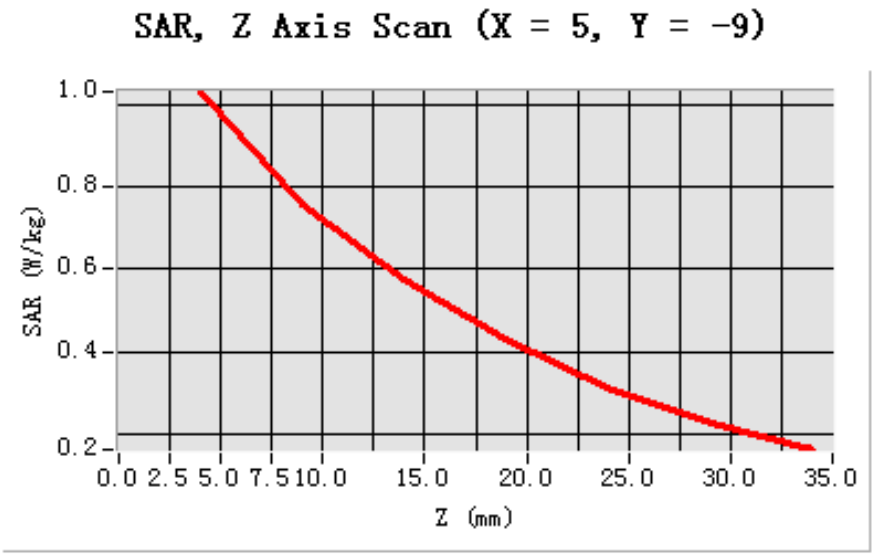

3D sceen shot	Hot spot position
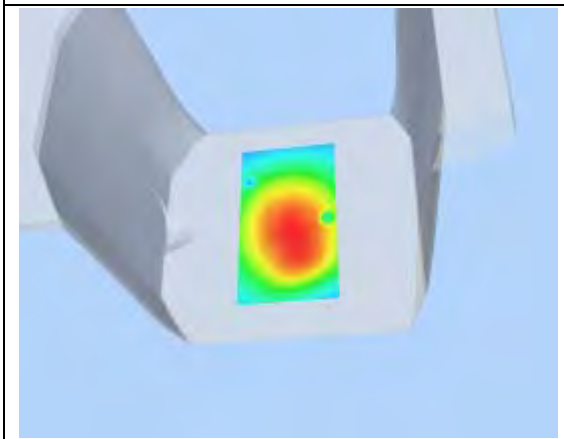	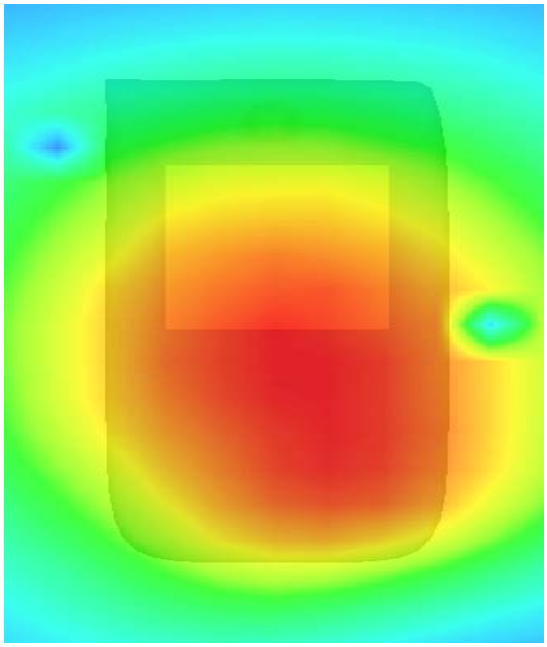

MEASUREMENT 43

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 9400):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.658270
Power drift (%)	0.570000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
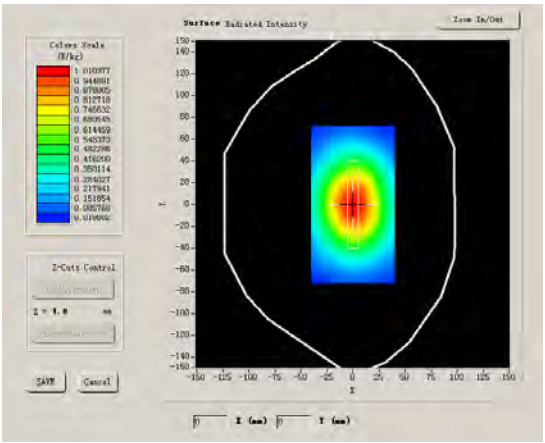	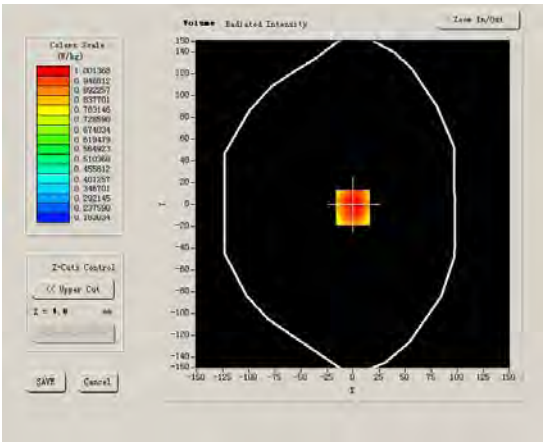

Maximum location: X=0.00, Y=-3.00

SAR 10g (W/Kg)	0.806481
SAR 1g (W/Kg)	1.071642

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0979	0.8831	0.7030	0.5637	0.4429	0.3495

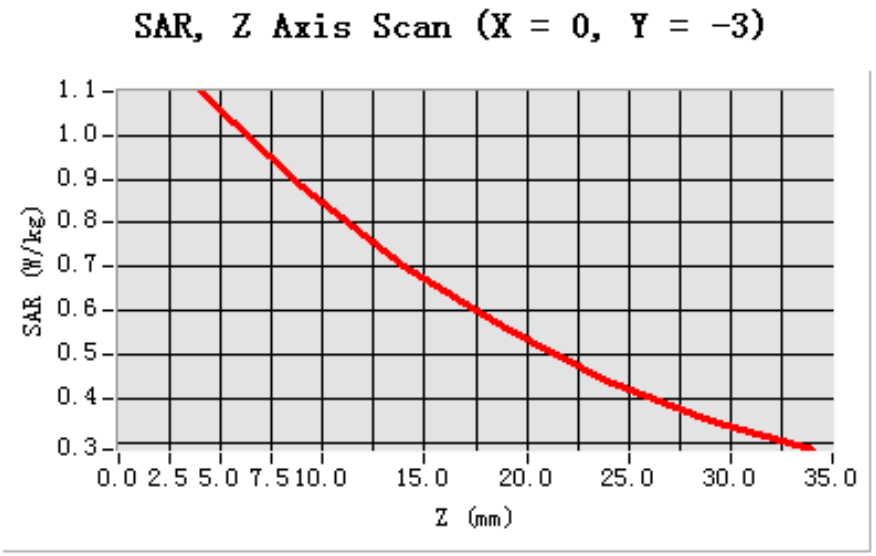

3D sceen shot	Hot spot position
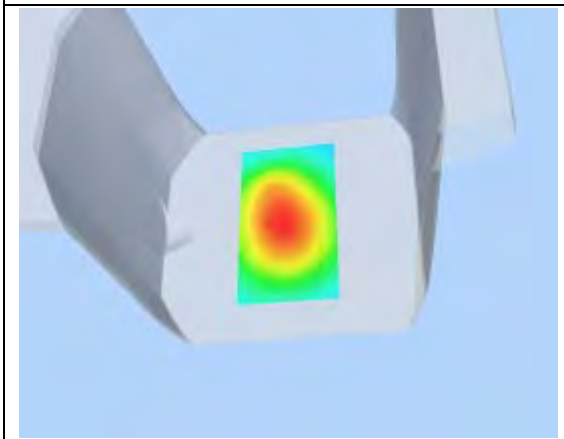	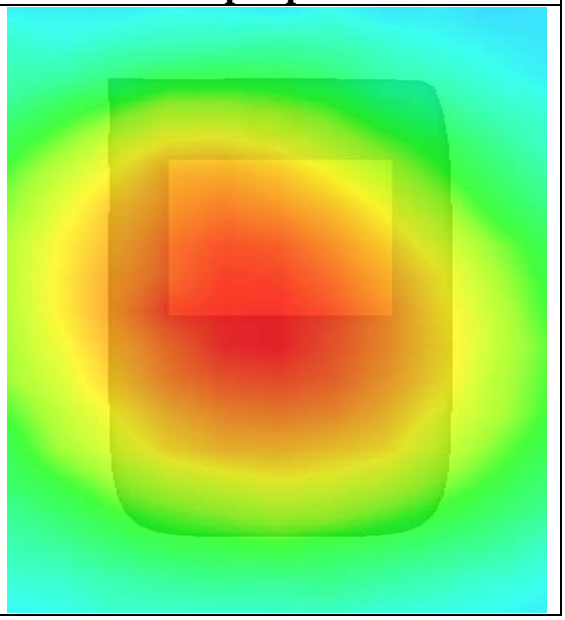

MEASUREMENT 44

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.682085
Power drift (%)	0.060000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
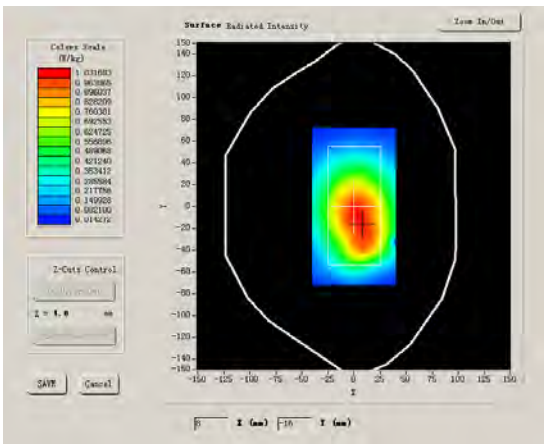	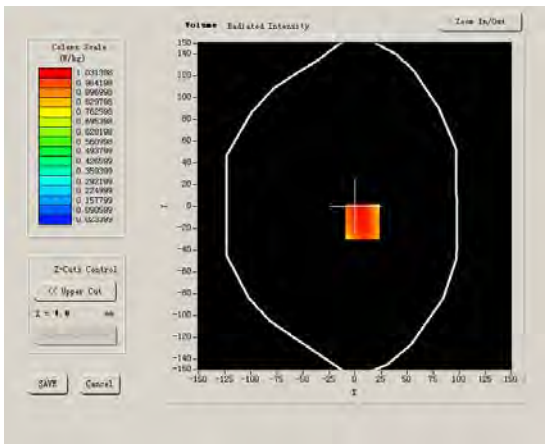

Maximum location: X=7.00, Y=-14.00

SAR 10g (W/Kg)	0.752064
SAR 1g (W/Kg)	1.108670

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.1359	0.8634	0.6099	0.4522	0.3241	0.2361

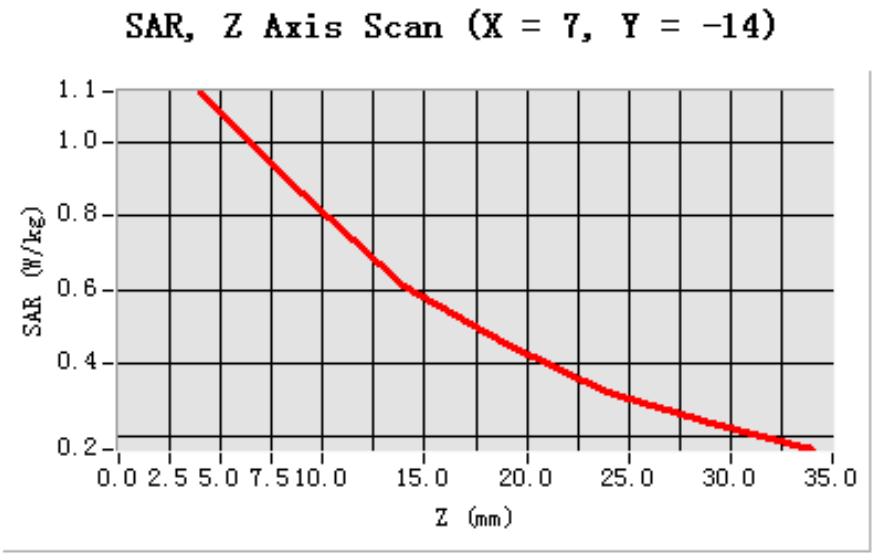

3D sceen shot	Hot spot position
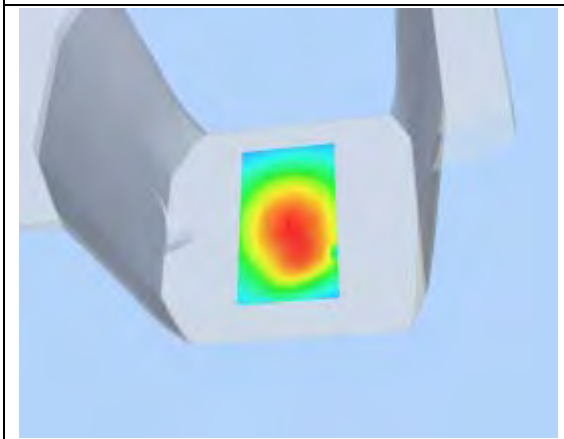	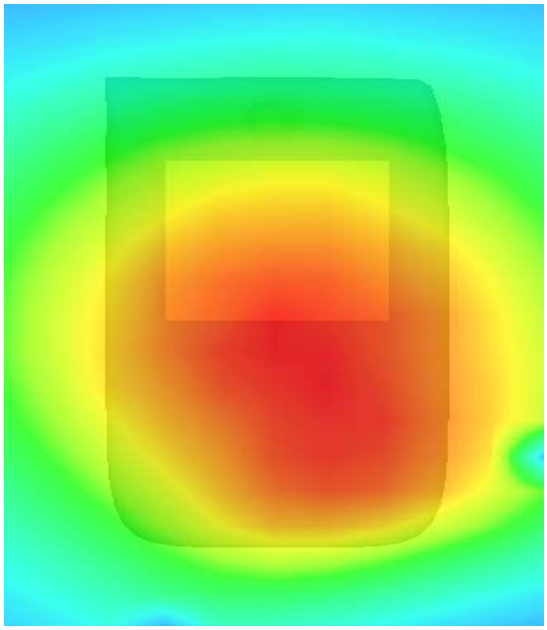

MEASUREMENT 45

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.682085
Power drift (%)	0.060000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
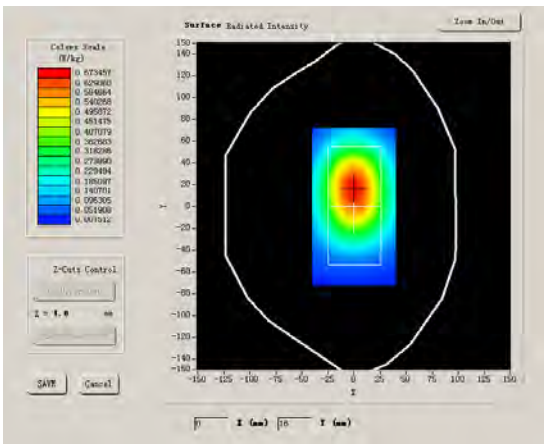	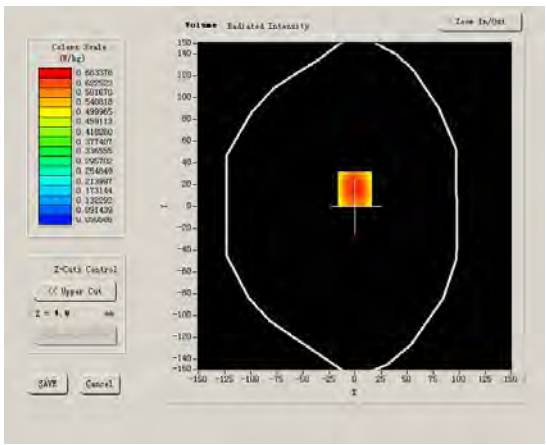

Maximum location: X=0.00, Y=16.00

SAR 10g (W/Kg)	0.474679
SAR 1g (W/Kg)	0.716109

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7383	0.5240	0.3628	0.2608	0.1811	0.1370

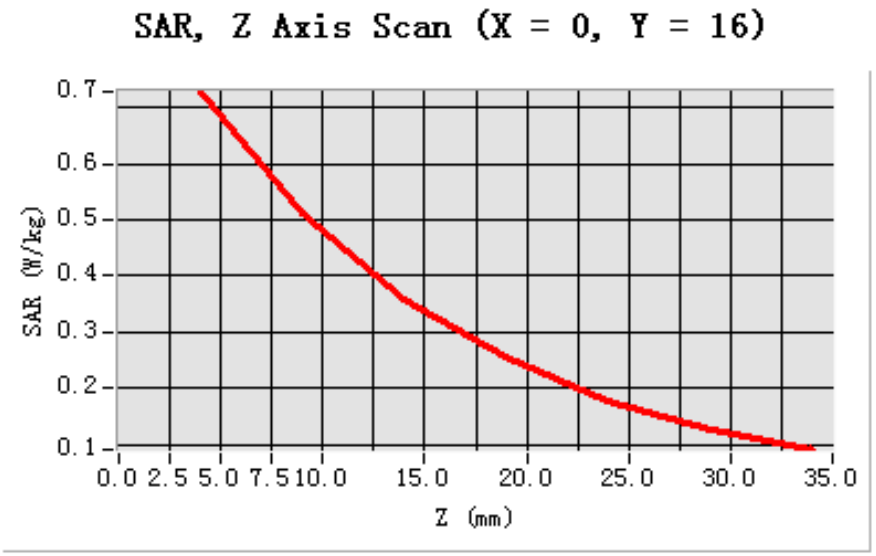

3D sceen shot	Hot spot position
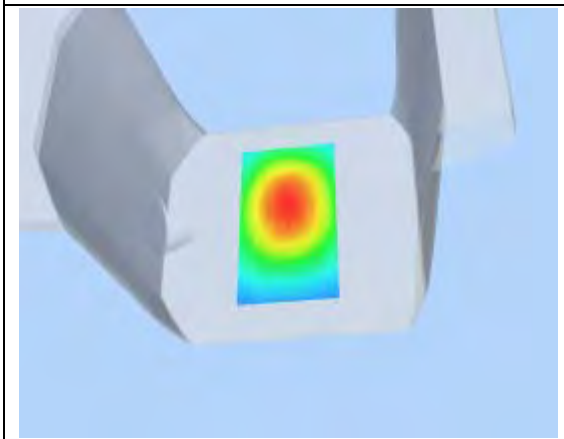	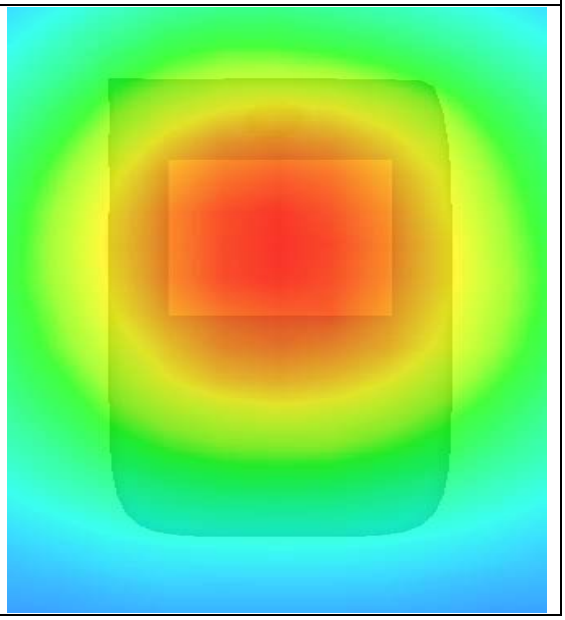

MEASUREMENT 46

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 14 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.658270
Power drift (%)	0.080000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
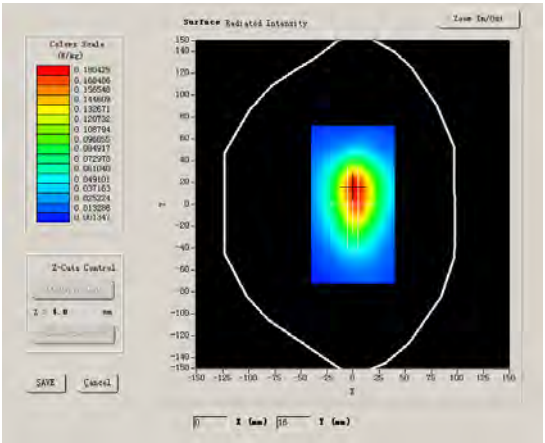	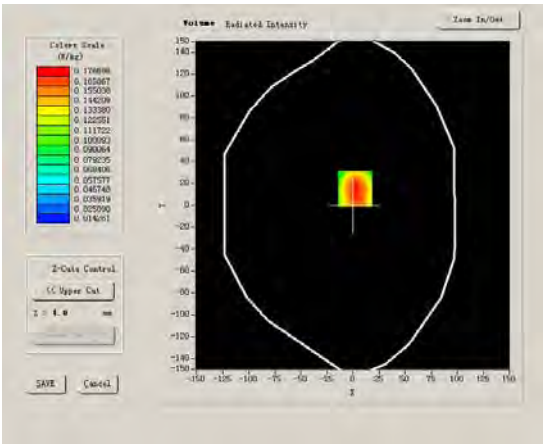

Maximum location: X=2.00, Y=15.00

SAR 10g (W/Kg)	0.138137
SAR 1g (W/Kg)	0.203360

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2120	0.1484	0.1053	0.0767	0.0556	0.0403

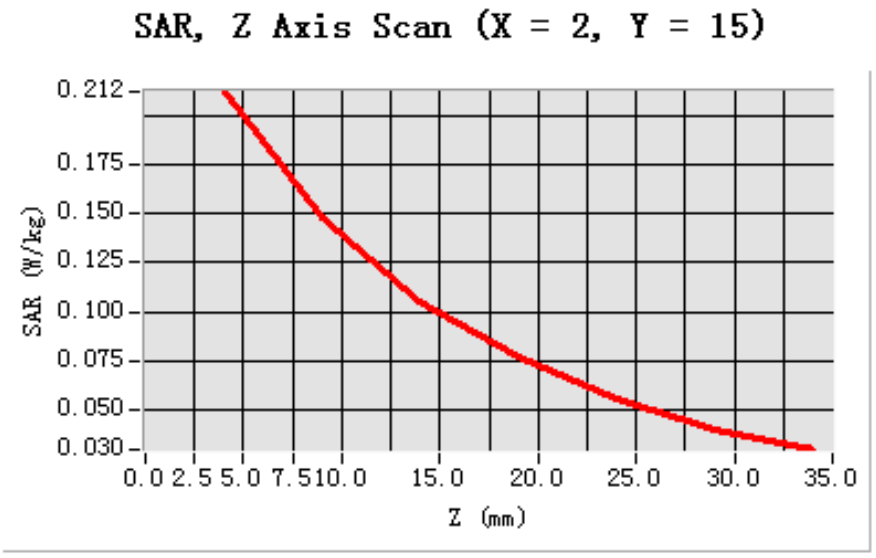

3D sceen shot	Hot spot position
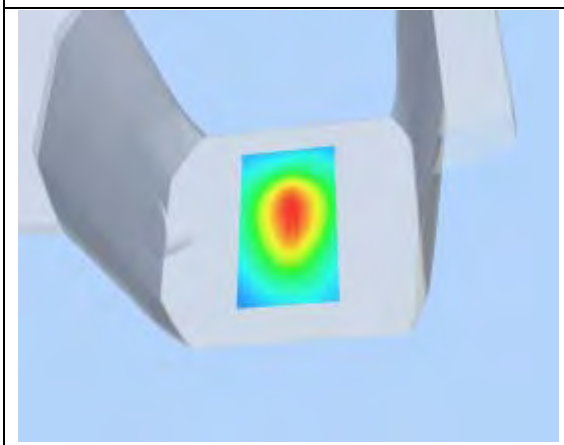	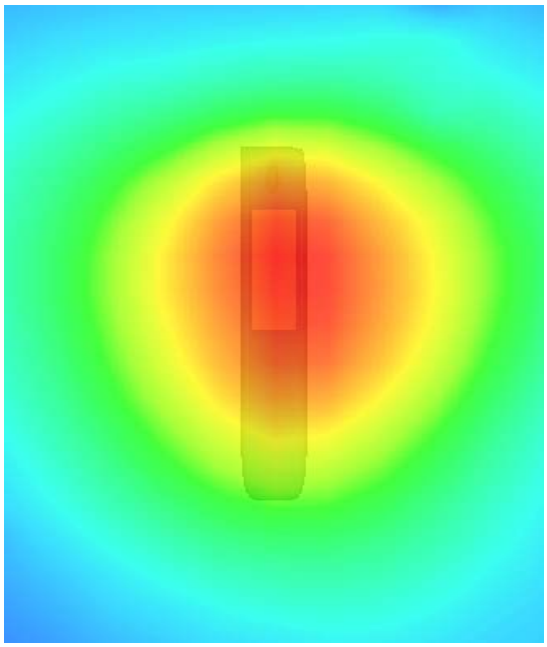

MEASUREMENT 47

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 14 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.658270
Power drift (%)	1.030000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
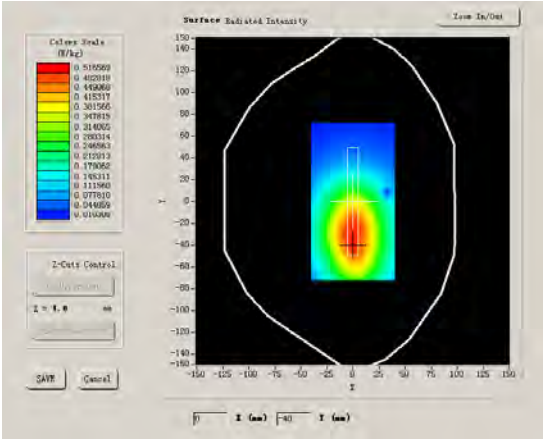	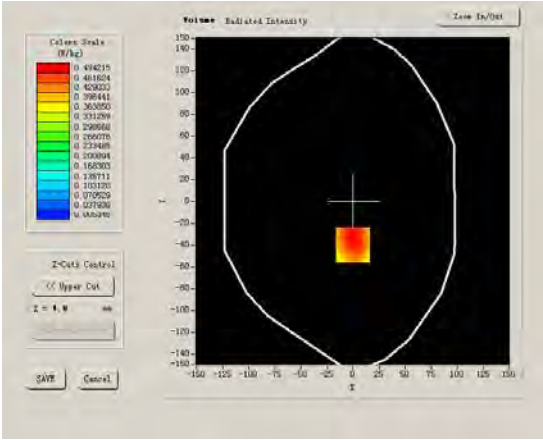

Maximum location: X=0.00, Y=-40.00

SAR 10g (W/Kg)	0.362136
SAR 1g (W/Kg)	0.563572

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5532	0.3824	0.2722	0.1910	0.1344	0.0980

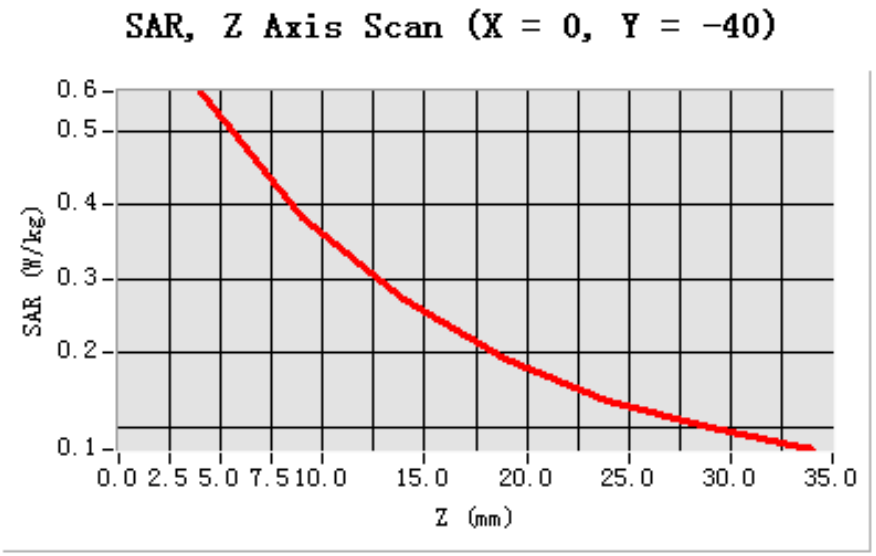

3D sceen shot	Hot spot position
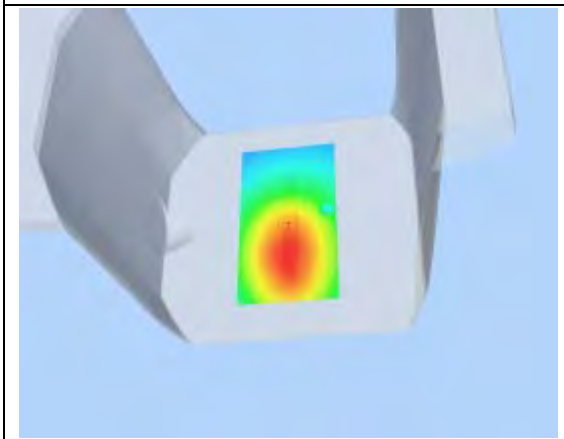	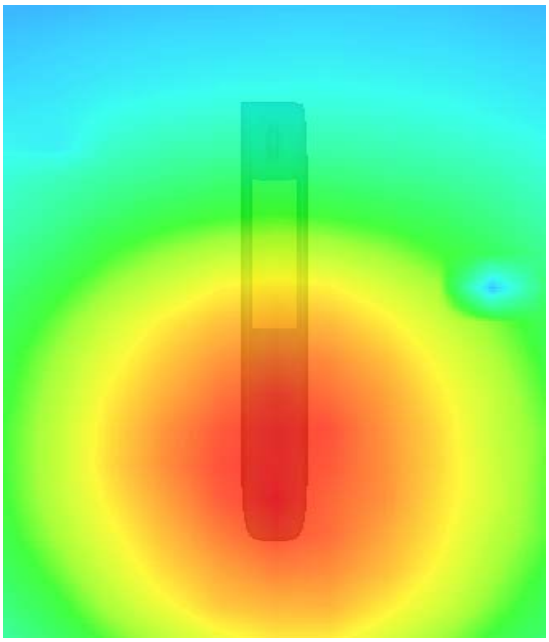

MEASUREMENT 48

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 12 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.658270
Power drift (%)	1.030000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
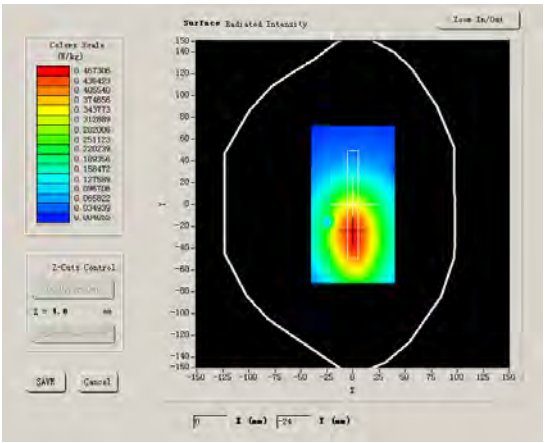	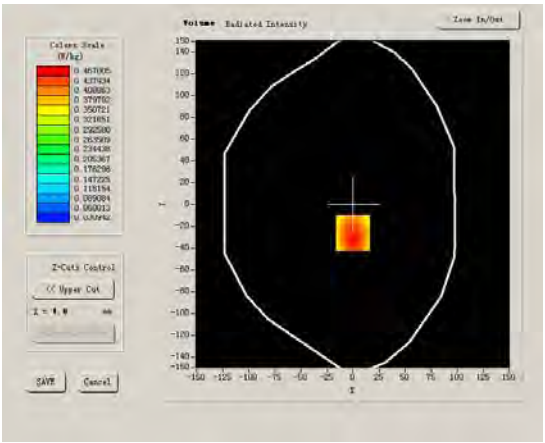

Maximum location: X=0.00, Y=-26.00

SAR 10g (W/Kg)	0.336763
SAR 1g (W/Kg)	0.507310

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5176	0.3617	0.2425	0.1690	0.1222	0.0870

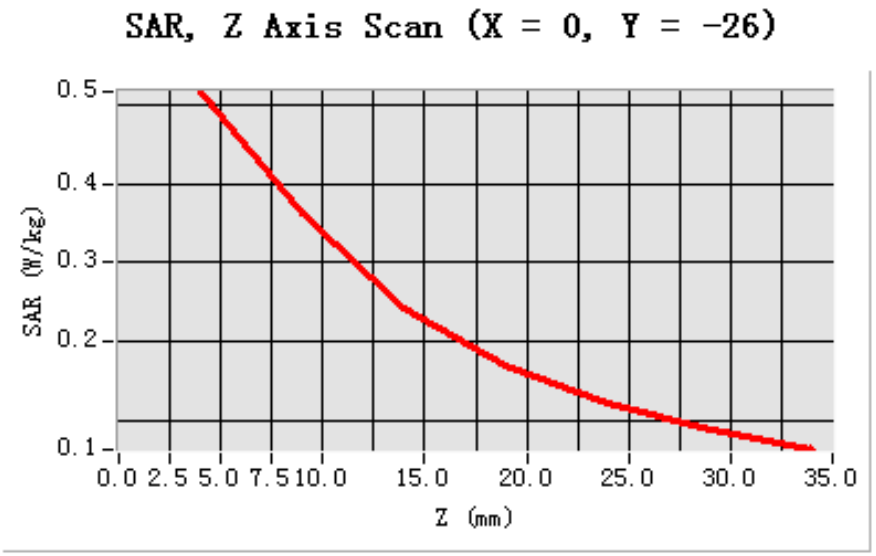

3D sceen shot	Hot spot position
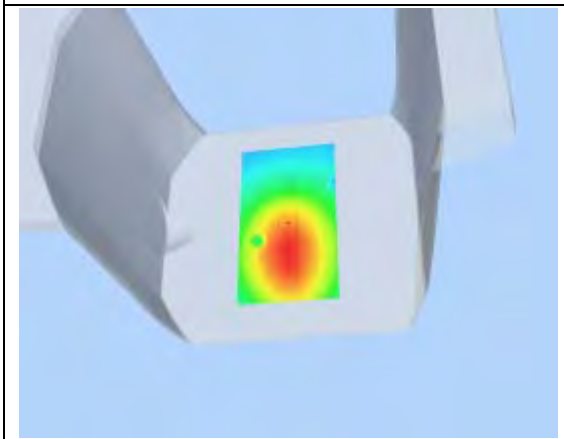	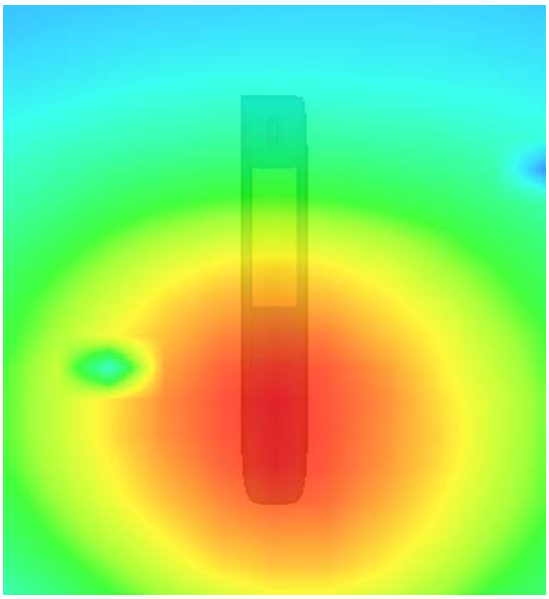

MEASUREMENT 49

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 13/2/2012
Measurement duration: 8 minutes 17 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Right head
Device Position	Cheek
Band	802.11B
Channels	Low
Signal	DSSS

B. SAR Measurement Results

Lower Band SAR (Channel 1)

Frequency (MHz)	2412.000000
Relative permittivity (real part)	39.622857
Relative permittivity	15.490000
Conductivity (S/m)	1.964313
Power drift (%)	-0.430000
Ambient Temperature:	22.3°C
Liquid Temperature:	21.5°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
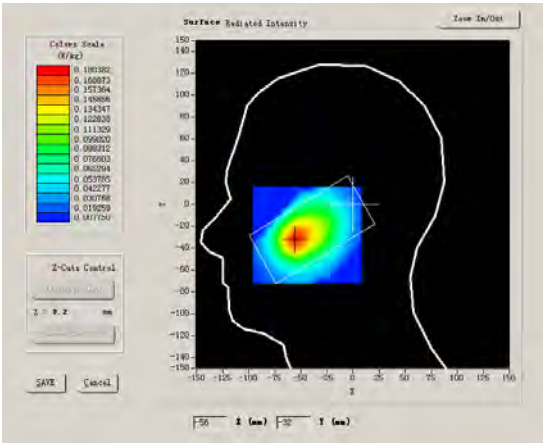	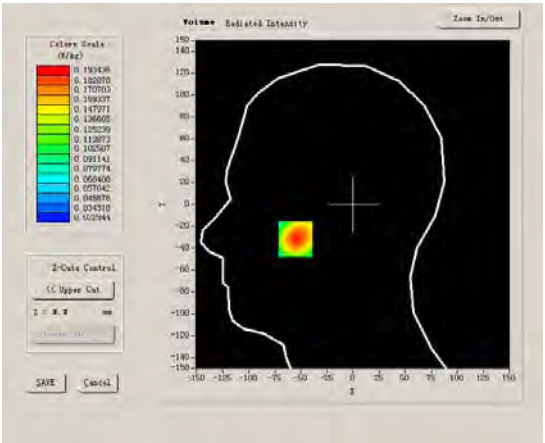

Maximum location: X=-55.00, Y=-32.00

SAR 10g (W/Kg)	0.137837
SAR 1g (W/Kg)	0.185303

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1934	0.1534	0.1305	0.1010	0.0793	0.0611

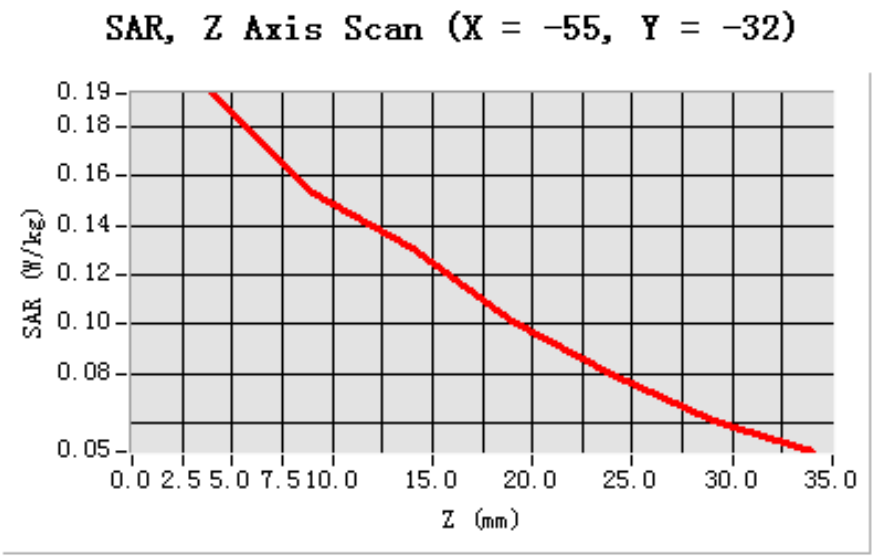

3D sceen shot	Hot spot position
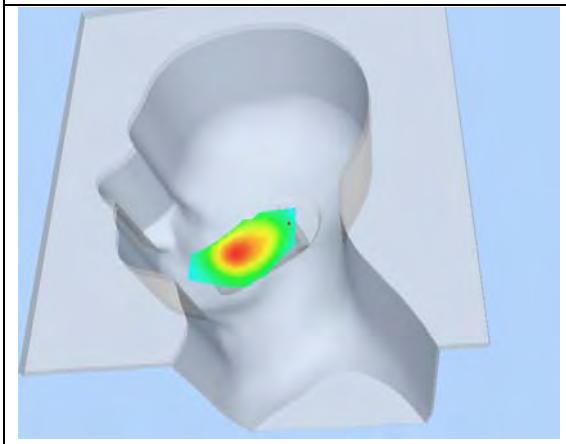	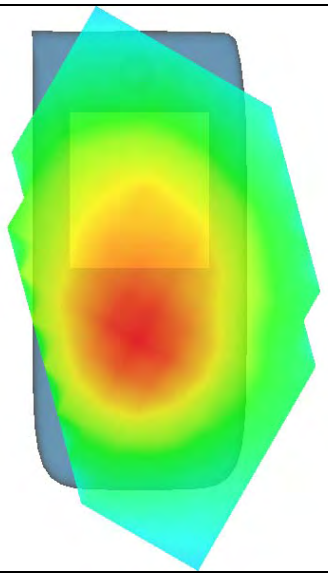

MEASUREMENT 50

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 13/2/2012
Measurement duration: 8 minutes 15 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Right head
Device Position	Tilt
Band	802.11B
Channels	Low
Signal	DSSS

B. SAR Measurement Results

Lower Band SAR (Channel 1)

Frequency (MHz)	2412.000000
Relative permittivity (real part)	39.622857
Relative permittivity	15.490000
Conductivity (S/m)	1.964313
Power drift (%)	-0.630000
Ambient Temperature:	22.3°C
Liquid Temperature:	21.5°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
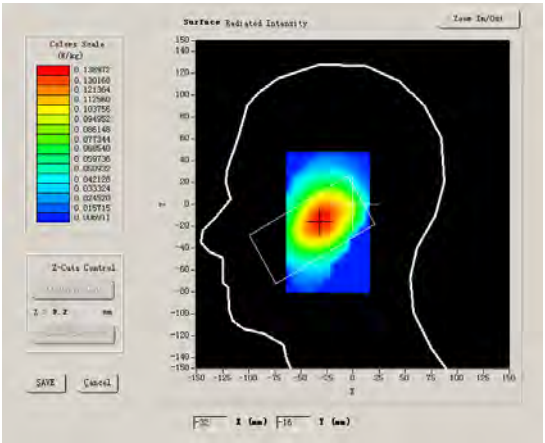	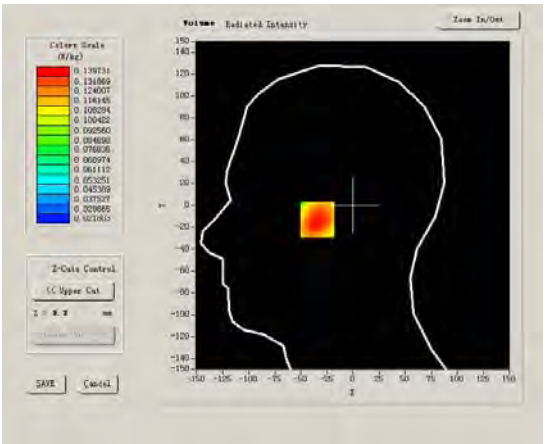

Maximum location: X=-30.00, Y=-13.00

SAR 10g (W/Kg)	0.110815
SAR 1g (W/Kg)	0.137899

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1397	0.1223	0.1027	0.0886	0.0712	0.0508

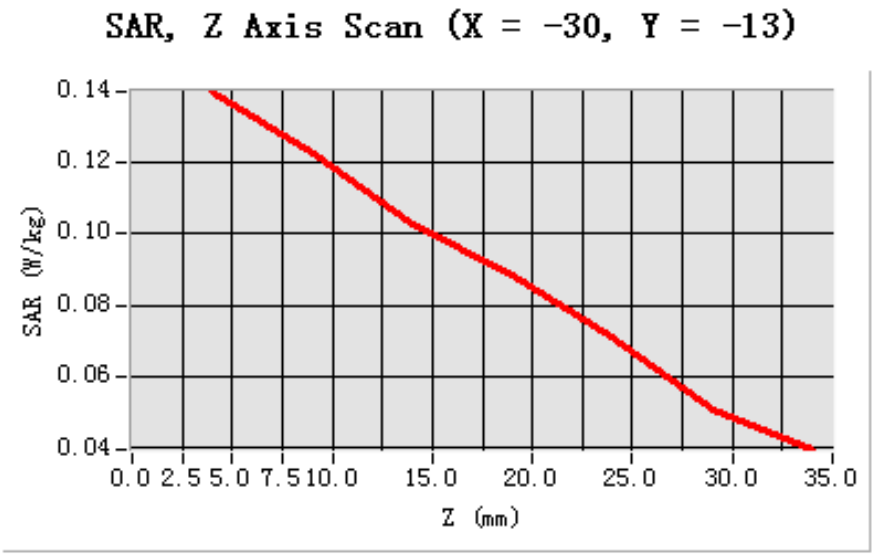

3D sceen shot	Hot spot position
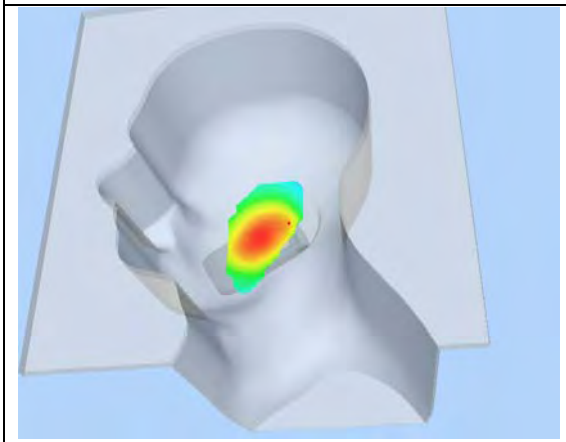	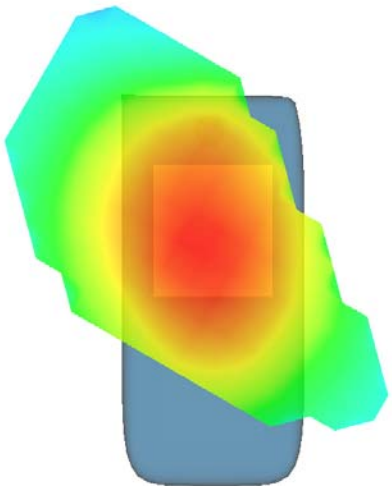

MEASUREMENT 51

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 13/2/2012
Measurement duration: 8 minutes 17 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Cheek
Band	802.11B
Channels	Low
Signal	DSSS

B. SAR Measurement Results

Lower Band SAR (Channel 1)

Frequency (MHz)	2412.000000
Relative permittivity (real part)	39.622857
Relative permittivity	15.490000
Conductivity (S/m)	1.964313
Power drift (%)	0.510000
Ambient Temperature:	22.3°C
Liquid Temperature:	21.5°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
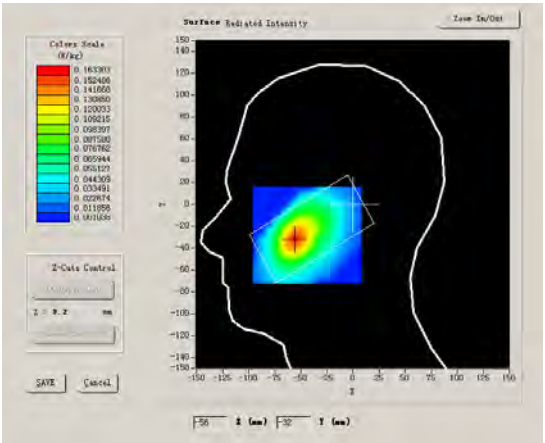	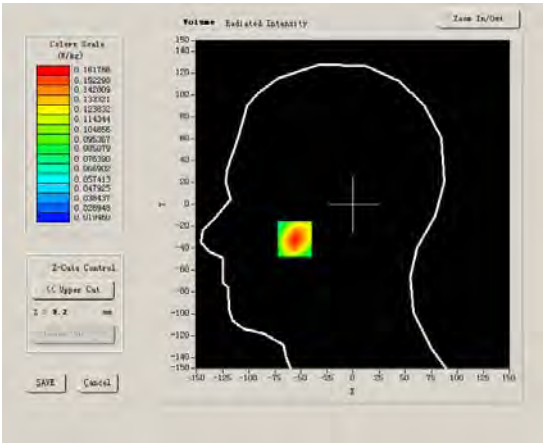

Maximum location: X=-56.00, Y=-32.00

SAR 10g (W/Kg)	0.110525
SAR 1g (W/Kg)	0.154025

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1618	0.1282	0.1010	0.0791	0.0624	0.0467

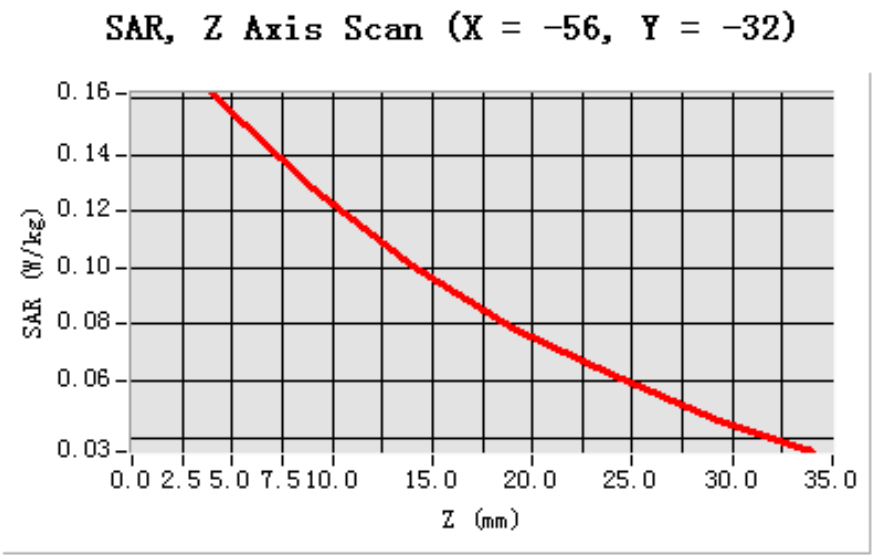

3D sceen shot	Hot spot position
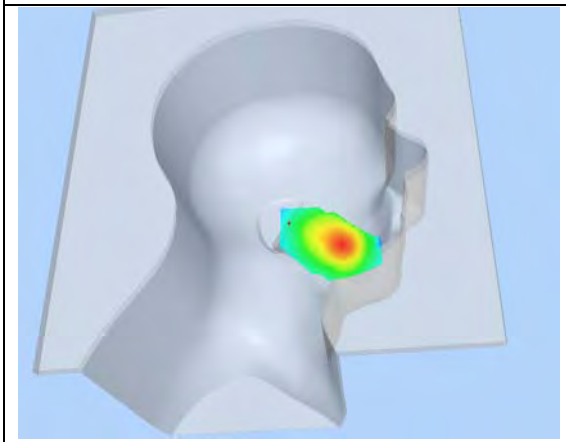	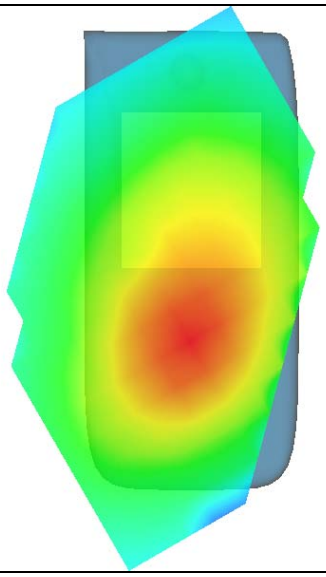

MEASUREMENT 52

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 13/2/2012
Measurement duration: 8 minutes 17 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Tilt
Band	802.11B
Channels	Low
Signal	DSSS

B. SAR Measurement Results

Lower Band SAR (Channel 1)

Frequency (MHz)	2412.000000
Relative permittivity (real part)	39.622857
Relative permittivity	15.490000
Conductivity (S/m)	1.964313
Power drift (%)	0.620000
Ambient Temperature:	22.3°C
Liquid Temperature:	21.5°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
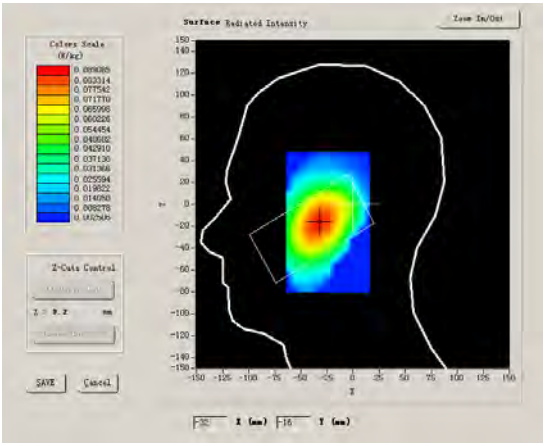	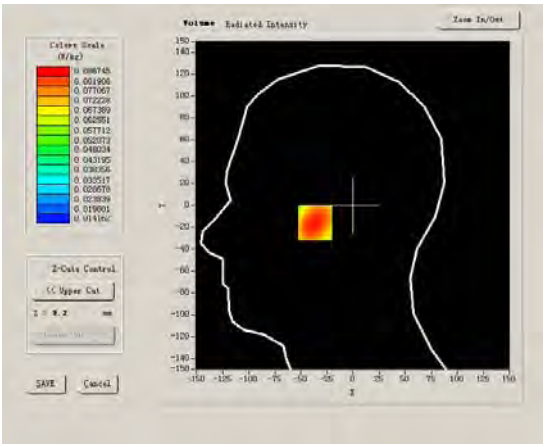

Maximum location: X=-32.00, Y=-16.00

SAR 10g (W/Kg)	0.068461
SAR 1g (W/Kg)	0.084536

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0867	0.0748	0.0649	0.0542	0.0451	0.0352

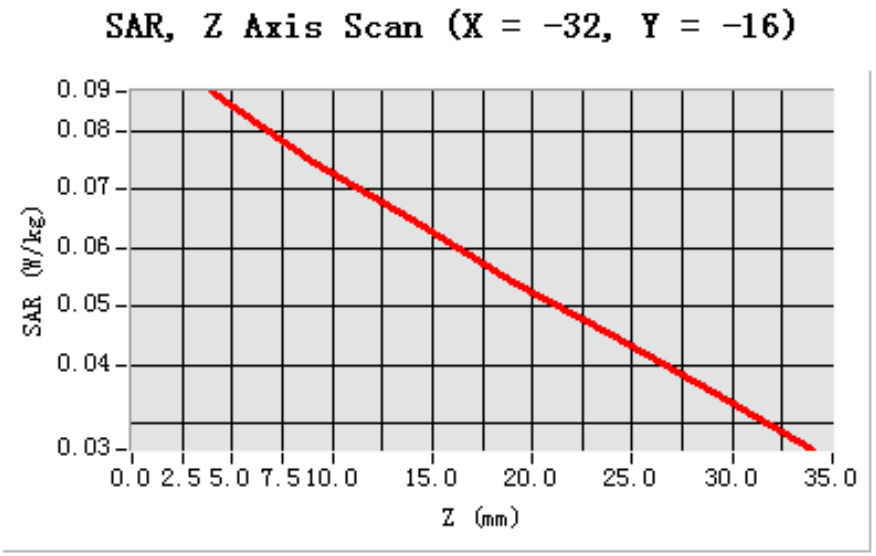

3D sceen shot	Hot spot position
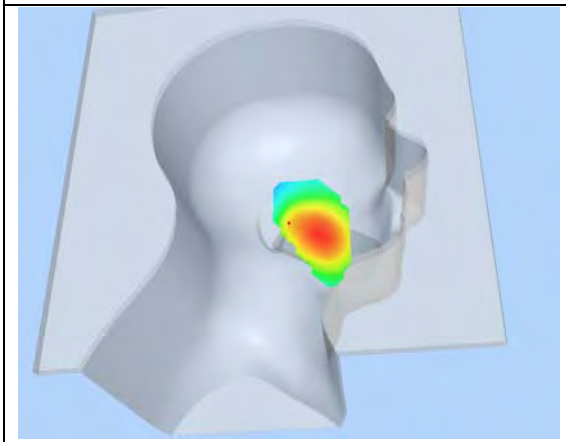	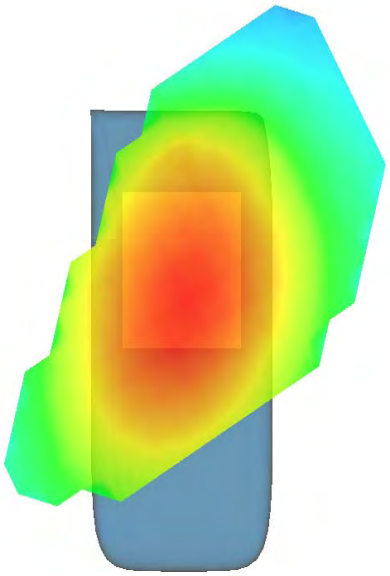

MEASUREMENT 53

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	Low
Signal	DSSS

B. SAR Measurement Results

Lower Band SAR (Channel 1)

Frequency (MHz)	2412.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-1.710000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
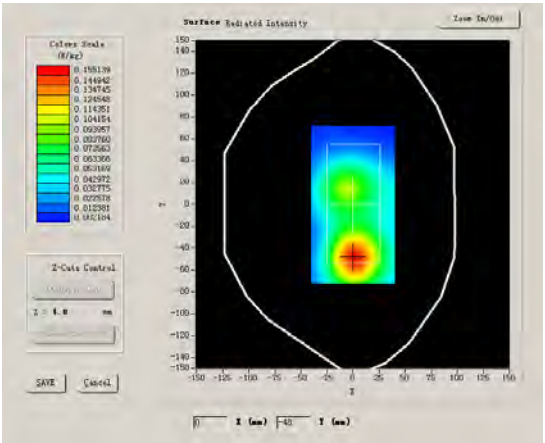	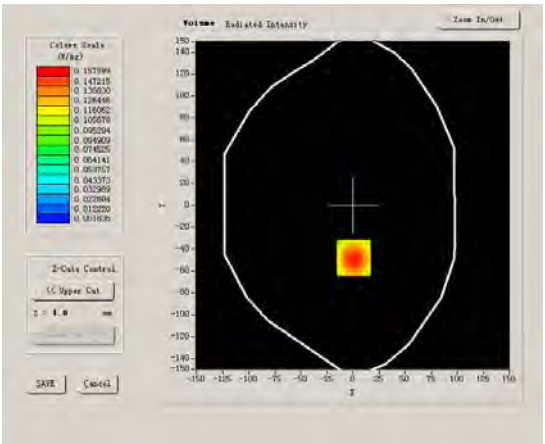

Maximum location: X=1.00, Y=-48.00

SAR 10g (W/Kg)	0.084342
SAR 1g (W/Kg)	0.135475

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1613	0.0798	0.0412	0.0215	0.0112	0.0067

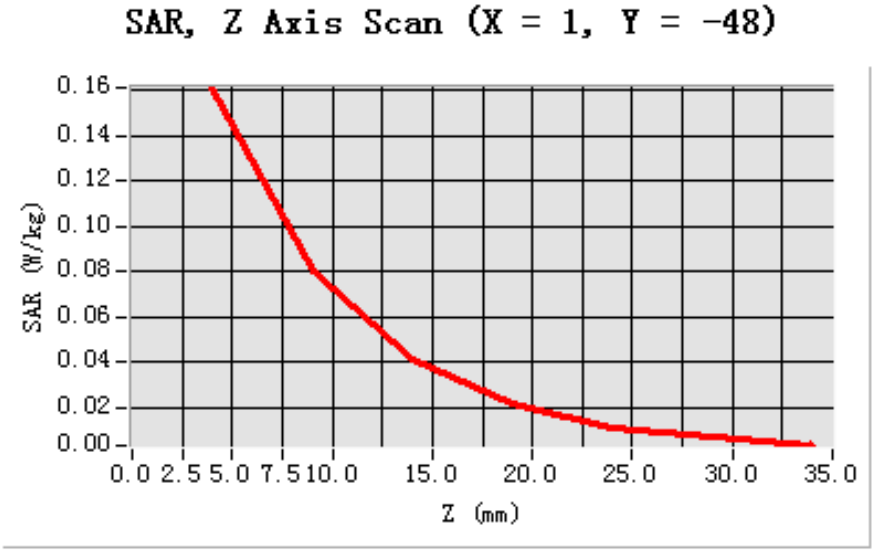

3D sceen shot	Hot spot position
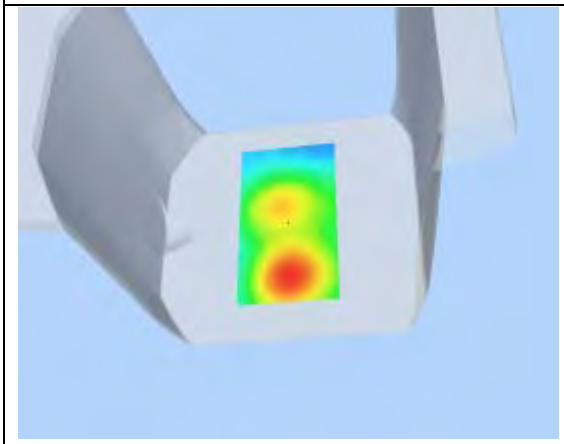	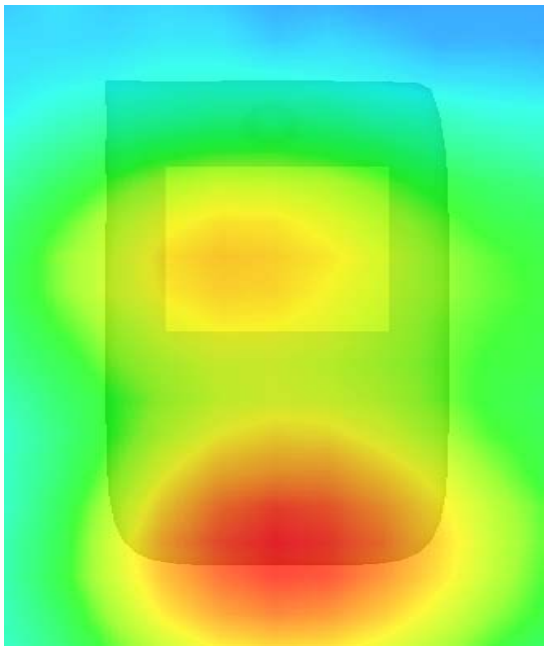

MEASUREMENT 54

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	Low
Signal	DSSS

B. SAR Measurement Results

Lower Band SAR (Channel 1)

Frequency (MHz)	2412.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-1.520000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
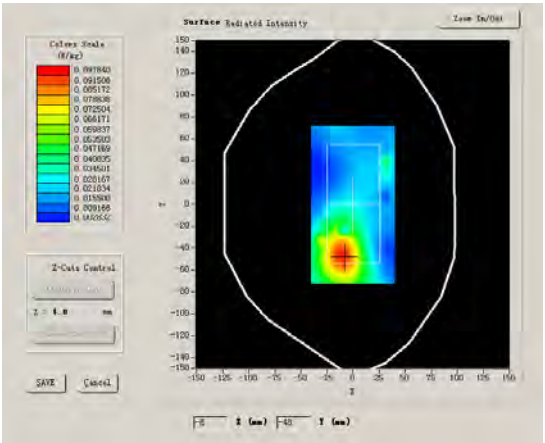	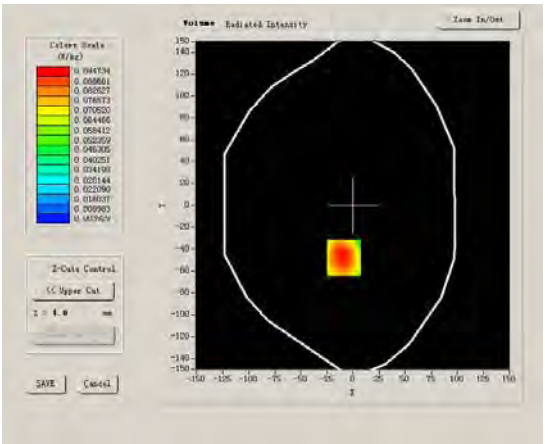

Maximum location: X=-9.00, Y=-48.00

SAR 10g (W/Kg)	0.068440
SAR 1g (W/Kg)	0.098294

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1032	0.0773	0.0568	0.0424	0.0337	0.0260

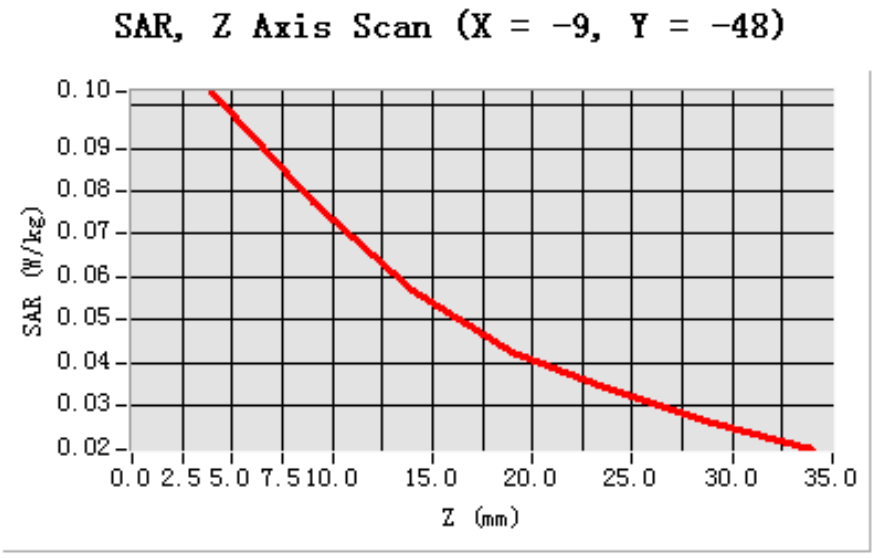

3D sceen shot	Hot spot position
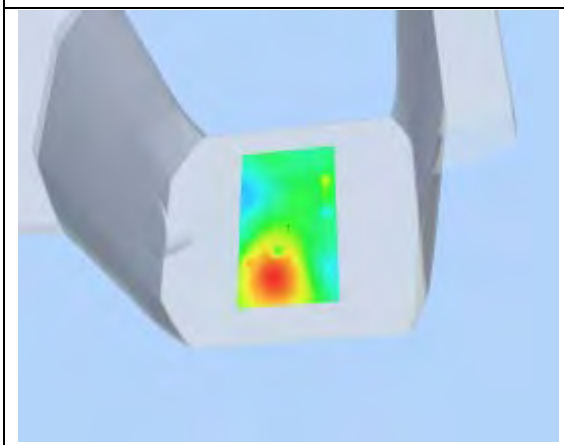	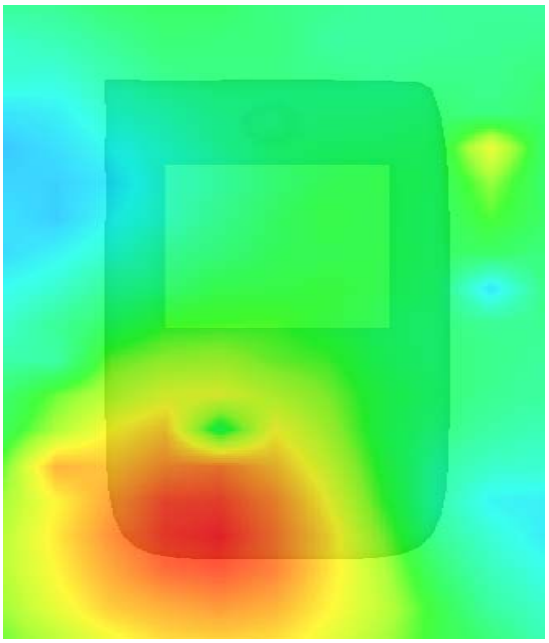

MEASUREMENT 55

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	Low
Signal	DSSS

B. SAR Measurement Results

Lower Band SAR (Channel 1)

Frequency (MHz)	2412.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-1.360000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
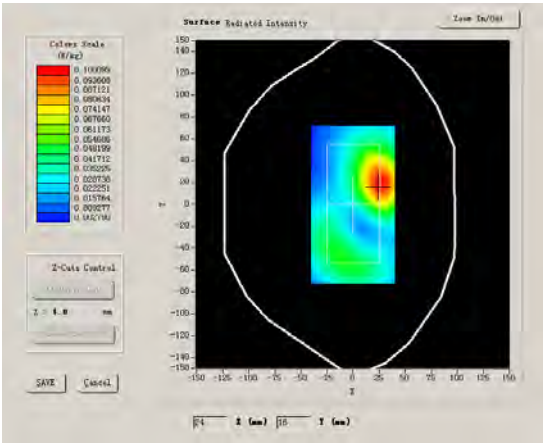	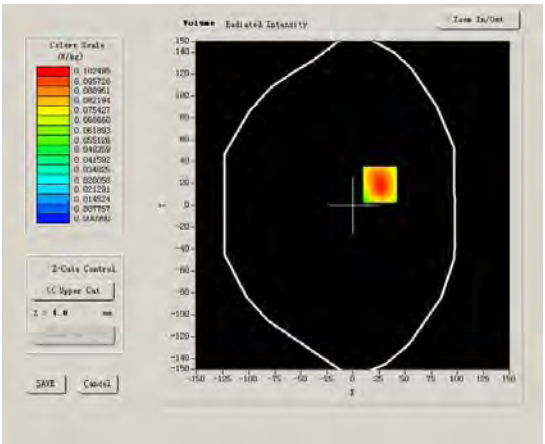

Maximum location: X=26.00, Y=19.00

SAR 10g (W/Kg)	0.058550
SAR 1g (W/Kg)	0.106529

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1116	0.0560	0.0306	0.0160	0.0087	0.0048

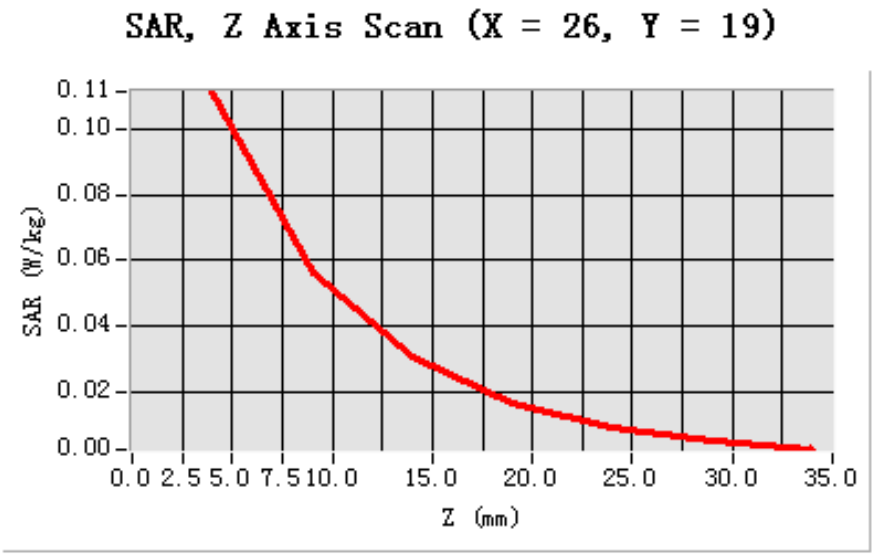

3D sceen shot	Hot spot position
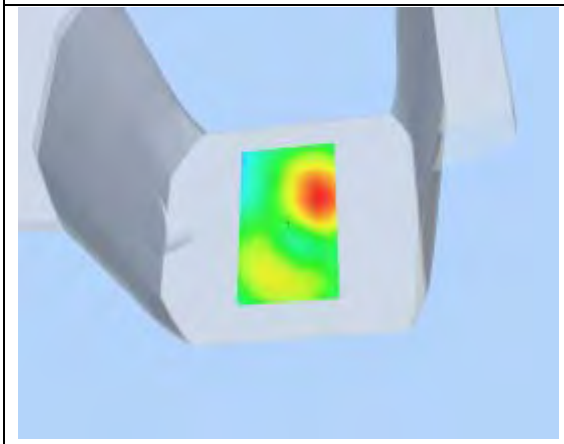	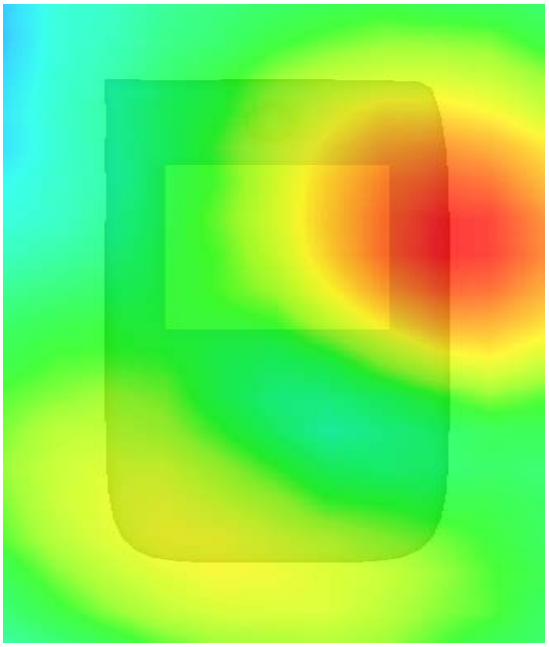

MEASUREMENT 56

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	Low
Signal	DSSS

B. SAR Measurement Results

Lower Band SAR (Channel 1)

Frequency (MHz)	2412.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-1.090000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
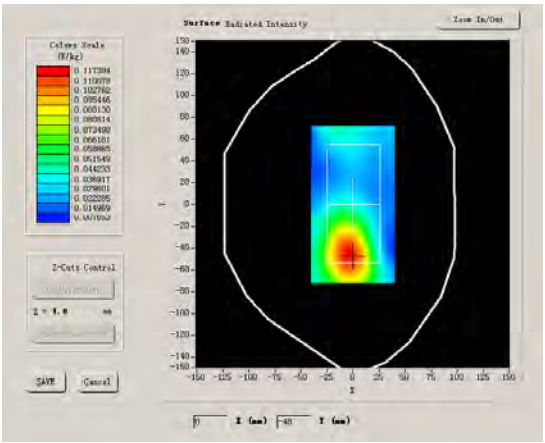	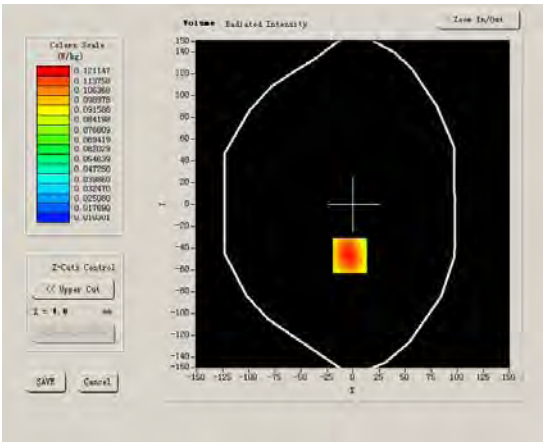

Maximum location: X=-3.00, Y=-47.00

SAR 10g (W/Kg)	0.093076
SAR 1g (W/Kg)	0.132400

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1454	0.0992	0.0699	0.0504	0.0366	0.0255

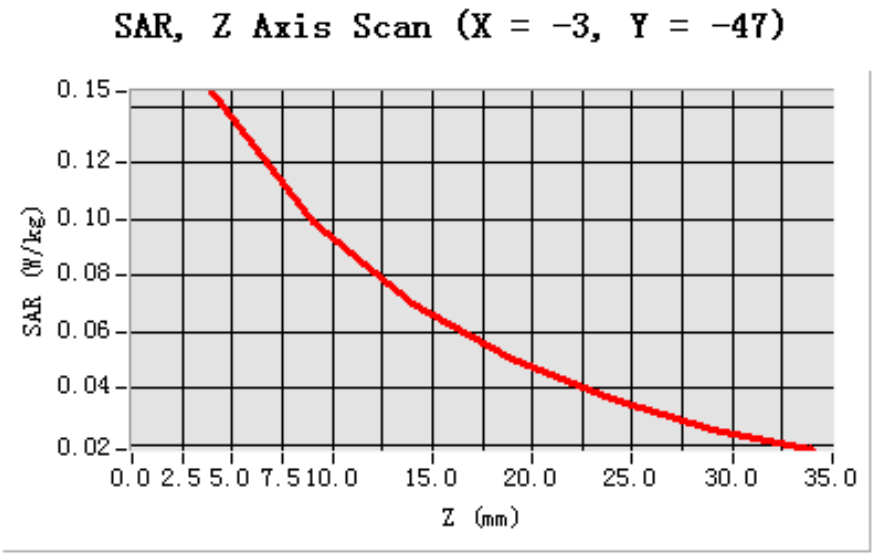

3D sceen shot	Hot spot position
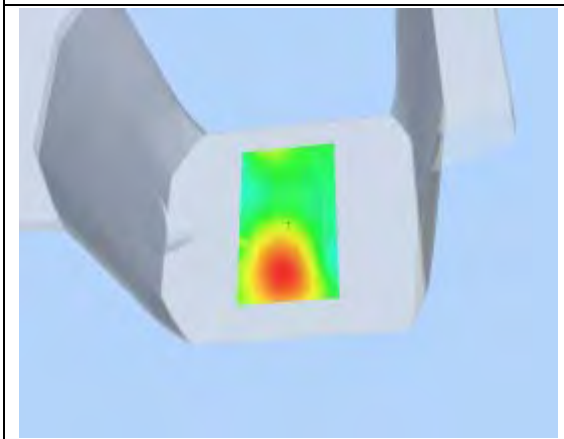	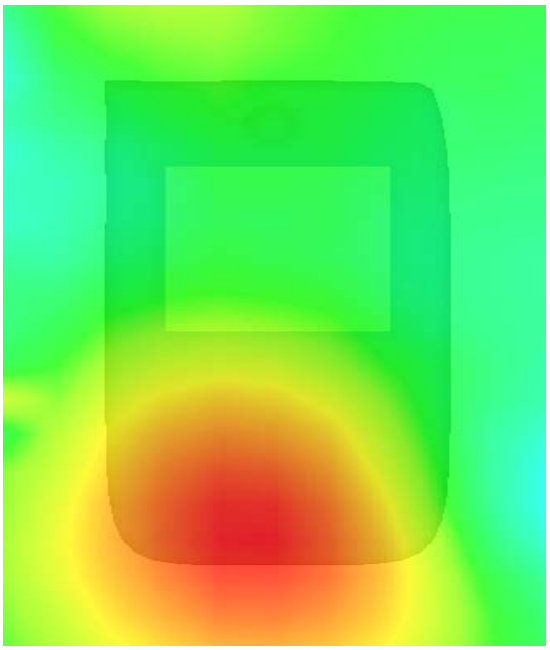

System Performance Check Data(Head)

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	41.675999
Relative permittivity	15.070000
Conductivity (S/m)	0.894409
Power drift (%)	-0.050000
Ambient Temperature:	22.4°C
Liquid Temperature:	21.5°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
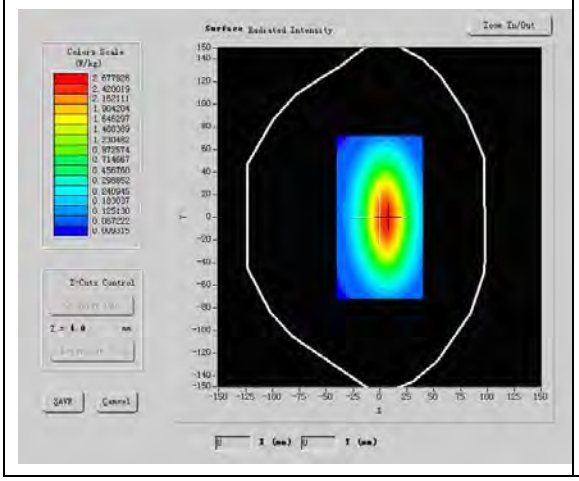	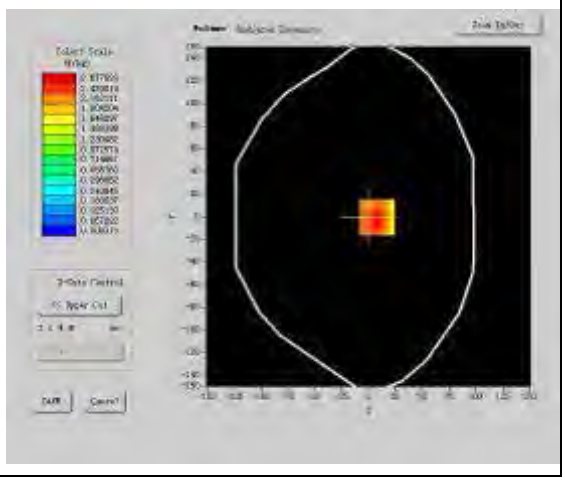

Maximum location: X=5.00, Y=1.00

SAR 10g (W/Kg)	1.685732
SAR 1g (W/Kg)	2.478462

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	2.4754	1.2251	0.5257	0.2114

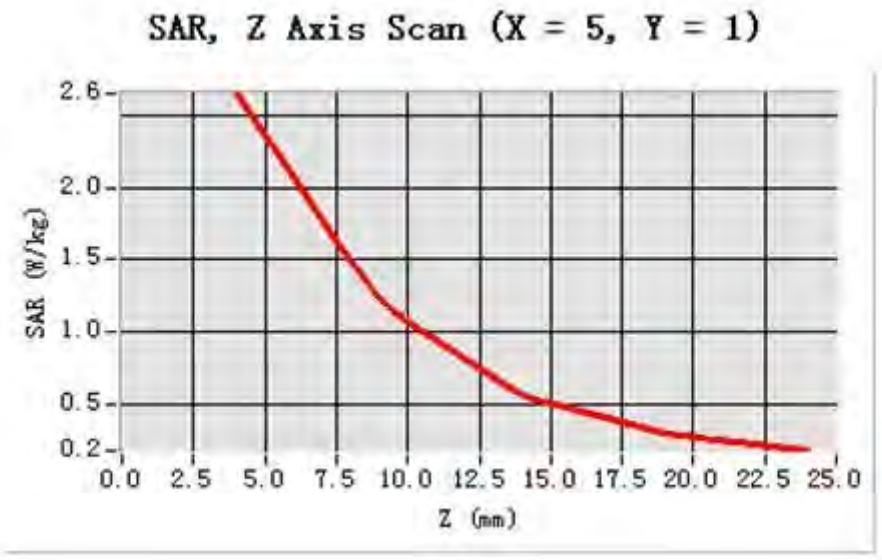

3D sceen shot	Hot spot position
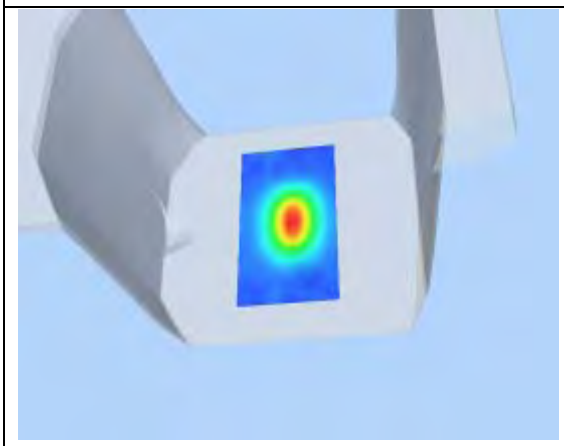	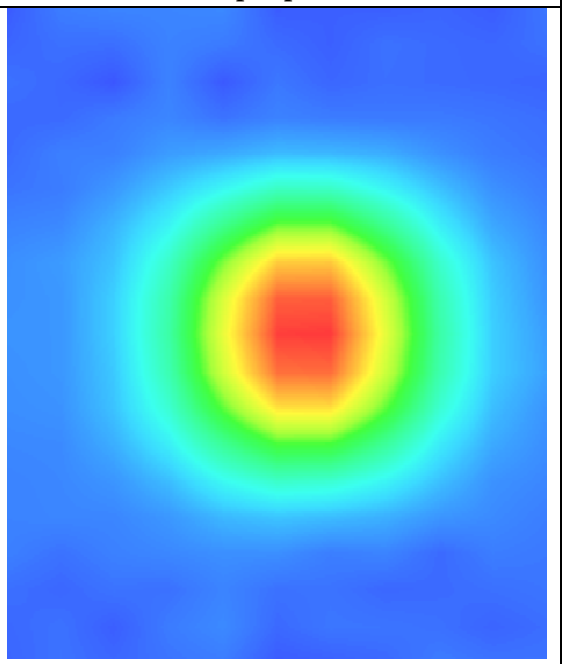

System Performance Check Data(Body)

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 29/1/2012
Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	0.9809033
Power drift (%)	-0.170000
Ambient Temperature:	22.4°C
Liquid Temperature:	21.5°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
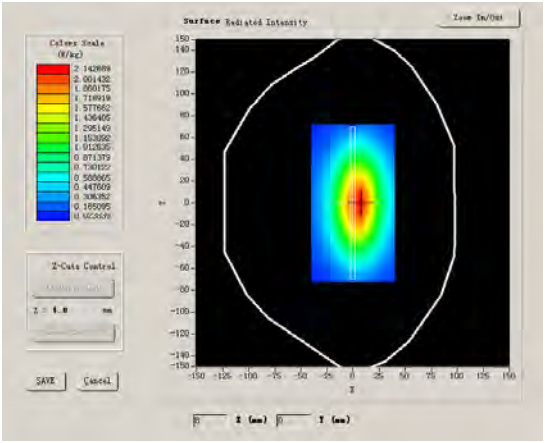	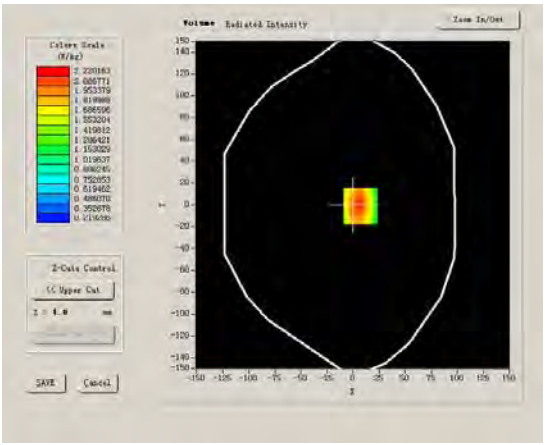

Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.539476
SAR 1g (W/Kg)	2.385979

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5209	1.6629	1.1437	0.8075	0.5889	0.4143

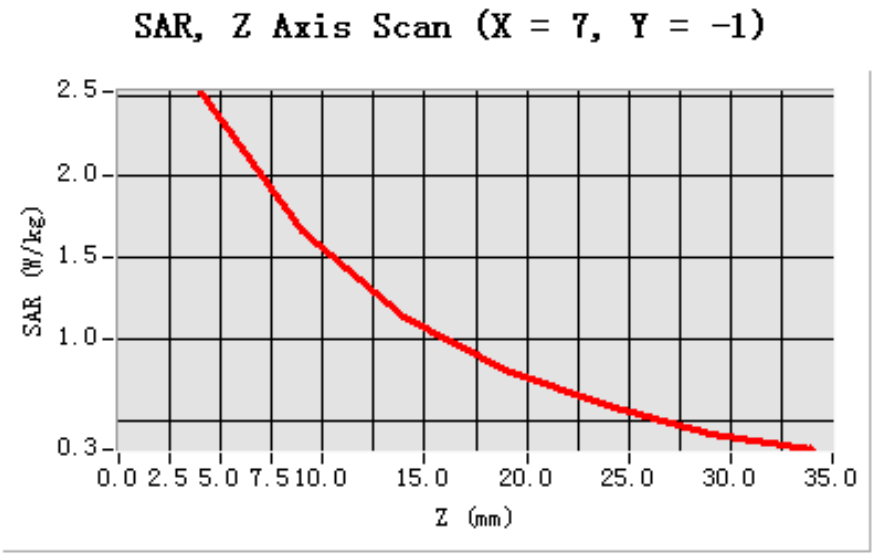

3D sceen shot	Hot spot position
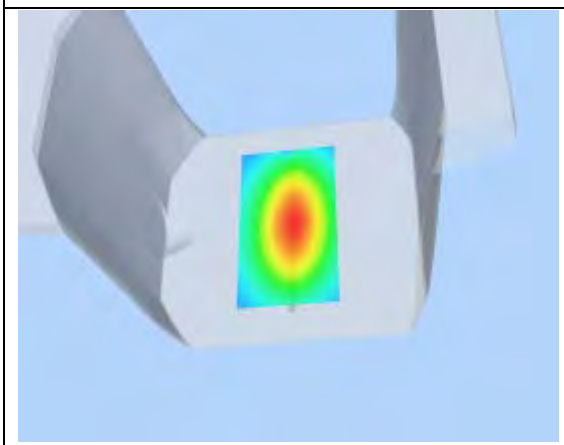	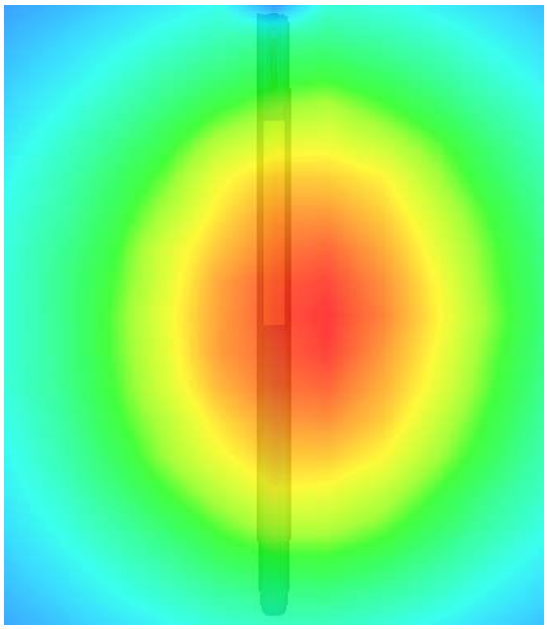

System Performance Check Data(Head)

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.509998
Relative permittivity	15.070000
Conductivity (S/m)	1.436111
Power drift (%)	-0.140000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
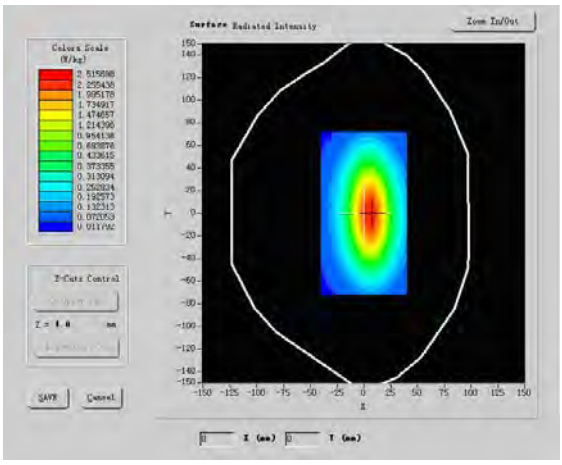	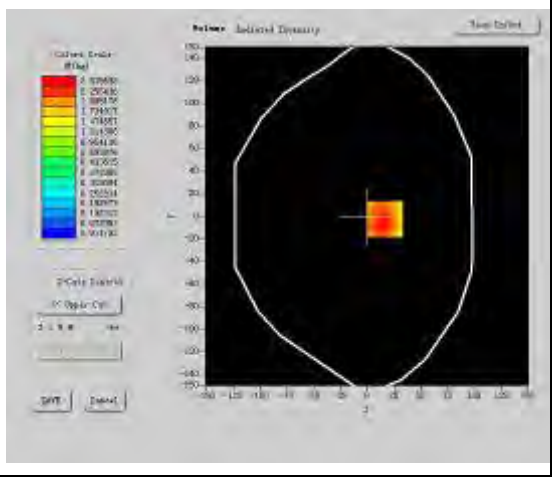

Maximum location: X=-1.00, Y=-50.00

SAR 10g (W/Kg)	4.884149
SAR 1g (W/Kg)	9.454628

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	9.4148	7.3955	6.3646	4.3955

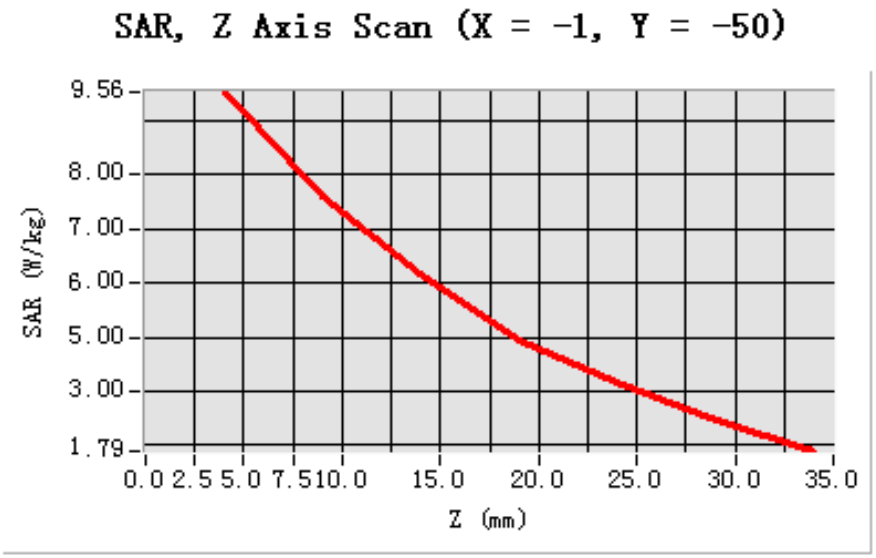

3D sceen shot	Hot spot position
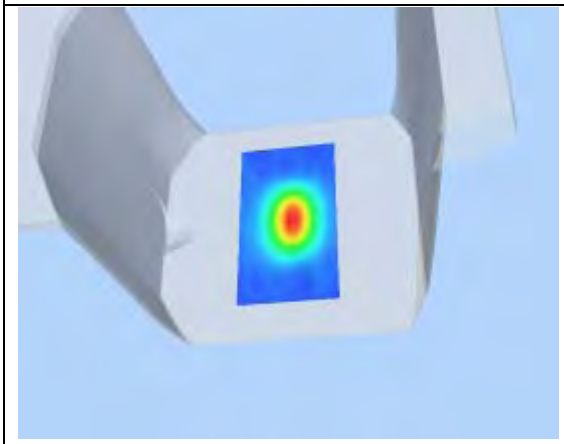	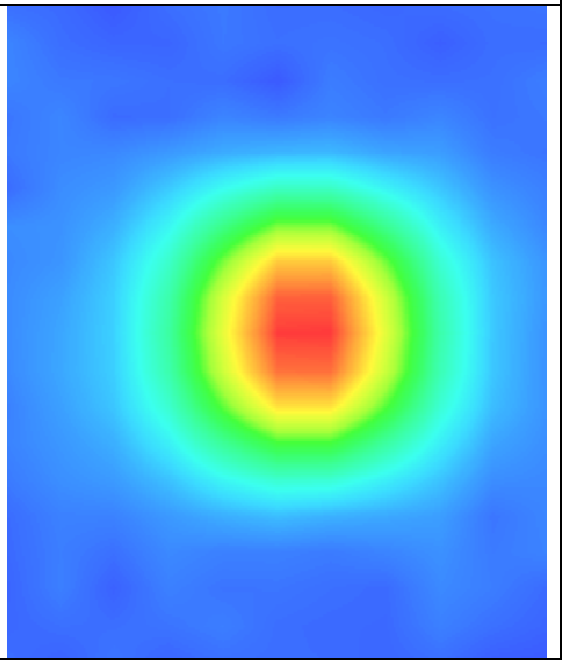

System Performance Check Data(Body)

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 13 minutes 26 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	52.548876
Relative permittivity	14.070000
Conductivity (S/m)	1.553978
Power drift (%)	-0.030000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
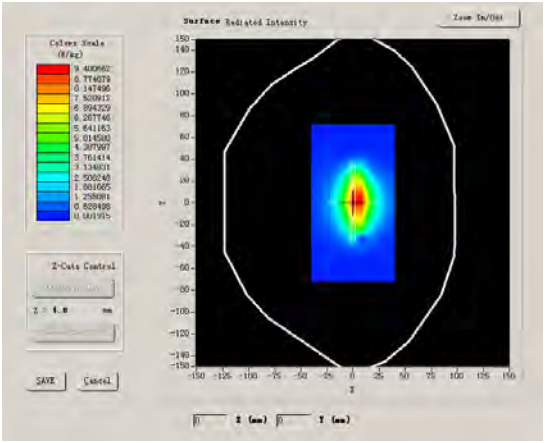	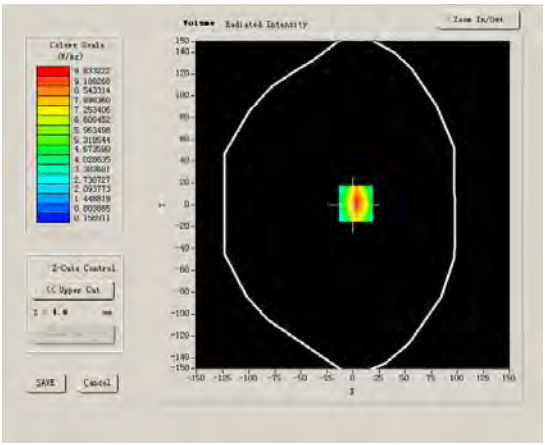

Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	4.981611
SAR 1g (W/Kg)	9.740177

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.0621	5.6445	3.6226	2.1642	1.4521	0.9078

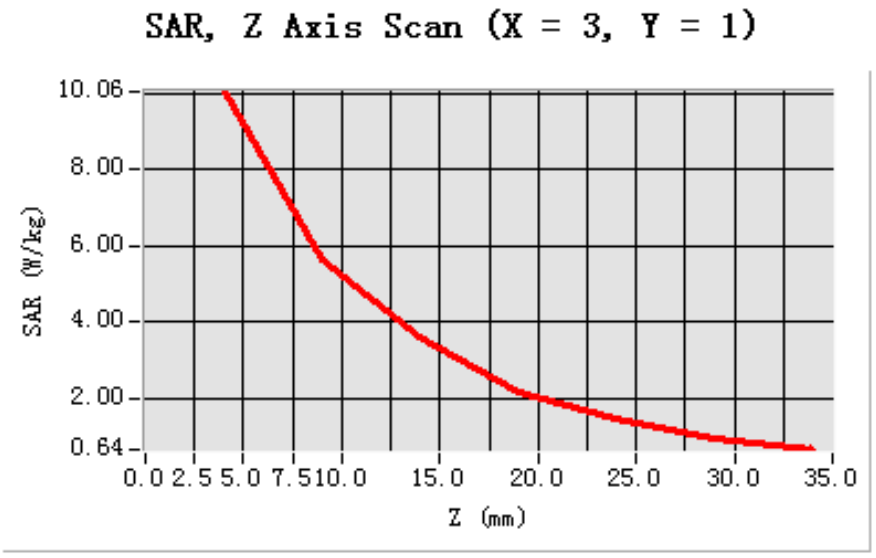

3D sceen shot	Hot spot position
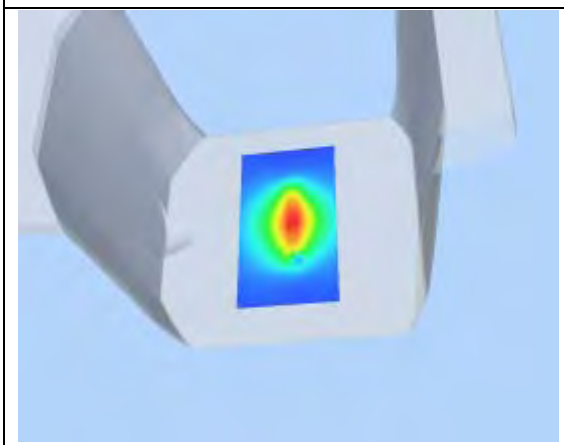	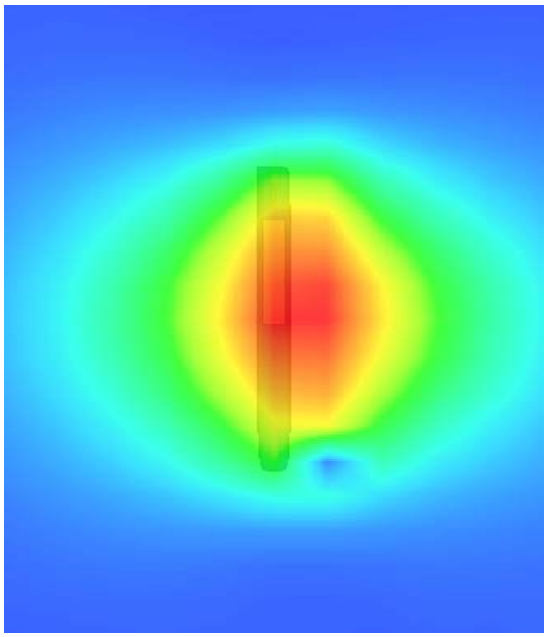

System Performance Check Data(Head)

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 13/2/2012
Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	39.622857
Relative permittivity	12.991650
Conductivity (S/m)	1.964313
Power Drift (%)	0.560000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
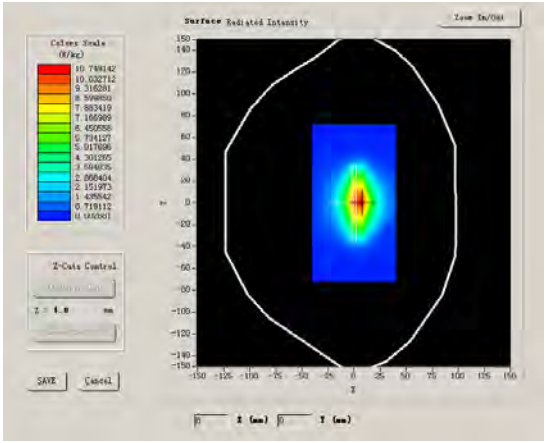	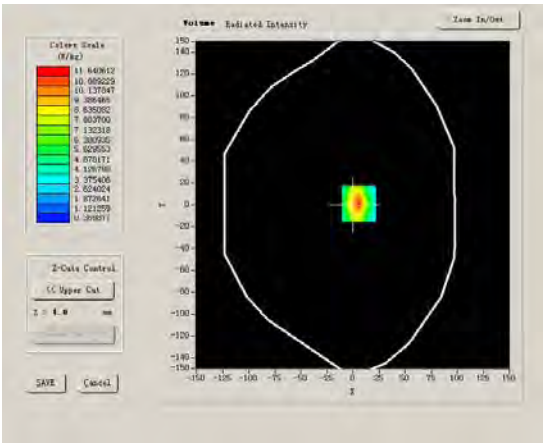

Maximum location: X=6.00, Y=1.00

SAR 10g (W/Kg)	5.938478
SAR 1g (W/Kg)	12.442675

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	12.7015	6.2096	3.8187	2.4504	1.5036	1.0219

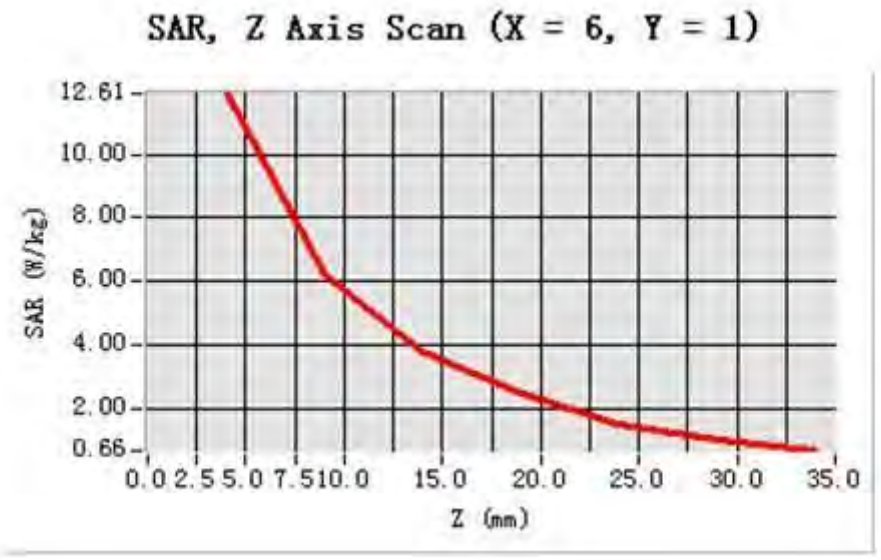

3D sceen shot	Hot spot position
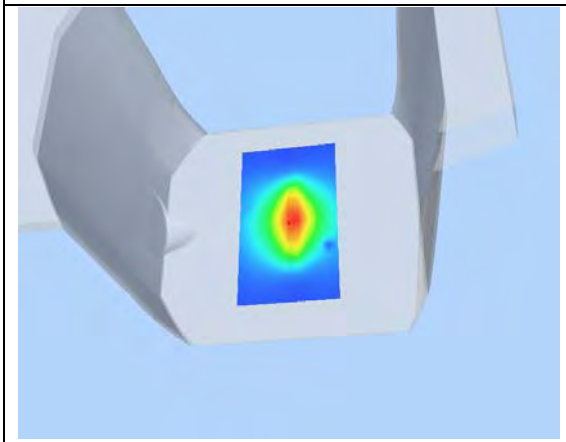	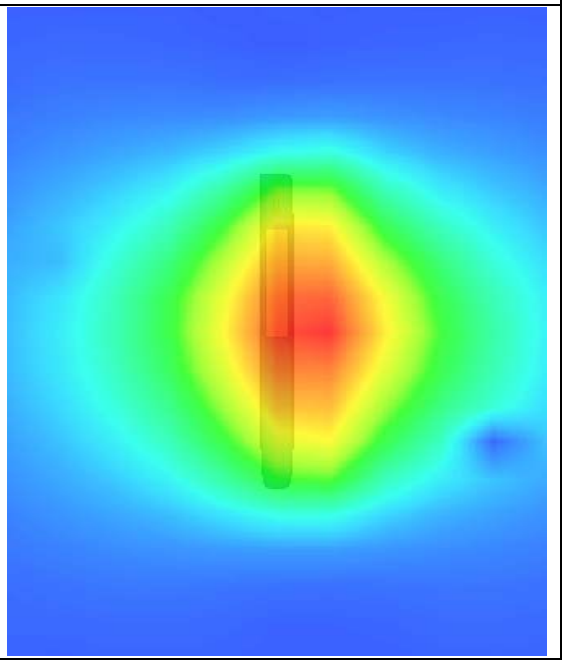

System Performance Check Data(Body)

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 30/1/2012
Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.548876
Relative permittivity	12.991650
Conductivity (S/m)	1.974257
Power Drift (%)	1.080000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR	VOLUME SAR
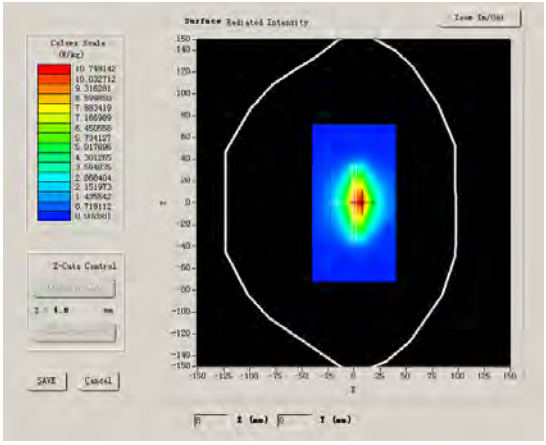	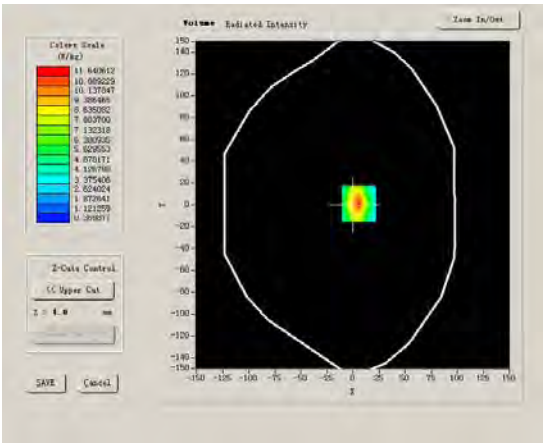

Maximum location: X=-1.00, Y=-50.00

SAR 10g (W/Kg)	6.256773
SAR 1g (W/Kg)	12.789110

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	13.1279	6.8312	3. 5991	1.3473

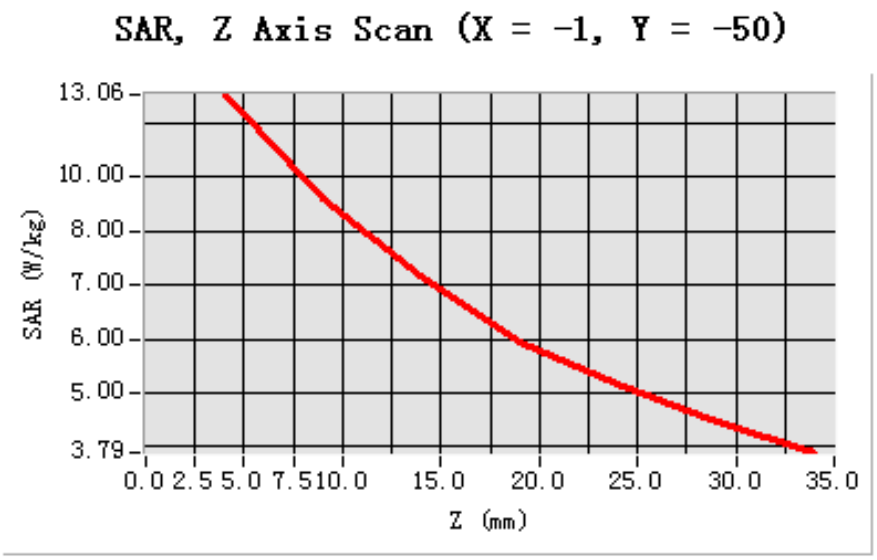
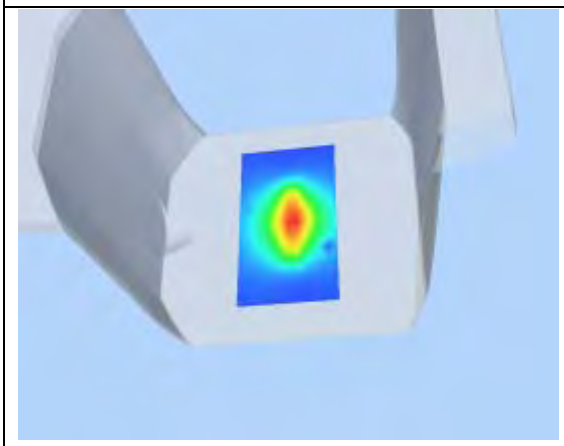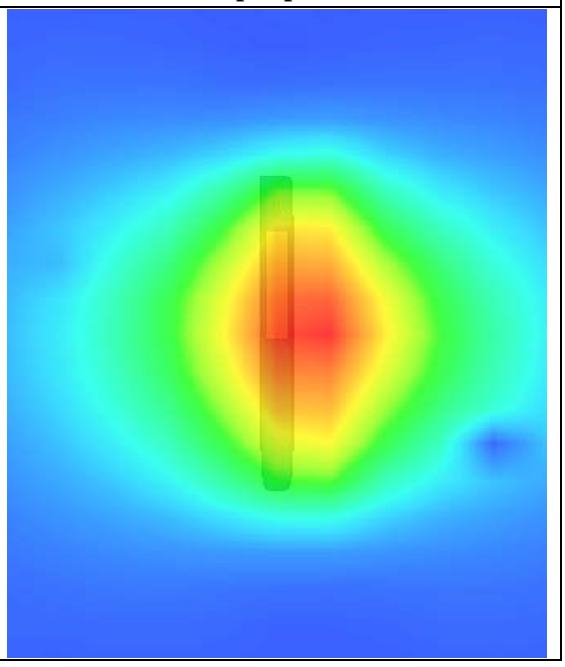
3D sceen shot	Hot spot position