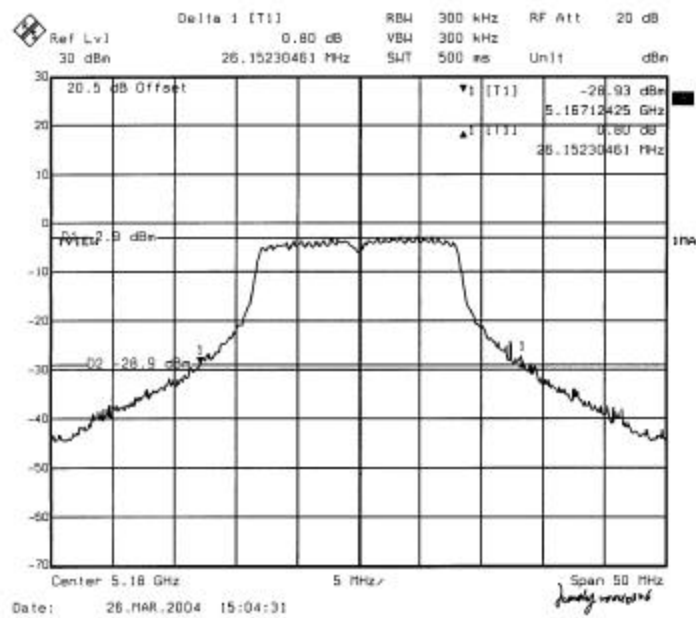
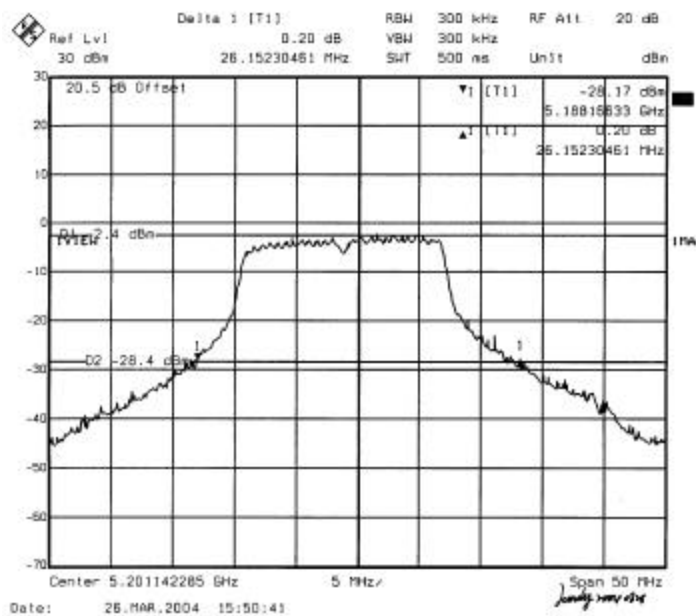



(5.15GHz-5.25GHz) Low Channel BPSK 802.11a




(5.15GHz-5.25GHz) Middle Channel BPSK 802.11a



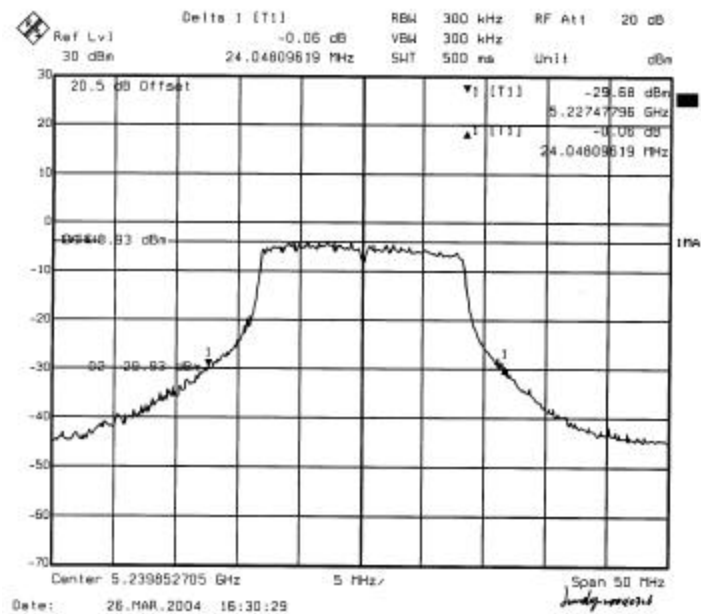(5.15GHz-5.25GHz) High Channel BPSK 802.11a



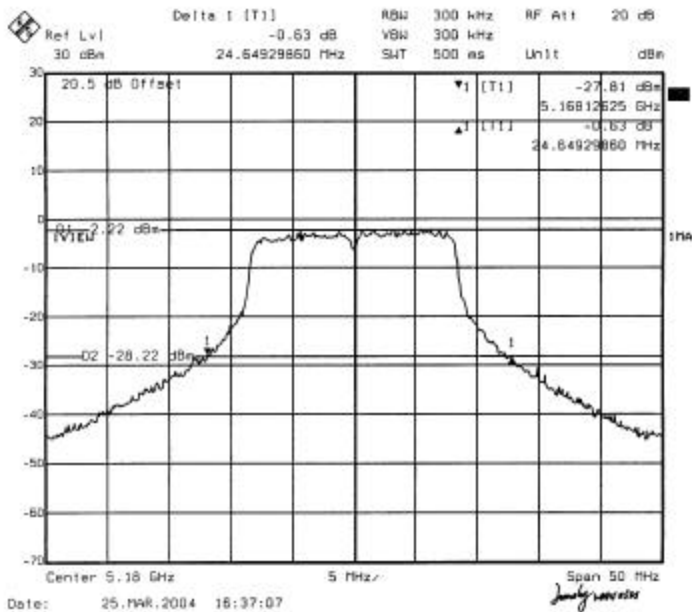(5.15GHz-5.25GHz) Low Channel BPSK 802.11a



Delta: [T1]

RBW 300 kHz RF Att 20 dB

Ref Lvl 0.41 dB VSM 1 MHz

30 dBn 24.54929860 MHz SWt 500 ms Unit dBm

20.5 dB Offset

▼ [T1] -26.02 dBm

▲ [T1] 5.18842585 GHz

0.41 dB

24.54929860 MHz

VIEW -26.02 dBm

D2 -27.88 dBm

Center 5.2 GHz

5 MHz

Span 50 MHz

Date: 25.MAR.2004 17:24:51

Delta 1 [T1] -0.36 dB RBW 300 kHz R/F Att 20 dB
 Ref Lvl 30 dBm VBW 300 kHz Unit dBm
 23.44689379 MHz


20.5 dB Offset

▼ [T1] -29.27 dBm
 ▲ [T1] -0.36 dB
 23.44689379 MHz


Center 5.239869739 GHz 5 MHz Span 50 MHz

Date: 25.MAR.2004 17:51:15

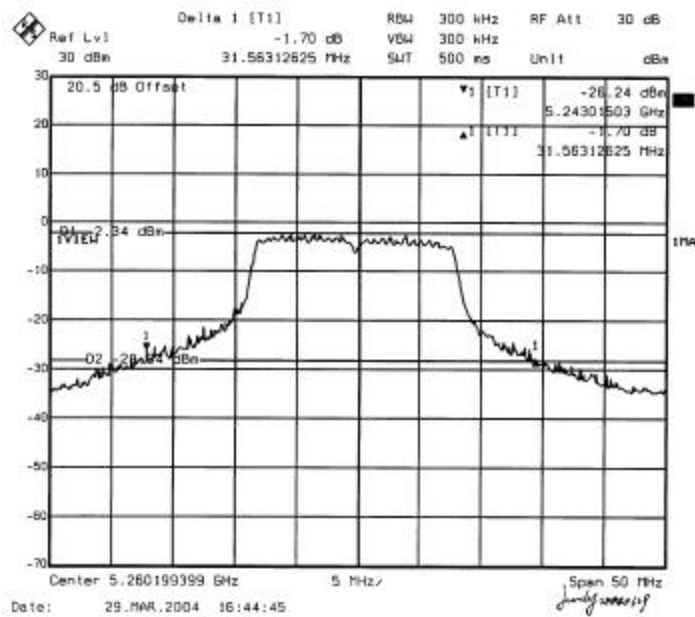
(5.25GHz-5.35GHz) Low Channel BPSK 802.11a



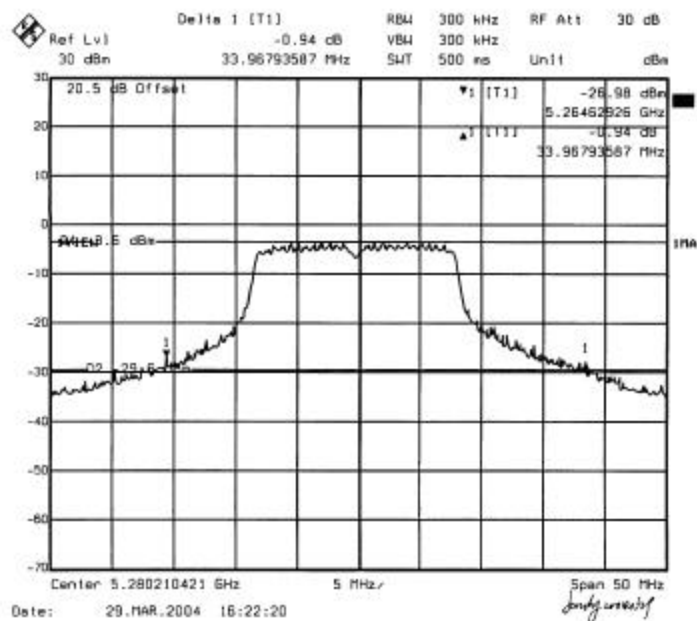
(5.25GHz-5.35GHz) Middle Channel BPSK 802.11a



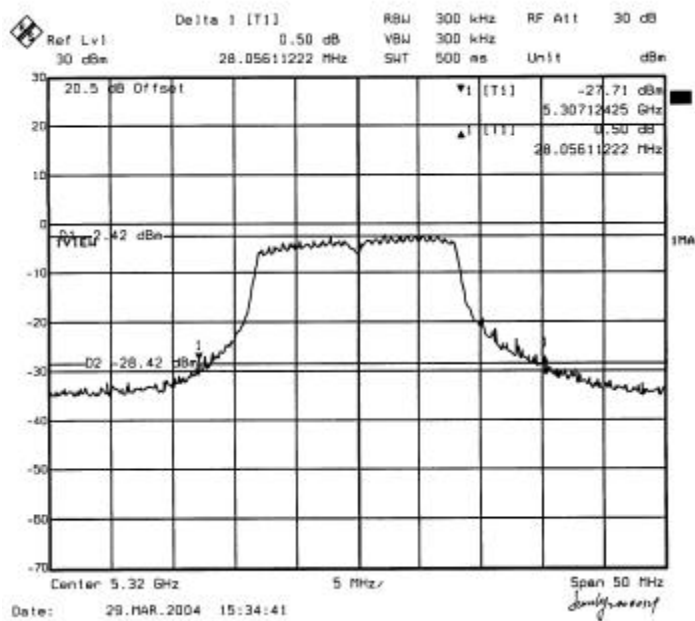
(5.25GHz-5.35GHz) High Channel BPSK 802.11a



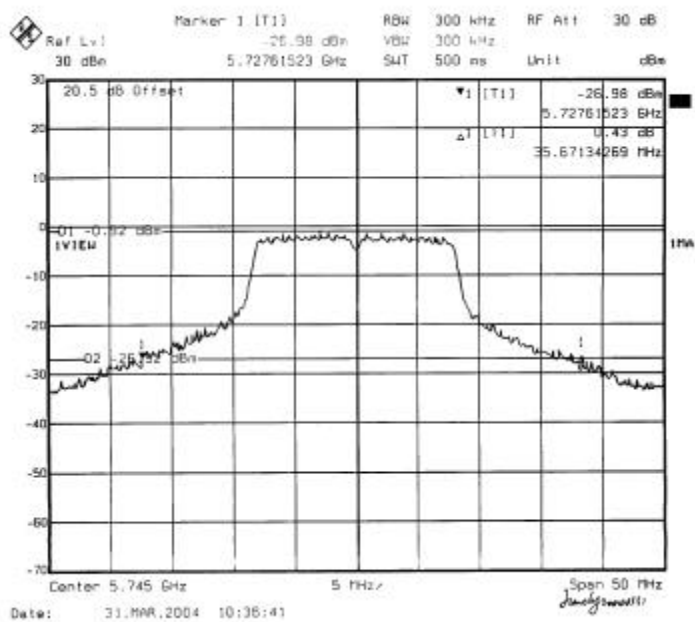
(5.725GHz-5.825GHz) Low Channel BPSK 802.11a



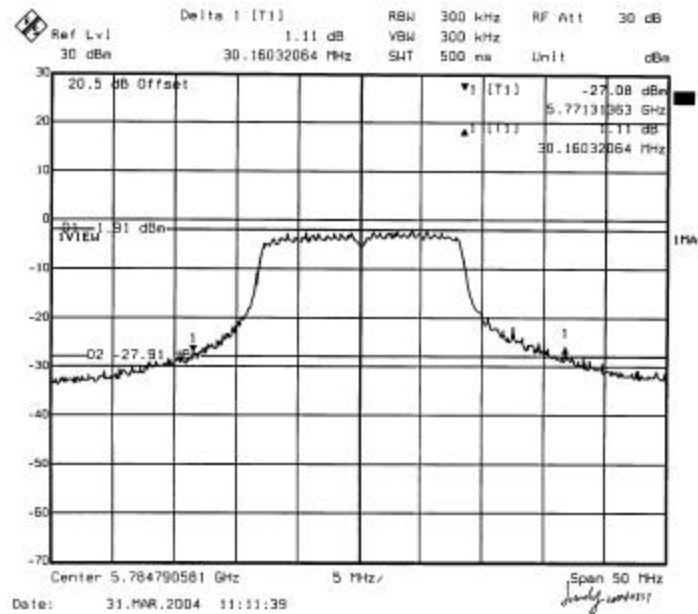(5.725GHz-5.825GHz) Middle Channel BPSK 802.11a



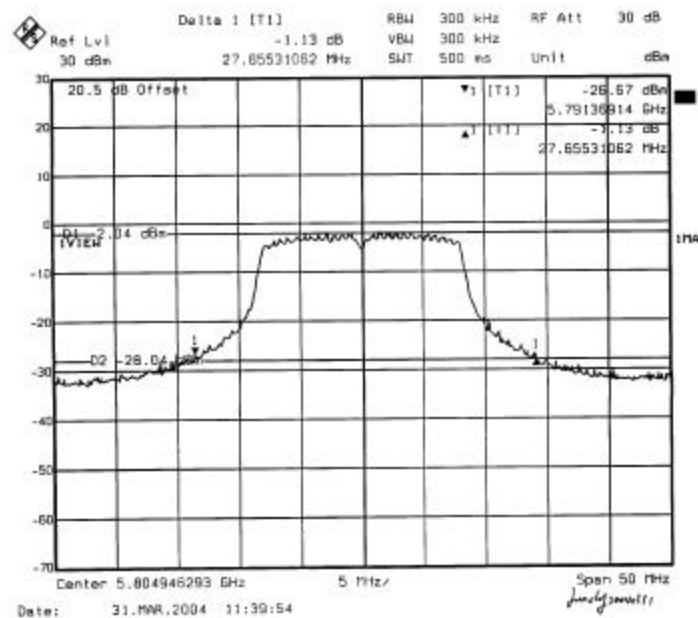(5.725GHz-5.825GHz) High Channel BPSK 802.11a



§15.247(d) & §15.407(a)(2) - POWER SPECTRAL DENSITY

Standard Applicable

According to §15.247 (d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.407(a) (1), for the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.407(a) (2), for the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.407(a) (3), for the band 5.725-5.825 GHz, the peak power spectral density shall not exceed 17 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 6MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (DTS)
4. Adjust the center frequency of SA on any frequency be measured and set SA to 50MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (UNII)
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R/S	Spectrum Analyzer	FSEM	849720/019	2003-10-30	2004-10-29

Measurement Result

Environmental Conditions

Temperature:	24° C
Relative Humidity:	63%
ATM Pressure:	1100 mbar

2.4GHz-2.4835GHz Power Spectral Density BPSK 802.11b

Channel	Frequency (MHz)	Peak Power Spectral Density (dBm)	Standard (dBm)	Result
Low Channel	2412	-8.40	≤ 8	Pass
Middle Channel	2437	-7.50	≤ 8	Pass
High Channel	2462	-6.33	≤ 8	Pass

2.4GHz-2.4835GHz Power Spectral Density BPSK 802.11g

Channel	Frequency (MHz)	Peak Power Spectral Density (dBm)	Standard (dBm)	Result
Low Channel	2412	-10.92	≤ 8	Pass
Middle Channel	2437	-11.29	≤ 8	Pass
High Channel	2462	-9.91	≤ 8	Pass

5.15GHz-5.25GHz Power Spectral Density BPSK 802.11a



Channel	Frequency (MHz)	Peak Power Spectral Density (dBm)	Standard (dBm)	Result
Low Channel	5175	2.74	≤ 4	Pass
Middle Channel	5201	3.00	≤ 4	Pass
High Channel	5234	0.90	≤ 4	Pass



5.25GHz-5.35GHz Power Spectral Density BPSK 802.11a



Channel	Frequency (MHz)	Peak Power Spectral Density (dBm)	Standard (dBm)	Result
Low Channel	5258	3.52	≤ 11	Pass
Middle Channel	5284	1.92	≤ 11	Pass
High Channel	5320	3.43	≤ 11	Pass



5.725GHz-5.825GHz Power Spectral Density BPSK 802.11a



Channel	Frequency (MHz)	Peak Power Spectral Density (dBm)	Standard (dBm)	Result
Low Channel	5746	3.55	≤ 17	Pass
Middle Channel	5785	3.56	≤ 17	Pass
High Channel	5806	3.29	≤ 17	Pass

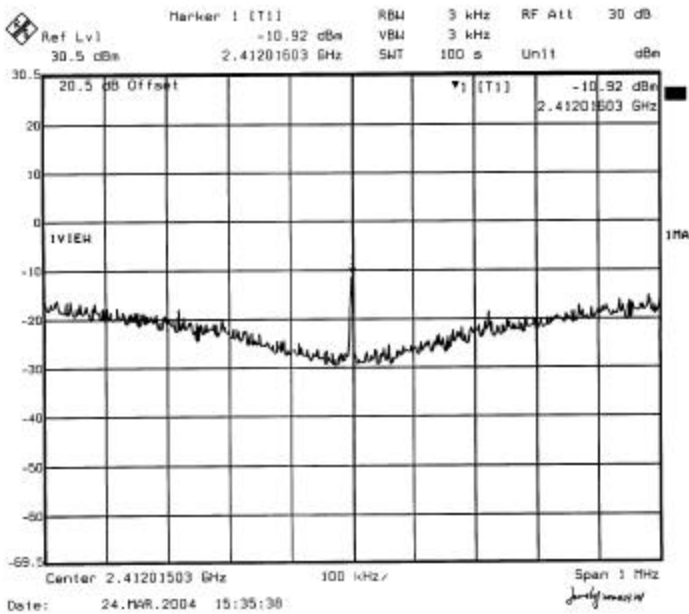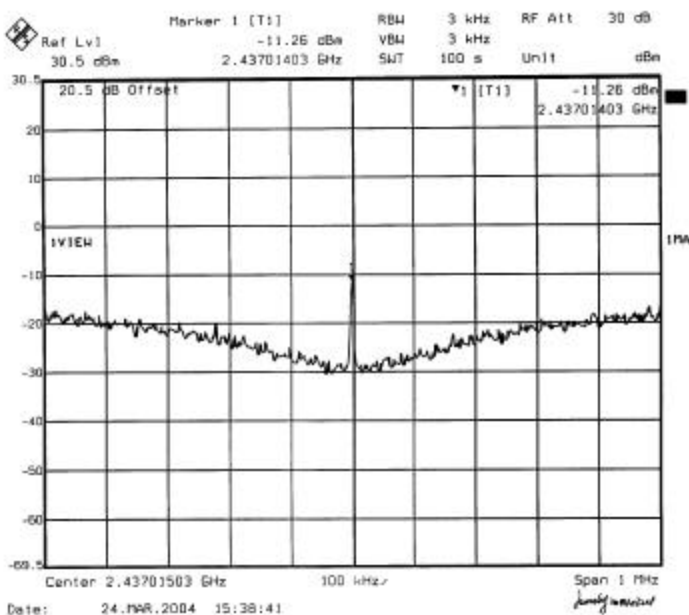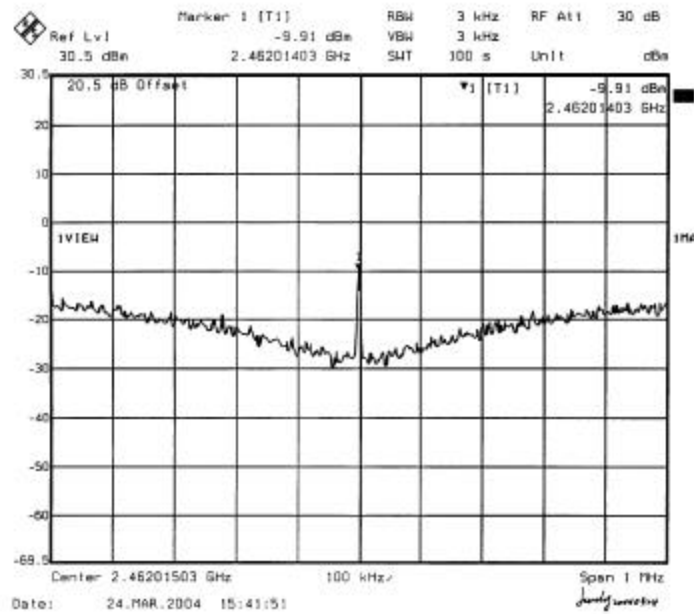
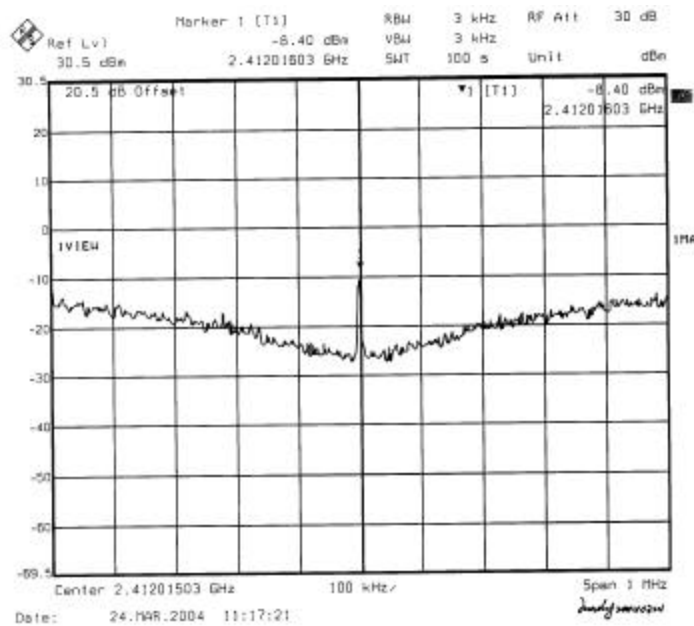
(2.4GHz-2.4835GHz) Low Channel BPSK 802.11g*(2.4GHz-2.4835GHz) Middle Channel BPSK 802.11g*

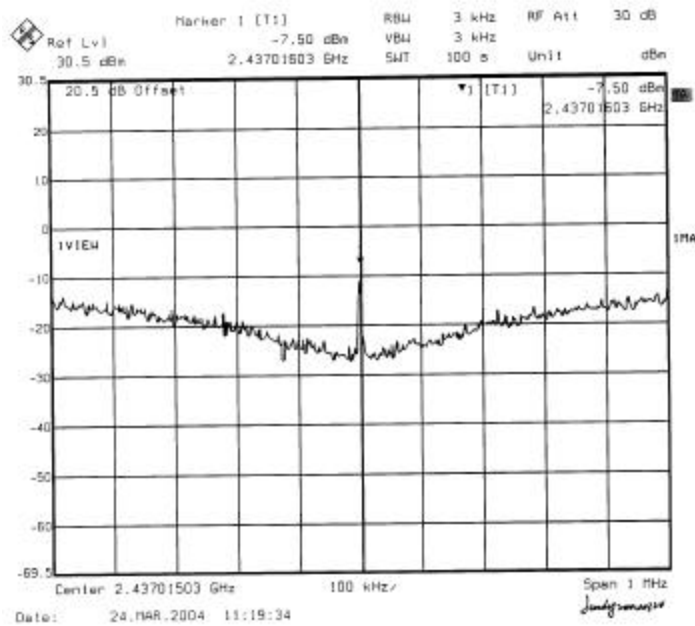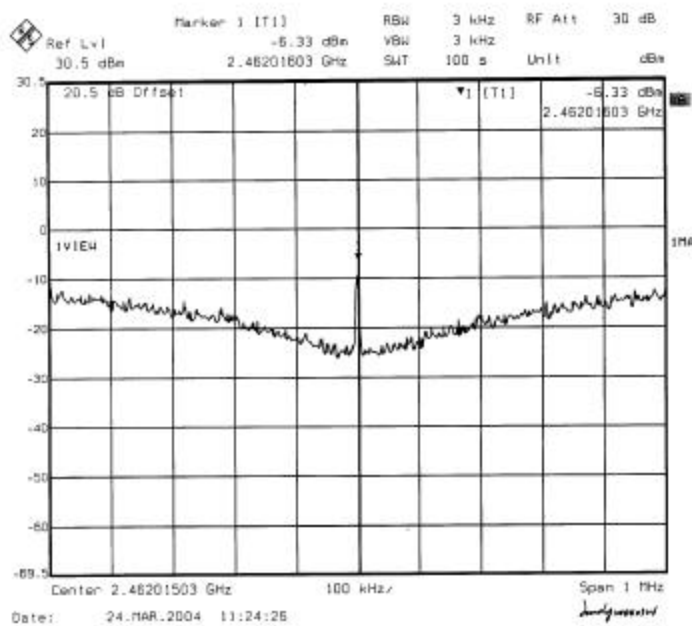(2.4GHz-2.4835GHz) High Channel BPSK 802.11g*(2.4GHz-2.4835GHz) Low Channel BPSK 802.11b*

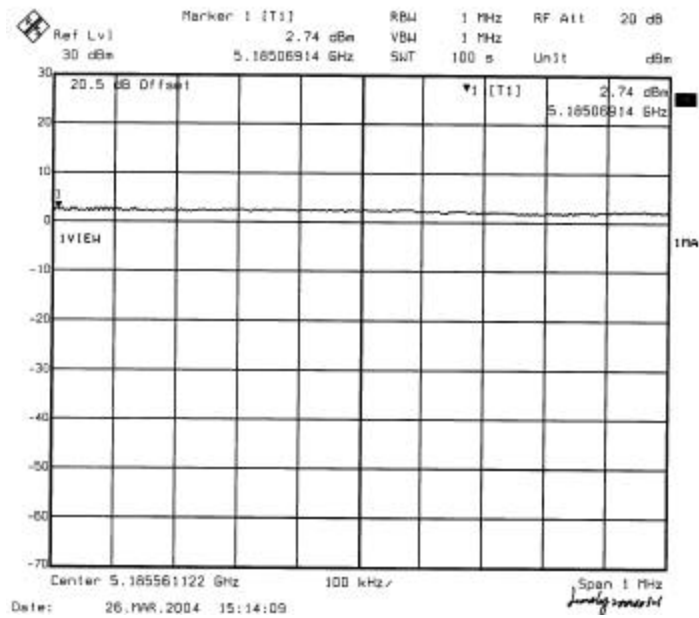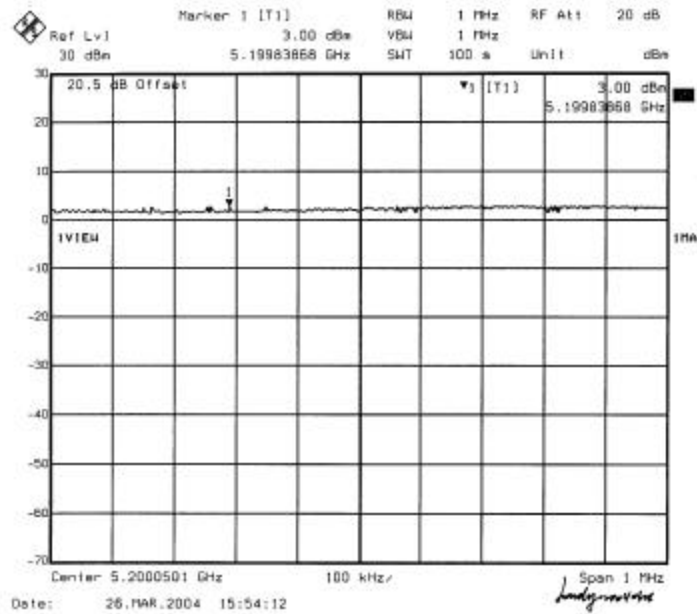(2.4GHz-2.4835GHz) Middle Channel BPSK 802.11b*(2.4GHz-2.4835GHz) High Channel BPSK 802.11b*

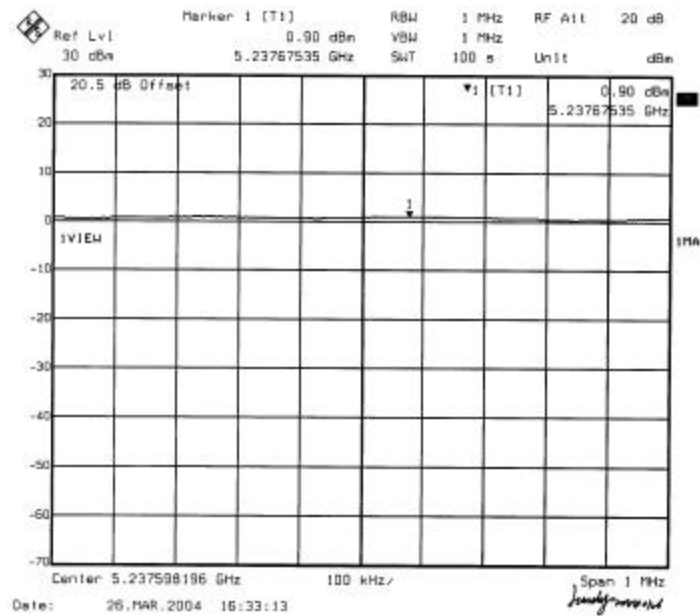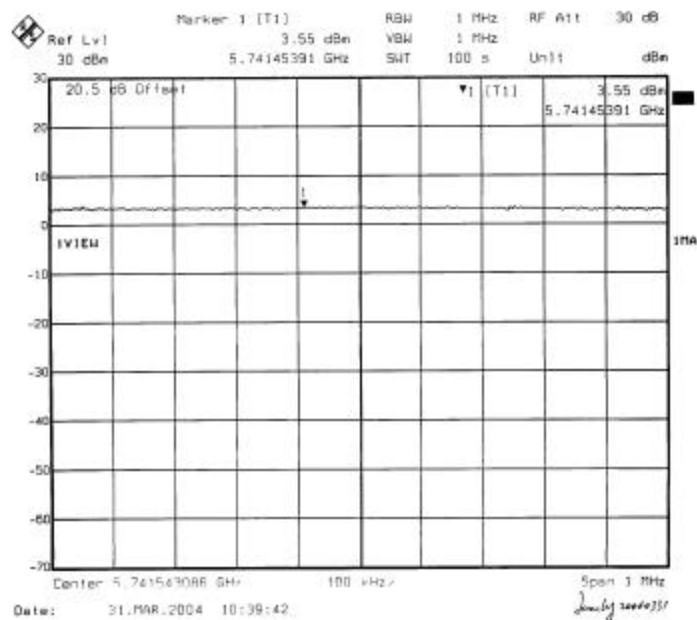(5.15GHz-5.25GHz) Low Channel BPSK 802.11a*(5.15GHz-5.25GHz) Middle Channel BPSK 802.11a*

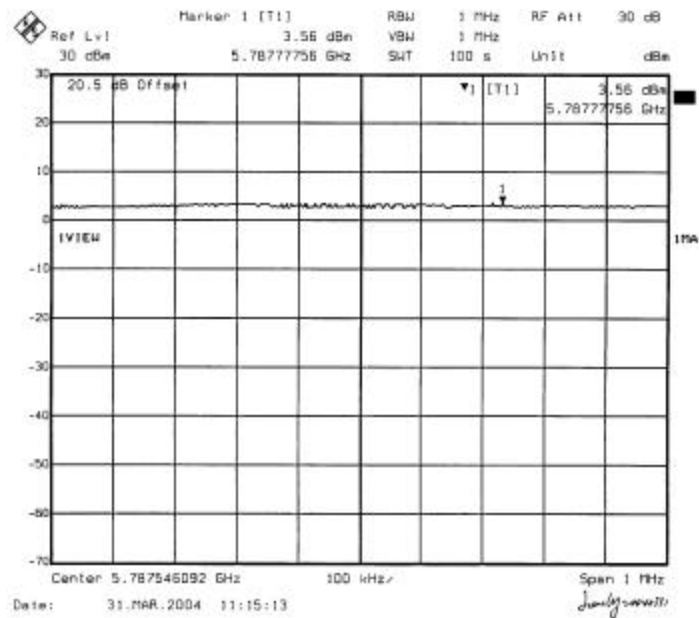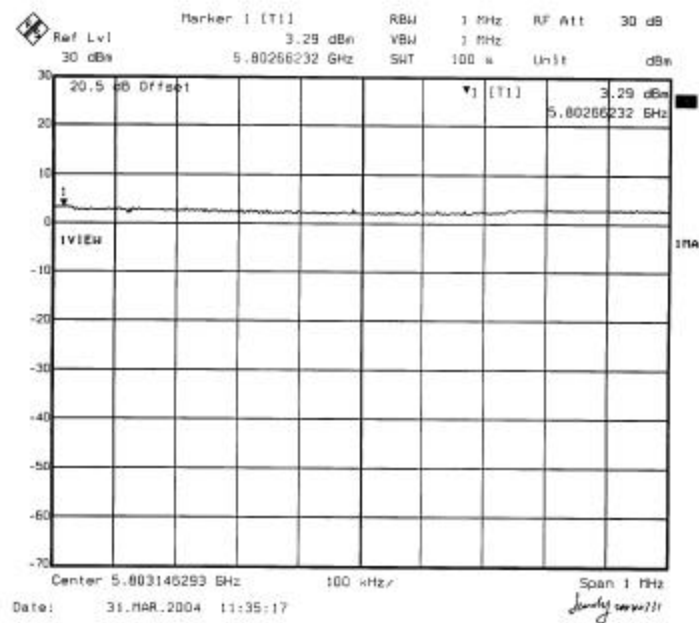(5.15GHz-5.25GHz) High Channel BPSK 802.11a*(5.725GHz-5.825GHz) Low Channel BPSK 802.11a*

(5.725GHz-5.825GHz) Middle Channel BPSK 802.11a*(5.725GHz-5.825GHz) High Channel BPSK 802.11a*

§15.247(c) - 100 KHZ BANDWIDTH OF BAND EDGES

Standard Applicable

According to §15.247(c), in *any* 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) see §15.205(c)).

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R/S	Spectrum Analyzer	FSEM	849720/019	2003-10-30	2004-10-29

Measurement Result

Environmental Conditions

Temperature:	24° C
Relative Humidity:	63%
ATM Pressure:	1100 mbar

Delta 1 [T1]

Ref Lvl 37.84 dB

RBW 100 kHz

VBW 100 kHz

RF Att 30 dB

30.5 dBm

10.16012024 MHz

SwT 10 s

Unit dBm

20.5 dB Offset

▼ [T1] -36.30 dBm

▲ [T1] 2.3999000 GHz

97.84 dB

10.16012024 MHz

IVIEW

10 Hz

Start 2.38 GHz

Stop 2.40 GHz

Date: 24.MAR.2004 15:00:21

andy merritt

Delta 1 [T1]

Ref Lvl 30.5 dBm 40.52 dB RBW 100 kHz RF Att 30 dB

30.5 dBm -23.07895792 MHz SWT 10 s Unit dBm

20.5 dB Offset

VIEW

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

Delta 1 [T1]

Ref Lvl 30.5 dBm

RBW 100 kHz RF Att 30 dB

VBW 100 kHz

SWT 10 s Unit dBm

20.5 dB Offset

37.01 dB

13.16613226 MHz

3

VIEW

Start 2.38 GHz

10 MHz

Stop 2.48 GHz

Date: 24.MAR.2004 11:02:20

Amplitude

Delta 1 [T1]

Ref Lvl 30.5 dBm Delta 1 [T1] 41.74 dB RBW 100 kHz VBW 100 kHz SMT 10 s RF Att 30 dB Unit dBm

30.5 dB Offset

20

10

0

-10

-20

-30

-40

-50

-60

-69.5

1VIEW

[T1] -38.88 dBm

2.4836000 GHz



41.74 dB

-20.47374749 MHz


Start 2.4 GHz 10 MHz Stop 2.5 GHz

Date: 24.MAR.2004 11:08:19

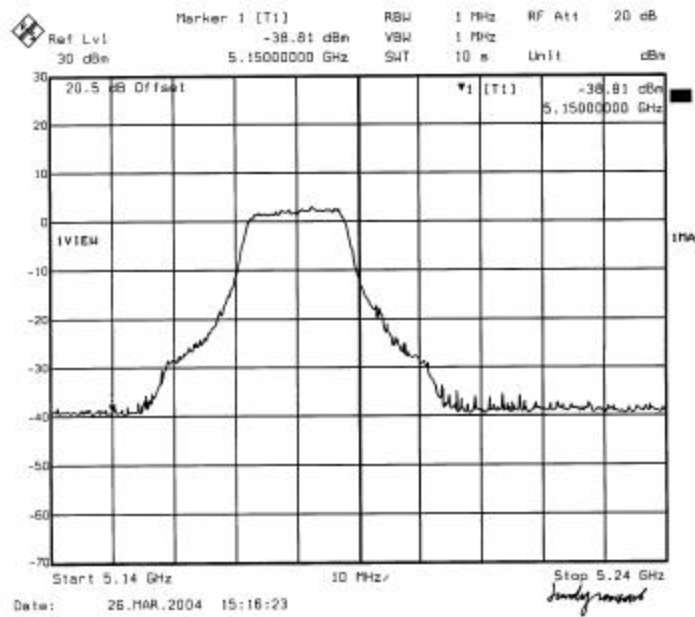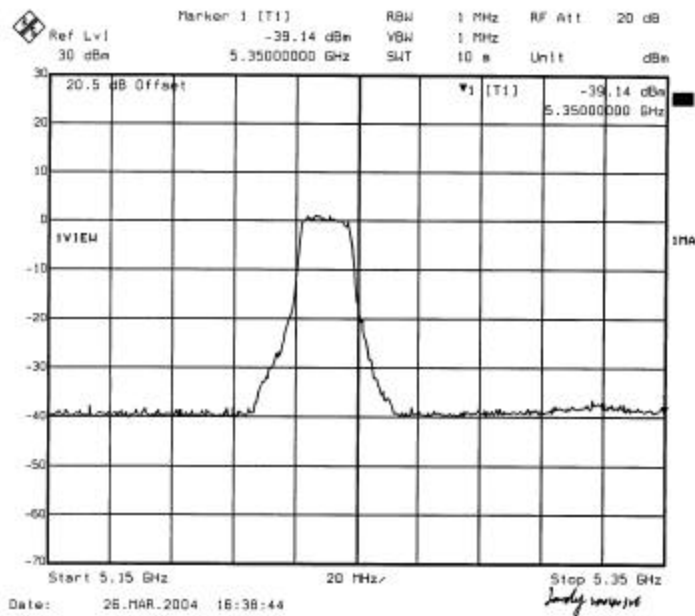
Indragan



(5.15GHz-5.25GHz) Low Channel BPSK 802.11a*(5.15GHz-5.25GHz) High Channel BPSK 802.11a*

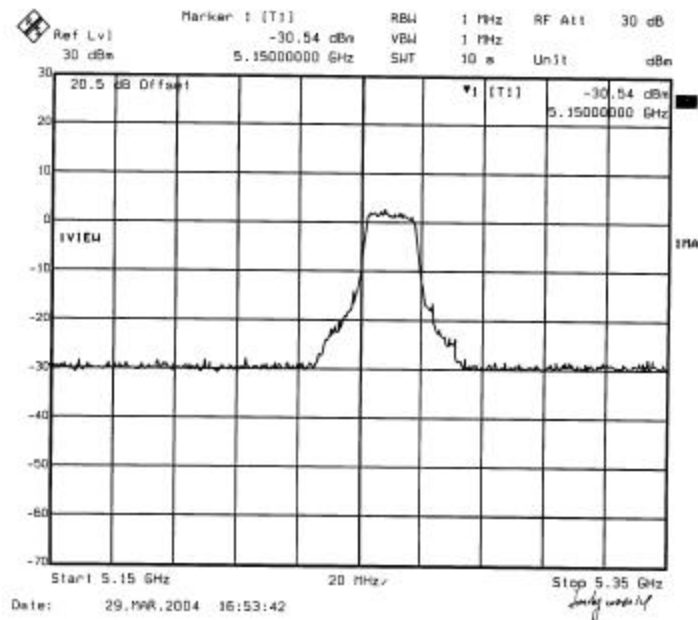(5.25GHz-5.35GHz) Low Channel BPSK 802.11a



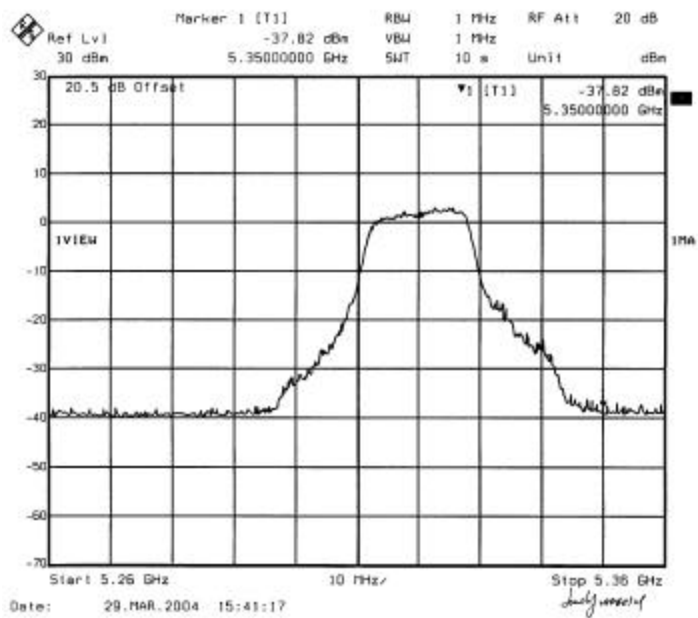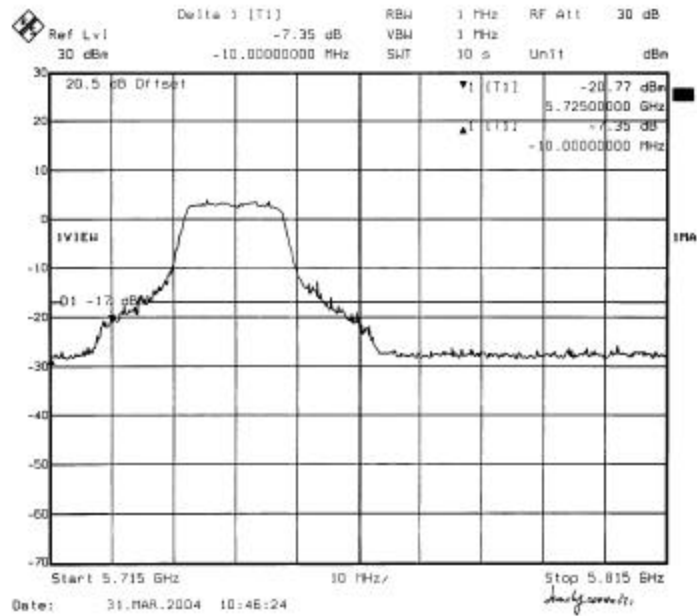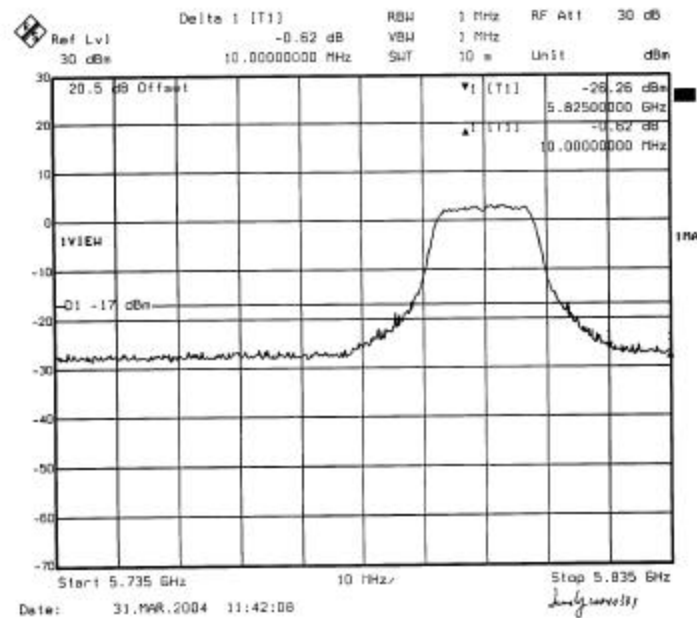(5.25GHz-5.35GHz) High Channel BPSK 802.11a



(5.725GHz-5.825GHz) Low Channel BPSK 802.11a*(5.725GHz-5.825GHz) High Channel BPSK 802.11a*

§15.407(a)(6) – The Ratio of the Peak Excursion of the Modulation Envelope to the Peak Transmit Power

Standard Applicable

According to §15.407(a)(6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth whichever is less.

Test Procedure

For this test, the EUT's antenna was removed and replaced with a SMA jack to UMP2.0 plug test cable, so output power levels were calculated from conducted emission levels.

The analyzer center frequency was set to the EUT carrier frequency. For the peak value trace A, the analyzer resolution and video bandwidth were set to 1MHz. Do a MAX HOLD, then VIEW. For the average value trace B, the analyzer resolution bandwidth was set to 1MHz, the video bandwidth was set to 30kHz. MAX HOLD then VIEW trace B also.

The delta from the peak value trace and the Average should not exceed 13dBm across any 1MHz bandwidth.

Test Equipment List and Details



Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R/S	Spectrum Analyzer	FSEM	849720/019	2003-10-30	2004-10-29

Measurement Result


Environmental Conditions

Temperature:	24° C
Relative Humidity:	63%
ATM Pressure:	1100 mbar

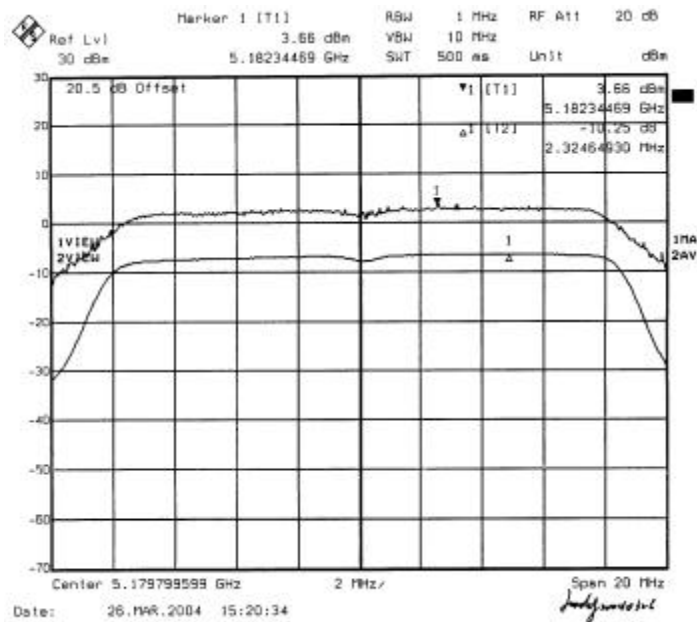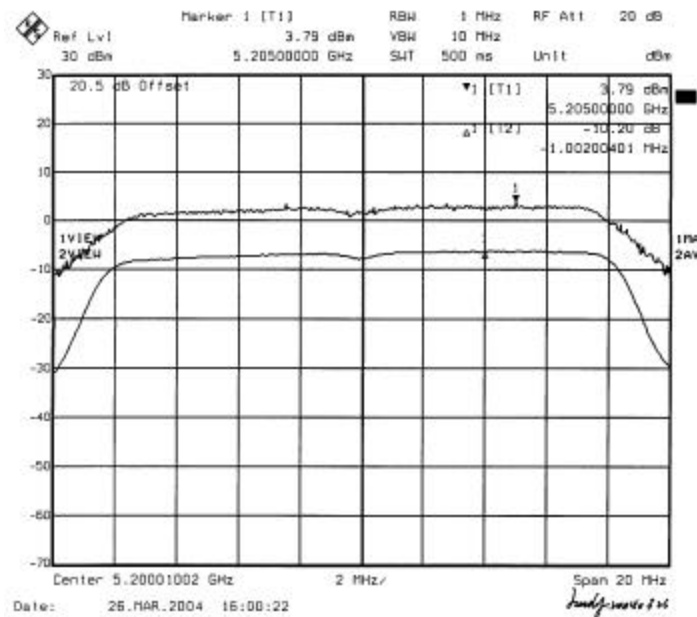
Please see the hereinafter plots for more detail.

(5.15GHz-5.25GHz) Low Channel BPSK 802.11a*(5.15GHz-5.25GHz) Middle Channel BPSK 802.11a*

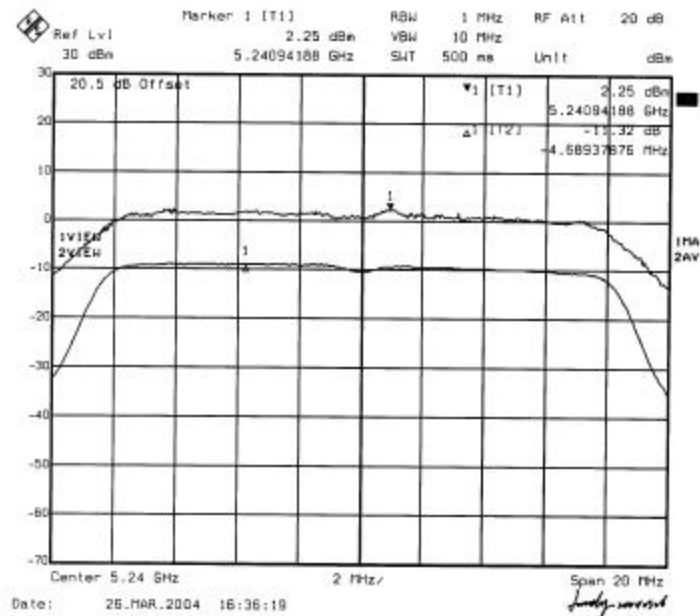
(5.15GHz-5.25GHz) High Channel BPSK 802.11a



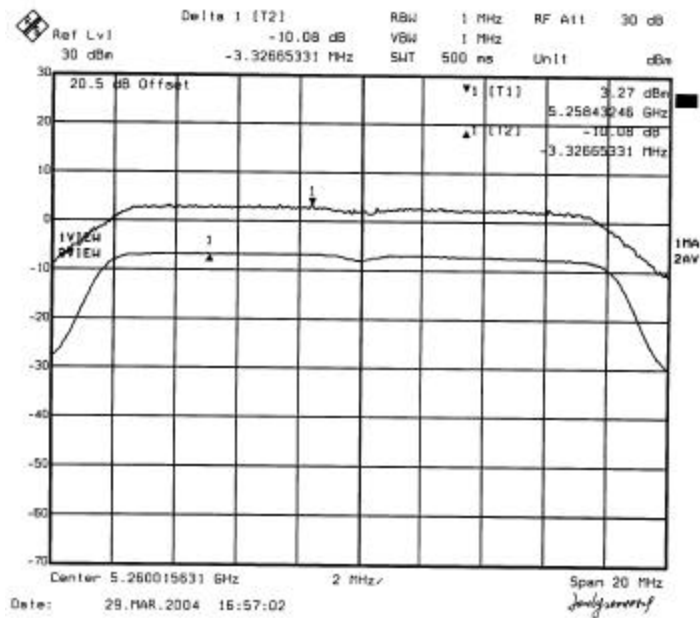
(5.25GHz-5.35GHz) Low Channel BPSK 802.11a





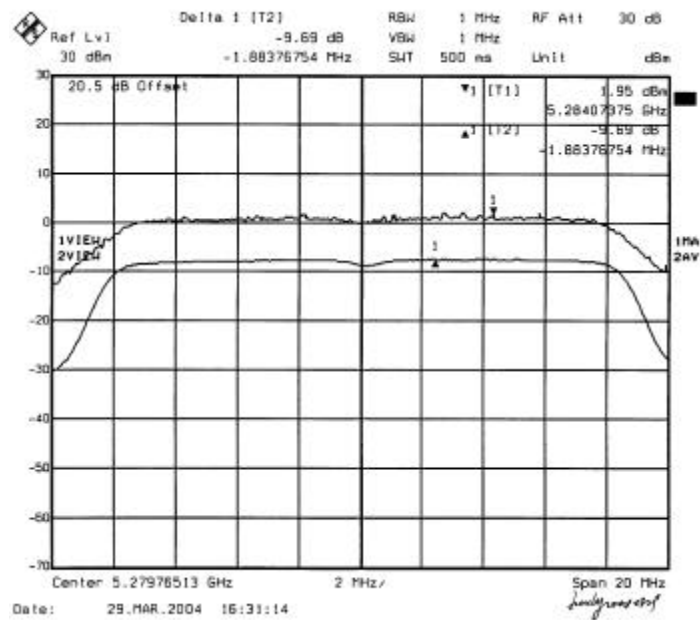(5.25GHz-5.35GHz) Middle Channel BPSK 802.11a




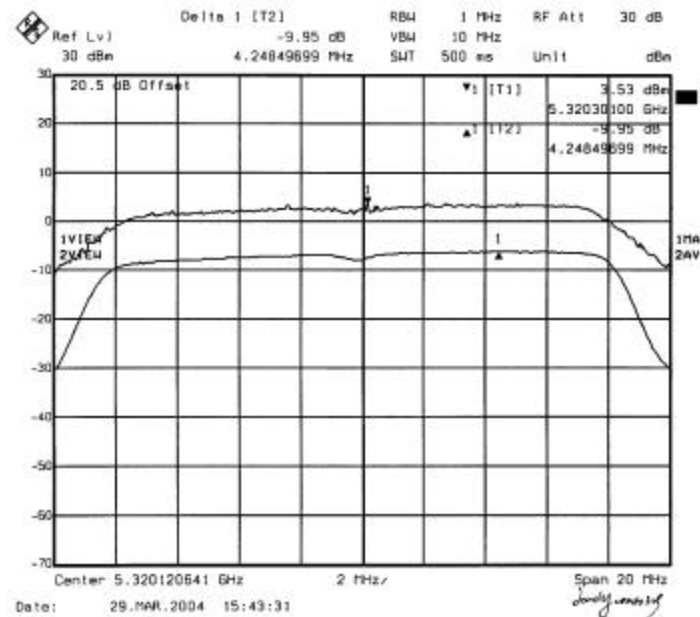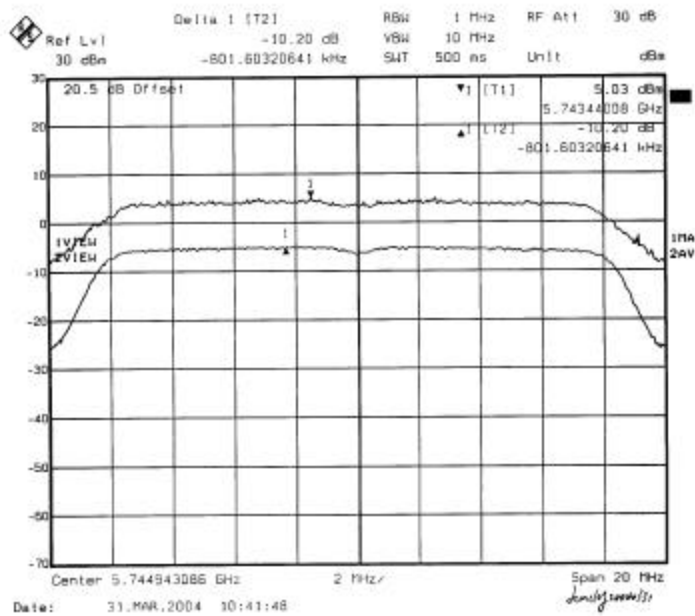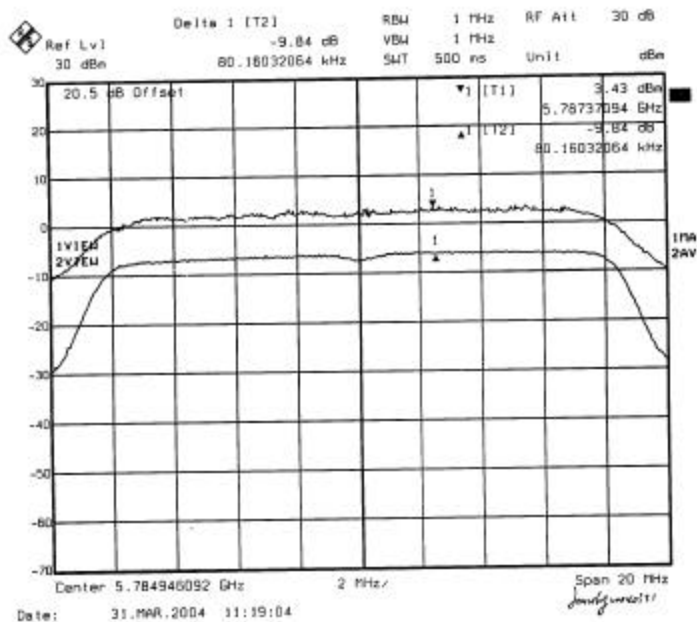(5.25GHz-5.35GHz) High Channel BPSK 802.11a



(5.725GHz-5.825GHz) Low Channel BPSK 802.11a*(5.725GHz-5.825GHz) Middle Channel BPSK 802.11a*

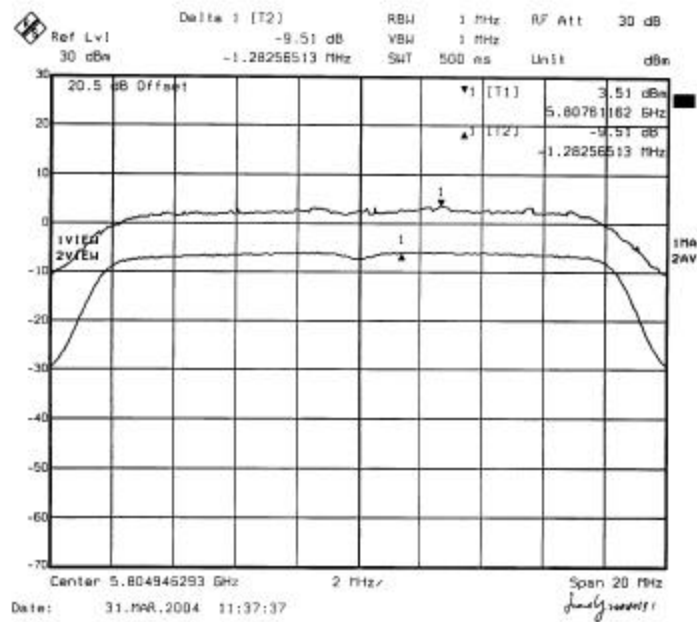(5.725GHz-5.825GHz) High Channel BPSK 802.11a



§15.203 - ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to § 15.407 (d), any U-NII device shall use a transmitting antenna that is an integral part of the device.

Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.

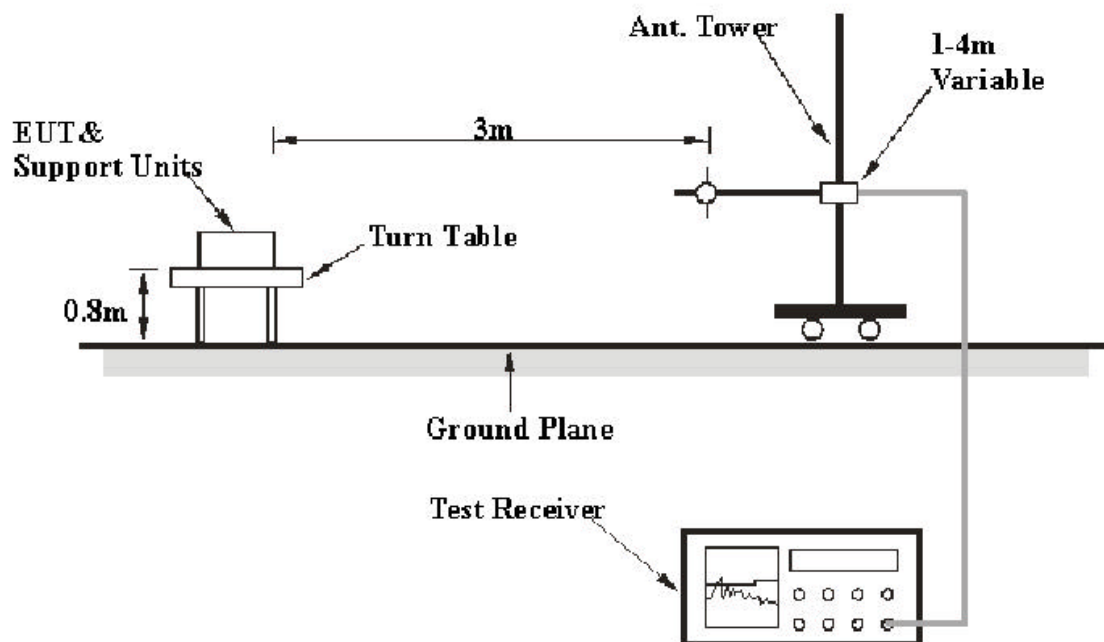
§15.205, §15.209(a), §15.407(b)(5), §15.407(b)(6) - SPURIOUS RADIATED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

EUT Setup



The radiated emission tests were performed in the open area 3-meter test site, using the setup accordance with the ANSI C63.4-2001. The specification used was the FCC Part 15 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The Host PC was connected to a 120 VAC/ 60Hz power source.

Spectrum Analyzer Setup

The system was investigated from 30MHz to 1000MHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<u>Frequency Range</u>	<u>RBW</u>	<u>Video B/W</u>
30 – 1000MHz	100KHz	100KHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R/S	Spectrum Analyzer	FSEM	849720/019	2003-10-30	2004-10-29
HP	Amplifier	8447D	2944A09795	2003-8-5	2004-8-4
ETS	Log Periodic Antenna	3146	9603-4421	2003-8-5	2004-8-4
ETS	Biconical Antenna	3110B	3360	2003-8-5	2004-8-4
FLUKE	True RMS Multimeter	187	78540402	2004-3-23	2005-3-22
HP	Amplifier (1-26.5GHz)	8449B	3147A00400	2003-11-5	2004-11-4
A.H.System	Horn Antenna (700MHz-18GHz)	SAS-200/571	261	2003-11-5	2004-11-4
YOKOROWA	Coaxial Cable 1#	N/A	NO: 001	2003-8-5	2004-8-4
YOKOROWA	Coaxial Cable 1#	N/A	NO: 002	2003-8-5	2004-8-4

* **Statement of Traceability: BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the Host PC, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

Test Data

Antenna M/N: R0322-025

Date of Test : April 2-9,2004 Temperature : 25?
 EUT : W800A Wireless Access Point Humidity : 70%
 M/N : W800A Operating Mode : Running
 S/N : 040360 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Anten na	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/ m		Degree	Meter	H/ V	dBμV/ m	DB	DB	dBμV/m	dBμV/m	dB
(5.15GHz -5.25GHz) Low Channel											
5180	79.88	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	88.3		
5180	83.38	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	91.8		
5180	70.14	FUND/AVE	45	1.0	v	33.9	5.2	30.6	78.6		
5180	74.52	FUND/AVE	45	1.2	h	33.9	5.2	30.6	83.0		
15540	35.41	AVE	270	1.0	v	40.6	9.2	32.6	52.6	54	-1.4
10360	38.67	AVE	60	1.2	v	37.8	7.3	32	51.8	54	-2.2
15540	33.56	AVE	180	1.2	h	40.6	9.2	32.6	50.8	54	-3.2
10360	37.01	AVE	90	1.2	h	37.8	7.3	32	50.1	54	-3.9
10360	56.04	PEAK	45	1.2	h	37.8	7.3	32	69.1	74	-4.9
15540	47.96	PEAK	45	1.0	v	40.6	9.2	32.6	65.2	74	-8.8
15540	47.83	PEAK	180	1.2	h	40.6	9.2	32.6	65.1	74	-8.9
10360	48.82	PEAK	180	1.2	v	37.8	7.3	32	61.9	74	-12.1
(5.15GHz -5.25GHz) Middle Channel											
5200	77.33	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	85.8		
5200	82.15	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	90.6		
5200	68.98	FUND/AVE	45	1.0	v	33.9	5.2	30.6	77.4		
5200	73.86	FUND/AVE	45	1.2	h	33.9	5.2	30.6	82.3		
10401	39.21	AVE	90	1.2	h	37.8	7.3	32	52.3	54	-1.7
10401	38.78	AVE	60	1.2	v	37.8	7.3	32	51.9	54	-2.1
15600	33.35	AVE	180	1.2	h	40.6	9.2	32.6	50.6	54	-3.4
15600	33.25	AVE	270	1.0	v	40.6	9.2	32.6	50.5	54	-3.5
10401	55.19	PEAK	45	1.2	h	37.8	7.3	32	68.3	74	-5.7
15600	47.96	PEAK	45	1.0	v	40.6	9.2	32.6	65.2	74	-8.8
15600	47.56	PEAK	180	1.2	h	40.6	9.2	32.6	64.8	74	-9.2
10401	50.99	PEAK	180	1.2	v	37.8	7.3	32	64.1	74	-9.9

Continued:

(5.15GHz-5.25GHz) High Channel											
5240	75.61	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	84.1		
5240	82.03	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	90.5		
5240	67.18	FUND/AVE	45	1.0	v	33.9	5.2	30.6	75.6		
5240	72.44	FUND/AVE	45	1.2	h	33.9	5.2	30.6	80.9		
10480	38.58	AVE	90	1.2	h	37.8	7.3	32	51.7	54	-2.3
10480	38.34	AVE	60	1.2	v	37.8	7.3	32	51.4	54	-2.6
15720	33.56	AVE	270	1.0	v	40.6	9.2	32.6	50.8	54	-3.2
15720	33.56	AVE	180	1.2	h	40.6	9.2	32.6	50.8	54	-3.2
15720	48.08	PEAK	180	1.2	h	40.6	9.2	32.6	65.3	74	-8.7
15720	47.69	PEAK	45	1.0	v	40.6	9.2	32.6	64.9	74	-9.1
10480	50.25	PEAK	45	1.2	h	37.8	7.3	32	63.3	74	-10.7
10480	48.28	PEAK	180	1.2	v	37.8	7.3	32	61.4	74	-12.6

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.15GHz-5.25GHz) 30MHz-1000MHz										
528.01	48.95	45	1.2	v	18.5	1.8	25	44.3	46	-1.8
528.01	47.69	45	1.2	h	18.5	1.8	25	43.0	46	-3.0
132.06	50.54	45	1.0	v	12.6	1.0	25	39.1	43.5	-4.4
297.02	52.77	60	1.0	h	12.6	1.1	25	41.5	46	-4.5
66.02	50.29	45	1.0	h	9.7	0.4	25	35.4	40	-4.6
131.98	49.84	180	1.2	h	12.6	1.0	25	38.4	43.5	-5.1
66.02	48.87	180	1.2	v	9.7	0.4	25	34.0	40	-6.0
297.02	47.86	270	1.0	v	12.6	1.1	25	36.6	46	-9.4
231.17	44.42	60	1.2	v	11.3	1.0	25	31.7	46	-14.3
231.17	43.8	45	1.0	h	11.3	1.0	25	31.1	46	-14.9

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Antenna	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/m		Degree	Meter	H/V	dBμV/m	DB	DB	dBμV/m	dBμV/m	dB
(5.25GHz -5.35GHz) Low Channel											
5260	74.26	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	82.7		
5260	79	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	87.5		
5260	64.77	FUND/AVE	45	1.0	v	33.9	5.2	30.6	73.2		
5260	70.58	FUND/AVE	45	1.2	h	33.9	5.2	30.6	79.0		
10520	37.41	AVE	90	1.2	h	38.9	7.5	32	51.8	54	-2.2
10520	37.01	AVE	60	1.2	v	38.9	7.5	32	51.4	54	-2.6
15780	33.56	AVE	270	1.0	v	40.6	9.2	32.6	50.8	54	-3.2
15780	33.56	AVE	180	1.2	h	40.6	9.2	32.6	50.8	54	-3.2
10520	55.15	PEAK	45	1.2	h	38.9	7.5	32	69.5	74	-4.5
10520	54.42	PEAK	180	1.2	v	38.9	7.5	32	68.8	74	-5.2
15780	48.58	PEAK	180	1.2	h	40.6	9.2	32.6	65.8	74	-8.2
15780	47.96	PEAK	45	1.0	v	40.6	9.2	32.6	65.2	74	-8.8
(5.25GHz -5.35GHz) 5Middle Channel											
5280	72.53	FUND/PEAK	45	1.0	v	33.9	5.2	31.1	80.5		
5280	79.13	FUND/PEAK	60	1.0	h	33.9	5.2	31.1	87.1		
5280	64.59	FUND/AVE	45	1.0	v	33.9	5.2	31.1	72.5		
5280	70.25	FUND/AVE	45	1.2	h	33.9	5.2	31.1	78.2		
10560	37.01	AVE	45	1.2	h	38.9	7.5	32.2	51.2	54	-2.8
15840	33.23	AVE	45	1.2	h	40.6	9.2	32.6	50.5	54	-3.6
15840	33.01	AVE	270	1.0	v	40.6	9.2	32.6	50.2	54	-3.8
10560	35.41	AVE	60	1.2	v	38.9	7.5	32.2	49.6	54	-4.4
10560	51.78	PEAK	45	1.2	h	38.9	7.5	32.2	65.9	74	-8.1
15840	48.46	PEAK	45	1.0	v	40.6	9.2	32.6	65.7	74	-8.3
15840	48.08	PEAK	180	1.2	h	40.6	9.2	32.6	65.3	74	-8.7
10560	49.78	PEAK	180	1.2	v	38.9	7.5	32.2	63.9	74	-10.1

Continued:

(5.25GHz -5.35GHz) High Channel											
5320	67.79	FUND/PEAK	45	1.0	v	33.9	5.2	30.7	76.1		
5320	71.38	FUND/PEAK	60	1.0	h	33.9	5.2	30.7	79.7		
5320	58.24	FUND/AVE	45	1.0	v	33.9	5.2	30.7	66.6		
5320	62.04	FUND/AVE	45	1.2	h	33.9	5.2	30.7	70.4		
10640	36.54	AVE	60	1.2	v	38.9	7.5	32.1	50.8	54	-3.2
10640	35.41	AVE	90	1.2	h	38.9	7.5	32.1	49.7	54	-4.3
15960	30.25	AVE	270	1.0	v	40.6	9.2	32.7	47.4	54	-6.6
15960	30.12	AVE	180	1.2	h	40.6	9.2	32.7	47.2	54	-6.8
15960	49.28	PEAK	45	1.0	v	40.6	9.2	32.7	66.4	74	-7.6
15960	47.83	PEAK	180	1.2	h	40.6	9.2	32.7	65.0	74	-9.1
10640	48.84	PEAK	180	1.2	v	38.9	7.5	32.1	63.1	74	-10.9
10640	48.34	PEAK	45	1.2	h	38.9	7.5	32.1	62.6	74	-11.4

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.25GHz -5.35GHz) 30MHz-1000MHz										
528.01	49.15	45	1.2	v	18.5	1.8	25	44.5	46	-1.6
66.02	52.97	180	1.2	v	9.7	0.4	25	38.1	40	-1.9
528.01	48.35	45	1.2	h	18.5	1.8	25	43.7	46	-2.4
132.06	49.97	45	1.0	v	12.6	1.0	25	38.6	43.5	-4.9
131.98	49.81	180	1.2	h	12.6	1.0	25	38.4	43.5	-5.1
66.02	49.71	45	1.0	h	9.7	0.4	25	34.8	40	-5.2
297.02	52.03	60	1.0	h	12.6	1.1	25	40.7	46	-5.3
297.02	47.74	270	1.0	v	12.6	1.1	25	36.4	46	-9.6
231.17	45.57	60	1.2	v	11.3	1.0	25	32.9	46	-13.1
231.17	43.01	45	1.0	h	11.3	1.0	25	30.3	46	-15.7

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Anten na	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/ m		Degree	Meter	H/ V	dBμV/ m	DB	DB	dBμV/m	dBμV/m	dB
(5.725GHz-5.825GHz) Low Channel											
5745	81.17	FUND/PEAK	45	1.0	v	34.1	5.4	31	89.7		
5745	80.66	FUND/PEAK	60	1.0	h	34.1	5.4	31	89.2		
5745	72.45	FUND/AVE	45	1.0	v	34.1	5.4	31	81.0		
5745	72.47	FUND/AVE	45	1.2	h	34.1	5.4	31	81.0		
11490	37.01	AVE	90	1.2	h	39.6	7.6	32	52.2	54	-1.8
17236	30.55	AVE	180	1.2	h	44.3	9.7	32.5	52.1	54	-2.0
17236	30.14	AVE	270	1.0	v	44.3	9.7	32.5	51.6	54	-2.4
17236	49.71	AVE	180	1.2	h	44.3	9.7	32.5	71.2	74	-2.8
11490	35.41	PEAK	60	1.2	v	39.6	7.6	32	50.6	54	-3.4
11490	53.65	PEAK	45	1.2	h	39.6	7.6	32	68.9	74	-5.1
17236	47.01	PEAK	45	1.0	v	44.3	9.7	32.5	68.5	74	-5.5
11490	50.17	PEAK	180	1.2	v	39.6	7.6	32	65.4	74	-8.6
(5.725GHz-5.825GHz) Middle Channel											
5782	82.65	FUND/PEAK	45	1.0	v	34.1	5.4	31	91.2		
5782	83.26	FUND/PEAK	60	1.0	h	34.1	5.4	32.8	90.0		
5782	74.01	FUND/AVE	45	1.0	v	34.1	5.4	32.5	81.0		
5782	74.59	FUND/AVE	45	1.2	h	34.1	5.4	32.1	82.0		
17355	31.36	AVE	270	1.0	v	41.8	9.7	31	51.9	54	-2.1
11567	37.54	AVE	60	1.2	v	39.1	7.8	32.8	51.6	54	-2.4
11567	37.01	AVE	45	1.2	h	39.1	7.8	32.5	51.4	54	-2.6
17355	32.46	AVE	45	1.2	h	41.8	9.7	32.8	51.2	54	-2.8
11567	53.16	PEAK	45	1.2	h	39.1	7.8	31	69.0	74	-5.0
17355	47.69	PEAK	180	1.2	h	41.8	9.7	32.1	67.1	74	-6.9
11567	50.71	PEAK	180	1.2	v	39.1	7.8	32.1	65.5	74	-8.5
17355	46.55	PEAK	45	1.0	v	41.8	9.7	32.5	65.6	74	-8.5

Continued:

(5.725GHz-5.825GHz) 16Low Channel											
5805	79.88	FUND/PEAK	45	1.0	v	34.1	5.4	31.1	88.3		
5805	82.4	FUND/PEAK	60	1.0	h	34.1	5.4	31.1	90.8		
5805	71.07	FUND/AVE	45	1.0	v	34.1	5.4	31.1	79.5		
5805	73.91	FUND/AVE	45	1.2	h	34.1	5.4	31.1	82.3		
17415	30.46	AVE	180	1.2	h	44.3	9.7	32.6	51.9	54	-2.1
11610	37.01	AVE	90	1.2	h	39.1	7.8	32.2	51.7	54	-2.3
17415	30.15	AVE	270	1.0	v	44.3	9.7	32.6	51.6	54	-2.5
11610	36.46	AVE	60	1.2	v	39.1	7.8	32.2	51.1	54	-2.9
17415	48.34	PEAK	180	1.2	h	44.3	9.7	32.6	69.7	74	-4.3
17415	47.83	PEAK	45	1.0	v	44.3	9.7	32.6	69.2	74	-4.8
11610	54.04	PEAK	45	1.2	h	39.1	7.8	32.2	68.7	74	-5.3
11610	50.52	PEAK	180	1.2	v	39.1	7.8	32.2	65.2	74	-8.8

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.725GHz-5.825GHz) 30MHz-1000MHz										
528.01	49.55	45	1.2	v	18.5	1.8	25	44.9	46	-1.2
528.01	49.34	45	1.2	h	18.5	1.8	25	44.6	46	-1.4
66.02	51.74	180	1.2	v	9.7	0.4	25	36.8	40	-3.2
66.02	50.27	45	1.0	h	9.7	0.4	25	35.4	40	-4.6
297.02	52.13	60	1.0	h	12.6	1.1	25	40.8	46	-5.2
132.06	48.5	45	1.0	v	12.6	1.0	25	37.1	43.5	-6.4
131.98	47.65	180	1.2	h	12.6	1.0	25	36.3	43.5	-7.3
297.02	49.43	270	1.0	v	12.6	1.1	25	38.1	46	-7.9
231.17	45.71	60	1.2	v	11.3	1.0	25	33.0	46	-13.0
231.17	45.45	45	1.0	h	11.3	1.0	25	32.8	46	-13.3

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Anten na	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/ m		Degree	Meter	H/ V	dBμV/ m	DB	DB	dBμV/m	dBμV/m	dB
(2.4GHz-2.4835GHz) 802.11b Low Channel											
2412	78.76	FUND/PEAK	45	1.0	v	28.7	3.4	28.7	82.1		
2412	80.4	FUND/PEAK	45	1.2	h	28.7	3.4	28.7	83.8		
2412	72.12	FUND/AVE	270	1.0	v	28.7	3.4	28.7	75.5		
2412	74.28	FUND/AVE	180	1.2	h	28.7	3.4	28.7	77.6		
9648	35.41	AVE	180	1.2	v	38.4	7.0	31.8	49.1	54	-4.9
9648	35.41	AVE	180	1.2	h	38.4	7.0	31.8	49.1	54	-4.9
7236	36.38	AVE	90	1.2	v	36.3	6.0	31.6	47.1	54	-7.0
7236	36.04	AVE	180	1.2	h	36.3	6.0	31.6	46.7	54	-7.3
4824	59.24	PEAK	180	1.2	h	32.5	4.9	30.4	66.3	74	-7.8
4824	38.46	AVE	45	1.2	v	32.5	4.9	30.4	45.5	54	-8.5
4824	37.01	AVE	180	1.2	h	32.5	4.9	30.4	44.0	54	-10.0
4824	55.68	PEAK	180	1.2	v	32.5	4.9	30.4	62.7	74	-11.3
9648	48.46	PEAK	60	1.0	v	38.4	7.0	31.8	62.1	74	-11.9
9648	48.46	PEAK	60	1.2	h	38.4	7.0	31.8	62.1	74	-11.9
7236	47.01	PEAK	45	1.0	h	36.3	6.0	31.6	57.7	74	-16.3
7236	46.34	PEAK	45	1.0	v	36.3	6.0	31.6	57.0	74	-17.0
(2.4GHz-2.4835GHz) 802.11b Middle Channel											
2436	84.79	FUND/PEAK	45	1.0	v	28.7	3.4	28.6	88.2		
2436	80.53	FUND/PEAK	45	1.2	h	28.7	3.4	28.6	84.0		
2436	78.72	FUND/AVE	270	1.0	v	28.7	3.4	28.6	82.2		
2436	74.44	FUND/AVE	45	1.2	h	28.7	3.4	28.6	77.9		
9749	38.34	AVE	45	1.2	v	38.4	7.0	31.8	52.0	54	-2.0
9749	35.41	AVE	45	1.2	h	38.4	7.0	31.8	49.1	54	-4.9
7322	37.01	AVE	45	1.2	v	36.3	6.0	31.7	47.6	54	-6.4
7322	37.01	AVE	45	1.2	h	36.3	6.0	31.7	47.6	54	-6.4
4875	39.38	AVE	45	1.2	v	32.5	4.9	30.4	46.4	54	-7.6
4875	38.34	AVE	45	1.2	h	32.5	4.9	30.4	45.4	54	-8.7
9749	49.5	PEAK	60	1.2	h	38.4	7.0	31.8	63.1	74	-10.9
7322	48.08	PEAK	45	1.0	h	36.3	6.0	31.7	58.7	74	-15.4
7322	47.46	PEAK	45	1.0	v	36.3	6.0	31.7	58.0	74	-16.0
4875	48.58	PEAK	180	1.2	v	32.5	4.9	30.4	55.6	74	-18.4
4875	48.46	PEAK	180	1.2	h	32.5	4.9	30.4	55.5	74	-18.5
9749	37.01	PEAK	60	1.0	v	38.4	7.0	31.8	50.7	74	-23.3

Continued:

(2.4GHz-2.4835GHz) 802.11b High Channel											
2462	81.05	FUND/PEAK	45	1.0	v	28.7	3.4	28.8	84.3		
2462	78.27	FUND/PEAK	45	1.2	h	28.7	3.4	28.8	81.5		
2462	74.21	FUND/AVE	270	1.0	v	28.7	3.4	28.8	77.5		
2462	71.97	FUND/AVE	180	1.2	h	28.7	3.4	28.8	75.2		
4924	45.58	AVE	180	1.2	h	32.5	4.9	30.4	52.6	54	-1.4
4924	45.02	AVE	45	1.2	v	32.5	4.9	30.4	52.0	54	-2.0
9848	35.41	AVE	180	1.2	v	38.4	7.0	31.9	49.0	54	-5.0
9848	35.41	AVE	180	1.2	h	38.4	7.0	31.9	49.0	54	-5.0
7386	36.34	AVE	90	1.2	v	36.3	6.0	31.7	46.9	54	-7.1
7386	36.04	AVE	180	1.2	h	36.3	6.0	31.7	46.6	54	-7.4
9848	48.58	PEAK	60	1.0	v	38.4	7.0	31.9	62.1	74	-11.9
4924	54.17	PEAK	180	1.2	v	32.5	4.9	30.4	61.2	74	-12.8
9848	47.01	PEAK	60	1.2	h	38.4	7.0	31.9	60.6	74	-13.4
4924	52.57	PEAK	180	1.2	h	32.5	4.9	30.4	59.6	74	-14.4
7386	46.85	PEAK	45	1.0	h	36.3	6.0	31.7	57.4	74	-16.6
7386	46.34	PEAK	45	1.0	v	36.3	6.0	31.7	56.9	74	-17.1

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(2.4GHz-2.4835GHz) 802.11b 30MHz-1000MHz										
528.01	49.65	45	1.2	v	18.5	1.8	25	45.0	46	-1.1
528.01	49.13	45	1.2	h	18.5	1.8	25	44.4	46	-1.6
66.02	52.52	180	1.2	v	9.7	0.4	25	37.6	40	-2.4
297.02	53	60	1.0	h	12.6	1.1	25	41.7	46	-4.3
132.06	50.38	45	1.0	v	12.6	1.0	25	39.0	43.5	-4.5
66.02	49.11	45	1.0	h	9.7	0.4	25	34.2	40	-5.8
297.02	51.12	270	1.0	v	12.6	1.1	25	39.8	46	-6.2
131.98	47.68	180	1.2	h	12.6	1.0	25	36.3	43.5	-7.2
231.17	44.59	45	1.0	h	11.3	1.0	25	31.9	46	-14.1
231.17	40.74	60	1.2	v	11.3	1.0	25	28.0	46	-18.0

Continued:

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dBμV/m	Comments	Angle Degree	Height Meter	Polar H/V	Antenna dBμV/m	Cable DB	Amp. DB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(2.4GHz-2.4835GHz) 802.11g Low Channel											
2412	79.75	FUND/PEAK	45	1.0	v	28.7	3.4	28.7	83.1		
2412	75.97	FUND/PEAK	45	1.2	h	28.7	3.4	28.7	79.3		
2412	70.43	FUND/AVE	270	1.0	v	28.7	3.4	28.7	73.8		
2412	66.73	FUND/AVE	180	1.2	h	28.7	3.4	28.7	70.1		
4824	43.9	AVE	45	1.2	v	32.5	4.9	30.4	50.9	54	-3.1
9648	37.01	AVE	180	1.2	v	38.4	7.0	31.8	50.7	54	-3.3
9648	35.41	AVE	180	1.2	h	38.4	7.0	31.8	49.1	54	-4.9
4824	41.26	AVE	180	1.2	h	32.5	4.9	30.4	48.3	54	-5.7
7236	36.54	AVE	90	1.2	v	36.3	6.0	31.6	47.2	54	-6.8
7236	36.54	AVE	180	1.2	h	36.3	6.0	31.6	47.2	54	-6.8
4824	53.92	PEAK	180	1.2	v	32.5	4.9	30.4	60.9	74	-13.1
9648	47.01	PEAK	60	1.2	h	38.4	7.0	31.8	60.7	74	-13.3
9648	46.54	PEAK	60	1.0	v	38.4	7.0	31.8	60.2	74	-13.8
4824	52.1	PEAK	180	1.2	h	32.5	4.9	30.4	59.1	74	-14.9
7236	47.01	PEAK	45	1.0	v	36.3	6.0	31.6	57.7	74	-16.3
7236	46.4	PEAK	45	1.0	h	36.3	6.0	31.6	57.1	74	-16.9
(2.4GHz-2.4835GHz) 802.11g Middle Channel											
2436	82.4	FUND/PEAK	45	1.0	v	28.7	3.4	28.6	85.9		
2436	81.05	FUND/PEAK	45	1.2	h	28.7	3.4	28.6	84.5		
2436	73.57	FUND/AVE	270	1.0	v	28.7	3.4	28.6	77.0		
2436	71.61	FUND/AVE	45	1.2	h	28.7	3.4	28.6	75.1		
9749	38.34	AVE	45	1.2	v	38.4	7.0	31.8	52.0	54	-2.0
9749	37.01	AVE	45	1.2	h	38.4	7.0	31.8	50.7	54	-3.3
4875	42.06	AVE	45	1.2	v	32.5	4.9	30.4	49.1	54	-4.9
4875	41.8	AVE	45	1.2	h	32.5	4.9	30.4	48.8	54	-5.2
7322	36.54	AVE	45	1.2	v	36.3	6.0	31.7	47.1	54	-6.9
7322	36.54	AVE	45	1.2	h	36.3	6.0	31.7	47.1	54	-6.9
9749	51.78	PEAK	60	1.0	v	38.4	7.0	31.8	65.4	74	-8.6
9749	51.69	PEAK	60	1.2	h	38.4	7.0	31.8	65.3	74	-8.7
4875	52.72	PEAK	180	1.2	v	32.5	4.9	30.4	59.7	74	-14.3
7322	48.21	PEAK	45	1.0	h	36.3	6.0	31.7	58.8	74	-15.2
7322	47.46	PEAK	45	1.0	v	36.3	6.0	31.7	58.0	74	-16.0
4875	50.9	PEAK	180	1.2	h	32.5	4.9	30.4	57.9	74	-16.1

Continued:

(2.4GHz-2.4835GHz) 802.11g High Channel											
2462	85.48	FUND/PEAK	45	1.0	v	28.7	3.4	28.8	88.7		
2462	79.38	FUND/PEAK	45	1.2	h	28.7	3.4	28.8	82.6		
2462	76.84	FUND/AVE	270	1.0	v	28.7	3.4	28.8	80.1		
2462	69.95	FUND/AVE	180	1.2	h	28.7	3.4	28.8	73.2		
9848	38.28	AVE	180	1.2	v	38.4	7.0	31.9	51.8	54	-2.2
9848	37.46	AVE	180	1.2	h	38.4	7.0	31.9	51.0	54	-3.0
4924	42.56	AVE	45	1.2	v	32.5	4.9	30.4	49.6	54	-4.4
4924	41.26	AVE	180	1.2	h	32.5	4.9	30.4	48.3	54	-5.7
7386	36.04	AVE	90	1.2	v	36.3	6.0	31.7	46.6	54	-7.4
7386	36.04	AVE	180	1.2	h	36.3	6.0	31.7	46.6	54	-7.4
9848	49.5	PEAK	60	1.0	v	38.4	7.0	31.9	63.0	74	-11.0
9848	47.42	PEAK	60	1.2	h	38.4	7.0	31.9	61.0	74	-13.0
4924	52.87	PEAK	180	1.2	v	32.5	4.9	30.4	59.9	74	-14.1
4924	51.78	PEAK	180	1.2	h	32.5	4.9	30.4	58.8	74	-15.2
7386	47.01	PEAK	45	1.0	v	36.3	6.0	31.7	57.6	74	-16.4
7386	46.55	PEAK	45	1.0	h	36.3	6.0	31.7	57.1	74	-16.9

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(2.4GHz-2.4835GHz) 802.11g 30MHz-1000MHz										
528.01	49.12	45	1.2	v	18.5	1.8	25	44.4	46	-1.6
528.01	48.89	45	1.2	h	18.5	1.8	25	44.2	46	-1.8
297.02	52.76	60	1.0	h	12.6	1.1	25	41.5	46	-4.5
66.02	49.56	180	1.2	v	9.7	0.4	25	34.7	40	-5.3
132.06	49.54	45	1.0	v	12.6	1.0	25	38.1	43.5	-5.4
131.98	47.48	180	1.2	h	12.6	1.0	25	36.1	43.5	-7.4
66.02	45.3	45	1.0	h	9.7	0.4	25	30.4	40	-9.6
297.02	45.68	270	1.0	v	12.6	1.1	25	34.4	46	-11.6
231.17	43.31	45	1.0	h	11.3	1.0	25	30.6	46	-15.4
231.17	42.07	60	1.2	v	11.3	1.0	25	29.4	46	-16.6

Antenna M/N: TWN-614-180

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Anten na	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/ m		Degree	Meter	H/ V	dBμV/ m	DB	DB	dBμV/m	dBμV/m	dB
(5.15GHz -5.25GHz) Low Channel											
5180	83.1	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	91.6		
5180	95.5	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	104.0		
5180	75.4	FUND/AVE	45	1.0	v	33.9	5.2	30.6	83.9		
5180	87.11	FUND/AVE	45	1.2	h	33.9	5.2	30.6	95.6		
10360	38.34	AVE	90	1.2	h	37.8	7.3	32	51.4	54	-2.6
15540	33.66	AVE	180	1.2	h	40.6	9.2	32.6	50.9	54	-3.1
15540	33.56	AVE	270	1.0	v	40.6	9.2	32.6	50.8	54	-3.2
10360	35.41	AVE	60	1.2	v	37.8	7.3	32	48.5	54	-5.5
15540	48.28	PEAK	45	1.0	v	40.6	9.2	32.6	65.5	74	-8.5
15540	47.01	PEAK	180	1.2	h	40.6	9.2	32.6	64.2	74	-9.8
10360	50.43	PEAK	45	1.2	h	37.8	7.3	32	63.5	74	-10.5
10360	47.01	PEAK	180	1.2	v	37.8	7.3	32	60.1	74	-13.9
(5.15GHz -5.25GHz) Middle Channel											
5200	81.04	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	89.5		
5200	94.7	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	103.2		
5200	72.75	FUND/AVE	45	1.0	v	33.9	5.2	30.6	81.2		
5200	85.38	FUND/AVE	45	1.2	h	33.9	5.2	30.6	93.8		
15600	33.14	AVE	270	1.0	v	40.6	9.2	32.6	50.4	54	-3.6
15600	32.65	AVE	180	1.2	h	40.6	9.2	32.6	49.9	54	-4.1
10401	35.41	AVE	60	1.2	v	37.8	7.3	32	48.5	54	-5.5
10401	35.41	AVE	90	1.2	h	37.8	7.3	32	48.5	54	-5.5
15600	47.46	PEAK	180	1.2	h	40.6	9.2	32.6	64.7	74	-9.3
15600	47.06	PEAK	45	1.0	v	40.6	9.2	32.6	64.3	74	-9.7
10401	47.01	PEAK	180	1.2	v	37.8	7.3	32	60.1	74	-13.9
10401	45.52	PEAK	45	1.2	h	37.8	7.3	32	58.6	74	-15.4

Continued:

(5.15GHz -5.25GHz) High Channel											
5240	82.4	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	90.9		
5240	94.76	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	103.2		
5240	74.02	FUND/AVE	45	1.0	v	33.9	5.2	30.6	82.5		
5240	85.95	FUND/AVE	45	1.2	h	33.9	5.2	30.6	94.4		
15720	33.48	AVE	270	1.0	v	40.6	9.2	32.6	50.7	54	-3.3
15720	33.48	AVE	180	1.2	h	40.6	9.2	32.6	50.7	54	-3.3
10480	35.41	AVE	60	1.2	v	37.8	7.3	32	48.5	54	-5.5
10480	35.41	AVE	90	1.2	h	37.8	7.3	32	48.5	54	-5.5
15720	47.01	PEAK	45	1.0	v	40.6	9.2	32.6	64.2	74	-9.8
15720	46.54	PEAK	180	1.2	h	40.6	9.2	32.6	63.8	74	-10.2
10480	47.46	PEAK	45	1.2	h	37.8	7.3	32	60.6	74	-13.5
10480	47.01	PEAK	180	1.2	v	37.8	7.3	32	60.1	74	-13.9

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.15GHz -5.25GHz) 30MHz -1000MHz										
66.02	52.41	180	1.2	v	9.7	0.4	25	37.5	40	-2.5
528.01	48.19	45	1.2	v	18.5	1.8	25	43.5	46	-2.5
296.97	53.28	270	1.0	v	12.6	1.1	25	42.0	46	-4.0
296.97	52.24	60	1.0	h	12.6	1.1	25	40.9	46	-5.1
131.98	48.62	180	1.2	h	12.6	1.0	25	37.2	43.5	-6.3
66.02	47.73	45	1.0	h	9.7	0.4	25	32.8	40	-7.2
528.01	43.41	45	1.2	h	18.5	1.8	25	38.7	46	-7.3
131.98	47.06	45	1.0	v	12.6	1.0	25	35.7	43.5	-7.8
231.17	45.45	60	1.2	v	11.3	1.0	25	32.8	46	-13.3
231.17	44.42	45	1.0	h	11.3	1.0	25	31.7	46	-14.3

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360
 Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Anten na	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/ m		Degree	Meter	H/ V	dBμV/ m	DB	DB	dBμV/m	dBμV/m	dB
(5.25GHz -5.35GHz) Low Channel											
5260	83.38	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	91.8		
5260	94.64	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	103.1		
5260	75.15	FUND/AVE	45	1.0	v	33.9	5.2	30.6	83.6		
5260	86.8	FUND/AVE	45	1.2	h	33.9	5.2	30.6	95.3		
15780	33.46	AVE	270	1.0	v	40.6	9.2	32.6	50.7	54	-3.3
15780	33.46	AVE	180	1.2	h	40.6	9.2	32.6	50.7	54	-3.3
10520	35.41	AVE	60	1.2	v	38.9	7.5	32	49.8	54	-4.2
10520	35.41	AVE	90	1.2	h	38.9	7.5	32	49.8	54	-4.2
15780	47.01	PEAK	45	1.0	v	40.6	9.2	32.6	64.2	74	-9.8
15780	46.04	PEAK	180	1.2	h	40.6	9.2	32.6	63.3	74	-10.7
10520	47.01	PEAK	45	1.2	h	38.9	7.5	32	61.4	74	-12.6
10520	46.04	PEAK	180	1.2	v	38.9	7.5	32	60.4	74	-13.6
(5.25GHz -5.35GHz) Middle Channel											
5280	84.45	FUND/PEAK	45	1.0	v	33.9	5.2	31.1	92.4		
5280	96.56	FUND/PEAK	60	1.0	h	33.9	5.2	31.1	104.5		
5280	75.75	FUND/AVE	45	1.0	v	33.9	5.2	31.1	83.7		
5280	87.47	FUND/AVE	45	1.2	h	33.9	5.2	31.1	95.4		
10560	37.6	AVE	45	1.2	h	38.9	7.5	32.2	51.8	54	-2.2
15840	34.1	AVE	45	1.2	h	40.6	9.2	32.6	51.3	54	-2.7
15840	33.22	AVE	270	1.0	v	40.6	9.2	32.6	50.4	54	-3.6
10560	35.41	AVE	60	1.2	v	38.9	7.5	32.2	49.6	54	-4.4
15840	48.28	PEAK	180	1.2	h	40.6	9.2	32.6	65.5	74	-8.5
15840	46.54	PEAK	45	1.0	v	40.6	9.2	32.6	63.8	74	-10.2
10560	47.88	PEAK	45	1.2	h	38.9	7.5	32.2	62.0	74	-12.0
10560	46.04	PEAK	180	1.2	v	38.9	7.5	32.2	60.2	74	-13.8

Continued:

(5.25GHz -5.35GHz) High Channel											
5320	85.37	FUND/PEAK	45	1.0	v	33.9	5.2	30.7	93.7		
5320	96.93	FUND/PEAK	60	1.0	h	33.9	5.2	30.7	105.3		
5320	77.41	FUND/AVE	45	1.0	v	33.9	5.2	30.7	85.8		
5320	89.2	FUND/AVE	45	1.2	h	33.9	5.2	30.7	97.6		
10640	37.01	AVE	90	1.2	h	38.9	7.5	32.1	51.3	54	-2.7
15960	33.46	AVE	270	1.0	v	40.6	9.2	32.7	50.6	54	-3.4
15960	33.46	AVE	180	1.2	h	40.6	9.2	32.7	50.6	54	-3.4
10640	35.41	AVE	60	1.2	v	38.9	7.5	32.1	49.7	54	-4.3
10640	53.48	PEAK	45	1.2	h	38.9	7.5	32.1	67.7	74	-6.3
15960	49.04	PEAK	45	1.0	v	40.6	9.2	32.7	66.2	74	-7.8
15960	47.88	PEAK	180	1.2	h	40.6	9.2	32.7	65.0	74	-9.0
10640	47.46	PEAK	180	1.2	v	38.9	7.5	32.1	61.7	74	-12.3

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.25GHz -5.35GHz) 30MHz-1000MHz										
528.01	48.9	45	1.2	v	18.5	1.8	25	44.2	46	-1.8
131.98	52.79	180	1.2	h	12.6	1.0	25	41.4	43.5	-2.1
66.02	52.32	45	1.0	h	9.7	0.4	25	37.4	40	-2.6
66.02	52.01	180	1.2	v	9.7	0.4	25	37.1	40	-2.9
296.97	53.54	60	1.0	h	12.6	1.1	25	42.2	46	-3.8
131.98	49.37	45	1.0	v	12.6	1.0	25	38.0	43.5	-5.5
528.01	44.85	45	1.2	h	18.5	1.8	25	40.2	46	-5.8
296.97	48.05	270	1.0	v	12.6	1.1	25	36.8	46	-9.3
231.17	44.68	45	1.0	h	11.3	1.0	25	32.0	46	-14.0
231.17	43.16	60	1.2	v	11.3	1.0	25	30.5	46	-15.5

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Anten na	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/ m		Degree	Meter	H/ V	dBμV/ m	DB	DB	dBμV/m	dBμV/m	dB
(5.725GHz-5.825GHz) Low Channel											
5745	89.64	FUND/PEAK	45	1.0	v	34.1	5.4	31	98.1		
5745	101.2	FUND/PEAK	60	1.0	h	34.1	5.4	31	109.7		
5745	81.83	FUND/AVE	45	1.0	v	34.1	5.4	31	90.3		
5745	93.07	FUND/AVE	45	1.2	h	34.1	5.4	31	101.6		
11490	37.01	AVE	90	1.2	h	39.6	7.6	32	52.2	54	-1.8
17236	30.55	AVE	180	1.2	h	44.3	9.7	32.5	52.1	54	-2.0
11490	56.7	AVE	45	1.2	h	39.6	7.6	32	71.9	74	-2.1
17236	30.26	AVE	270	1.0	v	44.3	9.7	32.5	51.8	54	-2.2
17236	49.36	PEAK	180	1.2	h	44.3	9.7	32.5	70.9	74	-3.1
11490	35.41	PEAK	60	1.2	v	39.6	7.6	32	50.6	54	-3.4
17236	48.28	PEAK	45	1.0	v	44.3	9.7	32.5	69.8	74	-4.2
11490	47.46	PEAK	180	1.2	v	39.6	7.6	32	62.7	74	-11.3
(5.725GHz-5.825GHz) Middle Channel											
5782	93.36	FUND/PEAK	45	1.0	v	34.1	5.4	31	101.9		
5782	103.9	FUND/PEAK	60	1.0	h	34.1	5.4	32.8	110.6		
5782	84.21	FUND/AVE	45	1.0	v	34.1	5.4	32.5	91.2		
5782	96.13	FUND/AVE	45	1.2	h	34.1	5.4	32.1	103.5		
11567	37.01	AVE	45	1.2	h	39.1	7.8	32.5	51.4	54	-2.6
17355	30.01	AVE	270	1.0	v	41.8	9.7	31	50.5	54	-3.5
17355	31.25	AVE	45	1.2	h	41.8	9.7	32.8	50.0	54	-4.1
11567	35.41	AVE	60	1.2	v	39.1	7.8	32.8	49.5	54	-4.5
17355	48.98	PEAK	180	1.2	h	41.8	9.7	32.1	68.4	74	-5.6
11567	51.56	PEAK	45	1.2	h	39.1	7.8	31	67.4	74	-6.6
17355	41.36	PEAK	45	1.0	v	41.8	9.7	32.5	60.4	74	-13.6
11567	43.38	PEAK	180	1.2	v	39.1	7.8	32.1	58.2	74	-15.8

Continued:

(5.725GHz-5.825GHz) High Channel											
5805	91.91	FUND/PEAK	45	1.0	v	34.1	5.4	31.1	100.3		
5805	102.6	FUND/PEAK	60	1.0	h	34.1	5.4	31.1	111.0		
5805	84.37	FUND/AVE	45	1.0	v	34.1	5.4	31.1	92.8		
5805	94.97	FUND/AVE	45	1.2	h	34.1	5.4	31.1	103.4		
11610	37.01	AVE	90	1.2	h	39.1	7.8	32.2	51.7	54	-2.3
17415	30.22	AVE	180	1.2	h	44.3	9.7	32.6	51.6	54	-2.4
17415	30.01	AVE	270	1.0	v	44.3	9.7	32.6	51.4	54	-2.6
17415	49.39	AVE	180	1.2	h	44.3	9.7	32.6	70.8	74	-3.2
11610	35.41	PEAK	60	1.2	v	39.1	7.8	32.2	50.1	54	-3.9
11610	54.1	PEAK	45	1.2	h	39.1	7.8	32.2	68.8	74	-5.2
17415	47.01	PEAK	45	1.0	v	44.3	9.7	32.6	68.4	74	-5.6
11610	49.39	PEAK	180	1.2	v	39.1	7.8	32.2	64.1	74	-9.9

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.725GHz-5.825GHz) 30MHz-1000MHz										
66.02	53.22	180	1.2	v	9.7	0.4	25	38.3	40	-1.7
528.01	48.96	45	1.2	v	18.5	1.8	25	44.3	46	-1.7
528.01	47.96	45	1.2	h	18.5	1.8	25	43.3	46	-2.7
296.97	53.95	60	1.0	h	12.6	1.1	25	42.7	46	-3.4
131.98	50.22	180	1.2	h	12.6	1.0	25	38.8	43.5	-4.7
131.98	47.77	45	1.0	v	12.6	1.0	25	36.4	43.5	-7.1
296.97	49.63	270	1.0	v	12.6	1.1	25	38.3	46	-7.7
66.02	47.14	45	1.0	h	9.7	0.4	25	32.2	40	-7.8
231.17	44.29	45	1.0	h	11.3	1.0	25	31.6	46	-14.4
231.17	42.65	60	1.2	v	11.3	1.0	25	30.0	46	-16.1

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Anten na	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/ m		Degree	Meter	H/ V	dBμV/ m	DB	DB	dBμV/m	dBμV/m	dB
(2.4GHz-2.4835GHz) 802.11b Low Channel											
2412	92.42	FUND/PEAK	45	1.0	v	28.7	3.4	28.7	95.8		
2412	102.9	FUND/PEAK	45	1.2	h	28.7	3.4	28.7	106.3		
2412	86.03	FUND/AVE	270	1.0	v	28.7	3.4	28.7	89.4		
2412	97.19	FUND/AVE	180	1.2	h	28.7	3.4	28.7	100.5		
9648	35.41	AVE	180	1.2	v	38.4	7.0	31.8	49.1	54	-4.9
9648	35.41	AVE	180	1.2	h	38.4	7.0	31.8	49.1	54	-4.9
7236	35.41	AVE	90	1.2	v	36.3	6.0	31.6	46.1	54	-7.9
7236	35.41	AVE	180	1.2	h	36.3	6.0	31.6	46.1	54	-7.9
4824	35.41	AVE	45	1.2	v	32.5	4.9	30.4	42.4	54	-11.6
4824	35.41	AVE	180	1.2	h	32.5	4.9	30.4	42.4	54	-11.6
9648	47.46	PEAK	60	1.2	h	38.4	7.0	31.8	61.1	74	-12.9
9648	46.54	PEAK	60	1.0	v	38.4	7.0	31.8	60.2	74	-13.8
7236	47.48	PEAK	45	1.0	v	36.3	6.0	31.6	58.2	74	-15.9
7236	47.46	PEAK	45	1.0	h	36.3	6.0	31.6	58.1	74	-15.9
4824	47.46	PEAK	180	1.2	v	32.5	4.9	30.4	54.5	74	-19.5
4824	47.01	PEAK	180	1.2	h	32.5	4.9	30.4	54.0	74	-20.0
(2.4GHz-2.4835GHz) 802.11b Middle Channel											
2437	92.7	FUND/PEAK	45	1.0	v	28.7	3.4	28.6	96.2		
2437	104.6	FUND/PEAK	45	1.2	h	28.7	3.4	28.6	108.0		
2437	87.01	FUND/AVE	270	1.0	v	28.7	3.4	28.6	90.5		
2437	98.23	FUND/AVE	45	1.2	h	28.7	3.4	28.6	101.7		
4875	43.26	AVE	45	1.2	h	32.5	4.9	30.4	50.3	54	-3.7
9749	35.41	AVE	45	1.2	v	38.4	7.0	31.8	49.1	54	-4.9
9749	35.41	AVE	45	1.2	h	38.4	7.0	31.8	49.1	54	-4.9
7322	35.41	AVE	45	1.2	v	36.3	6.0	31.7	46.0	54	-8.0
7322	33.48	AVE	45	1.2	h	36.3	6.0	31.7	44.1	54	-10.0
4875	35.41	AVE	45	1.2	v	32.5	4.9	30.4	42.4	54	-11.6
4875	54.69	PEAK	180	1.2	h	32.5	4.9	30.4	61.7	74	-12.3
9749	47.01	PEAK	60	1.2	h	38.4	7.0	31.8	60.7	74	-13.3
9749	46.04	PEAK	60	1.0	v	38.4	7.0	31.8	59.7	74	-14.3
7322	47.01	PEAK	45	1.0	v	36.3	6.0	31.7	57.6	74	-16.4
7322	45.52	PEAK	45	1.0	h	36.3	6.0	31.7	56.1	74	-17.9
4875	47.88	PEAK	180	1.2	v	32.5	4.9	30.4	54.9	74	-19.1

Continued:

(2.4GHz-2.4835GHz) 802.11b High Channel											
2462	92.36	FUND/PEAK	45	1.0	v	28.7	3.4	28.8	95.6		
2462	103.5	FUND/PEAK	45	1.2	h	28.7	3.4	28.8	106.7		
2462	86.09	FUND/AVE	270	1.0	v	28.7	3.4	28.8	89.3		
2462	97.31	FUND/AVE	180	1.2	h	28.7	3.4	28.8	100.6		
7386	39.5	AVE	90	1.2	v	36.3	6.0	31.7	50.1	54	-3.9
4924	42.26	AVE	180	1.2	h	32.5	4.9	30.4	49.3	54	-4.7
9848	35.41	AVE	180	1.2	v	38.4	7.0	31.9	49.0	54	-5.0
9848	35.41	AVE	180	1.2	h	38.4	7.0	31.9	49.0	54	-5.0
7386	35.41	AVE	180	1.2	h	36.3	6.0	31.7	46.0	54	-8.0
4924	35.41	AVE	45	1.2	v	32.5	4.9	30.4	42.4	54	-11.6
9848	47.46	PEAK	60	1.0	v	38.4	7.0	31.9	61.0	74	-13.0
9848	46.54	PEAK	60	1.2	h	38.4	7.0	31.9	60.1	74	-13.9
7386	49.39	PEAK	45	1.0	v	36.3	6.0	31.7	60.0	74	-14.0
4924	50.68	PEAK	180	1.2	h	32.5	4.9	30.4	57.7	74	-16.3
7386	46.54	PEAK	45	1.0	h	36.3	6.0	31.7	57.1	74	-16.9
4924	47.01	PEAK	180	1.2	v	32.5	4.9	30.4	54.0	74	-20.0

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(2.4GHz-2.4835GHz) 802.11b 30MHz-1000MHz										
528.01	49.22	45	1.2	v	18.5	1.8	25	44.5	46	-1.5
528.01	47.97	45	1.2	h	18.5	1.8	25	43.3	46	-2.7
296.97	54.01	270	1.0	v	12.6	1.1	25	42.7	46	-3.3
296.97	53.45	60	1.0	h	12.6	1.1	25	42.2	46	-3.9
131.98	48.99	180	1.2	h	12.6	1.0	25	37.6	43.5	-5.9
66.02	48.55	180	1.2	v	9.7	0.4	25	33.7	40	-6.4
66.02	47.38	45	1.0	h	9.7	0.4	25	32.5	40	-7.5
131.98	46.27	45	1.0	v	12.6	1.0	25	34.9	43.5	-8.6
231.17	45.13	60	1.2	v	11.3	1.0	25	32.4	46	-13.6
231.17	44.87	45	1.0	h	11.3	1.0	25	32.2	46	-13.8

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360
 Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dBμV/m	Comments	Angle Degree	Height Meter	Polar H/V	Antenna dBμV/m	Cable DB	Amp. DB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(2.4GHz-2.4835GHz) 802.11g Low Channel											
2412	90.97	FUND/PEAK	45	1.0	v	28.7	3.4	28.7	94.3		
2412	101	FUND/PEAK	45	1.2	h	28.7	3.4	28.7	104.4		
2412	83.1	FUND/AVE	270	1.0	v	28.7	3.4	28.7	86.5		
2412	92.84	FUND/AVE	180	1.2	h	28.7	3.4	28.7	96.2		
9648	35.41	AVE	180	1.2	v	38.4	7.0	31.8	49.1	54	-4.9
9648	35.41	AVE	180	1.2	h	38.4	7.0	31.8	49.1	54	-4.9
7236	35.41	AVE	90	1.2	v	36.3	6.0	31.6	46.1	54	-7.9
7236	33.48	AVE	180	1.2	h	36.3	6.0	31.6	44.2	54	-9.9
4824	35.41	AVE	45	1.2	v	32.5	4.9	30.4	42.4	54	-11.6
4824	35.41	AVE	180	1.2	h	32.5	4.9	30.4	42.4	54	-11.6
9648	47.46	PEAK	60	1.2	h	38.4	7.0	31.8	61.1	74	-12.9
9648	47.01	PEAK	60	1.0	v	38.4	7.0	31.8	60.7	74	-13.3
7236	47.46	PEAK	45	1.0	v	36.3	6.0	31.6	58.1	74	-15.9
7236	44.96	PEAK	45	1.0	h	36.3	6.0	31.6	55.6	74	-18.4
4824	47.88	PEAK	180	1.2	v	32.5	4.9	30.4	54.9	74	-19.1
4824	47.01	PEAK	180	1.2	h	32.5	4.9	30.4	54.0	74	-20.0
(2.4GHz-2.4835GHz) 802.11g Middle Channel											
2437	90.51	FUND/PEAK	45	1.0	v	28.7	3.4	28.6	94.0		
2437	100.8	FUND/PEAK	45	1.2	h	28.7	3.4	28.6	104.2		
2437	83.07	FUND/AVE	270	1.0	v	28.7	3.4	28.6	86.5		
2437	92.55	FUND/AVE	45	1.2	h	28.7	3.4	28.6	96.0		
9749	35.41	AVE	45	1.2	v	38.4	7.0	31.8	49.1	54	-4.9
9749	35.41	AVE	45	1.2	h	38.4	7.0	31.8	49.1	54	-4.9
7322	35.41	AVE	45	1.2	v	36.3	6.0	31.7	46.0	54	-8.0
7322	33.48	AVE	45	1.2	h	36.3	6.0	31.7	44.1	54	-10.0
4875	35.41	AVE	45	1.2	v	32.5	4.9	30.4	42.4	54	-11.6
4875	35.41	AVE	45	1.2	h	32.5	4.9	30.4	42.4	54	-11.6
9749	47.01	PEAK	60	1.0	v	38.4	7.0	31.8	60.7	74	-13.3
9749	47.01	PEAK	60	1.2	h	38.4	7.0	31.8	60.7	74	-13.3
7322	48.46	PEAK	45	1.0	v	36.3	6.0	31.7	59.0	74	-15.0
7322	46.04	PEAK	45	1.0	h	36.3	6.0	31.7	56.6	74	-17.4
4875	47.88	PEAK	180	1.2	h	32.5	4.9	30.4	54.9	74	-19.1
4875	47.46	PEAK	180	1.2	v	32.5	4.9	30.4	54.5	74	-19.5

Continued:

(2.4GHz-2.4835GHz) 802.11g High Channel											
2462	91.52	FUND/PEAK	45	1.0	v	28.7	3.4	28.8	94.8		
2462	102.2	FUND/PEAK	45	1.2	h	28.7	3.4	28.8	105.4		
2462	82.75	FUND/AVE	270	1.0	v	28.7	3.4	28.8	86.0		
2462	93.57	FUND/AVE	180	1.2	h	28.7	3.4	28.8	96.8		
9848	35.41	AVE	180	1.2	v	38.4	7.0	31.9	49.0	54	-5.0
9848	35.41	AVE	180	1.2	h	38.4	7.0	31.9	49.0	54	-5.0
7386	35.41	AVE	90	1.2	v	36.3	6.0	31.7	46.0	54	-8.0
7386	33.48	AVE	180	1.2	h	36.3	6.0	31.7	44.1	54	-10.0
4924	35.41	AVE	45	1.2	v	32.5	4.9	30.4	42.4	54	-11.6
4924	35.41	AVE	180	1.2	h	32.5	4.9	30.4	42.4	54	-11.6
9848	46.54	PEAK	60	1.0	v	38.4	7.0	31.9	60.1	74	-13.9
9848	46.54	PEAK	60	1.2	h	38.4	7.0	31.9	60.1	74	-13.9
7386	47.48	PEAK	45	1.0	v	36.3	6.0	31.7	58.1	74	-16.0
7386	44.96	PEAK	45	1.0	h	36.3	6.0	31.7	55.5	74	-18.5
4924	46.04	PEAK	180	1.2	v	32.5	4.9	30.4	53.1	74	-21.0
4924	46.04	PEAK	180	1.2	h	32.5	4.9	30.4	53.1	74	-21.0

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m		Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB		Amp. dB	Corr. Ampl. dBμV/m
(2.4GHz-2.4835GHz) 802.11g 30MHz-1000MHz										
528.01	49.31	45	1.2	v	18.5	1.8	25	44.6	46	-1.4
528.01	48.44	45	1.2	h	18.5	1.8	25	43.7	46	-2.3
296.97	54.91	60	1.0	h	12.6	1.1	25	43.6	46	-2.4
131.98	51.77	180	1.2	h	12.6	1.0	25	40.4	43.5	-3.1
296.97	53.95	270	1.0	v	12.6	1.1	25	42.7	46	-3.4
66.02	47.59	45	1.0	h	9.7	0.4	25	32.7	40	-7.3
66.02	46.74	180	1.2	v	9.7	0.4	25	31.8	40	-8.2
131.98	44.89	45	1.0	v	12.6	1.0	25	33.5	43.5	-10.0
231.17	45.17	45	1.0	h	11.3	1.0	25	32.5	46	-13.5
231.17	44.08	60	1.2	v	11.3	1.0	25	31.4	46	-14.6

Antenna M/N: TQJ-5800BKC40-W

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Antenna	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/m		Degree	Meter	H/V	dBμV/m	DB	DB	dBμV/m	dBμV/m	dB
(5.15GHz-5.25GHz) Low Channel											
5180	98.32	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	106.8		
5180	105.2	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	113.7		
5180	90.18	FUND/AVE	45	1.0	v	33.9	5.2	30.6	98.6		
5180	96.69	FUND/AVE	45	1.2	h	33.9	5.2	30.6	105.1		
15540	35.41	AVE	270	1.0	v	40.6	9.2	32.6	52.6	54	-1.4
10360	38.67	AVE	60	1.2	v	37.8	7.3	32	51.8	54	-2.2
10360	38.46	AVE	90	1.2	h	37.8	7.3	32	51.6	54	-2.5
15540	33.78	AVE	180	1.2	h	40.6	9.2	32.6	51.0	54	-3.0
10360	54.13	PEAK	45	1.2	h	37.8	7.3	32	67.2	74	-6.8
15540	49.98	PEAK	180	1.2	h	40.6	9.2	32.6	67.2	74	-6.8
10360	52.8	PEAK	180	1.2	v	37.8	7.3	32	65.9	74	-8.1
15540	47.46	PEAK	45	1.0	v	40.6	9.2	32.6	64.7	74	-9.3
(5.15GHz-5.25GHz) Middle Channel											
5200	99.98	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	108.4		
5200	100.9	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	109.4		
5200	91.95	FUND/AVE	45	1.0	v	33.9	5.2	30.6	100.4		
5200	92.5	FUND/AVE	45	1.2	h	33.9	5.2	30.6	101.0		
10401	38.28	AVE	90	1.2	h	37.8	7.3	32	51.4	54	-2.6
15600	33.41	AVE	180	1.2	h	40.6	9.2	32.6	50.6	54	-3.4
10401	37.36	AVE	60	1.2	v	37.8	7.3	32	50.5	54	-3.6
15600	33.14	AVE	270	1.0	v	40.6	9.2	32.6	50.4	54	-3.6
15600	48.28	PEAK	180	1.2	h	40.6	9.2	32.6	65.5	74	-8.5
15600	47.01	PEAK	45	1.0	v	40.6	9.2	32.6	64.2	74	-9.8
10401	48.28	PEAK	45	1.2	h	37.8	7.3	32	61.4	74	-12.6
10401	47.01	PEAK	180	1.2	v	37.8	7.3	32	60.1	74	-13.9

Continued:

(5.15GHz -5.25GHz) High Channel											
5240	100.5	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	108.9		
5240	98.3	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	106.8		
5240	92.52	FUND/AVE	45	1.0	v	33.9	5.2	30.6	101.0		
5240	89.44	FUND/AVE	45	1.2	h	33.9	5.2	30.6	97.9		
10480	38.58	AVE	90	1.2	h	37.8	7.3	32	51.7	54	-2.3
10480	38.34	AVE	60	1.2	v	37.8	7.3	32	51.4	54	-2.6
15720	33.86	AVE	180	1.2	h	40.6	9.2	32.6	51.1	54	-2.9
15720	33.56	AVE	270	1.0	v	40.6	9.2	32.6	50.8	54	-3.2
15720	49.04	PEAK	180	1.2	h	40.6	9.2	32.6	66.3	74	-7.7
10480	51.54	PEAK	45	1.2	h	37.8	7.3	32	64.6	74	-9.4
15720	47.01	PEAK	45	1.0	v	40.6	9.2	32.6	64.2	74	-9.8
10480	49.04	PEAK	180	1.2	v	37.8	7.3	32	62.1	74	-11.9

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.15GHz -5.25GHz) 30MHz-1000MHz										
528.01	49.52	45	1.2	v	18.5	1.8	25	44.8	46	-1.2
528.01	48.15	45	1.2	h	18.5	1.8	25	43.5	46	-2.6
66.02	52.17	180	1.2	v	9.7	0.4	25	37.3	40	-2.7
132.06	51.02	45	1.0	v	12.6	1.0	25	39.6	43.5	-3.9
131.98	49.91	180	1.2	h	12.6	1.0	25	38.5	43.5	-5.0
66.02	49.72	45	1.0	h	9.7	0.4	25	34.8	40	-5.2
297.02	50.34	60	1.0	h	12.6	1.1	25	39.0	46	-7.0
297.02	49.16	270	1.0	v	12.6	1.1	25	37.9	46	-8.1
231.17	47.51	60	1.2	v	11.3	1.0	25	34.8	46	-11.2
231.17	45.71	45	1.0	h	11.3	1.0	25	33.0	46	-13.0

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Antenna	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/m		Degree	Meter	H/V	dBμV/m	DB	DB	dBμV/m	dBμV/m	dB
(5.25GHz -5.35GHz) Low Channel											
5260	100.6	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	109.1		
5260	105	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	113.4		
5260	92.41	FUND/AVE	45	1.0	v	33.9	5.2	30.6	100.9		
5260	96.43	FUND/AVE	45	1.2	h	33.9	5.2	30.6	104.9		
10520	37.56	AVE	60	1.2	v	38.9	7.5	32	51.9	54	-2.1
10520	37.41	AVE	90	1.2	h	38.9	7.5	32	51.8	54	-2.2
10520	56.7	AVE	45	1.2	h	38.9	7.5	32	71.1	74	-2.9
10520	56.55	AVE	180	1.2	v	38.9	7.5	32	70.9	74	-3.1
15780	33.56	PEAK	180	1.2	h	40.6	9.2	32.6	50.8	54	-3.2
15780	33.46	PEAK	270	1.0	v	40.6	9.2	32.6	50.7	54	-3.3
15780	48.89	PEAK	180	1.2	h	40.6	9.2	32.6	66.1	74	-7.9
15780	48.28	PEAK	45	1.0	v	40.6	9.2	32.6	65.5	74	-8.5
(5.25GHz -5.35GHz) Middle Channel											
5280	98.27	FUND/PEAK	45	1.0	v	33.9	5.2	31.1	106.2		
5280	102.8	FUND/PEAK	60	1.0	h	33.9	5.2	31.1	110.7		
5280	90.74	FUND/AVE	45	1.0	v	33.9	5.2	31.1	98.7		
5280	94.35	FUND/AVE	45	1.2	h	33.9	5.2	31.1	102.3		
10560	37.41	AVE	60	1.2	v	38.9	7.5	32.2	51.6	54	-2.4
10560	37.01	AVE	45	1.2	h	38.9	7.5	32.2	51.2	54	-2.8
10560	56.85	AVE	45	1.2	h	38.9	7.5	32.2	71.0	74	-3.0
15840	33.55	AVE	270	1.0	v	40.6	9.2	32.6	50.8	54	-3.2
15840	33.14	PEAK	45	1.2	h	40.6	9.2	32.6	50.4	54	-3.6
15840	47.01	PEAK	180	1.2	h	40.6	9.2	32.6	64.2	74	-9.8
15840	46.54	PEAK	45	1.0	v	40.6	9.2	32.6	63.8	74	-10.2
10560	48.26	PEAK	180	1.2	v	38.9	7.5	32.2	62.4	74	-11.6

Continued:

(5.25GHz -5.35GHz) High Channel											
5320	90.64	FUND/PEAK	45	1.0	v	33.9	5.2	30.7	99.0		
5320	95.69	FUND/PEAK	60	1.0	h	33.9	5.2	30.7	104.0		
5320	81.92	FUND/AVE	45	1.0	v	33.9	5.2	30.7	90.3		
5320	87.25	FUND/AVE	45	1.2	h	33.9	5.2	30.7	95.6		
10640	37.01	AVE	90	1.2	h	38.9	7.5	32.1	51.3	54	-2.7
15960	33.46	AVE	270	1.0	v	40.6	9.2	32.7	50.6	54	-3.4
15960	33.46	AVE	180	1.2	h	40.6	9.2	32.7	50.6	54	-3.4
10640	35.41	AVE	60	1.2	v	38.9	7.5	32.1	49.7	54	-4.3
10640	51.26	PEAK	45	1.2	h	38.9	7.5	32.1	65.5	74	-8.5
15960	47.46	PEAK	180	1.2	h	40.6	9.2	32.7	64.6	74	-9.4
15960	47.01	PEAK	45	1.0	v	40.6	9.2	32.7	64.1	74	-9.9
10640	45.52	PEAK	180	1.2	v	38.9	7.5	32.1	59.8	74	-14.2

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.25GHz -5.35GHz) 30MHz-1000MHz										
528.01	49.48	45	1.2	v	18.5	1.8	25	44.8	46	-1.2
66.02	53.46	180	1.2	v	9.7	0.4	25	38.6	40	-1.4
528.01	48.88	45	1.2	h	18.5	1.8	25	44.2	46	-1.8
297.02	51.19	60	1.0	h	12.6	1.1	25	39.9	46	-6.1
131.98	48.41	180	1.2	h	12.6	1.0	25	37.0	43.5	-6.5
132.06	47.41	45	1.0	v	12.6	1.0	25	36.0	43.5	-7.5
297.02	47.94	270	1.0	v	12.6	1.1	25	36.6	46	-9.4
66.02	45.21	45	1.0	h	9.7	0.4	25	30.3	40	-9.7
231.17	46.07	45	1.0	h	11.3	1.0	25	33.4	46	-12.6
231.17	44.2	60	1.2	v	11.3	1.0	25	31.5	46	-14.5

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Anten na	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/ m		Degree	Meter	H/ V	dBμV/ m	DB	DB	dBμV/m	dBμV/m	dB
(5.725GHz-5.825GHz) Low Channel											
5745	98.27	FUND/PEAK	45	1.0	v	34.1	5.4	31	106.8		
5745	95.52	FUND/PEAK	60	1.0	h	34.1	5.4	31	104.0		
5745	88.94	FUND/AVE	45	1.0	v	34.1	5.4	31	97.4		
5745	87.32	FUND/AVE	45	1.2	h	34.1	5.4	31	95.8		
11490	37.01	AVE	60	1.2	v	39.6	7.6	32	52.2	54	-1.8
17236	30.75	AVE	270	1.0	v	44.3	9.7	32.5	52.3	54	-1.8
17236	30.41	AVE	180	1.2	h	44.3	9.7	32.5	51.9	54	-2.1
11490	35.41	AVE	90	1.2	h	39.6	7.6	32	50.6	54	-3.4
17236	48.28	PEAK	45	1.0	v	44.3	9.7	32.5	69.8	74	-4.2
17236	47.01	PEAK	180	1.2	h	44.3	9.7	32.5	68.5	74	-5.5
11490	49.04	PEAK	180	1.2	v	39.6	7.6	32	64.3	74	-9.7
11490	48.28	PEAK	45	1.2	h	39.6	7.6	32	63.5	74	-10.5
(5.725GHz-5.825GHz) Middle Channel											
5782	93.17	FUND/PEAK	45	1.0	v	34.1	5.4	31	101.7		
5782	95.97	FUND/PEAK	60	1.0	h	34.1	5.4	32.8	102.7		
5782	84.72	FUND/AVE	45	1.0	v	34.1	5.4	32.5	91.7		
5782	86.07	FUND/AVE	45	1.2	h	34.1	5.4	32.1	93.5		
17355	31.35	AVE	270	1.0	v	41.8	9.7	31	51.9	54	-2.1
17355	33.12	AVE	45	1.2	h	41.8	9.7	32.8	51.8	54	-2.2
11567	37.01	AVE	45	1.2	h	39.1	7.8	32.5	51.4	54	-2.6
11567	35.41	AVE	60	1.2	v	39.1	7.8	32.8	49.5	54	-4.5
11567	51.26	PEAK	180	1.2	v	39.1	7.8	32.1	66.0	74	-8.0
17355	46.54	PEAK	45	1.0	v	41.8	9.7	32.5	65.5	74	-8.5
17355	46.04	PEAK	180	1.2	h	41.8	9.7	32.1	65.4	74	-8.6
11567	47.01	PEAK	45	1.2	h	39.1	7.8	31	62.9	74	-11.1

Continued:

(5.725GHz-5.825GHz) High Channel											
5805	92.58	FUND/PEAK	45	1.0	v	34.1	5.4	31.1	101.0		
5805	99.52	FUND/PEAK	60	1.0	h	34.1	5.4	31.1	107.9		
5805	84.36	FUND/AVE	45	1.0	v	34.1	5.4	31.1	92.8		
5805	91.74	FUND/AVE	45	1.2	h	34.1	5.4	31.1	100.1		
11610	37.41	AVE	90	1.2	h	39.1	7.8	32.2	52.1	54	-1.9
17415	30.58	AVE	180	1.2	h	44.3	9.7	32.6	52.0	54	-2.0
11610	37.01	AVE	60	1.2	v	39.1	7.8	32.2	51.7	54	-2.3
17415	30.34	AVE	270	1.0	v	44.3	9.7	32.6	51.7	54	-2.3
11610	53.26	PEAK	45	1.2	h	39.1	7.8	32.2	67.9	74	-6.1
17415	46.04	PEAK	45	1.0	v	44.3	9.7	32.6	67.4	74	-6.6
17415	46.04	PEAK	180	1.2	h	44.3	9.7	32.6	67.4	74	-6.6
11610	48.67	PEAK	180	1.2	v	39.1	7.8	32.2	63.3	74	-10.7

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.725GHz-5.825GHz) 30MHz-1000MHz										
528.01	48.72	45	1.2	h	18.5	1.8	25	44.0	46	-2.0
66.02	52.24	180	1.2	v	9.7	0.4	25	37.3	40	-2.7
528.01	46.17	45	1.2	v	18.5	1.8	25	41.5	46	-4.5
132.06	49.04	45	1.0	v	12.6	1.0	25	37.6	43.5	-5.9
66.02	47.83	45	1.0	h	9.7	0.4	25	32.9	40	-7.1
131.98	47.85	180	1.2	h	12.6	1.0	25	36.5	43.5	-7.1
297.02	49.53	60	1.0	h	12.6	1.1	25	38.2	46	-7.8
297.02	49.27	270	1.0	v	12.6	1.1	25	38.0	46	-8.0
231.17	47.24	60	1.2	v	11.3	1.0	25	34.5	46	-11.5
231.17	42.63	45	1.0	h	11.3	1.0	25	29.9	46	-16.1

Antenna M/N: TQJ-5800BKF8

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Antenna	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/m		Degree	Meter	H/V	dBμV/m	DB	DB	dBμV/m	dBμV/m	dB
(5.15GHz -5.25GHz) Low Channel											
5180	93.4	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	101.9		
5180	92.1	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	100.6		
5180	84.84	FUND/AVE	45	1.0	v	33.9	5.2	30.6	93.3		
5180	83.17	FUND/AVE	45	1.2	h	33.9	5.2	30.6	91.6		
15540	35.41	AVE	270	1.0	v	40.6	9.2	32.6	52.6	54	-1.4
10360	38.67	AVE	60	1.2	v	37.8	7.3	32	51.8	54	-2.2
15540	33.56	AVE	180	1.2	h	40.6	9.2	32.6	50.8	54	-3.2
10360	36.54	AVE	90	1.2	h	37.8	7.3	32	49.6	54	-4.4
15540	47.69	PEAK	180	1.2	h	40.6	9.2	32.6	64.9	74	-9.1
15540	47.56	PEAK	45	1.0	v	40.6	9.2	32.6	64.8	74	-9.2
10360	49.28	PEAK	180	1.2	v	37.8	7.3	32	62.4	74	-11.6
10360	47	PEAK	45	1.2	h	37.8	7.3	32	60.1	74	-13.9
(5.15GHz -5.25GHz) Middle Channel											
5200	93.74	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	102.2		
5200	91.12	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	99.6		
5200	85.34	FUND/AVE	45	1.0	v	33.9	5.2	30.6	93.8		
5200	83.92	FUND/AVE	45	1.2	h	33.9	5.2	30.6	92.4		
10401	38.46	AVE	60	1.2	v	37.8	7.3	32	51.6	54	-2.5
15600	33.45	AVE	180	1.2	h	40.6	9.2	32.6	50.7	54	-3.3
10401	37.46	AVE	90	1.2	h	37.8	7.3	32	50.6	54	-3.5
15600	32.23	AVE	270	1.0	v	40.6	9.2	32.6	49.5	54	-4.6
15600	48.08	PEAK	45	1.0	v	40.6	9.2	32.6	65.3	74	-8.7
15600	47.28	PEAK	180	1.2	h	40.6	9.2	32.6	64.5	74	-9.5
10401	51.28	PEAK	180	1.2	v	37.8	7.3	32	64.4	74	-9.6
10401	48.58	PEAK	45	1.2	h	37.8	7.3	32	61.7	74	-12.3

Continued:

(5.15GHz -5.25GHz) High Channel											
5240	92.82	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	101.3		
5240	91.72	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	100.2		
5240	83.91	FUND/AVE	45	1.0	v	33.9	5.2	30.6	92.4		
5240	82.83	FUND/AVE	45	1.2	h	33.9	5.2	30.6	91.3		
15720	35.41	AVE	180	1.2	h	40.6	9.2	32.6	52.6	54	-1.4
15720	33.56	AVE	270	1.0	v	40.6	9.2	32.6	50.8	54	-3.2
10480	37.01	AVE	60	1.2	v	37.8	7.3	32	50.1	54	-3.9
10480	36.54	AVE	90	1.2	h	37.8	7.3	32	49.6	54	-4.4
10480	54.04	PEAK	180	1.2	v	37.8	7.3	32	67.1	74	-6.9
15720	49.28	PEAK	180	1.2	h	40.6	9.2	32.6	66.5	74	-7.5
15720	47.83	PEAK	45	1.0	v	40.6	9.2	32.6	65.1	74	-8.9
10480	47.56	PEAK	45	1.2	h	37.8	7.3	32	60.7	74	-13.4

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.15GHz -5.25GHz) 30MHz-1000MHz										
528.01	49.17	45	1.2	v	18.5	1.8	25	44.5	46	-1.5
528.01	47.68	45	1.2	h	18.5	1.8	25	43.0	46	-3.0
66.02	50.89	180	1.2	v	9.7	0.4	25	36.0	40	-4.0
132.06	49.15	45	1.0	v	12.6	1.0	25	37.8	43.5	-5.8
131.98	48.98	180	1.2	h	12.6	1.0	25	37.6	43.5	-5.9
66.02	48.22	45	1.0	h	9.7	0.4	25	33.3	40	-6.7
297.02	50.29	270	1.0	v	12.6	1.1	25	39.0	46	-7.0
297.02	48.87	60	1.0	h	12.6	1.1	25	37.6	46	-8.4
231.17	44.05	60	1.2	v	11.3	1.0	25	31.4	46	-14.7
231.17	42.19	45	1.0	h	11.3	1.0	25	29.5	46	-16.5

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Anten na	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/ m		Degree	Meter	H/ V	dBμV/ m	DB	DB	dBμV/m	dBμV/m	dB
(5.25GHz -5.35GHz) Low Channel											
5260	97.34	FUND/PEAK	45	1.0	v	33.9	5.2	30.6	105.8		
5260	96.31	FUND/PEAK	60	1.0	h	33.9	5.2	30.6	104.8		
5260	88.05	FUND/AVE	45	1.0	v	33.9	5.2	30.6	96.5		
5260	87.02	FUND/AVE	45	1.2	h	33.9	5.2	30.6	95.5		
10520	37.01	AVE	90	1.2	h	38.9	7.5	32	51.4	54	-2.6
10520	36.64	AVE	60	1.2	v	38.9	7.5	32	51.0	54	-3.0
15780	33.68	AVE	270	1.0	v	40.6	9.2	32.6	50.9	54	-3.1
15780	33.46	AVE	180	1.2	h	40.6	9.2	32.6	50.7	54	-3.3
15780	48.7	PEAK	45	1.0	v	40.6	9.2	32.6	65.9	74	-8.1
15780	48.08	PEAK	180	1.2	h	40.6	9.2	32.6	65.3	74	-8.7
10520	48.34	PEAK	45	1.2	h	38.9	7.5	32	62.7	74	-11.3
10520	48.21	PEAK	180	1.2	v	38.9	7.5	32	62.6	74	-11.4
(5.25GHz -5.35GHz) Middle Channel											
5280	95.37	FUND/PEAK	45	1.0	v	33.9	5.2	31.1	103.3		
5280	90.38	FUND/PEAK	60	1.0	h	33.9	5.2	31.1	98.3		
5280	86.22	FUND/AVE	45	1.0	v	33.9	5.2	31.1	94.2		
5280	81.42	FUND/AVE	45	1.2	h	33.9	5.2	31.1	89.4		
10560	37.01	AVE	60	1.2	v	38.9	7.5	32.2	51.2	54	-2.8
10560	37.01	AVE	45	1.2	h	38.9	7.5	32.2	51.2	54	-2.8
15840	33.45	AVE	270	1.0	v	40.6	9.2	32.6	50.7	54	-3.3
15840	33.01	AVE	45	1.2	h	40.6	9.2	32.6	50.2	54	-3.8
15840	48.46	PEAK	45	1.0	v	40.6	9.2	32.6	65.7	74	-8.3
15840	47.83	PEAK	180	1.2	h	40.6	9.2	32.6	65.1	74	-8.9
10560	50.39	PEAK	180	1.2	v	38.9	7.5	32.2	64.5	74	-9.5
10560	47.96	PEAK	45	1.2	h	38.9	7.5	32.2	62.1	74	-11.9

Continued:

(5.25GHz -5.35GHz) High Channel											
5320	89.05	FUND/PEAK	45	1.0	v	33.9	5.2	30.7	97.4		
5320	90.26	FUND/PEAK	60	1.0	h	33.9	5.2	30.7	98.6		
5320	79.99	FUND/AVE	45	1.0	v	33.9	5.2	30.7	88.3		
5320	82.02	FUND/AVE	45	1.2	h	33.9	5.2	30.7	90.4		
10640	36.54	AVE	60	1.2	v	38.9	7.5	32.1	50.8	54	-3.2
15960	33.68	AVE	270	1.0	v	40.6	9.2	32.7	50.8	54	-3.2
10640	36.54	AVE	90	1.2	h	38.9	7.5	32.1	50.8	54	-3.2
15960	33.68	AVE	180	1.2	h	40.6	9.2	32.7	50.8	54	-3.2
15960	48.82	PEAK	45	1.0	v	40.6	9.2	32.7	65.9	74	-8.1
15960	47.28	PEAK	180	1.2	h	40.6	9.2	32.7	64.4	74	-9.6
10640	47.56	PEAK	180	1.2	v	38.9	7.5	32.1	61.8	74	-12.2
10640	47.14	PEAK	45	1.2	h	38.9	7.5	32.1	61.4	74	-12.6

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.25GHz -5.35GHz) 30MHz-1000MHz										
528.01	48.65	45	1.2	v	18.5	1.8	25	44.0	46	-2.1
66.02	52.46	180	1.2	v	9.7	0.4	25	37.6	40	-2.4
297.02	53.74	60	1.0	h	12.6	1.1	25	42.4	46	-3.6
528.01	46.97	45	1.2	h	18.5	1.8	25	42.3	46	-3.7
66.02	49.9	45	1.0	h	9.7	0.4	25	35.0	40	-5.0
131.98	48.36	180	1.2	h	12.6	1.0	25	37.0	43.5	-6.5
297.02	50.85	270	1.0	v	12.6	1.1	25	39.6	46	-6.5
132.06	45.76	45	1.0	v	12.6	1.0	25	34.4	43.5	-9.1
231.17	44.03	60	1.2	v	11.3	1.0	25	31.3	46	-14.7
231.17	42.65	45	1.0	h	11.3	1.0	25	30.0	46	-16.1

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Anten na	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/ m		Degree	Meter	H/ V	dBμV/ m	DB	DB	dBμV/m	dBμV/m	dB
(5.725GHz-5.825GHz) Low Channel											
5745	94.92	FUND/PEAK	45	1.0	v	34.1	5.4	31	103.4		
5745	93.74	FUND/PEAK	60	1.0	h	34.1	5.4	31	102.2		
5745	86.32	FUND/AVE	45	1.0	v	34.1	5.4	31	94.8		
5745	85.82	FUND/AVE	45	1.2	h	34.1	5.4	31	94.3		
11490	37.01	AVE	90	1.2	h	39.6	7.6	32	52.2	54	-1.8
17236	30.41	AVE	180	1.2	h	44.3	9.7	32.5	51.9	54	-2.1
17236	30.22	AVE	270	1.0	v	44.3	9.7	32.5	51.7	54	-2.3
17236	49.71	AVE	180	1.2	h	44.3	9.7	32.5	71.2	74	-2.8
11490	35.41	PEAK	60	1.2	v	39.6	7.6	32	50.6	54	-3.4
17236	48.28	PEAK	45	1.0	v	44.3	9.7	32.5	69.8	74	-4.2
11490	52.87	PEAK	45	1.2	h	39.6	7.6	32	68.1	74	-5.9
11490	49.28	PEAK	180	1.2	v	39.6	7.6	32	64.5	74	-9.5
(5.725GHz-5.825GHz) Middle Channel											
5782	97.61	FUND/PEAK	45	1.0	v	34.1	5.4	31	106.1		
5782	98.02	FUND/PEAK	60	1.0	h	34.1	5.4	32.8	104.7		
5782	86.97	FUND/AVE	45	1.0	v	34.1	5.4	32.5	94.0		
5782	89.05	FUND/AVE	45	1.2	h	34.1	5.4	32.1	96.5		
17355	33.12	AVE	45	1.2	h	41.8	9.7	32.8	51.8	54	-2.2
11567	37.01	AVE	45	1.2	h	39.1	7.8	32.5	51.4	54	-2.6
17355	29.89	AVE	270	1.0	v	41.8	9.7	31	50.4	54	-3.6
11567	35.46	AVE	60	1.2	v	39.1	7.8	32.8	49.5	54	-4.5
11567	51.26	PEAK	45	1.2	h	39.1	7.8	31	67.1	74	-6.9
17355	47.56	PEAK	180	1.2	h	41.8	9.7	32.1	67.0	74	-7.0
17355	47.28	PEAK	45	1.0	v	41.8	9.7	32.5	66.3	74	-7.7
11567	49.6	PEAK	180	1.2	v	39.1	7.8	32.1	64.4	74	-9.6

Continued:

(5.725GHz-5.825GHz) High Channel											
5805	93.4	FUND/PEAK	45	1.0	v	34.1	5.4	31.1	101.8		
5805	97.66	FUND/PEAK	60	1.0	h	34.1	5.4	31.1	106.1		
5805	85.98	FUND/AVE	45	1.0	v	34.1	5.4	31.1	94.4		
5805	88.23	FUND/AVE	45	1.2	h	34.1	5.4	31.1	96.6		
11610	37.41	AVE	60	1.2	v	39.1	7.8	32.2	52.1	54	-1.9
17415	30.45	AVE	180	1.2	h	44.3	9.7	32.6	51.9	54	-2.2
17415	30.26	AVE	270	1.0	v	44.3	9.7	32.6	51.7	54	-2.3
11610	37.01	AVE	90	1.2	h	39.1	7.8	32.2	51.7	54	-2.3
17415	48.08	PEAK	180	1.2	h	44.3	9.7	32.6	69.5	74	-4.5
17415	47.96	PEAK	45	1.0	v	44.3	9.7	32.6	69.4	74	-4.6
11610	49.71	PEAK	45	1.2	h	39.1	7.8	32.2	64.4	74	-9.6
11610	48.08	PEAK	180	1.2	v	39.1	7.8	32.2	62.8	74	-11.2

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.725GHz-5.825GHz) 30MHz-1000MHz										
528.01	47.69	45	1.2	v	18.5	1.8	25	43.0	46	-3.0
131.98	51.71	180	1.2	h	12.6	1.0	25	40.3	43.5	-3.2
528.01	47.55	45	1.2	h	18.5	1.8	25	42.9	46	-3.2
66.02	50.66	180	1.2	v	9.7	0.4	25	35.8	40	-4.2
132.06	48.87	45	1.0	v	12.6	1.0	25	37.5	43.5	-6.0
66.02	48.16	45	1.0	h	9.7	0.4	25	33.3	40	-6.7
297.02	48.62	270	1.0	v	12.6	1.1	25	37.3	46	-8.7
297.02	46.56	60	1.0	h	12.6	1.1	25	35.3	46	-10.7
231.17	47.4	60	1.2	v	11.3	1.0	25	34.7	46	-11.3
231.17	42.25	45	1.0	h	11.3	1.0	25	29.6	46	-16.5

Antenna M/N: TQJ-5800C-5

Date of Test : April 2-9,2004
 EUT : W800A Wireless Access Point
 M/N : W800A
 S/N : 040360

Temperature : 25?
 Humidity : 70%
 Operating Mode : Running
 Test Engineer: Jandy SU

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency	Ampl.	Comments	Angle	Height	Polar	Anten na	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/ m		Degree	Meter	H/ V	dBμV/ m	DB	DB	dBμV/m	dBμV/m	dB
(5.725GHz-5.825GHz) Low Channel											
5745	90.6	FUND/PEAK	45	1.0	v	34.1	5.4	31	99.1		
5745	98.29	FUND/PEAK	60	1.0	h	34.1	5.4	31	106.8		
5745	82.6	FUND/AVE	45	1.0	v	34.1	5.4	31	91.1		
5745	91.01	FUND/AVE	45	1.2	h	34.1	5.4	31	99.5		
11490	37.01	AVE	60	1.2	v	39.6	7.6	32	52.2	54	-1.8
17236	30.1	AVE	270	1.0	v	44.3	9.7	32.5	51.6	54	-2.4
17236	29.98	AVE	180	1.2	h	44.3	9.7	32.5	51.5	54	-2.5
11490	55.75	AVE	45	1.2	h	39.6	7.6	32	71.0	74	-3.0
11490	35.41	PEAK	90	1.2	h	39.6	7.6	32	50.6	54	-3.4
17236	46.54	PEAK	45	1.0	v	44.3	9.7	32.5	68.0	74	-6.0
17236	46.54	PEAK	180	1.2	h	44.3	9.7	32.5	68.0	74	-6.0
11490	48.28	PEAK	180	1.2	v	39.6	7.6	32	63.5	74	-10.5
(5.725GHz-5.825GHz) Middle Channel											
5782	5782	FUND/PEAK	92.99	45	1.0	v	34.1	5.4	31		
5782	5782	FUND/PEAK	100.3	60	1.0	h	34.1	5.4	32.8		
5782	5782	FUND/AVE	85.49	45	1.0	v	34.1	5.4	32.5		
5782	5782	FUND/AVE	93.12	45	1.2	h	34.1	5.4	32.1		
11567	37.01	AVE	45	1.2	h	39.1	7.8	32.5	51.4	54	-2.6
17355	30.12	AVE	270	1.0	v	41.8	9.7	31	50.6	54	-3.4
11567	53.9	PEAK	45	1.2	h	39.1	7.8	31	69.8	74	-4.2
11567	35.41	AVE	60	1.2	v	39.1	7.8	32.8	49.5	54	-4.5
17355	30.23	AVE	45	1.2	h	41.8	9.7	32.8	48.9	54	-5.1
17355	46.54	PEAK	180	1.2	h	41.8	9.7	32.1	65.9	74	-8.1
17355	46.04	PEAK	45	1.0	v	41.8	9.7	32.5	65.0	74	-9.0
11567	47.01	PEAK	180	1.2	v	39.1	7.8	32.1	61.8	74	-12.2

Continued:

(5.725GHz-5.825GHz) High Channel											
5805	91.57	FUND/PEAK	45	1.0	v	34.1	5.4	31.1	100.0		
5805	100.1	FUND/PEAK	60	1.0	h	34.1	5.4	31.1	108.5		
5805	83.05	FUND/AVE	45	1.0	v	34.1	5.4	31.1	91.5		
5805	92.37	FUND/AVE	45	1.2	h	34.1	5.4	31.1	100.8		
11610	37.41	AVE	90	1.2	h	39.1	7.8	32.2	52.1	54	-1.9
17415	30.45	AVE	180	1.2	h	44.3	9.7	32.6	51.9	54	-2.2
11610	37.01	AVE	60	1.2	v	39.1	7.8	32.2	51.7	54	-2.3
17415	30.33	AVE	270	1.0	v	44.3	9.7	32.6	51.7	54	-2.3
17415	47.31	PEAK	45	1.0	v	44.3	9.7	32.6	68.7	74	-5.3
11610	53.48	PEAK	45	1.2	h	39.1	7.8	32.2	68.2	74	-5.8
17415	46.54	PEAK	180	1.2	h	44.3	9.7	32.6	67.9	74	-6.1
11610	47.88	PEAK	180	1.2	v	39.1	7.8	32.2	62.6	74	-11.4

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
(5.725GHz-5.825GHz) 30MHz-1000MHz										
528.01	49.15	45	1.2	v	18.5	1.8	25	44.5	46	-1.6
528.01	48.53	45	1.2	h	18.5	1.8	25	43.8	46	-2.2
66.02	52.66	180	1.2	v	9.7	0.4	25	37.8	40	-2.2
297.02	52.35	60	1.0	h	12.6	1.1	25	41.1	46	-5.0
131.98	48.34	180	1.2	h	12.6	1.0	25	36.9	43.5	-6.6
132.06	47.56	45	1.0	v	12.6	1.0	25	36.2	43.5	-7.3
66.02	46.79	45	1.0	h	9.7	0.4	25	31.9	40	-8.1
231.17	48.43	45	1.0	h	11.3	1.0	25	35.7	46	-10.3
297.02	46.32	270	1.0	v	12.6	1.1	25	35.0	46	-11.0
231.17	47.38	60	1.2	v	11.3	1.0	25	34.7	46	-11.3

Note:

FUND = Fundamental

AVG = average

Test Result: Pass