

LINKSYS®

A Division of Cisco Systems, Inc.



2.4GHz
802.11g

Wireless-G

PCI Adapter with SRX

User Guide




Model No. **WMP54GX**

CISCO SYSTEMS



Also Available:

Linksys High Gain Antenna for SMA Connectors (HGA7S)

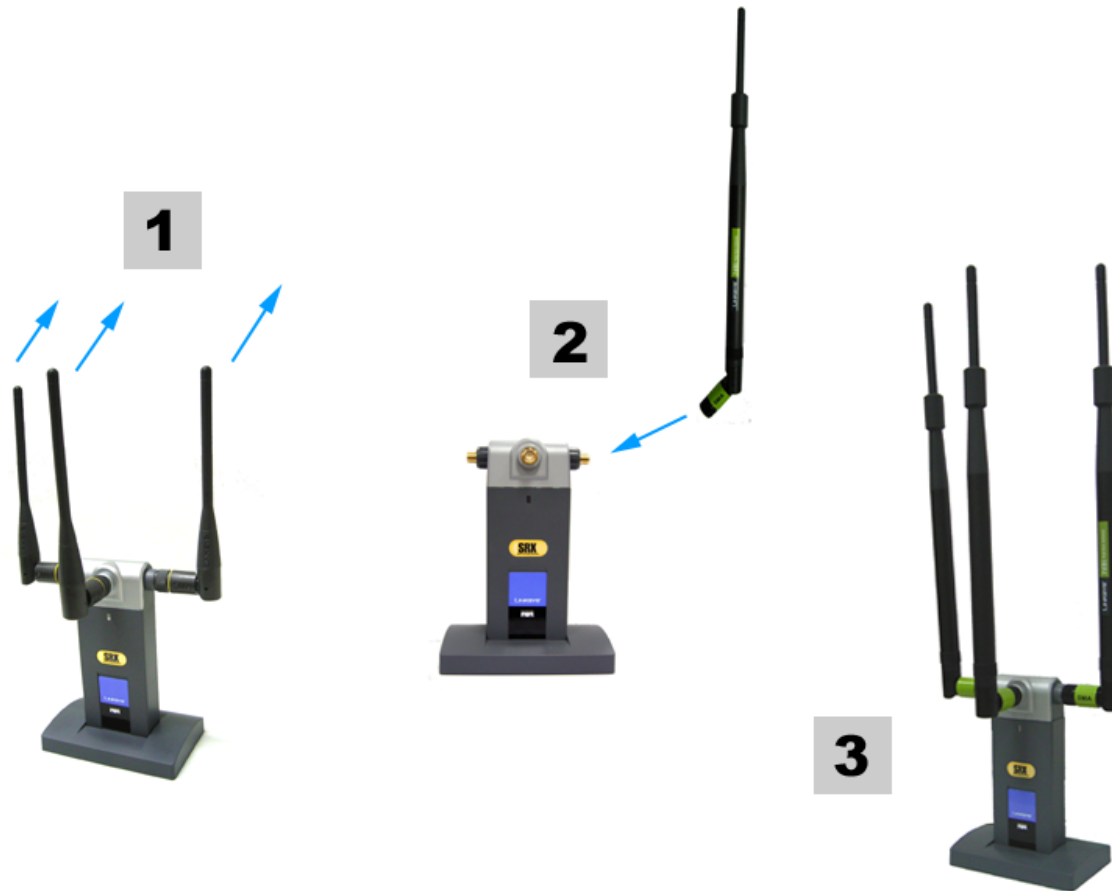

Copyright and Trademarks

Specifications are subject to change without notice. Linksys is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries. Copyright © 2005 Cisco Systems, Inc. All rights reserved. Other brands and product names are trademarks or registered trademarks of their respective holders.

WARNING: This product contains chemicals, including lead, known to the State of California to cause cancer, and birth defects or other reproductive harm. ***Wash hands after handling.***

How to Use This User Guide

This User Guide has been designed to make understanding networking with the Wireless-G PCI Adapter easier than ever. Look for the following items when reading this User Guide:



This checkmark means there is a note of interest and is something you should pay special attention to while using the Wireless-G PCI Adapter.



This exclamation point means there is a caution or warning and is something that could damage your property or the Wireless-G PCI Adapter.



This question mark provides you with a reminder about something you might need to do while using the Wireless-G PCI Adapter.

In addition to these symbols, there are definitions for technical terms that are presented like this:

word: *definition.*

Also, each figure (diagram, screenshot, or other image) is provided with a figure number and description, like this:

Figure 0-1: Sample Figure Description

Figure numbers and descriptions can also be found in the “List of Figures” section in the “Table of Contents”.

Table of Contents

Chapter 1: Introduction	1
Welcome	1
What's in This User Guide?	1
Chapter 2: Planning Your Wireless Network	3
Network Topology	3
Roaming	3
Network Layout	4
Chapter 3: Getting to Know the Wireless-G Notebook Adapter with SRX	5
Overview	5
The LED Indicator	5
The Cable Connectors	5
Chapter 4: Setting Up and Connecting the Wireless-G PCI Adapter with SRX	6
Starting the Setup Wizard	6
Installing the Adapter	7
Setting Up the Adapter	8
Chapter 5: Using the Wireless Network Monitor	18
Accessing the Wireless Network Monitor	18
Link Information Screens	18
Site Survey	21
Profiles	23
Creating a New Profile	24
Appendix A: Troubleshooting	34
Common Problems and Solutions	34
Frequently Asked Questions	35
Appendix B: Using Windows XP Wireless Zero Configuration	38
Appendix C: Wireless Security	41
Security Precautions	41
Security Threats Facing Wireless Networks	41
Appendix D: Windows Help	44
Appendix E: Glossary	45
Appendix F: Specifications	48

Appendix G: Warranty Information	50
Appendix H: Regulatory Information	51
Appendix I: Contact Information	53

List of Figures

Figure 3-1: Adapter's LED	5
Figure 3-2: Adapter's Connectors for the Antenna Cables	5
Figure 4-1: Setup Wizard's Welcome Screen	6
Figure 4-2: Setup Wizard's License Agreement	6
Figure 4-3: Connecting the Adapter Screen	7
Figure 4-4: Installing the Adapter	7
Figure 4-5: Attaching the Antenna Cables	7
Figure 4-6: Available Wireless Network Screen	8
Figure 4-7: Available Wireless Network Screen	9
Figure 4-8: WEP Key Needed for Connection	9
Figure 4-9: WPA-Personal Needed for Connection	10
Figure 4-10: WPA2-Personal Needed for Connection	10
Figure 4-11: Congratulations Screen	10
Figure 4-12: Available Wireless Network Screen	11
Figure 4-13: Network Settings Screen	11
Figure 4-14: Wireless Mode Screen	12
Figure 4-15: Ad-Hoc Mode Settings Screen	12
Figure 4-16: Wireless Security Screen	13
Figure 4-17: Wireless Security - WEP Screen	13
Figure 4-18: Wireless Security - WPA Personal Screen	14
Figure 4-19: Wireless Security - WPA2 Personal Screen	14
Figure 4-20: Wireless Security - WPA Enterprise Using EAP-TLS Screen	15
Figure 4-21: Wireless Security - WPA Enterprise Using PEAP Screen	15
Figure 4-22: Wireless Security - RADIUS Screen	16
Figure 4-23: Confirm New Settings Screen	17
Figure 4-24: Congratulations Screen	17
Figure 5-1: Wireless Network Monitor Icon	18
Figure 5-2: Link Information Screen	18
Figure 5-3: More Information - Wireless Network Status Screen	19
Figure 5-4: More Information - Wireless Network Statistics Screen	20
Figure 5-5: Site Survey Screen	21
Figure 5-6: WEP Key Needed for Connection	21
Figure 5-7: WPA-Personal Needed for Connection	22

Figure 5-8: WPA2-Personal Needed for Connection	22
Figure 5-9: Profiles Screen	23
Figure 5-10: Import a Profile	23
Figure 5-11: Export a Profile	23
Figure 5-12: Create a New Profile	24
Figure 5-13: Available Wireless Network Screen	24
Figure 5-14: Available Wireless Network Screen	25
Figure 5-15: WEP Key Needed for Connection	25
Figure 5-16: WPA-Personal Needed for Connection	26
Figure 5-17: WPA2-Personal Needed for Connection	26
Figure 5-18: Congratulations Screen	26
Figure 5-19: Available Wireless Network Screen	27
Figure 5-20: Network Settings Screen	27
Figure 5-21: Wireless Mode Screen	28
Figure 5-22: Ad-Hoc Mode Settings	28
Figure 5-23: Ad-Hoc Mode Settings Screen	28
Figure 5-24: Wireless Security Screen	29
Figure 5-25: Wireless Security - WEP Screen	29
Figure 5-26: Wireless Security - WPA Personal Screen	30
Figure 5-27: Wireless Security - WPA2 Personal Screen	30
Figure 5-28: Wireless Security - WPA Enterprise Using EAP-TLS Screen	31
Figure 5-29: Wireless Security - WPA Enterprise Using PEAP Screen	31
Figure 5-30: Wireless Security - RADIUS Screen	32
Figure 5-31: Confirm New Settings Screen	33
Figure 5-32: Congratulations Screen	33
Figure B-1: Wireless Network Monitor Icon	38
Figure B-2: Windows XP - Use Windows XP Wireless Configuration	38
Figure B-3: Windows XP Wireless Configuration Icon	38
Figure B-4: Available Wireless Network	39
Figure B-5: No Wireless Security	39
Figure B-6: Network Connection - Wireless Security	40
Figure B-7: Wireless Network Connection	40

Chapter 1: Introduction

Welcome

Thank you for choosing the Wireless-G PCI Adapter with SRX. With this Adapter, your wireless networking experience will be faster and easier than ever.

How does the Adapter do this? Like all wireless products, the Adapter allows for greater range and mobility within your wireless network, whether it's using the Wireless-G (802.11g) or Wireless-B (802.11b) standard. But what does all of this mean?

Networks are useful tools for sharing computer resources. You can access one printer from different computers and access data located on another computer's hard drive. Networks are even used for playing multiplayer video games. So, networks are not only useful in homes and offices, they can also be fun.

PCs equipped with wireless cards and adapters can communicate without cumbersome cables. By sharing the same wireless settings, within their transmission radius, they form a wireless network.

The included Setup Wizard walks you through configuring the Adapter to your wireless network settings, step by step. Use the instructions in this Guide to help you set up and connect the Adapter using the Setup Wizard. These instructions should be all you need to get the most out of the Adapter.

What's in This User Guide?

This user guide covers the steps for setting up and using the Wireless-G PCI Adapter with SRX.

- Chapter 1: Introduction

This chapter describes the Adapter's applications and this User Guide.

- Chapter 2: Planning Your Wireless Network

This chapter discusses a few of the basics about wireless networking.

- Chapter 3: Getting to Know the Wireless-G PCI Adapter with SRX

This chapter describes the physical features of the Adapter.

- Chapter 4: Setting Up and Connecting the Wireless-G PCI Adapter with SRX

This chapter shows you how to set up and connect the Adapter.

802.11b: an IEEE wireless networking standard that specifies a maximum data transfer rate of 11Mbps and an operating frequency of 2.4GHz.

adapter: a device that adds network functionality to your PC.

network: a series of computers or devices connected for the purpose of data sharing, storage, and/or transmission between users.

802.11g: an IEEE wireless networking standard that specifies a maximum data transfer rate of 54Mbps and an operating frequency of 2.4GHz

MIMO

The Wireless-G PCI Adapter with SRX combines smart antenna technology with standards-based Wireless-G (802.11g) networking. By overlaying the signals of two Wireless-G compatible radios, the "Multiple In, Multiple Out" (MIMO) technology effectively achieve greater throughput. Unlike ordinary wireless networking technologies that are confused by signal reflections, MIMO actually uses these reflections to increase the range and reduce "dead spots" in the wireless coverage area.

- **Chapter 5: Using the Wireless Network Monitor**
This chapter explains how to use the Adapter's Wireless Network Monitor.
- **Appendix A: Troubleshooting**
This appendix describes some problems and solutions, as well as frequently asked questions, regarding installation and use of the Adapter.
- **Appendix B: Using Windows XP Wireless Zero Configuration**
This chapter instructs you on how to use Window XP Wireless Zero Configuration.
- **Appendix C: Wireless Security**
This appendix discusses security issues regarding wireless networking and measures you can take to help protect your wireless network.
- **Appendix D: Windows Help**
This appendix describes how you can use Windows Help for instructions about networking, such as installing the TCP/IP protocol.
- **Appendix E: Glossary**
This appendix gives a brief glossary of terms frequently used in networking.
- **Appendix F: Specifications**
This appendix provides the Adapter's technical specifications.
- **Appendix G: Warranty Information**
This appendix supplies the Adapter's warranty information.
- **Appendix H: Regulatory Information**
This appendix supplies the Adapter's regulatory information.
- **Appendix I: Contact Information**
This appendix provides contact information for a variety of Linksys resources, including Technical Support.

Chapter 2: Planning Your Wireless Network

Network Topology

A wireless network is a group of computers, each equipped with one wireless adapter. Computers in a wireless network must be configured to share the same radio channel. Several PCs equipped with wireless cards or adapters can communicate with one another to form an ad-hoc network.

Linksys wireless adapters also provide users access to a wired network when using an access point or wireless router. An integrated wireless and wired network is called an infrastructure network. Each wireless PC in an infrastructure network can talk to any computer in a wired network infrastructure via the access point or wireless router.

An infrastructure configuration extends the accessibility of a wireless PC to a wired network, and can double the effective wireless transmission range for two wireless adapter PCs. Since an access point is able to forward data within a network, the effective transmission range in an infrastructure network can be doubled.

Roaming

Infrastructure mode also supports roaming capabilities for mobile users. Roaming means that you can move your wireless PC within your network and the access points will pick up the wireless PC's signal, providing that they both share the same channel and SSID.

Before you consider enabling roaming, choose a feasible radio channel and optimum access point position. Proper access point positioning combined with a clear radio signal will greatly enhance performance.

topology: the physical layout of a network.

ad-hoc: a group of wireless devices communicating directly with each other (peer-to-peer) without the use of an access point.

access point: a device that allows wireless-equipped computers and other devices to communicate with a wired network. Also used to expand the range of a wireless network

infrastructure: a wireless network that is bridged to a wired network via an access point.

roaming: the ability to take a wireless device from one access point's range to another without losing the connection.

ssid: your wireless network's name.

Network Layout

Linksys wireless access points and wireless routers have been designed for use with 802.11b and 802.11g products. Products using the 802.11g and 802.11b standards can communicate with each other.

Access points and wireless routers are compatible with 802.11b and 802.11g adapters, such as the notebook adapters for your laptop computers, PCI adapters for your desktop PCs, and USB adapters for when you want to enjoy USB connectivity. Wireless products will also communicate with a wireless print server.

When you wish to connect your wired network with your wireless network, network ports on access points and wireless routers can be connected to any of Linksys's switches or routers.

With these, and many other, Linksys products, your networking options are limitless. Go to the Linksys website at www.linksys.com for more information about wireless products.

switch: *a data switch that connects computing devices to host computers, allowing a large number of devices to share a limited number of ports*

router: *a networking device that connects multiple networks together*

Chapter 3: Getting to Know the Wireless-G Notebook Adapter with SRX

Overview

The Adapter has two parts, the antenna stand and PCI card.

The LED Indicator

The Adapter's LED on the Adapter's antenna stand displays information about the wireless connection.

(Activity) *Green.* The LED lights up when the Adapter has an active wireless connection. It flashes when the Adapter is transmitting or receiving data.

The Cable Connectors

The Adapter's connectors attach the antenna stand's cables to the PCI card part of the Adapter.

ANT. The ANT. connectors are connection points for the stand's antenna cables.

ACT. The ACT. connector is a connection point for the stand's activity cable, which activates the LED on the antenna stand.



Figure 3-1: Adapter's LED



Figure 3-2: Adapter's Connectors