

FCC TEST REPORT

REPORT NO.: RF950102H01

MODEL NO.: WCG104

RECEIVED: Jan. 02, 2006

TESTED: Jan. 06 to 16, 2006

ISSUED: Jan. 18, 2006

APPLICANT: Cisco-Linksys LLC

ADDRESS: 121 Theory Drive Irvine, CA 92617, U.S.A.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 82 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Table of Contents

1	CERTIFICATION	5
2	SUMMARY OF TEST RESULTS	6
3	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	9
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	10
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	12
3.5	DESCRIPTION OF SUPPORT UNITS	13
3.6	CONFIGURATION OF SYSTEM UNDER TEST	14
4	TEST TYPES AND RESULTS	15
4.1	CONDUCTED EMISSION MEASUREMENT	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	15
4.1.2	TEST INSTRUMENTS.....	15
4.1.3	TEST PROCEDURES	16
4.1.4	TEST SETUP	16
4.1.5	EUT OPERATING CONDITIONS	17
4.1.6	TEST RESULTS	18
4.2	RADIATED EMISSION MEASUREMENT	22
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	22
4.2.2	TEST INSTRUMENTS.....	23
4.2.3	TEST PROCEDURES	24
4.2.4	TEST SETUP	25
4.2.5	EUT OPERATING CONDITIONS	26
4.2.6	TEST RESULTS (ANTENNA 1).....	27
4.2.7	TEST RESULTS (ANTENNA 1 – DSSS)	28
4.2.8	TEST RESULTS (ANTENNA 1 – OFDM).....	31
4.2.9	TEST RESULTS (ANTENNA 2).....	34
4.2.10	TEST RESULTS (ANTENNA 2 – DSSS)	35
4.2.11	TEST RESULTS (ANTENNA 2 – OFDM).....	38
4.3	6dB BANDWIDTH MEASUREMENT	41
4.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	41

4.3.2	TEST INSTRUMENTS.....	41
4.3.3	TEST PROCEDURE.....	42
4.3.4	TEST SETUP	42
4.3.5	EUT OPERATING CONDITIONS	42
4.3.6	TEST RESULTS –DSSS.....	43
4.3.7	TEST RESULTS-OFDM	46
4.4	MAXIMUM PEAK OUTPUT POWER	49
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	49
4.4.2	TEST INSTRUMENTS.....	49
4.4.3	TEST PROCEDURES	50
4.4.4	TEST SETUP	50
4.4.5	EUT OPERATING CONDITIONS	50
4.4.6	TEST RESULTS – DSSS.....	51
4.4.7	TEST RESULTS –OFDM.....	52
4.5	POWER SPECTRAL DENSITY MEASUREMENT	53
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	53
4.5.2	TEST INSTRUMENTS.....	53
4.5.3	TEST PROCEDURE.....	54
4.5.4	TEST SETUP	54
4.5.5	EUT OPERATING CONDITIONS	54
4.5.6	TEST RESULTS –DSSS.....	55
4.5.7	TEST RESULTS –OFDM.....	58
4.6	BAND EDGES MEASUREMENT	61
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	61
4.6.2	TEST INSTRUMENTS.....	61
4.6.3	TEST PROCEDURE.....	61
4.6.4	EUT OPERATING CONDITION.....	61
4.6.5	TEST RESULTS (ANTENNA 1 – DSSS)	62
4.6.6	TEST RESULTS (ANTENNA 1 – OFDM)	66
4.6.7	TEST RESULTS (ANTENNA 2 – DSSS)	70
4.6.8	TEST RESULTS (ANTENNA 2 – OFDM)	74
4.7	ANTENNA REQUIREMENT	78
4.7.1	STANDARD APPLICABLE	78



4.7.2	ANTENNA CONNECTED CONSTRUCTION	78
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	79
6	INFORMATION ON THE TESTING LABORATORIES	81
	APPENDIX-A.....	A-1

1 CERTIFICATION

PRODUCT : Wireless-G Cable Gateway
BRAND NAME : LINKSYS
MODEL NO. : WCG104
TESTED: Jan. 06 to 16, 2006
APPLICANT : Cisco-Linksys LLC
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: WCG104) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** Jan. 18, 2006
(Carol Liao)

TECHNICAL
ACCEPTANCE : Hank Chung , **DATE:** Jan. 18, 2006
Responsible for RF (Hank Chung)

APPROVED BY : May Chen , **DATE:** Jan. 18, 2006
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -3.80 dB at 0.170 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.2 dB at 2390.00 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless-G Cable Gateway
MODEL NO.	WCG104
FCC ID	Q87-WCG104
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
CHANNEL SPACING	5MHz
OUTPUT POWER	802.11b: 85.507mW 802.11g: 120.504mW
ANTENNA TYPE	Please see note 1
DATA CABLE	NA
INTERFACE	BNC port x 1, Ethernet Port x4
ASSOCIATED DEVICES	NA

NOTE:

1. There are two antennas provided to this EUT, please refer to the following table:

No.	Gain (dBi)	Antenna Type	Antenna Connector
1	3	Printed	I-Pex
2	3	PCB	I-Pex

2. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps.

3. The EUT must be supplied with a power adapter and following different models could be chosen:

Adapter 1:	
Brand:	LEADER ELECTRONICS INC.
Model No.:	T481210RO3CT
Input power :	AC120V 60Hz, 25W AC in:1.9m /non-shielded
Output power :	DC 12V, 1A DC out:1.9m /non-shielded
Adapter 2:	
Brand:	OEM
Model No.:	AD-121ANDT
Input power :	AC120V 60Hz 20W AC in:1.9m /non-shielded
Output power :	DC 12V, 1A DC out:1.9m, non-shielded

4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g normal mode: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	X	X	X	X	NA

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

- ☒ For spurious emissions (Below 1GHz), the EUT was pre-tested in chamber as the following test modes:

Test Mode	Power
Mode 1	With adapter 1
Mode 2	Without adapter 2

Mode 1, the worse case one, was chosen for final test.

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless-G Cable Gateway. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	PERSONAL COMPUTER	DELL	4600	00043-517-542-487	FCC DoC
2	MONITOR	ADI	G1000	240058T00100081	NA
3	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X
4	MODEM	ACEEX	1414	0206026779	IFAXDM1414
5	KEYBOARD	BTC	KB-5200T	F24800412	E5XKB5122WTH0110
6	PS/2 MOUSE	BTC	M851	G00347024425	NA
7	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-70166-5CA-0448	PIW632500516610
8	NOTEBOOK COMPUTER	DELL	PP01L	TW-0791UH-12800-0CK-3735	FCC DoC
9	NOTEBOOK COMPUTER	DELL	C600	6DRV601	FCC DoC
10	CMTS100	NORTEL NETWORKS	DES801E02	03039330	NA
11	2-WAY SPLITTER	JEBSEE	2242	NA	NA
12	Hub Switch	3Com	3C16467	0100/7PWF000010	NA

No.	Signal cable description
1	NA
2	1.5 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
3	1.1 m braid shielded wire, terminated with DB25 connector via metallic frame, w/o core.
4	1.1 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core
5	1.7 m foil shielded wire, terminal by frame, PS2 Connector, w/o Core.
6	1.5 m foil shielded wire, terminal by frame, PS2 Connector, w/o Core.
7	NA
8	NA
9	NA
10	NA
11	NA
12	NA

Note: 1. All power cords of the above support units are unshielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

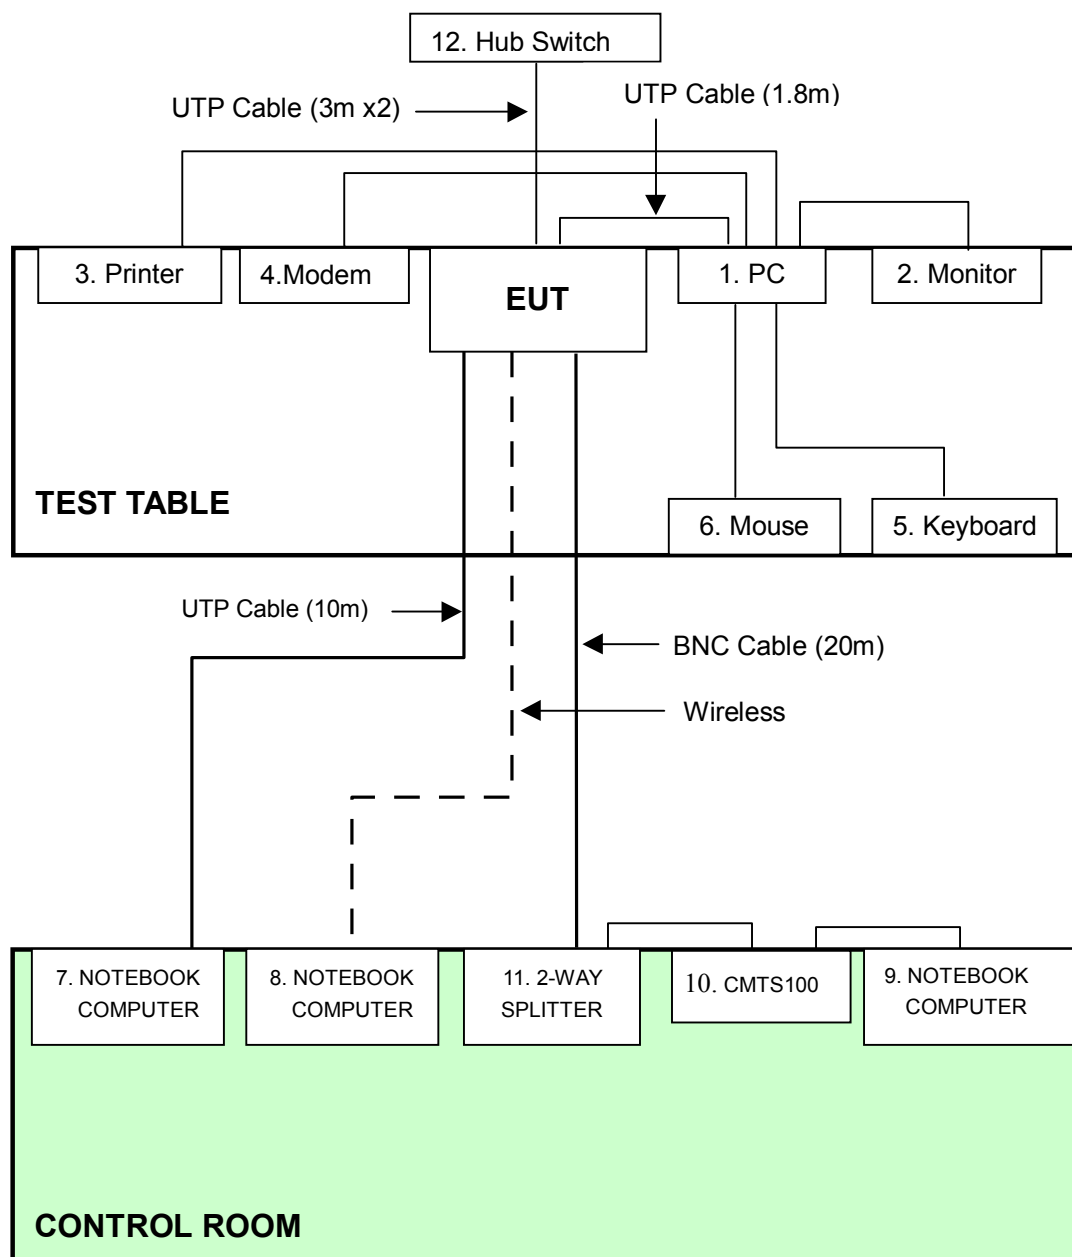

NOTE: 1. Support unit 7 ~11 were kept in the control room during the test.
2. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Sep. 19, 2006
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 10, 2006
ROHDE & SCHWARZ LISN	ESH3-Z5	848773/004	Oct. 24, 2006
RF Signal Cable	RG233	COBCAB9K-30MHz	Dec. 10, 2006
Impedance-stabilization-network	ENY 41	838119/024	Jan. 09, 2007
Impedance-stabilization-network	ENY 22	837497/019	Jan. 09, 2007
Current Probe	SMZ11	18001	Jul. 13, 2006
Current Probe	SMZ11	18013	Jul. 13, 2006

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.

4.1.3 TEST PROCEDURES

- The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

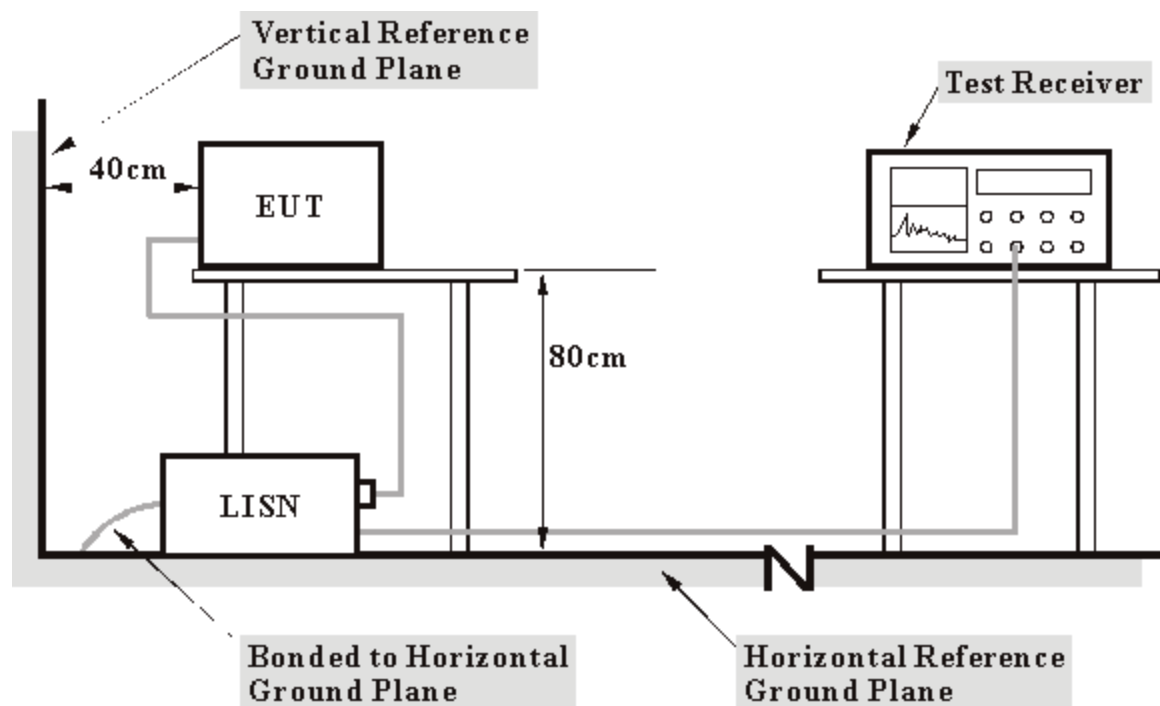

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. The support units (1-6) act as a Server PC system to communicate with EUT via USB cable.
- c. Prepared other computer systems (support unit 7~11) to act as communication partners and placed them outside of testing area.
- d. The communication partner run the test program "Ping.exe" & "ART V48 build6" to enable EUT under transmission/receiving condition continuously via one UTP cable, one BNC cable and wireless transmission.
- e. PC sends "H" messages to modem.
- f. PC sends "H" messages to printer, and the printer prints them on paper.

4.1.6 TEST RESULTS

TEST MODE	Adapter 1	CHANNEL	Channel 11
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 968hPa	PHASE	Line (L)
TESTED BY	Eric Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.44	60.70	35.93	61.14	36.37	64.94	54.94	-3.80	-18.57
2	0.259	0.46	53.26	-14.76	53.72	-14.30	61.45	51.45	-7.74	-65.76
3	0.500	0.48	44.63	-	45.11	-	56.00	46.00	-10.89	-
4	0.713	0.49	39.97	-	40.46	-	56.00	46.00	-15.54	-
5	1.033	0.50	34.86	-	35.36	-	56.00	46.00	-20.64	-
6	13.418	1.11	36.60	-	37.71	-	60.00	50.00	-22.29	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

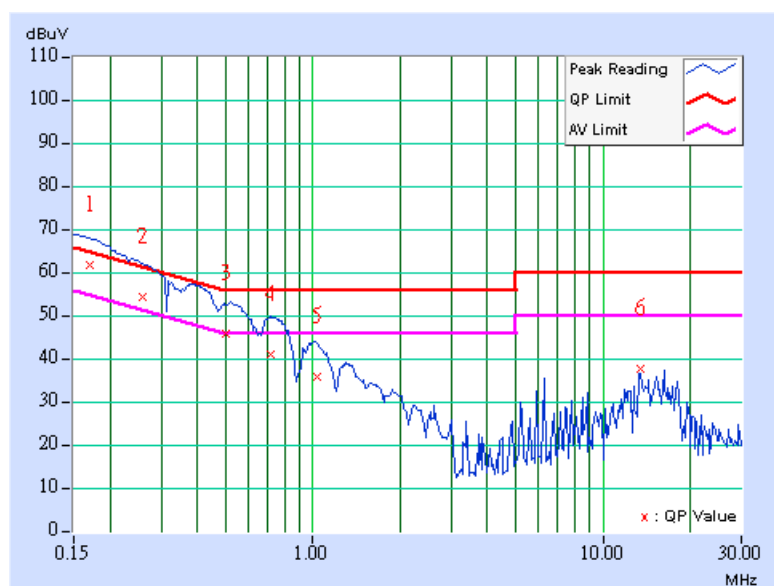

TEST MODE	Adapter 1	CHANNEL	Channel 11
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 968hPa	PHASE	Neutral (N)
TESTED BY	Eric Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.24	60.47	37.21	60.71	37.45	64.98	54.98	-4.27	-17.53
2	0.228	0.25	54.67	30.05	54.92	30.30	62.52	52.52	-7.60	-22.22
3	0.375	0.27	45.94	-	46.21	-	58.40	48.40	-12.19	-
4	0.508	0.29	40.33	-	40.62	-	56.00	46.00	-15.38	-
5	0.654	0.33	36.28	-	36.61	-	56.00	46.00	-19.39	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

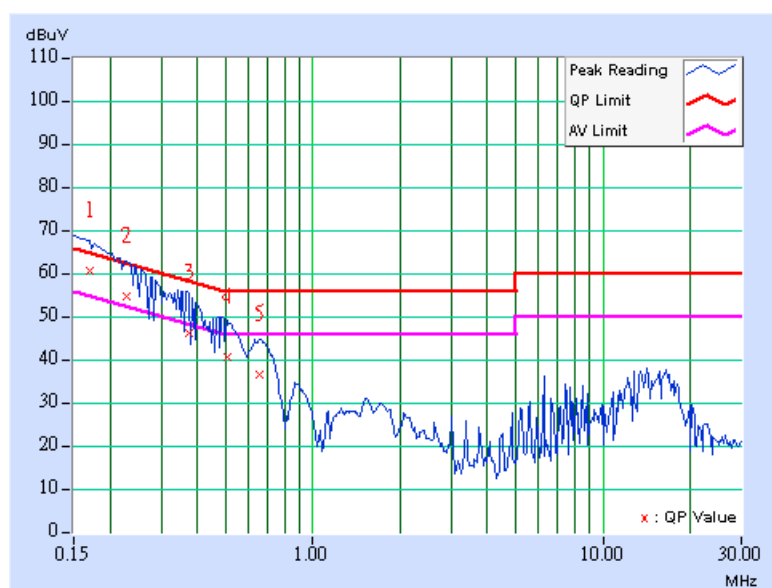

TEST MODE	Adapter 2	CHANNEL	Channel 11
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 968hPa	PHASE	Line (L)
TESTED BY	Eric Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.172	0.44	53.44	-	53.88	-	64.88	54.88	-11.00	-
2	0.257	0.46	50.86	-	51.32	-	61.54	51.54	-10.23	-
3	0.375	0.47	48.79	-15.00	49.26	-14.53	58.38	48.38	-9.13	-62.92
4	0.423	0.47	48.08	15.91	48.55	16.38	57.38	47.38	-8.83	-31.00
5	13.359	1.11	37.18	-	38.29	-	60.00	50.00	-21.71	-
6	16.227	1.20	40.28	-	41.48	-	60.00	50.00	-18.52	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

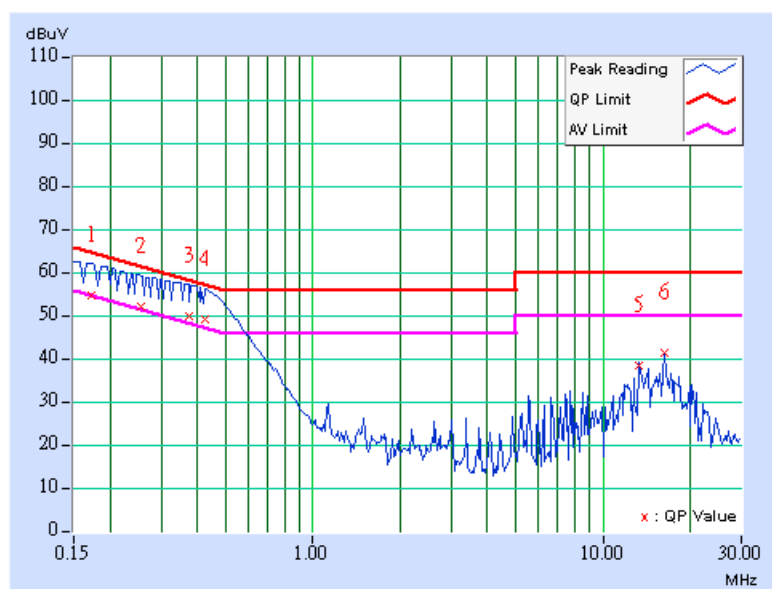

TEST MODE	Adapter 2	CHANNEL	Channel 11
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 968hPa	PHASE	Neutral (N)
TESTED BY	Eric Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.24	53.53	-	53.77	-	64.79	54.79	-11.02	-
2	0.256	0.26	50.46	-	50.72	-	61.57	51.57	-10.85	-
3	0.377	0.27	48.38	23.84	48.65	24.11	58.35	48.35	-9.71	-24.25
4	8.489	0.95	30.94	-	31.89	-	60.00	50.00	-28.11	-
5	13.359	1.21	36.86	-	38.07	-	60.00	50.00	-21.93	-
6	14.273	1.26	35.58	-	36.84	-	60.00	50.00	-23.16	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

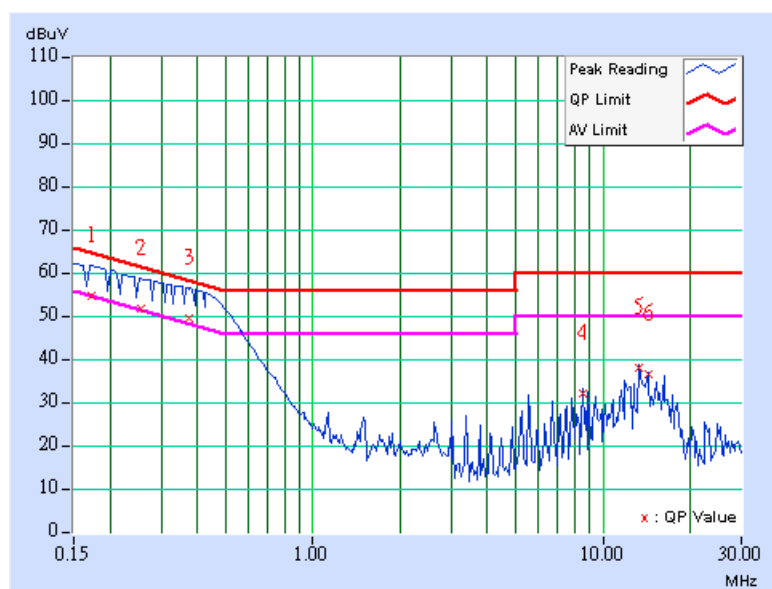

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 07, 2006
HP Pre_Amplifier	8449B	3008A01922	Oct. 02, 2006
ROHDE & SCHWARZ Test Receiver	ESCS30	100287	Dec. 08, 2006
CHASE Broadband Antenna	VULB9168	138	Dec. 21, 2006
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 11, 2006
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 30, 2006
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 26, 2006
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 26, 2006
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Nov. 16, 2006
RF Cable(RICHTEC)	9913-30M	STCCAB-30M-1GHz-021	Jul. 16, 2006
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~20GHz)	1.88 dB


4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

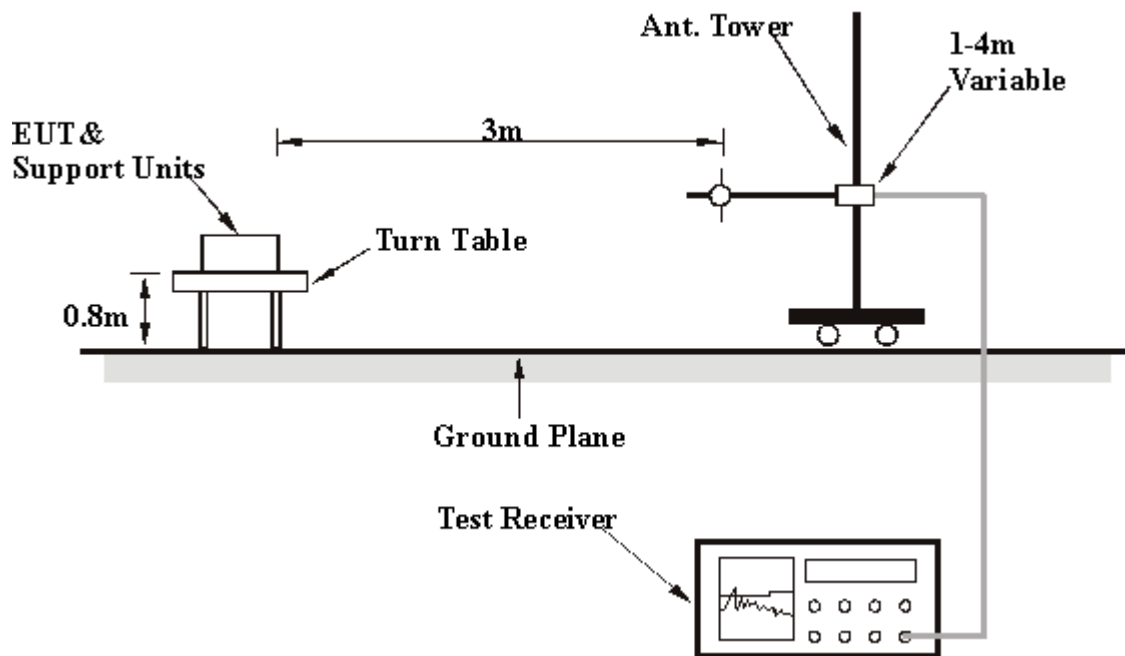

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. The support units (1-6) act as a Server PC system to communicate with EUT via UTP cable.
- c. Prepared other computer systems (support unit 7~11) to act as communication partners and placed them outside of testing area.
- d. The communication partner run the test program "Ping.exe" & "ART V48 build6" to enable EUT under transmission/receiving condition continuously via one UTP cable, one BNC cable and wireless transmission.
- e. PC sends "H" messages to modem.
- f. PC sends "H" messages to printer, and the printer prints them on paper.

4.2.6 TEST RESULTS (ANTENNA 1)

Below 1GHz Worst-Case Data

TEST MODE	Antenna 1	CHANNEL	Channel 11
MODULATION TYPE	BPSK	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	15deg. C, 58%RH, 968hPa	DETECTOR FUNCTION	Quasi-Peak, 120kHz
TESTED BY	Tony Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	200.01	31.20 QP	43.50	-12.30	1.04 H	235	19.60	11.60
2	250.01	37.20 QP	46.00	-8.80	1.24 H	10	23.40	13.80
3	300.01	41.80 QP	46.00	-4.20	1.20 H	128	25.00	16.80
4	375.02	35.80 QP	46.00	-10.20	1.11 H	360	17.60	18.20
5	500.01	36.40 QP	46.00	-9.60	1.04 H	235	14.60	21.80
6	600.01	35.40 QP	46.00	-10.60	1.12 H	102	10.90	24.50
7	700.00	31.90 QP	46.00	-14.10	1.30 H	222	6.10	25.80
8	800.00	35.90 QP	46.00	-10.10	1.17 H	201	8.30	27.60
9	899.98	36.10 QP	46.00	-9.90	1.02 H	10	7.30	28.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.19	34.20 QP	40.00	-5.80	1.24 V	223	20.10	14.10
2	113.24	37.10 QP	43.50	-6.40	1.04 V	20	26.10	11.00
3	250.02	38.40 QP	46.00	-7.60	1.24 V	235	24.60	13.80
4	300.01	39.40 QP	46.00	-6.60	1.07 V	147	22.60	16.80
5	375.01	35.40 QP	46.00	-10.60	1.24 V	111	17.20	18.20
6	400.01	35.40 QP	46.00	-10.60	1.11 V	234	16.40	19.00
7	500.01	41.20 QP	46.00	-4.80	1.21 V	360	19.40	21.80
8	600.01	33.50 QP	46.00	-12.50	1.10 V	10	9.00	24.50
9	899.97	37.20 QP	46.00	-8.80	1.02 V	257	8.40	28.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.7 TEST RESULTS (ANTENNA 1 – DSSS)

802.11b DSSS modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	15 deg. C, 60%RH, 968hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.70 PK	74.00	-20.30	1.33 H	0	20.00	33.70
1	2390.00	42.70 AV	54.00	-11.30	1.33 H	0	9.00	33.70
2	*2412.00	106.10 PK			1.33 H	0	76.30	29.80
2	*2412.00	99.00 AV			1.33 H	0	69.20	29.80
3	4824.00	43.30 PK	74.00	-30.70	1.20 H	12	8.20	35.10
3	4824.00	32.50 AV	54.00	-21.50	1.20 H	12	-2.60	35.10
4	7236.00	47.50 PK	74.00	-26.50	1.12 H	279	7.00	40.50
4	7236.00	36.30 AV	54.00	-17.70	1.12 H	279	-4.20	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	39.00 PK	74.00	-35.00	1.00 V	317	5.30	33.70
1	2390.00	28.50 AV	54.00	-25.50	1.00 V	317	-5.20	33.70
2	*2412.00	91.40 PK			1.00 V	317	61.60	29.80
2	*2412.00	84.80 AV			1.00 V	317	55.00	29.80
3	4824.00	42.90 PK	74.00	-31.10	1.11 V	351	7.80	35.10
3	4824.00	31.50 AV	54.00	-22.50	1.11 V	351	-3.60	35.10
4	7236.00	47.70 PK	74.00	-26.30	1.00 V	20	7.20	40.50
4	7236.00	36.00 AV	54.00	-18.00	1.00 V	20	-4.50	40.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	15 deg. C, 60%RH, 968hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.90 PK			1.33 H	355	76.00	29.90
1	*2437.00	99.30 AV			1.33 H	355	69.40	29.90
2	4874.00	43.70 PK	74.00	-30.30	1.23 H	10	8.40	35.30
2	4874.00	32.80 AV	54.00	-21.20	1.23 H	10	-2.50	35.30
3	7311.00	47.90 PK	74.00	-26.10	1.15 H	286	7.20	40.70
3	7311.00	36.60 AV	54.00	-17.40	1.15 H	286	-4.10	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	92.20 PK			1.37 V	332	62.30	29.90
1	*2437.00	85.80 AV			1.37 V	332	55.90	29.90
2	4874.00	43.10 PK	74.00	-30.90	1.14 V	347	7.80	35.30
2	4874.00	31.60 AV	54.00	-22.40	1.14 V	347	-3.70	35.30
3	7311.00	48.10 PK	74.00	-25.90	1.01 V	22	7.40	40.70
3	7311.00	36.10 AV	54.00	-17.90	1.01 V	22	-4.60	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	15 deg. C, 60%RH, 968hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.70 PK			1.34 H	350	77.70	30.00
1	*2462.00	100.80 AV			1.34 H	350	70.80	30.00
2	2483.50	62.10 PK	74.00	-11.90	1.34 H	350	32.00	30.10
2	2483.50	45.40 AV	54.00	-8.60	1.34 H	350	15.30	30.10
3	4924.00	43.90 PK	74.00	-30.10	1.26 H	351	8.30	35.50
3	4924.00	32.90 AV	54.00	-21.10	1.26 H	351	-2.70	35.50
4	7386.00	47.90 PK	74.00	-26.10	1.18 H	277	7.10	40.80
4	7386.00	36.70 AV	54.00	-17.30	1.18 H	277	-4.10	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	93.90 PK			1.15 V	329	63.90	30.00
1	*2462.00	87.10 AV			1.15 V	329	57.10	30.00
2	2483.50	48.30 PK	74.00	-25.70	1.15 V	329	18.20	30.10
2	2483.50	31.70 AV	54.00	-22.30	1.15 V	329	1.60	30.10
3	4924.00	43.30 PK	74.00	-30.70	1.16 V	344	7.70	35.50
3	4924.00	31.80 AV	54.00	-22.20	1.16 V	344	-3.80	35.50
4	7386.00	48.00 PK	74.00	-26.00	1.00 V	25	7.20	40.80
4	7386.00	36.40 AV	54.00	-17.60	1.00 V	25	-4.40	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

4.2.8 TEST RESULTS (ANTENNA 1 – OFDM)

802.11g Normal OFDM modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	15 deg. C, 60%RH, 968hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.80 PK	74.00	-16.20	1.43 H	14	24.10	33.70
1	2390.00	51.80 AV	54.00	-2.20	1.43 H	14	18.10	33.70
2	*2412.00	109.40 PK			1.43 H	14	79.60	29.80
2	*2412.00	101.90 AV			1.43 H	14	72.10	29.80
3	4824.00	47.80 PK	74.00	-26.20	1.03 H	276	12.70	35.10
3	4824.00	43.10 AV	54.00	-10.90	1.03 H	276	8.00	35.10
4	7236.00	50.30 PK	74.00	-23.70	1.58 H	30	9.80	40.50
4	7236.00	39.60 AV	54.00	-14.40	1.58 H	30	-0.90	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	45.30 PK	74.00	-28.70	1.43 V	322	11.60	33.70
1	2390.00	39.50 AV	54.00	-14.50	1.43 V	322	5.80	33.70
2	*2412.00	96.90 PK			1.43 V	322	67.10	29.80
2	*2412.00	89.60 AV			1.43 V	322	59.80	29.80
3	4824.00	50.10 PK	74.00	-23.90	1.26 V	17	15.00	35.10
3	4824.00	44.40 AV	54.00	-9.60	1.26 V	17	9.30	35.10
4	7236.00	53.40 PK	74.00	-20.60	1.77 V	325	12.90	40.50
4	7236.00	42.60 AV	54.00	-11.40	1.77 V	325	2.10	40.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. " * " : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	15 deg. C, 60%RH, 968hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.60 PK			1.42 H	17	78.70	29.90
1	*2437.00	102.10 AV			1.42 H	17	72.20	29.90
2	4874.00	47.00 PK	74.00	-27.00	1.06 H	290	11.70	35.30
2	4874.00	42.40 AV	54.00	-11.60	1.06 H	290	7.10	35.30
3	7311.00	49.70 PK	74.00	-24.30	1.61 H	35	9.00	40.70
3	7311.00	39.40 AV	54.00	-14.60	1.61 H	35	-1.30	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	97.40 PK			1.45 V	324	67.50	29.90
1	*2437.00	90.10 AV			1.45 V	324	60.20	29.90
2	4874.00	48.90 PK	74.00	-25.10	1.22 V	10	13.60	35.30
2	4874.00	44.00 AV	54.00	-10.00	1.22 V	10	8.70	35.30
3	7311.00	52.50 PK	74.00	-21.50	1.69 V	317	11.80	40.70
3	7311.00	42.10 AV	54.00	-11.90	1.69 V	317	1.40	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	15 deg. C, 60%RH, 968hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.70 PK			1.42 H	22	76.70	30.00
1	*2462.00	99.60 AV			1.42 H	22	69.60	30.00
2	2483.50	61.70 PK	74.00	-12.30	1.42 H	22	31.60	30.10
2	2483.50	50.80 AV	54.00	-3.20	1.42 H	22	20.70	30.10
3	4924.00	47.80 PK	74.00	-26.20	1.00 H	281	12.20	35.50
3	4924.00	44.80 AV	54.00	-9.20	1.00 H	281	9.20	35.50
4	7386.00	50.10 PK	74.00	-23.90	1.57 H	33	9.30	40.80
4	7386.00	40.40 AV	54.00	-13.60	1.57 H	33	-0.40	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	97.80 PK			1.44 V	313	67.80	30.00
1	*2462.00	90.60 AV			1.44 V	313	60.60	30.00
2	2483.50	52.80 PK	74.00	-21.20	1.44 V	313	22.70	30.10
2	2483.50	41.80 AV	54.00	-12.20	1.44 V	313	11.70	30.10
3	4924.00	48.70 PK	74.00	-25.30	1.23 V	14	13.10	35.50
3	4924.00	43.30 AV	54.00	-10.70	1.23 V	14	7.70	35.50
4	7386.00	54.30 PK	74.00	-19.70	1.65 V	311	13.50	40.80
4	7386.00	43.10 AV	54.00	-10.90	1.65 V	311	2.30	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

4.2.9 TEST RESULTS (ANTENNA 2)

Below 1GHz Worst-Case Data

TEST MODE	Antenna 2	CHANNEL	Channel 11
MODULATION TYPE	BPSK	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	15deg. C, 58%RH, 968hPa	DETECTOR FUNCTION	Quasi-Peak, 120kHz
TESTED BY	Tony Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	200.01	30.80 QP	43.50	-12.70	1.00 H	78	19.20	11.60
2	250.02	37.70 QP	46.00	-8.30	1.18 H	105	23.90	13.80
3	300.01	42.90 QP	46.00	-3.10	1.25 H	44	26.10	16.80
4	375.02	36.90 QP	46.00	-9.10	1.07 H	270	18.70	18.20
5	500.01	35.10 QP	46.00	-10.90	1.19 H	173	13.40	21.80
6	600.01	35.90 QP	46.00	-10.10	1.45 H	36	11.40	24.50
7	700.00	31.60 QP	46.00	-14.40	1.17 H	306	5.80	25.80
8	800.00	35.20 QP	46.00	-10.80	1.05 H	64	7.70	27.60
9	899.95	37.00 QP	46.00	-9.00	1.00 H	10	8.10	28.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.75	33.20 QP	40.00	-6.80	1.33 V	89	18.50	14.70
2	112.26	37.90 QP	43.50	-5.60	1.01 V	130	27.00	10.90
3	125.00	31.30 QP	43.50	-12.20	1.12 V	208	19.10	12.20
4	250.02	39.60 QP	46.00	-6.40	1.27 V	21	25.80	13.80
5	300.01	38.90 QP	46.00	-7.10	1.57 V	330	22.10	16.80
6	375.01	34.80 QP	46.00	-11.20	1.00 V	8	16.60	18.20
7	400.01	35.20 QP	46.00	-10.80	1.20 V	8	16.20	19.00
8	500.01	40.70 QP	46.00	-5.30	1.04 V	11	18.90	21.80
9	600.00	32.60 QP	46.00	-13.40	1.00 V	334	8.10	24.50
10	750.00	33.60 QP	46.00	-12.40	1.00 V	102	6.20	27.30
11	899.95	37.70 QP	46.00	-8.30	1.00 V	127	8.90	28.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.10 TEST RESULTS (ANTENNA 2 – DSSS)

802.11b DSSS modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	15 deg. C, 60%RH, 968hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.60 PK	74.00	-15.40	1.45 H	12	24.90	33.70
1	2390.00	47.80 AV	54.00	-6.20	1.45 H	12	14.10	33.70
2	*2412.00	111.00 PK			1.45 H	12	81.20	29.80
2	*2412.00	104.10 AV			1.45 H	12	74.30	29.80
3	4824.00	43.20 PK	74.00	-30.80	1.15 H	320	8.10	35.10
3	4824.00	32.10 AV	54.00	-21.90	1.15 H	320	-3.00	35.10
4	7236.00	47.50 PK	74.00	-26.50	1.06 H	287	7.00	40.50
4	7236.00	36.40 AV	54.00	-17.60	1.06 H	287	-4.10	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	44.60 PK	74.00	-29.40	1.99 V	242	10.90	33.70
1	2390.00	34.20 AV	54.00	-19.80	1.99 V	242	0.50	33.70
2	*2412.00	97.00 PK			1.99 V	242	67.20	29.80
2	*2412.00	90.50 AV			1.99 V	242	60.70	29.80
3	4824.00	42.50 PK	74.00	-31.50	1.12 V	348	7.40	35.10
3	4824.00	31.30 AV	54.00	-22.70	1.12 V	348	-3.80	35.10
4	7236.00	47.60 PK	74.00	-26.40	1.01 V	25	7.10	40.50
4	7236.00	35.90 AV	54.00	-18.10	1.01 V	25	-4.60	40.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	15 deg. C, 60%RH, 968hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.70 PK			1.42 H	20	80.80	29.90
1	*2437.00	103.80 AV			1.42 H	20	73.90	29.90
2	4874.00	43.50 PK	74.00	-30.50	1.17 H	311	8.20	35.30
2	4874.00	32.40 AV	54.00	-21.60	1.17 H	311	-2.90	35.30
3	7311.00	47.70 PK	74.00	-26.30	1.05 H	289	7.00	40.70
3	7311.00	36.40 AV	54.00	-17.60	1.05 H	289	-4.30	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	98.40 PK			1.97 V	236	68.50	29.90
1	*2437.00	91.60 AV			1.97 V	236	61.70	29.90
2	4874.00	42.70 PK	74.00	-31.30	1.11 V	355	7.40	35.30
2	4874.00	31.70 AV	54.00	-22.30	1.11 V	355	-3.60	35.30
3	7311.00	47.90 PK	74.00	-26.10	1.04 V	28	7.20	40.70
3	7311.00	36.30 AV	54.00	-17.70	1.04 V	28	-4.40	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	15 deg. C, 60%RH, 968hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.10 PK			1.42 H	29	80.10	30.00
1	*2462.00	103.30 AV			1.42 H	29	73.30	30.00
2	2483.50	64.50 PK	74.00	-9.50	1.42 H	29	34.40	30.10
2	2483.50	47.90 AV	54.00	-6.10	1.42 H	29	17.80	30.10
3	4924.00	44.00 PK	74.00	-30.00	1.20 H	316	8.40	35.50
3	4924.00	32.90 AV	54.00	-21.10	1.20 H	316	-2.70	35.50
4	7386.00	48.00 PK	74.00	-26.00	1.09 H	281	7.20	40.80
4	7386.00	36.70 AV	54.00	-17.30	1.09 H	281	-4.10	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.90 PK			1.64 V	234	69.90	30.00
1	*2462.00	93.20 AV			1.64 V	234	63.20	30.00
2	2483.50	54.30 PK	74.00	-19.70	1.64 V	234	24.20	30.10
2	2483.50	37.80 AV	54.00	-16.20	1.64 V	234	7.70	30.10
3	4924.00	43.00 PK	74.00	-31.00	1.15 V	351	7.40	35.50
3	4924.00	31.70 AV	54.00	-22.30	1.15 V	351	-3.90	35.50
4	7386.00	47.90 PK	74.00	-26.10	1.02 V	29	7.10	40.80
4	7386.00	36.30 AV	54.00	-17.70	1.02 V	29	-4.50	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

4.2.11 TEST RESULTS (ANTENNA 2 – OFDM)

802.11g Normal OFDM modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	15 deg. C, 60%RH, 968hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.70 PK	74.00	-15.30	1.43 H	11	25.00	33.70
1	2390.00	52.80 AV	54.00	-1.20	1.43 H	11	19.10	33.70
2	*2412.00	110.30 PK			1.43 H	11	80.50	29.80
2	*2412.00	102.90 AV			1.43 H	11	73.10	29.80
3	4824.00	47.90 PK	74.00	-26.10	1.00 H	268	12.80	35.10
3	4824.00	43.30 AV	54.00	-10.70	1.00 H	268	8.20	35.10
4	7236.00	50.20 PK	74.00	-23.80	1.61 H	15	9.70	40.50
4	7236.00	39.70 AV	54.00	-14.30	1.61 H	15	-0.80	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	45.80 PK	74.00	-28.20	2.03 V	246	12.10	33.70
1	2390.00	40.20 AV	54.00	-13.80	2.03 V	246	6.50	33.70
2	*2412.00	97.40 PK			2.03 V	246	67.60	29.80
2	*2412.00	90.30 AV			2.03 V	246	60.50	29.80
3	4824.00	50.40 PK	74.00	-23.60	1.22 V	10	15.30	35.10
3	4824.00	45.50 AV	54.00	-8.50	1.22 V	10	10.40	35.10
4	7236.00	53.70 PK	74.00	-20.30	1.80 V	312	13.20	40.50
4	7236.00	42.90 AV	54.00	-11.10	1.80 V	312	2.40	40.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. " * " : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	15 deg. C, 60%RH, 968hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.70 PK			1.45 H	19	78.80	29.90
1	*2437.00	102.20 AV			1.45 H	19	72.30	29.90
2	4874.00	47.10 PK	74.00	-26.90	1.00 H	267	11.80	35.30
2	4874.00	42.60 AV	54.00	-11.40	1.00 H	267	7.30	35.30
3	7311.00	49.90 PK	74.00	-24.10	1.60 H	12	9.20	40.70
3	7311.00	39.60 AV	54.00	-14.40	1.60 H	12	-1.10	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	97.80 PK			2.03 V	245	67.90	29.90
1	*2437.00	90.90 AV			2.03 V	245	61.00	29.90
2	4874.00	49.00 PK	74.00	-25.00	1.27 V	7	13.70	35.30
2	4874.00	44.40 AV	54.00	-9.60	1.27 V	7	9.10	35.30
3	7311.00	52.60 PK	74.00	-21.40	1.82 V	307	11.90	40.70
3	7311.00	42.10 AV	54.00	-11.90	1.82 V	307	1.40	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	15 deg. C, 60%RH, 968hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.60 PK			1.46 H	17	77.60	30.00
1	*2462.00	100.60 AV			1.46 H	17	70.60	30.00
2	2483.50	62.60 PK	74.00	-11.40	1.46 H	17	32.50	30.10
2	2483.50	51.80 AV	54.00	-2.20	1.46 H	17	21.70	30.10
3	4924.00	48.30 PK	74.00	-25.70	1.03 H	282	12.70	35.50
3	4924.00	45.10 AV	54.00	-8.90	1.03 H	282	9.50	35.50
4	7386.00	50.50 PK	74.00	-23.50	1.57 H	7	9.70	40.80
4	7386.00	40.90 AV	54.00	-13.10	1.57 H	7	0.10	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.00 PK			2.02 V	243	68.00	30.00
1	*2462.00	91.70 AV			2.02 V	243	61.70	30.00
2	2483.50	53.00 PK	74.00	-21.00	2.02 V	243	22.90	30.10
2	2483.50	42.90 AV	54.00	-11.10	2.02 V	243	12.80	30.10
3	4924.00	49.00 PK	74.00	-25.00	1.00 V	354	13.40	35.50
3	4924.00	42.90 AV	54.00	-11.10	1.00 V	354	7.30	35.50
4	7386.00	54.50 PK	74.00	-19.50	1.84 V	21	13.70	40.80
4	7386.00	43.80 AV	54.00	-10.20	1.84 V	21	3.00	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.6 TEST RESULTS –DSSS

802.11b DSSS modulation


MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 968hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.64	0.5	PASS
6	2437	10.64	0.5	PASS
11	2462	10.57	0.5	PASS


CH1

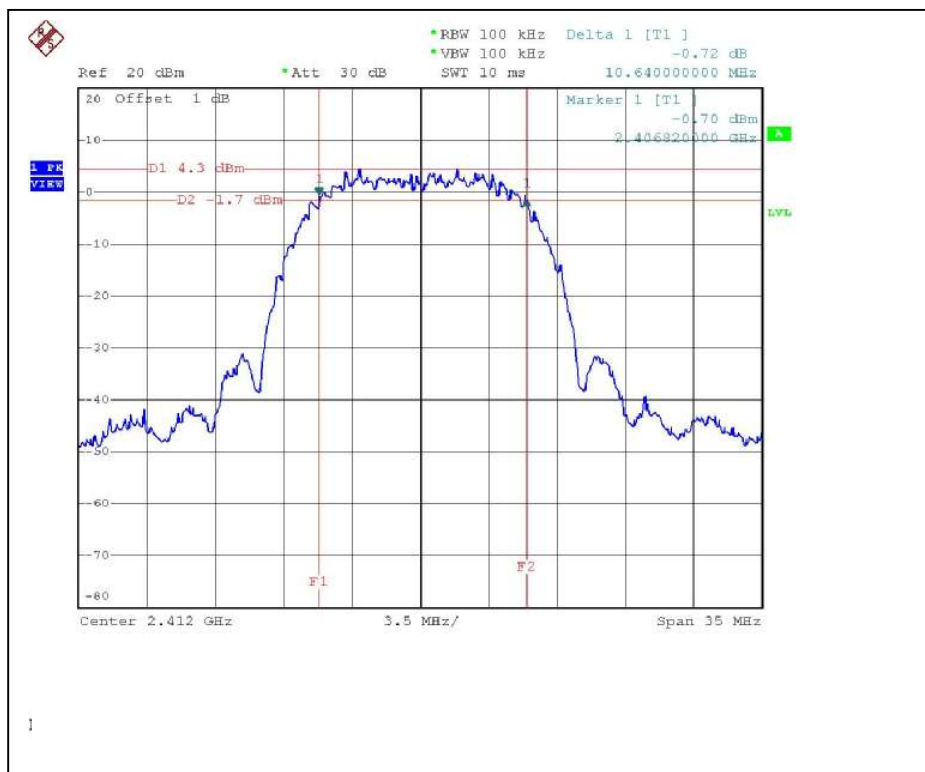

CH6

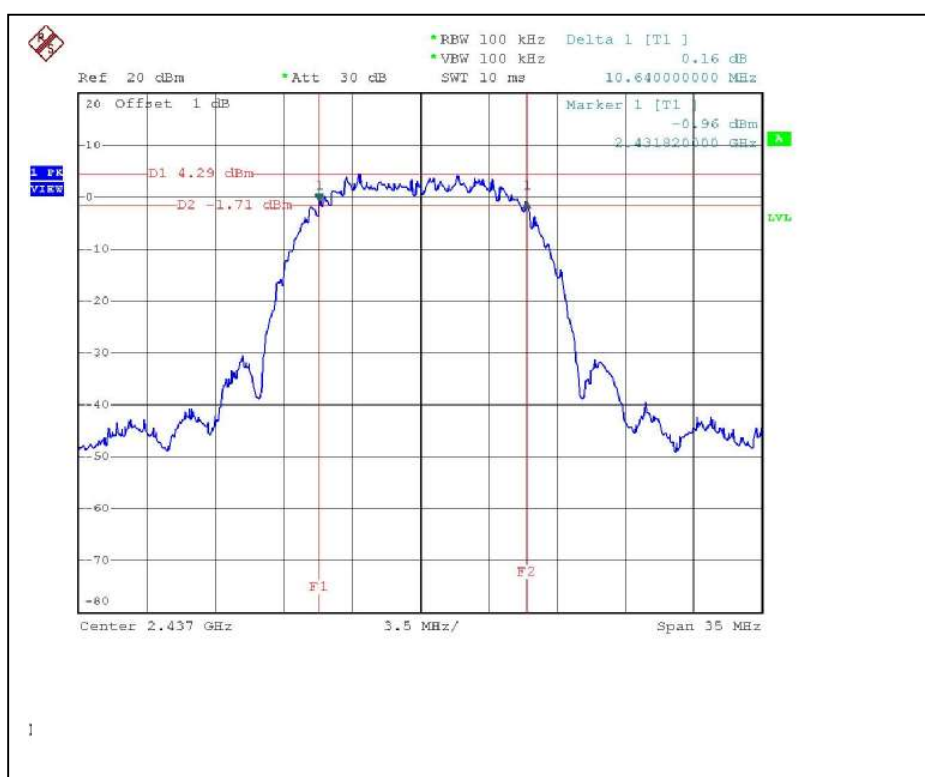

CH11

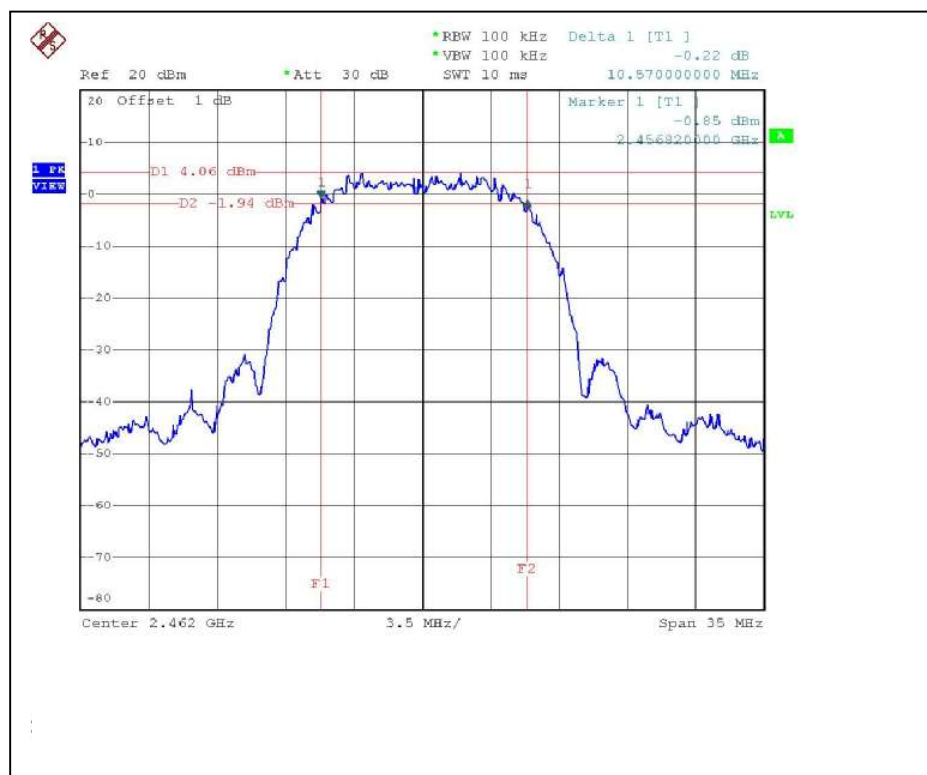


4.3.7 TEST RESULTS-OFDM

802.11g OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 968hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	15.47	0.5	PASS
6	2437	15.11	0.5	PASS
11	2462	15.40	0.5	PASS


CH1

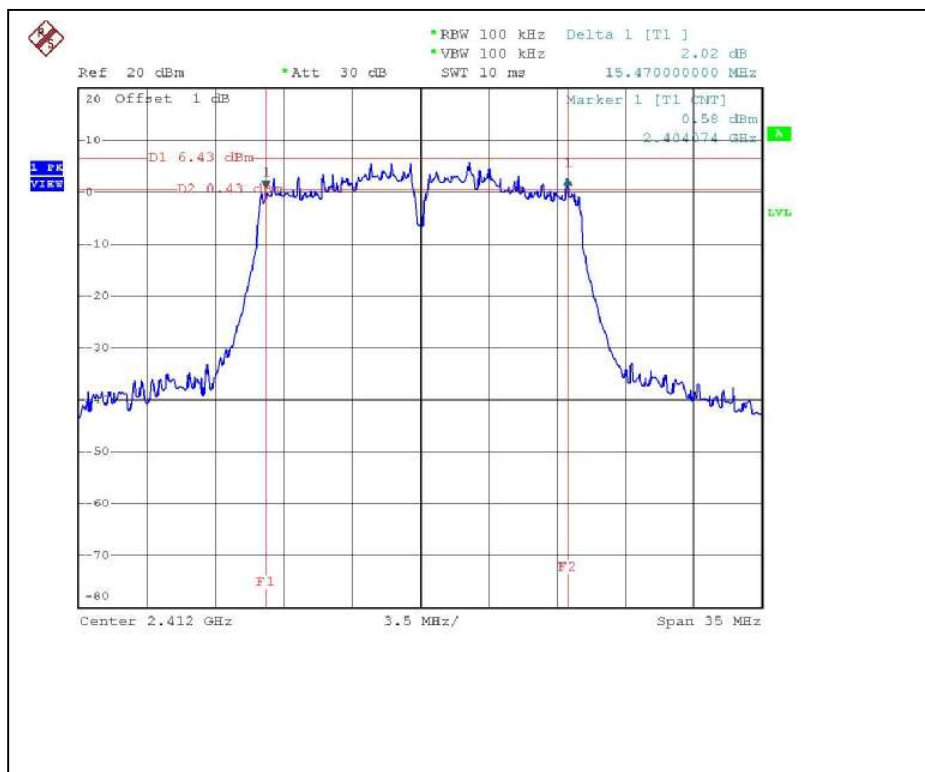

CH6

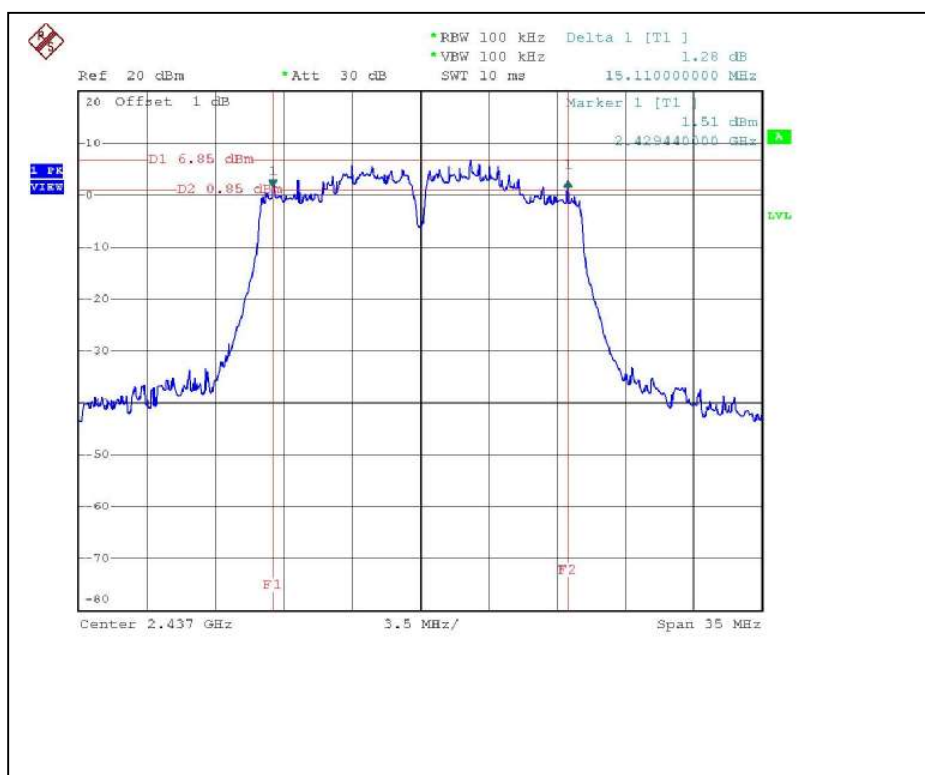

CH11

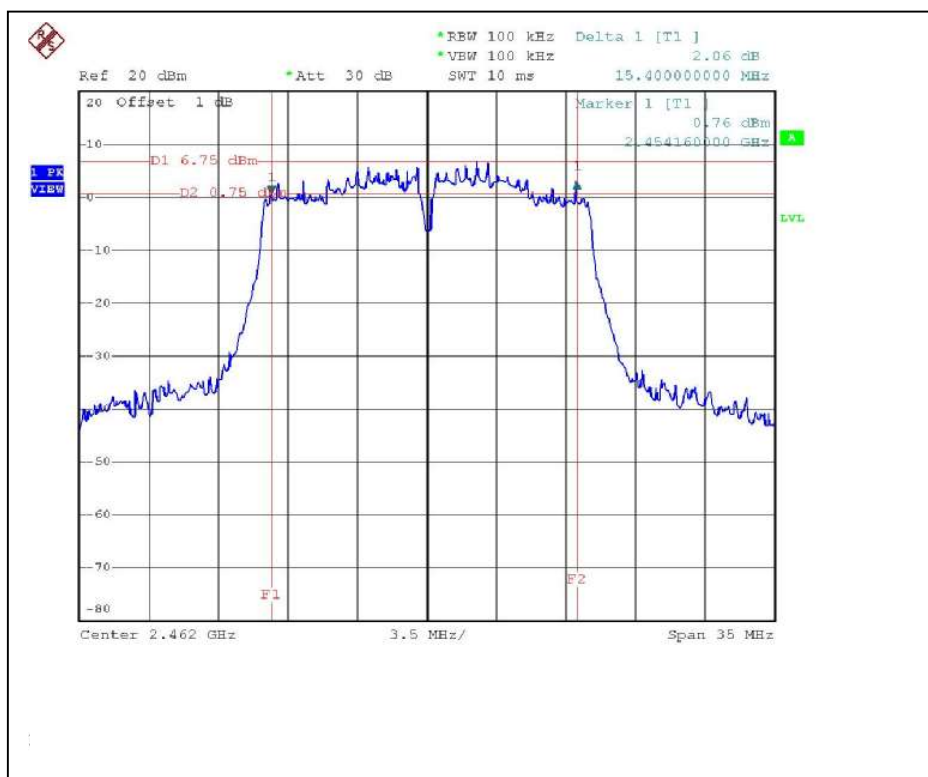

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 07, 2006
TEKTRONIX OSCILLOSCOPE	TDS380	B016335	Jun. 22, 2006
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.4.6 TEST RESULTS – DSSS

802.11b DSSS modulation

MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 968hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	85.507	19.32	30	PASS
6	2437	84.918	19.29	30	PASS
11	2462	83.368	19.21	30	PASS

4.4.7 TEST RESULTS –OFDM

802.11g OFDM modulation

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 968hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	115.878	20.64	30	PASS
6	2437	116.681	20.67	30	PASS
11	2462	120.504	20.81	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5


4.5.6 TEST RESULTS –DSSS

802.11b DSSS modulation

MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 968hPa
TESTED BY	Rex Huang		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.54	8	PASS
6	2437	-8.62	8	PASS
11	2462	-8.94	8	PASS

CH11

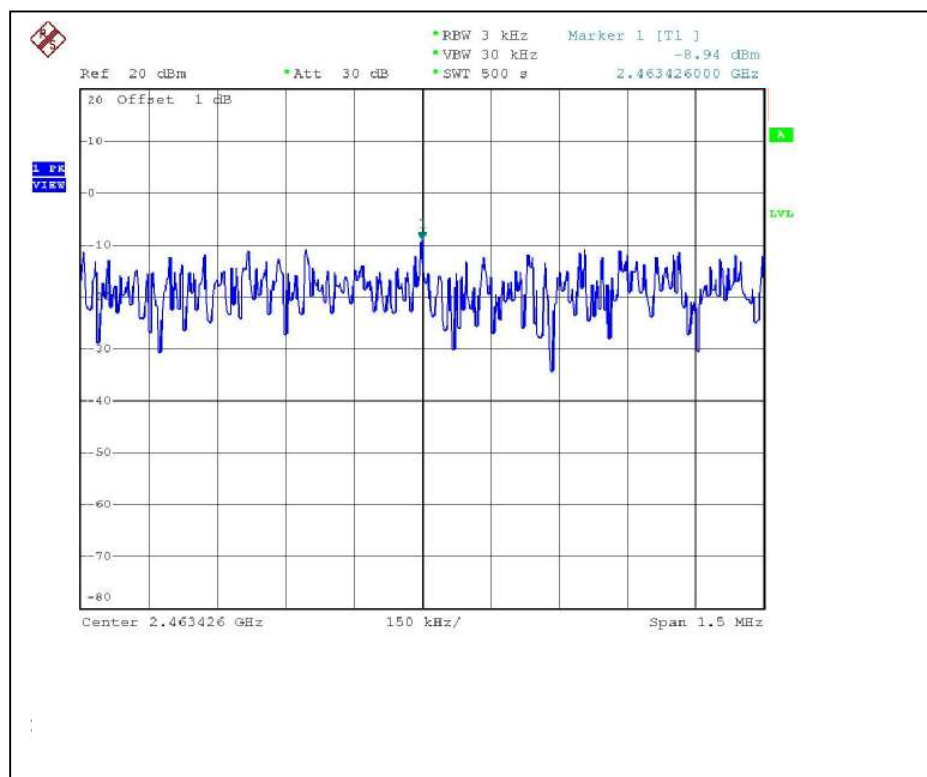


4.5.7 TEST RESULTS –OFDM

802.11g OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 968hPa
TESTED BY	Rex Huang		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.47	8	PASS
6	2437	-9.60	8	PASS
11	2462	-9.44	8	PASS


CH1

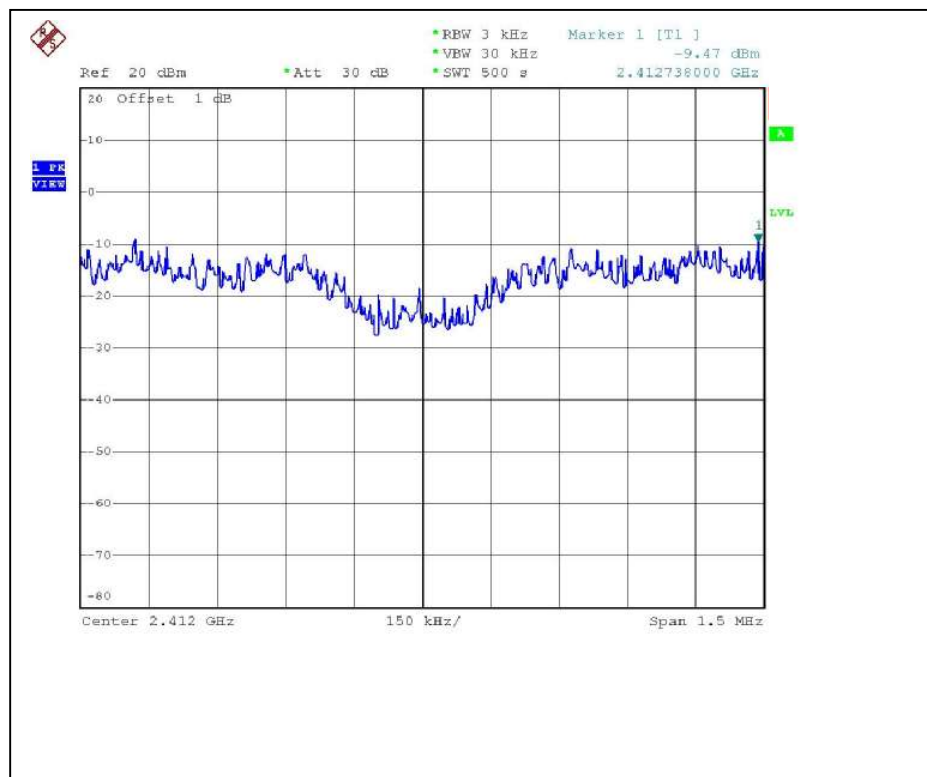

CH6

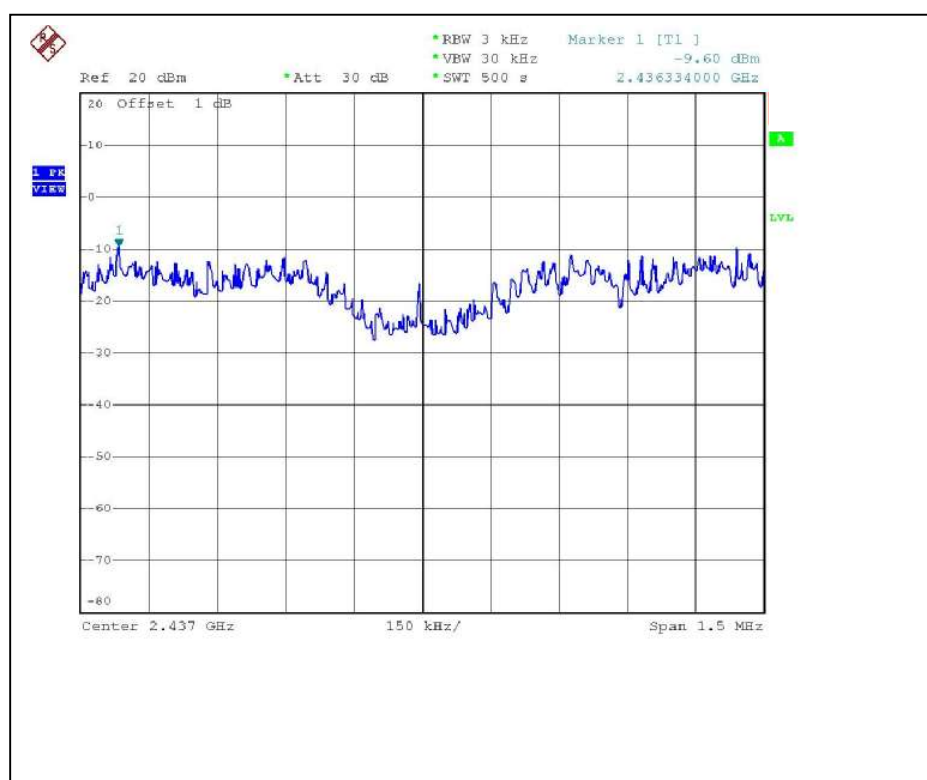

CH11

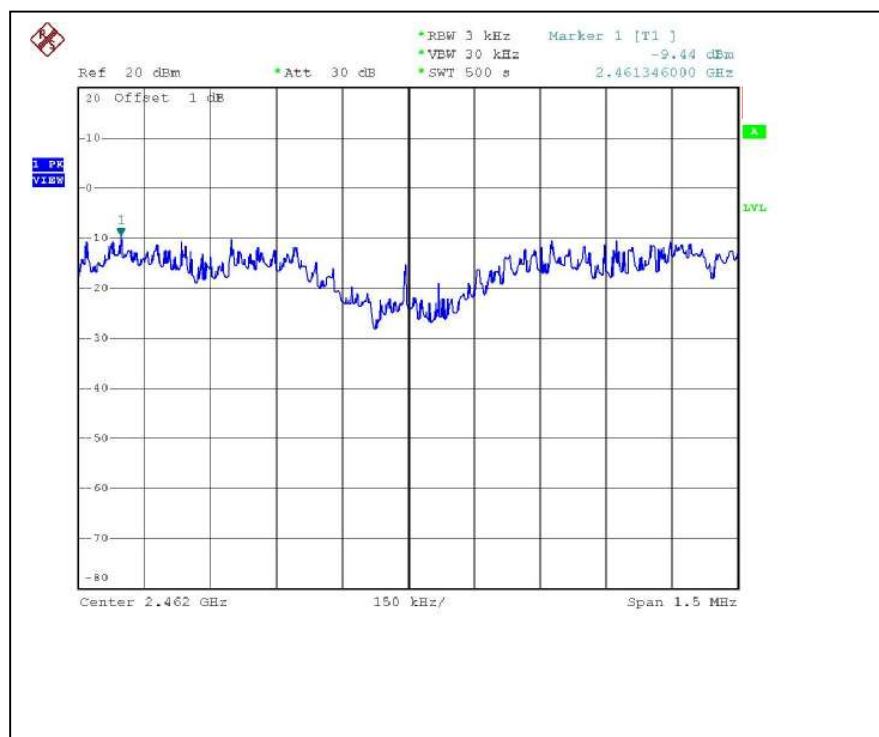

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 1MHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW spectrum analyzer to 1 MHz and set VBW spectrum analyzer to 10 Hz with suitable frequency span including 1 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5

4.6.5 TEST RESULTS (ANTENNA 1 – DSSS)

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of DSSS technique on the following first page show 53.85dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 106.1dBuV/m, so the maximum field strength in restrict band is $106.1 - 53.85 = 52.25$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of DSSS technique on the following first page shows 52.37dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 107.7dBuV/m, so the maximum field strength in restrict band is $107.7 - 52.37 = 55.33$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of DSSS technique on the following second page shows 56.57dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 99.0dBuV/m, so the maximum field strength in restrict band is $99.0 - 56.57 = 42.43$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of DSSS technique on the following second page shows 55.0dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 100.8dBuV/m, so the maximum field strength in restrict band is $100.8 - 55.0 = 45.8$ dBuV/m which is under 54 dBuV/m limit.

CH1

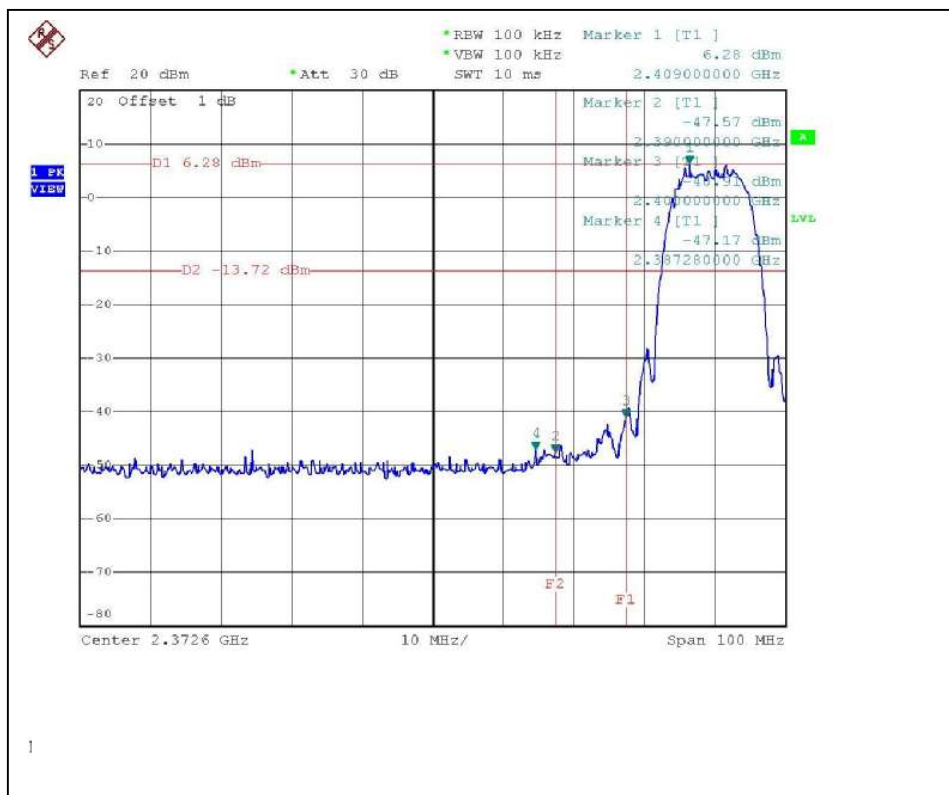


CH11

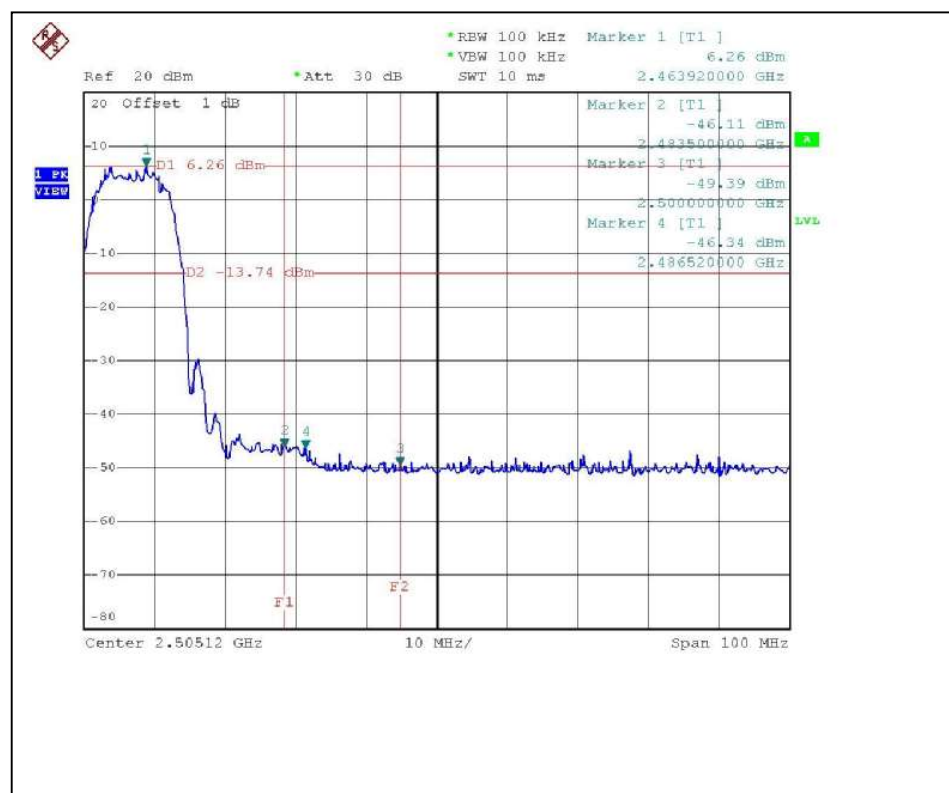


CH1




CH11

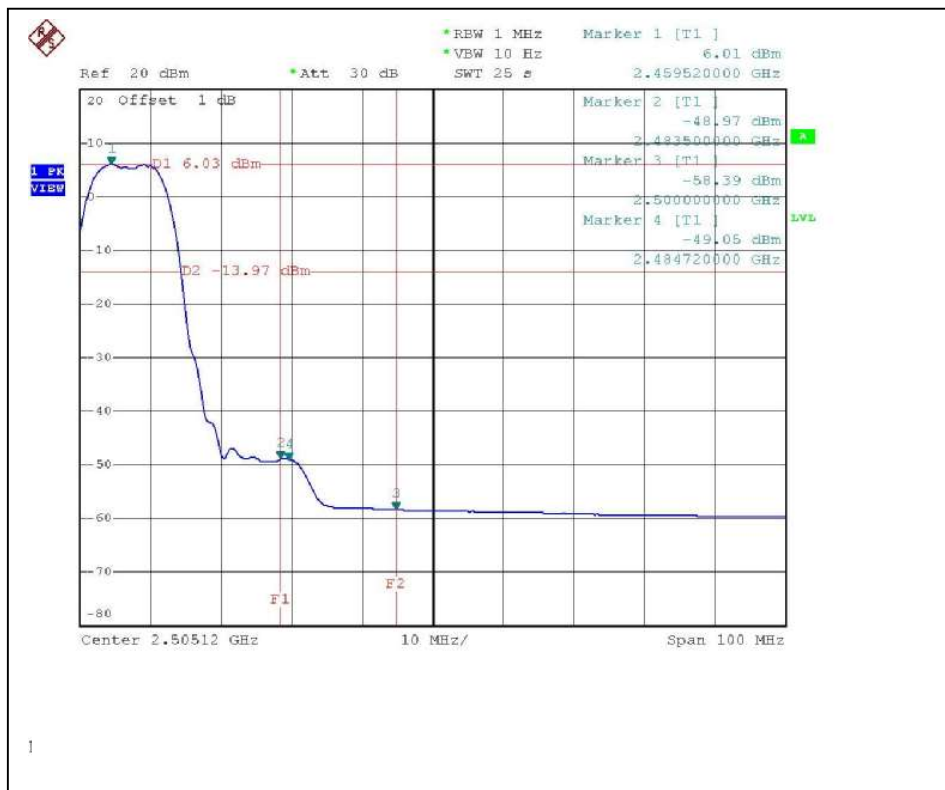

CH1

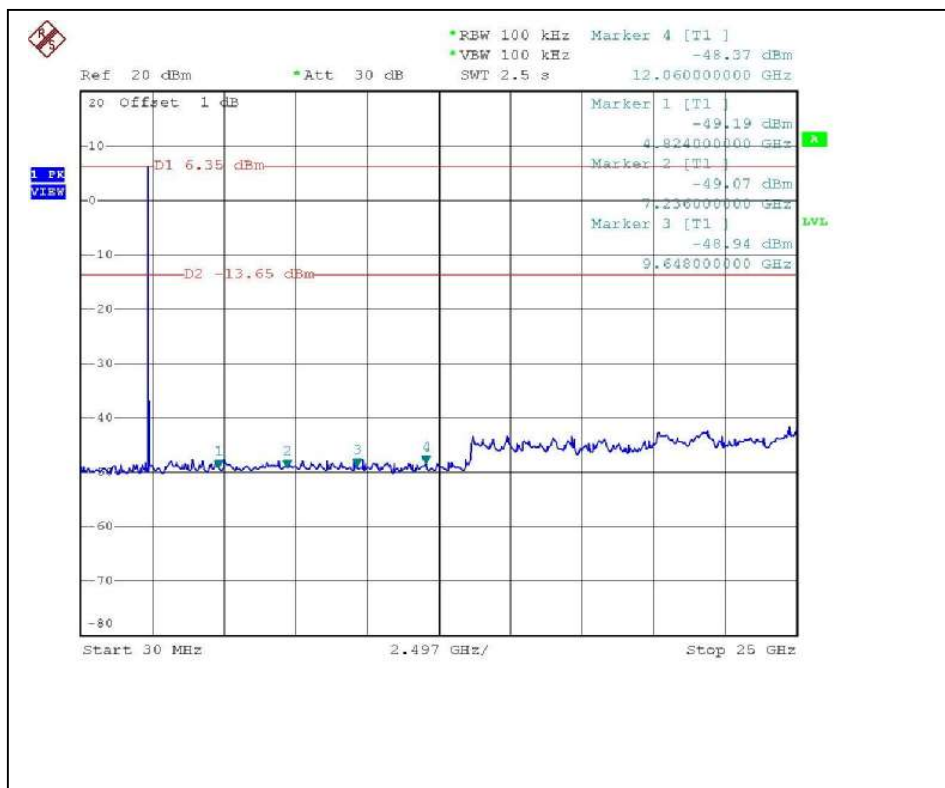

CH11

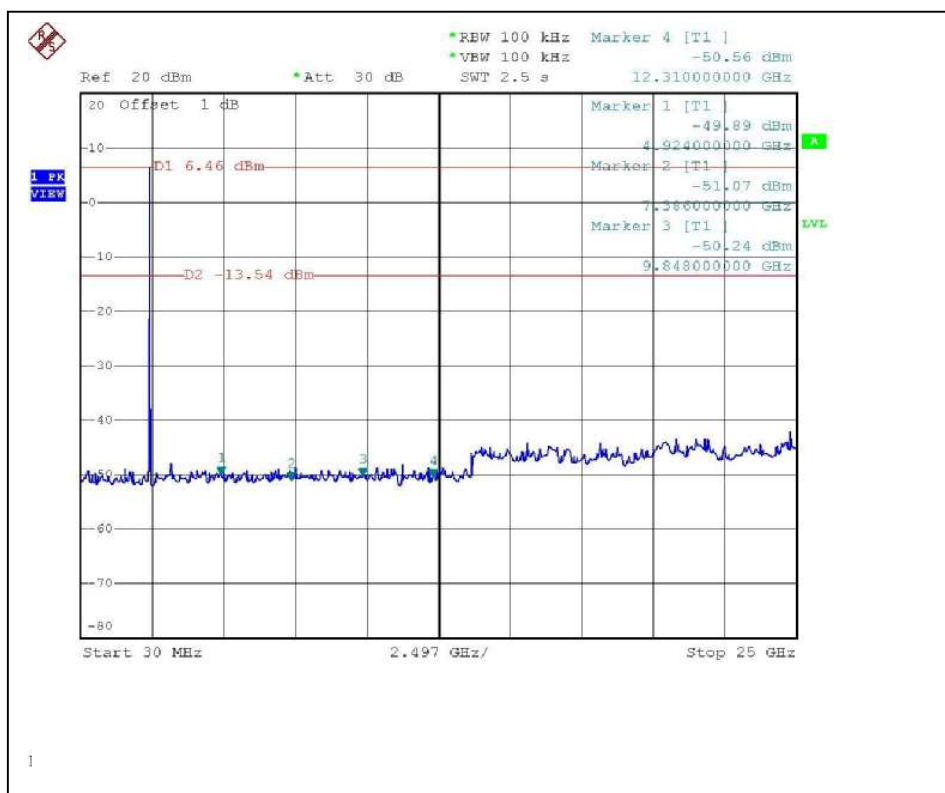

4.6.6 TEST RESULTS (ANTENNA 1 – OFDM)

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of OFDM technique on the following first page show 51.85dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 109.4dBuV/m, so the maximum field strength in restrict band is $109.4 - 51.85 = 57.55$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of OFDM technique on the following first page shows 50.89dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 106.7dBuV/m, so the maximum field strength in restrict band is $106.7 - 50.89 = 55.81$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of OFDM technique on the following second page shows 50.1dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 101.9dBuV/m, so the maximum field strength in restrict band is $101.9 - 50.1 = 51.80$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 49.13dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 99.6dBuV/m, so the maximum field strength in restrict band is $99.6 - 49.13 = 50.47$ dBuV/m which is under 54 dBuV/m limit.


CH1

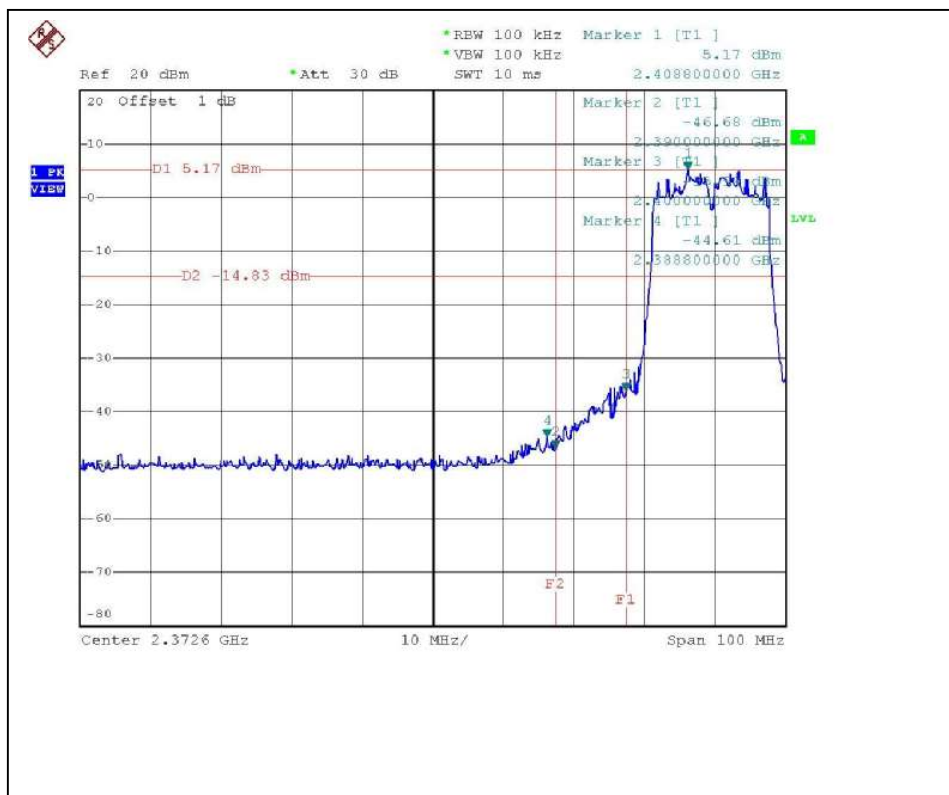


CH11

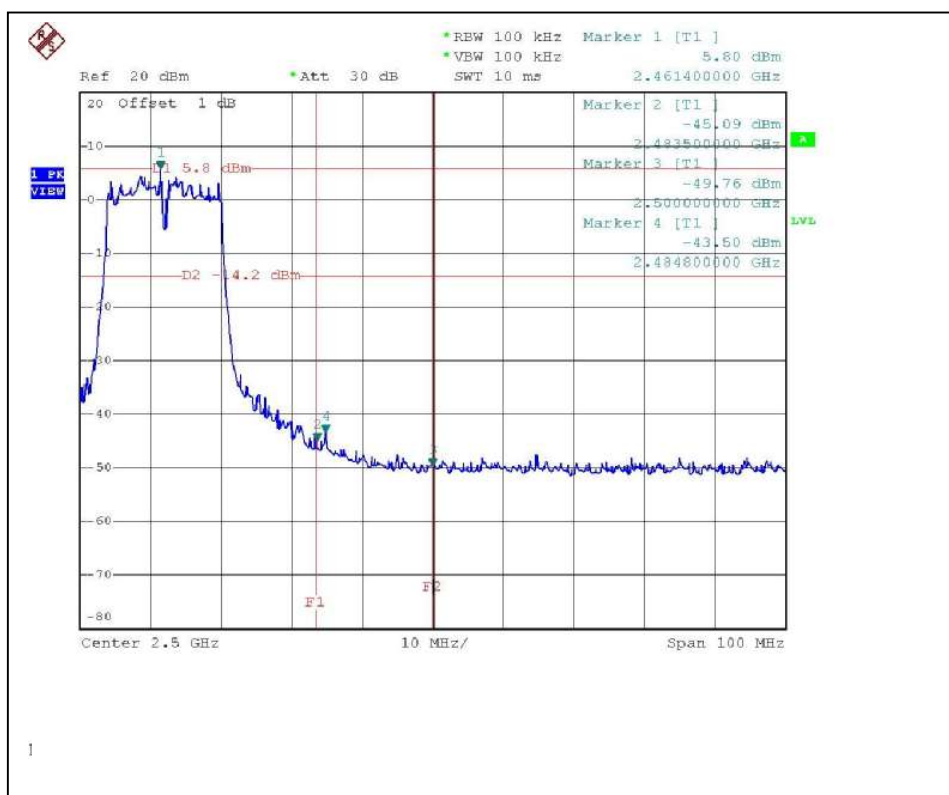


CH1

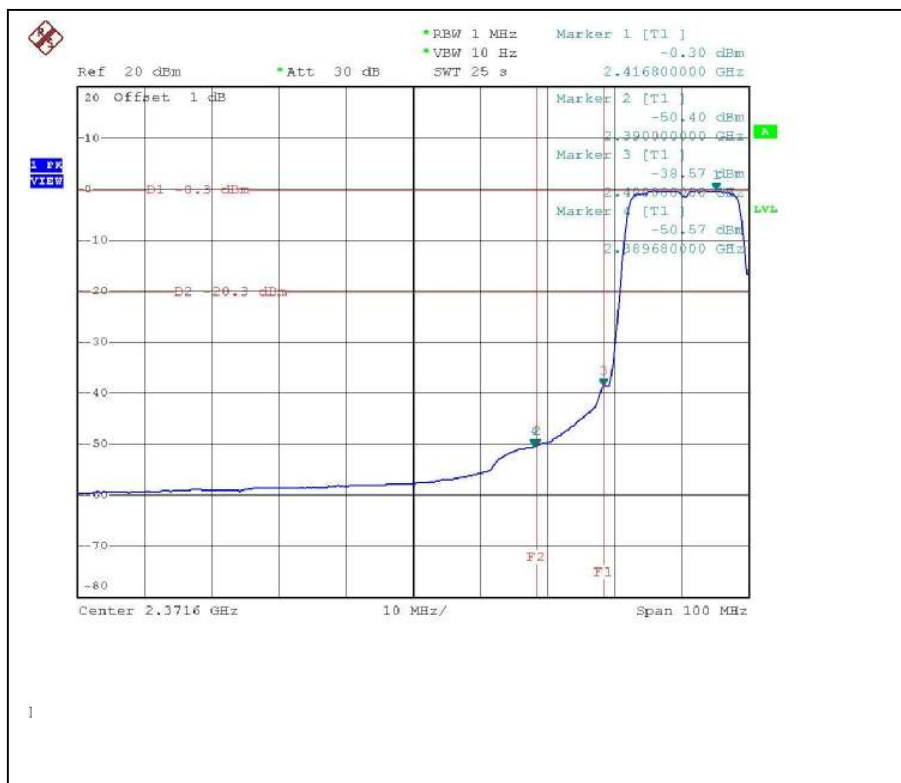


CH11

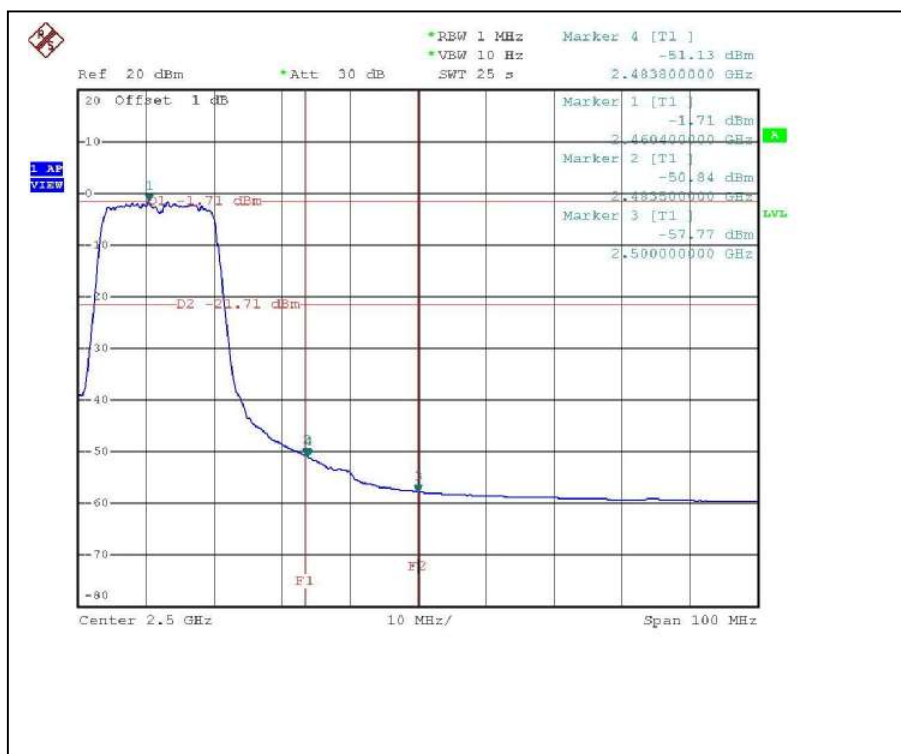

CH1

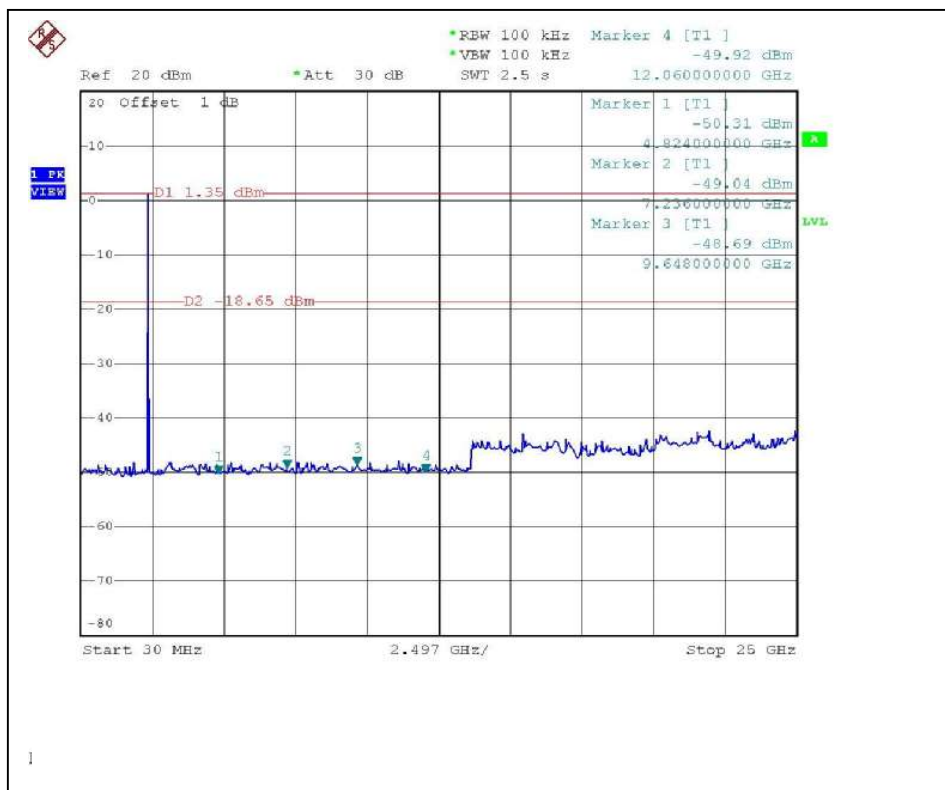

CH11

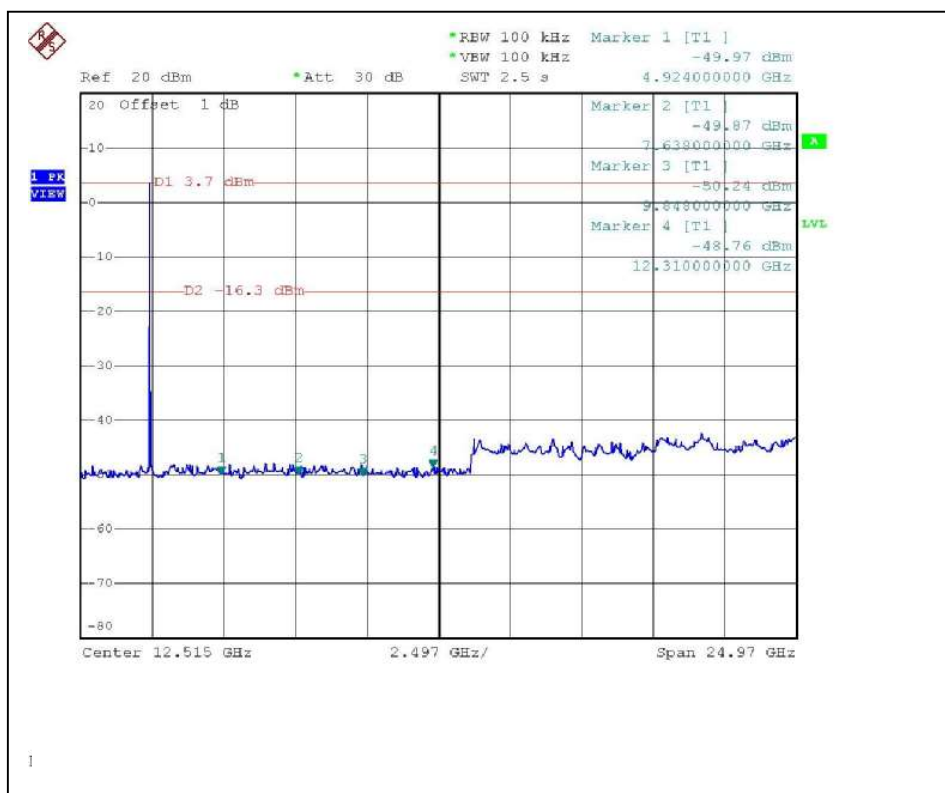

4.6.7 TEST RESULTS (ANTENNA 2 – DSSS)

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of DSSS technique on the following first page show 53.85dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 111.0dBuV/m, so the maximum field strength in restrict band is $111.0 - 53.85 = 57.15$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of DSSS technique on the following first page shows 52.37dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 110.1dBuV/m, so the maximum field strength in restrict band is $110.1 - 52.37 = 57.73$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of DSSS technique on the following second page shows 56.57dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 104.1dBuV/m, so the maximum field strength in restrict band is $104.1 - 56.57 = 47.53$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of DSSS technique on the following second page shows 55.0dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 103.3dBuV/m, so the maximum field strength in restrict band is $103.3 - 55.0 = 48.3$ dBuV/m which is under 54 dBuV/m limit.

CH1

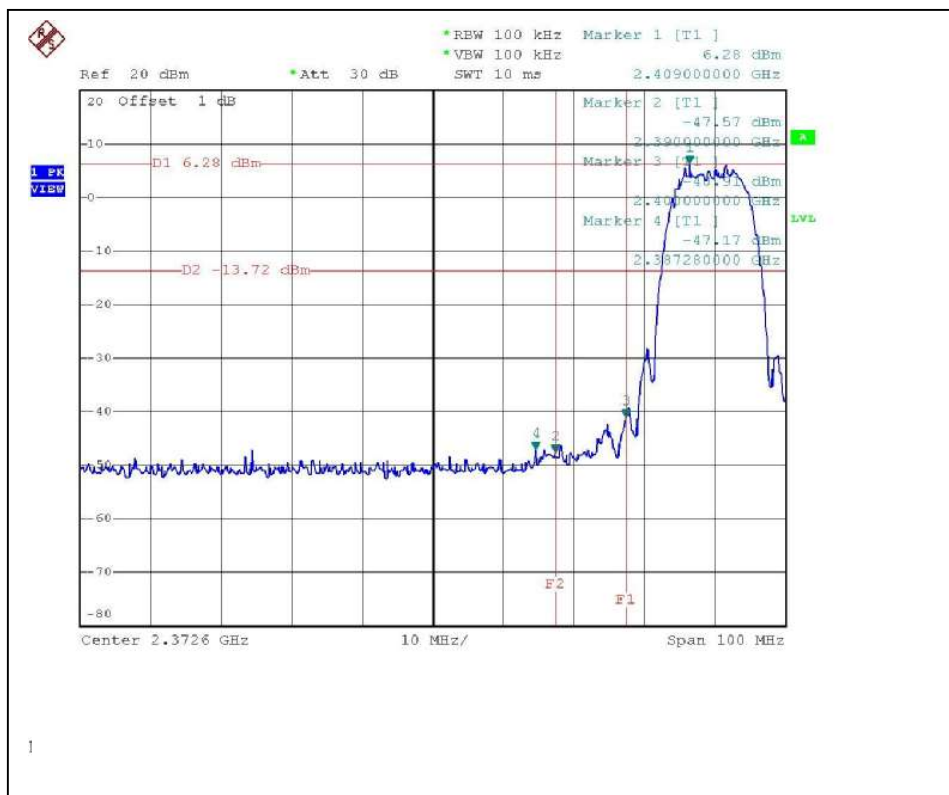


CH11

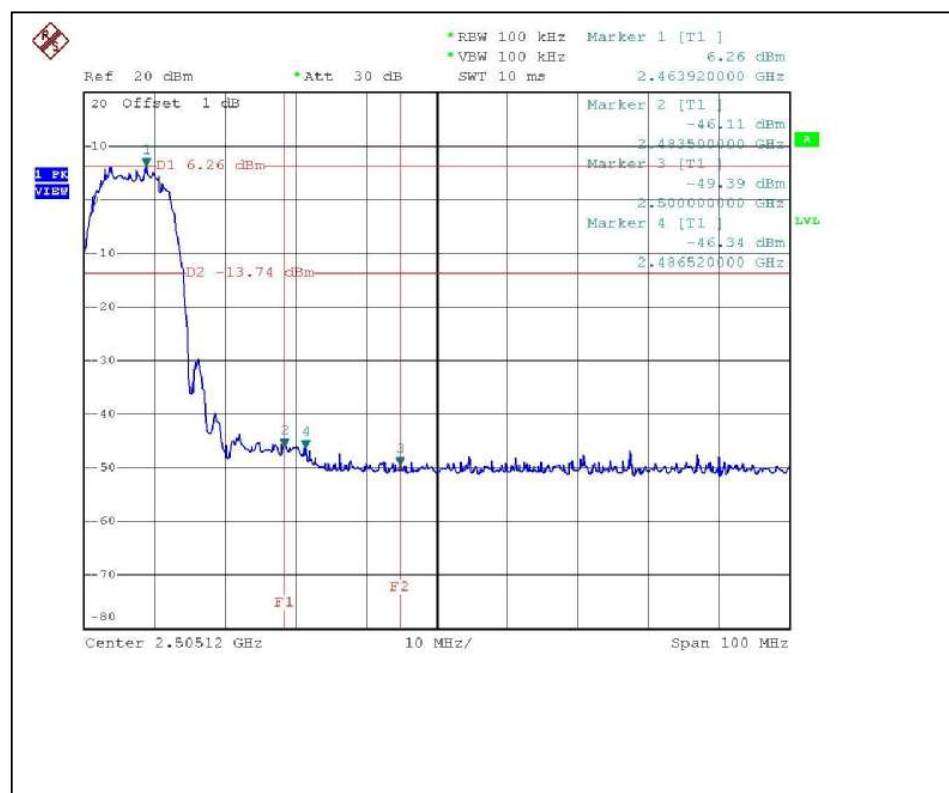


CH1




CH11

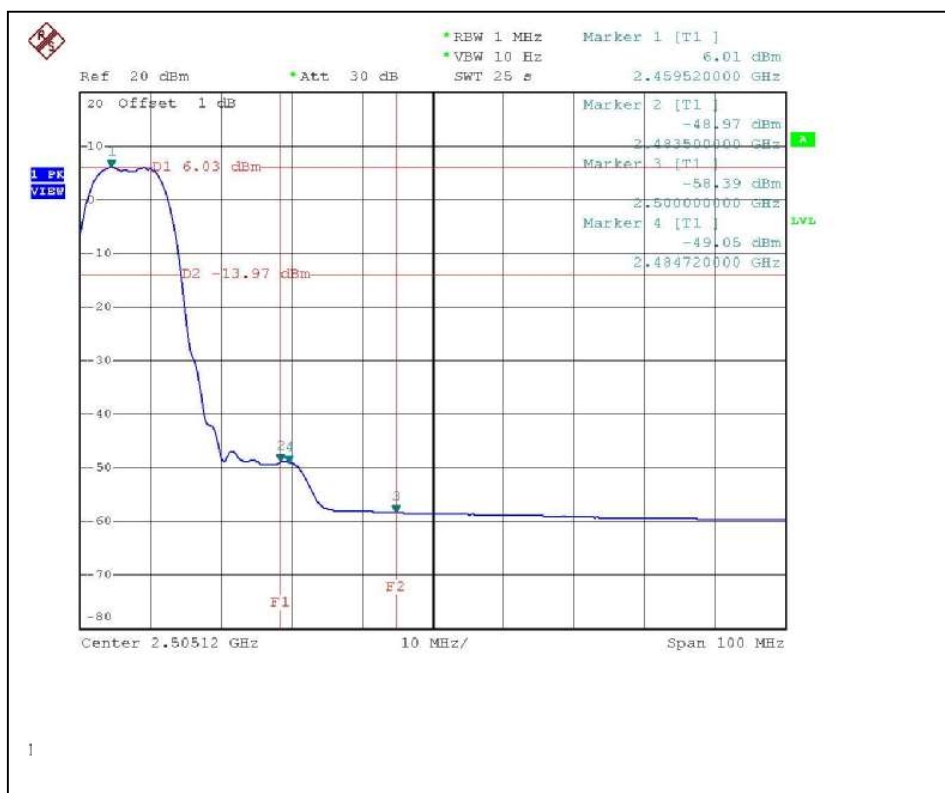

CH1

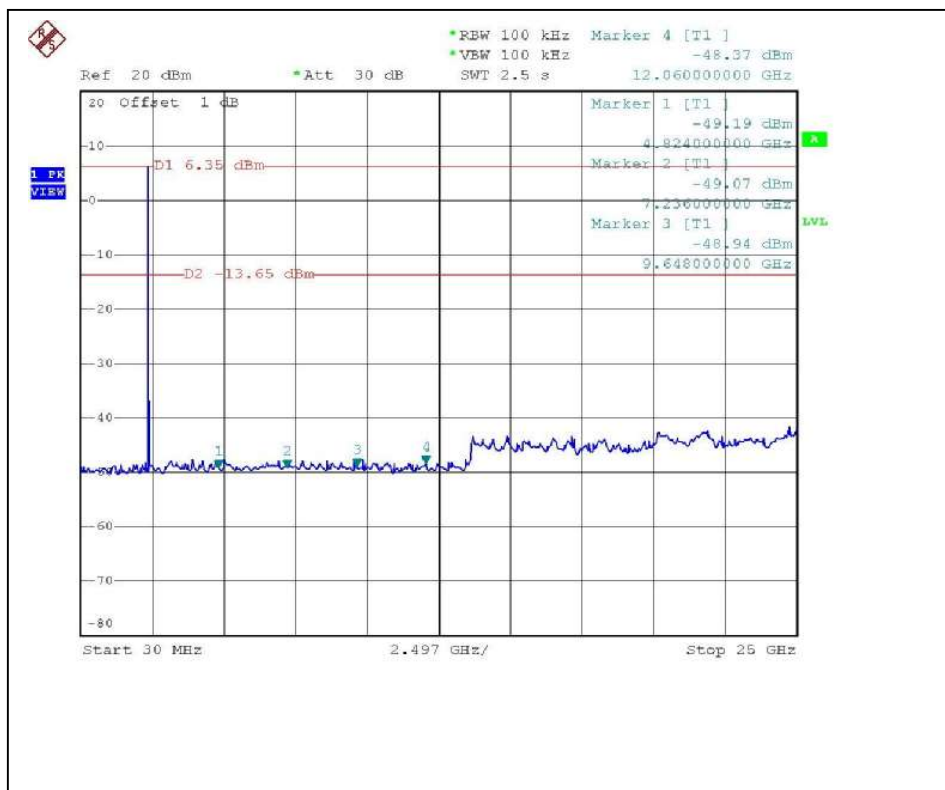

CH11

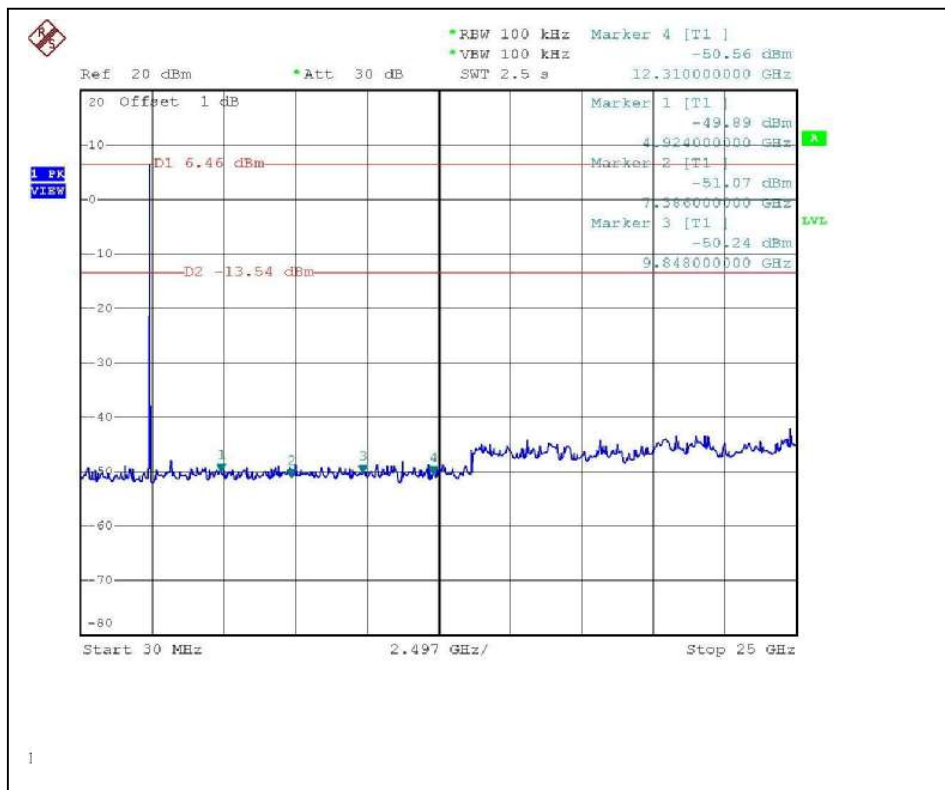

4.6.8 TEST RESULTS (ANTENNA 2 – OFDM)

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of OFDM technique on the following first page show 51.85dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 110.3dBuV/m, so the maximum field strength in restrict band is $110.3 - 51.85 = 58.45$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of OFDM technique on the following first page shows 50.89dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 107.6dBuV/m, so the maximum field strength in restrict band is $107.6 - 50.89 = 56.71$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of OFDM technique on the following second page shows 50.1dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 102.9dBuV/m, so the maximum field strength in restrict band is $102.9 - 50.1 = 52.80$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 49.13dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 100.6dBuV/m, so the maximum field strength in restrict band is $100.6 - 49.13 = 51.47$ dBuV/m which is under 54 dBuV/m limit.


CH1

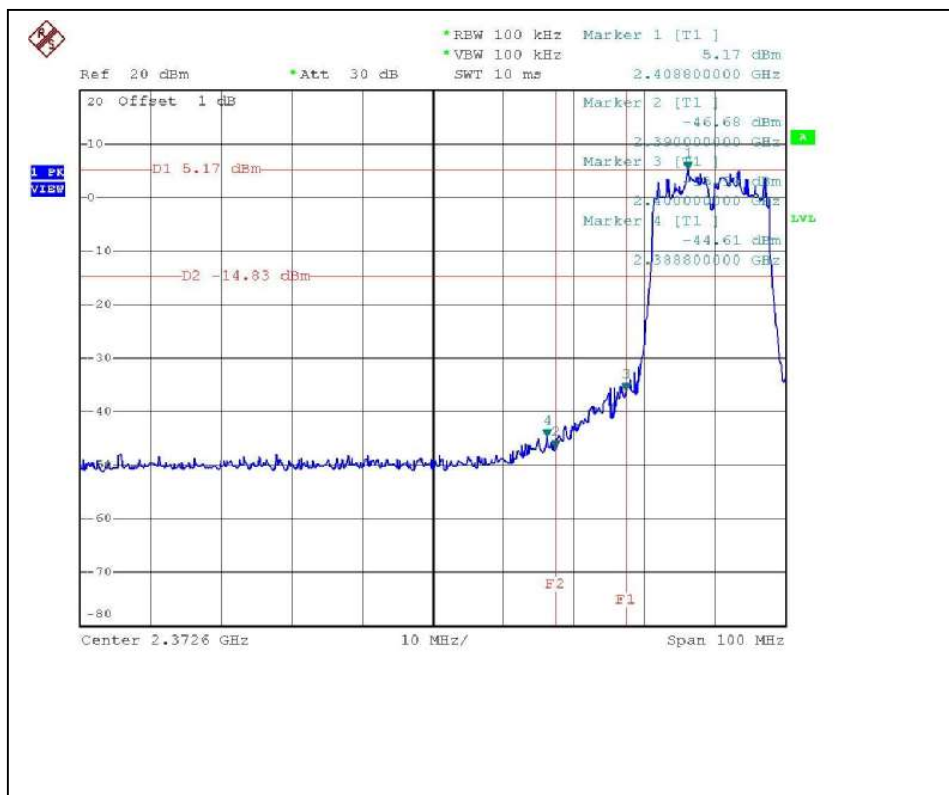


CH11

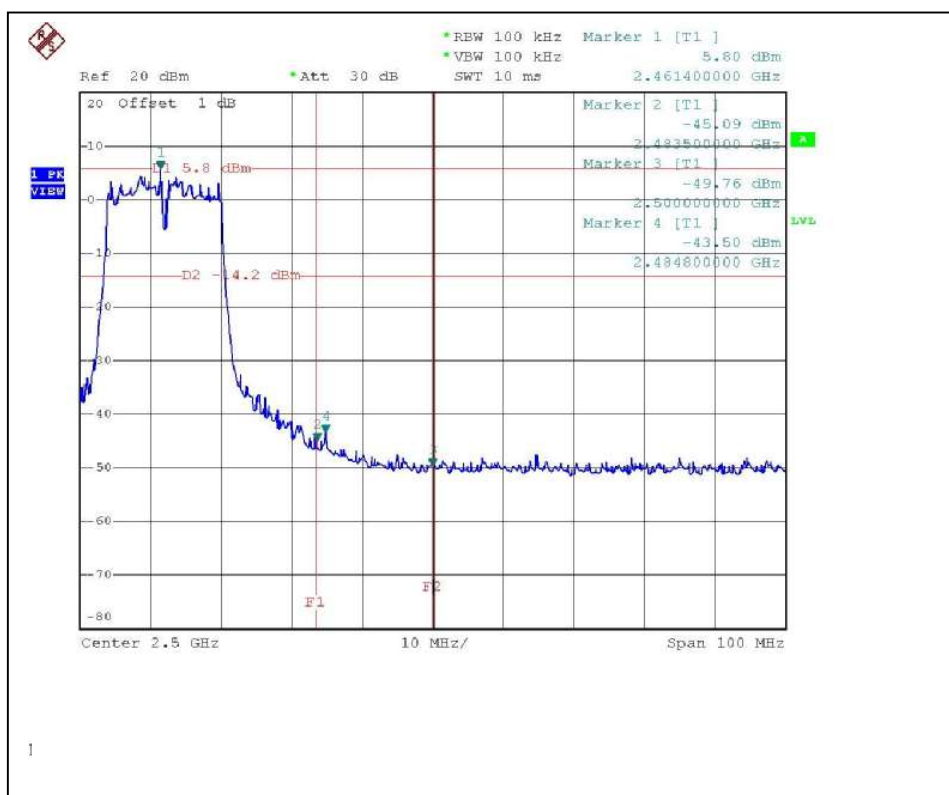


CH1

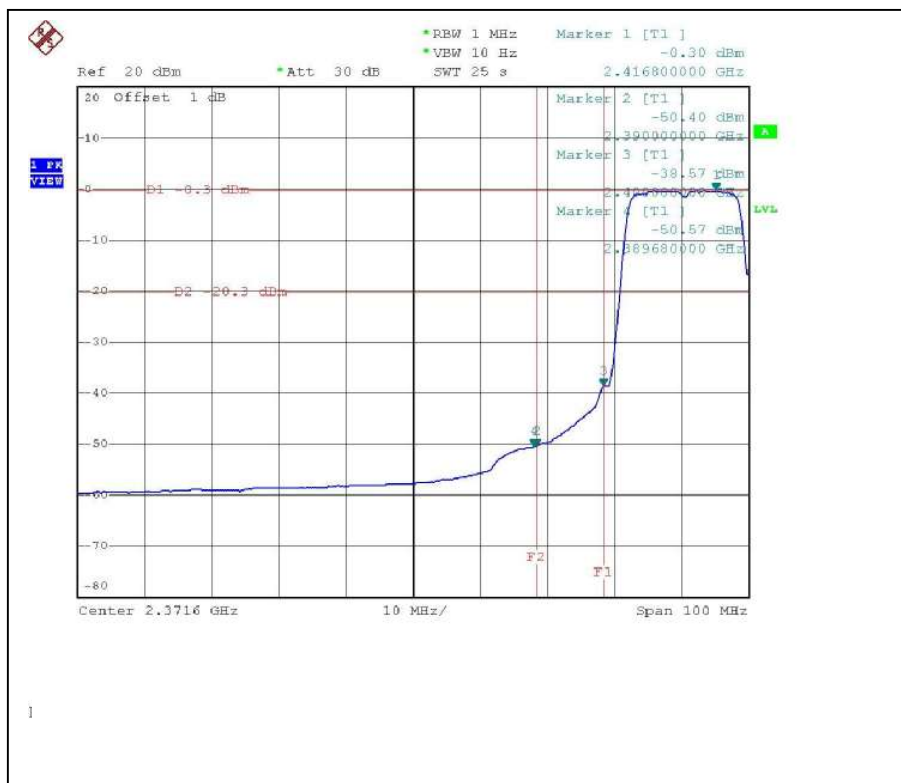


CH11

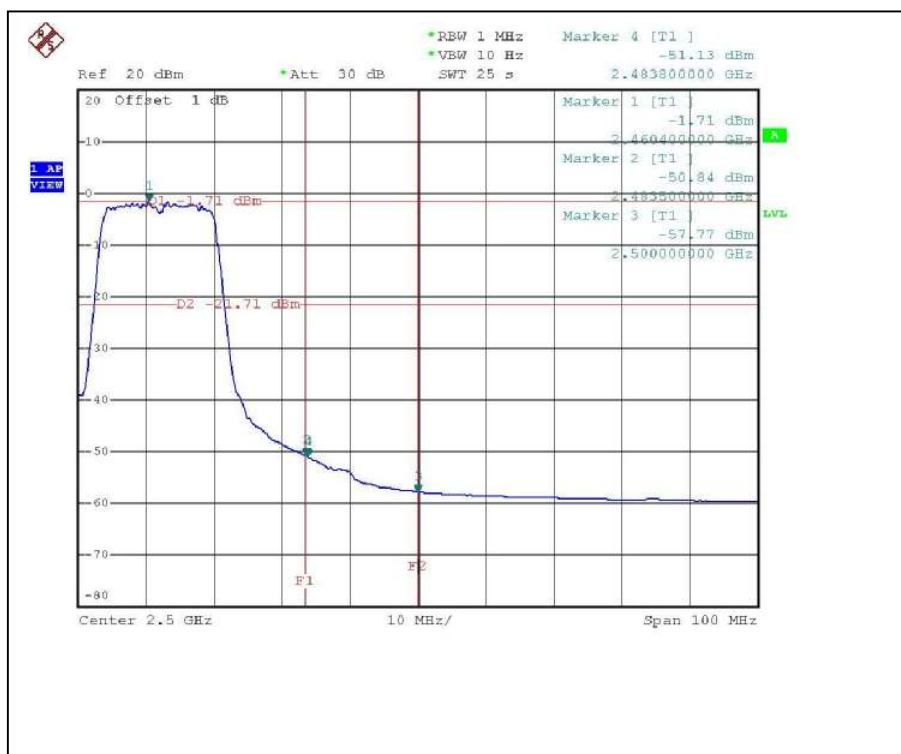

CH1

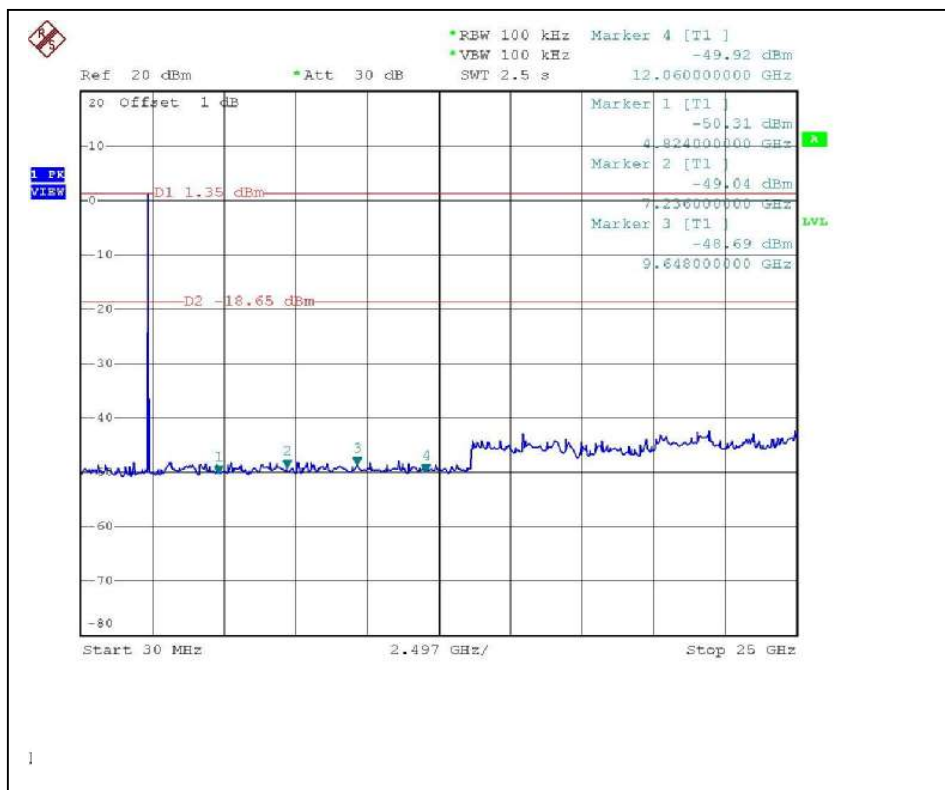

CH11

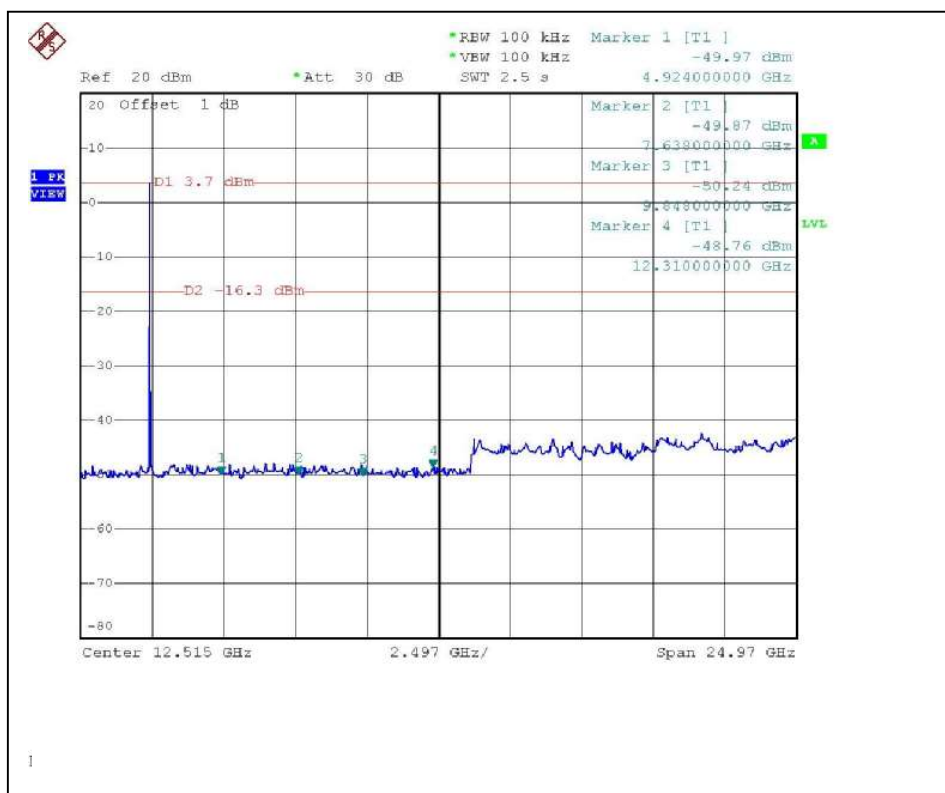

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product are printed antenna and PCB antenna with I-Pex connector. The maximum Gain of the antenna is 3.0dBi.

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.