



RF TEST REPORT

Product Name : Wireless-G Broadband Router With 4-Port Switch

Model Number : WRK54G V1.1

FCC ID : Q87-WRKG V11

Applicant : Cisco-Linksys, LLC

Address : 121 Theory Drive Irvine, CA 92612 (USA)

Received Date : October 22, 2004

Tested Date : October 22 ~ November 12, 2004

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to testing, and be invalid as seperately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the data issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.



**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing
Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 2 of 61

Test Report Certification

Product Name : Wireless-G Broadband Router With 4-Port Switch
Model Number : WRK54G V1.1
FCC ID : Q87-WRKG V11
Applicant : Cisco-Linksys, LLC

Measurement Standard :

FCC 47 C.F.R. Part 15, Subpart B and Subpart C (2004),
ANSI C63.4-2003

Tested By : Ken Tu, **Date** : November 16, 2004
(Ken Tu)

Approved By : Chieh-De Tsai, **Date** : November 16, 2004
(Chieh-De Tsai, Manager)



WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION	5
1.1 General Statement	5
1.2 General Description of EUT & Power	5
1.3 Description of Peripherals	6
1.4 EUT & Peripherals Setup Diagram	7
1.5 EUT Operating Condition	8
1.6 Description of Test Site	9
1.7 Summary of Test Results	9
2. CONDUCTED POWERLINE TEST	10
2.1 Test Equipments	10
2.2 Test Setup	10
2.3 Conducted Power Line Emission Limit	11
2.4 Test Procedure	11
2.5 Uncertainty of Conducted Emission	11
2.6 Conducted RF Voltage Measurement	12-17
2.7 Photos of Conduction Test	18
3. RADIATED EMISSION TEST	19
3.1 Test Equipments	19
3.2 Test Setup	19
3.3 Radiation Limit	20
3.4 Test Procedures	21
3.5 Uncertainty of Radiated Emission	21
3.6 Radiated RF Noise Measurement	22-40
3.7 Photos of Open Site	41-42
4. 6dB BANDWIDTH MEASUREMENT	43
4.1 Test Equipments	43
4.2 Test Setup	43
4.3 Limits of 6dB Bandwidth Measurement	43
4.4 Test Procedure	43
4.5 Uncertainty of Conducted Emission	43
4.6 Test Results	44
4.7 Photo of 6db Bandwidth Measurement	45-46



TABLE OF CONTENTS

TITLE	PAGE NO.
5. MAXIMUM PEAK OUTPUT POWER	47
5.1 Test Equipments.....	47
5.2 Test Setup.....	47
5.3 Limits of Maximum Peak Output Power	47
5.4 Test Procedure.....	48
5.5 Uncertainty of Conducted Emission	48
5.6 Test Results	48
6. POWER SPECTRAL DENSITY MEASUREMENT	49
6.1 Test Equipments.....	49
6.2 Test Setup.....	49
6.3 Limits of Power Spectral Density Measurement.....	49
6.4 Test Procedure.....	50
6.5 Uncertainty of Conducted Emission	50
6.6 Test Results	50
6.7 Photo of Power Spectral Density Measurement.....	51-52
7. BAND EDGE MEASUREMENT	53
7.1 Test Equipments.....	53
7.2 Test Setup.....	53
7.3 Limits of Out of Band Emissions Measurement	53
7.4 Test Procedure.....	53
7.5 Uncertainty of Conducted Emission	53
7.6 Test Results	54
7.7 Photo of Band Edge Measurement.....	55-58
8. ANTENNA REQUIREMENT	59
8.1 Standard Applicable	59
8.2 Antenna Connected Construction	59
9. RF EXPOSURE EVALUATION	60
9.1 Friis Formula.....	60
9.2 EUT Operating Condition	60
9.3 Test Result of RF Exposure Evaluation	61
9.3.1 Antenna Gain	61
9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance	61

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 5 of 61

1. GENERAL INFORMATION

1.1 General Statement

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to National or International std.

1.2 General Description of EUT & Power

Product Name	Wireless-G Broadband Router With 4-Port Switch
Model Number	WRK54G V1.1
Frequency Range	2400MHz to 2483.5MHz
Frequency Channel	2412MHz + 5×n (MHz), n=0, 1, 2,.....10
Channel Number	11
Channel Spacing	5MHz
Air Data Rate	11Mbps(802.11b Mode), 54Mbps(802.11g Mode)
Type of Modulation	802.11b : DSSS(CCK, DQPSK, DBPSK) 802.11g : OFDM(64QAM, 16AQM, QPSK, BPSK)
Frequency Selection	by software / firmware
Transmitter Classification	Mobile device
EUT Description	2.4GHz (Direct Sequence Spread Spectrum and Orthogonal Frequency Division Multiplex) Data Transceiver for WLAN application
Antenna Type	Dipole Antenna, Antenna gain : 3.3dBi
Power Source	12VDC (From Power Adapter)

Power Adapter :

Power Adapter	Manufacturer	Model No.	Power Input	Power Output
1	HON-KWANG ELECTRIC CO., LTD.	D12-1A	120VAC	12VDC, 1A
2	Global Yeou Diann Elec. Ind. co., Ltd.	AM-1201000D41	120VAC	12VDC, 1A
3	LEADER ELECTRONICS INC	411210003CT	120VAC	12VDC, 1A



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing
Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 6 of 61

1.3 Description of Peripherals

(1) PC

MANUFACTURER : HP CORP.
MODEL NUMBER : VECTRA VEI8DT
SERIAL NUMBER : SG1202412
FCC : DOC

(2) PC

MANUFACTURER : HP CORP.
MODEL NUMBER : VECTRA VEI8DT
SERIAL NUMBER : SG1202415
FCC : DOC

(3) PC

MANUFACTURER : HP CORP.
MODEL NUMBER : VECTRA VEI8DT
SERIAL NUMBER : SG1202416
FCC : DOC


(4) Notebook PC

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : N800V
SERIAL NUMBER : 5Y33KSQZMOYL
FCC : DOC
POWER CORD : Unshielded, Detachable, 1.8m

(5) CABLE

	Type	Connector	shielded	Length
(A)	Cat5 twisted-pair	RJ-45, Plastic	NO	15m

1.4 EUT & Peripherals Setup Diagram

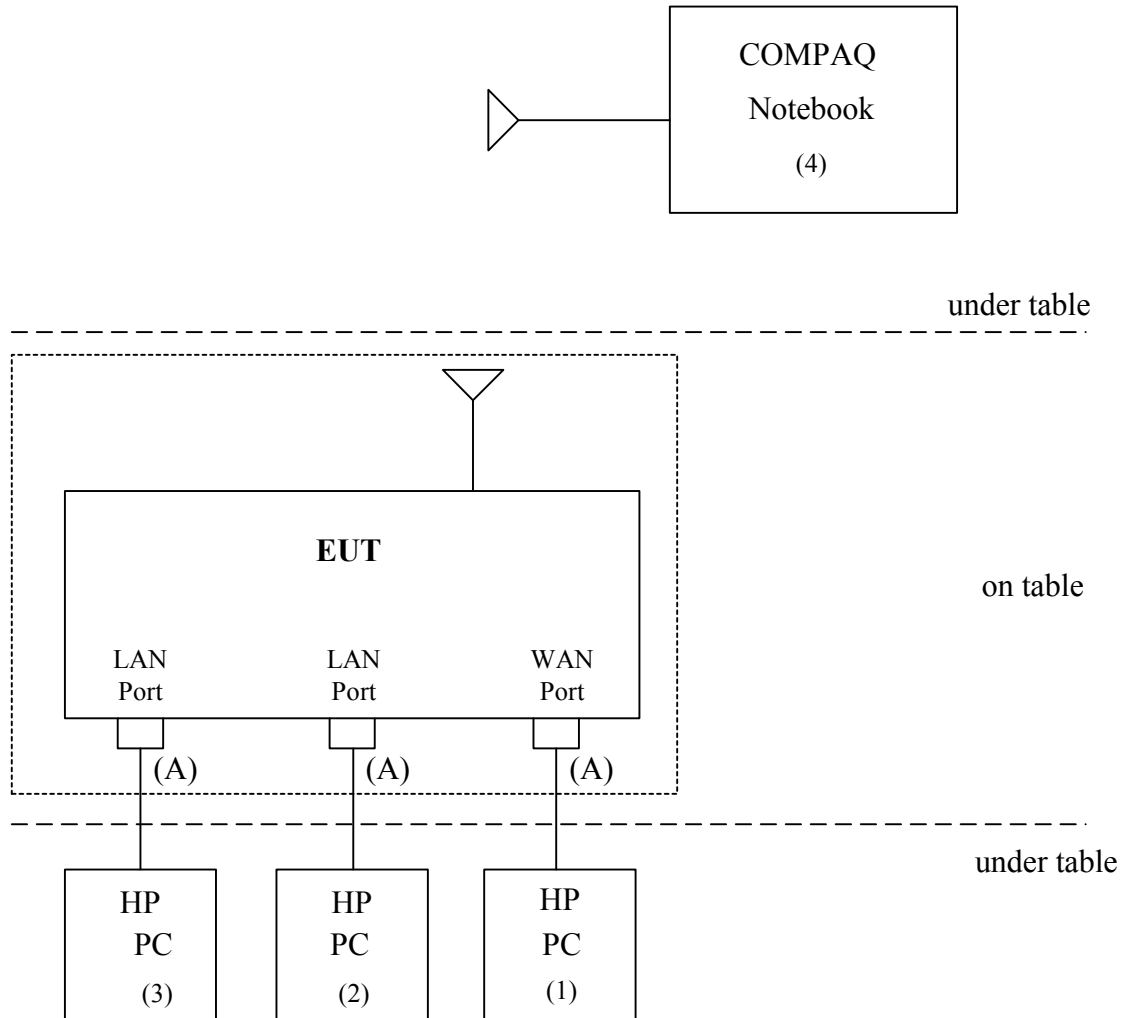

The indicated numbers (1)(2)..., (A), please refer to item 1.3



1.5 EUT Operating Condition

- (1) Ping EUT IP address.
- (2) Paste the IP address to the files "setup.ini".
- (3) Open the software "DutApi_AP_Gp.exe".
- (4) Tx mode
 - ① Command 78 to start test
 - ② Command 12 to set channel
 - ③ Command 13 to set data rate
 - ④ Command 22 to set b mode power
 - ⑤ Command 16 14 0 1 to set g mode power
 - ⑥ Command 17 1 to set Continuous Tx mode
- (5) Rx mode
 - ① Command 78 to start test
 - ② Command 12 to set Channel
 - ③ Command 13 to set data rate
 - ④ Command 31 1 to set Rx test

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKGV11

Report No. : ER04-10-064FRF

Page 9 of 61

1.6 Description of Test Site

SITE DESCRIPTION :

FCC Certificate NO. : 90585
BSMI Certificate NO. : SL2-IN-E-0002
NVLAP Lab Code : 200118-0
CNLA Certificate NO. : CNLA-ZL97018
VCCI Certificate NO. : R-1229, C-1250
TÜV Rheinland Certificate NO. : 10008375

NAME OF SITE : Ecom Sertech Corp. Hsin-Chu Lab.
(Spin-off from ITRI / ERSO on Apr. 01, 2003)

SITE LOCATION : Rm.258, Bldg.17, NO.195 , Sec. 4, Chung Hsing Rd.,
Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.

1.7 Summary of Test Results

The EUT has been tested according to the following specifications :

APPLIED STANDARD : FCC 47 C.F.R. Part 15, Subpart B and Subpart C			
Standard Section	Test Item and Limit	Result	REMARK
15.107 15.207	AC Power Conducted Emission Limit : 15.107	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Orthogonal Frequency Division Multiplex System Limit : 6dB bandwidth > 500KHz	PASS	Meet the requirement of limit
15.247(b)(3)	Maximum Peak Output Power Limit : max. 30dBm	PASS	Meet the requirement of limit
15.109 15.205 15.209	Transmitter Radiated Emissions Limit : Table 15.209	PASS	Meet the requirement of limit
15.247(e)	Power Spectral Density Limit : max. 8dBm	PASS	Meet the requirement of limit
15.247(d)	Out of Band Emission and Restricted Band Radiation Limit:20dB less than peak value of fundamental frequency Restricted band Limit:Table 15.209	PASS	Meet the requirement of limit



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKGV11

Report No. : ER04-10-064FRF

Page 10 of 61


2. CONDUCTED POWERLINE TEST

2.1 Test Equipments

The following test equipments are used during the conducted powerline tests :

Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
HP SPECTRUM ANALYZER & DISPLAY	8594E	3801A05627	April 26, 2004	1 Year	PRETEST
SOLAR ISOLATION TRANSFORMER	7032-1	N/A	N/A	N/A	FINAL
EMCO L.I.S.N.	3850/2	9311-1025 9401-1028	January 08, 2004 For Characteristic impedance	1 Year	FINAL
			May 18, 2004 For Insertion loss		
R & S TEST RECEIVER	ESHS30	838550/003	February 11, 2004	1 Year	FINAL
KEENE SHIELDED ROOM	5983	No.1	N/A	N/A	FINAL
R & S PULSE LIMIT	EHS3Z2	357.8810.52	July 10, 2004	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	July 10, 2004	1 Year	FINAL
50Ω TERMINATOR	-----	-----	July 10, 2004	1 Year	FINAL

2.2 Test Setup

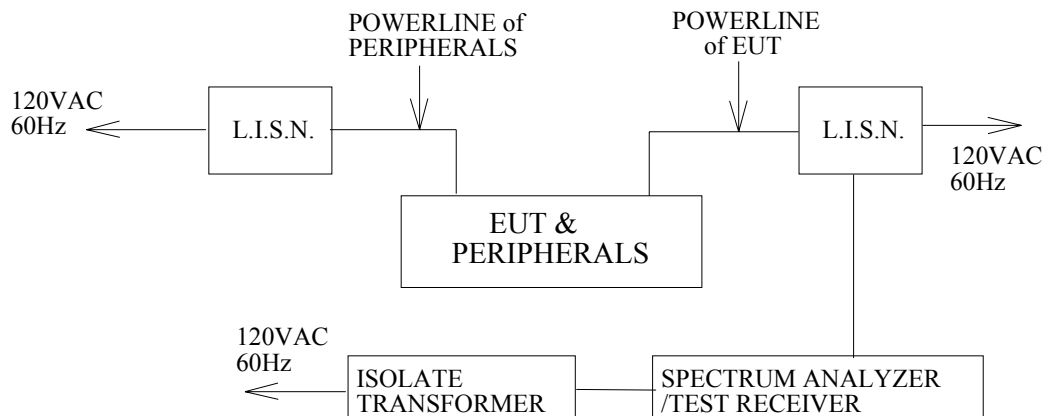

2.3 Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ v)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to § 15.207(a) Line Conducted Emission Limit is same as above table.

2.4 Test Procedure

The test procedure is performed in a 12ft×12ft×8ft(L×W×H) shielded room.

The EUT along with its peripherals were placed on a 1.0m(W)× 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.36 dB.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF


Page 12 of 61

2.6 Conducted RF Voltage Measurement

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Cisco-Linksys, LLC	Test Date	2004/11/05
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	25°C, 60%

LINE

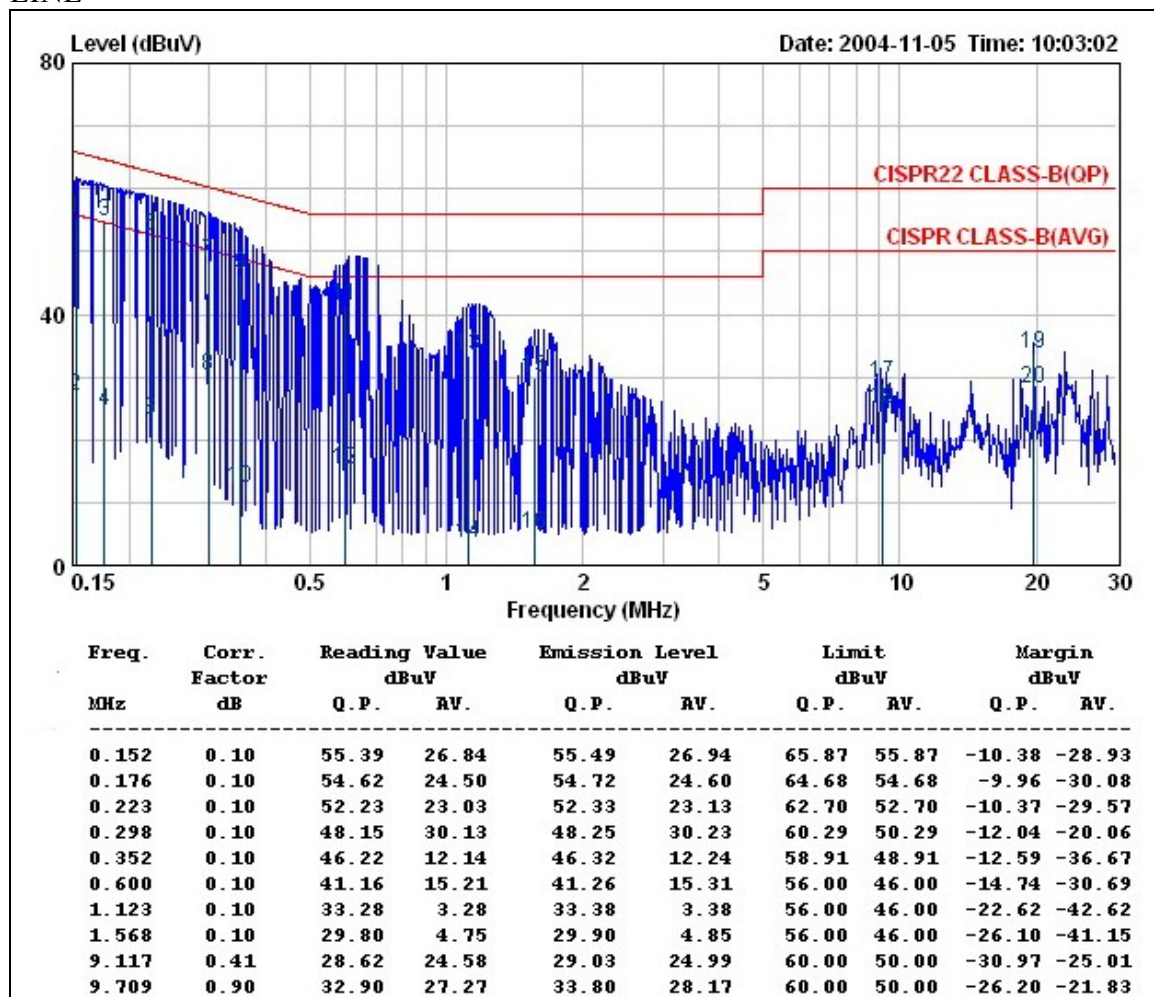

- REMARKS :
1. Correction Factor = Insertion loss + cable loss
 2. Margin value = Emission level – Limit value
 3. The EUT was set to be normal operation condition. Each Ethernet port was connected and data payload was transmitted at highest data rate. The RF chip can be operated in 802.11g and 802.11b mode. The rf chip will detect the environment and select the proper mode automatically. The WLAN function was set to normal operation condition.
 4. For Power Adapter (1) : HON-KWANG / D12-1A



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11


Report No. : ER04-10-064FRF

Page 13 of 61

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Cisco-Linksys, LLC	Test Date	2004/11/05
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	25°C, 60%

NEUTRAL

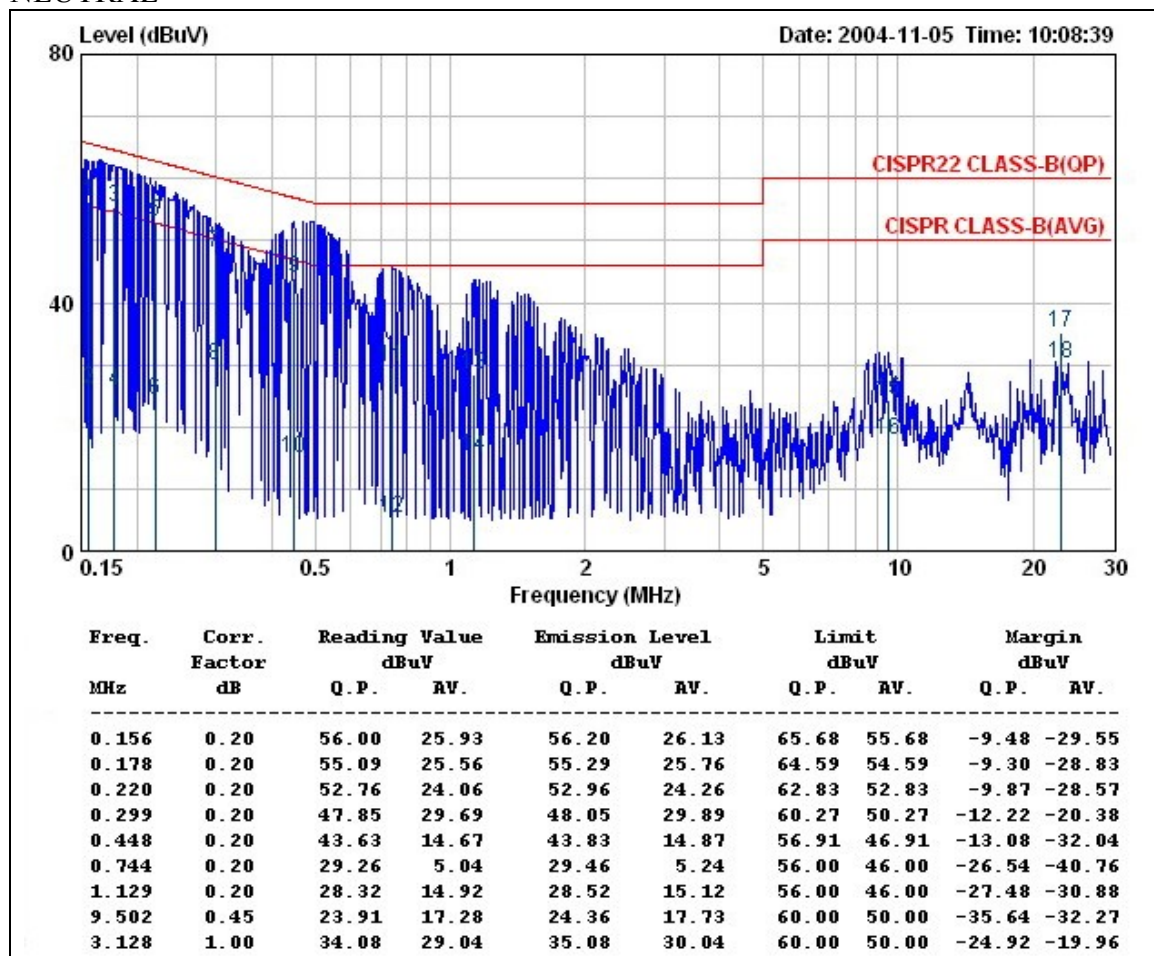

- REMARKS :
1. Correction Factor = Insertion loss + cable loss
 2. Margin value = Emission level – Limit value
 3. The EUT was set to be normal operation condition. Each Ethernet port was connected and data payload was transmitted at highest data rate. The RF chip can be operated in 802.11g and 802.11b mode. The rf chip will detect the environment and select the proper mode automatically. The WLAN function was set to normal operation condition.
 4. For Power Adapter (1) : HON-KWANG / D12-1A



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11


Report No. : ER04-10-064FRF

Page 14 of 61

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Cisco-Linksys, LLC	Test Date	2004/11/05
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	25°C, 60%

LINE

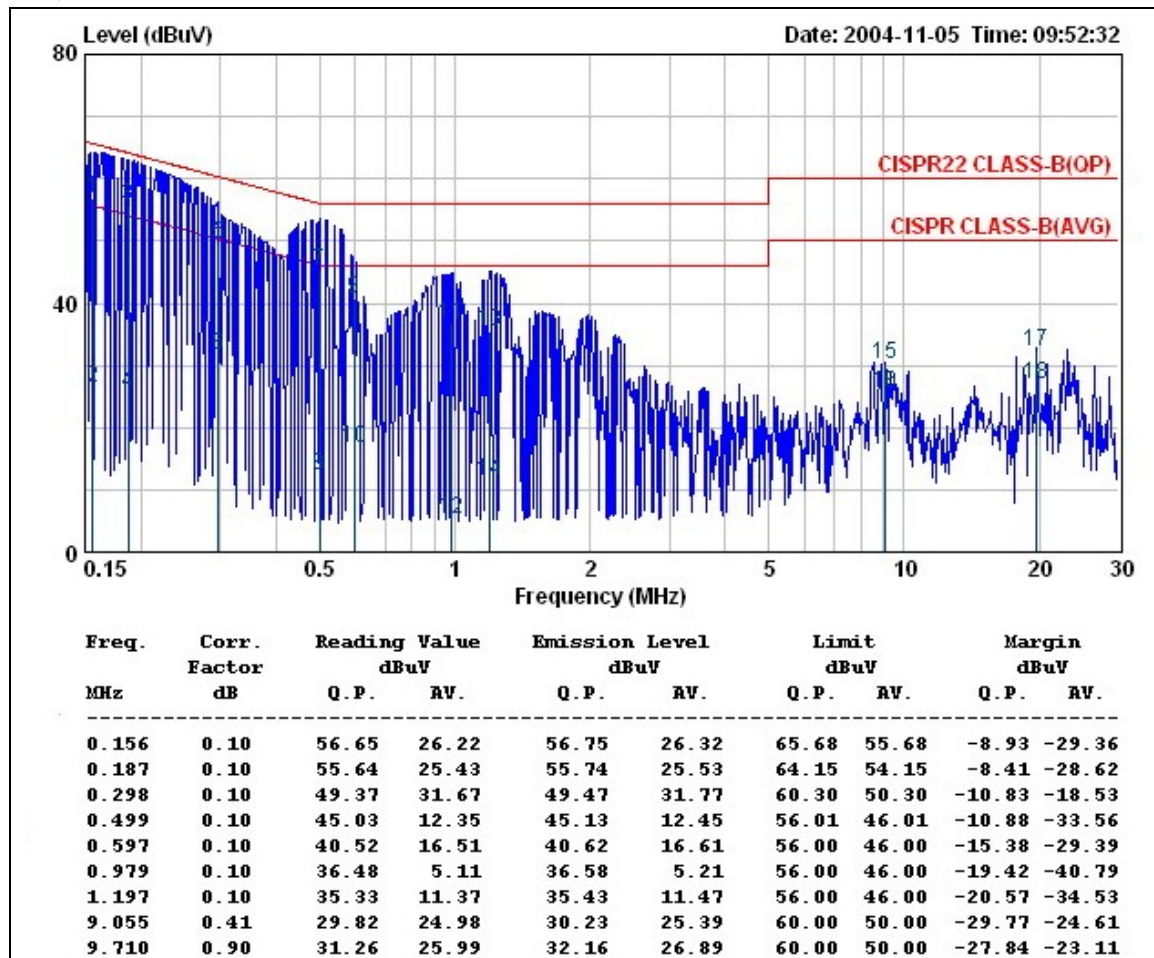

- REMARKS :
1. Correction Factor = Insertion loss + cable loss
 2. Margin value = Emission level – Limit value
 3. The EUT was set to be normal operation condition. Each Ethernet port was connected and data payload was transmitted at highest data rate. The RF chip can be operated in 802.11g and 802.11b mode. The rf chip will detect the environment and select the proper mode automatically. The WLAN function was set to normal operation condition.
 4. For Power Adapter (2) : Global Yeou Diann / AM-1201000D41



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11


Report No. : ER04-10-064FRF

Page 15 of 61

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Cisco-Linksys, LLC	Test Date	2004/11/05
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	25°C, 60%

NEUTRAL

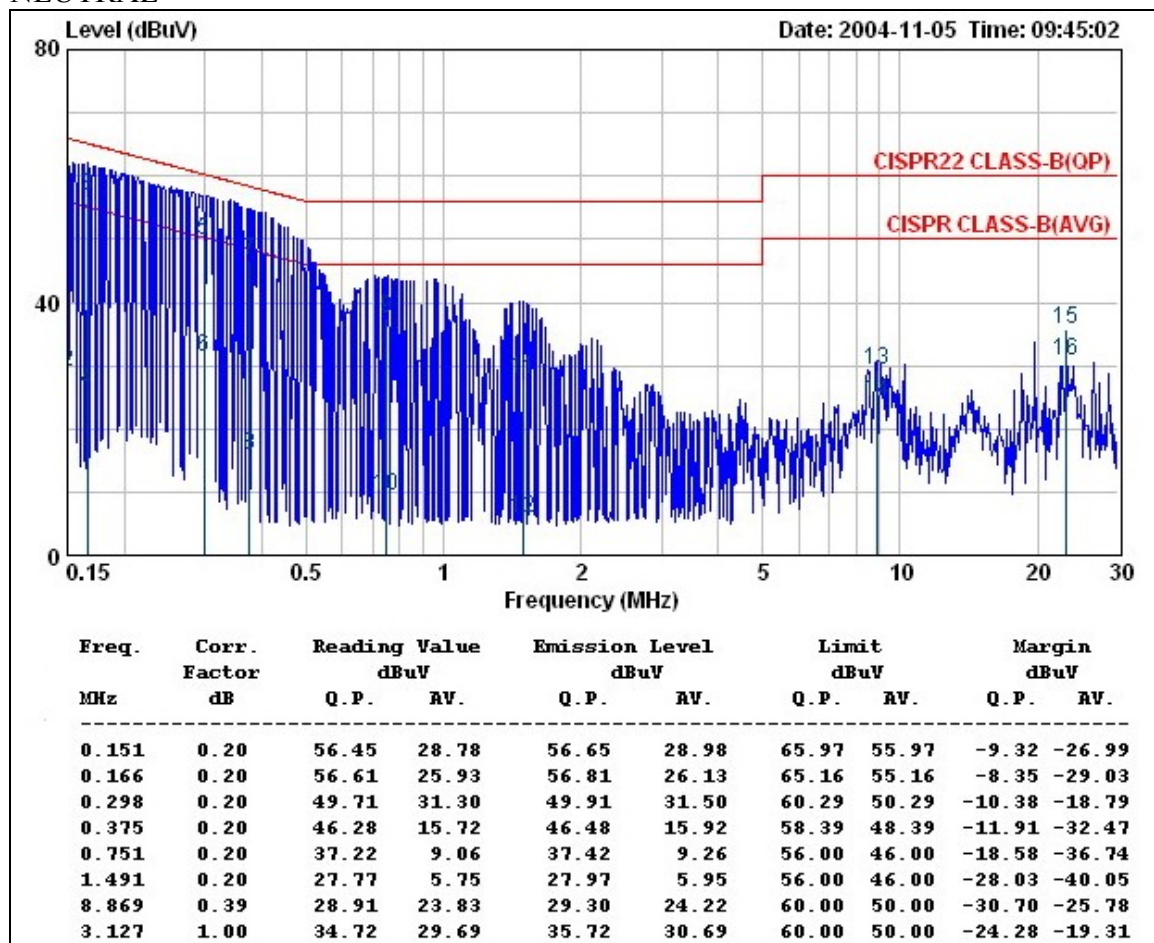

- REMARKS :
1. Correction Factor = Insertion loss + cable loss
 2. Margin value = Emission level – Limit value
 3. The EUT was set to be normal operation condition. Each Ethernet port was connected and data payload was transmitted at highest data rate. The RF chip can be operated in 802.11g and 802.11b mode. The rf chip will detect the environment and select the proper mode automatically. The WLAN function was set to normal operation condition.
 4. For Power Adapter (2) : Global Yeou Diann / AM-1201000D41



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11


Report No. : ER04-10-064FRF

Page 16 of 61

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Cisco-Linksys, LLC	Test Date	2004/11/05
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	25°C, 60%

LINE

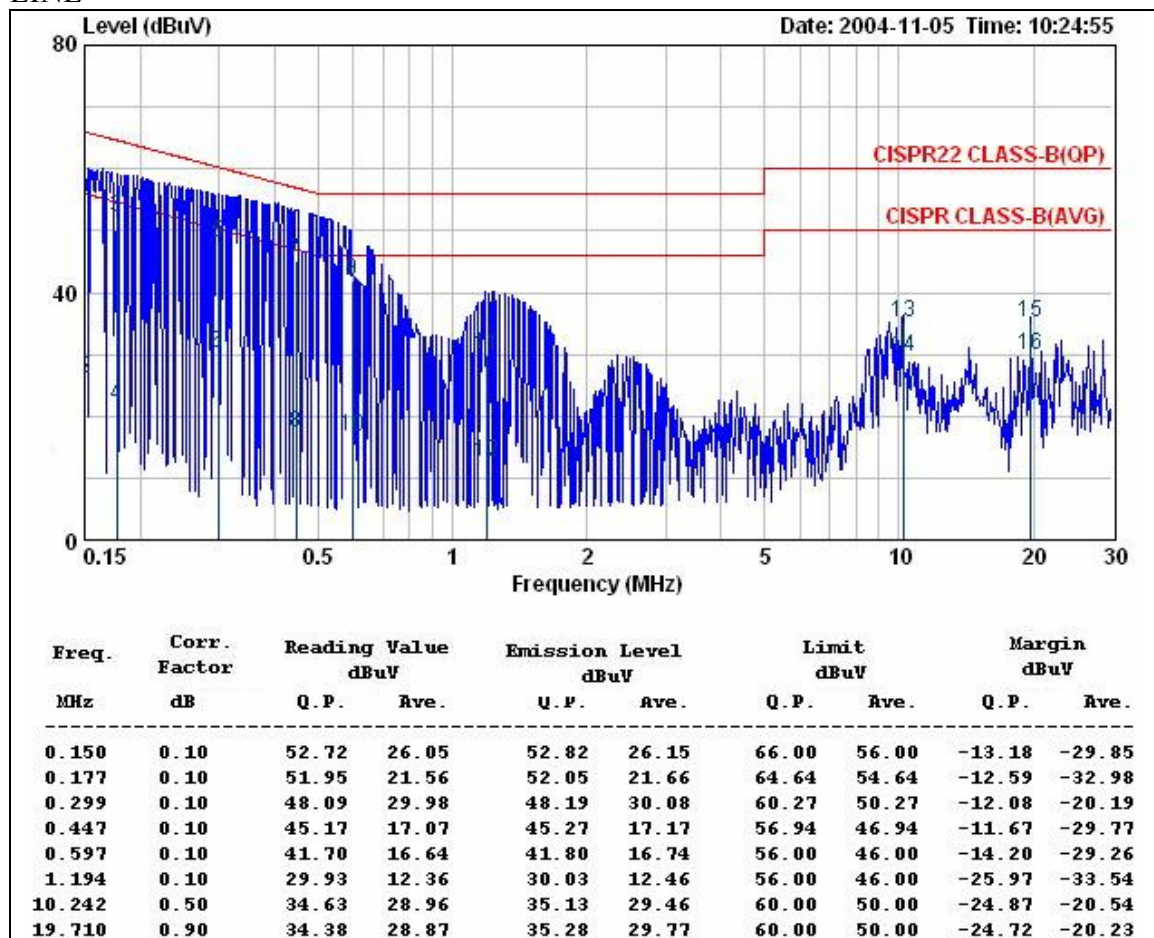

- REMARKS :
1. Correction Factor = Insertion loss + cable loss
 2. Margin value = Emission level - Limit value
 3. The EUT was set to be normal operation condition. Each Ethernet port was connected and data payload was transmitted at highest data rate. The RF chip can be operated in 802.11g and 802.11b mode. The rf chip will detect the environment and select the proper mode automatically. The WLAN function was set to normal operation condition.
 4. For Power Adapter (3) : LEADER / 411210003CT



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11


Report No. : ER04-10-064FRF

Page 17 of 61

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Cisco-Linksys, LLC	Test Date	2004/11/05
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	25°C, 60%

NEUTRAL

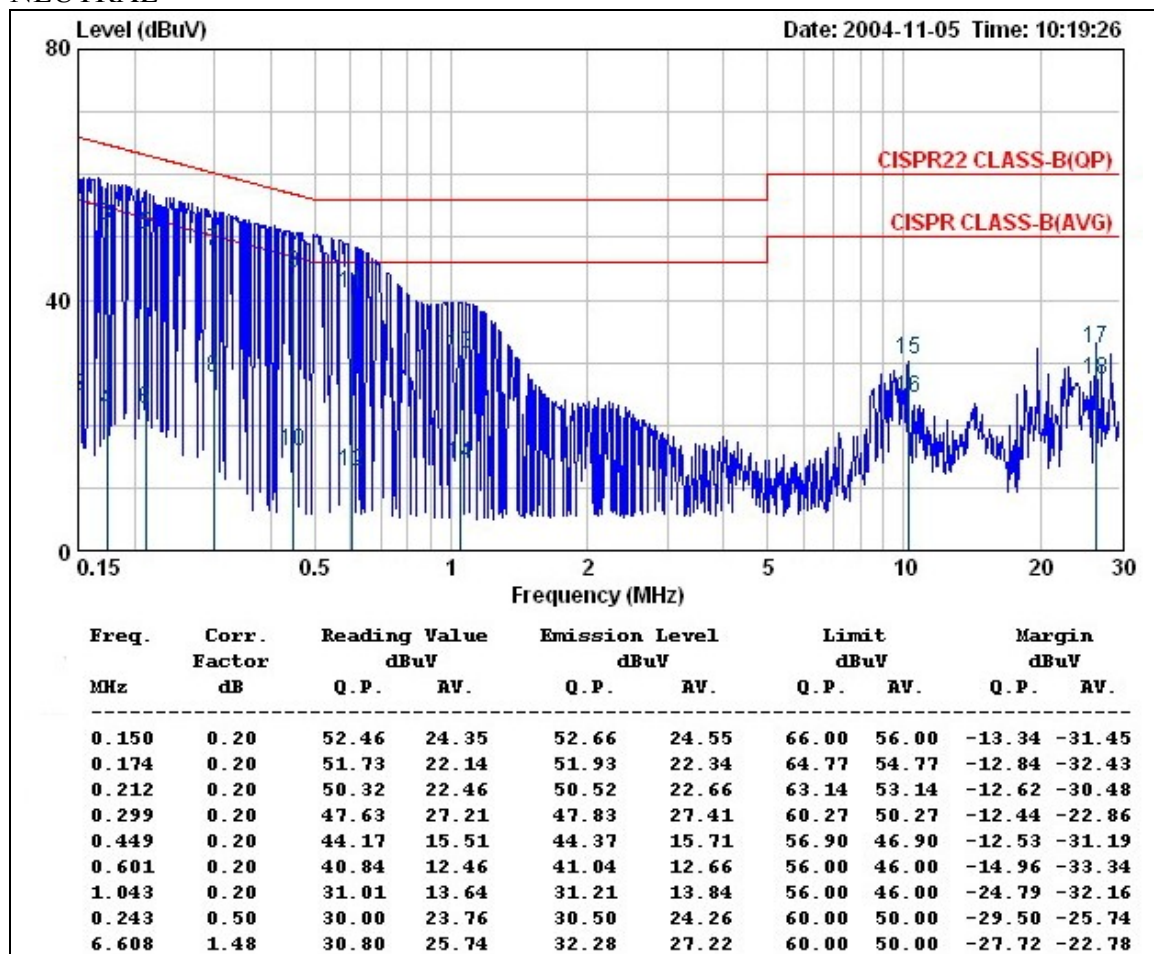

- REMARKS :
1. Correction Factor = Insertion loss + cable loss
 2. Margin value = Emission level – Limit value
 3. The EUT was set to be normal operation condition. Each Ethernet port was connected and data payload was transmitted at highest data rate. The RF chip can be operated in 802.11g and 802.11b mode. The rf chip will detect the environment and select the proper mode automatically. The WLAN function was set to normal operation condition.
 4. For Power Adapter (3) : LEADER / 411210003CT

2.7 Photos of Conduction Test



3. RADIATED EMISSION TEST


3.1 Test Equipments

The following test equipments are utilized in making the measurements contained in this report.


Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
CHASE BI-LOG ANTENNA	CBL6112B	2421	May 07, 2004	1 Year	FINAL
R/S SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004	1 Year	FINAL
OPEN SITE	-----	No.2	May 07, 2004	1 Year	FINAL
Horn Antenna	AH-118	10089	February 25, 2004	1 Year	FINAL
HP Pre-amplifier	8449B	3008A01471	November 07, 2004	1 Year	FINAL
HP High pass filter	84300/80038	011	cal. on use	1 Year	FINAL
Horn Antenna	AH-840	03077	February 25, 2004	1 Year	FINAL

3.2 Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

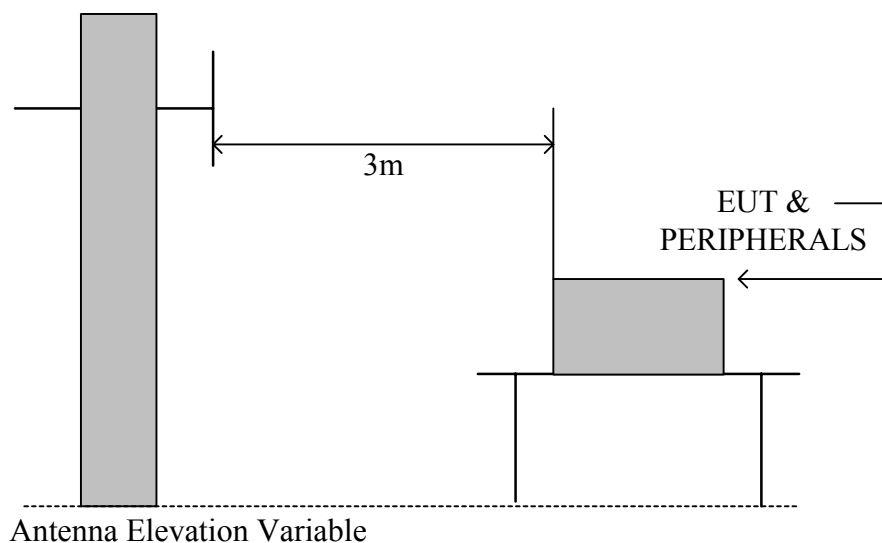

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

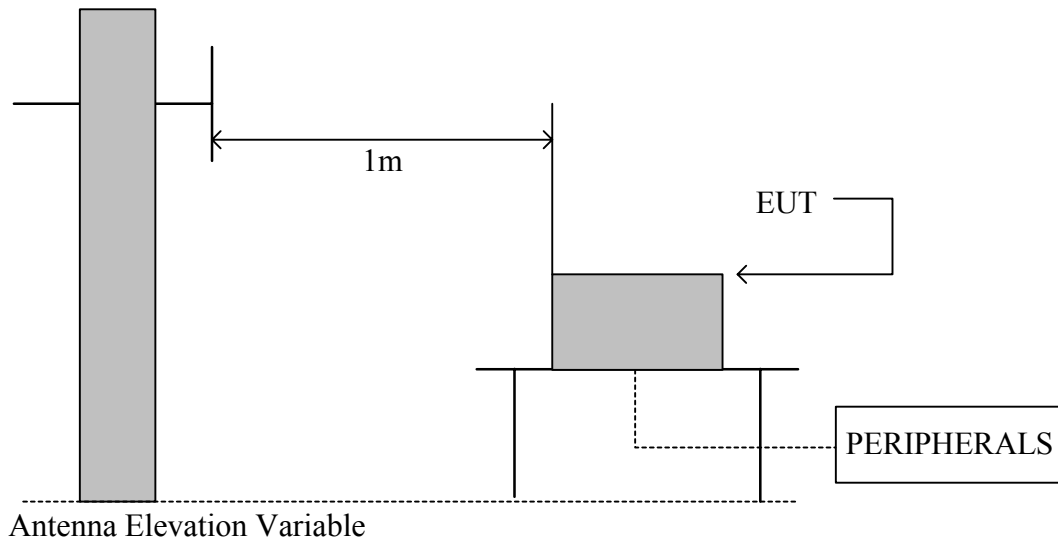

3.3 Radiation Limit

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

3.4 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1GHz, the EUT was set 1 meters away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

3.5 Uncertainty of Radiated Emission

The uncertainty of radiated emission is $\pm 2.72\text{dB}$.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 22 of 61

3.6 Radiated RF Noise Measurement

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

All readings are quasi-peak values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/01
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	22.6°C, 6%

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading at 3m(dBμV)		Limits (dBμV/m)	Emission Level at 3m(dBμV/m)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	17.01	0.97	*	*	40.00	*	*
125.00	12.95	2.21	2.30	9.50	43.50	17.46	24.66
149.99	11.64	2.53	9.80	10.60	43.50	23.97	24.77
199.99	9.80	3.14	13.80	15.80	43.50	26.74	28.74
249.99	12.72	4.01	25.20	22.80	46.00	41.93	39.53
479.99	17.95	5.12	16.10	18.80	46.00	39.17	41.87
639.99	19.00	5.90	11.60	10.60	46.00	36.50	35.50
799.98	20.77	6.80	6.60	8.20	46.00	34.17	35.77
859.98	21.14	7.06	2.10	1.20	46.00	30.30	29.40
1000.00	21.58	7.00	*	*	54.00	*	*

- REMARKS :
1. * Undetectable
 2. Emission level (dBμV/m) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).
 3. According to technical experiences, all spurious emission at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in finial test.
 4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at finial test to get the worst case test results.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 23 of 61

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/09/21
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.9℃, 65%

CH1 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1120.03	50.52	25.67	2.50	36.51	9.50	0.00	32.68	74	-41.32	P	1.0
1120.03	45.97	25.67	2.50	36.51	9.50	0.00	28.13	54	-25.87	A	1.0
1280.06	51.42	26.69	2.67	36.13	9.50	0.00	35.15	74	-38.85	P	1.0
1280.06	47.61	26.69	2.67	36.13	9.50	0.00	31.34	54	-22.66	A	1.0
1600.08	52.78	28.92	2.99	35.54	9.50	0.00	39.65	74	-34.35	P	1.0
1600.08	48.36	28.92	2.99	35.54	9.50	0.00	35.23	54	-18.77	A	1.0
8151.75	45.44	39.45	7.37	35.95	9.50	0.00	46.81	74	-27.19	P	1.0
8151.75	33.54	39.45	7.37	35.95	9.50	0.00	34.91	54	-19.09	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 24 of 61

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/09/21
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.9°C, 65%

CH1 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1120.01	52.05	25.67	2.50	36.51	9.50	0.00	34.21	74	-39.79	P	1.0
1120.01	48.83	25.67	2.50	36.51	9.50	0.00	30.99	54	-23.01	A	1.0
1279.99	54.85	26.69	2.67	36.13	9.50	0.00	38.58	74	-35.42	P	1.0
1279.99	52.02	26.69	2.67	36.13	9.50	0.00	35.75	54	-18.25	A	1.0
1600.07	55.15	28.92	2.99	35.54	9.50	0.00	42.02	74	-31.98	P	1.0
1600.07	52.43	28.92	2.99	35.54	9.50	0.00	39.30	54	-14.70	A	1.0
8152.47	45.50	39.45	7.37	35.94	9.50	0.00	46.88	74	-27.12	P	1.0
8152.47	33.54	39.45	7.37	35.94	9.50	0.00	34.92	54	-19.08	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 25 of 61

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/09/21
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.9℃, 65%

CH6 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1120.01	50.41	25.67	2.50	36.51	9.50	0.00	32.57	74	-41.43	P	1.0
1120.01	45.42	25.67	2.50	36.51	9.50	0.00	27.58	54	-26.42	A	1.0
1279.99	52.11	26.69	2.67	36.13	9.50	0.00	35.84	74	-38.16	P	1.0
1279.99	47.42	26.69	2.67	36.13	9.50	0.00	31.15	54	-22.85	A	1.0
1600.13	52.92	28.92	2.99	35.54	9.50	0.00	39.79	74	-34.21	P	1.0
1600.13	48.89	28.92	2.99	35.54	9.50	0.00	35.76	54	-18.24	A	1.0
8251.46	45.02	39.35	7.45	35.19	9.50	0.00	47.13	74	-26.87	P	1.0
8251.46	33.54	39.35	7.45	35.19	9.50	0.00	35.65	54	-18.35	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 26 of 61

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/09/21
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.9°C, 65%

CH6 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1119.99	52.64	25.67	2.50	36.51	9.50	0.00	34.80	74	-39.20	P	1.0
1119.99	49.77	25.67	2.50	36.51	9.50	0.00	31.93	54	-22.07	A	1.0
1279.99	54.70	26.69	2.67	36.13	9.50	0.00	38.43	74	-35.57	P	1.0
1279.99	51.83	26.69	2.67	36.13	9.50	0.00	35.56	54	-18.44	A	1.0
1600.08	55.36	28.92	2.99	35.54	9.50	0.00	42.23	74	-31.77	P	1.0
1600.08	52.54	28.92	2.99	35.54	9.50	0.00	39.41	54	-14.59	A	1.0
8252.06	45.18	39.35	7.45	35.18	9.50	0.00	47.30	74	-26.70	P	1.0
8252.06	33.62	39.35	7.45	35.18	9.50	0.00	35.74	54	-18.26	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 27 of 61

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/09/21
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.9℃, 65%

CH11 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1120.01	50.56	25.67	2.50	36.51	9.50	0.00	32.72	74	-41.28	P	1.0
1120.01	45.86	25.67	2.50	36.51	9.50	0.00	28.02	54	-25.98	A	1.0
1280.12	51.98	26.69	2.67	36.13	9.50	0.00	35.71	74	-38.29	P	1.0
1280.12	47.55	26.69	2.67	36.13	9.50	0.00	31.28	54	-22.72	A	1.0
1600.04	53.01	28.92	2.99	35.54	9.50	0.00	39.88	74	-34.12	P	1.0
1600.04	48.64	28.92	2.99	35.54	9.50	0.00	35.51	54	-18.49	A	1.0
8352.01	44.76	39.25	7.53	34.42	9.50	0.00	47.61	74	-26.39	P	1.0
8352.01	33.42	39.25	7.53	34.42	9.50	0.00	36.27	54	-17.73	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 28 of 61

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/09/21
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.9°C, 65%

CH11 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1200.03	52.55	26.18	2.58	36.32	9.50	0.00	35.49	74	-38.51	P	1.0
1200.03	49.78	26.18	2.58	36.32	9.50	0.00	32.72	54	-21.28	A	1.0
1280.01	54.62	26.69	2.67	36.13	9.50	0.00	38.35	74	-35.65	P	1.0
1280.01	52.02	26.69	2.67	36.13	9.50	0.00	35.75	54	-18.25	A	1.0
1599.89	55.13	28.92	2.99	35.54	9.50	0.00	42.00	74	-32.00	P	1.0
1599.89	52.09	28.92	2.99	35.54	9.50	0.00	38.96	54	-15.04	A	1.0
8352.05	44.82	39.25	7.53	34.42	9.50	0.00	47.68	74	-26.32	P	1.0
8352.05	33.12	39.25	7.53	34.42	9.50	0.00	35.98	54	-18.02	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 29 of 61

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/08
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.3°C, 71%

CH1 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2359.77	22.00	31.84	3.56	0.00	9.50	0.00	47.90	74.00	-26.10	P	1.00
* 2359.77	10.90	31.84	3.56	0.00	9.50	0.00	36.80	54.00	-17.20	A	1.00
2399.90	22.60	31.80	3.58	0.00	9.50	0.00	48.48	80.53	-32.05	P	1.00
2399.90	11.90	31.80	3.58	0.00	9.50	0.00	37.78	73.40	-35.62	A	1.00
2413.25	74.66	31.79	3.58	0.00	9.50	0.00	100.53	Fundamental Frequency		P	1.00
2413.25	67.53	31.79	3.58	0.00	9.50	0.00	93.40			A	1.00
* 4824.64	45.64	34.44	5.08	35.16	9.50	2.00	42.51	74.00	-31.49	P	1.00
* 4824.64	33.28	34.44	5.08	35.16	9.50	2.00	30.15	54.00	-23.85	A	1.00
7235.71	44.75	39.81	6.74	35.65	9.50	2.00	48.14	80.53	-32.39	P	1.00
7235.71	33.12	39.81	6.74	35.65	9.50	2.00	36.51	73.40	-36.89	A	1.00
9648.02	46.37	38.54	8.29	36.44	9.50	0.61	47.87	80.53	-32.66	P	1.00
9648.02	34.44	38.54	8.29	36.44	9.50	0.61	35.94	73.40	-37.46	A	1.00
* 12066.25	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14479.50	-----	-----	-----	-----	9.50	0.68	-----	-----	-----	-----	1.00
16892.75	-----	-----	-----	-----	9.50	0.44	-----	-----	-----	-----	1.00
* 19306.00	-----	-----	-----	-----	9.50	1.97	-----	-----	-----	-----	1.00
21719.25	-----	-----	-----	-----	9.50	0.81	-----	-----	-----	-----	1.00
24132.50	-----	-----	-----	-----	9.50	2.89	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level=Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11b mode at 11Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 30 of 61

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/08
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.3℃, 71%

CH1 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2359.92	29.96	31.84	3.56	0.00	9.50	0.00	55.86	74.00	-18.14	P	1.00
* 2359.92	21.10	31.84	3.56	0.00	9.50	0.00	47.00	54.00	-7.00	A	1.00
2399.90	34.40	31.80	3.58	0.00	9.50	0.00	60.28	92.79	-32.51	P	1.00
2399.90	23.40	31.80	3.58	0.00	9.50	0.00	49.28	85.76	-36.48	A	1.00
2413.30	86.92	31.79	3.58	0.00	9.50	0.00	112.79	Fundamental Frequency		P	1.00
2413.30	79.89	31.79	3.58	0.00	9.50	0.00	105.76			A	1.00
* 4824.01	54.36	34.44	5.08	35.16	9.50	2.00	51.23	74.00	-22.77	P	1.00
* 4824.01	43.44	34.44	5.08	35.16	9.50	2.00	40.31	54.00	-13.69	A	1.00
7235.56	44.98	39.81	6.74	35.65	9.50	2.00	48.37	92.79	-44.42	P	1.00
7235.56	33.54	39.81	6.74	35.65	9.50	2.00	36.93	85.76	-48.83	A	1.00
9647.76	46.39	38.54	8.29	36.44	9.50	0.61	47.89	92.79	-44.90	P	1.00
9647.76	34.47	38.54	8.29	36.44	9.50	0.61	35.97	85.76	-49.79	A	1.00
* 12066.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14479.80	-----	-----	-----	-----	9.50	0.68	-----	-----	-----	-----	1.00
16893.10	-----	-----	-----	-----	9.50	0.44	-----	-----	-----	-----	1.00
* 19306.40	-----	-----	-----	-----	9.50	1.97	-----	-----	-----	-----	1.00
21719.70	-----	-----	-----	-----	9.50	0.81	-----	-----	-----	-----	1.00
24133.00	-----	-----	-----	-----	9.50	2.89	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11b mode at 11Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 31 of 61

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/08
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.3℃, 71%

CH6 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2438.25	74.84	31.76	3.59	0.00	9.50	0.00	100.69	Fundamental Frequency		P	1.00
2438.25	67.70	31.76	3.59	0.00	9.50	0.00	93.55			A	1.00
* 4874.25	44.89	34.77	5.10	35.20	9.50	1.80	41.86	74.00	-32.14	P	1.00
* 4874.25	33.02	34.77	5.10	35.20	9.50	1.80	29.99	54.00	-24.01	A	1.00
* 7311.02	45.15	39.78	6.79	35.64	9.50	2.00	48.58	74.00	-25.42	P	1.00
* 7311.02	33.57	39.78	6.79	35.64	9.50	2.00	37.00	54.00	-17.00	A	1.00
9748.09	46.33	38.53	8.33	36.60	9.50	0.55	47.64	80.69	-33.06	P	1.00
9748.09	34.89	38.53	8.33	36.60	9.50	0.55	36.20	73.55	-37.36	A	1.00
* 12191.25	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14629.50	-----	-----	-----	-----	9.50	0.60	-----	-----	-----	-----	1.00
17067.75	-----	-----	-----	-----	9.50	0.53	-----	-----	-----	-----	1.00
* 19506.00	-----	-----	-----	-----	9.50	2.21	-----	-----	-----	-----	1.00
21944.25	-----	-----	-----	-----	9.50	0.72	-----	-----	-----	-----	1.00
24382.50	-----	-----	-----	-----	9.50	2.49	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11b mode at 11Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 32 of 61

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/08
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.3℃, 71%

CH6 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2438.30	85.84	31.76	3.59	0.00	9.50	0.00	111.69	Fundamental Frequency		P	1.00
2438.30	78.80	31.76	3.59	0.00	9.50	0.00	104.65			A	1.00
* 4874.05	55.10	34.77	5.10	35.20	9.50	1.80	52.07	74.00	-21.93	P	1.00
* 4874.05	44.23	34.77	5.10	35.20	9.50	1.80	41.20	54.00	-12.80	A	1.00
* 7311.15	45.62	39.78	6.79	35.64	9.50	2.00	49.05	74.00	-24.95	P	1.00
* 7311.15	33.86	39.78	6.79	35.64	9.50	2.00	37.29	54.00	-16.71	A	1.00
9747.85	46.25	38.53	8.33	36.60	9.50	0.55	47.56	91.69	-44.14	P	1.00
9747.85	35.02	38.53	8.33	36.60	9.50	0.55	36.33	84.65	-48.33	A	1.00
* 12191.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14629.80	-----	-----	-----	-----	9.50	0.60	-----	-----	-----	-----	1.00
17068.10	-----	-----	-----	-----	9.50	0.53	-----	-----	-----	-----	1.00
* 19506.40	-----	-----	-----	-----	9.50	2.21	-----	-----	-----	-----	1.00
21944.70	-----	-----	-----	-----	9.50	0.72	-----	-----	-----	-----	1.00
24383.00	-----	-----	-----	-----	9.50	2.49	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11b mode at 11Mbps.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 33 of 61

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/08
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.3℃, 71%

CH11 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2463.30	74.00	31.74	3.60	0.00	9.50	0.00	99.84	Fundamental Frequency		P	1.00
2463.30	66.93	31.74	3.60	0.00	9.50	0.00	92.77			A	1.00
* 2483.50	20.90	31.72	3.61	0.00	9.50	0.00	46.73	74.00	-27.27	P	1.00
* 2483.50	9.80	31.72	3.61	0.00	9.50	0.00	35.63	54.00	-18.37	A	1.00
* 2483.60	20.60	31.72	3.61	0.00	9.50	0.00	46.43	74.00	-27.57	P	1.00
* 2483.60	9.80	31.72	3.61	0.00	9.50	0.00	35.63	54.00	-18.37	A	1.00
* 4924.74	44.07	35.10	5.12	35.24	9.50	1.60	41.15	74.00	-32.85	P	1.00
* 4924.74	32.75	35.10	5.12	35.24	9.50	1.60	29.83	54.00	-24.17	A	1.00
* 7386.45	44.11	39.75	6.84	35.62	9.50	2.00	47.58	74.00	-26.42	P	1.00
* 7386.45	34.18	39.75	6.84	35.62	9.50	2.00	37.65	54.00	-16.35	A	1.00
9847.95	46.71	38.52	8.37	36.76	9.50	0.49	47.82	79.84	-32.02	P	1.00
9847.95	34.98	38.52	8.37	36.76	9.50	0.49	36.09	72.77	-36.68	A	1.00
* 12316.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14779.80	-----	-----	-----	-----	9.50	0.48	-----	-----	-----	-----	1.00
17243.10	-----	-----	-----	-----	9.50	0.60	-----	-----	-----	-----	1.00
* 19706.40	-----	-----	-----	-----	9.50	2.41	-----	-----	-----	-----	1.00
* 22169.70	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24633.00	-----	-----	-----	-----	9.50	2.11	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11b mode at 11Mbps.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 34 of 61

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/08
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.3℃, 71%

CH11 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2463.30	84.44	31.74	3.60	0.00	9.50	0.00	110.28	Fundamental Frequency		P	1.00
2463.30	77.34	31.74	3.60	0.00	9.50	0.00	103.18			A	1.00
* 2483.50	28.70	31.72	3.61	0.00	9.50	0.00	54.53	74.00	-19.47	P	1.00
* 2483.50	15.20	31.72	3.61	0.00	9.50	0.00	41.03	54.00	-12.97	A	1.00
* 2483.60	27.50	31.72	3.61	0.00	9.50	0.00	53.33	74.00	-20.67	P	1.00
* 2483.60	15.20	31.72	3.61	0.00	9.50	0.00	41.03	54.00	-12.97	A	1.00
* 4924.00	56.68	35.10	5.12	35.24	9.50	1.60	53.76	74.00	-20.24	P	1.00
* 4923.83	45.68	35.10	5.12	35.24	9.50	1.60	42.76	54.00	-11.24	A	1.00
* 7386.63	45.89	39.75	6.84	35.62	9.50	2.00	49.36	74.00	-24.64	P	1.00
* 7386.63	34.39	39.75	6.84	35.62	9.50	2.00	37.86	54.00	-16.14	A	1.00
9848.21	46.63	38.52	8.37	36.76	9.50	0.49	47.74	90.28	-42.54	P	1.00
9848.21	35.05	38.52	8.37	36.76	9.50	0.49	36.16	83.18	-47.02	A	1.00
* 12316.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14779.80	-----	-----	-----	-----	9.50	0.48	-----	-----	-----	-----	1.00
17243.10	-----	-----	-----	-----	9.50	0.60	-----	-----	-----	-----	1.00
* 19706.40	-----	-----	-----	-----	9.50	2.41	-----	-----	-----	-----	1.00
* 22169.70	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24633.00	-----	-----	-----	-----	9.50	2.11	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11b mode at 11Mbps.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 35 of 61

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/08
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.3°C , 71%

CH1 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2388.90	31.20	31.81	3.57	0.00	9.50	0.00	57.08	74.00	-16.92	P	1.00
* 2388.90	13.30	31.81	3.57	0.00	9.50	0.00	39.18	54.00	-14.82	A	1.00
2399.90	41.50	31.80	3.58	0.00	9.50	0.00	67.38	76.44	-9.06	P	1.00
2399.90	23.60	31.80	3.58	0.00	9.50	0.00	49.48	68.47	-18.99	A	1.00
2418.06	70.57	31.78	3.58	0.00	9.50	0.00	96.44	Fundamental Frequency		P	1.00
2418.06	62.60	31.78	3.58	0.00	9.50	0.00	88.47			A	1.00
* 4823.83	45.09	34.44	5.08	35.16	9.50	2.00	41.96	74.00	-32.04	P	1.00
* 4823.83	33.08	34.44	5.08	35.16	9.50	2.00	29.95	54.00	-24.05	A	1.00
7236.02	45.02	39.81	6.74	35.65	9.50	2.00	48.41	76.44	-28.02	P	1.00
7236.02	33.51	39.81	6.74	35.65	9.50	2.00	36.90	68.47	-31.56	A	1.00
9648.11	46.02	38.54	8.29	36.44	9.50	0.61	47.52	76.44	-28.91	P	1.00
9648.11	33.45	38.54	8.29	36.44	9.50	0.61	34.95	68.47	-33.51	A	1.00
* 12090.30	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14508.36	-----	-----	-----	-----	9.50	0.69	-----	-----	-----	-----	1.00
16926.42	-----	-----	-----	-----	9.50	0.46	-----	-----	-----	-----	1.00
* 19344.48	-----	-----	-----	-----	9.50	2.01	-----	-----	-----	-----	1.00
21762.54	-----	-----	-----	-----	9.50	0.79	-----	-----	-----	-----	1.00
24180.60	-----	-----	-----	-----	9.50	2.81	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level=Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11g mode at 6Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 36 of 61

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/08
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.3℃, 71%

CH1 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.00	45.70	31.81	3.57	0.00	9.50	0.00	71.58	74.00	-2.42	P	1.00
* 2389.00	26.00	31.81	3.57	0.00	9.50	0.00	51.88	54.00	-2.12	A	1.00
2399.90	55.30	31.80	3.58	0.00	9.50	0.00	81.18	88.46	-7.28	P	1.00
2399.90	37.60	31.80	3.58	0.00	9.50	0.00	63.48	80.56	-17.08	A	1.00
2413.25	82.59	31.79	3.58	0.00	9.50	0.00	108.46	Fundamental Frequency		P	1.00
2413.25	74.69	31.79	3.58	0.00	9.50	0.00	100.56			A	1.00
* 4826.15	52.73	34.45	5.08	35.16	9.50	2.00	49.60	74.00	-24.40	P	1.00
* 4826.15	39.82	34.45	5.08	35.16	9.50	2.00	36.69	54.00	-17.31	A	1.00
7235.86	45.22	39.81	6.74	35.65	9.50	2.00	48.61	88.46	-39.85	P	1.00
7235.86	33.73	39.81	6.74	35.65	9.50	2.00	37.12	80.56	-43.44	A	1.00
9648.15	45.46	38.54	8.29	36.44	9.50	0.61	46.96	88.46	-41.50	P	1.00
9648.15	33.75	38.54	8.29	36.44	9.50	0.61	35.25	80.56	-45.31	A	1.00
* 12066.25	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14479.50	-----	-----	-----	-----	9.50	0.68	-----	-----	-----	-----	1.00
16892.75	-----	-----	-----	-----	9.50	0.44	-----	-----	-----	-----	1.00
* 19306.00	-----	-----	-----	-----	9.50	1.97	-----	-----	-----	-----	1.00
21719.25	-----	-----	-----	-----	9.50	0.81	-----	-----	-----	-----	1.00
24132.50	-----	-----	-----	-----	9.50	2.89	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11g mode at 6Mbps.
10. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 37 of 61

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/08
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.3℃, 71%

CH6 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2443.41	70.01	31.76	3.60	0.00	9.50	0.00	95.86	Fundamental Frequency		P	1.00
2443.41	62.05	31.76	3.60	0.00	9.50	0.00	87.90			A	1.00
* 4874.41	46.40	34.77	5.10	35.20	9.50	1.80	43.37	74.00	-30.63	P	1.00
* 4874.41	33.96	34.77	5.10	35.20	9.50	1.80	30.93	54.00	-23.07	A	1.00
* 7310.89	44.89	39.78	6.79	35.64	9.50	2.00	48.32	74.00	-25.68	P	1.00
* 7310.89	33.54	39.78	6.79	35.64	9.50	2.00	36.97	54.00	-17.03	A	1.00
9747.99	46.01	38.53	8.33	36.60	9.50	0.55	47.32	75.86	-28.54	P	1.00
9747.99	34.02	38.53	8.33	36.60	9.50	0.55	35.33	67.90	-32.57	A	1.00
* 12217.05	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14660.46	-----	-----	-----	-----	9.50	0.57	-----	-----	-----	-----	1.00
17103.87	-----	-----	-----	-----	9.50	0.54	-----	-----	-----	-----	1.00
* 19547.28	-----	-----	-----	-----	9.50	2.25	-----	-----	-----	-----	1.00
21990.69	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24434.10	-----	-----	-----	-----	9.50	2.41	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11g mode at 6Mbps.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 38 of 61

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/08
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.3°C, 71%

CH6 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2442.31	81.21	31.76	3.59	0.00	9.50	0.00	107.06	Fundamental Frequency		P	1.00
2442.31	73.34	31.76	3.59	0.00	9.50	0.00	99.19			A	1.00
* 4874.20	53.32	34.77	5.10	35.20	9.50	1.80	50.29	74.00	-23.71	P	1.00
* 4874.20	40.80	34.77	5.10	35.20	9.50	1.80	37.77	54.00	-16.23	A	1.00
* 7311.02	45.12	39.78	6.79	35.64	9.50	2.00	48.55	74.00	-25.45	P	1.00
* 7311.02	33.25	39.78	6.79	35.64	9.50	2.00	36.68	54.00	-17.32	A	1.00
9748.05	46.52	38.53	8.33	36.60	9.50	0.55	47.83	87.06	-39.23	P	1.00
9748.05	34.25	38.53	8.33	36.60	9.50	0.55	35.56	79.19	-43.63	A	1.00
* 12211.55	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14653.86	-----	-----	-----	-----	9.50	0.58	-----	-----	-----	-----	1.00
17096.17	-----	-----	-----	-----	9.50	0.54	-----	-----	-----	-----	1.00
* 19538.48	-----	-----	-----	-----	9.50	2.24	-----	-----	-----	-----	1.00
21980.79	-----	-----	-----	-----	9.50	0.71	-----	-----	-----	-----	1.00
24423.10	-----	-----	-----	-----	9.50	2.42	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11g mode at 6Mbps.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 39 of 61

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/08
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.3℃, 71%

CH11 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2455.47	70.40	31.74	3.60	0.00	9.50	0.00	96.24	Fundamental Frequency		P	1.00
2455.47	62.33	31.74	3.60	0.00	9.50	0.00	88.17			A	1.00
* 2483.50	33.10	31.72	3.61	0.00	9.50	0.00	58.93	74.00	-15.07	P	1.00
* 2483.50	13.50	31.72	3.61	0.00	9.50	0.00	39.33	54.00	-14.67	A	1.00
* 2483.60	31.00	31.72	3.61	0.00	9.50	0.00	56.83	74.00	-17.17	P	1.00
* 2483.60	13.50	31.72	3.61	0.00	9.50	0.00	39.33	54.00	-14.67	A	1.00
* 4925.89	44.18	35.11	5.12	35.24	9.50	1.60	41.26	74.00	-32.74	P	1.00
* 4925.89	32.82	35.11	5.12	35.24	9.50	1.60	29.90	54.00	-24.10	A	1.00
* 7385.87	45.54	39.75	6.84	35.62	9.50	2.00	49.01	74.00	-24.99	P	1.00
* 7385.87	33.47	39.75	6.84	35.62	9.50	2.00	36.94	54.00	-17.06	A	1.00
9848.12	46.15	38.52	8.37	36.76	9.50	0.49	47.26	76.24	-28.98	P	1.00
9848.12	34.55	38.52	8.37	36.76	9.50	0.49	35.66	68.17	-32.51	A	1.00
* 12277.35	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14732.82	-----	-----	-----	-----	9.50	0.51	-----	-----	-----	-----	1.00
17188.29	-----	-----	-----	-----	9.50	0.58	-----	-----	-----	-----	1.00
* 19643.76	-----	-----	-----	-----	9.50	2.34	-----	-----	-----	-----	1.00
* 22099.23	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24554.70	-----	-----	-----	-----	9.50	2.22	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11g mode at 6Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 40 of 61

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date	2004/11/08
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By	Ken Tu
Model Name	WRK54G V1.1	TEMP&Humidity	23.3℃, 71%

CH11 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2455.67	83.75	31.74	3.60	0.00	9.50	0.00	109.59	Fundamental Frequency		P	1.00
2455.67	75.74	31.74	3.60	0.00	9.50	0.00	101.58			A	1.00
* 2483.50	40.30	31.72	3.61	0.00	9.50	0.00	66.13	74.00	-7.87	P	1.00
* 2483.50	26.30	31.72	3.61	0.00	9.50	0.00	52.13	54.00	-1.87	A	1.00
* 2483.60	39.60	31.72	3.61	0.00	9.50	0.00	65.43	74.00	-8.57	P	1.00
* 2483.60	25.60	31.72	3.61	0.00	9.50	0.00	51.43	54.00	-2.57	A	1.00
* 4926.40	54.17	35.11	5.12	35.24	9.50	1.59	51.25	74.00	-22.75	P	1.00
* 4926.40	41.94	35.11	5.12	35.24	9.50	1.59	39.02	54.00	-14.98	A	1.00
* 7386.95	45.34	39.75	6.84	35.62	9.50	2.00	48.81	74.00	-25.19	P	1.00
* 7386.95	33.58	39.75	6.84	35.62	9.50	2.00	37.05	54.00	-16.95	A	1.00
9848.05	46.34	38.52	8.37	36.76	9.50	0.49	47.45	89.59	-42.14	P	1.00
9848.05	34.46	38.52	8.37	36.76	9.50	0.49	35.57	81.58	-46.01	A	1.00
* 12278.35	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14734.02	-----	-----	-----	-----	9.50	0.51	-----	-----	-----	-----	1.00
17189.69	-----	-----	-----	-----	9.50	0.58	-----	-----	-----	-----	1.00
* 19645.36	-----	-----	-----	-----	9.50	2.35	-----	-----	-----	-----	1.00
* 22101.03	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24556.70	-----	-----	-----	-----	9.50	2.22	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11g mode at 6Mbps.
10. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.

3.7 Photos of Open Site







Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKGV11

Report No. : ER04-10-064FRF

Page 43 of 61

4. 6dB BANDWIDTH MEASUREMENT


4.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 Test Setup



4.3 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500KHz

4.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 1MHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 200 KHz.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing
Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKGV11

Report No. : ER04-10-064FRF

Page 44 of 61

4.6 Test Results

Input Power (System)	12VDC (From Power Adapter)	Environmental Conditions	26°C, 48%RH
Tested By	Ken Tu		

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	9.02	0.5	PASS
6	2437	9.87	0.5	PASS
11	2462	10.02	0.5	PASS

Note : 1. For 802.11b Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.63	0.5	PASS
6	2437	16.63	0.5	PASS
11	2462	16.53	0.5	PASS

Note : 1. For 802.11g Mode



Ecom Sertech Corp.




Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKGV11

Report No. : ER04-10-064FRF

Page 45 of 61

4.7 Photo of 6db Bandwidth Measurement

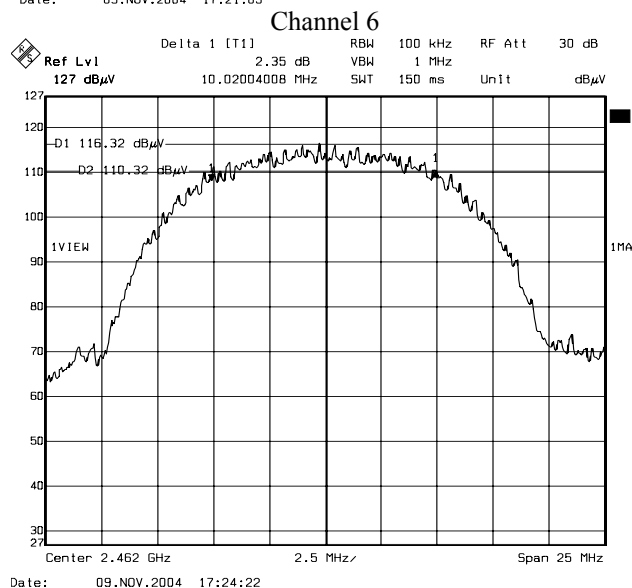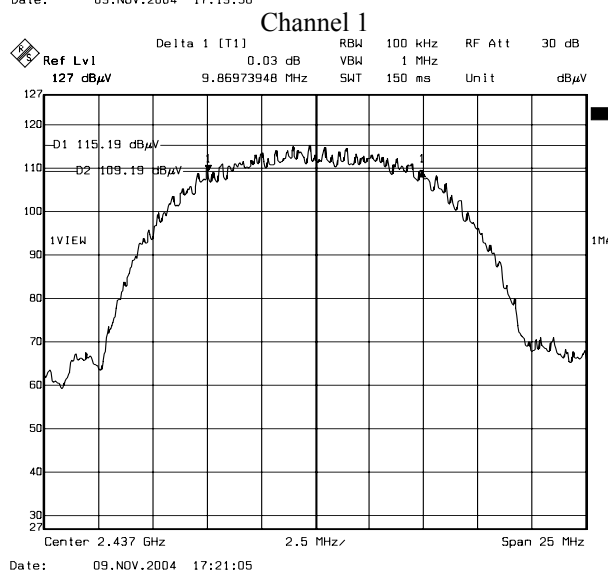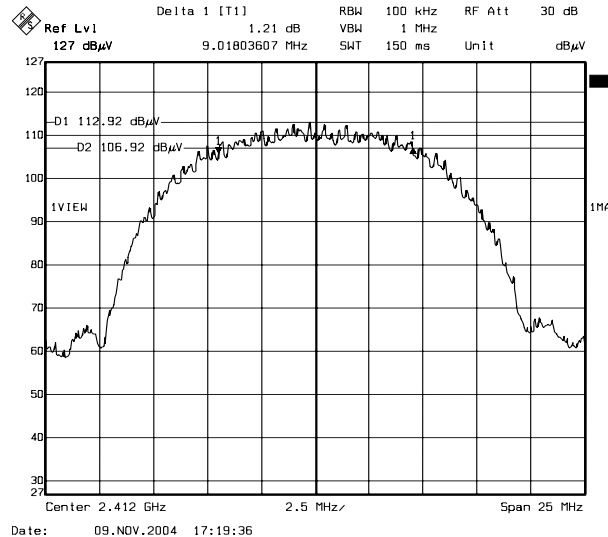

Channel 11

Note : For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : Q87-WRKGV11

Report No. : ER04-10-064FRF


Page 46 of 61

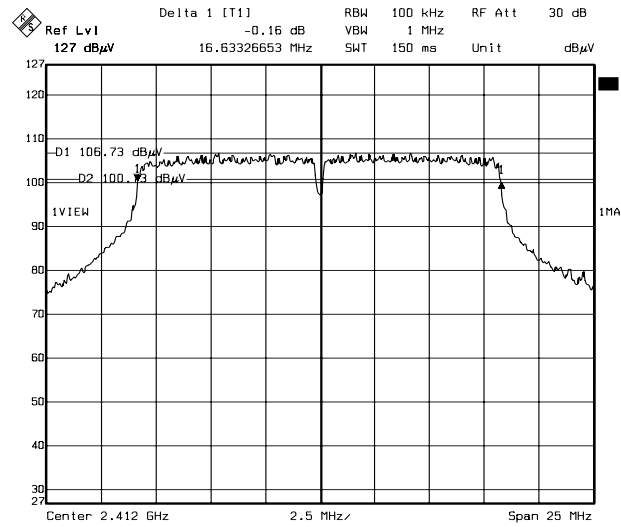

Channel 1

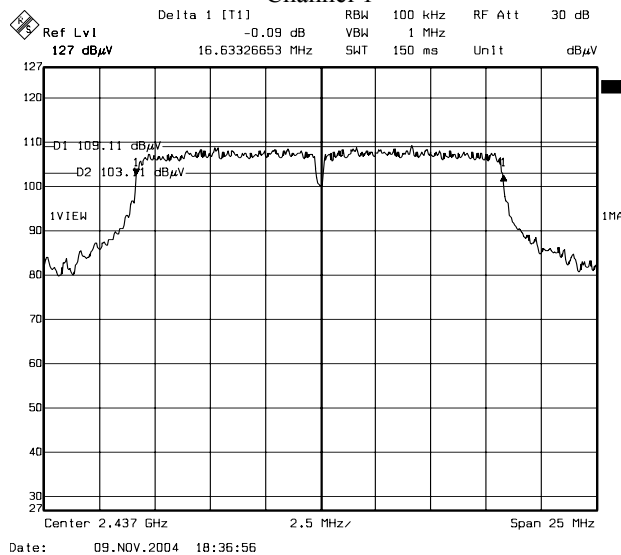

Channel 6

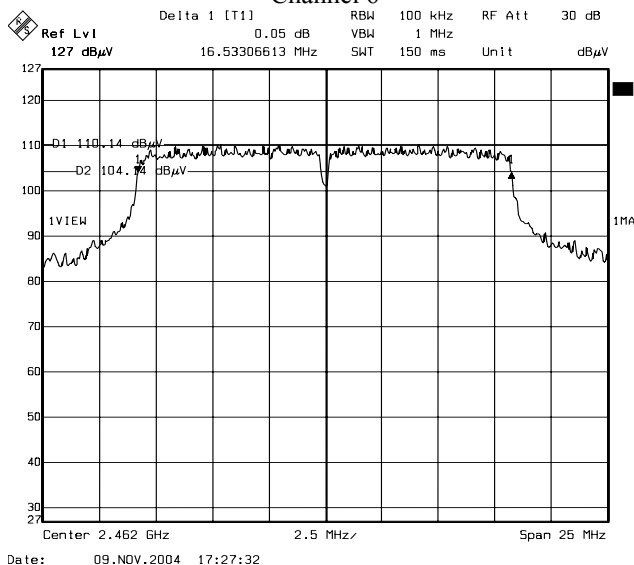

Channel 11

Note : For 802.11g Mode



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKGV11

Report No. : ER04-10-064FRF

Page 47 of 61

5. MAXIMUM PEAK OUTPUT POWER


5.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004
Agilent ATTENUATOR	8491B	57321	Cal. on use
ANRITSU Peak Power Meter	ML2487A MAL2491A	6K00001783 030982	February 10, 2004

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 Test Setup



5.3 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKGV11

Report No. : ER04-10-064FRF

Page 48 of 61

5.4 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency.

5.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

5.6 Test Results

Input Power (System)	12VDC (From Power Adapter)	Environmental Conditions	26°C , 48%RH
Tested By	Ken Tu		

Channel	Channel Frequency (MHz)	Average Power Output (dBm)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	14.85	17.32	30	PASS
6	2437	15.51	17.86	30	PASS
11	2462	15.32	17.79	30	PASS

- Note :
1. For 802.11b Mode
 2. At final test to get the worst-case emission at 11Mbps.
 3. Cable loss = 0.5dB, Attenuator = 10dB
 4. The result basic equation calculation as follow :
Peak Power Output = Peak Power Reading + Cable loss

Channel	Channel Frequency (MHz)	Average Power Output (dBm)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	13.59	22.20	30	PASS
6	2437	13.43	22.24	30	PASS
11	2462	13.68	22.16	30	PASS

- Note :
1. For 802.11g Mode
 2. At final test to get the worst-case emission at 6Mbps.
 3. Cable loss = 0.5dB, Attenuator = 10dB
 4. The result basic equation calculation as follow :
Peak Power Output = Peak Power Reading + Cable loss



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKGV11

Report No. : ER04-10-064FRF

Page 49 of 61

6. POWER SPECTRAL DENSITY MEASUREMENT


6.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004

NOTE :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 Test Setup



6.3 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3KHz.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 50 of 61

6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3KHz RBW and 30KHz VBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

6.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

6.6 Test Results

Input Power (System)	12VDC (From Power Adapter)	Environmental Conditions	26°C, 48%RH
Tested By	Ken Tu		

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
1	2412	-7.84	8	PASS
6	2437	-6.65	8	PASS
11	2462	-5.77	8	PASS

Note: 1. For 802.11b mode at final test to get the worst-case emission at 11Mbps.

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
1	2412	-15.45	8	PASS
6	2437	-17.46	8	PASS
11	2462	-17.45	8	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11


Report No. : ER04-10-064FRF

Page 51 of 61


6.7 Photo of Power Spectral Density Measurement

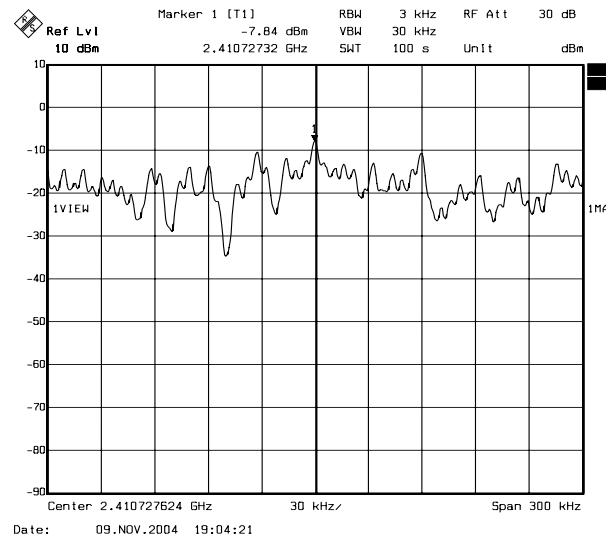

Channel 1

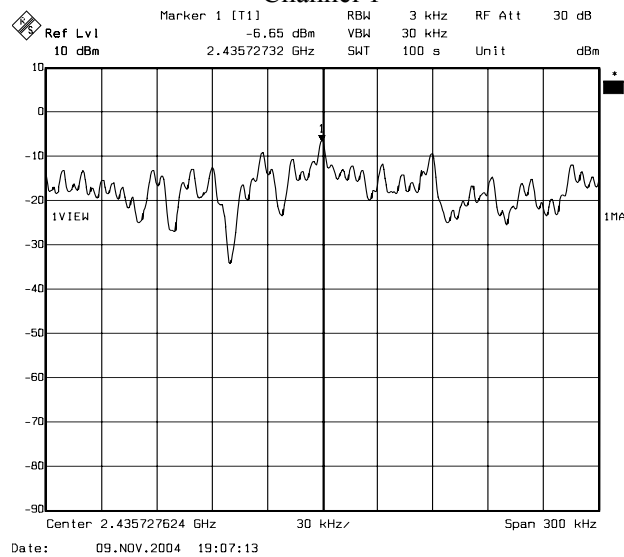

Channel 6

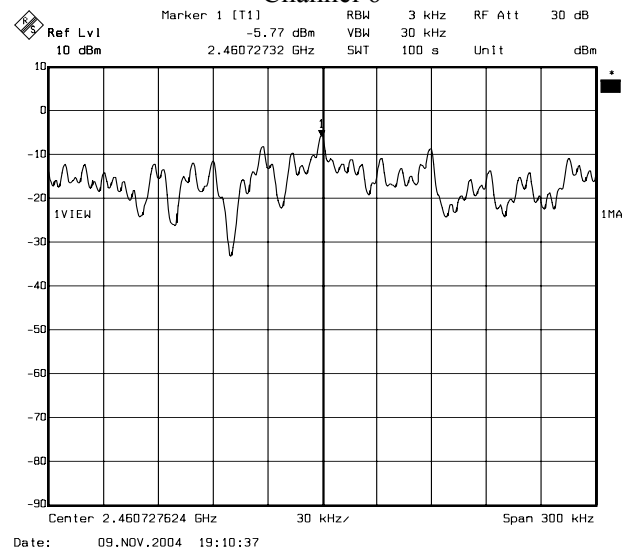

Channel 11

Note: 802.11b Mode (11Mbps)




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF


Page 52 of 61

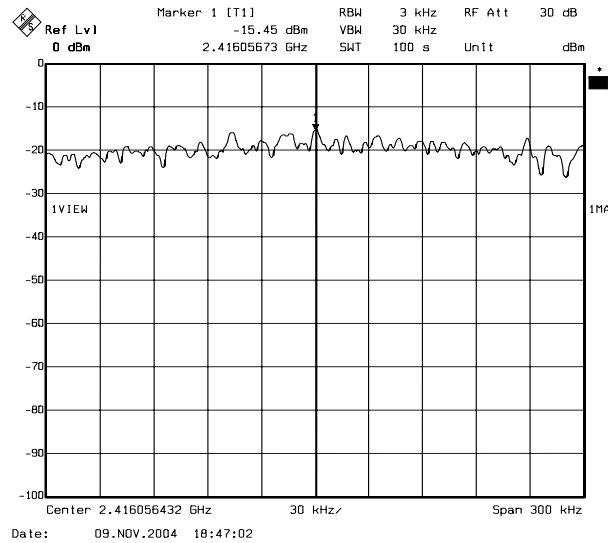

Channel 1

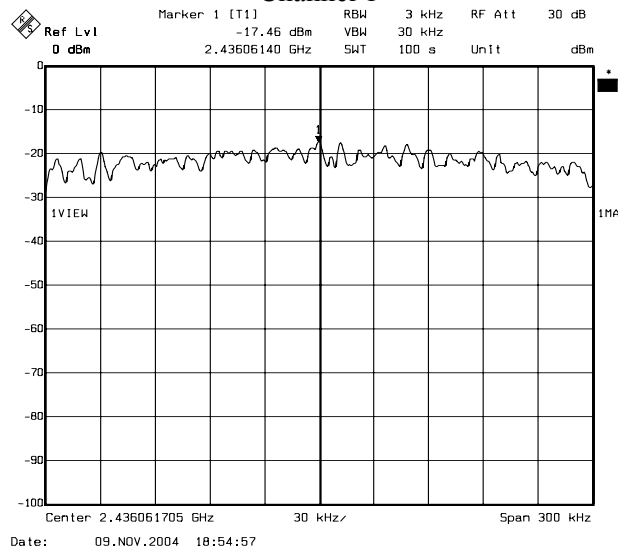

Channel 6

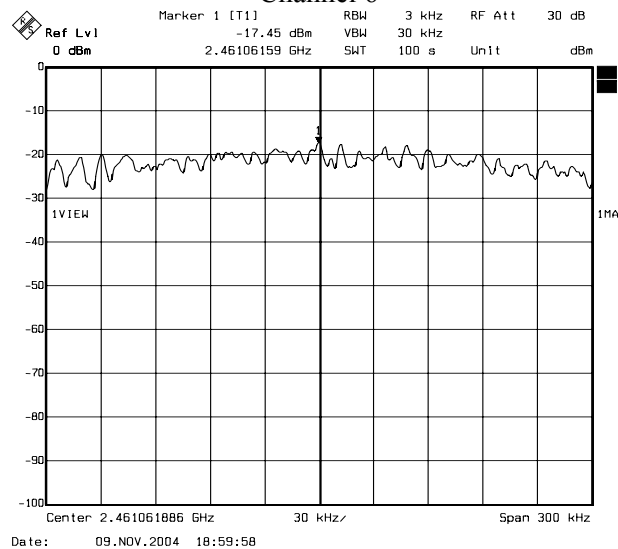

Channel 11

Note: 802.11g Mode (6Mbps)



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 53 of 61

7. BAND EDGE MEASUREMENT


7.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 Test Setup



7.3 Limits of Out of Band Emissions Measurement

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.4 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to with suitable frequency span including 100KHz bandwidth from band edge. The band edges was measured and recorded.

7.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 54 of 61

7.6 Test Results

A. Conducted

Refer to 7.7 photo of out band Emission measurement

B. Radiated

Input Power (System)	12VDC (From Power Adapter)	Environmental Conditions	26°C, 48%RH
Tested By	Ken Tu		

For 802.11b mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	48.48	60.28	80.53	92.79	PASS
	AV	37.78	49.28	73.40	85.76	
2483.50	PK	46.73	54.53	74.00	74.00	PASS
	AV	35.63	41.03	54.00	54.00	

For 802.11g mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	67.38	81.18	76.44	88.46	PASS
	AV	49.48	63.48	68.47	80.56	
2483.50	PK	58.93	66.13	74.00	74.00	PASS
	AV	39.33	52.13	54.00	54.00	

Note : 1. Radiated band edge field strength is measured with measurement procedure ANSI C63.4-2003



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11


Report No. : ER04-10-064FRF

Page 55 of 61

7.7 Photo of Band Edge Measurement

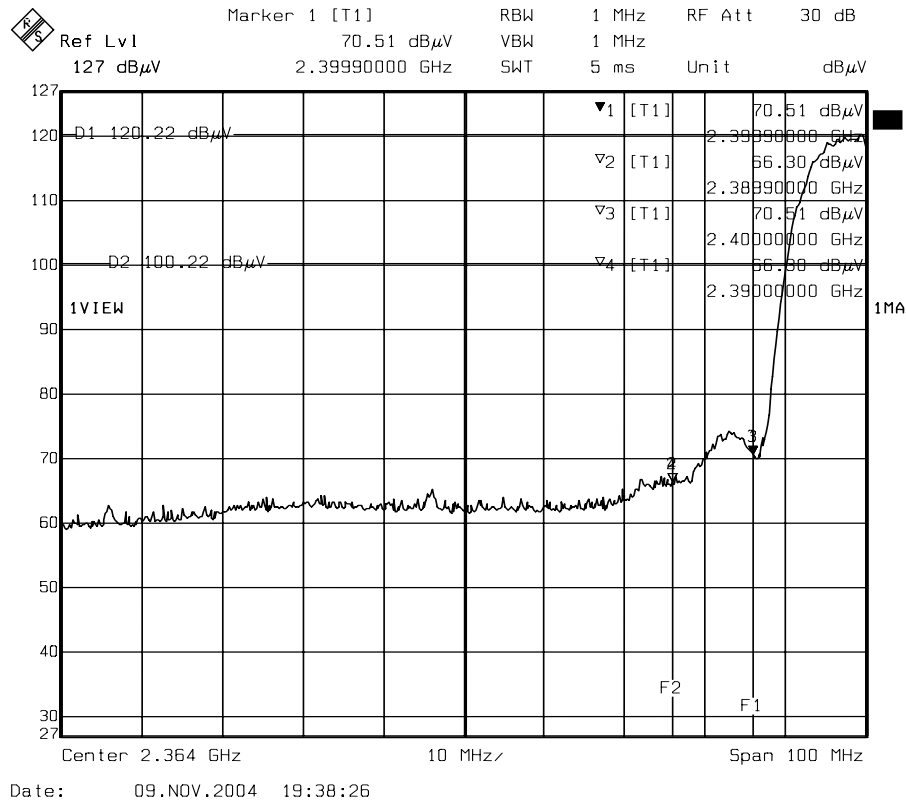

Lower Band Edge (Peak)

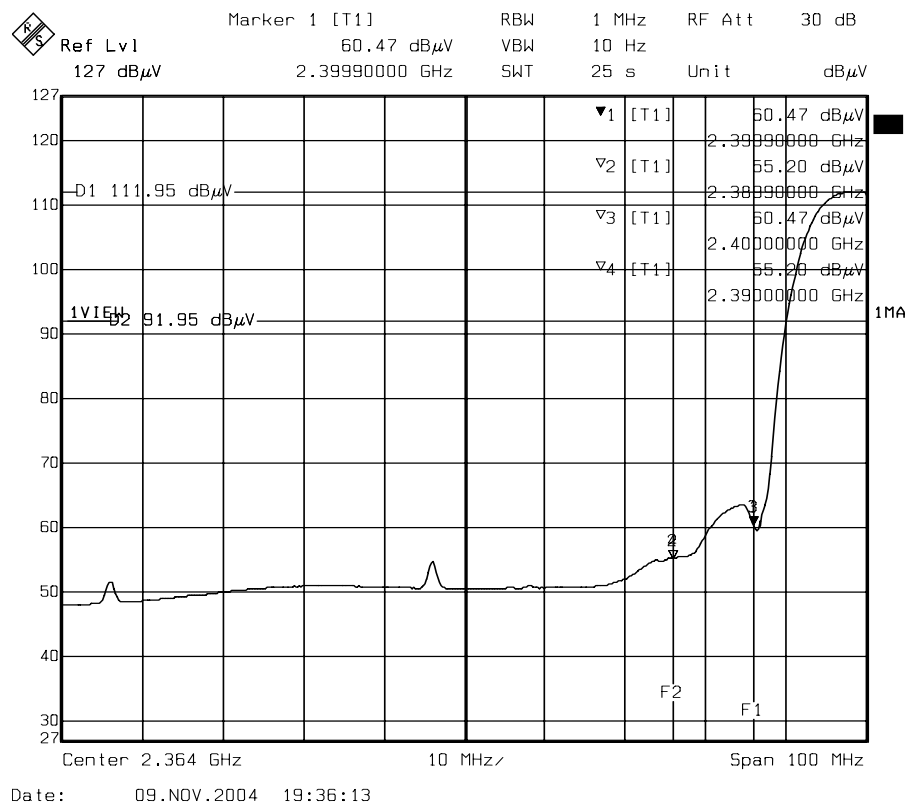

Lower Band Edge (Average)

Note : For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11


Report No. : ER04-10-064FRF

Page 56 of 61

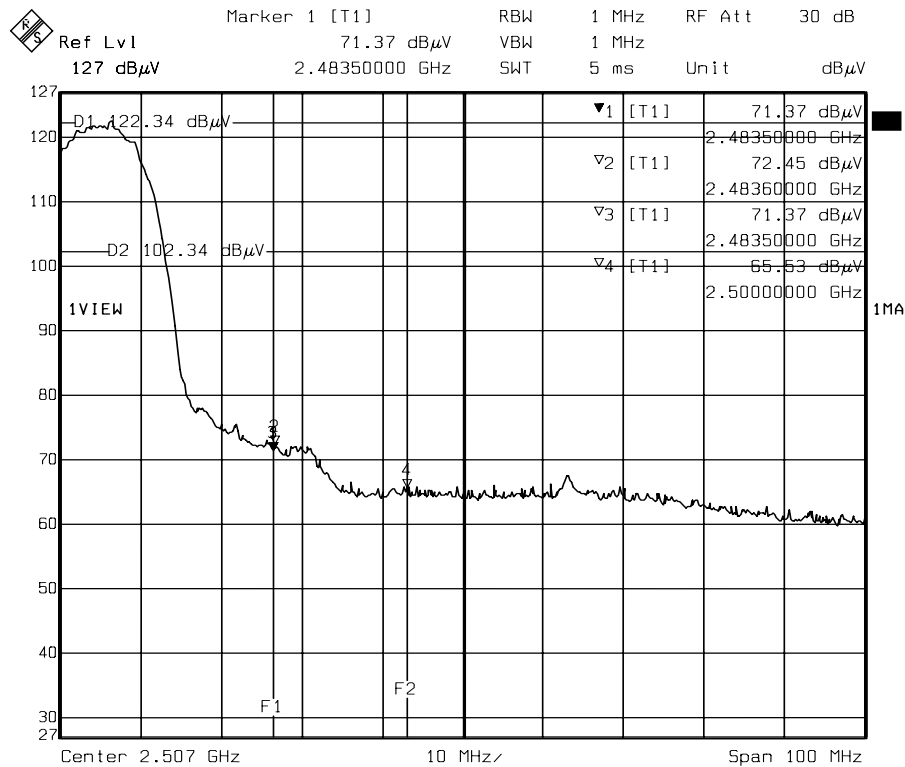

Date: 09.NOV.2004 19:14:44

Higher Band Edge (Peak)

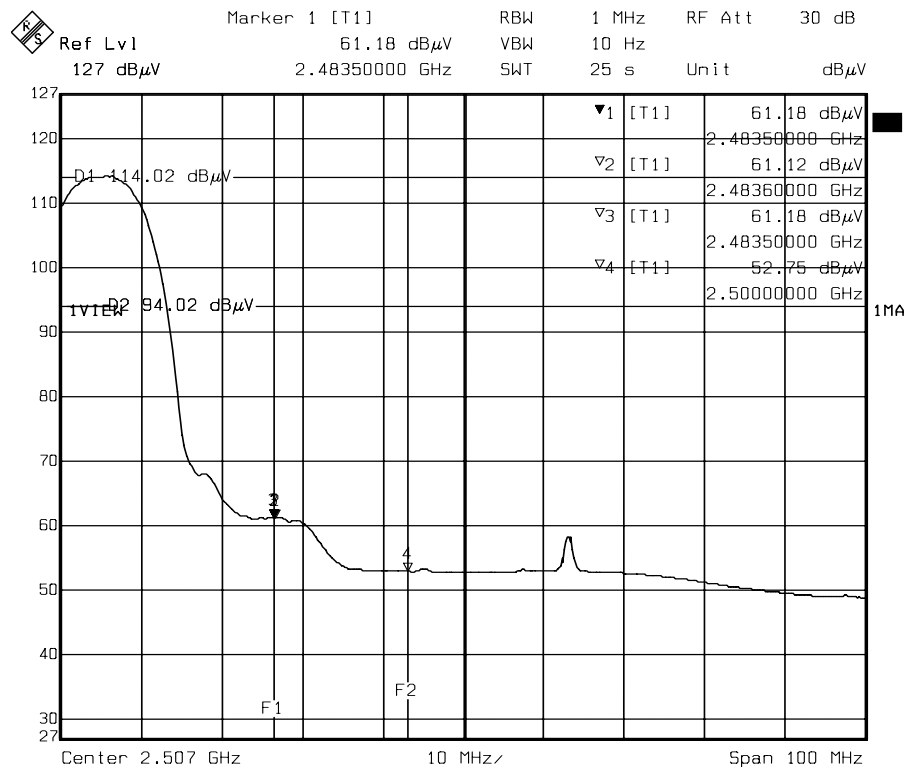

Date: 09.NOV.2004 19:17:00

Higher Band Edge (Average)

Note : For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11


Report No. : ER04-10-064FRF

Page 57 of 61

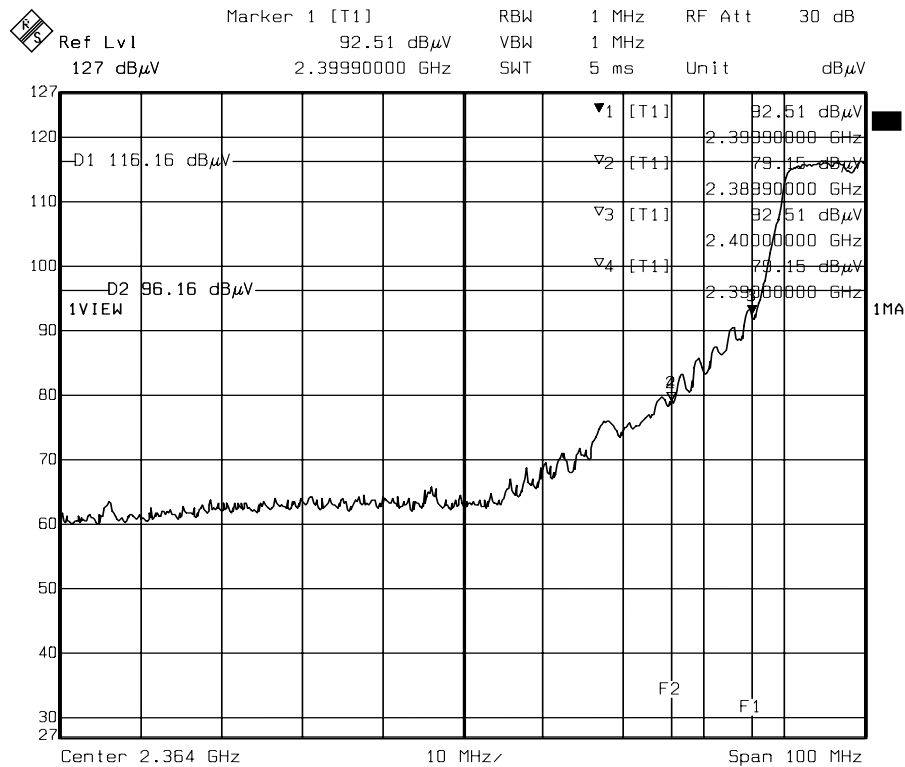

Date: 09.NOV.2004 19:29:35

Lower Band Edge (Peak)

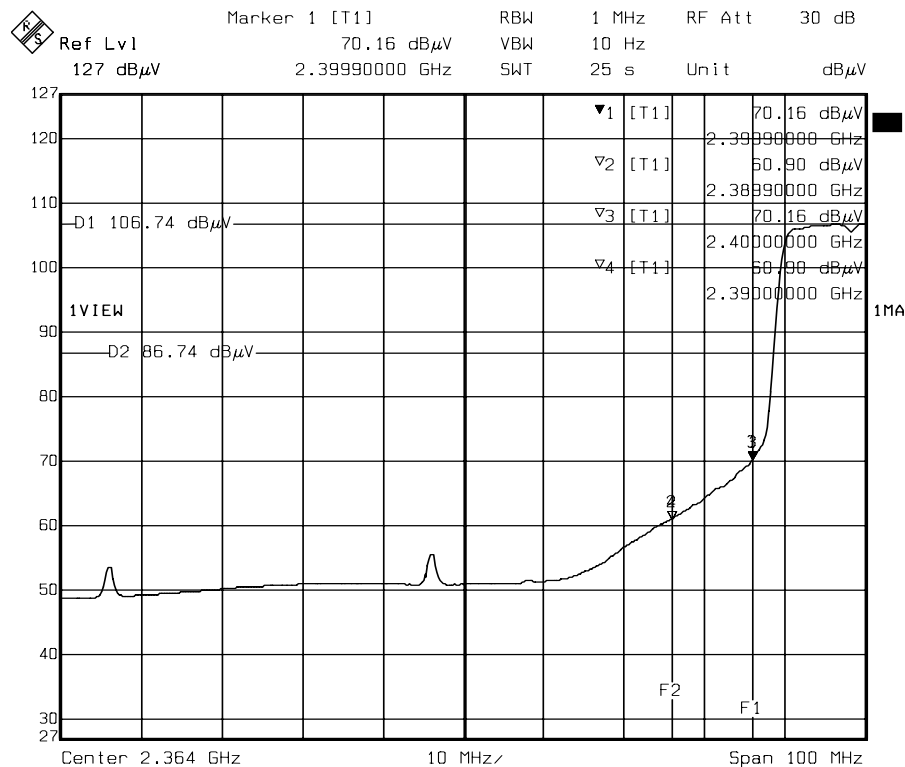

Date: 09.NOV.2004 19:32:30

Lower Band Edge (Average)

Note : For 802.11g Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 58 of 61

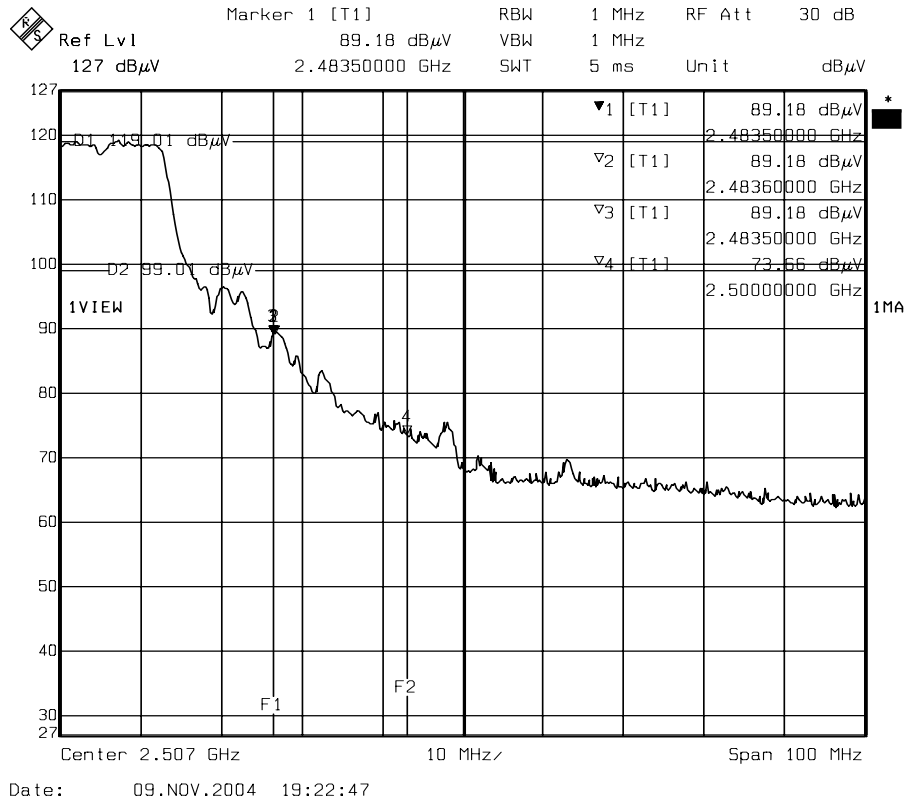

Higher Band Edge (Peak)

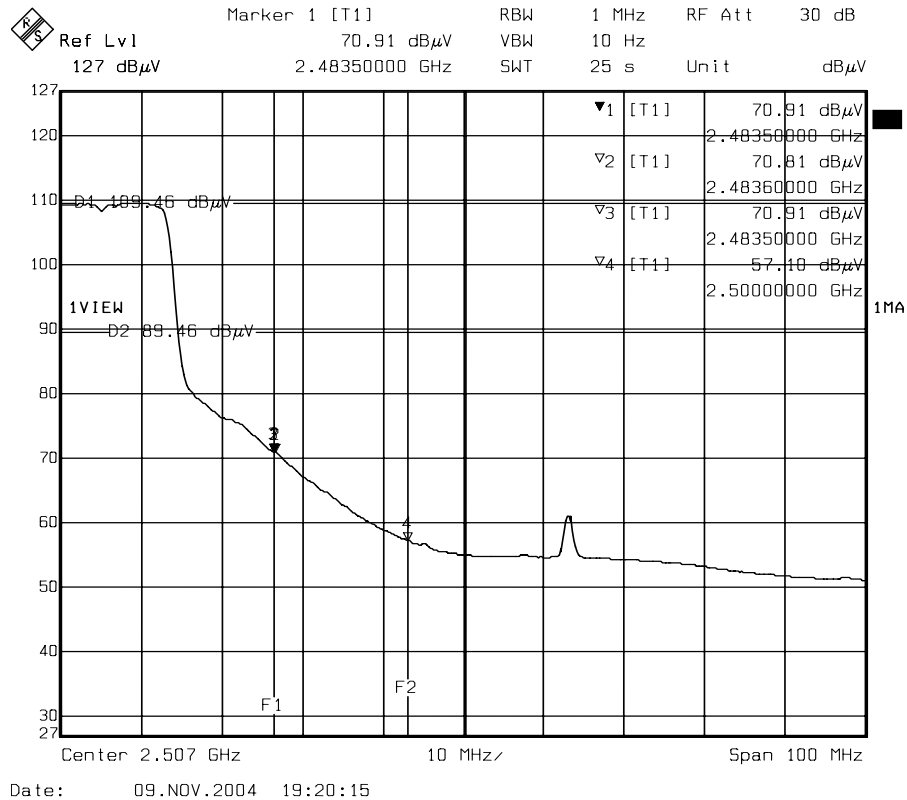

Higher Band Edge (Average)

Note : For 802.11g Mode



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKGV11

Report No. : ER04-10-064FRF

Page 59 of 61

8. ANTENNA REQUIREMENT

8.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.2 Antenna Connected Construction

The antenna used in this product is Dipole antenna. The maximum Gain of the antenna only 3.3dBi



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKGV11

Report No. : ER04-10-064FRF

Page 60 of 61

9. RF EXPOSURE EVALUATION

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b) LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational / Control Exposures				
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300-1,500	--	--	F/1500	6
1,500-100,000	--	--	1	30

9.1 Friis Formula

Friis transmission formula : $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

P_d is the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

9.2 EUT Operating Condition

A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRKG V11

Report No. : ER04-10-064FRF

Page 61 of 61

9.3 Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

9.3.1 Antenna Gain

Antenna Gain : The maximum Gain measured in fully anechoic chamber is 3.3dBi linear scale.

9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance

Channel	Channel Frequency (MHz)	Output Average Power to Antenna (dBm)	Antenna Gain	Power Density at 20cm (mW/cm ²)	LIMITS (mW/cm ²)
CH1	2412.00	14.85	3.3	0.012994	1
CH6	2437.00	15.51	3.3	0.015126	1
CH11	2462.00	15.32	3.3	0.014479	1

Note : 1. For 802.11b Mode (11Mbps)

2. The power density Pd (4th column) at a distance of 20cm calculated from the Friis transmission formula is far below the limit of 1 mW/cm². The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.

Channel	Channel Frequency (MHz)	Output Average Power to Antenna (dBm)	Antenna Gain	Power Density at 20cm (mW/cm ²)	LIMITS (mW/cm ²)
CH1	2412.00	13.59	3.3	0.009721	1
CH6	2437.00	13.43	3.3	0.009370	1
CH11	2462.00	13.68	3.3	0.009925	1

Note : 1. For 802.11g Mode (6Mbps).

2. The power density Pd (4th column) at a distance of 20cm calculated from the Friis transmission formula is far below the limit of 1 mW/cm². The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.