



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless-N Gigabit Router with Storage Link

Model: WRT350N Ver.2

Trade Name: Linksys

Issued to

**Cisco-Linksys LLC
121 Theory Drive
IRVINE, CA 92617(USA)**

Issued by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
<http://www.ccsemc.com.tw>
service@tw.ccsemc.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	6
3.5 DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION.....	8
4.1 MEASURING INSTRUMENT CALIBRATION.....	8
4.2 MEASUREMENT EQUIPMENT USED.....	8
5. FACILITIES AND ACCREDITATIONS	9
5.1 FACILITIES	9
5.2 EQUIPMENT.....	9
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	10
6. SETUP OF EQUIPMENT UNDER TEST	11
6.1 SETUP CONFIGURATION OF EUT.....	11
6.2 SUPPORT EQUIPMENT	11
7. FCC PART 15.247 REQUIREMENTS.....	12
7.1 6DB BANDWIDTH.....	12
7.2 PEAK POWER.....	27
7.3 AVERAGE POWER	41
7.4 BAND EDGES MEASUREMENT	55
7.5 PEAK POWER SPECTRAL DENSITY	72
7.6 SPURIOUS EMISSIONS	93
7.7 RADIATED EMISSIONS	112
7.8 POWERLINE CONDUCTED EMISSIONS.....	128
APPENDIX I RADIO FREQUENCY EXPOSURE	131
APPENDIX II PHOTOGRAPHS OF TEST SETUP	134



1. TEST RESULT CERTIFICATION

Applicant: Cisco-Linksys LLC
121 Theory Drive
IRVINE, CA 92617(USA)

Equipment Under Test: Wireless-N Gigabit Router with Storage Link

Trade Name: Linksys

Model: WRT350N Ver.2

Date of Test: September 12 ~ October 23, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Gavin Lim
Section Manager
Compliance Certification Services Inc.

Amanda Wu
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Wireless-N Gigabit Router with Storage Link
Trade Name	Linksys
Model Number	WRT350N Ver.2
Model Discrepancy	N/A
Power Supply	I.T.E. Model: MU18-2120150-A1 I/P: 100-240V, 50/60Hz, 0.6A O/P: 12.0V, 1.5A
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b mode: 17.82 dBm IEEE 802.11g mode: 18.86 dBm draft 802.11n Standard-20 MHz Channel mode: 19.39 dBm draft 802.11n Wide-40 MHz Channel mode: 17.06 dBm
Modulation Technique	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33, 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)
Number of Channels	IEEE 802.11b/g mode: 11 Channels draft 802.11n Standard-20 MHz Channel mode: 11 Channels draft 802.11n Wide-40 MHz Channel mode: 7 Channels
Antenna Specification	Antenna-Left Gain: 2.6 dBi for TX / RX (including cable loss) Antenna-Mid Gain: 3.4 dBi for RX only (including cable loss) Antenna-Right Gain: 2.3 dBi for TX / RX (including cable loss) Antenna Calculation for CDD Mode: Antenna-Left Gain: $2.6 \text{ dBi} + 10 \log(2) = 5.6 \text{ dBi}$ (Numeric gain: 3.63) Antenna-Right Gain: $2.3 \text{ dBi} + 10 \log(2) = 5.3 \text{ dBi}$ (Numeric gain: 3.38)
Antenna Designation	Omni-directional Antenna

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **Q87-WRT350NV2** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: WRT350N Ver.2) had been tested under operating condition.

The EUT is a 2x3 configuration spatial MIMO (2Tx & 3Rx) without beam forming function but with cyclic delay diversity function that operate in double TX chains and triple RX chains. The 2x3 configuration is implemented with two outside TX & RX chains (Chain 0 and 2) and the middle RX chain (chain 1).

Software used to control the EUT for staying in continuous transmitting mode was programmed.

The worst case data rate is determined as the data rate with highest output power.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

IEEE802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate and cyclic delay diversity were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/18/2007

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	07/25/2007
Test Receiver	Rohde&Schwarz	ESCI	100064	11/05/2006
Switch Controller	TRC	Switch Controller	SC94050010	05/05/2007
4 Port Switch	TRC	4 Port Switch	SC94050020	05/05/2007
Horn-Antenna	TRC	HA-0502	06	06/02/2007
Horn-Antenna	TRC	HA-0801	04	05/05/2007
Horn-Antenna	TRC	HA-1201A	01	07/04/2007
Horn-Antenna	TRC	HA-1301A	01	07/04/2007
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/09/2007
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/26/2008
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than $\pm 2.0065\text{dB}$ (30MHz ~ 1GHz), $\pm 3.0958\text{dB}$ (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	09/26/2007
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/14/2007
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	03/20/2007
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than $\pm 2.81\text{dB}$, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☒ No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, EIC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 0824-01
USA	FCC	3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements	 93105, 90471 965860
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	TAF	EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	 Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 3991-3, IC 3991-4) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1	 IC 3991-3 IC 3991-4 IC 6106

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC (Remote)	Sony	VGN-S44TP	28198080 8100339	WLAN: ETC094LPD0155 Bluetooth: ETC094LPD0156	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	Notebook PC (Remote)	IBM	2672 (X31)	99PBTKB	WLAN: ANO20030400LEG Bluetooth: ANO20020100MTN	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
3.	Wireless-N Notebook Adapter	LINKSYS	WPC300N	N/A	FCC DoC	N/A	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.00	>500	PASS
Mid	2437	9.58		PASS
High	2462	10.25		PASS

Test mode: IEEE 802.11b mode / Chain 2

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	11.17	>500	PASS
Mid	2437	10.17		PASS
High	2462	11.00		PASS

Test mode: IEEE 802.11g mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.33	>500	PASS
Mid	2437	16.50		PASS
High	2462	16.50		PASS

Test mode: IEEE 802.11g mode / Chain 2

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.50	>500	PASS
Mid	2437	16.50		PASS
High	2462	16.50		PASS

**Test mode: draft 802.11n Standard-20 MHz Channel mode / Chain 0**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.33	>500	PASS
Mid	2437	17.83		PASS
High	2462	17.67		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode / Chain 2

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.75	>500	PASS
Mid	2437	17.58		PASS
High	2462	17.83		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.42	>500	PASS
Mid	2437	36.42		PASS
High	2452	36.50		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode / Chain 2


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.42	>500	PASS
Mid	2437	36.50		PASS
High	2452	36.50		PASS




Test Plot

IEEE 802.11b mode / Chain 0

6dB Bandwidth (CH Low)

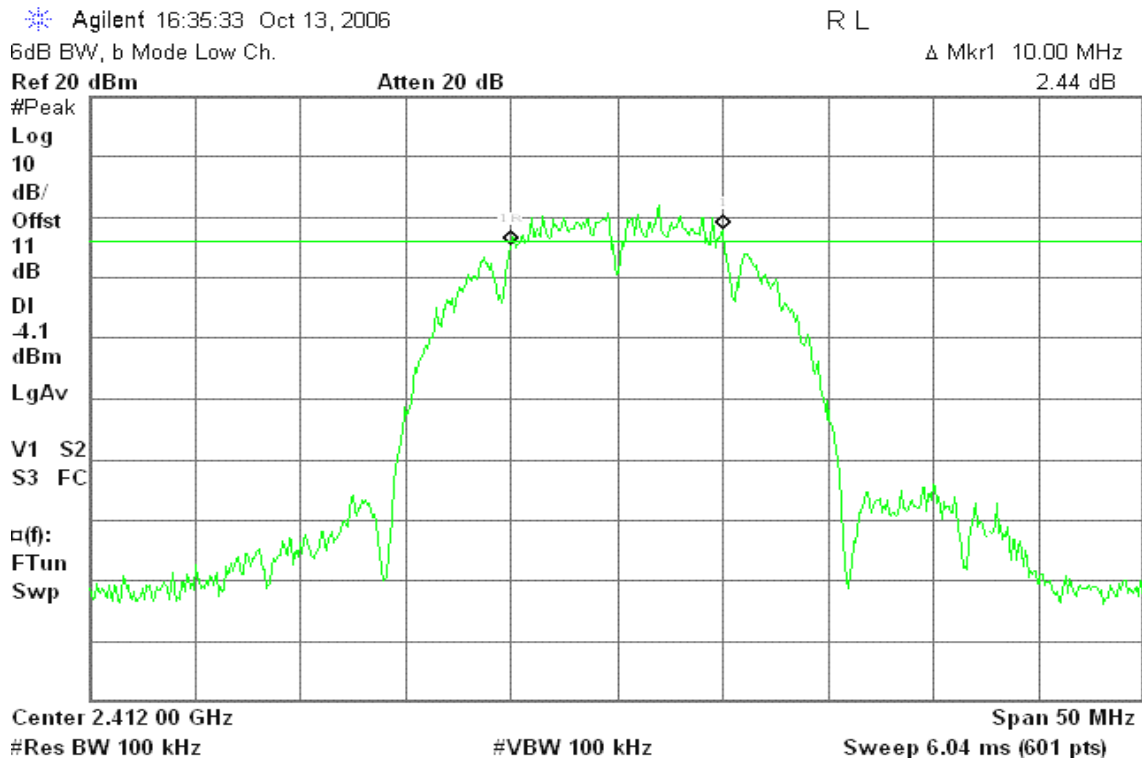

6dB Bandwidth (CH Mid)

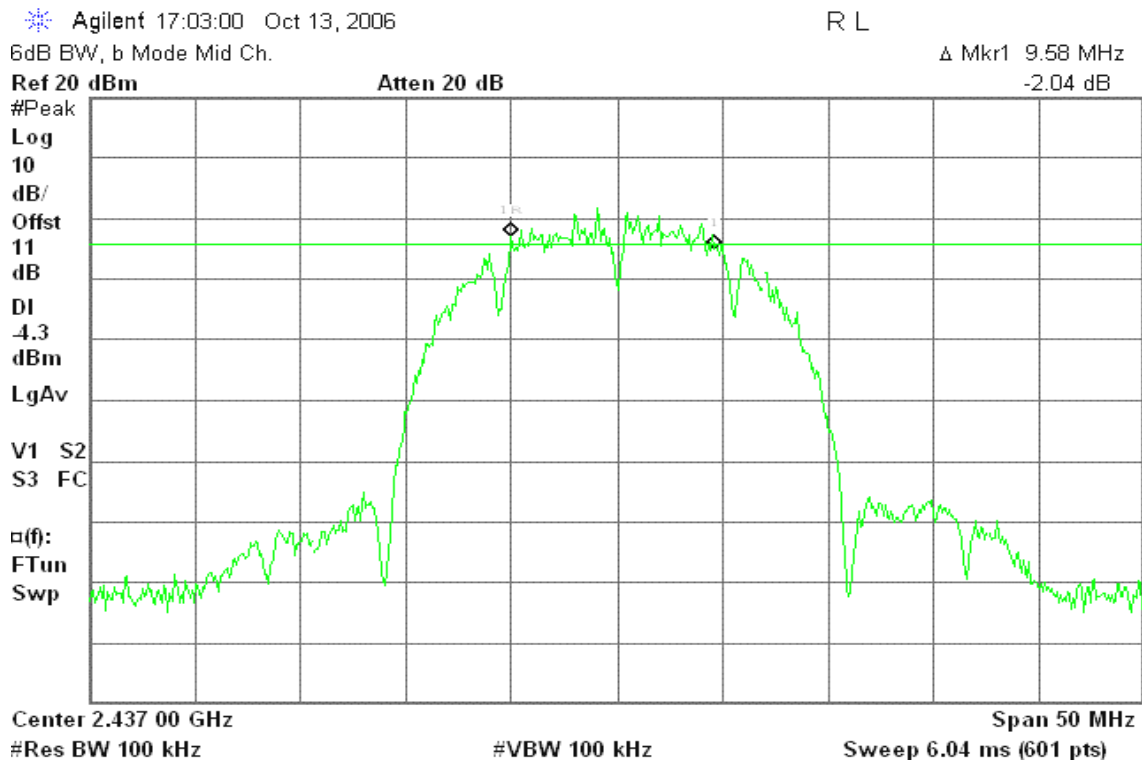

**6dB Bandwidth (CH High)**

Agilent 17:09:57 Oct 13, 2006

R L

6dB BW, b Mode High Ch.

 Δ Mkr1 10.25 MHz

Ref 20 dBm

Atten 20 dB

0.26 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-5.1

dBm

LgAv


V1 S2

S3 FC

 $\square(f)$:

FTun

Swp

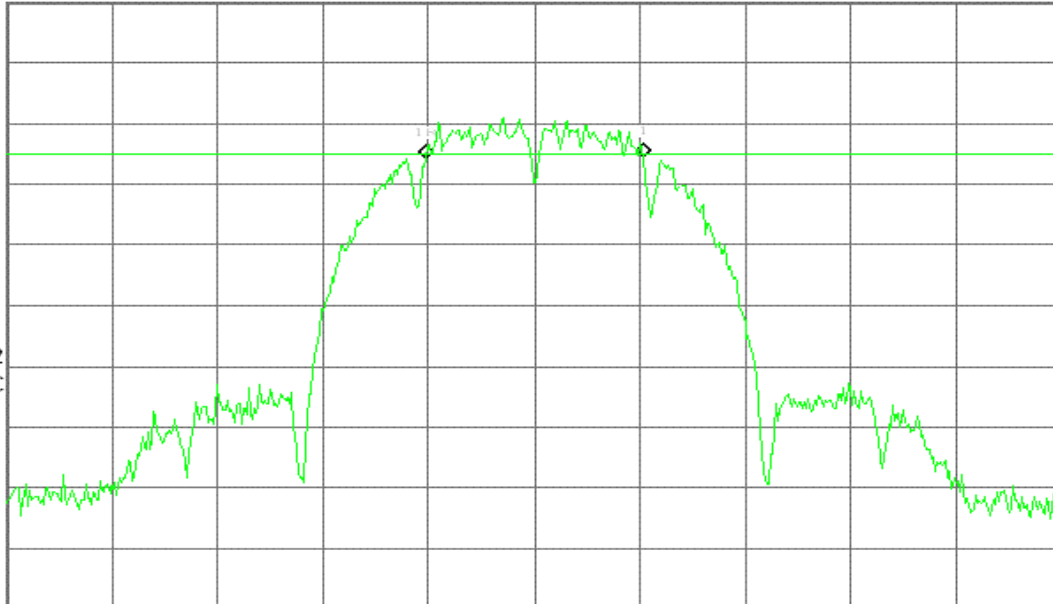

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

IEEE 802.11b mode / Chain 2**6dB Bandwidth (CH Low)**

Agilent 16:42:08 Oct 13, 2006

R L

6dB BW, b Mode Low Ch.

 Δ Mkr1 11.17 MHz

Ref 20 dBm

Atten 20 dB

-0.47 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-5.3

dBm

LgAv


V1 S2

S3 FC

 $\square(f)$:

FTun

Swp

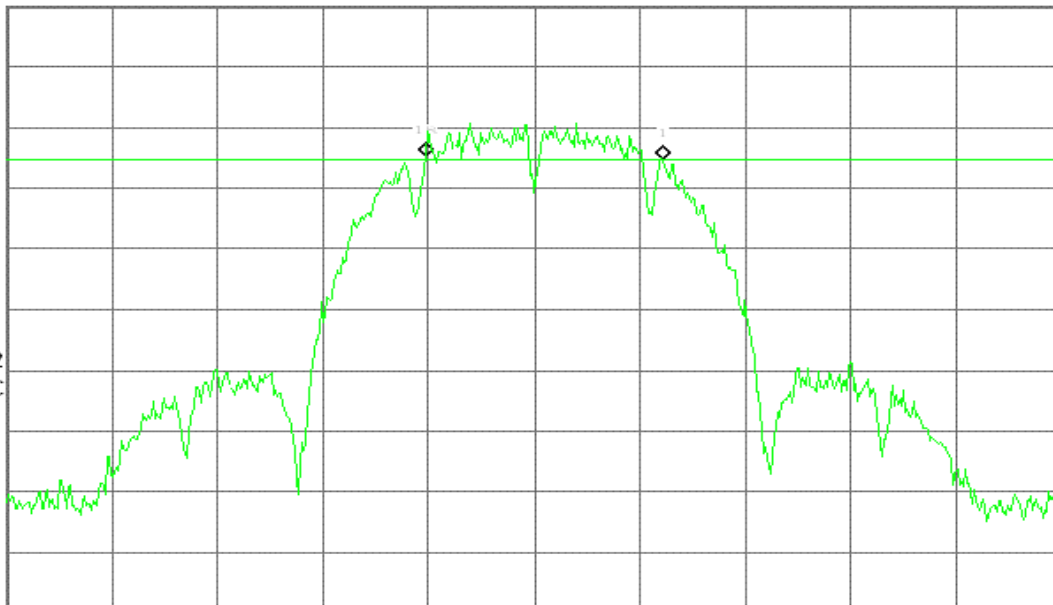

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 16:56:48 Oct 13, 2006

R L

6dB BW, b Mode Mid Ch.

 Δ Mkr1 10.17 MHz

Ref 20 dBm

Atten 20 dB

2.14 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-6.2

dBm

LgAv


V1 S2

S3 FC

 $\square(f)$:

FTun

Swp

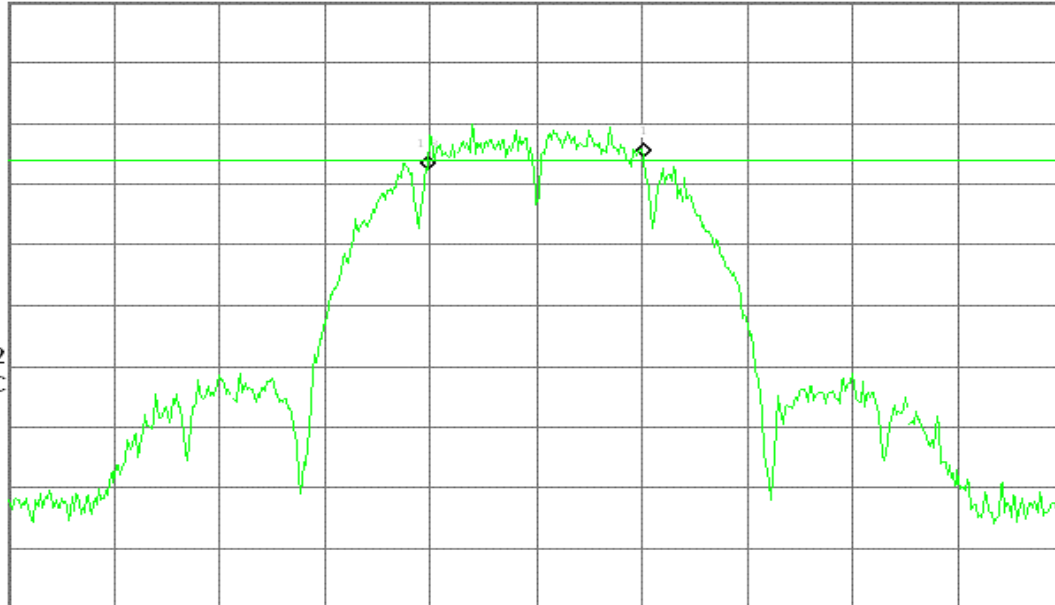

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 17:17:03 Oct 13, 2006

R L

6dB BW, b Mode High Ch.

 Δ Mkr1 11.00 MHz

Ref 20 dBm

Atten 20 dB

-0.57 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-4.5

dBm

LgAv


V1 S2

S3 FC

 $\square(f)$:

FTun

Swp

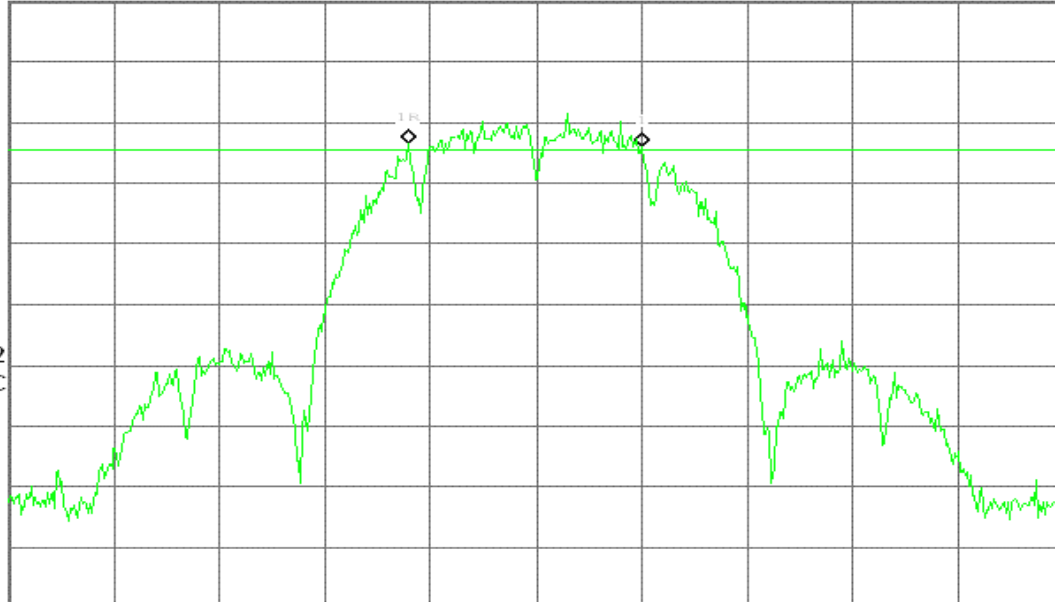

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

**IEEE 802.11g mode / Chain 0****6dB Bandwidth (CH Low)**

Agilent 18:45:06 Oct 13, 2006

R L

6dB BW, g Mode Low Ch.

 Δ Mkr1 16.33 MHz

Ref 20 dBm

Atten 20 dB

-0.36 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-6.3

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

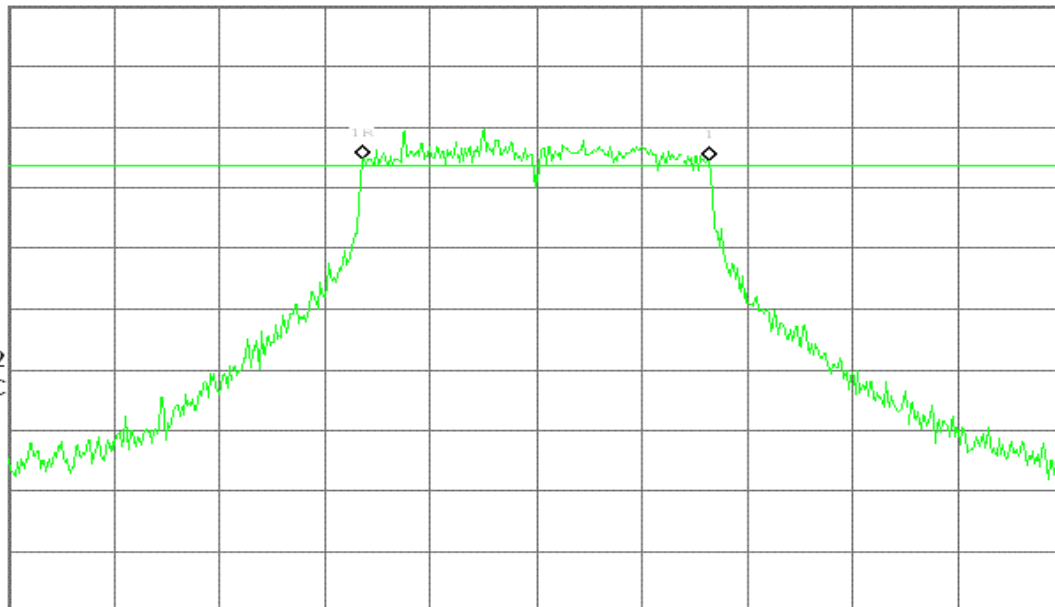

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 19:10:25 Oct 13, 2006

R L

6dB BW, g Mode Mid Ch.

 Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 20 dB

0.47 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-8.1

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

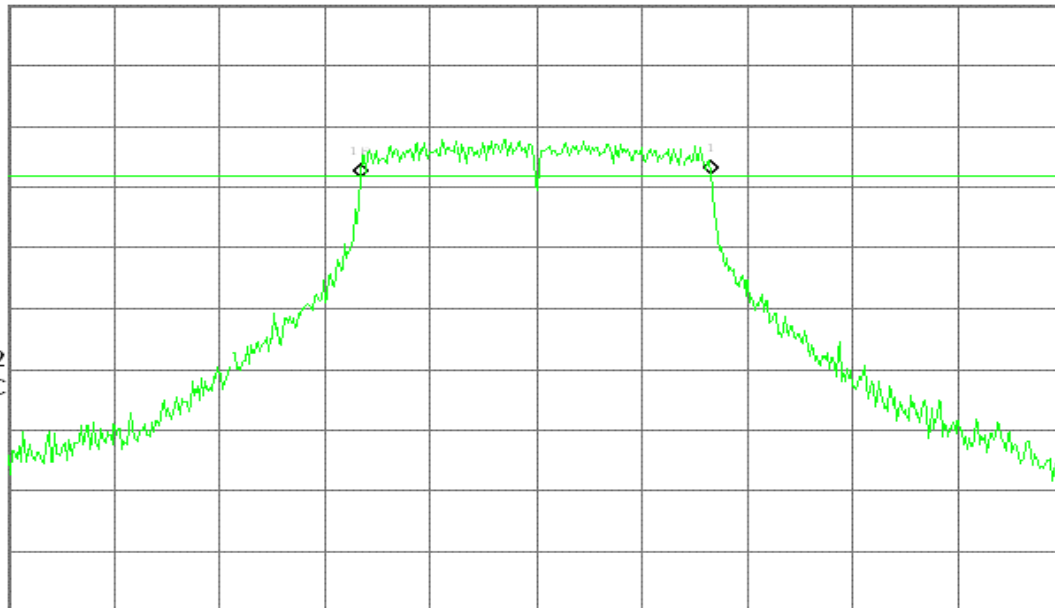

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

**6dB Bandwidth (CH High)**

Agilent 19:17:01 Oct 13, 2006

R L

6dB BW, g Mode High Ch.

 Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 20 dB

-0.08 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-6.5

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

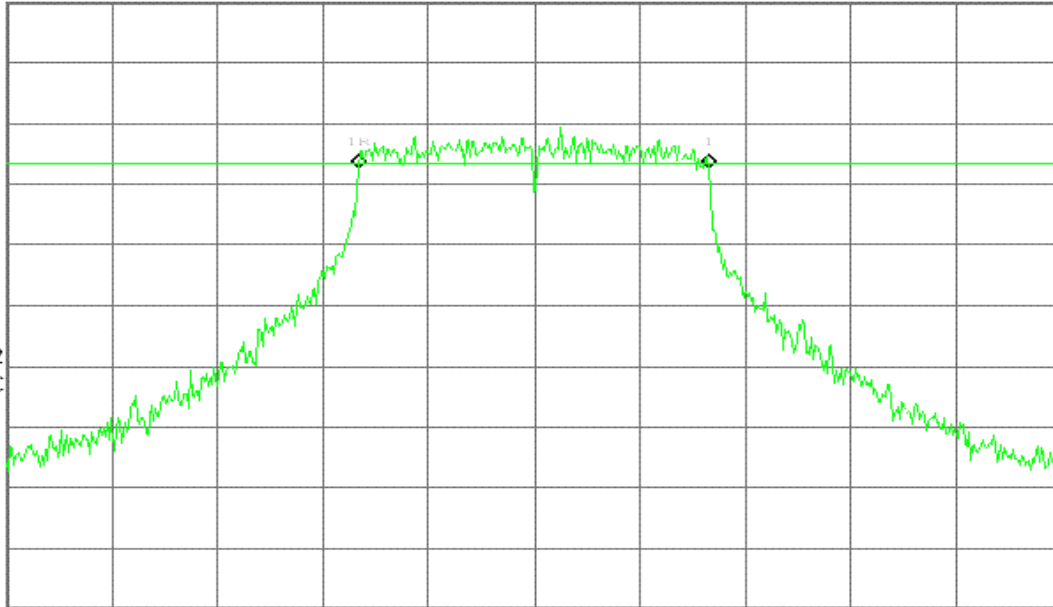

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

IEEE 802.11g mode / Chain 2**6dB Bandwidth (CH Low)**

Agilent 18:53:13 Oct 13, 2006

R L

6dB BW, g Mode Low Ch.

 Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 20 dB

0.95 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-7.8

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

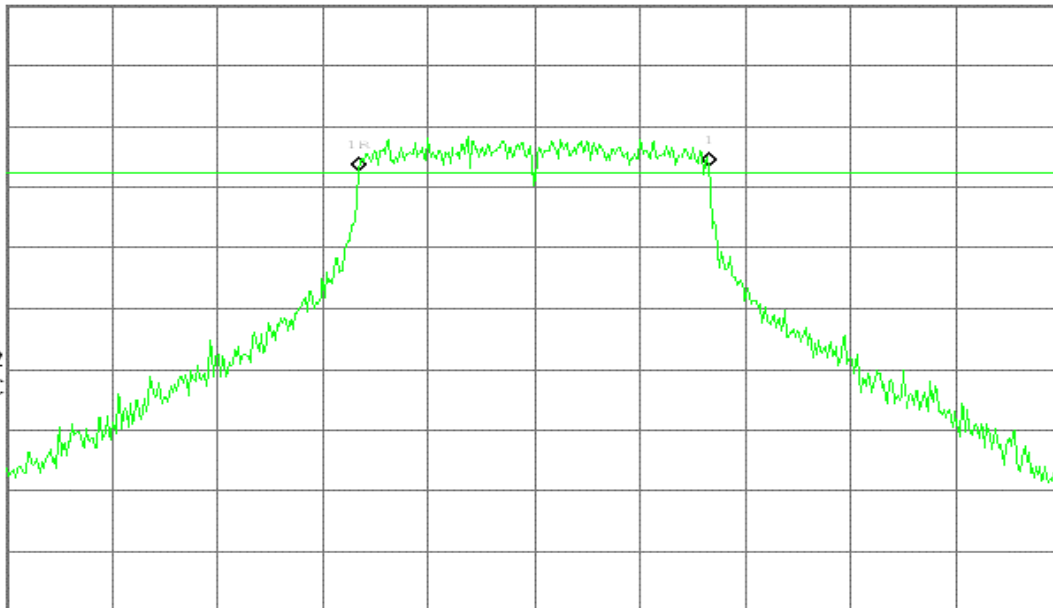

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

**6dB Bandwidth (CH Mid)**

Agilent 19:04:07 Oct 13, 2006

R L

6dB BW, g Mode Mid Ch.

 Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 20 dB

-0.65 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-8.8

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

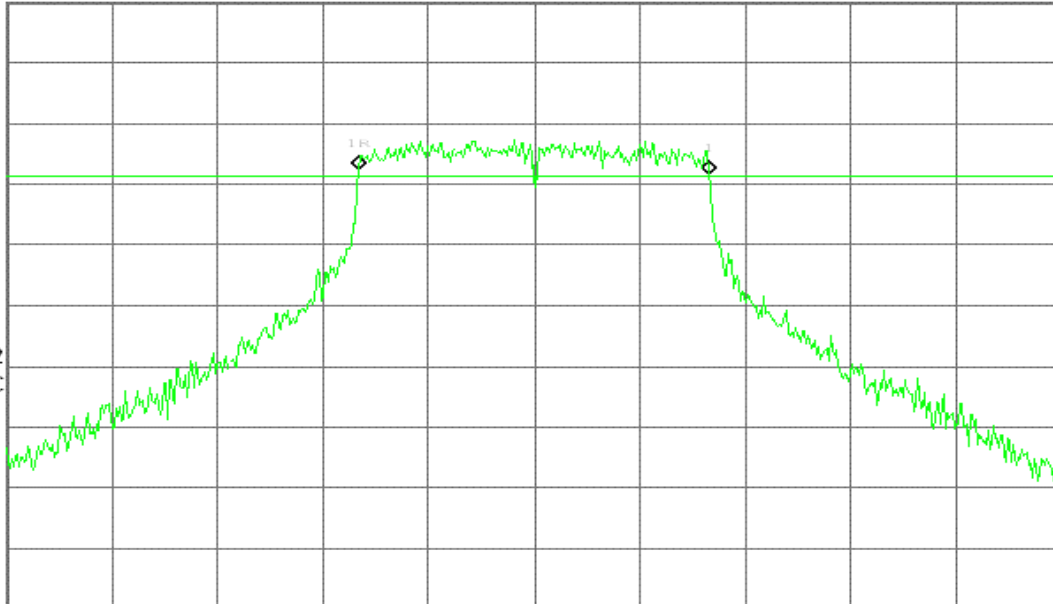

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 19:23:33 Oct 13, 2006

R L

6dB BW, g Mode High Ch.

 Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 20 dB

0.82 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-8.0

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

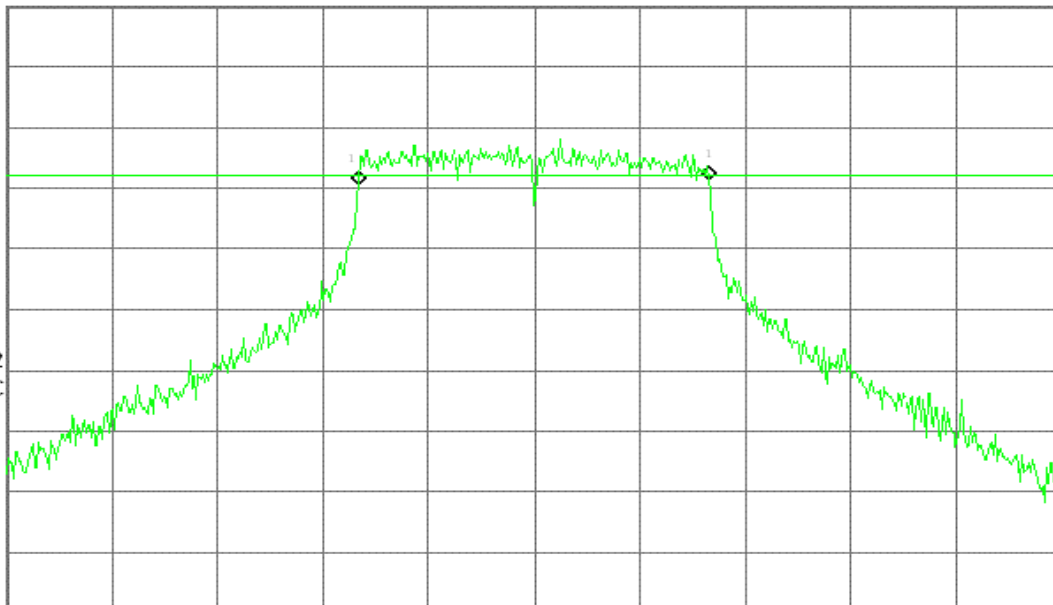



Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

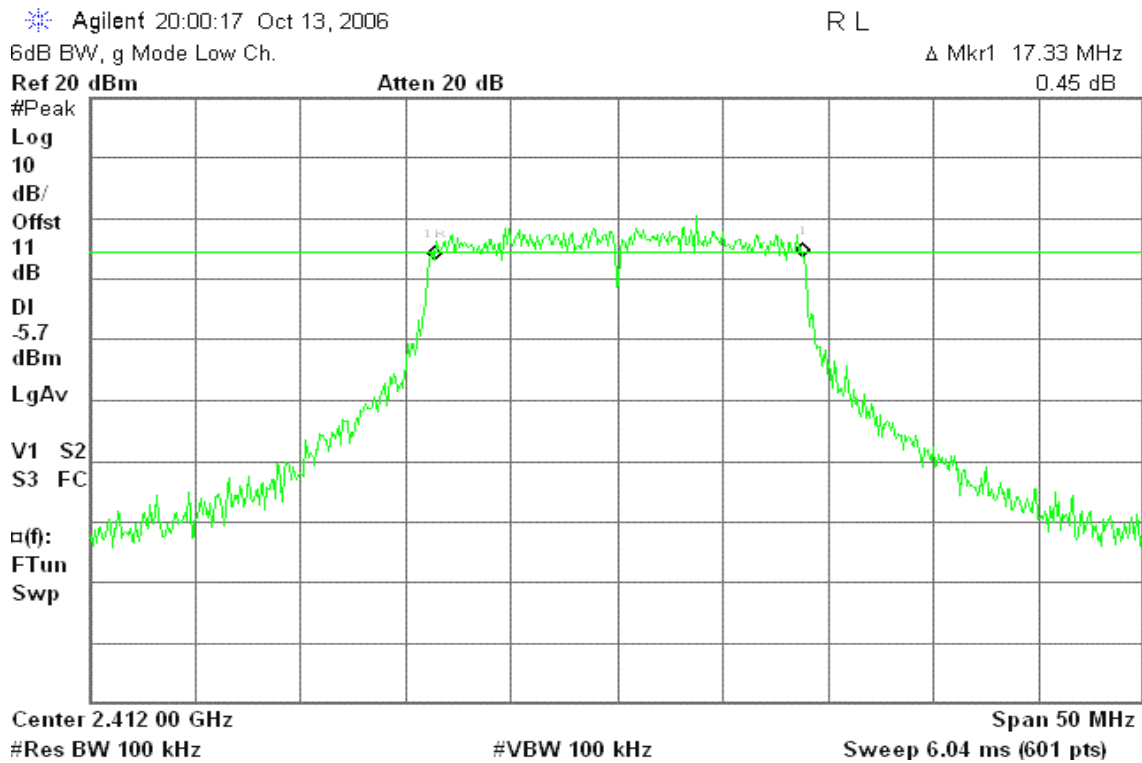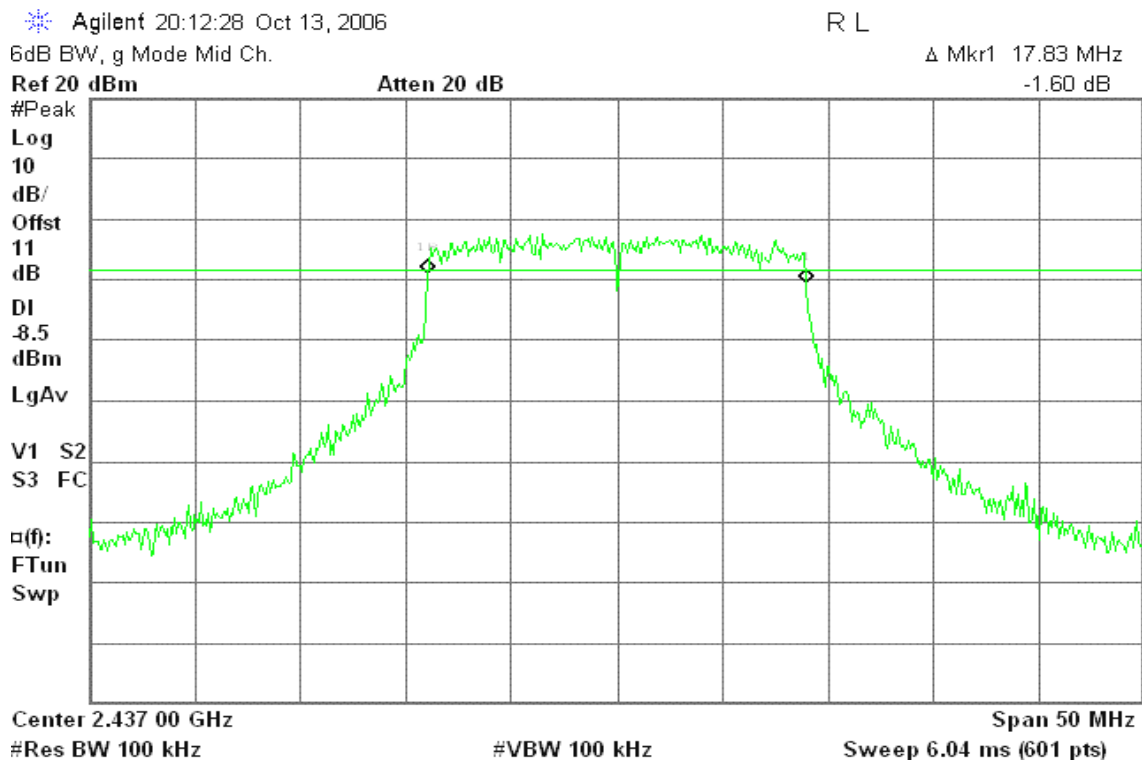**draft 802.11n Standard-20 MHz Channel mode / Chain 0****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

**6dB Bandwidth (CH High)**

Agilent 20:44:11 Oct 13, 2006

R L

6dB BW, g Mode High Ch.

 Δ Mkr1 17.67 MHz

Ref 20 dBm

Atten 20 dB

-0.91 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-6.0

dBm

LgAv


V1 S2

S3 FC

 $\square(f)$:

FTun

Swp

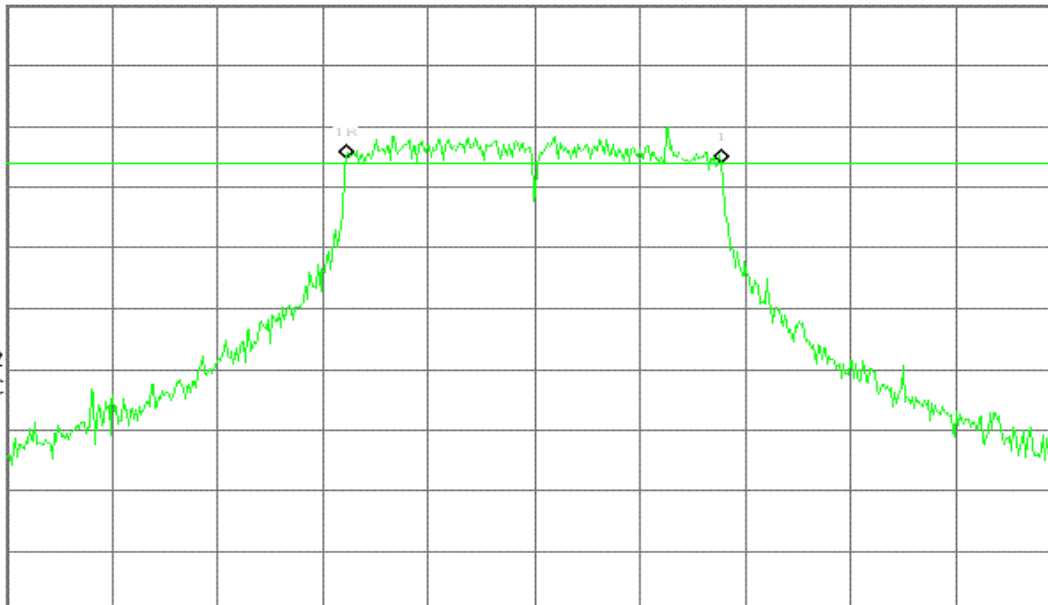

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

draft 802.11n Standard-20 MHz Channel mode / Chain 2**6dB Bandwidth (CH Low)**

Agilent 19:54:30 Oct 13, 2006

R L

6dB BW, g Mode Low Ch.

 Δ Mkr1 17.75 MHz

Ref 20 dBm

Atten 20 dB

-0.67 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-7.8

dBm

LgAv


V1 S2

S3 FC

 $\square(f)$:

FTun

Swp

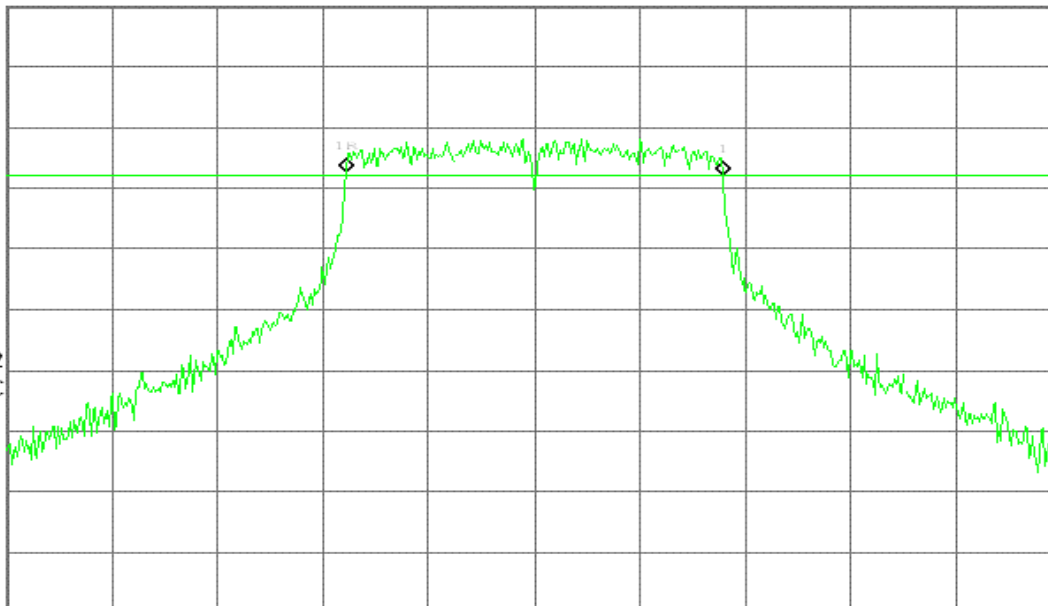

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 20:25:52 Oct 13, 2006

R L

6dB BW, g Mode Mid Ch.

 Δ Mkr1 17.58 MHz

Ref 20 dBm

Atten 20 dB

-0.40 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-6.2

dBm

LgAv


V1 S2

S3 FC

 $\square(f)$:

FTun

Swp

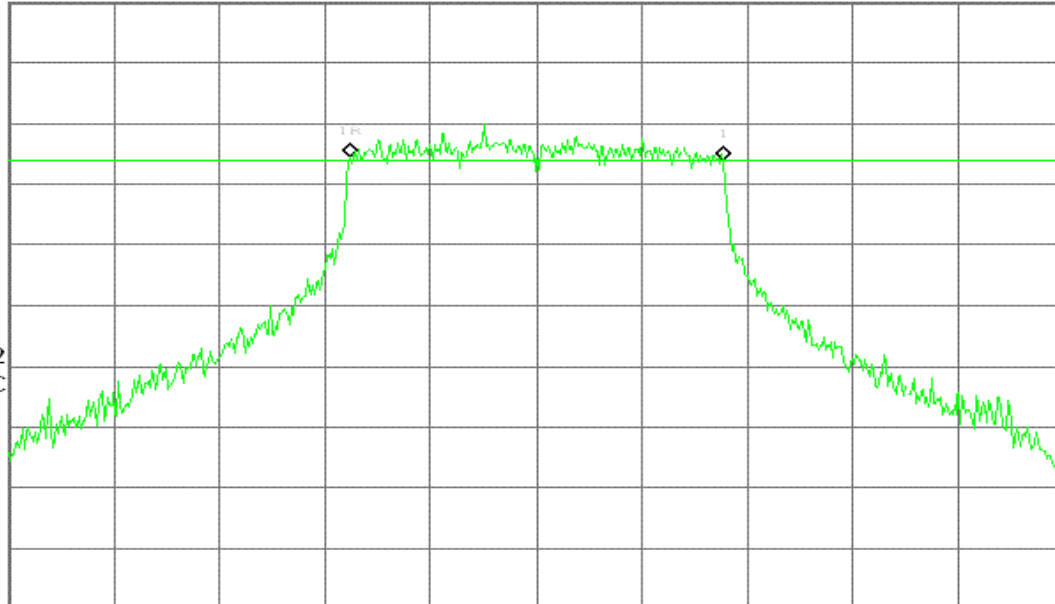

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 20:33:01 Oct 13, 2006

R L

6dB BW, g Mode High Ch.

 Δ Mkr1 17.83 MHz

Ref 20 dBm

Atten 20 dB

-0.18 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-8.0

dBm

LgAv


V1 S2

S3 FC

 $\square(f)$:

FTun

Swp

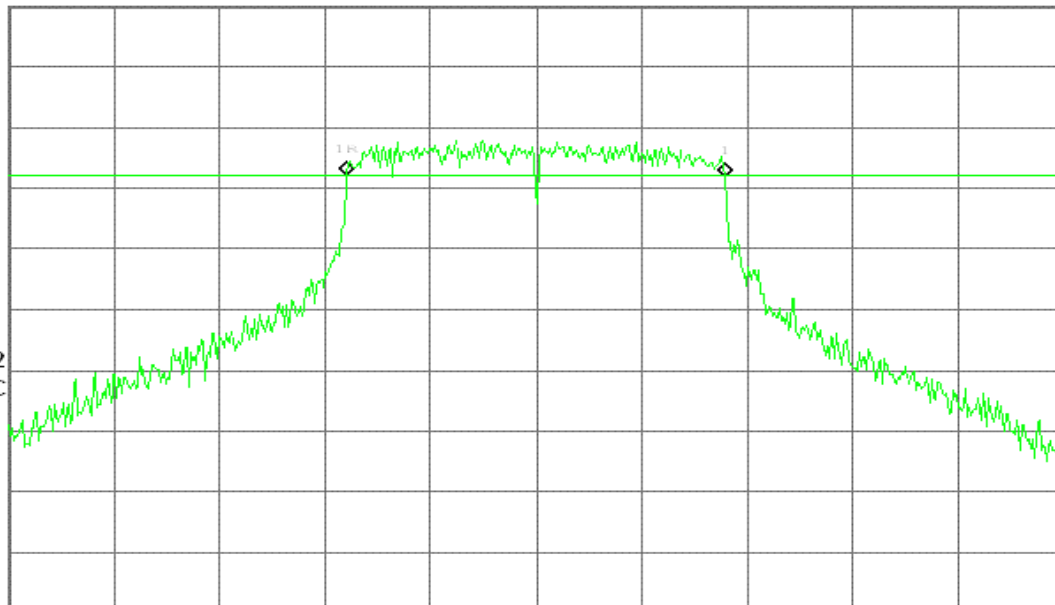

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

**draft 802.11n Wide-40 MHz Channel mode / Chain 0****6dB Bandwidth (CH Low)**

* Agilent 21:16:38 Oct 13, 2006

R L

6dB BW, g Mode Low Ch.

 Δ Mkr1 36.42 MHz

Ref 20 dBm

Atten 20 dB

1.49 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-11.1

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

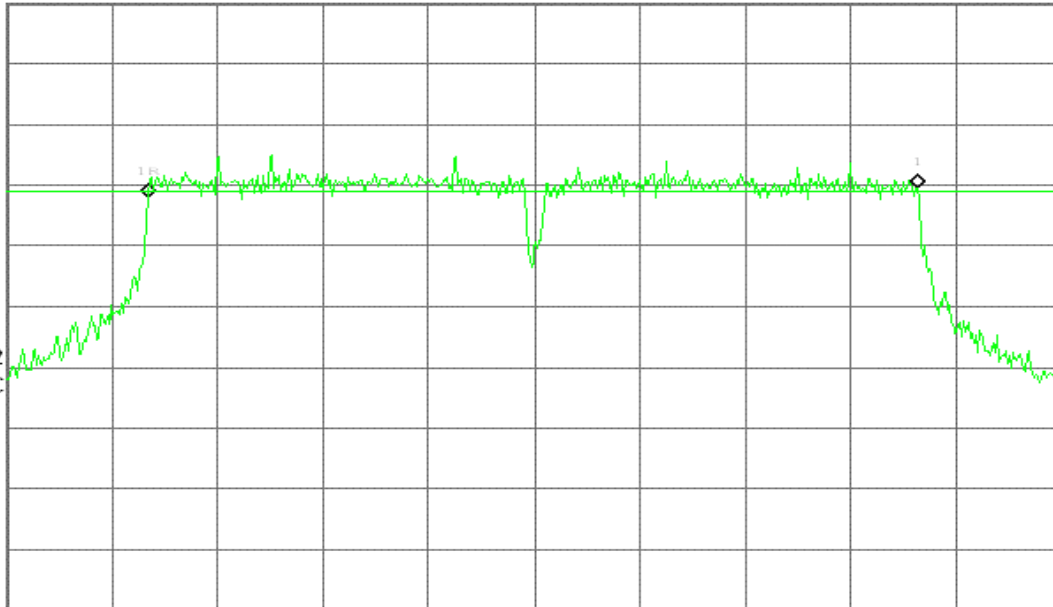

Center 2.422 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

* Agilent 21:46:04 Oct 13, 2006

R L

6dB BW, g Mode Mid Ch.

 Δ Mkr1 36.42 MHz

Ref 20 dBm

Atten 20 dB

1.57 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-10.9

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

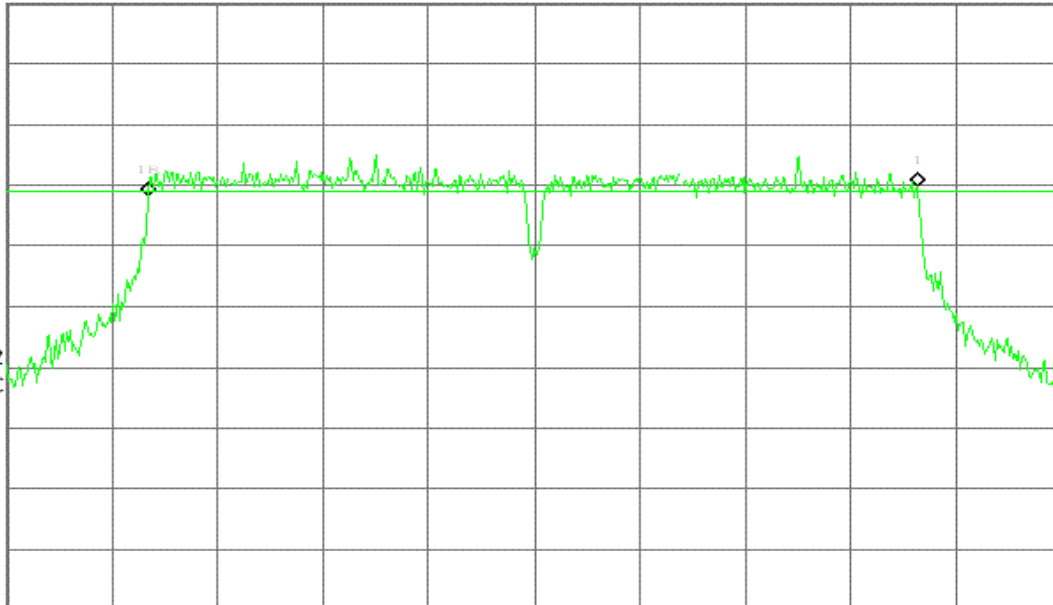

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

**6dB Bandwidth (CH High)**

Agilent 21:54:02 Oct 13, 2006

R L

6dB BW, g Mode High Ch.

 Δ Mkr1 36.50 MHz

Ref 20 dBm

Atten 20 dB

-0.24 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-12.6

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

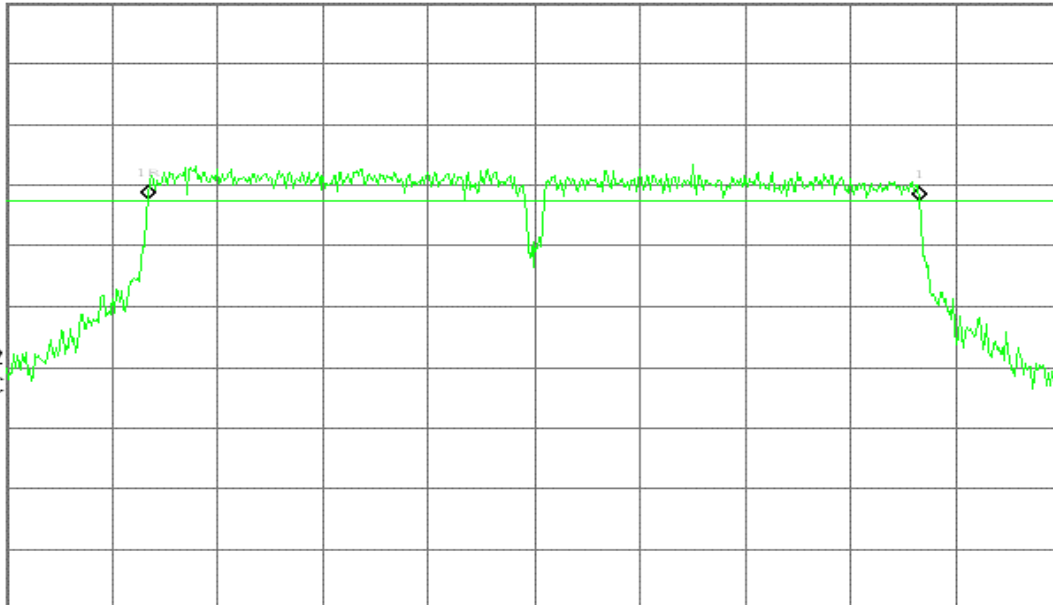

Center 2.452 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

draft 802.11n Wide-40 MHz Channel mode / Chain 2**6dB Bandwidth (CH Low)**

Agilent 21:29:00 Oct 13, 2006

R L

6dB BW, g Mode Low Ch.

 Δ Mkr1 36.42 MHz

Ref 20 dBm

Atten 20 dB

0.73 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-10.9

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

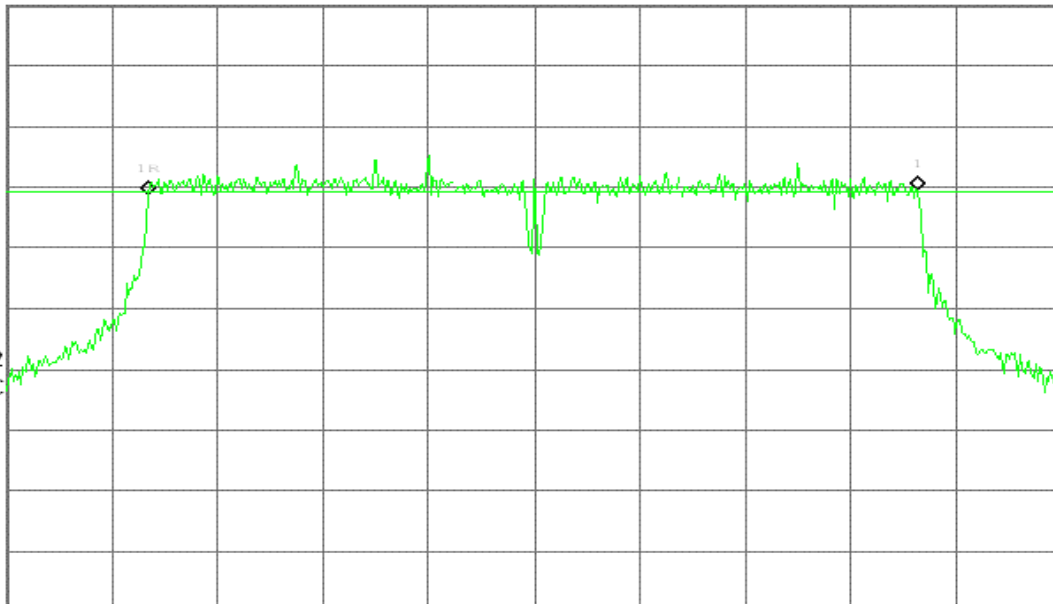

Center 2.422 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 21:38:09 Oct 13, 2006

R L

6dB BW, g Mode Mid Ch.

 Δ Mkr1 36.50 MHz

Ref 20 dBm

Atten 20 dB

-0.57 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-11.5

dBm

LgAv


V1 S2

S3 FC

 $\square(f)$:

FTun

Swp

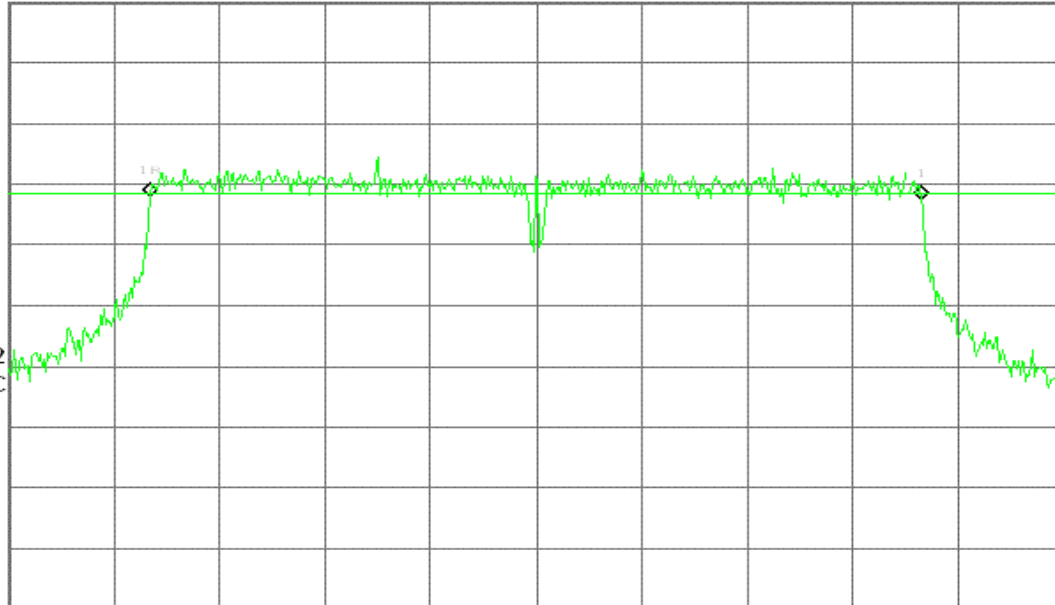

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 22:02:05 Oct 13, 2006

R L

6dB BW, g Mode High Ch.

 Δ Mkr1 36.50 MHz

Ref 20 dBm

Atten 20 dB

-2.70 dB

#Peak

Log

10

dB/

Offst

11

dB

DI

-12.4

dBm

LgAv


V1 S2

S3 FC

 $\square(f)$:

FTun

Swp

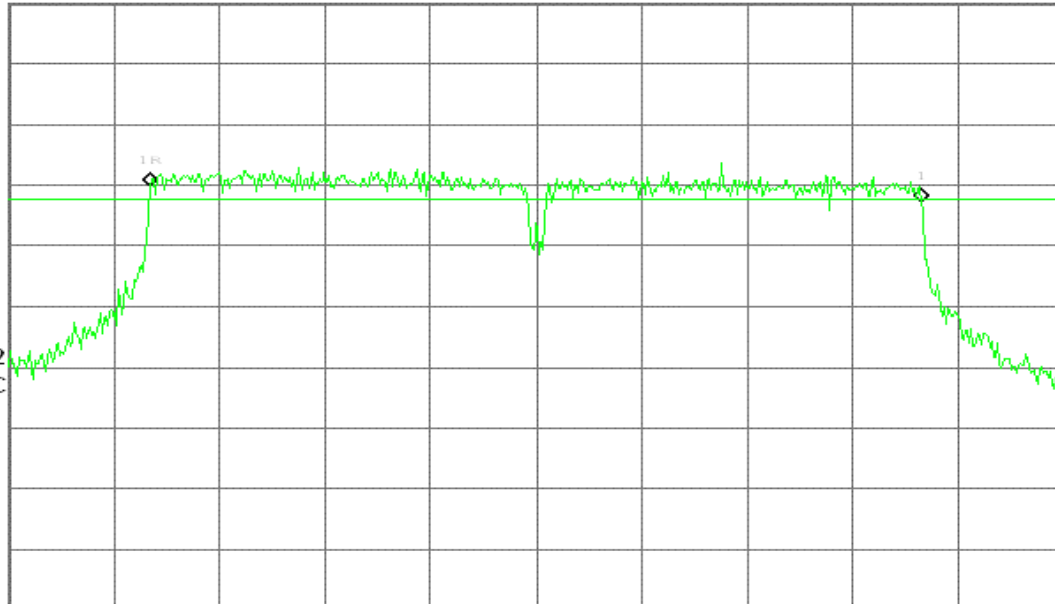

Center 2.452 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 1 MHz, VBW $\geq$ 3 MHz. in “Channel Power ” measurement.
4. Record the max reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 2 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	14.88	14.72	17.81	0.0604	1.00	PASS
Mid	2437	13.68	13.25	16.48	0.0445		PASS
High	2462	14.97	14.65	*17.82	0.0606		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 2 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	15.83	15.76	18.81	0.0760	1.00	PASS
Mid	2437	15.91	15.78	*18.86	0.0768		PASS
High	2462	15.63	15.17	18.42	0.0694		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 2 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.49	16.27	*19.39	0.0869	1.00	PASS
Mid	2437	16.02	15.47	18.76	0.0752		PASS
High	2462	15.50	15.94	18.74	0.0747		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 2 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	13.98	13.80	16.90	0.0490	1.00	PASS
Mid	2437	14.11	13.99	*17.06	0.0508		PASS
High	2462	14.09	13.91	17.01	0.0502		PASS

Remark: Total Output Power (w) = Chain 0 ($10^{(Output\ Power / 10)} / 1000$) + Chain 2 ($10^{(Output\ Power / 10)} / 1000$)



Test Plot

IEEE 802.11b mode / Chain 0

Peak Power (CH Low)


Agilent 16:36:44 Oct 13, 2006

R L

Peak Output Power (DTS), b Mode Low Ch.

Ref 20 dBm

Atten 20 dB

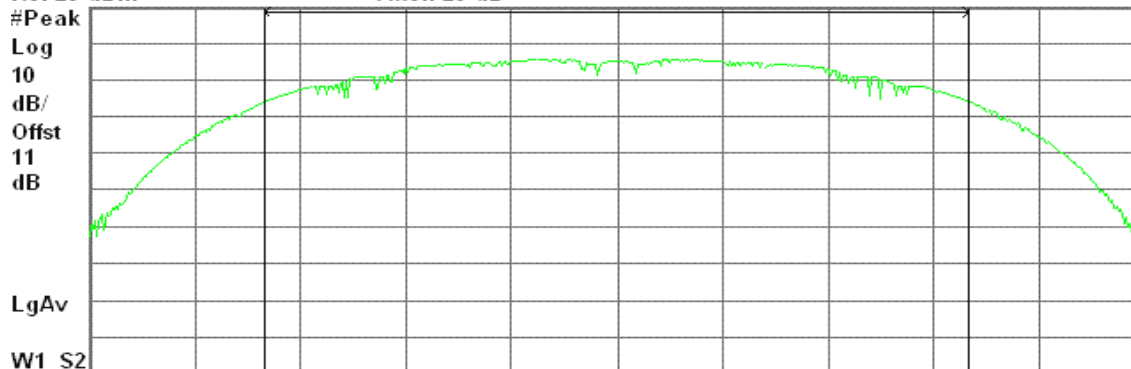

Center 2.412 00 GHz

Span 22.8 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

14.88 dBm / 15.2010 MHz

-56.94 dBm/Hz

Peak Power (CH Mid)


Agilent 17:05:11 Oct 13, 2006

R L

Peak Output Power (DTS), b Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

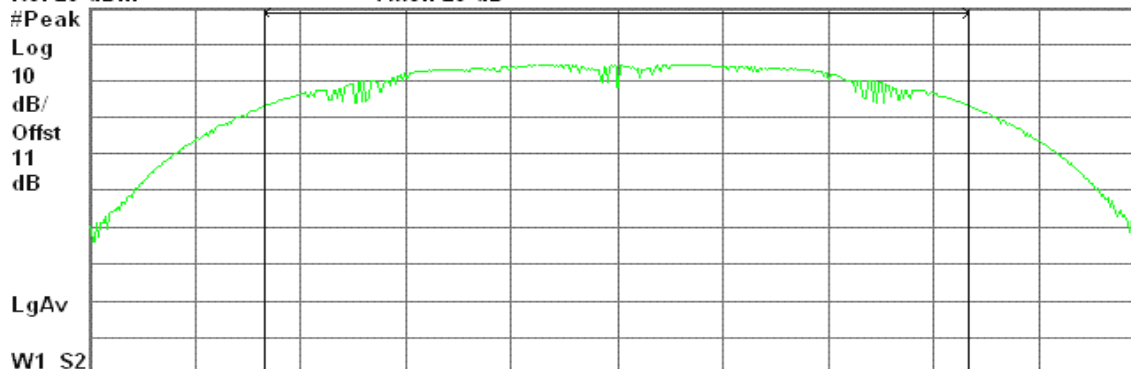

Center 2.437 00 GHz

Span 22.81 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

13.68 dBm / 15.2080 MHz

-58.14 dBm/Hz

**Peak Power (CH High)**


* Agilent 17:12:05 Oct 13, 2006

R T

Peak Output Power (DTS), b Mode High Ch.

Ref 20 dBm

Atten 20 dB

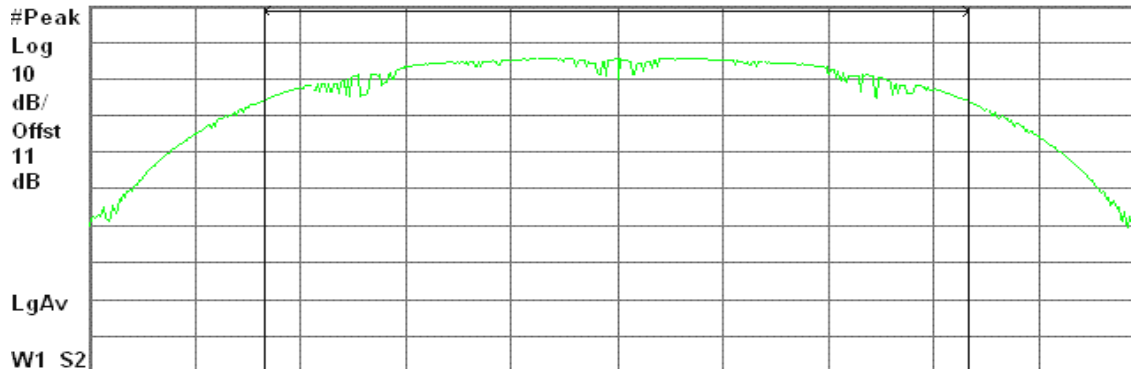

Center 2.462 00 GHz

Span 22.91 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

14.97 dBm / 15.2760 MHz

-56.87 dBm/Hz

IEEE 802.11b mode / Chain 2**Peak Power (CH Low)**


* Agilent 03:13:09 Oct 13, 2006

R L

Peak Output Power (DTS), b Mode Low Ch.

Ref 20 dBm

Atten 20 dB

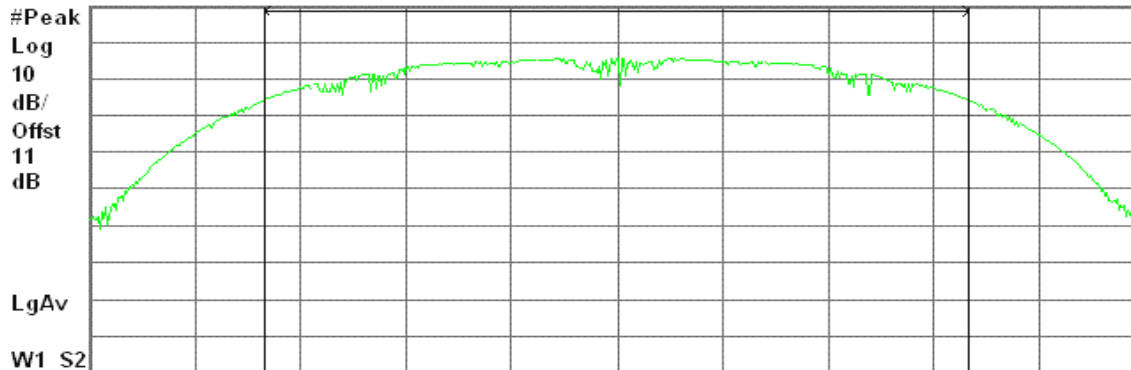

Center 2.412 00 GHz

Span 23.01 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

14.72 dBm / 15.3370 MHz

-57.13 dBm/Hz



Peak Power (CH Mid)


* Agilent 03:14:07 Oct 13, 2006

R L

Peak Output Power (DTS), b Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

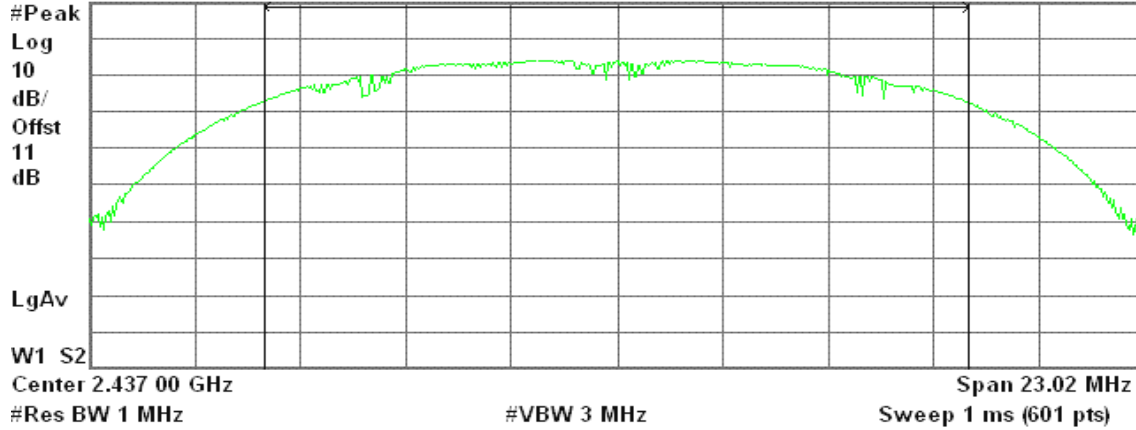

Channel Power

13.25 dBm / 15.3480 MHz

Power Spectral Density

-58.61 dBm/Hz

Peak Power (CH High)


* Agilent 03:15:04 Oct 13, 2006

R L

Peak Output Power (DTS), b Mode High Ch.

Ref 20 dBm

Atten 20 dB

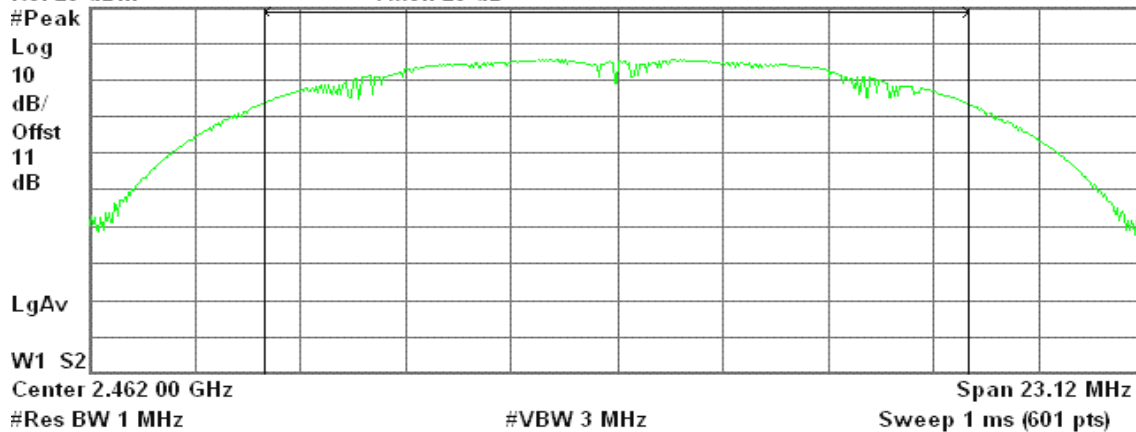

Channel Power

14.65 dBm / 15.4150 MHz

Power Spectral Density

-57.23 dBm/Hz

**IEEE 802.11g mode / Chain 0****Peak Power (CH Low)**


* Agilent 18:46:47 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode Low Ch.

Ref 20 dBm

Atten 20 dB

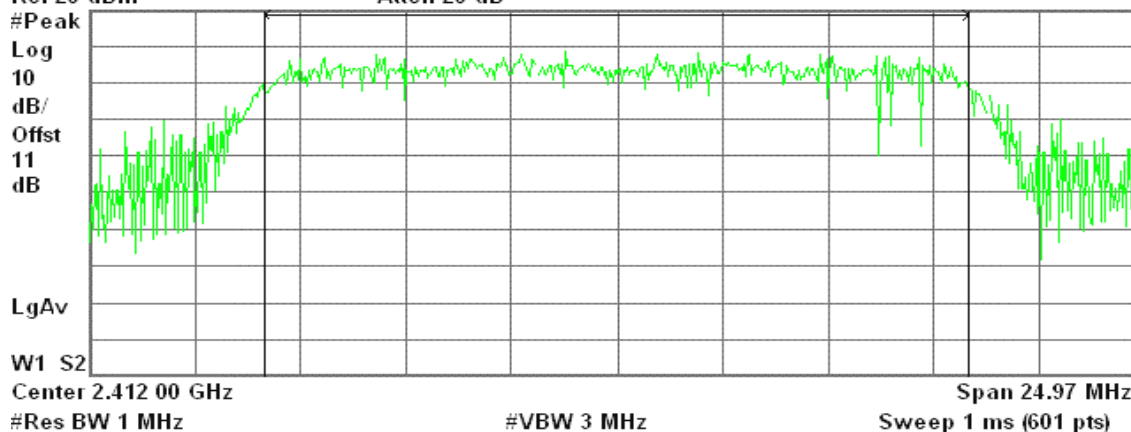

Channel Power

Power Spectral Density

15.83 dBm / 16.6480 MHz

-56.39 dBm/Hz

Peak Power (CH Mid)


* Agilent 19:11:35 Oct 13, 2006

L

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

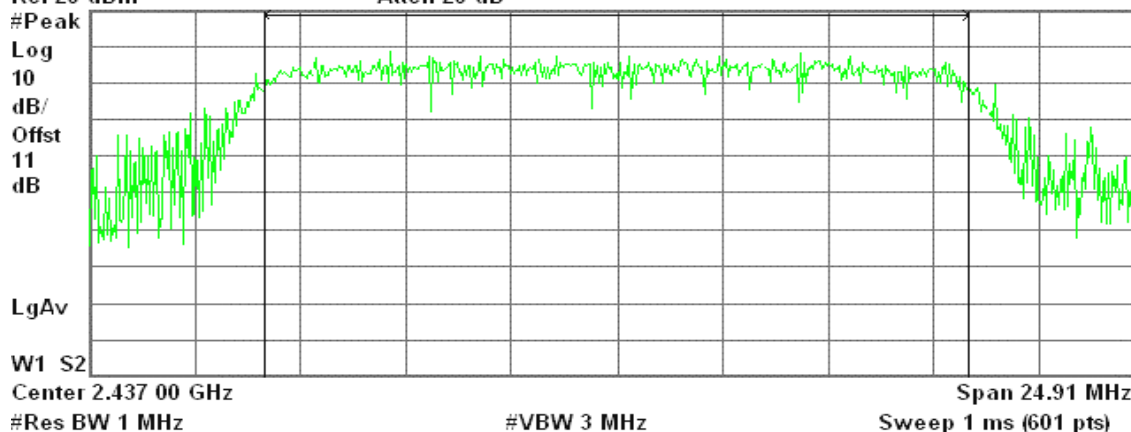

Channel Power

Power Spectral Density

15.91 dBm / 16.6040 MHz

-56.29 dBm/Hz

**Peak Power (CH High)**


* Agilent 19:18:36 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode High Ch.

Ref 20 dBm

Atten 20 dB

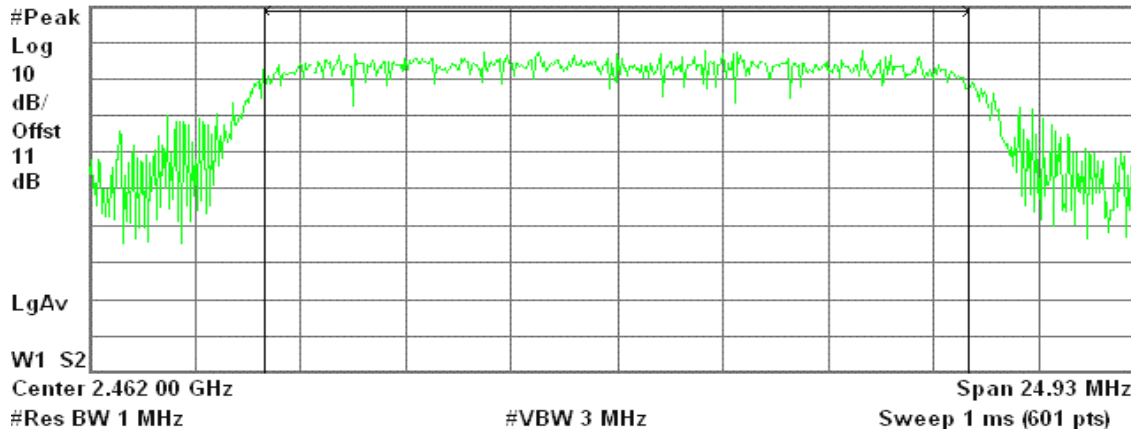

Channel Power

15.63 dBm / 16.6230 MHz

Power Spectral Density

-56.58 dBm/Hz

IEEE 802.11g mode / Chain 2**Peak Power (CH Low)**


* Agilent 03:16:56 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode Low Ch.

Ref 20 dBm

Atten 20 dB

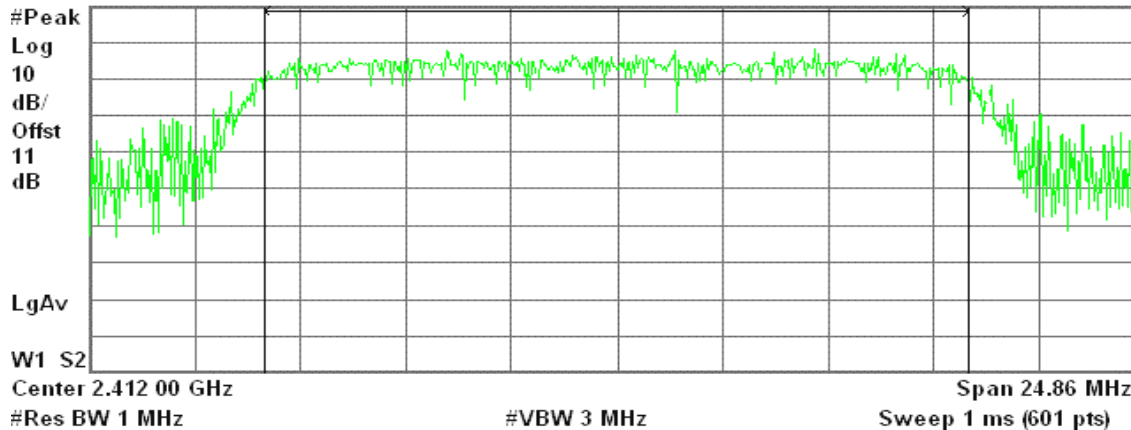

Channel Power

15.76 dBm / 16.5720 MHz

Power Spectral Density

-56.43 dBm/Hz



Peak Power (CH Mid)


Agilent 03:18:28 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

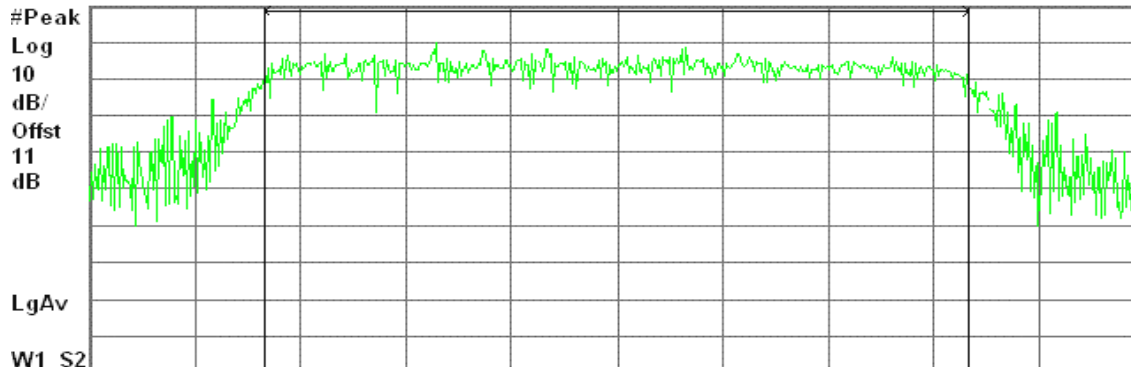

Center 2.437 00 GHz

Span 24.86 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.78 dBm / 16.5720 MHz

-56.42 dBm/Hz

Peak Power (CH High)


Agilent 03:19:49 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode High Ch.

Ref 20 dBm

Atten 20 dB

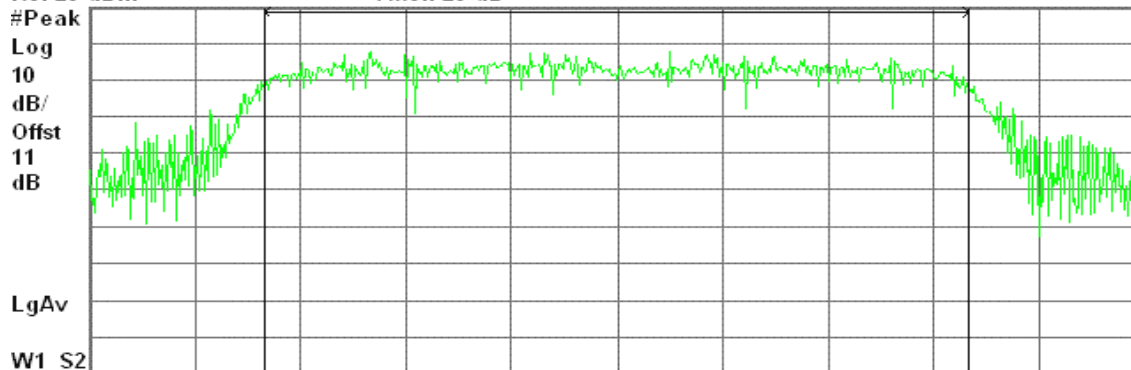

Center 2.462 00 GHz

Span 24.93 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.17 dBm / 16.6230 MHz

-57.03 dBm/Hz

**draft 802.11n Standard-20 MHz Channel mode / Chain 0****Peak Power (CH Low)**


* Agilent 20:01:42 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode Low Ch.

Ref 20 dBm

Atten 20 dB

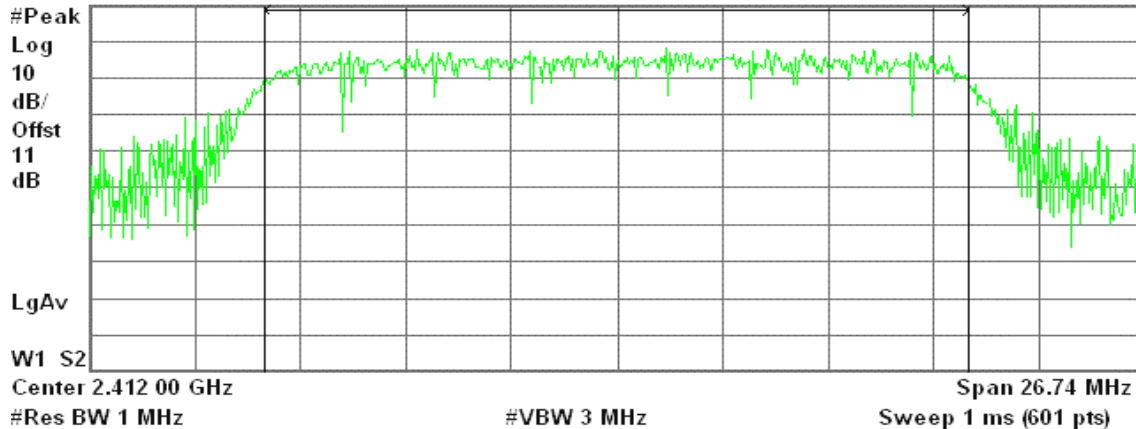

Channel Power

Power Spectral Density

16.49 dBm / 17.8270 MHz

-56.02 dBm/Hz

Peak Power (CH Mid)


* Agilent 20:15:00 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

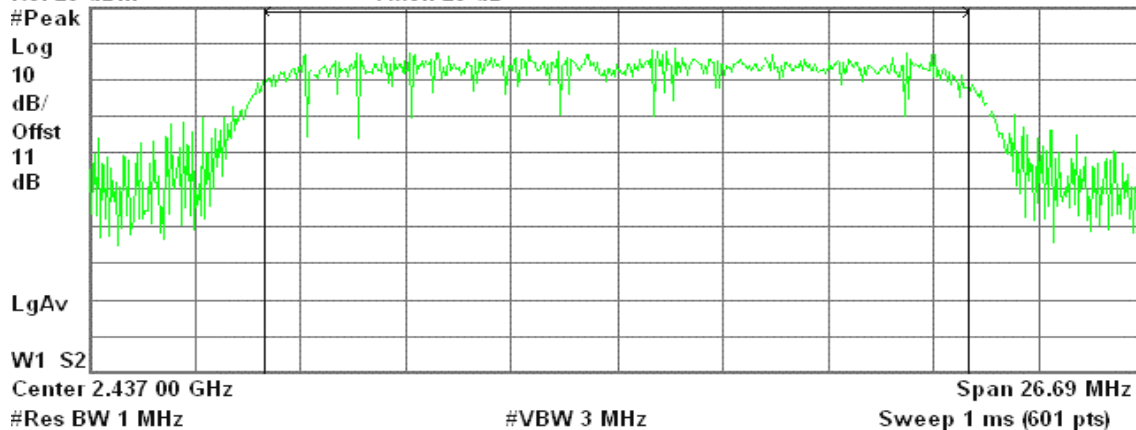

Channel Power

Power Spectral Density

16.02 dBm / 17.7940 MHz

-56.48 dBm/Hz

**Peak Power (CH High)**


* Agilent 20:44:59 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode High Ch.

Ref 20 dBm

Atten 20 dB

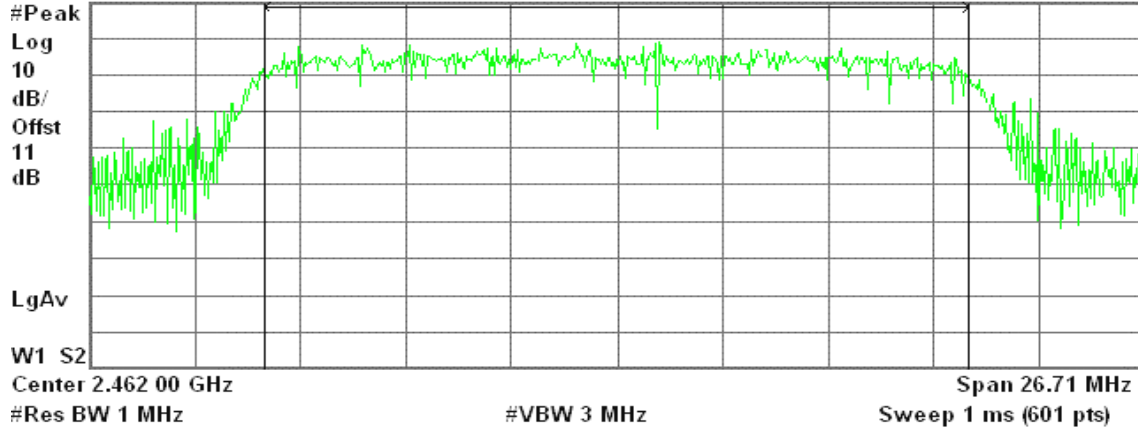

Channel Power

Power Spectral Density

15.50 dBm / 17.8060 MHz

-57.01 dBm/Hz

draft 802.11n Standard-20 MHz Channel mode / Chain 2**Peak Power (CH Low)**


* Agilent 03:21:37 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode Low Ch.

Ref 20 dBm

Atten 20 dB

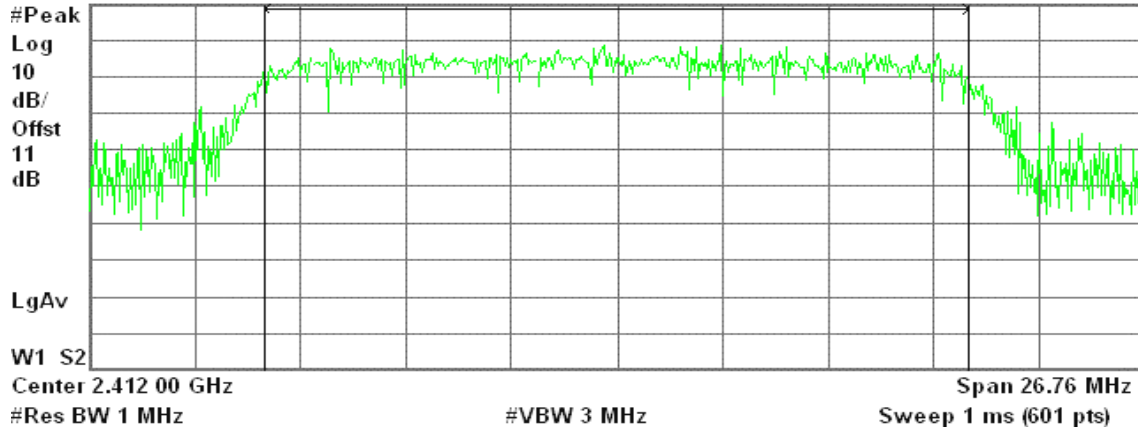

Channel Power

Power Spectral Density

16.27 dBm / 17.8430 MHz

-56.24 dBm/Hz

**Peak Power (CH Mid)**


* Agilent 03:22:28 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

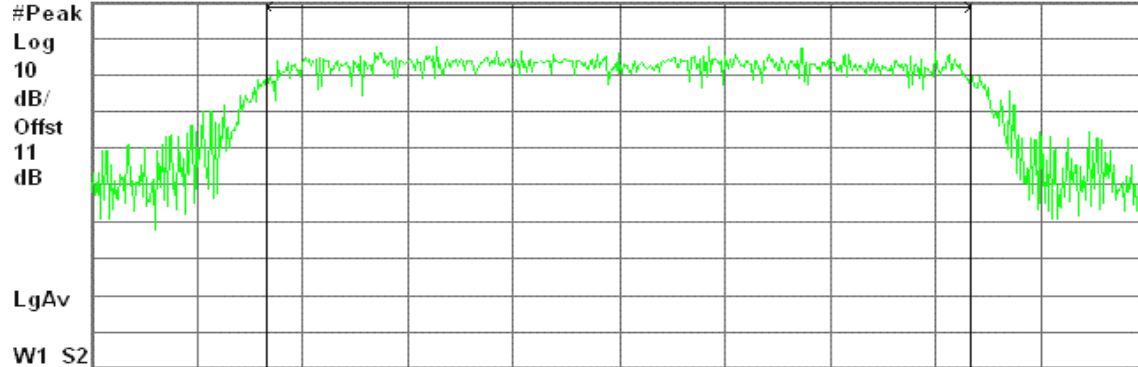

Center 2.437 00 GHz

Span 26.75 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.47 dBm / 17.8330 MHz

-57.04 dBm/Hz

Peak Power (CH High)


* Agilent 03:23:34 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode High Ch.

Ref 20 dBm

Atten 20 dB

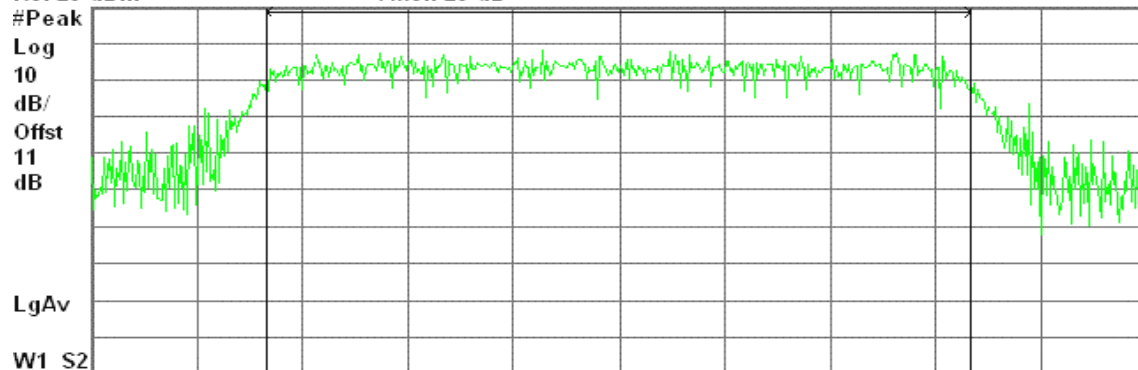

Center 2.462 00 GHz

Span 26.73 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.94 dBm / 17.8190 MHz

-56.57 dBm/Hz

**draft 802.11n Wide-40 MHz Channel mode / Chain 0****Peak Power (CH Low)**


* Agilent 21:18:43 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode Low Ch.

Ref 20 dBm

Atten 20 dB

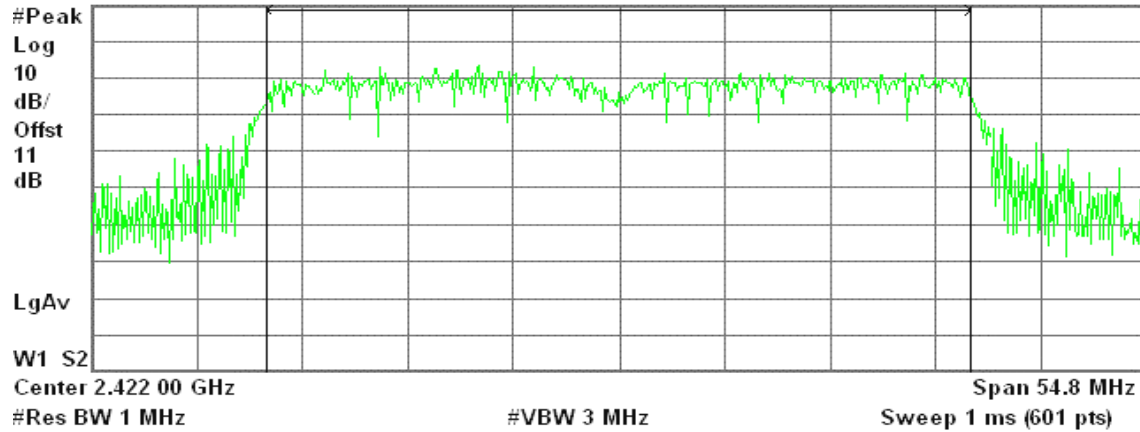

Channel Power

Power Spectral Density

13.98 dBm / 36.5320 MHz

-61.65 dBm/Hz

Peak Power (CH Mid)


* Agilent 21:47:18 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

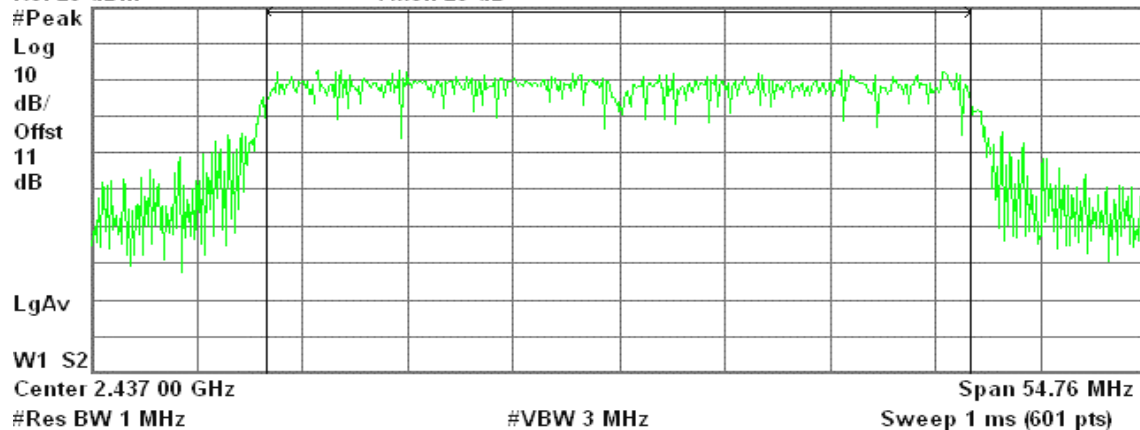

Channel Power

Power Spectral Density

14.11 dBm / 36.5080 MHz

-61.51 dBm/Hz

**Peak Power (CH High)**


* Agilent 21:55:32 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode High Ch.

Ref 20 dBm

Atten 20 dB

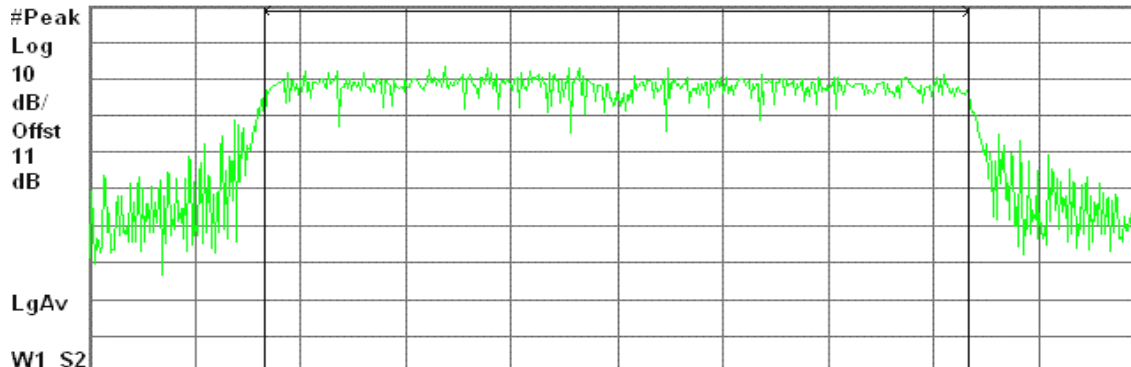

Center 2.452 00 GHz

Span 54.99 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

14.09 dBm / 36.6610 MHz

-61.56 dBm/Hz

draft 802.11n Wide-40 MHz Channel mode / Chain 2**Peak Power (CH Low)**


* Agilent 21:31:33 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode Low Ch.

Ref 20 dBm

Atten 20 dB

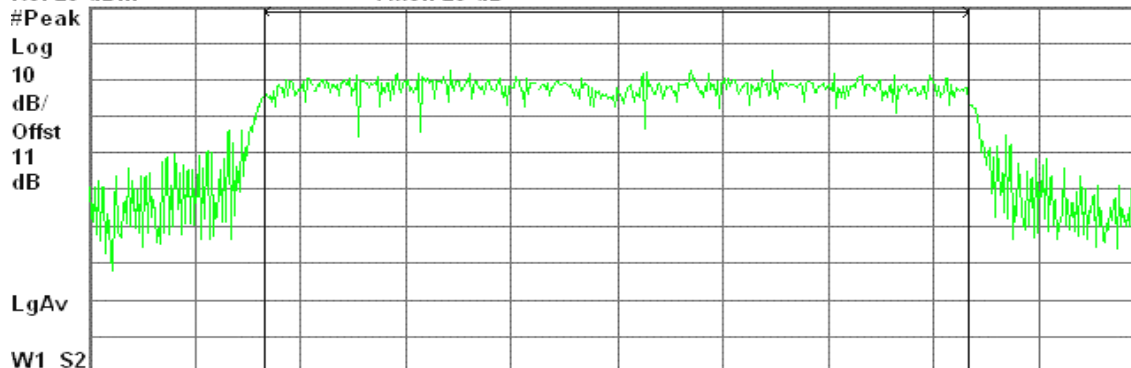

Center 2.422 00 GHz

Span 54.71 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

13.80 dBm / 36.4710 MHz

-61.82 dBm/Hz



Peak Power (CH Mid)


Agilent 21:39:50 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

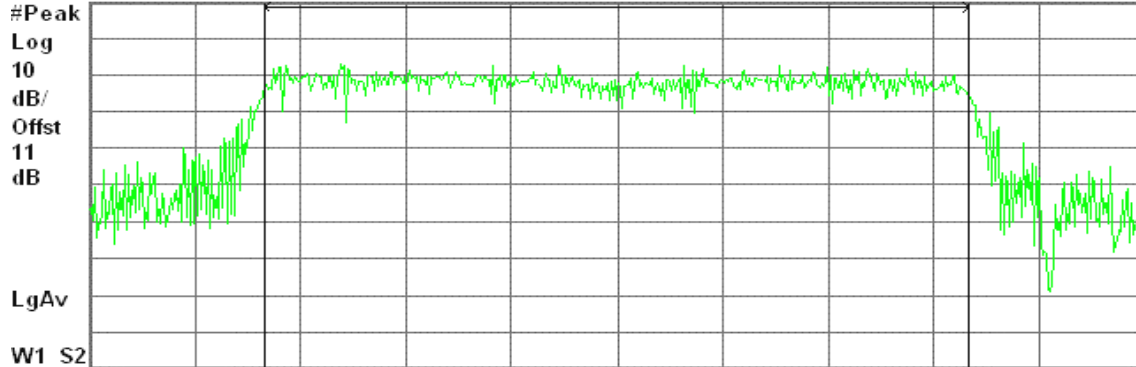

Center 2.437 00 GHz

Span 54.66 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

13.99 dBm / 36.4410 MHz

-61.63 dBm/Hz

Peak Power (CH High)

Agilent 22:03:33 Oct 13, 2006

R L

Peak Output Power (DTS), g Mode High Ch.

Ref 20 dBm

Atten 20 dB



Center 2.452 00 GHz

Span 54.68 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

13.91 dBm / 36.4550 MHz

-61.71 dBm/Hz




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 2 Output Power (dBm)	Output Power (dBm)	Output Power (W)
Low	2412	9.57	12.30	14.16	0.0260
Mid	2437	11.04	11.15	14.11	0.0257
High	2462	12.22	12.15	15.20	0.0331

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 2 Output Power (dBm)	Output Power (dBm)	Output Power (W)
Low	2412	11.95	12.37	15.18	0.0329
Mid	2437	12.55	12.27	15.42	0.0349
High	2462	12.51	11.98	15.26	0.0336

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 2 Output Power (dBm)	Output Power (dBm)	Output Power (W)
Low	2412	12.81	12.69	15.76	0.0377
Mid	2437	12.33	12.31	15.33	0.0341
High	2462	12.98	12.53	15.77	0.0378

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 2 Output Power (dBm)	Output Power (dBm)	Output Power (W)
Low	2412	10.08	9.98	13.04	0.0201
Mid	2437	10.64	10.21	13.44	0.0221
High	2462	10.49	10.27	13.39	0.0218


Remark: Total Output Power (w) = Chain 0 ($10^{(\text{Output Power}/10)/1000}$) + Chain 2 ($10^{(\text{Output Power}/10)/1000}$)




Test Plot

IEEE 802.11b mode / Chain 0

Average Power (CH Low)

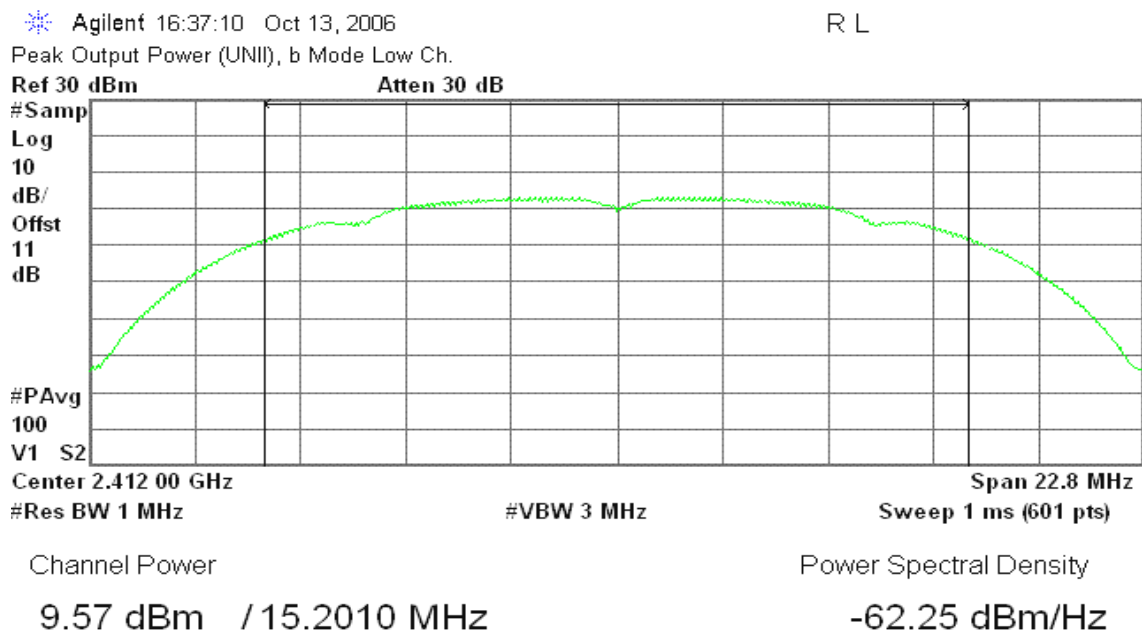

Average Power (CH Mid)

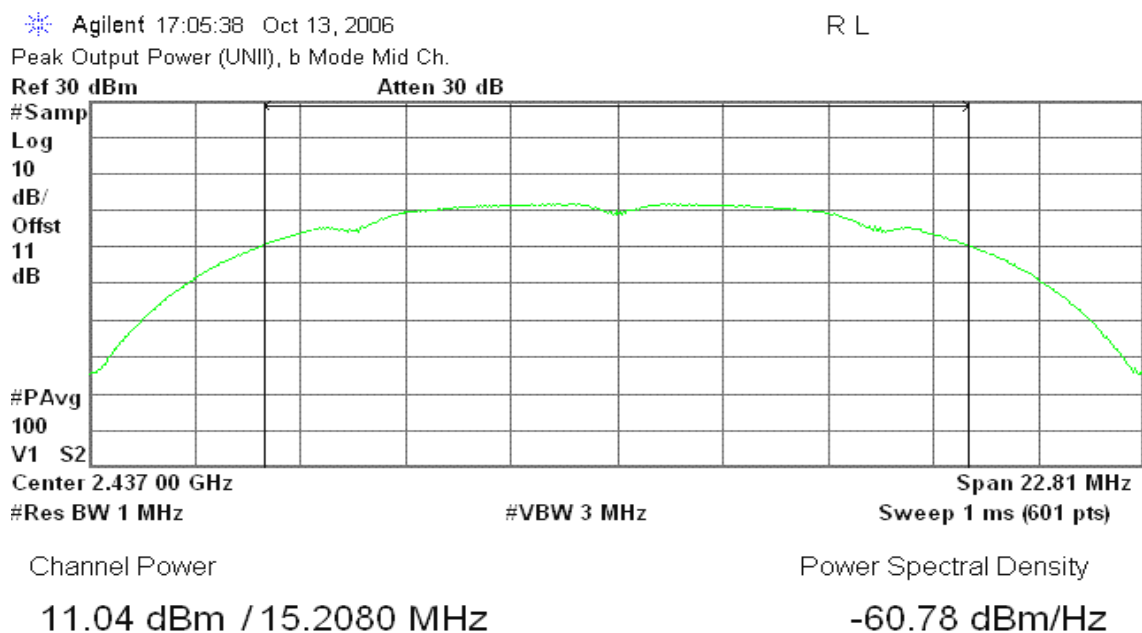



Average Power (CH High)


* Agilent 17:12:34 Oct 13, 2006

R L

Peak Output Power (UNII), b Mode High Ch.

Ref 30 dBm

Atten 30 dB

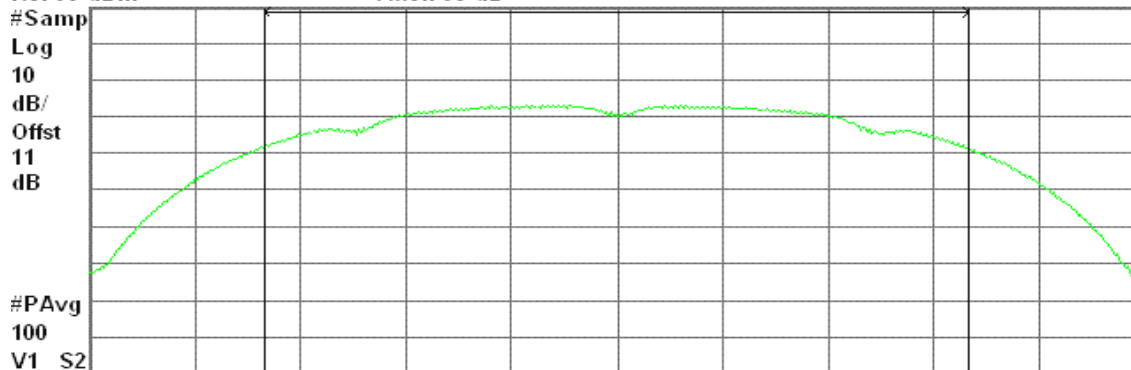

Center 2.462 00 GHz

Span 22.91 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

12.22 dBm / 15.2760 MHz

-59.62 dBm/Hz

IEEE 802.11b mode / Chain 2

Average Power (CH Low)


* Agilent 16:43:35 Oct 13, 2006

R L

Peak Output Power (UNII), b Mode Low Ch.

Ref 30 dBm

Atten 30 dB

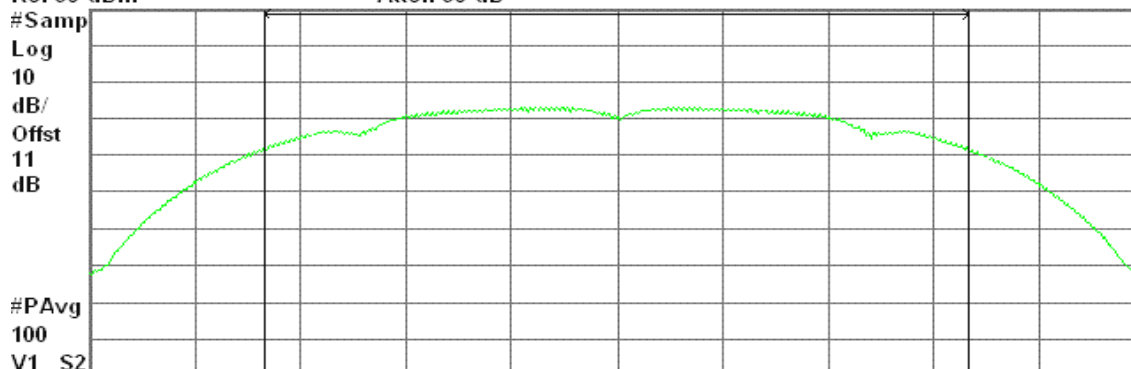

Center 2.412 00 GHz

Span 23.01 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

12.30 dBm / 15.3370 MHz

-59.55 dBm/Hz



Average Power (CH Mid)


* Agilent 16:58:21 Oct 13, 2006

R L

Peak Output Power (UNII), b Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

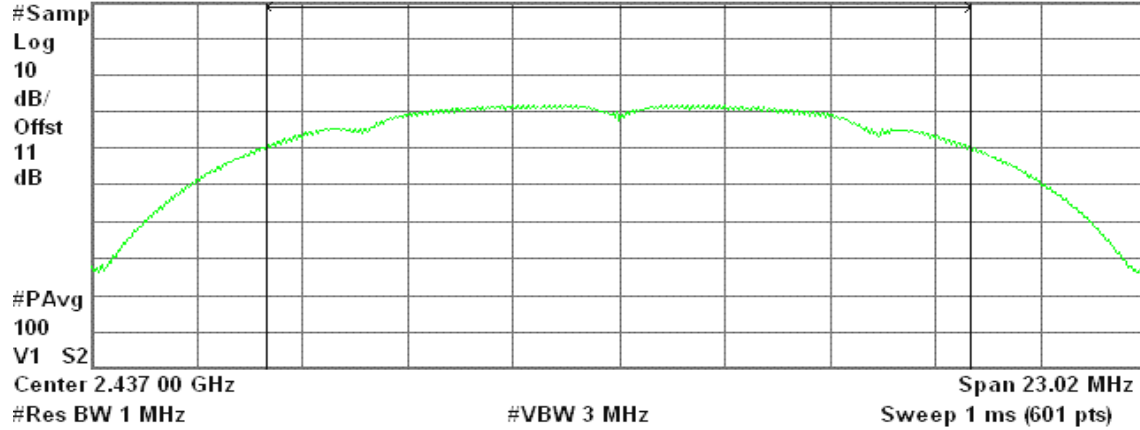

Channel Power

11.15 dBm / 15.3480 MHz

Power Spectral Density

-60.71 dBm/Hz

Average Power (CH High)


* Agilent 17:18:59 Oct 13, 2006

R L

Peak Output Power (UNII), b Mode High Ch.

Ref 30 dBm

Atten 30 dB

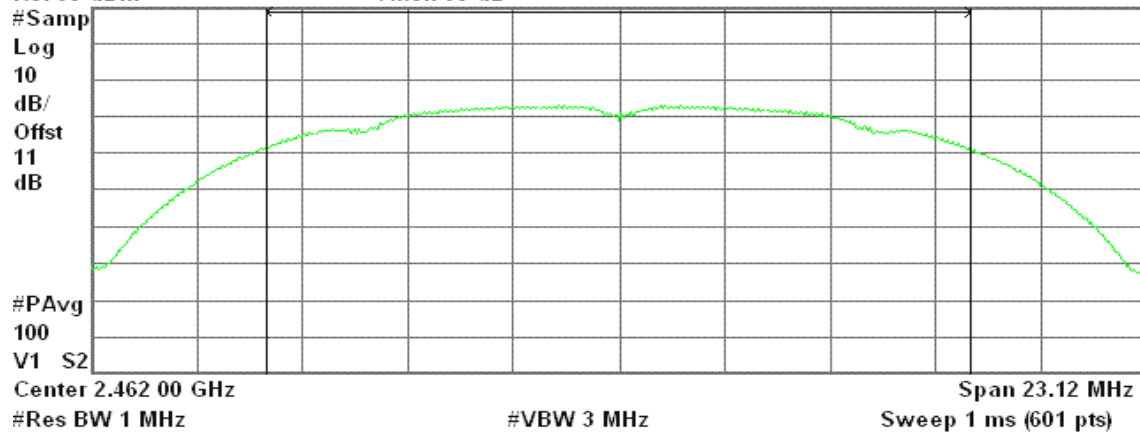

Channel Power

12.15 dBm / 15.4150 MHz

Power Spectral Density

-59.73 dBm/Hz

**IEEE 802.11g mode / Chain 0****Average Power (CH Low)**


* Agilent 18:47:38 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode Low Ch.

Ref 30 dBm

Atten 30 dB

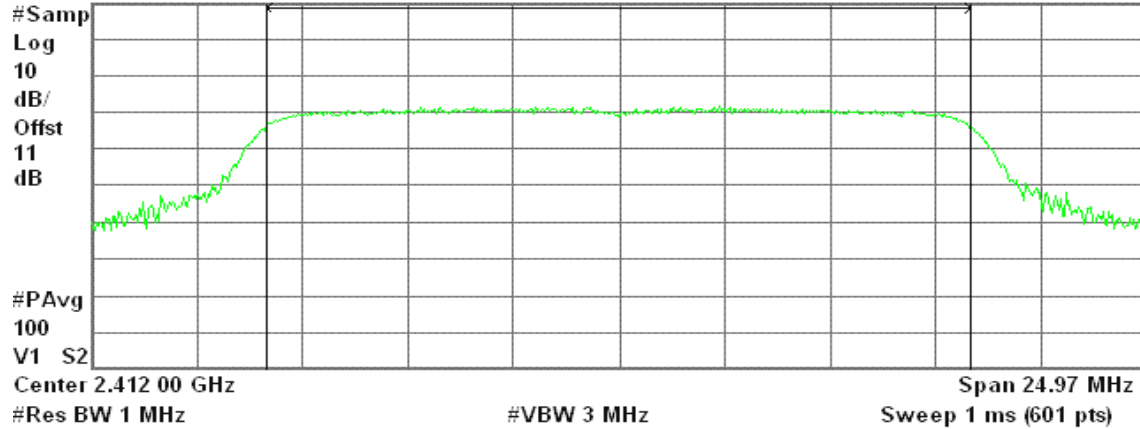

Channel Power

Power Spectral Density

11.95 dBm / 16.6480 MHz

-60.27 dBm/Hz

Average Power (CH Mid)


* Agilent 19:12:24 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

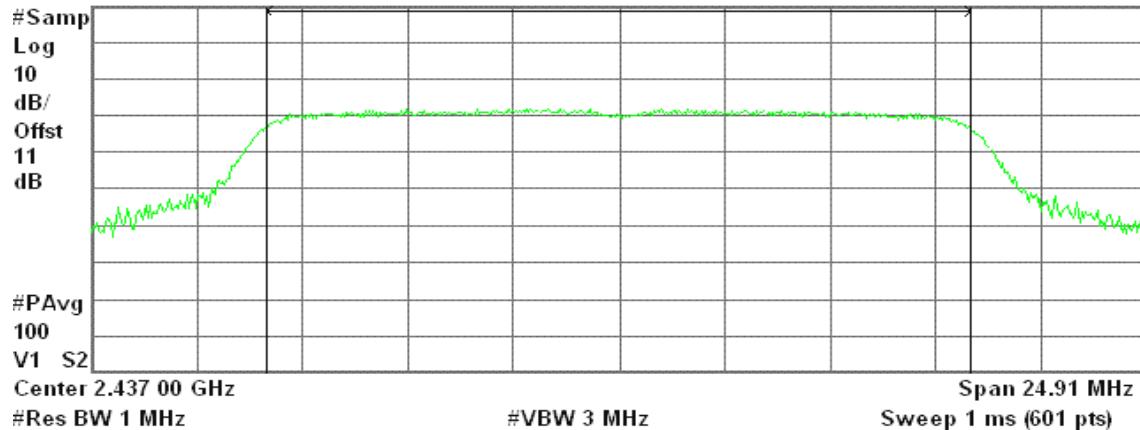

Channel Power

Power Spectral Density

12.55 dBm / 16.6040 MHz

-59.65 dBm/Hz

**Average Power (CH High)**


* Agilent 19:19:02 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode High Ch.

Ref 30 dBm

Atten 30 dB

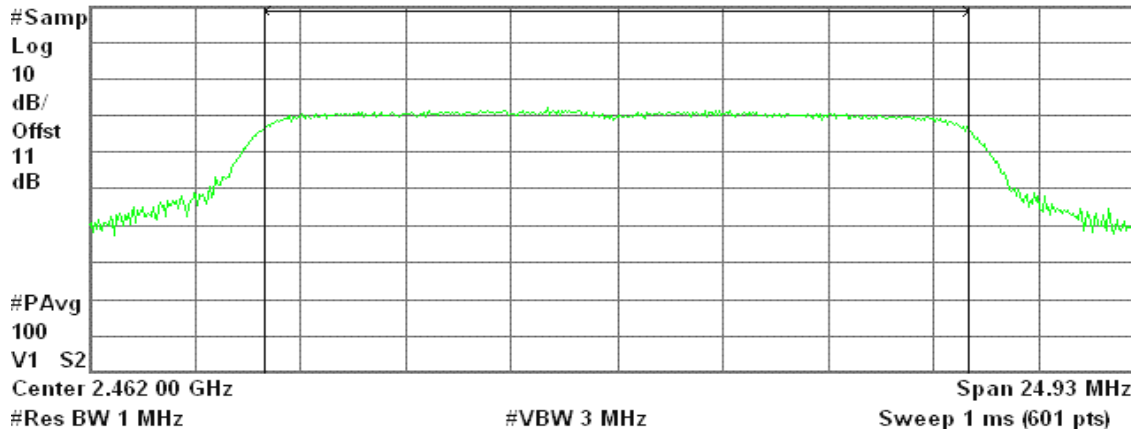

Channel Power

Power Spectral Density

12.51 dBm / 16.6230 MHz

-59.70 dBm/Hz

IEEE 802.11g mode / Chain 2**Average Power (CH Low)**


* Agilent 18:58:47 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode Low Ch.

Ref 30 dBm

Atten 30 dB

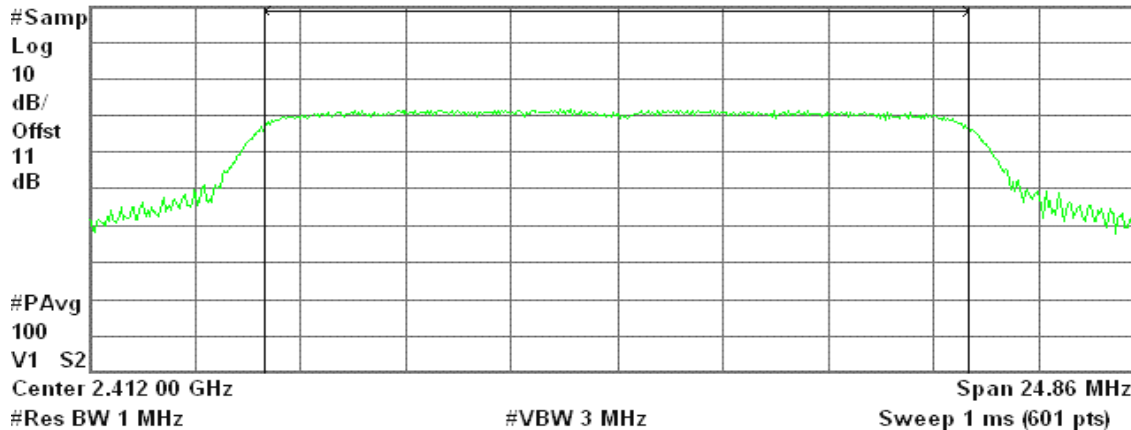

Channel Power

Power Spectral Density

12.37 dBm / 16.5720 MHz

-59.82 dBm/Hz



Average Power (CH Mid)


* Agilent 19:06:13 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

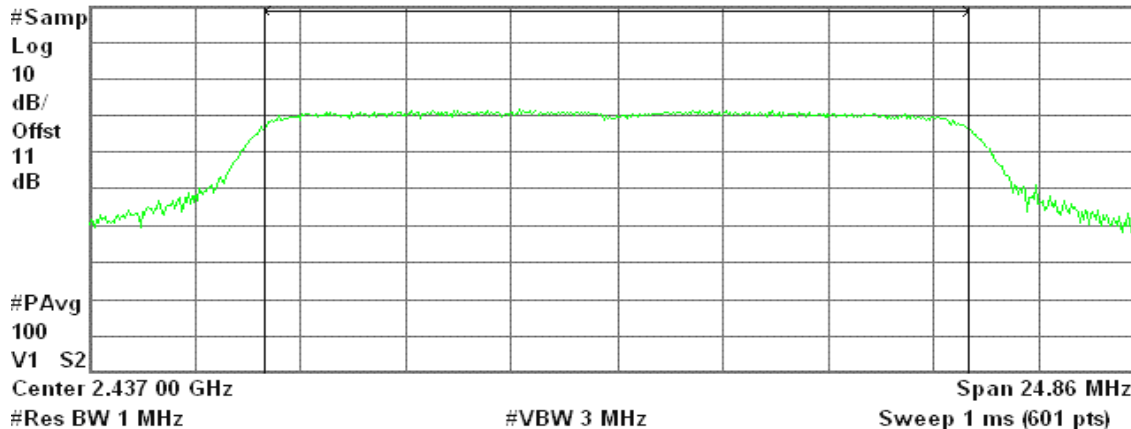

Channel Power

Power Spectral Density

12.27 dBm / 16.5720 MHz

-59.92 dBm/Hz

Average Power (CH High)


* Agilent 19:25:16 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode High Ch.

Ref 30 dBm

Atten 30 dB

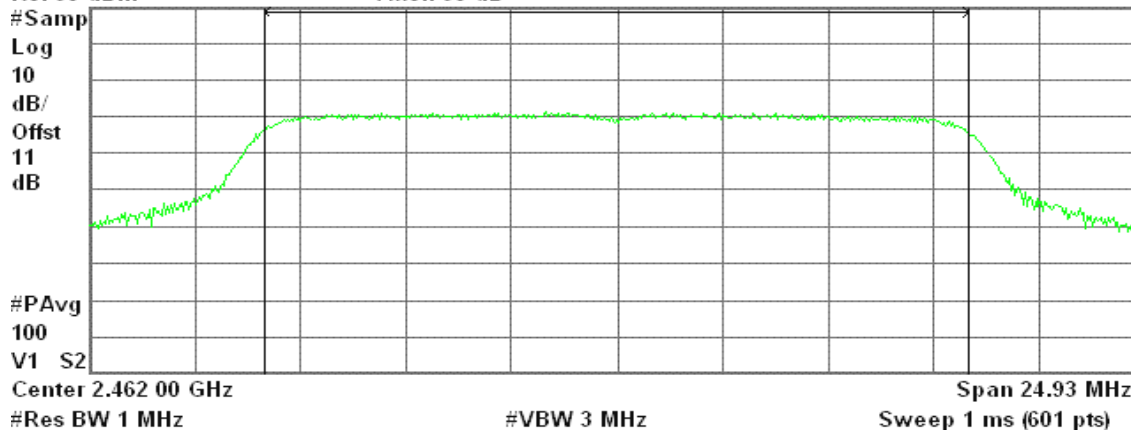

Channel Power

Power Spectral Density

11.98 dBm / 16.6230 MHz

-60.23 dBm/Hz

**draft 802.11n Standard-20 MHz Channel mode / Chain 0****Average Power (CH Low)**


* Agilent 20:02:17 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode Low Ch.

Ref 30 dBm

Atten 30 dB

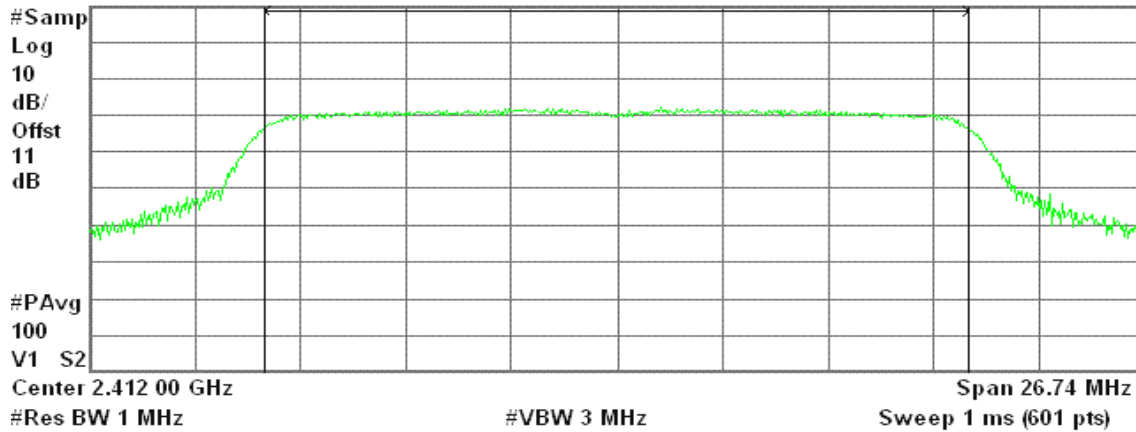

Channel Power

Power Spectral Density

12.81 dBm / 17.8270 MHz

-59.70 dBm/Hz

Average Power (CH Mid)


* Agilent 20:17:03 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

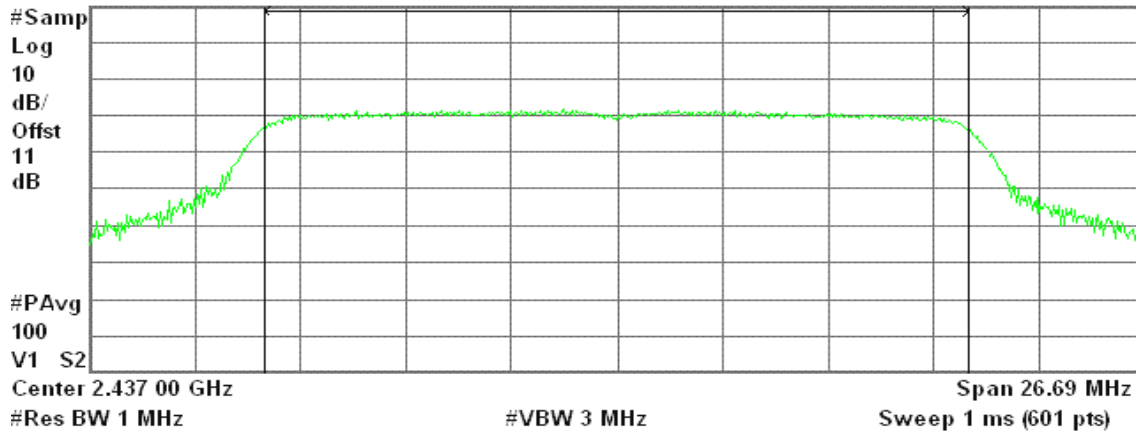

Channel Power

Power Spectral Density

12.33 dBm / 17.7940 MHz

-60.17 dBm/Hz

**Average Power (CH High)**


* Agilent 20:45:29 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode High Ch.

Ref 30 dBm

Atten 30 dB

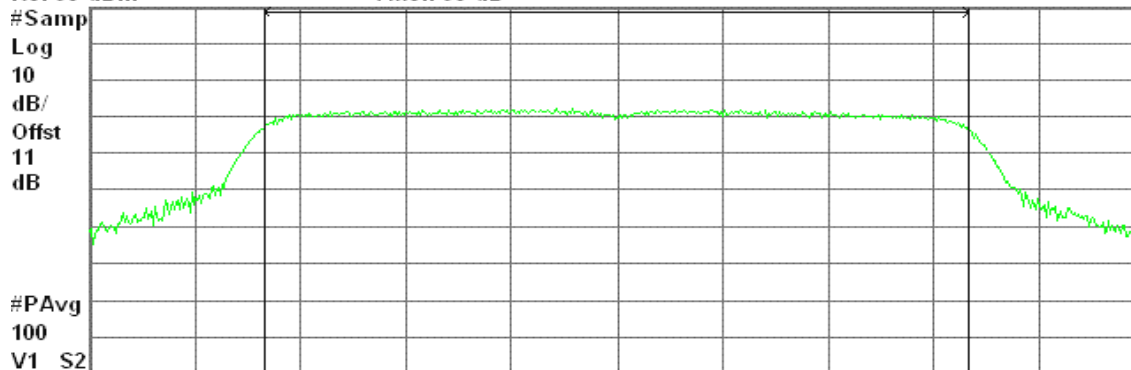

Center 2.462 00 GHz

Span 26.71 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

12.98 dBm / 17.8060 MHz

-59.52 dBm/Hz

draft 802.11n Standard-20 MHz Channel mode / Chain 2**Average Power (CH Low)**


* Agilent 19:56:04 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode Low Ch.

Ref 30 dBm

Atten 30 dB

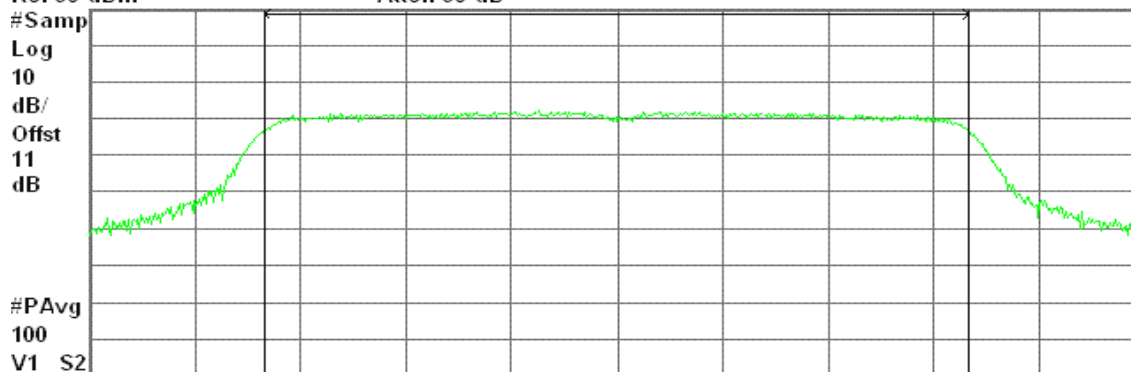

Center 2.412 00 GHz

Span 26.76 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

12.69 dBm / 17.8430 MHz

-59.83 dBm/Hz



Average Power (CH Mid)


* Agilent 20:27:30 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

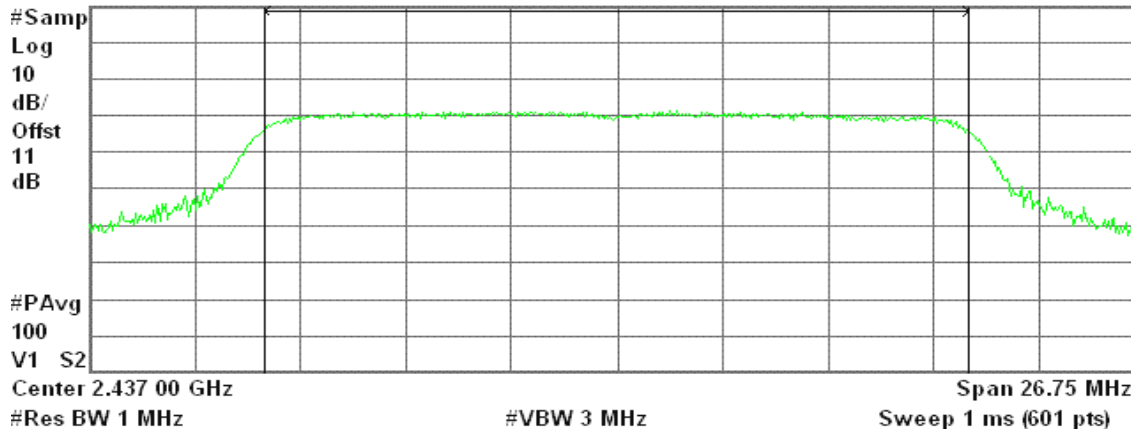

Channel Power

12.31 dBm / 17.8330 MHz

Power Spectral Density

-60.20 dBm/Hz

Average Power (CH High)


* Agilent 20:37:31 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode High Ch.

Ref 30 dBm

Atten 30 dB

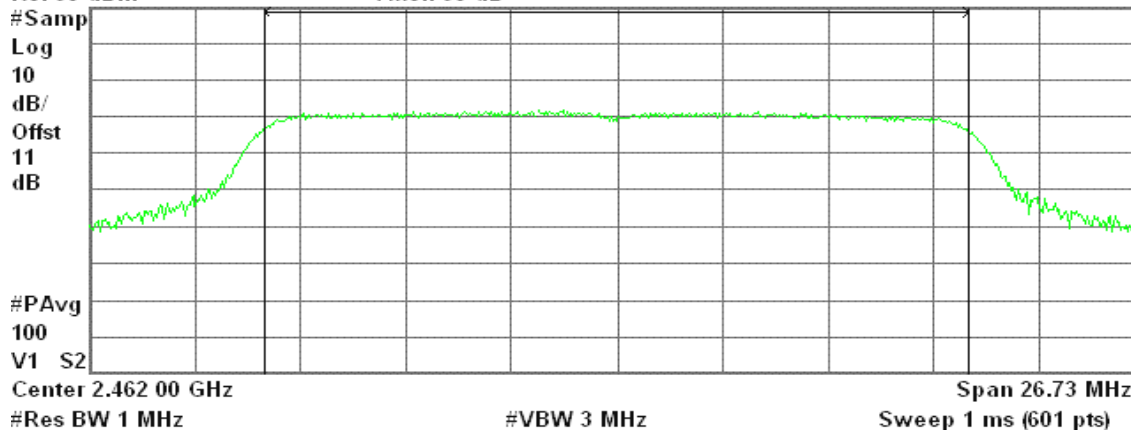

Channel Power

12.53 dBm / 17.8190 MHz

Power Spectral Density

-59.98 dBm/Hz

**draft 802.11n Wide-40 MHz Channel mode / Chain 0****Average Power (CH Low)**


* Agilent 21:19:20 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode Low Ch.

Ref 30 dBm

Atten 30 dB

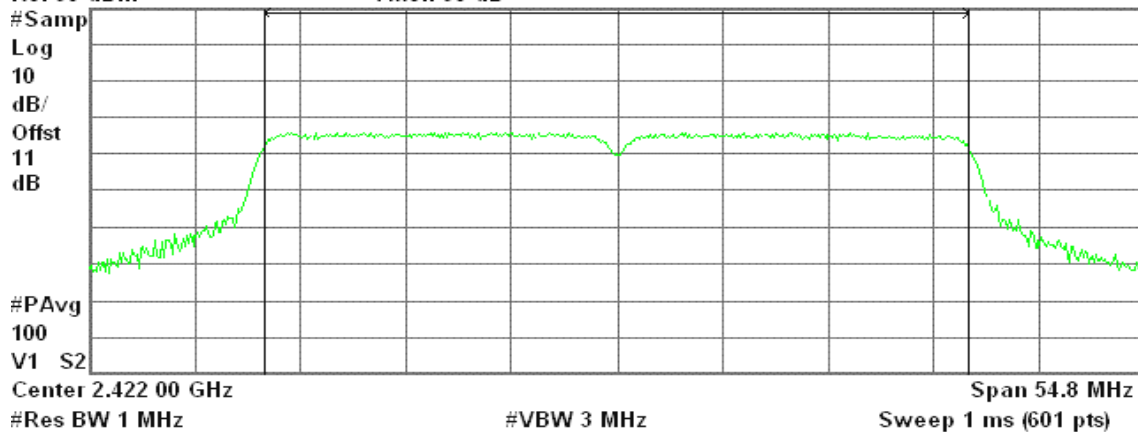

Channel Power

Power Spectral Density

10.08 dBm / 36.5320 MHz

-65.54 dBm/Hz

Average Power (CH Mid)


* Agilent 21:48:00 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

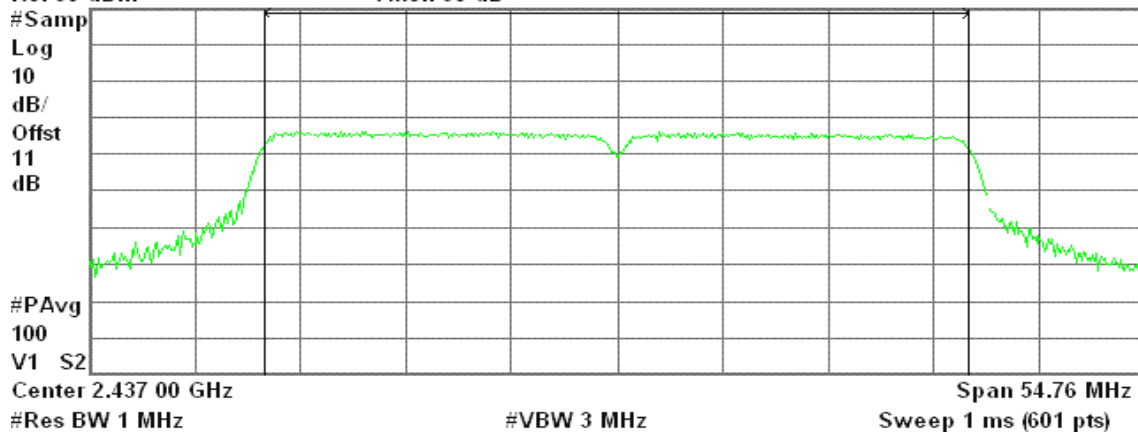

Channel Power

Power Spectral Density

10.64 dBm / 36.5080 MHz

-64.98 dBm/Hz

**Average Power (CH High)**


* Agilent 21:56:01 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode High Ch.

Ref 30 dBm

Atten 30 dB

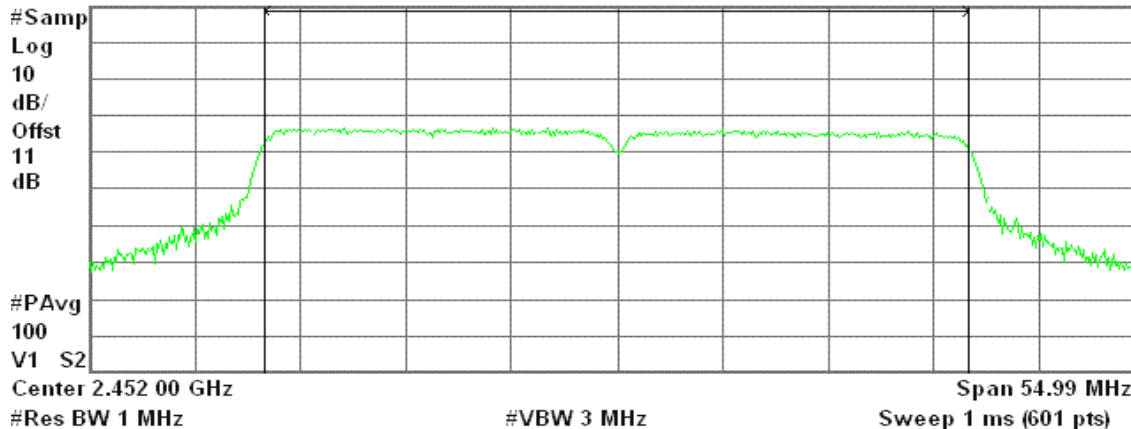

Channel Power

10.49 dBm / 36.6610 MHz

Power Spectral Density

-65.16 dBm/Hz

draft 802.11n Wide-40 MHz Channel mode / Chain 2**Average Power (CH Low)**


* Agilent 21:32:02 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode Low Ch.

Ref 30 dBm

Atten 30 dB

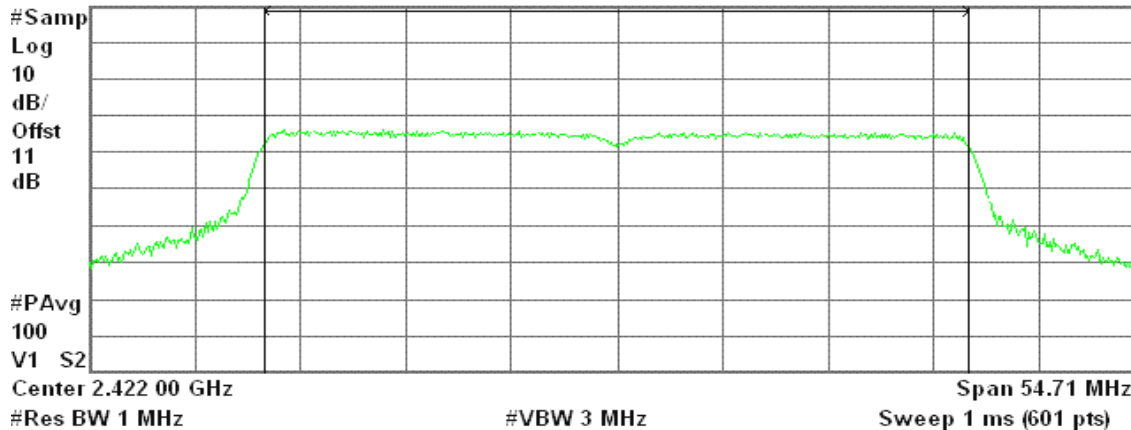

Channel Power

9.98 dBm / 36.4710 MHz

Power Spectral Density

-65.64 dBm/Hz



Average Power (CH Mid)


* Agilent 21:40:17 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

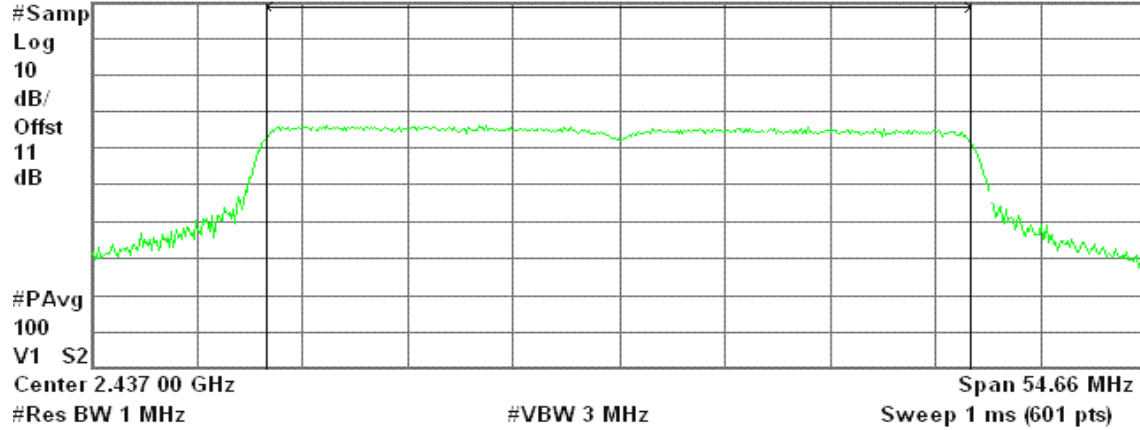

Channel Power

10.21 dBm / 36.4410 MHz

Power Spectral Density

-65.41 dBm/Hz

Average Power (CH High)


* Agilent 22:04:05 Oct 13, 2006

R L

Peak Output Power (UNII), g Mode High Ch.

Ref 30 dBm

Atten 30 dB

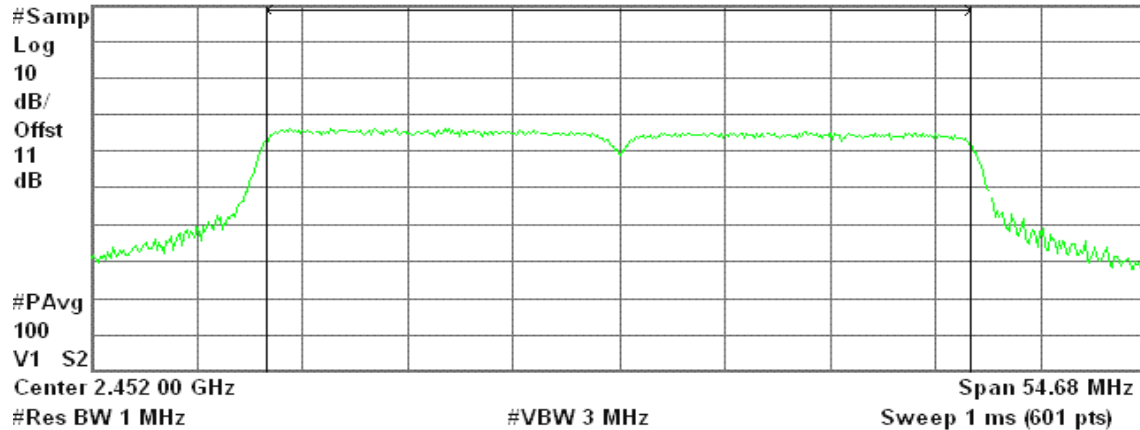

Channel Power

10.27 dBm / 36.4550 MHz

Power Spectral Density


-65.35 dBm/Hz

7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

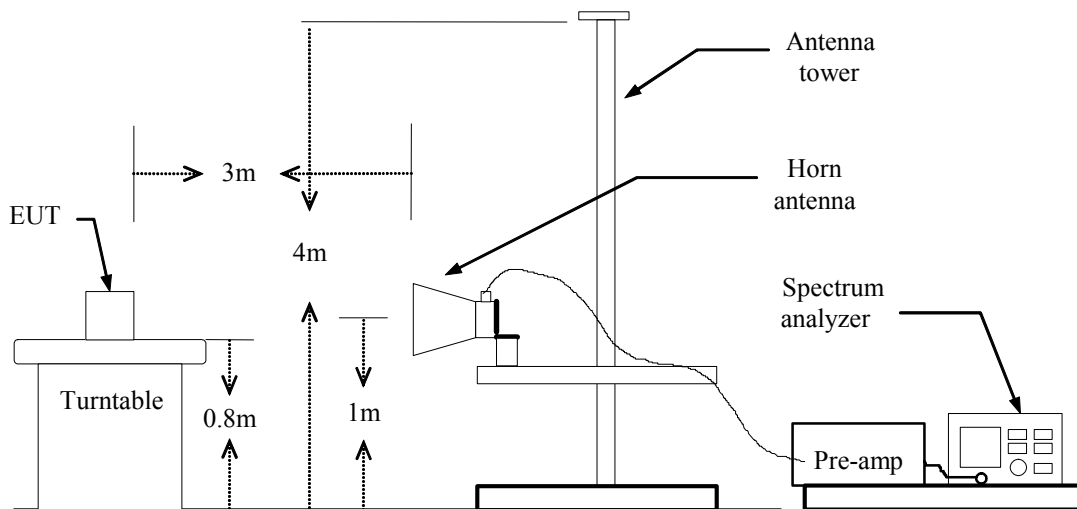

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.


TEST RESULTS

Refer to attach spectrum analyzer data chart.

**Band Edges (IEEE 802.11b mode / CH Low)****Detector mode: Peak****Polarity: Vertical**


Agilent 08:02:18 Oct 4, 2006

R T

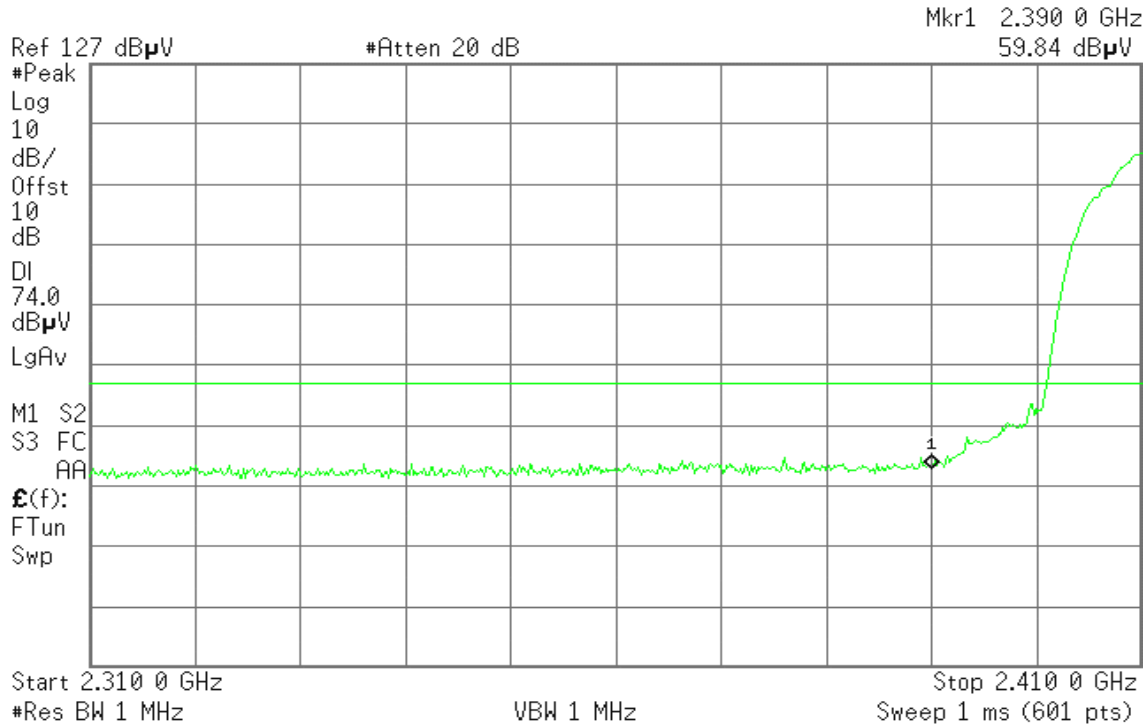**Detector mode: Average****Polarity: Vertical**

Agilent 08:03:26 Oct 4, 2006

T

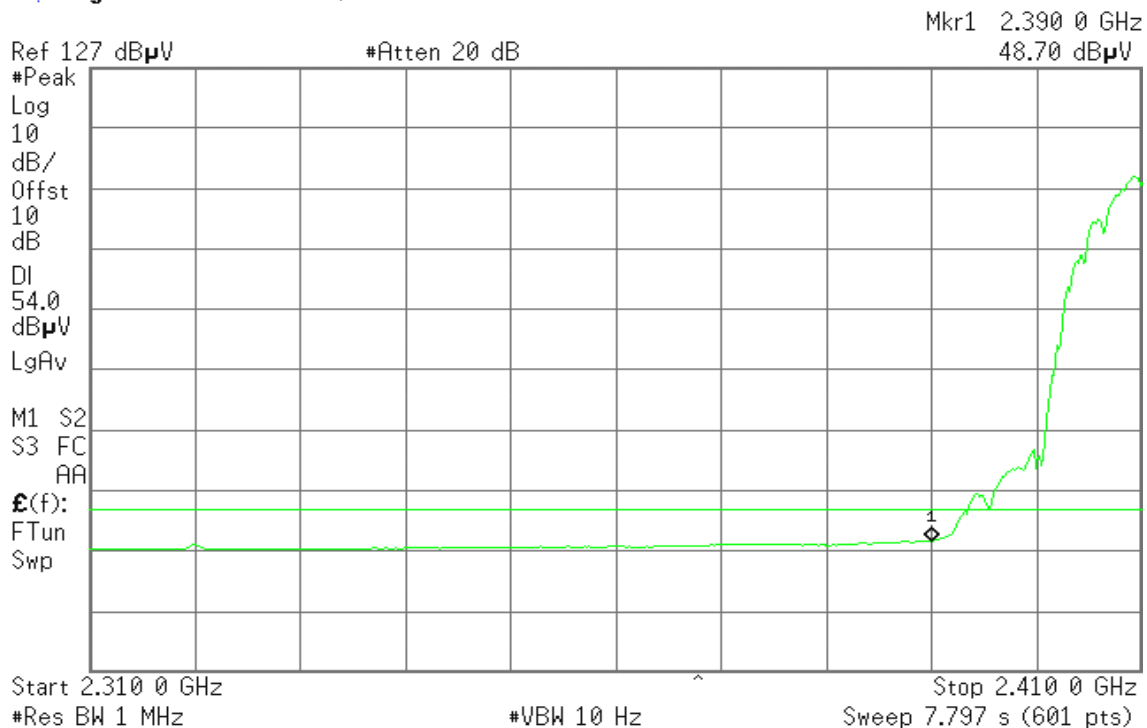

**Detector mode: Peak****Polarity: Horizontal**

* Agilent 08:50:46 Oct 4, 2006

T

Ref 121 dB μ V

#Atten 14 dB

Mkr1 2.390 0 GHz
57.41 dB μ V

#Peak

Log

10

dB/

Offst

10

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

AA

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.310 0 GHz

#Res BW 1 MHz

VBW 1 MHz

Stop 2.420 0 GHz

Sweep 1 ms (601 pts)

Detector mode: Average**Polarity: Horizontal**

* Agilent 08:50:09 Oct 4, 2006

T

Ref 121 dB μ V

#Atten 14 dB

Mkr1 2.390 0 GHz
45.66 dB μ V

#Peak

Log

10

dB/

Offst

10

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

AA

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.420 0 GHz

Sweep 8.577 s (601 pts)

**Band Edges (IEEE 802.11b mode / CH High)****Detector mode: Peak****Polarity: Vertical**

Agilent 08:23:13 Oct 4, 2006

T

Mkr1 2.483 50 GHz
57.18 dB μ VRef 121 dB μ V

#Atten 14 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

AA

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

VBW 1 MHz

Stop 2.500 00 GHz

Sweep 1 ms (601 pts)

Detector mode: Average**Polarity: Vertical**

Agilent 08:25:48 Oct 4, 2006

T

Mkr1 2.483 50 GHz
46.23 dB μ VRef 121 dB μ V

#Atten 14 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

AA

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)

Display**Full Screen****Display Line**54.00 dB μ V

On

Off

Limits**Active Fctn****Position**

Bottom


Title**Preferences**

Copyright 2000-2002 Agilent Technologies

**Detector mode: Peak****Polarity: Horizontal**


* Agilent 08:29:57 Oct 4, 2006

T

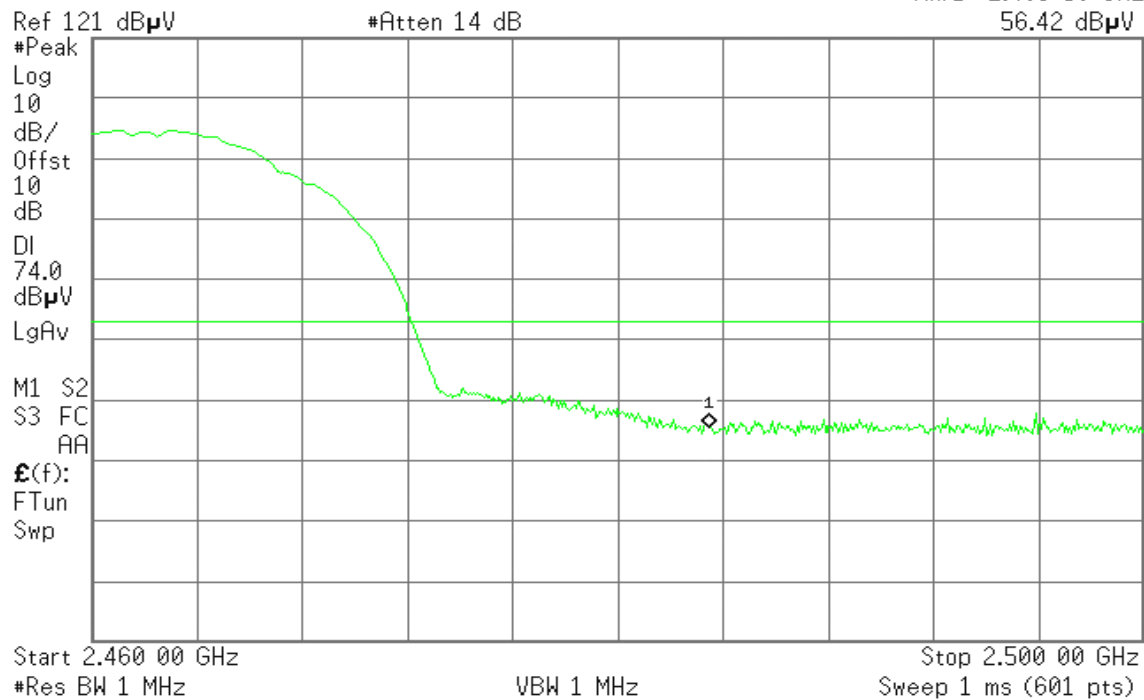Mkr1 2.483 50 GHz
56.42 dB μ V**Detector mode: Average****Polarity: Horizontal**

* Agilent 08:30:58 Oct 4, 2006


T

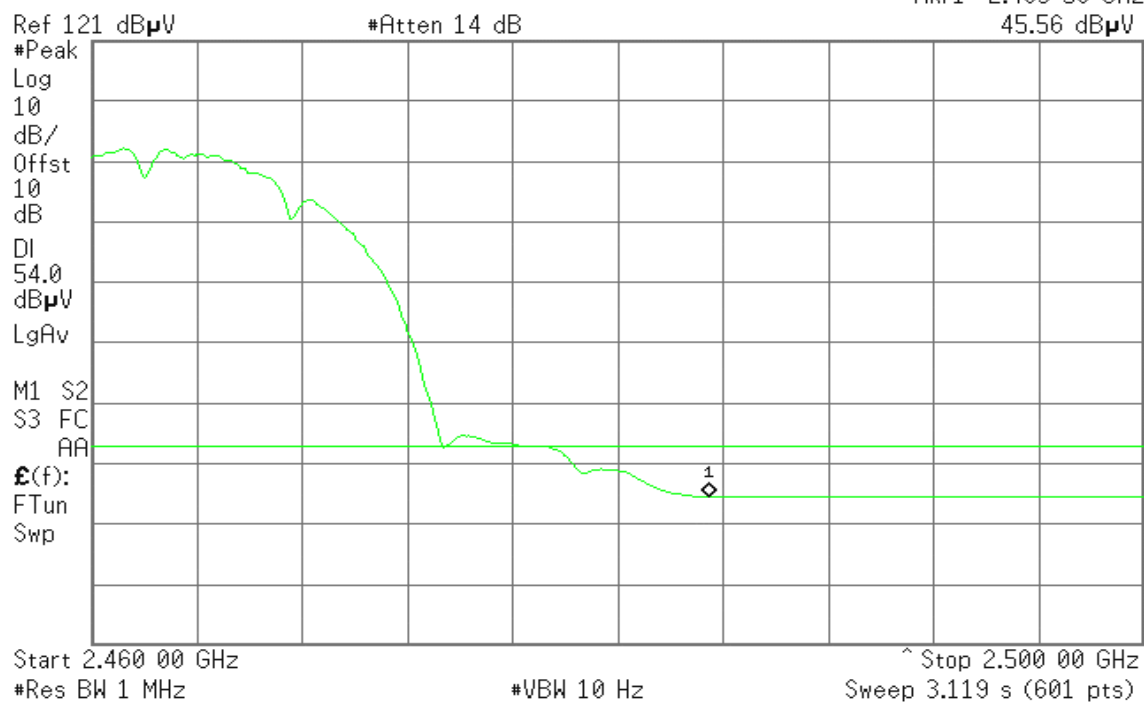Mkr1 2.483 50 GHz
45.56 dB μ V

**Band Edges (IEEE 802.11g mode / CH Low)****Detector mode: Peak****Polarity: Vertical**


* Agilent 07:55:45 Oct 4, 2006

R T

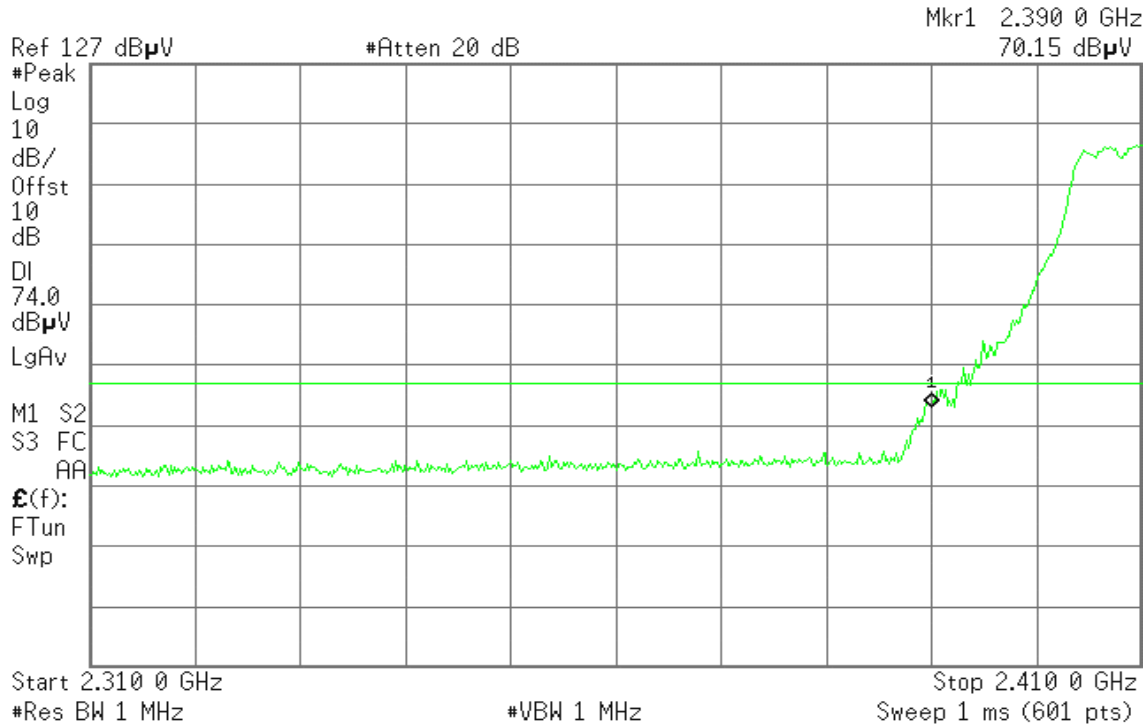**Detector mode: Average****Polarity: Vertical**

* Agilent 07:56:15 Oct 4, 2006


T

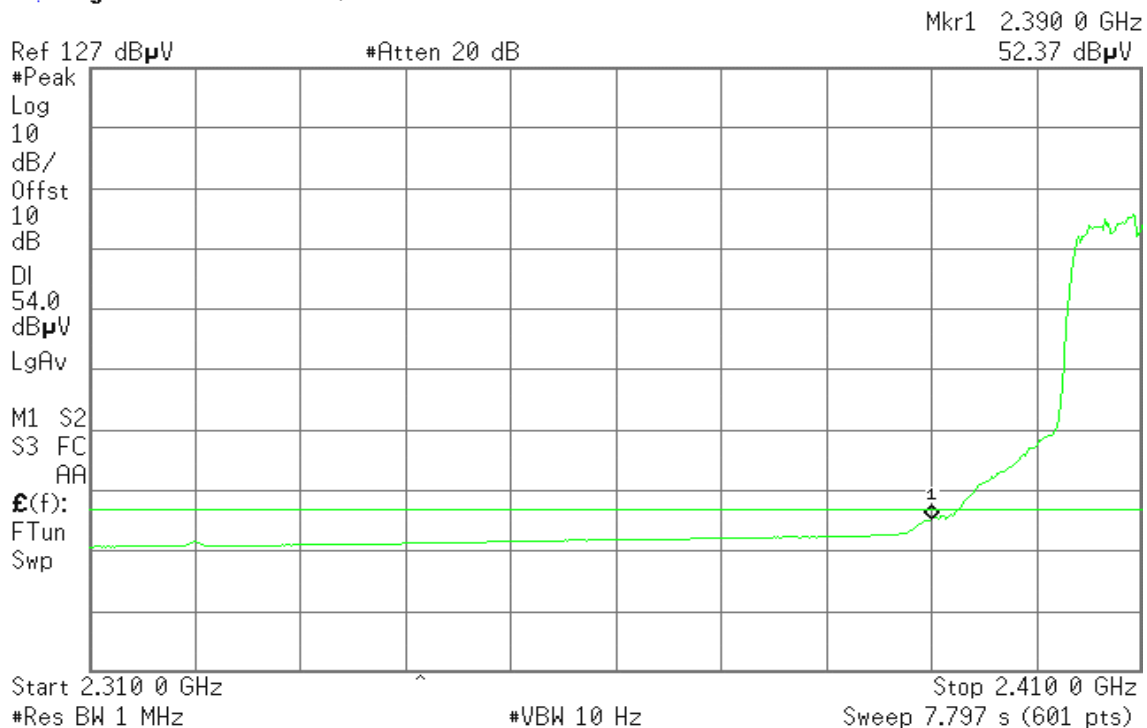

**Detector mode: Peak****Polarity: Horizontal**


* Agilent 08:43:38 Oct 4, 2006

T

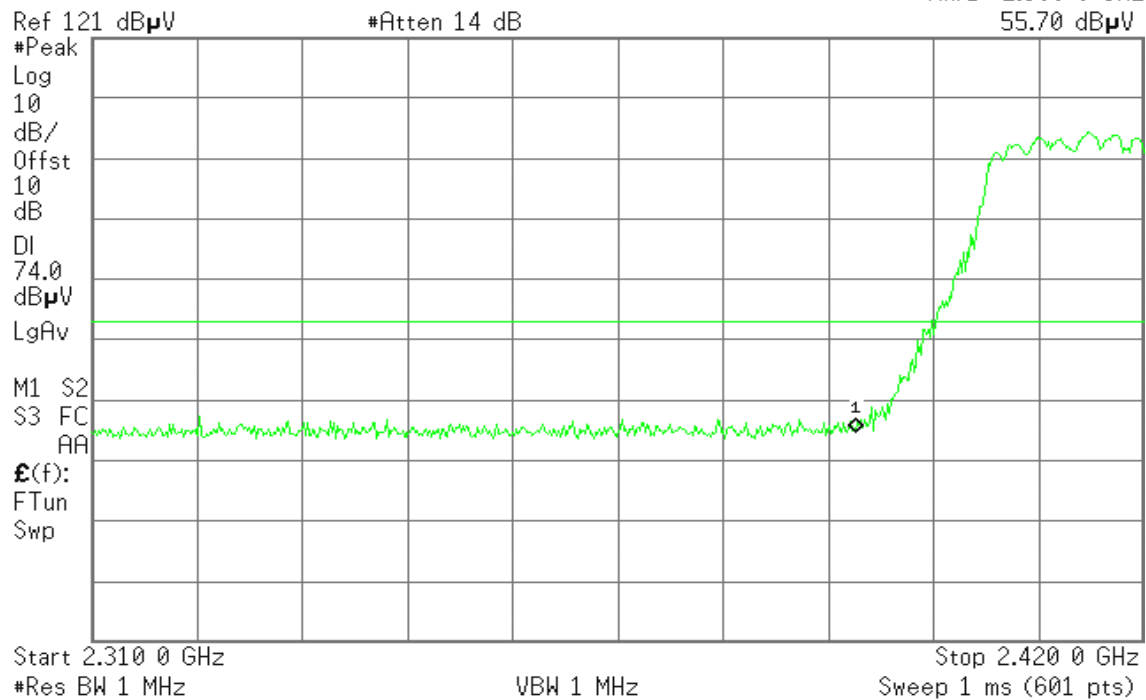**Detector mode: Average****Polarity: Horizontal**

* Agilent 08:45:05 Oct 4, 2006


T

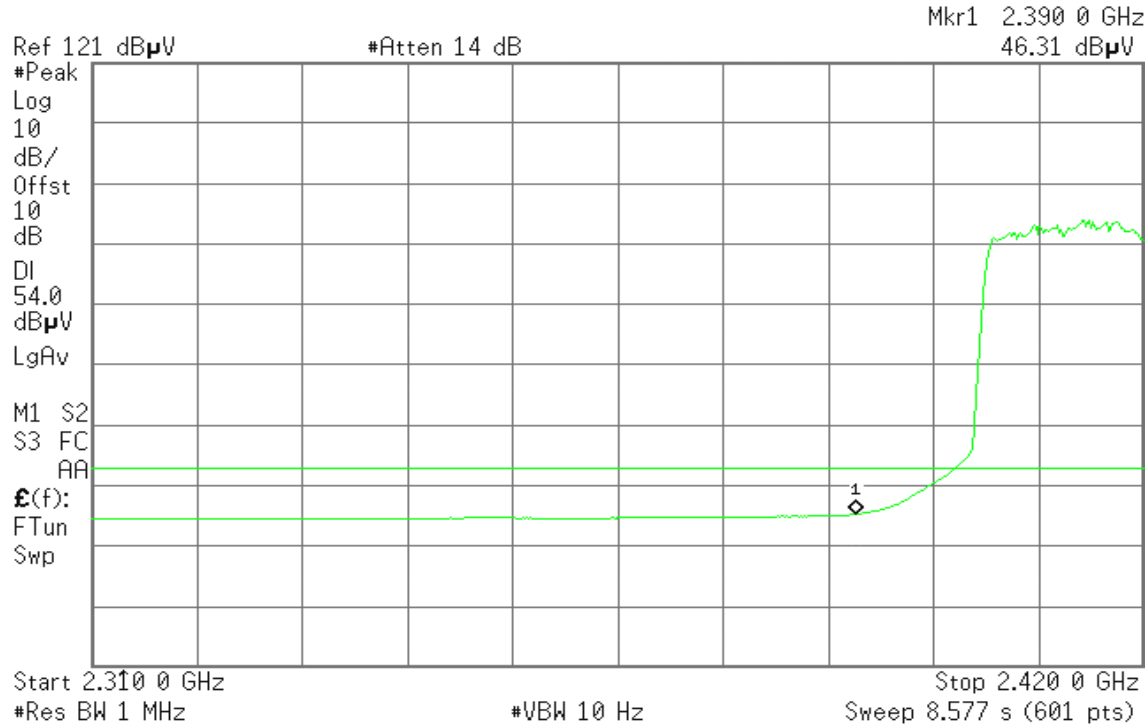

**Band Edges (IEEE 802.11g mode / CH High)****Detector mode: Peak****Polarity: Vertical**


* Agilent 08:21:24 Oct 4, 2006

T

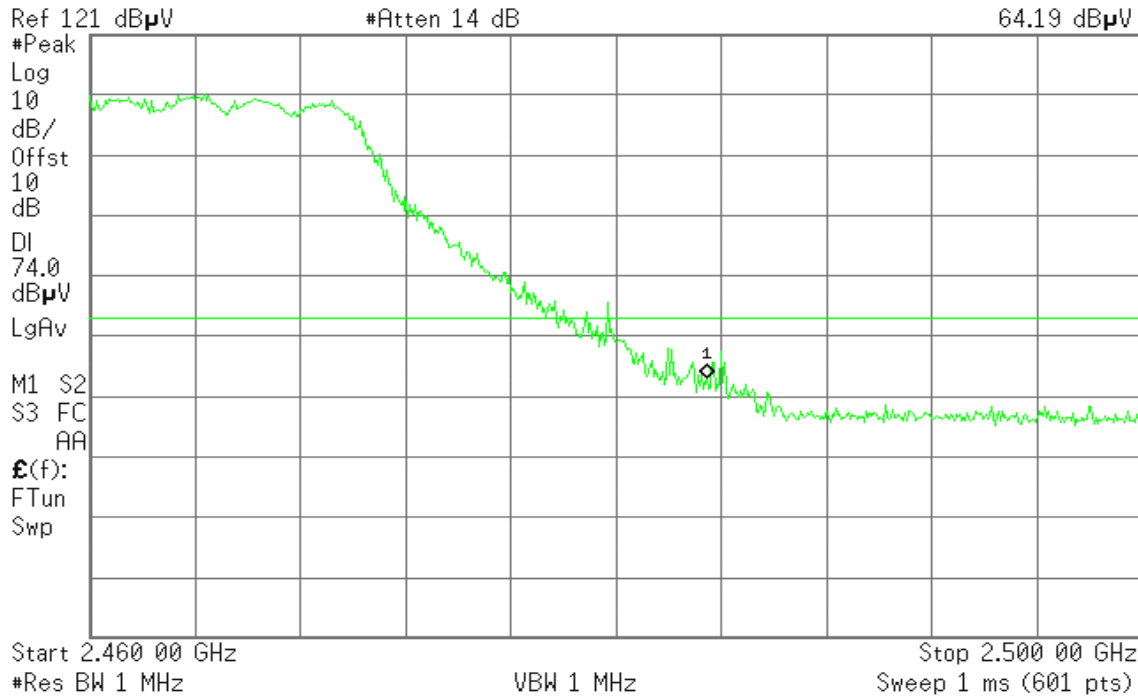Mkr1 2.483 50 GHz
64.19 dB μ V**Detector mode: Average****Polarity: Vertical**

* Agilent 08:21:04 Oct 4, 2006

T

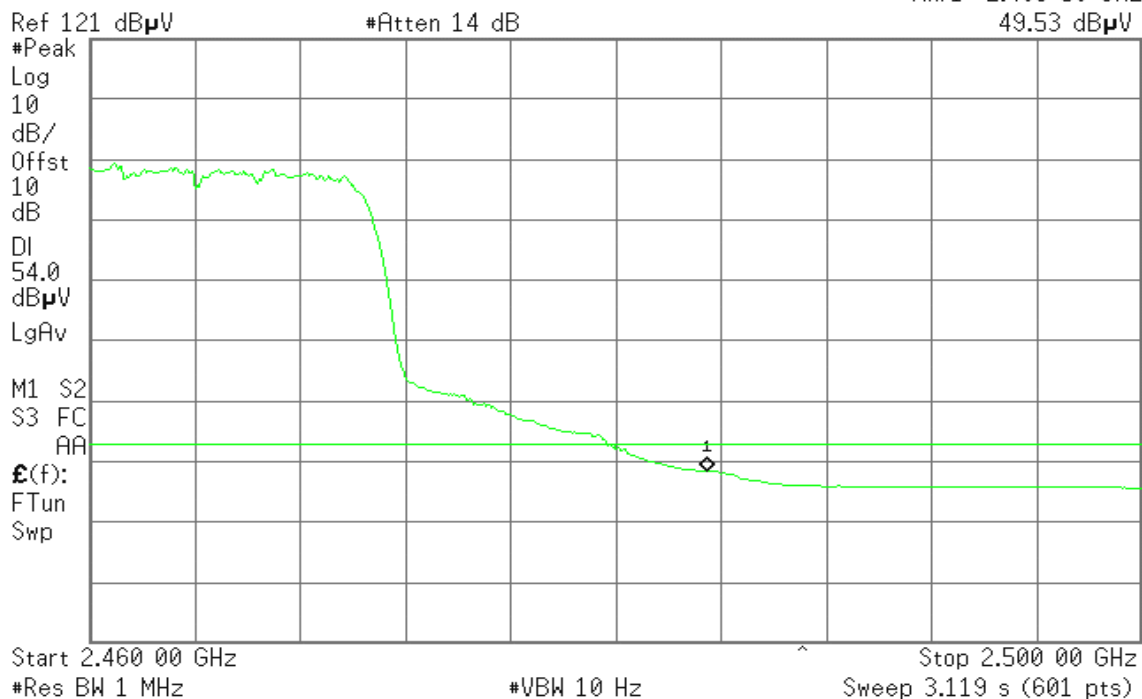Mkr1 2.483 50 GHz
49.53 dB μ V

**Detector mode: Peak****Polarity: Horizontal**

* Agilent 08:32:01 Oct 4, 2006

T

Mkr1 2.483 50 GHz
57.97 dB μ VRef 121 dB μ V

#Atten 14 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

AA

 $\mathcal{E}(f)$:

FTun

Swp

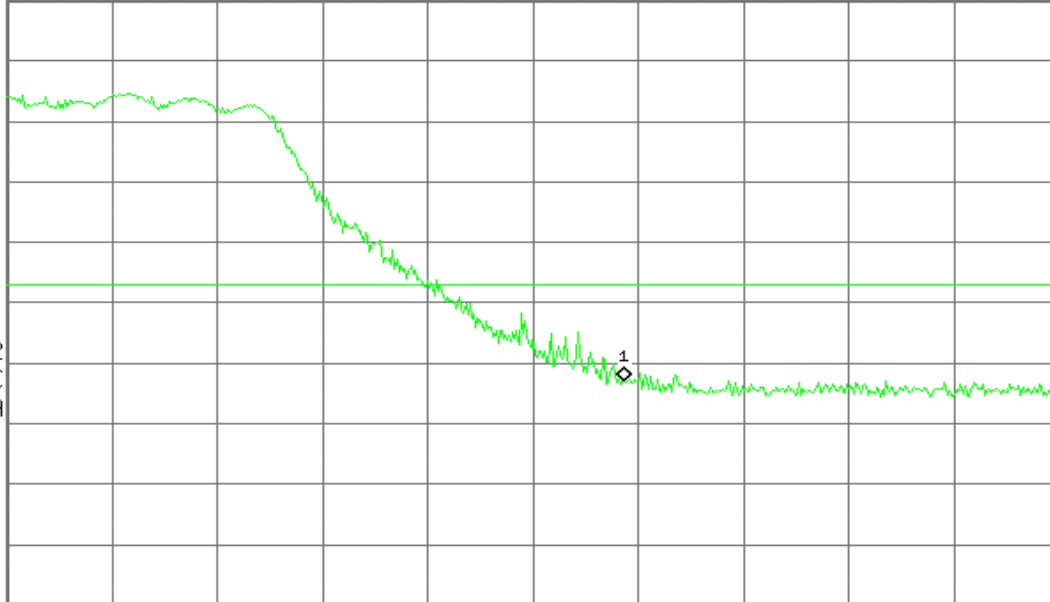

Start 2.460 00 GHz

#Res BW 1 MHz

VBW 1 MHz

Stop 2.500 00 GHz

Sweep 1 ms (601 pts)

Detector mode: Average**Polarity: Horizontal**

* Agilent 08:31:46 Oct 4, 2006

T

Mkr1 2.483 50 GHz
46.75 dB μ VRef 121 dB μ V

#Atten 14 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

AA

 $\mathcal{E}(f)$:

FTun

Swp

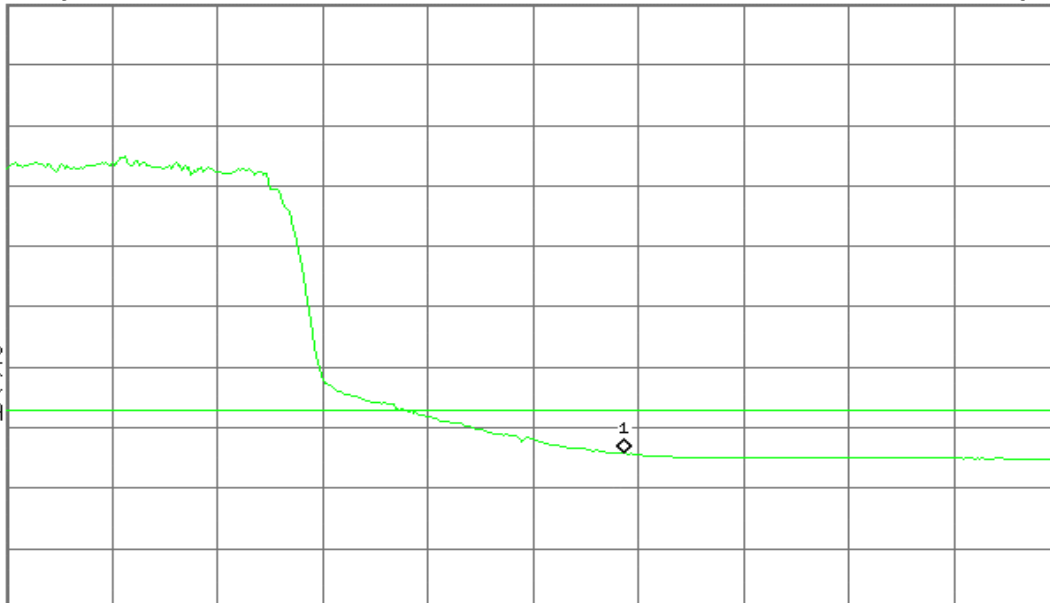

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)

**Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)****Detector mode: Peak****Polarity: Vertical**


Agilent 08:09:48 Oct 4, 2006

T

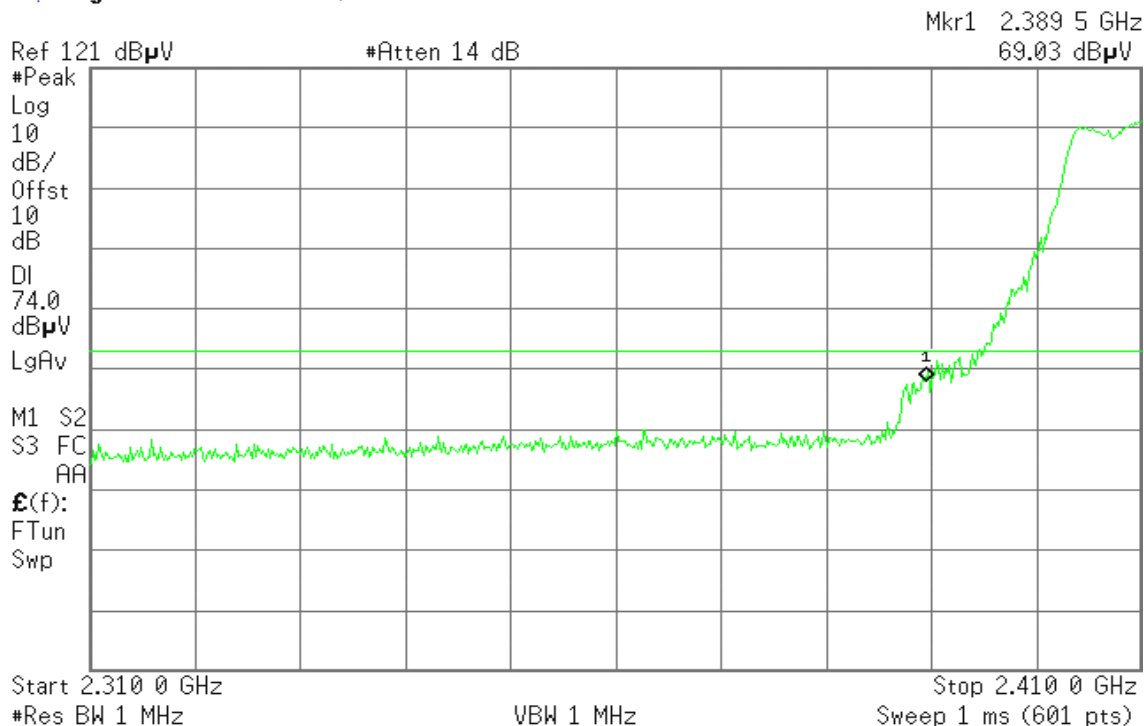**Detector mode: Average****Polarity: Vertical**

Agilent 08:08:53 Oct 4, 2006


T

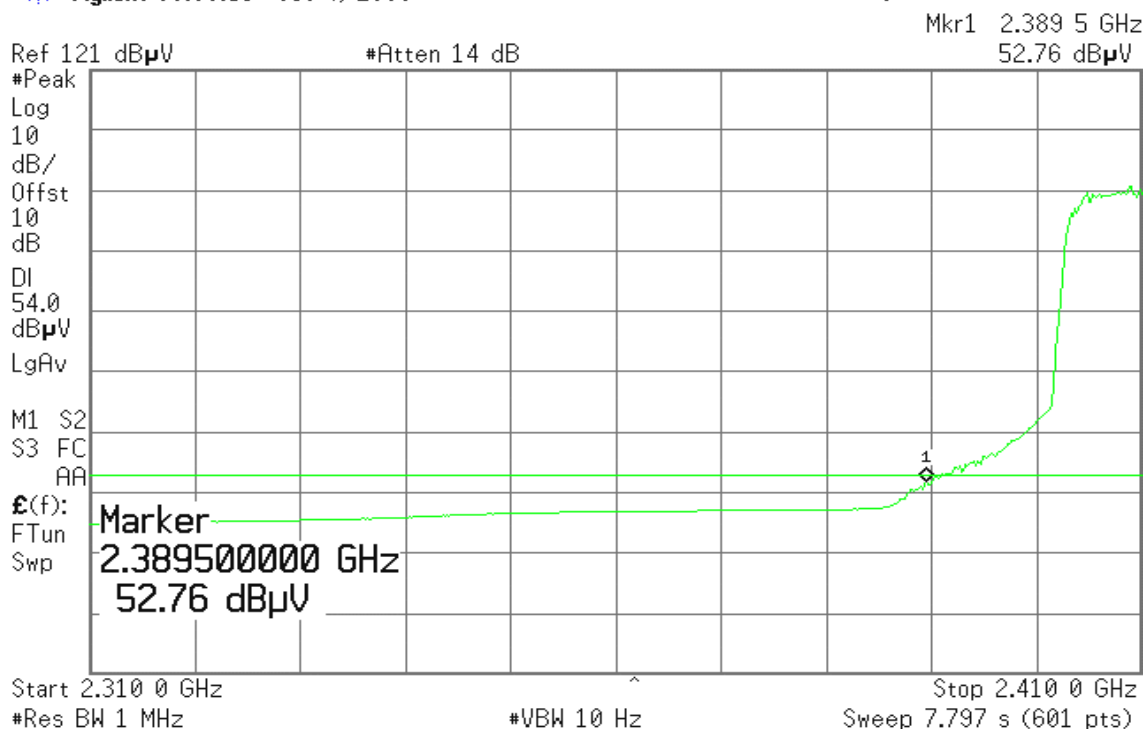

**Detector mode: Peak****Polarity: Horizontal**


* Agilent 08:41:16 Oct 4, 2006

T

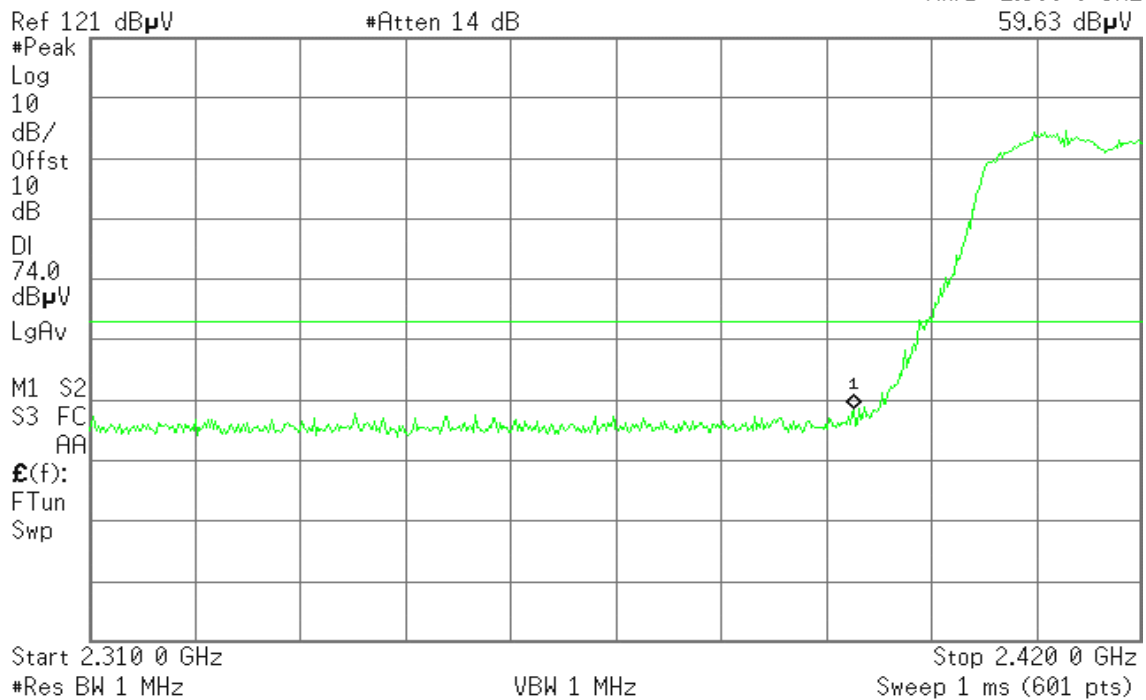**Detector mode: Average****Polarity: Horizontal**

* Agilent 08:40:55 Oct 4, 2006


T

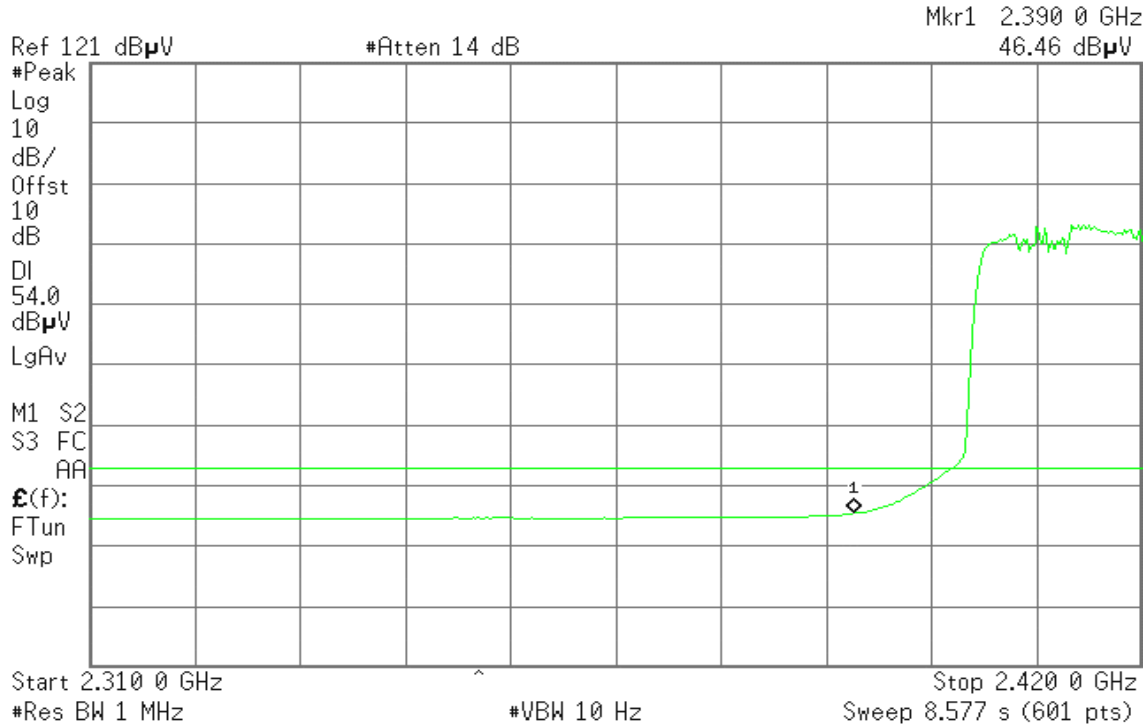

**Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)****Detector mode: Peak****Polarity: Vertical**


* Agilent 08:18:26 Oct 4, 2006

T

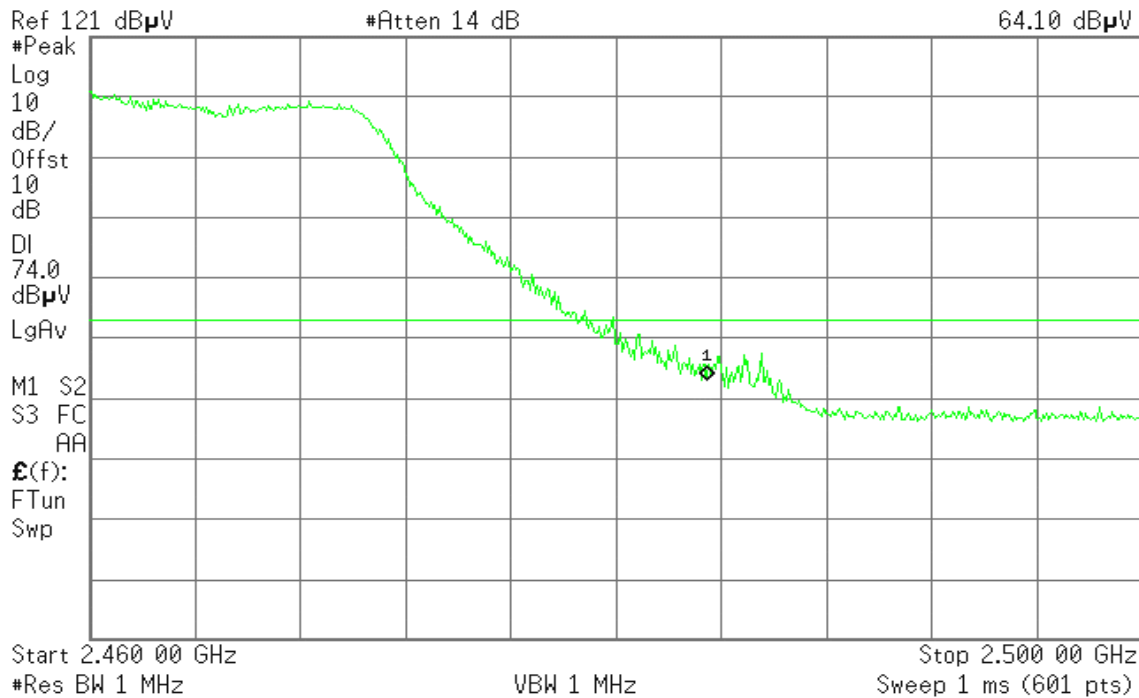Mkr1 2.483 50 GHz
64.10 dB μ V**Detector mode: Average****Polarity: Vertical**

* Agilent 08:19:48 Oct 4, 2006

T

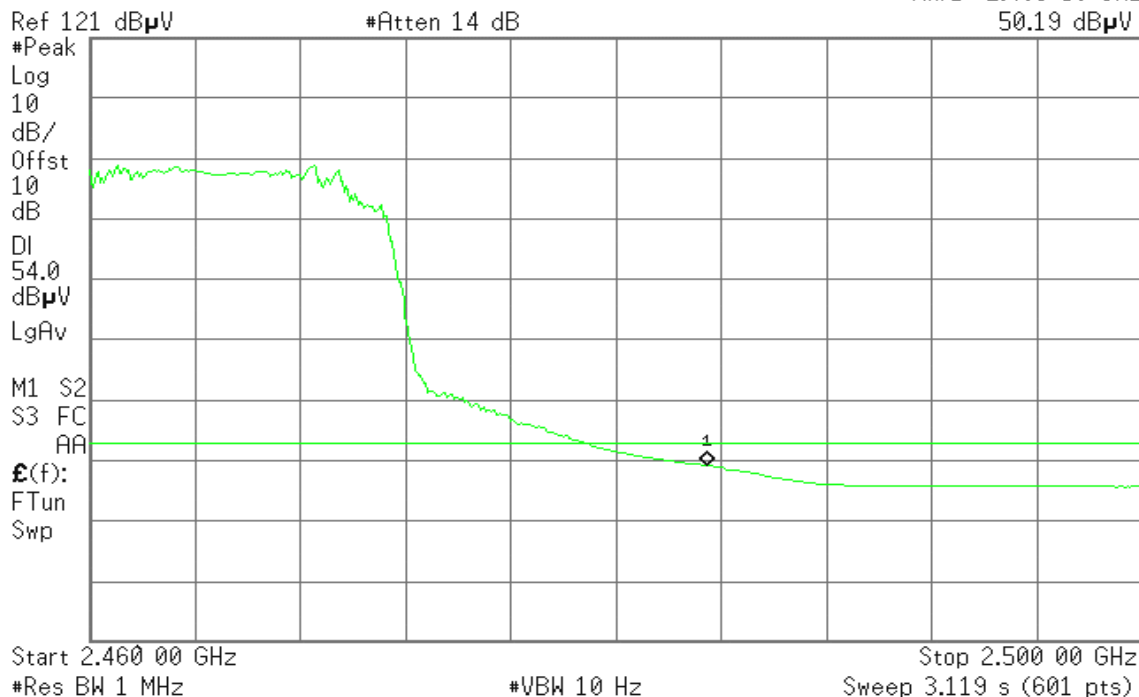Mkr1 2.483 50 GHz
50.19 dB μ V

**Detector mode: Peak****Polarity: Horizontal**

* Agilent 08:32:46 Oct 4, 2006

T

Mkr1 2.483 50 GHz
61.57 dB μ VRef 121 dB μ V

#Atten 14 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

AA

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

VBW 1 MHz

Stop 2.500 00 GHz

Sweep 1 ms (601 pts)

Detector mode: Average**Polarity: Horizontal**

* Agilent 08:33:24 Oct 4, 2006

T

Mkr1 2.483 50 GHz
46.93 dB μ VRef 121 dB μ V

#Atten 14 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

AA

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)

**Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)****Detector mode: Peak****Polarity: Vertical**


* Agilent 08:13:28 Oct 4, 2006

T

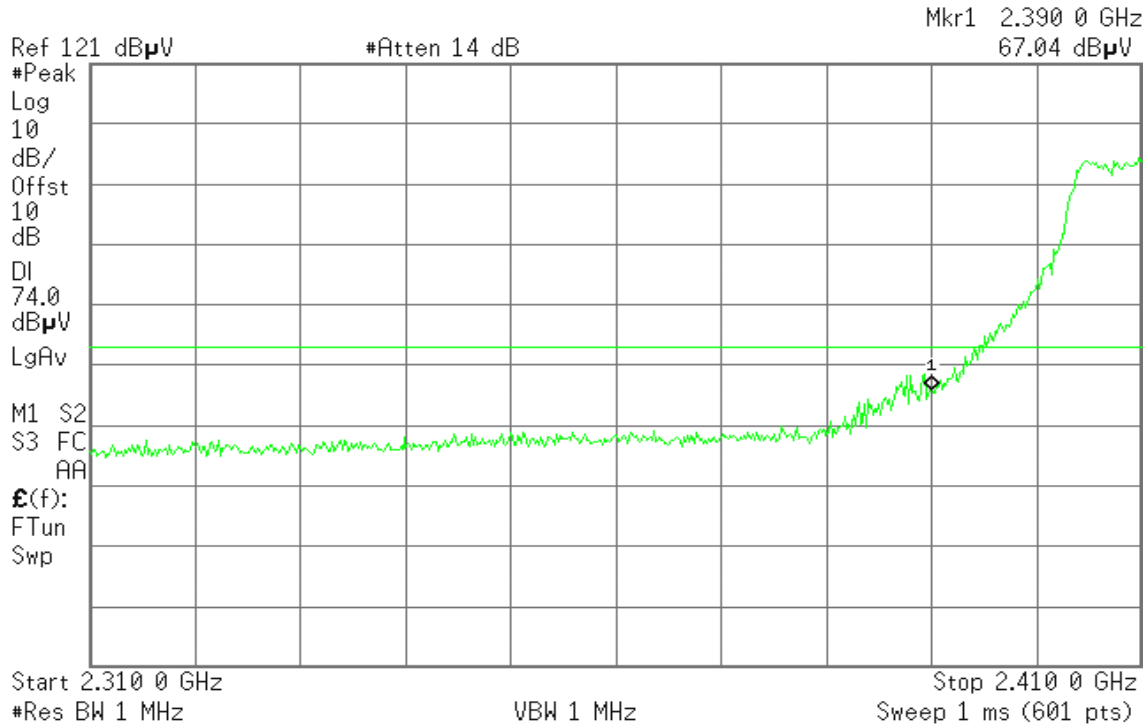**Detector mode: Average****Polarity: Vertical**

* Agilent 08:13:10 Oct 4, 2006


T

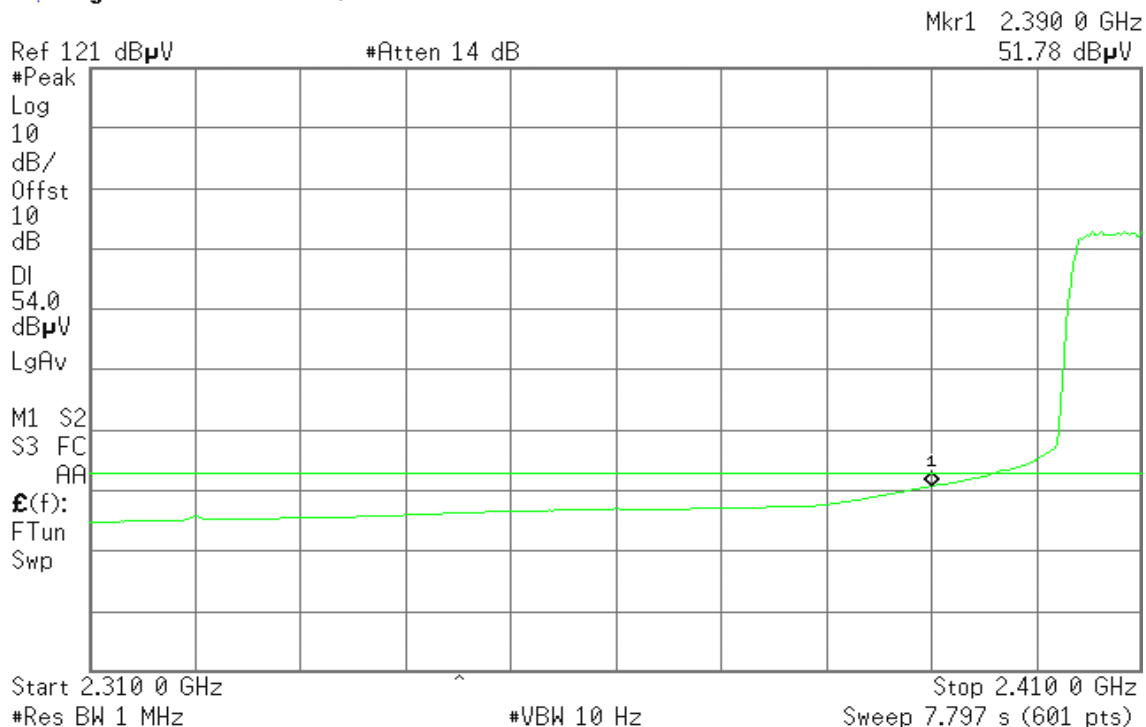

**Detector mode: Peak****Polarity: Horizontal**


* Agilent 08:39:26 Oct 4, 2006

R T

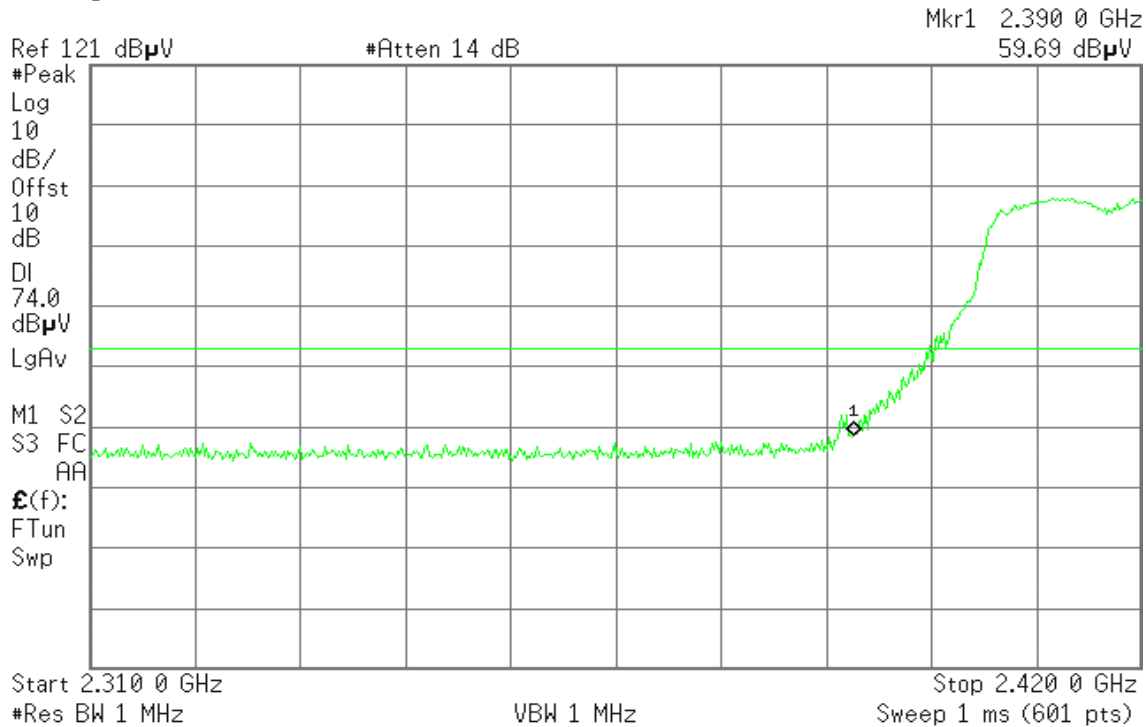**Detector mode: Average****Polarity: Horizontal**

* Agilent 08:39:51 Oct 4, 2006


T

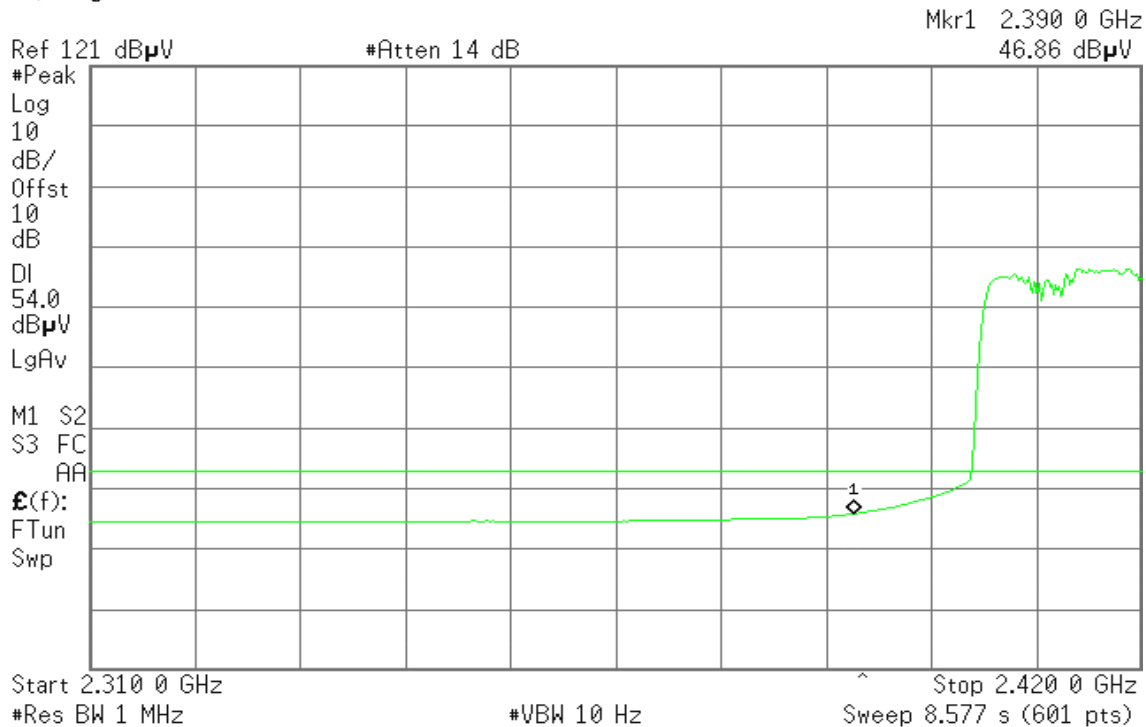

**Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)****Detector mode: Peak****Polarity: Vertical**


* Agilent 08:16:05 Oct 4, 2006

T

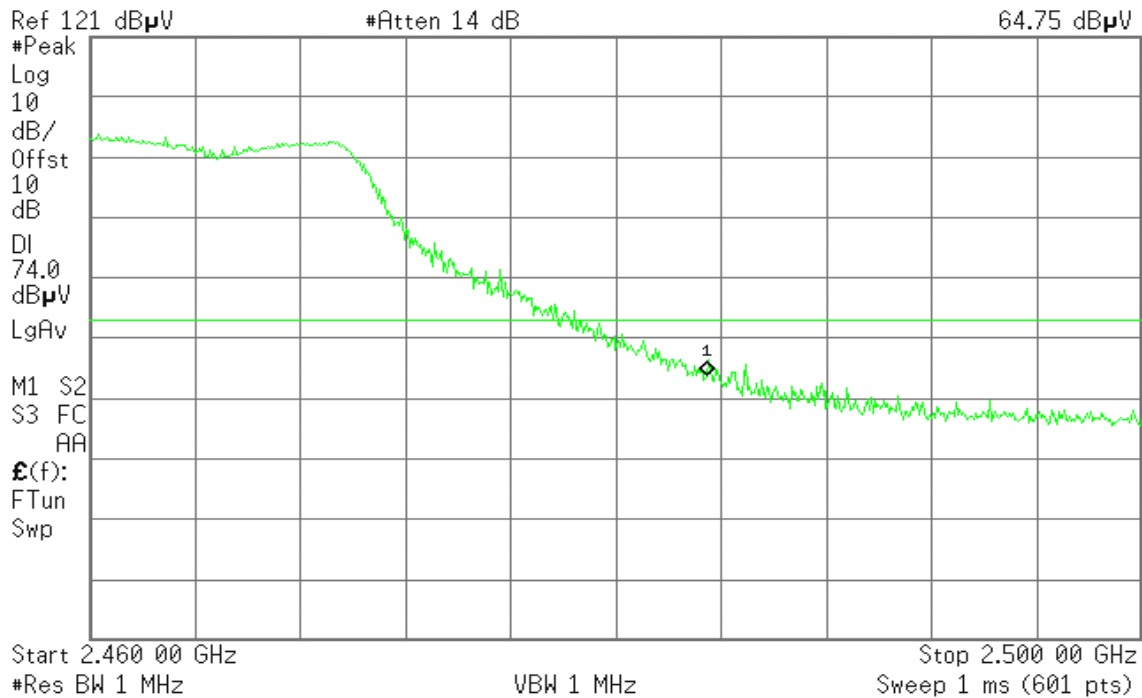Mkr1 2.483 50 GHz
64.75 dB μ V**Detector mode: Average****Polarity: Vertical**

* Agilent 08:15:44 Oct 4, 2006

R T

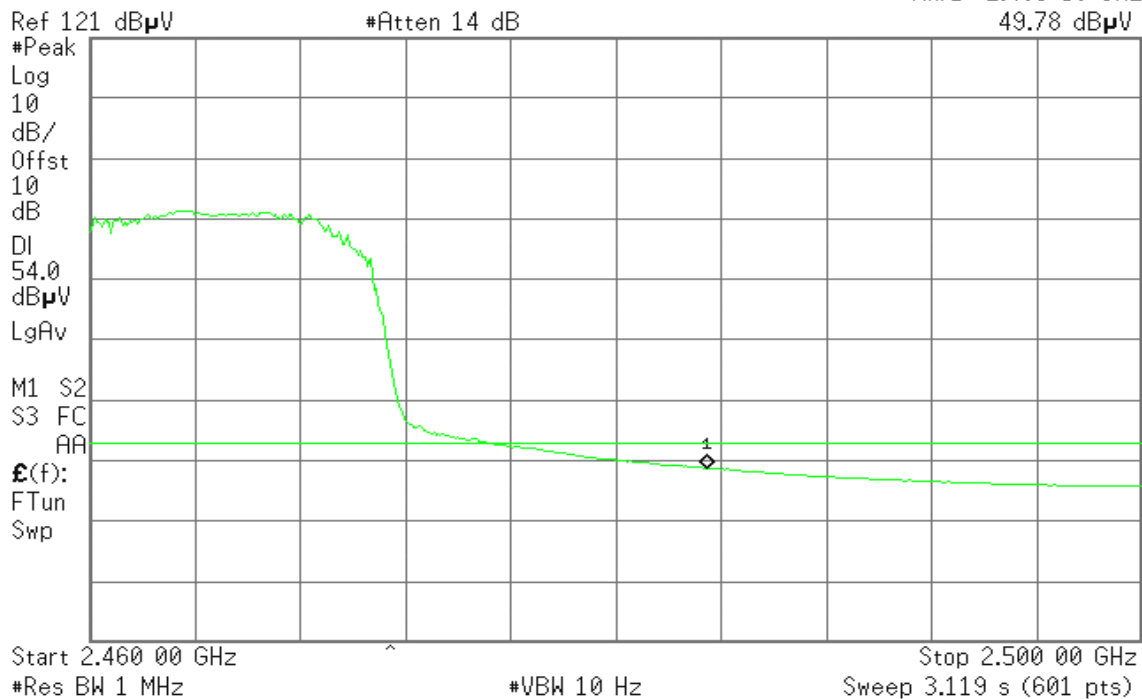Mkr1 2.483 50 GHz
49.78 dB μ V

**Detector mode: Peak****Polarity: Horizontal**

* Agilent 08:37:24 Oct 4, 2006

T

Mkr1 2.483 50 GHz
60.58 dB μ VRef 121 dB μ V

#Atten 14 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

AA

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

VBW 1 MHz

Stop 2.500 00 GHz

Sweep 1 ms (601 pts)

Detector mode: Average**Polarity: Horizontal**

* Agilent 08:37:47 Oct 4, 2006

T

Mkr1 2.483 50 GHz
47.13 dB μ VRef 121 dB μ V

#Atten 14 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

AA

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz


Sweep 3.119 s (601 pts)

7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

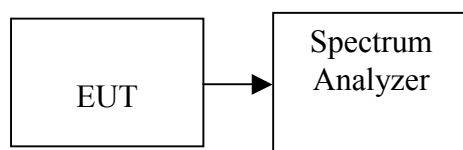

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 2 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-11.58	-10.29	-7.88	8.00	PASS
Mid	2437	-14.01	-11.64	-9.65		PASS
High	2462	-10.41	-11.89	-8.08		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 2 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-11.43	-10.41	-7.88	8.00	PASS
Mid	2437	-11.72	-11.55	-8.62		PASS
High	2462	-12.89	-12.45	-9.65		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 2 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-11.98	-12.12	-9.04	8.00	PASS
Mid	2437	-11.48	-8.87	-6.97		PASS
High	2462	-11.44	-11.86	-8.63		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 2 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
Low	2412	-18.42	-10.89	-10.18	8.00	PASS
Mid	2437	-16.38	-8.91	-8.19		PASS
High	2462	-16.49	-16.37	-13.42		PASS

Remark: Total PPSD (dBm) = $10 * \log(10^{(\text{Chain 0 PPSD} / 10)} + 10^{(\text{Chain 2 PPSD} / 10)})$

**Test mode: IEEE 802.11b mode with combiner**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-9.49	8.00	PASS
Mid	2437	-9.83		PASS
High	2462	-8.06		PASS

Test mode: IEEE 802.11g mode with combiner

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-8.63	8.00	PASS
Mid	2437	-8.44		PASS
High	2462	-9.66		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode with combiner

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-8.27	8.00	PASS
Mid	2437	-8.68		PASS
High	2462	-7.77		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode with combiner


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-12.52	8.00	PASS
Mid	2437	-10.93		PASS
High	2462	-8.42		PASS




Test Plot



IEEE 802.11b mode / Chain 0



PPSD (CH Low)


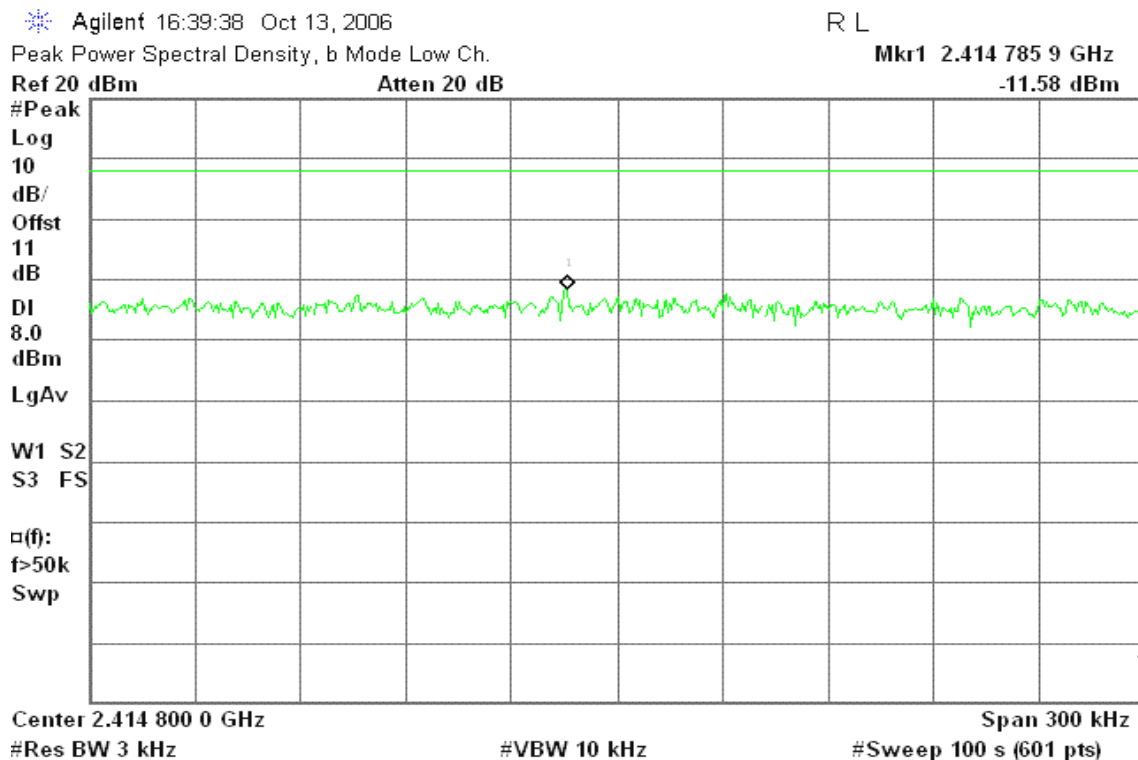




PPSD (CH Mid)

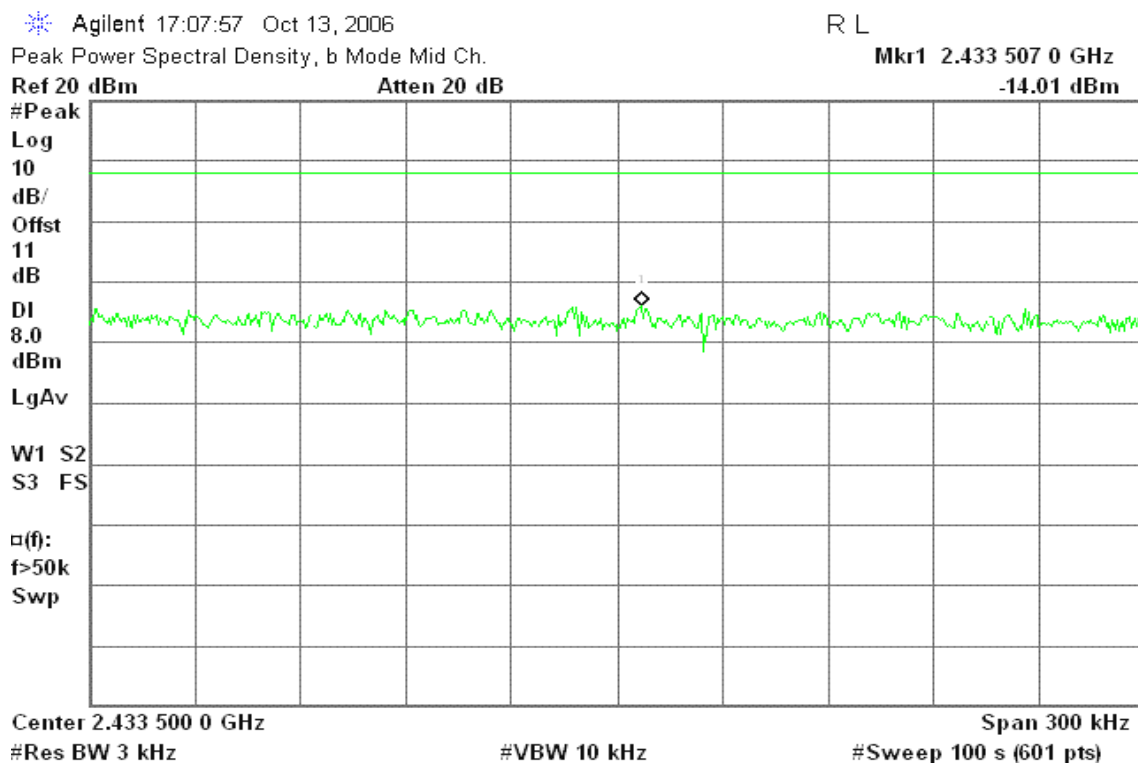

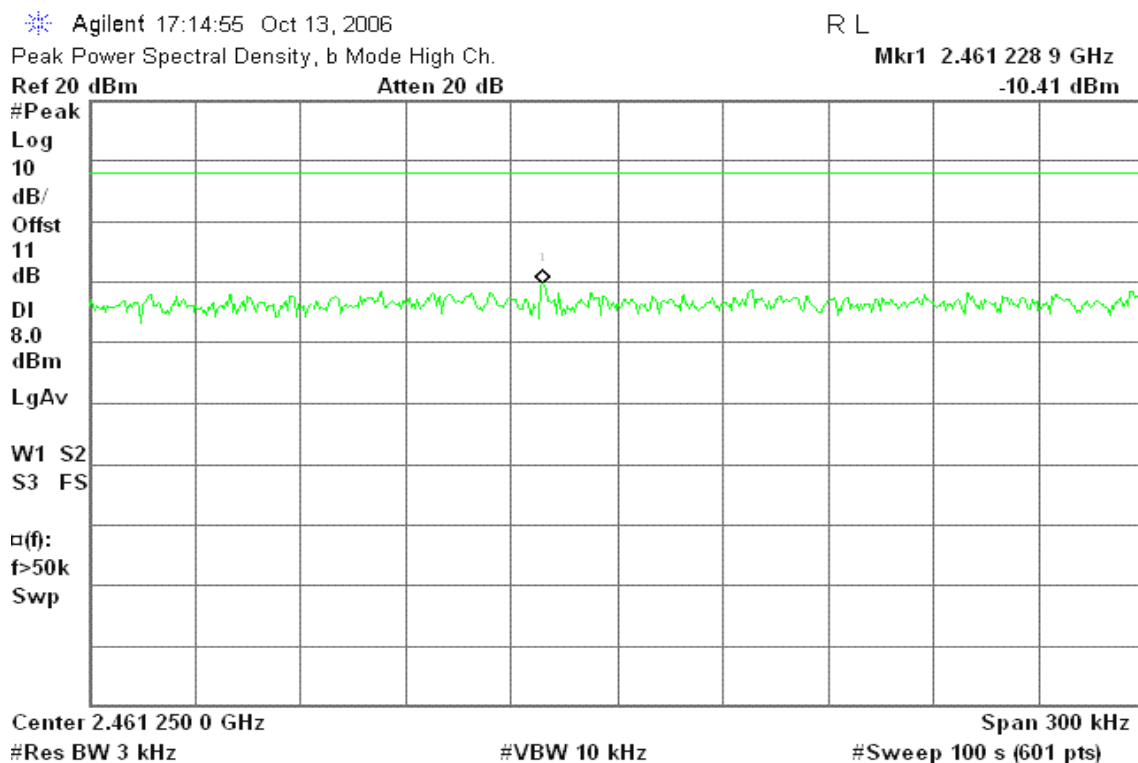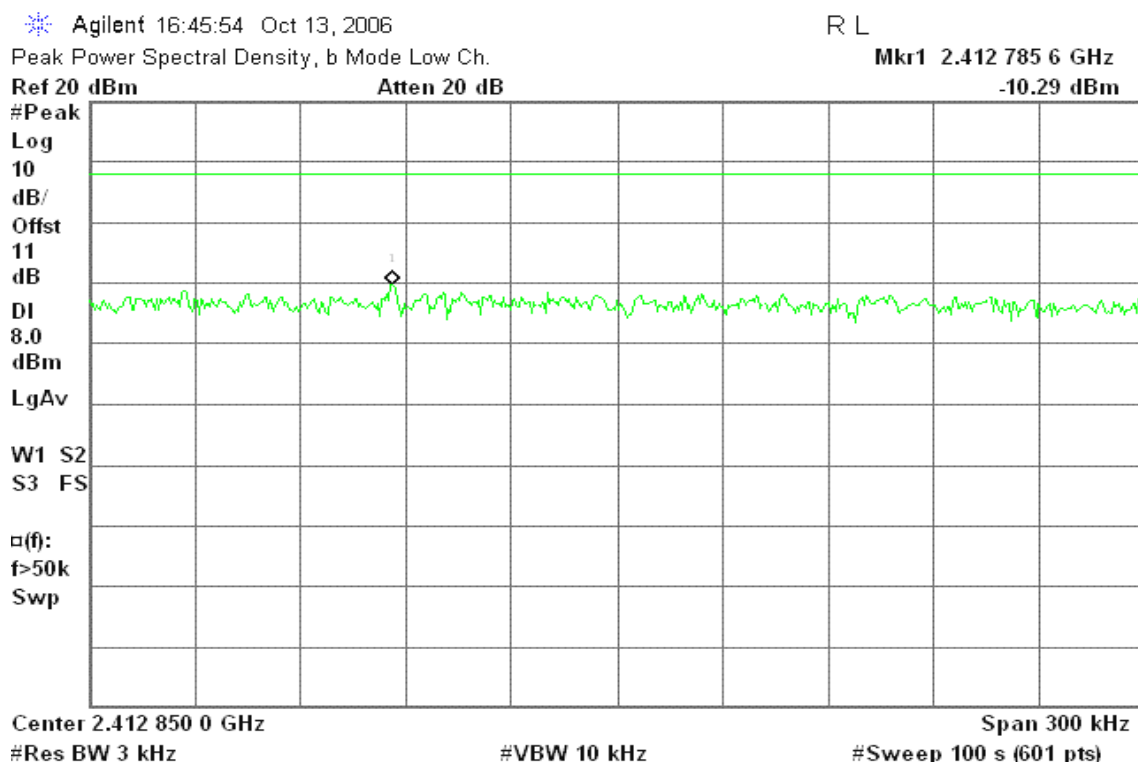**PPSD (CH High)****IEEE 802.11b mode / Chain 2****PPSD (CH Low)**

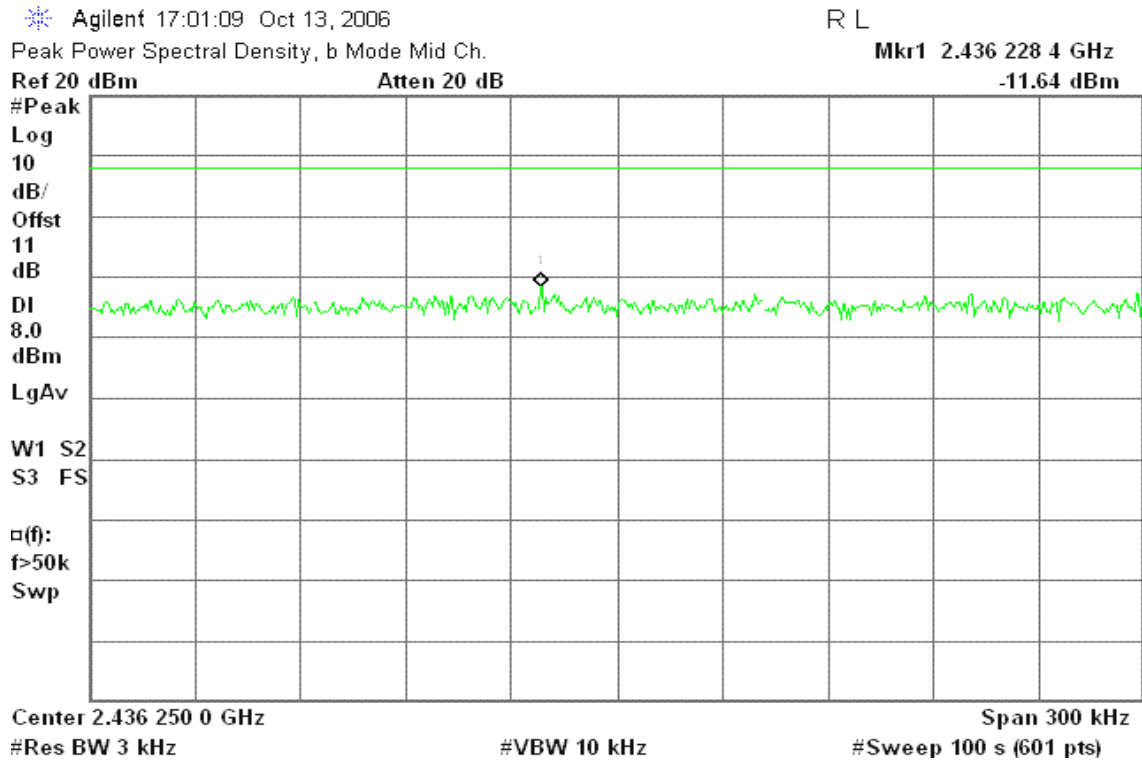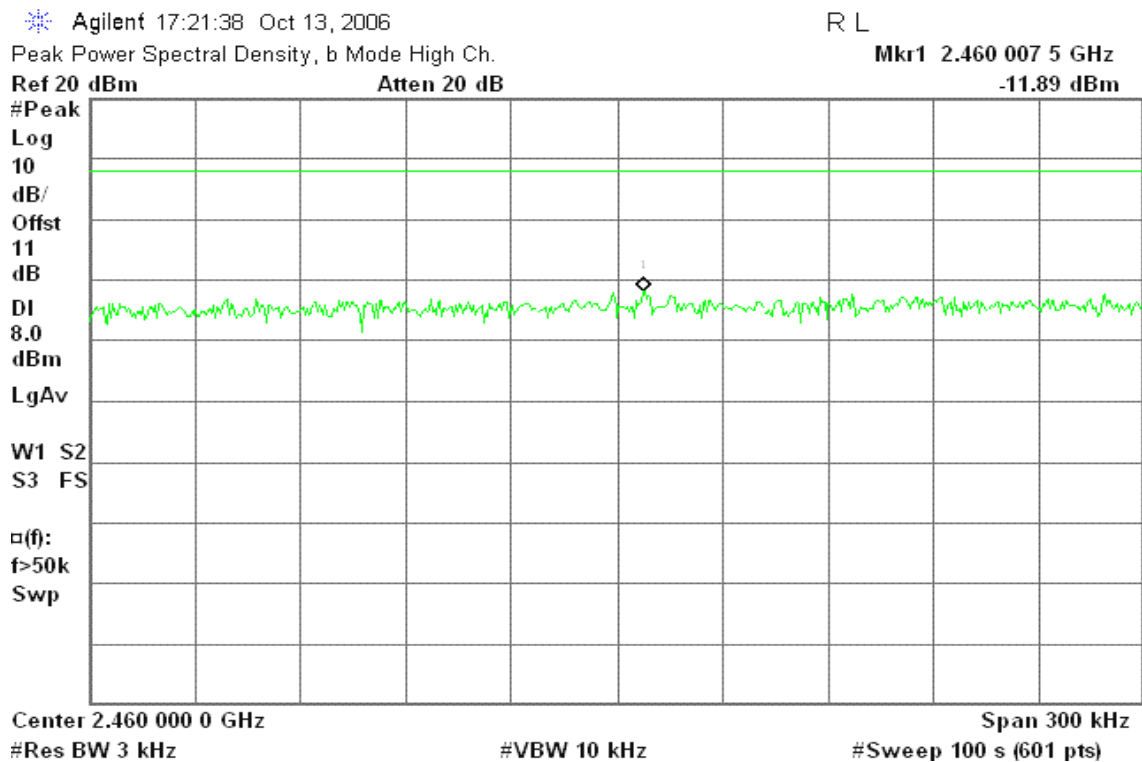**PPSD (CH Mid)****PPSD (CH High)**

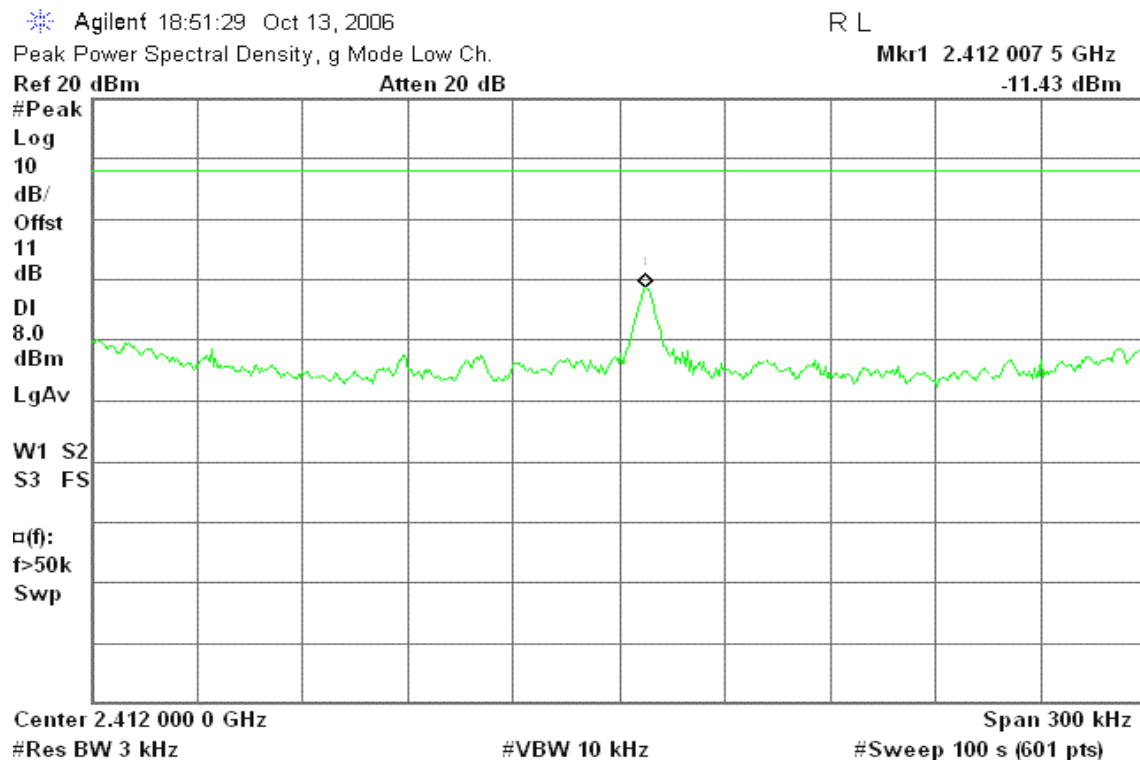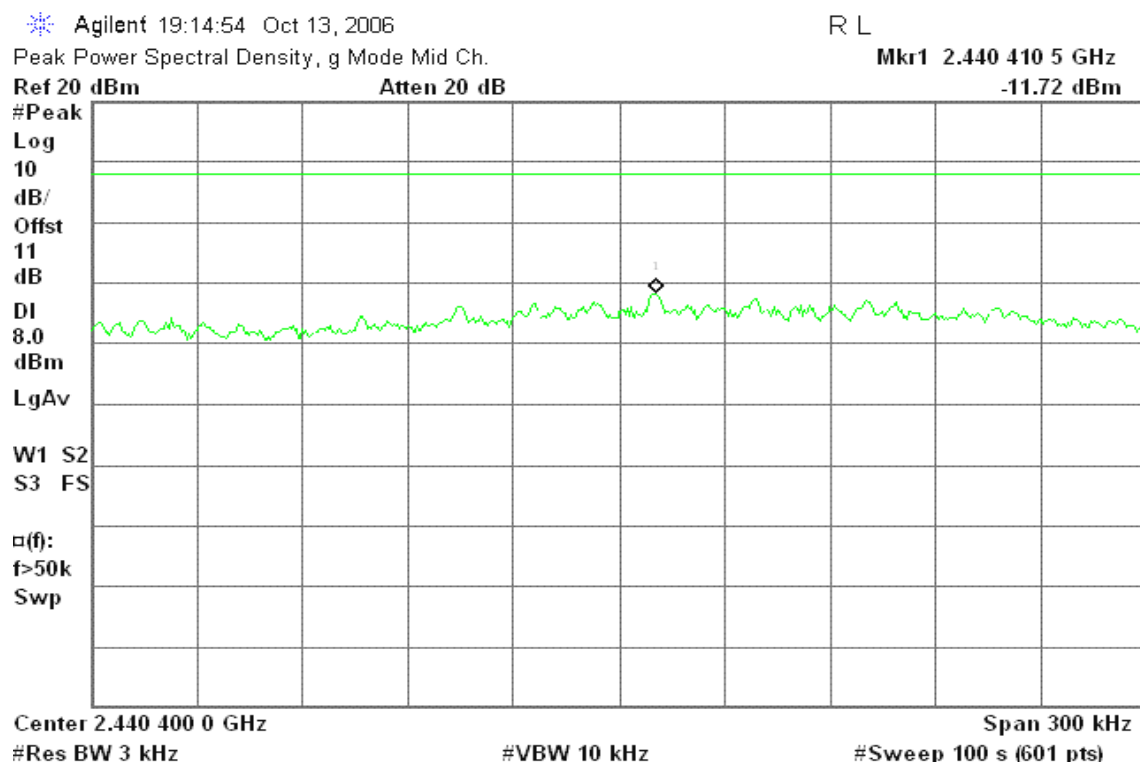**IEEE 802.11g mode / Chain 0****PPSD (CH Low)****PPSD (CH Mid)**

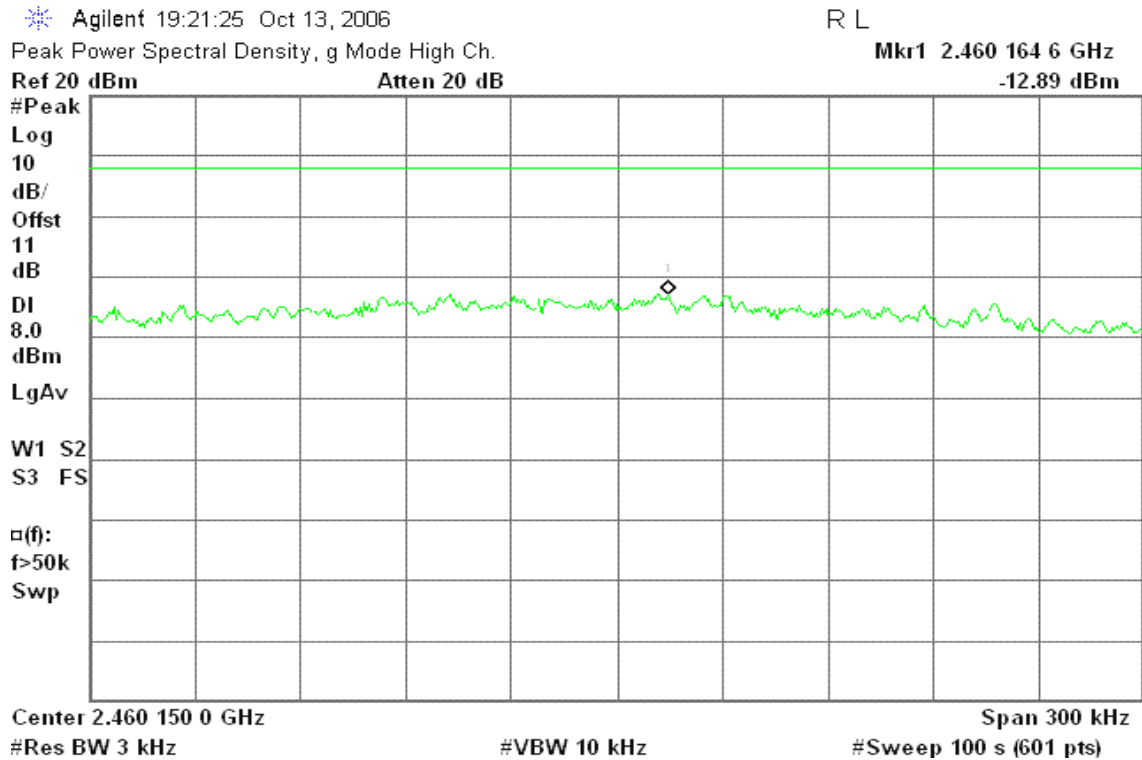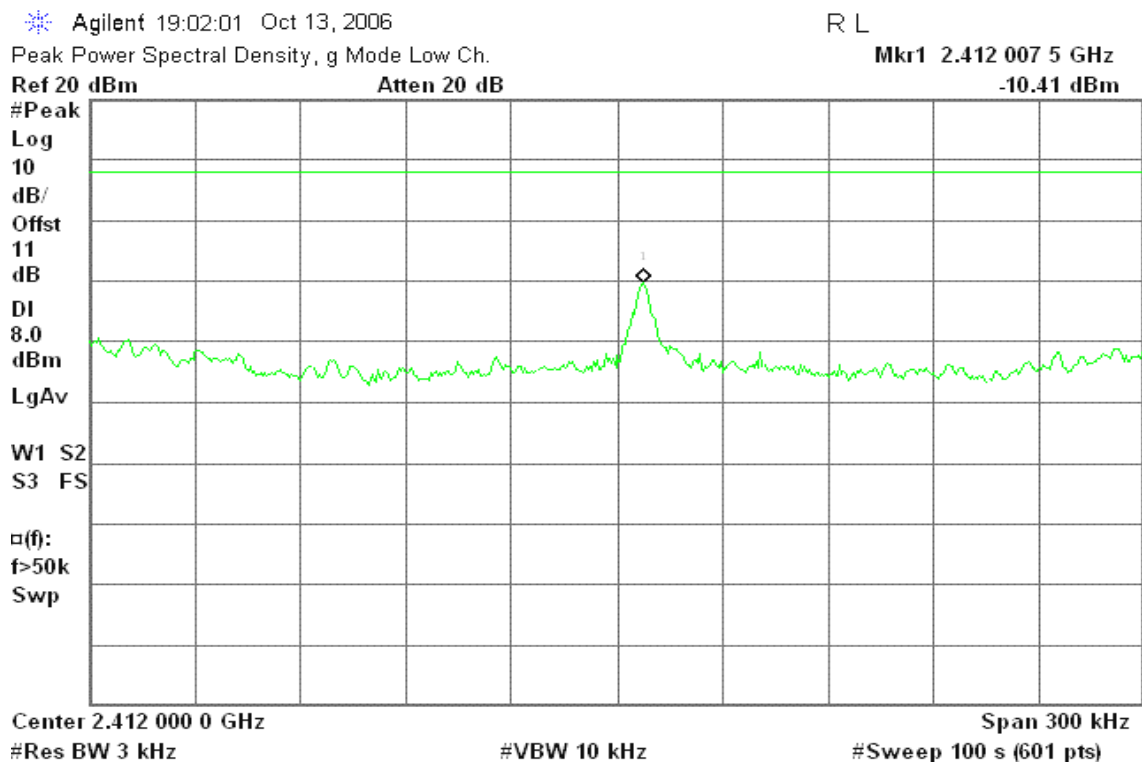**PPSD (CH High)****IEEE 802.11g mode / Chain 2****PPSD (CH Low)**

**PPSD (CH Mid)**

* Agilent 19:08:32 Oct 13, 2006

R L


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.437 008 0 GHz

Ref 20 dBm

Atten 20 dB

-11.55 dBm

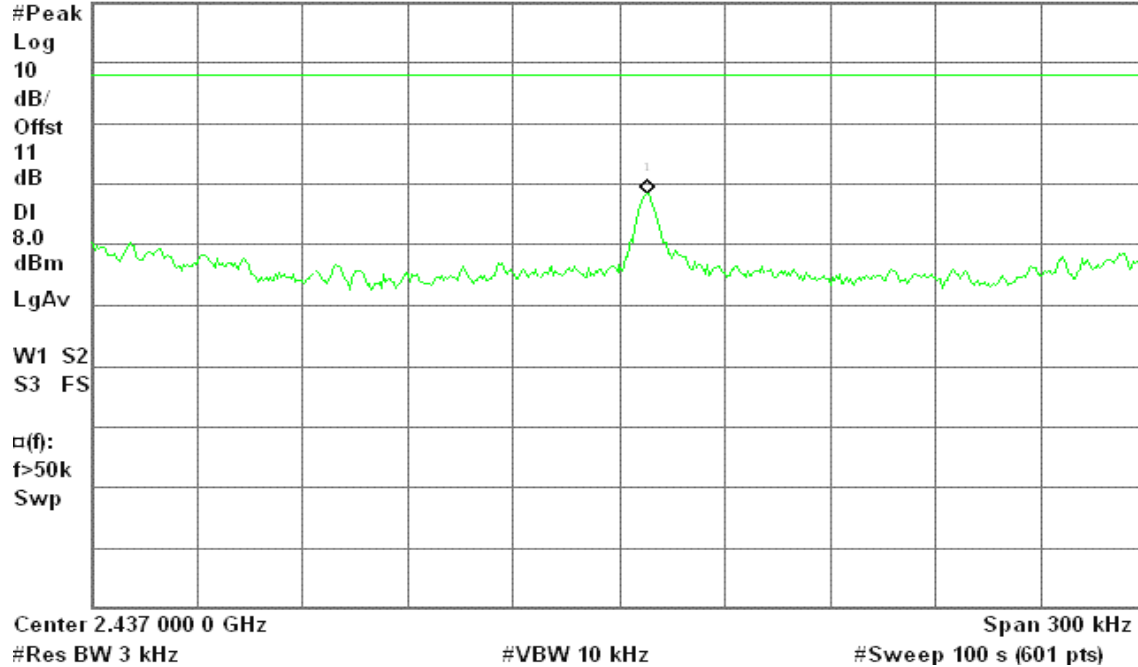**PPSD (CH High)**

* Agilent 19:27:58 Oct 13, 2006

R T


Peak Power Spectral Density, g Mode High Ch.



Mkr1 2.457 632 4 GHz

Ref 20 dBm

Atten 20 dB

-12.45 dBm

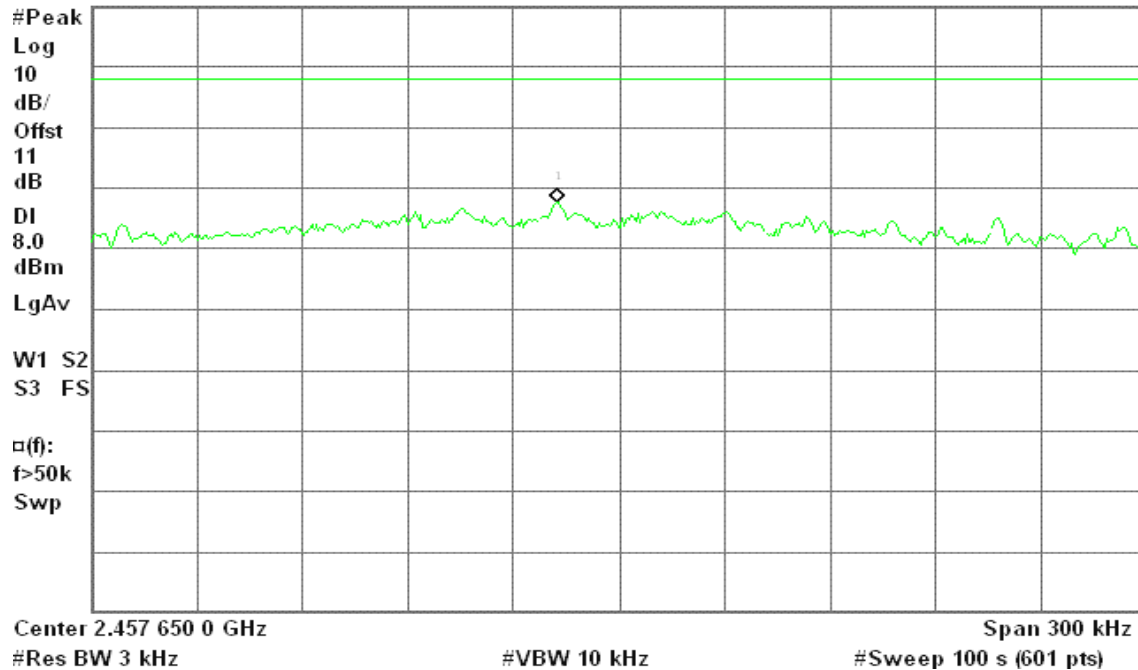

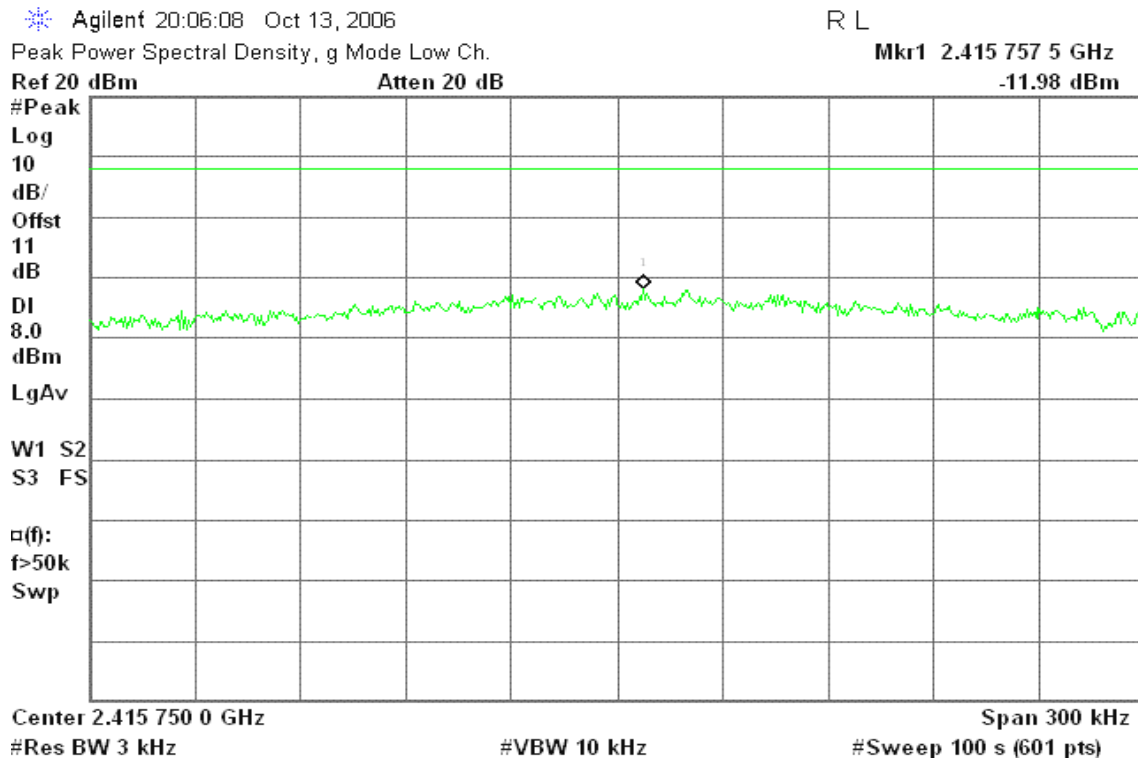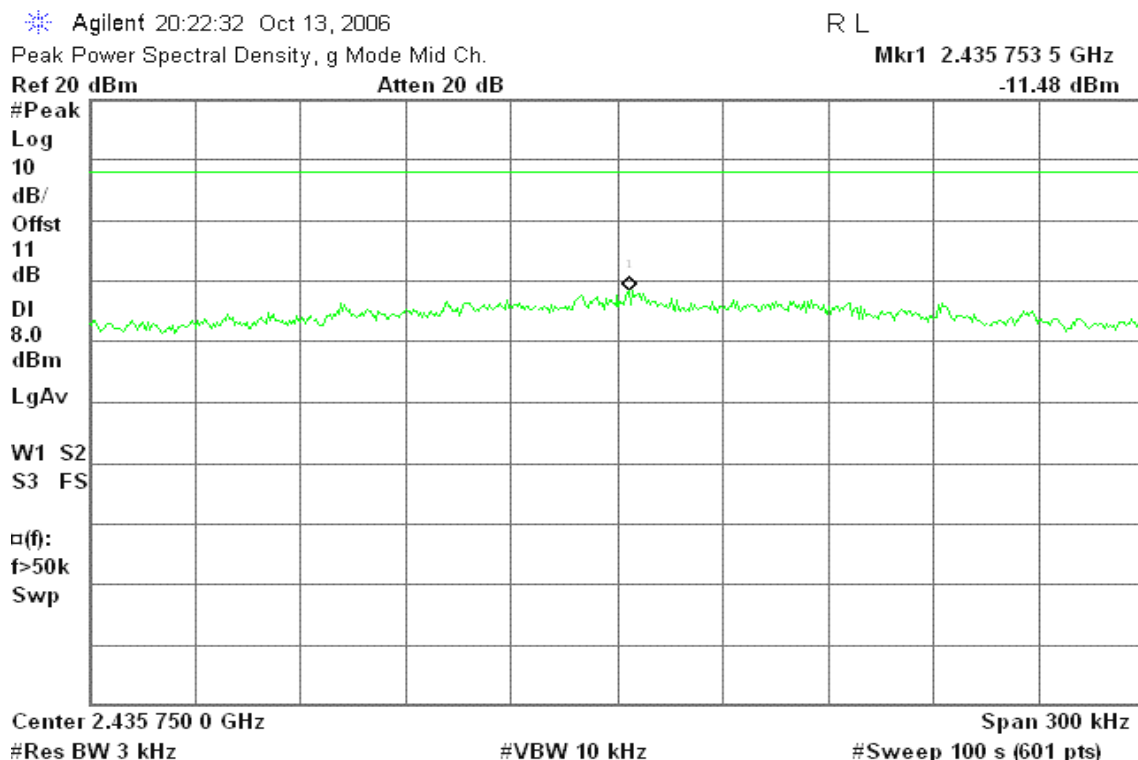**draft 802.11n Standard-20 MHz Channel mode / Chain 0****PPSD (CH Low)****PPSD (CH Mid)**

**PPSD (CH High)**

Agilent 20:51:14 Oct 13, 2006

R L

Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.460 132.4 GHz

Ref 20 dBm

Atten 20 dB

-11.44 dBm

#Peak

Log

10

dB/

Offst

11

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

□(f):

f>50k

Swp

Center 2.460 150.0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

draft 802.11n Standard-20 MHz Channel mode / Chain 2**PPSD (CH Low)**

Agilent 19:58:26 Oct 13, 2006

R L

Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.416 257.4 GHz

Ref 20 dBm

Atten 20 dB

-12.12 dBm

#Peak

Log

10

dB/

Offst

11

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

□(f):

f>50k

Swp



Center 2.416 350.0 GHz



Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

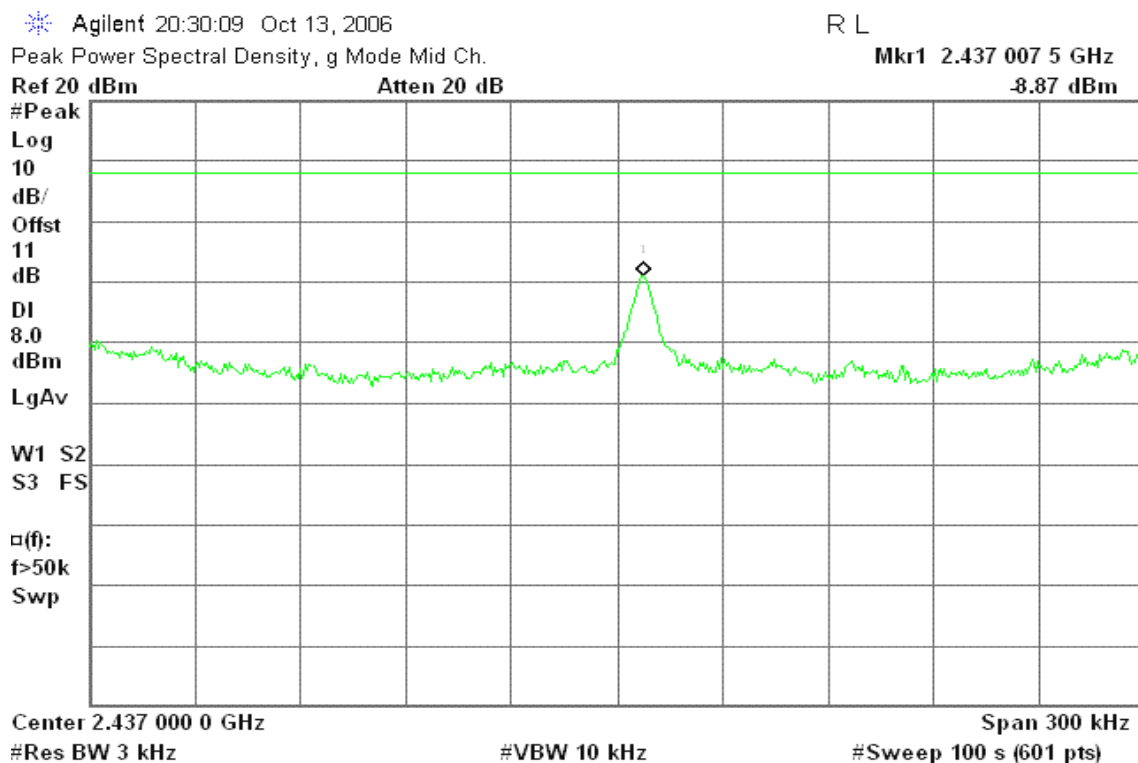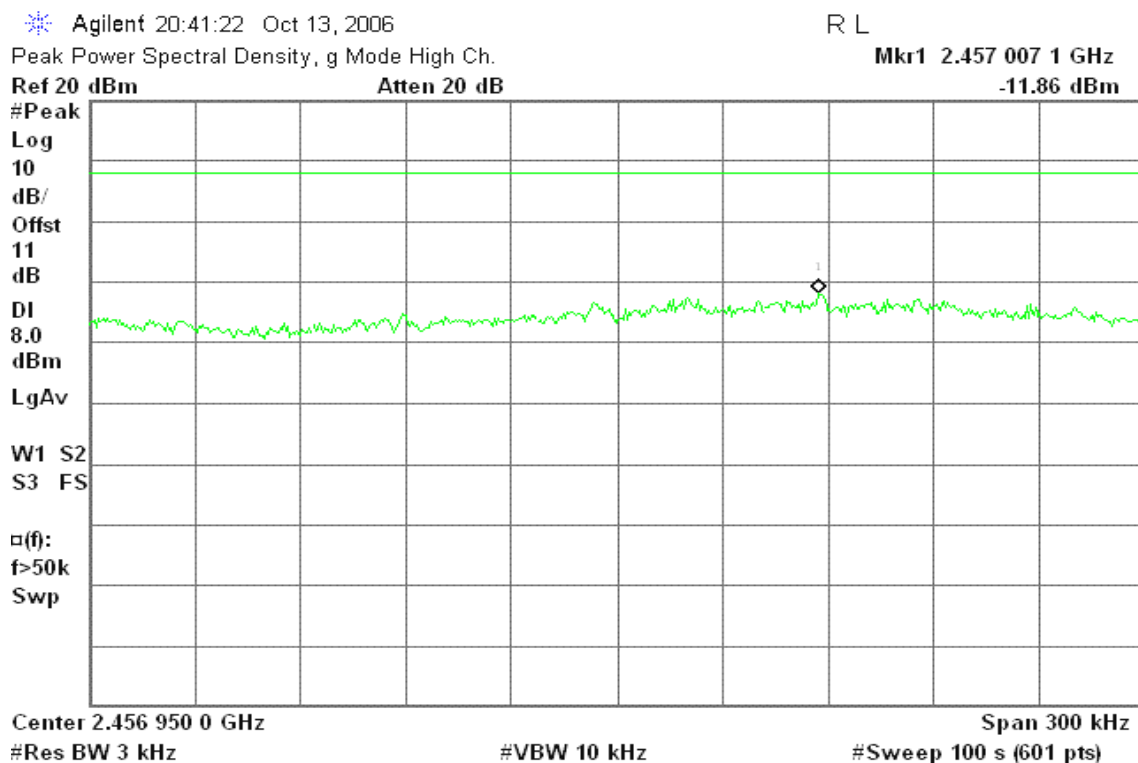**PPSD (CH Mid)****PPSD (CH High)**

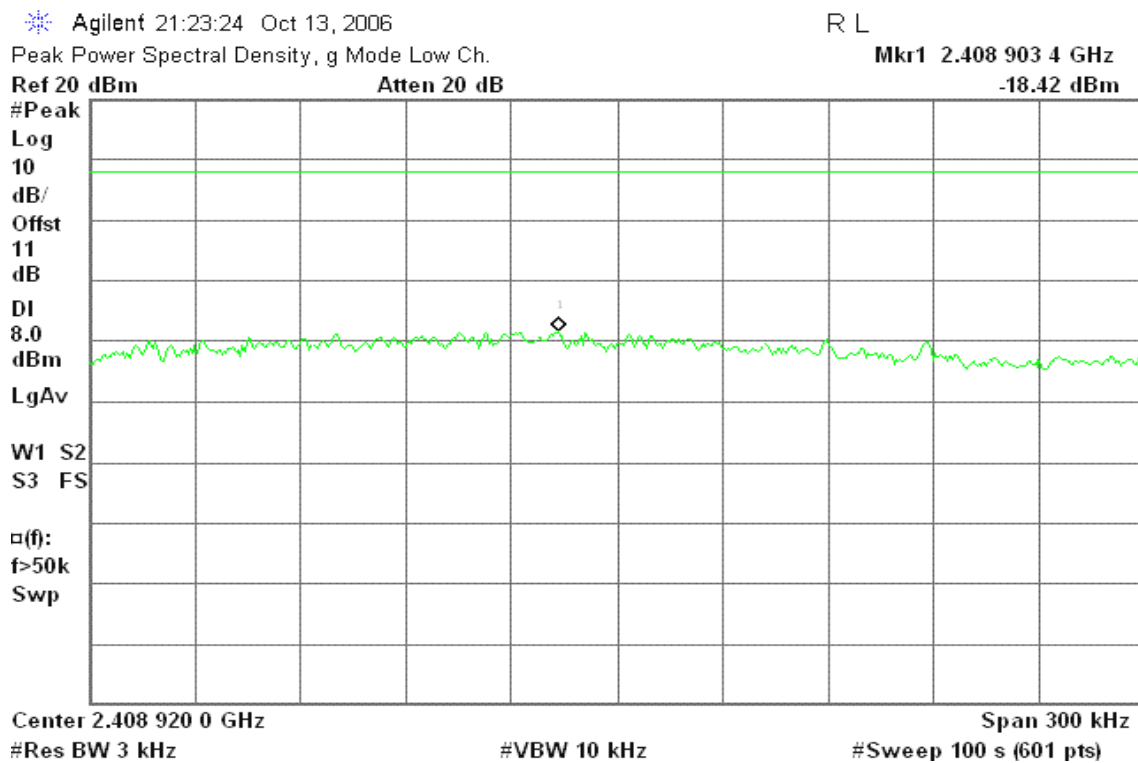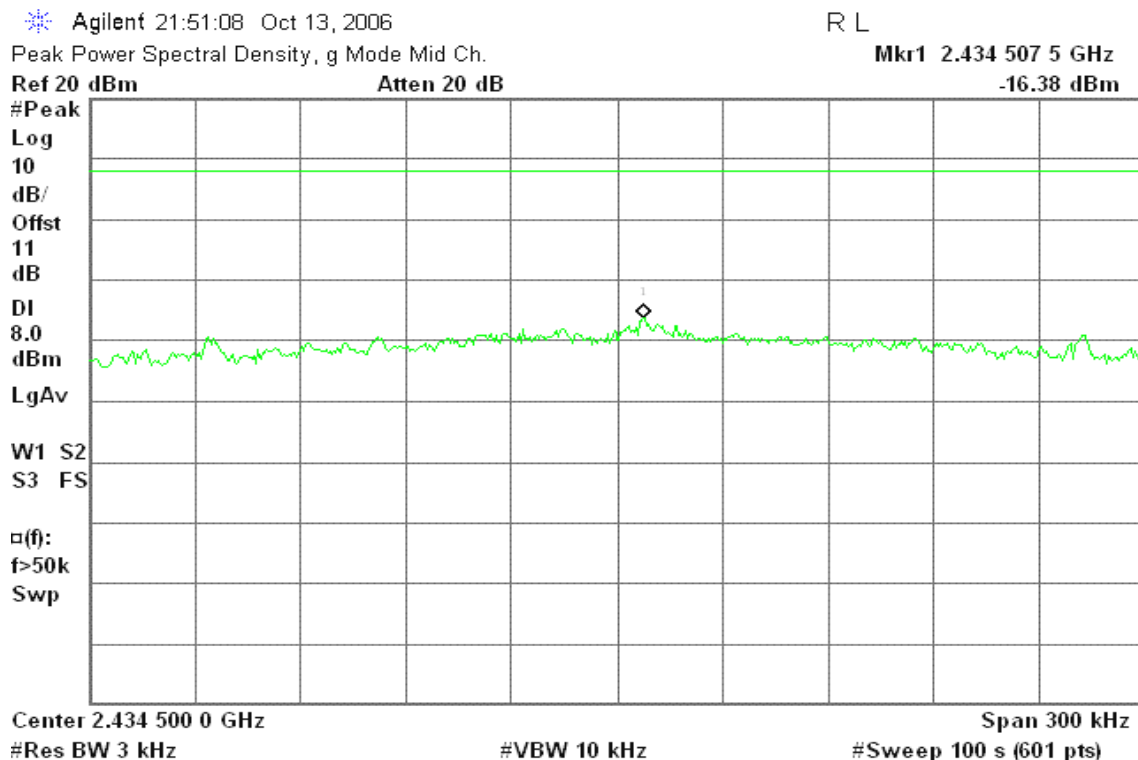**draft 802.11n Wide-40 MHz Channel mode / Chain 0****PPSD (CH Low)****PPSD (CH Mid)**

**PPSD (CH High)**

Agilent 21:58:29 Oct 13, 2006

R L

Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.454 758 4 GHz

Ref 20 dBm

Atten 20 dB

-16.49 dBm

#Peak

Log

10

dB/

Offst

11

dB

DI

8.0

dBm

LgAv


W1 S2

S3 FS

□(f):

f>50k

Swp

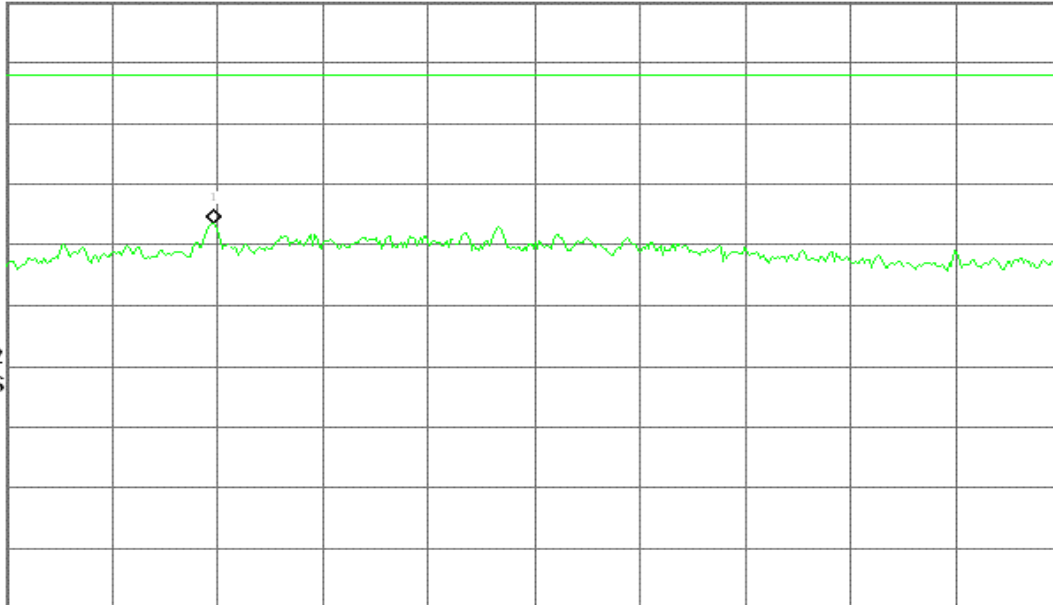

Center 2.454 850 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

draft 802.11n Wide-40 MHz Channel mode / Chain 2**PPSD (CH Low)**

Agilent 21:35:52 Oct 13, 2006

R L

Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.422 008 0 GHz

Ref 20 dBm

Atten 20 dB

-10.89 dBm

#Peak

Log

10

dB/

Offst

11

dB

DI

8.0

dBm

LgAv


W1 S2

S3 FS

□(f):

f>50k

Swp

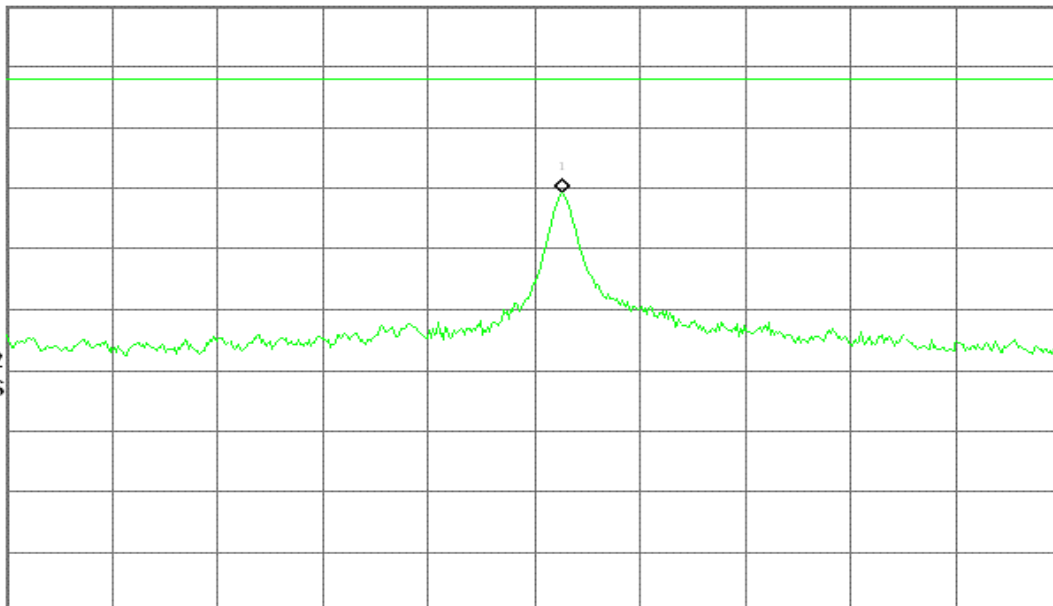



Center 2.422 000 0 GHz



Span 300 kHz



#Res BW 3 kHz



#VBW 10 kHz



#Sweep 100 s (601 pts)

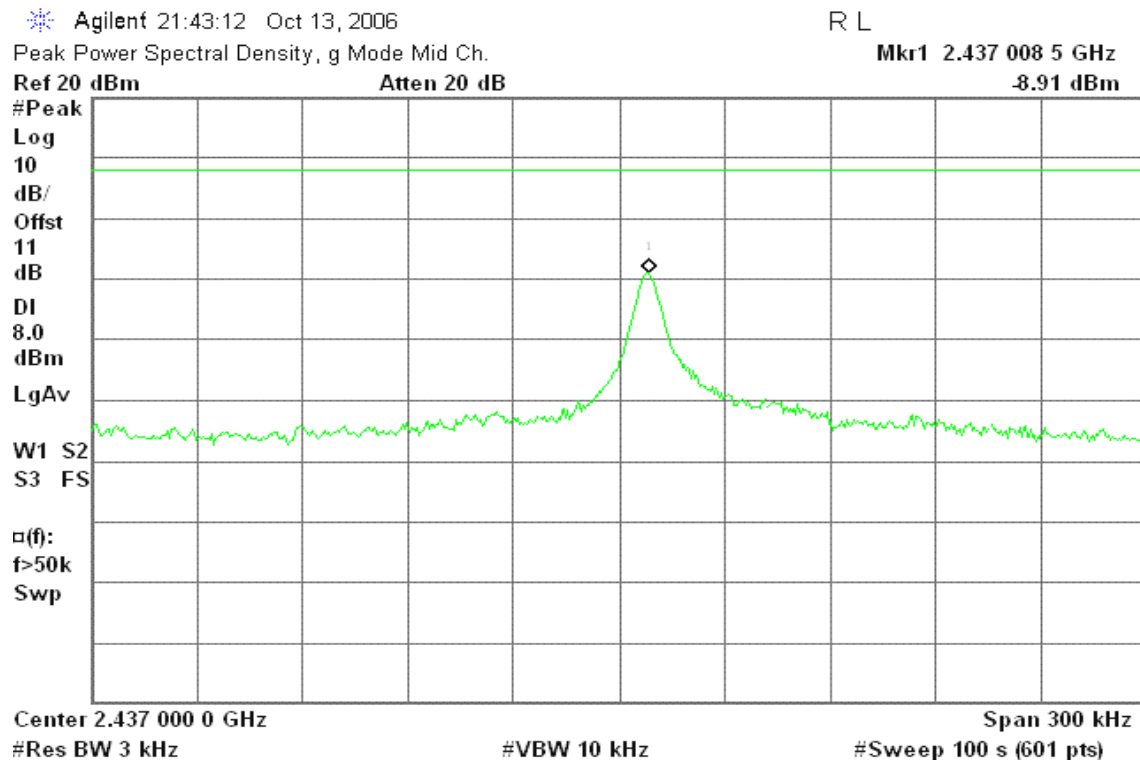
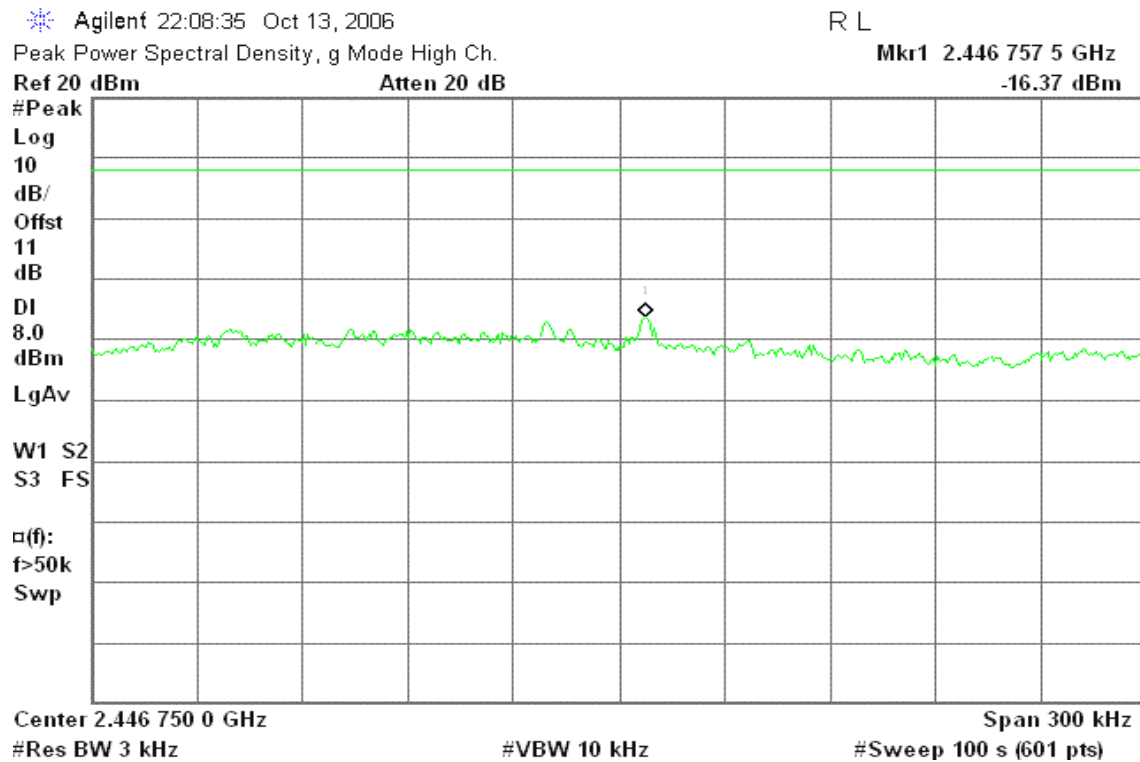
**PPSD (CH Mid)****PPSD (CH High)**

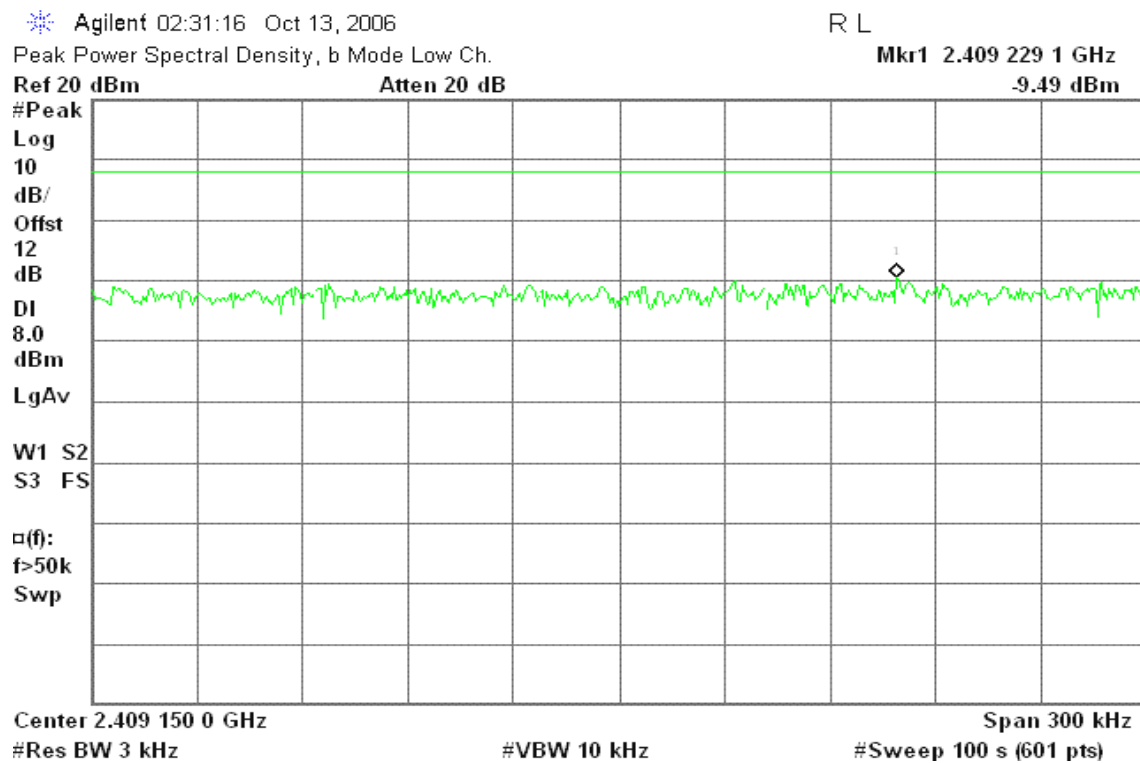
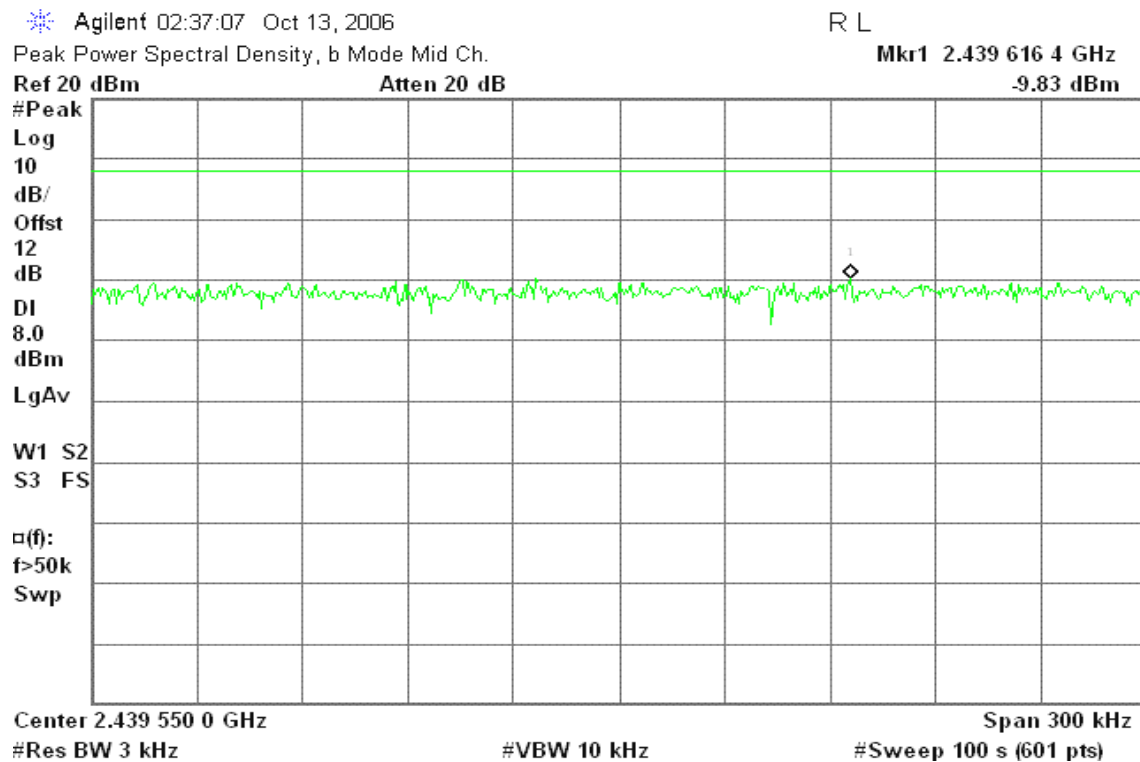
**IEEE 802.11b mode with combiner****PPSD (CH Low)****PPSD (CH Mid)**

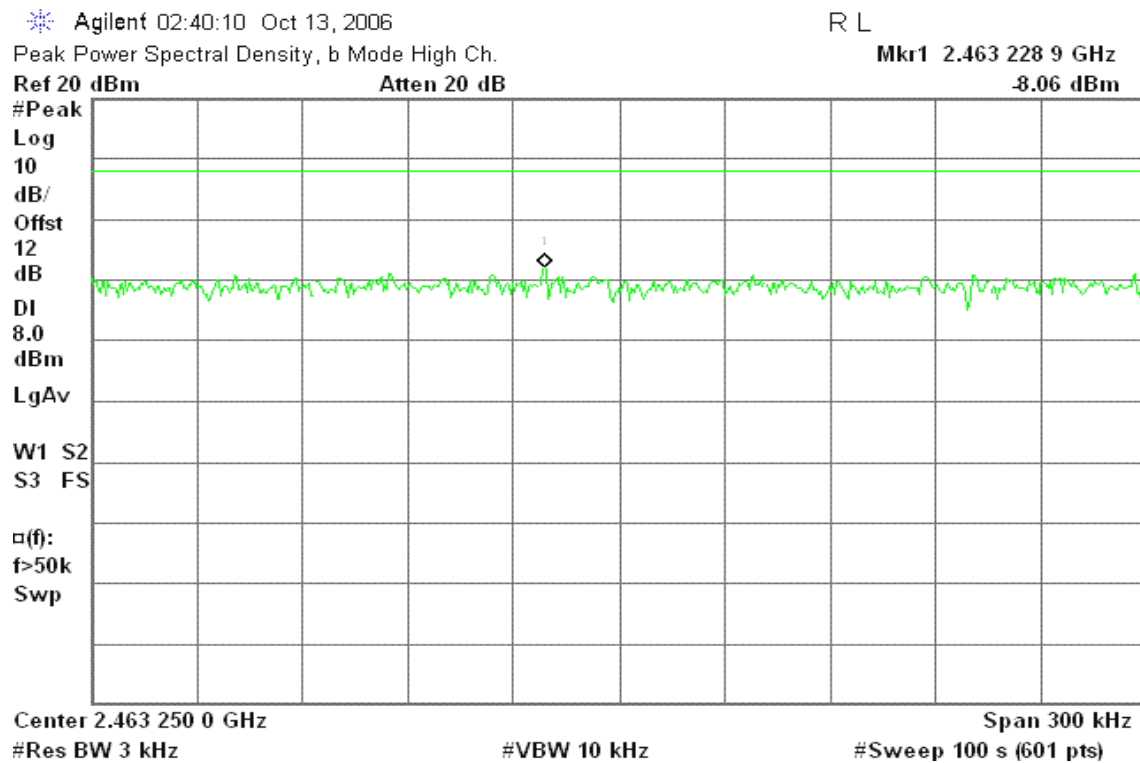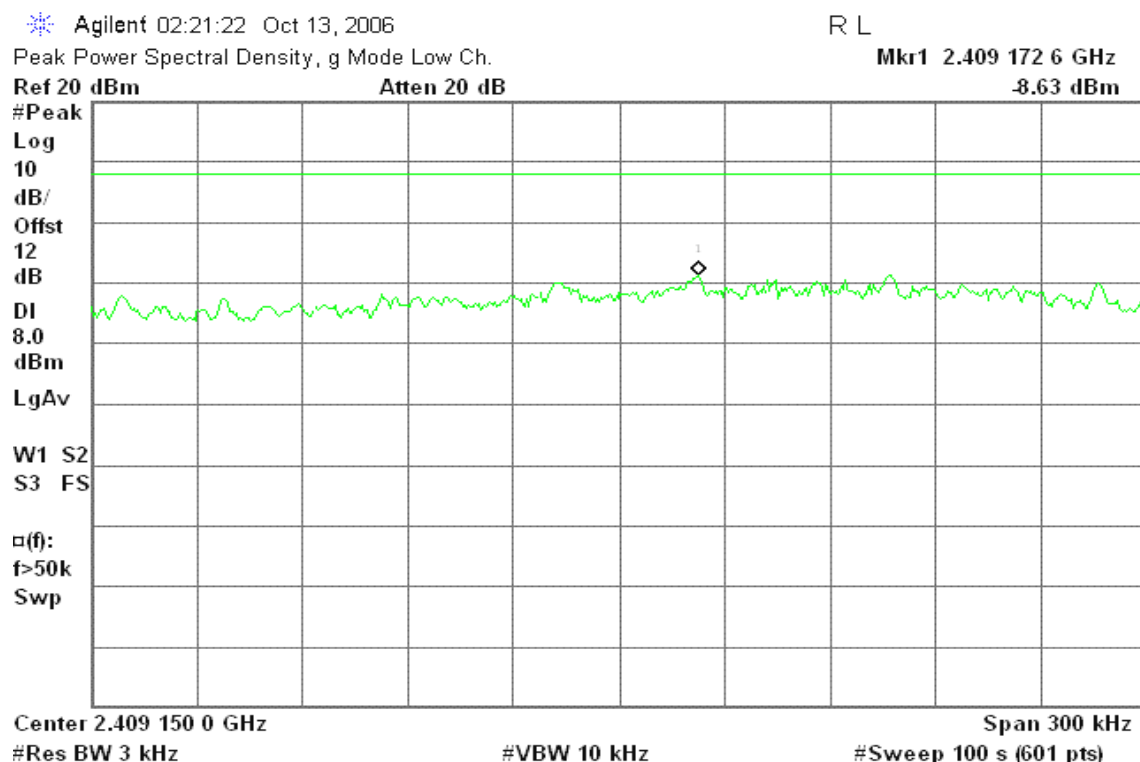**PPSD (CH High)****IEEE 802.11g mode with combiner****PPSD (CH Low)**

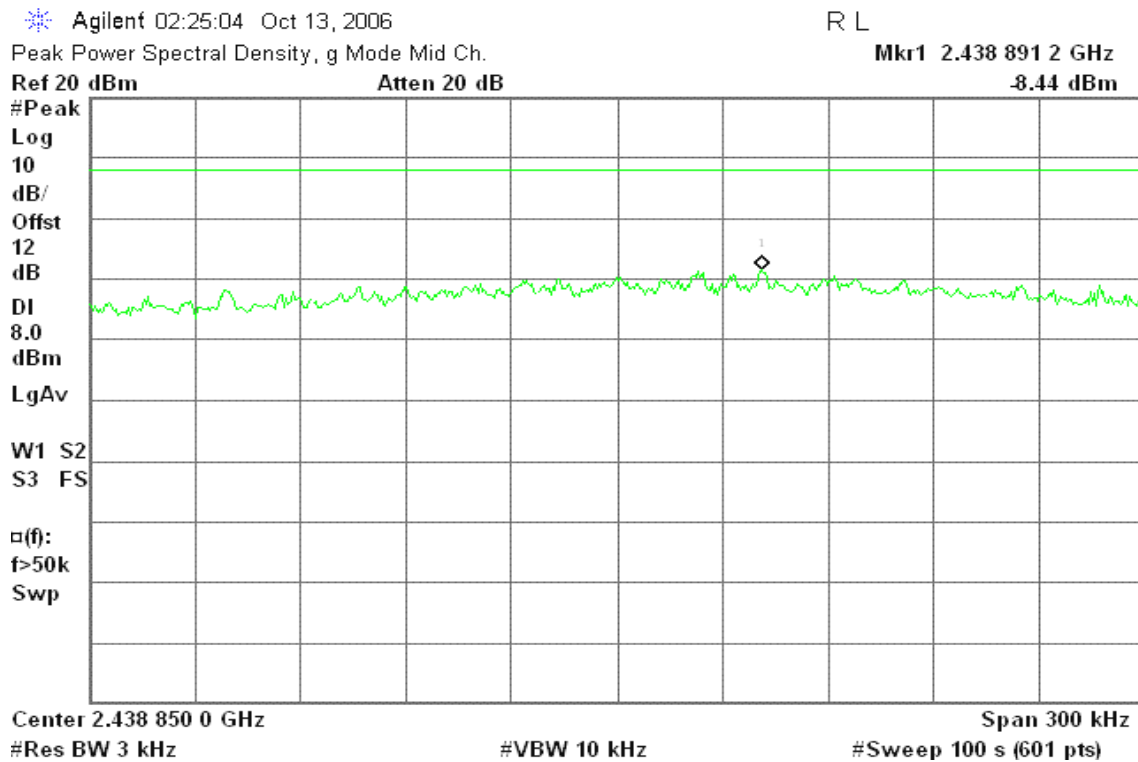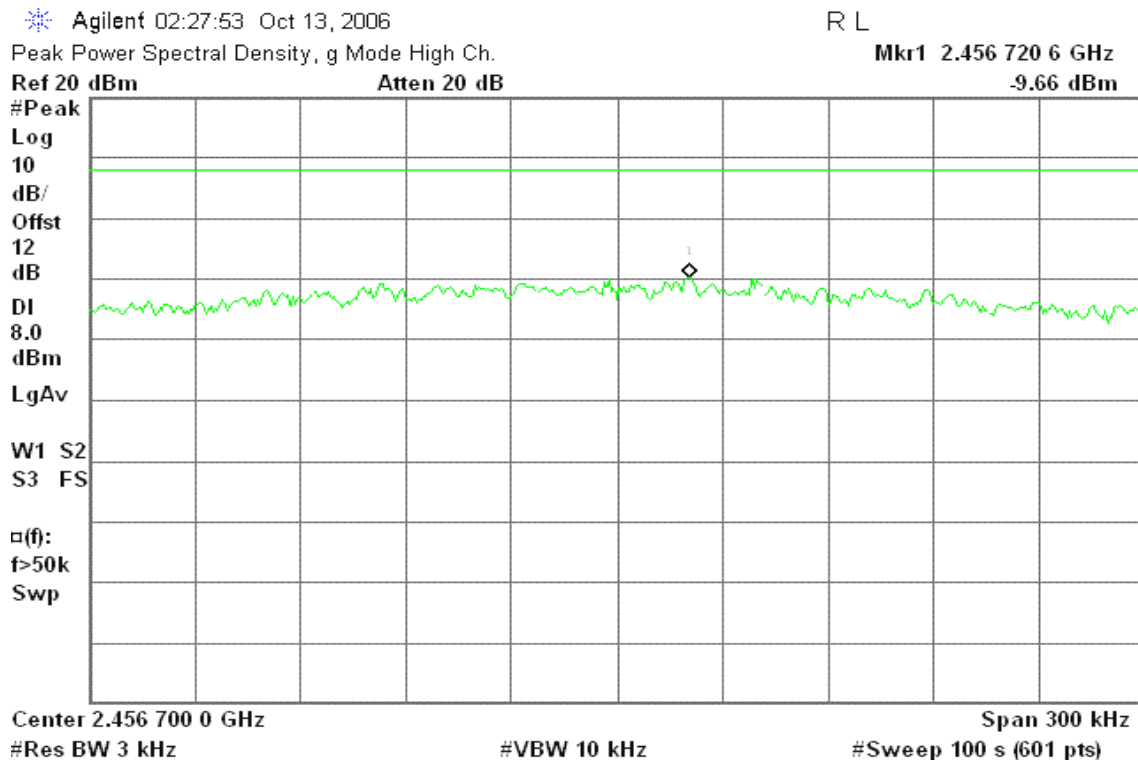**PPSD (CH Mid)****PPSD (CH High)**

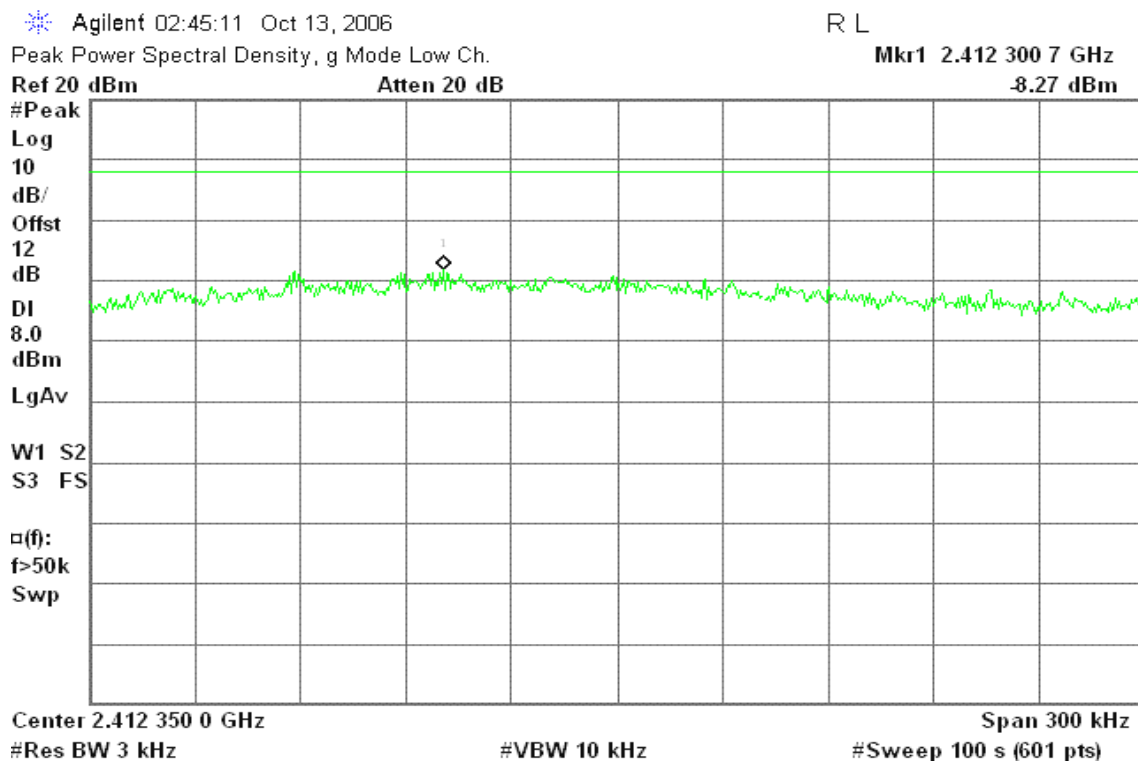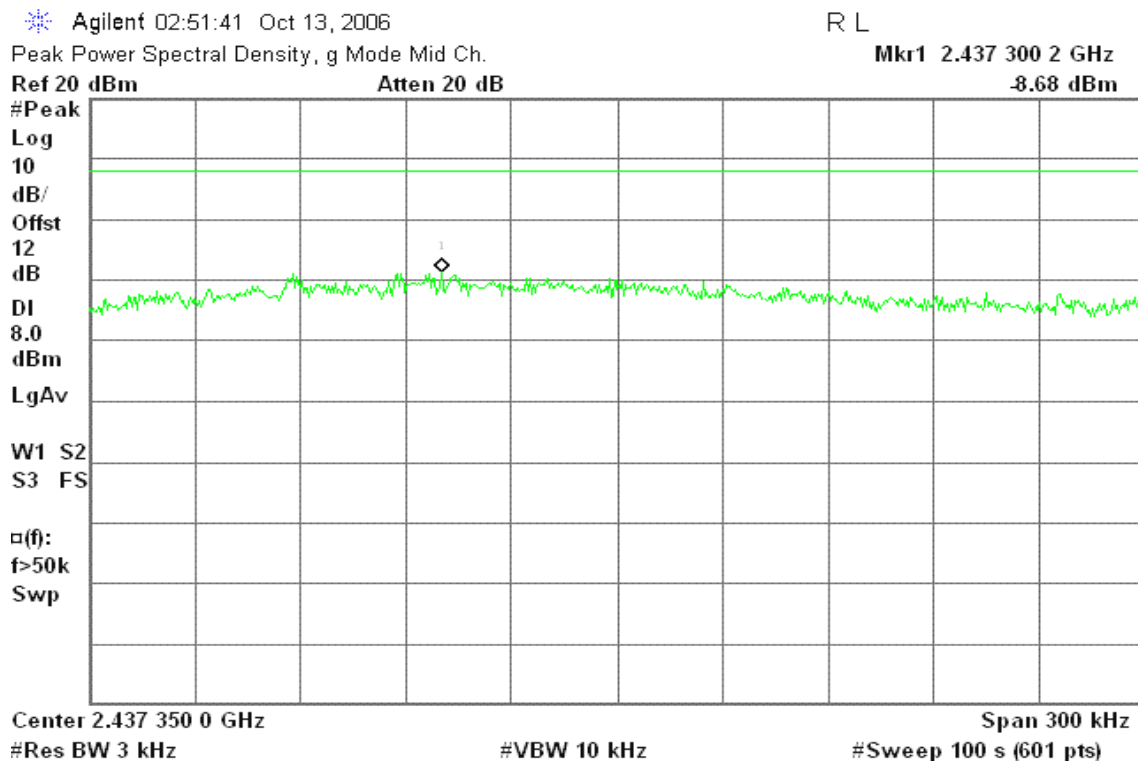**draft 802.11n Standard-20 MHz Channel mode with combiner****PPSD (CH Low)****PPSD (CH Mid)**

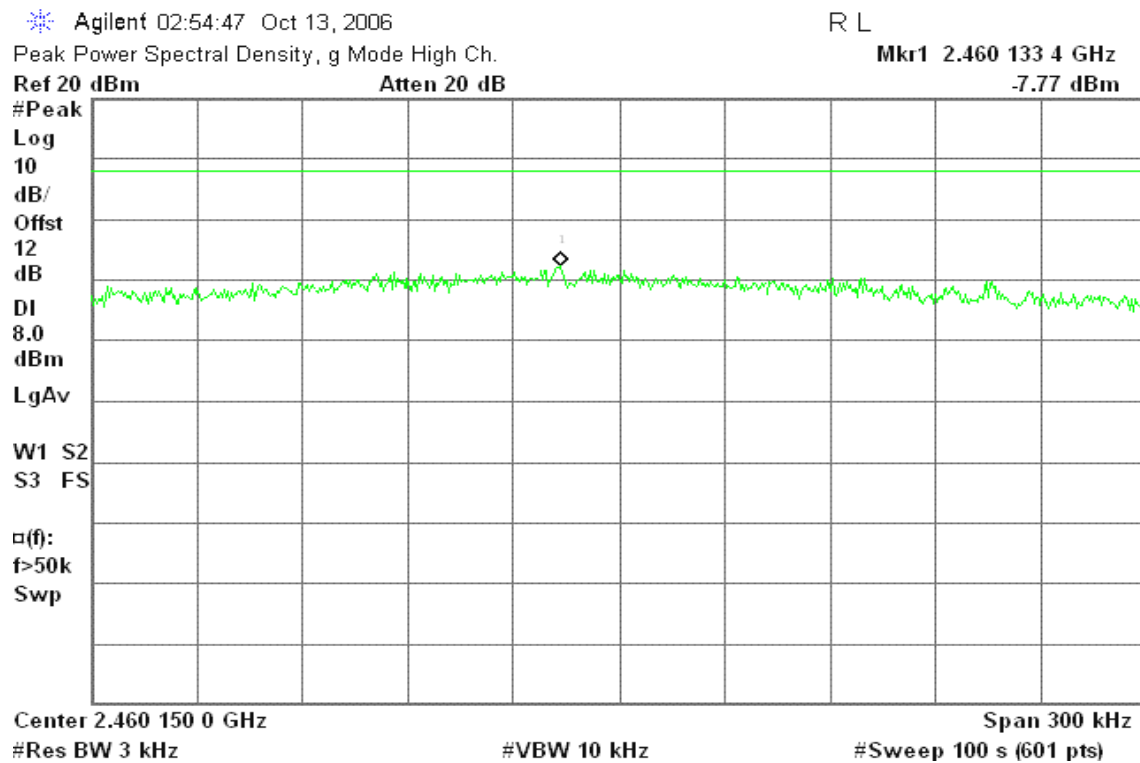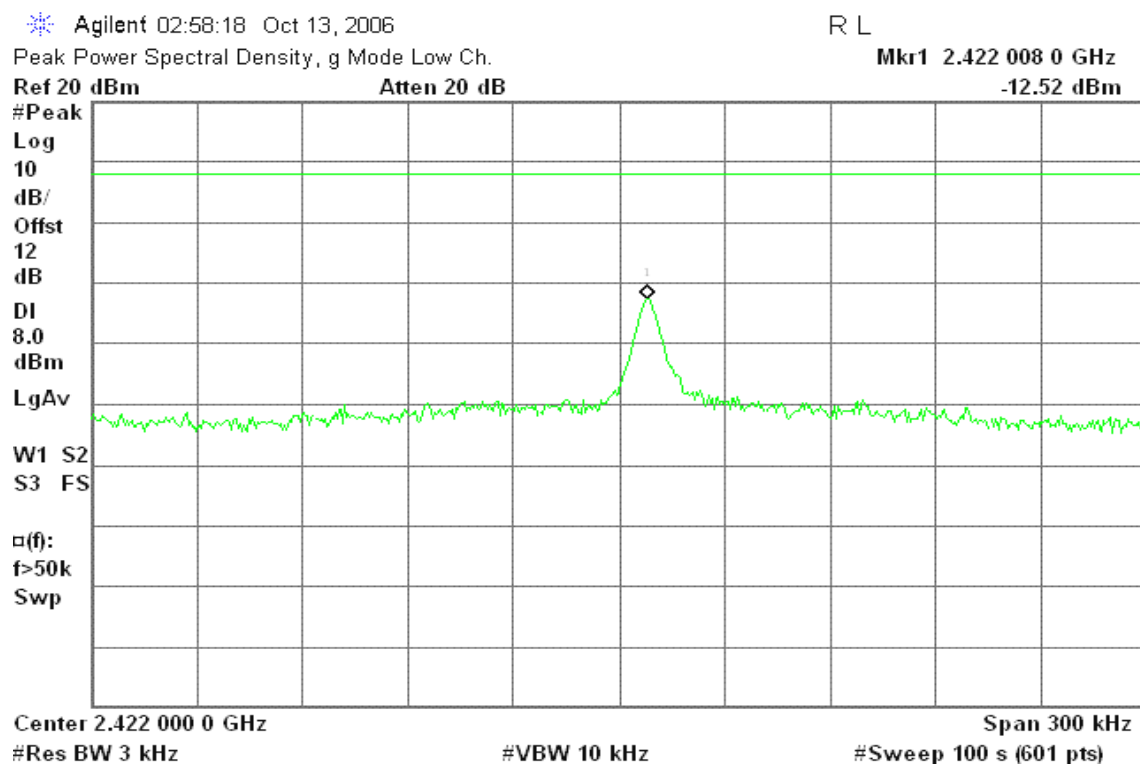**PPSD (CH High)****draft 802.11n Wide-40 MHz Channel mode with combiner****PPSD (CH Low)**

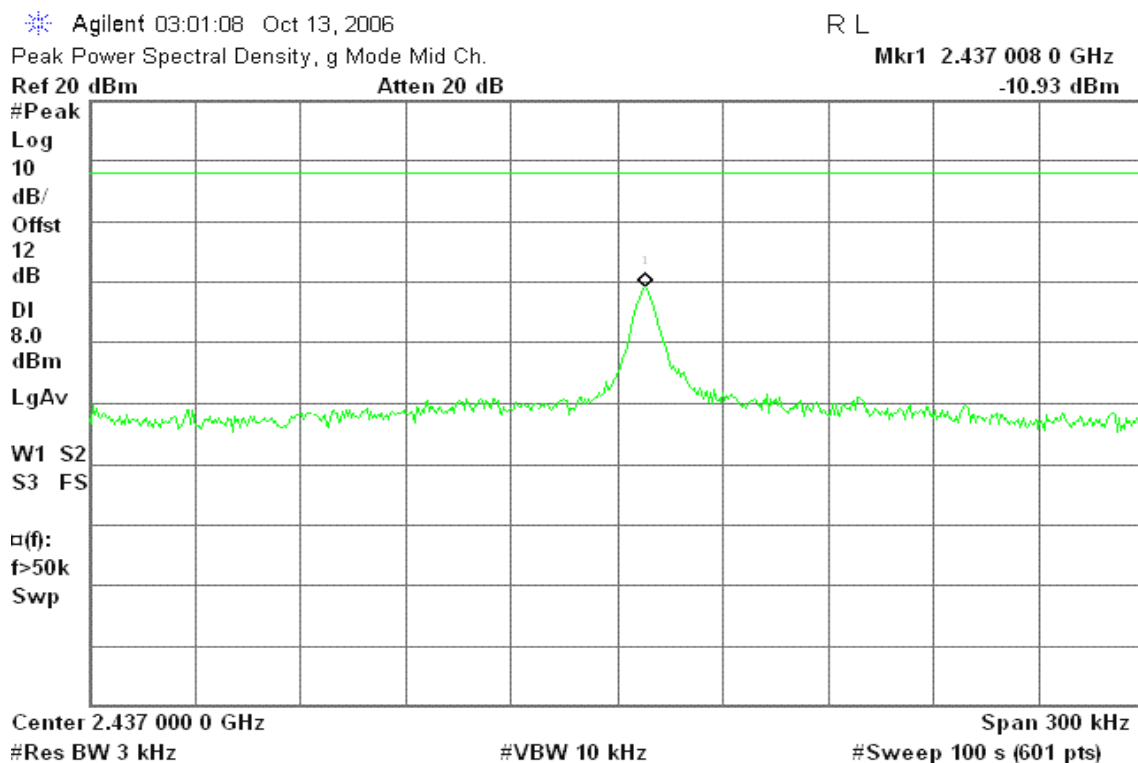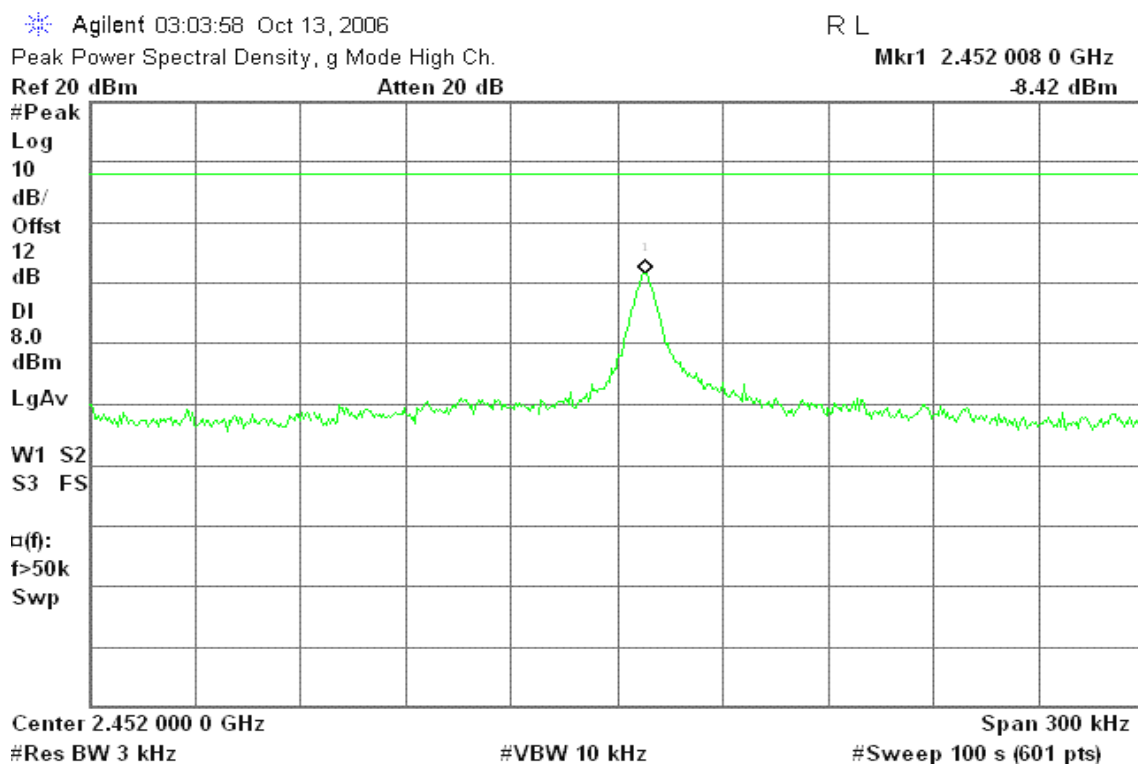**PPSD (CH Mid)****PPSD (CH High)**




7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS


No non-compliance noted




Test Plot

IEEE 802.11b mode / Chain 0

CH Low

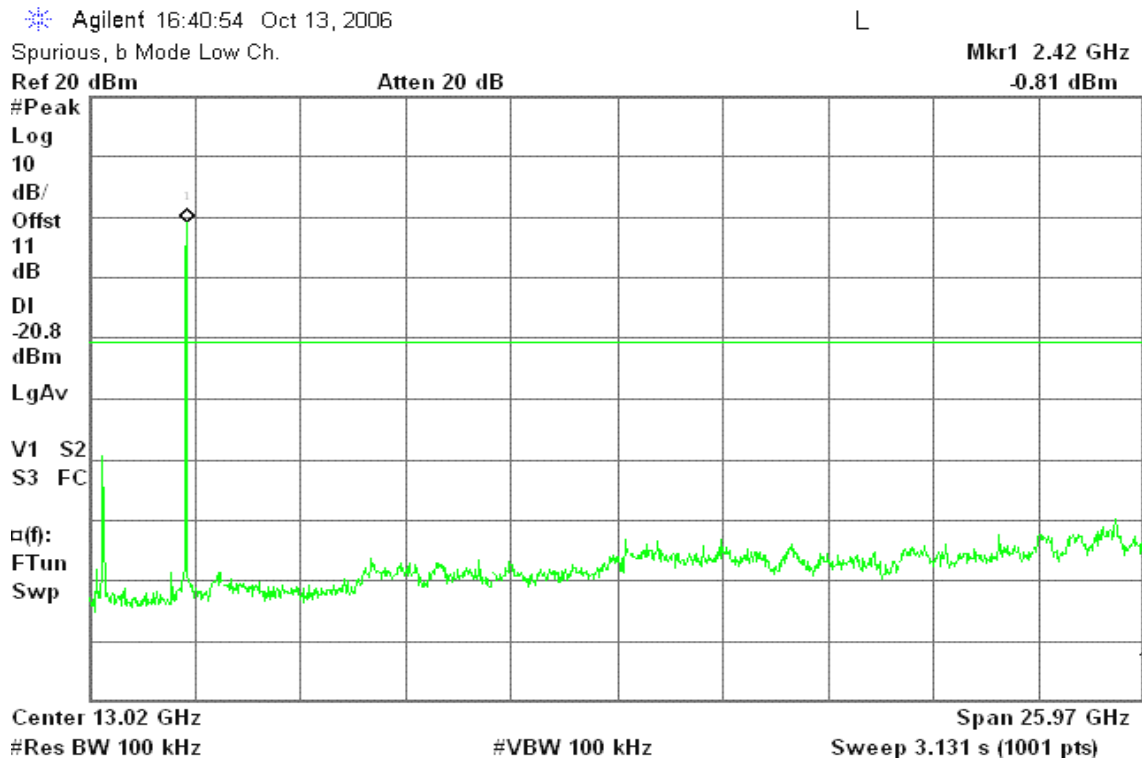

CH Mid

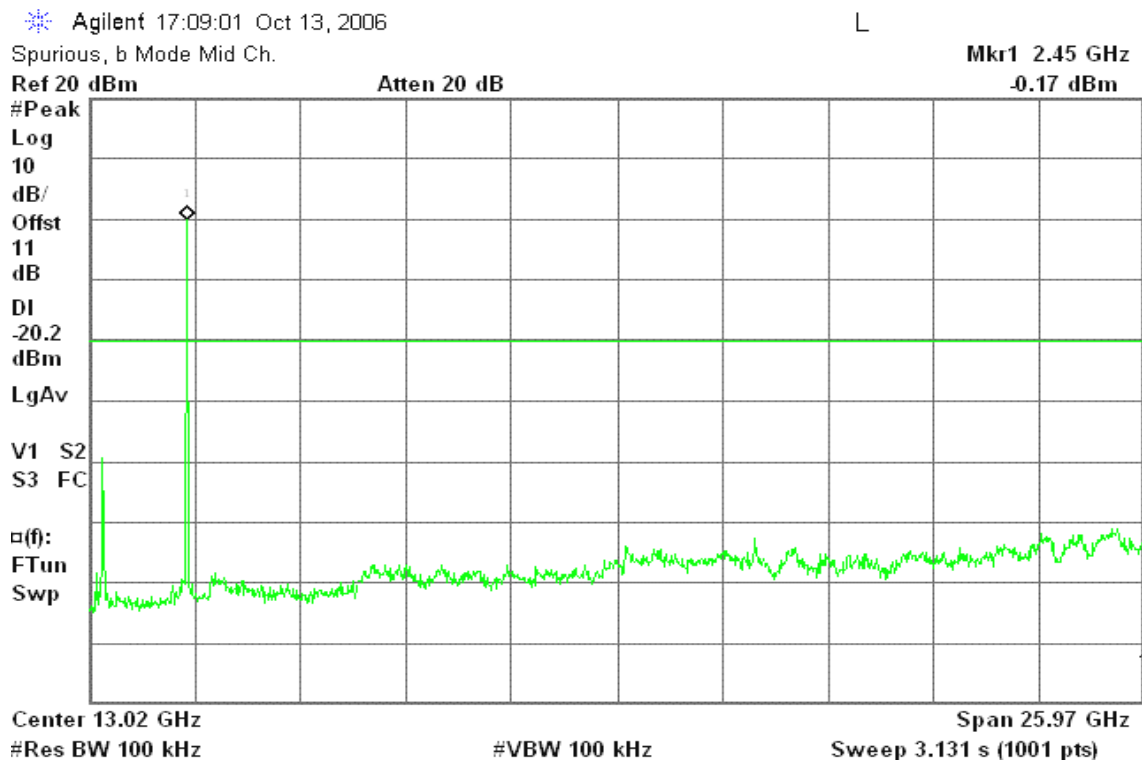



CH High

Agilent 17:16:02 Oct 13, 2006

L


Spurious, b Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

0.05 dBm

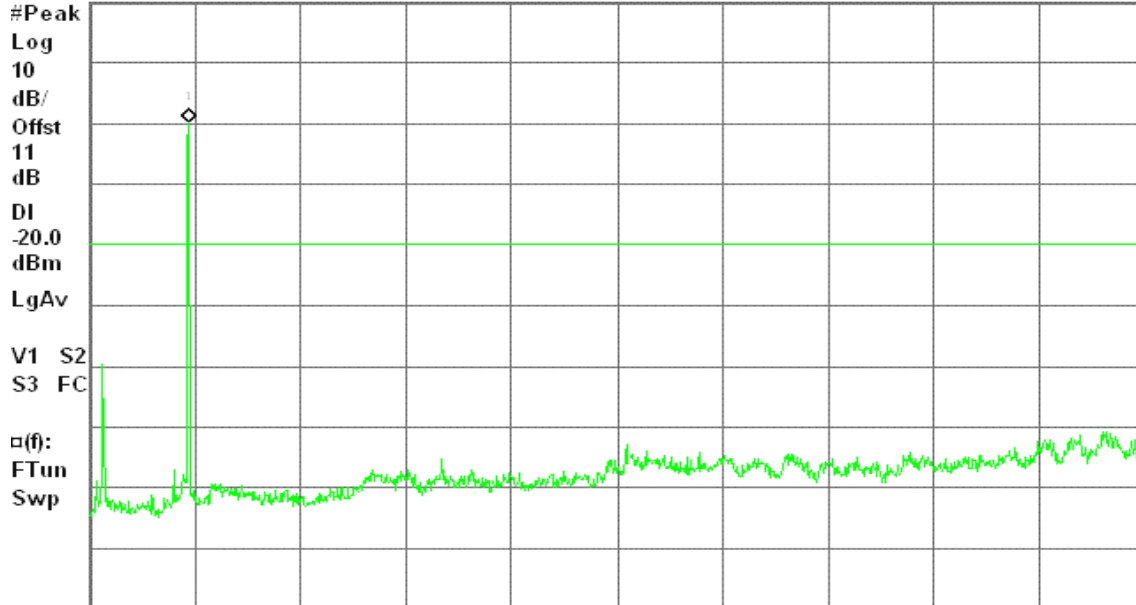

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

IEEE 802.11b mode / Chain 2

CH Low

Agilent 16:46:58 Oct 13, 2006

L


Spurious, b Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

0.64 dBm

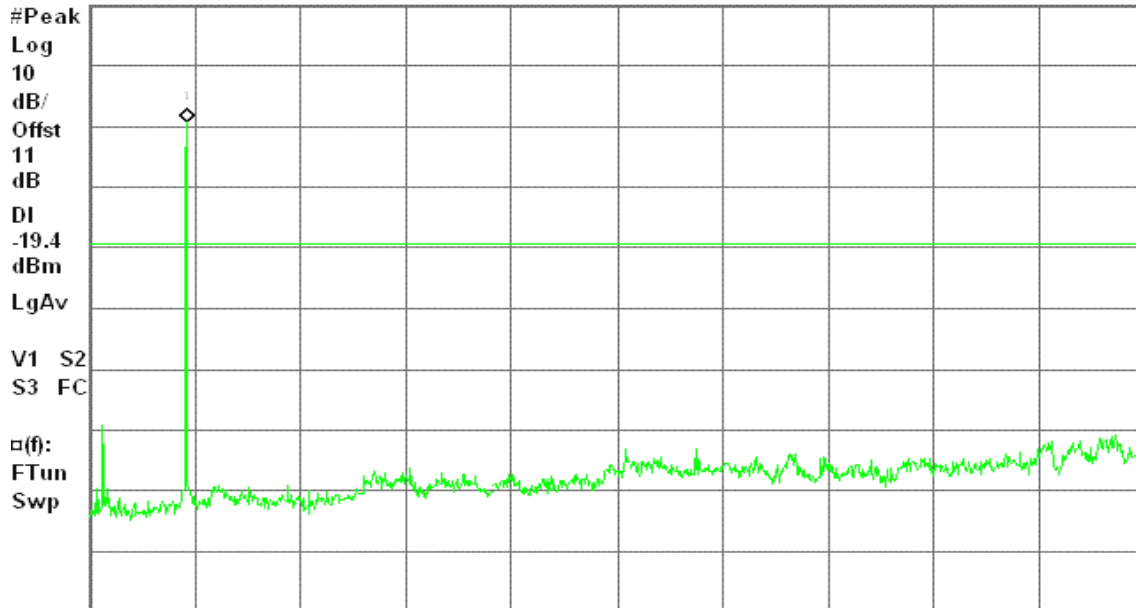

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

Agilent 17:02:08 Oct 13, 2006

L


Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

-0.56 dBm

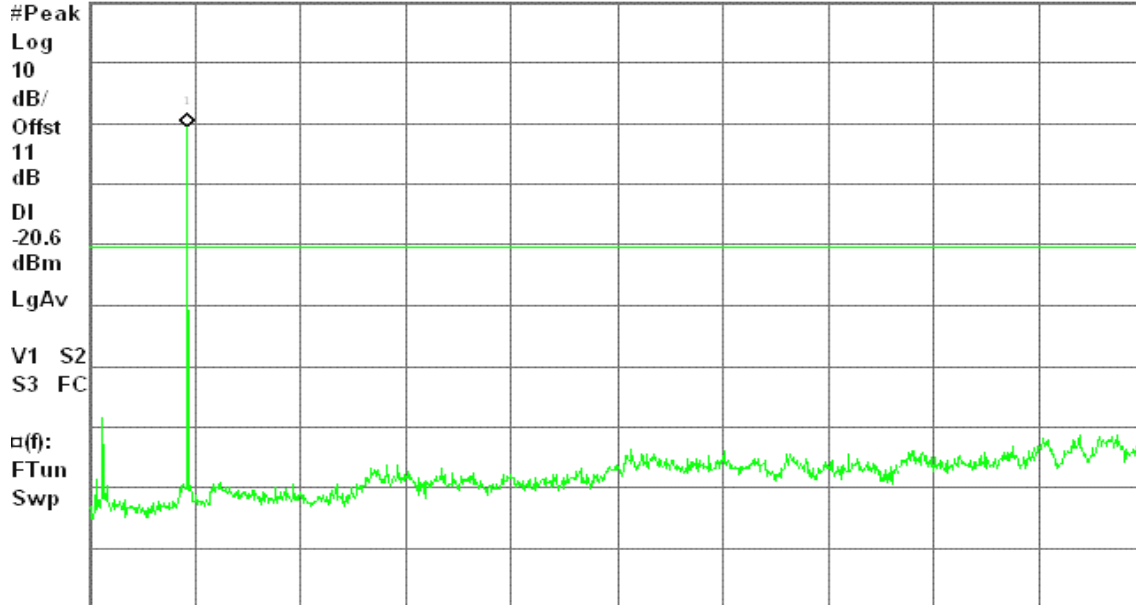

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

Agilent 17:22:53 Oct 13, 2006

L


Spurious, b Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

-0.75 dBm

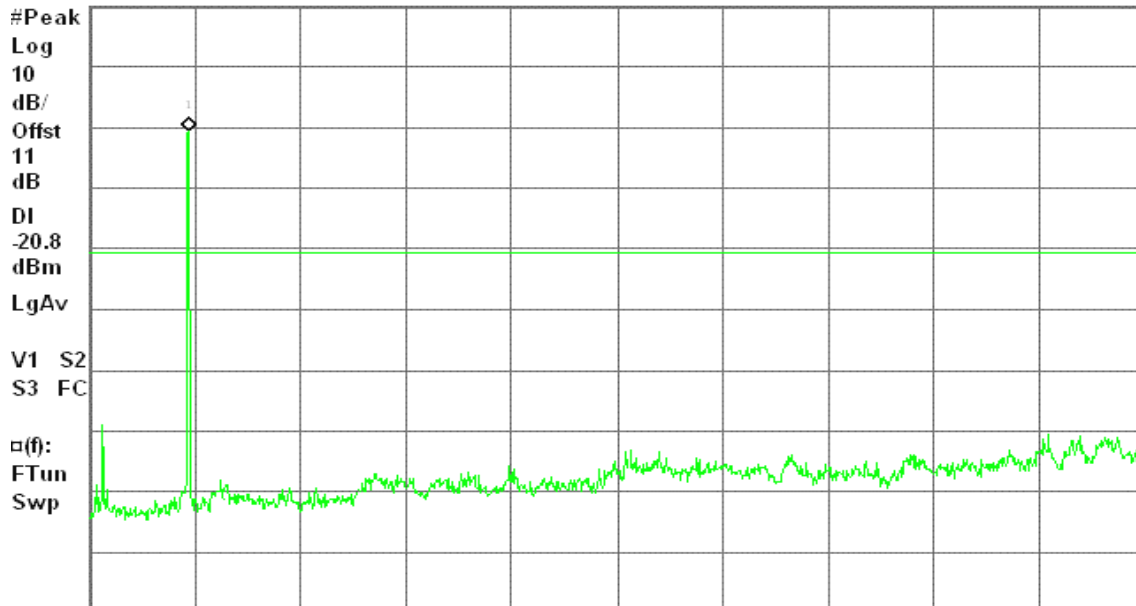

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**IEEE 802.11g mode / Chain 0****CH Low**

Agilent 18:52:25 Oct 13, 2006

L


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

-2.89 dBm

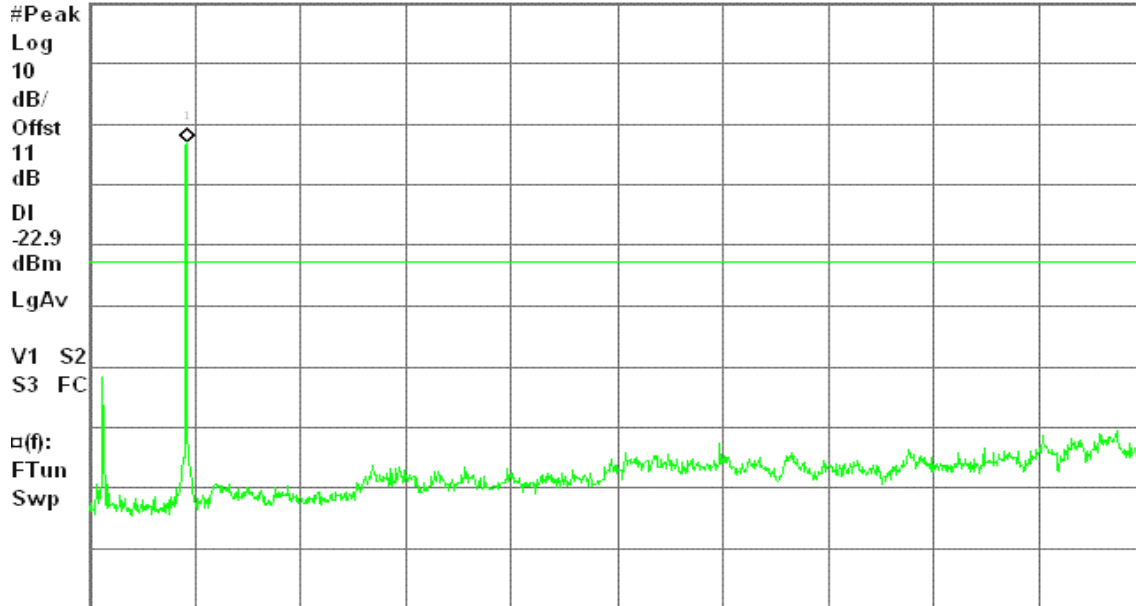

Center 13.02 GHz

#Res BW 100 kHz

#VBW 100 kHz

Span 25.97 GHz
Sweep 3.131 s (1001 pts)**CH Mid**

Agilent 19:15:54 Oct 13, 2006

L


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

-0.74 dBm

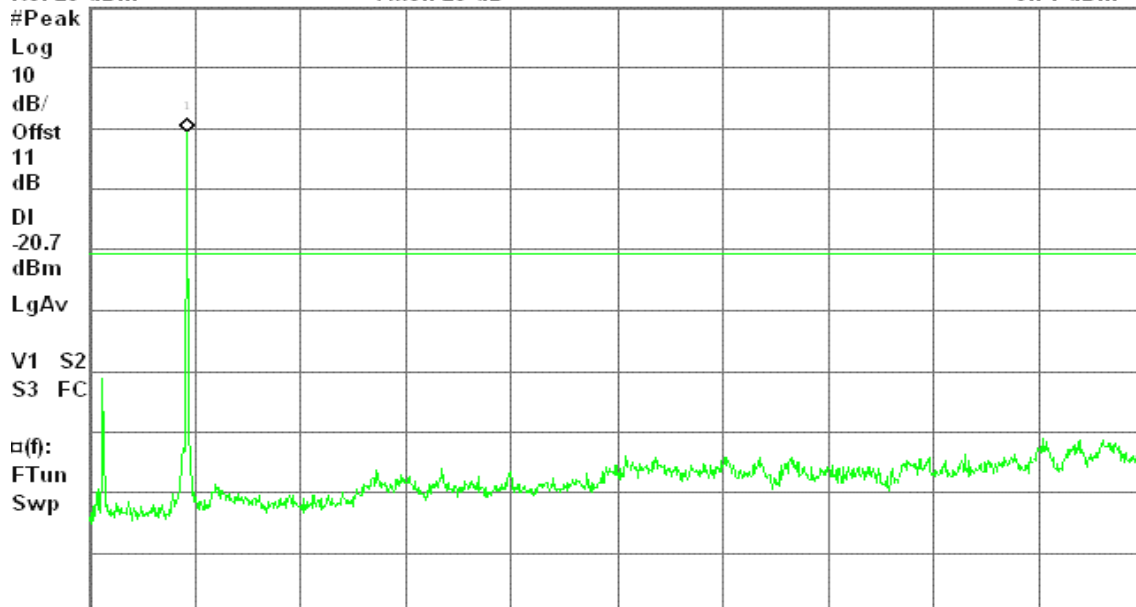

Center 13.02 GHz

#Res BW 100 kHz

#VBW 100 kHz

Span 25.97 GHz
Sweep 3.131 s (1001 pts)



CH High

Agilent 19:22:40 Oct 13, 2006

L


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

-3.07 dBm

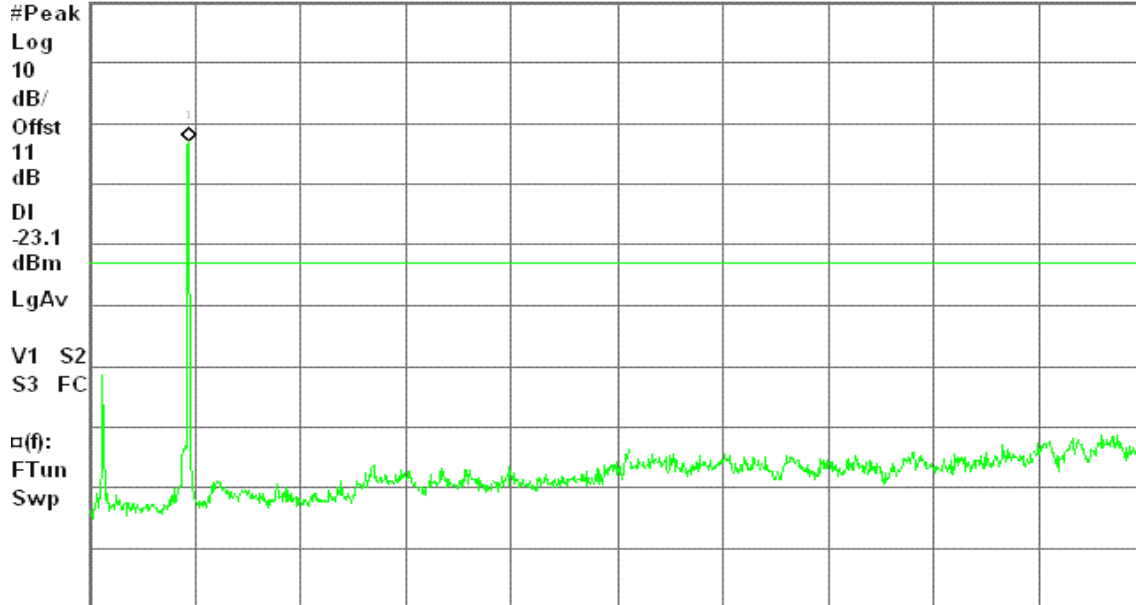

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

IEEE 802.11g mode / Chain 2

CH Low

Agilent 19:03:09 Oct 13, 2006

L


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

-1.71 dBm

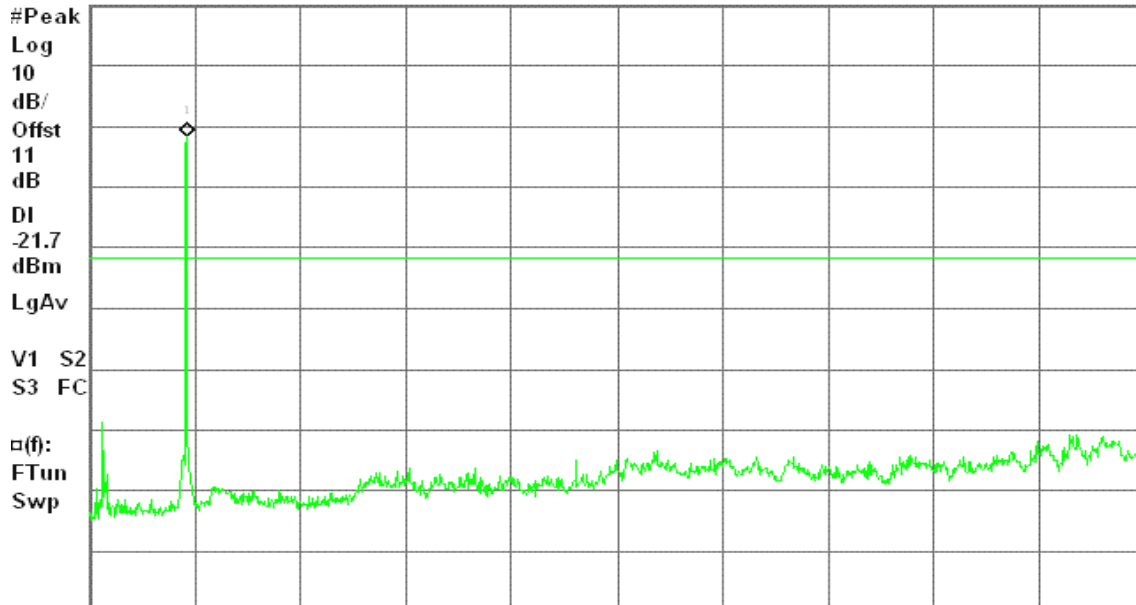

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

* Agilent 19:09:27 Oct 13, 2006

L


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

-2.16 dBm

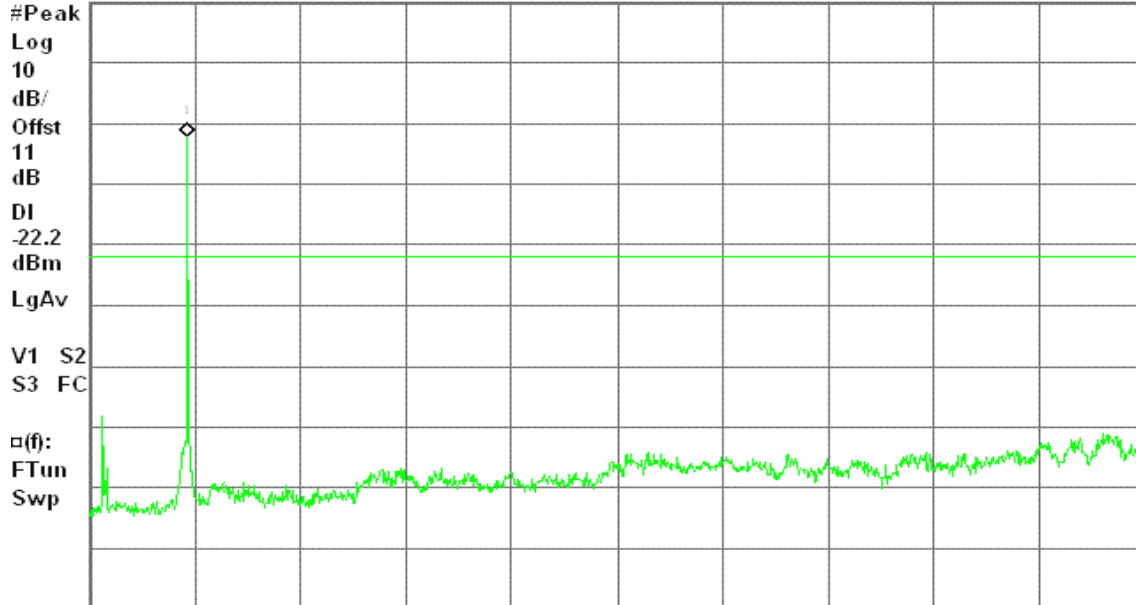

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

* Agilent 19:29:45 Oct 13, 2006

L


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

-2.54 dBm

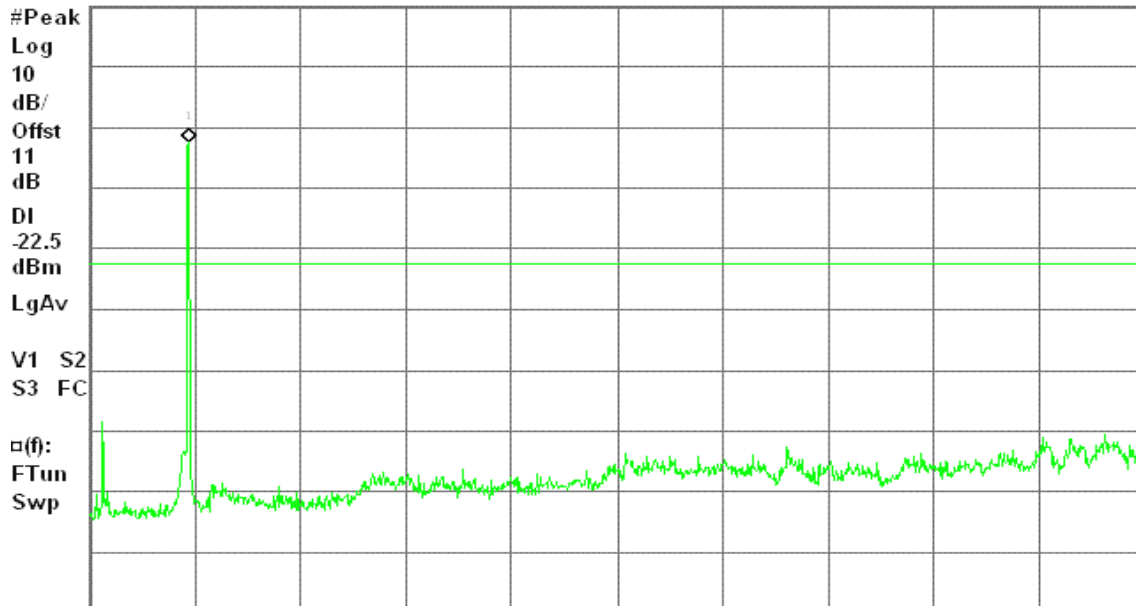

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**draft 802.11n Standard-20 MHz Channel mode / Chain 0****CH Low**

* Agilent 20:08:50 Oct 13, 2006

L


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

-2.74 dBm

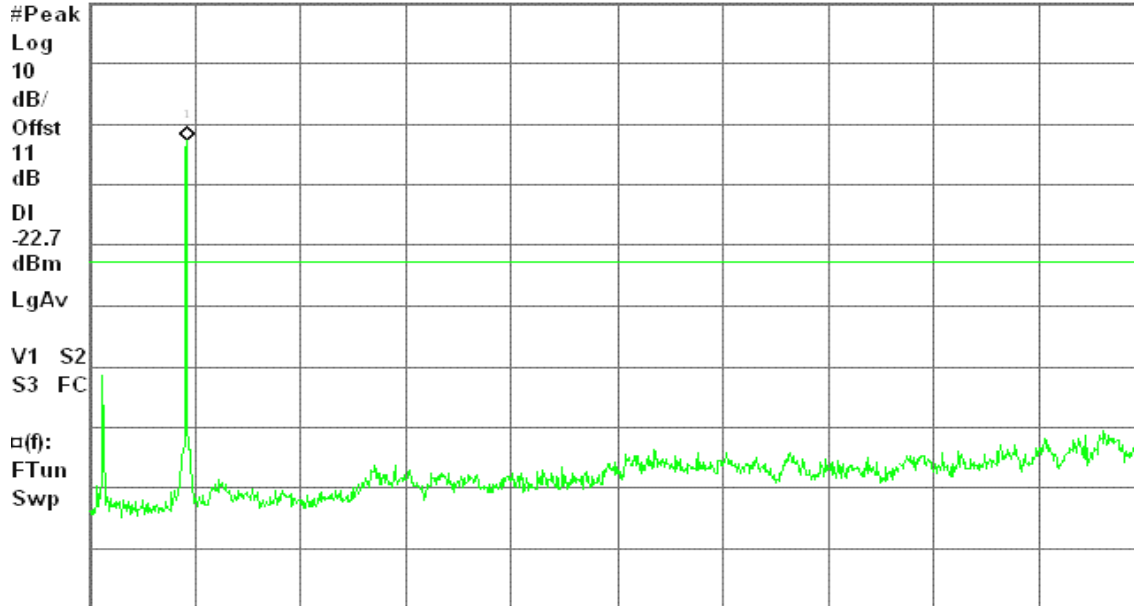

Center 13.02 GHz

#Res BW 100 kHz

#VBW 100 kHz

Span 25.97 GHz
Sweep 3.131 s (1001 pts)**CH Mid**

* Agilent 20:23:59 Oct 13, 2006

L


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

-2.13 dBm

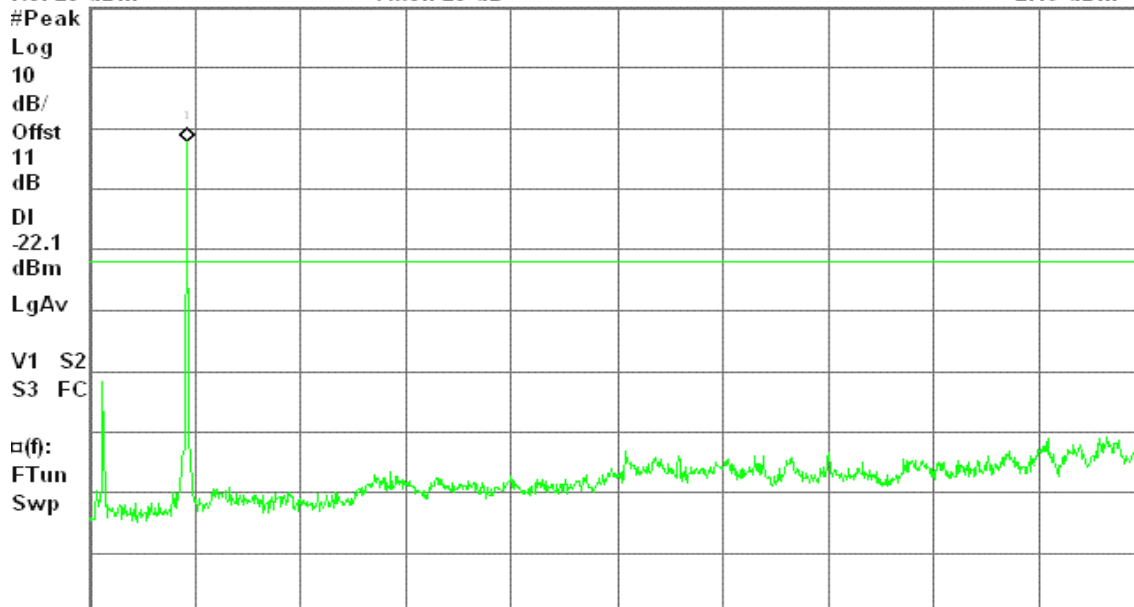

Center 13.02 GHz

#Res BW 100 kHz

#VBW 100 kHz

Span 25.97 GHz
Sweep 3.131 s (1001 pts)

**CH High**

* Agilent 20:52:09 Oct 13, 2006

L


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

-1.58 dBm

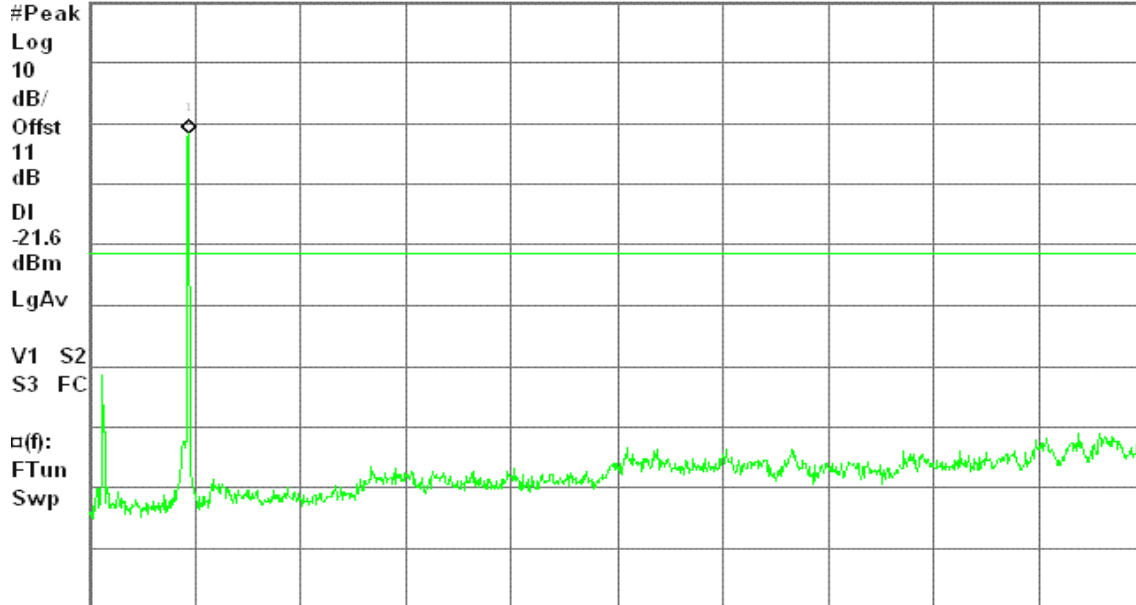

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

draft 802.11n Standard-20 MHz Channel mode / Chain 2**CH Low**

* Agilent 19:59:26 Oct 13, 2006

L


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

-2.47 dBm

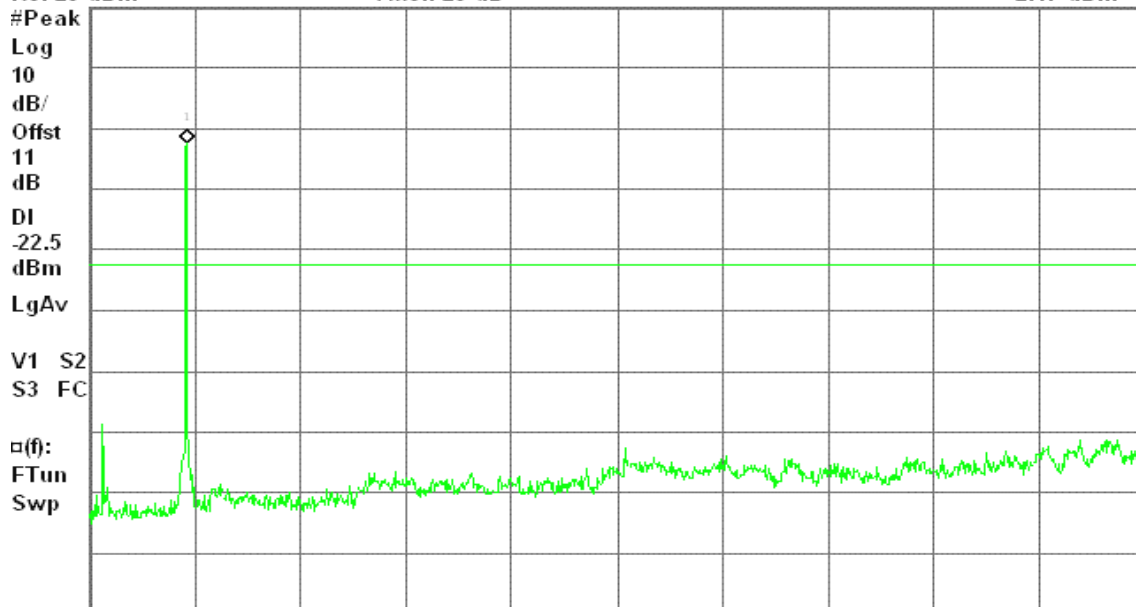

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

* Agilent 20:31:02 Oct 13, 2006

L


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

-2.05 dBm

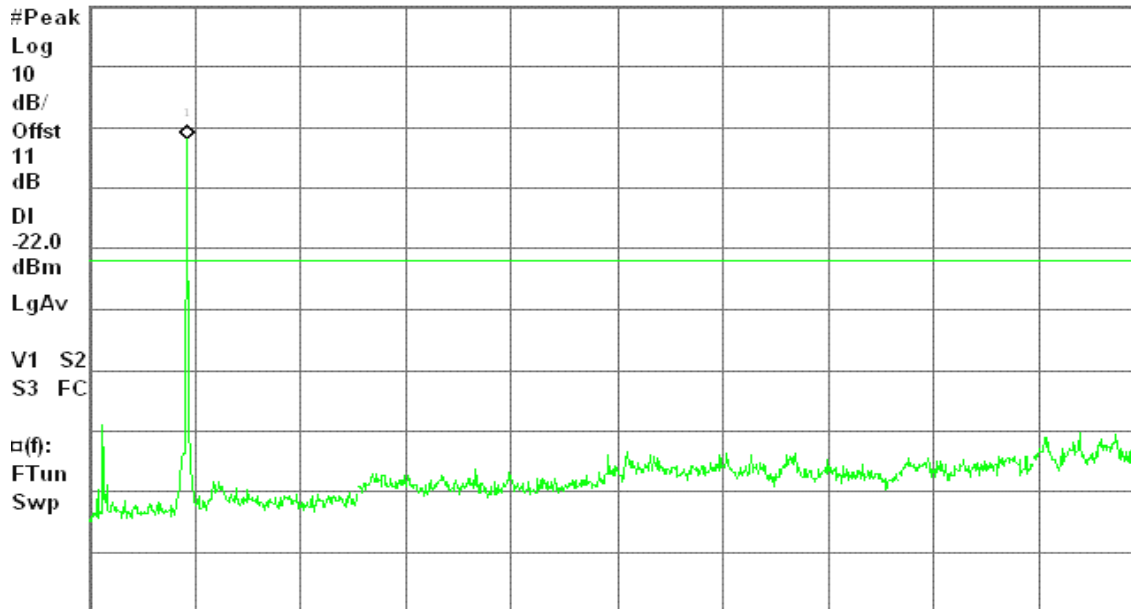

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

* Agilent 20:42:18 Oct 13, 2006

L


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

-1.95 dBm

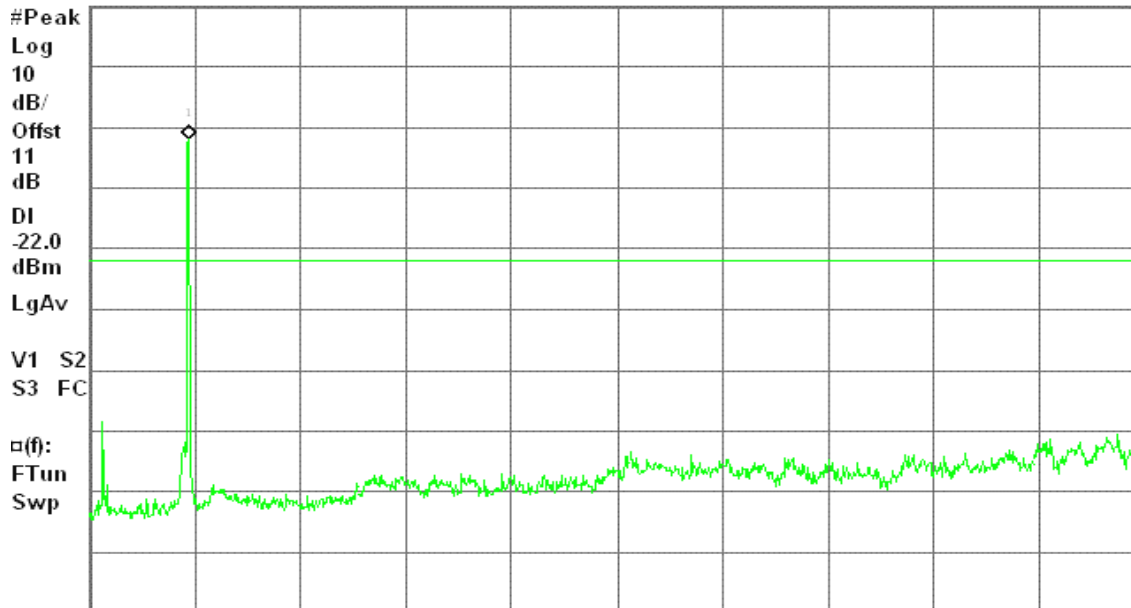

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**draft 802.11n Wide-40 MHz Channel mode / Chain 0****CH Low**

* Agilent 21:28:07 Oct 13, 2006

L

Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

-5.93 dBm

#Peak

Log

10

dB/

Offst

11

dB

DI

-25.9

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

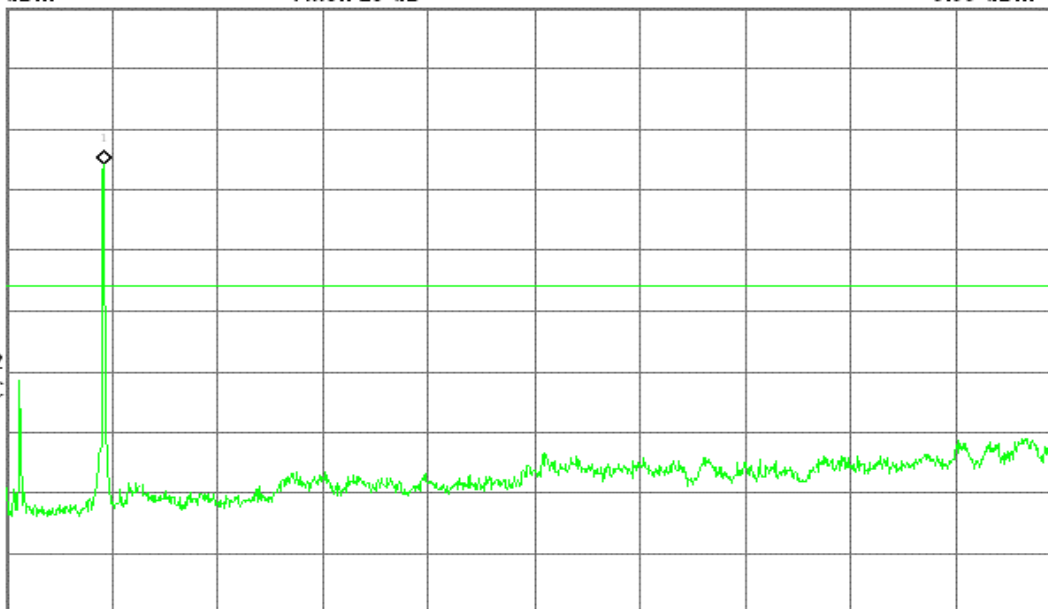

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH Mid

* Agilent 21:53:10 Oct 13, 2006

L

Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

-3.94 dBm

#Peak

Log

10

dB/

Offst

11

dB

DI

-23.9

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

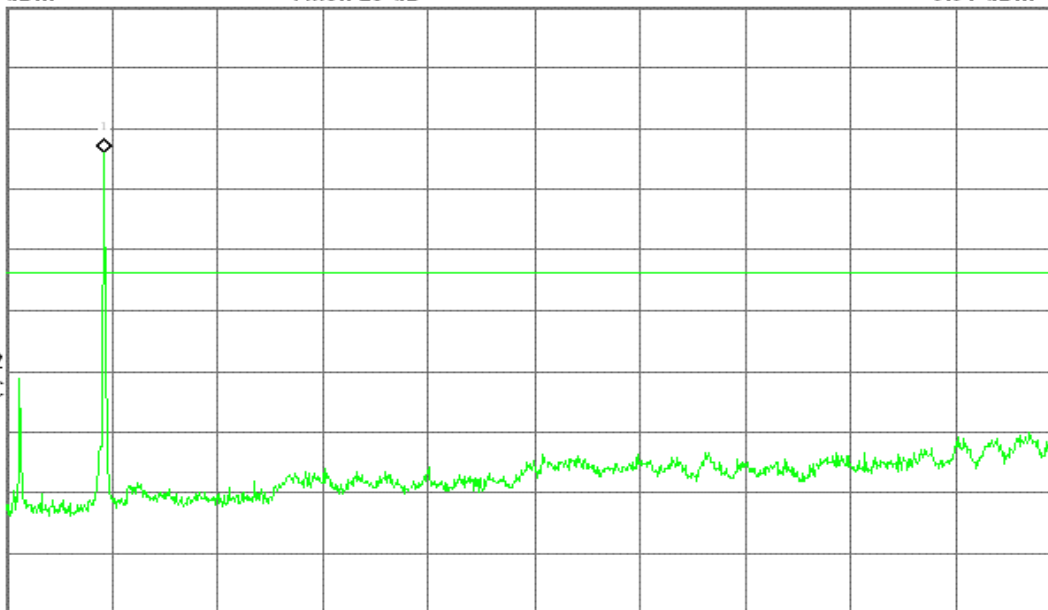

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**CH High**

* Agilent 22:01:17 Oct 13, 2006

L


Spurious, g Mode High Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

-5.01 dBm

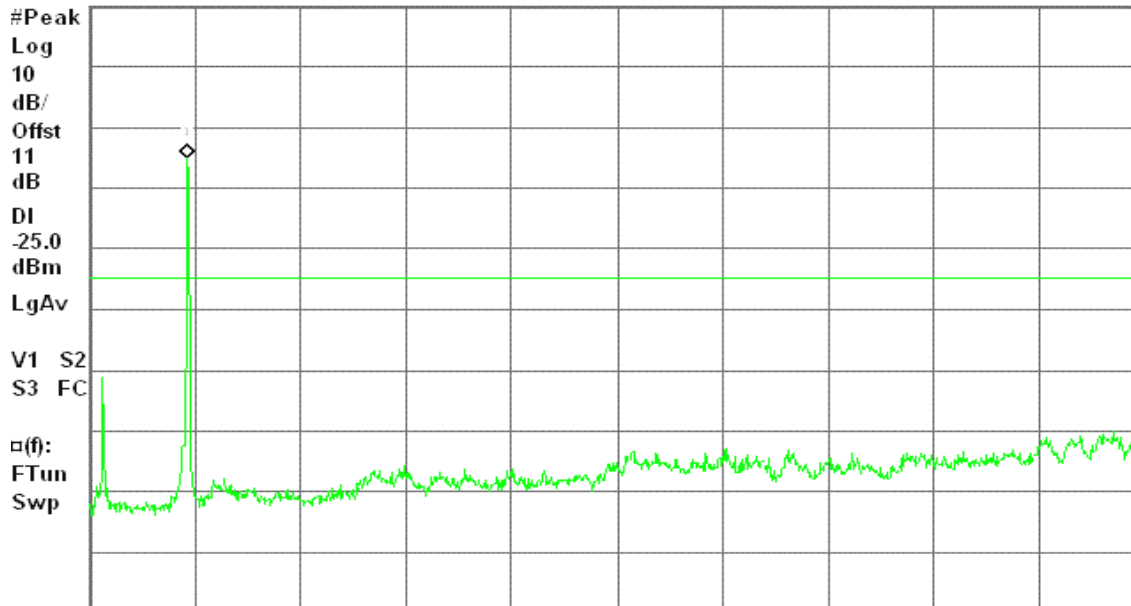

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

draft 802.11n Wide-40 MHz Channel mode / Chain 2**CH Low**

* Agilent 21:36:53 Oct 13, 2006

L


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

-5.46 dBm

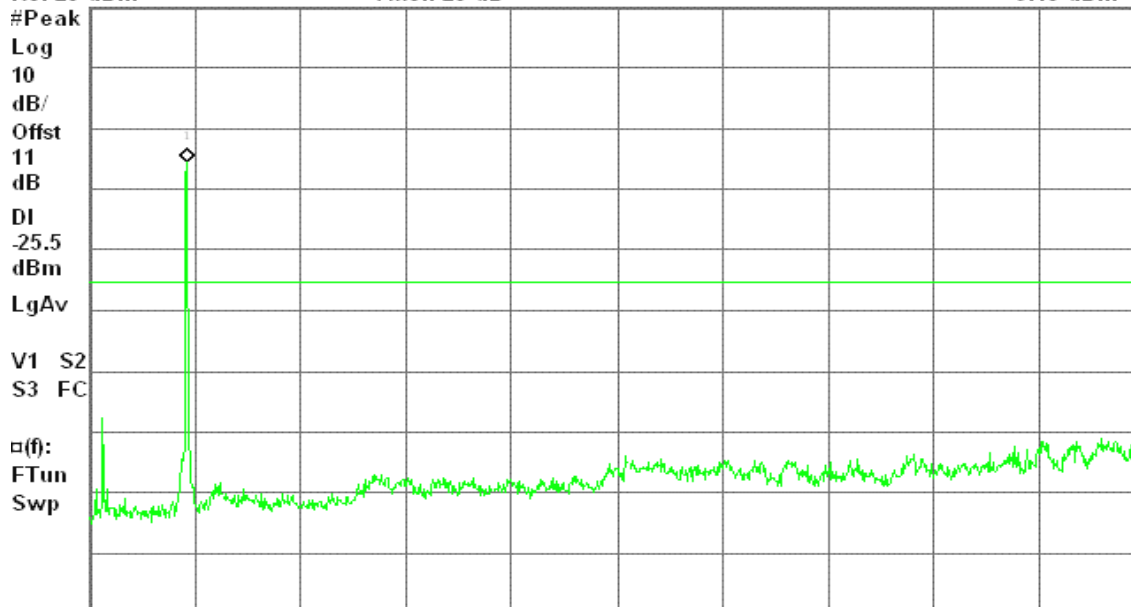

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

* Agilent 03:35:06 Oct 13, 2006

L


Spurious, g Mode Mid Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

-3.87 dBm

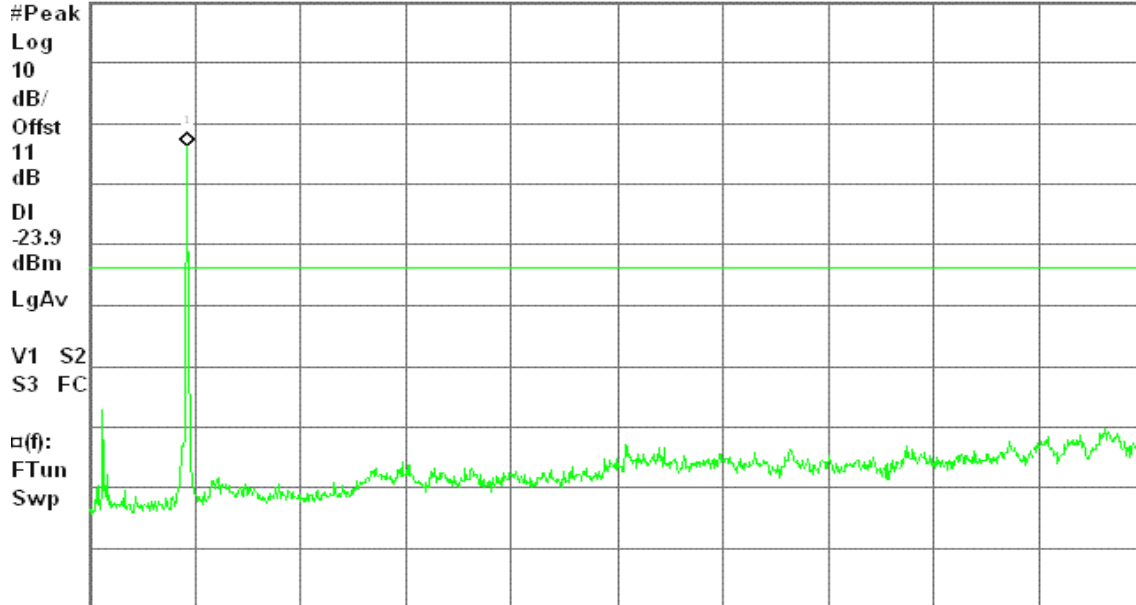

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

* Agilent 22:11:44 Oct 13, 2006

L


Spurious, g Mode High Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

-4.86 dBm

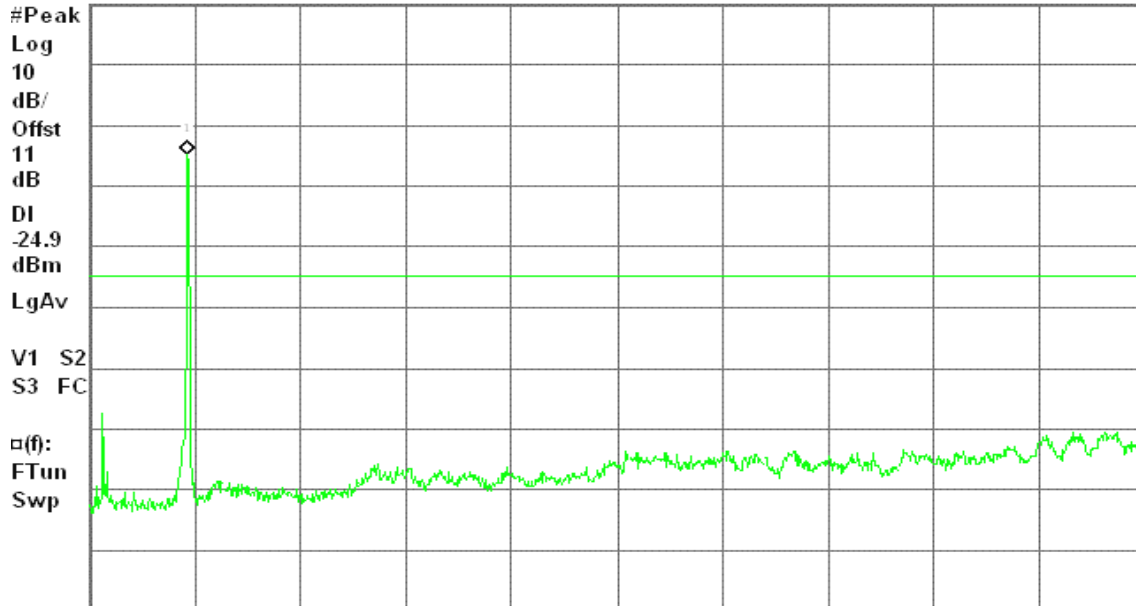

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz


#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**IEEE 802.11b mode with combiner****CH Low**


Agilent 02:08:20 Oct 13, 2006

T

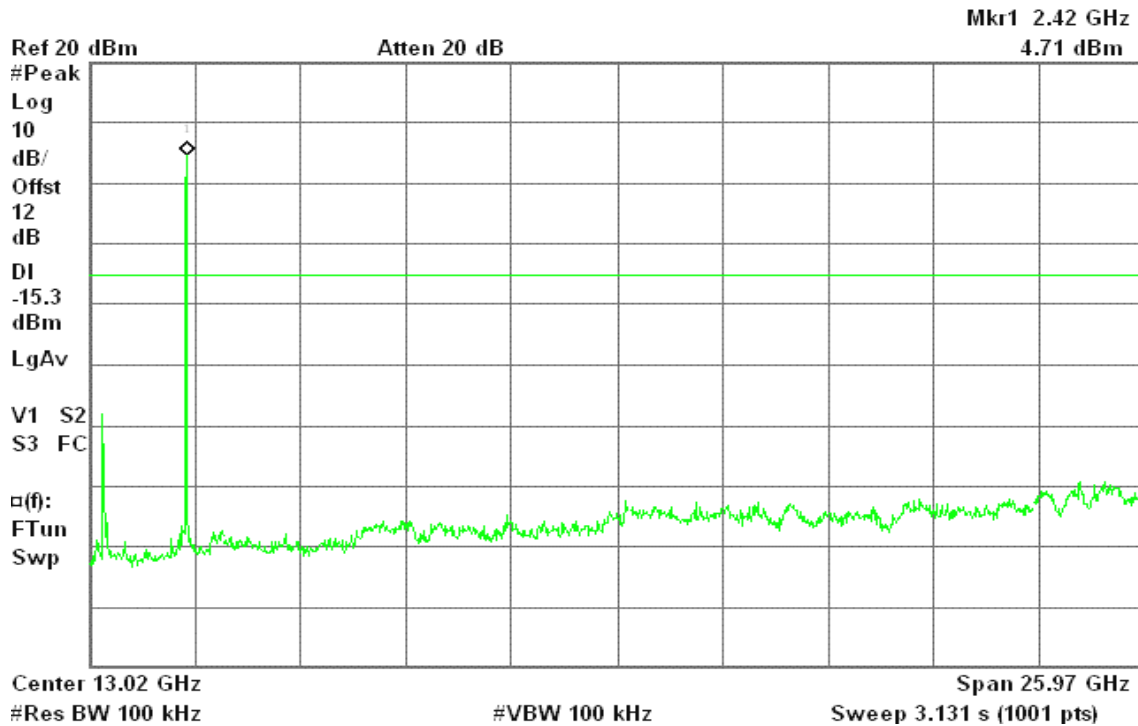**CH Mid**

Agilent 02:05:51 Oct 13, 2006


T

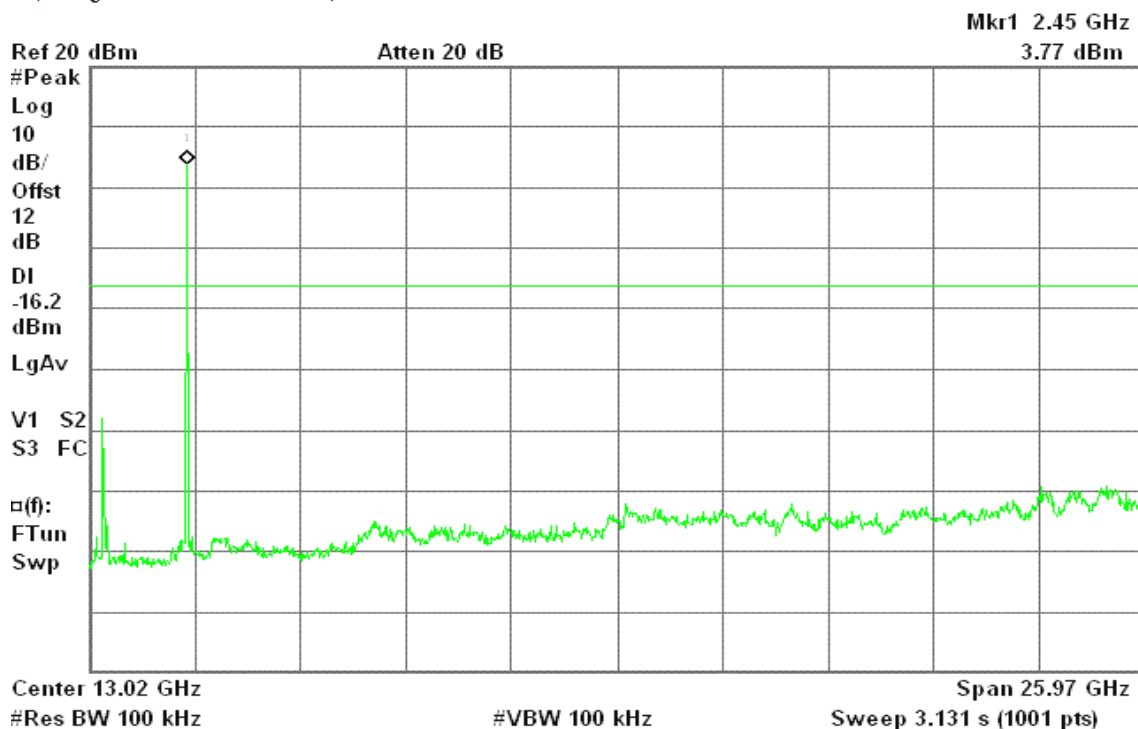

**CH High**


✱ Agilent 02:04:29 Oct 13, 2006

T

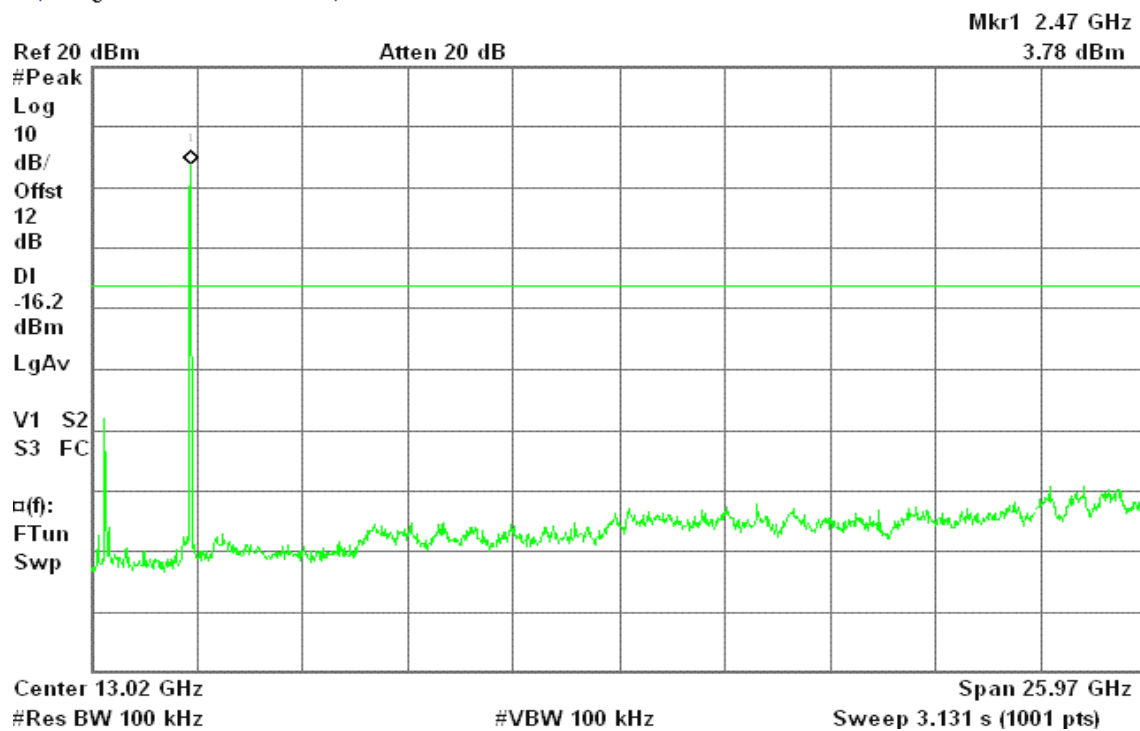**IEEE 802.11g mode with combiner****CH Low**

✱ Agilent 02:10:21 Oct 13, 2006

T

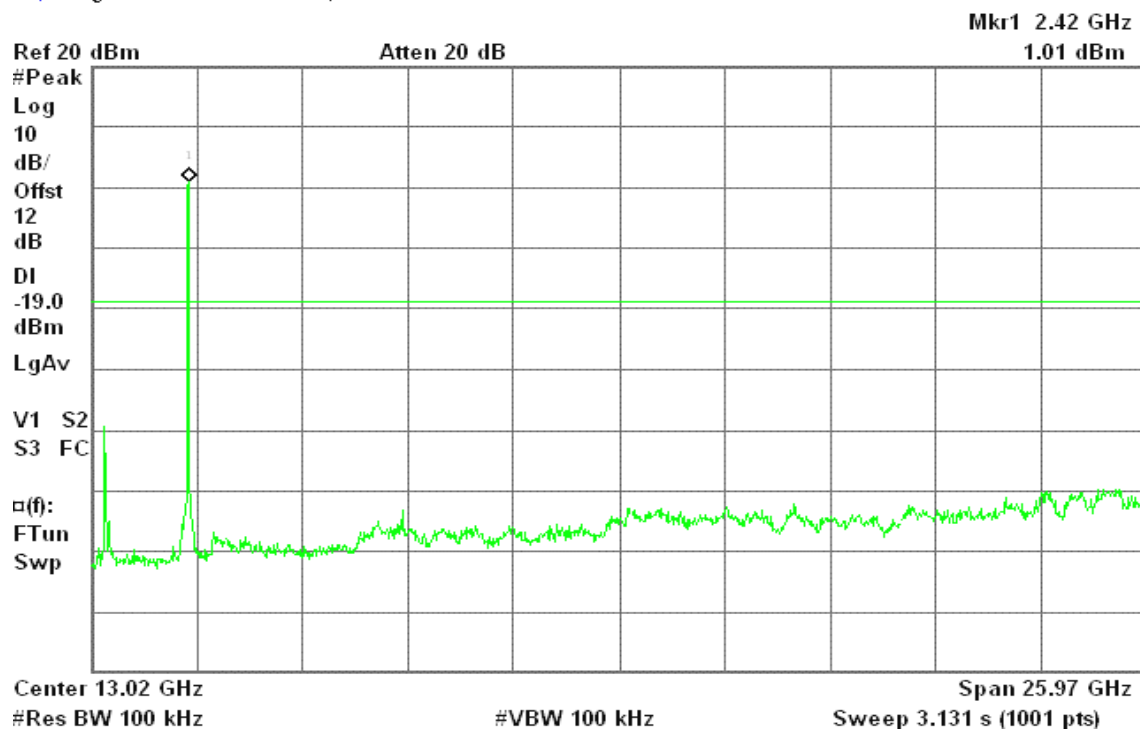




CH Mid

* Agilent 02:12:04 Oct 13, 2006


T

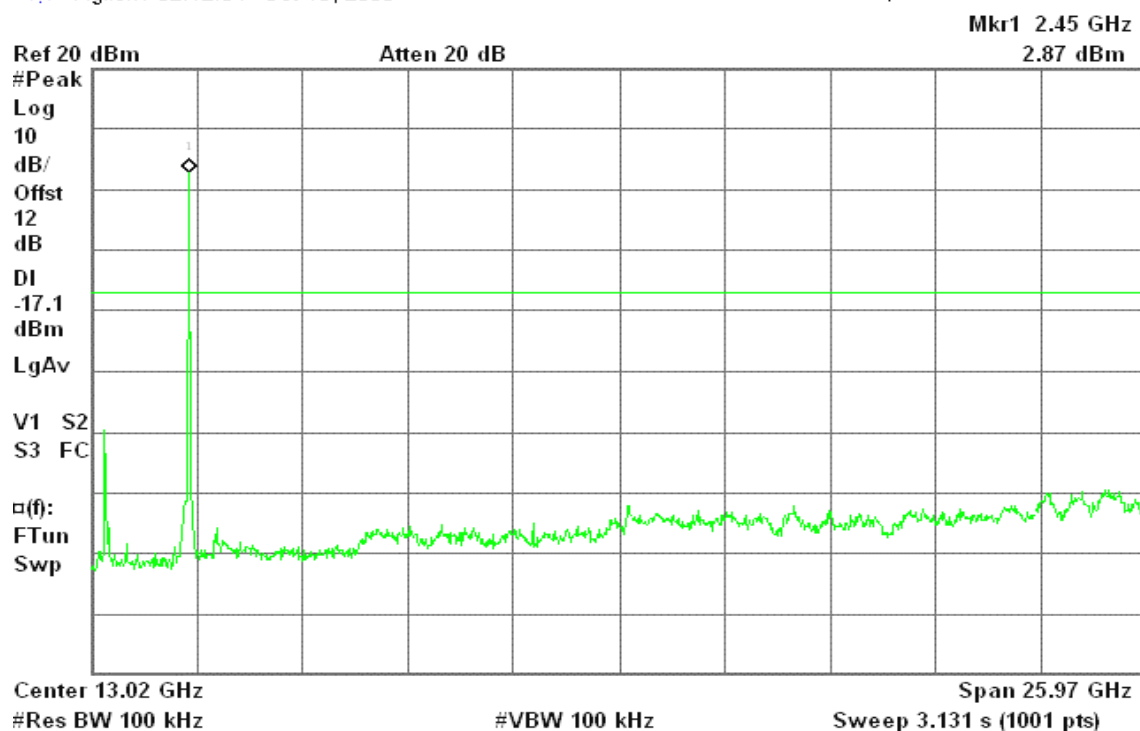

CH High

* Agilent 02:13:34 Oct 13, 2006


T

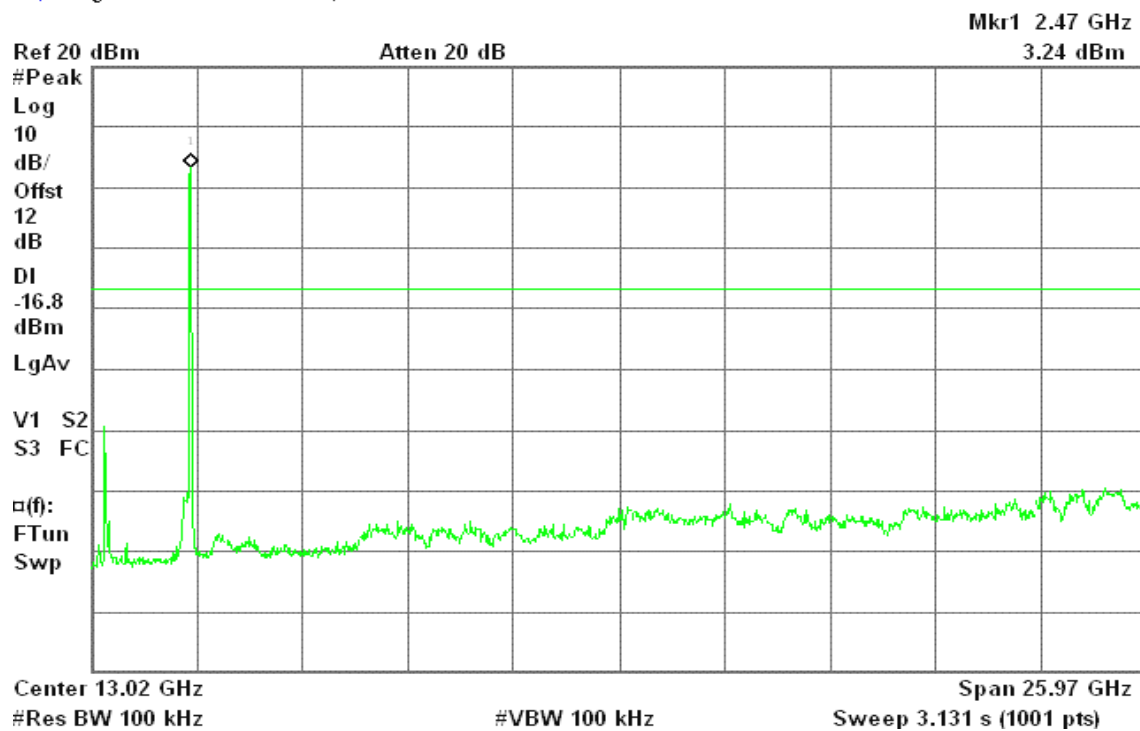

**draft 802.11n Standard-20 MHz Channel mode with combiner****CH Low**


Agilent 02:00:08 Oct 13, 2006

T

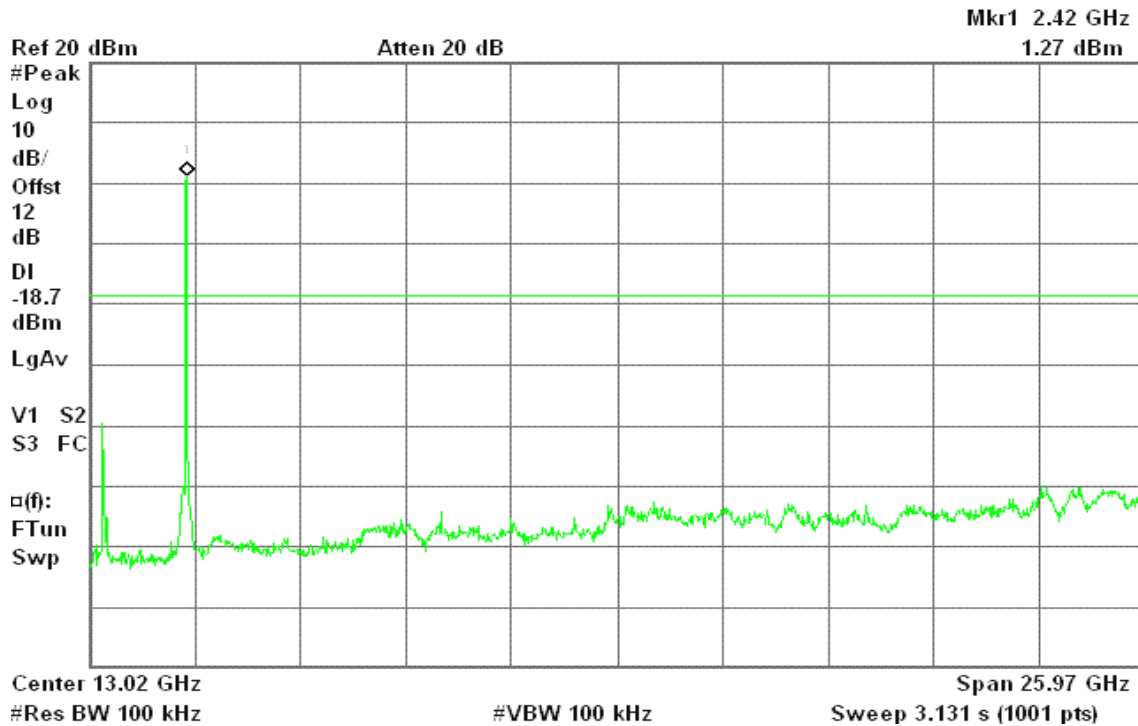**CH Mid**

Agilent 02:01:35 Oct 13, 2006


T

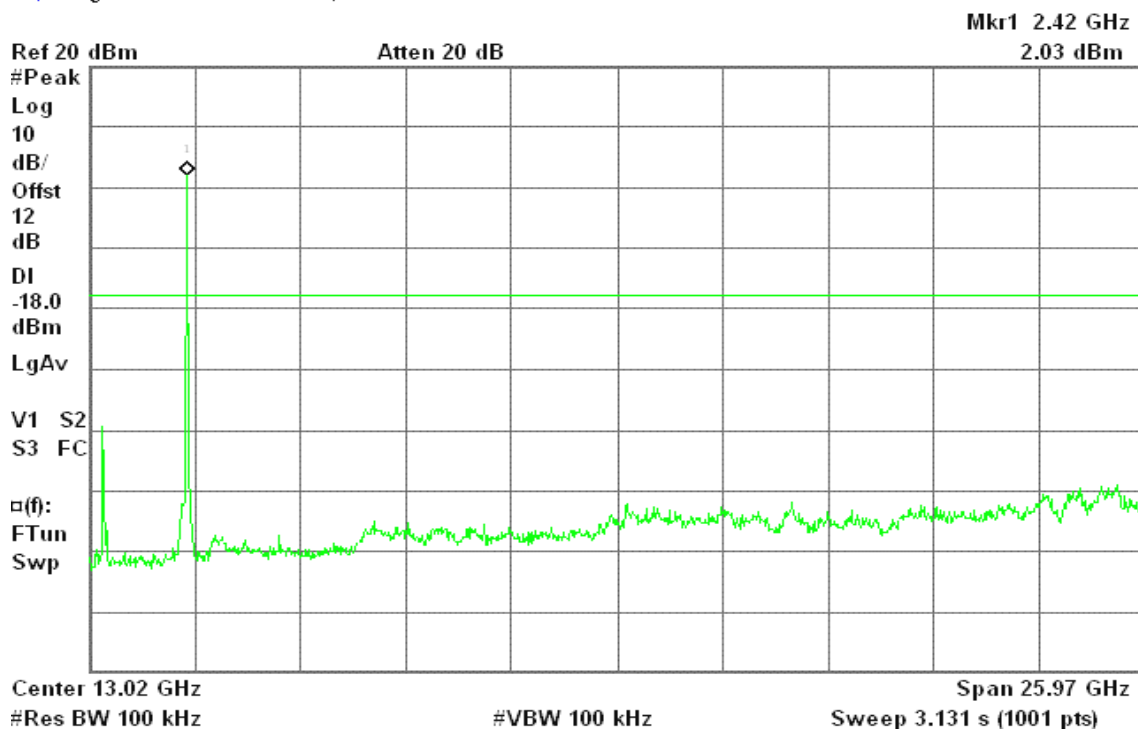

**CH High**


* Agilent 02:02:54 Oct 13, 2006

T

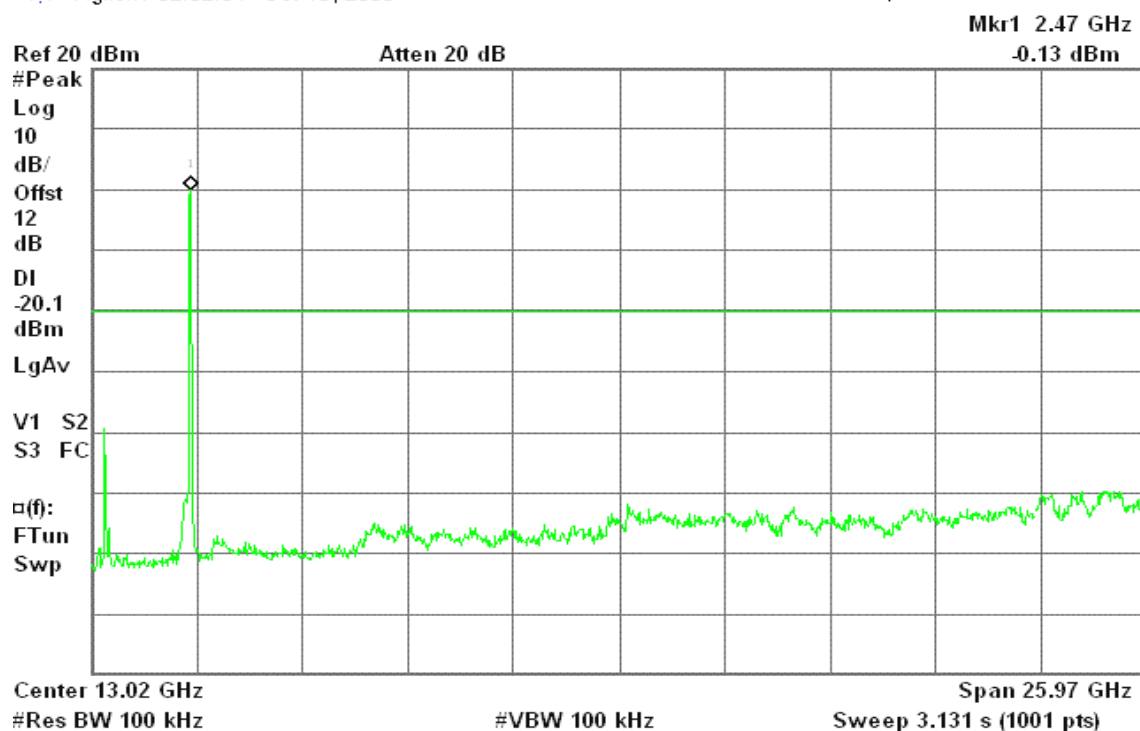**draft 802.11n Wide-40 MHz Channel mode with combiner****CH Low**

* Agilent 23:35:53 Oct 13, 2006

L

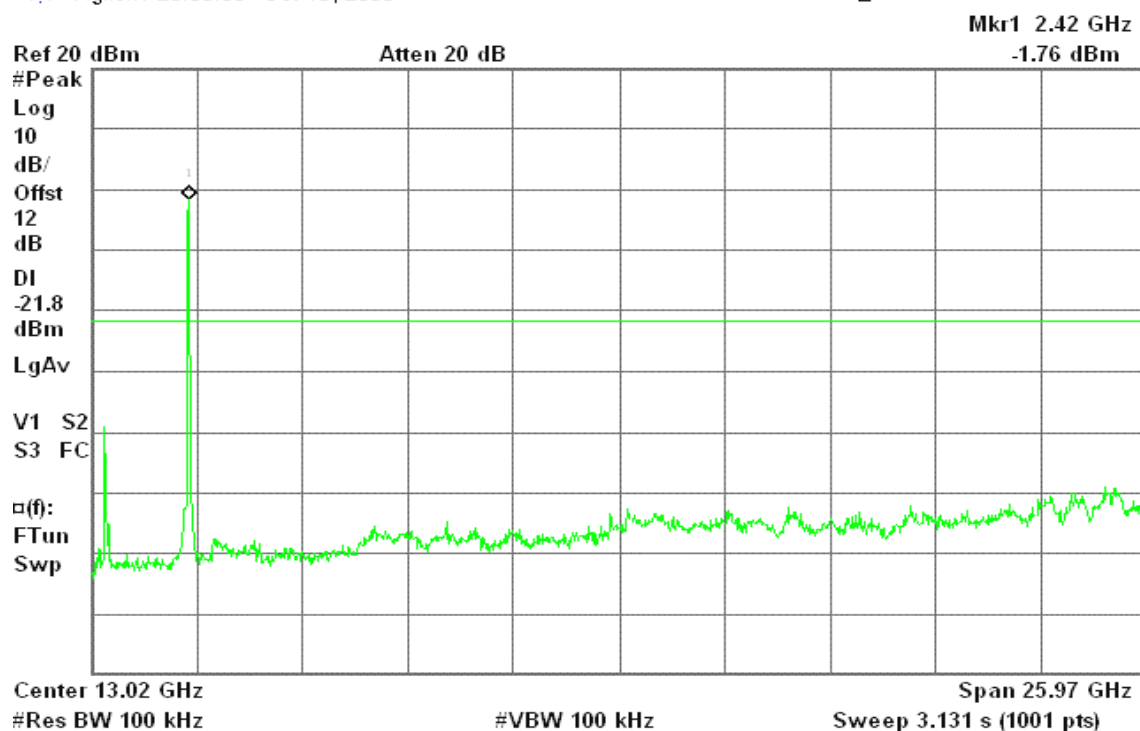




CH Mid

* Agilent 23:37:15 Oct 13, 2006


T

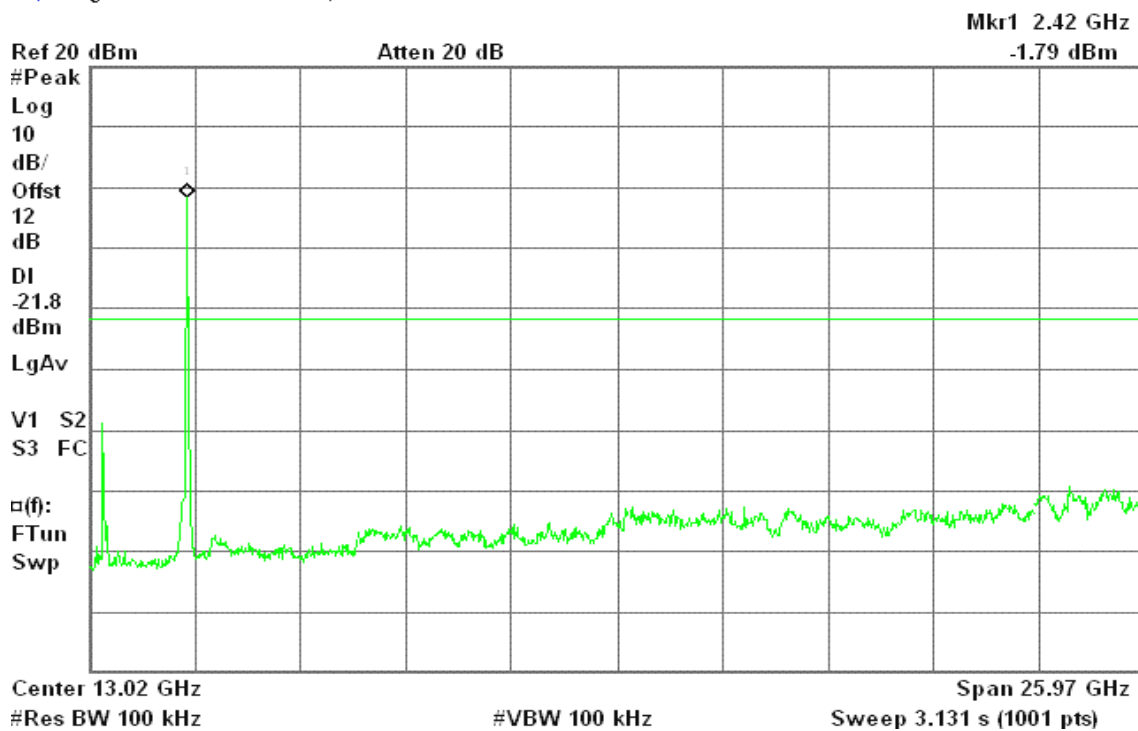

CH High

* Agilent 23:38:20 Oct 13, 2006

T

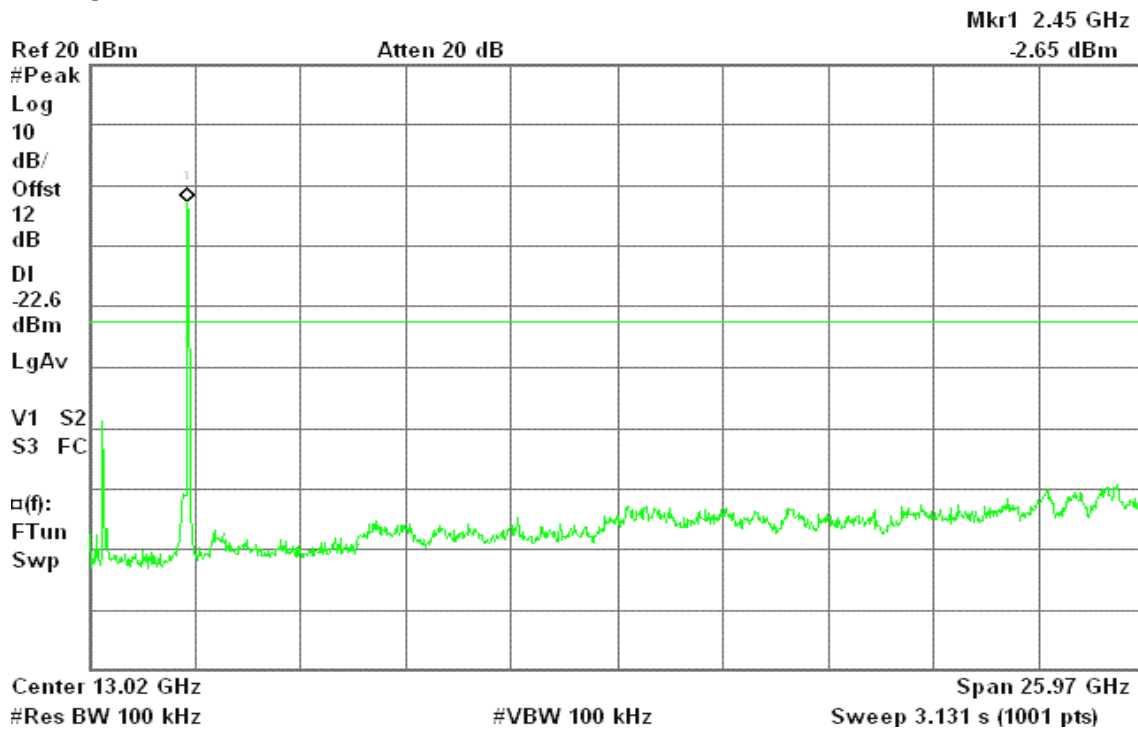



7.7 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

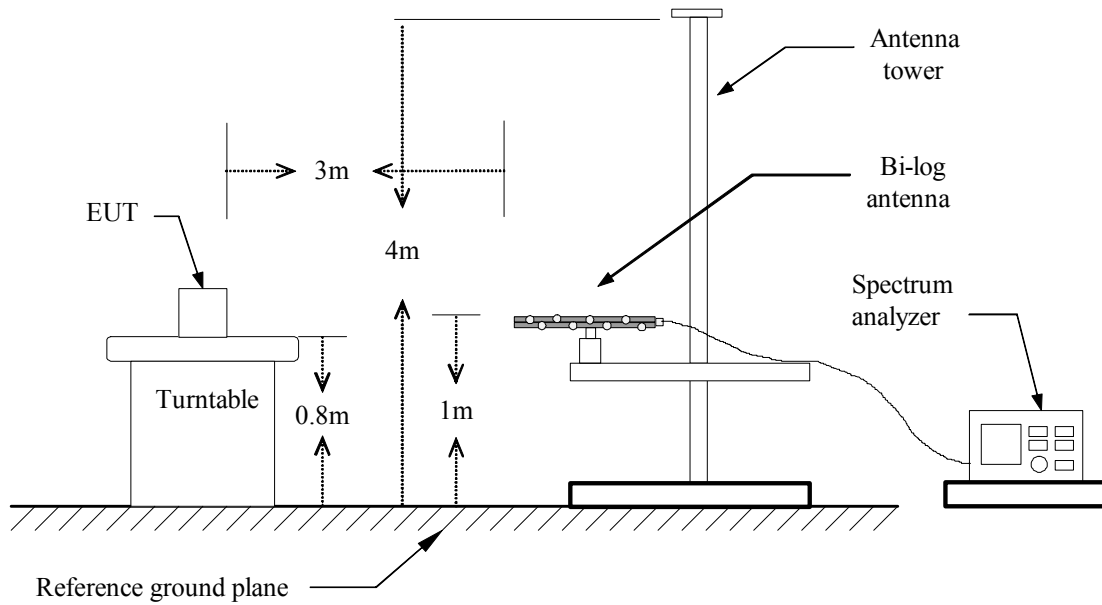

Above 1 GHz

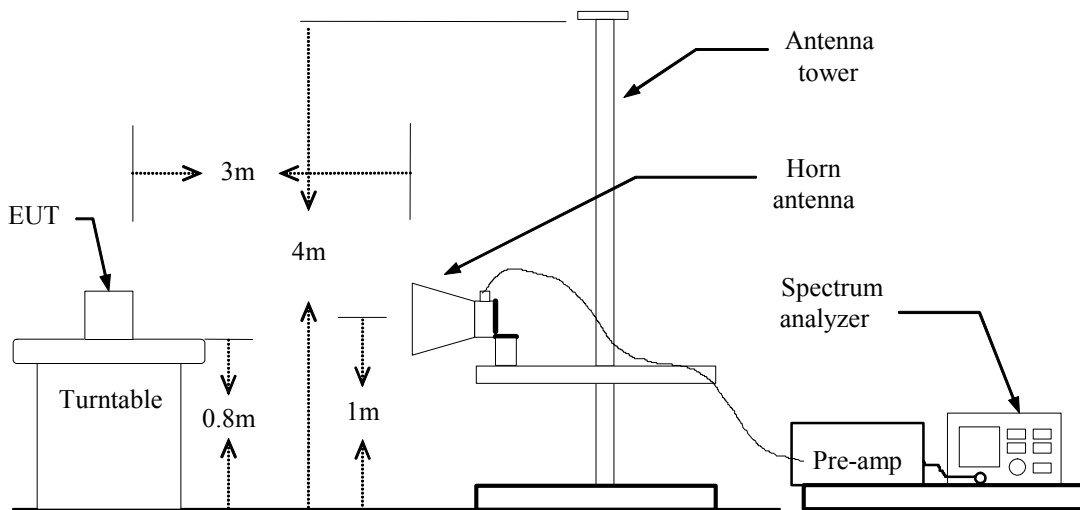



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1GHz

Operation Mode: Normal Link**Test Date:** October 23, 2006**Temperature:** 25°C**Tested by:** James Yu**Humidity:** 47% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
199.75	V	46.05	-13.37	32.68	43.50	-10.82	Peak
374.35	V	43.68	-10.20	33.48	46.00	-12.52	Peak
500.45	V	42.96	-7.86	35.11	46.00	-10.89	Peak
624.93	V	48.18	-5.38	42.81	46.00	-3.19	Peak
749.42	V	38.51	-4.15	34.36	46.00	-11.64	Peak
875.52	V	40.18	-2.31	37.87	46.00	-8.13	Peak
400.22	H	45.38	-10.00	35.38	46.00	-10.62	Peak
500.45	H	43.45	-7.86	35.60	46.00	-10.40	Peak
624.93	H	41.73	-5.38	36.36	46.00	-9.64	Peak
749.42	H	38.59	-4.15	34.44	46.00	-11.56	Peak
875.52	H	40.20	-2.31	37.89	46.00	-8.11	Peak
N/A							

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** October 5, 2006**Temperature:** 20°C**Tested by:** James Yu**Humidity:** 51 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	56.30	---	-10.57	45.74	---	74.00	54.00	-8.26	Peak
1196.67	V	59.83	---	-10.38	49.45	---	74.00	54.00	-4.55	Peak
4825.00	V	46.38	---	0.39	46.77	---	74.00	54.00	-7.23	Peak
N/A										
1066.67	H	55.24	---	-10.57	44.68	---	74.00	54.00	-9.32	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** October 5, 2006**Temperature:** 20°C**Tested by:** James Yu**Humidity:** 51 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	56.60	---	-10.57	46.03	---	74.00	54.00	-7.97	Peak
1253.33	V	53.24	---	-10.31	42.94	---	74.00	54.00	-11.06	Peak
4875.00	V	46.20	---	0.38	46.59	---	74.00	54.00	-7.41	Peak
N/A										
1253.33	H	52.97	---	-10.31	42.66	---	74.00	54.00	-11.34	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** October 5, 2006**Temperature:** 20°C**Tested by:** James Yu**Humidity:** 51 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1320.00	V	53.18	---	-10.21	42.97	---	74.00	54.00	-11.03	Peak
4925.00	V	45.84	---	0.38	46.22	---	74.00	54.00	-7.78	Peak
N/A										
1320.00	H	53.38	---	-10.21	43.17	---	74.00	54.00	-10.83	Peak
4125.00	H	43.66	---	-0.52	43.14	---	74.00	54.00	-10.86	Peak
5233.33	H	44.19	---	0.75	44.94	---	74.00	54.00	-9.06	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** October 5, 2006**Temperature:** 20°C**Tested by:** James Yu**Humidity:** 51 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	56.01	---	-10.57	45.45	---	74.00	54.00	-8.55	Peak
1320.00	V	53.29	---	-10.21	43.08	---	74.00	54.00	-10.92	Peak
N/A										
1320.00	H	53.30	---	-10.21	43.09	---	74.00	54.00	-10.91	Peak
5383.33	H	44.44	---	0.99	45.43	---	74.00	54.00	-8.57	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** October 5, 2006**Temperature:** 20°C**Tested by:** James Yu**Humidity:** 51 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1296.67	V	52.59	---	-10.24	42.34	---	74.00	54.00	-11.66	Peak
N/A										
1296.67	H	53.97	---	-10.24	43.73	---	74.00	54.00	-10.27	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** October 5, 2006**Temperature:** 20°C**Tested by:** James Yu**Humidity:** 51 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1323.33	V	54.06	---	-10.21	43.86	---	74.00	54.00	-10.14	Peak
N/A										
1323.33	H	53.34	---	-10.21	43.14	---	74.00	54.00	-10.86	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: October 5, 2006

Temperature: 20°C

Tested by: James Yu

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	57.64	---	-10.57	47.08	---	74.00	54.00	-6.92	Peak
1360.00	V	53.35	---	-10.16	43.19	---	74.00	54.00	-10.81	Peak
N/A										
1306.67	H	54.11	---	-10.23	43.88	---	74.00	54.00	-10.12	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: October 5, 2006

Temperature: 20°C

Tested by: James Yu

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2270.00	V	58.36	45.24	2.32	60.68	47.56	74.00	54.00	-6.44	Average
N/A										
1303.33	H	54.01	---	-10.24	43.78	---	74.00	54.00	-10.22	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: October 5, 2006

Temperature: 20°C

Tested by: James Yu

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	57.68	---	-10.57	47.10	---	74.00	54.00	-6.90	Peak
N/A										
1316.67	H	53.48	---	-10.22	43.27	---	74.00	54.00	-10.73	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH Low

Test Date: October 5, 2006

Temperature: 20°C

Tested by: James Yu

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1200.00	V	55.60	---	-10.38	45.22	---	74.00	54.00	-8.78	Peak
N/A										
1336.67	H	53.52	---	-10.19	43.33	---	74.00	54.00	-10.67	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH Mid

Test Date: October 5, 2006

Temperature: 20°C

Tested by: James Yu

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2120.00	V	56.90	43.46	1.92	58.82	45.38	74.00	54.00	-8.62	Average
N/A										
1313.33	H	53.43	---	-10.22	43.21	---	74.00	54.00	-10.79	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH High

Test Date: October 5, 2006

Temperature: 20°C

Tested by: James Yu

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	57.49	---	-10.57	46.92	---	74.00	54.00	-7.08	Peak
N/A										
1316.67	H	53.08	---	-10.22	42.86	---	74.00	54.00	-11.14	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** September 12, 2006
Temperature: 25°C **Tested by:** Ivan Tsai
Humidity: 55% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.195	50.650	40.670	0.110	50.760	40.780	63.821	53.821	-13.061	-13.041	L1
0.262	41.570	32.440	0.100	41.670	32.540	61.368	51.368	-19.698	-18.828	L1
0.328	33.850	27.700	0.100	33.950	27.800	59.502	49.502	-25.552	-21.702	L1
0.393	33.770	31.330	0.100	33.870	31.430	58.000	48.000	-24.130	-16.570	L1
0.520	26.290	22.120	0.100	26.390	22.220	56.000	46.000	-29.610	-23.780	L1
3.872	27.210	23.750	0.100	27.310	23.850	56.000	46.000	-28.690	-22.150	L1
0.197	49.900	43.220	0.106	50.006	43.326	63.736	53.736	-13.730	-10.410	L2
0.264	40.430	35.010	0.100	40.530	35.110	61.305	51.305	-20.775	-16.195	L2
0.328	34.500	31.460	0.100	34.600	31.560	59.502	49.502	-24.902	-17.942	L2
0.393	39.030	39.190	0.100	39.130	39.290	58.000	48.000	-18.870	-8.710	L2
0.660	27.910	27.750	0.100	28.010	27.850	56.000	46.000	-27.990	-18.150	L2
1.718	16.470	11.110	0.100	16.570	11.210	56.000	46.000	-39.430	-34.790	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Test Plots

Conducted emissions (Line 1)

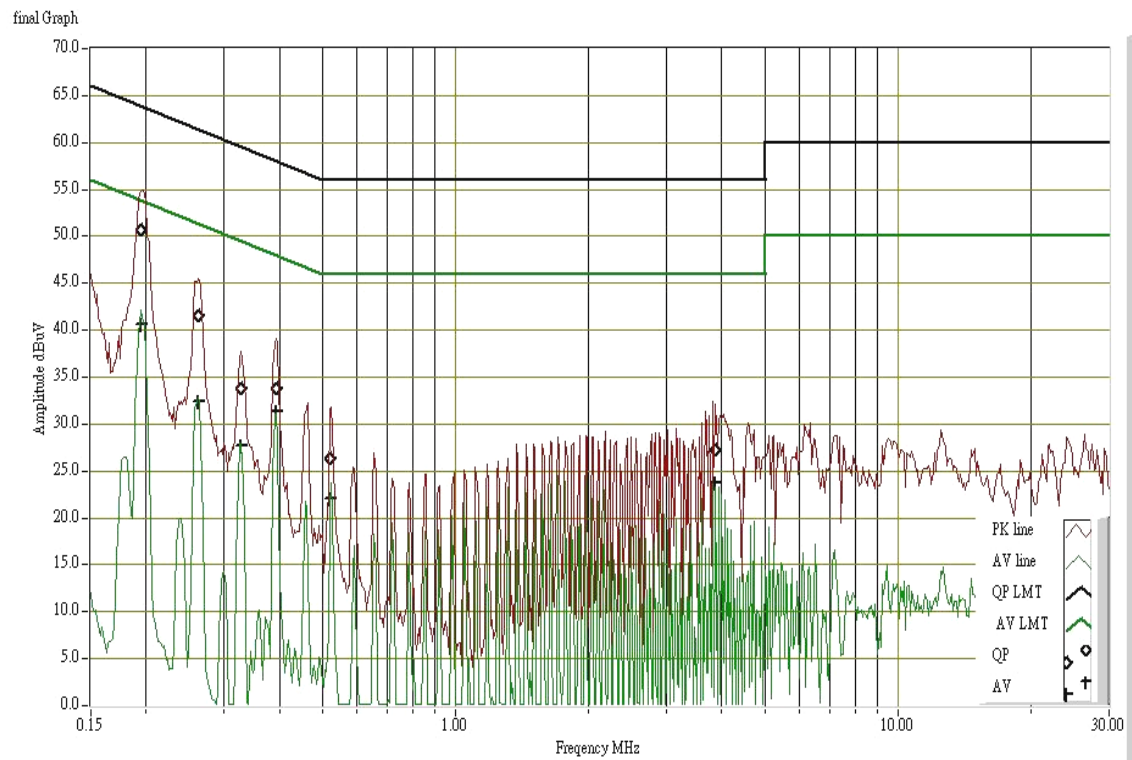

Conducted emissions (Line 2)

