



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 1 of 66



TEST REPORT

Product Name : Wireless-G Broadband Router

Model Number : WRT54GV.2

Applicant : Cisco-Linksys, LLC

Address : 17401 Armstrong Ave. Irvine, CA 92614

Received Date : Sept. 30, 2003

Tested Date : Sept. 30~Nov. 17, 2003

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to testing, and be invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the data issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 2 of 66

Test Report Certification

Product Name : Wireless-G Broadband Router
Model Number : WRT54GV.2
Applicant : Cisco-Linksys, LLC


Measurement Standard :

47 CFR Part 15, Subpart B and Subpart C (Section 15.247),
ANSI C63.4-2001

Tested By : K. P. Pang, **Date** : Nov. 17, 2003
(K. P. Pang)

Reviewed By : Roger Sheng, **Date** : Nov. 17, 2003
(Roger Sheng)

Approved By : Chieh-De Tsai, **Date** : Nov. 17, 2003
(Chieh-De Tsai, Manager)



WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 3 of 66

TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION	5
1.1 General Statement.....	5
1.2 General Description of EUT & Power.....	5
1.3 Description of Peripherals.....	6
1.4 EUT & Peripherals Setup Diagram.....	6
1.5 EUT Operating Condition.....	7
1.6 Description of Test Site	8
1.7 Summary of Test Results	8
2. CONDUCTED POWERLINE TEST	9
2.1 Test Equipments	9
2.2 Test Setup	9
2.3 Conducted Power Line Emission Limit.....	10
2.4 Test Procedure	10
2.5 Uncertainty of Conducted Emission	10
2.6 Conducted RF Voltage Measurement	11-13
2.7 Photos of Conduction Test.....	14-17
3. RADIATED EMISSION TEST	18
3.1 Test Equipments	18
3.2 Test Setup	18
3.3 Radiation Limit	19
3.4 Test Procedures.....	20
3.5 Uncertainty of Radiated Emission	20
3.6 Radiated RF Noise Measurement	21-46
3.7 Photos of Open Site	47-48
4. 6dB BANDWIDTH MEASUREMENT	49
4.1 Test Equipments	49
4.2 Test Setup	49
4.3 Limits of 6dB Bandwidth Measurement.....	49
4.4 Test Procedure	49
4.5 Uncertainty of Conducted Emission	49
4.6 Test Results.....	50
4.7 Photo of 6db Bandwidth Measurement.....	51-52
5. MAXIMUM PEAK OUTPUT POWER	53
5.1 Test Equipments	53
5.2 Test Setup	53
5.3 Limits of Maximum Peak Output Power	53
5.4 Test Procedure	54
5.5 Uncertainty of Conducted Emission	54
5.6 Test Results.....	54
6. POWER SPECTRAL DENSITY MEASUREMENT.....	55
6.1 Test Equipments	55
6.2 Test Setup	55
6.3 Limits of Power Spectral Density Measurement	55
6.4 Test Procedure	56
6.5 Uncertainty of Conducted Emission	56
6.6 Test Results.....	56
6.7 Photo of Power Spectral Density Measurement	57-58



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 4 of 66

TABLE OF CONTENTS

TITLE	PAGE NO.
7. BANDEDGE MEASUREMENT	59
7.1 Test Equipments	59
7.2 Test Setup	59
7.3 Limits of Out of Band Emissions Measurement	59
7.4 Test Procedure	60
7.5 Uncertainty of Conducted Emission	60
7.6 Test Results	60-61
7.7 Photo of Out of Bandedge Measurement	62-63
8. ANTENNA REQUIREMENT	64
8.1 Standard Applicable	64
8.2 Antenna Connected Construction	64
9. RF EXPOSURE EVALUATION	65
9.1 Friis Formula	65
9.2 EUT Operating Condition	65
9.3 Test Result of RF Exposure Evaluation	66
9.3.1 Antenna Gain	66
9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance	66



1. GENERAL INFORMATION

1.1 General Statement

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to national or international std.

1.2 General Description of EUT & Power

MANUFACTURER : Cisco-Linksys, LLC

SAMPLE NAME : Wireless-G Broadband Router

MODEL NAME : WRT54GV.2

FREQUENCY RANGE : 2412 MHz to 2462MHz

CHANNEL NUMBER : 11

AIR DATA RATE : 54Mbps (802.11g Mode), 11Mbps(802.11b Mode)

TYPE OF MODULATION : Orthogonal Frequency Division Multiplex or Direct Sequence
Spread Spectrum

FREQUENCY SELECTION : BY SOFTWARE

ANTENNA TYPE : Dipole Antenna , Antenna Gain : 2dBi.

POWER SOURCE : 12VDC (From Adapter)

Power Adapter (1) :

MANUFACTURER : HON-KWANG ELECTRIC CO., LTD.

MODEL NUMBER : D12-1A

INPUT POWER : 120VAC/60Hz, 23W

OUTPUT POWER : 12VDC, 1000mA

Power Adapter (2) :

MANUFACTURER : Global Yeou Diann Elec. Ind. co., Ltd.

MODEL NUMBER : AM-1201000D41

INPUT POWER : 120VAC/60Hz, 23W

OUTPUT POWER : 12VDC, 1000mA

Power Adapter (3) :

MANUFACTURER : LEADER ELECTRONICS INC.

MODEL NUMBER : 411210003CT

INPUT POWER : 120VAC/60Hz, 20W

OUTPUT POWER : 12VDC, 1000mA



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 6 of 66

1.3 Description of Peripherals

(1) PC

MANUFACTURER : HP CORP.
MODEL NUMBER : VECTRA VEI8DT
SERIAL NUMBER : SG1202412
FCC : DOC

(2) PC

MANUFACTURER : HP CORP.
MODEL NUMBER : VECTRA VEI8DT
SERIAL NUMBER : SG1202415
FCC : DOC

(3) PC

MANUFACTURER : HP CORP.
MODEL NUMBER : VECTRA VEI8DT
SERIAL NUMBER : SG1202416
FCC : DOC


(4) Notebook PC

MANUFACTURER : DELL CORP.
MODEL NUMBER : PP01L
SERIAL NUMBER : CN-09C748-48155-1AP-6630
FCC : DOC
POWER CORD : Unshielded, Detachable, 1.8m

(5) CABLE

	Type	Connector	shielded	Length
(A)	Cat5 twisted-pair	RJ-45, Plastic	NO	15m

1.4 EUT & Peripherals Setup Diagram

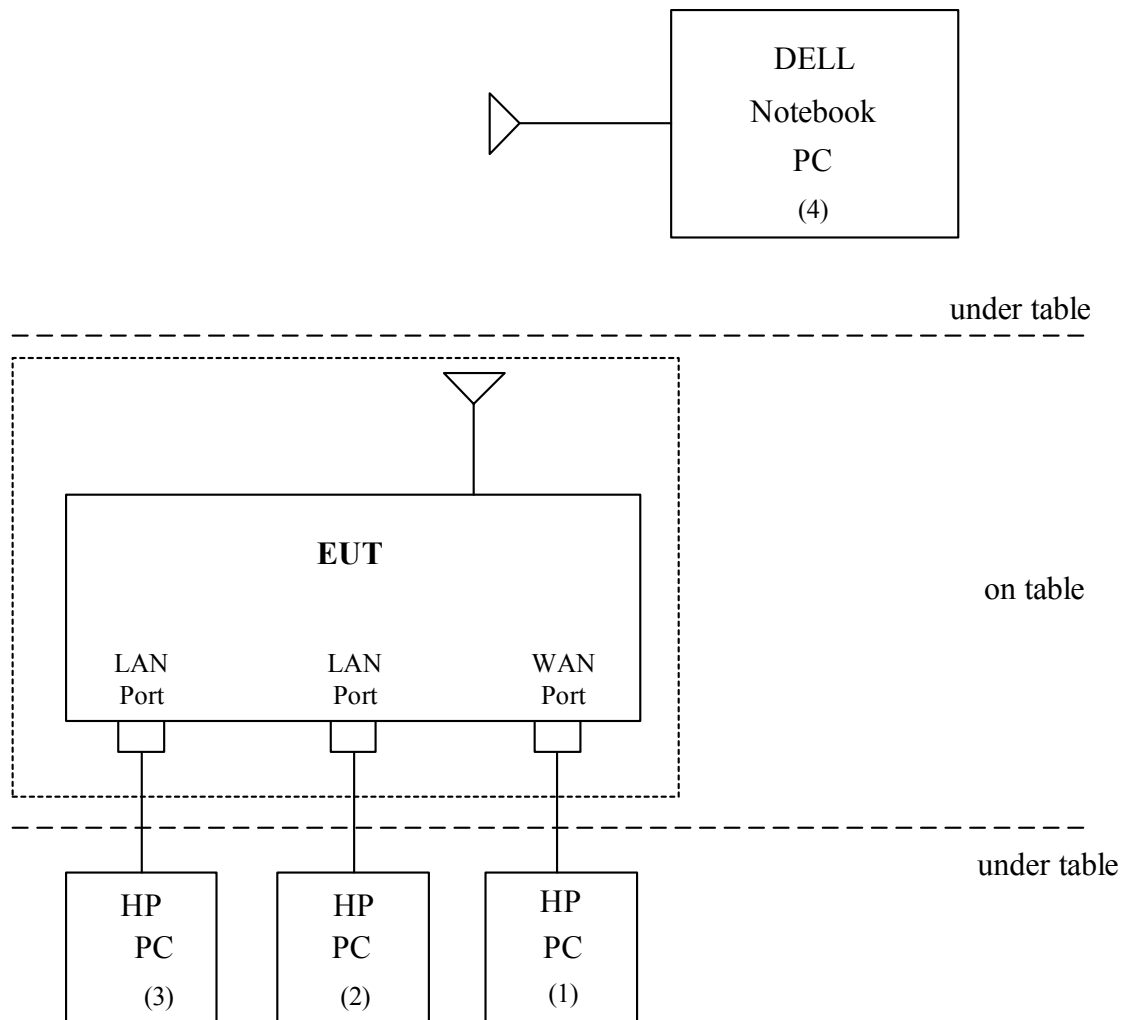

1.5 EUT Operating Condition

1. Set up all computers like the setup diagram.
2. PC (1) ping 192.168.62.1 -t to EUT.
3. PC (2) ping 192.168.1.80 -t to PC (3).
4. Notebook (4) ping 192.168.62.1 -t to EUT.
5. All of the function are under run.
6. Start test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 8 of 66

1.6 Description of Test Site

SITE DESCRIPTION : FCC Certificate NO. : 90585
BSMI Certificate NO. : SL2-IN-E-0002
NVLAP Lab code : 200118-0
CNLA Certificate NO. : CNLA-ZL97018
VCCI Certificate NO. : R-1229, C-1250

NAME OF SITE : Ecom Sertech Corp. Hsinchu
(Spin-off from ITRI / ERSO on Apr. 01, 2003)
SITE LOCATION : Rm.258, Bldg.17, NO.195, Sec. 4, Chung Hsing Rd.,
Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.

1.7 Summary of Test Results

The EUT has been tested according to the following specifications :

APPLIED STANDARD : 47 CFR Part 15, Subpart B and Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.107 15.207	AC Power Conducted Emission Limit : 15.107	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Orthogonal Frequency Division Multiplex System Limit : 6dB bandwidth > 500KHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit : max. 30dBm	PASS	Meet the requirement of limit
15.109 15.205 15.209	Transmitter Radiated Emissions Limit : Table 15.209	PASS	Meet the requirement of limit
15.247(d)	Power Spectral Density Limit : max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Out of Band Emission and Restricted Band Radiation Limit:20dB less than peak value of fundamental frequency Restricted band Limit:Table 15.209	PASS	Meet the requirement of limit


2. CONDUCTED POWERLINE TEST

2.1 Test Equipments

The following test equipments are used during the conducted powerline tests :

Manufacturer or Type	Model No	Serial No.	Date of Calibration	Calibration Period	Remark
SPECTRUM ANALYZER & DISPLAY	HP 8568A	2235A02320	APR. 01, 2003	1 Year	PRETEST
QUASI-PEAK ADAPTER	HP 85650 A	2341A00672	APR. 01, 2003	1 Year	PRETEST
ISOLATION TRANSFORMER	SOLAR 7032-1	N/A	N/A	N/A	FINAL
L.I.S.N.	EMCO 3850/2	9311-1025 9401-1028	JAN. 08, 2003 For Characteristic impedance	1 Year	FINAL
			MAY 18, 2003 For Insertion loss		
TEST RECEIVER	R/S ESHS30	838550/003	JUN. 07, 2003	1 Year	FINAL
SHIELDED ROOM	KEENE 5983	NO.1	N/A	N/A	FINAL
PULSE LIMIT	R/S EHS3Z2	357.8810.52	JUL. 10, 2003	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	JUL. 10, 2003	1 Year	FINAL
50Ω TERMINATOR	-----	-----	JUL. 10, 2003	1 Year	FINAL

2.2 Test Setup

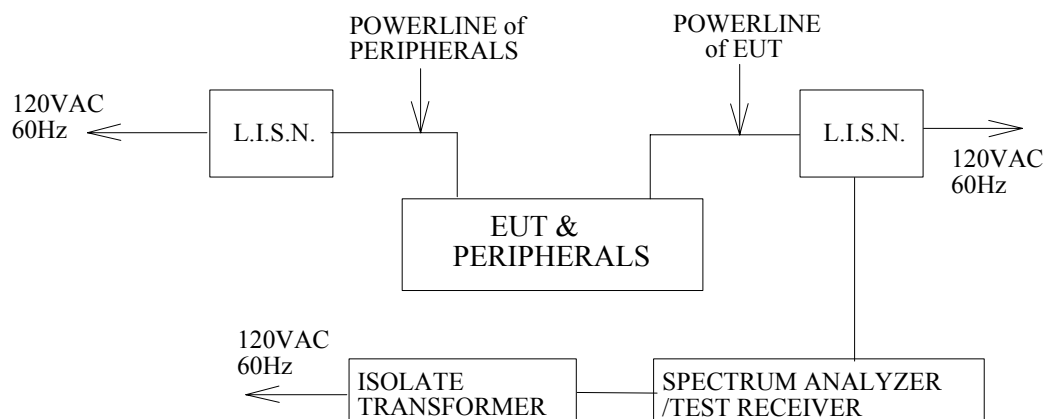

2.3 Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (Db μ v)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56	56-46
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

For intentional device, according to § 15.207(a) Line Conducted Emission Limit is same as above table.

2.4 Test Procedure

The test procedure is performed in a 12ft×12ft×8ft(L×W×H) shielded room. the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.36 dB.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 11 of 66

2.6 Conducted RF Voltage Measurement

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

Frequency (MHz)	Loss(dB)		Measurement				L1 Emission		L2 Emission		Limits	
			L1(dBμV)		L2(dBμV)		(dBμV)		(dBμV)		(dBμV)	
	L1	L2	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.
0.150	0.1	0.2	*	*	*	*	*	*	*	*	66.00	56.00
0.165	0.1	0.2	54.90	24.20	*	*	55.00	24.30	*	*	65.21	55.21
0.168	0.1	0.2	26.60	17.80	*	*	26.70	17.90	*	*	65.06	55.06
0.192	0.1	0.2	*	*	54.10	24.00	*	*	54.30	24.20	63.95	53.95
0.291	0.1	0.2	*	*	48.70	19.00	*	*	48.90	19.20	60.50	50.50
0.408	0.1	0.2	43.00	14.00	*	*	43.10	14.10	*	*	57.69	47.69
0.500	0.1	0.2	40.50	11.30	41.10	8.40	40.60	11.40	41.30	8.60	56.00	46.00
1.110	0.1	0.2	*	*	34.80	5.60	*	*	35.00	5.80	56.00	46.00
1.700	0.1	0.2	24.50	6.20	*	*	24.60	6.30	*	*	56.00	46.00
2.150	0.1	0.2	*	*	27.90	20.60	*	*	28.10	20.80	56.00	46.00
3.985	0.2	0.2	35.10	30.70	*	*	35.30	30.90	*	*	56.00	46.00
3.990	0.2	0.2	30.60	21.90	*	*	30.80	22.10	*	*	56.00	46.00
4.904	0.2	0.2	39.00	33.10	*	*	39.20	33.30	*	*	56.00	46.00
4.910	0.2	0.2	33.50	22.20	*	*	33.70	22.40	*	*	56.00	46.00
4.911	0.2	0.2	*	*	38.90	33.00	*	*	39.10	33.20	56.00	46.00
4.930	0.2	0.2	*	*	35.60	14.20	*	*	35.80	14.40	56.00	46.00
6.745	0.3	0.3	49.80	44.80	*	*	50.10	45.10	*	*	60.00	50.00
6.750	0.3	0.3	48.40	32.20	*	*	48.70	32.50	*	*	60.00	50.00
7.363	0.3	0.3	*	*	48.80	44.00	*	*	49.10	44.30	60.00	50.00
7.400	0.3	0.3	*	*	32.90	22.50	*	*	33.20	22.80	60.00	50.00
24.000	1.0	1.0	35.10	32.80	37.70	35.40	36.10	33.80	38.70	36.40	60.00	50.00
30.000	1.4	1.8	*	*	*	*	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.

2. Mode : 802.11b mode.

3. The EUT can be operated in transmitting, stand-by and receiving mode.

After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

4. For Adapter (1).

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 12 of 66

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

Frequency (MHz)	Loss(dB)		Measurement				L1 Emission (dBμV)		L2 Emission (dBμV)		Limits (dBμV)	
			L1(dBμV)		L2(dBμV)							
	L1	L2	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.
0.150	0.1	0.2	*	*	*	*	*	*	*	*	66.00	56.00
0.165	0.1	0.2	*	*	55.70	24.90	*	*	55.90	25.10	65.21	55.21
0.168	0.1	0.2	54.60	23.80	*	*	54.70	23.90	*	*	65.06	55.06
0.354	0.1	0.2	*	*	42.60	13.00	*	*	42.80	13.20	58.87	48.87
0.402	0.1	0.2	42.60	13.50	*	*	42.70	13.60	*	*	57.81	47.81
0.510	0.1	0.2	39.40	10.20	*	*	39.50	10.30	*	*	56.00	46.00
0.600	0.1	0.2	*	*	41.30	13.00	*	*	41.50	13.20	56.00	46.00
1.230	0.1	0.2	*	*	35.30	20.80	*	*	35.50	21.00	56.00	46.00
1.690	0.1	0.2	25.70	18.70	*	*	25.80	18.80	*	*	56.00	46.00
3.680	0.2	0.2	33.10	29.80	*	*	33.30	30.00	*	*	56.00	46.00
3.990	0.2	0.2	*	*	34.60	29.60	*	*	34.80	29.80	56.00	46.00
4.910	0.2	0.2	38.80	34.00	39.00	33.30	39.00	34.20	39.20	33.50	56.00	46.00
6.750	0.3	0.3	48.30	43.70	46.90	42.30	48.60	44.00	47.20	42.60	60.00	50.00
24.000	1.0	1.0	34.20	32.00	36.80	34.70	35.20	33.00	37.80	35.70	60.00	50.00
30.000	1.4	1.8	*	*	*	*	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.

2. Mode : 802.11g mode.

3. The EUT can be operated in transmitting, stand-by and receiving mode.

After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

4. For Adapter (1).

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 13 of 66

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

Frequency (MHz)	Loss(dB)		Measurement				L1 Emission		L2 Emission		Limits	
			L1(dBμV)		L2(dBμV)		(dBμV)		(dBμV)		(dBμV)	
	L1	L2	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.
0.150	0.1	0.2	*	*	*	*	*	*	*	*	66.00	56.00
0.189	0.1	0.2	55.00	24.40	*	*	55.10	24.60	*	*	64.08	54.08
0.234	0.1	0.2	*	*	53.00	21.80	*	*	53.10	22.00	62.31	52.31
0.291	0.1	0.2	*	*	50.00	19.90	*	*	50.10	20.10	60.50	50.50
0.327	0.1	0.2	46.70	16.60	*	*	46.80	16.70	*	*	59.53	49.53
0.560	0.1	0.2	*	*	41.20	12.90	*	*	41.40	13.10	56.00	46.00
0.570	0.1	0.2	42.90	13.60	*	*	43.00	13.70	*	*	56.00	46.00
1.100	0.1	0.2	34.10	6.00	*	*	34.20	6.10	*	*	56.00	46.00
1.110	0.1	0.2	*	*	35.20	7.60	*	*	35.40	7.80	56.00	46.00
3.676	0.2	0.2	*	*	32.70	28.60	*	*	32.90	28.80	56.00	46.00
3.680	0.2	0.2	*	*	32.60	25.80	*	*	32.80	26.00	56.00	46.00
3.980	0.2	0.2	34.00	29.50	*	*	34.20	29.70	*	*	56.00	46.00
3.980	0.2	0.2	34.80	30.20	*	*	35.00	30.40	*	*	56.00	46.00
4.740	0.2	0.2	38.10	33.60	*	*	38.30	33.80	*	*	56.00	46.00
4.750	0.2	0.2	37.30	32.30	*	*	37.50	32.50	*	*	56.00	46.00
4.910	0.2	0.2	*	*	34.40	15.20	*	*	34.60	15.40	56.00	46.00
6.893	0.3	0.3	*	*	47.60	41.70	*	*	47.90	42.00	60.00	50.00
6.900	0.3	0.3	*	*	47.10	28.40	*	*	47.40	28.70	60.00	50.00
7.200	0.3	0.3	50.40	42.10	*	*	50.70	42.40	*	*	60.00	50.00
24.000	1.0	1.0	38.00	35.70	33.80	31.50	39.00	36.70	34.80	32.50	60.00	50.00
30.000	1.4	1.8	*	*	*	*	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.

2. Mode : 802.11b mode.

3. The EUT can be operated in transmitting, stand-by and receiving mode.

After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

4. For Adapter (2).

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 14 of 66

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

Frequency (MHz)	Loss(dB)		Measurement				L1 Emission		L2 Emission		Limits	
			L1(dBμV)		L2(dBμV)		(dBμV)		(dBμV)		(dBμV)	
	L1	L2	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.
0.150	0.1	0.2	*	*	*	*	*	*	*	*	66.00	56.00
0.189	0.1	0.2	54.70	24.30	*	*	54.80	24.40	*	*	64.08	54.08
0.207	0.1	0.2	*	*	50.60	24.20	*	*	50.80	24.40	63.32	53.32
0.294	0.1	0.2	49.40	17.90	49.90	19.90	49.50	18.00	50.10	20.10	60.41	50.41
0.530	0.1	0.2	*	*	4.50	11.70	*	*	4.70	11.90	56.00	46.00
0.580	0.1	0.2	43.00	13.20	*	*	43.10	13.30	*	*	56.00	46.00
1.100	0.1	0.2	*	*	35.10	8.90	*	*	35.30	9.10	56.00	46.00
1.110	0.1	0.2	34.10	8.00	*	*	34.20	8.10	*	*	56.00	46.00
3.830	0.2	0.2	33.30	30.40	31.60	26.30	33.50	30.60	31.80	26.50	56.00	46.00
3.832	0.2	0.2	33.90	31.50	*	*	34.10	31.70	*	*	56.00	46.00
3.833	0.2	0.2	*	*	32.60	30.30	*	*	32.80	30.50	56.00	46.00
4.750	0.2	0.2	36.90	33.40	35.30	31.30	37.10	33.60	35.50	31.50	56.00	46.00
4.750	0.2	0.2	*	*	35.30	31.30	*	*	35.50	31.50	56.00	46.00
4.753	0.2	0.2	*	*	36.40	33.00	*	*	36.60	33.20	56.00	46.00
7.050	0.3	0.3	48.90	42.60	46.30	40.00	49.20	42.90	46.60	40.30	60.00	50.00
7.052	0.3	0.3	*	*	47.00	43.50	*	*	47.30	43.80	60.00	50.00
24.000	1.0	1.0	37.30	35.00	33.20	31.10	38.30	36.00	34.20	32.10	60.00	50.00
30.000	1.4	1.8	*	*	*	*	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.

2. Mode : 802.11g mode.

3. The EUT can be operated in transmitting, stand-by and receiving mode.

After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

4. For Adapter (2).

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 15 of 66

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

Frequency (MHz)	Loss(dB)		Measurement				L1 Emission		L2 Emission		Limits	
			L1(dBμV)		L2(dBμV)		(dBμV)		(dBμV)		(dBμV)	
	L1	L2	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.
0.150	0.1	0.2	*	*	*	*	*	*	*	*	66.00	56.00
0.189	0.1	0.2	52.30	22.60	*	*	52.40	22.70	*	*	64.08	54.08
0.282	0.1	0.2	*	*	50.10	20.30	*	*	50.30	20.50	60.76	50.76
0.333	0.1	0.2	47.50	17.80	*	*	47.60	17.90	*	*	59.38	49.38
0.405	0.1	0.2	*	*	45.10	17.90	*	*	45.30	18.10	57.75	47.75
0.500	0.1	0.2	*	*	44.10	14.90	*	*	44.30	15.10	56.00	46.00
0.510	0.1	0.2	41.00	12.10	*	*	41.10	12.20	*	*	56.00	46.00
1.110	0.1	0.2	*	*	32.30	5.90	*	*	32.50	6.10	56.00	46.00
1.120	0.1	0.2	22.00	4.10	*	*	22.10	4.20	*	*	56.00	46.00
3.827	0.2	0.2	*	*	35.00	30.90	*	*	35.20	31.10	56.00	46.00
3.830	0.2	0.2	*	*	33.70	29.10	*	*	33.90	29.30	56.00	46.00
3.980	0.2	0.2	32.20	26.10	*	*	32.40	26.30	*	*	56.00	46.00
3.981	0.2	0.2	32.40	28.20	*	*	32.60	28.40	*	*	56.00	46.00
4.747	0.2	0.2	*	*	39.00	34.90	*	*	39.20	35.10	56.00	46.00
4.750	0.2	0.2	*	*	38.60	31.00	*	*	38.80	31.20	56.00	46.00
4.899	0.2	0.2	35.60	31.00	*	*	35.80	31.20	*	*	56.00	46.00
4.900	0.2	0.2	35.40	30.90	*	*	35.60	31.10	*	*	56.00	46.00
7.197	0.3	0.3	*	*	50.90	45.10	*	*	51.20	45.40	60.00	50.00
7.200	0.3	0.3	*	*	51.20	40.50	*	*	51.50	40.80	60.00	50.00
7.349	0.3	0.3	47.60	42.60	*	*	47.90	42.90	*	*	60.00	50.00
7.350	0.3	0.3	47.70	41.90	*	*	48.00	42.20	*	*	60.00	50.00
24.000	1.0	1.0	37.30	34.70	34.90	34.20	38.30	35.70	35.90	35.20	60.00	50.00
30.000	1.4	1.8	*	*	*	*	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.

2. Mode : 802.11b mode.

3. The EUT can be operated in transmitting, stand-by and receiving mode.

After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

4. For Adapter (3).

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 16 of 66

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

Frequency (MHz)	Loss(dB)		Measurement				L1 Emission		L2 Emission		Limits	
			L1(dBμV)		L2(dBμV)		(dBμV)		(dBμV)		(dBμV)	
	L1	L2	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.
0.150	0.1	0.2	*	*	*	*	*	*	*	*	66.00	56.00
0.165	0.1	0.2	53.70	23.10	*	*	53.80	23.30	*	*	65.21	55.21
0.288	0.1	0.2	*	*	49.70	20.10	*	*	49.90	20.30	60.58	50.58
0.300	0.1	0.2	48.10	19.50	*	*	48.20	19.60	*	*	60.24	50.24
0.402	0.1	0.2	*	*	47.50	17.60	*	*	47.70	17.80	57.81	47.81
0.500	0.1	0.2	*	*	43.40	15.10	*	*	43.60	15.30	56.00	46.00
0.540	0.1	0.2	40.30	11.20	*	*	40.40	11.40	*	*	56.00	46.00
1.110	0.1	0.2	*	*	33.30	7.40	*	*	33.50	7.60	56.00	46.00
1.140	0.1	0.2	23.00	6.20	*	*	23.10	6.30	*	*	56.00	46.00
3.980	0.2	0.2	36.80	28.50	36.10	30.70	37.00	28.70	36.30	30.90	56.00	46.00
4.898	0.2	0.2	36.10	31.30	39.70	34.90	36.30	31.50	39.90	35.10	56.00	46.00
4.900	0.2	0.2	39.80	30.20	38.30	33.30	40.00	30.40	38.50	33.50	56.00	46.00
7.498	0.3	0.3	46.90	42.60	*	*	47.20	42.90	*	*	60.00	50.00
7.500	0.4	0.3	51.70	42.80	50.60	46.00	52.10	43.20	50.90	46.30	60.00	50.00
24.000	1.0	1.0	39.50	34.50	36.50	34.10	40.50	35.50	37.50	35.10	60.00	50.00
30.000	1.4	1.8	*	*	*	*	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.

2. Mode : 802.11g mode.

3. The EUT can be operated in transmitting, stand-by and receiving mode.

After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

4. For Adapter (3).

2.7 Photos of Conduction Test



3. RADIATED EMISSION TEST


3.1 Test Equipments

The following test equipments are utilized in making the measurements contained in this report.

Manufacturer or Type	Model No	Serial No	Date of Calibration	Calibration Period	Remark
CHASE BI-LOG ANTENNA	CBL6112B	2421	MAY 07, 2003	1 Year	FINAL
OPEN SITE	-----	No.2	JAN. 10, 2003	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9525	4	JUL. 13, 2003	1 Year	FINAL
Horn Antenna	AH-118	10089	FEB. 25, 2003	1 Year	FINAL
HP Pre-amplifier	8449B	3008A01471	OCT. 11, 2003	1 Year	FINAL
HP High pass filter	84300/80038	011	cal. on use	1 Year	FINAL
Horn Antenna	AH-840	03077	FEB. 25, 2003	1 Year	FINAL


3.2 Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

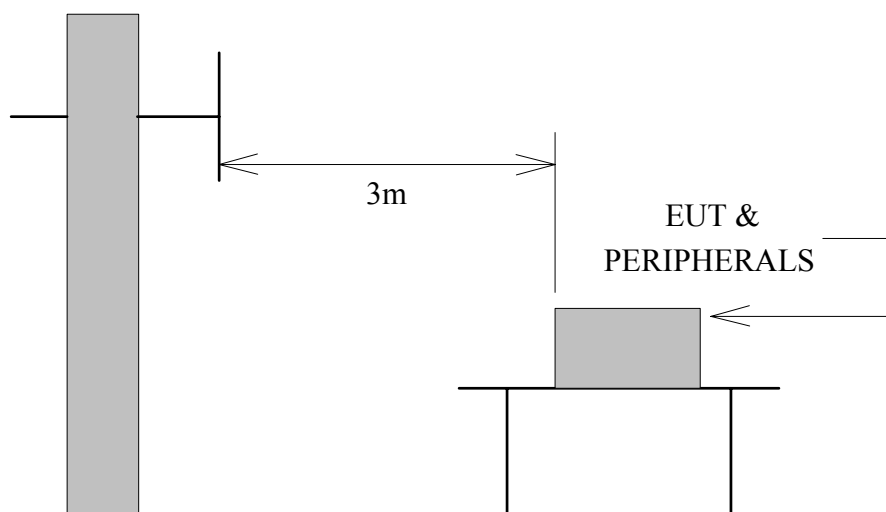

Antenna Elevation Variable

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

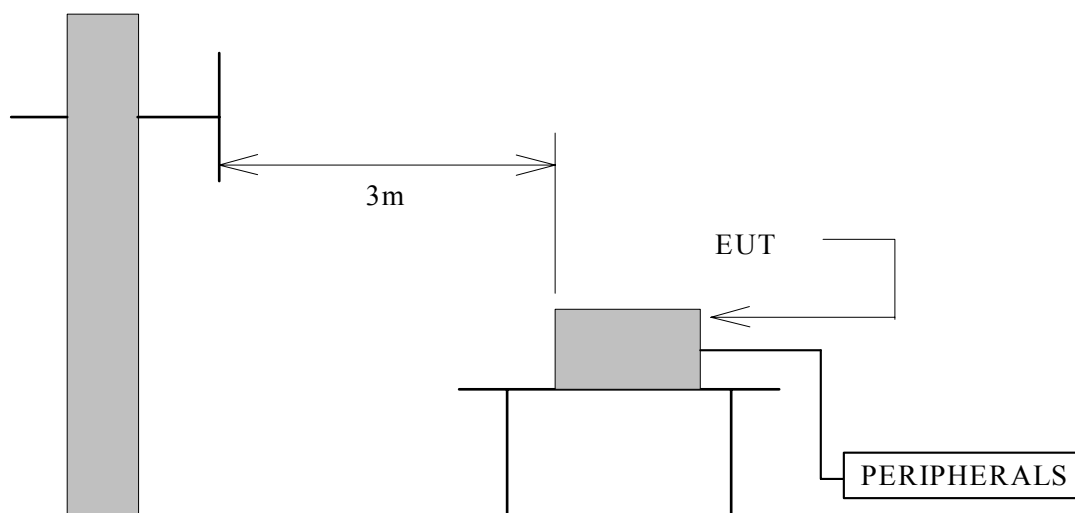

Antenna Elevation Variable

3.3 Radiation Limit

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/M)	Radiated (μV/M)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

3.4 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

3.5 Uncertainty of Radiated Emission

The uncertainty of radiated emission is ± 2.72 dB.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 21 of 66

3.6 Radiated RF Noise Measurement

Test Requirement: 15.109, 15.209

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature : 34.9 °C

Humidity : 40 % RH

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Meter Reading at 3m(dB μ V/M)		Limits at 3m (dB μ V/M)	Emission Level at 3m(dB μ V/M)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	21.39	0.90	*	*	40.00	*	*
194.90	10.34	2.75	15.40	12.70	43.50	28.49	25.79
299.98	13.50	3.60	20.80	17.80	46.00	37.90	34.90
399.97	17.24	4.20	11.50	12.60	46.00	32.94	34.04
458.18	17.87	4.61	8.70	10.50	46.00	31.18	32.98
500.00	18.32	4.90	10.00	15.80	46.00	33.22	39.02
733.28	19.80	6.07	8.90	9.30	46.00	34.76	35.16
799.94	20.53	6.40	6.80	7.70	46.00	33.73	34.63
1000.00	21.58	7.00	*	*	54.00	*	*

REMARKS : 1. * Undetectable

2. Emission level (dB μ V/M) = Antenna Factor (dB/m) + Cable loss (dB)
+ Meter Reading (dB μ V).

3. According to technical experiences, all spurious emission at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.

4. Mode : Wireless 802.11b Transmitting test.

5. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 22 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature : 34.9 °C

Humidity : 40 % RH

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Meter Reading at 3m(dBμV/M)		Limits at 3m (dBμV/M)	Emission Level at 3m(dBμV/M)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	21.39	0.90	*	*	40.00	*	*
124.99	13.33	2.10	18.90	14.10	43.50	34.33	29.53
200.00	10.39	2.80	18.40	21.70	43.50	31.59	34.89
250.00	13.09	3.20	21.30	17.10	46.00	37.59	33.39
274.99	13.29	3.40	14.30	8.10	46.00	30.99	24.79
300.00	13.50	3.60	24.40	20.60	46.00	41.50	37.70
375.01	16.31	4.05	23.70	16.50	46.00	44.06	36.86
400.01	17.24	4.20	21.80	15.30	46.00	43.24	36.74
500.01	18.32	4.90	21.00	21.60	46.00	44.22	44.82
700.01	19.43	5.90	16.30	17.90	46.00	41.63	43.23
900.02	21.04	6.60	10.00	12.40	46.00	37.64	40.04
1000.00	21.58	7.00	*	*	54.00	*	*

REMARKS : 1. * Undetectable

2. Emission level (dBμV/M) = Antenna Factor (dB/m) + Cable loss (dB)
+ Meter Reading (dBμV).

3. According to technical experiences, all spurious emission at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.

4. Mode : Wireless 802.11g Transmitting test.

5. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

6. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 23 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH1 RX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4824.05	42.10	34.44	2.82	35.16	9.50	0.00	34.70	74	-39.30	P	1.0
4824.05	29.93	34.44	2.82	35.16	9.50	0.00	22.53	54	-31.47	A	1.0
7236.05	41.24	39.81	4.79	35.65	9.50	0.00	40.69	74	-33.31	P	1.0
7236.05	29.64	39.81	4.79	35.65	9.50	0.00	29.09	54	-24.91	A	1.0
9647.88	41.89	38.54	5.90	36.44	9.50	0.00	40.39	74	-33.61	P	1.0
9647.88	29.14	38.54	5.90	36.44	9.50	0.00	27.64	54	-26.36	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11b mode at 11Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 24 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH1 RX				Measurement Distance at 1m					Vertical polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4824.16	41.38	34.44	2.82	35.16	9.50	0.00	33.98	74	-40.02	P	1.0
4824.16	29.74	34.44	2.82	35.16	9.50	0.00	22.34	54	-31.66	A	1.0
7237.55	42.39	39.80	4.80	35.65	9.50	0.00	41.84	74	-32.16	P	1.0
7237.55	29.54	39.80	4.80	35.65	9.50	0.00	28.99	54	-25.01	A	1.0
9648.83	42.17	38.54	5.90	36.44	9.50	0.00	40.67	74	-33.33	P	1.0
9648.83	31.06	38.54	5.90	36.44	9.50	0.00	29.56	54	-24.44	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11b mode at 11Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 25 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH6 RX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4873.83	41.78	34.77	2.73	35.20	9.50	0.00	34.58	74	-39.42	P	1.0
4873.83	29.92	34.77	2.73	35.20	9.50	0.00	22.72	54	-31.28	A	1.0
7312.22	42.35	39.78	4.82	35.64	9.50	0.00	41.81	74	-32.19	P	1.0
7312.22	30.14	39.78	4.82	35.64	9.50	0.00	29.60	54	-24.40	A	1.0
9747.94	42.35	38.53	5.90	36.60	9.50	0.00	40.68	74	-33.32	P	1.0
9747.94	30.89	38.53	5.90	36.60	9.50	0.00	29.22	54	-24.78	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11b mode at 11Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 26 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH6 RX				Measurement Distance at 1m					Vertical polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4873.16	42.56	34.76	2.73	35.20	9.50	0.00	35.35	74	-38.65	P	1.0
4873.16	31.02	34.76	2.73	35.20	9.50	0.00	23.81	54	-30.19	A	1.0
7311.55	41.23	39.78	4.82	35.64	9.50	0.00	40.69	74	-33.31	P	1.0
7311.55	28.97	39.78	4.82	35.64	9.50	0.00	28.43	54	-25.57	A	1.0
9747.61	41.52	38.53	5.90	36.60	9.50	0.00	39.85	74	-34.15	P	1.0
9747.61	30.42	38.53	5.90	36.60	9.50	0.00	28.75	54	-25.25	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11b mode at 11Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 27 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH11 RX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4923.27	41.87	35.09	2.64	35.24	9.50	0.00	34.86	74	-39.14	P	1.0
4923.27	29.38	35.09	2.64	35.24	9.50	0.00	22.37	54	-31.63	A	1.0
7387.99	41.82	39.74	4.86	35.62	9.50	0.00	41.30	74	-32.70	P	1.0
7387.99	30.18	39.74	4.86	35.62	9.50	0.00	29.66	54	-24.34	A	1.0
9848.16	41.54	38.52	5.90	36.76	9.50	0.00	39.70	74	-34.30	P	1.0
9848.16	29.63	38.52	5.90	36.76	9.50	0.00	27.79	54	-26.21	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11b mode at 11Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 28 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH11 RX				Measurement Distance at 1m					Vertical polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4923.11	41.46	35.09	2.64	35.24	9.50	0.00	34.45	74	-39.55	P	1.0
4923.11	29.84	35.09	2.64	35.24	9.50	0.00	22.83	54	-31.17	A	1.0
7387.05	41.12	39.75	4.85	35.62	9.50	0.00	40.60	74	-33.40	P	1.0
7387.05	29.34	39.75	4.85	35.62	9.50	0.00	28.82	54	-25.18	A	1.0
9847.83	42.05	38.52	5.90	36.76	9.50	0.00	40.21	74	-33.79	P	1.0
9847.83	30.14	38.52	5.90	36.76	9.50	0.00	28.30	54	-25.70	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11b mode at 11Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 29 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH1 RX				Measurement Distance at 1m					Horizontal polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4824.00	40.42	34.44	2.82	35.16	9.50	0.00	33.02	74	-40.98	P	1.0
4824.00	28.46	34.44	2.82	35.16	9.50	0.00	21.06	54	-32.94	A	1.0
7236.05	40.14	39.81	4.79	35.65	9.50	0.00	39.59	74	-34.41	P	1.0
7236.05	28.61	39.81	4.79	35.65	9.50	0.00	28.06	54	-25.94	A	1.0
9647.88	41.57	38.54	5.90	36.44	9.50	0.00	40.07	74	-33.93	P	1.0
9647.88	28.92	38.54	5.90	36.44	9.50	0.00	27.42	54	-26.58	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11g mode at 6Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 30 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH1 RX				Measurement Distance at 1m					Vertical polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4824.16	40.81	34.44	2.82	35.16	9.50	0.00	33.41	74	-40.59	P	1.0
4824.16	28.61	34.44	2.82	35.16	9.50	0.00	21.21	54	-32.79	A	1.0
7237.55	40.32	39.80	4.80	35.65	9.50	0.00	39.77	74	-34.23	P	1.0
7237.55	28.46	39.80	4.80	35.65	9.50	0.00	27.91	54	-26.09	A	1.0
9648.83	42.34	38.54	5.90	36.44	9.50	0.00	40.84	74	-33.16	P	1.0
9648.83	28.89	38.54	5.90	36.44	9.50	0.00	27.39	54	-26.61	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11g mode at 6Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 31 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH6 RX				Measurement Distance at 1m					Horizontal polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4873.83	41.54	34.77	2.73	35.20	9.50	0.00	34.34	74	-39.66	P	1.0
4873.83	29.68	34.77	2.73	35.20	9.50	0.00	22.48	54	-31.52	A	1.0
7312.22	41.44	39.78	4.82	35.64	9.50	0.00	40.90	74	-33.10	P	1.0
7312.22	29.22	39.78	4.82	35.64	9.50	0.00	28.68	54	-25.32	A	1.0
9747.94	41.57	38.53	5.90	36.60	9.50	0.00	39.90	74	-34.10	P	1.0
9747.94	29.12	38.53	5.90	36.60	9.50	0.00	27.45	54	-26.55	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11g mode at 6Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 32 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH6 RX				Measurement Distance at 1m					Vertical polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4873.16	41.73	34.76	2.73	35.20	9.50	0.00	34.52	74	-39.48	P	1.0
4873.16	29.75	34.76	2.73	35.20	9.50	0.00	22.54	54	-31.46	A	1.0
7311.55	40.83	39.78	4.82	35.64	9.50	0.00	40.29	74	-33.71	P	1.0
7311.55	28.46	39.78	4.82	35.64	9.50	0.00	27.92	54	-26.08	A	1.0
9747.61	40.47	38.53	5.90	36.60	9.50	0.00	38.80	74	-35.20	P	1.0
9747.61	29.14	38.53	5.90	36.60	9.50	0.00	27.47	54	-26.53	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11g mode at 6Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 33 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH11 RX				Measurement Distance at 1m					Horizontal polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4923.27	42.54	35.09	2.64	35.24	9.50	0.00	35.53	74	-38.47	P	1.0
4923.27	29.88	35.09	2.64	35.24	9.50	0.00	22.87	54	-31.13	A	1.0
7387.99	41.75	39.74	4.86	35.62	9.50	0.00	41.23	74	-32.77	P	1.0
7387.99	29.09	39.74	4.86	35.62	9.50	0.00	28.57	54	-25.43	A	1.0
9848.16	41.74	38.52	5.90	36.76	9.50	0.00	39.90	74	-34.10	P	1.0
9848.16	29.47	38.52	5.90	36.76	9.50	0.00	27.63	54	-26.37	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11g mode at 6Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 34 of 66

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH11 RX				Measurement Distance at 1m					Vertical polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4923.11	41.56	35.09	2.64	35.24	9.50	0.00	34.55	74	-39.45	P	1.0
4923.11	29.86	35.09	2.64	35.24	9.50	0.00	22.85	54	-31.15	A	1.0
7387.05	40.06	39.75	4.85	35.62	9.50	0.00	39.54	74	-34.46	P	1.0
7387.05	28.15	39.75	4.85	35.62	9.50	0.00	27.63	54	-26.37	A	1.0
9847.83	41.23	38.52	5.90	36.76	9.50	0.00	39.39	74	-34.61	P	1.0
9847.83	29.47	38.52	5.90	36.76	9.50	0.00	27.63	54	-26.37	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11g mode at 6Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 35 of 66

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH1 TX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
* 2389.90	32.60	31.81	3.84	0.00	9.50	0.00	58.75	74	-15.25	P	1.00
* 2389.90	20.26	31.81	3.84	0.00	9.50	0.00	46.41	54	-7.59	A	1.00
2410.09	75.87	31.79	3.68	0.00	9.50	0.00	101.84	Fundamental Frequency		P	1.00
2410.09	69.46	31.79	3.68	0.00	9.50	0.00	95.43			A	1.00
* 4824.02	42.82	34.44	2.82	35.16	9.50	2.00	37.42	74	-36.58	P	1.00
* 4824.02	32.20	34.44	2.82	35.16	9.50	2.00	26.80	54	-27.20	A	1.00
7234.89	49.21	39.81	4.79	35.65	9.50	2.00	50.66	74	-23.34	P	1.00
7234.89	38.78	39.81	4.79	35.65	9.50	2.00	40.23	54	-13.77	A	1.00
9647.92	50.71	38.54	5.90	36.44	9.50	0.61	49.82	74	-24.18	P	1.00
9647.92	42.56	38.54	5.90	36.44	9.50	0.61	41.67	54	-12.33	A	1.00
* 12050.45	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14460.54	-----	-----	-----	-----	0.00	0.65	-----	-----	-----	-----	1.00
16870.63	-----	-----	-----	-----	0.00	0.42	-----	-----	-----	-----	1.00
* 19280.72	-----	-----	-----	-----	0.00	1.94	-----	-----	-----	-----	1.00
21690.81	-----	-----	-----	-----	0.00	0.82	-----	-----	-----	-----	1.00
24100.90	-----	-----	-----	-----	0.00	2.94	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 36 of 66

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH1 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
* 2389.90	39.27	31.81	3.84	0.00	9.50	0.00	65.42	74	-8.58	P	1.00
* 2389.90	26.45	31.81	3.84	0.00	9.50	0.00	52.60	54	-1.40	A	1.00
2413.10	83.59	31.79	3.66	0.00	9.50	0.00	109.54	Fundamental Frequency		P	1.00
2413.10	76.69	31.79	3.66	0.00	9.50	0.00	102.64			A	1.00
* 4826.85	44.20	34.46	2.81	35.16	9.50	1.99	38.80	74	-35.20	P	1.00
* 4826.85	33.81	34.46	2.81	35.16	9.50	1.99	28.41	54	-25.59	A	1.00
7232.39	54.13	39.81	4.79	35.65	9.50	2.00	55.58	74	-18.42	P	1.00
7232.39	44.46	39.81	4.79	35.65	9.50	2.00	45.91	54	-8.09	A	1.00
9647.94	54.10	38.54	5.90	36.44	9.50	0.61	53.21	74	-20.79	P	1.00
9647.94	48.40	38.54	5.90	36.44	9.50	0.61	47.51	54	-6.49	A	1.00
* 12065.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14478.60	-----	-----	-----	-----	0.00	0.67	-----	-----	-----	-----	1.00
16891.70	-----	-----	-----	-----	0.00	0.44	-----	-----	-----	-----	1.00
* 19304.80	-----	-----	-----	-----	0.00	1.97	-----	-----	-----	-----	1.00
21717.90	-----	-----	-----	-----	0.00	0.81	-----	-----	-----	-----	1.00
24131.00	-----	-----	-----	-----	0.00	2.89	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
11. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 37 of 66

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH6 TX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2436.89	73.89	31.76	3.48	0.00	9.50	0.00	99.63	Fundamental Frequency		P	1.00
2436.89	67.58	31.76	3.48	0.00	9.50	0.00	93.32			A	1.00
* 4874.68	41.52	34.77	2.73	35.20	9.50	1.80	36.12	74	-37.88	P	1.00
* 4874.68	29.36	34.77	2.73	35.20	9.50	1.80	23.96	54	-30.04	A	1.00
* 7311.77	48.16	39.78	4.82	35.64	9.50	2.00	49.62	74	-24.38	P	1.00
* 7311.77	37.68	39.78	4.82	35.64	9.50	2.00	39.14	54	-14.86	A	1.00
9747.61	49.36	38.53	5.90	36.60	9.50	0.55	48.24	74	-25.76	P	1.00
9747.61	42.17	38.53	5.90	36.60	9.50	0.55	41.05	54	-12.95	A	1.00
* 12184.45	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14621.34	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
17058.23	-----	-----	-----	-----	0.00	0.52	-----	-----	-----	-----	1.00
* 19495.12	-----	-----	-----	-----	0.00	2.19	-----	-----	-----	-----	1.00
21932.01	-----	-----	-----	-----	0.00	0.73	-----	-----	-----	-----	1.00
24368.90	-----	-----	-----	-----	0.00	2.51	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 38 of 66

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH6 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2433.69	82.44	31.77	3.50	0.00	9.50	0.00	108.21	Fundamental Frequency		P	1.00
2433.69	75.79	31.77	3.50	0.00	9.50	0.00	101.56			A	1.00
* 4874.70	43.60	34.77	2.73	35.20	9.50	1.80	38.20	74	-35.80	P	1.00
* 4874.70	32.80	34.77	2.73	35.20	9.50	1.80	27.40	54	-26.60	A	1.00
* 73140.80	51.07	0.00	0.00	0.00	0.00	0.00	51.07	74	-22.93	P	1.00
* 73140.80	39.82	0.00	0.00	0.00	0.00	0.00	39.82	54	-14.18	A	1.00
9747.97	53.35	38.53	5.90	36.60	9.50	0.55	52.23	74	-21.77	P	1.00
9747.97	46.92	38.53	5.90	36.60	9.50	0.55	45.80	54	-8.20	A	1.00
* 12168.45	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14602.14	-----	-----	-----	-----	0.00	0.62	-----	-----	-----	-----	1.00
17035.83	-----	-----	-----	-----	0.00	0.51	-----	-----	-----	-----	1.00
* 19469.52	-----	-----	-----	-----	0.00	2.16	-----	-----	-----	-----	1.00
21903.21	-----	-----	-----	-----	0.00	0.74	-----	-----	-----	-----	1.00
24336.90	-----	-----	-----	-----	0.00	2.56	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 39 of 66

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH11 TX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2461.77	70.31	31.74	3.29	0.00	9.50	0.00	95.84	Fundamental Frequency		P	1.00
2461.77	63.48	31.74	3.29	0.00	9.50	0.00	89.01			A	1.00
* 2483.90	34.08	31.72	3.12	0.00	9.50	0.00	59.42	74	-14.58	P	1.00
* 2483.90	20.52	31.72	3.12	0.00	9.50	0.00	45.86	54	-8.14	A	1.00
* 4923.51	43.01	35.10	2.64	35.24	9.50	1.61	37.61	74	-36.39	P	1.00
* 4923.51	33.27	35.10	2.64	35.24	9.50	1.61	27.87	54	-26.13	A	1.00
* 7386.33	46.37	39.75	4.85	35.62	9.50	2.00	47.85	74	-26.15	P	1.00
* 7386.33	36.79	39.75	4.85	35.62	9.50	2.00	38.27	54	-15.73	A	1.00
9847.68	48.35	38.52	5.90	36.76	9.50	0.49	47.00	74	-27.00	P	1.00
9847.68	41.87	38.52	5.90	36.76	9.50	0.49	40.52	54	-13.48	A	1.00
* 12308.85	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14770.62	-----	-----	-----	-----	0.00	0.48	-----	-----	-----	-----	1.00
17232.39	-----	-----	-----	-----	0.00	0.59	-----	-----	-----	-----	1.00
* 19694.16	-----	-----	-----	-----	0.00	2.39	-----	-----	-----	-----	1.00
* 22155.93	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24617.70	-----	-----	-----	-----	0.00	2.14	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 40 of 66

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH11 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2463.10	80.79	31.74	3.28	0.00	9.50	0.00	106.31	Fundamental Frequency		P	1.00
2463.10	74.25	31.74	3.28	0.00	9.50	0.00	99.77			A	1.00
* 2483.90	39.13	31.72	3.12	0.00	9.50	0.00	64.47	74	-9.53	P	1.00
* 2483.90	27.01	31.72	3.12	0.00	9.50	0.00	52.35	54	-1.65	A	1.00
* 4923.09	44.59	35.09	2.64	35.24	9.50	1.61	39.19	74	-34.81	P	1.00
* 4923.09	33.79	35.09	2.64	35.24	9.50	1.61	28.39	54	-25.61	A	1.00
* 7382.29	48.96	39.75	4.85	35.62	9.50	2.00	50.44	74	-23.56	P	1.00
* 7382.29	38.50	39.75	4.85	35.62	9.50	2.00	39.98	54	-14.02	A	1.00
9847.97	51.84	38.52	5.90	36.76	9.50	0.49	50.49	74	-23.51	P	1.00
9847.97	43.85	38.52	5.90	36.76	9.50	0.49	42.50	54	-11.50	A	1.00
* 12315.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14778.60	-----	-----	-----	-----	0.00	0.48	-----	-----	-----	-----	1.00
17241.70	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
* 19704.80	-----	-----	-----	-----	0.00	2.40	-----	-----	-----	-----	1.00
* 22167.90	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24631.00	-----	-----	-----	-----	0.00	2.12	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
11. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 41 of 66

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH1 TX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
* 2389.95	28.93	31.81	3.84	0.00	9.50	0.00	55.08	74	-18.92	P	1.00
* 2389.95	18.34	31.81	3.84	0.00	9.50	0.00	44.49	54	-9.51	A	1.00
2415.50	89.62	31.78	3.64	0.00	9.50	0.00	115.55	Fundamental Frequency		P	1.00
2415.50	83.59	31.78	3.64	0.00	9.50	0.00	109.52			A	1.00
* 4823.86	45.23	34.44	2.82	35.16	9.50	2.00	39.83	74	-34.17	P	1.00
* 4823.86	32.96	34.44	2.82	35.16	9.50	2.00	27.56	54	-26.44	A	1.00
7231.28	51.04	39.81	4.79	35.65	9.50	2.00	52.49	74	-21.51	P	1.00
7231.28	40.14	39.81	4.79	35.65	9.50	2.00	41.59	54	-12.41	A	1.00
9639.23	61.85	38.54	5.90	36.42	9.50	0.62	60.98	74	-13.02	P	1.00
9639.23	47.22	38.54	5.90	36.42	9.50	0.62	46.35	54	-7.65	A	1.00
* 12077.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14493.00	-----	-----	-----	-----	0.00	0.69	-----	-----	-----	-----	1.00
16908.50	-----	-----	-----	-----	0.00	0.45	-----	-----	-----	-----	1.00
* 19324.00	-----	-----	-----	-----	0.00	1.99	-----	-----	-----	-----	1.00
21739.50	-----	-----	-----	-----	0.00	0.80	-----	-----	-----	-----	1.00
24155.00	-----	-----	-----	-----	0.00	2.85	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 42 of 66

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH1 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
* 2389.95	37.03	31.81	3.84	0.00	9.50	0.00	63.18	74	-10.82	P	1.00
* 2389.95	26.32	31.81	3.84	0.00	9.50	0.00	52.47	54	-1.53	A	1.00
2415.40	99.73	31.78	3.64	0.00	9.50	0.00	125.66	Fundamental Frequency		P	1.00
2415.40	93.87	31.78	3.64	0.00	9.50	0.00	119.80			A	1.00
* 4823.79	46.57	34.44	2.82	35.16	9.50	2.00	41.17	74	-32.83	P	1.00
* 4823.79	35.04	34.44	2.82	35.16	9.50	2.00	29.64	54	-24.36	A	1.00
7235.72	57.84	39.81	4.79	35.65	9.50	2.00	59.29	74	-14.71	P	1.00
7235.72	46.05	39.81	4.79	35.65	9.50	2.00	47.50	54	-6.50	A	1.00
9647.85	64.34	38.54	5.90	36.44	9.50	0.61	63.45	74	-10.55	P	1.00
9647.85	50.25	38.54	5.90	36.44	9.50	0.61	49.36	54	-4.64	A	1.00
* 12077.00	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14492.40	-----	-----	-----	-----	0.00	0.69	-----	-----	-----	-----	1.00
16907.80	-----	-----	-----	-----	0.00	0.44	-----	-----	-----	-----	1.00
* 19323.20	-----	-----	-----	-----	0.00	1.99	-----	-----	-----	-----	1.00
21738.60	-----	-----	-----	-----	0.00	0.80	-----	-----	-----	-----	1.00
24154.00	-----	-----	-----	-----	0.00	2.85	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.
10. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
11. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 43 of 66

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH6 TX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2437.70	88.82	31.76	3.47	0.00	9.50	0.00	114.56	Fundamental Frequency		P	1.00
2437.70	82.55	31.76	3.47	0.00	9.50	0.00	108.29			A	1.00
* 4874.68	43.42	34.77	2.73	35.20	9.50	1.80	38.02	74	-35.98	P	74
* 4874.68	32.87	34.77	2.73	35.20	9.50	1.80	27.47	54	-26.53	A	54
* 7311.77	51.60	39.78	4.82	35.64	9.50	2.00	53.06	74	-20.94	P	74
* 7311.77	39.45	39.78	4.82	35.64	9.50	2.00	40.91	54	-13.09	A	54
9747.61	59.64	38.53	5.90	36.60	9.50	0.55	58.52	74	-15.48	P	74
9747.61	44.05	38.53	5.90	36.60	9.50	0.55	42.93	54	-11.07	A	54
* 12188.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	-----
14626.20	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	-----
17063.90	-----	-----	-----	-----	0.00	0.53	-----	-----	-----	-----	-----
* 19501.60	-----	-----	-----	-----	0.00	2.20	-----	-----	-----	-----	-----
21939.30	-----	-----	-----	-----	0.00	0.72	-----	-----	-----	-----	-----
24377.00	-----	-----	-----	-----	0.00	2.50	-----	-----	-----	-----	-----

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 44 of 66

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH6 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2438.10	98.08	31.76	3.47	0.00	9.50	0.00	123.81	Fundamental Frequency		P	1.00
2438.10	90.12	31.76	3.47	0.00	9.50	0.00	115.85			A	1.00
* 4873.74	43.13	34.77	2.73	35.20	9.50	1.81	37.73	74	-36.27	P	1.00
* 4873.74	36.52	34.77	2.73	35.20	9.50	1.81	31.12	54	-22.88	A	1.00
* 7310.97	59.11	39.78	4.82	35.64	9.50	2.00	60.57	74	-13.43	P	1.00
* 7310.97	47.06	39.78	4.82	35.64	9.50	2.00	48.52	54	-5.48	A	1.00
9747.69	64.06	38.53	5.90	36.60	9.50	0.55	62.94	74	-11.06	P	1.00
9747.69	49.67	38.53	5.90	36.60	9.50	0.55	48.55	54	-5.45	A	1.00
* 12190.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14628.60	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
17066.70	-----	-----	-----	-----	0.00	0.53	-----	-----	-----	-----	1.00
* 19504.80	-----	-----	-----	-----	0.00	2.20	-----	-----	-----	-----	1.00
21942.90	-----	-----	-----	-----	0.00	0.72	-----	-----	-----	-----	1.00
24381.00	-----	-----	-----	-----	0.00	2.49	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 45 of 66

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%

CH11 TX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2460.69	74.32	31.74	3.30	0.00	9.50	0.00	99.86	Fundamental Frequency		P	1.00
2460.69	65.55	31.74	3.30	0.00	9.50	0.00	91.09			A	1.00
* 2484.05	25.19	31.72	3.12	0.00	9.50	0.00	50.53	74	-23.47	P	1.00
* 2484.05	15.41	31.72	3.12	0.00	9.50	0.00	40.75	54	-13.25	A	1.00
* 4925.15	41.64	35.11	2.63	35.24	9.50	1.60	36.24	74	-37.76	P	1.00
* 4925.15	32.04	35.11	2.63	35.24	9.50	1.60	26.64	54	-27.36	A	1.00
* 7386.33	52.51	39.75	4.85	35.62	9.50	2.00	53.99	74	-20.01	P	1.00
* 7386.33	39.06	39.75	4.85	35.62	9.50	2.00	40.54	54	-13.46	A	1.00
9845.64	61.25	38.52	5.90	36.75	9.50	0.49	59.91	74	-14.09	P	1.00
9845.64	46.56	38.52	5.90	36.75	9.50	0.49	45.22	54	-8.78	A	1.00
* 12303.45	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14764.14	-----	-----	-----	-----	0.00	0.49	-----	-----	-----	-----	1.00
17224.83	-----	-----	-----	-----	0.00	0.59	-----	-----	-----	-----	1.00
* 19685.52	-----	-----	-----	-----	0.00	2.39	-----	-----	-----	-----	1.00
* 22146.21	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24606.90	-----	-----	-----	-----	0.00	2.15	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 46 of 66

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2003/11/3
Product Name	Wireless-G Broadband Router	Test By:	K. P. Pang
Model Name	WRT54GV.2	TEMP&Humidity :	34.9°C , 40%


CH11 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2460.59	85.47	31.74	3.30	0.00	9.50	0.00	111.01	Fundamental Frequency		P	1.00
2460.59	74.26	31.74	3.30	0.00	9.50	0.00	99.80			A	1.00
* 2484.05	35.00	31.72	3.12	0.00	9.50	0.00	60.34	74	-13.66	P	1.00
* 2484.05	24.96	31.72	3.12	0.00	9.50	0.00	50.30	54	-3.70	A	1.00
* 4923.78	48.47	35.10	2.64	35.24	9.50	1.60	43.07	74	-30.93	P	1.00
* 4923.78	35.47	35.10	2.64	35.24	9.50	1.60	30.07	54	-23.93	A	1.00
* 7379.53	57.69	39.75	4.85	35.62	9.50	2.00	59.17	74	-14.83	P	1.00
* 7379.53	45.33	39.75	4.85	35.62	9.50	2.00	46.81	54	-7.19	A	1.00
9845.69	63.48	38.52	5.90	36.75	9.50	0.49	62.13	74	-11.87	P	1.00
9845.69	48.26	38.52	5.90	36.75	9.50	0.49	46.91	54	-7.09	A	1.00
* 12302.95	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14763.54	-----	-----	-----	-----	0.00	0.49	-----	-----	-----	-----	1.00
17224.13	-----	-----	-----	-----	0.00	0.59	-----	-----	-----	-----	1.00
* 19684.72	-----	-----	-----	-----	0.00	2.38	-----	-----	-----	-----	1.00
* 22145.31	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24605.90	-----	-----	-----	-----	0.00	2.15	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark "*" means that Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11g mode at 6Mbps.
- The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

3.7 Photos of Open Site

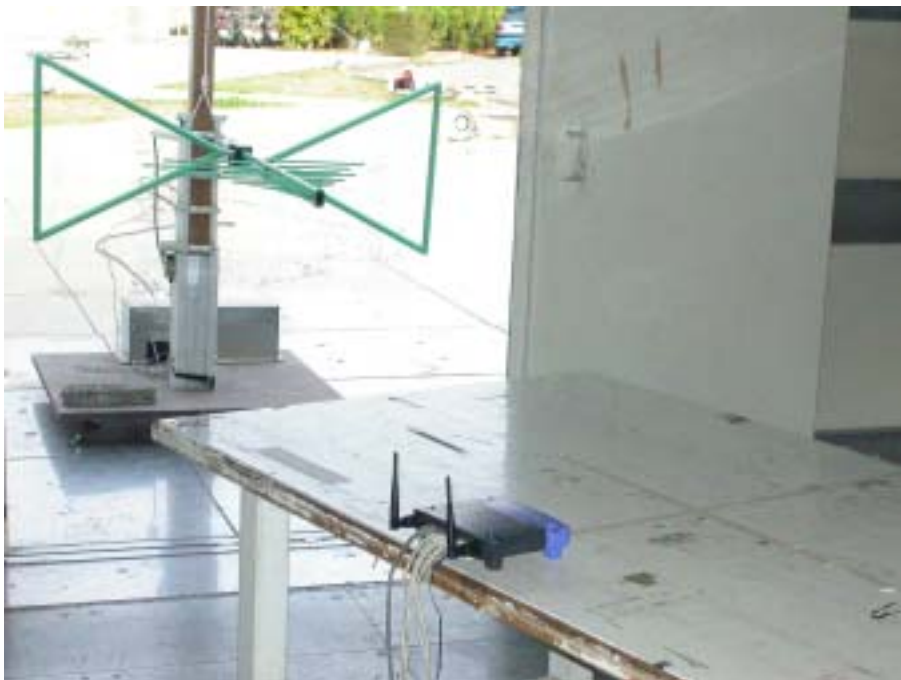



4. 6dB BANDWIDTH MEASUREMENT


4.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	JUN. 17, 2003
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 Test Setup



4.3 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is $>500\text{KHz}$

4.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 200\text{KHz}$.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 50 of 66

4.6 Test Results

Input Power (System)	12VDC(Form Adapter)	Environmental Conditions	33.4°C, 43%RH,
Tested By	K. P. Pang		

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	11.18	0.5	PASS
6	2437	11.18	0.5	PASS
11	2462	11.18	0.5	PASS

Note: For 802.11b Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.35	0.5	PASS
6	2437	16.35	0.5	PASS
11	2462	16.43	0.5	PASS

Note: For 802.11g Mode



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF


Page 51 of 66

4.7 Photo of 6db Bandwidth Measurement

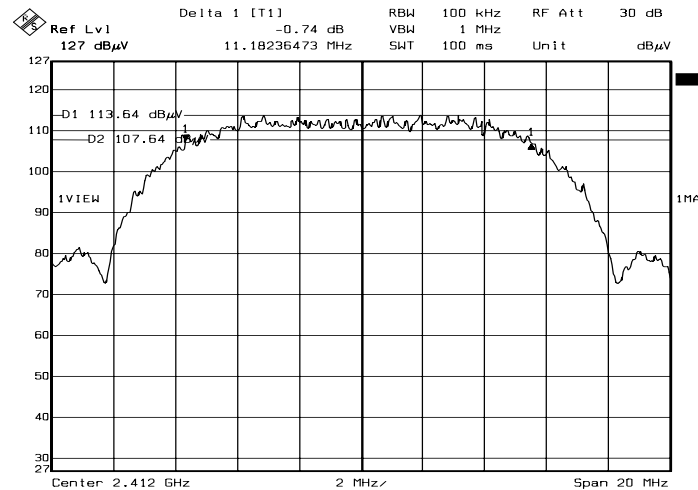


Date: 13.NOV.2003 2:16:44

Channel 1

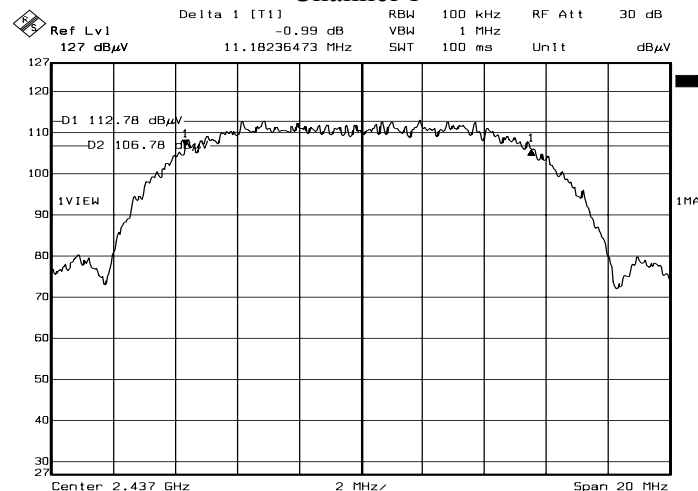

Date: 13.NOV.2003 2:21:14

Channel 6

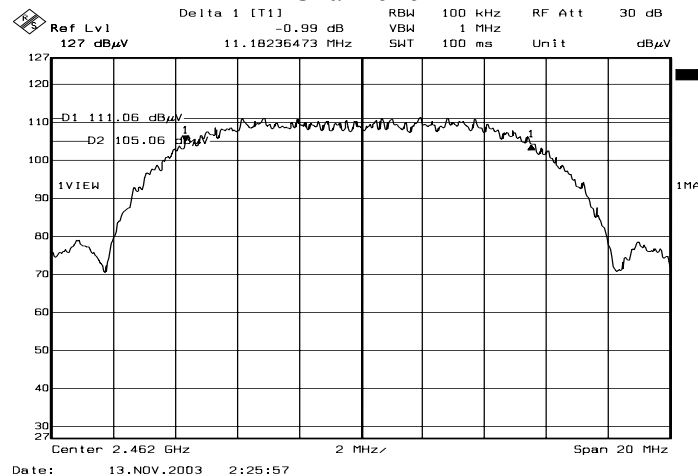

Date: 13.NOV.2003 2:25:57

Channel 11

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF


Page 52 of 66

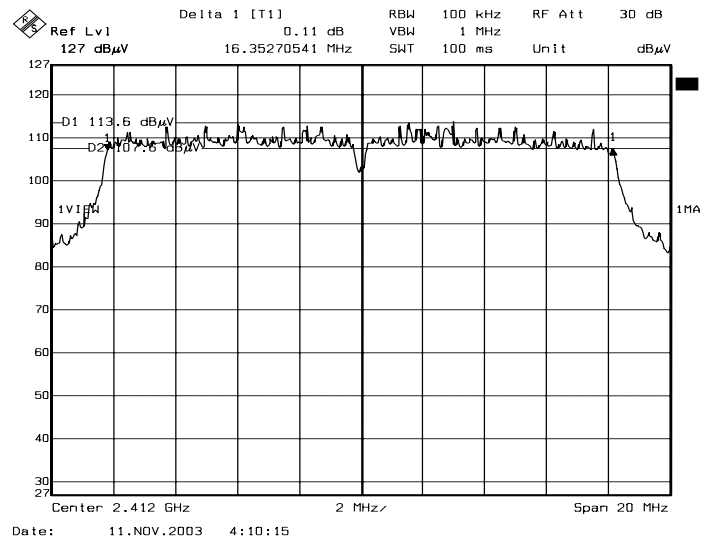

Channel 1

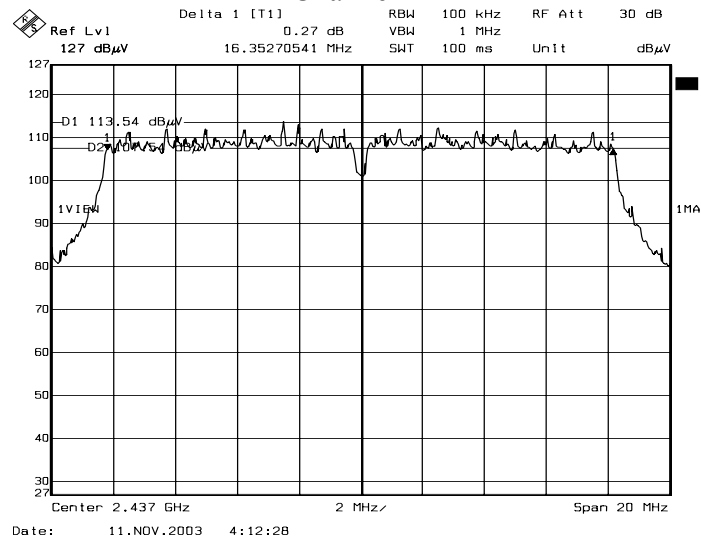

Channel 6

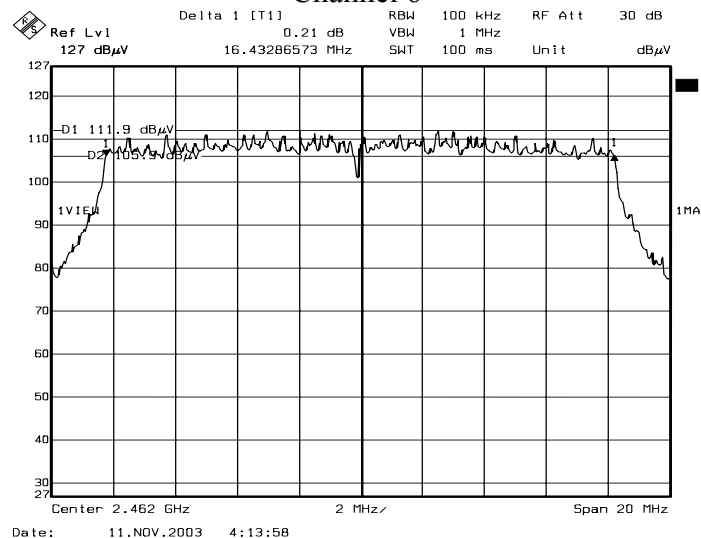

Channel 11

Note: For 802.11g Mode



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 53 of 66

5. MAXIMUM PEAK OUTPUT POWER


5.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	JUN. 17, 2003
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 Test Setup



5.3 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 54 of 66

5.4 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency.

5.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

5.6 Test Results

Input Power (System)	12VDC(Form Adapter)	Environmental Conditions	33.4°C, 43%RH,
Tested By	K. P. Pang		

Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	16.02	30	PASS
6	2437	17.16	30	PASS
11	2462	16.15	30	PASS

Note : 1. For 802.11b Mode
2. At final test to get the worst-case emission at 11Mbps.
3. The result basic equation calculation as follow :
Peak Power Output = Peak Power Reading + Cable loss + Attenuator

Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	15.53	30	PASS
6	2437	15.51	30	PASS
11	2462	15.59	30	PASS

Note : 1. For 802.11g Mode
2. At final test to get the worst-case emission at 6Mbps.
3. The result basic equation calculation as follow :
Peak Power Output = Peak Power Reading + Cable loss + Attenuator

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 55 of 66

6. POWER SPECTRAL DENSITY MEASUREMENT


6.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	JUN. 17, 2003
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 Test Setup



6.3 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 56 of 66

6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3KHz RBW and 30KHz VBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

6.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

6.6 Test Results

Input Power (System)	12VDC(Form Adapter)	Environmental Conditions	33.4°C , 43%RH,
Tested By	K. P. Pang		

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
1	2412	-8.61	8	PASS
6	2437	-9.35	8	PASS
11	2462	-10.16	8	PASS

Note: For 11Mbps (802.11b mode) at final test to get the worst-case emission at 11Mbps.

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
1	2412	-8.38	8	PASS
6	2437	-7.63	8	PASS
11	2462	-9.29	8	PASS

Note: For 54Mbps (802.11g mode) at final test to get the worst-case emission at 6Mbps.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2


Report No. : ER03-10-085FRF

Page 57 of 66


6.7 Photo of Power Spectral Density Measurement

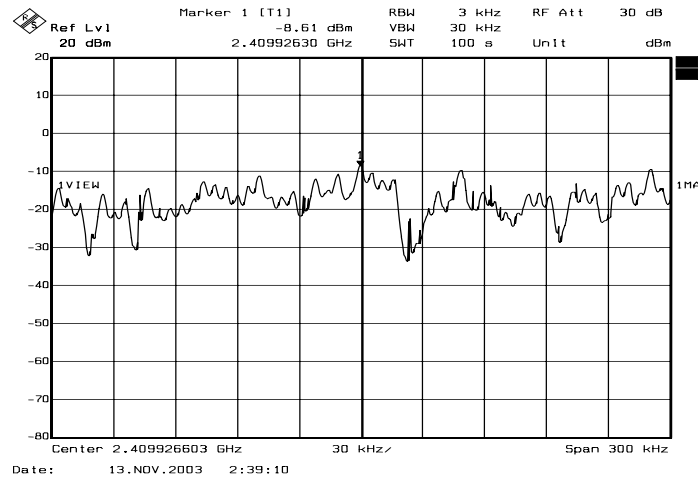

Channel 1

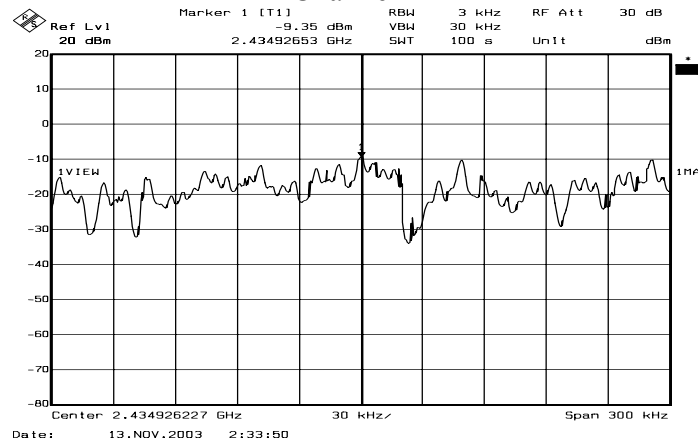

Channel 6

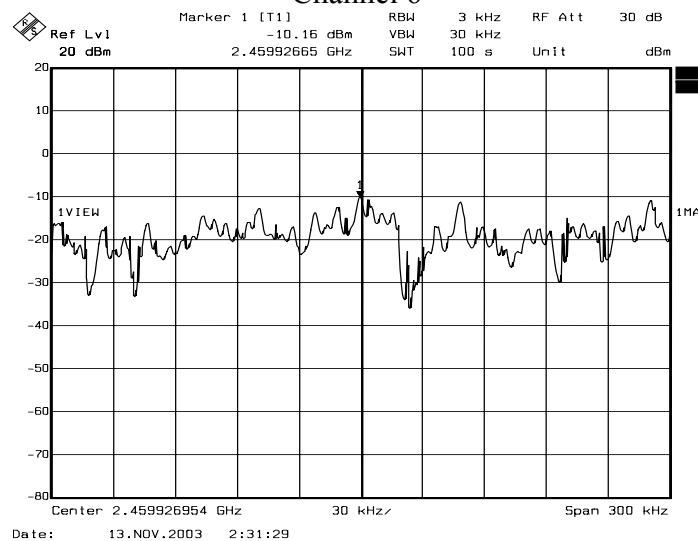

Channel 11

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF


Page 58 of 66

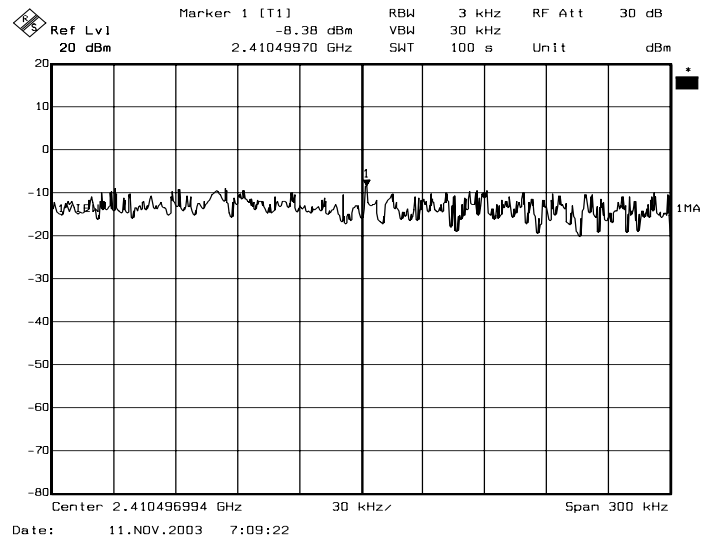

Channel 1

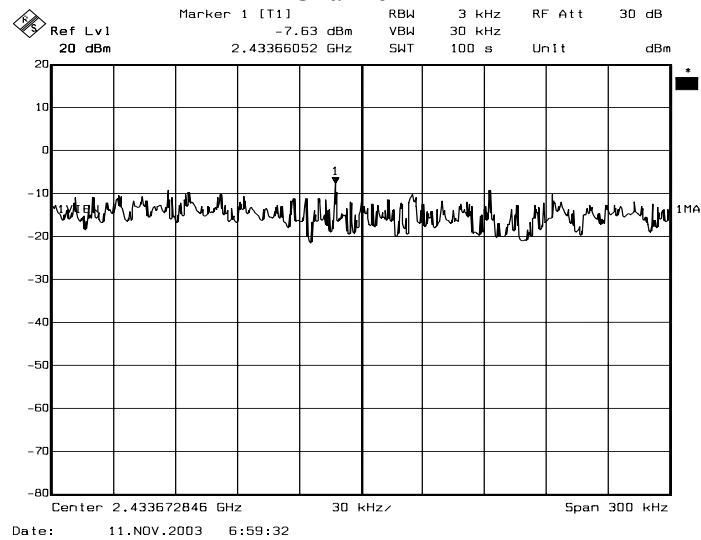

Channel 6

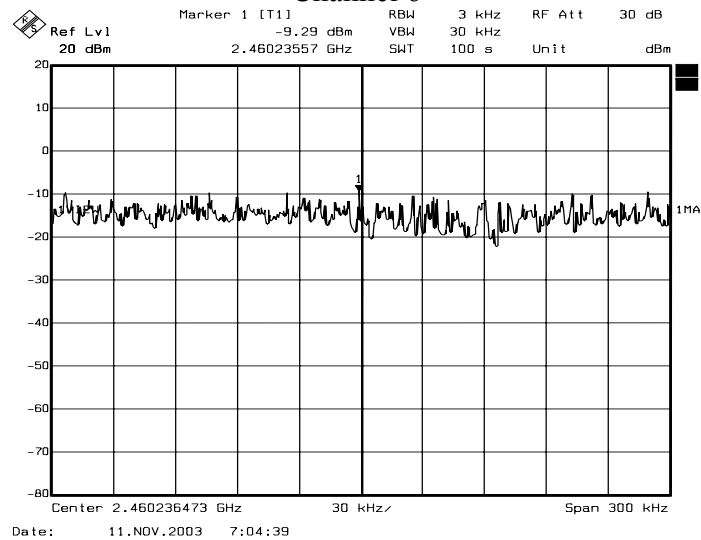

Channel 11

Note: For 802.11g Mode



7. BANDEDGE MEASUREMENT


7.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	JUN. 17, 2003
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 Test Setup



7.3 Limits of Out of Band Emissions Measurement

1. Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.



7.4 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100KHz with suitable frequency span including 100KHz bandwidth from band edge. The band edges were measured and recorded.

7.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

7.6 Test Results

A. Conducted

Refer to 7.7 photo of out band Emission measurement

B. Radiated

For 802.11b Mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Input Power (System)	12VDC (Form Adapter)	Environmental Conditions	33.4°C, 43%RH
Tested By	K. P. Pang		

Band edge		Measured radiated band edge field strength (dBuV/m)		Horizontal radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	60.03	67.73	81.84	89.54	pass
	AVG	53.62	60.83	75.43	82.64	
2483.50	PK	45.16	55.63	74.00	74.00	pass
	AVG	38.33	49.09	54.00	54.00	

NOTE : Radiated front band edge field strength is measured with FCC recommended mark-delta method.

Measured radiated band edge field strength Test Results = Radiated fundamental emission field strength - DELTA.

DELTA = Relative measurement between conducted measured peak level of fundamental emission and relevant band edge emission. Please refer to 7.7 photo of out of Band Measurement.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 61 of 66

For 802.11g Mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Input Power (System)	12VDC(Form Adapter)	Environmental Conditions	33.4℃, 43%RH
Tested By	K. P. Pang		

Band edge		Measured radiated band edge field strength (dBuV/m)		Horizontal radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	82.98	93.09	95.55	105.66	pass
	AVG	76.95	87.23	89.52	99.80	
2483.50	PK	53.14	64.29	74.00	74.00	pass
	AVG	44.37	53.08	54.00	54.00	

NOTE : Radiated front band edge field strength is measured with FCC recommended mark-delta method.

Measured radiated band edge field strength Test Results = Radiated fundamental emission field strength — DELTA.

DELTA = Relative measurement between conducted measured peak level of fundamental emission and relevant band edge emission. Please refer to 7.7 photo of out of Band Measurement.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2


Report No. : ER03-10-085FRF

Page 62 of 66

7.7 Photo of Out of Bandedge Measurement

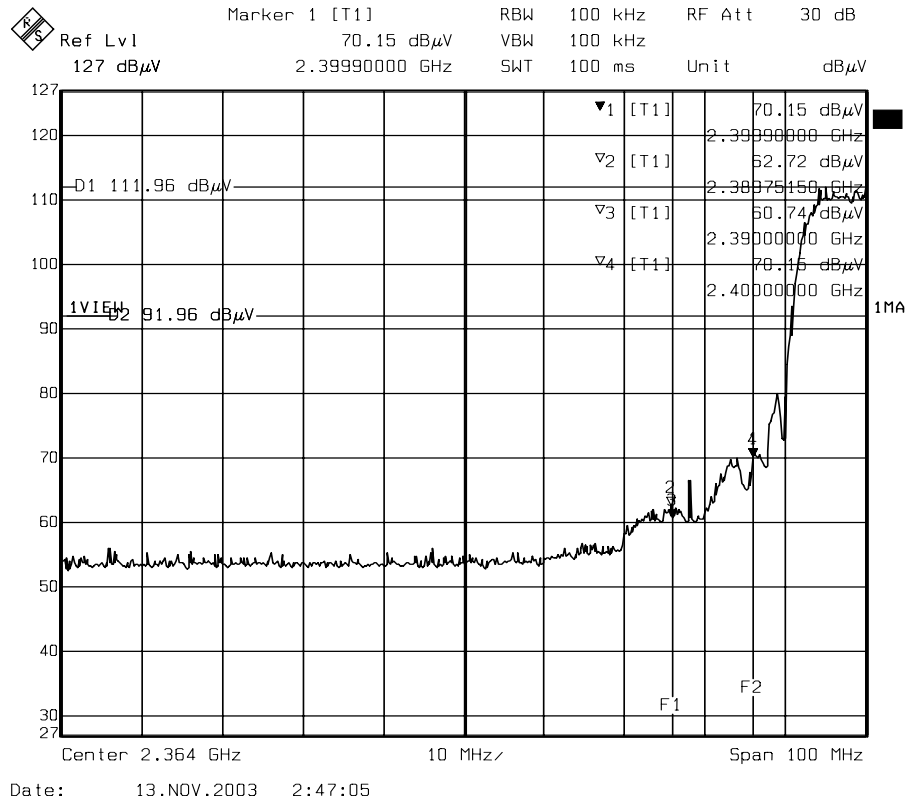

FRONT

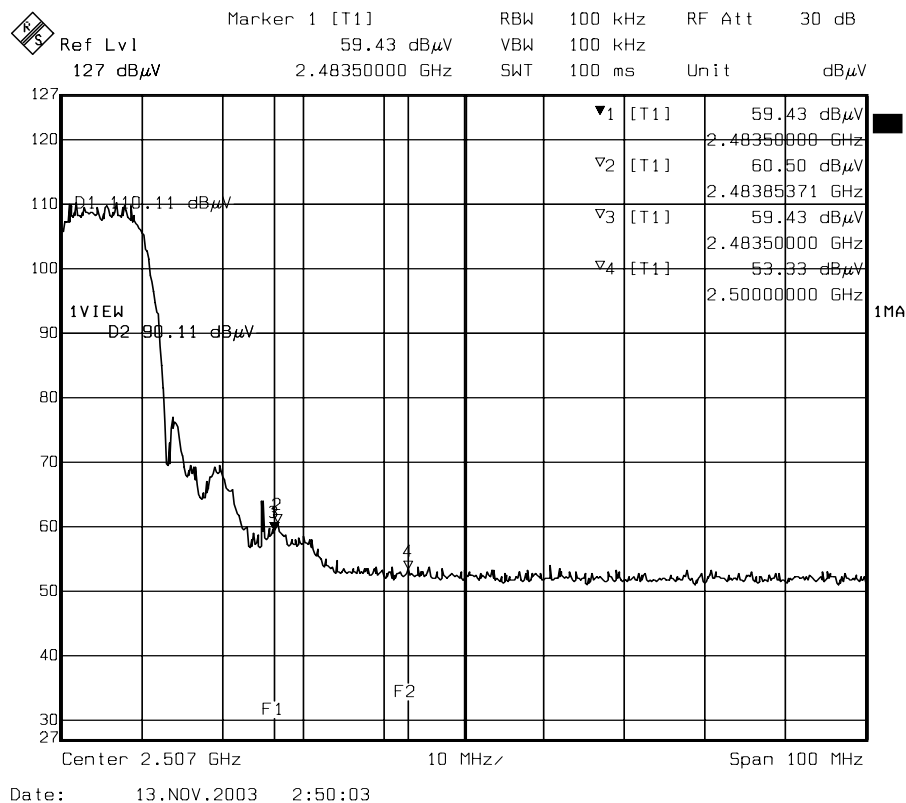

BACK

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 63 of 66

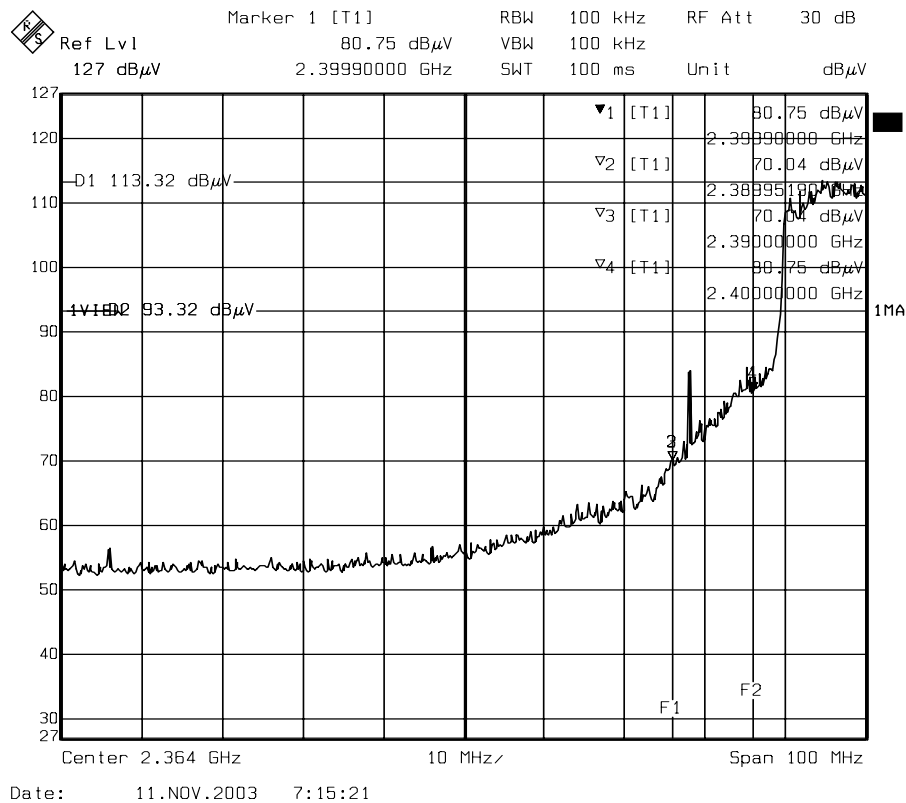

FRONT

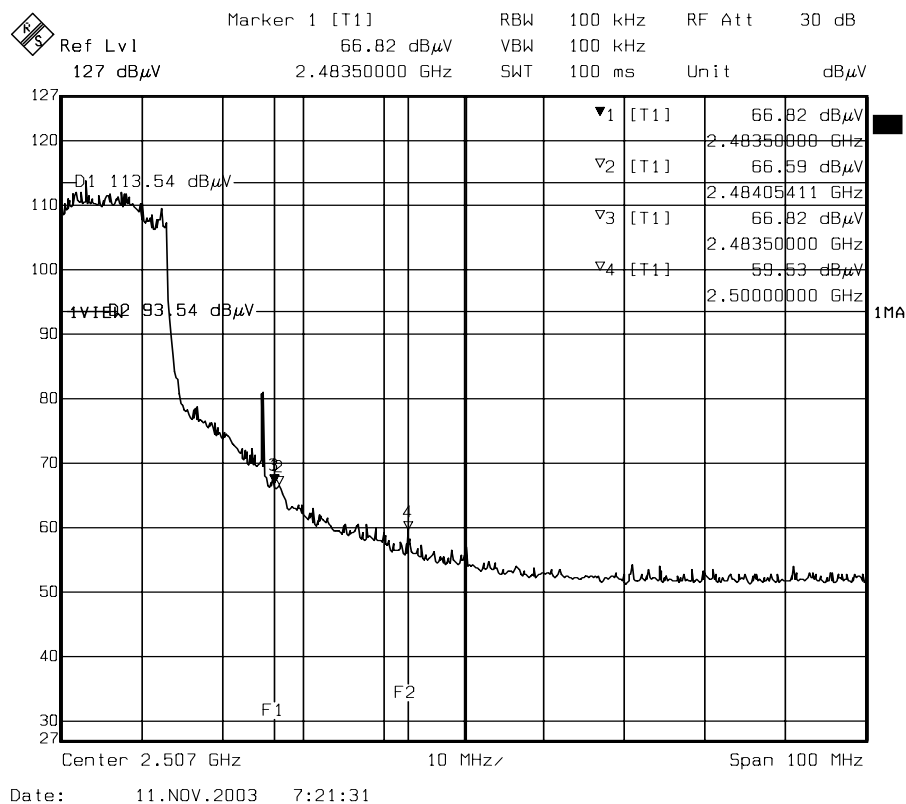

BACK

Note: For 802.11g Mode



8. ANTENNA REQUIREMENT

8.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.2 Antenna Connected Construction

The antenna used in this product is Dipole antenna. The maximum Gain of this antenna is only 2dBi and the internal connector is TNC connector.



9. RF EXPOSURE EVALUATION

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b) LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational / Control Exposures				
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300-1,500	--	--	F/1500	6
1,500-100,000	--	--	1	30

9.1 Friis Formula

Friis transmission formula : $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

P_d is the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance r where the MPE limit is reached.

9.2 EUT Operating Condition

A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRT54GV2

Report No. : ER03-10-085FRF

Page 66 of 66

9.3 Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

9.3.1 Antenna Gain

Antenna Gain : The maximum Gain measured in fully anechoic chamber is 2dBi linear scale.

9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Power Density at 20cm (mW/cm ²)	LIMITS (mW/cm ²)
CH1	2412.00	16.02	0.012610	1
CH6	2437.00	17.16	0.016396	1
CH11	2462.00	16.15	0.012994	1

Note : 1. For Antenna 1 802.11b Mode (11Mbps).

2. The power density Pd (4th column) at a distance of 20cm calculated from the Friis transmission formula is far below the limit of 1 mW/cm². The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Power Density at 20cm (mW/cm ²)	LIMITS (mW/cm ²)
CH1	2412.00	15.53	0.011265	1
CH6	2437.00	15.51	0.011213	1
CH11	2462.00	15.59	0.011422	1

Note : 1. For Antenna 1 802.11g Mode (6Mbps).

2. The power density Pd (4th column) at a distance of 20cm calculated from the Friis transmission formula is far below the limit of 1 mW/cm². The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.