

File name: D014968C.RES
Date: 19. Aug 03 12:16




CMA Testing
and Certification
Laboratories
聯合資檢定中心

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	1ms	AUTO LN	OFF
1M	10M	10k	9k	QP+AV	1ms	AUTO LN	OFF
10M	30M	50k	9k	QP+AV	1ms	AUTO LN	OFF

Transducer No.	Start	Stop	Name
2	150k	30M	LIMITER

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 30dB

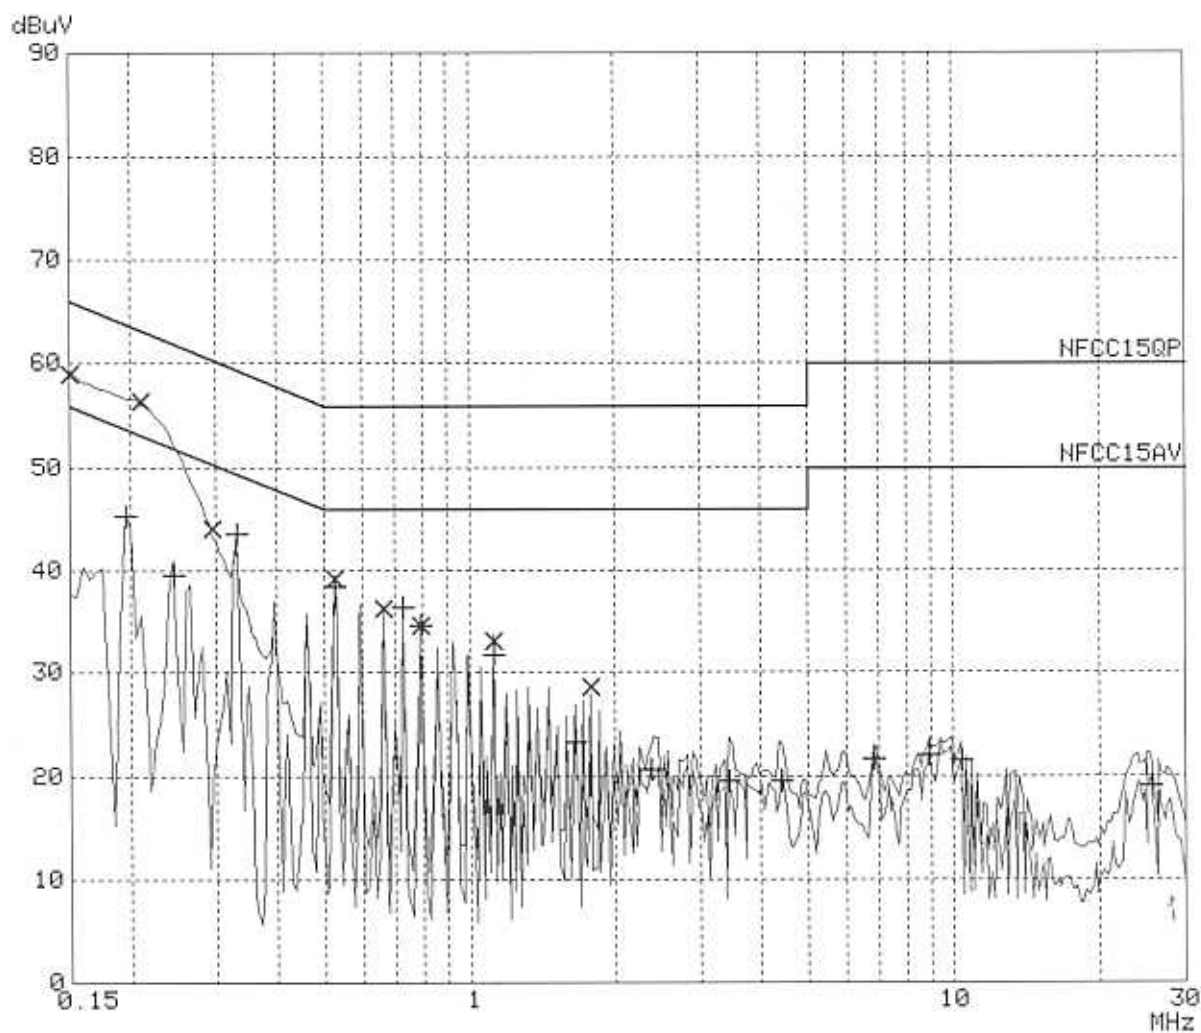



**CMA Testing
and Certification
Laboratories**
检测认证中心

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase -	PE -
0.15000	59.0	-6.9	L1	f1
0.21000	56.4	-6.8	L1	f1
0.29500	44.1	-16.2	N	f1
0.52500	39.2	-16.7	L1	f1
0.66000	36.4	-19.5	L1	f1
0.79000	34.8	-21.1	N	f1
1.12000	33.2	-22.7	N	f1
1.78000	28.7	-27.2	N	f1

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase -	PE -
0.19500	45.4	-8.4	L1	fl
0.24500	39.6	-12.2	L1	fl
0.33000	43.5	-5.9	L1	fl
0.52500	38.5	-7.4	L1	fl
0.72500	36.5	-9.4	L1	fl
0.79000	34.8	-11.1	N	fl
1.12000	31.9	-14.0	L1	fl
1.65000	23.3	-22.6	L1	fl
2.37000	20.6	-25.3	L1	fl
3.43000	19.6	-26.3	L1	fl
4.41000	19.5	-26.4	L1	fl
6.86000	21.7	-28.2	N	fl
8.88000	22.1	-27.8	N	fl
10.35000	21.6	-28.4	N	fl
25.60000	19.1	-30.8	L1	fl

```
* limit exceeded
```