



FCC RF Test Report

APPLICANT : Cardo Systems, Ltd.
EQUIPMENT : SC EDGE REMOTE CONTROL
BRAND NAME : Cardo Systems, Ltd.
MODEL NAME : SC EDGE REMOTE CONTROL
FCC ID : Q95ER33
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Feb. 17, 2025 ~ Feb. 18, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	19
3.5 Radiated Band Edges and Spurious Emission Measurement	24
3.6 Antenna Requirements.....	28
4 LIST OF MEASURING EQUIPMENT.....	29
5 MEASUREMENT UNCERTAINTY	30
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4D2602	Rev. 01	Initial issue of report	Feb. 28, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.18 dB at 2483.56 MHz
-	15.207	AC Conducted Emission	15.207(a)	Pass	Not Connect to the AC mains
3.6	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Cardo Systems, Ltd.
101 E. Park Blvd, Suite 600, Plano TX, 75074 USA

1.2 Manufacturer

Cardo Systems, Ltd.
101 E. Park Blvd, Suite 600, Plano TX, 75074 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	SC EDGE REMOTE CONTROL
Brand Name	Cardo Systems, Ltd.
Model Name	SC EDGE REMOTE CONTROL
FCC ID	Q95ER33
SN Code	Conducted / Radiation: SQ4389Q295
HW Version	1
SW Version	1
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: -7.77 dBm (0.0002 W)
99% Occupied Bandwidth	BLE 1Mbps:1.07MHz
Antenna Type / Gain	Printed Antenna type with gain 0 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	03CH06-KS	AUDIX	E3	210616

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
Remark: For Radiated Test Cases, The tests were performance with Notebook.	

2.3 Connection Diagram of Test System

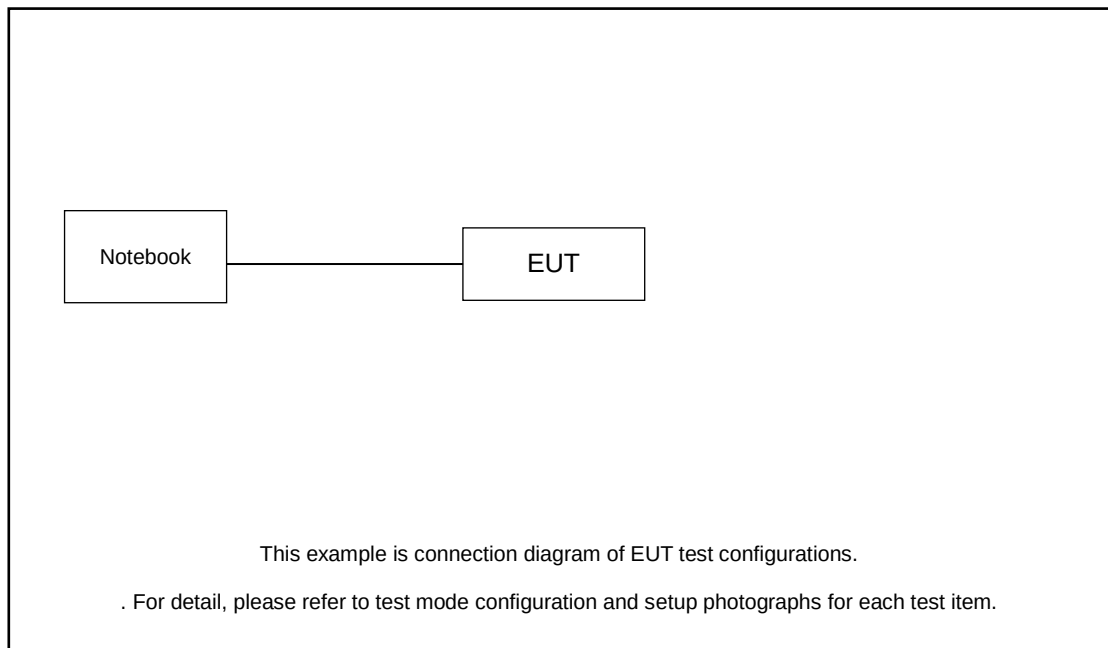

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	N/A	N/A	N/A	N/A	N/A
2.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss .

Following shows an offset computation example with cable loss 0.60 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 0.60 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


BLE 1Mbps

6 dB Bandwidth Plot on Channel 00

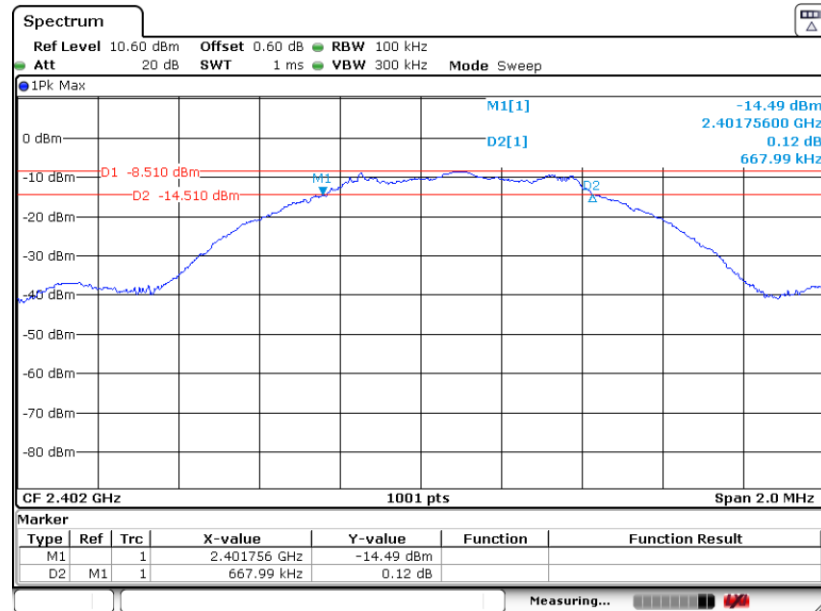

Date: 18.FEB.2025 04:40:16


6 dB Bandwidth Plot on Channel 19

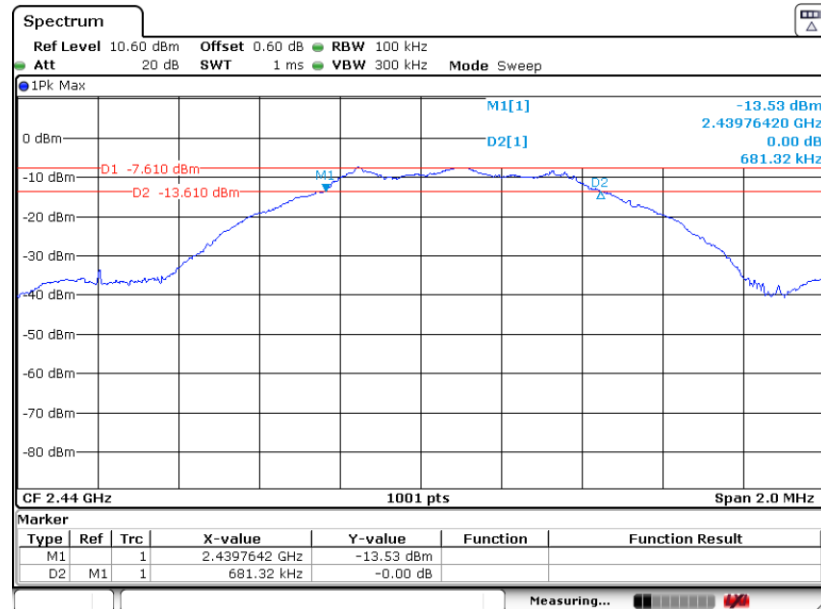

Date: 18.FEB.2025 04:52:03



6 dB Bandwidth Plot on Channel 39

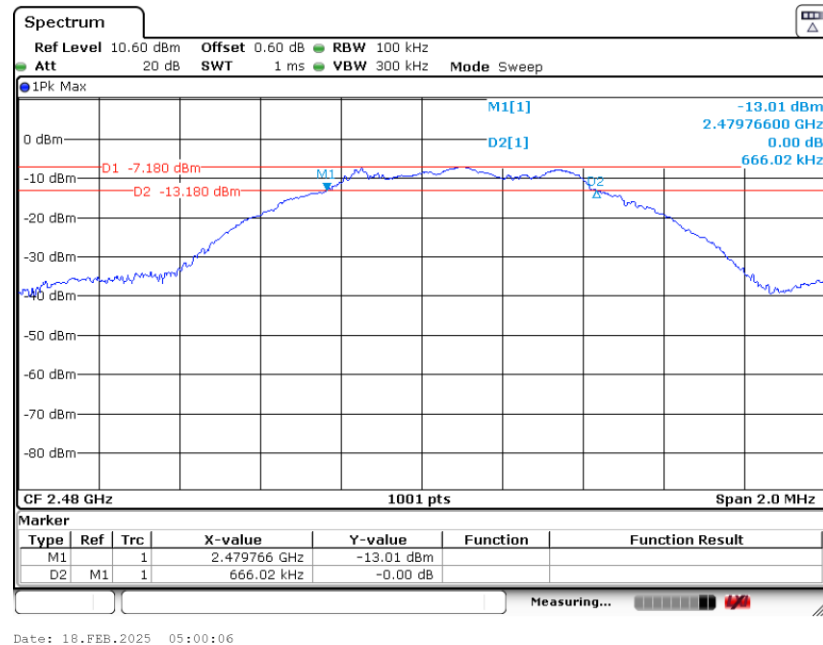


3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


BLE 1Mbps

99% Occupied Bandwidth Plot on Channel 00

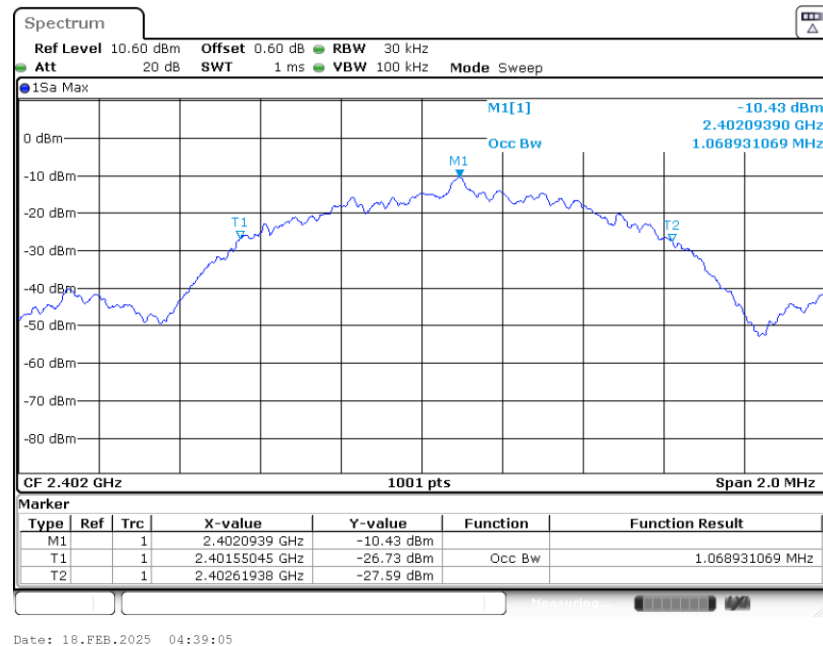




99% Occupied Bandwidth Plot on Channel 19

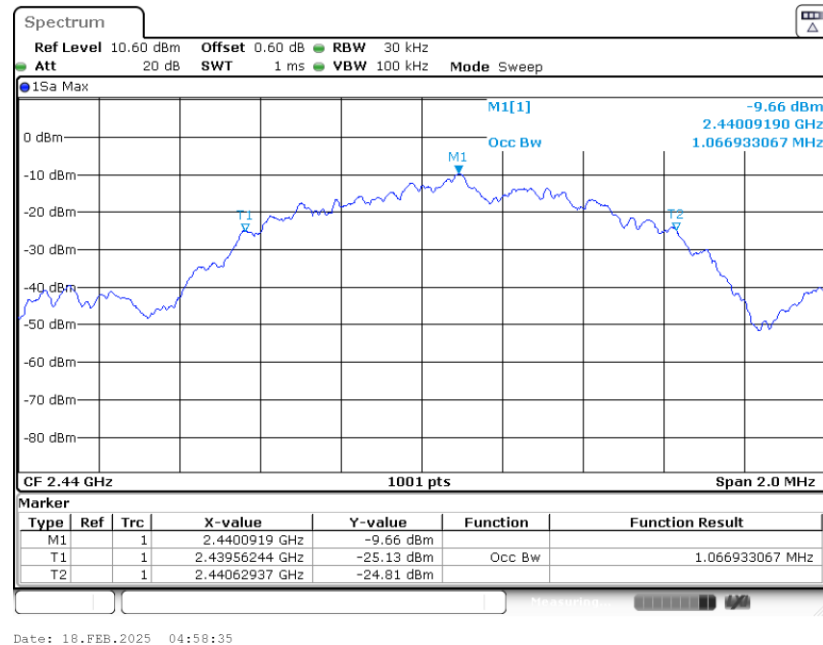

99% Occupied Bandwidth Plot on Channel 39

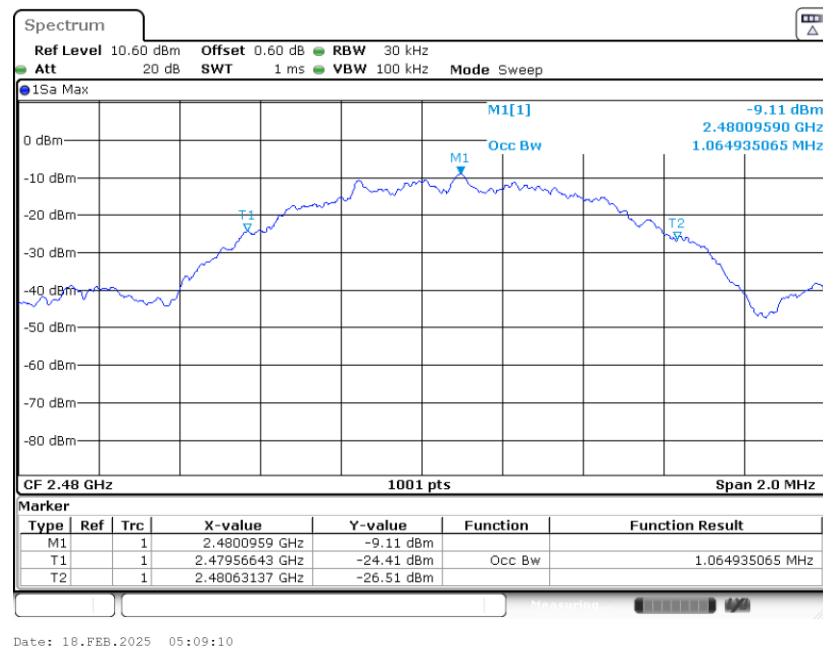

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

BLE 1Mbps

PSD 100kHz Plot on Channel 00

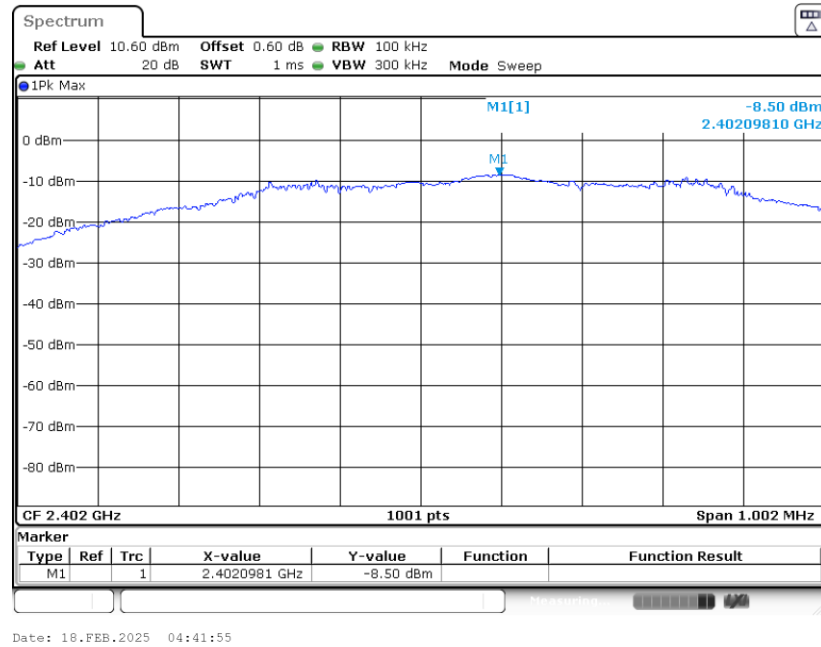


PSD 100kHz Plot on Channel 19

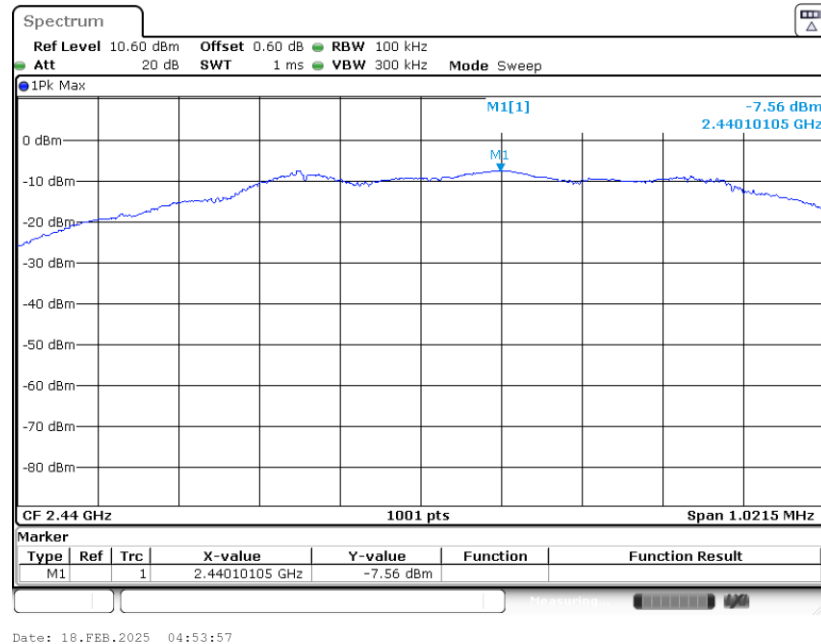




PSD 100kHz Plot on Channel 39

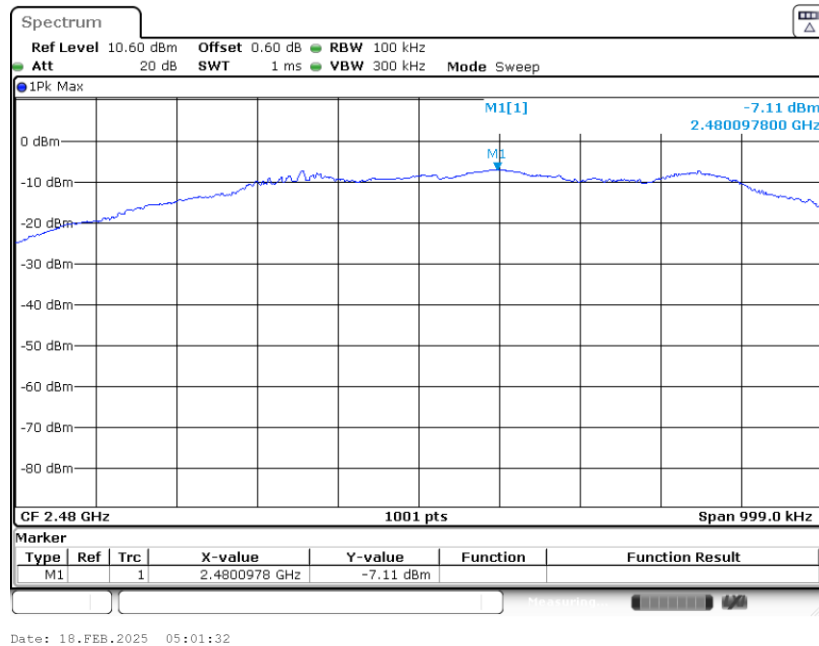

3.3.7 Test Result of Power Spectral Density Plots (3kHz)


BLE 1Mbps

PSD 3kHz Plot on Channel 00

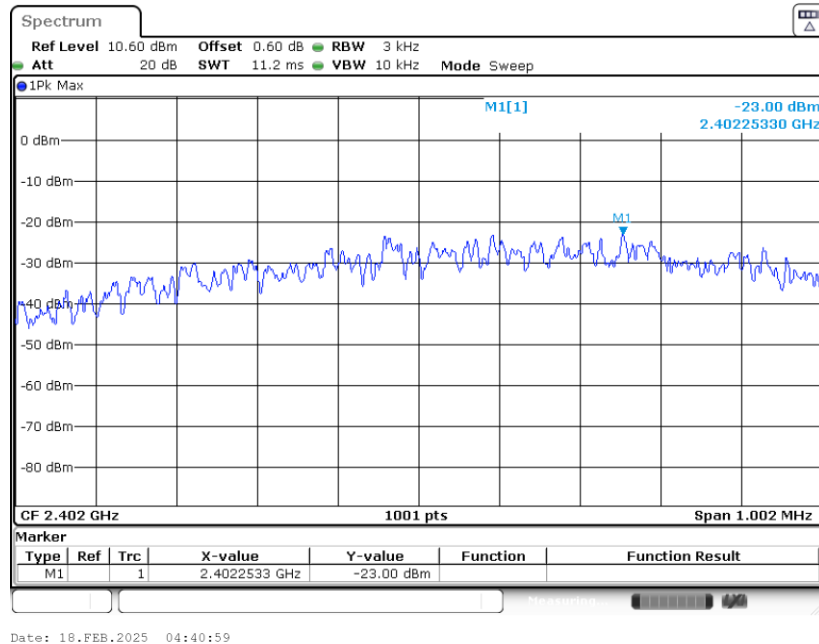




PSD 3kHz Plot on Channel 19

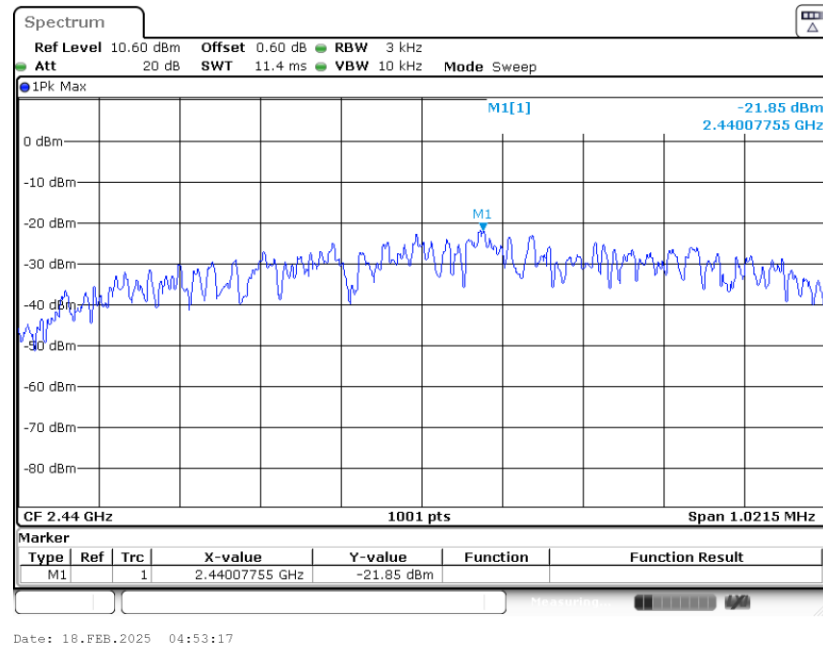

PSD 3kHz Plot on Channel 39

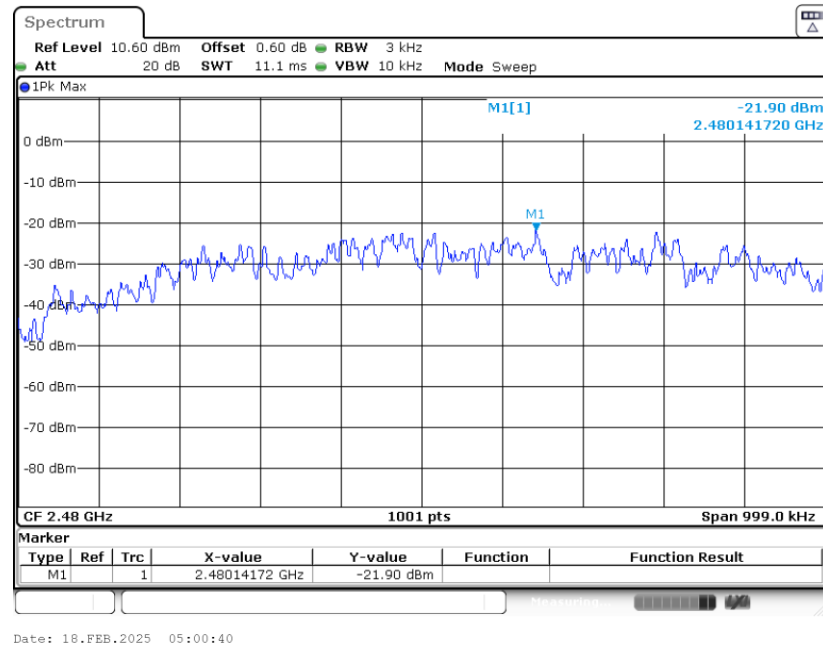

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges Plots


BLE 1Mbps

Low Band Edge Plot on Channel 00

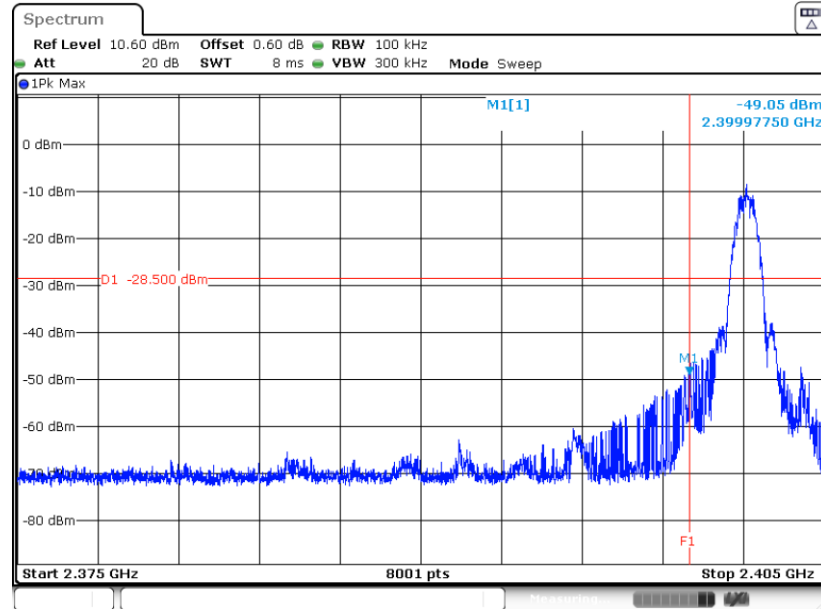

Date: 18.FEB.2025 04:42:54

High Band Edge Plot on Channel 39

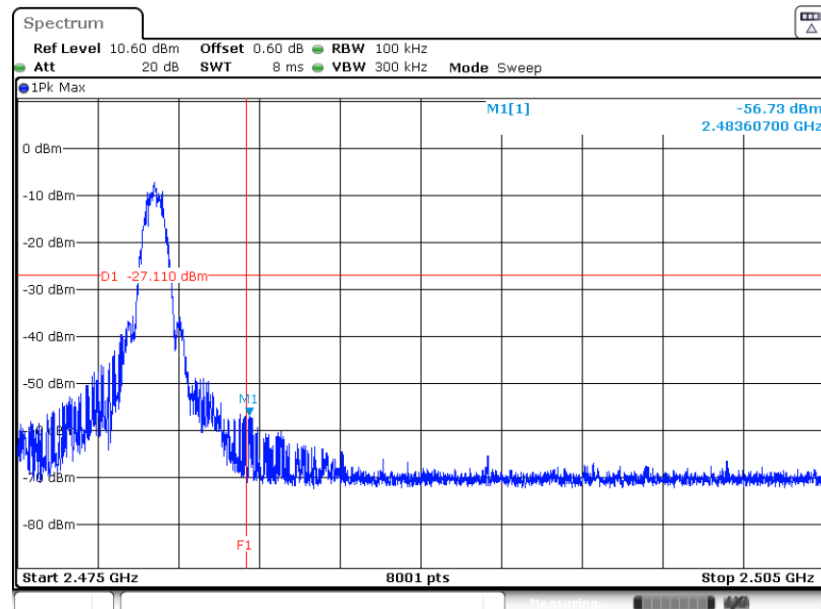


Date: 18.FEB.2025 05:03:07




3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

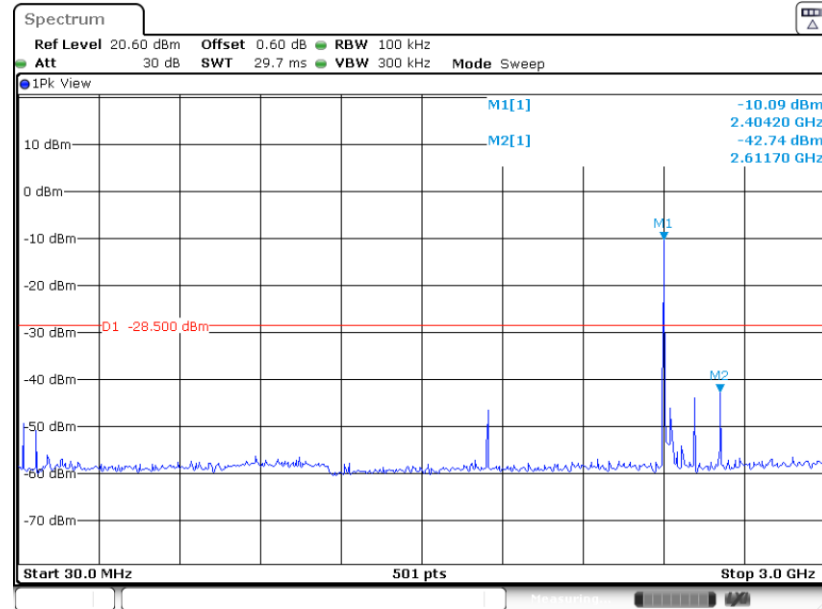

Date: 18.FEB.2025 04:46:14


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

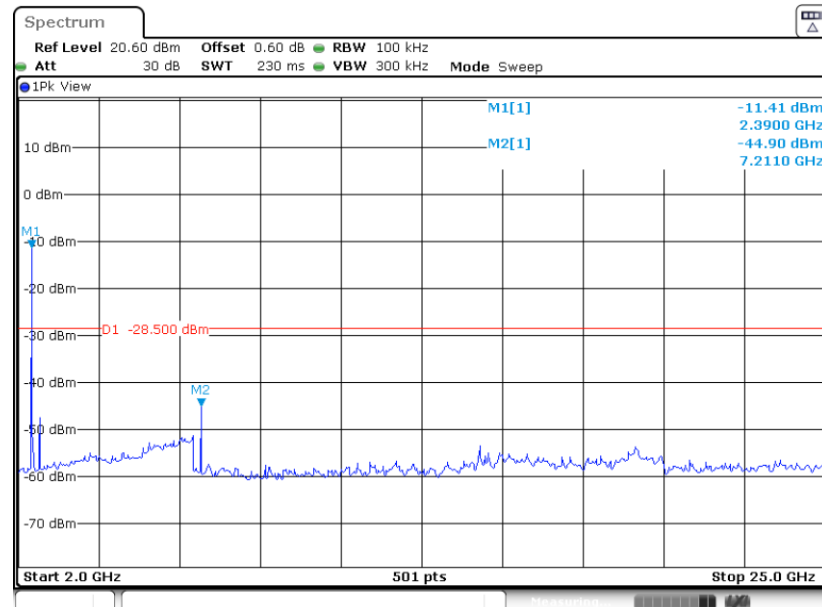


Date: 18.FEB.2025 04:47:40



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

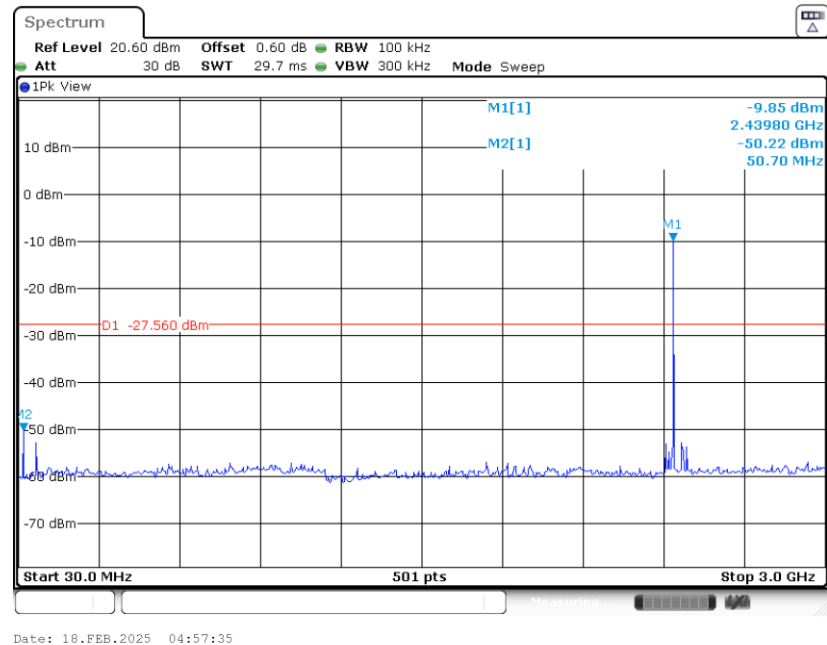


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

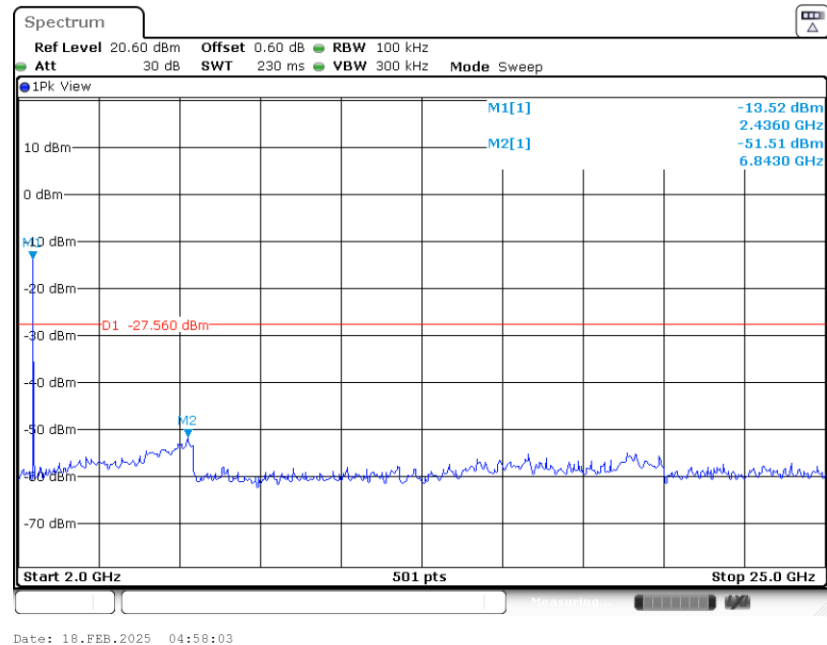




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

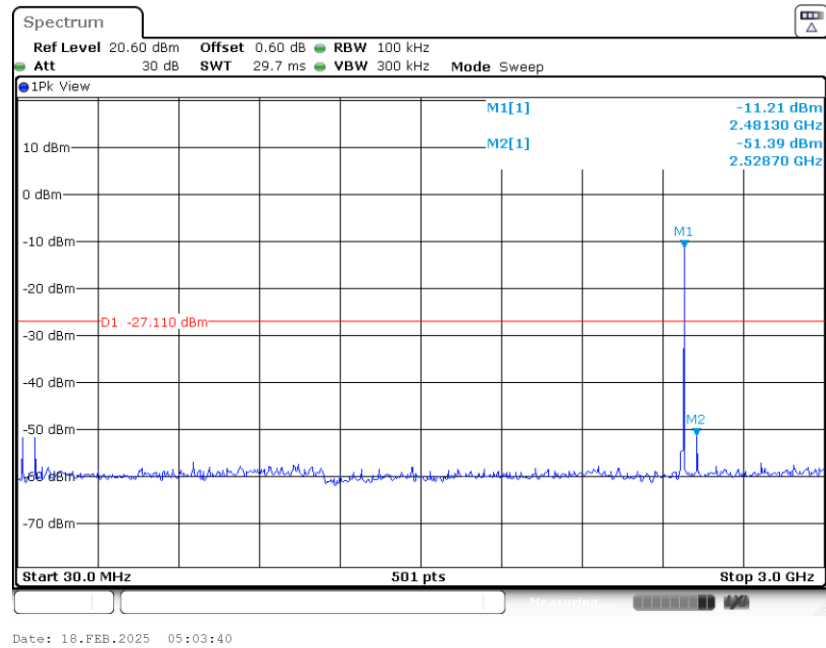

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

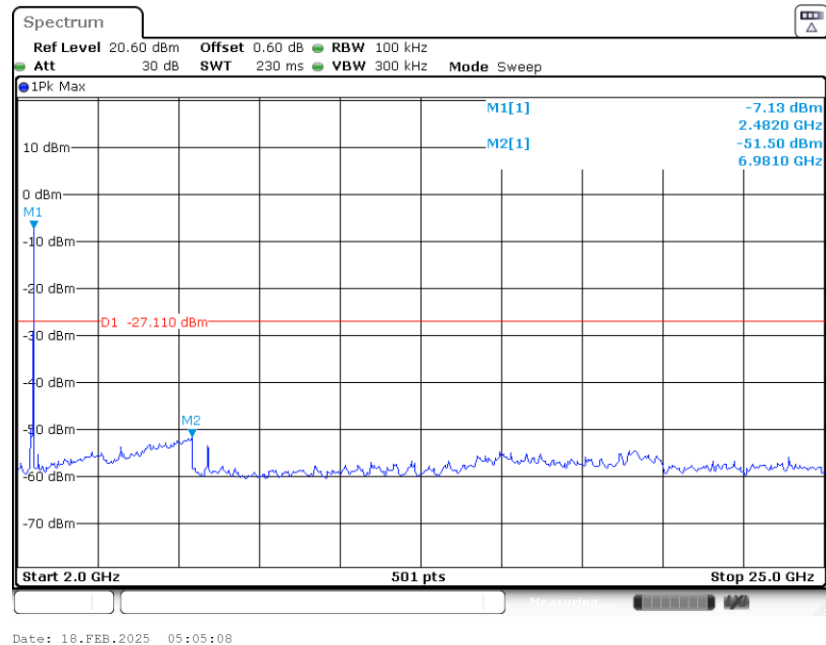

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

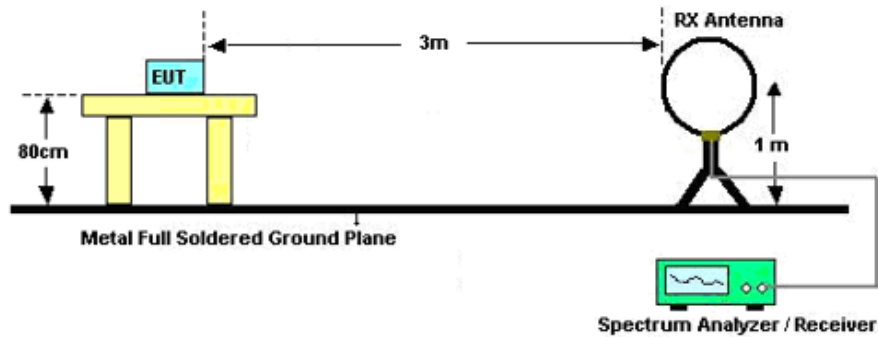

For radiated emissions from 30MHz to 1GHz

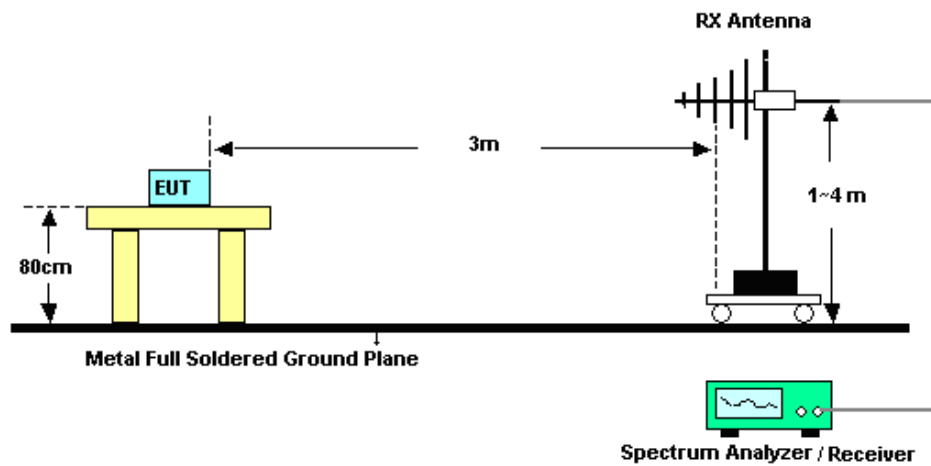

For radiated emissions above 1GHz

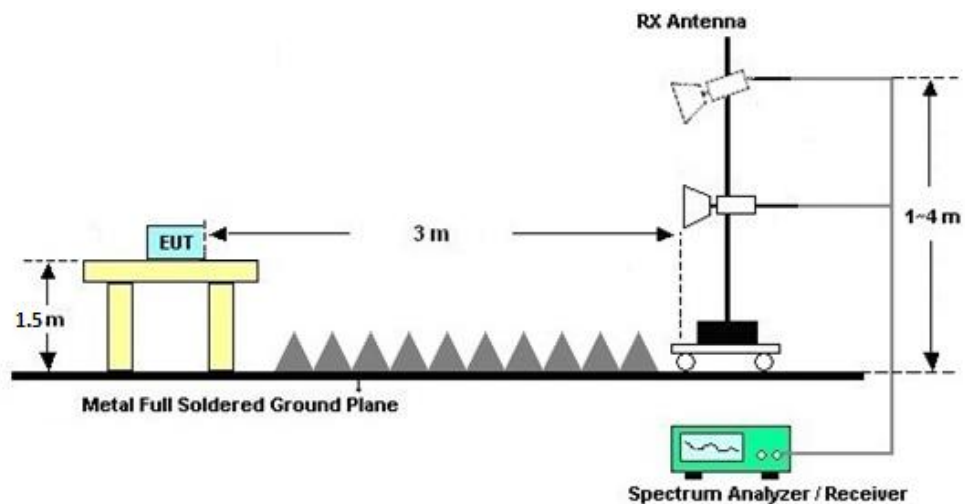

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2025	Feb. 17, 2025	Jan. 01, 2026	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Feb. 17, 2025	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Feb. 17, 2025	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Feb. 17, 2025	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Feb. 17, 2025	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Feb. 17, 2025	Oct. 21, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 04, 2024	Feb. 17, 2025	Jul. 03, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 03, 2025	Feb. 17, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz-18Ghz	Jan. 03, 2025	Feb. 17, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Feb. 17, 2025	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 17, 2025	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 17, 2025	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 17, 2025	NCR	Radiation (03CH06-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Feb. 18, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Feb. 18, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Feb. 18, 2025	Jan. 01, 2026	Conducted (TH01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	± 2.22 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.50 dB
Conducted Power Spectral Density	± 0.90 dB
Frequency	± 0.04 ppm

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.06 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.38 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Jacob Zhang	Temperature:	20~26	°C
Test Date:	2025/2/18	Relative Humidity:	40~51	%

BLE1M-Ant1

TEST RESULTS DATA

6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.07	0.67	0.50	Pass
BLE	1Mbps	1	19	2440	1.07	0.68	0.50	Pass
BLE	1Mbps	1	39	2480	1.06	0.67	0.50	Pass

TEST RESULTS DATA

Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-9.77	30.00	0.00	-9.77	36.00	Pass
BLE	1Mbps	1	19	2440	-8.82	30.00	0.00	-8.82	36.00	Pass
BLE	1Mbps	1	39	2480	-7.77	30.00	0.00	-7.77	36.00	Pass

TEST RESULTS DATA

Average Power Table

(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	16.13	-10.32
BLE	1Mbps	1	19	2440	16.13	-8.92
BLE	1Mbps	1	39	2480	16.13	-7.87

Note: The Power setting is default.

TEST RESULTS DATA

Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-8.50	-23.00	0.00	8.00	Pass
BLE	1Mbps	1	19	2440	-7.56	-21.85	0.00	8.00	Pass
BLE	1Mbps	1	39	2480	-7.11	-21.90	0.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. Radiated Spurious Emission

Test Engineer :	Jerry Xu	Relative Humidity :	41~42%
		Temperature :	22~23°C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE_GSKF	0	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE_GSKF	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	1Mbps	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSKF	0	2354.20	45.69	54.00	-8.31	V	AVERAGE	Pass	Band Edge
1	Bluetooth-LE_GSKF	0	7207.50	59.54	67.92	-8.38	V	Peak	Pass	Harmonic
2	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE_GSKF	19	12201.00	60.16	74.00	-13.84	H	Peak	Pass	Harmonic
3	Bluetooth-LE_GSKF	39	2483.56	49.82	54.00	-4.18	V	AVERAGE	Pass	Band Edge
3	Bluetooth-LE_GSKF	39	12402.00	60.56	74.00	-13.44	H	Peak	Pass	Harmonic

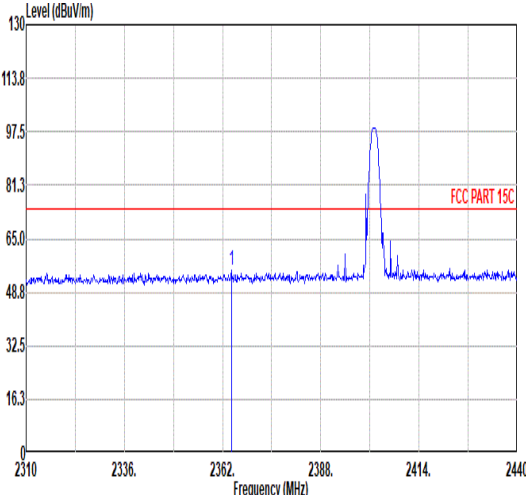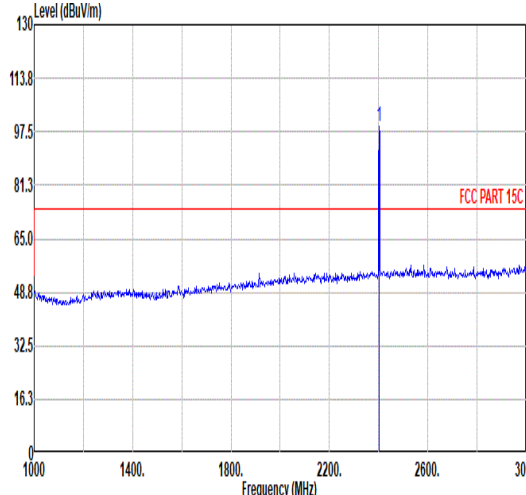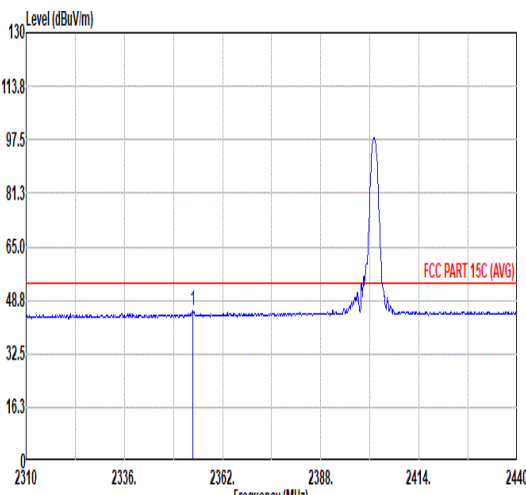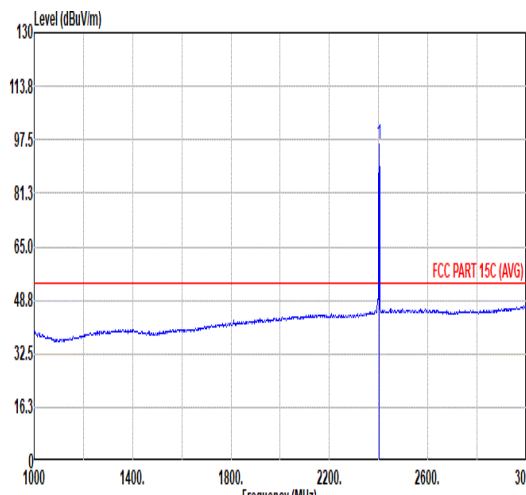

Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2364.34</td><td>55.25</td><td>74.00</td><td>-18.75</td><td>42.71</td><td>32.17</td><td>6.56</td><td>32.19</td><td>6.00</td><td>122 154 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2364.34	55.25	74.00	-18.75	42.71	32.17	6.56	32.19	6.00	122 154 PEAK	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>98.96</td><td>-----</td><td>-----</td><td>85.93</td><td>32.59</td><td>6.62</td><td>32.18</td><td>6.00</td><td>122 154 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	98.96	-----	-----	85.93	32.59	6.62	32.18	6.00	122 154 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2364.34	55.25	74.00	-18.75	42.71	32.17	6.56	32.19	6.00	122 154 PEAK																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	98.96	-----	-----	85.93	32.59	6.62	32.18	6.00	122 154 PEAK																																																																																
Avg	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2354.20</td><td>45.38</td><td>54.00</td><td>-8.62</td><td>32.98</td><td>32.05</td><td>6.55</td><td>32.20</td><td>6.00</td><td>122 154 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2354.20	45.38	54.00	-8.62	32.98	32.05	6.55	32.20	6.00	122 154 AVERAGE	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>96.03</td><td>-----</td><td>-----</td><td>83.00</td><td>32.59</td><td>6.62</td><td>32.18</td><td>6.00</td><td>122 154 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	96.03	-----	-----	83.00	32.59	6.62	32.18	6.00	122 154 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2354.20	45.38	54.00	-8.62	32.98	32.05	6.55	32.20	6.00	122 154 AVERAGE																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	96.03	-----	-----	83.00	32.59	6.62	32.18	6.00	122 154 AVERAGE																																																																																

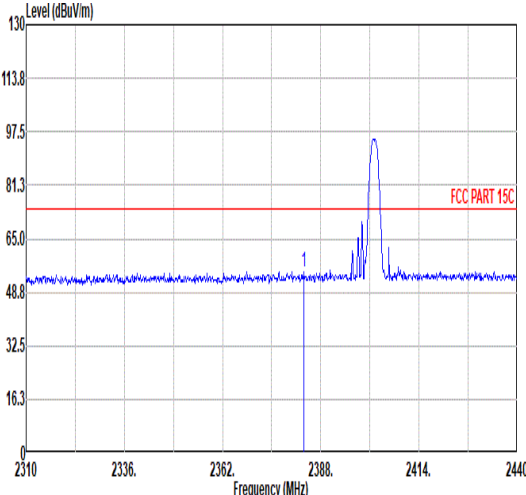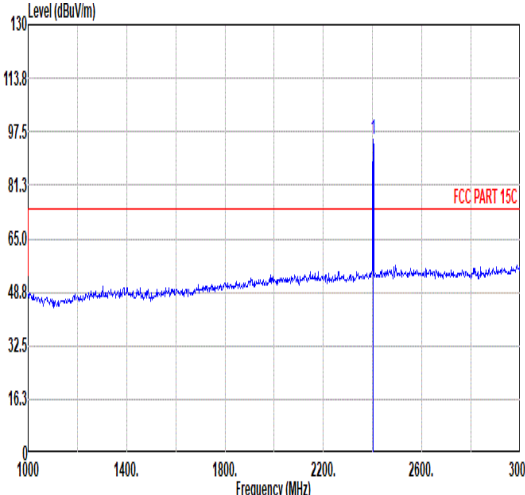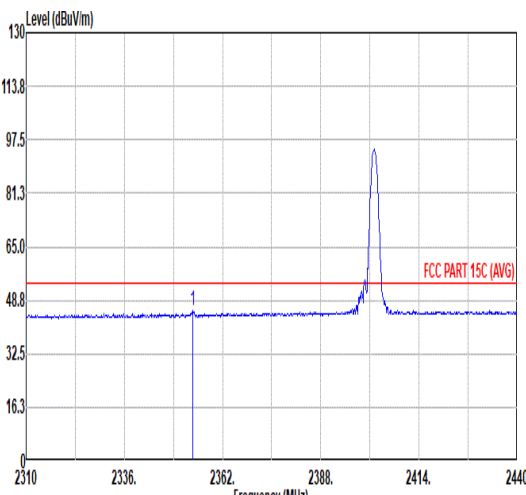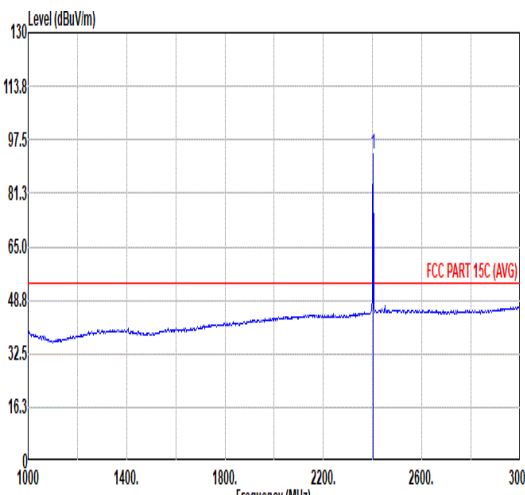

Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2383.58</td><td>55.18</td><td>74.00</td><td>-18.82</td><td>42.38</td><td>32.40</td><td>6.59</td><td>32.19</td><td>6.00</td><td>100 176 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2383.58	55.18	74.00	-18.82	42.38	32.40	6.59	32.19	6.00	100 176 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>95.08</td><td>-----</td><td>-----</td><td>82.05</td><td>32.59</td><td>6.62</td><td>32.18</td><td>6.00</td><td>100 176 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.08	-----	-----	82.05	32.59	6.62	32.18	6.00	100 176 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2383.58	55.18	74.00	-18.82	42.38	32.40	6.59	32.19	6.00	100 176 PEAK																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	95.08	-----	-----	82.05	32.59	6.62	32.18	6.00	100 176 PEAK																																																																																
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2354.20</td><td>45.69</td><td>54.00</td><td>-8.31</td><td>33.29</td><td>32.05</td><td>6.55</td><td>32.20</td><td>6.00</td><td>100 176 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2354.20	45.69	54.00	-8.31	33.29	32.05	6.55	32.20	6.00	100 176 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.18</td><td>-----</td><td>-----</td><td>80.15</td><td>32.59</td><td>6.62</td><td>32.18</td><td>6.00</td><td>100 176 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.18	-----	-----	80.15	32.59	6.62	32.18	6.00	100 176 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2354.20	45.69	54.00	-8.31	33.29	32.05	6.55	32.20	6.00	100 176 AVERAGE																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	93.18	-----	-----	80.15	32.59	6.62	32.18	6.00	100 176 AVERAGE																																																																																







Mode	1																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal																																																																																																																			
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4083.00</td><td>51.96</td><td>74.00</td><td>-22.04</td><td>74.30</td><td>34.20</td><td>9.44</td><td>65.98</td><td>0.00</td><td>100</td><td>70 Peak</td></tr><tr><td>2</td><td>4083.00</td><td>19.27</td><td>54.00</td><td>-34.73</td><td>41.61</td><td>34.20</td><td>9.44</td><td>65.98</td><td>0.00</td><td>100</td><td>70 Average</td></tr><tr><td>3</td><td>7206.00</td><td>61.02</td><td>72.86</td><td>-11.84</td><td>78.62</td><td>35.60</td><td>11.65</td><td>64.85</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>4</td><td>9609.00</td><td>48.88</td><td>72.86</td><td>-23.98</td><td>64.85</td><td>36.90</td><td>13.56</td><td>66.43</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>5</td><td>12009.00</td><td>56.15</td><td>74.00</td><td>-17.85</td><td>67.10</td><td>38.71</td><td>15.28</td><td>64.94</td><td>0.00</td><td>100</td><td>332 Peak</td></tr><tr><td>6</td><td>12009.00</td><td>23.46</td><td>54.00</td><td>-30.54</td><td>34.41</td><td>38.71</td><td>15.28</td><td>64.94</td><td>0.00</td><td>100</td><td>332 Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4083.00	51.96	74.00	-22.04	74.30	34.20	9.44	65.98	0.00	100	70 Peak	2	4083.00	19.27	54.00	-34.73	41.61	34.20	9.44	65.98	0.00	100	70 Average	3	7206.00	61.02	72.86	-11.84	78.62	35.60	11.65	64.85	0.00	---	--- Peak	4	9609.00	48.88	72.86	-23.98	64.85	36.90	13.56	66.43	0.00	---	--- Peak	5	12009.00	56.15	74.00	-17.85	67.10	38.71	15.28	64.94	0.00	100	332 Peak	6	12009.00	23.46	54.00	-30.54	34.41	38.71	15.28	64.94	0.00	100	332 Average
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	4083.00	51.96	74.00	-22.04	74.30	34.20	9.44	65.98	0.00	100	70 Peak																																																																																																									
2	4083.00	19.27	54.00	-34.73	41.61	34.20	9.44	65.98	0.00	100	70 Average																																																																																																									
3	7206.00	61.02	72.86	-11.84	78.62	35.60	11.65	64.85	0.00	---	--- Peak																																																																																																									
4	9609.00	48.88	72.86	-23.98	64.85	36.90	13.56	66.43	0.00	---	--- Peak																																																																																																									
5	12009.00	56.15	74.00	-17.85	67.10	38.71	15.28	64.94	0.00	100	332 Peak																																																																																																									
6	12009.00	23.46	54.00	-30.54	34.41	38.71	15.28	64.94	0.00	100	332 Average																																																																																																									
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4084.50</td><td>52.88</td><td>74.00</td><td>-21.12</td><td>75.20</td><td>34.20</td><td>9.45</td><td>65.97</td><td>0.00</td><td>100</td><td>267 Peak</td></tr><tr><td>2</td><td>4804.50</td><td>20.19</td><td>54.00</td><td>-33.81</td><td>42.51</td><td>34.20</td><td>9.45</td><td>65.97</td><td>0.00</td><td>100</td><td>267 Average</td></tr><tr><td>3</td><td>5988.00</td><td>44.27</td><td>67.92</td><td>-23.65</td><td>64.15</td><td>35.35</td><td>10.57</td><td>65.80</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>4</td><td>7207.50</td><td>59.54</td><td>67.92</td><td>-8.38</td><td>77.14</td><td>35.60</td><td>11.65</td><td>64.85</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>5</td><td>12012.00</td><td>54.00</td><td>74.00</td><td>-20.00</td><td>64.95</td><td>38.71</td><td>15.28</td><td>64.94</td><td>0.00</td><td>100</td><td>127 Peak</td></tr><tr><td>6</td><td>12012.00</td><td>21.31</td><td>54.00</td><td>-32.69</td><td>32.26</td><td>38.71</td><td>15.28</td><td>64.94</td><td>0.00</td><td>100</td><td>127 Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4084.50	52.88	74.00	-21.12	75.20	34.20	9.45	65.97	0.00	100	267 Peak	2	4804.50	20.19	54.00	-33.81	42.51	34.20	9.45	65.97	0.00	100	267 Average	3	5988.00	44.27	67.92	-23.65	64.15	35.35	10.57	65.80	0.00	---	--- Peak	4	7207.50	59.54	67.92	-8.38	77.14	35.60	11.65	64.85	0.00	---	--- Peak	5	12012.00	54.00	74.00	-20.00	64.95	38.71	15.28	64.94	0.00	100	127 Peak	6	12012.00	21.31	54.00	-32.69	32.26	38.71	15.28	64.94	0.00	100	127 Average
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	4084.50	52.88	74.00	-21.12	75.20	34.20	9.45	65.97	0.00	100	267 Peak																																																																																																									
2	4804.50	20.19	54.00	-33.81	42.51	34.20	9.45	65.97	0.00	100	267 Average																																																																																																									
3	5988.00	44.27	67.92	-23.65	64.15	35.35	10.57	65.80	0.00	---	--- Peak																																																																																																									
4	7207.50	59.54	67.92	-8.38	77.14	35.60	11.65	64.85	0.00	---	--- Peak																																																																																																									
5	12012.00	54.00	74.00	-20.00	64.95	38.71	15.28	64.94	0.00	100	127 Peak																																																																																																									
6	12012.00	21.31	54.00	-32.69	32.26	38.71	15.28	64.94	0.00	100	127 Average																																																																																																									



Mode	2																																																																																																																		
	Harmonic																																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																		
ANT	1																																																																																																																		
Pol.	Horizontal																																																																																																																		
Peak Avg																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4881.00</td><td>58.30</td><td>74.00</td><td>-15.70</td><td>80.49</td><td>34.14</td><td>9.53</td><td>65.86</td><td>0.00</td><td>100</td><td>319 Peak</td></tr><tr><td>2</td><td>4881.00</td><td>25.61</td><td>54.00</td><td>-28.39</td><td>47.80</td><td>34.14</td><td>9.53</td><td>65.86</td><td>0.00</td><td>100</td><td>319 Average</td></tr><tr><td>3</td><td>7321.50</td><td>52.92</td><td>74.00</td><td>-21.08</td><td>70.73</td><td>35.70</td><td>11.69</td><td>65.20</td><td>0.00</td><td>300</td><td>69 Peak</td></tr><tr><td>4</td><td>7321.50</td><td>20.23</td><td>54.00</td><td>-33.77</td><td>38.04</td><td>35.70</td><td>11.69</td><td>65.20</td><td>0.00</td><td>300</td><td>69 Average</td></tr><tr><td>5</td><td>12201.00</td><td>60.16</td><td>74.00</td><td>-13.84</td><td>70.81</td><td>38.00</td><td>15.43</td><td>64.88</td><td>0.00</td><td>100</td><td>308 Peak</td></tr><tr><td>6</td><td>12201.00</td><td>27.47</td><td>54.00</td><td>-26.53</td><td>38.12</td><td>38.00</td><td>15.43</td><td>64.88</td><td>0.00</td><td>100</td><td>308 Average</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4881.00	58.30	74.00	-15.70	80.49	34.14	9.53	65.86	0.00	100	319 Peak	2	4881.00	25.61	54.00	-28.39	47.80	34.14	9.53	65.86	0.00	100	319 Average	3	7321.50	52.92	74.00	-21.08	70.73	35.70	11.69	65.20	0.00	300	69 Peak	4	7321.50	20.23	54.00	-33.77	38.04	35.70	11.69	65.20	0.00	300	69 Average	5	12201.00	60.16	74.00	-13.84	70.81	38.00	15.43	64.88	0.00	100	308 Peak	6	12201.00	27.47	54.00	-26.53	38.12	38.00	15.43	64.88	0.00	100	308 Average
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	4881.00	58.30	74.00	-15.70	80.49	34.14	9.53	65.86	0.00	100	319 Peak																																																																																																								
2	4881.00	25.61	54.00	-28.39	47.80	34.14	9.53	65.86	0.00	100	319 Average																																																																																																								
3	7321.50	52.92	74.00	-21.08	70.73	35.70	11.69	65.20	0.00	300	69 Peak																																																																																																								
4	7321.50	20.23	54.00	-33.77	38.04	35.70	11.69	65.20	0.00	300	69 Average																																																																																																								
5	12201.00	60.16	74.00	-13.84	70.81	38.00	15.43	64.88	0.00	100	308 Peak																																																																																																								
6	12201.00	27.47	54.00	-26.53	38.12	38.00	15.43	64.88	0.00	100	308 Average																																																																																																								
Peak Avg																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4881.00</td><td>49.25</td><td>74.00</td><td>-24.75</td><td>71.44</td><td>34.14</td><td>9.53</td><td>65.86</td><td>0.00</td><td>300</td><td>161 Peak</td></tr><tr><td>2</td><td>4881.00</td><td>16.56</td><td>54.00</td><td>-37.44</td><td>38.75</td><td>34.14</td><td>9.53</td><td>65.86</td><td>0.00</td><td>300</td><td>161 Average</td></tr><tr><td>3</td><td>7320.00</td><td>59.07</td><td>74.00</td><td>-14.93</td><td>76.88</td><td>35.70</td><td>11.69</td><td>65.20</td><td>0.00</td><td>300</td><td>216 Peak</td></tr><tr><td>4</td><td>7320.00</td><td>26.38</td><td>54.00</td><td>-27.62</td><td>44.19</td><td>35.70</td><td>11.69</td><td>65.20</td><td>0.00</td><td>300</td><td>216 Average</td></tr><tr><td>5</td><td>12201.00</td><td>55.55</td><td>74.00</td><td>-18.45</td><td>66.20</td><td>38.00</td><td>15.43</td><td>64.88</td><td>0.00</td><td>300</td><td>0 Peak</td></tr><tr><td>6</td><td>12201.00</td><td>22.86</td><td>54.00</td><td>-31.14</td><td>33.51</td><td>38.00</td><td>15.43</td><td>64.88</td><td>0.00</td><td>300</td><td>0 Average</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4881.00	49.25	74.00	-24.75	71.44	34.14	9.53	65.86	0.00	300	161 Peak	2	4881.00	16.56	54.00	-37.44	38.75	34.14	9.53	65.86	0.00	300	161 Average	3	7320.00	59.07	74.00	-14.93	76.88	35.70	11.69	65.20	0.00	300	216 Peak	4	7320.00	26.38	54.00	-27.62	44.19	35.70	11.69	65.20	0.00	300	216 Average	5	12201.00	55.55	74.00	-18.45	66.20	38.00	15.43	64.88	0.00	300	0 Peak	6	12201.00	22.86	54.00	-31.14	33.51	38.00	15.43	64.88	0.00	300	0 Average
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	4881.00	49.25	74.00	-24.75	71.44	34.14	9.53	65.86	0.00	300	161 Peak																																																																																																								
2	4881.00	16.56	54.00	-37.44	38.75	34.14	9.53	65.86	0.00	300	161 Average																																																																																																								
3	7320.00	59.07	74.00	-14.93	76.88	35.70	11.69	65.20	0.00	300	216 Peak																																																																																																								
4	7320.00	26.38	54.00	-27.62	44.19	35.70	11.69	65.20	0.00	300	216 Average																																																																																																								
5	12201.00	55.55	74.00	-18.45	66.20	38.00	15.43	64.88	0.00	300	0 Peak																																																																																																								
6	12201.00	22.86	54.00	-31.14	33.51	38.00	15.43	64.88	0.00	300	0 Average																																																																																																								

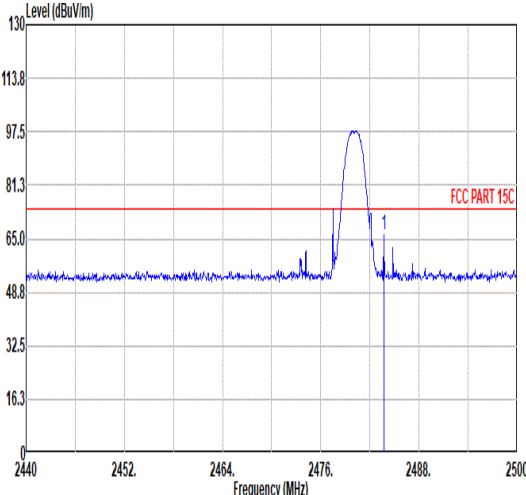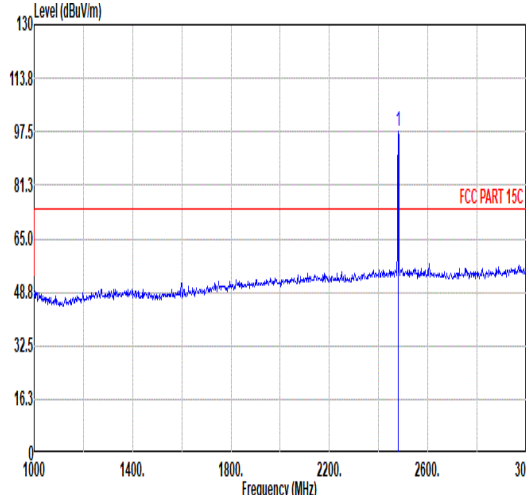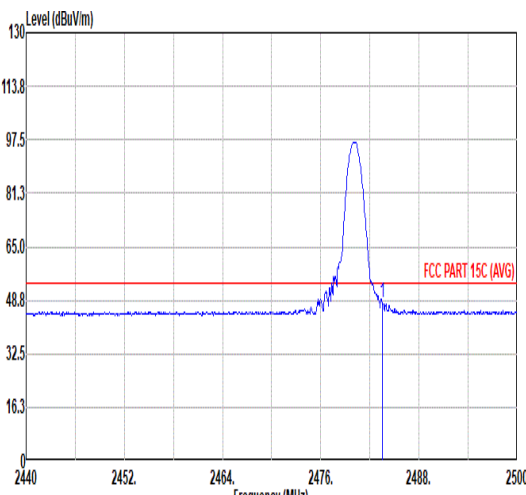
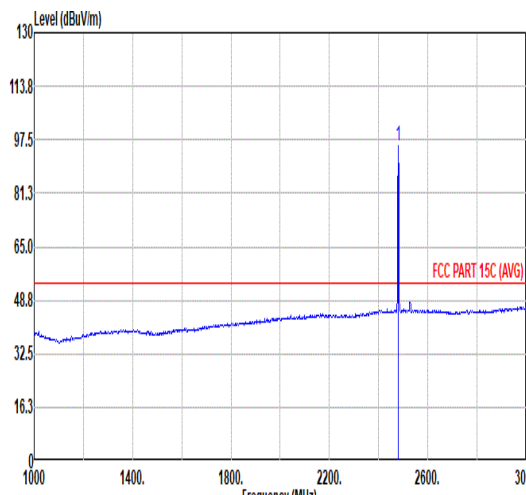


Mode	3																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.68</td><td>66.29</td><td>74.00</td><td>-7.71</td><td>53.19</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>101 179 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	66.29	74.00	-7.71	53.19	32.60	6.73	32.23	6.00	101 179 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>97.73</td><td>-----</td><td>-----</td><td>84.65</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>101 179 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.73	-----	-----	84.65	32.58	6.73	32.23	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.68	66.29	74.00	-7.71	53.19	32.60	6.73	32.23	6.00	101 179 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	97.73	-----	-----	84.65	32.58	6.73	32.23	6.00	101 179 PEAK																																																																																									
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>48.29</td><td>54.00</td><td>-5.71</td><td>35.19</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>101 179 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	48.29	54.00	-5.71	35.19	32.60	6.73	32.23	6.00	101 179 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>95.50</td><td>-----</td><td>-----</td><td>82.42</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>101 179 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.50	-----	-----	82.42	32.58	6.73	32.23	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.50	48.29	54.00	-5.71	35.19	32.60	6.73	32.23	6.00	101 179 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	95.50	-----	-----	82.42	32.58	6.73	32.23	6.00	101 179 AVERAGE																																																																																									



Mode	3																																																																																											
	Band Edge																																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>68.96</td><td>74.00</td><td>-5.04</td><td>55.86</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>100</td><td>283 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	68.96	74.00	-5.04	55.86	32.60	6.73	32.23	6.00	100	283 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>98.90</td><td>-----</td><td>-----</td><td>85.82</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>100</td><td>283 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.90	-----	-----	85.82	32.58	6.73	32.23	6.00	100	283 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2483.62	68.96	74.00	-5.04	55.86	32.60	6.73	32.23	6.00	100	283 PEAK																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	98.90	-----	-----	85.82	32.58	6.73	32.23	6.00	100	283 PEAK																																																																																	
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>49.82</td><td>54.00</td><td>-4.18</td><td>36.72</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>100</td><td>283 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	49.82	54.00	-4.18	36.72	32.60	6.73	32.23	6.00	100	283 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>98.31</td><td>-----</td><td>-----</td><td>85.23</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>100</td><td>283 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.31	-----	-----	85.23	32.58	6.73	32.23	6.00	100	283 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2483.56	49.82	54.00	-4.18	36.72	32.60	6.73	32.23	6.00	100	283 AVERAGE																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	98.31	-----	-----	85.23	32.58	6.73	32.23	6.00	100	283 AVERAGE																																																																																	

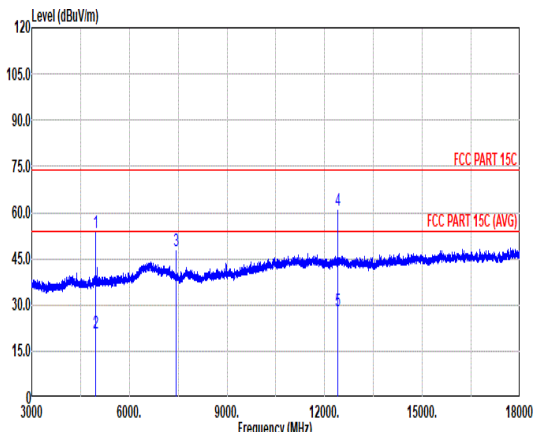
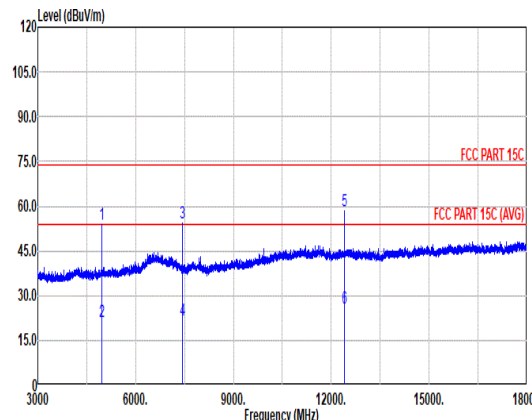


Mode	3																																																																																																																																																																																																																
	Harmonic																																																																																																																																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																																																																
ANT	1																																																																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																																																																										
Peak Avg																																																																																																																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4959.00</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>75.75</td><td>34.00</td><td>9.61</td><td>65.75</td><td>0.00</td><td>100</td><td>318 Peak</td></tr><tr><td>2</td><td>4959.00</td><td>20.92</td><td>54.00</td><td>-33.08</td><td>43.06</td><td>34.00</td><td>9.61</td><td>65.75</td><td>0.00</td><td>100</td><td>318 Average</td></tr><tr><td>3</td><td>7441.50</td><td>47.70</td><td>74.00</td><td>-26.30</td><td>65.79</td><td>35.70</td><td>11.78</td><td>65.57</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>12402.00</td><td>60.56</td><td>74.00</td><td>-13.44</td><td>71.01</td><td>38.00</td><td>15.58</td><td>64.83</td><td>0.00</td><td>100</td><td>330 Peak</td></tr><tr><td>5</td><td>12402.00</td><td>27.87</td><td>54.00</td><td>-26.13</td><td>38.32</td><td>38.00</td><td>15.58</td><td>64.83</td><td>0.00</td><td>100</td><td>330 Average</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4959.00	53.61	74.00	-20.39	75.75	34.00	9.61	65.75	0.00	100	318 Peak	2	4959.00	20.92	54.00	-33.08	43.06	34.00	9.61	65.75	0.00	100	318 Average	3	7441.50	47.70	74.00	-26.30	65.79	35.70	11.78	65.57	0.00	---	---	Peak	4	12402.00	60.56	74.00	-13.44	71.01	38.00	15.58	64.83	0.00	100	330 Peak	5	12402.00	27.87	54.00	-26.13	38.32	38.00	15.58	64.83	0.00	100	330 Average	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.50</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>75.88</td><td>34.00</td><td>9.61</td><td>65.74</td><td>0.00</td><td>278</td><td>0 Peak</td></tr><tr><td>2</td><td>4960.50</td><td>21.06</td><td>54.00</td><td>-32.94</td><td>43.19</td><td>34.00</td><td>9.61</td><td>65.74</td><td>0.00</td><td>278</td><td>0 Average</td></tr><tr><td>3</td><td>7441.50</td><td>54.39</td><td>74.00</td><td>-19.61</td><td>72.48</td><td>35.70</td><td>11.78</td><td>65.57</td><td>0.00</td><td>300</td><td>37 Peak</td></tr><tr><td>4</td><td>7441.50</td><td>21.70</td><td>54.00</td><td>-32.30</td><td>39.79</td><td>35.70</td><td>11.78</td><td>65.57</td><td>0.00</td><td>300</td><td>37 Average</td></tr><tr><td>5</td><td>12399.00</td><td>58.48</td><td>74.00</td><td>-15.52</td><td>68.93</td><td>38.00</td><td>15.58</td><td>64.83</td><td>0.00</td><td>100</td><td>149 Peak</td></tr><tr><td>6</td><td>12399.00</td><td>25.79</td><td>54.00</td><td>-28.21</td><td>36.24</td><td>38.00</td><td>15.58</td><td>64.83</td><td>0.00</td><td>100</td><td>149 Average</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.50	53.75	74.00	-20.25	75.88	34.00	9.61	65.74	0.00	278	0 Peak	2	4960.50	21.06	54.00	-32.94	43.19	34.00	9.61	65.74	0.00	278	0 Average	3	7441.50	54.39	74.00	-19.61	72.48	35.70	11.78	65.57	0.00	300	37 Peak	4	7441.50	21.70	54.00	-32.30	39.79	35.70	11.78	65.57	0.00	300	37 Average	5	12399.00	58.48	74.00	-15.52	68.93	38.00	15.58	64.83	0.00	100	149 Peak	6	12399.00	25.79	54.00	-28.21	36.24	38.00	15.58	64.83	0.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																							
1	4959.00	53.61	74.00	-20.39	75.75	34.00	9.61	65.75	0.00	100	318 Peak																																																																																																																																																																																																						
2	4959.00	20.92	54.00	-33.08	43.06	34.00	9.61	65.75	0.00	100	318 Average																																																																																																																																																																																																						
3	7441.50	47.70	74.00	-26.30	65.79	35.70	11.78	65.57	0.00	---	---	Peak																																																																																																																																																																																																					
4	12402.00	60.56	74.00	-13.44	71.01	38.00	15.58	64.83	0.00	100	330 Peak																																																																																																																																																																																																						
5	12402.00	27.87	54.00	-26.13	38.32	38.00	15.58	64.83	0.00	100	330 Average																																																																																																																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																							
1	4960.50	53.75	74.00	-20.25	75.88	34.00	9.61	65.74	0.00	278	0 Peak																																																																																																																																																																																																						
2	4960.50	21.06	54.00	-32.94	43.19	34.00	9.61	65.74	0.00	278	0 Average																																																																																																																																																																																																						
3	7441.50	54.39	74.00	-19.61	72.48	35.70	11.78	65.57	0.00	300	37 Peak																																																																																																																																																																																																						
4	7441.50	21.70	54.00	-32.30	39.79	35.70	11.78	65.57	0.00	300	37 Average																																																																																																																																																																																																						
5	12399.00	58.48	74.00	-15.52	68.93	38.00	15.58	64.83	0.00	100	149 Peak																																																																																																																																																																																																						
6	12399.00	25.79	54.00	-28.21	36.24	38.00	15.58	64.83	0.00	100	149 Average																																																																																																																																																																																																						



Mode	3	
	18G-25G	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	Horizontal Polarization Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line, a red line for FCC PART 15C, and a red line for FCC PART 15C (AVG). The signal level is approximately 48.8 dBuV/m, well below the 81.3 dBuV/m limit.	Vertical Polarization Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line, a red line for FCC PART 15C, and a red line for FCC PART 15C (AVG). The signal level is approximately 48.8 dBuV/m, well below the 81.3 dBuV/m limit.

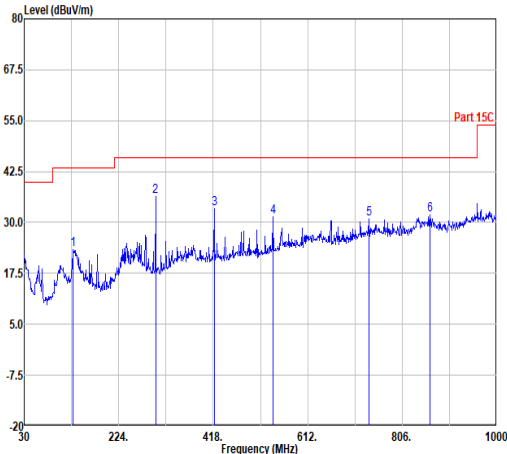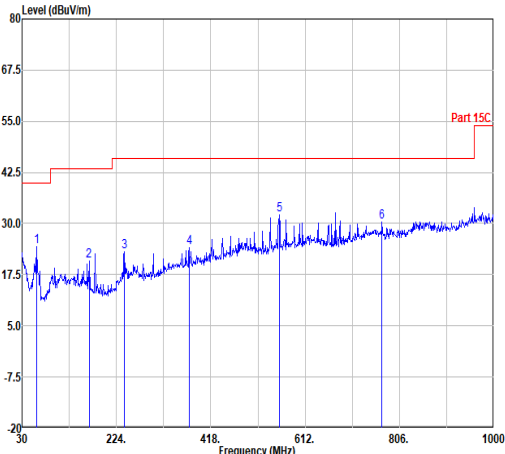

Mode	3																																																																																																																																																																																										
	30M-1G																																																																																																																																																																																										
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																																										
ANT	1																																																																																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																																																																																				
Peak																																																																																																																																																																																											
	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>130.88</td><td>23.28</td><td>43.50</td><td>-20.22</td><td>36.06</td><td>17.54</td><td>1.74</td><td>32.06</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>299.66</td><td>36.43</td><td>46.00</td><td>-9.57</td><td>46.93</td><td>19.14</td><td>2.66</td><td>32.30</td><td>--</td><td>-- Peak</td></tr><tr><td>3</td><td>419.94</td><td>33.28</td><td>46.00</td><td>-12.72</td><td>39.92</td><td>22.44</td><td>3.13</td><td>32.21</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>540.22</td><td>31.32</td><td>46.00</td><td>-14.68</td><td>35.57</td><td>24.61</td><td>3.54</td><td>32.40</td><td>--</td><td>-- Peak</td></tr><tr><td>5</td><td>737.13</td><td>30.99</td><td>46.00</td><td>-15.01</td><td>30.83</td><td>27.95</td><td>4.13</td><td>31.92</td><td>--</td><td>-- Peak</td></tr><tr><td>6</td><td>863.23</td><td>31.95</td><td>46.00</td><td>-14.05</td><td>29.37</td><td>29.59</td><td>4.46</td><td>31.47</td><td>--</td><td>-- Peak</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	130.88	23.28	43.50	-20.22	36.06	17.54	1.74	32.06	--	-- Peak	2	299.66	36.43	46.00	-9.57	46.93	19.14	2.66	32.30	--	-- Peak	3	419.94	33.28	46.00	-12.72	39.92	22.44	3.13	32.21	--	-- Peak	4	540.22	31.32	46.00	-14.68	35.57	24.61	3.54	32.40	--	-- Peak	5	737.13	30.99	46.00	-15.01	30.83	27.95	4.13	31.92	--	-- Peak	6	863.23	31.95	46.00	-14.05	29.37	29.59	4.46	31.47	--	-- Peak	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>60.07</td><td>24.42</td><td>40.00</td><td>-15.58</td><td>43.43</td><td>11.87</td><td>1.19</td><td>32.07</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>167.74</td><td>20.79</td><td>43.50</td><td>-22.71</td><td>35.30</td><td>15.59</td><td>1.97</td><td>32.07</td><td>--</td><td>-- Peak</td></tr><tr><td>3</td><td>240.49</td><td>23.14</td><td>46.00</td><td>-22.86</td><td>35.36</td><td>17.29</td><td>2.37</td><td>31.88</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>373.38</td><td>24.01</td><td>46.00</td><td>-21.99</td><td>32.32</td><td>20.80</td><td>2.94</td><td>32.05</td><td>--</td><td>-- Peak</td></tr><tr><td>5</td><td>558.65</td><td>32.06</td><td>46.00</td><td>-13.94</td><td>34.89</td><td>25.95</td><td>3.60</td><td>32.38</td><td>--</td><td>-- Peak</td></tr><tr><td>6</td><td>770.11</td><td>30.34</td><td>46.00</td><td>-15.66</td><td>29.90</td><td>27.95</td><td>4.22</td><td>31.73</td><td>--</td><td>-- Peak</td></tr></table>					Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	60.07	24.42	40.00	-15.58	43.43	11.87	1.19	32.07	--	-- Peak	2	167.74	20.79	43.50	-22.71	35.30	15.59	1.97	32.07	--	-- Peak	3	240.49	23.14	46.00	-22.86	35.36	17.29	2.37	31.88	--	-- Peak	4	373.38	24.01	46.00	-21.99	32.32	20.80	2.94	32.05	--	-- Peak	5	558.65	32.06	46.00	-13.94	34.89	25.95	3.60	32.38	--	-- Peak	6	770.11	30.34	46.00	-15.66	29.90	27.95	4.22	31.73	--	-- Peak
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																		
1	130.88	23.28	43.50	-20.22	36.06	17.54	1.74	32.06	--	-- Peak																																																																																																																																																																																	
2	299.66	36.43	46.00	-9.57	46.93	19.14	2.66	32.30	--	-- Peak																																																																																																																																																																																	
3	419.94	33.28	46.00	-12.72	39.92	22.44	3.13	32.21	--	-- Peak																																																																																																																																																																																	
4	540.22	31.32	46.00	-14.68	35.57	24.61	3.54	32.40	--	-- Peak																																																																																																																																																																																	
5	737.13	30.99	46.00	-15.01	30.83	27.95	4.13	31.92	--	-- Peak																																																																																																																																																																																	
6	863.23	31.95	46.00	-14.05	29.37	29.59	4.46	31.47	--	-- Peak																																																																																																																																																																																	
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																		
1	60.07	24.42	40.00	-15.58	43.43	11.87	1.19	32.07	--	-- Peak																																																																																																																																																																																	
2	167.74	20.79	43.50	-22.71	35.30	15.59	1.97	32.07	--	-- Peak																																																																																																																																																																																	
3	240.49	23.14	46.00	-22.86	35.36	17.29	2.37	31.88	--	-- Peak																																																																																																																																																																																	
4	373.38	24.01	46.00	-21.99	32.32	20.80	2.94	32.05	--	-- Peak																																																																																																																																																																																	
5	558.65	32.06	46.00	-13.94	34.89	25.95	3.60	32.38	--	-- Peak																																																																																																																																																																																	
6	770.11	30.34	46.00	-15.66	29.90	27.95	4.22	31.73	--	-- Peak																																																																																																																																																																																	

Note: For the above frequencies which fall in the non-restricted frequency band, the limit is 100kHz-PSD down 20dB.

Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	2.45	0.254	3.943	4kHz

Bluetooth LE 1Mbps

