

## FCC TEST REPORT (15.407)

**REPORT NO.:** RF940906H06

**MODEL NO.:** AP-80MB, AP-80SB, AP-80M, AP-80S

**RECEIVED:** Sep. 06, 2005

**TESTED:** Sep. 23 to Oct. 06, 2005

**ISSUED:** Oct. 22, 2005

**APPLICANT:** ARUBA WIRELESS NETWORKS INC.

**ADDRESS:** 1322 Crossman Ave. Sunnyvale , CA94089-1113, U.S.A.

**ISSUED BY:** Advance Data Technology Corporation

**TEST LOCATION:** No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien, Taiwan, R.O.C.

This test report consists of 138 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



0536  
ILAC MRA



No. 2177-01

## Table of Contents

|        |                                                              |    |
|--------|--------------------------------------------------------------|----|
| 1.     | CERTIFICATION .....                                          | 5  |
| 2.     | SUMMARY OF TEST RESULTS .....                                | 6  |
| 3.     | GENERAL INFORMATION.....                                     | 7  |
| 3.1    | GENERAL DESCRIPTION OF EUT .....                             | 7  |
| 3.2    | DESCRIPTION OF TEST MODES .....                              | 10 |
| 3.2.1  | TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL: .....     | 11 |
| 3.3    | GENERAL DESCRIPTION OF APPLIED STANDARDS .....               | 13 |
| 3.4    | DESCRIPTION OF SUPPORT UNITS.....                            | 14 |
| 3.5    | CONFIGURATION OF SYSTEM UNDER TEST .....                     | 15 |
| 4.     | TEST TYPES AND RESULTS .....                                 | 16 |
| 4.1    | CONDUCTED EMISSION MEASUREMENT .....                         | 16 |
| 4.1.1  | LIMITS OF CONDUCTED EMISSION MEASUREMENT .....               | 16 |
| 4.1.2  | TEST INSTRUMENTS .....                                       | 16 |
| 4.1.3  | TEST PROCEDURES .....                                        | 17 |
| 4.1.4  | DEVIATION FROM TEST STANDARD .....                           | 17 |
| 4.1.5  | TEST SETUP .....                                             | 18 |
| 4.1.6  | EUT OPERATING CONDITIONS.....                                | 18 |
| 4.1.7  | TEST RESULTS.....                                            | 19 |
| 4.2    | RADIATED EMISSION MEASUREMENT .....                          | 21 |
| 4.2.1  | LIMITS OF RADIATED EMISSION MEASUREMENT.....                 | 21 |
| 4.2.2  | LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS..... | 22 |
| 4.2.3  | TEST INSTRUMENTS .....                                       | 23 |
| 4.2.4  | TEST PROCEDURES.....                                         | 24 |
| 4.2.5  | DEVIATION FROM TEST STANDARD .....                           | 24 |
| 4.2.6  | TEST SETUP .....                                             | 25 |
| 4.2.7  | EUT OPERATING CONDITION .....                                | 25 |
| 4.2.8  | TEST RESULTS (ANTENNA 1).....                                | 26 |
| 4.2.9  | TEST RESULTS (ANTENNA 2).....                                | 30 |
| 4.2.10 | TEST RESULTS (ANTENNA 3).....                                | 34 |
| 4.2.11 | TEST RESULTS (ANTENNA 4).....                                | 38 |
| 4.3    | PEAK TRANSMIT POWER MEASUREMENT .....                        | 42 |
| 4.3.1  | LIMITS OF PEAK TRANSMIT POWER MEASUREMENT .....              | 42 |
| 4.3.2  | TEST INSTRUMENTS .....                                       | 42 |
| 4.3.3  | TEST PROCEDURE .....                                         | 43 |
| 4.3.4  | DEVIATION FROM TEST STANDARD .....                           | 43 |

|        |                                                         |     |
|--------|---------------------------------------------------------|-----|
| 4.3.5  | TEST SETUP .....                                        | 43  |
| 4.3.6  | EUT OPERATING CONDITIONS .....                          | 43  |
| 4.3.7  | TEST RESULTS (ANTENNA 1) .....                          | 44  |
| 4.3.8  | TEST RESULTS (ANTENNA 2) .....                          | 49  |
| 4.3.9  | TEST RESULTS (ANTENNA 3) .....                          | 54  |
| 4.3.10 | TEST RESULTS (ANTENNA 4) .....                          | 59  |
| 4.4    | PEAK POWER EXCURSION MEASUREMENT .....                  | 64  |
| 4.4.1  | LIMITS OF PEAK POWER EXCURSION MEASUREMENT .....        | 64  |
| 4.4.2  | TEST INSTRUMENTS .....                                  | 64  |
| 4.4.3  | TEST PROCEDURE .....                                    | 65  |
| 4.4.4  | DEVIATION FROM TEST STANDARD .....                      | 65  |
| 4.4.5  | TEST SETUP .....                                        | 65  |
| 4.4.6  | EUT OPERATING CONDITIONS .....                          | 65  |
| 4.4.7  | TEST RESULTS (ANTENNA 1) .....                          | 66  |
| 4.4.8  | TEST RESULTS (ANTENNA 2) .....                          | 70  |
| 4.4.9  | TEST RESULTS (ANTENNA 3) .....                          | 74  |
| 4.4.10 | TEST RESULTS (ANTENNA 4) .....                          | 78  |
| 4.5    | PEAK POWER SPECTRAL DENSITY MEASUREMENT .....           | 82  |
| 4.5.1  | LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT ..... | 82  |
| 4.5.2  | TEST INSTRUMENTS .....                                  | 82  |
| 4.5.3  | TEST PROCEDURES .....                                   | 83  |
| 4.5.4  | DEVIATION FROM TEST STANDARD .....                      | 83  |
| 4.5.5  | TEST SETUP .....                                        | 83  |
| 4.5.6  | EUT OPERATING CONDITIONS .....                          | 83  |
| 4.5.7  | TEST RESULTS (ANTENNA 1) .....                          | 84  |
| 4.5.8  | TEST RESULTS (ANTENNA 2) .....                          | 88  |
| 4.5.9  | TEST RESULTS (ANTENNA 3) .....                          | 92  |
| 4.5.10 | TEST RESULTS (ANTENNA 4) .....                          | 96  |
| 4.6    | FREQUENCY STABILITY .....                               | 100 |
| 4.6.1  | LIMITS OF FREQUENCY STABILITY MEASUREMENT .....         | 100 |
| 4.6.2  | TEST INSTRUMENTS .....                                  | 100 |
| 4.6.3  | TEST PROCEDURE .....                                    | 100 |
| 4.6.4  | DEVIATION FROM TEST STANDARD .....                      | 101 |
| 4.6.5  | TEST SETUP .....                                        | 101 |
| 4.6.6  | EUT OPERATING CONDITION .....                           | 101 |
| 4.6.7  | TEST RESULTS (ANTENNA 1) .....                          | 102 |
| 4.6.8  | TEST RESULTS (ANTENNA 2) .....                          | 103 |
| 4.6.9  | TEST RESULTS (ANTENNA 3) .....                          | 104 |
| 4.6.10 | TEST RESULTS (ANTENNA 4) .....                          | 105 |
| 4.7    | BAND EDGES MEASUREMENT .....                            | 106 |



4.7.1 TEST INSTRUMENTS .....106

4.7.2 TEST PROCEDURE .....106

4.7.3 EUT OPERATING CONDITION .....106

4.7.4 TEST RESULTS (ANTENNA 1).....107

4.7.5 TEST RESULTS (ANTENNA 2)..... 113

4.7.6 TEST RESULTS (ANTENNA 3)..... 119

4.7.7 TEST RESULTS (ANTENNA 4).....125

4.8 ANTENNA REQUIREMENT ..... 131

4.8.1 STANDARD APPLICABLE .....131

4.8.2 ANTENNA CONNECTED CONSTRUCTION .....131

5. PHOTOGRAPHS OF THE TEST CONFIGURATION.....132

6. INFORMATION ON THE TESTING LABORATORIES .....137

APPENDIX-A..... A-1



## 1. CERTIFICATION

**PRODUCT:** Aruba 80 a+b/g Outdoor Stand-alone Access Point /  
WDS Bridge Master  
Aruba 80 a+b/g Outdoor Stand-alone Access Point /  
WDS Bridge Slave

**BRAND NAME:** ARUBA WIRELESS NETWORKS

**MODEL NO.:** AP-80MB, AP-80SB, AP-80M, AP-80S

**TEST SAMPLE:** R&D SAMPLE

**TESTED:** Sep. 23 to Oct. 06, 2005

**APPLICANT:** ARUBA WIRELESS NETWORKS INC.

**STANDARDS:** FCC Part 15, Subpart E (Section 15.407)  
ANSI C63.4-2003

The above equipment (Model: AP-80MB) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Carol Liao , **DATE:** Oct. 22, 2005  
( Carol Liao )

**TECHNICAL**  
**ACCEPTANCE :** Hank Chung , **DATE:** Oct. 22, 2005  
Responsible for RF ( Hank Chung )

**APPROVED BY :** May Chen , **DATE:** Oct. 22, 2005  
(May Chen, Deputy Manager)

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| <b>APPLIED STANDARD: FCC Part 15, Subpart E (Section 15.407)</b> |                                                              |               |                                                                                   |
|------------------------------------------------------------------|--------------------------------------------------------------|---------------|-----------------------------------------------------------------------------------|
| <b>Standard Section</b>                                          | <b>Test Type</b>                                             | <b>Result</b> | <b>Remark</b>                                                                     |
| 15.407(b)(5)                                                     | AC Power Conducted Emission                                  | PASS          | Meet the requirement of limit.<br>Minimum passing margin is -10.19dB at 0.344MHz  |
| 15.407(b/1/2/3)(b)(5)                                            | Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz | PASS          | Meet the requirement of limit.<br>Minimum passing margin is -0.50dB at 5350.00MHz |
| 15.407(a/1/2/3)                                                  | Peak Transmit Power                                          | PASS          | Meet the requirement of limit.                                                    |
| 15.407(a)(6)                                                     | Peak Power Excursion                                         | PASS          | Meet the requirement of limit.                                                    |
| 15.407(a/1/2/3)                                                  | Peak Power Spectral Density                                  | PASS          | Meet the requirement of limit.                                                    |
| 15.407(g)                                                        | Frequency Stability                                          | PASS          | Meet the requirement of limit.                                                    |

**NOTE:**

1. The EUT was operating in 2.412 ~ 2.462GHz, 5.250 ~ 5.350GHz and 5.725 ~ 5.850GHz frequencies band. This report was recorded the RF parameters including 5.250 ~ 5.350GHz. For the 2.412 ~ 2.462GHz and 5.725 ~ 5.850GHz RF parameters was recorded in another test report.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                              |                                                                                                                                                |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EUT</b>                   | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master                                                                            |
| <b>MODEL NO.</b>             | AP-80MB                                                                                                                                        |
| <b>POWER SUPPLY</b>          | DC 48 V from POE                                                                                                                               |
| <b>MODULATION TYPE</b>       | CCK, DQPSK, DBPSK for DSSS<br>64QAM, 16QAM, QPSK, BPSK for OFDM                                                                                |
| <b>MODULATION TECHNOLOGY</b> | DSSS, OFDM                                                                                                                                     |
| <b>TRANSFER RATE</b>         | 802.11b: 11/5.5/2/1Mbps<br>802.11g: 54/48/36/24/18/12/9/6Mbps<br>802.11a: 54/48/36/24/18/12/9/6Mbps<br>(Turbo mode: up to 108Mbps *see Note 2) |
| <b>FREQUENCY RANGE</b>       | 802.11b & 802.11g: 2412 ~ 2462MHz<br>802.11a: 5.25 ~ 5.35GHz and 5.725 ~ 5.850GHz                                                              |
| <b>NUMBER OF CHANNEL</b>     | 802.11b & 802.11g: 11 (1 for 802.11g Turbo mode)<br>802.11a: 9 (3 for 802.11a Turbo mode)                                                      |
| <b>CHANNEL SPACING</b>       | 802.11b & 802.11g: 5MHz<br>802.11a: 20MHz for Normal mode / 40MHz for Turbo mode                                                               |
| <b>OUTPUT POWER</b>          | Please see note 7 (on next page)                                                                                                               |
| <b>DATA CABLE</b>            | POE Cable x 1 (Shielded, 30m)                                                                                                                  |
| <b>ANTENNA TYPE</b>          | Please see note 5 (on next page)                                                                                                               |
| <b>I/O PORTS</b>             | RJ 45 Port x 1                                                                                                                                 |
| <b>ASSOCIATED DEVICES</b>    | NA                                                                                                                                             |

#### NOTE:

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
2. This EUT is capable of providing data rates of up to 108 Mbps in 802.11a/g Turbo mode depending upon reception quality.
3. The EUT was operated with the following power adapter:

|                |                                |
|----------------|--------------------------------|
| <b>BRAND:</b>  | MICROELECTRONICS TECH. INC.    |
| <b>MODEL:</b>  | TR60A-POE-L(0640-0086)         |
| <b>INPUT:</b>  | INPUT: 100-240Vac 1.5A 47-63Hz |
| <b>OUTPUT:</b> | OUTPUT: 48V, 1.2A              |

4. The EUT has four model names which are identical to each other in all aspects except for the followings:

| Brand Name | Model Name | Product Name                                                        | Difference                       |
|------------|------------|---------------------------------------------------------------------|----------------------------------|
| Aruba      | AP-80SB    | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Slave  | Int5G.+Ext2.4G (Accton software) |
| Aruba      | AP-80MB    | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master | Ext2.4G+Ext5G (Accton software)  |
| Aruba      | AP-80S     | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Slave  | Int5G.+Ext2.4G (Aruba software)  |
| Aruba      | AP-80M     | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master | Ext2.4G+Ext5G (Aruba software)   |

From the above models, model: **AP-80MB** was selected as representative model for the test and its data were recorded in this report.

5. There are eleven antennas provided to this EUT, please refer to the following table:

| For 2.4GHz |           |            |                 |                                             |                   |
|------------|-----------|------------|-----------------|---------------------------------------------|-------------------|
| No.        | Model No. | Gain (dBi) | Cable Loss (dB) | Antenna Type                                | Antenna Connector |
| 1          | AP-ANT-80 | 8.0 dBi    | 0.79dB          | Dipole                                      | N-type            |
| 2          | AP-ANT-82 | 12.0 dBi   |                 | Wide-Angle (H-Plane)90°Sectored             |                   |
| 3          | AP-ANT-84 | 5.0 dBi    |                 | Wide-Angle 135° Directional                 |                   |
| 4          | AP-ANT-85 | 15.0 dBi   |                 | High Gain, Directional Panel                |                   |
| 5          | AP-ANT-87 | 7.0 dBi    |                 | Wide-Angle (H-Plane)60°Patch                |                   |
| 6          | AP-ANT-81 | 8.0 dBi    |                 | Wide-Angle (H-Plane)60°Sectored             |                   |
| 7          | AP-ANT-83 | 7.0 dBi    |                 | Wide-Angle 90° Directional Sectored         |                   |
| For 5GHz   |           |            |                 |                                             |                   |
| No.        | Model No. | Gain (dBi) | Cable Loss (dB) | Antenna Type                                | Antenna Connector |
| 1          | AP-ANT-86 | 9.0dBi     | 1.36dB          | Omnidirectional (Dipole)                    | N-type            |
| 2          | AP-ANT-87 | 7.0dBi     |                 | Wide-Angle (H-Plane)60°Patch                |                   |
| 3          | AP-ANT-88 | 10.0dBi    |                 | 120° Sector, typical with 36” cable         |                   |
| 4          | AP-ANT-89 | 14.0dBi    |                 | Wide-Angle, High Gain, Directional Panel,   |                   |
| 5          | ANT05535  | 17.0dBi    | NA              | Directional, Patch Panel (Internal Antenna) | Probe Pin         |

**Note:**

- All of the above antennas are outdoor Antenna except the antenna model No.: ANT05535.
- Antenna Model No. AP-ANT-85, AP-ANT-89 and ANT05535 can be used in point-to-point applications.
- From above antennas, the different type of antennas were chosen for final test and its data were recorded in this report.
- For 2.4GHz antennas, antenna 2, 6 and 7 are the same type of antenna ( wide Angle(H-Plane)Sectoredand ), we choose the highest gain antenna for final test. Antenna 2, the highest antenna gain one, was selected as representative antenna for the test.

## 6. Frequency Range of each Antennas are as followings:

| For 2.4GHz  |                                         |
|-------------|-----------------------------------------|
| Antenna No. | Frequency Range                         |
| No. 1 ~ 7   | 2400MHz ~ 2483.5MHz                     |
| For 5GHz    |                                         |
| Antenna No. | Frequency Range                         |
| No. 1 ~ 4   | 5.25GHz~5.35GHz and 5.725GHz ~ 5.850GHz |
| No. 5       | 5.725GHz ~ 5.850GHz (ISM Band)          |

## 7. Maximum peak output power (Unit : dBm) :

| No. | Model No.<br>(Antenna) | Operating Frequency (MHz) |           |           |
|-----|------------------------|---------------------------|-----------|-----------|
|     |                        | 2412~2462                 | 5250~5350 | 5725~5850 |
| 1   | AP-ANT-80              | 24.06                     | NA        | NA        |
| 2   | AP-ANT-82              | 18.46                     | NA        | NA        |
| 3   | AP-ANT-84              | 24.06                     | NA        | NA        |
| 4   | AP-ANT-85              | 18.46                     | NA        | NA        |
| 5   | AP-ANT-87              | 24.06                     | 22.53     | 24.98     |
| 6   | AP-ANT-86              | NA                        | 20.44     | 24.98     |
| 7   | AP-ANT-88              | NA                        | 19.39     | 24.98     |
| 8   | AP-ANT-89              | NA                        | 16.56     | 24.98     |
| 9   | ANT05535               | NA                        | NA        | 13.50     |

## 8. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

Operated in 5250MHz ~ 5350MHz bands:

Four channels are provided to this EUT for normal mode.

| Channel | Frequency |
|---------|-----------|
| 1       | 5260 MHz  |
| 2       | 5280 MHz  |
| 3       | 5300 MHz  |
| 4       | 5320 MHz  |

one channel is provided to this EUT for turbo mode.

| Channel | Frequency |
|---------|-----------|
| 1       | 5290 MHz  |

## 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

| EUT<br>configure<br>mode | Applicable to |       |       |      | Description |
|--------------------------|---------------|-------|-------|------|-------------|
|                          | PLC           | RE<1G | RE≥1G | APCM |             |
| -                        | X             | X     | X     | X    | NA          |

Where PLC: Power Line Conducted Emission

RE&lt;1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

**Power Line Conducted Emission Test:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| Mode    | Available Channel | Tested Channel | Modulation Technology | Modulation Type | Data Rate (Mbps) |
|---------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11a | 1 to 4            | 4              | OFDM                  | BPSK            | 6                |

**Radiated Emission Test (Below 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| Mode    | Available Channel | Tested Channel | Modulation Technology | Modulation Type | Data Rate (Mbps) |
|---------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11a | 1 to 4            | 4              | OFDM                  | BPSK            | 6                |

**Radiated Emission Test (Above 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| Mode          | Available Channel | Tested Channel | Modulation Technology | Modulation Type | Data Rate (Mbps) |
|---------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11a       | 1 to 4            | 1, 4           | OFDM                  | BPSK            | 6                |
| 802.11a Turbo | 1                 | 1              | OFDM                  | BPSK            | 12               |



### **Bandedge Measurement:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| Mode          | Available Channel | Tested Channel | Modulation Technology | Modulation Type | Data Rate (Mbps) |
|---------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11a       | 1 to 4            | 1, 4           | OFDM                  | BPSK            | 6                |
| 802.11a Turbo | 1                 | 1              | OFDM                  | BPSK            | 12               |

### **Antenna Port Conducted Measurement:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| Mode          | Available Channel | Tested Channel | Modulation Technology | Modulation Type | Data Rate (Mbps) |
|---------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11a       | 1 to 4            | 1, 4           | OFDM                  | BPSK            | 6                |
| 802.11a Turbo | 1                 | 1              | OFDM                  | BPSK            | 12               |



### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is an Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### **FCC Part 15, Subpart E (15.407)**

#### **ANSI C63.4-2003**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT              | BRAND | MODEL NO. | SERIAL NO.                   | FCC ID  |
|-----|----------------------|-------|-----------|------------------------------|---------|
| 1   | NOTEBOOK<br>COMPUTER | DELL  | PP01L     | TW-09c748-<br>12800-165-3171 | FCC DoC |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|-----------------------------------------------------|
| 1   | NA                                                  |

**NOTE:** All power cords of the above support units are non shielded (1.8m).

### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

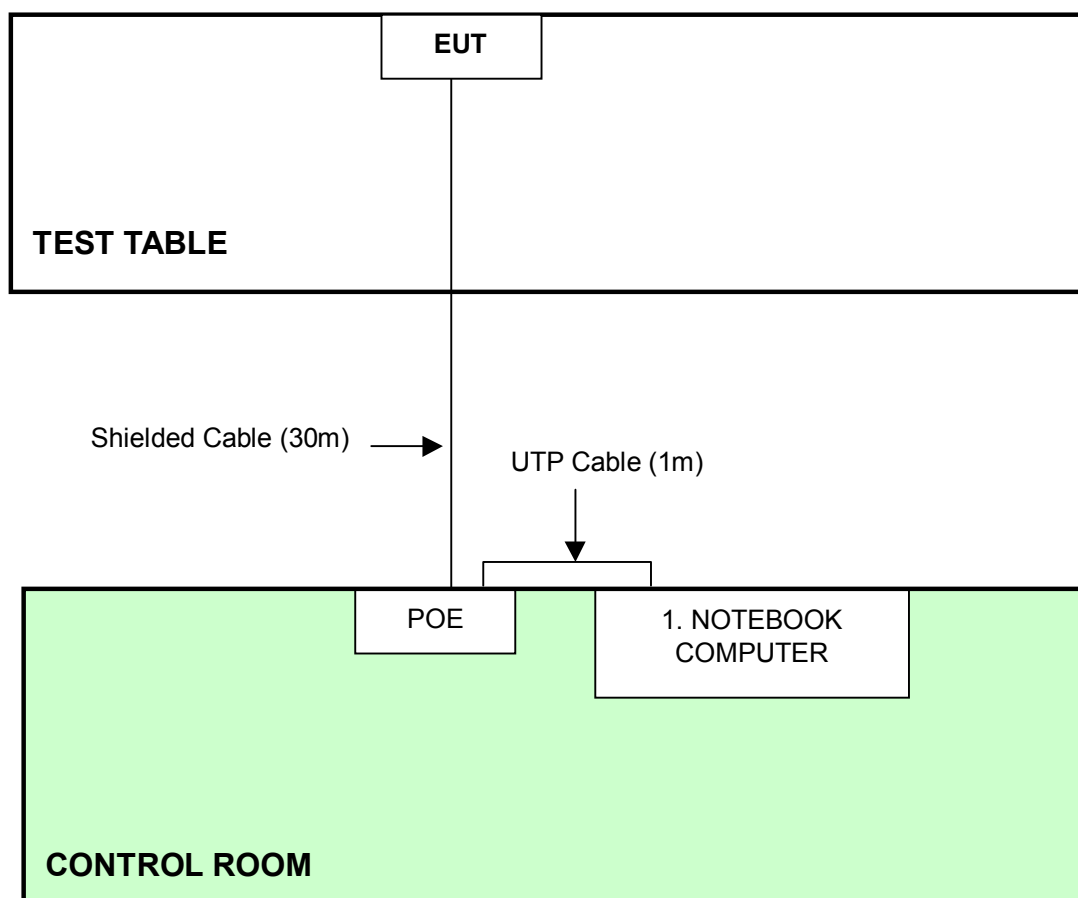

**NOTE:** 1. Support unit 1 was kept in the control room during the test.  
2. Please refer to the photos of test configuration in Item 6 also.

## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15-0.5                    | 66 to 56                     | 56 to 46 |
| 0.5-5                       | 56                           | 46       |
| 5-30                        | 60                           | 50       |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER        | MODEL NO. | SERIAL NO.  | CALIBRATED UNTIL |
|-----------------------------------|-----------|-------------|------------------|
| ROHDE & SCHWARZ<br>Test Receiver  | ESCS 30   | 847124/029  | Dec. 07, 2005    |
| ROHDE & SCHWARZ LISN<br>(for EUT) | ESHS-Z5   | 848773/004  | Nov. 08, 2005    |
| KYORITSU LISN (for peripheral)    | KNW-407   | 8/1395/12   | Jul. 19, 2006    |
| RF Cable (JETBAO)                 | RG233/U   | Cable_CA_01 | Jul. 19, 2006    |
| Terminator(for KYORITSU)          | 50        | 3           | Oct. 12, 2005    |
| Software                          | Cond-V2e  | NA          | NA               |

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. The measurement uncertainty is 2.53 dB, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.




#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit - 20dB) was not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

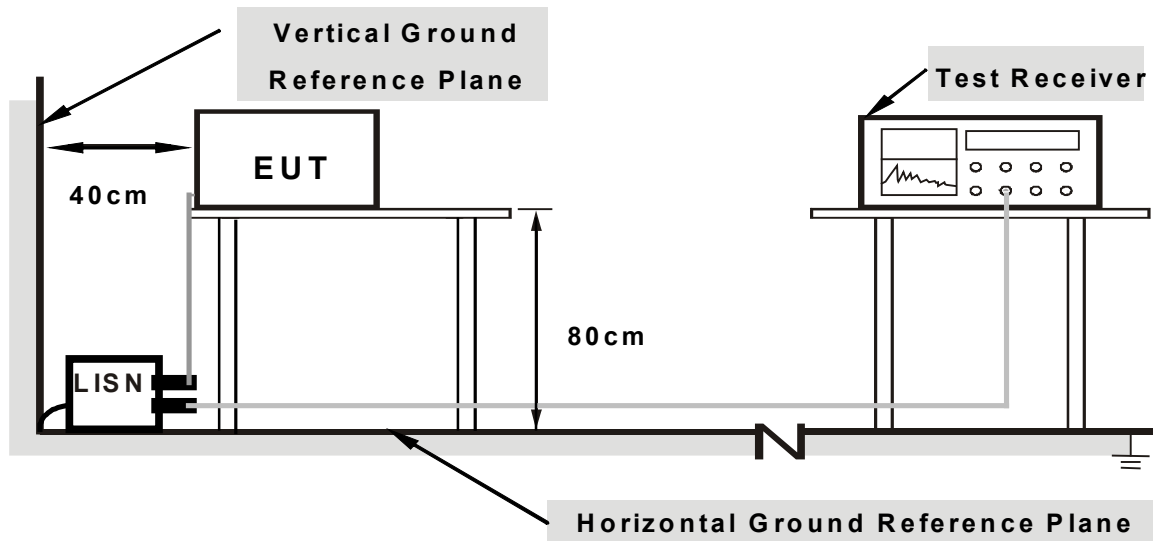

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared other computer system to act as a communication partner and placed it outside of testing area.
- The communication partner run test program “ART V48 build5” to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cable and wireless.


## 4.1.7 TEST RESULTS

**Conducted Worst-Case Data**

|                                 |                                                                     |                      |               |
|---------------------------------|---------------------------------------------------------------------|----------------------|---------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                      |               |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>6dB BANDWIDTH</b> | 9 kHz         |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>TRANSFER RATE</b> | 6Mbps         |
| <b>INPUT POWER (SYSTEM)</b>     | 120VAC, 60 HZ                                                       | <b>PHASE</b>         | Line (L)      |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 65%RH, 961hPa                                             | <b>TESTED BY</b>     | Phoenix Huang |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.206          | 0.15                    | 43.61         | -   | 43.76          | -   | 63.37     | 53.37 | -19.61 | -   |
| 2  | 0.345          | 0.16                    | 45.05         | -   | 45.21          | -   | 59.07     | 49.07 | -13.86 | -   |
| 3  | 0.548          | 0.18                    | 37.96         | -   | 38.14          | -   | 56.00     | 46.00 | -17.86 | -   |
| 4  | 0.619          | 0.18                    | 38.81         | -   | 38.99          | -   | 56.00     | 46.00 | -17.01 | -   |
| 5  | 2.310          | 0.28                    | 36.00         | -   | 36.28          | -   | 56.00     | 46.00 | -19.72 | -   |
| 6  | 19.526         | 1.30                    | 34.42         | -   | 35.72          | -   | 60.00     | 50.00 | -24.28 | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

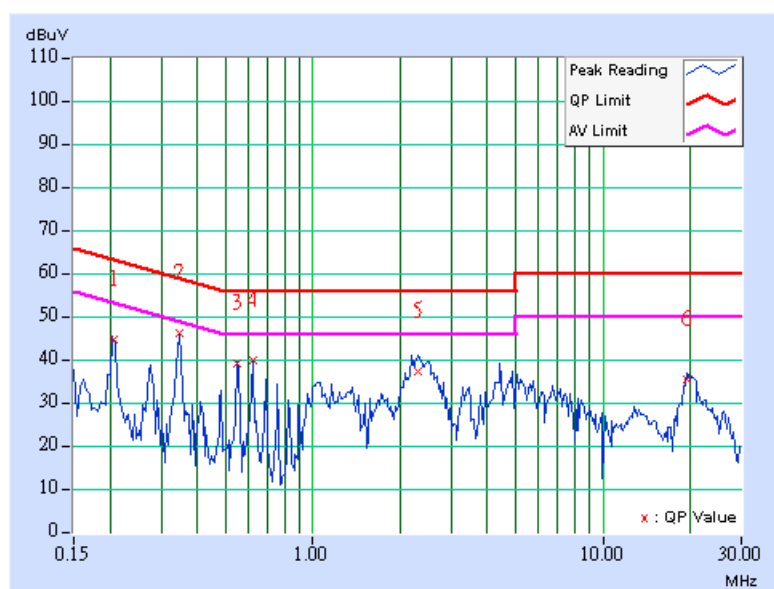

|                                 |                                                                     |                      |               |
|---------------------------------|---------------------------------------------------------------------|----------------------|---------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                      |               |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>6dB BANDWIDTH</b> | 9 kHz         |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>TRANSFER RATE</b> | 6Mbps         |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>PHASE</b>         | Neutral (N)   |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 65%RH, 961hPa                                             | <b>TESTED BY</b>     | Phoenix Huang |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |     | Emission Level<br>[dB (uV)] |     | Limit<br>[dB (uV)] |       | Margin<br>(dB) |     |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
|    |                |                         |                            |     |                             |     |                    |       |                |     |
|    |                |                         | Q.P.                       | AV. | Q.P.                        | AV. | Q.P.               | AV.   | Q.P.           | AV. |
| 1  | 0.206          | 0.15                    | 46.53                      | -   | 46.68                       | -   | 63.37              | 53.37 | -16.69         | -   |
| 2  | 0.344          | 0.16                    | 48.75                      | -   | 48.91                       | -   | 59.11              | 49.11 | -10.19         | -   |
| 3  | 0.550          | 0.18                    | 38.64                      | -   | 38.82                       | -   | 56.00              | 46.00 | -17.18         | -   |
| 4  | 0.619          | 0.18                    | 37.88                      | -   | 38.06                       | -   | 56.00              | 46.00 | -17.94         | -   |
| 5  | 2.267          | 0.28                    | 33.27                      | -   | 33.55                       | -   | 56.00              | 46.00 | -22.45         | -   |
| 6  | 19.793         | 1.12                    | 35.11                      | -   | 36.23                       | -   | 60.00              | 50.00 | -23.77         | -   |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

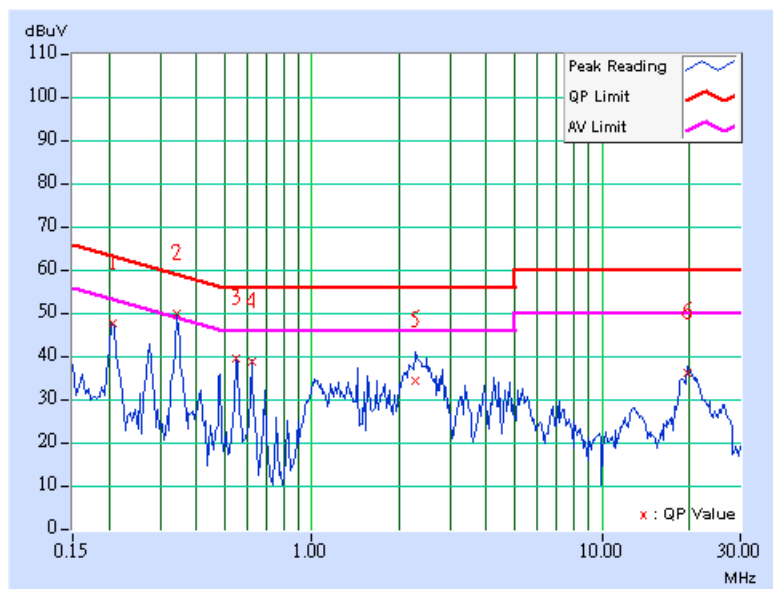

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| Frequencies (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009-0.490       | 2400/F(kHz)                       | 300                           |
| 0.490-1.705       | 24000/F(kHz)                      | 30                            |
| 1.705-30.0        | 30                                | 30                            |
| 30-88             | 100                               | 3                             |
| 88-216            | 150                               | 3                             |
| 216-960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## 4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

| Frequencies (MHz) | EIRP Limit (dBm) | Equivalent Field Strength at 3m (dBμV/m) *note 3 |
|-------------------|------------------|--------------------------------------------------|
| 5150~5250         | -27              | 68.3                                             |
| 5250~5350         | -27              | 68.3                                             |
| 5725~5825         | -27 *note 1      | 68.3                                             |
|                   | -17 *note 2      | 78.3                                             |

**NOTE:**

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

## 4.2.3 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER       | MODEL NO.              | SERIAL NO.              | CALIBRATED UNTIL |
|----------------------------------|------------------------|-------------------------|------------------|
| ADVANTEST Spectrum Analyzer      | R3271A                 | 85060311                | July 07, 2006    |
| HP Pre_Amplifier                 | 8449B                  | 3008A01922              | Oct. 13, 2005    |
| ROHDE & SCHWARZ<br>Test Receiver | ESCS30                 | 100287                  | Dec. 08, 2005    |
| CHASE Broadband Antenna          | VULB9168               | 138                     | Dec. 21, 2005    |
| Schwarzbeck Horn_Antenna         | BBHA9120               | D124                    | Dec. 11, 2005    |
| Schwarzbeck Horn_Antenna         | BBHA 9170              | BBHA9170153             | Jan. 30, 2006    |
| SCHWARZBECK<br>Biconical Antenna | VHBA9123               | 459                     | Jun. 26, 2006    |
| SCHWARZBECK<br>Periodic Antenna  | UPA6108                | 1148                    | Jun. 26, 2006    |
| RF Switches (ARNITSU)            | CS-201                 | 1565157                 | NA               |
| RF CABLE (Chaintek) 1GHz-20GHz   | SF102                  | 22054-2                 | Nov. 15, 2005    |
| RF Cable(RICHTEC)                | 9913-30M               | STCCAB-30M-<br>1GHz-021 | Jul. 16, 2006    |
| Software                         | ADT_Radiated_V<br>5.14 | NA                      | NA               |
| CHANCE MOST<br>Antenna Tower     | AT-100                 | 0203                    | NA               |
| CHANCE MOST Turn Table           | TT-100                 | 0203                    | NA               |

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Measurement                       | Value   |
|-----------------------------------|---------|
| Radiated emissions (30MHz-1GHz)   | 2.98 dB |
| Radiated emissions (1GHz ~18GHz)  | 2.21 dB |
| Radiated emissions (18GHz ~20GHz) | 1.88 dB |

#### 4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.5 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.6 TEST SETUP

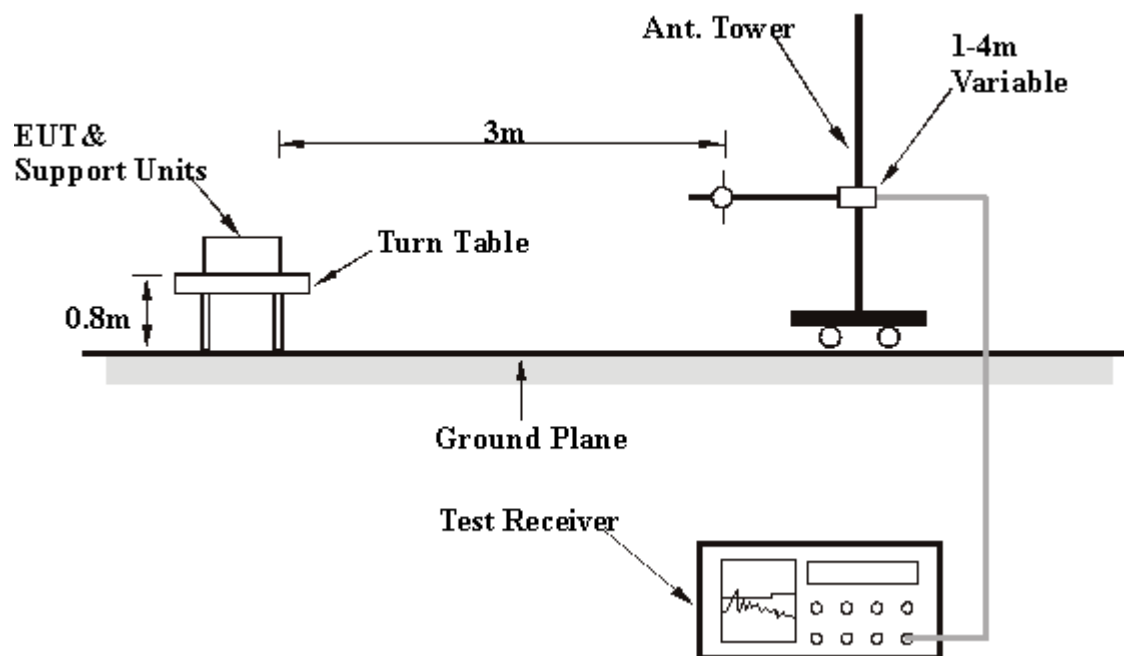

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

## 4.2.8 TEST RESULTS (ANTENNA 1)

## Below 1GHz Worst-Case Data

|                                 |                                                                     |                          |               |
|---------------------------------|---------------------------------------------------------------------|--------------------------|---------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |               |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>FREQUENCY RANGE</b>   | Below 1000MHz |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>TRANSFER RATE</b>     | 6Mbps         |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>DETECTOR FUNCTION</b> | Quasi-Peak    |
| <b>ENVIRONMENTAL CONDITIONS</b> | 28deg. C, 55%RH, 966hPa                                             | <b>TESTED BY</b>         | Wen Yu        |

## ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 200.01      | 26.40 QP                | 43.50          | -17.10      | 1.25 H             | 210                  | 15.90            | 10.50                    |
| 2   | 250.02      | 32.10 QP                | 46.00          | -13.90      | 1.84 H             | 113                  | 18.50            | 13.60                    |
| 3   | 320.01      | 30.90 QP                | 46.00          | -15.10      | 1.24 H             | 53                   | 14.70            | 16.20                    |
| 4   | 375.02      | 27.00 QP                | 46.00          | -19.00      | 1.25 H             | 357                  | 9.50             | 17.50                    |
| 5   | 400.01      | 24.90 QP                | 46.00          | -21.10      | 1.43 H             | 2                    | 6.40             | 18.40                    |
| 6   | 500.01      | 27.30 QP                | 46.00          | -18.70      | 1.10 H             | 2                    | 7.10             | 20.20                    |
| 7   | 550.01      | 29.90 QP                | 46.00          | -16.10      | 1.00 H             | 37                   | 7.80             | 22.10                    |
| 8   | 600.01      | 28.60 QP                | 46.00          | -17.40      | 1.45 H             | 34                   | 6.80             | 21.90                    |

## ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 120.00      | 30.80 QP                | 43.50          | -12.70      | 1.34 V             | 353                  | 19.40            | 11.50                    |
| 2   | 200.00      | 31.40 QP                | 43.50          | -12.10      | 1.36 V             | 9                    | 20.20            | 11.20                    |
| 3   | 240.01      | 32.50 QP                | 46.00          | -13.50      | 1.74 V             | 300                  | 19.60            | 12.90                    |
| 4   | 250.02      | 29.90 QP                | 46.00          | -16.10      | 1.60 V             | 326                  | 16.60            | 13.30                    |
| 5   | 320.00      | 31.90 QP                | 46.00          | -14.10      | 1.39 V             | 55                   | 15.40            | 16.50                    |
| 6   | 399.98      | 31.50 QP                | 46.00          | -14.50      | 1.24 V             | 36                   | 13.10            | 18.40                    |
| 7   | 550.00      | 32.40 QP                | 46.00          | -13.60      | 1.22 V             | 25                   | 10.10            | 22.30                    |
| 8   | 600.00      | 32.60 QP                | 46.00          | -13.40      | 1.24 V             | 143                  | 9.10             | 23.50                    |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value

**802.11a OFDM modulation**

|                                 |                                                                     |                          |                          |
|---------------------------------|---------------------------------------------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |                          |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>CHANNEL</b>           | Channel 1                |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>FREQUENCY RANGE</b>   | 1 ~ 40 GHz               |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>TRANSFER RATE</b>     | 6Mbps                    |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 70%RH, 966hPa                                             | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Wen Yu                                                              |                          |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5260.00    | 99.70 PK                |                |             | 1.34 H             | 79                   | 63.90            | 35.80                    |
| 1   | *5260.00    | 91.10 AV                |                |             | 1.34 H             | 79                   | 55.30            | 35.80                    |
| 2   | 10520.00    | 49.10 PK                | 68.30          | -19.20      | 1.20 H             | 3                    | 4.40             | 44.70                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5260.00    | 115.10 PK               |                |             | 1.15 V             | 3                    | 79.30            | 35.80                    |
| 1   | *5260.00    | 107.00 AV               |                |             | 1.15 V             | 3                    | 71.20            | 35.80                    |
| 2   | 10520.00    | 50.20 PK                | 68.30          | -18.10      | 1.14 V             | 2                    | 5.50             | 44.70                    |

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. “\*” : Fundamental frequency
  6. “#” The radiated frequency falling in the restricted band.

|                                 |                                                                     |                          |                          |
|---------------------------------|---------------------------------------------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |                          |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>CHANNEL</b>           | Channel 4                |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>FREQUENCY RANGE</b>   | 1 ~ 40 GHz               |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>TRANSFER RATE</b>     | 6Mbps                    |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 70%RH, 966hPa                                             | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Wen Yu                                                              |                          |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5320.00    | 97.60 PK                |                |             | 1.30 H             | 65                   | 61.80            | 35.80                    |
| 1   | *5320.00    | 88.90 AV                |                |             | 1.30 H             | 65                   | 53.10            | 35.80                    |
| 2   | #5350.00    | 48.50 PK                | 74.00          | -25.50      | 1.25 H             | 65                   | 12.70            | 35.80                    |
| 2   | #5350.00    | 37.00 AV                | 54.00          | -17.00      | 1.25 H             | 65                   | 1.20             | 35.80                    |
| 3   | #10640.00   | 50.40 PK                | 74.00          | -23.60      | 1.11 H             | 7                    | 4.50             | 45.90                    |
| 3   | #10640.00   | 40.30 AV                | 54.00          | -13.70      | 1.11 H             | 7                    | -5.60            | 45.90                    |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5320.00    | 113.20 PK               |                |             | 1.16 V             | 4                    | 77.40            | 35.80                    |
| 1   | *5320.00    | 104.90 AV               |                |             | 1.16 V             | 4                    | 69.10            | 35.80                    |
| 2   | #5350.00    | 64.10 PK                | 74.00          | -9.90       | 1.19 V             | 0                    | 28.30            | 35.80                    |
| 2   | #5350.00    | 53.00 AV                | 54.00          | -1.00       | 1.19 V             | 0                    | 17.20            | 35.80                    |
| 3   | #10640.00   | 52.60 PK                | 74.00          | -21.40      | 1.21 V             | 1                    | 6.70             | 45.90                    |
| 3   | #10640.00   | 41.30 AV                | 54.00          | -12.70      | 1.21 V             | 1                    | -4.60            | 45.90                    |

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. “\*” : Fundamental frequency
  6. “#”The radiated frequency falling in the restricted band.

**802.11a Turbo OFDM modulation**

|                                 |                                                                     |                          |                          |
|---------------------------------|---------------------------------------------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |                          |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>CHANNEL</b>           | Channel 1                |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>FREQUENCY RANGE</b>   | 1 ~ 40 GHz               |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>TRANSFER RATE</b>     | 12Mbps                   |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 70%RH, 966hPa                                             | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Wen Yu                                                              |                          |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5290.00    | 94.40 PK                |                |             | 1.11 H             | 315                  | 58.60            | 35.80                    |
| 1   | *5290.00    | 86.20 AV                |                |             | 1.11 H             | 315                  | 50.40            | 35.80                    |
| 2   | #5350.00    | 46.50 PK                | 74.00          | -27.50      | 1.12 H             | 343                  | 10.70            | 35.80                    |
| 2   | #5350.00    | 35.40 AV                | 54.00          | -18.60      | 1.12 H             | 343                  | -0.40            | 35.80                    |
| 3   | 10580.00    | 48.90 PK                | 68.30          | -19.40      | 1.20 H             | 6                    | 3.70             | 45.30                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5290.00    | 111.60 PK               |                |             | 1.14 V             | 5                    | 75.80            | 35.80                    |
| 1   | *5290.00    | 104.00 AV               |                |             | 1.14 V             | 5                    | 68.20            | 35.80                    |
| 2   | #5350.00    | 63.70 PK                | 74.00          | -10.30      | 1.16 V             | 3                    | 27.90            | 35.80                    |
| 2   | #5350.00    | 53.20 AV                | 54.00          | -0.80       | 1.16 V             | 3                    | 17.40            | 35.80                    |
| 3   | 10580.00    | 52.20 PK                | 68.30          | -16.10      | 1.19 V             | 3                    | 7.00             | 45.30                    |

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. “\*” : Fundamental frequency
  6. “#”The radiated frequency falling in the restricted band.

## 4.2.9 TEST RESULTS (ANTENNA 2)

## Below 1GHz Worst-Case Data

|                                 |                                                                     |                          |               |
|---------------------------------|---------------------------------------------------------------------|--------------------------|---------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |               |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>FREQUENCY RANGE</b>   | Below 1000MHz |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>TRANSFER RATE</b>     | 6Mbps         |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>DETECTOR FUNCTION</b> | Quasi-Peak    |
| <b>ENVIRONMENTAL CONDITIONS</b> | 28deg. C, 55%RH, 966hPa                                             | <b>TESTED BY</b>         | Wen Yu        |

## ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 200.01      | 27.00 QP                | 43.50          | -16.50      | 1.32 H             | 320                  | 16.50            | 10.50                    |
| 2   | 250.03      | 32.40 QP                | 46.00          | -13.60      | 1.08 H             | 53                   | 18.80            | 13.60                    |
| 3   | 320.00      | 30.40 QP                | 46.00          | -15.60      | 1.52 H             | 123                  | 14.20            | 16.20                    |
| 4   | 375.01      | 27.00 QP                | 46.00          | -19.00      | 1.75 H             | 346                  | 9.50             | 17.50                    |
| 5   | 400.01      | 22.00 QP                | 46.00          | -24.00      | 1.50 H             | 237                  | 3.60             | 18.40                    |
| 6   | 500.01      | 25.90 QP                | 46.00          | -20.10      | 1.04 H             | 239                  | 5.70             | 20.20                    |
| 7   | 550.00      | 28.90 QP                | 46.00          | -17.10      | 1.11 H             | 43                   | 6.80             | 22.10                    |
| 8   | 600.02      | 29.50 QP                | 46.00          | -16.50      | 1.54 H             | 320                  | 7.60             | 21.90                    |

## ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 120.03      | 31.20 QP                | 43.50          | -12.30      | 1.53 V             | 62                   | 19.70            | 11.50                    |
| 2   | 199.99      | 30.40 QP                | 43.50          | -13.10      | 1.24 V             | 153                  | 19.30            | 11.20                    |
| 3   | 240.03      | 31.00 QP                | 46.00          | -15.00      | 1.80 V             | 300                  | 18.10            | 12.90                    |
| 4   | 250.01      | 30.70 QP                | 46.00          | -15.30      | 1.60 V             | 326                  | 17.40            | 13.30                    |
| 5   | 320.01      | 32.40 QP                | 46.00          | -13.60      | 1.07 V             | 100                  | 15.90            | 16.50                    |
| 6   | 399.98      | 31.90 QP                | 46.00          | -14.10      | 1.24 V             | 36                   | 13.50            | 18.40                    |
| 7   | 550.00      | 33.40 QP                | 46.00          | -12.60      | 1.75 V             | 0                    | 11.10            | 22.30                    |
| 8   | 600.00      | 33.30 QP                | 46.00          | -12.70      | 1.79 V             | 243                  | 9.80             | 23.50                    |

## REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

**802.11a OFDM modulation**

|                                 |                                                                     |                          |                          |
|---------------------------------|---------------------------------------------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |                          |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>CHANNEL</b>           | Channel 1                |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>FREQUENCY RANGE</b>   | 1 ~ 40 GHz               |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>TRANSFER RATE</b>     | 6Mbps                    |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 70%RH, 966hPa                                             | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Wen Yu                                                              |                          |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5260.00    | 100.90 PK               |                |             | 1.00 H             | 315                  | 65.10            | 35.80                    |
| 1   | *5260.00    | 92.70 AV                |                |             | 1.00 H             | 315                  | 56.90            | 35.80                    |
| 2   | 10520.00    | 50.10 PK                | 68.30          | -18.20      | 1.02 H             | 320                  | 5.40             | 44.70                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5260.00    | 116.00 PK               |                |             | 1.00 V             | 1                    | 80.20            | 35.80                    |
| 1   | *5260.00    | 107.70 AV               |                |             | 1.00 V             | 1                    | 71.90            | 35.80                    |
| 2   | 10520.00    | 52.30 PK                | 68.30          | -16.00      | 1.01 V             | 3                    | 7.60             | 44.70                    |

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. “\*” : Fundamental frequency
  6. “#” The radiated frequency falling in the restricted band.

|                                 |                                                                     |                          |                          |
|---------------------------------|---------------------------------------------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |                          |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>CHANNEL</b>           | Channel 4                |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>FREQUENCY RANGE</b>   | 1 ~ 40 GHz               |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>TRANSFER RATE</b>     | 6Mbps                    |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 70%RH, 966hPa                                             | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Wen Yu                                                              |                          |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5320.00    | 98.60 PK                |                |             | 1.02 H             | 329                  | 62.80            | 35.80                    |
| 1   | *5320.00    | 89.80 AV                |                |             | 1.02 H             | 329                  | 54.00            | 35.80                    |
| 2   | #5350.00    | 49.60 PK                | 74.00          | -24.40      | 1.02 H             | 329                  | 13.80            | 35.80                    |
| 2   | #5350.00    | 38.10 AV                | 54.00          | -15.90      | 1.02 H             | 329                  | 2.30             | 35.80                    |
| 3   | #10640.00   | 51.30 PK                | 74.00          | -22.70      | 1.11 H             | 6                    | 5.40             | 45.90                    |
| 3   | #10640.00   | 40.60 AV                | 54.00          | -13.40      | 1.11 H             | 6                    | -5.30            | 45.90                    |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5320.00    | 113.90 PK               |                |             | 1.00 V             | 359                  | 78.10            | 35.80                    |
| 1   | *5320.00    | 104.80 AV               |                |             | 1.00 V             | 359                  | 69.00            | 35.80                    |
| 2   | #5350.00    | 64.90 PK                | 74.00          | -9.10       | 1.10 V             | 3                    | 29.10            | 35.80                    |
| 2   | #5350.00    | 53.20 AV                | 54.00          | -0.80       | 1.10 V             | 3                    | 17.40            | 35.80                    |
| 3   | #10640.00   | 53.20 PK                | 74.00          | -20.80      | 1.01 V             | 358                  | 7.30             | 45.90                    |
| 3   | #10640.00   | 42.00 AV                | 54.00          | -12.00      | 1.01 V             | 358                  | -3.90            | 45.90                    |

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. “\*” : Fundamental frequency
  6. “#”The radiated frequency falling in the restricted band.

**802.11a Turbo OFDM modulation**

|                                 |                                                                     |                          |                          |
|---------------------------------|---------------------------------------------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |                          |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>CHANNEL</b>           | Channel 1                |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>FREQUENCY RANGE</b>   | 1 ~ 40 GHz               |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>TRANSFER RATE</b>     | 12Mbps                   |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 70%RH, 966hPa                                             | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Wen Yu                                                              |                          |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5290.00    | 97.90 PK                |                |             | 1.01 H             | 318                  | 62.10            | 35.80                    |
| 1   | *5290.00    | 89.40 AV                |                |             | 1.01 H             | 318                  | 53.60            | 35.80                    |
| 2   | #5350.00    | 53.10 PK                | 74.00          | -20.90      | 1.09 H             | 320                  | 17.30            | 35.80                    |
| 2   | #5350.00    | 38.60 AV                | 54.00          | -15.40      | 1.09 H             | 320                  | 2.80             | 35.80                    |
| 3   | 10580.00    | 49.80 PK                | 68.30          | -18.50      | 1.10 H             | 350                  | 4.60             | 45.30                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB)  | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5290.00    | 112.10 PK               |                |              | 1.01 V             | 2                    | 76.30            | 35.80                    |
| 1   | *5290.00    | 104.30 AV               |                |              | 1.01 V             | 2                    | 68.50            | 35.80                    |
| 2   | #5350.00    | 67.30 PK                | 74.00          | -6.70        | 1.01 V             | 358                  | 31.50            | 35.80                    |
| 2   | #5350.00    | <b>53.50 AV</b>         | <b>54.00</b>   | <b>-0.50</b> | <b>1.01 V</b>      | <b>358</b>           | <b>17.70</b>     | <b>35.80</b>             |
| 3   | 10580.00    | 52.70 PK                | 68.30          | -15.60       | 1.00 V             | 3                    | 7.50             | 45.30                    |

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. "\*" : Fundamental frequency
  6. "#"The radiated frequency falling in the restricted band.

## 4.2.10 TEST RESULTS (ANTENNA 3)

## Below 1GHz Worst-Case Data

|                                 |                                                                     |                          |               |
|---------------------------------|---------------------------------------------------------------------|--------------------------|---------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |               |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>FREQUENCY RANGE</b>   | Below 1000MHz |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>TRANSFER RATE</b>     | 6Mbps         |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>DETECTOR FUNCTION</b> | Quasi-Peak    |
| <b>ENVIRONMENTAL CONDITIONS</b> | 28deg. C, 55%RH, 966hPa                                             | <b>TESTED BY</b>         | Wen Yu        |

## ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 199.98      | 26.40 QP                | 43.50          | -17.10      | 1.20 H             | 20                   | 15.90            | 10.50                    |
| 2   | 250.00      | 33.60 QP                | 46.00          | -12.40      | 1.02 H             | 36                   | 20.00            | 13.60                    |
| 3   | 320.02      | 29.90 QP                | 46.00          | -16.10      | 1.10 H             | 270                  | 13.70            | 16.20                    |
| 4   | 375.01      | 26.70 QP                | 46.00          | -19.30      | 1.34 H             | 56                   | 9.20             | 17.50                    |
| 5   | 400.02      | 25.30 QP                | 46.00          | -20.70      | 1.30 H             | 207                  | 6.90             | 18.40                    |
| 6   | 500.01      | 28.00 QP                | 46.00          | -18.00      | 1.09 H             | 9                    | 7.80             | 20.20                    |
| 7   | 550.01      | 30.10 QP                | 46.00          | -15.90      | 1.53 H             | 43                   | 8.00             | 22.10                    |
| 8   | 600.02      | 29.30 QP                | 46.00          | -16.70      | 1.31 H             | 43                   | 7.40             | 21.90                    |

## ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 120.01      | 30.80 QP                | 43.50          | -12.70      | 1.34 V             | 353                  | 19.40            | 11.50                    |
| 2   | 200.00      | 32.60 QP                | 43.50          | -10.90      | 1.36 V             | 9                    | 21.40            | 11.20                    |
| 3   | 240.01      | 33.00 QP                | 46.00          | -13.00      | 1.36 V             | 3                    | 20.10            | 12.90                    |
| 4   | 250.02      | 31.80 QP                | 46.00          | -14.20      | 1.60 V             | 326                  | 18.50            | 13.30                    |
| 5   | 320.01      | 31.90 QP                | 46.00          | -14.10      | 1.39 V             | 55                   | 15.40            | 16.50                    |
| 6   | 400.00      | 32.00 QP                | 46.00          | -14.00      | 1.24 V             | 36                   | 13.60            | 18.40                    |
| 7   | 550.00      | 31.40 QP                | 46.00          | -14.60      | 1.62 V             | 250                  | 9.20             | 22.30                    |
| 8   | 600.00      | 33.00 QP                | 46.00          | -13.00      | 1.24 V             | 143                  | 9.50             | 23.50                    |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value

**802.11a OFDM modulation**

|                                 |                                                                     |                          |                          |
|---------------------------------|---------------------------------------------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |                          |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>CHANNEL</b>           | Channel 1                |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>FREQUENCY RANGE</b>   | 1 ~ 40 GHz               |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>TRANSFER RATE</b>     | 6Mbps                    |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 70%RH, 966hPa                                             | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Wen Yu                                                              |                          |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5260.00    | 99.40 PK                |                |             | 1.20 H             | 29                   | 63.60            | 35.80                    |
| 1   | *5260.00    | 91.60 AV                |                |             | 1.20 H             | 29                   | 55.80            | 35.80                    |
| 2   | 10520.00    | 50.50 PK                | 68.30          | -17.80      | 1.11 H             | 6                    | 5.80             | 44.70                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5260.00    | 115.00 PK               |                |             | 1.19 V             | 5                    | 79.20            | 35.80                    |
| 1   | *5260.00    | 106.10 AV               |                |             | 1.19 V             | 5                    | 70.30            | 35.80                    |
| 2   | 10520.00    | 51.20 PK                | 68.30          | -17.10      | 1.20 V             | 6                    | 6.50             | 44.70                    |

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. “\*” : Fundamental frequency
  6. “#” The radiated frequency falling in the restricted band.

|                                 |                                                                     |                          |                          |
|---------------------------------|---------------------------------------------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |                          |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>CHANNEL</b>           | Channel 4                |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>FREQUENCY RANGE</b>   | 1 ~ 40 GHz               |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>TRANSFER RATE</b>     | 6Mbps                    |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 70%RH, 966hPa                                             | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Wen Yu                                                              |                          |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5320.00    | 98.20 PK                |                |             | 1.19 H             | 39                   | 62.40            | 35.80                    |
| 1   | *5320.00    | 90.20 AV                |                |             | 1.19 H             | 39                   | 54.40            | 35.80                    |
| 2   | #5350.00    | 49.10 PK                | 74.00          | -24.90      | 1.08 H             | 3                    | 13.30            | 35.80                    |
| 2   | #5350.00    | 38.50 AV                | 54.00          | -15.50      | 1.08 H             | 3                    | 2.70             | 35.80                    |
| 3   | #10640.00   | 52.30 PK                | 74.00          | -21.70      | 1.08 H             | 12                   | 6.40             | 45.90                    |
| 3   | #10640.00   | 40.90 AV                | 54.00          | -13.10      | 1.08 H             | 12                   | -5.00            | 45.90                    |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No.      | Freq. (MHz)     | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB)  | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----------|-----------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| 1        | *5320.00        | 113.80 PK               |                |              | 1.20 V             | 4                    | 78.00            | 35.80                    |
| 1        | *5320.00        | 105.20 AV               |                |              | 1.20 V             | 4                    | 69.40            | 35.80                    |
| 2        | #5350.00        | 64.70 PK                | 74.00          | -9.30        | 1.10 V             | 2                    | 28.90            | 35.80                    |
| <b>2</b> | <b>#5350.00</b> | <b>53.50 AV</b>         | <b>54.00</b>   | <b>-0.50</b> | <b>1.10 V</b>      | <b>2</b>             | <b>17.70</b>     | <b>35.80</b>             |
| 3        | #10640.00       | 52.60 PK                | 74.00          | -21.40       | 1.11 V             | 358                  | 6.70             | 45.90                    |
| 3        | #10640.00       | 41.20 AV                | 54.00          | -12.80       | 1.11 V             | 358                  | -4.70            | 45.90                    |

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. “\*” : Fundamental frequency
  6. “#”The radiated frequency falling in the restricted band.

**802.11a Turbo OFDM modulation**

|                                 |                                                                     |                          |                          |
|---------------------------------|---------------------------------------------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |                          |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>CHANNEL</b>           | Channel 1                |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>FREQUENCY RANGE</b>   | 1 ~ 40 GHz               |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>TRANSFER RATE</b>     | 12Mbps                   |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 70%RH, 966hPa                                             | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Wen Yu                                                              |                          |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5290.00    | 97.20 PK                |                |             | 1.19 H             | 28                   | 61.40            | 35.80                    |
| 1   | *5290.00    | 89.70 AV                |                |             | 1.19 H             | 28                   | 53.90            | 35.80                    |
| 2   | #5350.00    | 49.30 PK                | 74.00          | -24.70      | 1.22 H             | 4                    | 13.50            | 35.80                    |
| 2   | #5350.00    | 38.90 AV                | 54.00          | -15.10      | 1.22 H             | 4                    | 3.10             | 35.80                    |
| 3   | 10580.00    | 50.80 PK                | 68.30          | -17.50      | 1.11 H             | 6                    | 5.60             | 45.30                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5290.00    | 111.60 PK               |                |             | 1.11 V             | 1                    | 75.80            | 35.80                    |
| 1   | *5290.00    | 103.90 AV               |                |             | 1.11 V             | 1                    | 68.10            | 35.80                    |
| 2   | #5350.00    | 63.70 PK                | 74.00          | -10.30      | 1.11 V             | 1                    | 27.90            | 35.80                    |
| 2   | #5350.00    | 53.10 AV                | 54.00          | -0.90       | 1.11 V             | 1                    | 17.30            | 35.80                    |
| 3   | 10580.00    | 51.90 PK                | 68.30          | -16.40      | 1.02 V             | 4                    | 6.70             | 45.30                    |

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. “\*” : Fundamental frequency
  6. “#”The radiated frequency falling in the restricted band.

## 4.2.11 TEST RESULTS (ANTENNA 4)

**Below 1GHz Worst-Case Data**

|                                 |                                                                     |                          |               |
|---------------------------------|---------------------------------------------------------------------|--------------------------|---------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |               |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>FREQUENCY RANGE</b>   | Below 1000MHz |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>TRANSFER RATE</b>     | 6Mbps         |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>DETECTOR FUNCTION</b> | Quasi-Peak    |
| <b>ENVIRONMENTAL CONDITIONS</b> | 28deg. C, 55%RH, 966hPa                                             | <b>TESTED BY</b>         | Wen Yu        |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 200.00      | 25.60 QP                | 43.50          | -17.90      | 1.25 H             | 210                  | 15.10            | 10.50                    |
| 2   | 250.01      | 33.00 QP                | 46.00          | -13.00      | 1.43 H             | 63                   | 19.40            | 13.60                    |
| 3   | 320.03      | 30.90 QP                | 46.00          | -15.10      | 1.50 H             | 148                  | 14.70            | 16.20                    |
| 4   | 375.01      | 27.00 QP                | 46.00          | -19.00      | 1.25 H             | 357                  | 9.50             | 17.50                    |
| 5   | 400.00      | 23.90 QP                | 46.00          | -22.10      | 1.50 H             | 237                  | 5.50             | 18.40                    |
| 6   | 500.03      | 25.90 QP                | 46.00          | -20.10      | 1.04 H             | 239                  | 5.70             | 20.20                    |
| 7   | 550.00      | 28.90 QP                | 46.00          | -17.10      | 1.11 H             | 43                   | 6.80             | 22.10                    |
| 8   | 600.01      | 28.60 QP                | 46.00          | -17.40      | 1.63 H             | 326                  | 6.80             | 21.90                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 120.00      | 31.20 QP                | 43.50          | -12.30      | 1.53 V             | 62                   | 19.70            | 11.50                    |
| 2   | 200.01      | 30.40 QP                | 43.50          | -13.10      | 1.24 V             | 153                  | 19.30            | 11.20                    |
| 3   | 240.03      | 32.50 QP                | 46.00          | -13.50      | 1.74 V             | 300                  | 19.60            | 12.90                    |
| 4   | 250.01      | 30.70 QP                | 46.00          | -15.30      | 1.60 V             | 326                  | 17.40            | 13.30                    |
| 5   | 320.00      | 33.50 QP                | 46.00          | -12.50      | 1.04 V             | 234                  | 17.00            | 16.50                    |
| 6   | 399.98      | 32.50 QP                | 46.00          | -13.50      | 1.24 V             | 36                   | 14.20            | 18.40                    |
| 7   | 550.03      | 33.40 QP                | 46.00          | -12.60      | 1.75 V             | 0                    | 11.10            | 22.30                    |
| 8   | 600.00      | 33.30 QP                | 46.00          | -12.70      | 1.79 V             | 5                    | 9.80             | 23.50                    |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value

**802.11a OFDM modulation**

|                                 |                                                                     |                          |                          |
|---------------------------------|---------------------------------------------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |                          |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>CHANNEL</b>           | Channel 1                |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>FREQUENCY RANGE</b>   | 1 ~ 40 GHz               |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>TRANSFER RATE</b>     | 6Mbps                    |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 70%RH, 966hPa                                             | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Wen Yu                                                              |                          |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5260.00    | 99.10 PK                |                |             | 1.02 H             | 2                    | 63.30            | 35.80                    |
| 1   | *5260.00    | 89.90 AV                |                |             | 1.02 H             | 2                    | 54.10            | 35.80                    |
| 2   | 10520.00    | 49.30 PK                | 68.30          | -19.00      | 1.09 H             | 18                   | 4.60             | 44.70                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5260.00    | 113.30 PK               |                |             | 4.00 V             | 2                    | 77.50            | 35.80                    |
| 1   | *5260.00    | 104.40 AV               |                |             | 4.00 V             | 2                    | 68.60            | 35.80                    |
| 2   | 10520.00    | 50.90 PK                | 68.30          | -17.40      | 1.10 V             | 9                    | 6.20             | 44.70                    |

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. “\*” : Fundamental frequency
  6. “#” The radiated frequency falling in the restricted band.

|                                 |                                                                     |                          |                          |
|---------------------------------|---------------------------------------------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |                          |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>CHANNEL</b>           | Channel 4                |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>FREQUENCY RANGE</b>   | 1 ~ 40 GHz               |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>TRANSFER RATE</b>     | 6Mbps                    |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 70%RH, 966hPa                                             | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Wen Yu                                                              |                          |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5320.00    | 98.70 PK                |                |             | 1.00 H             | 350                  | 62.90            | 35.80                    |
| 1   | *5320.00    | 89.60 AV                |                |             | 1.00 H             | 350                  | 53.80            | 35.80                    |
| 2   | #5350.00    | 48.40 PK                | 74.00          | -25.60      | 1.01 H             | 358                  | 12.60            | 35.80                    |
| 2   | #5350.00    | 38.10 AV                | 54.00          | -15.90      | 1.01 H             | 358                  | 2.30             | 35.80                    |
| 3   | #10640.00   | 50.60 PK                | 74.00          | -23.40      | 1.03 H             | 4                    | 4.70             | 45.90                    |
| 3   | #10640.00   | 39.50 AV                | 54.00          | -14.50      | 1.03 H             | 4                    | -6.40            | 45.90                    |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5320.00    | 112.80 PK               |                |             | 1.14 V             | 0                    | 77.00            | 35.80                    |
| 1   | *5320.00    | 103.90 AV               |                |             | 1.14 V             | 0                    | 68.10            | 35.80                    |
| 2   | #5350.00    | 62.50 PK                | 74.00          | -11.50      | 1.30 V             | 359                  | 26.70            | 35.80                    |
| 2   | #5350.00    | 52.40 AV                | 54.00          | -1.60       | 1.30 V             | 359                  | 16.60            | 35.80                    |
| 3   | #10640.00   | 51.40 PK                | 74.00          | -22.60      | 1.00 V             | 350                  | 5.50             | 45.90                    |
| 3   | #10640.00   | 40.30 AV                | 54.00          | -13.70      | 1.00 V             | 350                  | -5.60            | 45.90                    |

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. “\*” : Fundamental frequency
  6. “#”The radiated frequency falling in the restricted band.

**802.11a Turbo OFDM modulation**

|                                 |                                                                     |                          |                          |
|---------------------------------|---------------------------------------------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                          |                          |
| <b>MODEL</b>                    | AP-80MB                                                             | <b>CHANNEL</b>           | Channel 1                |
| <b>MODULATION TYPE</b>          | BPSK                                                                | <b>FREQUENCY RANGE</b>   | 1 ~ 40 GHz               |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                                                       | <b>TRANSFER RATE</b>     | 12Mbps                   |
| <b>ENVIRONMENTAL CONDITIONS</b> | 27deg. C, 70%RH, 966hPa                                             | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Wen Yu                                                              |                          |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5290.00    | 96.20 PK                |                |             | 1.03 H             | 1                    | 60.40            | 35.80                    |
| 1   | *5290.00    | 87.10 AV                |                |             | 1.03 H             | 1                    | 51.30            | 35.80                    |
| 2   | #5350.00    | 46.60 PK                | 74.00          | -27.40      | 1.10 H             | 20                   | 10.80            | 35.80                    |
| 2   | #5350.00    | 35.70 AV                | 54.00          | -18.30      | 1.10 H             | 20                   | -0.10            | 35.80                    |
| 3   | 10580.00    | 48.90 PK                | 68.30          | -19.40      | 1.20 H             | 3                    | 3.70             | 45.30                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5290.00    | 109.90 PK               |                |             | 1.16 V             | 2                    | 74.10            | 35.80                    |
| 1   | *5290.00    | 101.50 AV               |                |             | 1.16 V             | 2                    | 65.70            | 35.80                    |
| 2   | #5350.00    | 60.30 PK                | 74.00          | -13.70      | 1.18 V             | 358                  | 24.50            | 35.80                    |
| 2   | #5350.00    | 50.10 AV                | 54.00          | -3.90       | 1.18 V             | 358                  | 14.30            | 35.80                    |
| 3   | 10580.00    | 50.10 PK                | 68.30          | -18.20      | 1.10 V             | 1                    | 4.90             | 45.30                    |

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. “\*” : Fundamental frequency
  6. “#”The radiated frequency falling in the restricted band.

### 4.3 PEAK TRANSMIT POWER MEASUREMENT

#### 4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

| Frequency Band   | Limit                                         |
|------------------|-----------------------------------------------|
| 5.15 – 5.25GHz   | The lesser of 50mW (17dBm) or 4dBm + 10logB   |
| 5.25 – 5.35GHz   | The lesser of 250mW (24dBm) or 11dBm + 10logB |
| 5.725 – 5.825GHz | The lesser of 1W (30dBm) or 17dBm + 10logB    |

**NOTE:** Where B is the 26dB emission bandwidth in MHz.

#### 4.3.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER      | FSP40     | 100036     | Nov. 23, 2005    |

**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 300kHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

**NOTE:**


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP



#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

## 4.3.7 TEST RESULTS (ANTENNA 1)

**802.11a OFDM modulation**

|                             |                                                                     |                                 |                        |
|-----------------------------|---------------------------------------------------------------------|---------------------------------|------------------------|
| <b>EUT</b>                  | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                                 |                        |
| <b>MODEL</b>                | AP-80MB                                                             | <b>TRANSFER RATE</b>            | 6Mbps                  |
| <b>MODULATION TYPE</b>      | BPSK                                                                | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 966hPa |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz                                                       | <b>TESTED BY</b>                | Rex Huang              |


Antenna 1 (Gain : 9.0 dBi) +Cable loss (1.36dB)

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | 26dBc Occupied Bandwidth (MHz) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|--------------------------------|-----------|
| 1       | 5260                    | 20.44                   | 22.36                  | 25.52                          | PASS      |
| 4       | 5320                    | 18.08                   | 22.36                  | 25.28                          | PASS      |


**NOTE:** The 26dBc Occupied Bandwidth plot, please refer to the following pages.

Peak Power Output:  
CH1


## CH4

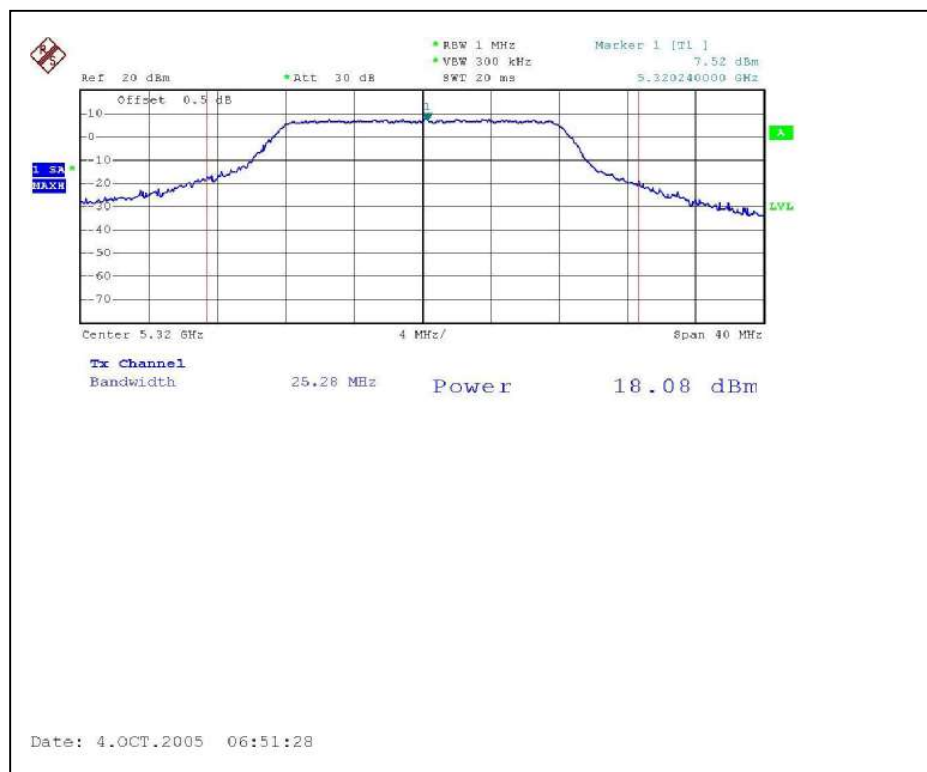

## 26dB Occupied Bandwidth: CH1

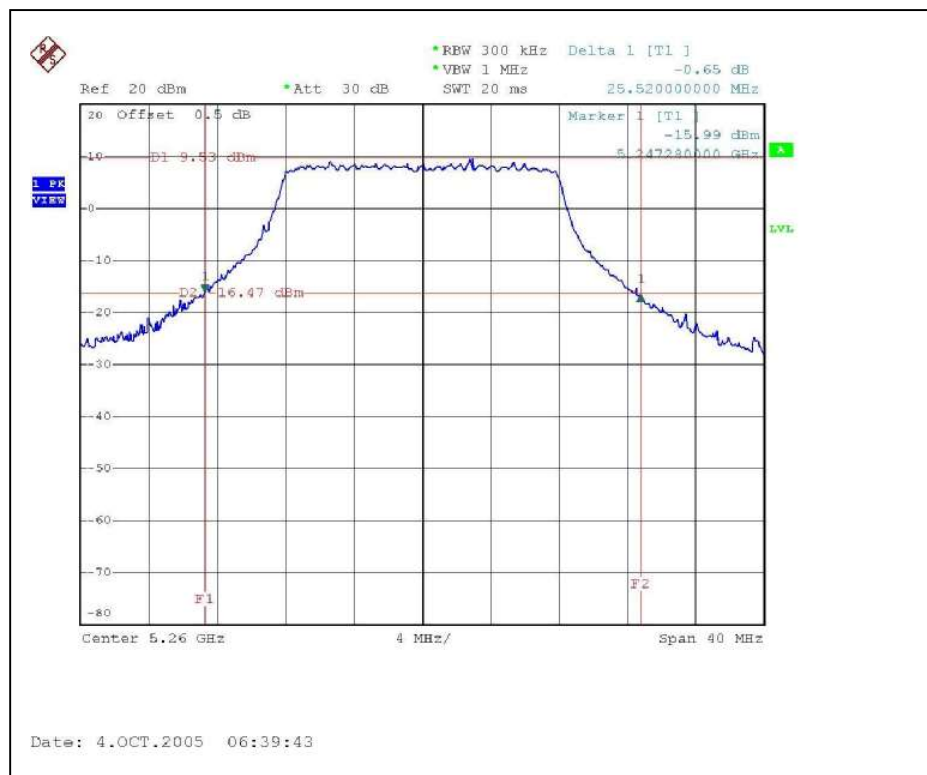

## CH4

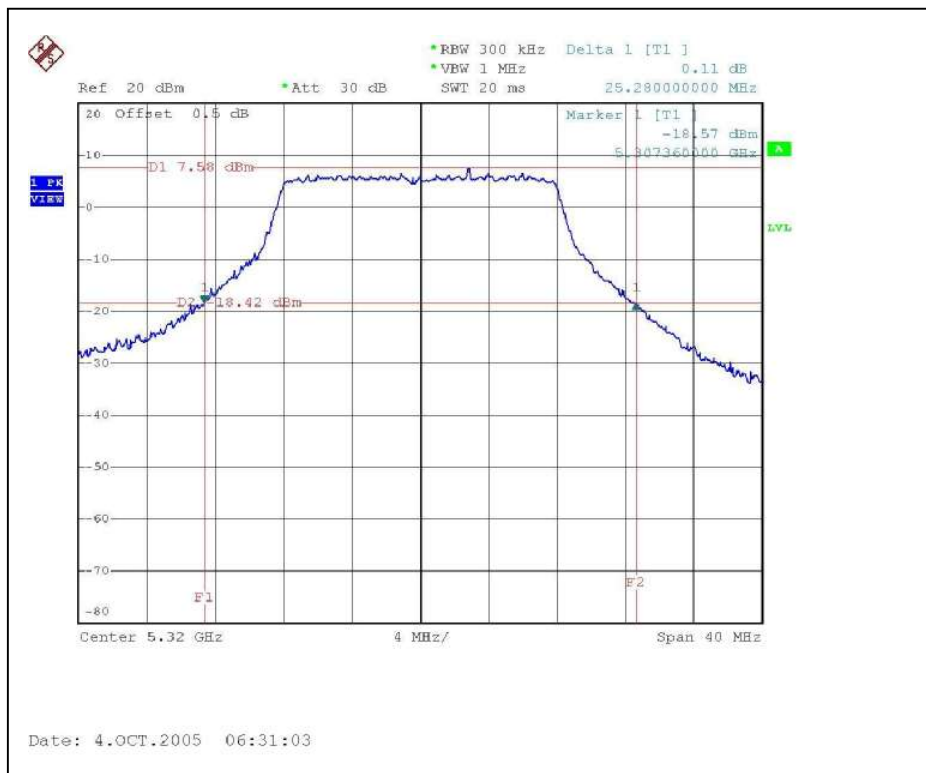


**802.11a Turbo OFDM modulation**

|                             |                                                                     |                                 |                        |
|-----------------------------|---------------------------------------------------------------------|---------------------------------|------------------------|
| <b>EUT</b>                  | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                                 |                        |
| <b>MODEL</b>                | AP-80MB                                                             | <b>TRANSFER RATE</b>            | 12Mbps                 |
| <b>MODULATION TYPE</b>      | BPSK                                                                | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 966hPa |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz                                                       | <b>TESTED BY</b>                | Rex Huang              |

Antenna 1 (Gain : 9.0 dBi) +Cable loss (1.36dB)

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | 26dBc Occupied Bandwidth (MHz) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|--------------------------------|-----------|
| 1       | 5290                    | 19.39                   | 22.36                  | 49.01                          | PASS      |

**NOTE:** The 26dBc Occupied Bandwidth plot, please refer to the following pages.

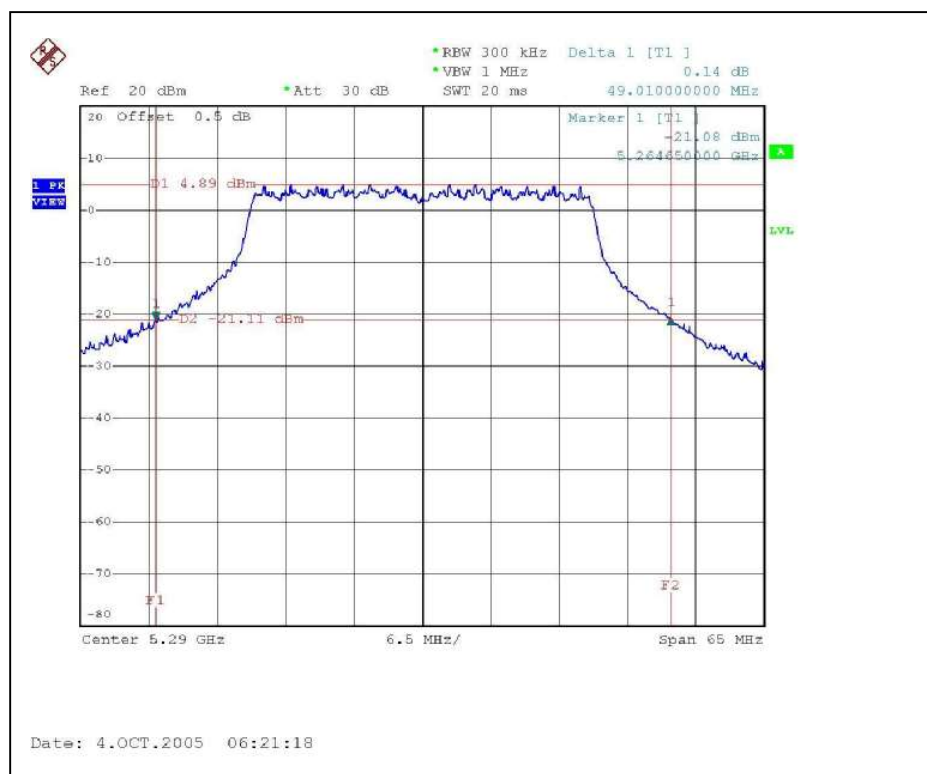**Peak Power Output:  
CH1****26dB Occupied Bandwidth:  
CH1**

## 4.3.8 TEST RESULTS (ANTENNA 2)



**802.11a OFDM modulation**

|                             |                                                                     |                                 |                        |
|-----------------------------|---------------------------------------------------------------------|---------------------------------|------------------------|
| <b>EUT</b>                  | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                                 |                        |
| <b>MODEL</b>                | AP-80MB                                                             | <b>TRANSFER RATE</b>            | 6Mbps                  |
| <b>MODULATION TYPE</b>      | BPSK                                                                | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 966hPa |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz                                                       | <b>TESTED BY</b>                | Rex Huang              |


Antenna 2 (Gain : 7.0 dBi) +Cable loss (1.36dB)

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | 26dBc Occupied Bandwidth (MHz) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|--------------------------------|-----------|
| 1       | 5260                    | 22.53                   | 24                     | 29.44                          | PASS      |
| 4       | 5320                    | 19.03                   | 24                     | 25.52                          | PASS      |


**NOTE:** The 26dBc Occupied Bandwidth plot, please refer to the following pages.

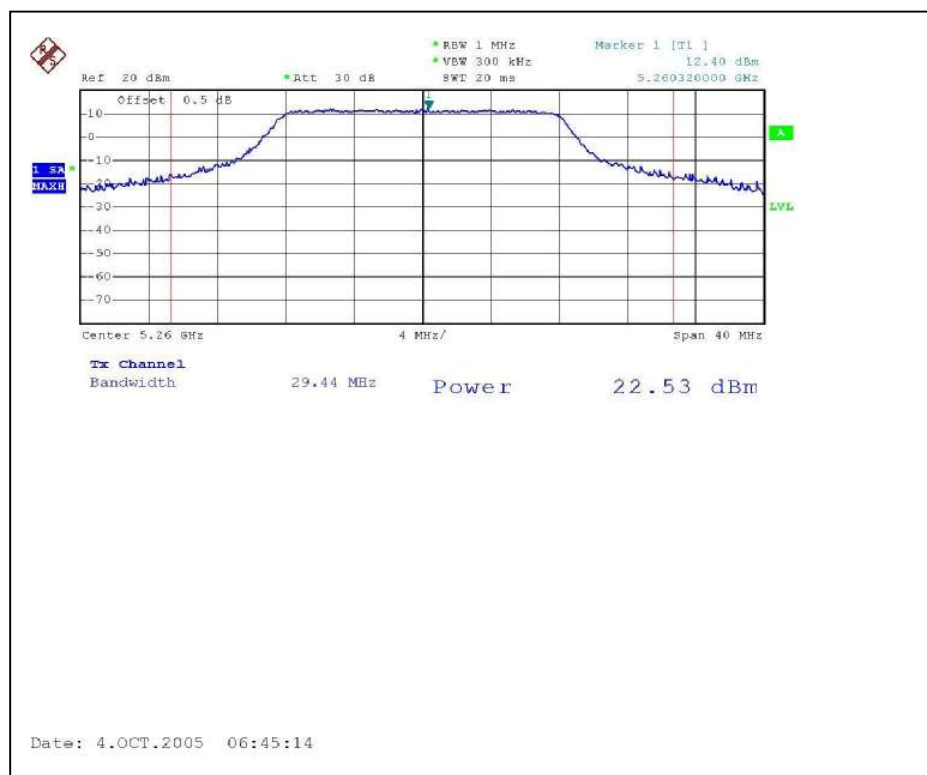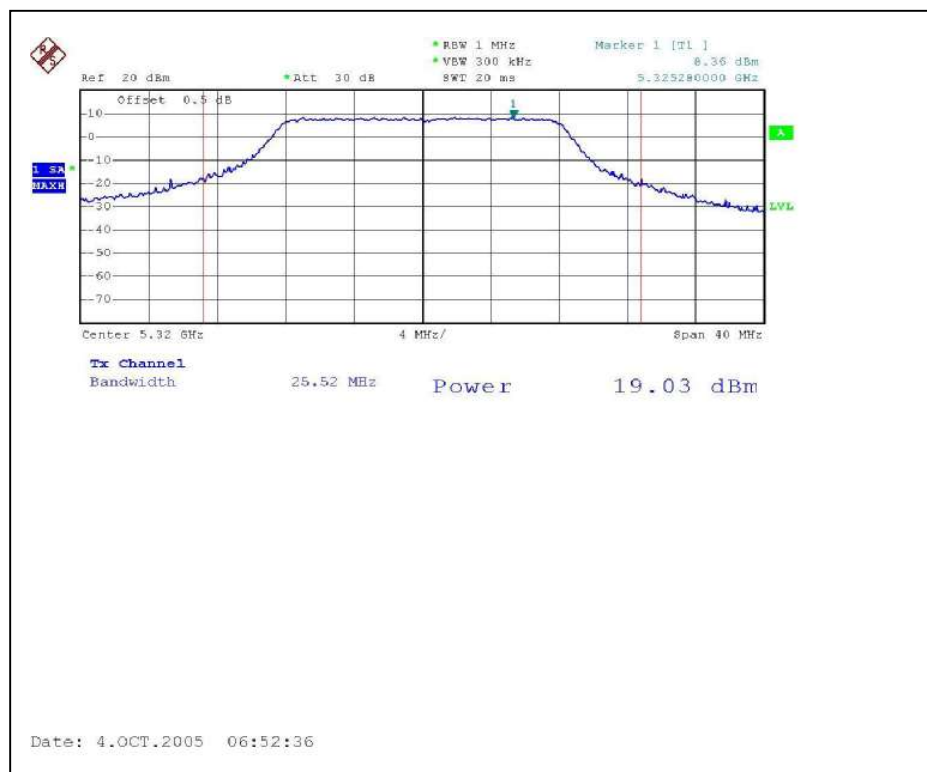**Peak Power Output:**  
**CH1****CH4**

## 26dB Occupied Bandwidth: CH1

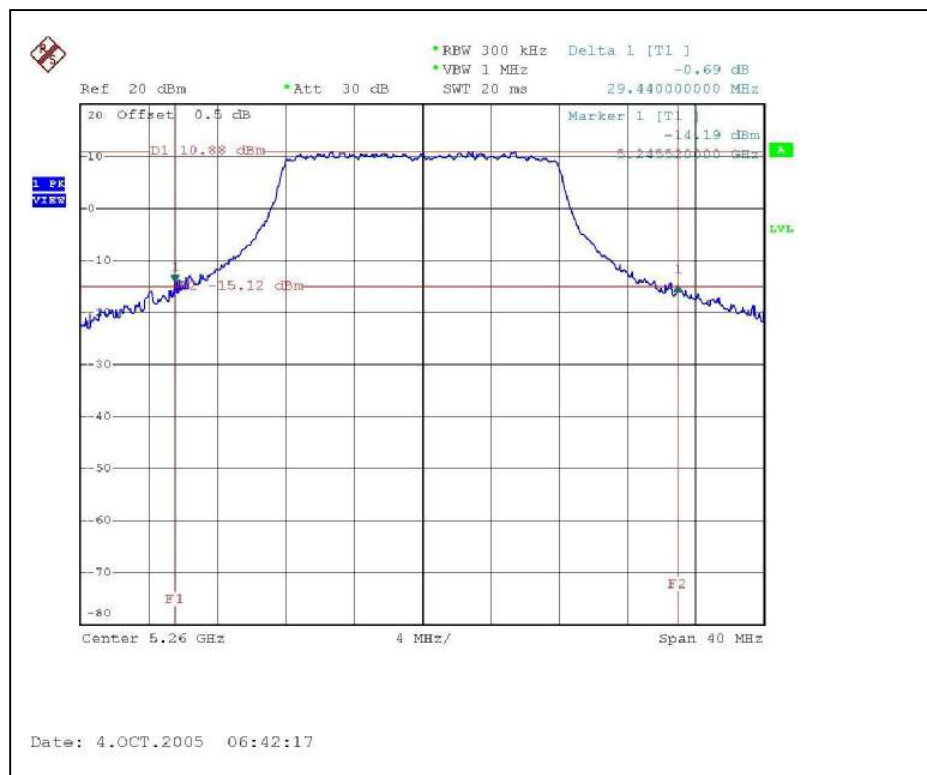

## CH4

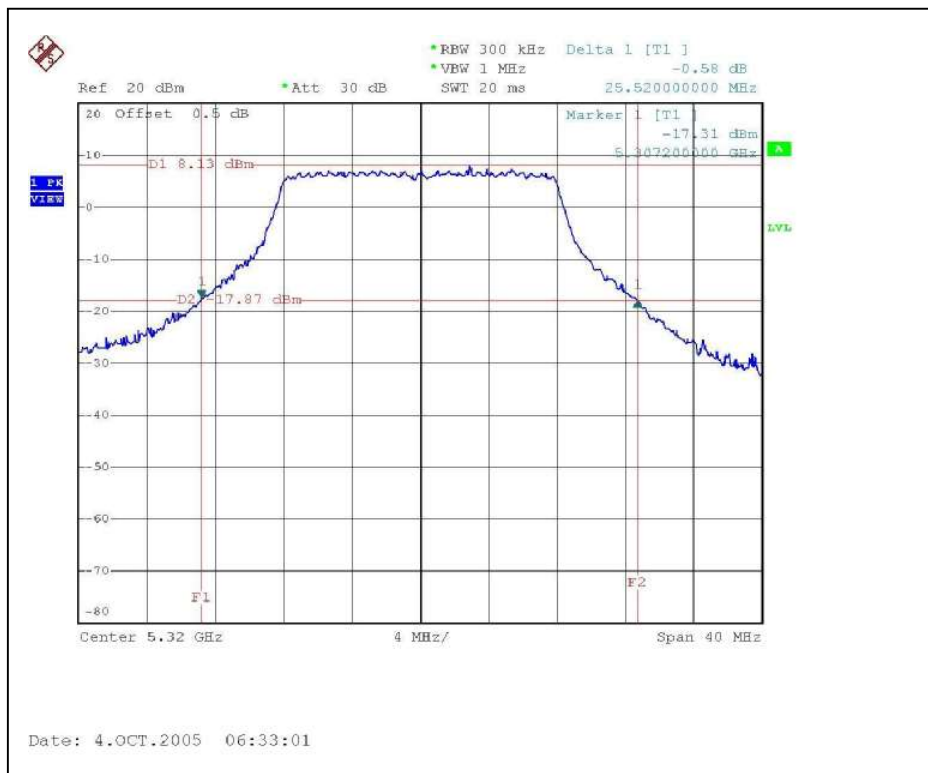


**802.11a Turbo OFDM modulation**

|                             |                                                                     |                                 |                        |
|-----------------------------|---------------------------------------------------------------------|---------------------------------|------------------------|
| <b>EUT</b>                  | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                                 |                        |
| <b>MODEL</b>                | AP-80MB                                                             | <b>TRANSFER RATE</b>            | 12Mbps                 |
| <b>MODULATION TYPE</b>      | BPSK                                                                | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 966hPa |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz                                                       | <b>TESTED BY</b>                | Rex Huang              |

Antenna 2 (Gain : 7.0 dBi) +Cable loss (1.36dB)

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | 26dBc Occupied Bandwidth (MHz) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|--------------------------------|-----------|
| 1       | 5290                    | 22.08                   | 24                     | 52.65                          | PASS      |

**NOTE:** The 26dBc Occupied Bandwidth plot, please refer to the following pages.

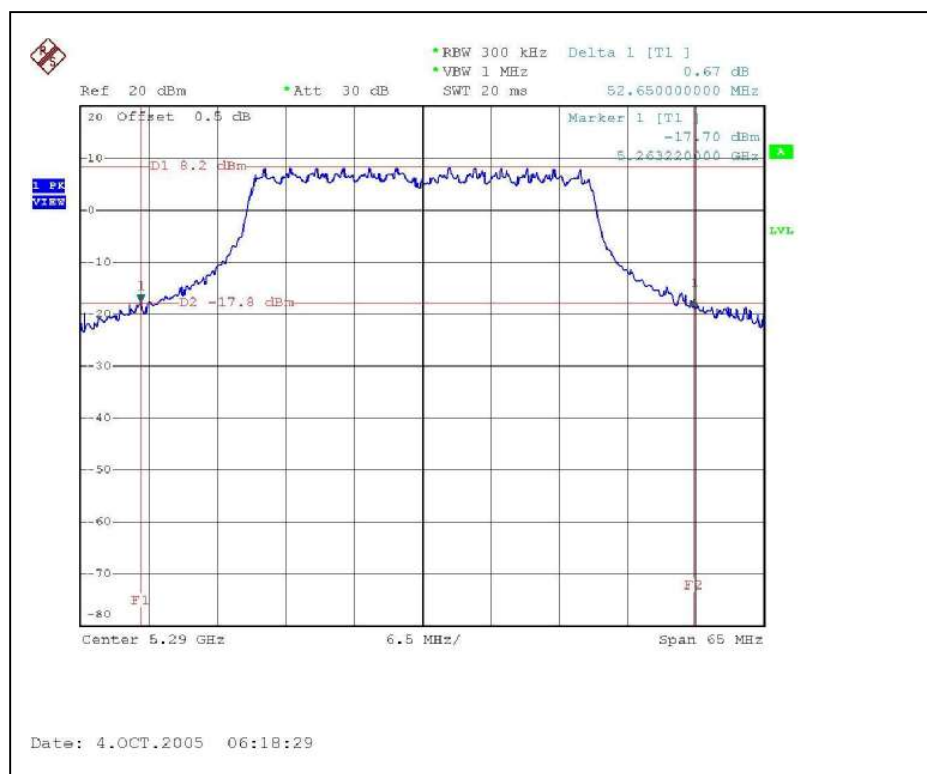**Peak Power Output:  
CH1****26dB Occupied Bandwidth:  
CH1**

## 4.3.9 TEST RESULTS (ANTENNA 3)


**802.11a OFDM modulation**

|                             |                                                                     |                                 |                        |
|-----------------------------|---------------------------------------------------------------------|---------------------------------|------------------------|
| <b>EUT</b>                  | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                                 |                        |
| <b>MODEL</b>                | AP-80MB                                                             | <b>TRANSFER RATE</b>            | 6Mbps                  |
| <b>MODULATION TYPE</b>      | BPSK                                                                | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 966hPa |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz                                                       | <b>TESTED BY</b>                | Rex Huang              |


Antenna 3 (Gain : 10.0 dBi) +Cable loss (1.36dB)

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | 26dBc Occupied Bandwidth (MHz) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|--------------------------------|-----------|
| 1       | 5260                    | 19.37                   | 21.36                  | 25.68                          | PASS      |
| 4       | 5320                    | 18.08                   | 21.36                  | 25.28                          | PASS      |


**NOTE:** The 26dBc Occupied Bandwidth plot, please refer to the following pages.

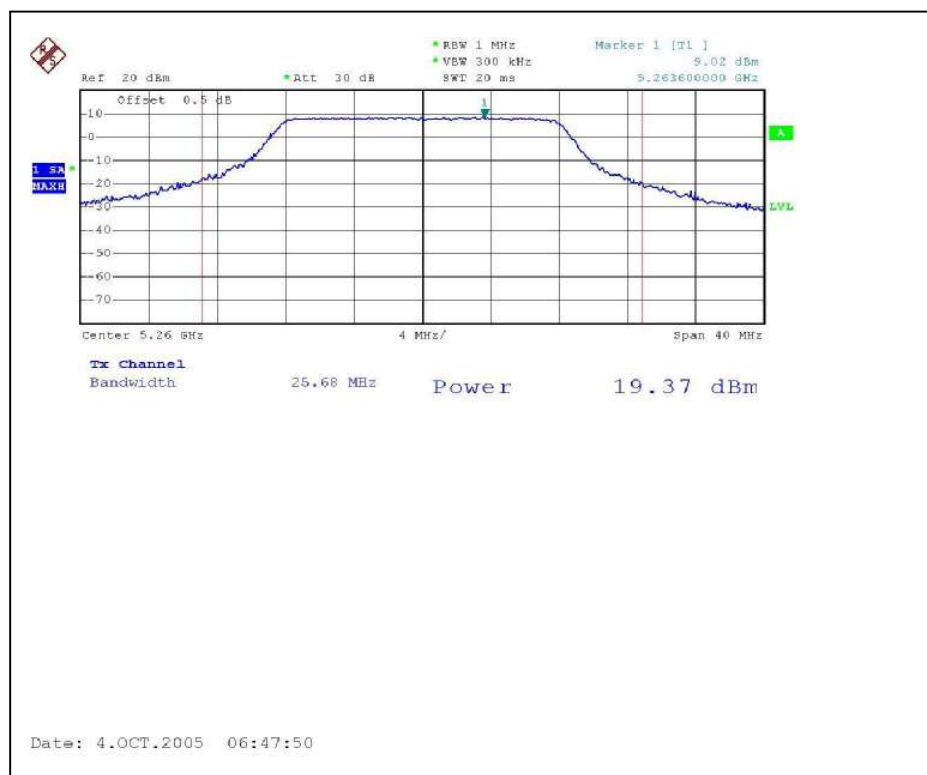Peak Power Output:  
CH1


## CH4

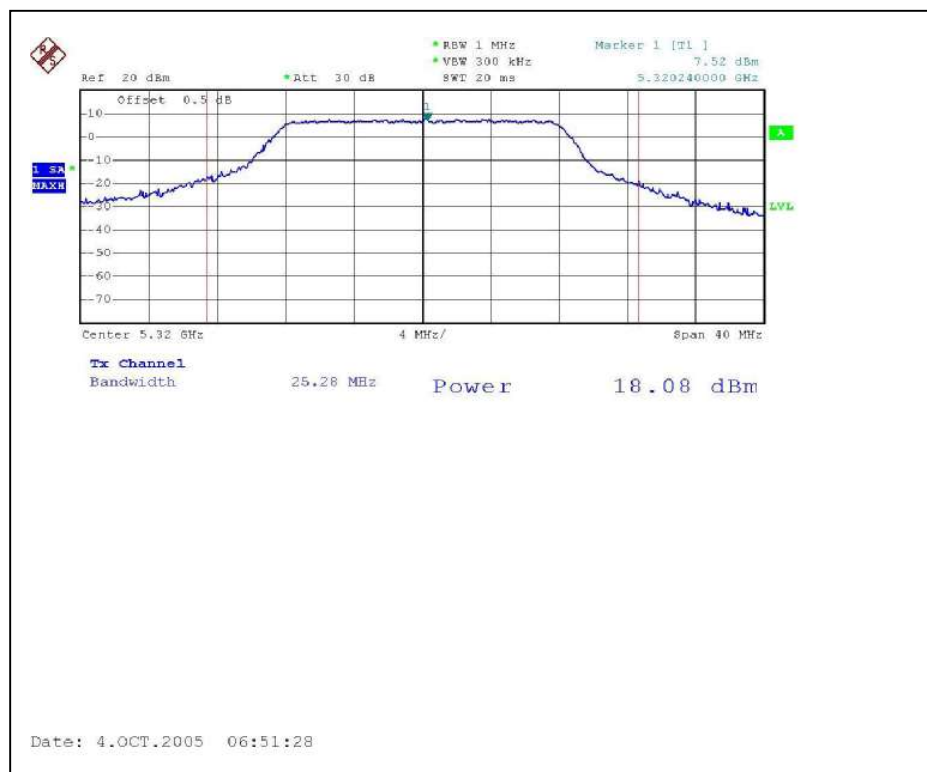

## 26dB Occupied Bandwidth: CH1

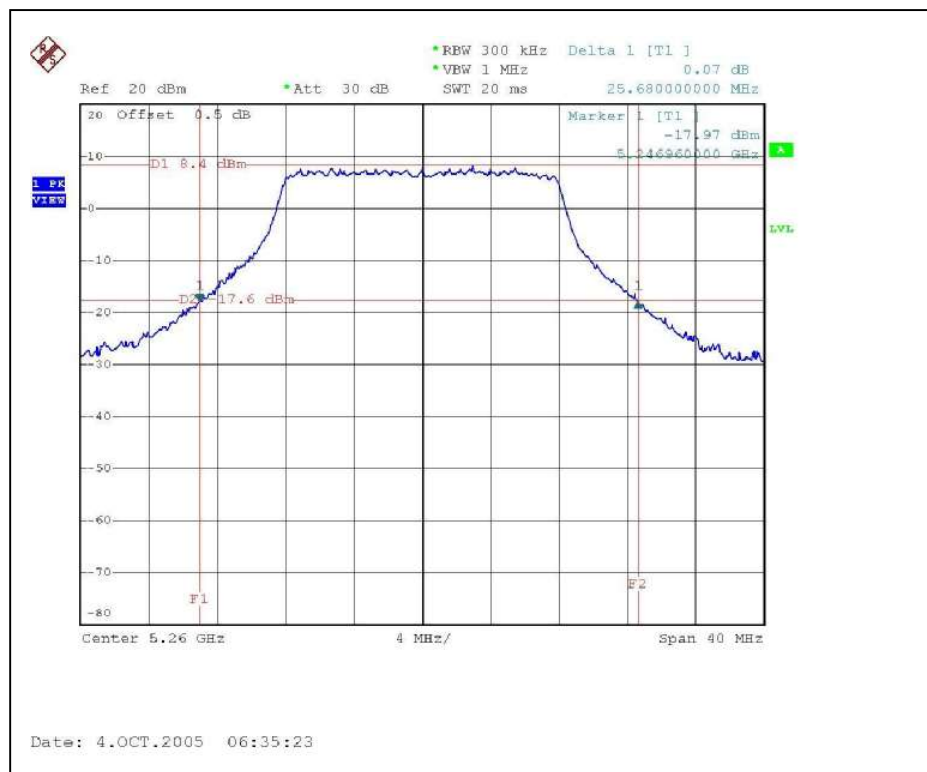

## CH4

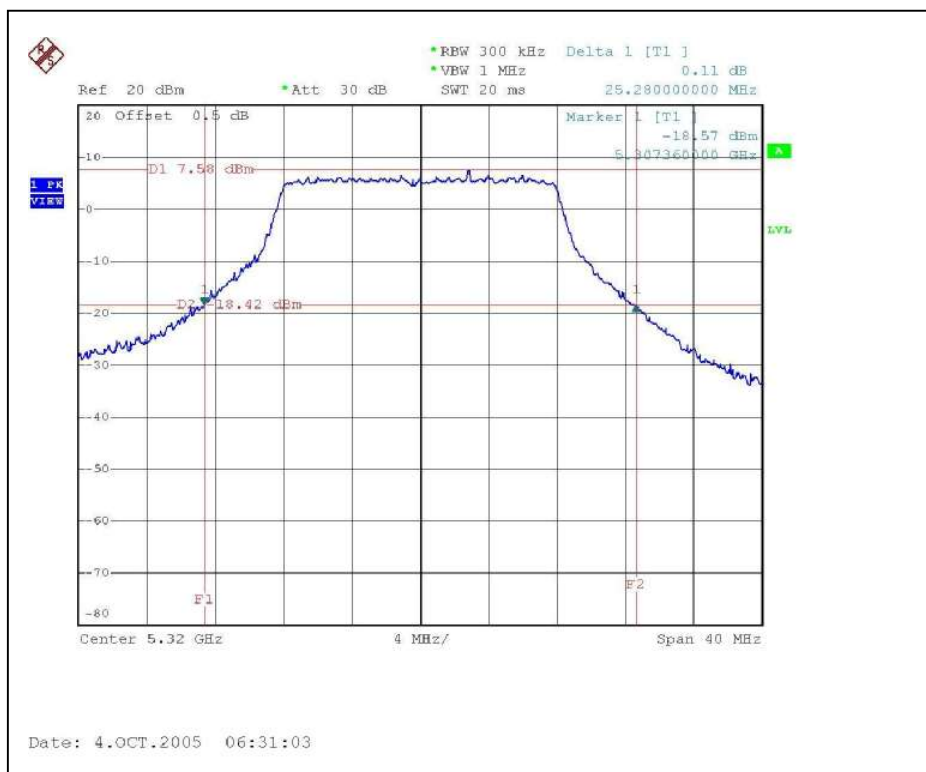


**802.11a Turbo OFDM modulation**

|                             |                                                                     |                                 |                        |
|-----------------------------|---------------------------------------------------------------------|---------------------------------|------------------------|
| <b>EUT</b>                  | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                                 |                        |
| <b>MODEL</b>                | AP-80MB                                                             | <b>TRANSFER RATE</b>            | 12Mbps                 |
| <b>MODULATION TYPE</b>      | BPSK                                                                | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 966hPa |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz                                                       | <b>TESTED BY</b>                | Rex Huang              |

Antenna 3 (Gain : 10.0 dBi) +Cable loss (1.36dB)

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | 26dBc Occupied Bandwidth (MHz) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|--------------------------------|-----------|
| 1       | 5290                    | 19.39                   | 21.36                  | 49.01                          | PASS      |

**NOTE:** The 26dBc Occupied Bandwidth plot, please refer to the following pages.

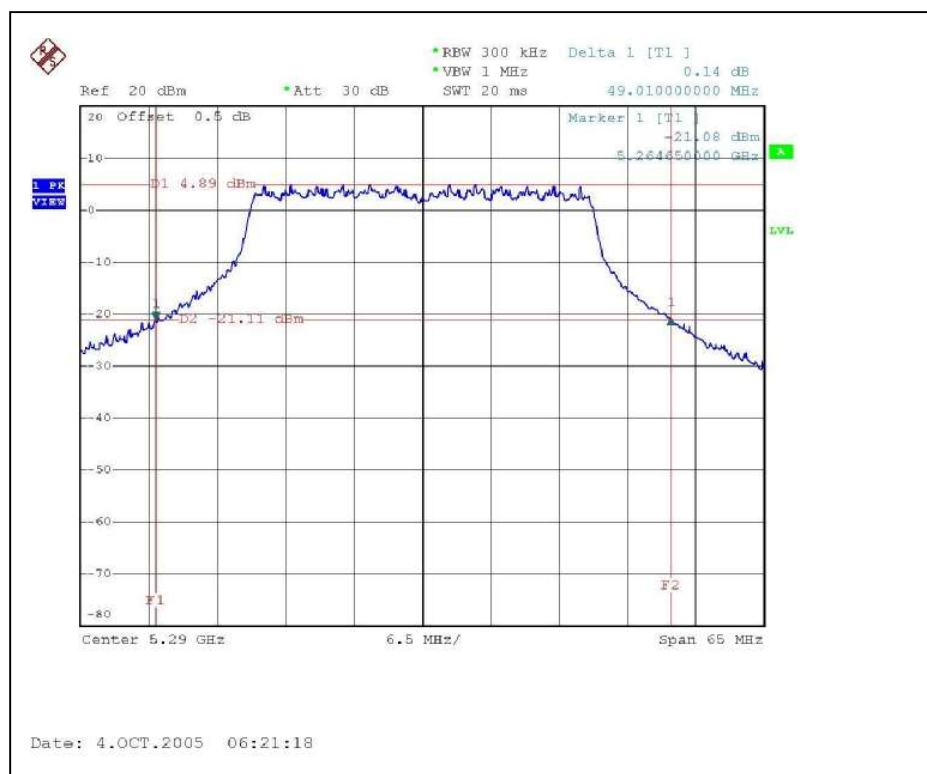**Peak Power Output:  
CH1****26dB Occupied Bandwidth:  
CH1**

## 4.3.10 TEST RESULTS (ANTENNA 4)


**802.11a OFDM modulation**

|                             |                                                                     |                                 |                        |
|-----------------------------|---------------------------------------------------------------------|---------------------------------|------------------------|
| <b>EUT</b>                  | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                                 |                        |
| <b>MODEL</b>                | AP-80MB                                                             | <b>TRANSFER RATE</b>            | 6Mbps                  |
| <b>MODULATION TYPE</b>      | BPSK                                                                | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 966hPa |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz                                                       | <b>TESTED BY</b>                | Rex Huang              |


Antenna 4 (Gain : 14.0 dBi) +Cable loss (1.36dB)

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | 26dBc Occupied Bandwidth (MHz) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|--------------------------------|-----------|
| 1       | 5260                    | 16.56                   | 17.36                  | 25.6                           | PASS      |
| 4       | 5320                    | 16.42                   | 17.36                  | 25.76                          | PASS      |


**NOTE:** The 26dBc Occupied Bandwidth plot, please refer to the following pages.

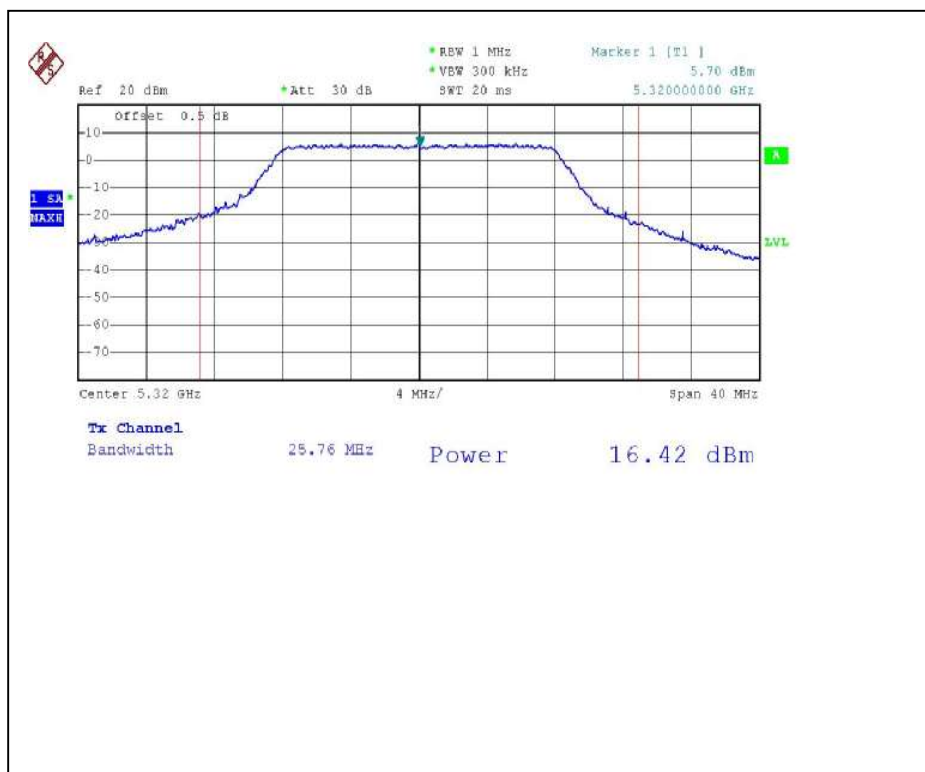**Peak Power Output:  
CH1****CH4**

## 26dB Occupied Bandwidth: CH1

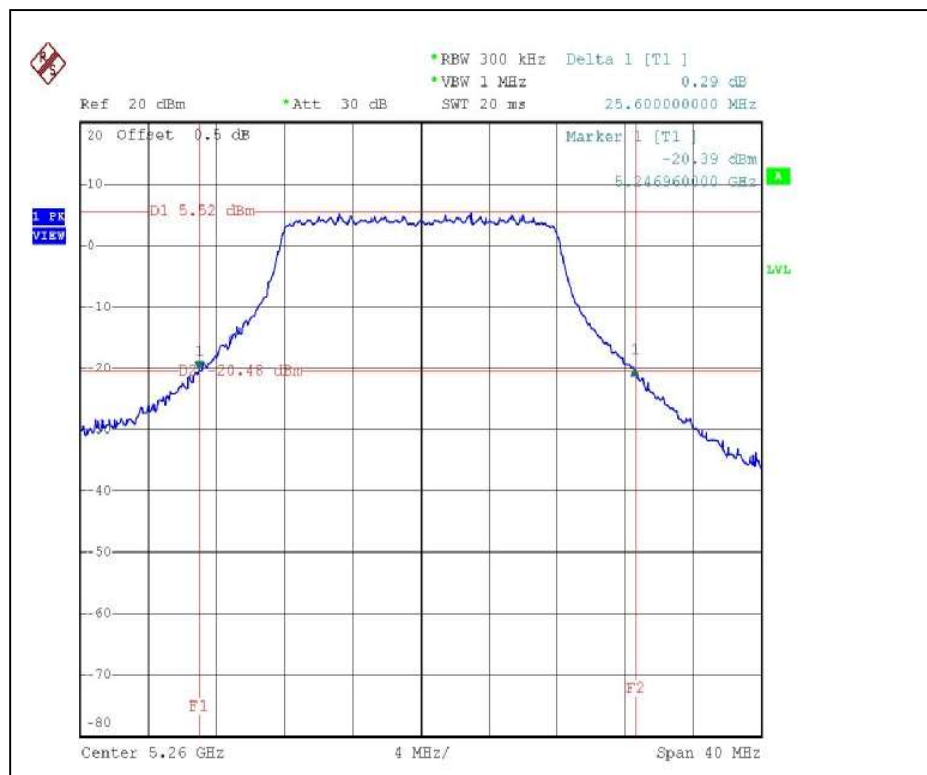

## CH4

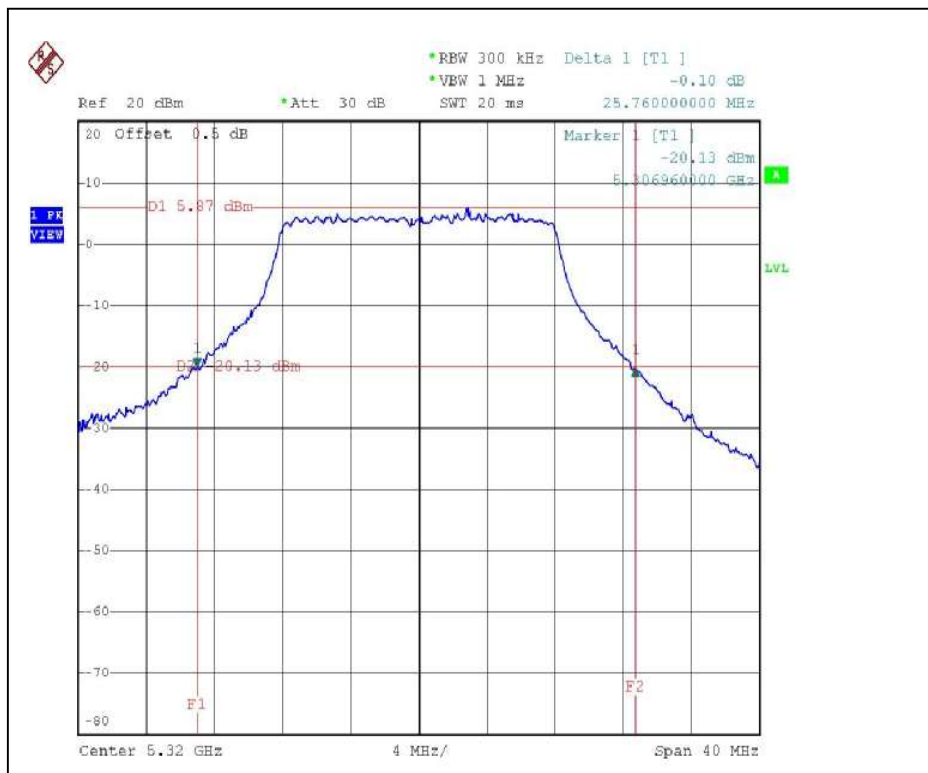


**802.11a Turbo OFDM modulation**

|                             |                                                                     |                                 |                        |
|-----------------------------|---------------------------------------------------------------------|---------------------------------|------------------------|
| <b>EUT</b>                  | Aruba 80 a+b/g Outdoor Stand-alone Access Point / WDS Bridge Master |                                 |                        |
| <b>MODEL</b>                | AP-80MB                                                             | <b>TRANSFER RATE</b>            | 12Mbps                 |
| <b>MODULATION TYPE</b>      | BPSK                                                                | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 966hPa |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz                                                       | <b>TESTED BY</b>                | Rex Huang              |

Antenna 4 (Gain : 14.0 dBi) +Cable loss (1.36dB)

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | 26dBc Occupied Bandwidth (MHz) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|--------------------------------|-----------|
| 1       | 5290                    | 16.43                   | 17.36                  | 50.57                          | PASS      |

**NOTE:** The 26dBc Occupied Bandwidth plot, please refer to the following pages.

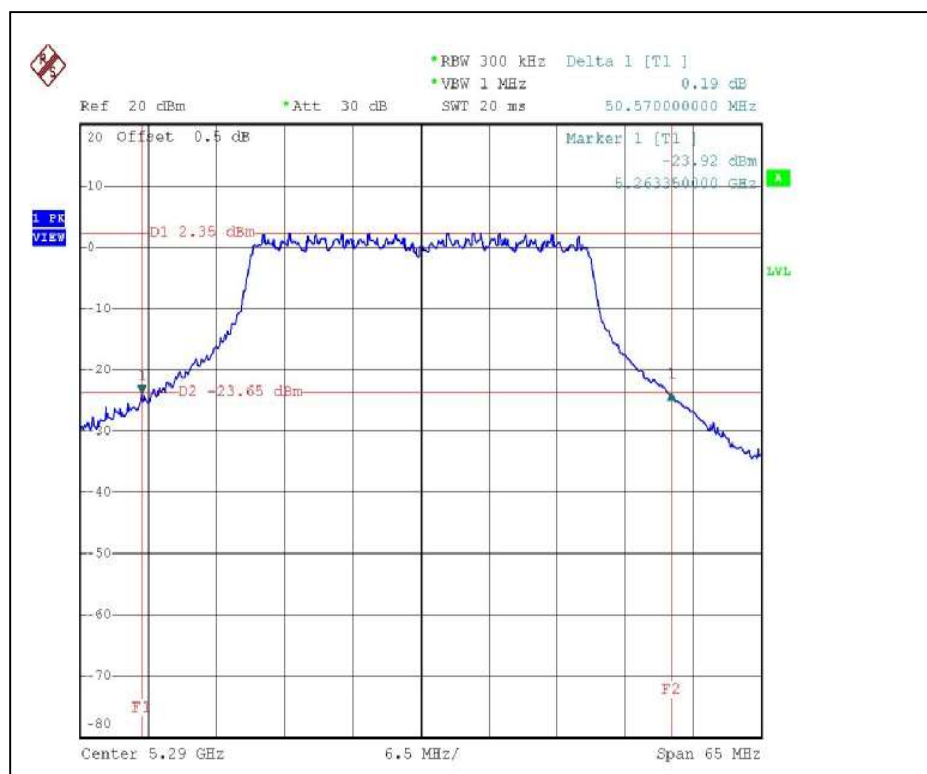**Peak Power Output:  
CH1****26dB Occupied Bandwidth:  
CH1**

#### 4.4 PEAK POWER EXCURSION MEASUREMENT

##### 4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

| Frequency Band    | Limit |
|-------------------|-------|
| 5.15 – 5.25 GHz   | 13dB  |
| 5.25 – 5.35 GHz   | 13dB  |
| 5.725 – 5.825 GHz | 13dB  |

##### 4.4.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER      | FSP40     | 100036     | Nov. 23, 2005    |

**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300KHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.