


|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/06 - 04:56 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

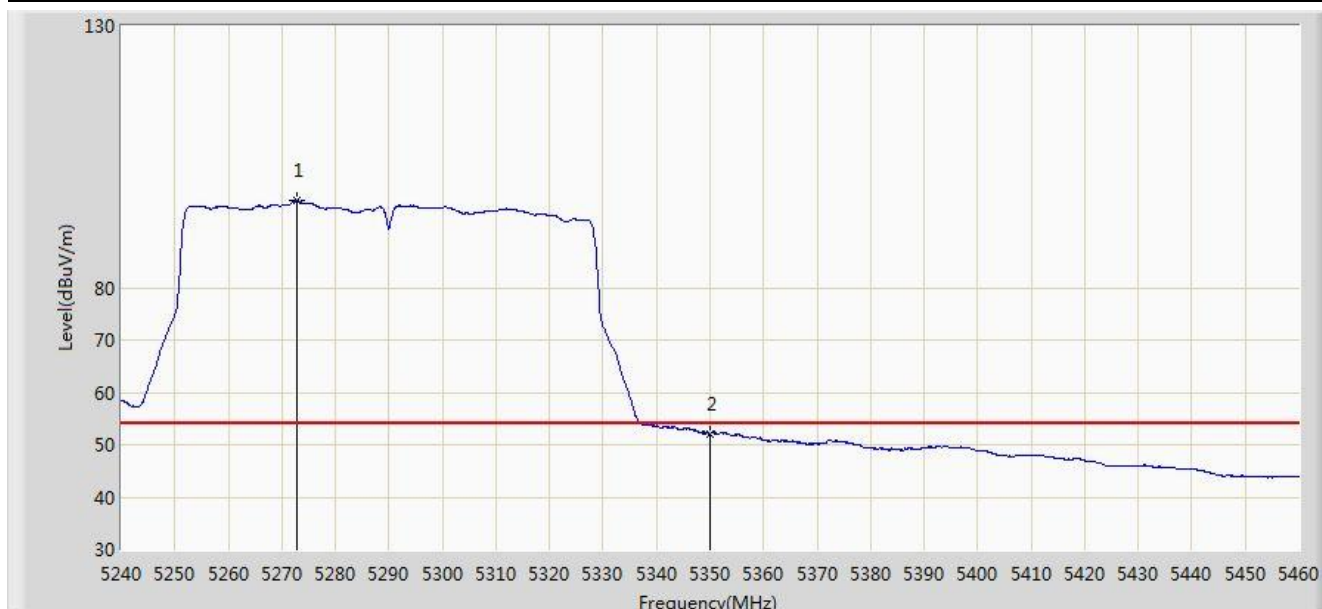


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5272.780        | 96.646                 | 92.813               | N/A             | N/A            | 3.833       | AV   |
| 2  |      |      | 5350.000        | 52.098                 | 48.193               | -1.902          | 54.000         | 3.904       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/06 - 04:58 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

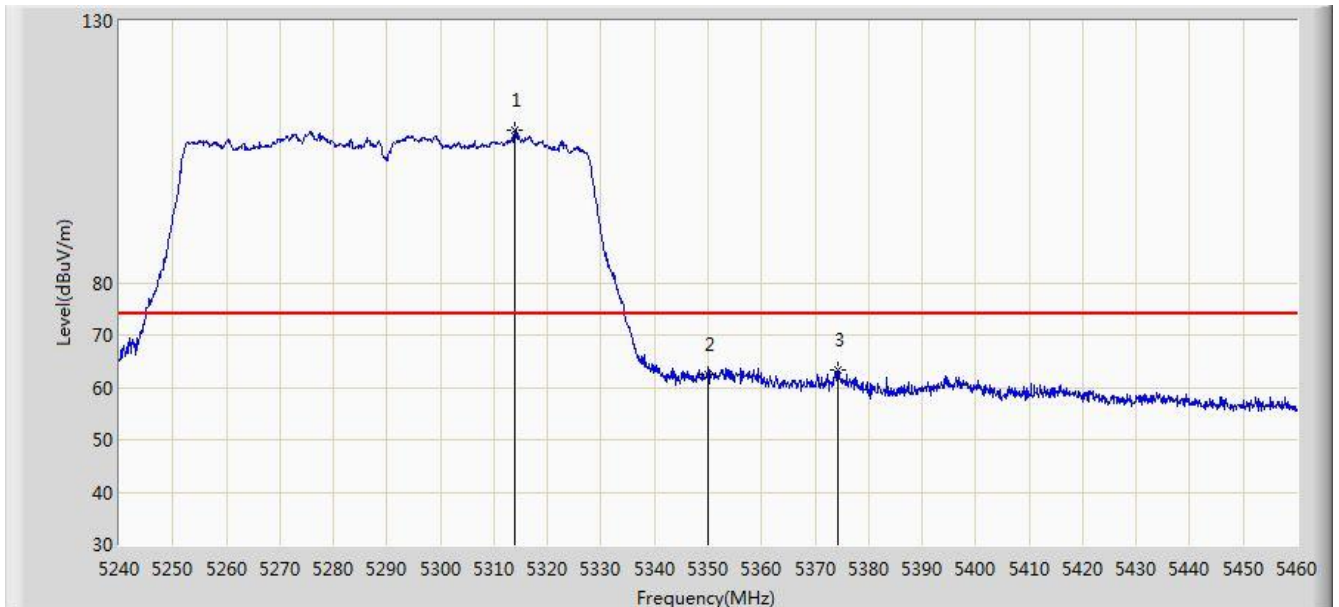


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5313.920        | 109.053                | 105.216              | N/A             | N/A            | 3.837       | PK   |
| 2  |      |      | 5350.000        | 62.398                 | 58.493               | -11.602         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5374.310        | 63.466                 | 59.517               | -10.534         | 74.000         | 3.950       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/06 - 04:58 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

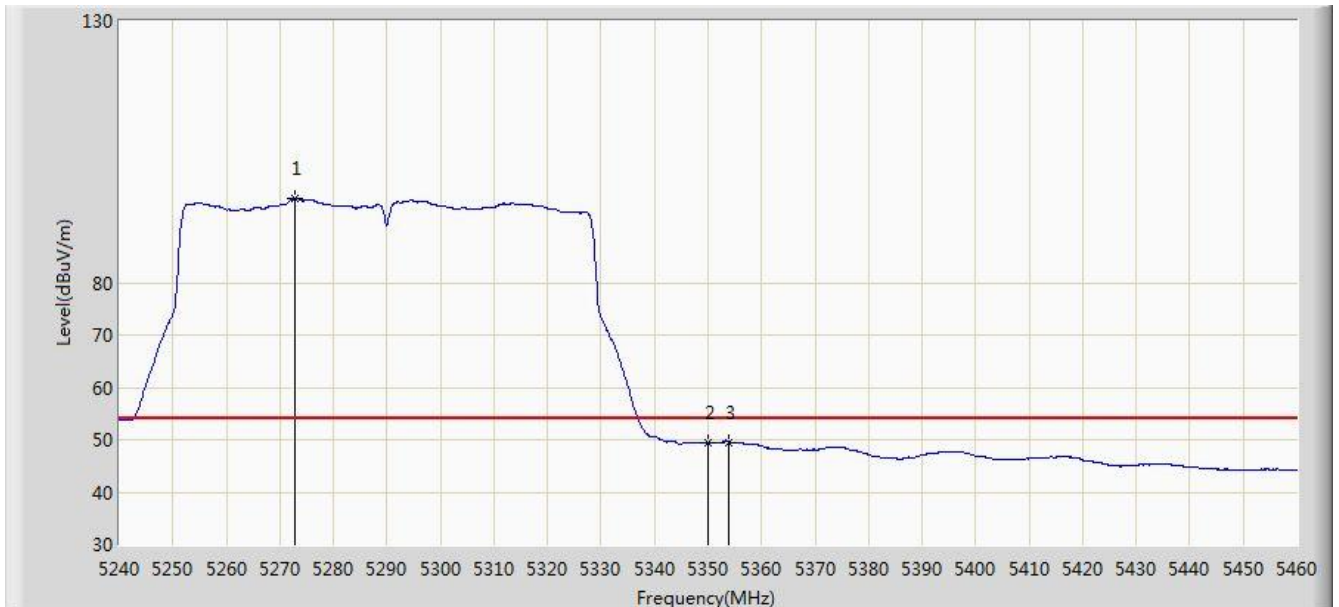


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5272.780        | 96.140                 | 92.307               | N/A             | N/A            | 3.833       | AV   |
| 2  |      |      | 5350.000        | 49.388                 | 45.483               | -4.612          | 54.000         | 3.904       | AV   |
| 3  |      |      | 5353.850        | 49.547                 | 45.635               | -4.453          | 54.000         | 3.912       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/06 - 04:04 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

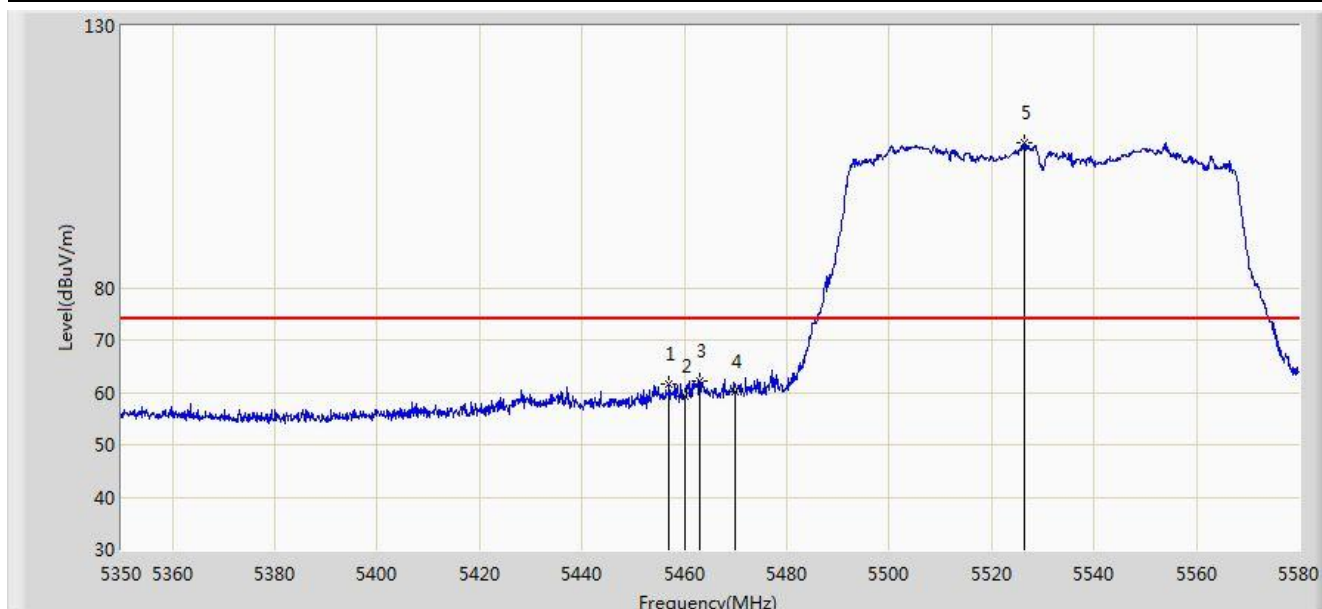


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5457.065        | 61.575                 | 57.401               | -12.425         | 74.000         | 4.174       | PK   |
| 2  |      |      | 5460.000        | 59.363                 | 55.183               | -14.637         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5463.045        | 62.199                 | 58.012               | -11.801         | 74.000         | 4.187       | PK   |
| 4  |      |      | 5470.000        | 60.238                 | 56.036               | -13.762         | 74.000         | 4.202       | PK   |
| 5  |      | *    | 5526.525        | 107.748                | 103.397              | N/A             | N/A            | 4.351       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/06 - 04:05 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

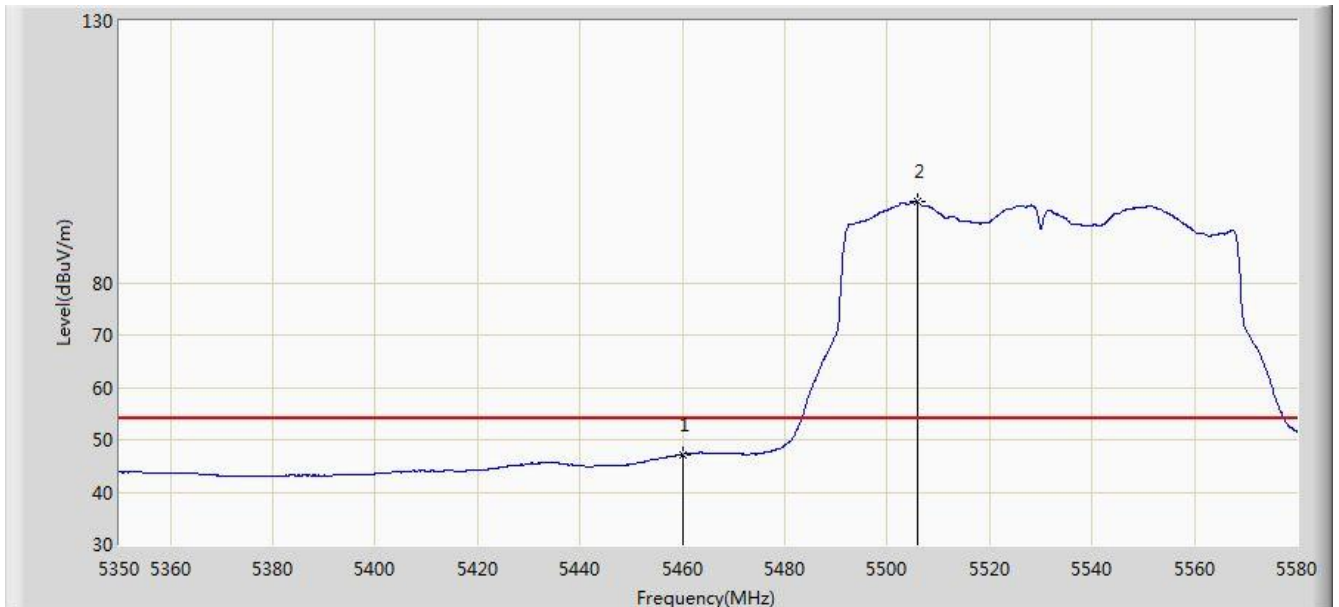


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.143                 | 42.963               | -6.857          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5505.825        | 95.377                 | 91.088               | N/A             | N/A            | 4.289       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/06 - 04:07 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

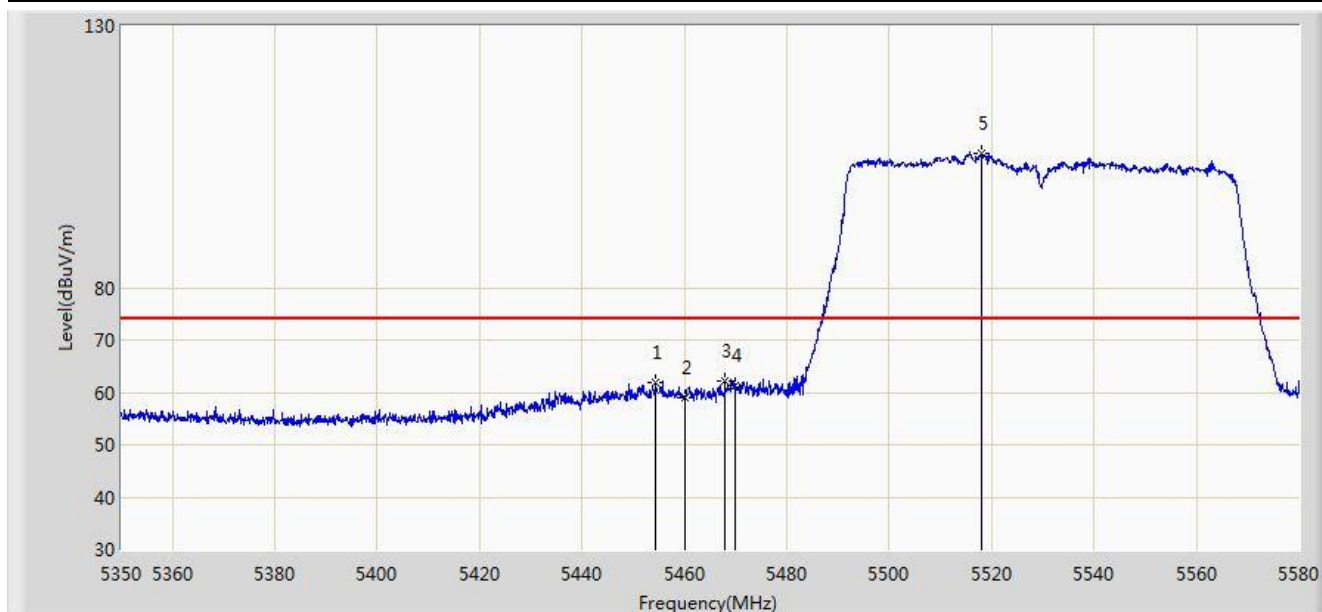


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5454.420        | 61.998                 | 57.830               | -12.002         | 74.000         | 4.168       | PK   |
| 2  |      |      | 5460.000        | 58.924                 | 54.744               | -15.076         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5467.875        | 62.276                 | 58.078               | -11.724         | 74.000         | 4.198       | PK   |
| 4  |      |      | 5470.000        | 61.228                 | 57.026               | -12.772         | 74.000         | 4.202       | PK   |
| 5  |      | *    | 5518.015        | 105.655                | 101.330              | N/A             | N/A            | 4.325       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/06 - 04:07 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

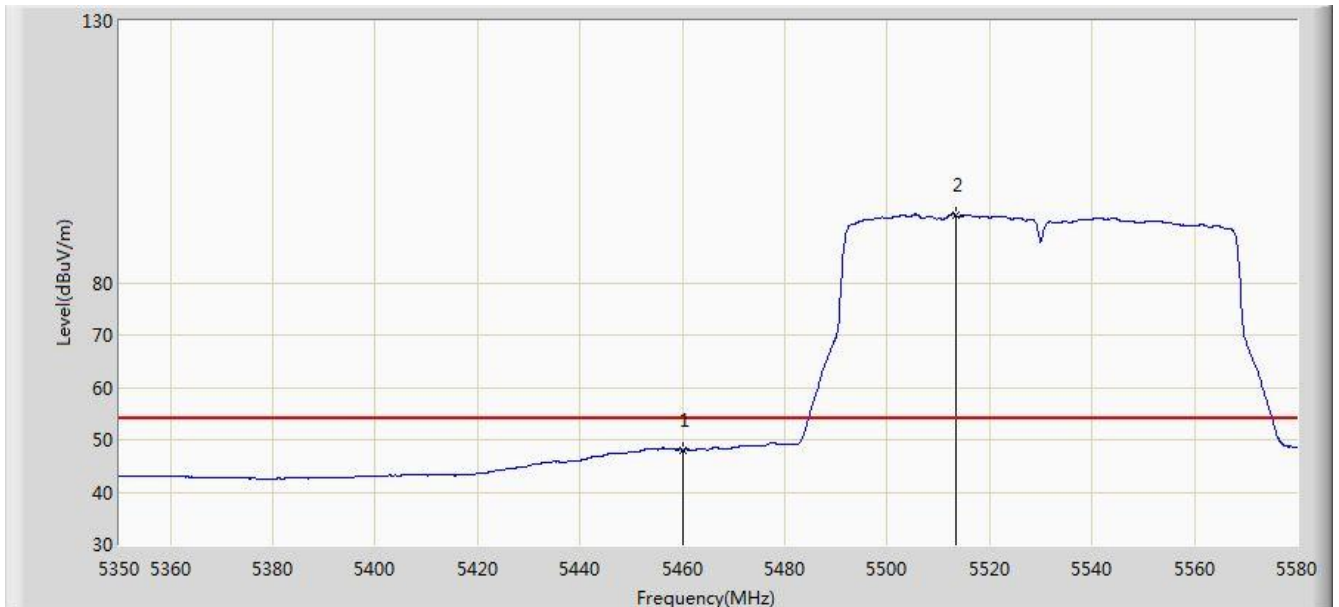

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 48.067                 | 43.887               | -5.933          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5513.300        | 92.986                 | 88.675               | N/A             | N/A            | 4.310       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/11/07 - 22:03 |
| Limit: FCC_Part15.209_RE(3m)                                                   | Engineer: Snake Ni       |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5210MHz+5290MHz |                          |
| Ant 0 + 1 + 2 + 3 (CDD Mode)                                                   |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.500        | 58.932                 | 54.758               | -15.068         | 74.000         | 4.173       | PK   |
| 2  |      |      | 5150.000        | 58.275                 | 54.106               | -15.725         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5229.875        | 103.994                | 100.084              | N/A             | N/A            | 3.909       | PK   |
| 4  |      |      | 5350.000        | 56.039                 | 52.134               | -17.961         | 74.000         | 3.904       | PK   |
| 5  |      |      | 5356.925        | 58.220                 | 54.303               | -15.780         | 74.000         | 3.917       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/11/07 - 22:10 |
| Limit: FCC_Part15.209_RE(3m)                                                   | Engineer: Snake Ni       |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5210MHz+5290MHz |                          |
| Ant 0 + 1 + 2 + 3 (CDD Mode)                                                   |                          |

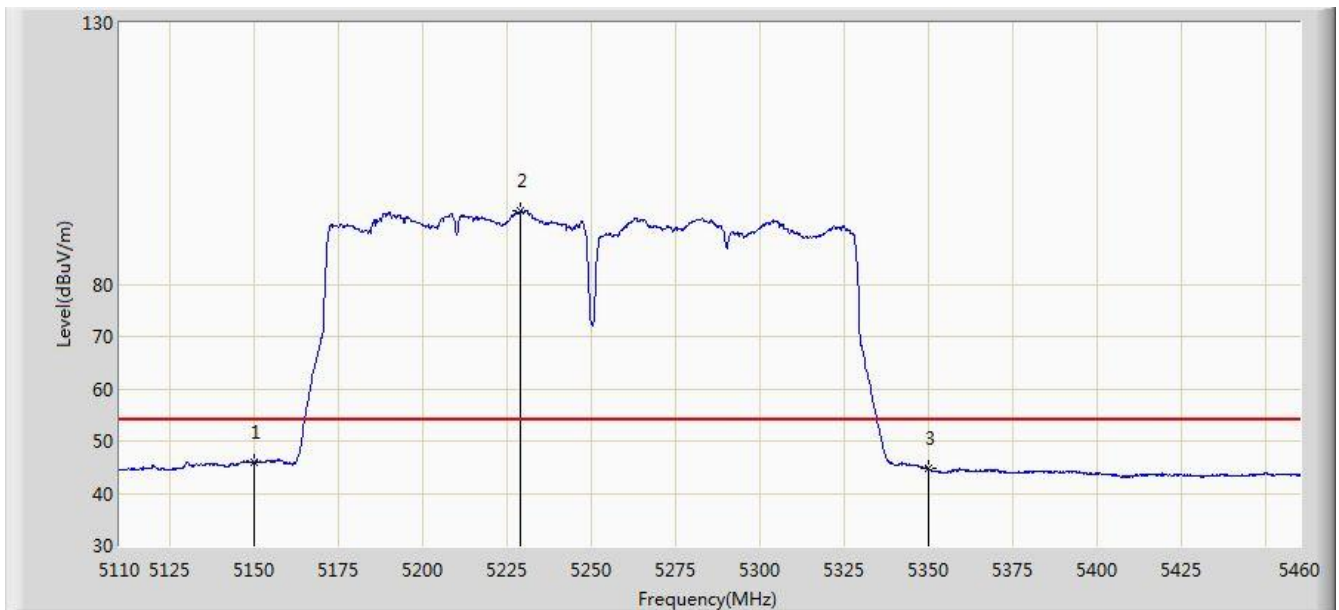


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 45.819                 | 41.650               | -8.181          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5229.000        | 93.941                 | 90.029               | N/A             | N/A            | 3.912       | AV   |
| 3  |      |      | 5350.000        | 44.726                 | 40.821               | -9.274          | 54.000         | 3.904       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/11/07 - 22:13 |
| Limit: FCC_Part15.209_RE(3m)                                                   | Engineer: Snake Ni       |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5210MHz+5290MHz |                          |
| Ant 0 + 1 + 2 + 3 (CDD Mode)                                                   |                          |

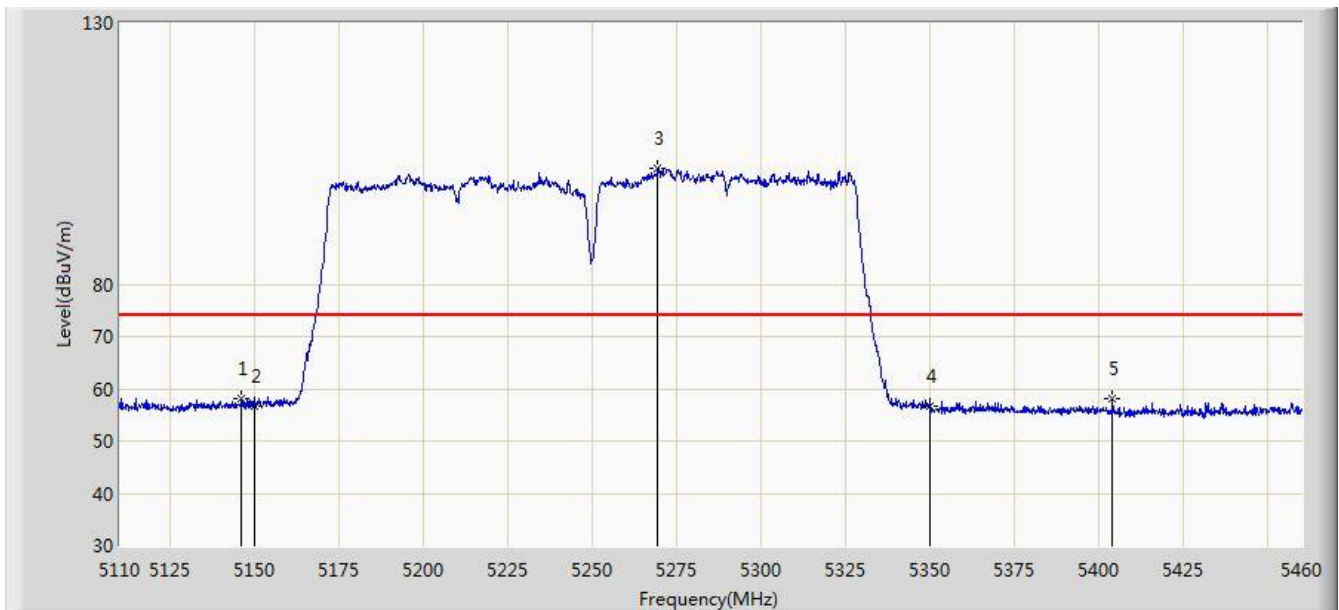


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5146.050        | 58.169                 | 53.993               | -15.831         | 74.000         | 4.175       | PK   |
| 2  |      |      | 5150.000        | 56.752                 | 52.583               | -17.248         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5269.425        | 102.270                | 98.435               | N/A             | N/A            | 3.835       | PK   |
| 4  |      |      | 5350.000        | 56.691                 | 52.786               | -17.309         | 74.000         | 3.904       | PK   |
| 5  |      |      | 5404.000        | 58.254                 | 54.243               | -15.746         | 74.000         | 4.010       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/11/07 - 22:15 |
| Limit: FCC_Part15.209_RE(3m)                                                   | Engineer: Snake Ni       |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5210MHz+5290MHz |                          |
| Ant 0 + 1 + 2 + 3 (CDD Mode)                                                   |                          |

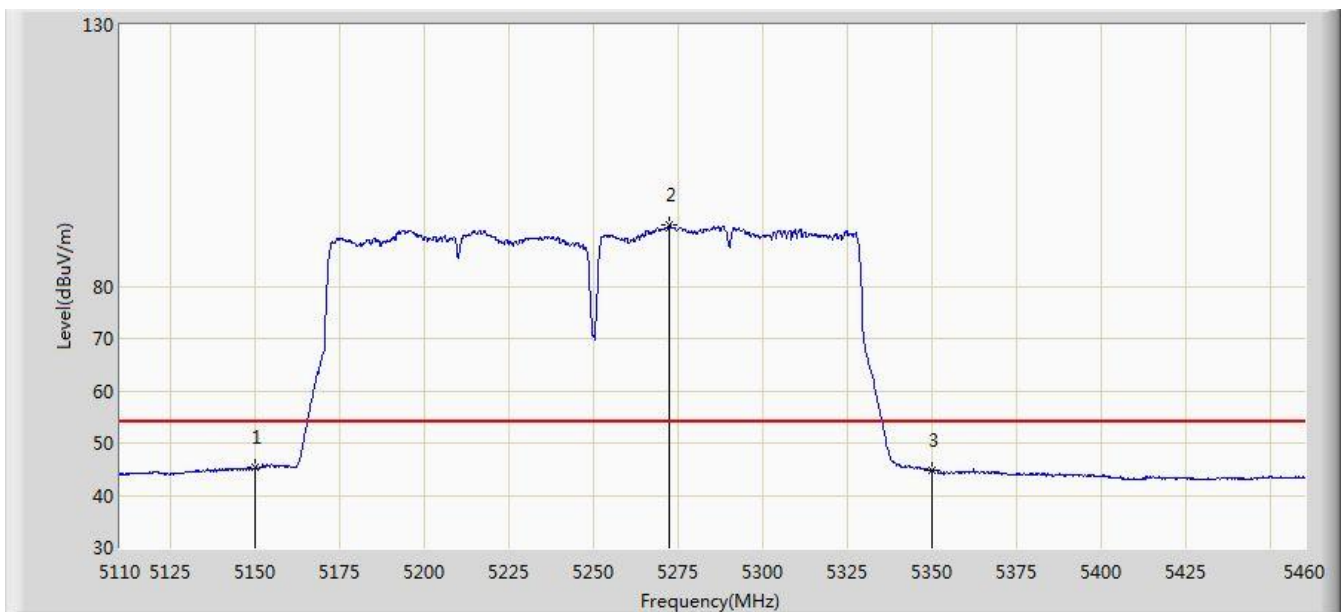


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 45.287                 | 41.118               | -8.713          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5272.225        | 91.732                 | 87.899               | N/A             | N/A            | 3.834       | AV   |
| 3  |      |      | 5350.000        | 44.747                 | 40.842               | -9.253          | 54.000         | 3.904       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/10/20 - 15:19 |
| Limit: FCC_Part15.209_RE(3m)                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5530MHz+5610MHz |                          |
| Ant 0 + 1 + 2 + 3 (CDD Mode)                                                   |                          |

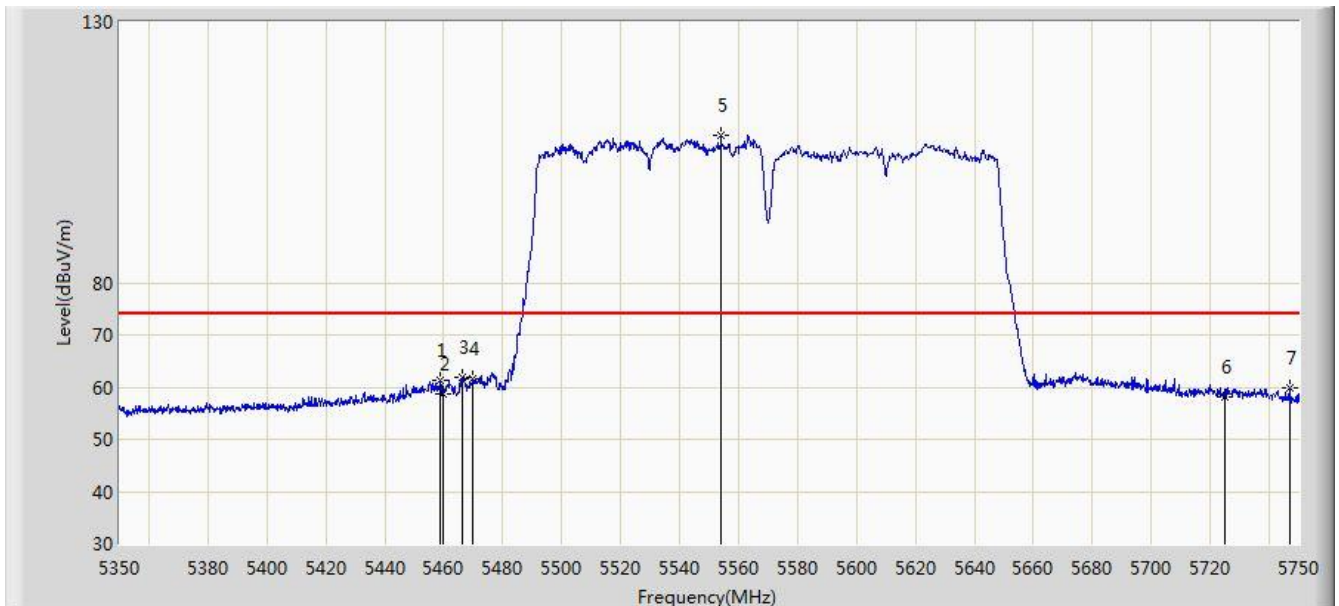


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5458.800        | 61.312                 | 57.134               | -12.688         | 74.000         | 4.178       | PK   |
| 2  |      |      | 5460.000        | 58.587                 | 54.407               | -15.413         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5466.200        | 61.933                 | 57.739               | -12.067         | 74.000         | 4.193       | PK   |
| 4  |      |      | 5470.000        | 61.457                 | 57.255               | -12.543         | 74.000         | 4.202       | PK   |
| 5  |      | *    | 5554.000        | 108.150                | 103.721              | N/A             | N/A            | 4.428       | PK   |
| 6  |      |      | 5725.000        | 58.101                 | 53.072               | -15.899         | 74.000         | 5.029       | PK   |
| 7  |      |      | 5746.800        | 59.784                 | 54.619               | -14.216         | 74.000         | 5.165       | PK   |

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/10/20 - 15:22 |
| Limit: FCC_Part15.209_RE(3m)                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5530MHz+5610MHz |                          |
| Ant 0 + 1 + 2 + 3 (CDD Mode)                                                   |                          |

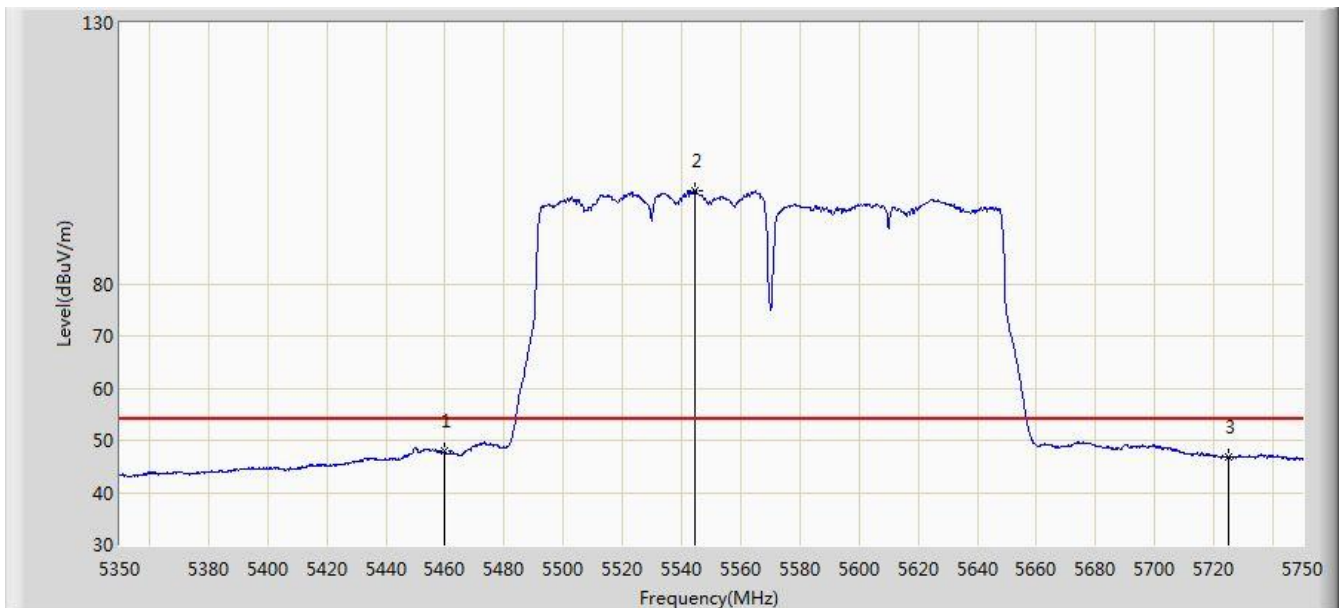


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.893                 | 43.713               | -6.107          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5544.600        | 97.880                 | 93.477               | N/A             | N/A            | 4.403       | AV   |
| 3  |      |      | 5725.000        | 46.716                 | 41.687               | -7.284          | 54.000         | 5.029       | AV   |

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/10/20 - 15:24 |
| Limit: FCC_Part15.209_RE(3m)                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5530MHz+5610MHz |                          |
| Ant 0 + 1 + 2 + 3 (CDD Mode)                                                   |                          |

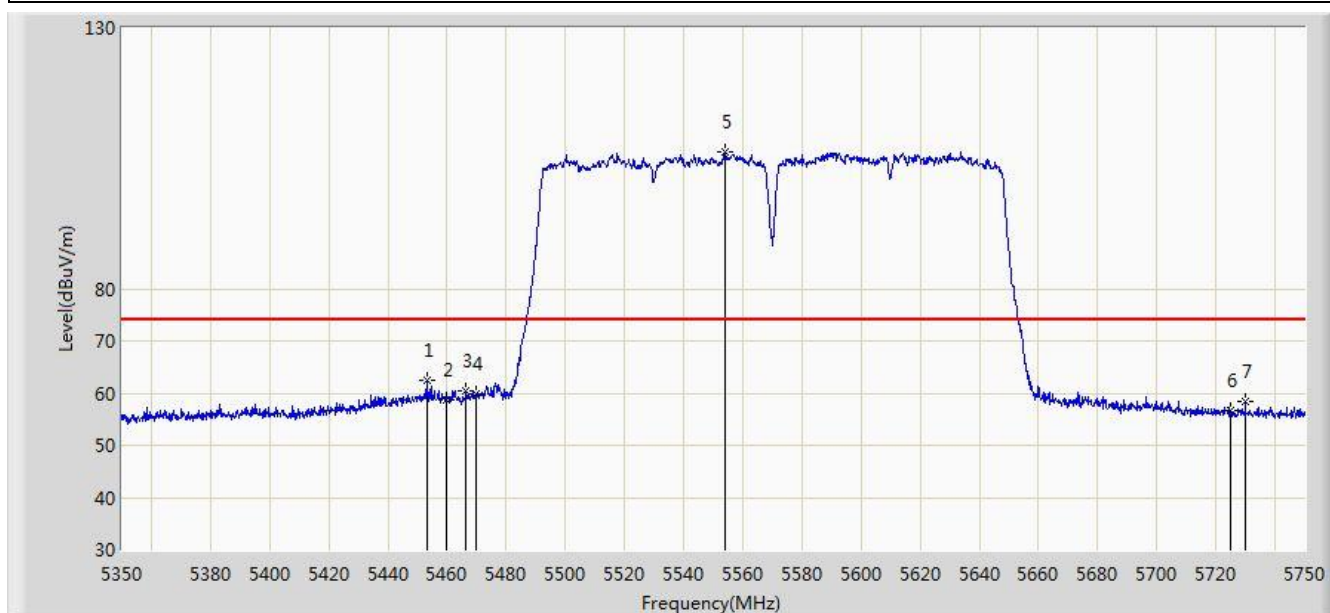


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5453.200        | 62.396                 | 58.231               | -11.604         | 74.000         | 4.164       | PK   |
| 2  |      |      | 5460.000        | 58.742                 | 54.562               | -15.258         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5466.400        | 60.512                 | 56.318               | -13.488         | 74.000         | 4.194       | PK   |
| 4  |      |      | 5470.000        | 59.765                 | 55.563               | -14.235         | 74.000         | 4.202       | PK   |
| 5  |      | *    | 5554.000        | 106.224                | 101.795              | N/A             | N/A            | 4.428       | PK   |
| 6  |      |      | 5725.000        | 56.609                 | 51.580               | -17.391         | 74.000         | 5.029       | PK   |
| 7  |      |      | 5730.000        | 58.479                 | 53.418               | -15.521         | 74.000         | 5.061       | PK   |

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/10/20 - 15:25 |
| Limit: FCC_Part15.209_RE(3m)                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5530MHz+5610MHz |                          |
| Ant 0 + 1 + 2 + 3 (CDD Mode)                                                   |                          |

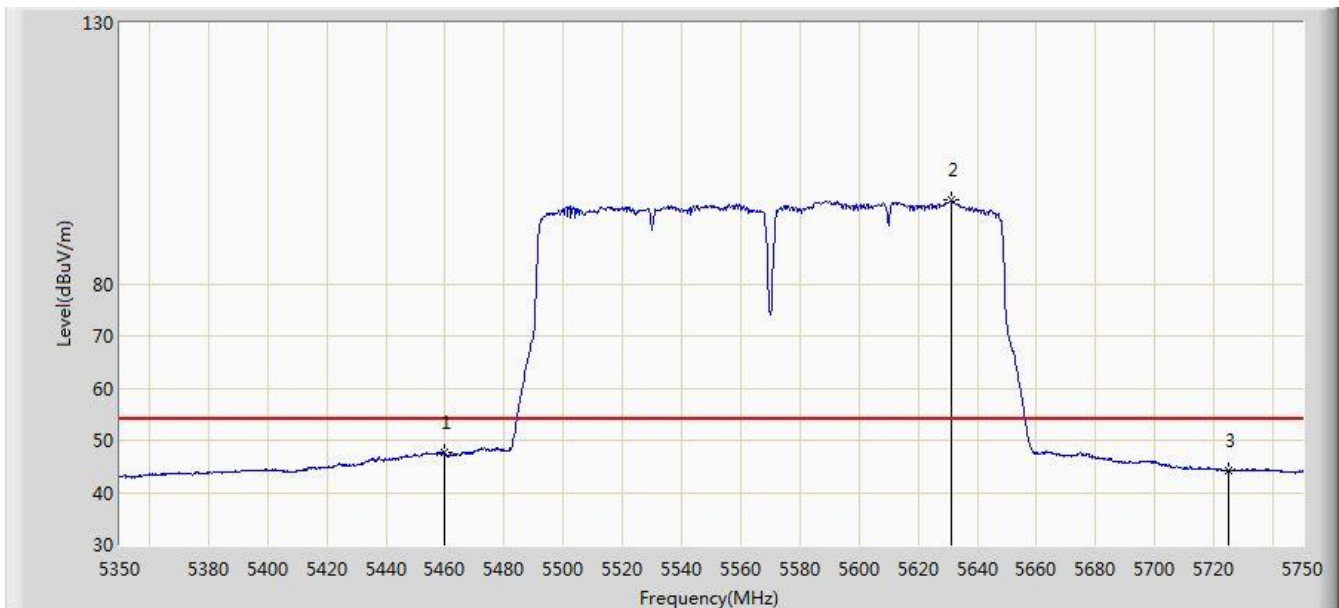


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.622                 | 43.442               | -6.378          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5631.000        | 95.980                 | 91.368               | N/A             | N/A            | 4.612       | AV   |
| 3  |      |      | 5725.000        | 44.089                 | 39.060               | -9.911          | 54.000         | 5.029       | AV   |

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 17:42 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

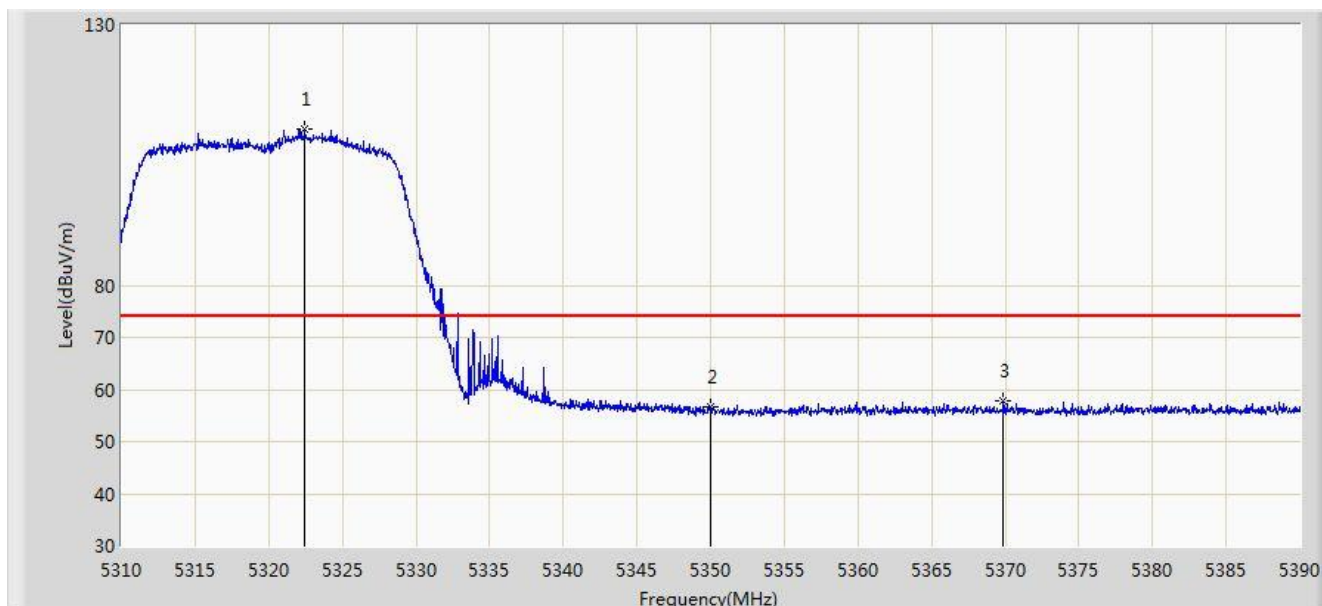


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5322.480        | 110.025                | 106.172              | N/A             | N/A            | 3.853       | PK   |
| 2  |      |      | 5350.000        | 56.780                 | 52.875               | -17.220         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5369.880        | 57.908                 | 53.967               | -16.092         | 74.000         | 3.941       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 17:48 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

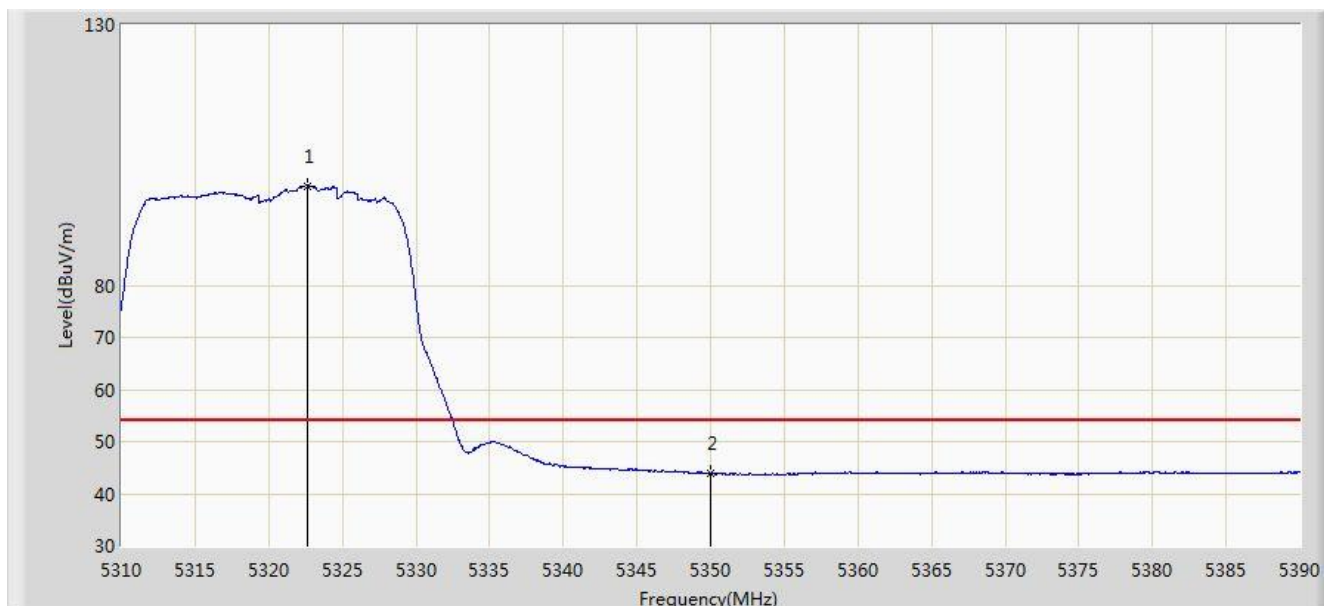


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5322.640        | 99.100                 | 95.246               | N/A             | N/A            | 3.853       | AV   |
| 2  |      |      | 5350.000        | 43.882                 | 39.977               | -10.118         | 54.000         | 3.904       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 17:49 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

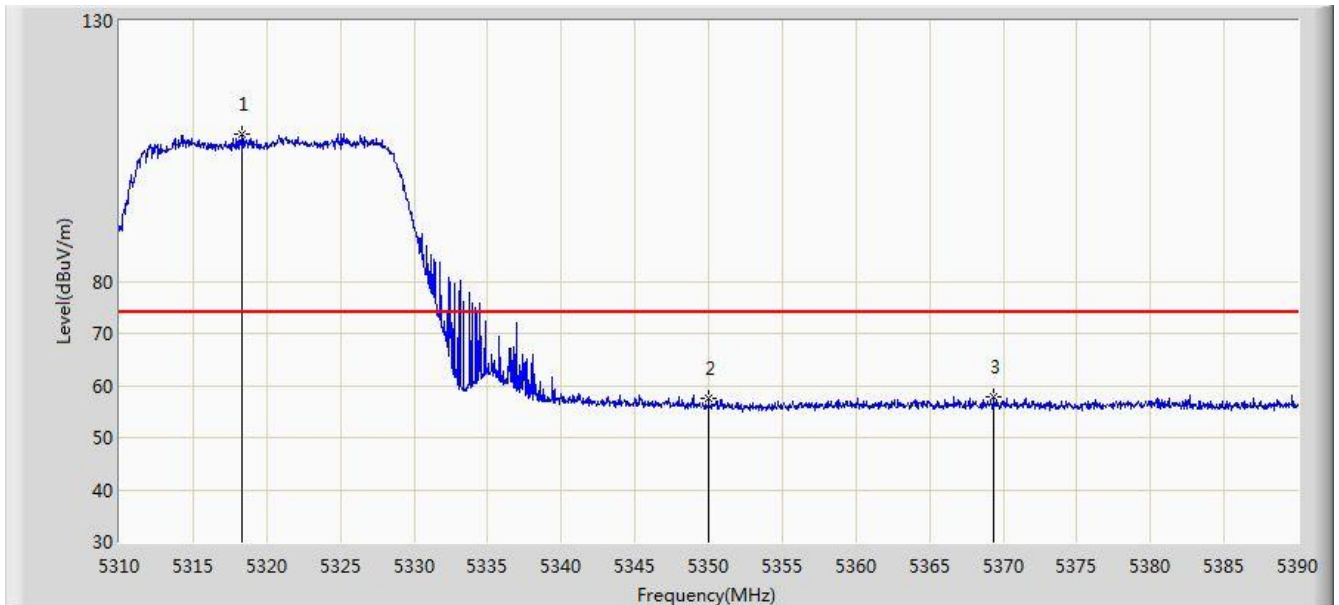


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5318.360        | 108.338                | 104.493              | N/A             | N/A            | 3.845       | PK   |
| 2  |      |      | 5350.000        | 57.449                 | 53.544               | -16.551         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5369.360        | 57.841                 | 53.901               | -16.159         | 74.000         | 3.940       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 17:51 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

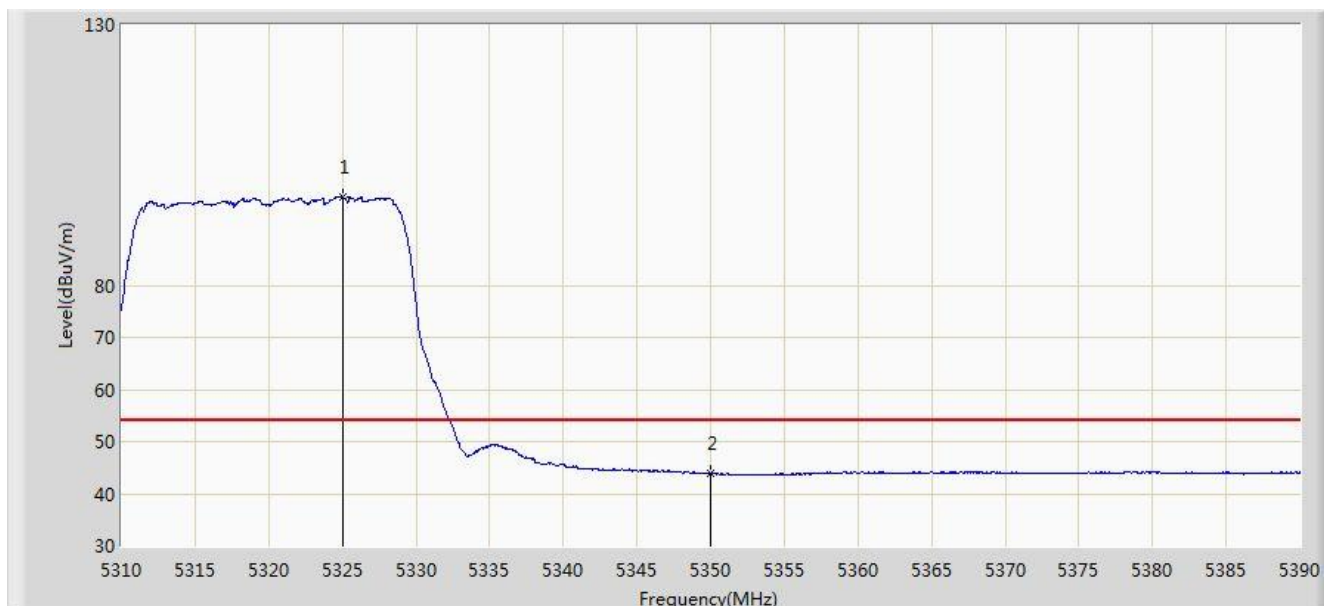


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5325.000        | 96.998                 | 93.140               | N/A             | N/A            | 3.858       | AV   |
| 2  |      |      | 5350.000        | 43.870                 | 39.965               | -10.130         | 54.000         | 3.904       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 17:52 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

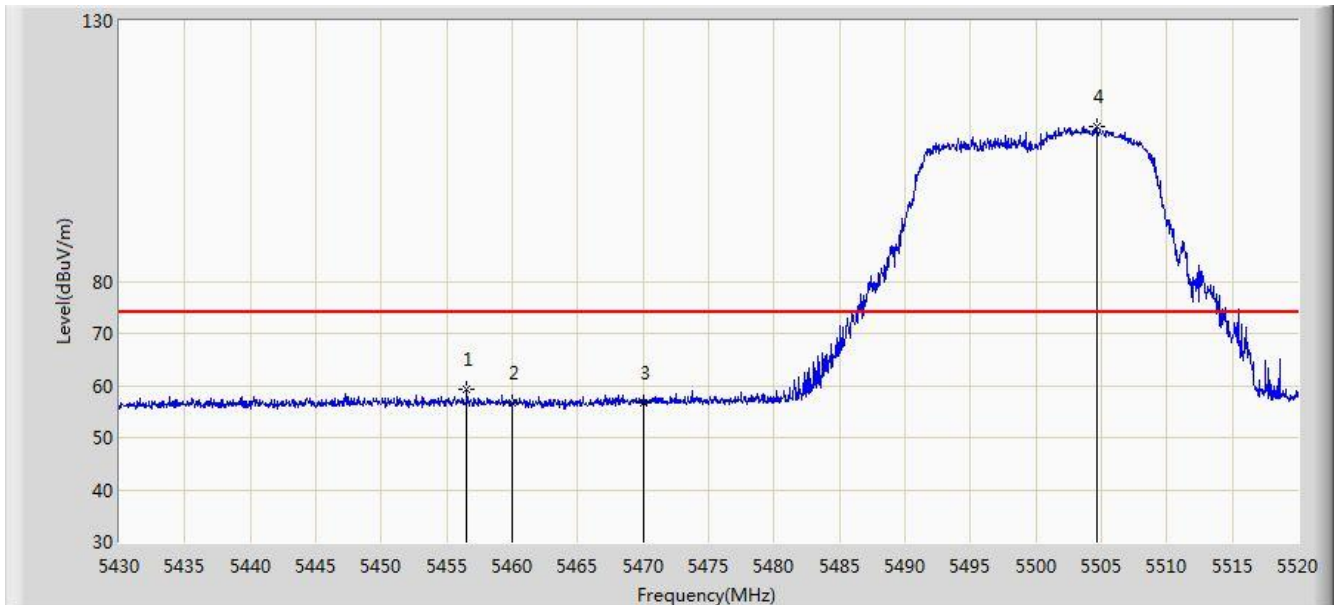


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5456.550        | 59.236                 | 55.063               | -14.764         | 74.000         | 4.173       | PK   |
| 2  |      |      | 5460.000        | 56.551                 | 52.371               | -17.449         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5470.000        | 56.540                 | 52.338               | -17.460         | 74.000         | 4.202       | PK   |
| 4  |      | *    | 5504.655        | 109.807                | 105.521              | N/A             | N/A            | 4.286       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 17:58 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

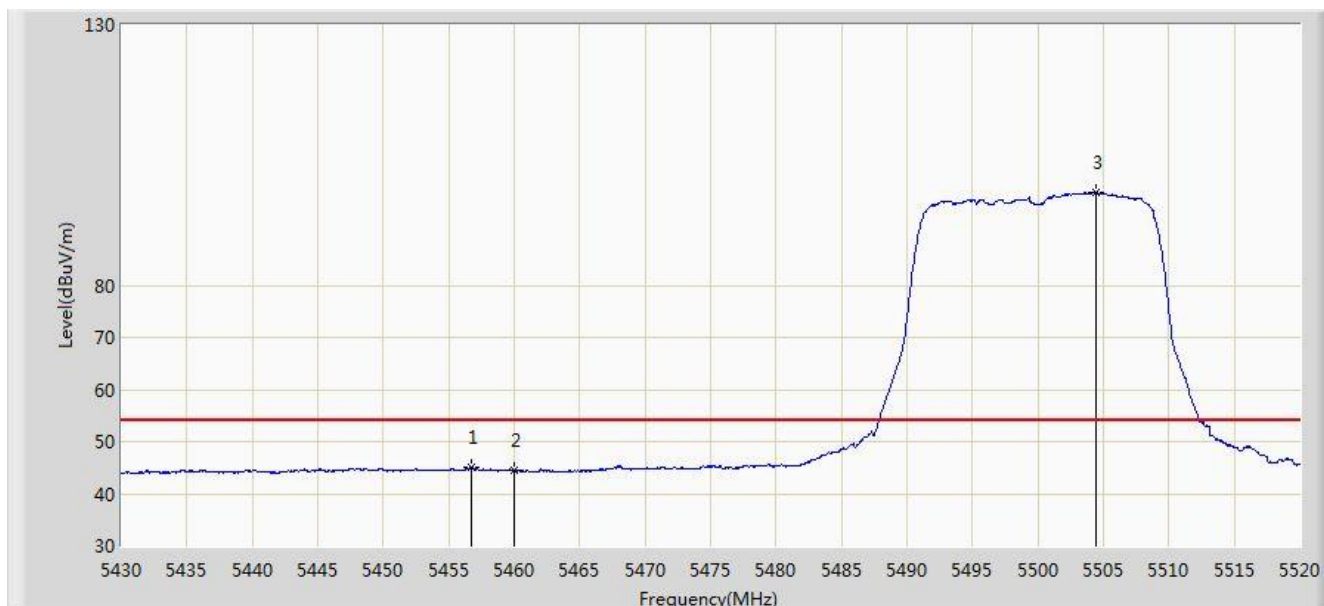


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5456.730        | 45.090                 | 40.917               | -8.910          | 54.000         | 4.173       | AV   |
| 2  |      |      | 5460.000        | 44.414                 | 40.234               | -9.586          | 54.000         | 4.180       | AV   |
| 3  |      | *    | 5504.430        | 97.894                 | 93.609               | N/A             | N/A            | 4.285       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 18:01 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

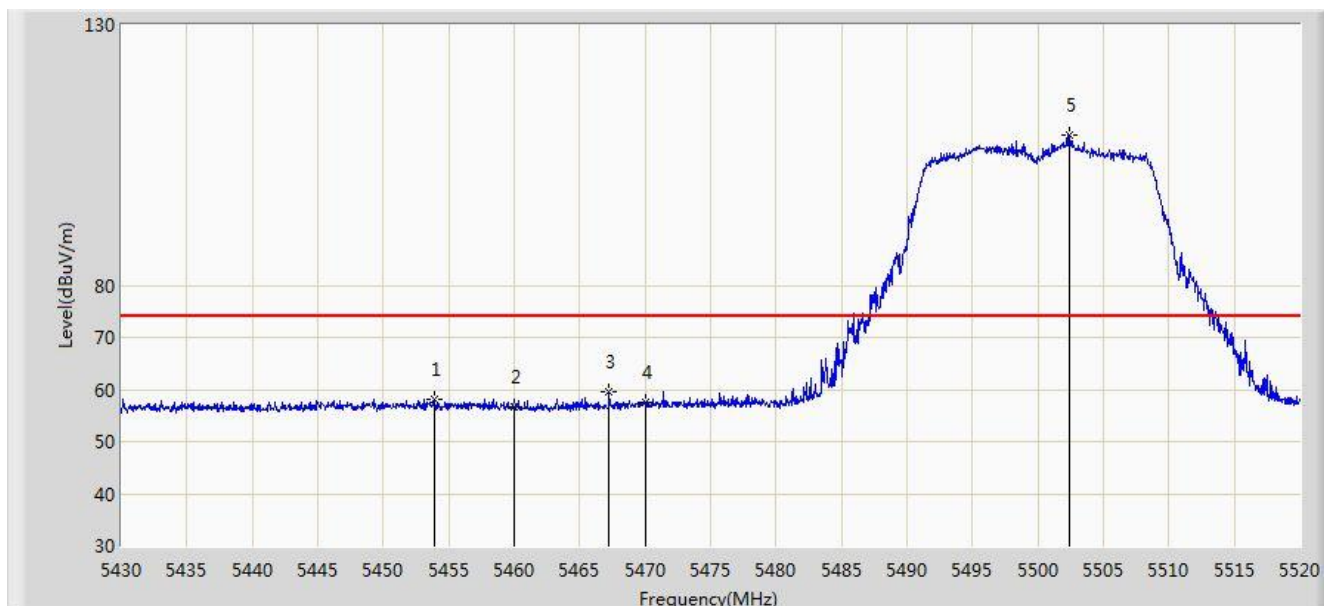


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5453.940        | 58.006                 | 53.839               | -15.994         | 74.000         | 4.168       | PK   |
| 2  |      |      | 5460.000        | 56.546                 | 52.366               | -17.454         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5467.260        | 59.502                 | 55.306               | -14.498         | 74.000         | 4.196       | PK   |
| 4  |      |      | 5470.000        | 57.627                 | 53.425               | -16.373         | 74.000         | 4.202       | PK   |
| 5  |      | *    | 5502.450        | 108.777                | 104.498              | N/A             | N/A            | 4.278       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 18:03 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

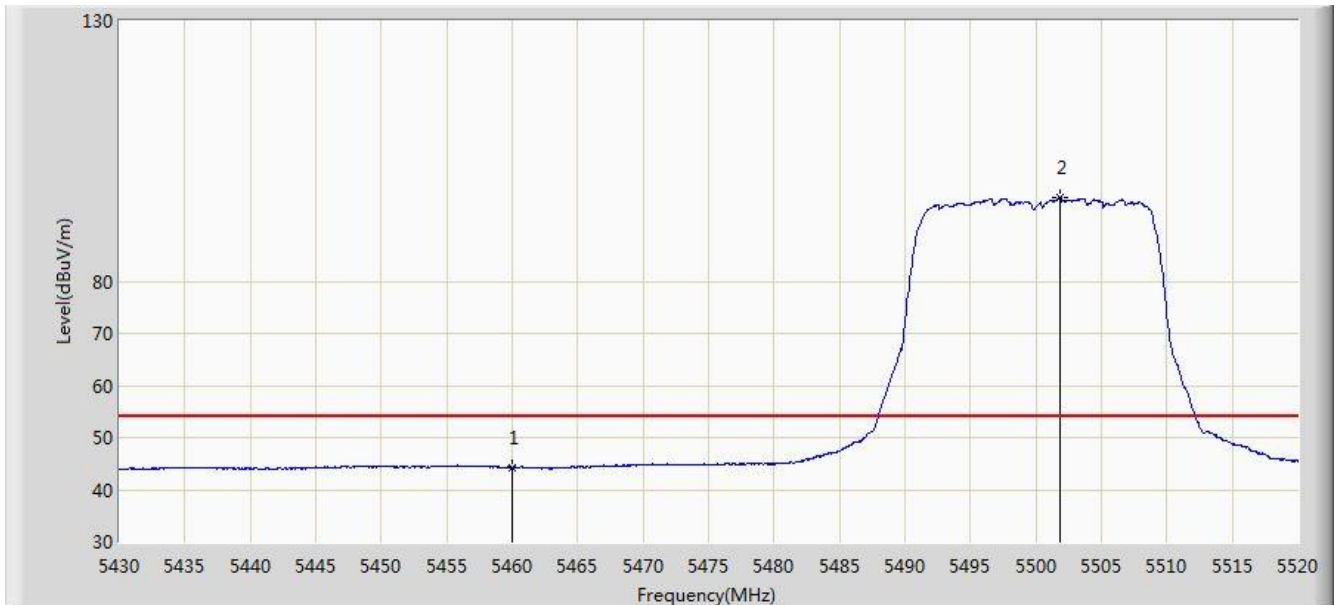


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.254                 | 40.074               | -9.746          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5501.820        | 96.016                 | 91.739               | N/A             | N/A            | 4.278       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 18:05 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

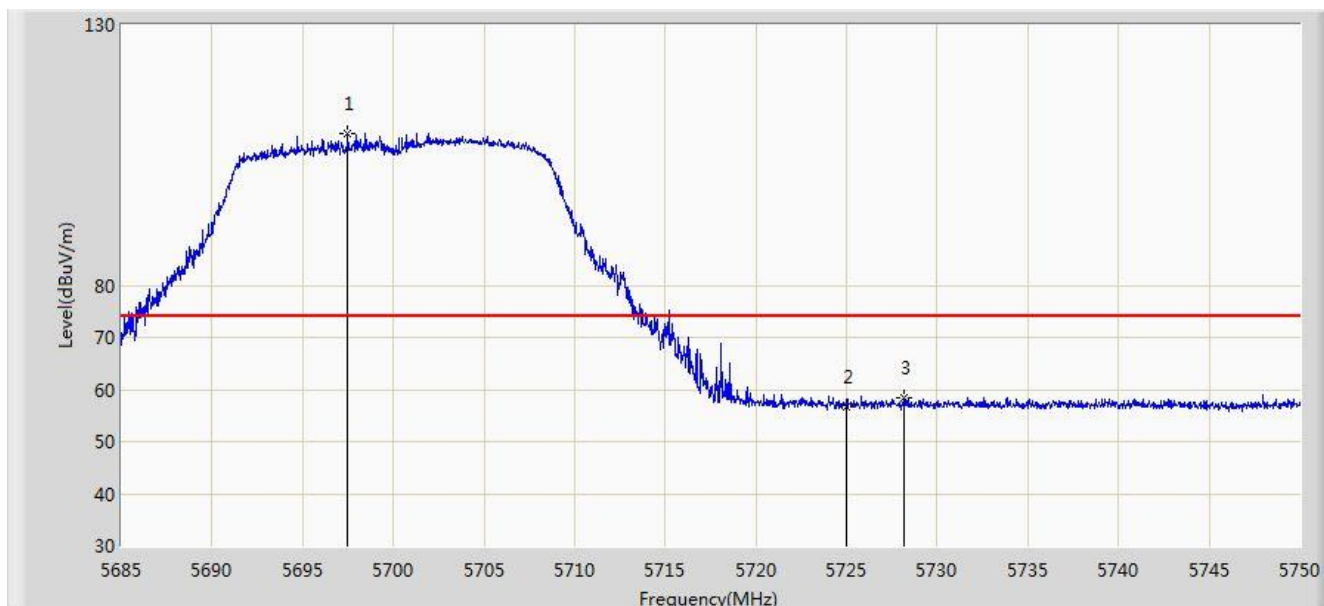


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5697.480        | 109.153                | 104.288              | N/A             | N/A            | 4.865       | PK   |
| 2  |      |      | 5725.000        | 56.645                 | 51.616               | -17.355         | 74.000         | 5.029       | PK   |
| 3  |      |      | 5728.192        | 58.499                 | 53.450               | -15.501         | 74.000         | 5.049       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 18:09 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

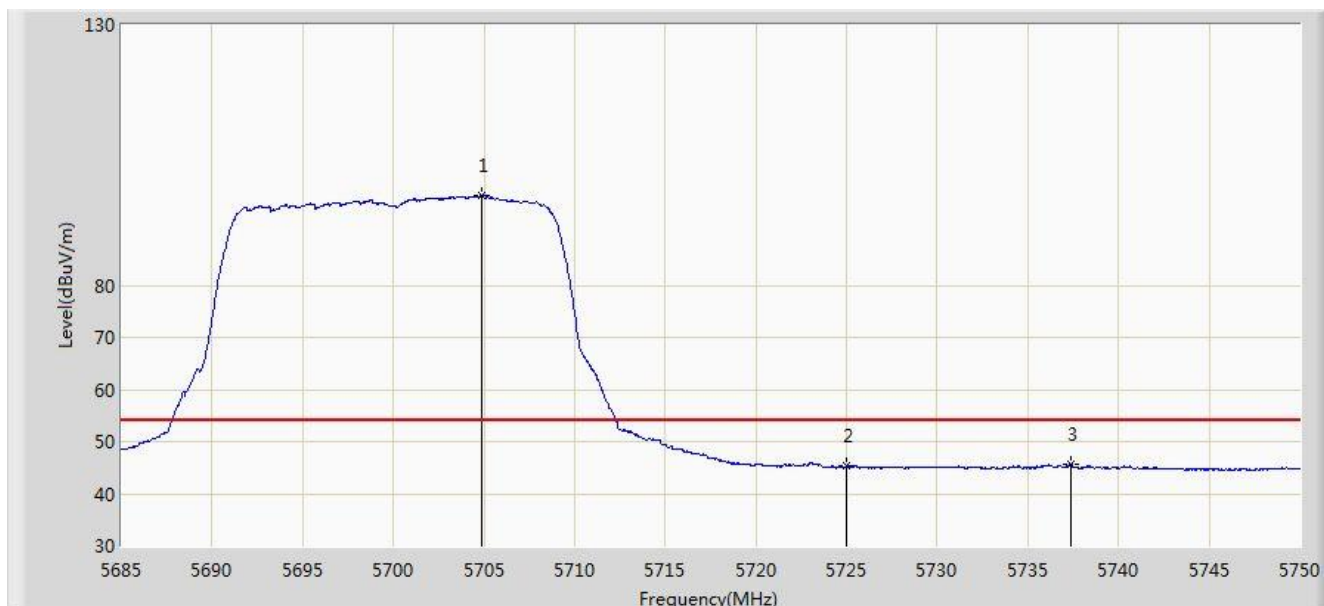


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5704.857        | 97.241                 | 92.337               | N/A             | N/A            | 4.904       | AV   |
| 2  |      |      | 5725.000        | 45.218                 | 40.189               | -8.782          | 54.000         | 5.029       | AV   |
| 3  |      |      | 5737.357        | 45.700                 | 40.592               | -8.300          | 54.000         | 5.108       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 18:11 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

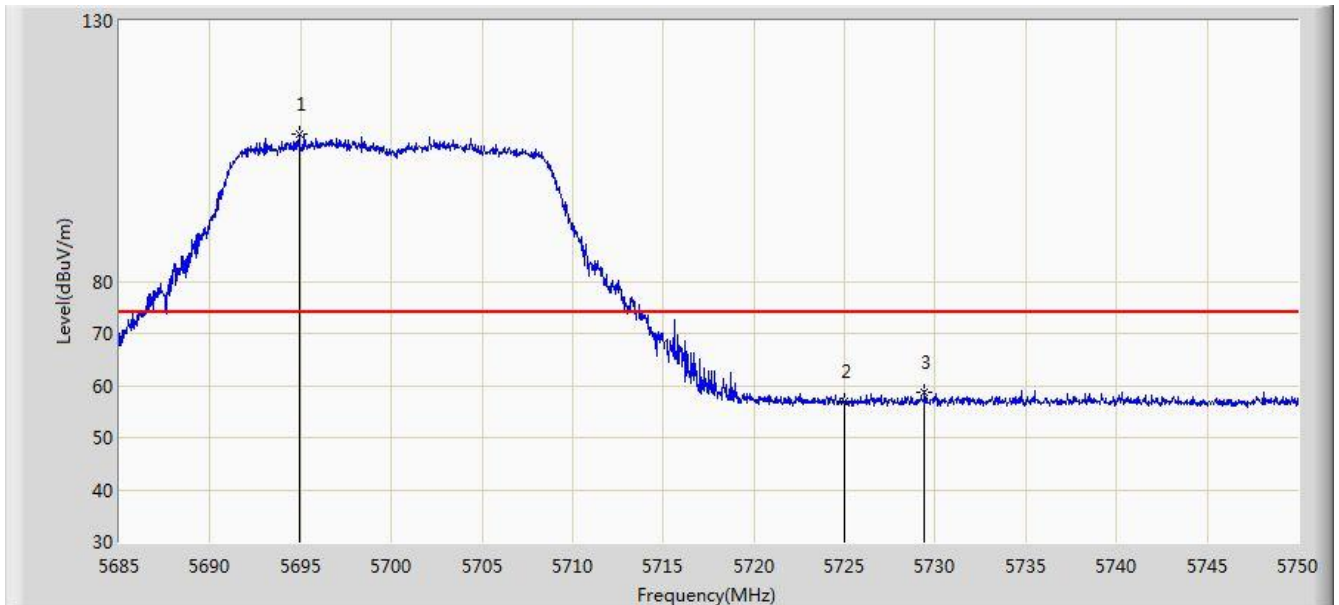


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5694.913        | 108.365                | 103.514              | N/A             | N/A            | 4.851       | PK   |
| 2  |      |      | 5725.000        | 56.878                 | 51.849               | -17.122         | 74.000         | 5.029       | PK   |
| 3  |      |      | 5729.428        | 58.840                 | 53.783               | -15.160         | 74.000         | 5.058       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 18:12 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

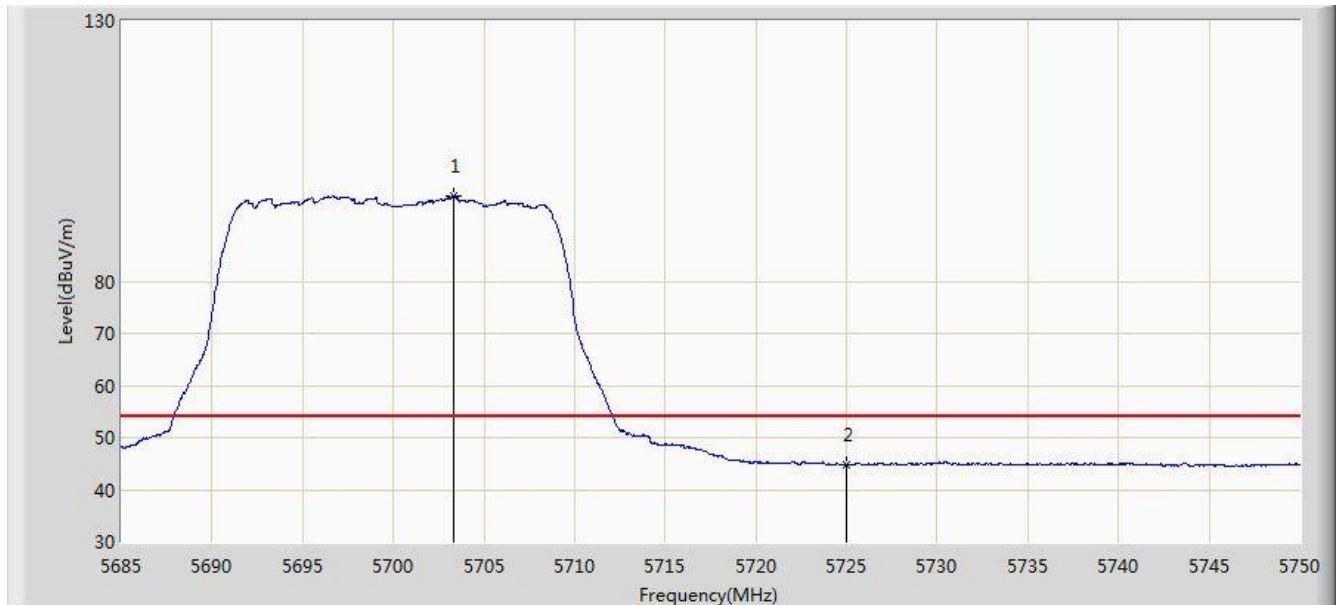


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5703.330        | 96.370                 | 91.474               | N/A             | N/A            | 4.896       | AV   |
| 2  |      |      | 5725.000        | 44.671                 | 39.642               | -9.329          | 54.000         | 5.029       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 18:43 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

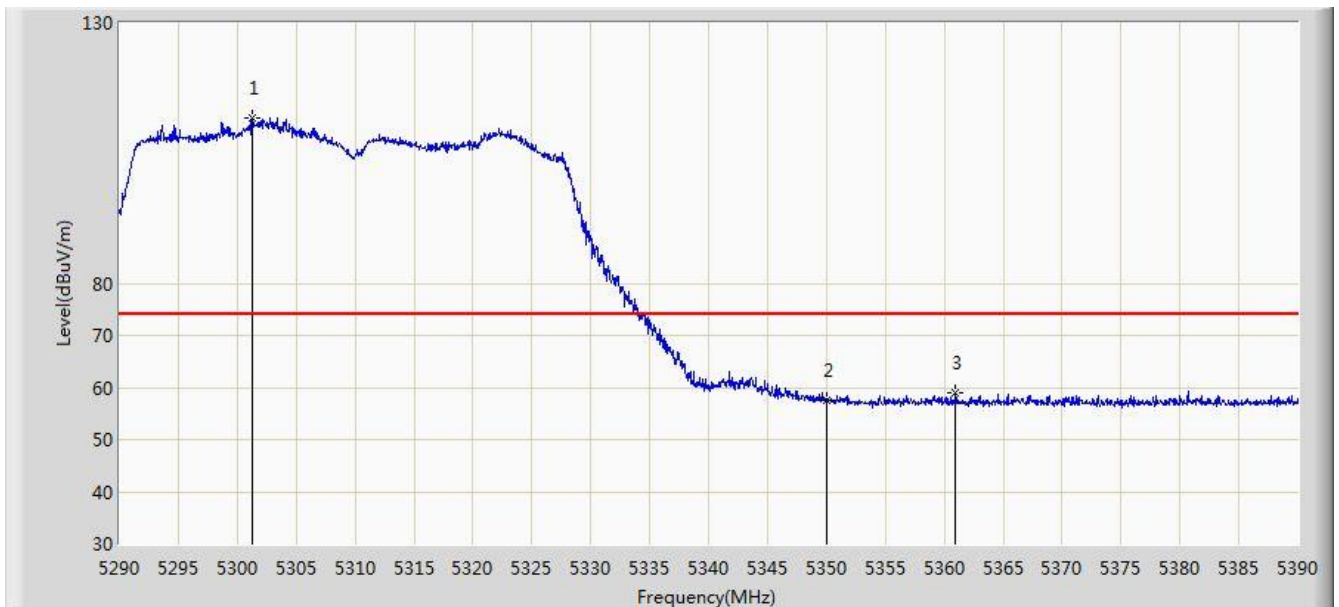


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5301.250        | 111.736                | 107.923              | N/A             | N/A            | 3.813       | PK   |
| 2  |      |      | 5350.000        | 57.508                 | 53.603               | -16.492         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5360.950        | 58.849                 | 54.925               | -15.151         | 74.000         | 3.924       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 18:53 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

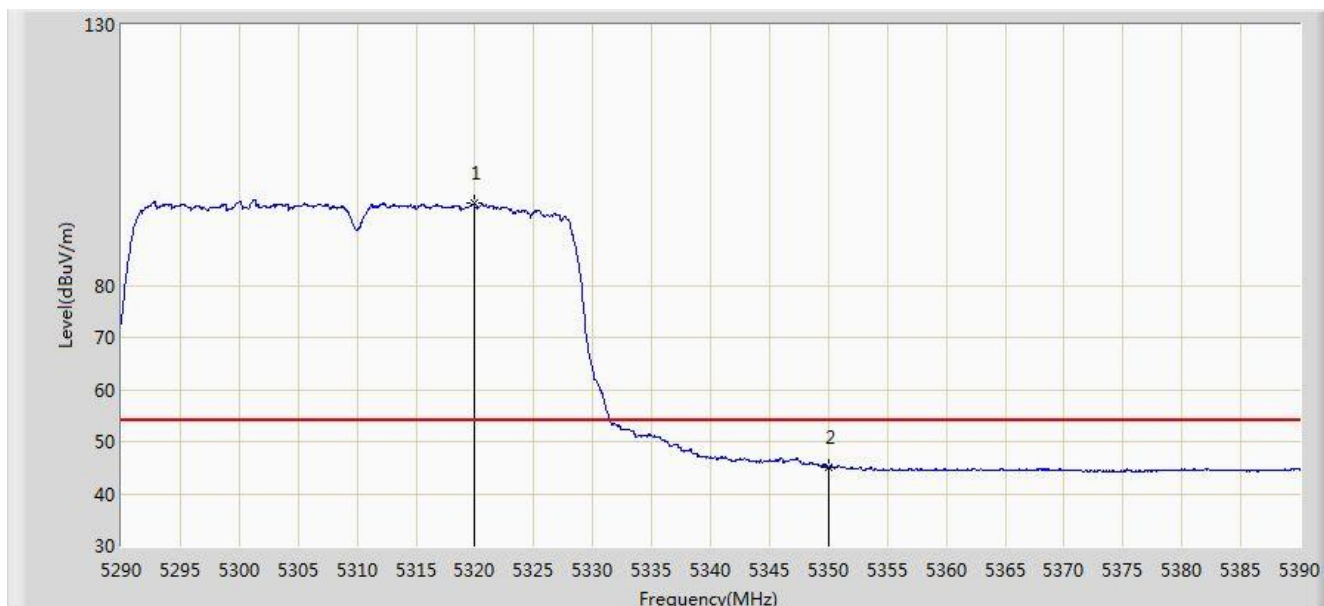


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5319.900        | 95.686                 | 91.838               | N/A             | N/A            | 3.848       | AV   |
| 2  |      |      | 5350.000        | 45.144                 | 41.239               | -8.856          | 54.000         | 3.904       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 18:54 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

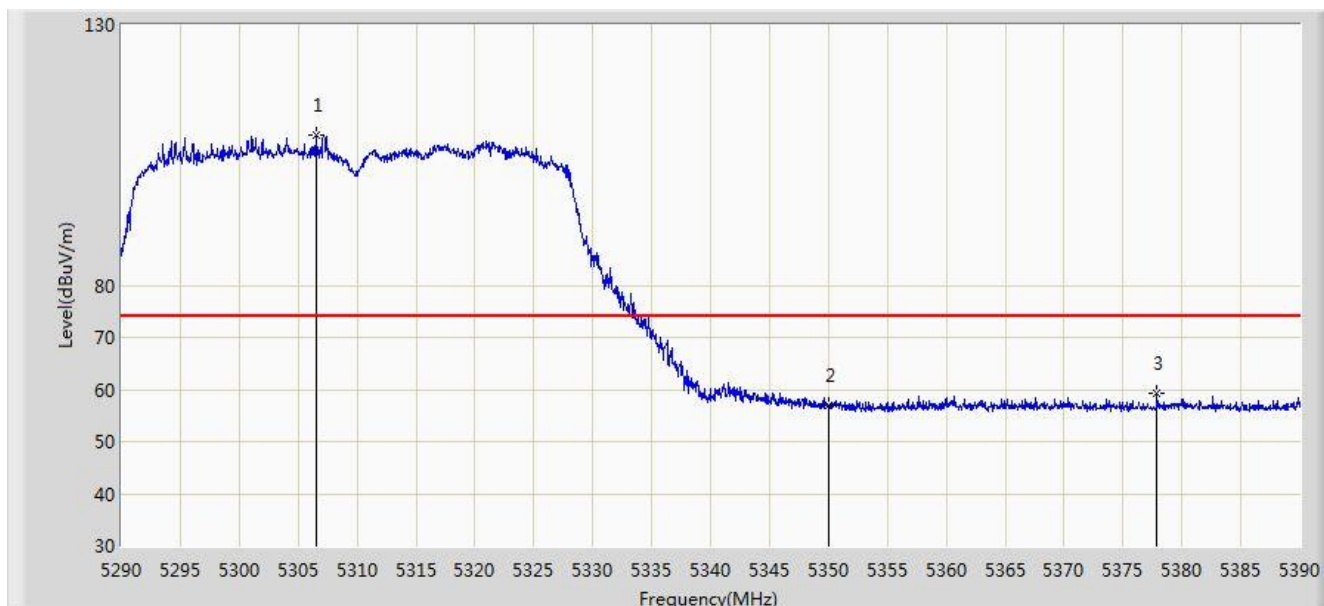


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5306.500        | 108.732                | 104.908              | N/A             | N/A            | 3.824       | PK   |
| 2  |      |      | 5350.000        | 56.961                 | 53.056               | -17.039         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5377.900        | 59.323                 | 55.368               | -14.677         | 74.000         | 3.956       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 18:56 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

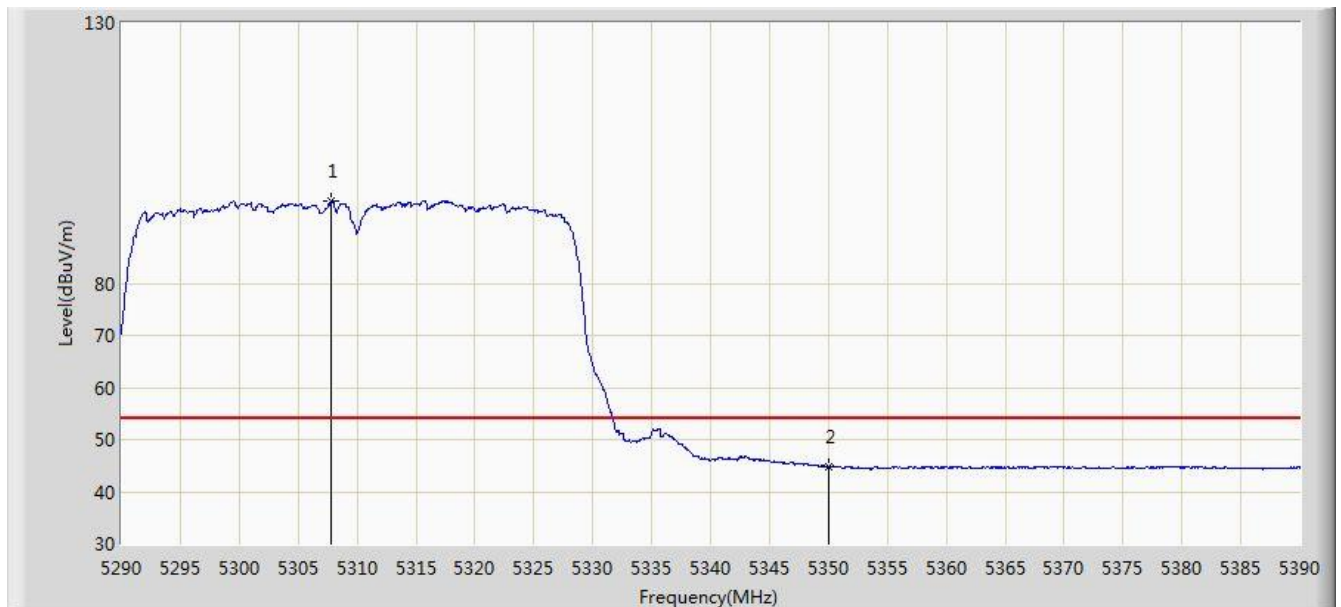


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5307.850        | 95.714                 | 91.888               | N/A             | N/A            | 3.826       | AV   |
| 2  |      |      | 5350.000        | 44.837                 | 40.932               | -9.163          | 54.000         | 3.904       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 18:58 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

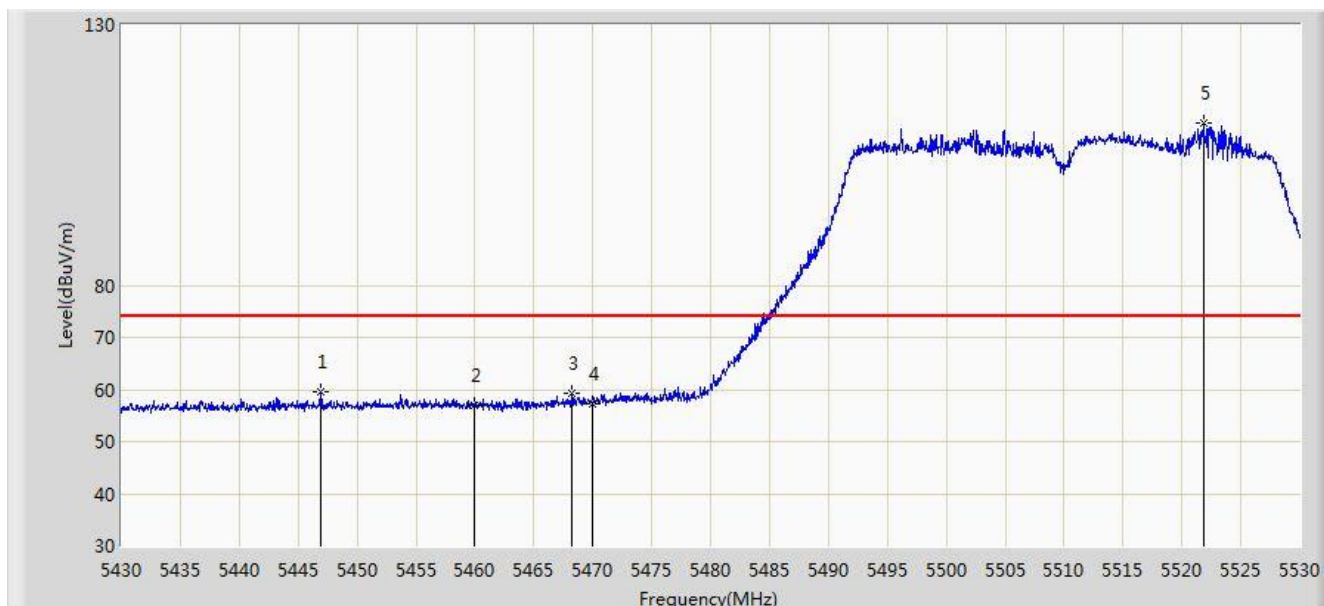


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5446.900        | 59.485                 | 55.340               | -14.515         | 74.000         | 4.145       | PK   |
| 2  |      |      | 5460.000        | 56.905                 | 52.725               | -17.095         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5468.250        | 59.293                 | 55.095               | -14.707         | 74.000         | 4.198       | PK   |
| 4  |      |      | 5470.000        | 57.258                 | 53.056               | -16.742         | 74.000         | 4.202       | PK   |
| 5  |      | *    | 5521.850        | 111.279                | 106.942              | N/A             | N/A            | 4.337       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 19:02 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

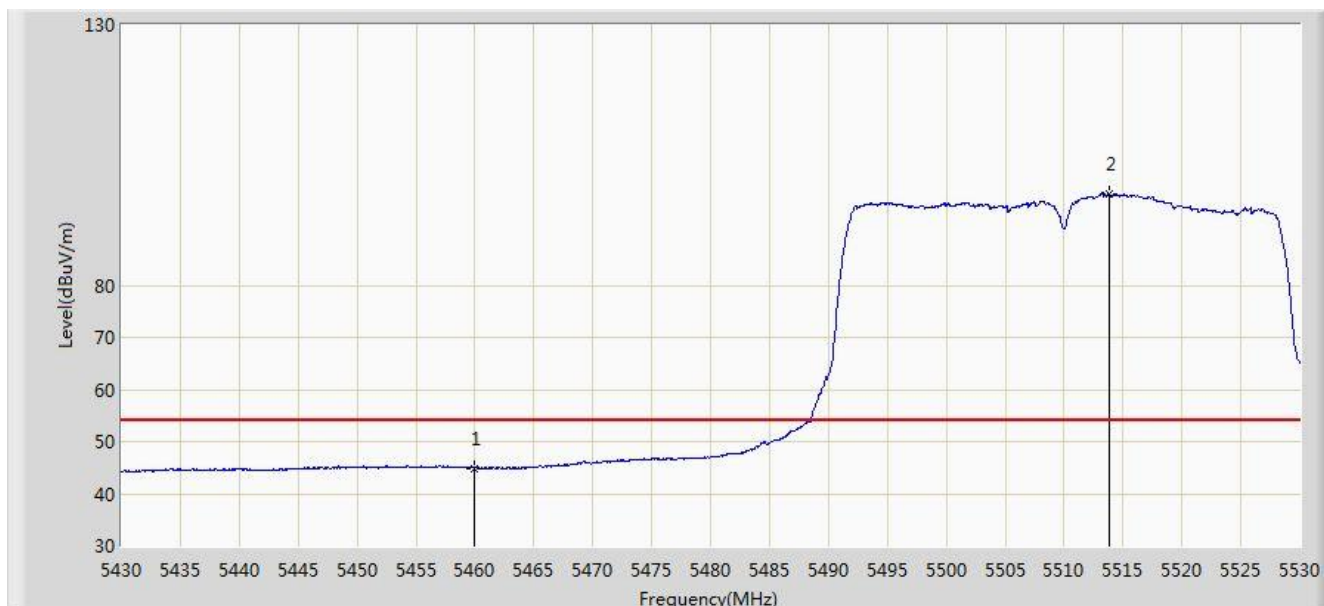


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.856                 | 40.676               | -9.144          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5513.850        | 97.585                 | 93.273               | N/A             | N/A            | 4.313       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 19:04 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

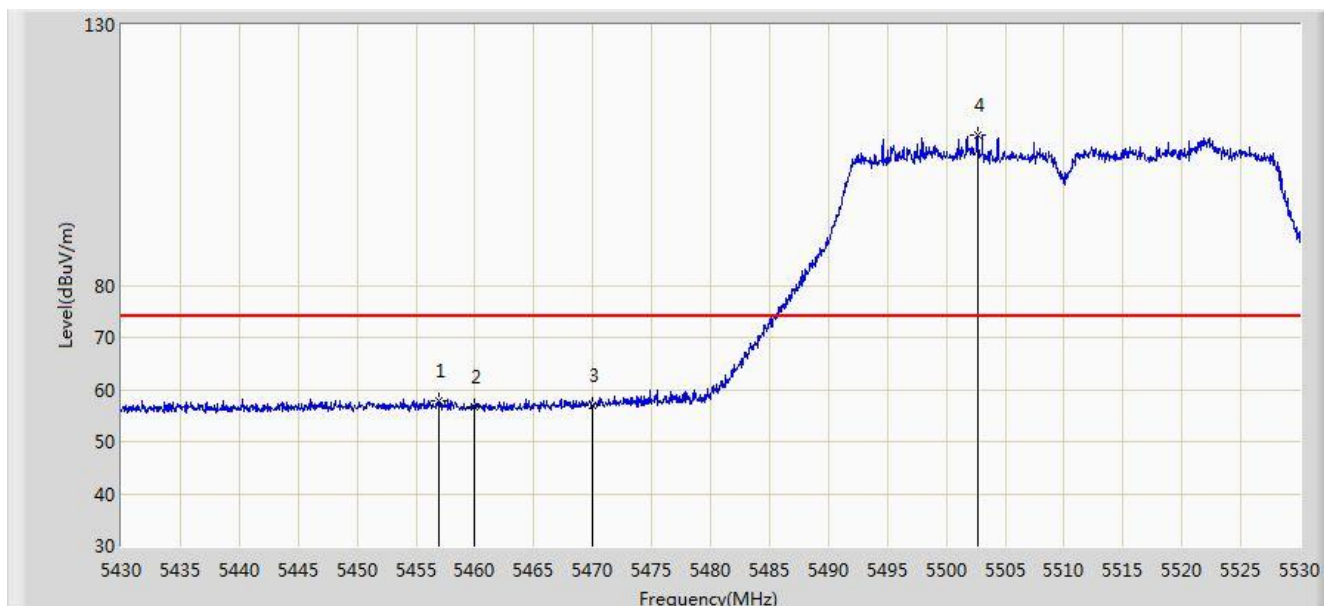


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5456.950        | 57.840                 | 53.666               | -16.160         | 74.000         | 4.173       | PK   |
| 2  |      |      | 5460.000        | 56.577                 | 52.397               | -17.423         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5470.000        | 56.953                 | 52.751               | -17.047         | 74.000         | 4.202       | PK   |
| 4  |      | *    | 5502.650        | 108.956                | 104.676              | N/A             | N/A            | 4.281       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 19:05 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

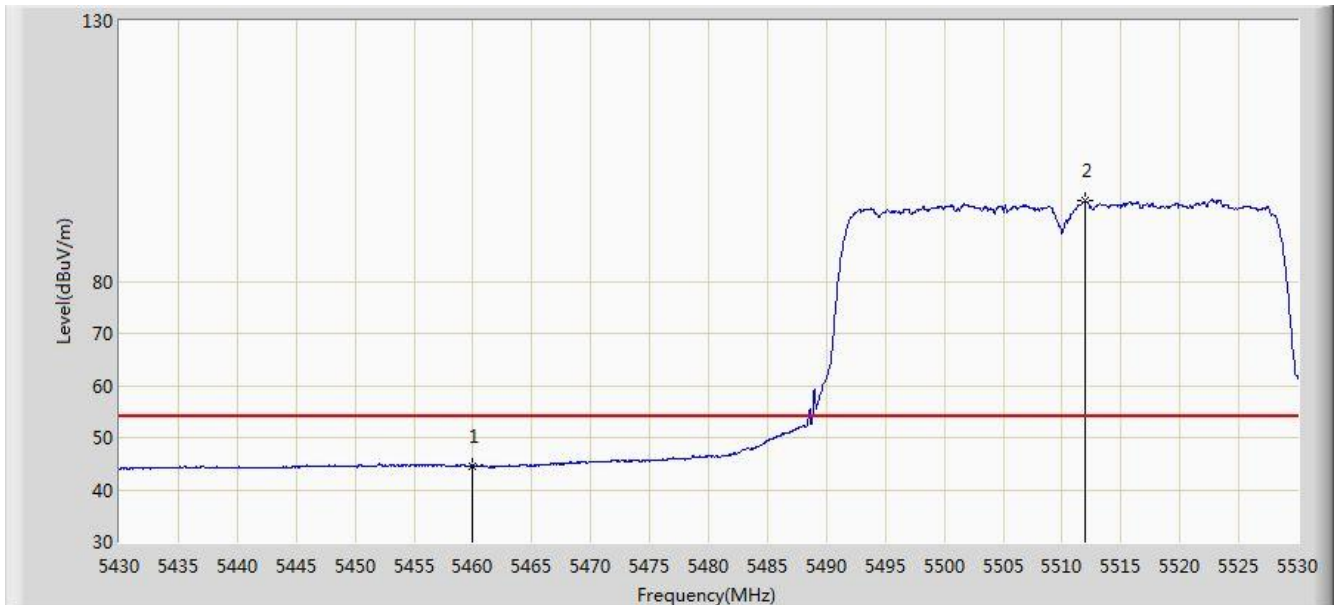


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.530                 | 40.350               | -9.470          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5511.900        | 95.406                 | 91.099               | N/A             | N/A            | 4.307       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 19:06 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

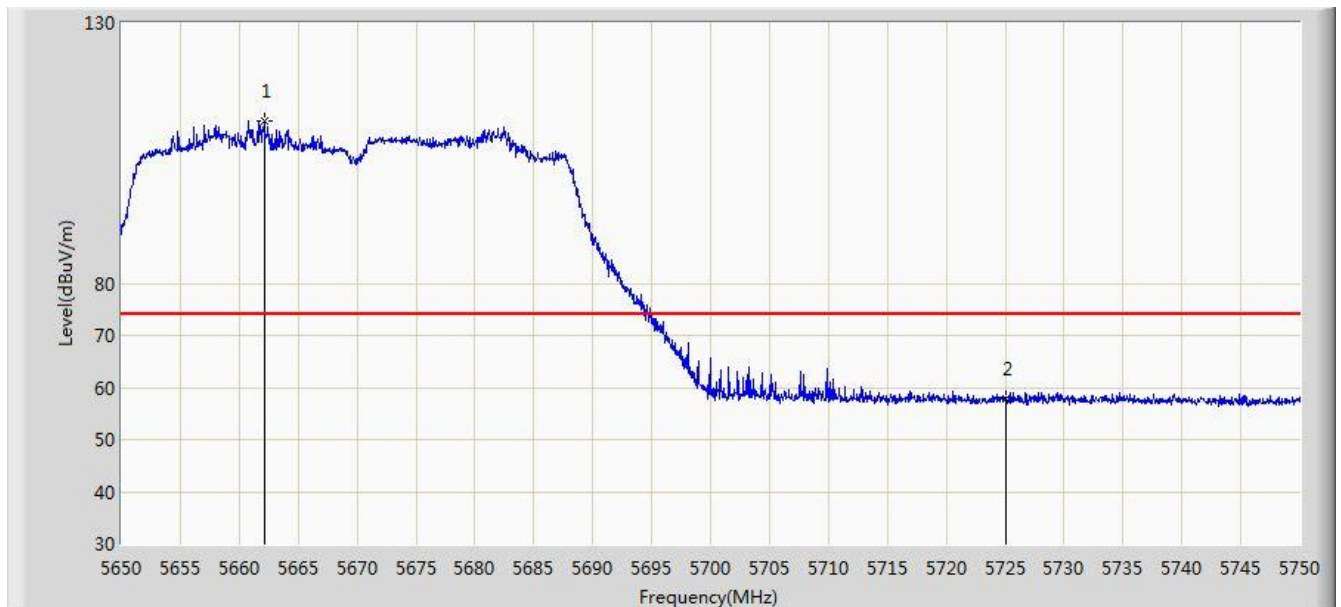


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5662.100        | 111.099                | 106.384              | N/A             | N/A            | 4.715       | PK   |
| 2  |      |      | 5725.000        | 57.734                 | 52.705               | -16.266         | 74.000         | 5.029       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 19:11 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

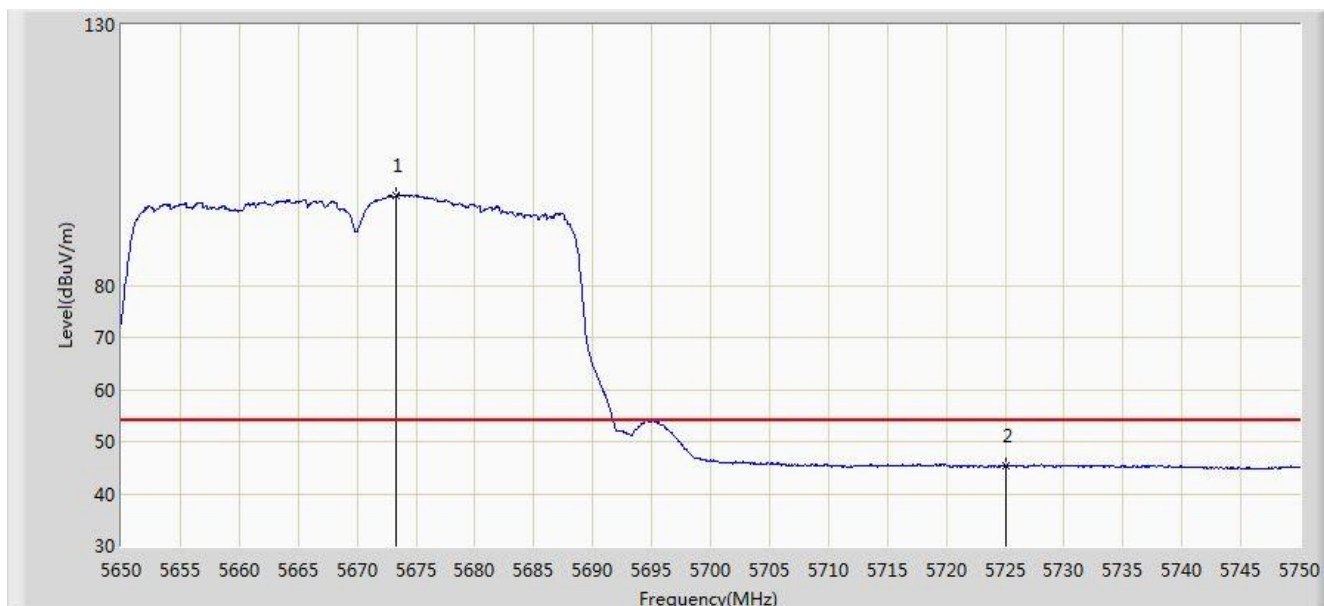


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5673.350        | 97.246                 | 92.485               | N/A             | N/A            | 4.760       | AV   |
| 2  |      |      | 5725.000        | 45.315                 | 40.286               | -8.685          | 54.000         | 5.029       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 19:12 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

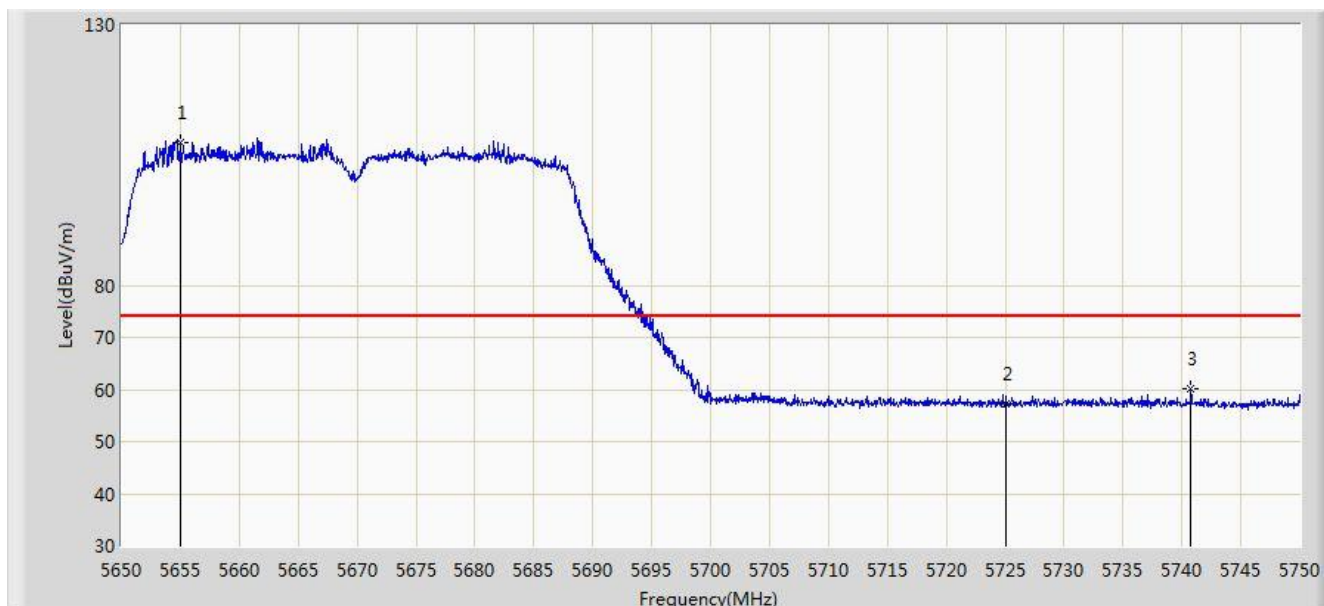


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5654.950        | 107.525                | 102.838              | N/A             | N/A            | 4.687       | PK   |
| 2  |      |      | 5725.000        | 57.208                 | 52.179               | -16.792         | 74.000         | 5.029       | PK   |
| 3  |      |      | 5740.750        | 60.192                 | 55.063               | -13.808         | 74.000         | 5.130       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/04 - 19:14 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

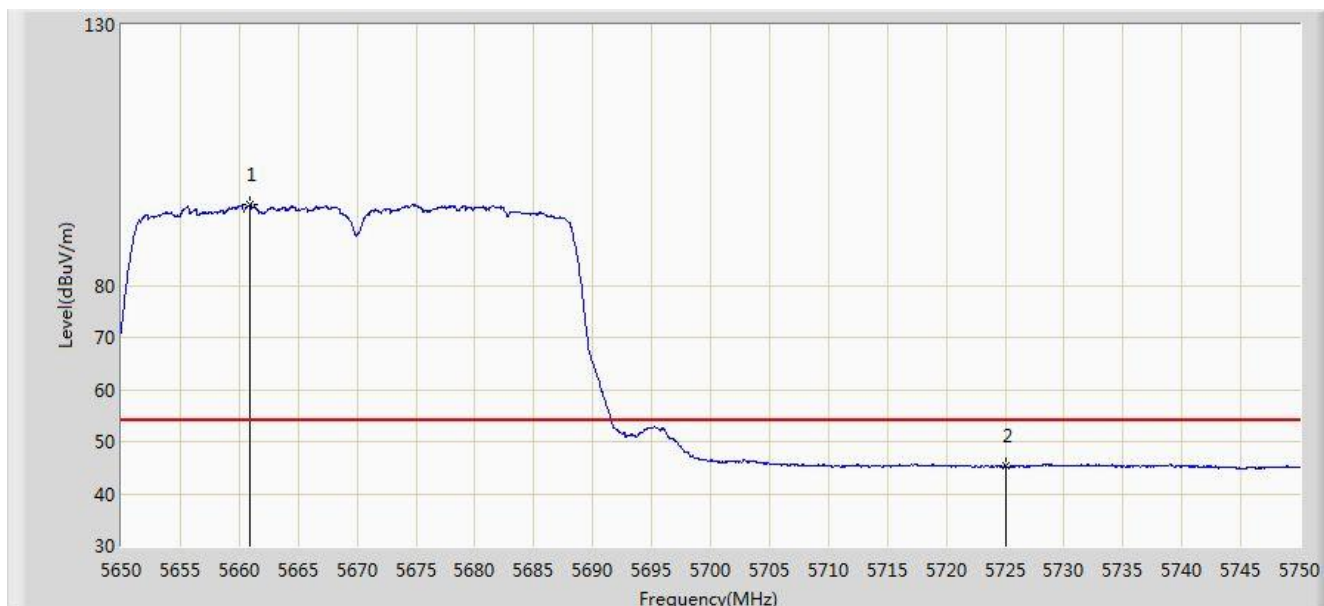


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5660.850        | 95.459                 | 90.749               | N/A             | N/A            | 4.710       | AV   |
| 2  |      |      | 5725.000        | 45.253                 | 40.224               | -8.747          | 54.000         | 5.029       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 19:47 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

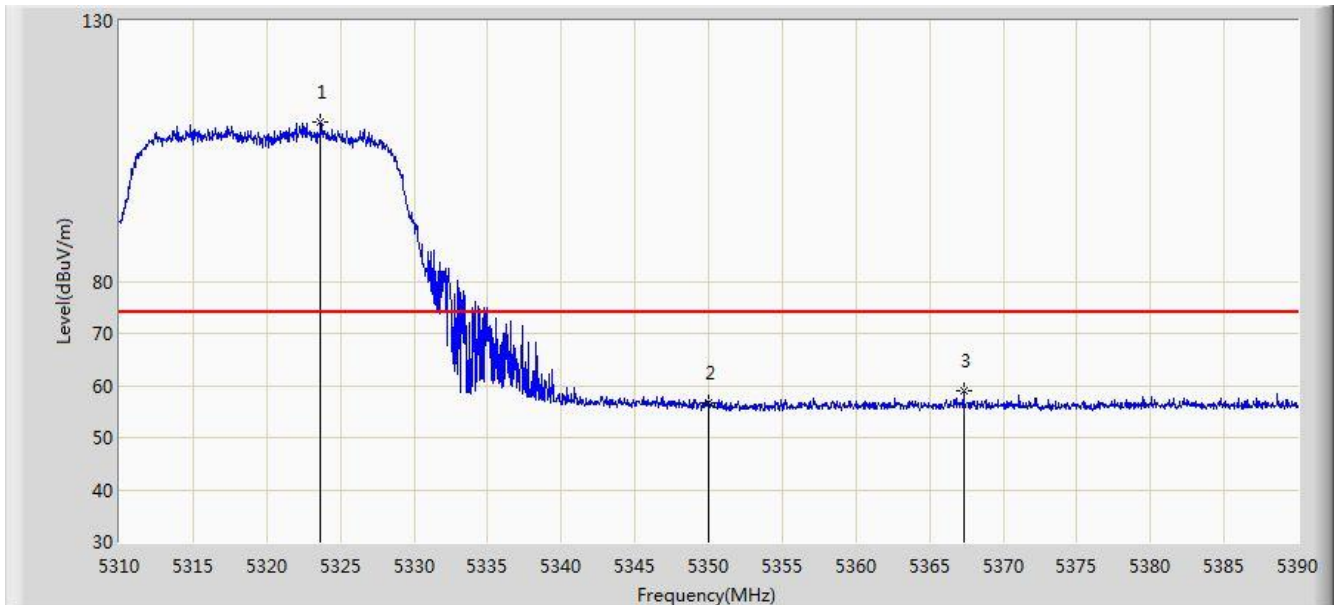


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5323.680        | 110.591                | 106.735              | N/A             | N/A            | 3.855       | PK   |
| 2  |      |      | 5350.000        | 56.557                 | 52.652               | -17.443         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5367.320        | 59.104                 | 55.168               | -14.896         | 74.000         | 3.936       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 19:53 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

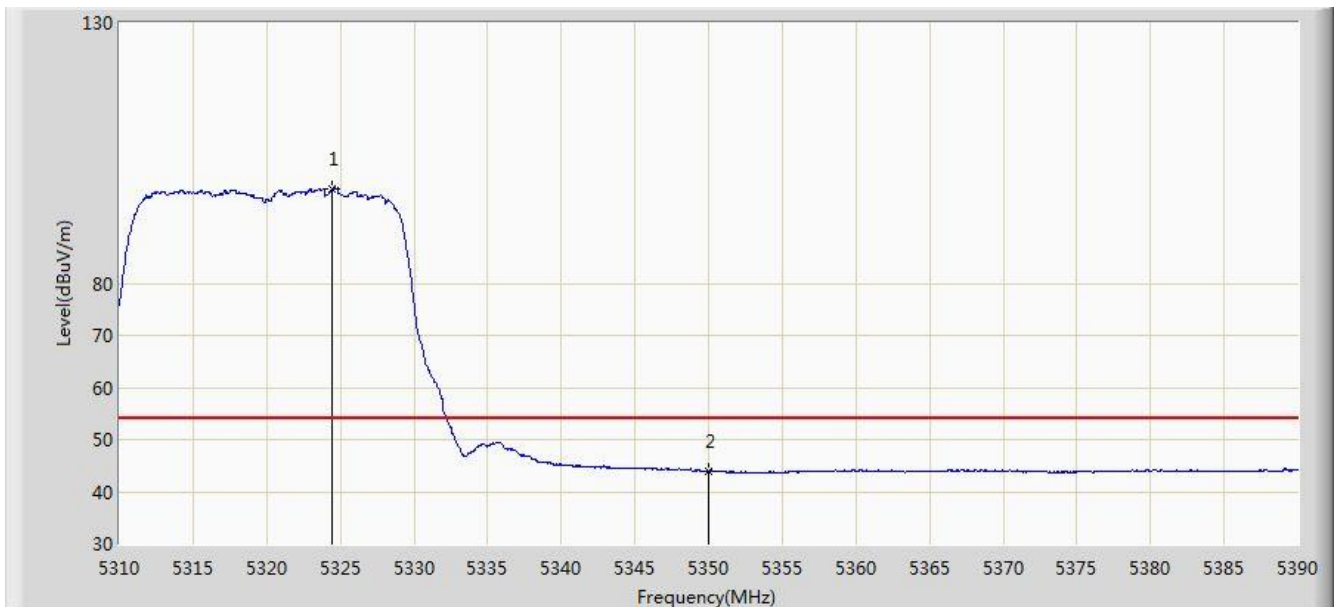


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5324.480        | 98.201                 | 94.344               | N/A             | N/A            | 3.857       | AV   |
| 2  |      |      | 5350.000        | 43.953                 | 40.048               | -10.047         | 54.000         | 3.904       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 19:55 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

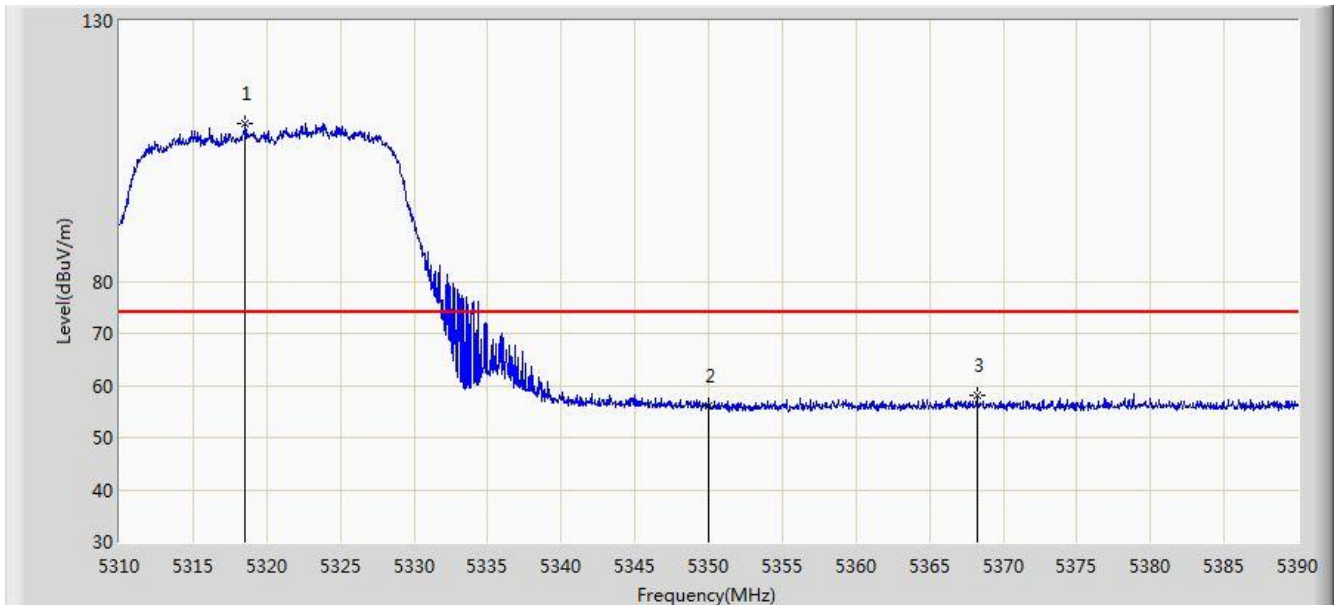


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5318.560        | 110.348                | 106.502              | N/A             | N/A            | 3.846       | PK   |
| 2  |      |      | 5350.000        | 56.010                 | 52.105               | -17.990         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5368.240        | 58.129                 | 54.191               | -15.871         | 74.000         | 3.938       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 19:56 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

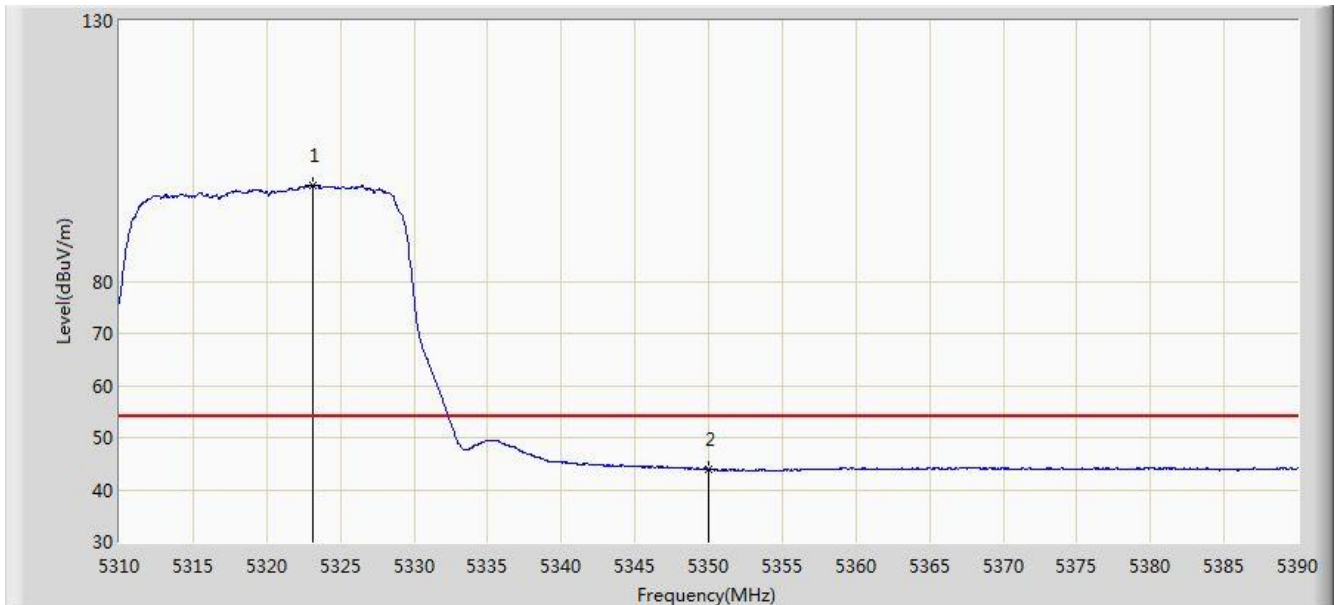


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5323.160        | 98.488                 | 94.633               | N/A             | N/A            | 3.854       | AV   |
| 2  |      |      | 5350.000        | 43.890                 | 39.985               | -10.110         | 54.000         | 3.904       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 19:57 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

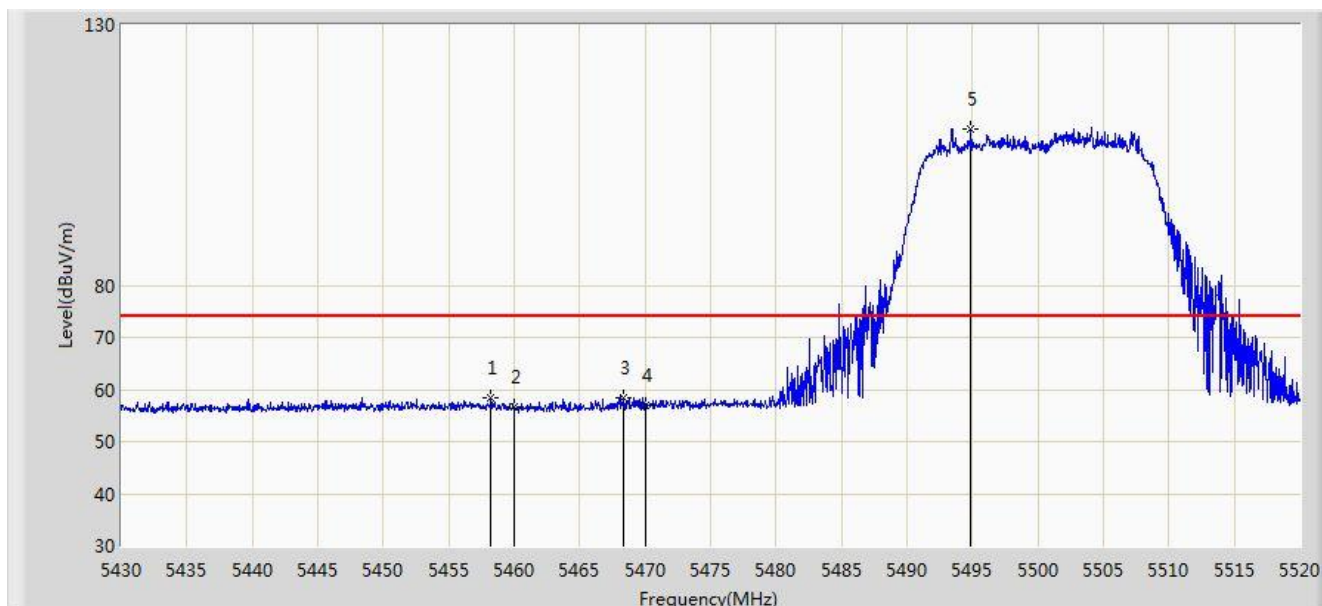


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5458.215        | 58.341                 | 54.165               | -15.659         | 74.000         | 4.177       | PK   |
| 2  |      |      | 5460.000        | 56.557                 | 52.377               | -17.443         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5468.295        | 58.471                 | 54.272               | -15.529         | 74.000         | 4.198       | PK   |
| 4  |      |      | 5470.000        | 56.839                 | 52.637               | -17.161         | 74.000         | 4.202       | PK   |
| 5  |      | *    | 5494.845        | 110.094                | 105.835              | N/A             | N/A            | 4.259       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:01 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

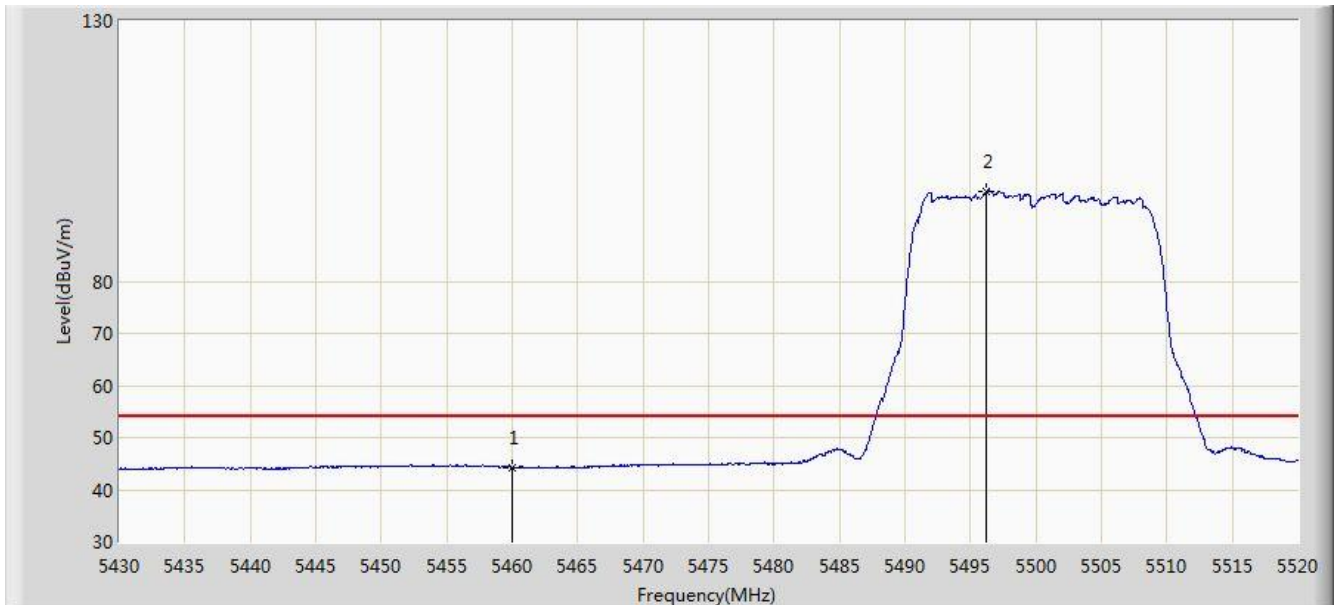


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.287                 | 40.107               | -9.713          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5496.240        | 97.247                 | 92.985               | N/A             | N/A            | 4.261       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:03 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

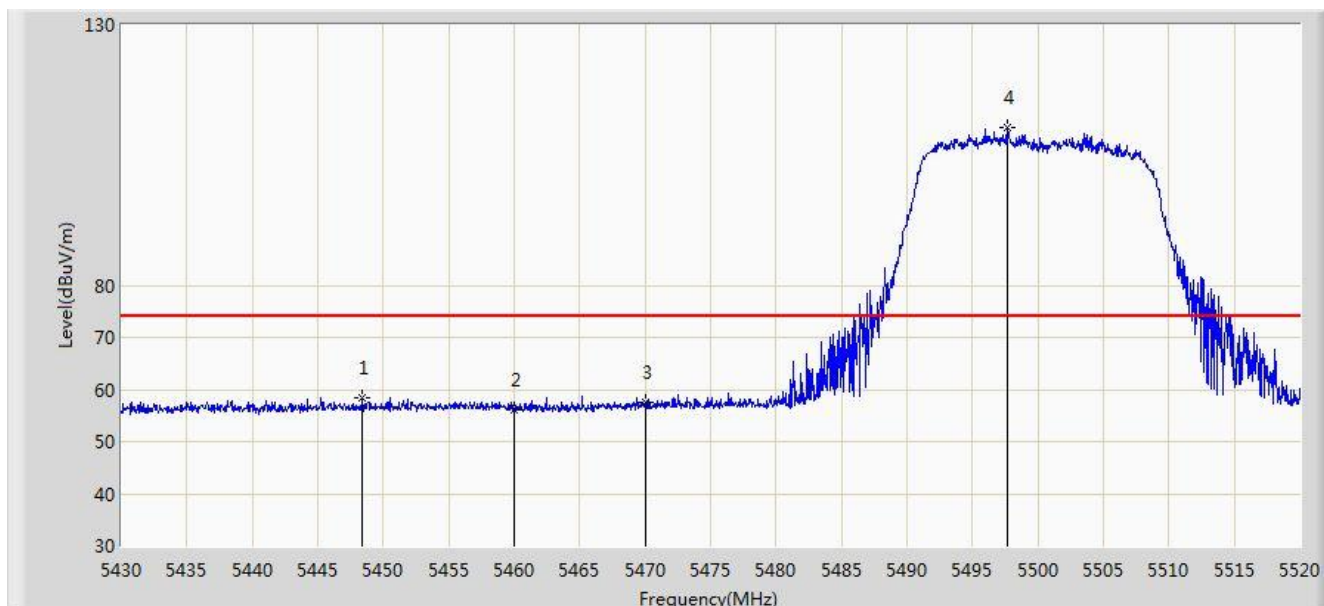


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5448.405        | 58.264                 | 54.114               | -15.736         | 74.000         | 4.149       | PK   |
| 2  |      |      | 5460.000        | 56.075                 | 51.895               | -17.925         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5470.000        | 57.518                 | 53.316               | -16.482         | 74.000         | 4.202       | PK   |
| 4  |      | *    | 5497.725        | 110.259                | 105.994              | N/A             | N/A            | 4.265       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:05 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

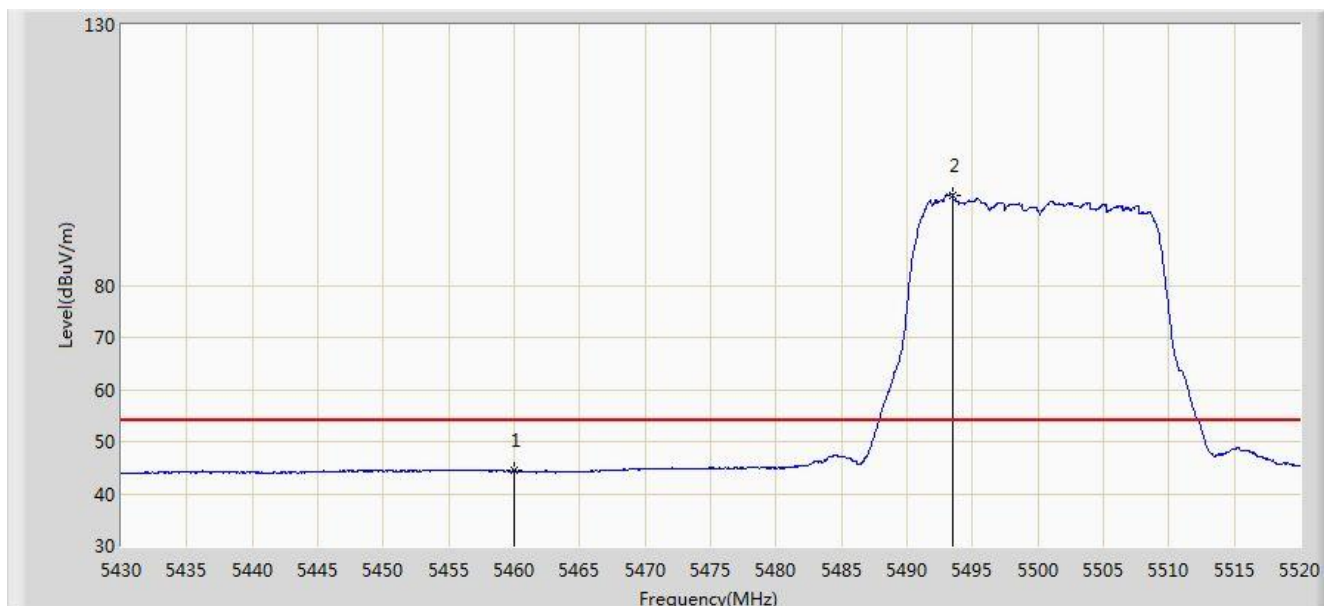


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.363                 | 40.183               | -9.637          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5493.495        | 97.333                 | 93.077               | N/A             | 54.000         | 4.255       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:06 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

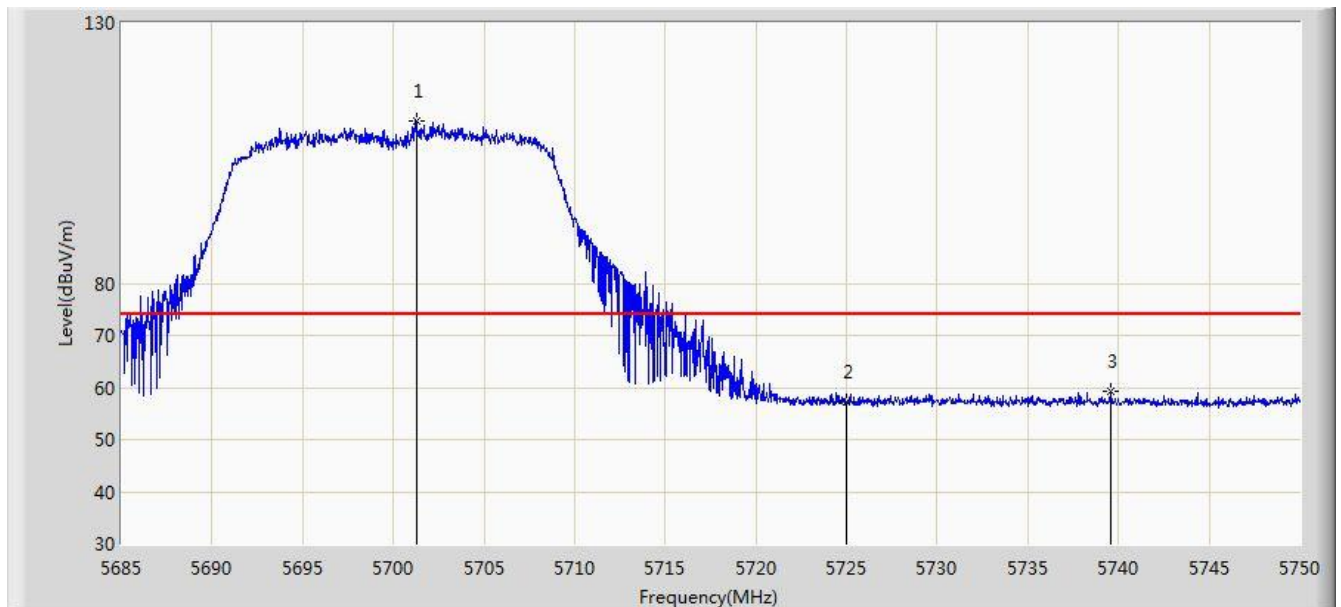


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5701.250        | 111.234                | 106.349              | N/A             | N/A            | 4.885       | PK   |
| 2  |      |      | 5725.000        | 57.244                 | 52.215               | -16.756         | 74.000         | 5.029       | PK   |
| 3  |      |      | 5739.535        | 59.148                 | 54.026               | -14.852         | 74.000         | 5.122       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:10 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

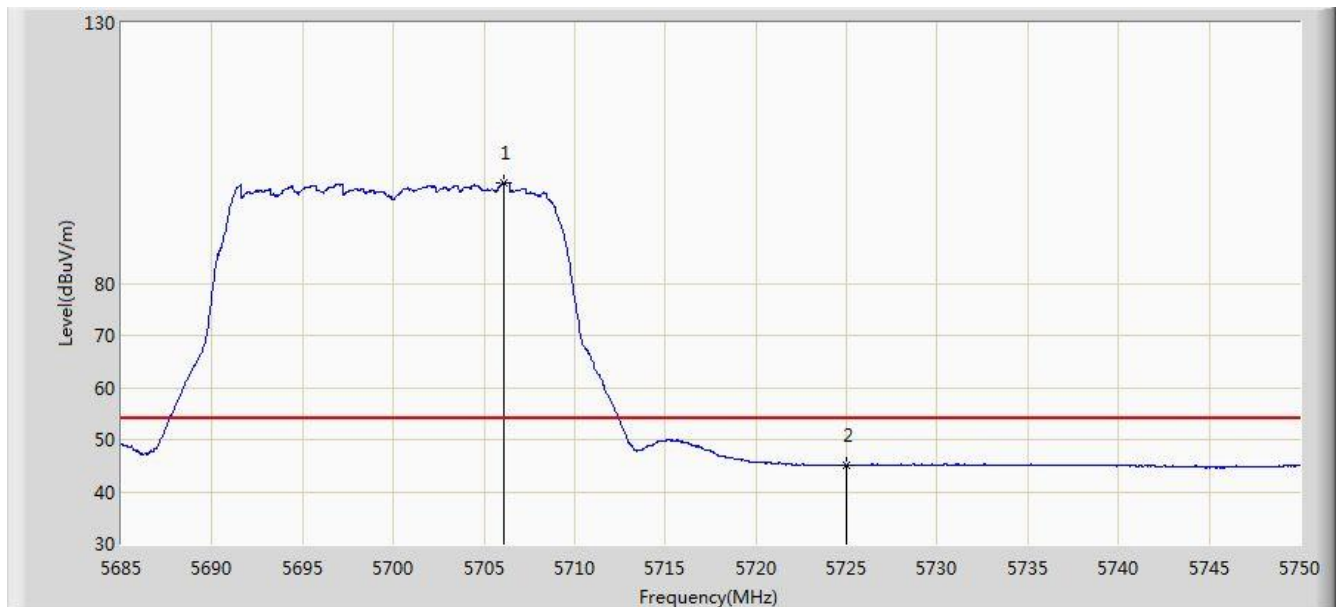


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5706.092        | 99.339                 | 94.428               | N/A             | N/A            | 4.911       | AV   |
| 2  |      |      | 5725.000        | 45.038                 | 40.009               | -8.962          | 54.000         | 5.029       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:12 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

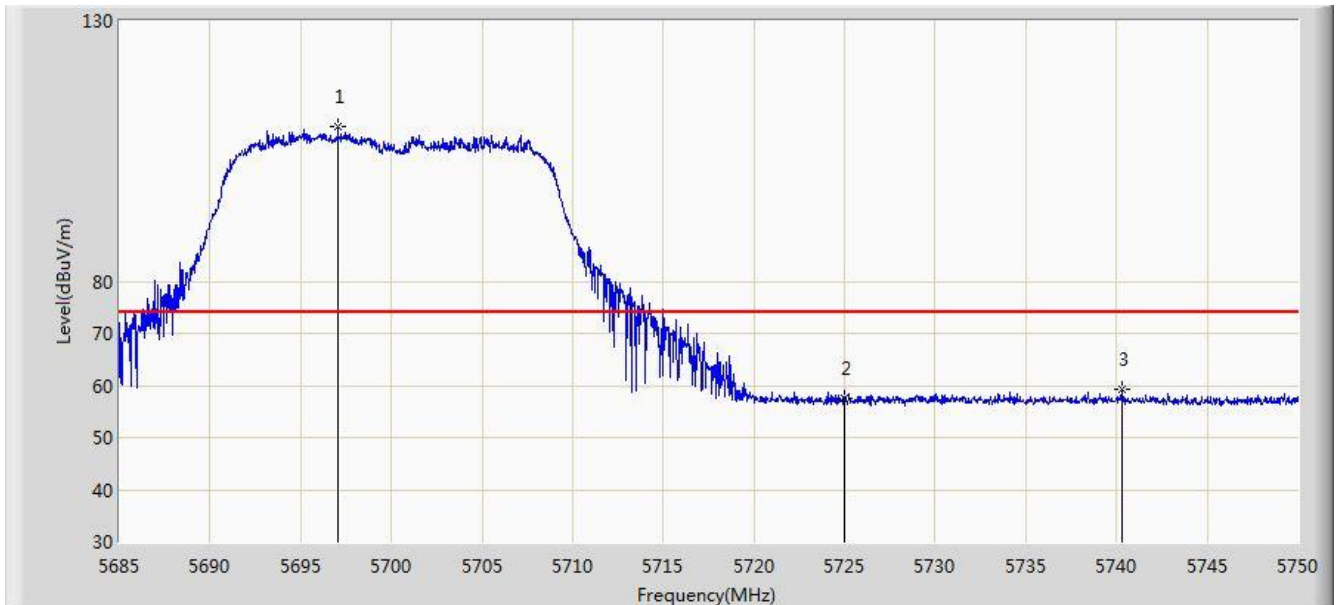


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5697.058        | 109.689                | 104.826              | N/A             | N/A            | 4.863       | PK   |
| 2  |      |      | 5725.000        | 57.587                 | 52.558               | -16.413         | 74.000         | 5.029       | PK   |
| 3  |      |      | 5740.283        | 59.241                 | 54.115               | -14.759         | 74.000         | 5.127       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:14 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

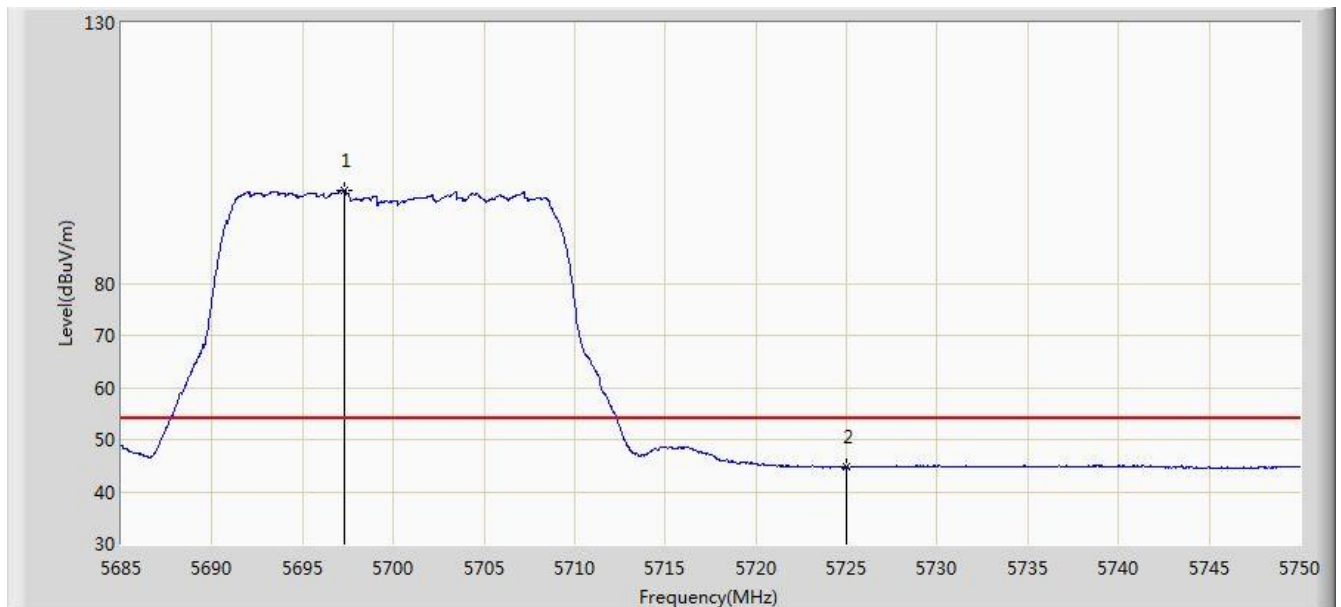


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5697.285        | 97.895                 | 93.031               | N/A             | N/A            | 4.864       | AV   |
| 2  |      |      | 5725.000        | 44.640                 | 39.611               | -9.360          | 54.000         | 5.029       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:32 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

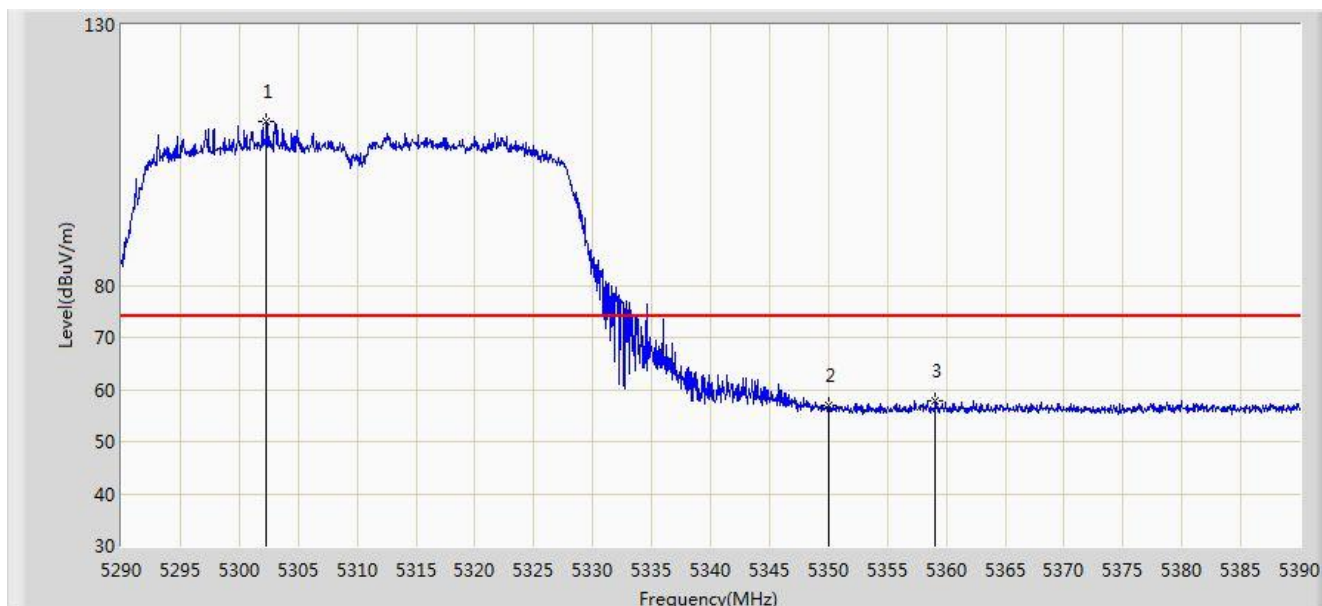


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5302.300        | 111.543                | 107.728              | N/A             | N/A            | 3.815       | PK   |
| 2  |      |      | 5350.000        | 56.916                 | 53.011               | -17.084         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5359.100        | 57.879                 | 53.958               | -16.121         | 74.000         | 3.922       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:36 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

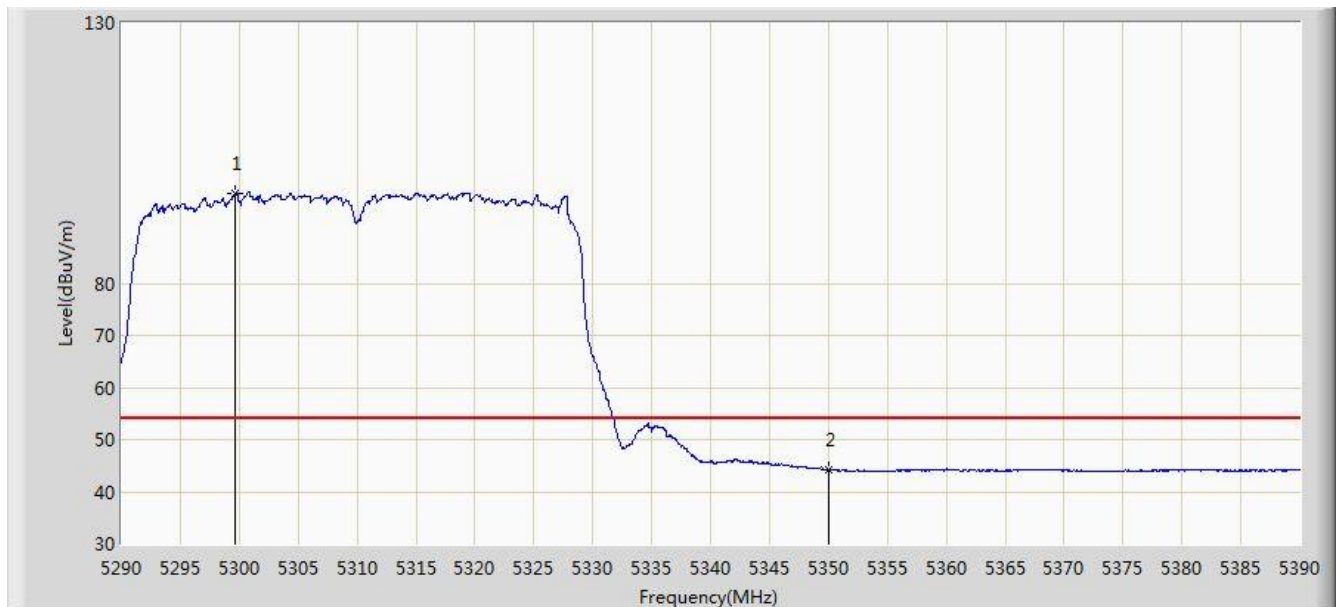


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5299.650        | 97.244                 | 93.431               | N/A             | N/A            | 3.813       | AV   |
| 2  |      |      | 5350.000        | 44.182                 | 40.277               | -9.818          | 54.000         | 3.904       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:38 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

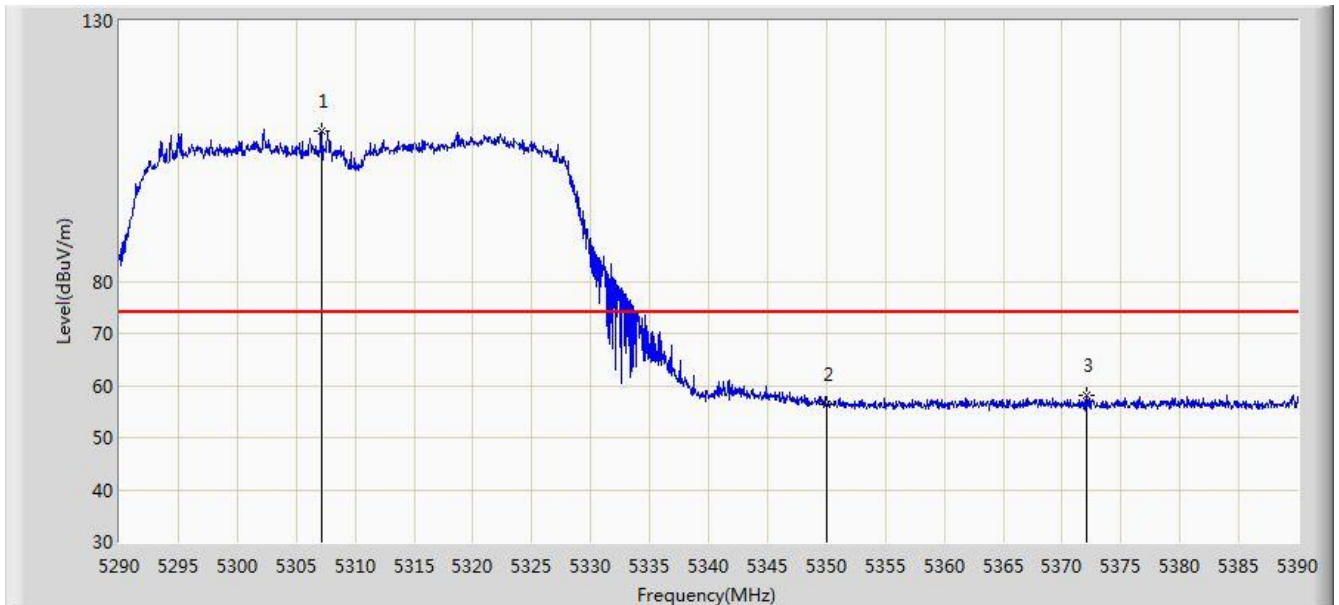


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5307.150        | 108.980                | 105.155              | N/A             | N/A            | 3.825       | PK   |
| 2  |      |      | 5350.000        | 56.322                 | 52.417               | -17.678         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5372.050        | 57.992                 | 54.047               | -16.008         | 74.000         | 3.945       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:39 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

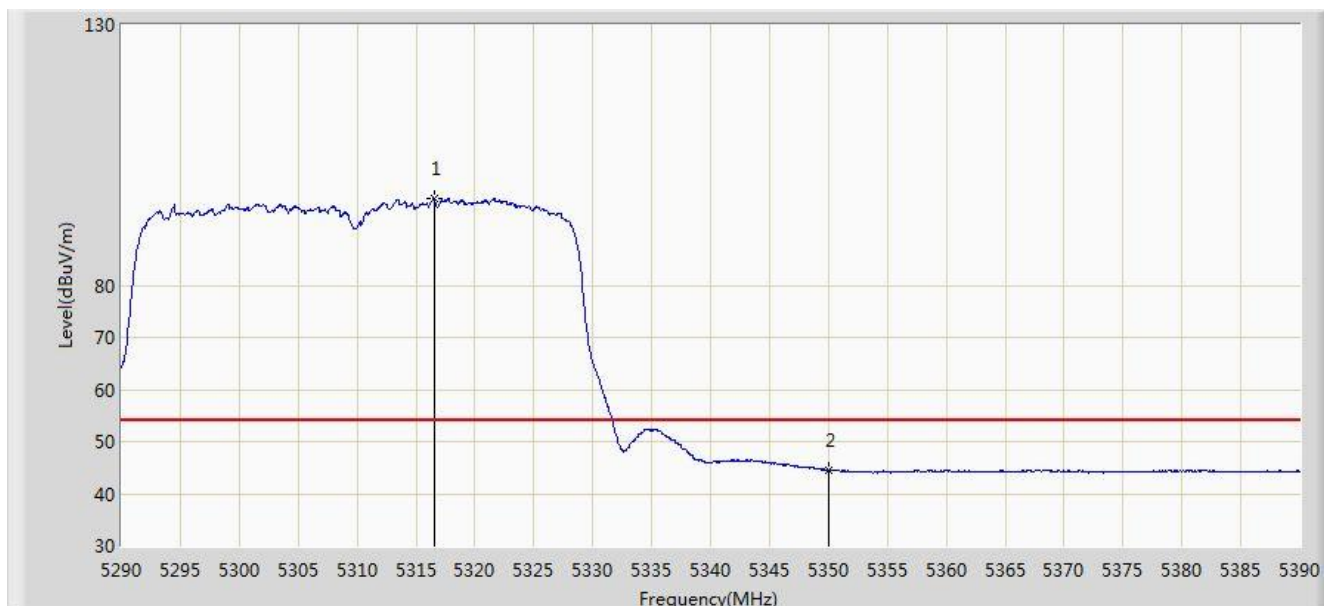


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5316.550        | 96.744                 | 92.902               | N/A             | N/A            | 3.842       | AV   |
| 2  |      |      | 5350.000        | 44.552                 | 40.647               | -9.448          | 54.000         | 3.904       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:41 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

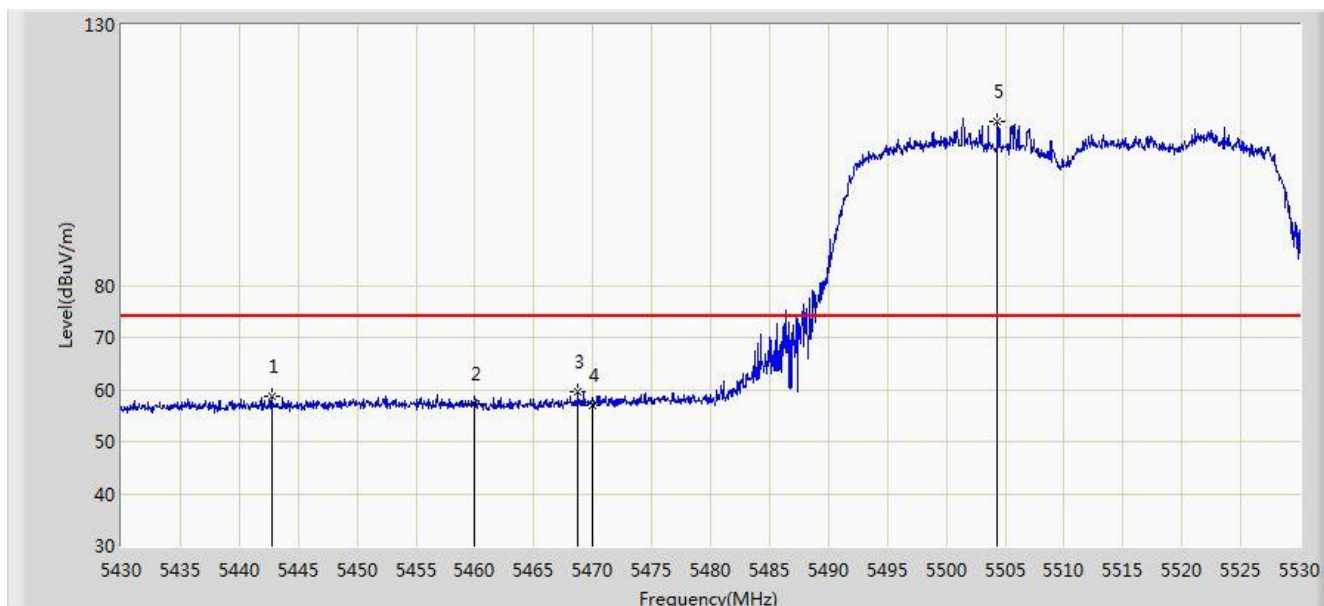


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5442.750        | 58.762                 | 54.630               | -15.238         | 74.000         | 4.133       | PK   |
| 2  |      |      | 5460.000        | 57.320                 | 53.140               | -16.680         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5468.750        | 59.679                 | 55.479               | -14.321         | 74.000         | 4.199       | PK   |
| 4  |      |      | 5470.000        | 56.987                 | 52.785               | -17.013         | 74.000         | 4.202       | PK   |
| 5  |      | *    | 5504.350        | 111.522                | 107.237              | N/A             | N/A            | 4.284       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 20:44 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

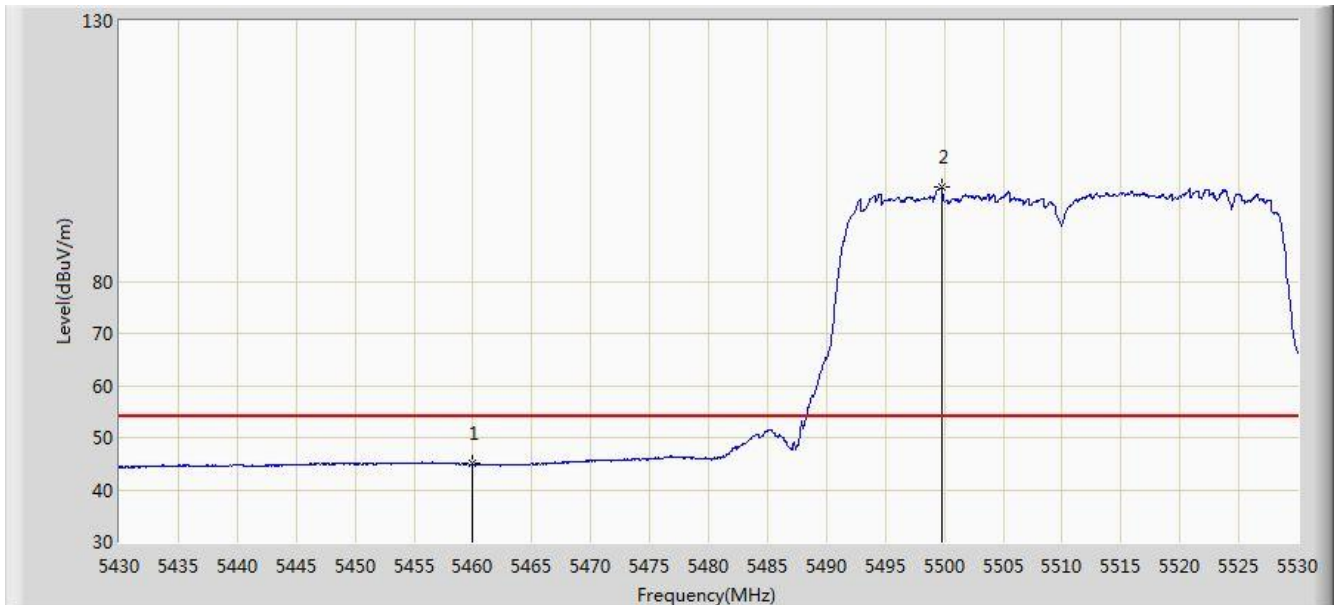


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.968                 | 40.788               | -9.032          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5499.800        | 98.148                 | 93.877               | N/A             | N/A            | 4.271       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 21:02 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

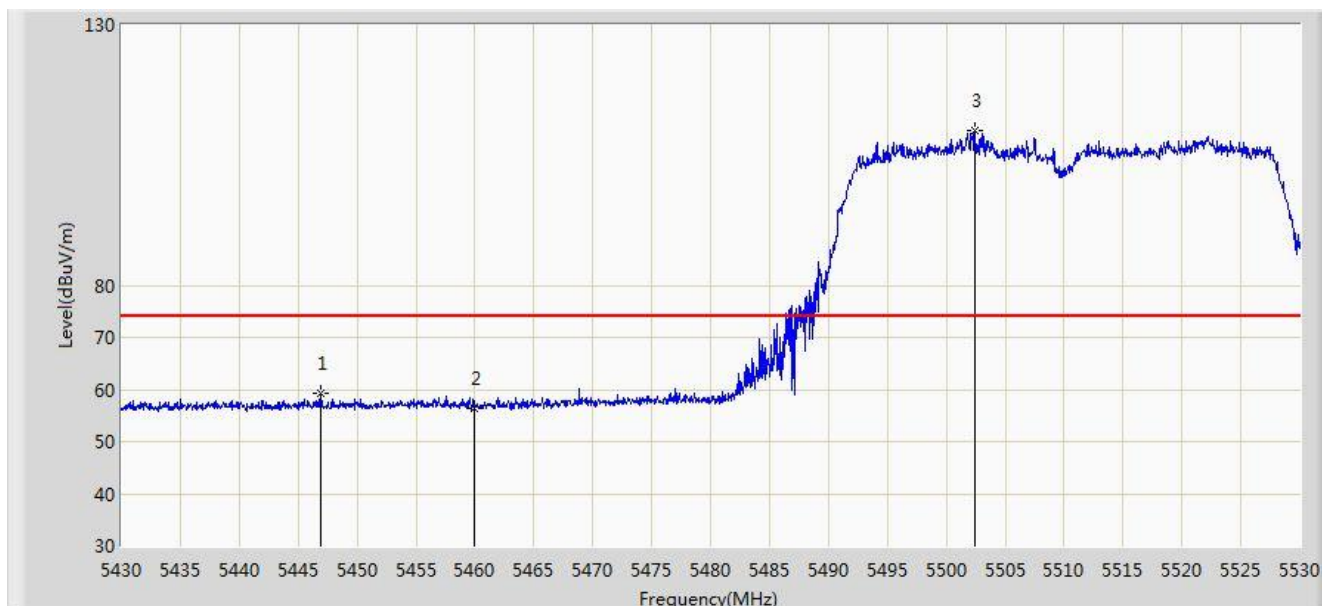


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5446.950        | 59.166                 | 55.021               | -14.834         | 74.000         | 4.145       | PK   |
| 2  |      |      | 5460.000        | 56.416                 | 52.236               | -17.584         | 74.000         | 4.180       | PK   |
| 3  |      | *    | 5502.400        | 109.593                | 105.314              | N/A             | N/A            | 4.278       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 21:04 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

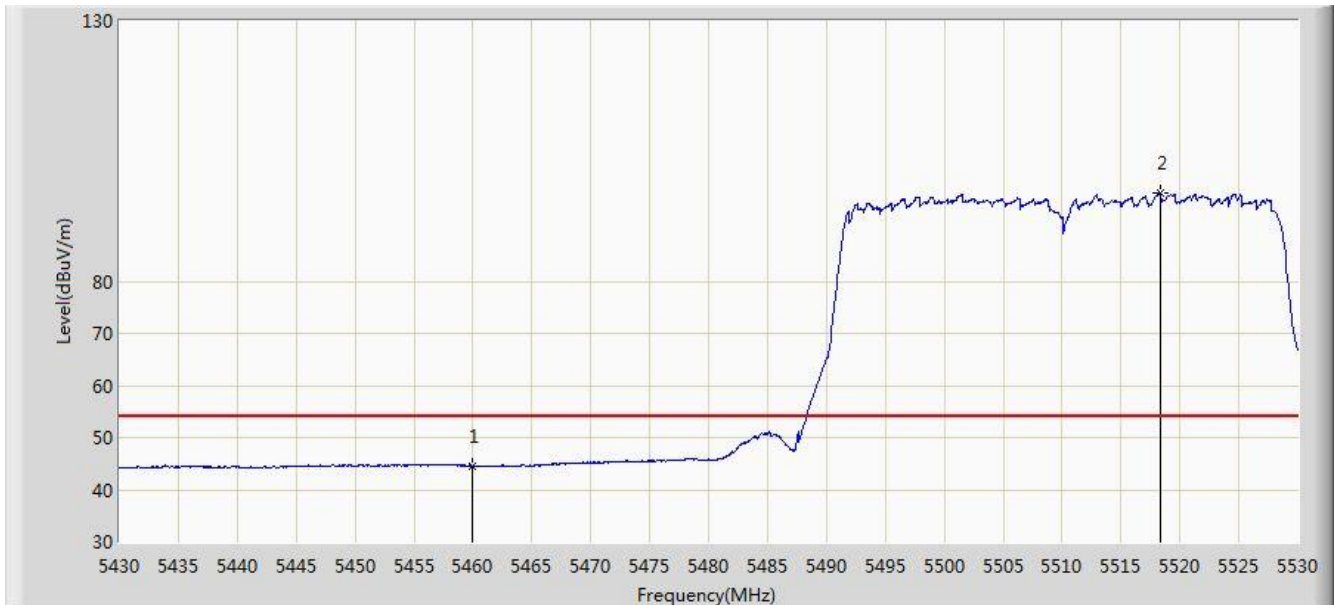


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.511                 | 40.331               | -9.489          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5518.350        | 96.952                 | 92.626               | N/A             | N/A            | 4.326       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 21:06 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

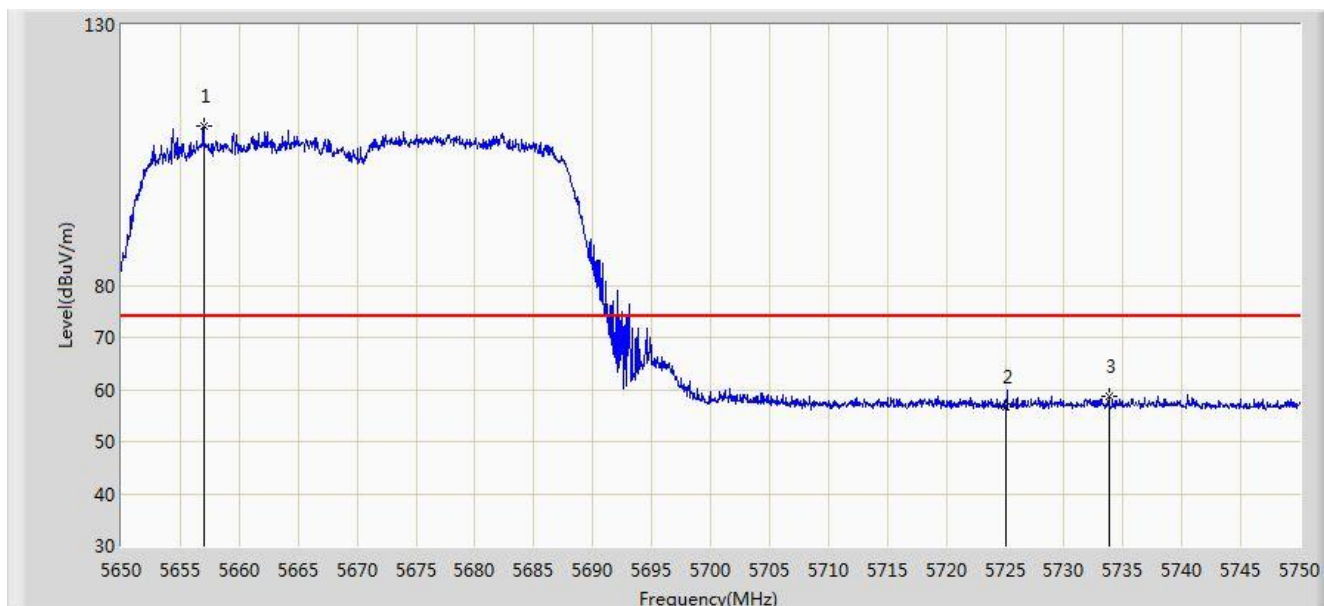


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5657.000        | 110.537                | 105.842              | N/A             | N/A            | 4.695       | PK   |
| 2  |      |      | 5725.000        | 56.634                 | 51.605               | -17.366         | 74.000         | 5.029       | PK   |
| 3  |      |      | 5733.800        | 58.815                 | 53.730               | -15.185         | 74.000         | 5.085       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 21:10 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

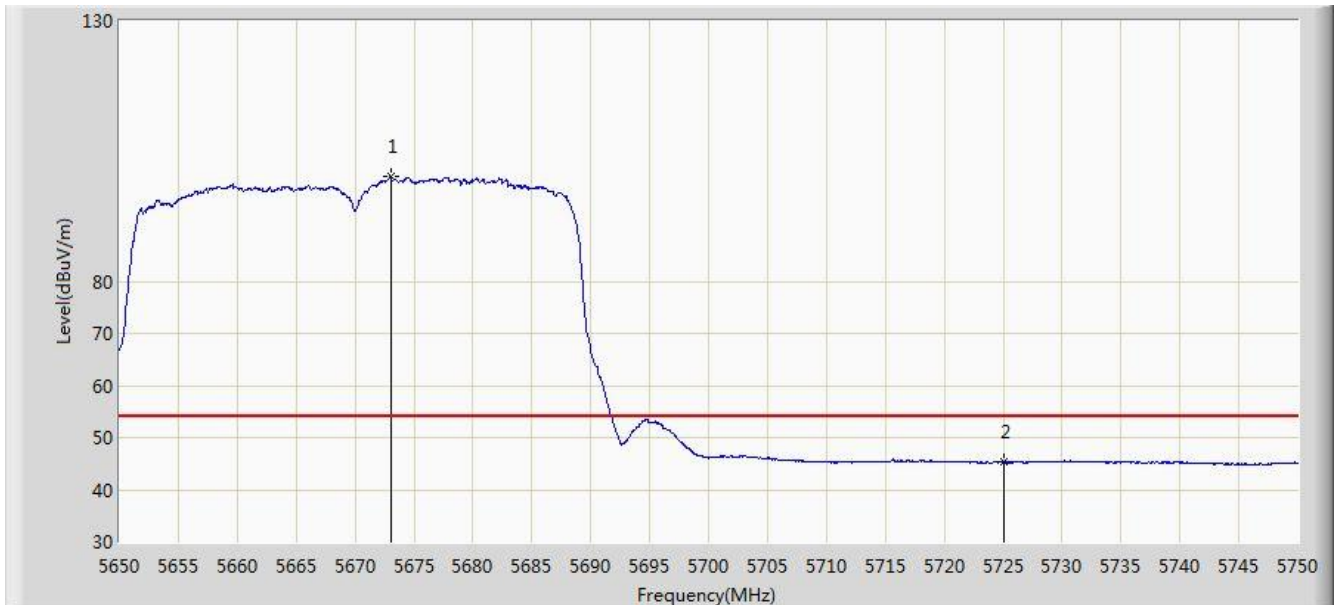


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5673.000        | 100.056                | 95.297               | N/A             | N/A            | 4.759       | AV   |
| 2  |      |      | 5725.000        | 45.386                 | 40.357               | -8.614          | 54.000         | 5.029       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 21:23 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

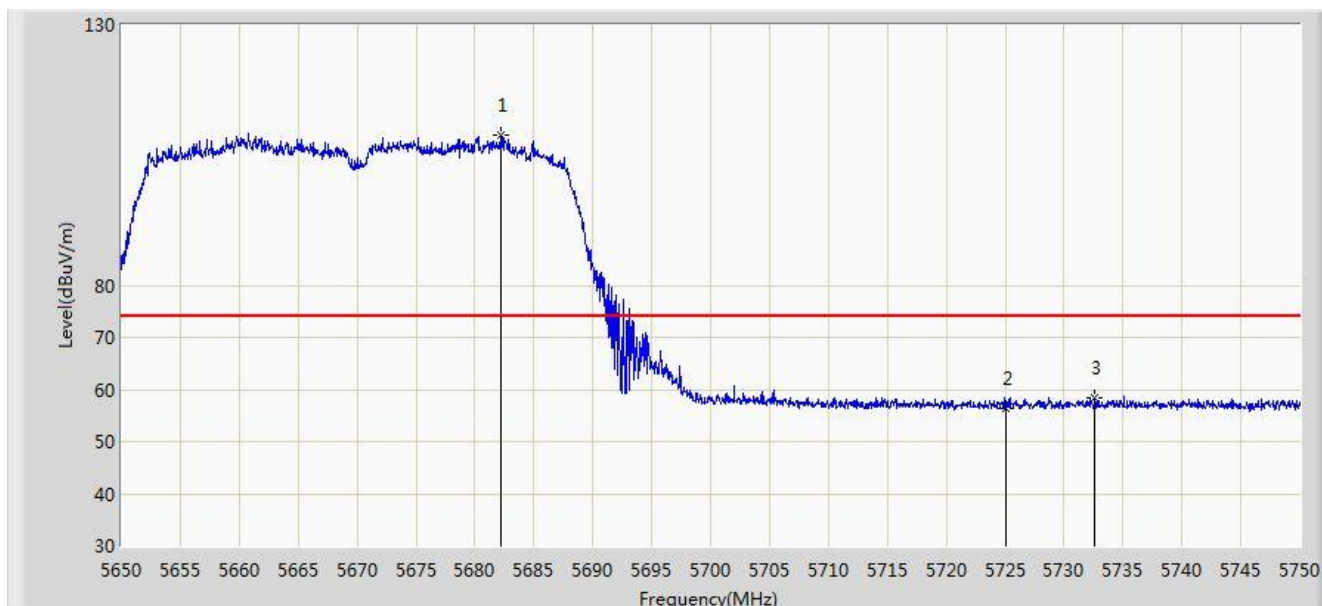


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5682.250        | 108.850                | 104.054              | N/A             | N/A            | 4.797       | PK   |
| 2  |      |      | 5725.000        | 56.372                 | 51.343               | -17.628         | 74.000         | 5.029       | PK   |
| 3  |      |      | 5732.600        | 58.478                 | 53.401               | -15.522         | 74.000         | 5.077       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 21:24 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

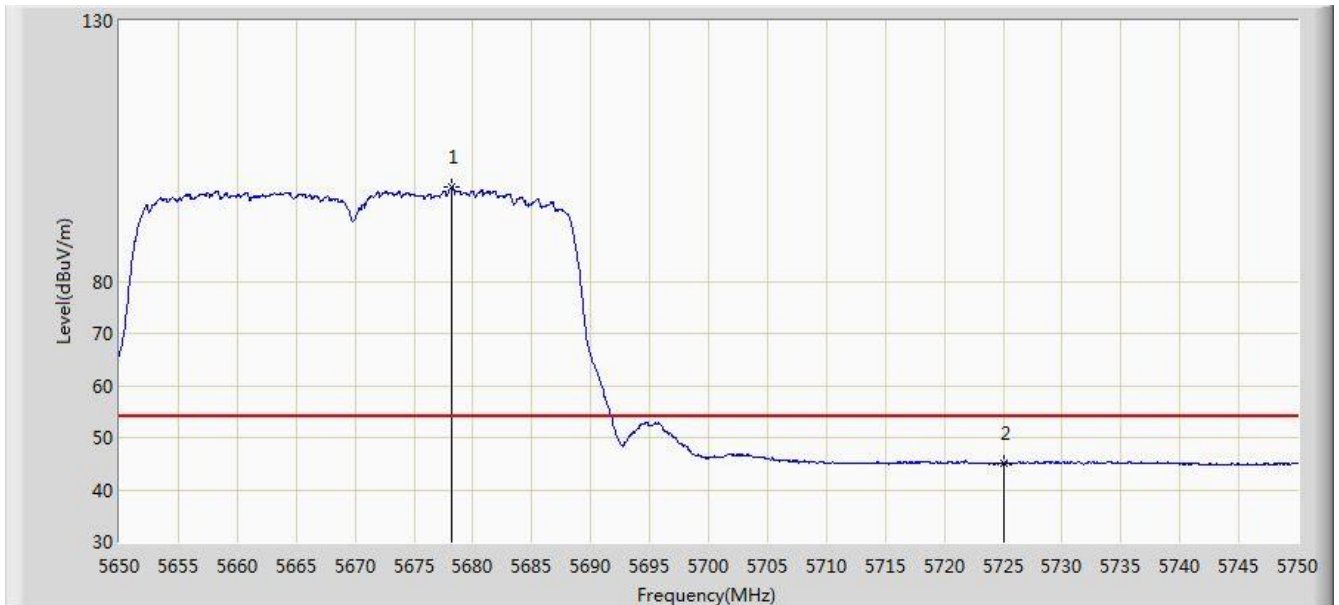


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5678.250        | 98.138                 | 93.358               | N/A             | N/A            | 4.780       | AV   |
| 2  |      |      | 5725.000        | 45.033                 | 40.004               | -8.967          | 54.000         | 5.029       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 21:45 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

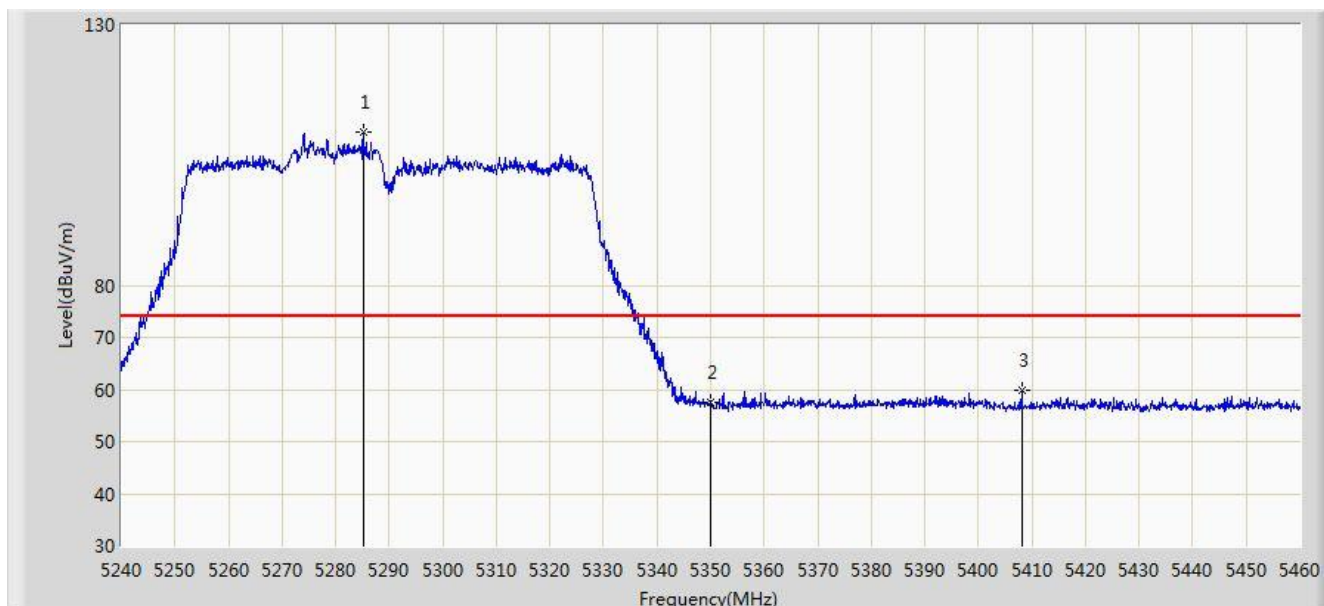


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5285.100        | 109.552                | 105.729              | N/A             | N/A            | 3.823       | PK   |
| 2  |      |      | 5350.000        | 57.620                 | 53.715               | -16.380         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5408.080        | 59.875                 | 55.852               | -14.125         | 74.000         | 4.023       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 21:49 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

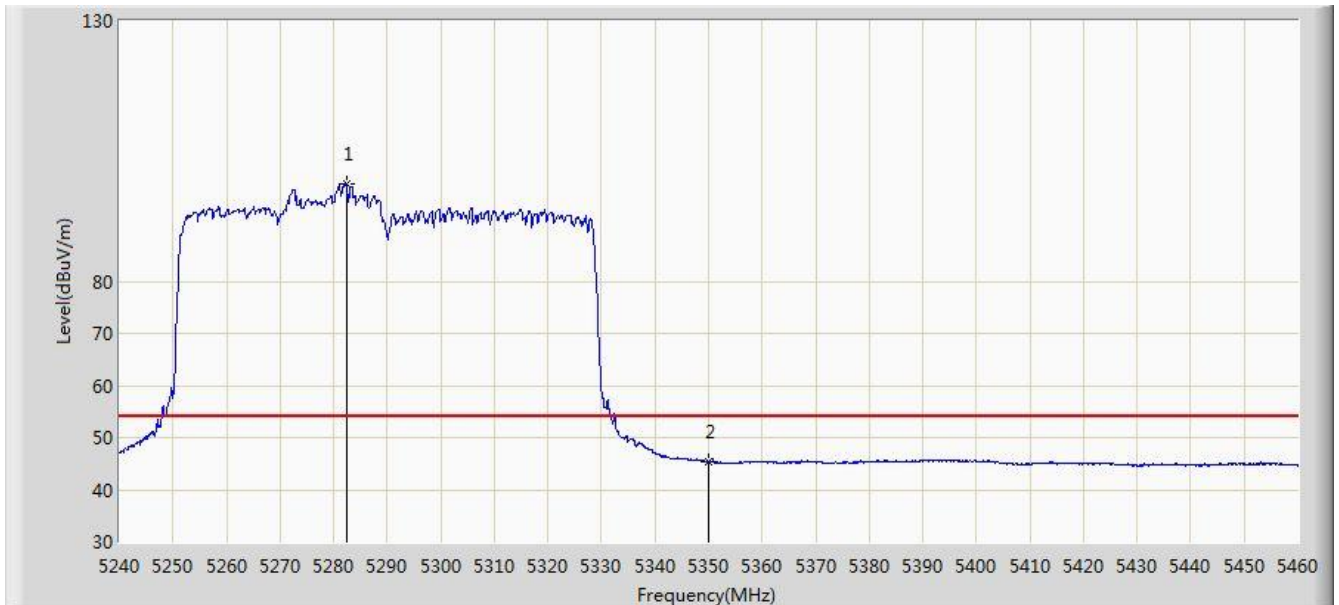


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5282.460        | 98.808                 | 94.983               | N/A             | N/A            | 3.825       | AV   |
| 2  |      |      | 5350.000        | 45.218                 | 41.313               | -8.782          | 54.000         | 3.904       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 21:50 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

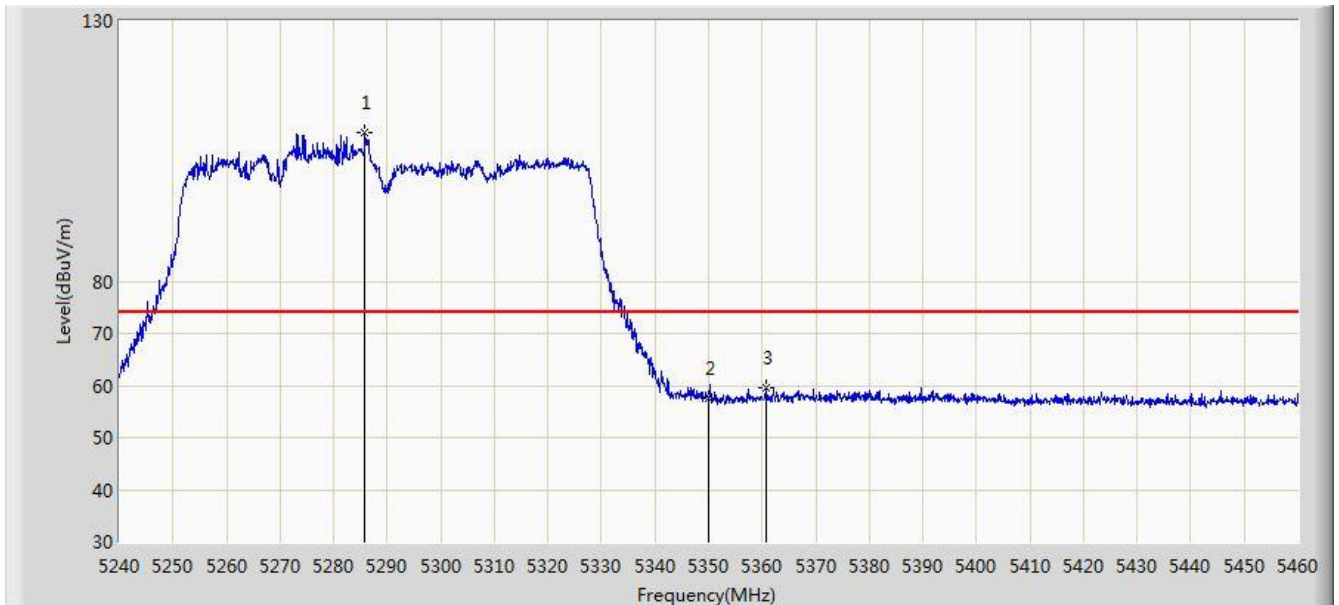


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5285.870        | 108.612                | 104.789              | N/A             | N/A            | 3.823       | PK   |
| 2  |      |      | 5350.000        | 57.569                 | 53.664               | -16.431         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5360.780        | 59.668                 | 55.744               | -14.332         | 74.000         | 3.923       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 21:51 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

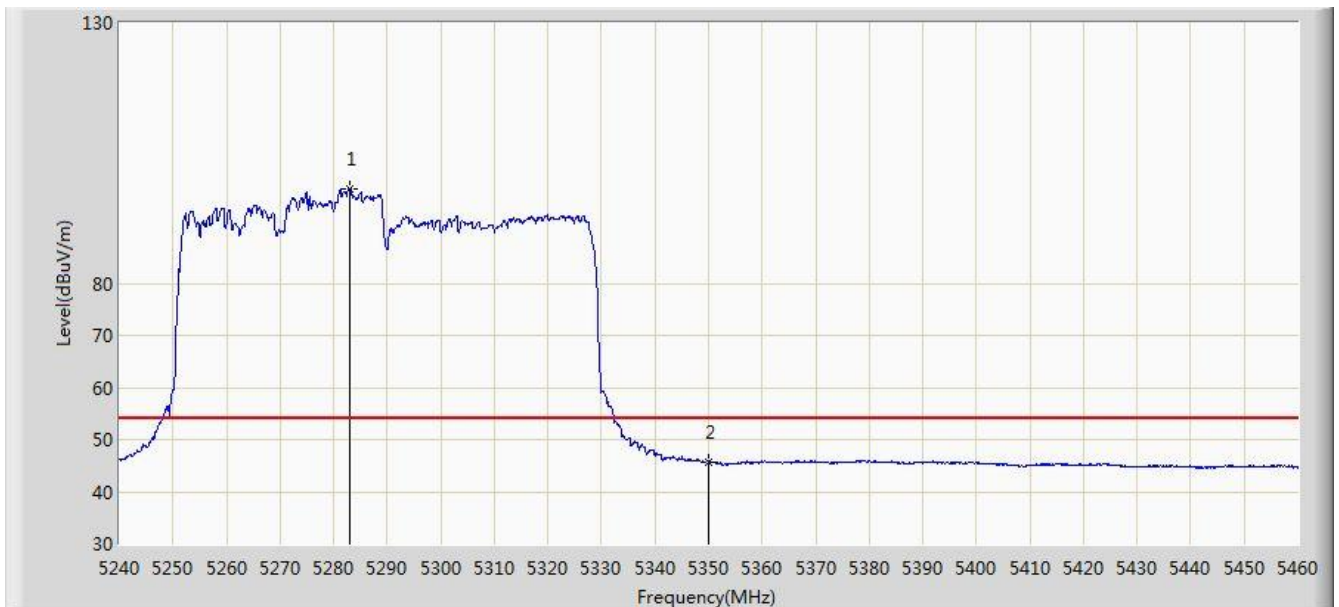


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5283.010        | 98.206                 | 94.381               | N/A             | N/A            | 3.825       | AV   |
| 2  |      |      | 5350.000        | 45.566                 | 41.661               | -8.434          | 54.000         | 3.904       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 21:55 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

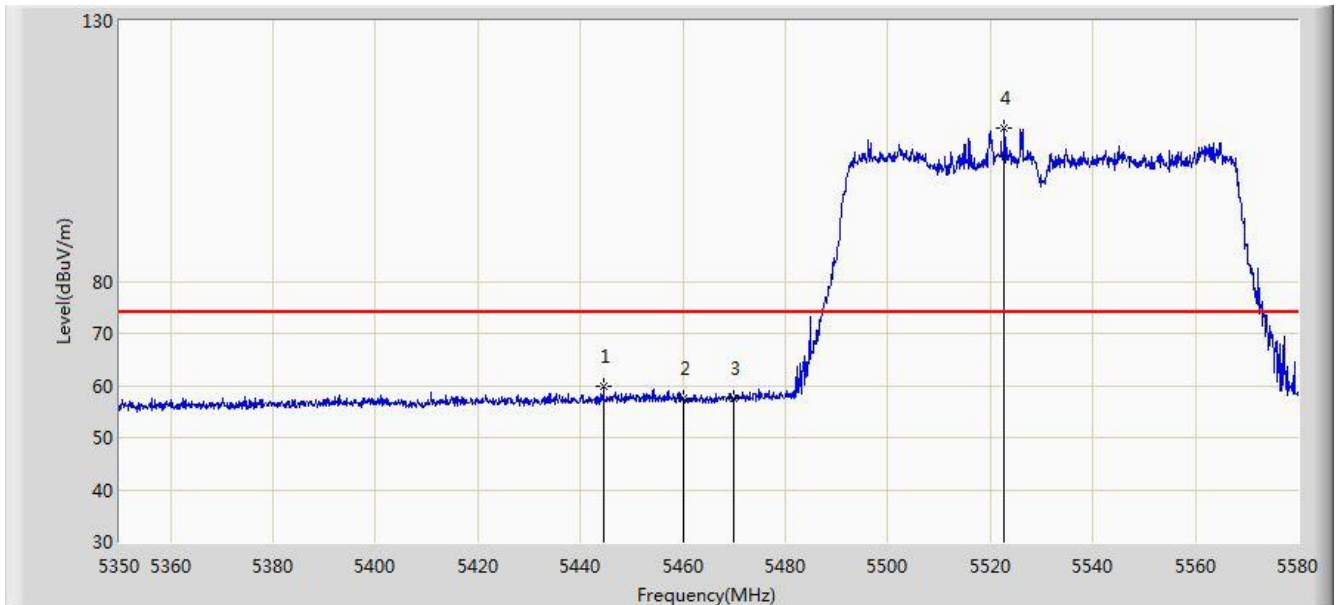


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5444.530        | 59.938                 | 55.800               | -14.062         | 74.000         | 4.138       | PK   |
| 2  |      |      | 5460.000        | 57.516                 | 53.336               | -16.484         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5470.000        | 57.597                 | 53.395               | -16.403         | 74.000         | 4.202       | PK   |
| 4  |      | *    | 5522.730        | 109.514                | 105.175              | N/A             | N/A            | 4.339       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 21:58 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

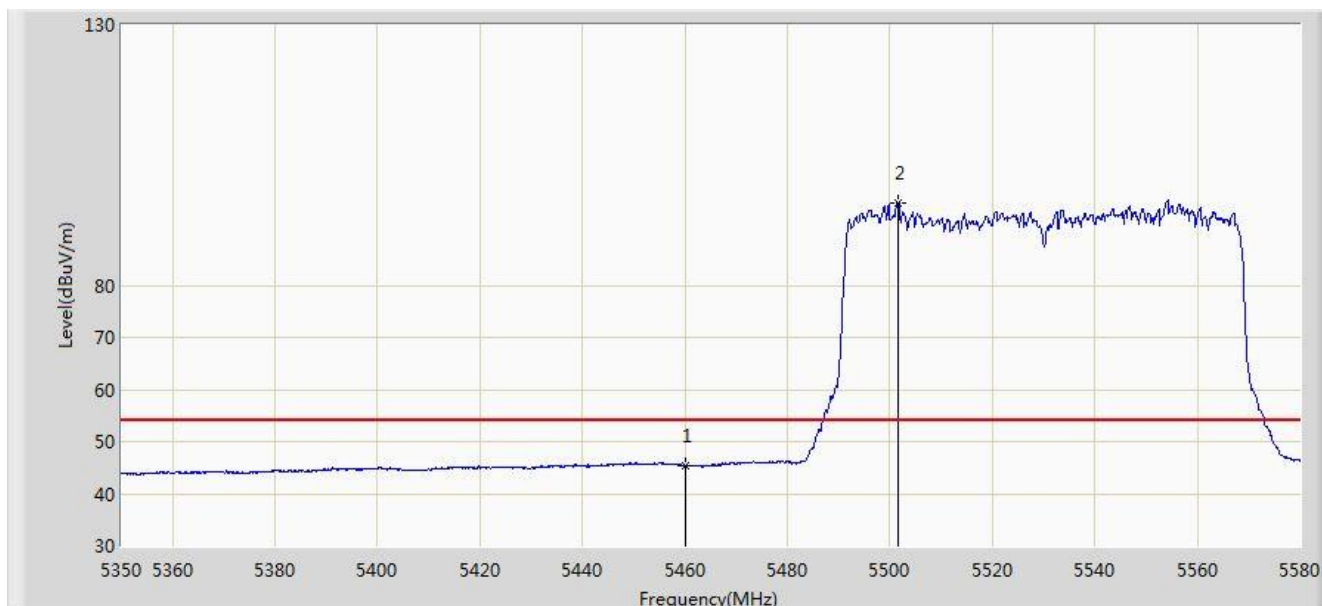


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 45.396                 | 41.216               | -8.604          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5501.570        | 95.836                 | 91.559               | N/A             | N/A            | 4.277       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 22:00 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

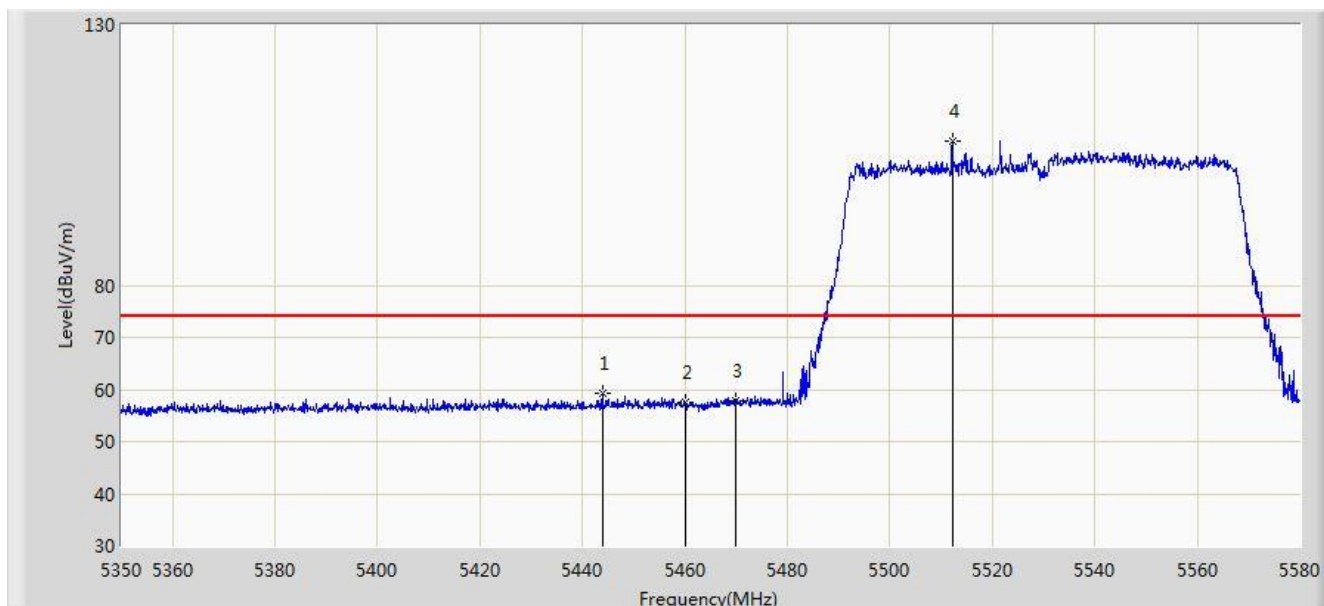


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5443.840        | 59.360                 | 55.224               | -14.640         | 74.000         | 4.136       | PK   |
| 2  |      |      | 5460.000        | 57.426                 | 53.246               | -16.574         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5470.000        | 57.725                 | 53.523               | -16.275         | 74.000         | 4.202       | PK   |
| 4  |      | *    | 5512.150        | 107.773                | 103.465              | N/A             | N/A            | 4.307       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/04 - 22:01 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

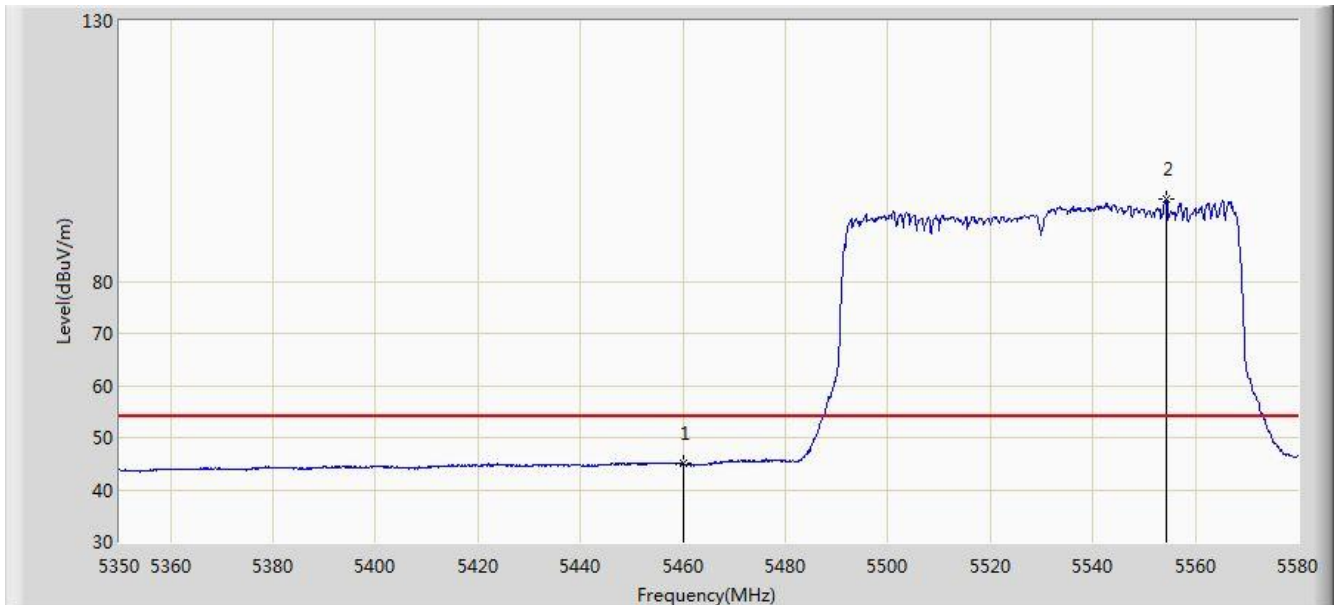


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 45.008                 | 40.828               | -8.992          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5554.470        | 95.680                 | 91.250               | N/A             | N/A            | 4.430       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 14:20 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

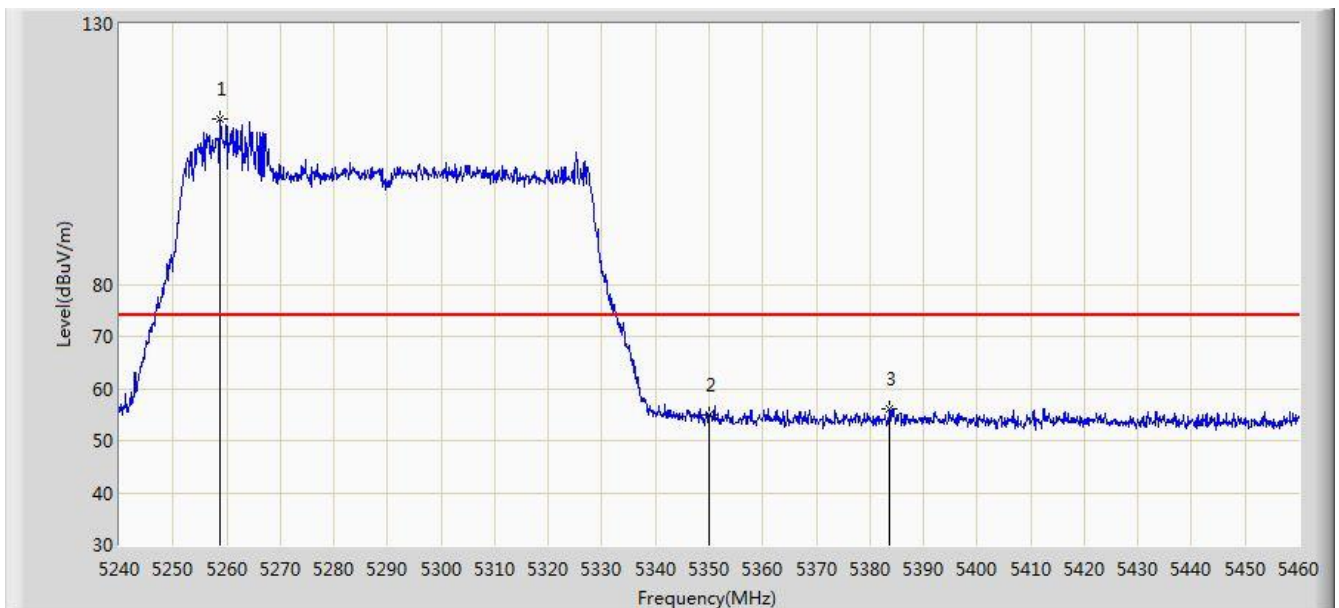


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5258.700        | 111.637                | 107.793              | N/A             | N/A            | 3.844       | PK   |
| 2  |      |      | 5350.000        | 54.984                 | 51.079               | -19.016         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5383.770        | 55.983                 | 52.017               | -18.017         | 74.000         | 3.966       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 14:27 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

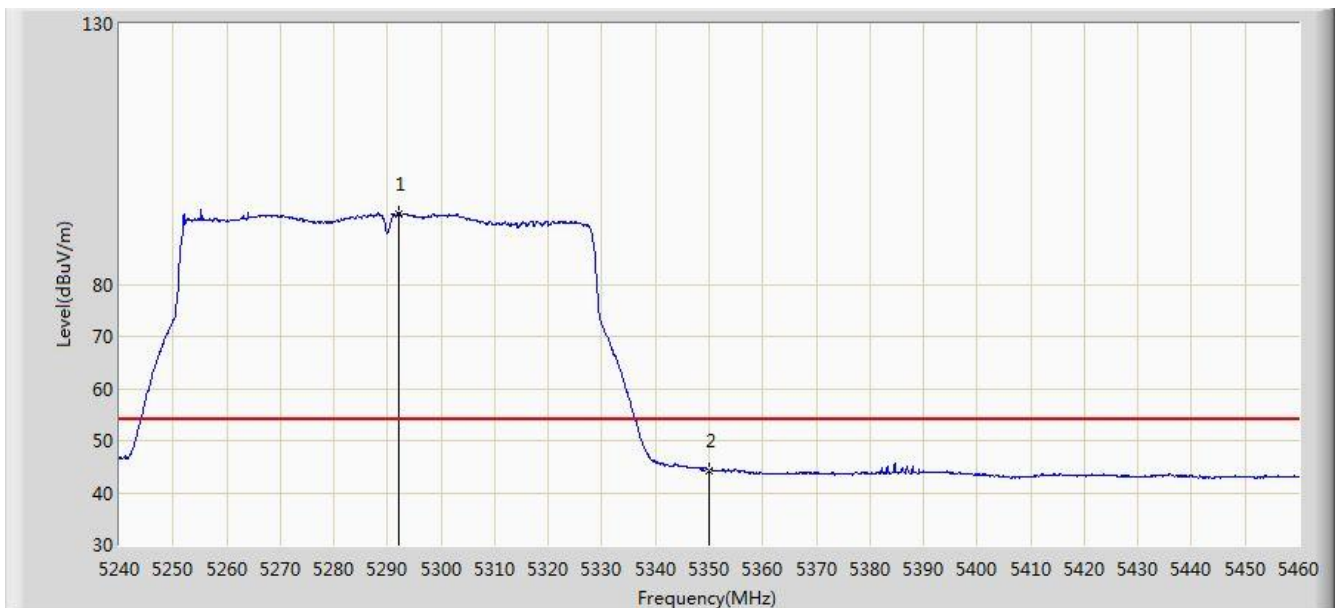


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5292.030        | 93.606                 | 89.787               | N/A             | N/A            | 3.819       | AV   |
| 2  |      |      | 5350.000        | 44.331                 | 40.426               | -9.669          | 54.000         | 3.904       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 14:28 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

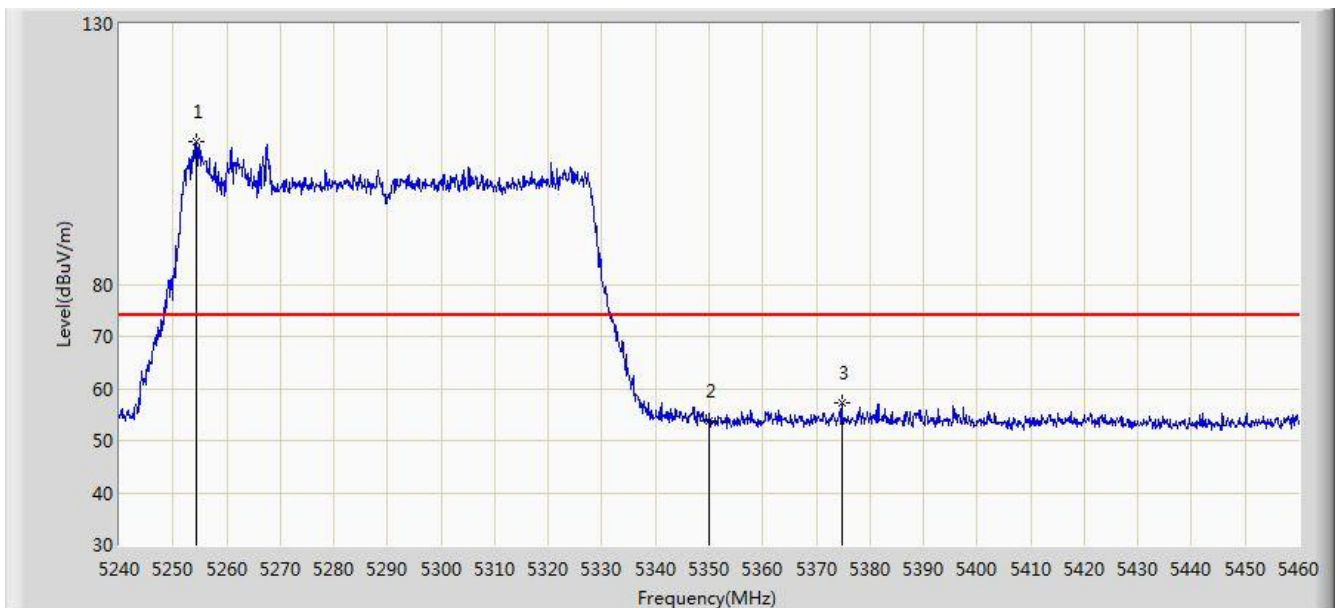


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5254.300        | 107.287                | 103.440              | N/A             | N/A            | 3.847       | PK   |
| 2  |      |      | 5350.000        | 53.901                 | 49.996               | -20.099         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5374.750        | 57.337                 | 53.387               | -16.663         | 74.000         | 3.949       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 14:29 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

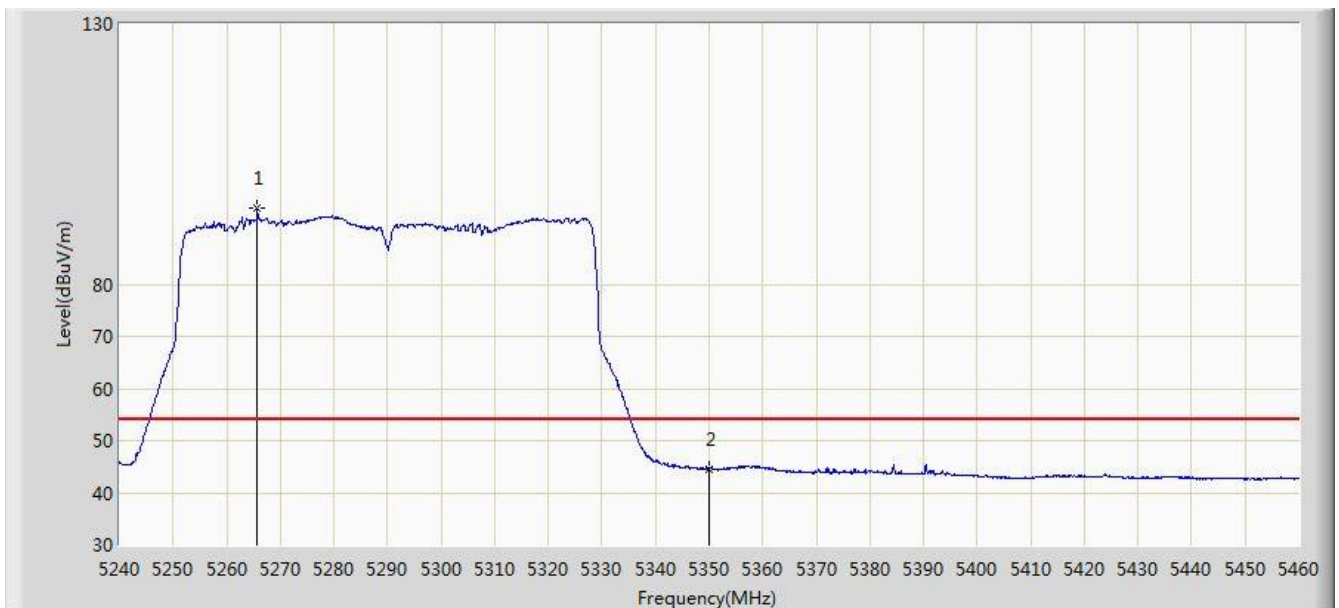


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5265.740        | 94.662                 | 90.824               | N/A             | N/A            | 3.838       | AV   |
| 2  |      |      | 5350.000        | 44.612                 | 40.707               | -9.388          | 54.000         | 3.904       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 14:31 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

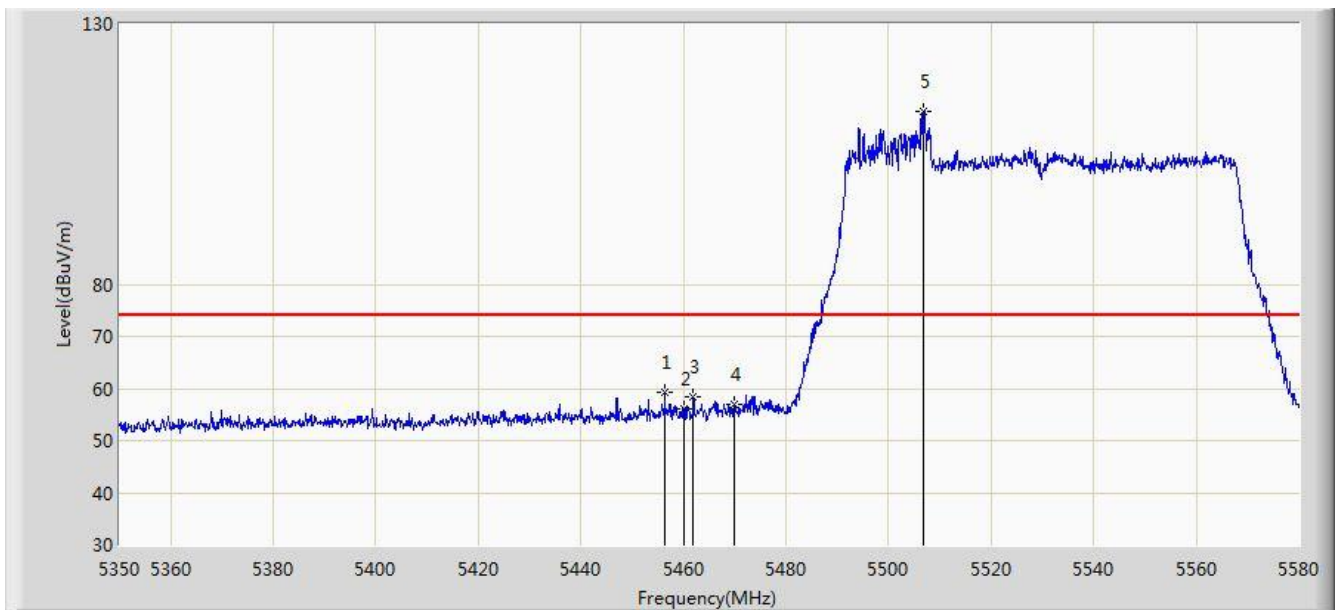


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5456.375        | 59.254                 | 55.081               | -14.746         | 74.000         | 4.172       | PK   |
| 2  |      |      | 5460.000        | 56.015                 | 51.835               | -17.985         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5461.895        | 58.368                 | 54.184               | -15.632         | 74.000         | 4.185       | PK   |
| 4  |      |      | 5470.000        | 56.823                 | 52.621               | -17.177         | 74.000         | 4.202       | PK   |
| 5  |      | *    | 5506.860        | 113.231                | 108.939              | N/A             | N/A            | 4.292       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 14:46 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

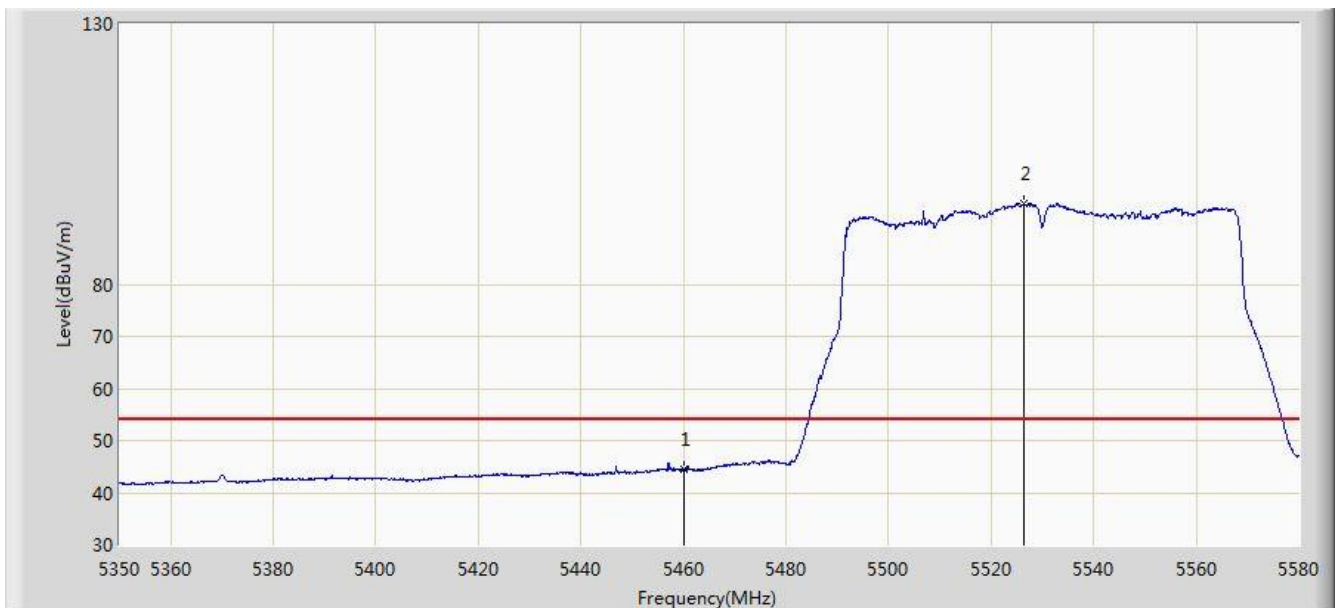


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.530                 | 40.350               | -9.470          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5526.295        | 95.405                 | 91.055               | N/A             | N/A            | 4.350       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 14:47 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

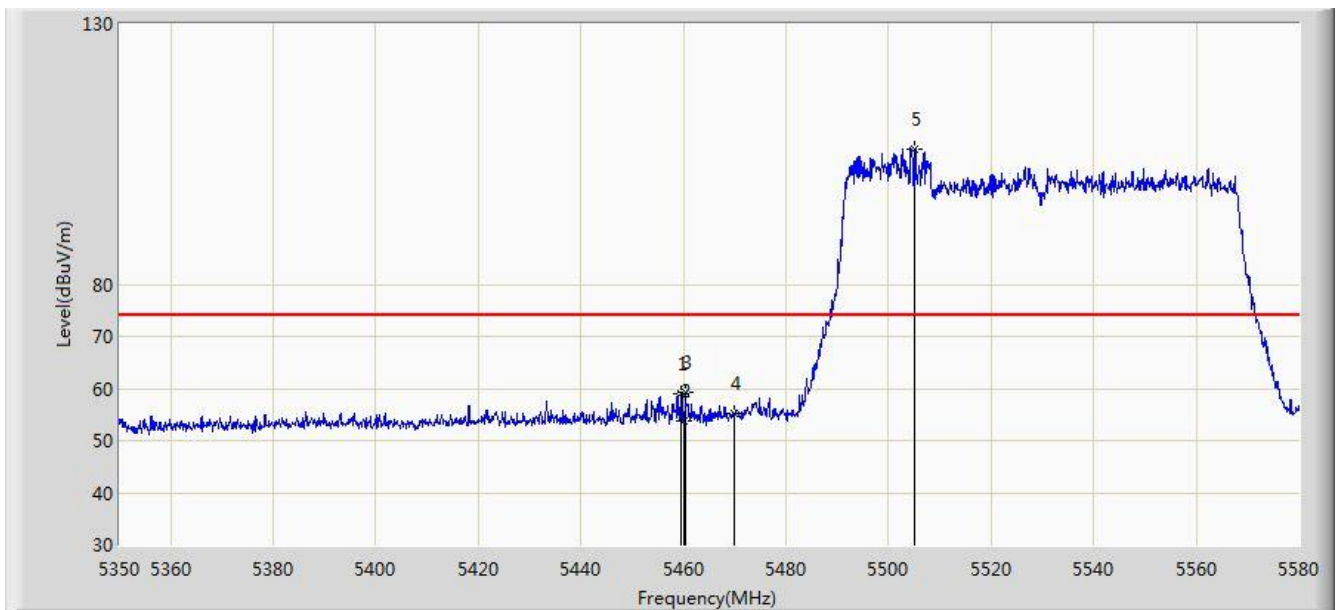


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5459.480        | 58.940                 | 54.761               | -15.060         | 74.000         | 4.179       | PK   |
| 2  |      |      | 5460.000        | 53.803                 | 49.623               | -20.197         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5460.400        | 59.251                 | 55.070               | -14.749         | 74.000         | 4.180       | PK   |
| 4  |      |      | 5470.000        | 55.246                 | 51.044               | -18.754         | 74.000         | 4.202       | PK   |
| 5  |      | *    | 5505.135        | 106.005                | 101.718              | N/A             | N/A            | 4.287       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 14:48 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

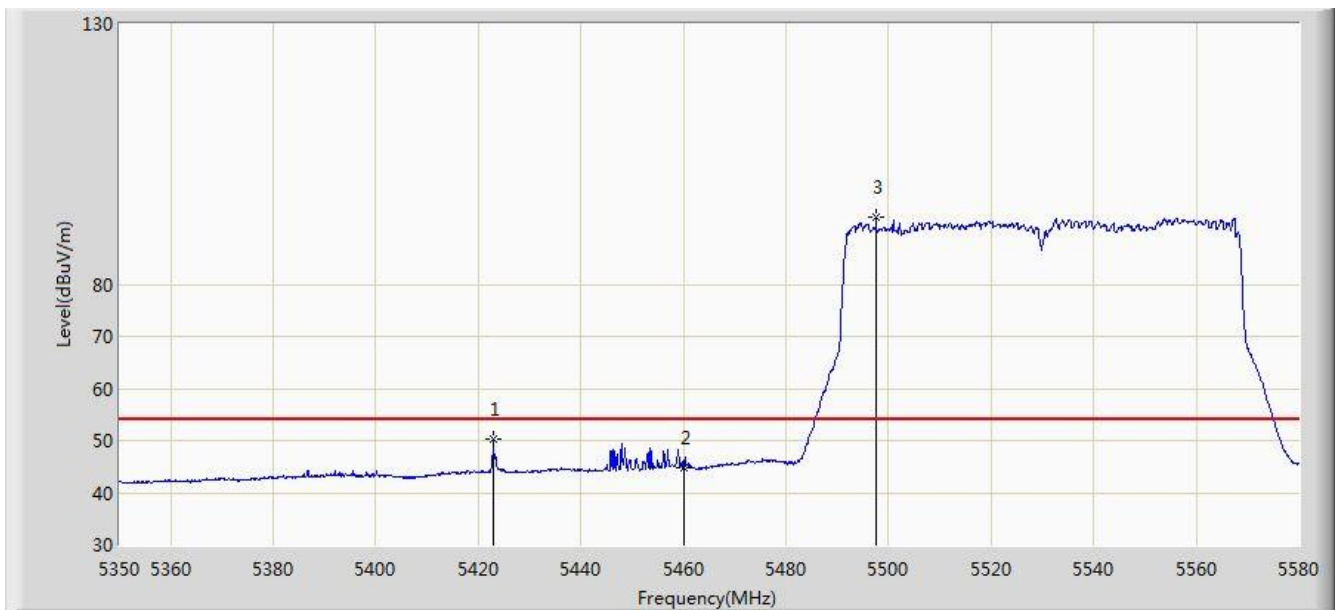


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5422.910        | 50.184                 | 46.114               | -3.816          | 54.000         | 4.070       | AV   |
| 2  |      |      | 5460.000        | 44.846                 | 40.666               | -9.154          | 54.000         | 4.180       | AV   |
| 3  |      | *    | 5497.545        | 92.902                 | 88.637               | N/A             | N/A            | 4.265       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 15:45 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

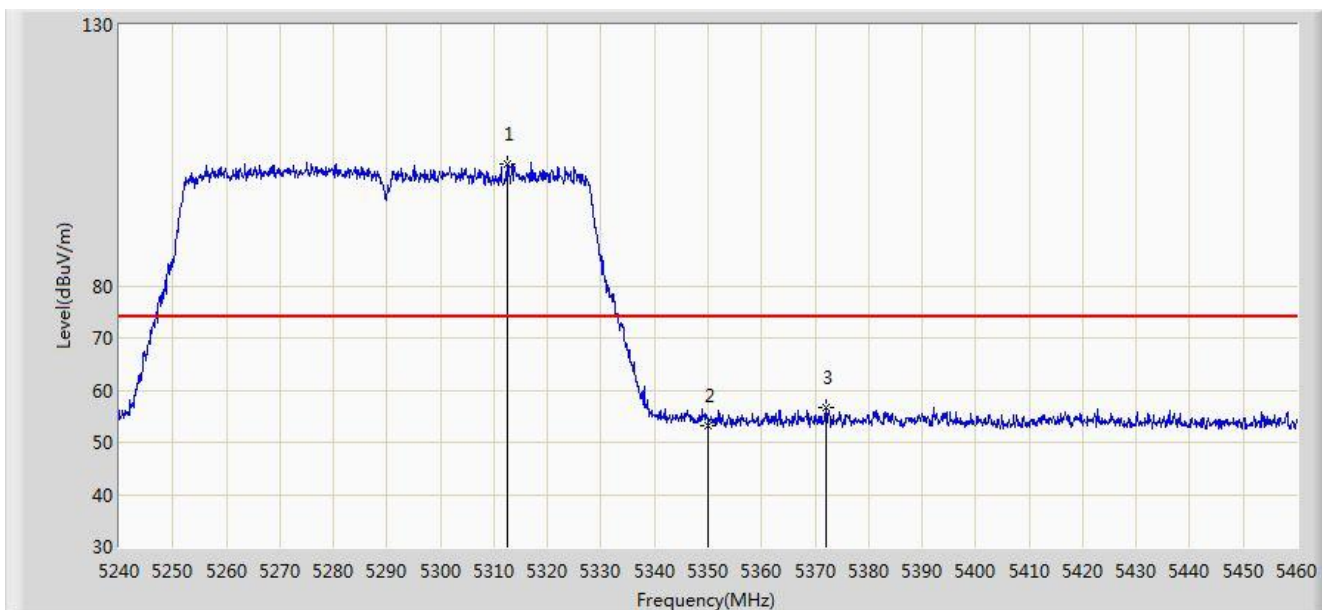


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5312.380        | 103.476                | 99.642               | N/A             | N/A            | 3.834       | PK   |
| 2  |      |      | 5350.000        | 53.213                 | 49.308               | -20.787         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5372.000        | 56.535                 | 52.590               | -17.465         | 74.000         | 3.944       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 15:51 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

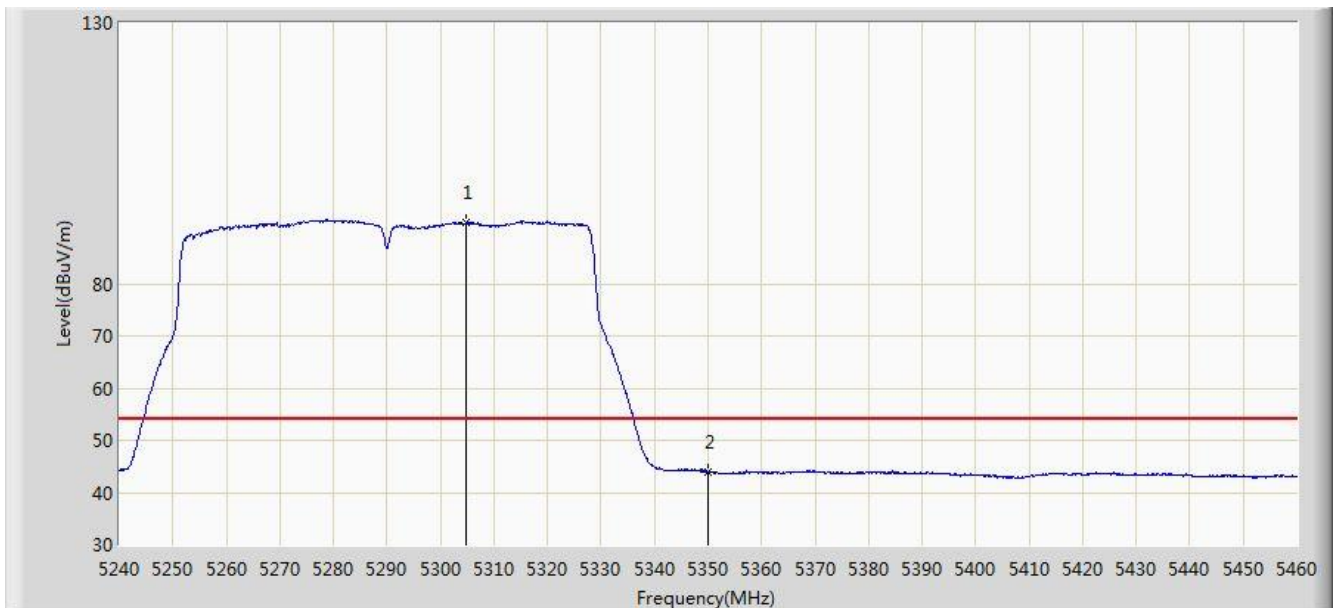


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5304.900        | 91.675                 | 87.854               | N/A             | N/A            | 3.821       | AV   |
| 2  |      |      | 5350.000        | 43.999                 | 40.094               | -10.001         | 54.000         | 3.904       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 15:52 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

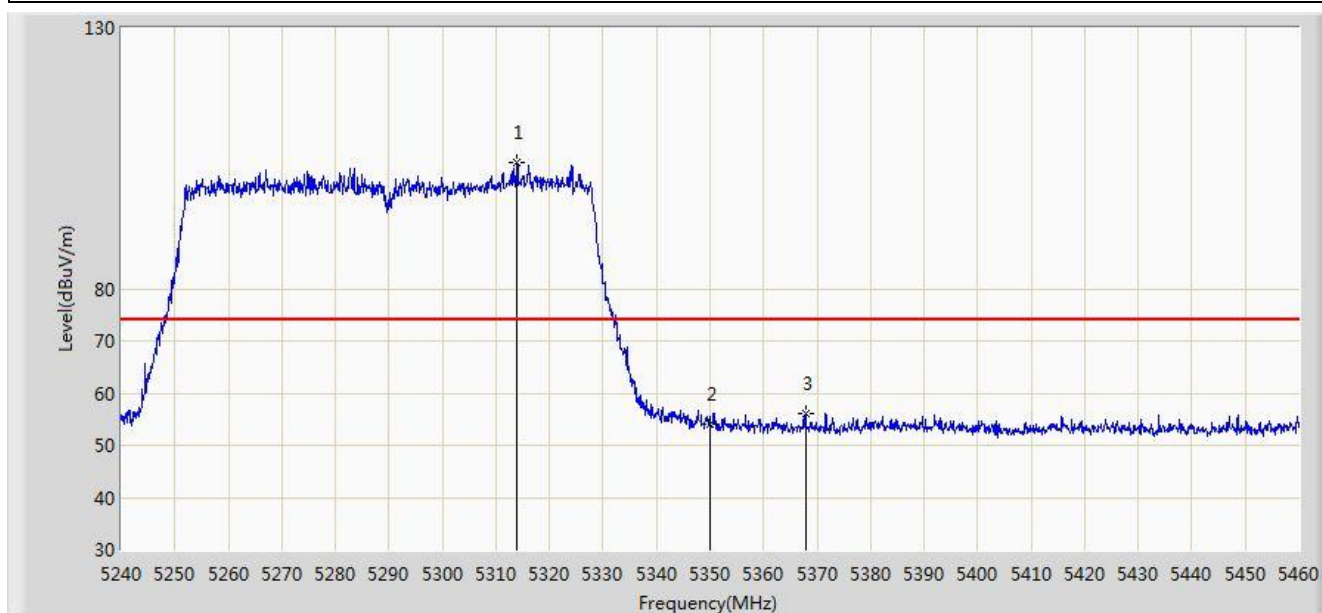


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5313.920        | 104.263                | 100.426              | N/A             | N/A            | 3.837       | PK   |
| 2  |      |      | 5350.000        | 54.029                 | 50.124               | -19.971         | 74.000         | 3.904       | PK   |
| 3  |      |      | 5367.820        | 56.012                 | 52.075               | -17.988         | 74.000         | 3.937       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 15:53 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

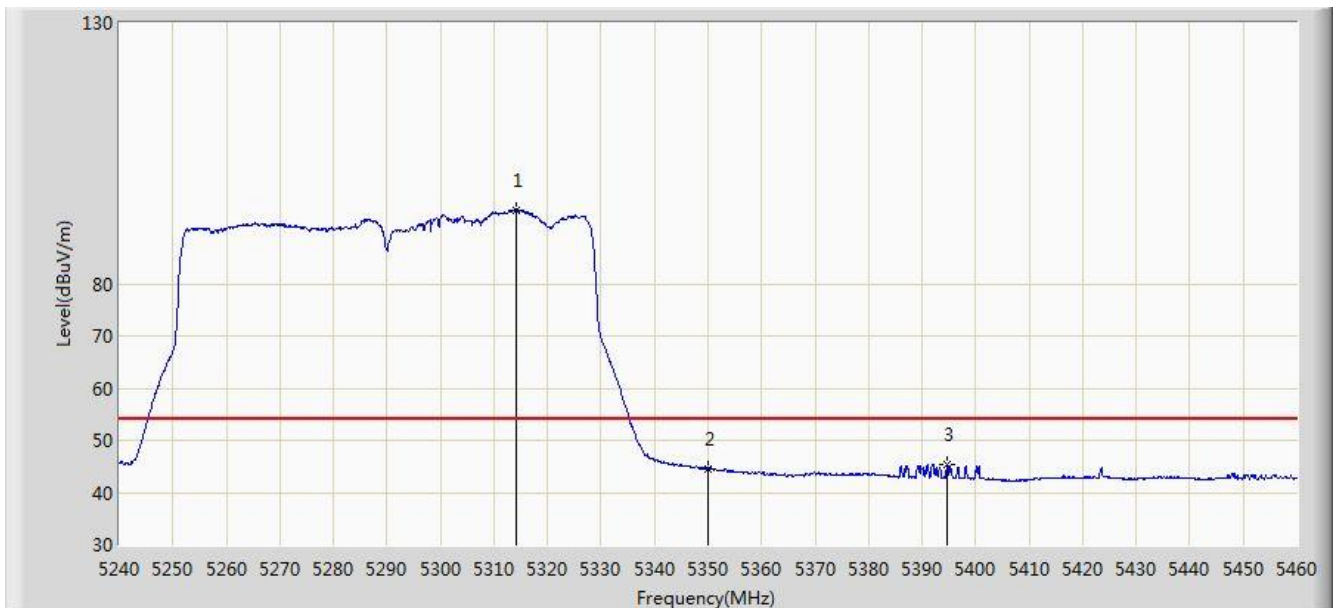


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5314.140        | 94.164                 | 90.326               | N/A             | N/A            | 3.838       | AV   |
| 2  |      |      | 5350.000        | 44.485                 | 40.580               | -9.515          | 54.000         | 3.904       | AV   |
| 3  |      |      | 5394.660        | 45.387                 | 41.399               | -8.613          | 54.000         | 3.988       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 15:56 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

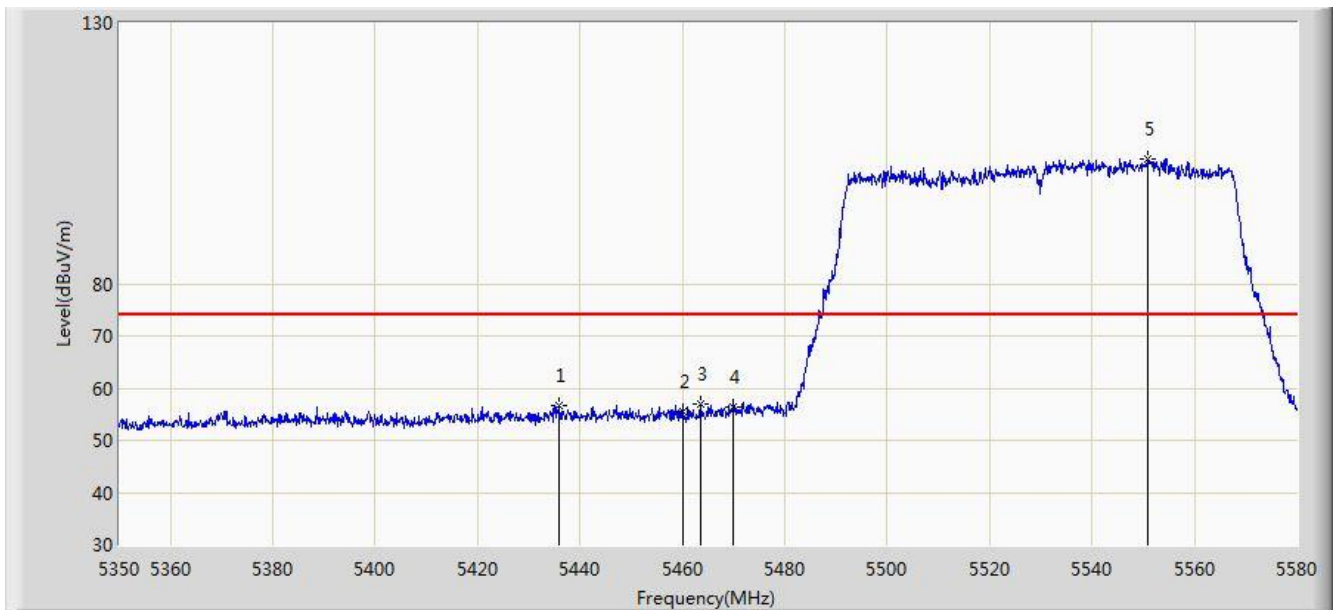


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5436.020        | 56.598                 | 52.485               | -17.402         | 74.000         | 4.113       | PK   |
| 2  |      |      | 5460.000        | 55.588                 | 51.408               | -18.412         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5463.505        | 56.903                 | 52.715               | -17.097         | 74.000         | 4.188       | PK   |
| 4  |      |      | 5470.000        | 56.393                 | 52.191               | -17.607         | 74.000         | 4.202       | PK   |
| 5  |      | *    | 5550.790        | 103.807                | 99.387               | N/A             | N/A            | 4.420       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 15:59 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

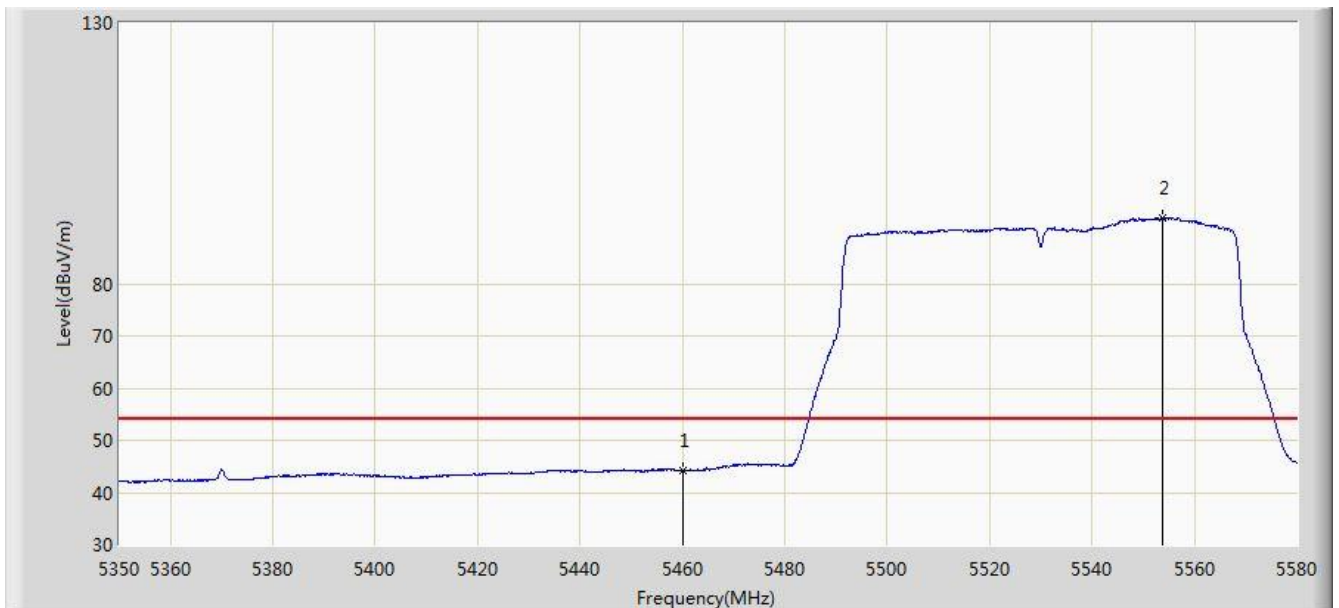


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.256                 | 40.076               | -9.744          | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5553.895        | 92.673                 | 88.245               | N/A             | N/A            | 4.428       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 16:01 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

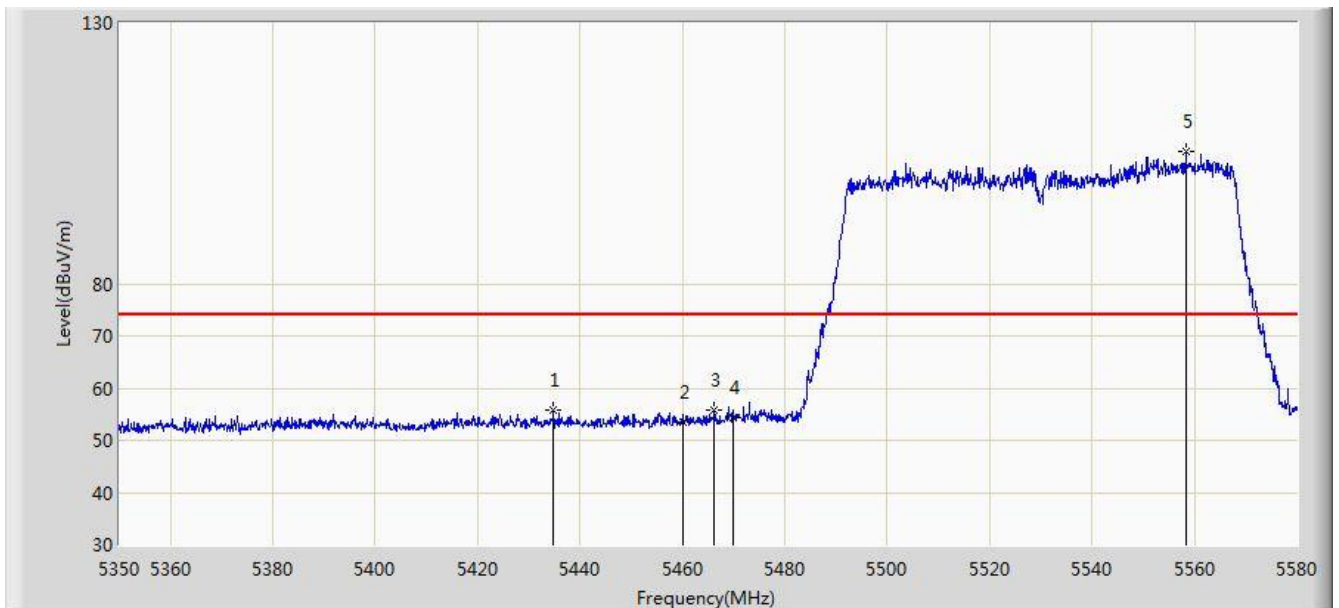


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5434.870        | 55.693                 | 51.584               | -18.307         | 74.000         | 4.109       | PK   |
| 2  |      |      | 5460.000        | 53.499                 | 49.319               | -20.501         | 74.000         | 4.180       | PK   |
| 3  |      |      | 5466.265        | 55.942                 | 51.748               | -18.058         | 74.000         | 4.194       | PK   |
| 4  |      |      | 5470.000        | 54.292                 | 50.090               | -19.708         | 74.000         | 4.202       | PK   |
| 5  |      | *    | 5558.380        | 105.342                | 100.903              | N/A             | N/A            | 4.438       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                 |                          |
|-----------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                       | Time: 2017/09/27 - 16:02 |
| Limit: FCC_Part15.209_RE(3m)                                                                                    | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                     | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                               | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beamforming Mode) |                          |

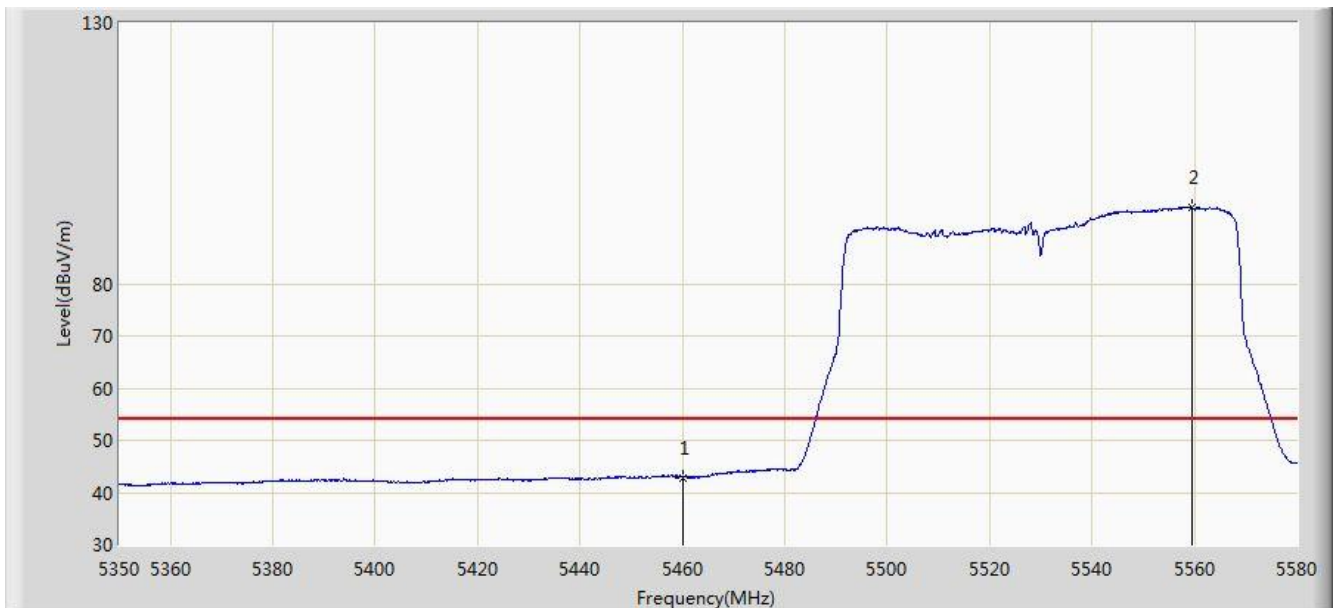


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 42.884                 | 38.704               | -11.116         | 54.000         | 4.180       | AV   |
| 2  |      | *    | 5559.530        | 94.528                 | 90.087               | N/A             | N/A            | 4.441       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

## 7. AC Conducted Emissions Measurement Test Result

|                                |                          |
|--------------------------------|--------------------------|
| Site: SR2                      | Time: 2017/09/13 - 16:58 |
| Limit: FCC_Part15.207_CE       | Engineer: Kevin Ker      |
| Probe: ENV216_101683_Filter On | Polarity: Line           |
| EUT: ACCESS POINT              | Power: AC 120V/60Hz      |
| Test Mode: Mode 4              |                          |

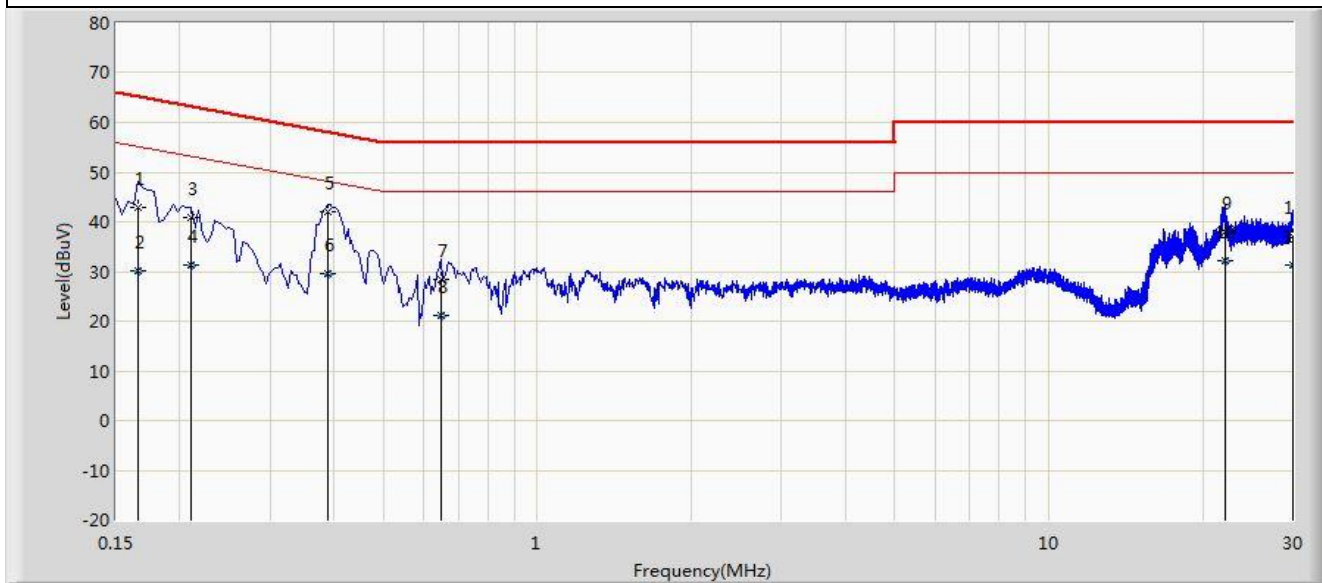


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.166           | 42.775               | 32.687               | -22.383     | 65.158       | 10.087      | QP   |
| 2  |      |      | 0.166           | 30.269               | 20.181               | -24.890     | 55.158       | 10.087      | AV   |
| 3  |      |      | 0.210           | 40.754               | 30.785               | -22.451     | 63.205       | 9.969       | QP   |
| 4  |      |      | 0.210           | 31.313               | 21.344               | -21.893     | 53.205       | 9.969       | AV   |
| 5  |      | *    | 0.390           | 41.942               | 31.865               | -16.122     | 58.064       | 10.077      | QP   |
| 6  |      |      | 0.390           | 29.651               | 19.574               | -18.412     | 48.064       | 10.077      | AV   |
| 7  |      |      | 0.650           | 28.382               | 18.293               | -27.618     | 56.000       | 10.089      | QP   |
| 8  |      |      | 0.650           | 21.167               | 11.078               | -24.833     | 46.000       | 10.089      | AV   |
| 9  |      |      | 22.062          | 38.022               | 27.861               | -21.978     | 60.000       | 10.161      | QP   |
| 10 |      |      | 22.062          | 32.242               | 22.081               | -17.758     | 50.000       | 10.161      | AV   |
| 11 |      |      | 29.962          | 37.164               | 26.894               | -22.836     | 60.000       | 10.270      | QP   |
| 12 |      |      | 29.962          | 31.336               | 21.066               | -18.664     | 50.000       | 10.270      | AV   |

Note: Measure Level (dBuV) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

|                                |                          |
|--------------------------------|--------------------------|
| Site: SR2                      | Time: 2017/09/13 - 17:02 |
| Limit: FCC_Part15.207_CE       | Engineer: Kevin Ker      |
| Probe: ENV216_101683_Filter On | Polarity: Neutral        |
| EUT: ACCESS POINT              | Power: AC 120V/60Hz      |
| Test Mode: Mode 4              |                          |

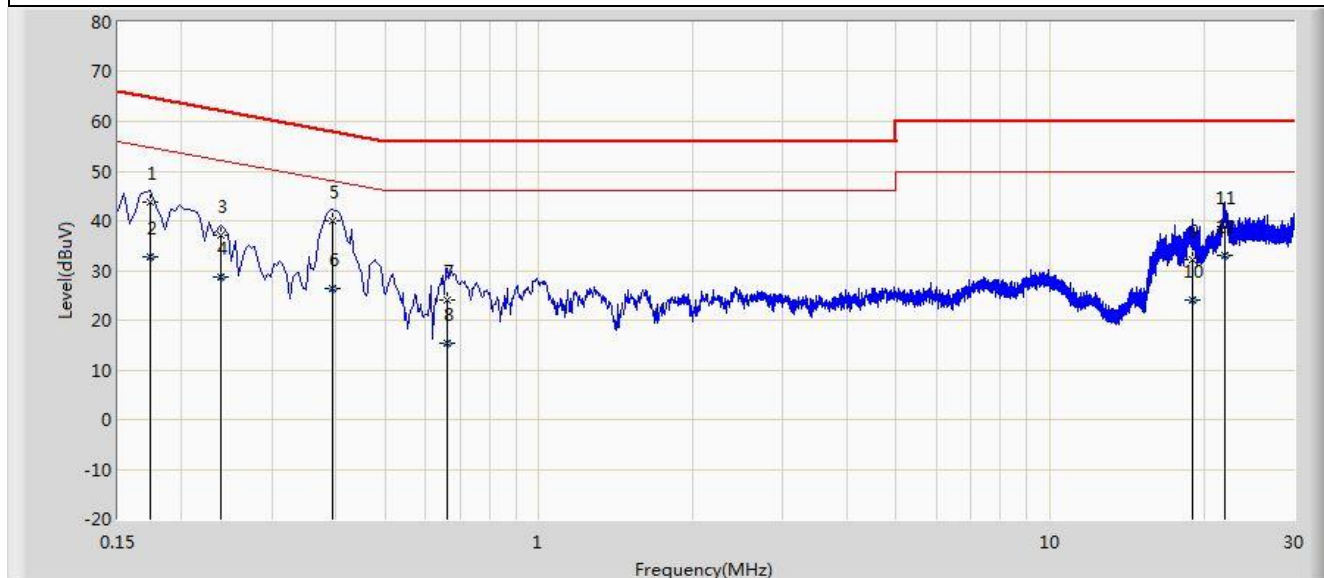

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.174           | 43.808               | 33.752               | -20.959     | 64.767       | 10.057      | QP   |
| 2  |      |      | 0.174           | 32.740               | 22.683               | -22.027     | 54.767       | 10.057      | AV   |
| 3  |      |      | 0.238           | 36.973               | 26.981               | -25.192     | 62.166       | 9.992       | QP   |
| 4  |      |      | 0.238           | 28.603               | 18.611               | -23.563     | 52.166       | 9.992       | AV   |
| 5  |      |      | 0.394           | 40.081               | 29.973               | -17.898     | 57.979       | 10.108      | QP   |
| 6  |      |      | 0.394           | 26.424               | 16.316               | -21.555     | 47.979       | 10.108      | AV   |
| 7  |      |      | 0.662           | 23.991               | 13.895               | -32.009     | 56.000       | 10.096      | QP   |
| 8  |      |      | 0.662           | 15.422               | 5.325                | -30.578     | 46.000       | 10.096      | AV   |
| 9  |      |      | 19.038          | 32.171               | 22.030               | -27.829     | 60.000       | 10.142      | QP   |
| 10 |      |      | 19.038          | 24.140               | 13.998               | -25.860     | 50.000       | 10.142      | AV   |
| 11 |      |      | 21.950          | 38.843               | 28.617               | -21.157     | 60.000       | 10.226      | QP   |
| 12 |      | *    | 21.950          | 33.056               | 22.829               | -16.944     | 50.000       | 10.226      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

The End