


Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at 5320MHz	

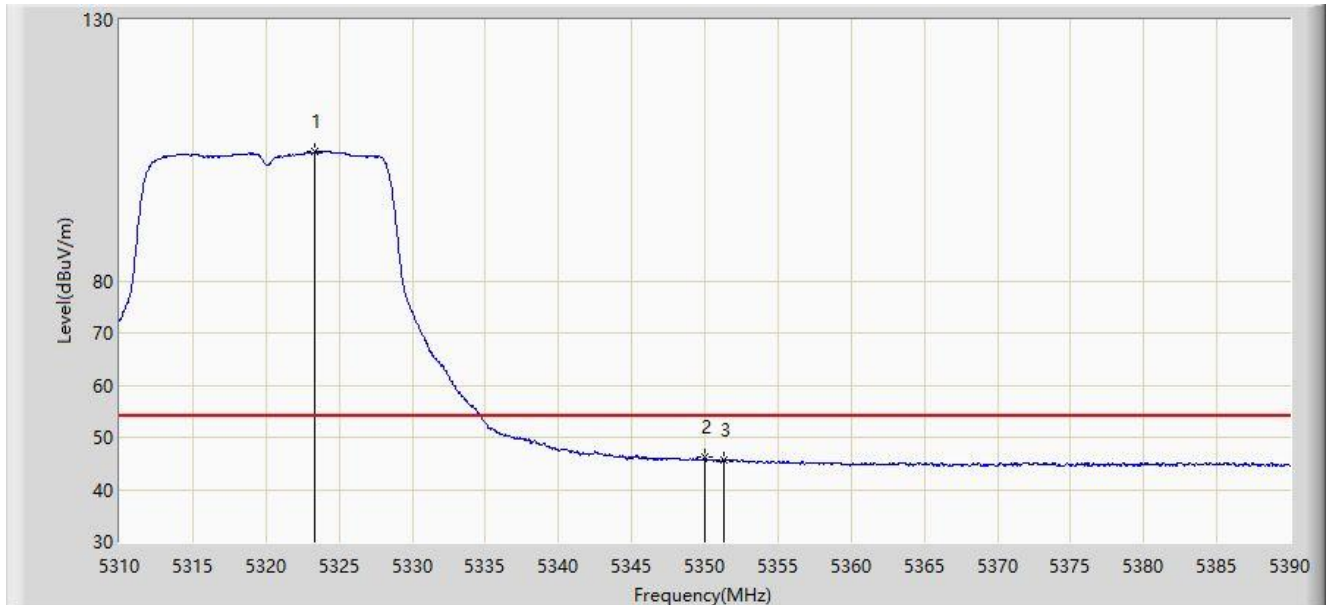


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5323.360	104.727	101.120	N/A	N/A	3.607	AV
2	*	5350.000	46.118	42.590	-7.882	54.000	3.527	AV
3		5351.280	45.779	42.259	-8.221	54.000	3.521	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at 5500MHz	

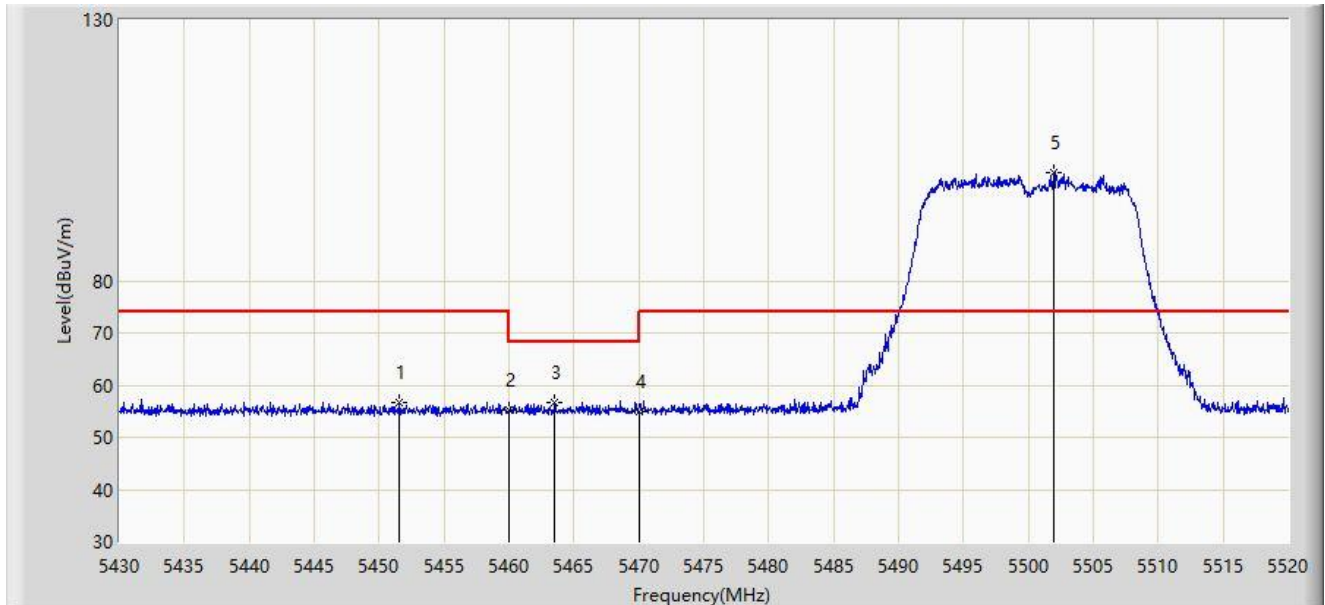


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5451.555	56.586	52.889	-17.414	74.000	3.698	PK
2		5460.000	55.091	51.353	-18.909	74.000	3.738	PK
3	*	5463.525	56.683	52.931	-11.517	68.200	3.751	PK
4		5470.000	55.055	51.278	-13.145	68.200	3.777	PK
5		5502.000	100.596	96.563	N/A	N/A	4.034	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at 5500MHz	

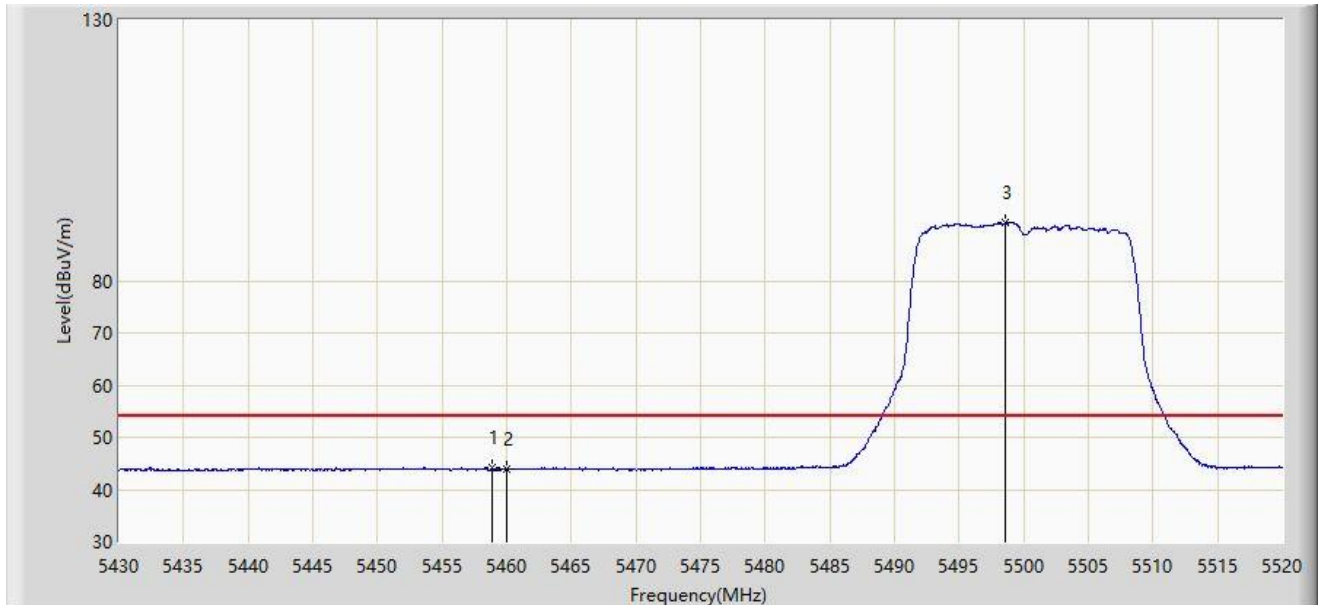


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5458.890	44.069	40.336	-9.931	54.000	3.733	AV
2		5460.000	43.957	40.219	-10.043	54.000	3.738	AV
3		5498.625	91.042	87.013	N/A	N/A	4.028	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at 5500MHz	

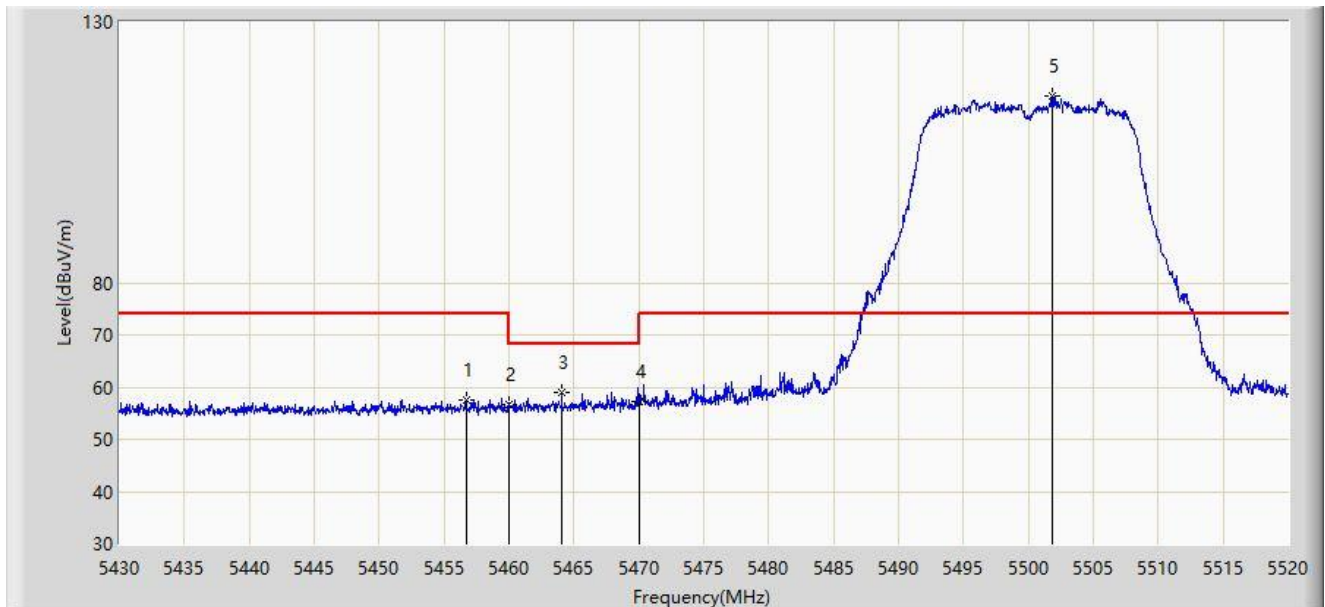


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.685	57.465	53.742	-16.535	74.000	3.723	PK
2		5460.000	56.677	52.939	-17.323	74.000	3.738	PK
3	*	5464.065	58.878	55.124	-9.322	68.200	3.754	PK
4		5470.000	57.135	53.358	-11.065	68.200	3.777	PK
5		5501.820	115.767	111.734	N/A	N/A	4.033	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at 5500MHz	

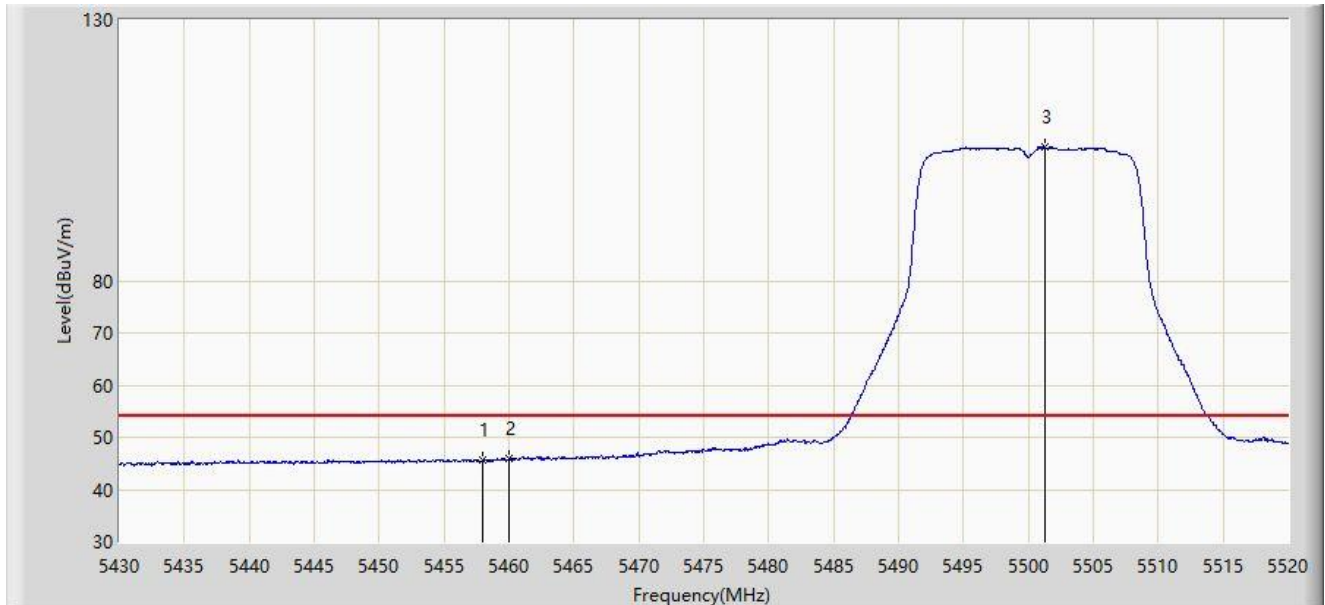


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.990	45.750	42.020	-8.250	54.000	3.730	AV
2	*	5460.000	45.887	42.149	-8.113	54.000	3.738	AV
3		5501.235	105.623	101.591	N/A	N/A	4.031	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at 5700MHz	

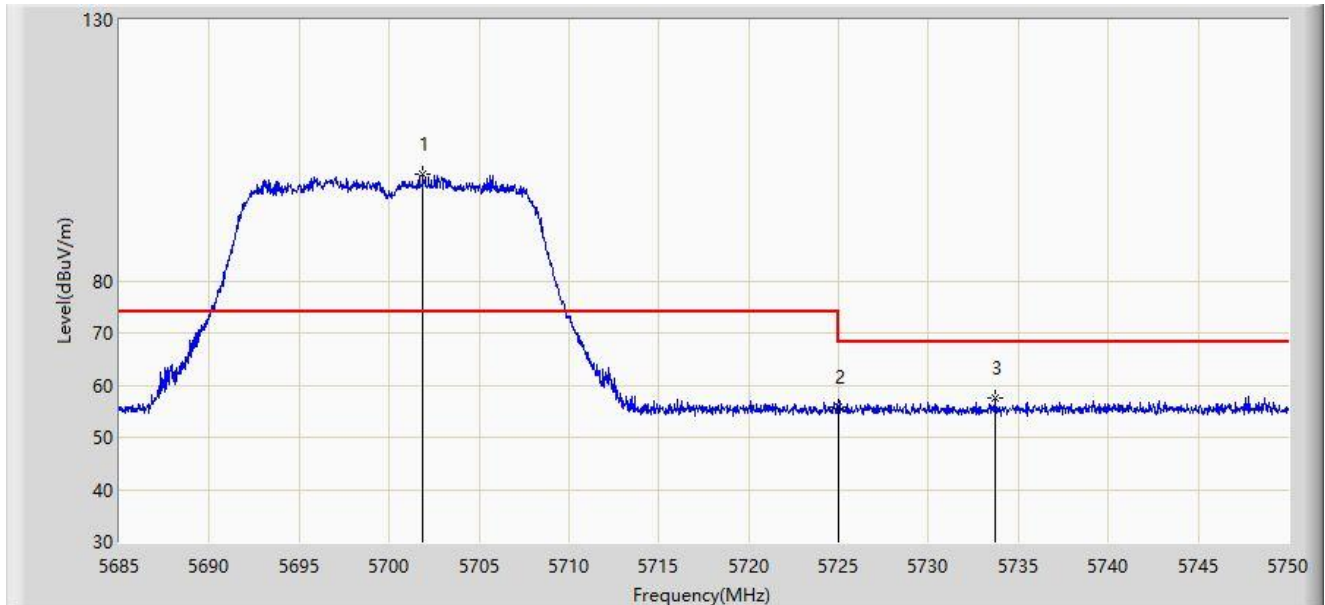


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5701.868	100.465	96.290	N/A	N/A	4.175	PK
2		5725.000	55.671	51.441	-12.529	68.200	4.230	PK
3	*	5733.685	57.430	53.129	-10.770	68.200	4.300	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at 5700MHz	

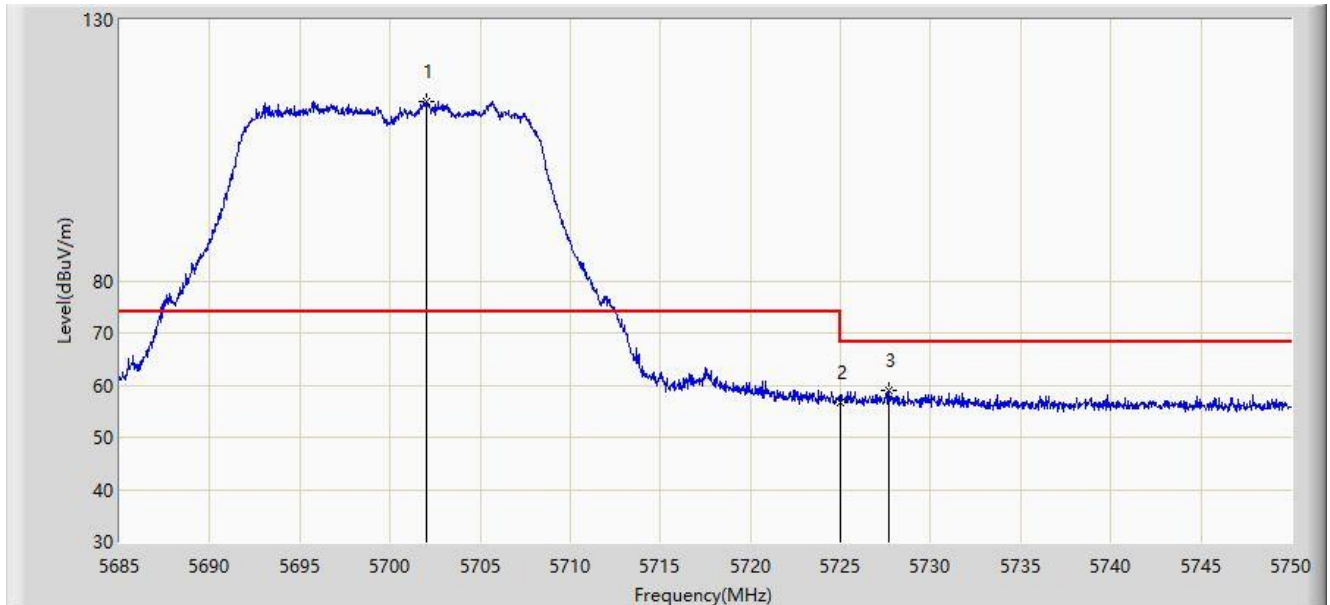


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5702.030	114.415	110.239	N/A	N/A	4.175	PK
2		5725.000	56.809	52.579	-11.391	68.200	4.230	PK
3	*	5727.705	59.018	54.775	-9.182	68.200	4.243	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at 5745MHz	

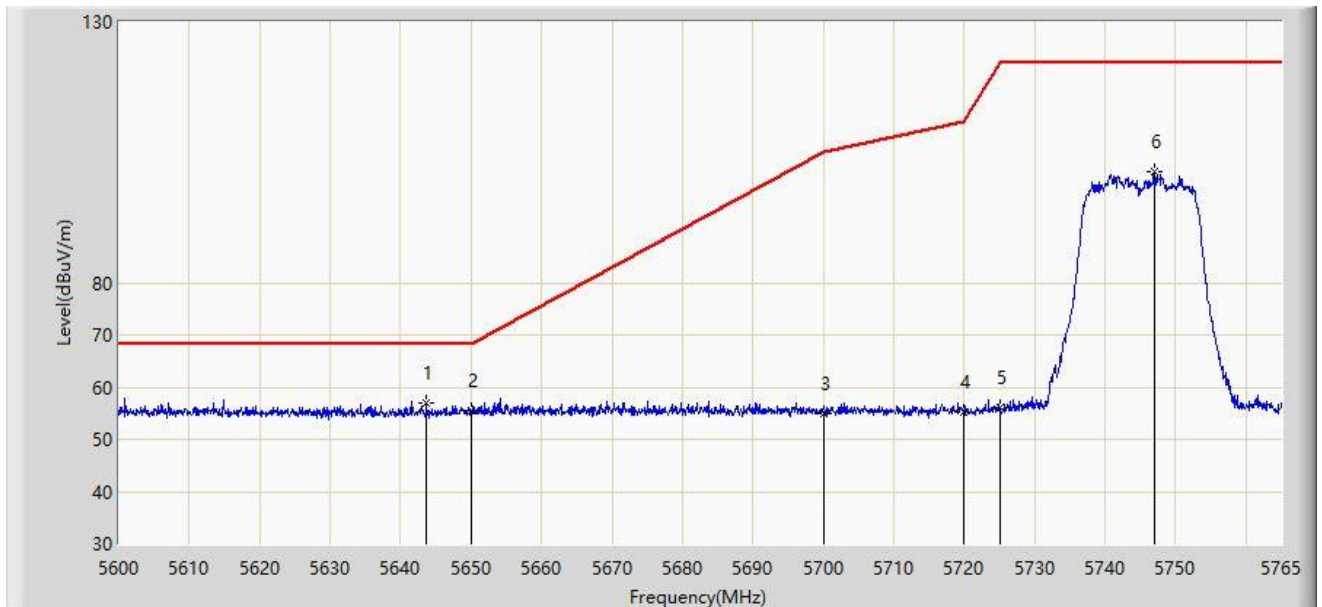


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5643.725	56.991	53.090	-11.209	68.200	3.901	PK
2		5650.000	55.603	51.543	-12.597	68.200	4.060	PK
3		5700.000	54.928	50.760	-50.272	105.200	4.168	PK
4		5720.000	55.087	50.867	-55.713	110.800	4.219	PK
5		5725.000	56.209	51.979	-65.991	122.200	4.230	PK
6		5746.933	101.332	96.925	N/A	N/A	4.407	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at 5745MHz	

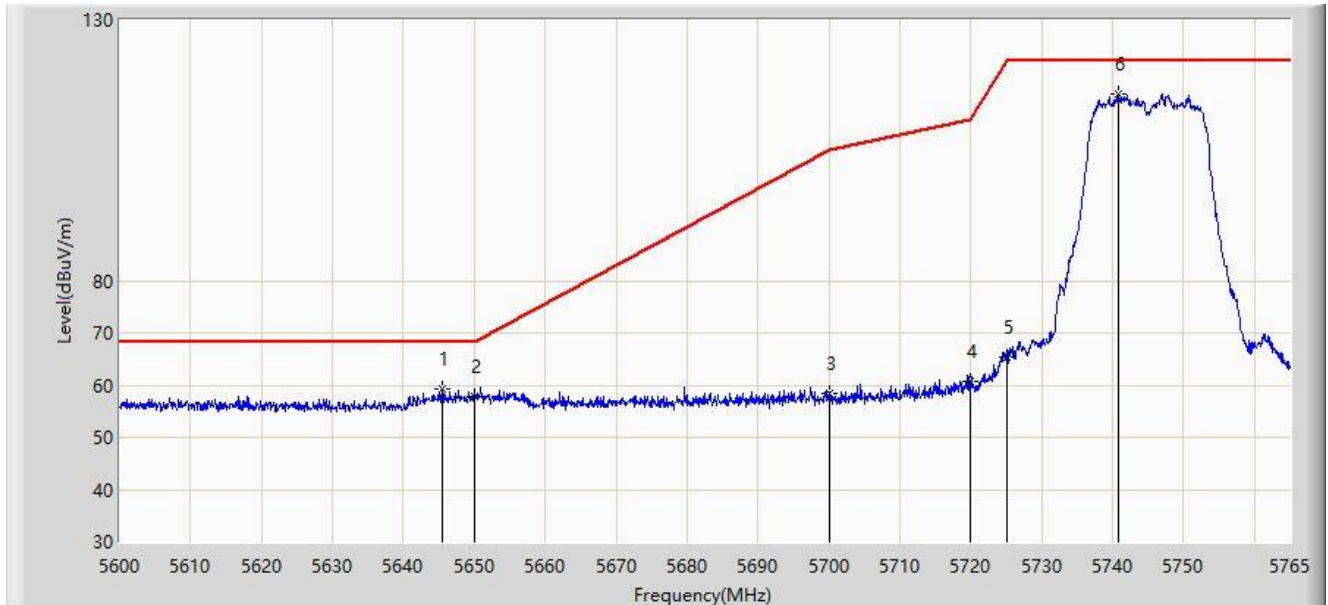


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5645.540	59.344	55.397	-8.856	68.200	3.947	PK
2		5650.000	57.856	53.796	-10.344	68.200	4.060	PK
3		5700.000	58.541	54.373	-46.659	105.200	4.168	PK
4		5720.000	60.597	56.377	-50.203	110.800	4.219	PK
5		5725.000	65.351	61.121	-56.849	122.200	4.230	PK
6		5740.745	115.854	111.485	N/A	N/A	4.369	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at 5825MHz	

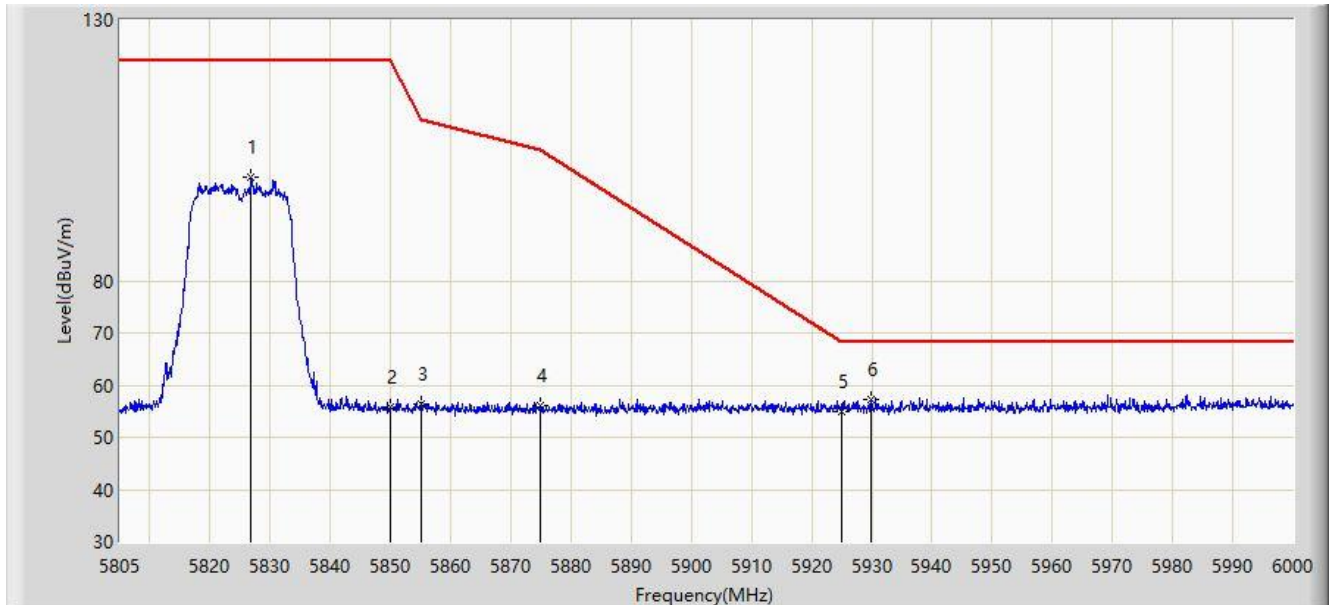


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5826.840	99.819	95.249	N/A	N/A	4.570	PK
2		5850.000	55.653	51.001	-66.547	122.200	4.651	PK
3		5855.000	56.467	51.843	-54.333	110.800	4.624	PK
4		5875.000	56.176	51.632	-49.024	105.200	4.543	PK
5		5925.000	54.970	50.218	-13.230	68.200	4.751	PK
6	*	5929.897	57.314	52.548	-10.886	68.200	4.767	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at 5825MHz	

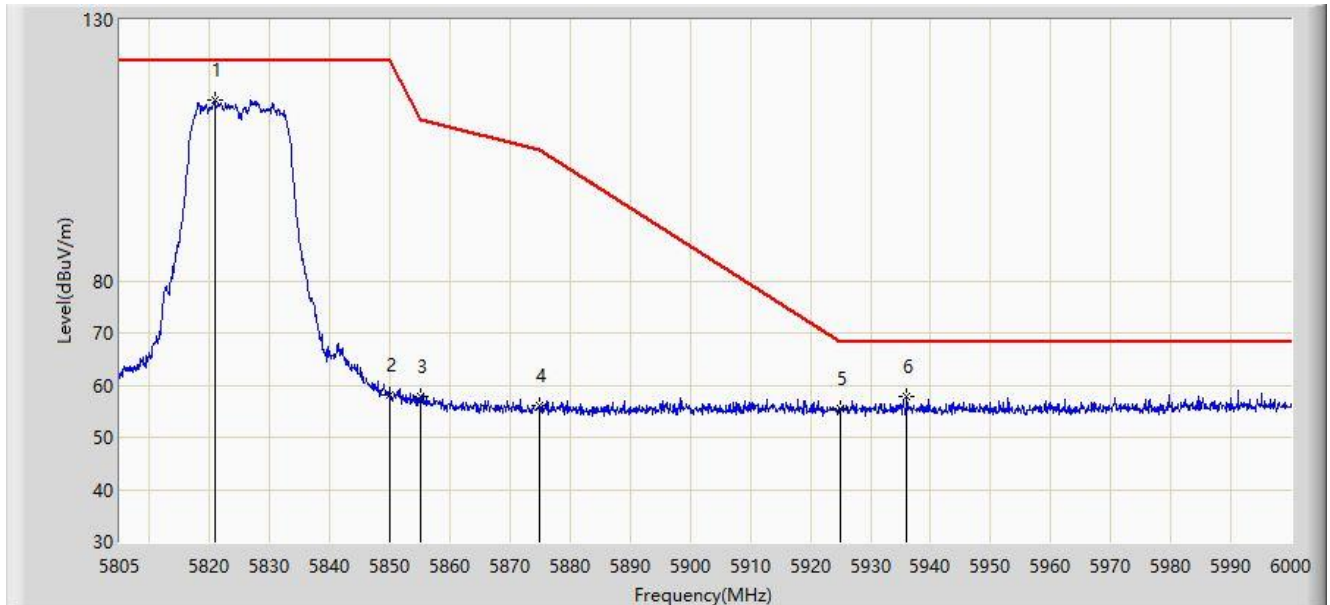


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5820.795	114.636	110.115	N/A	N/A	4.522	PK
2		5850.000	58.138	53.486	-64.062	122.200	4.651	PK
3		5855.000	57.726	53.102	-53.074	110.800	4.624	PK
4		5875.000	56.100	51.556	-49.100	105.200	4.543	PK
5		5925.000	55.490	50.738	-12.710	68.200	4.751	PK
6	*	5936.040	57.702	52.998	-10.498	68.200	4.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

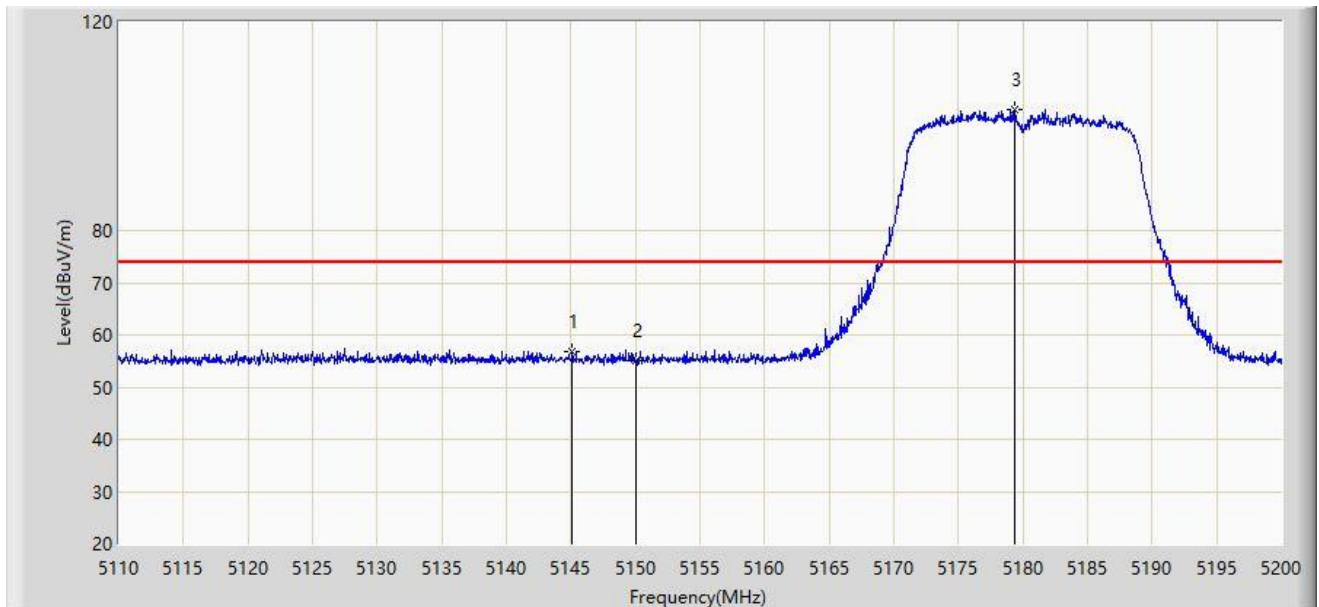


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.100	56.850	53.066	-17.150	74.000	3.784	PK
2		5150.000	54.961	51.189	-19.039	74.000	3.773	PK
3		5179.345	103.162	99.625	N/A	N/A	3.537	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

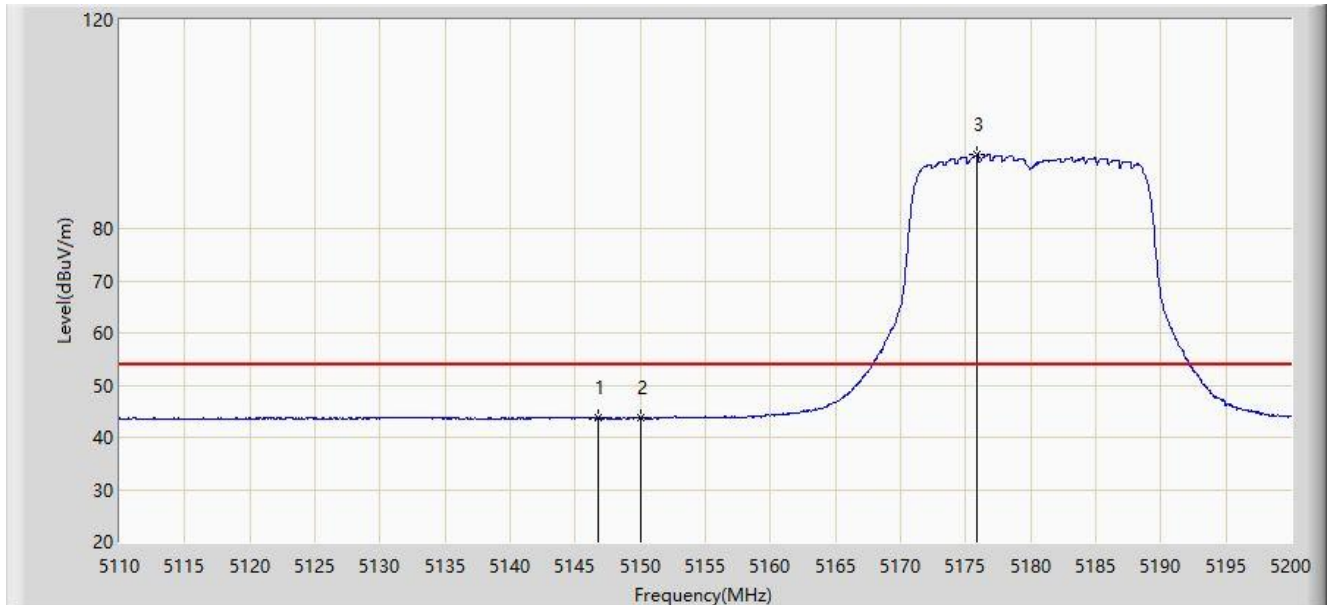


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.720	43.802	40.024	-10.198	54.000	3.778	AV
2		5150.000	43.662	39.890	-10.338	54.000	3.773	AV
3		5175.835	94.073	90.503	N/A	N/A	3.570	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

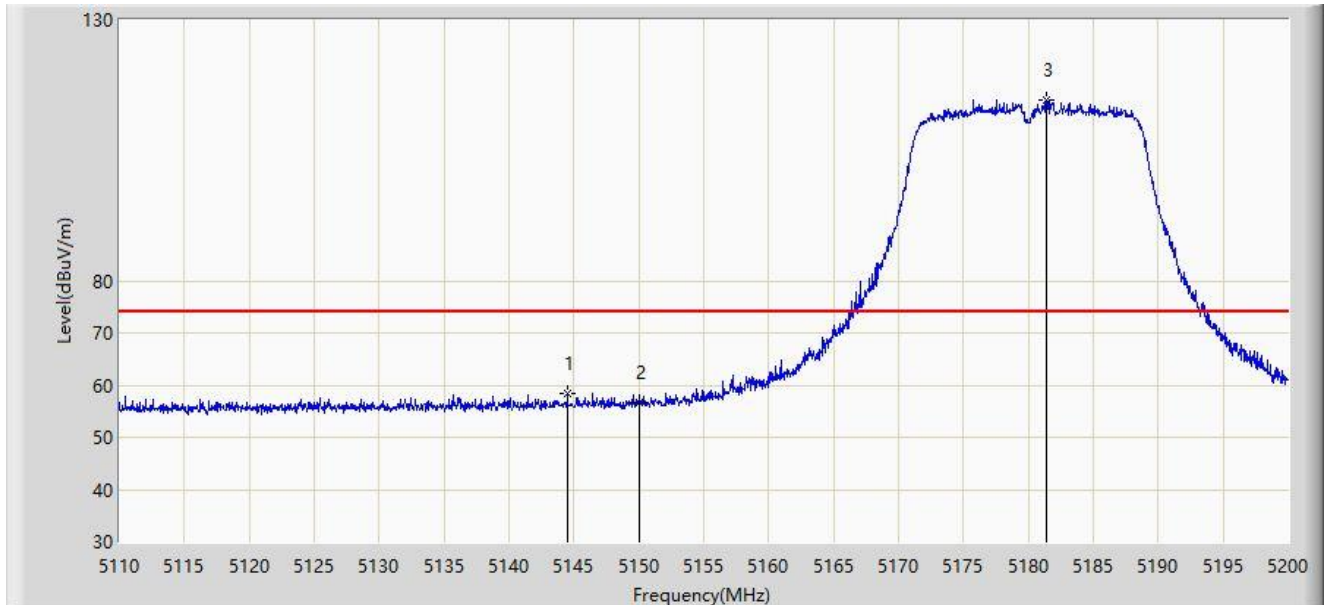


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.515	58.487	54.701	-15.513	74.000	3.786	PK
2		5150.000	56.716	52.944	-17.284	74.000	3.773	PK
3		5181.415	114.699	111.181	N/A	N/A	3.517	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

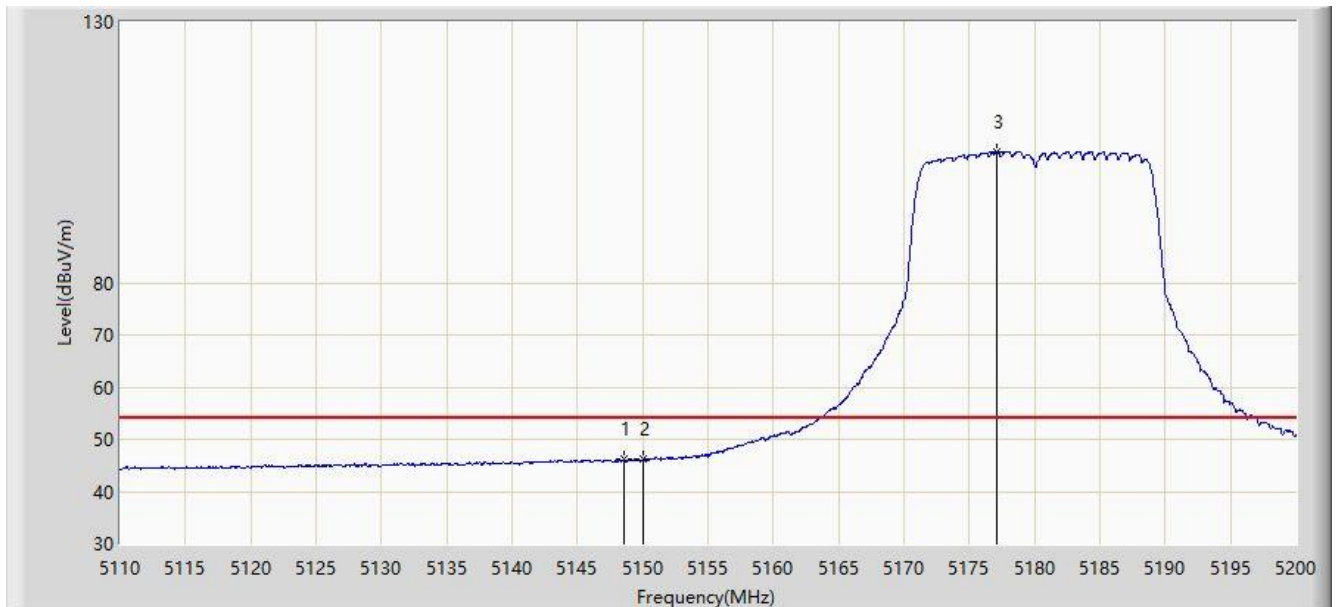


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5148.520	46.107	42.335	-7.893	54.000	3.772	AV
2	*	5150.000	46.172	42.400	-7.828	54.000	3.773	AV
3		5177.140	105.067	101.509	N/A	N/A	3.558	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

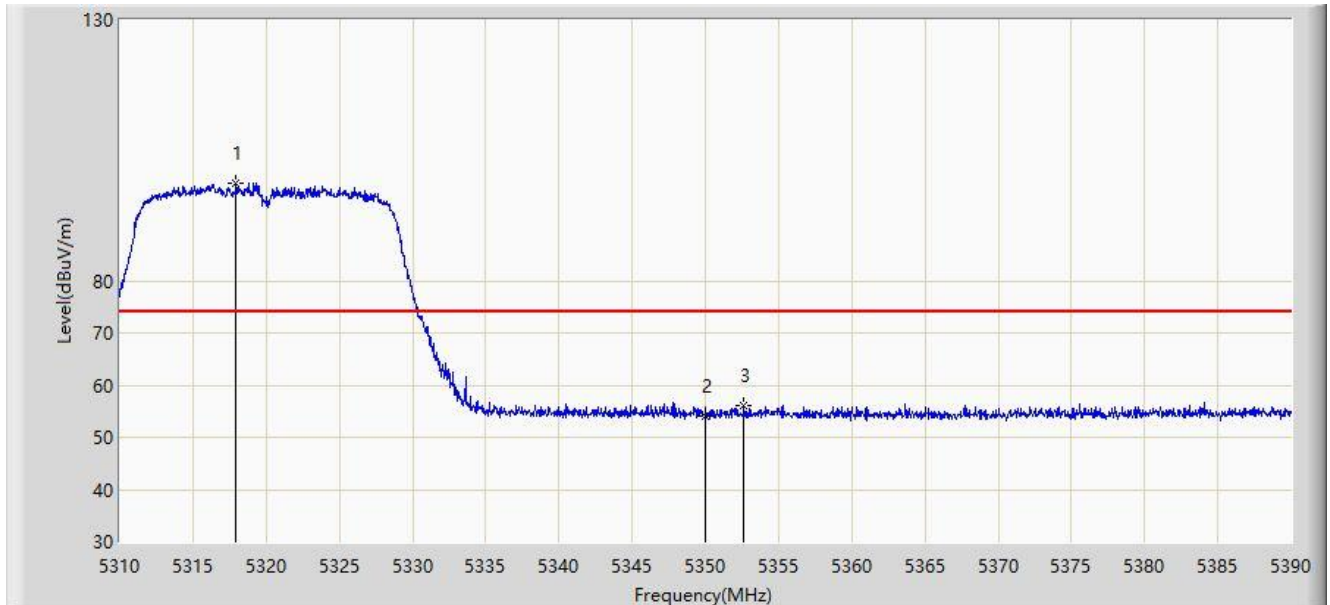


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.920	98.789	95.156	N/A	N/A	3.633	PK
2		5350.000	54.152	50.624	-19.848	74.000	3.527	PK
3	*	5352.640	56.045	52.535	-17.955	74.000	3.510	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

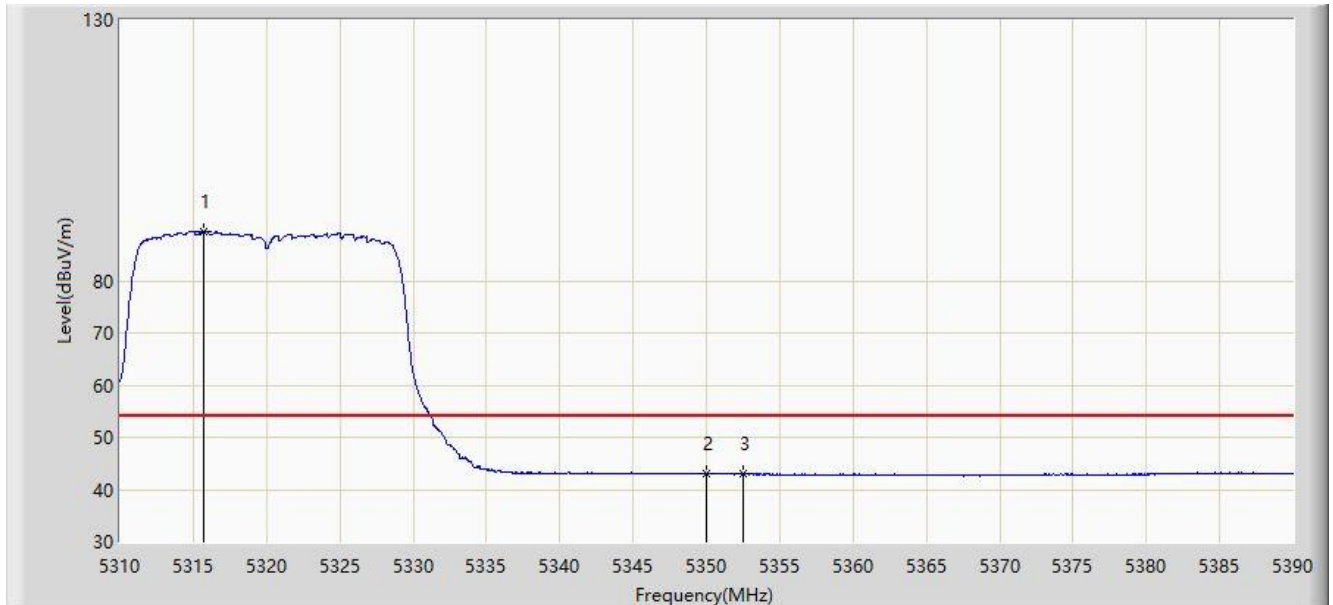


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5315.720	89.488	85.866	N/A	N/A	3.621	AV
2		5350.000	42.996	39.468	-11.004	54.000	3.527	AV
3	*	5352.520	43.022	39.511	-10.978	54.000	3.511	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

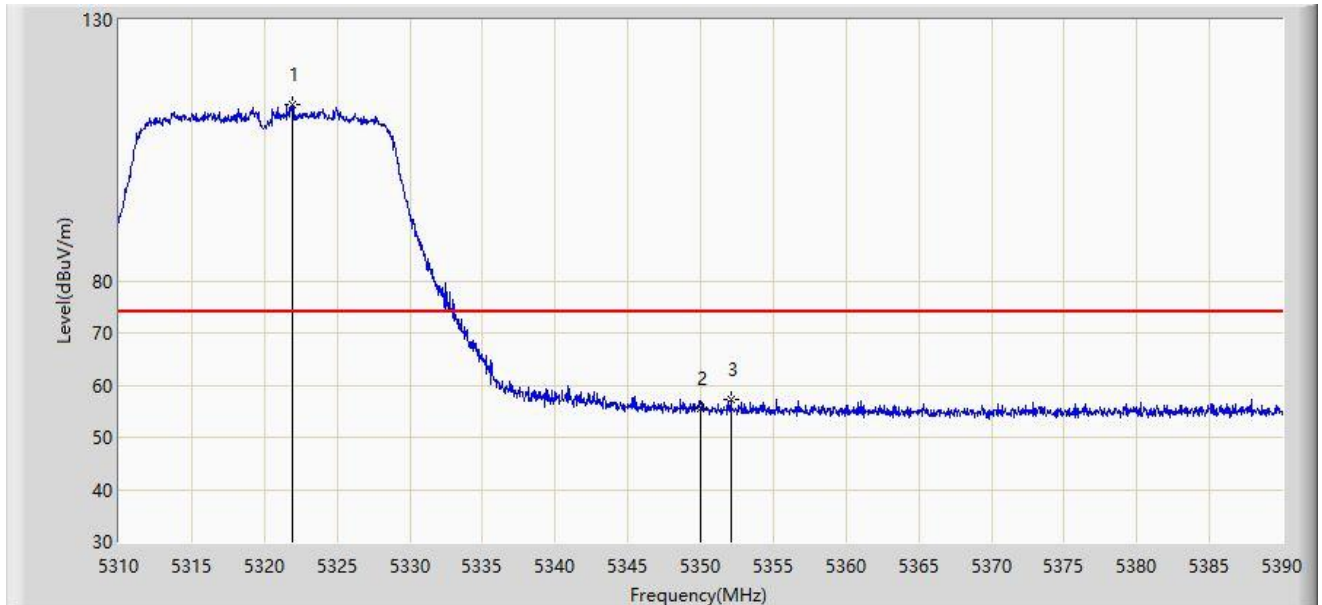


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5321.960	113.798	110.184	N/A	N/A	3.614	PK
2		5350.000	55.396	51.868	-18.604	74.000	3.527	PK
3	*	5352.080	57.205	53.690	-16.795	74.000	3.515	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

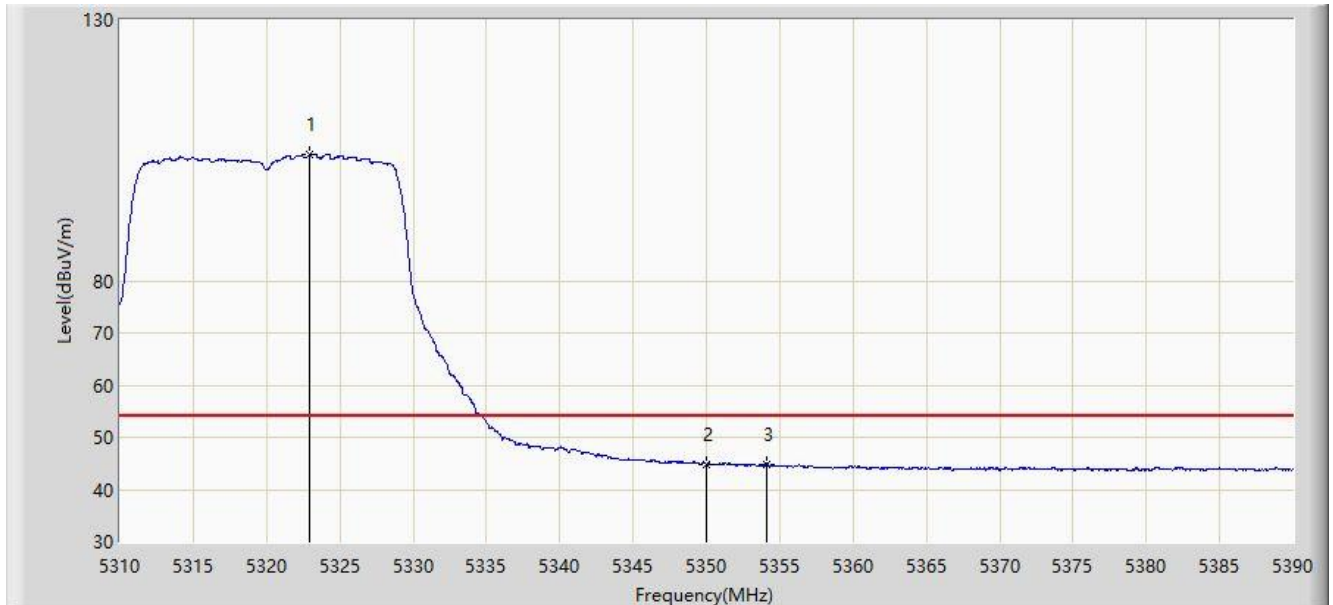


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5322.960	104.089	100.480	N/A	N/A	3.610	AV
2		5350.000	44.828	41.300	-9.172	54.000	3.527	AV
3	*	5354.120	44.905	41.409	-9.095	54.000	3.497	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

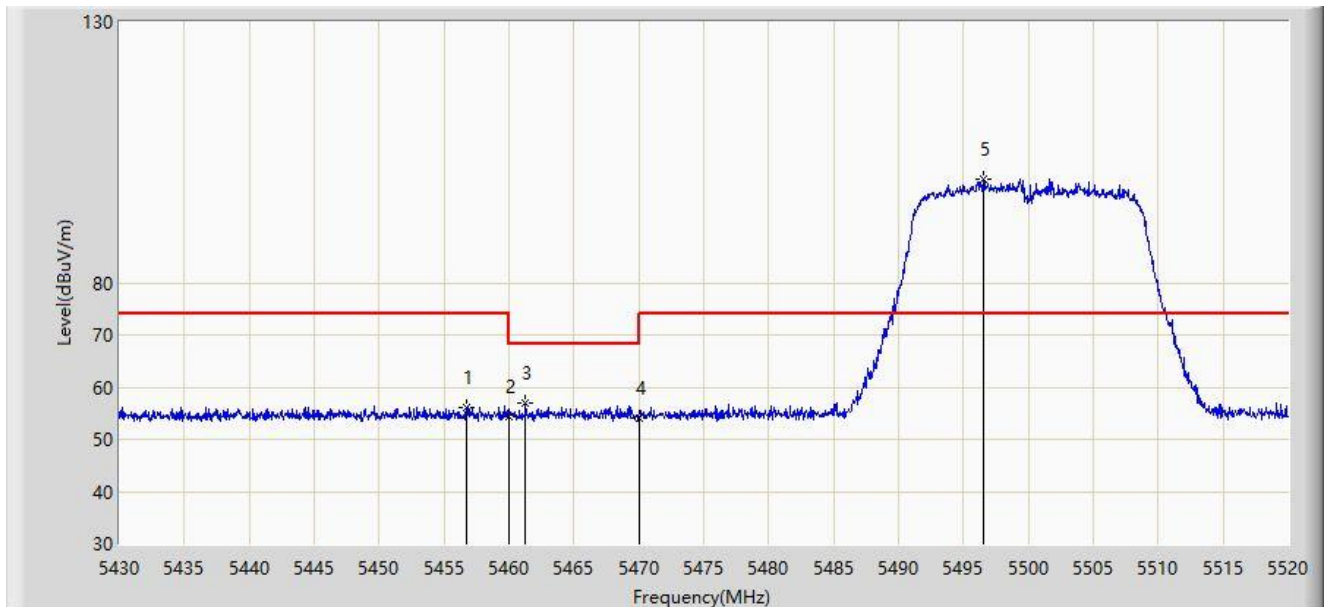


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.685	56.114	52.391	-17.886	74.000	3.723	PK
2		5460.000	54.416	50.678	-19.584	74.000	3.738	PK
3	*	5461.275	56.997	53.254	-11.203	68.200	3.742	PK
4		5470.000	54.099	50.322	-14.101	68.200	3.777	PK
5		5496.510	99.750	95.724	N/A	N/A	4.026	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

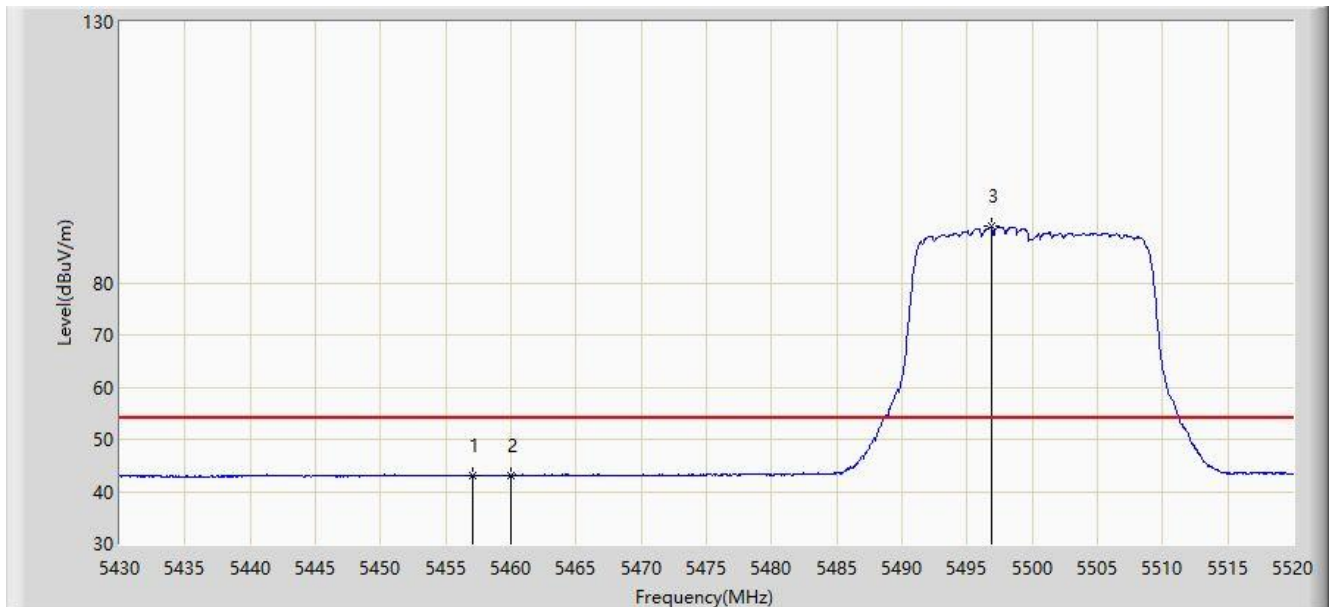


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5457.090	43.153	39.427	-10.847	54.000	3.726	AV
2		5460.000	43.111	39.373	-10.889	54.000	3.738	AV
3		5496.915	90.732	86.706	N/A	N/A	4.026	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

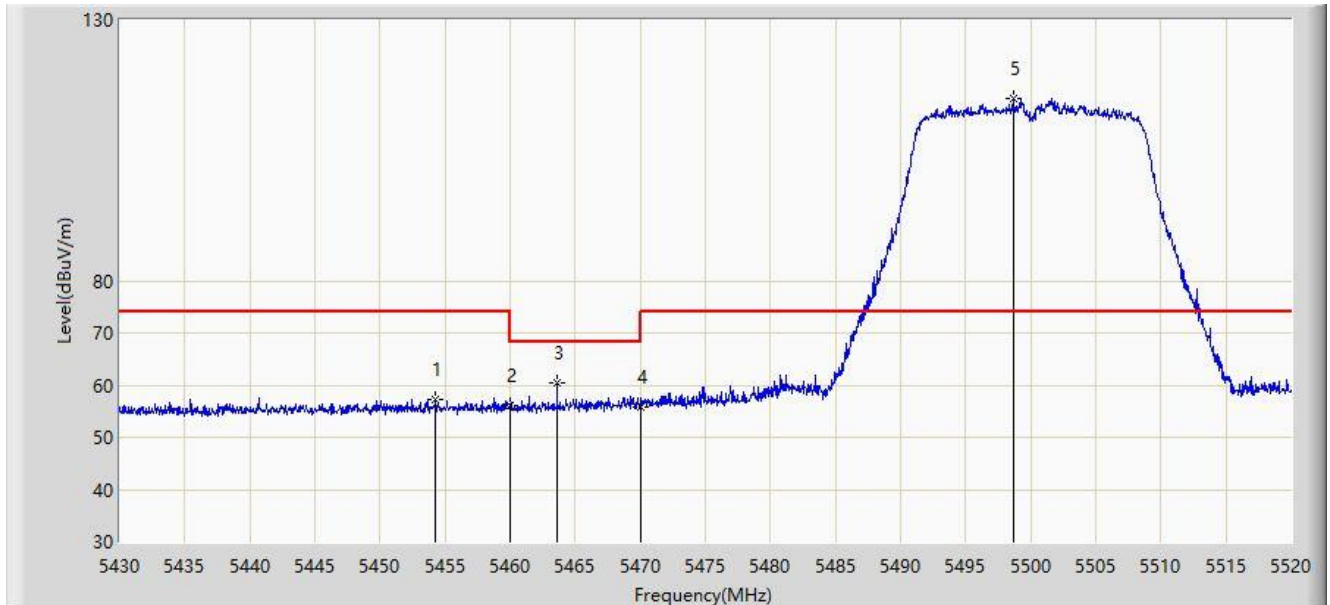


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5454.300	57.185	53.485	-16.815	74.000	3.700	PK
2		5460.000	56.004	52.266	-17.996	74.000	3.738	PK
3	*	5463.615	60.309	56.557	-7.891	68.200	3.752	PK
4		5470.000	55.887	52.110	-12.313	68.200	3.777	PK
5		5498.670	115.045	111.016	N/A	N/A	4.028	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

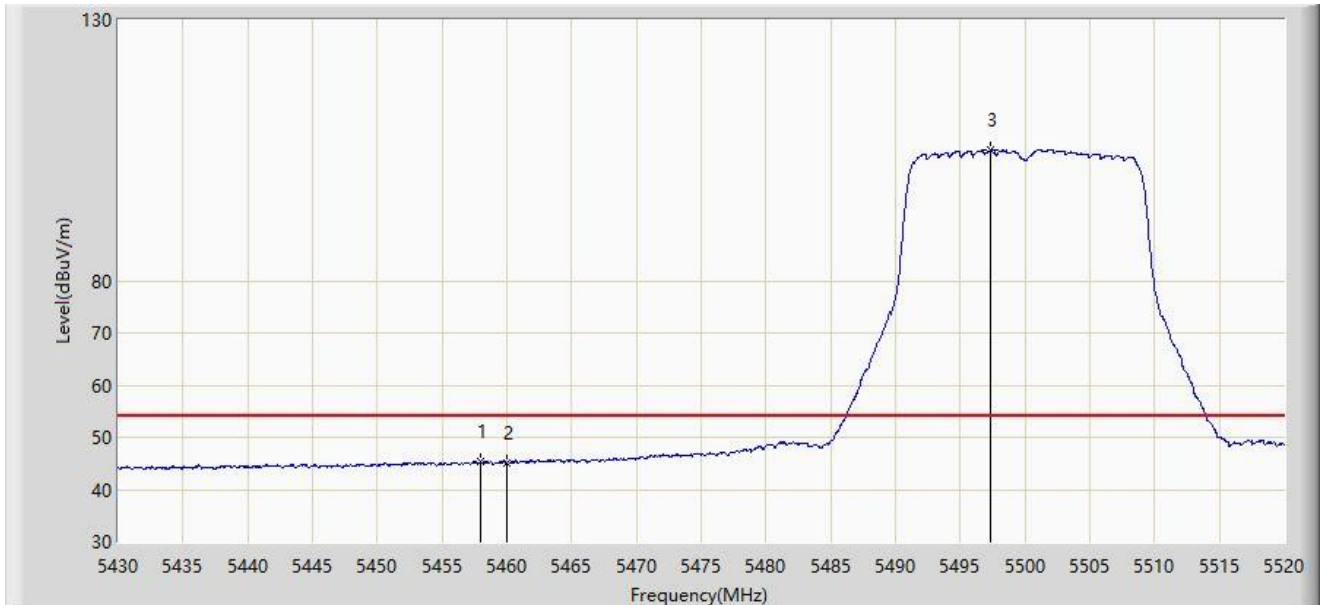


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5457.945	45.221	41.491	-8.779	54.000	3.730	AV
2		5460.000	45.115	41.377	-8.885	54.000	3.738	AV
3		5497.320	105.004	100.977	N/A	N/A	4.027	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

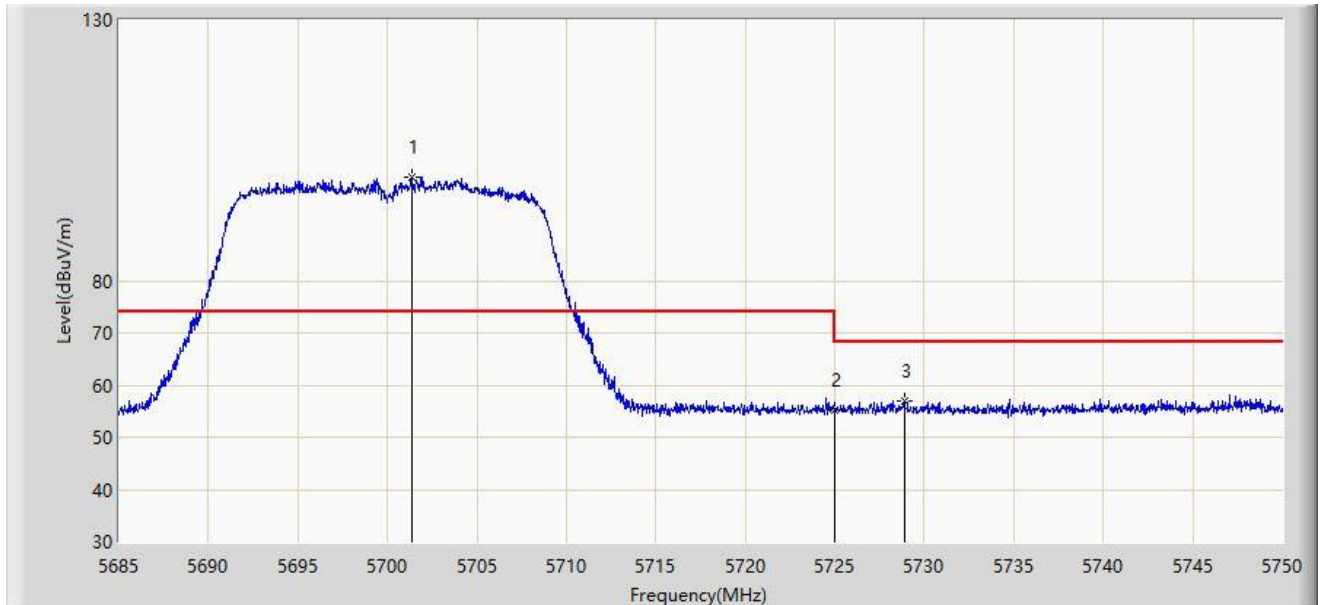


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5701.348	99.751	95.578	N/A	N/A	4.173	PK
2		5725.000	55.118	50.888	-13.082	68.200	4.230	PK
3	*	5728.875	56.921	52.667	-11.279	68.200	4.255	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

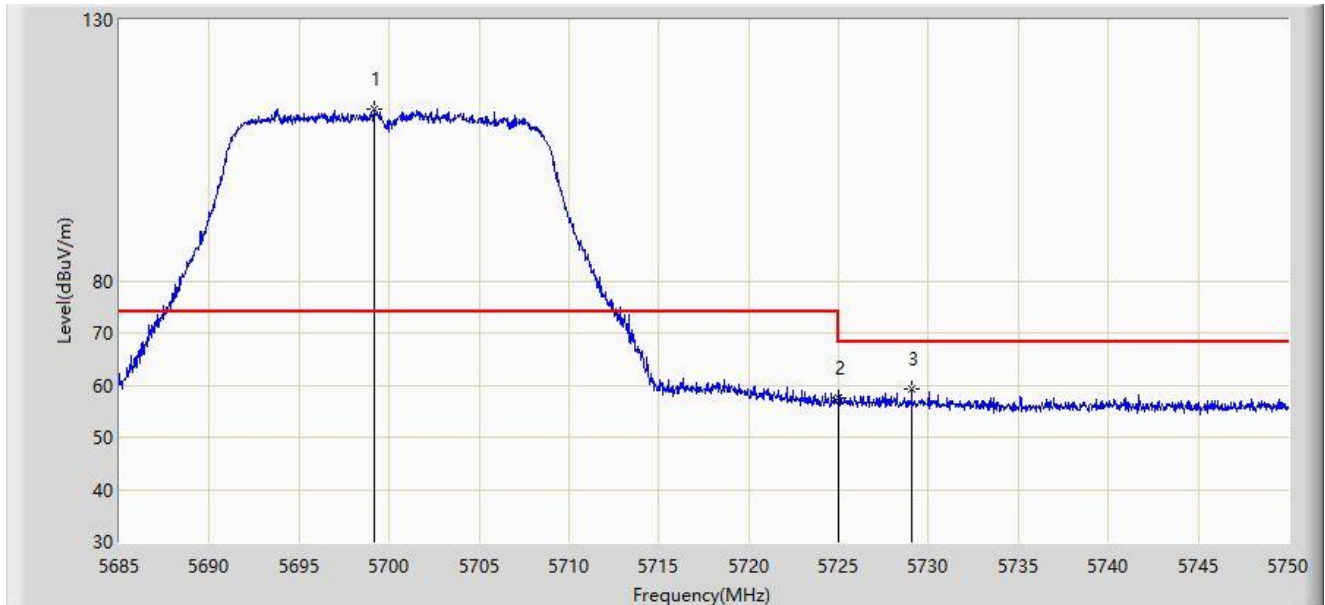


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5699.138	112.870	108.705	N/A	N/A	4.165	PK
2		5725.000	57.676	53.446	-10.524	68.200	4.230	PK
3	*	5729.070	59.233	54.977	-8.967	68.200	4.256	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

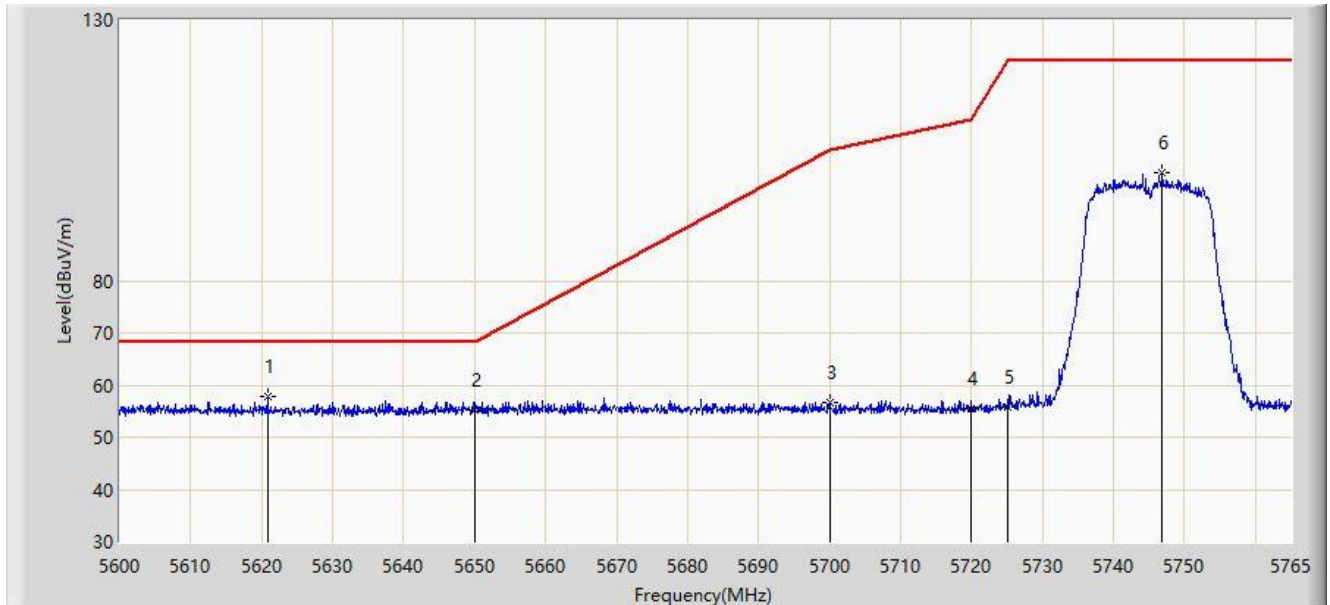


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5620.790	57.886	54.043	-10.314	68.200	3.843	PK
2		5650.000	55.162	51.102	-13.038	68.200	4.060	PK
3		5700.000	56.529	52.361	-48.671	105.200	4.168	PK
4		5720.000	55.430	51.210	-55.370	110.800	4.219	PK
5		5725.000	55.763	51.533	-66.437	122.200	4.230	PK
6		5746.850	100.824	96.417	N/A	N/A	4.407	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

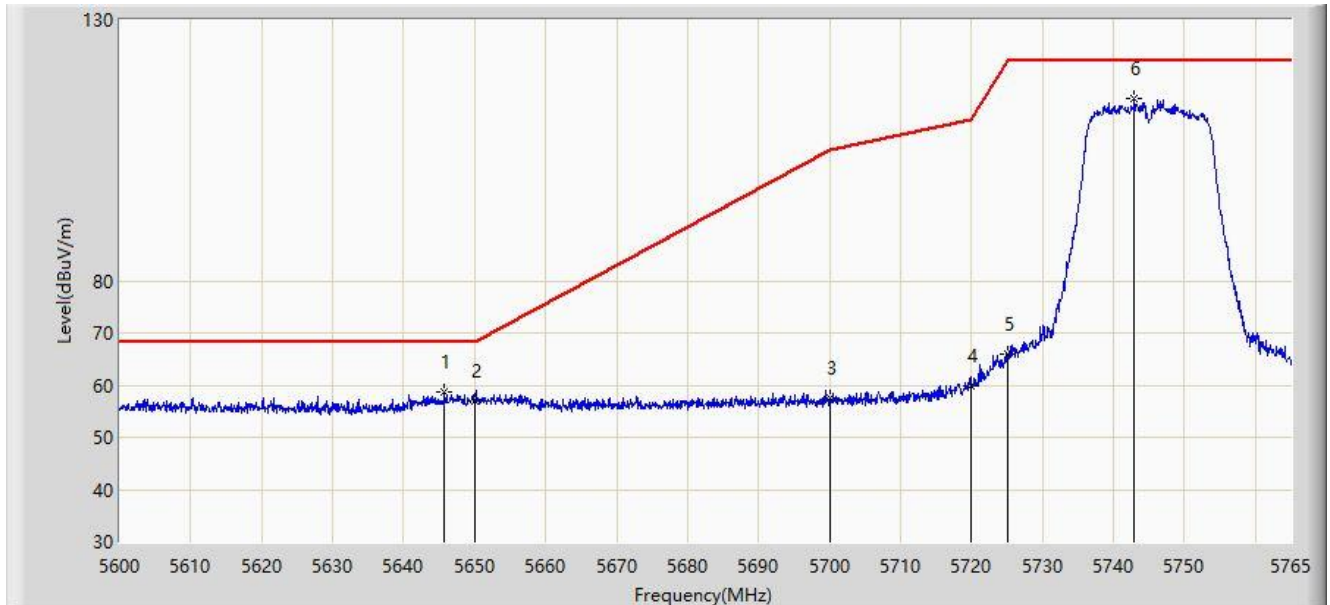


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5645.705	58.562	54.610	-9.638	68.200	3.951	PK
2		5650.000	56.917	52.857	-11.283	68.200	4.060	PK
3		5700.000	57.562	53.394	-47.638	105.200	4.168	PK
4		5720.000	59.944	55.724	-50.856	110.800	4.219	PK
5		5725.000	65.877	61.647	-56.323	122.200	4.230	PK
6		5742.890	114.789	110.399	N/A	N/A	4.390	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

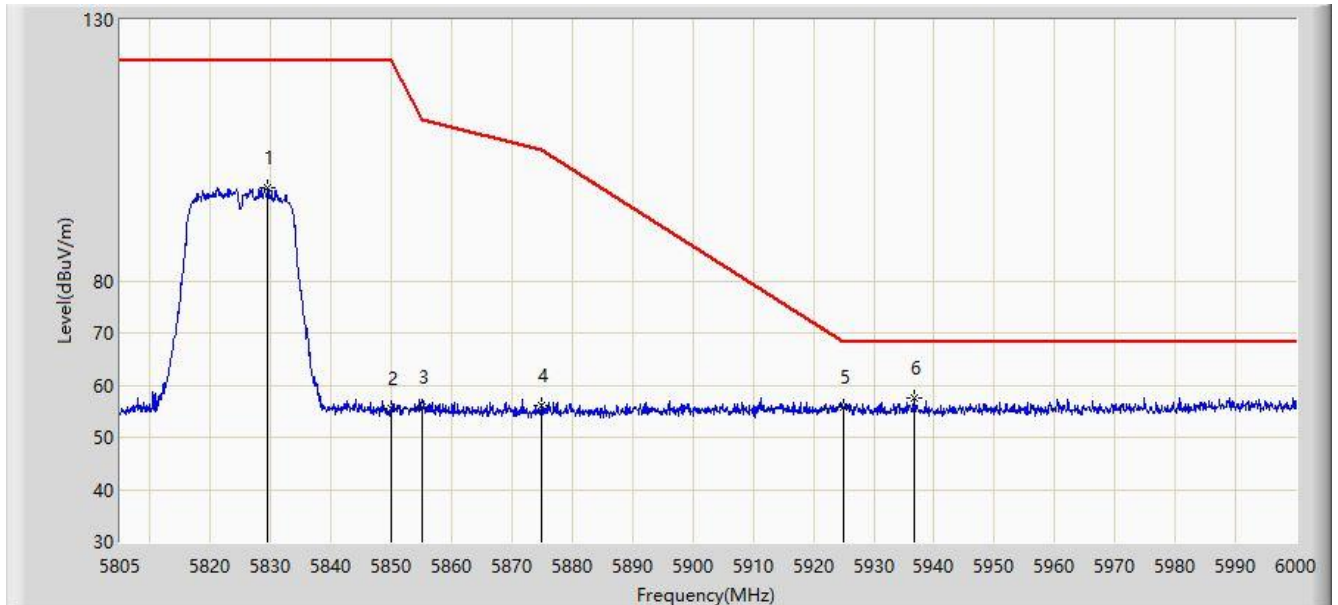


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5829.473	97.904	93.327	N/A	N/A	4.577	PK
2		5850.000	55.449	50.797	-66.751	122.200	4.651	PK
3		5855.000	55.653	51.029	-55.147	110.800	4.624	PK
4		5875.000	56.187	51.643	-49.013	105.200	4.543	PK
5		5925.000	55.670	50.918	-12.530	68.200	4.751	PK
6	*	5936.820	57.621	52.925	-10.579	68.200	4.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

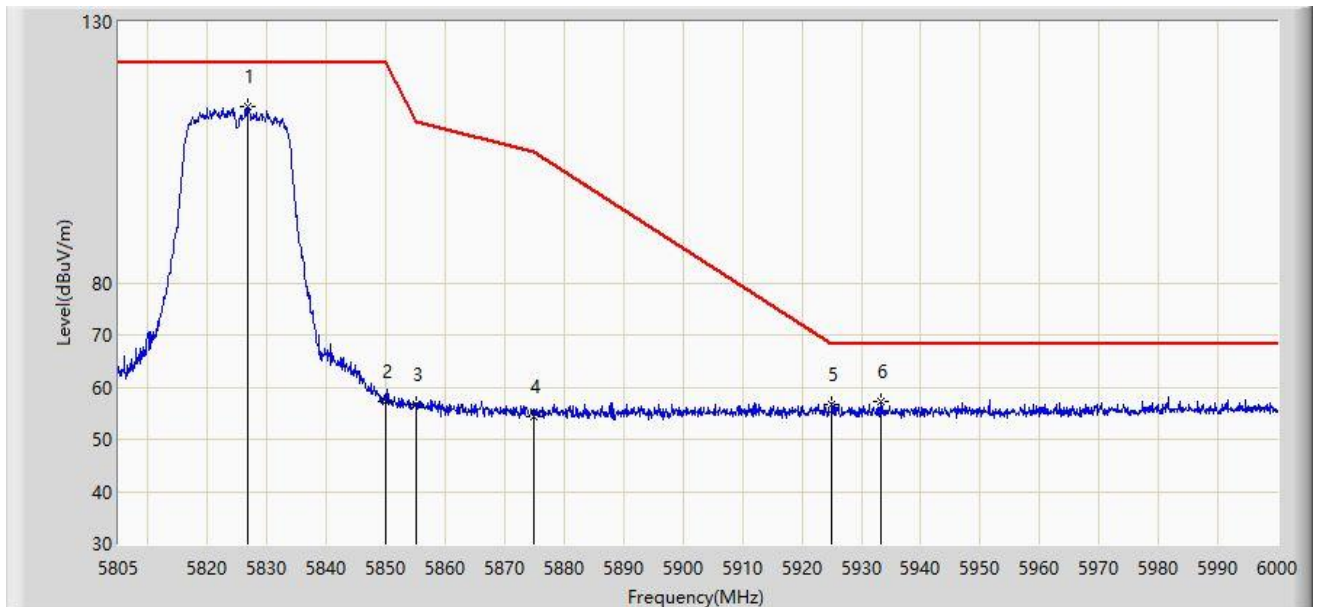


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5826.645	113.735	109.166	N/A	N/A	4.568	PK
2		5850.000	57.310	52.658	-64.890	122.200	4.651	PK
3		5855.000	56.542	51.918	-54.258	110.800	4.624	PK
4		5875.000	54.259	49.715	-50.941	105.200	4.543	PK
5		5925.000	56.557	51.805	-11.643	68.200	4.751	PK
6	*	5933.212	57.262	52.529	-10.938	68.200	4.733	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

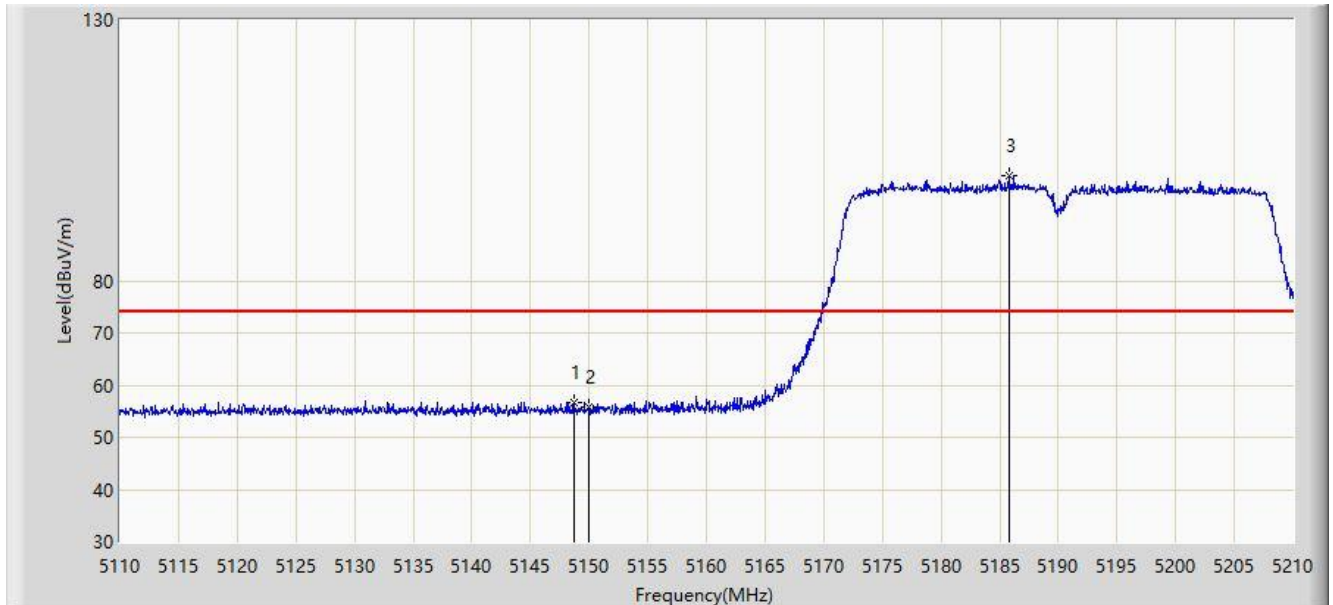


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.700	56.638	52.866	-17.362	74.000	3.772	PK
2		5150.000	55.790	52.018	-18.210	74.000	3.773	PK
3		5185.800	100.065	96.549	N/A	N/A	3.516	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

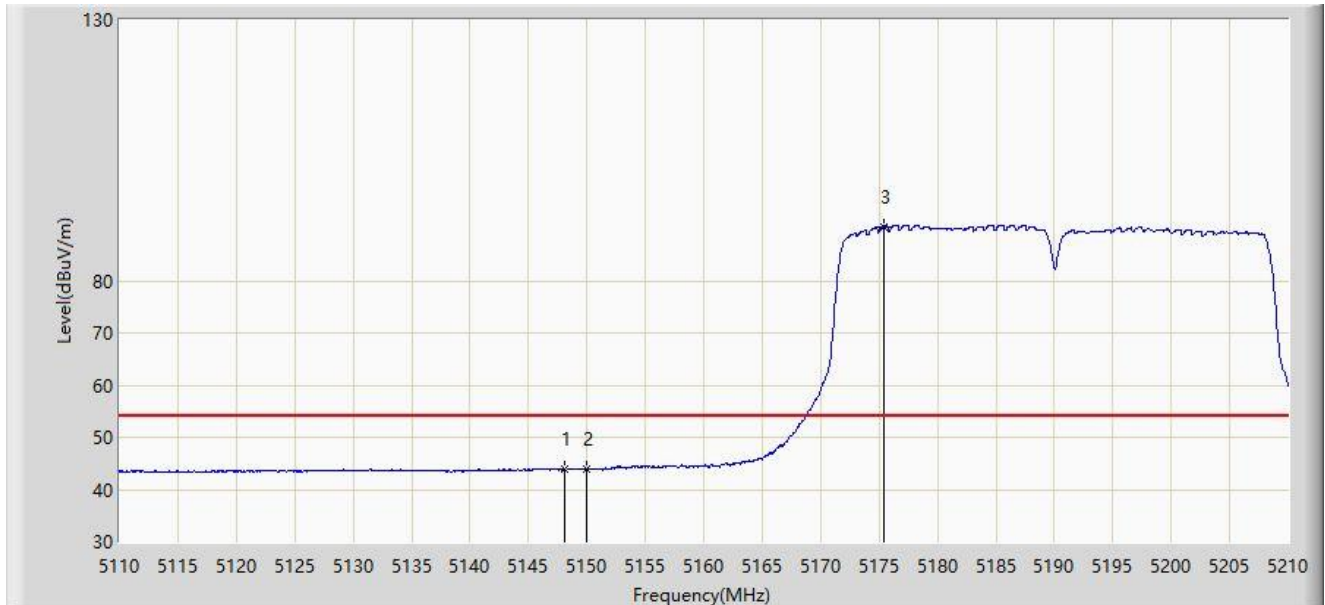


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.100	43.939	40.167	-10.061	54.000	3.772	AV
2		5150.000	43.935	40.163	-10.065	54.000	3.773	AV
3		5175.400	90.416	86.842	N/A	N/A	3.574	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

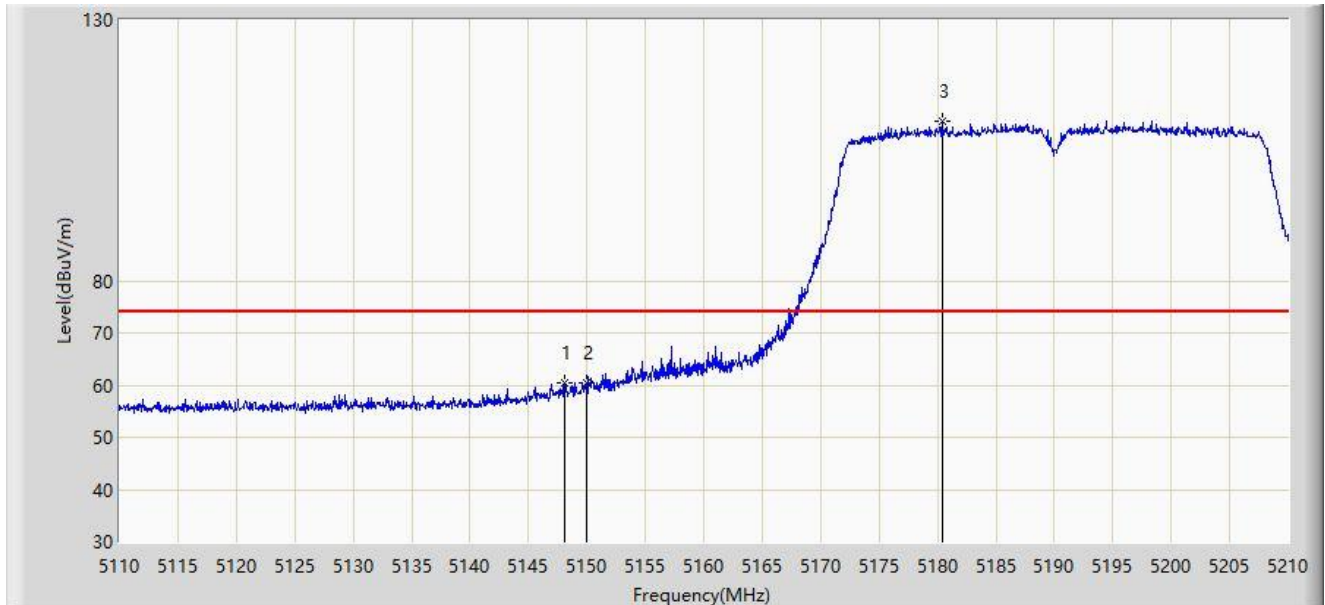


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5148.050	60.331	56.559	-13.669	74.000	3.772	PK
2	*	5150.000	60.479	56.707	-13.521	74.000	3.773	PK
3		5180.400	110.689	107.162	N/A	N/A	3.527	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

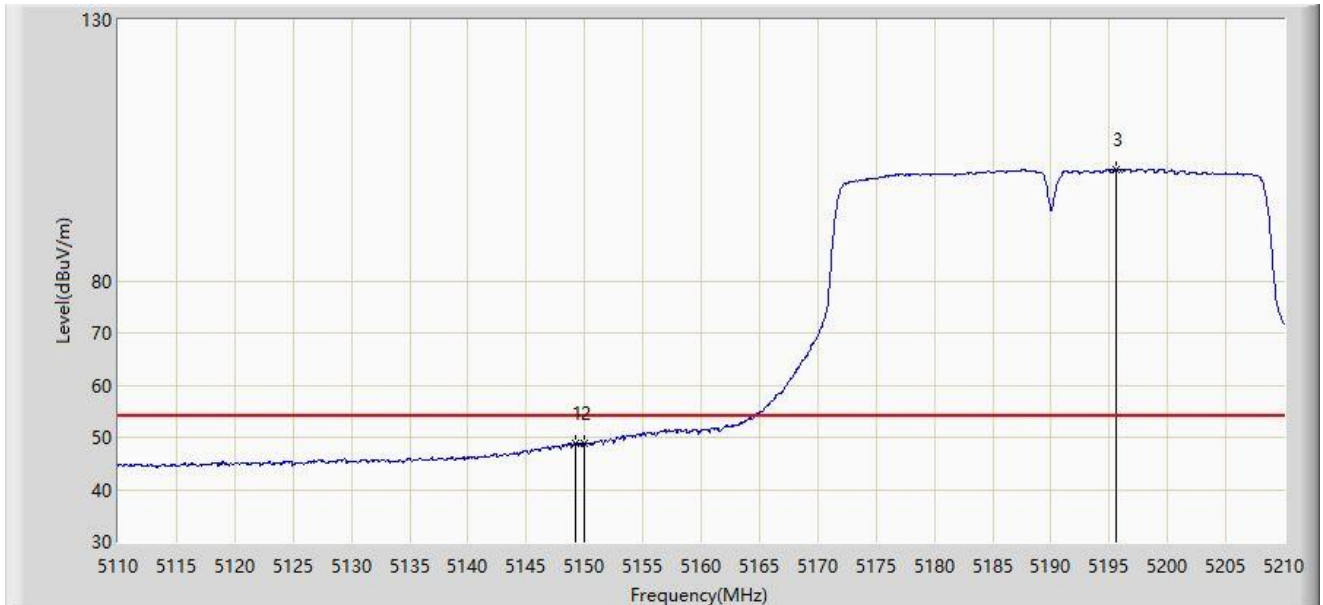


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.200	48.941	45.169	-5.059	54.000	3.772	AV
2		5150.000	48.811	45.039	-5.189	54.000	3.773	AV
3		5195.550	101.299	97.833	N/A	N/A	3.466	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

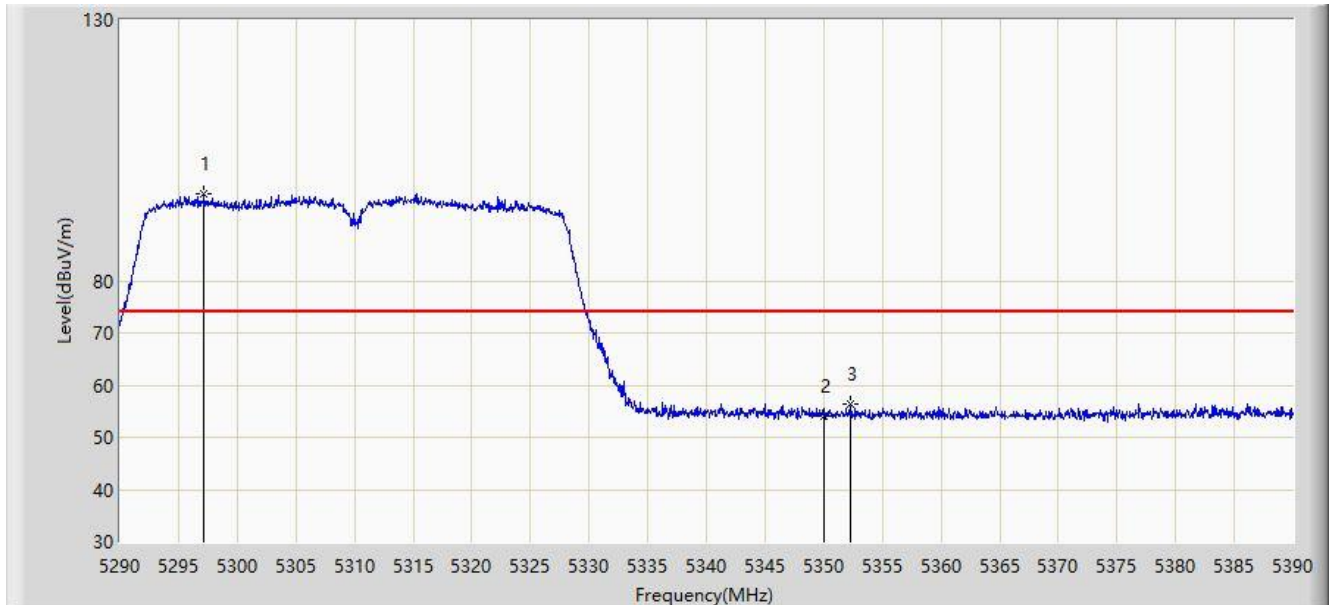


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5297.150	96.785	93.237	N/A	N/A	3.547	PK
2		5350.000	54.068	50.540	-19.932	74.000	3.527	PK
3	*	5352.250	56.386	52.872	-17.614	74.000	3.515	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

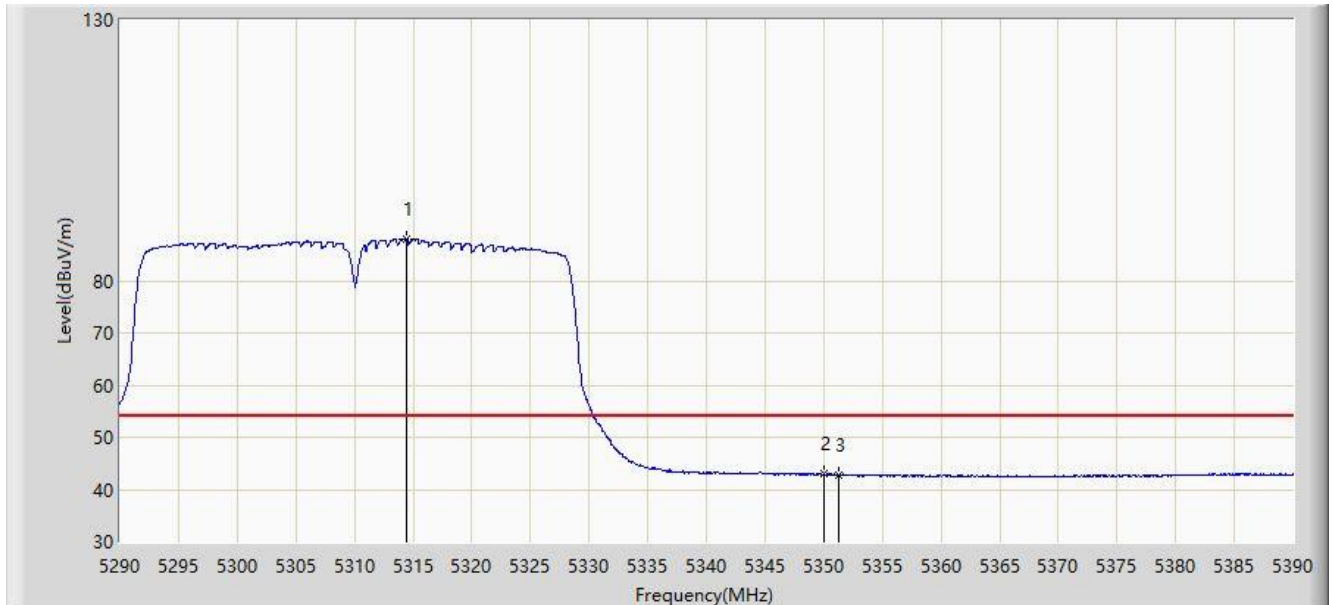


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5314.400	87.932	84.317	N/A	N/A	3.615	AV
2	*	5350.000	43.024	39.496	-10.976	54.000	3.527	AV
3		5351.300	42.867	39.347	-11.133	54.000	3.521	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

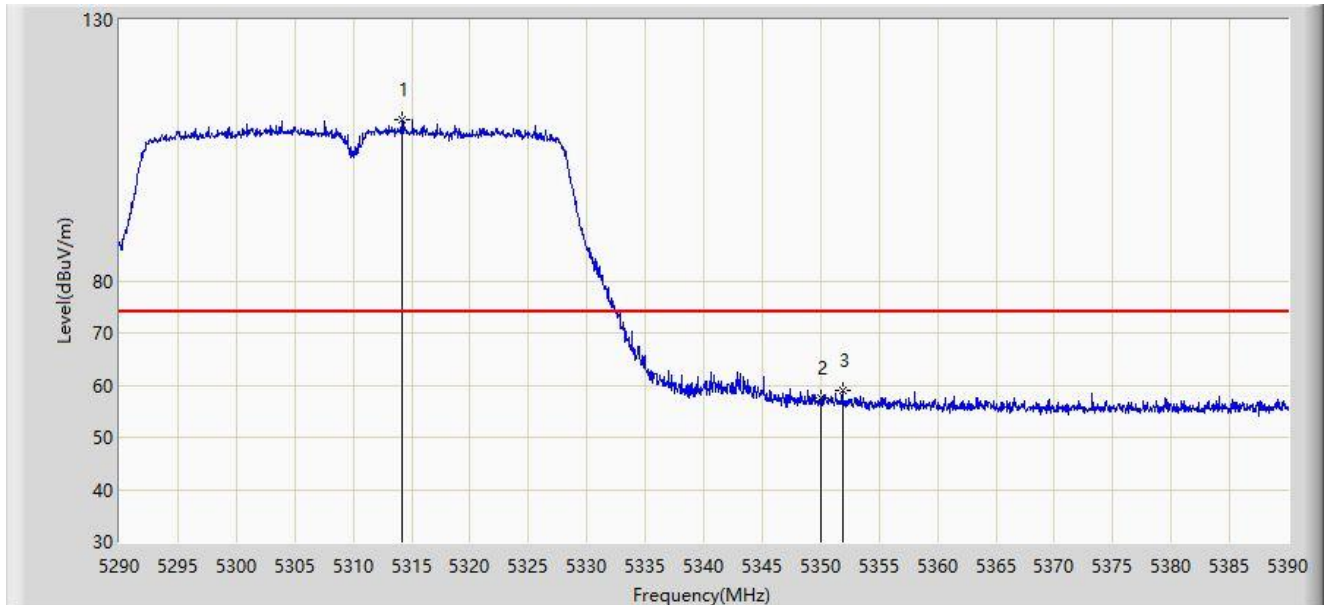


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5314.150	110.991	107.377	N/A	N/A	3.614	PK
2		5350.000	57.474	53.946	-16.526	74.000	3.527	PK
3	*	5351.850	58.969	55.452	-15.031	74.000	3.518	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

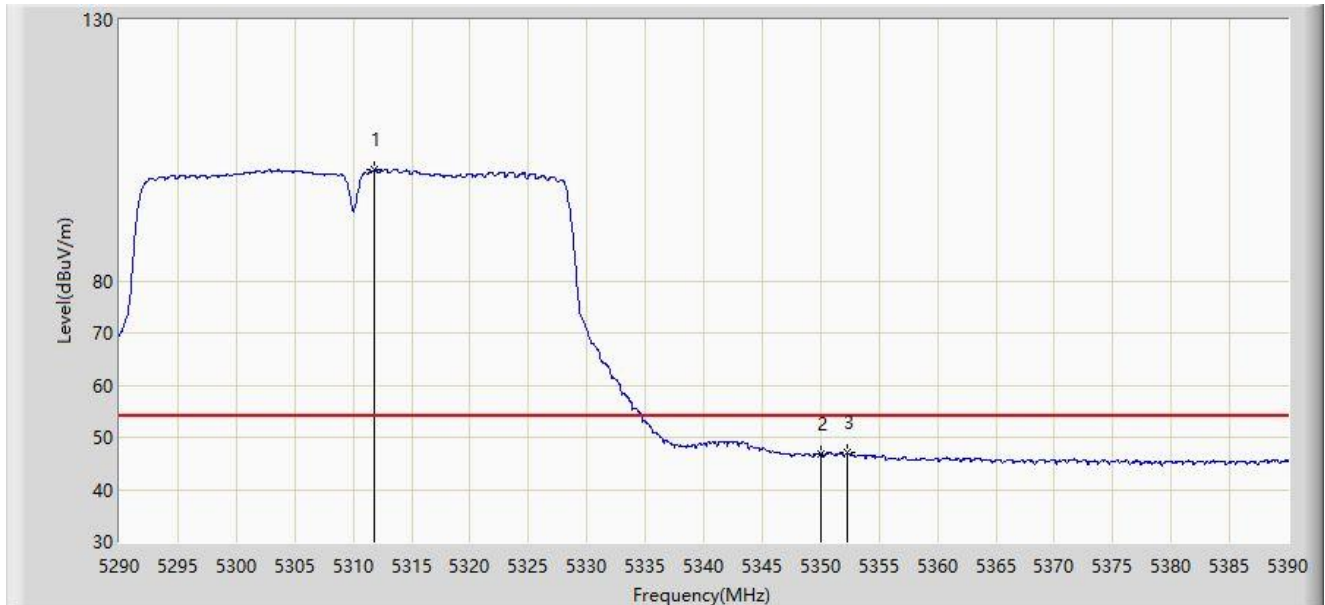


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.800	101.284	97.677	N/A	N/A	3.607	AV
2		5350.000	46.843	43.315	-7.157	54.000	3.527	AV
3	*	5352.300	46.989	43.476	-7.011	54.000	3.513	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

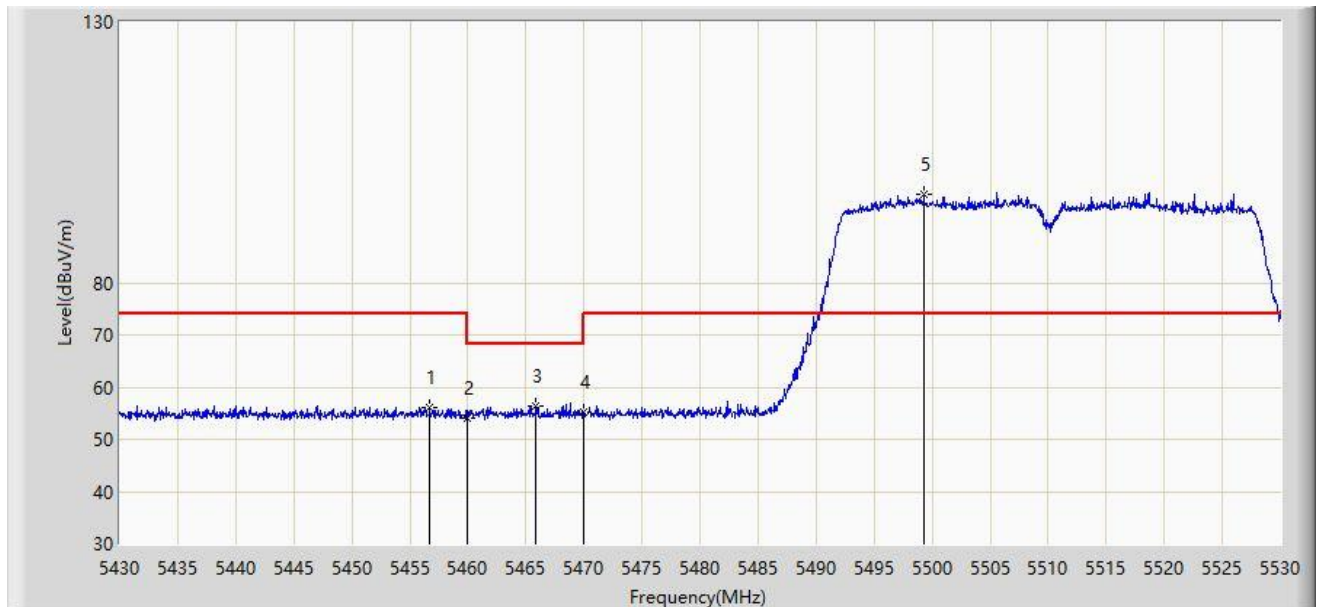


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.700	56.111	52.388	-17.889	74.000	3.724	PK
2		5460.000	53.982	50.244	-20.018	74.000	3.738	PK
3	*	5465.850	56.304	52.543	-11.896	68.200	3.761	PK
4		5470.000	55.296	51.519	-12.904	68.200	3.777	PK
5		5499.300	96.962	92.933	N/A	N/A	4.030	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

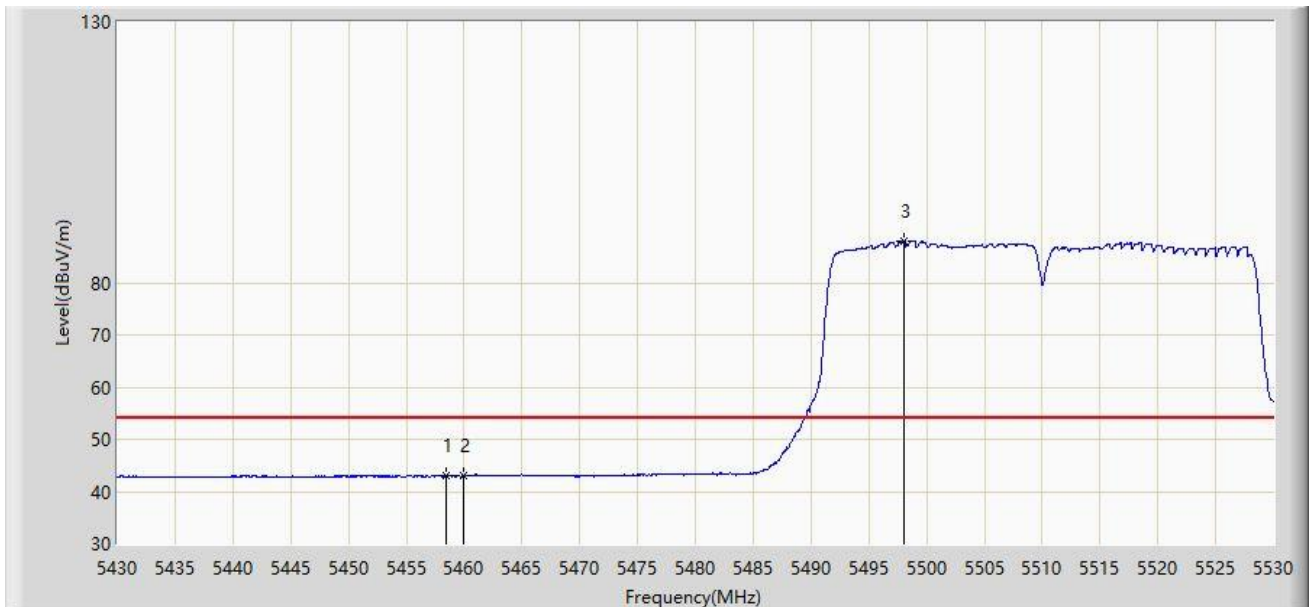


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5458.400	43.035	39.304	-10.965	54.000	3.732	AV
2		5460.000	42.971	39.233	-11.029	54.000	3.738	AV
3		5498.100	87.924	83.896	N/A	N/A	4.028	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

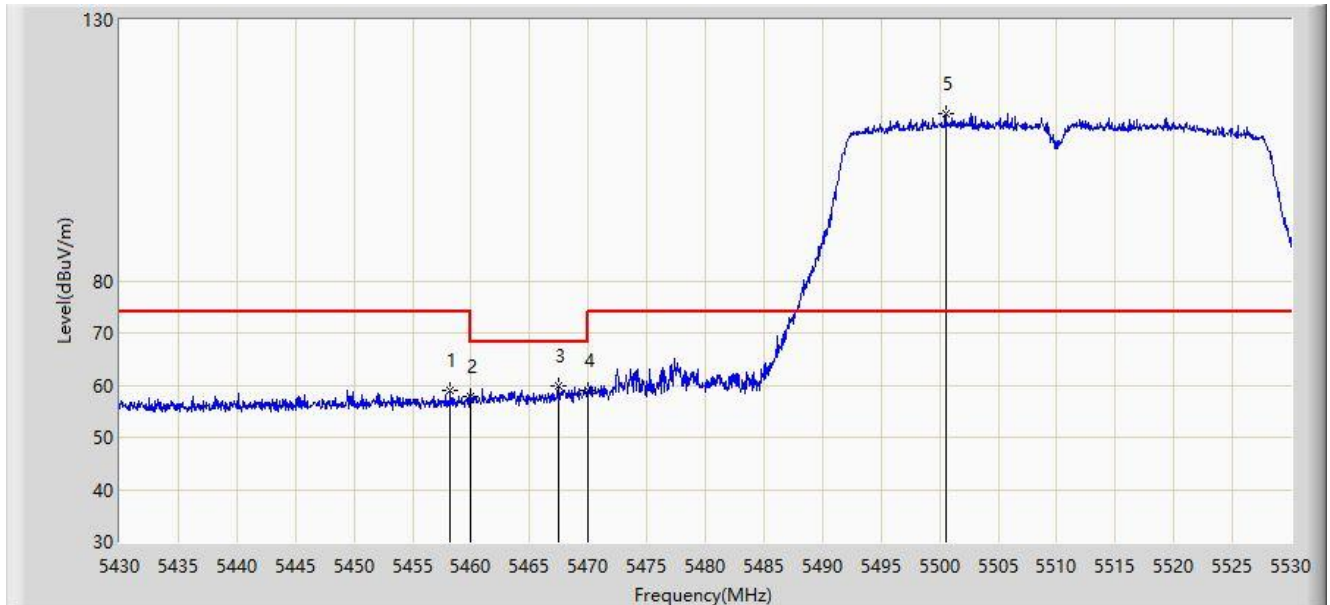


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.250	59.068	55.337	-14.932	74.000	3.731	PK
2		5460.000	57.901	54.163	-16.099	74.000	3.738	PK
3	*	5467.450	59.958	56.191	-8.242	68.200	3.767	PK
4		5470.000	58.917	55.140	-9.283	68.200	3.777	PK
5		5500.500	111.940	107.909	N/A	N/A	4.031	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

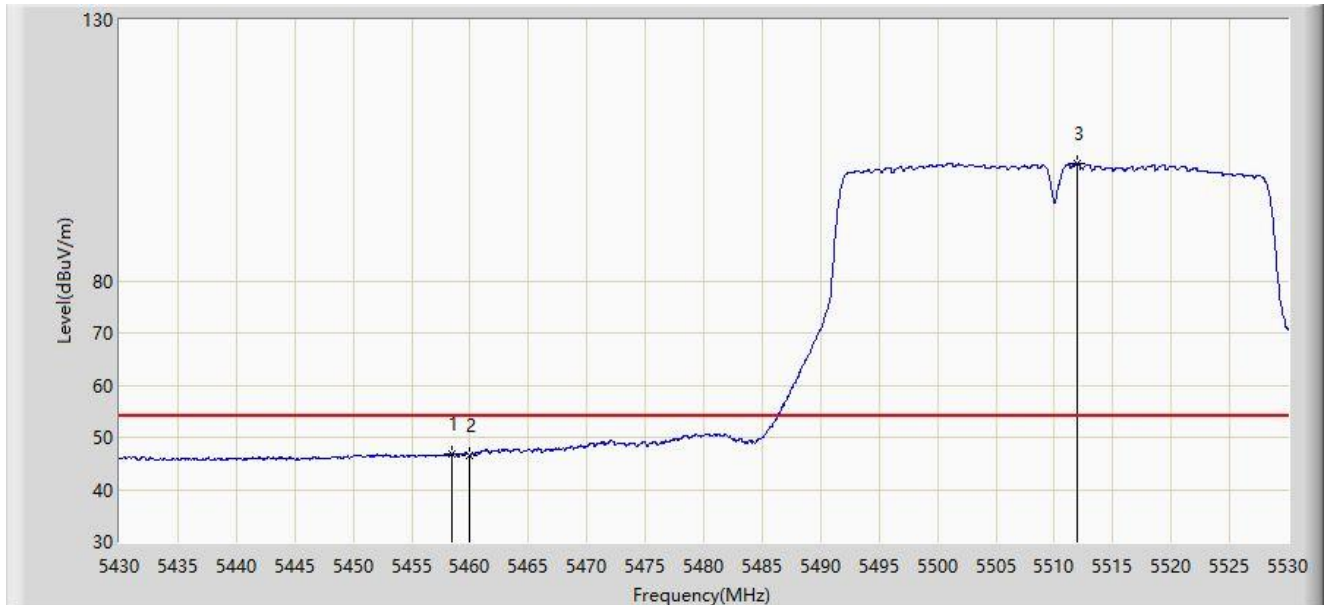


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5458.400	46.926	43.195	-7.074	54.000	3.732	AV
2		5460.000	46.665	42.927	-7.335	54.000	3.738	AV
3		5511.950	102.519	98.540	N/A	N/A	3.978	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

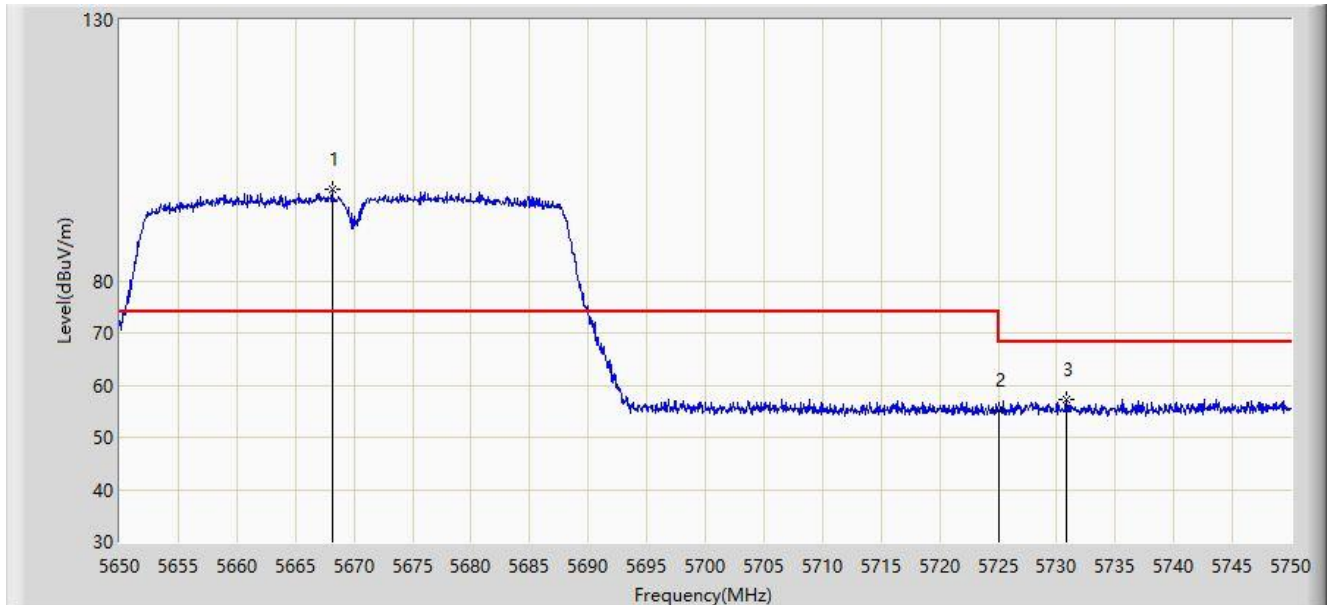


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5668.150	97.585	93.326	N/A	N/A	4.259	PK
2		5725.000	55.253	51.023	-12.947	68.200	4.230	PK
3	*	5730.800	57.272	52.999	-10.928	68.200	4.273	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

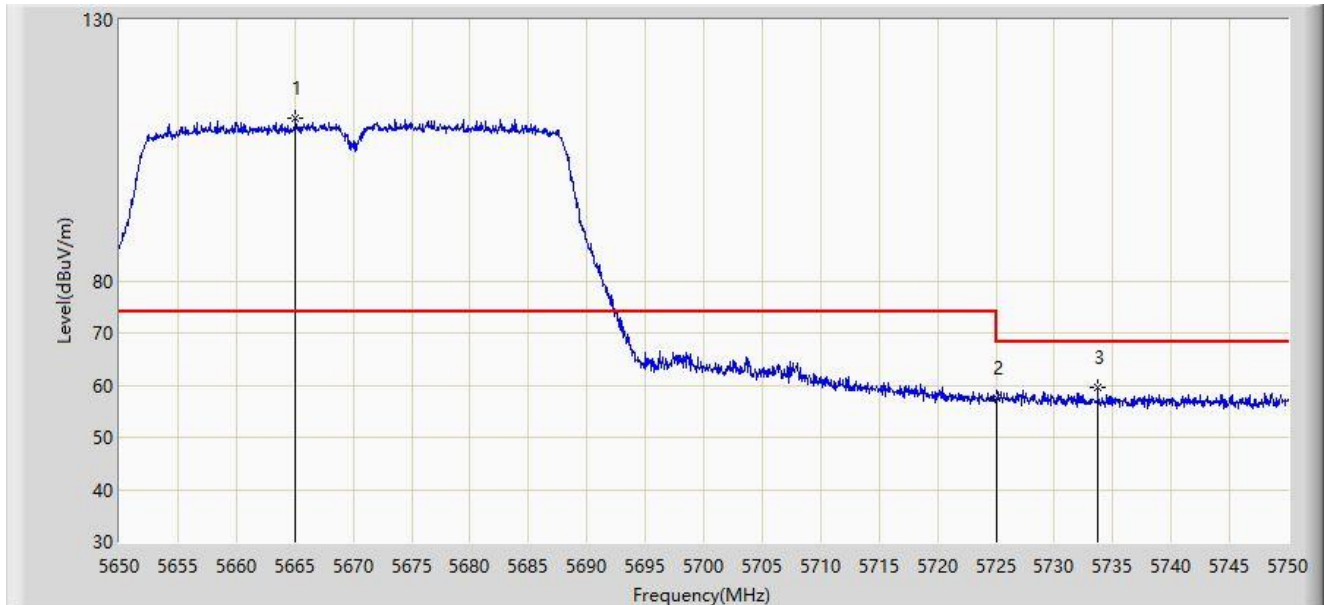


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5665.100	111.202	106.952	N/A	N/A	4.250	PK
2		5725.000	57.433	53.203	-10.767	68.200	4.230	PK
3	*	5733.700	59.489	55.188	-8.711	68.200	4.301	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

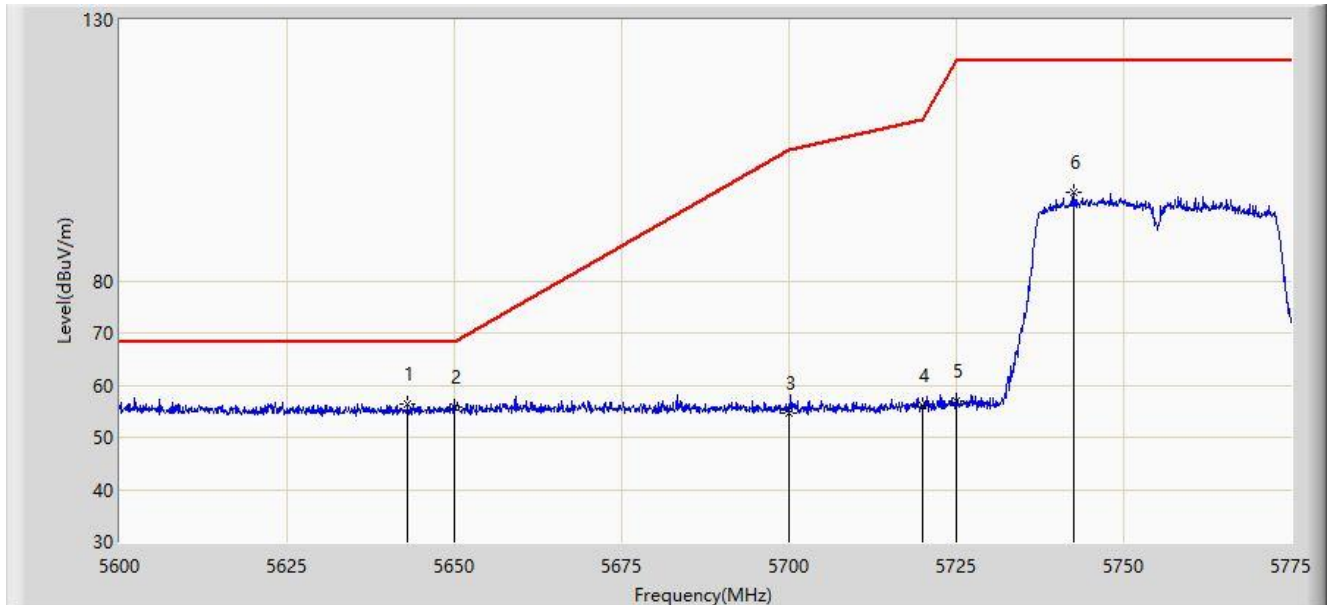


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5642.962	56.420	52.538	-11.780	68.200	3.882	PK
2		5650.000	55.786	51.726	-12.414	68.200	4.060	PK
3		5700.000	54.717	50.549	-50.483	105.200	4.168	PK
4		5720.000	55.962	51.742	-54.838	110.800	4.219	PK
5		5725.000	56.963	52.733	-65.237	122.200	4.230	PK
6		5742.625	97.035	92.648	N/A	N/A	4.387	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

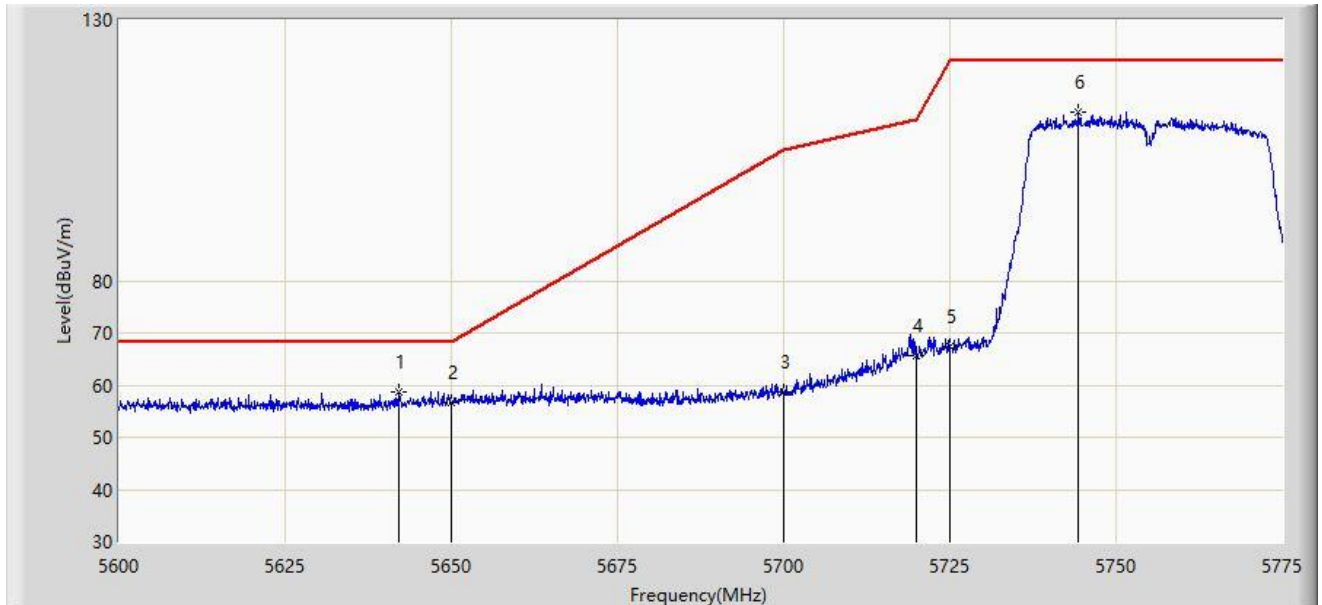


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5642.175	58.561	54.699	-9.639	68.200	3.863	PK
2		5650.000	56.704	52.644	-11.496	68.200	4.060	PK
3		5700.000	58.727	54.559	-46.473	105.200	4.168	PK
4		5720.000	65.694	61.474	-45.106	110.800	4.219	PK
5		5725.000	67.286	63.056	-54.914	122.200	4.230	PK
6		5744.375	112.184	107.782	N/A	N/A	4.402	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

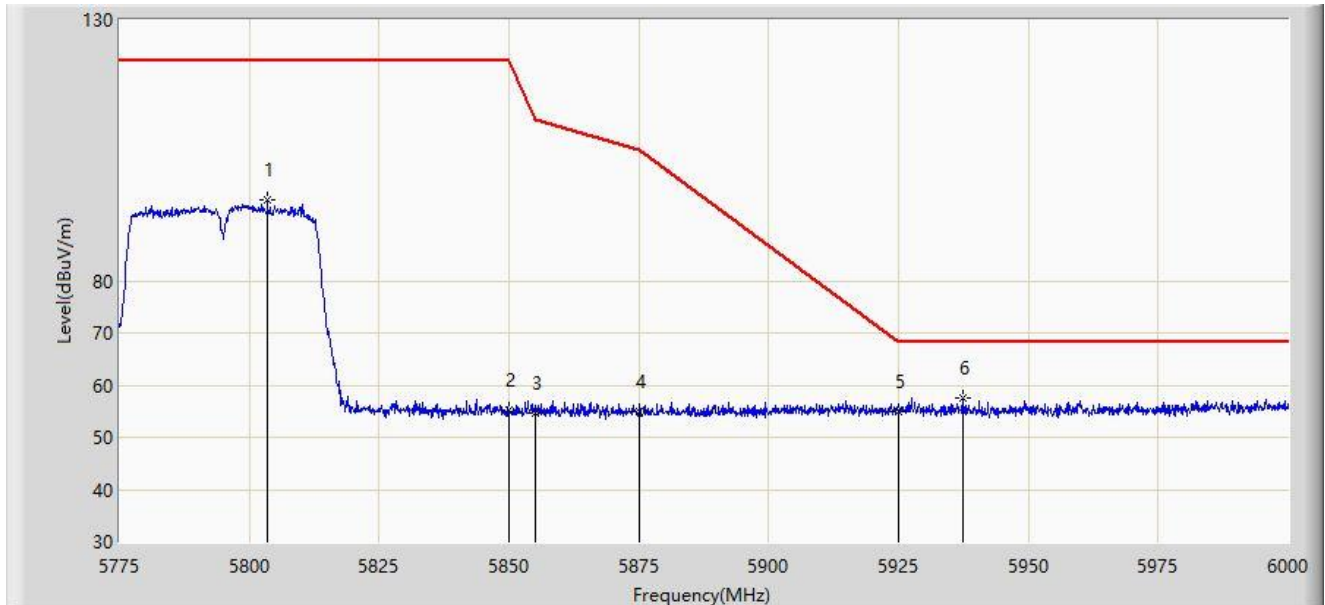


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5803.462	95.398	90.976	N/A	N/A	4.422	PK
2		5850.000	55.110	50.458	-67.090	122.200	4.651	PK
3		5855.000	54.622	49.998	-56.178	110.800	4.624	PK
4		5875.000	54.805	50.261	-50.395	105.200	4.543	PK
5		5925.000	54.883	50.131	-13.317	68.200	4.751	PK
6	*	5937.337	57.588	52.897	-10.612	68.200	4.691	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

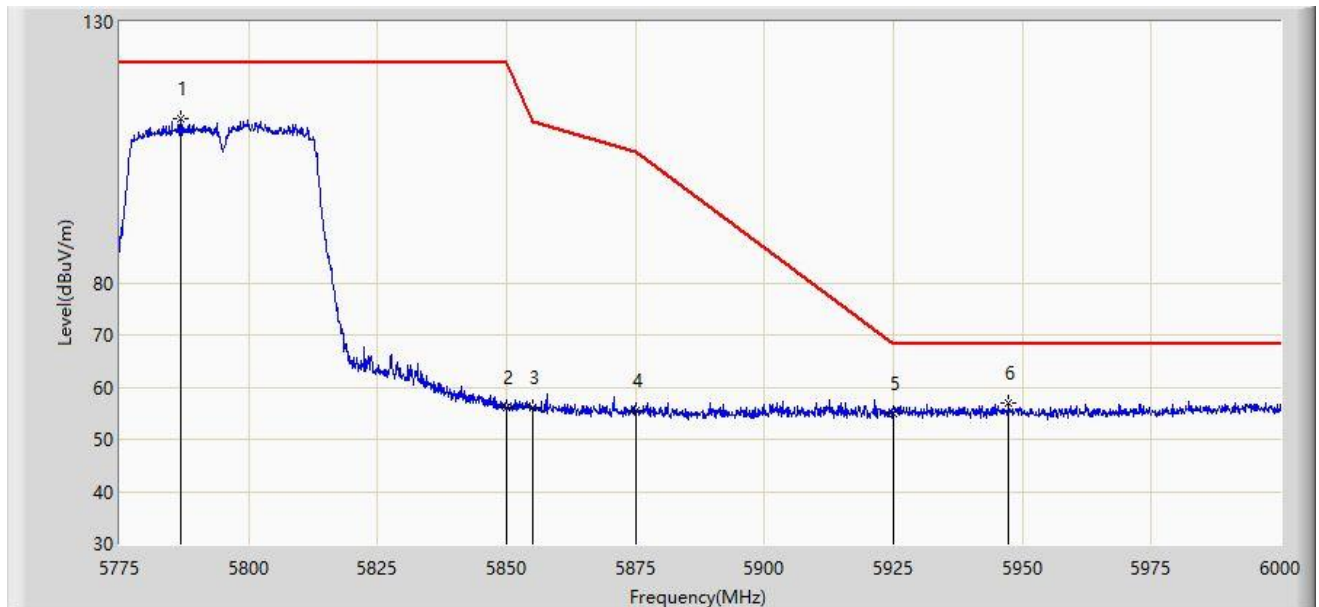


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5786.925	111.316	106.937	N/A	N/A	4.378	PK
2		5850.000	56.017	51.365	-66.183	122.200	4.651	PK
3		5855.000	56.134	51.510	-54.666	110.800	4.624	PK
4		5875.000	55.522	50.978	-49.678	105.200	4.543	PK
5		5925.000	54.909	50.157	-13.291	68.200	4.751	PK
6	*	5947.350	57.049	52.435	-11.151	68.200	4.614	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

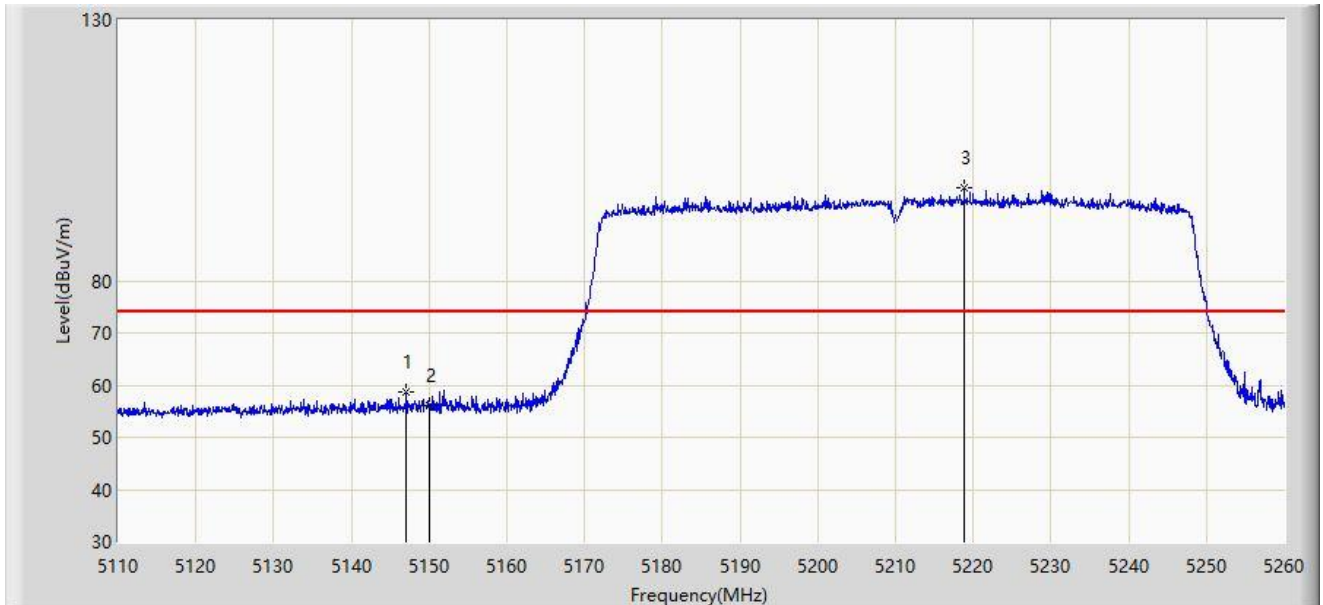


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.050	58.579	54.803	-15.421	74.000	3.776	PK
2		5150.000	56.100	52.328	-17.900	74.000	3.773	PK
3		5218.825	97.838	94.341	N/A	N/A	3.498	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

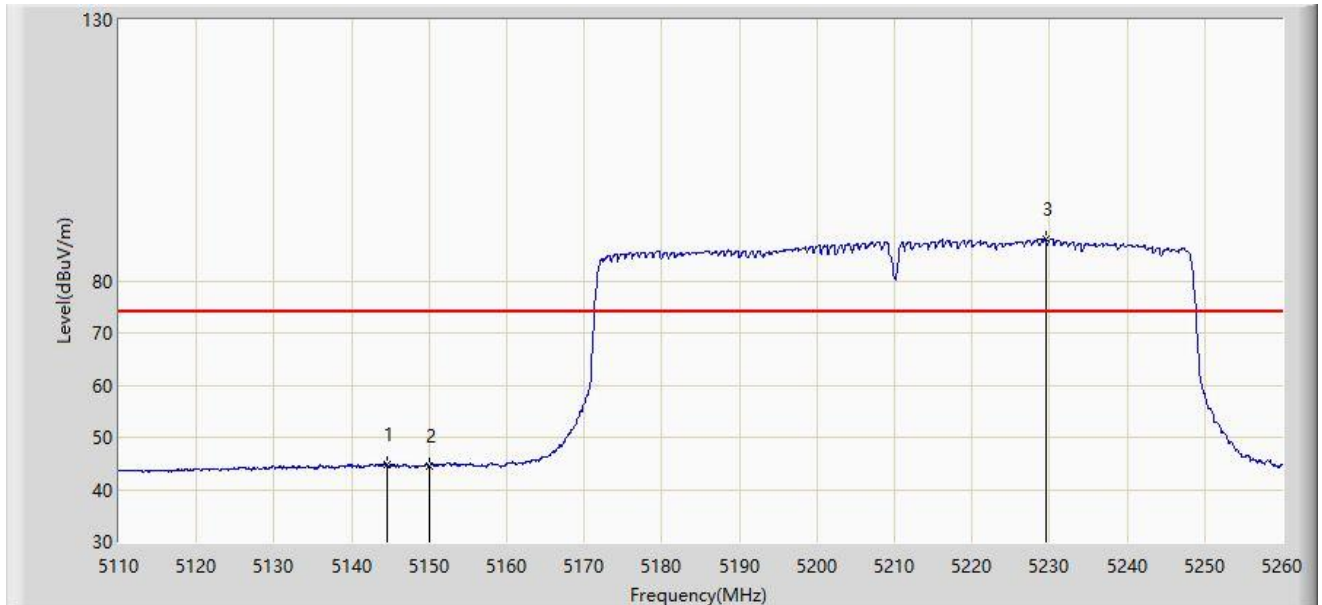


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.575	44.784	40.998	-29.216	74.000	3.786	PK
2		5150.000	44.433	40.661	-29.567	74.000	3.773	PK
3		5229.475	87.931	84.386	N/A	N/A	3.544	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

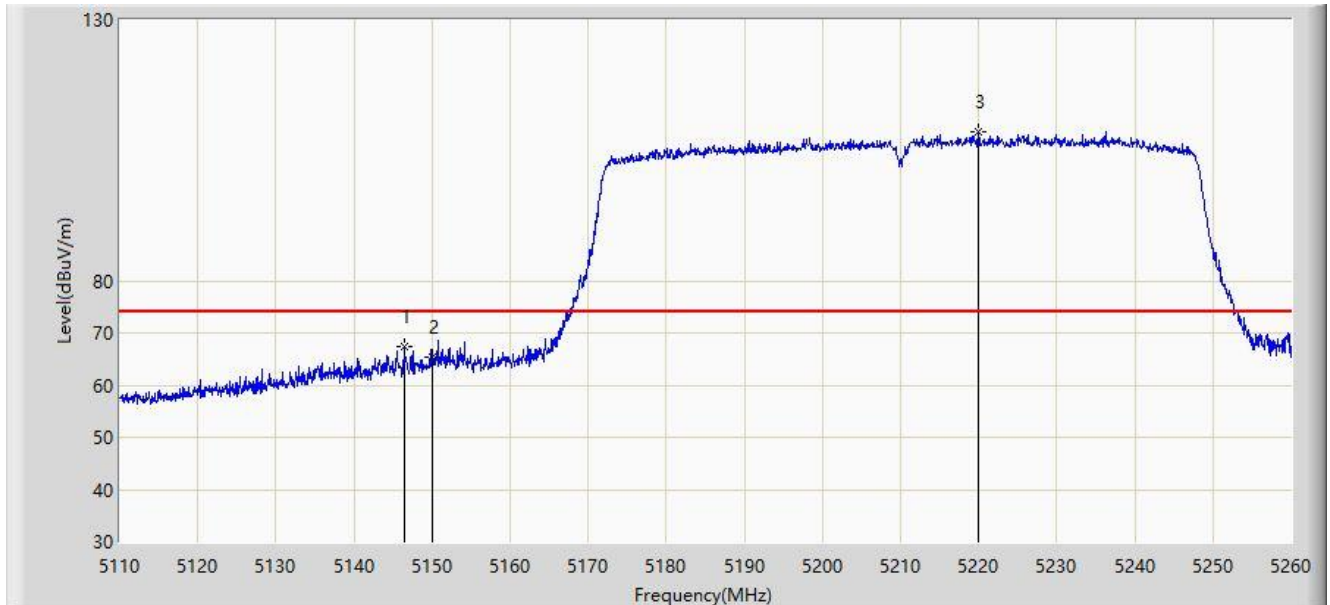


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.450	67.530	63.751	-6.470	74.000	3.779	PK
2		5150.000	65.253	61.481	-8.747	74.000	3.773	PK
3		5220.025	108.499	105.000	N/A	N/A	3.499	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

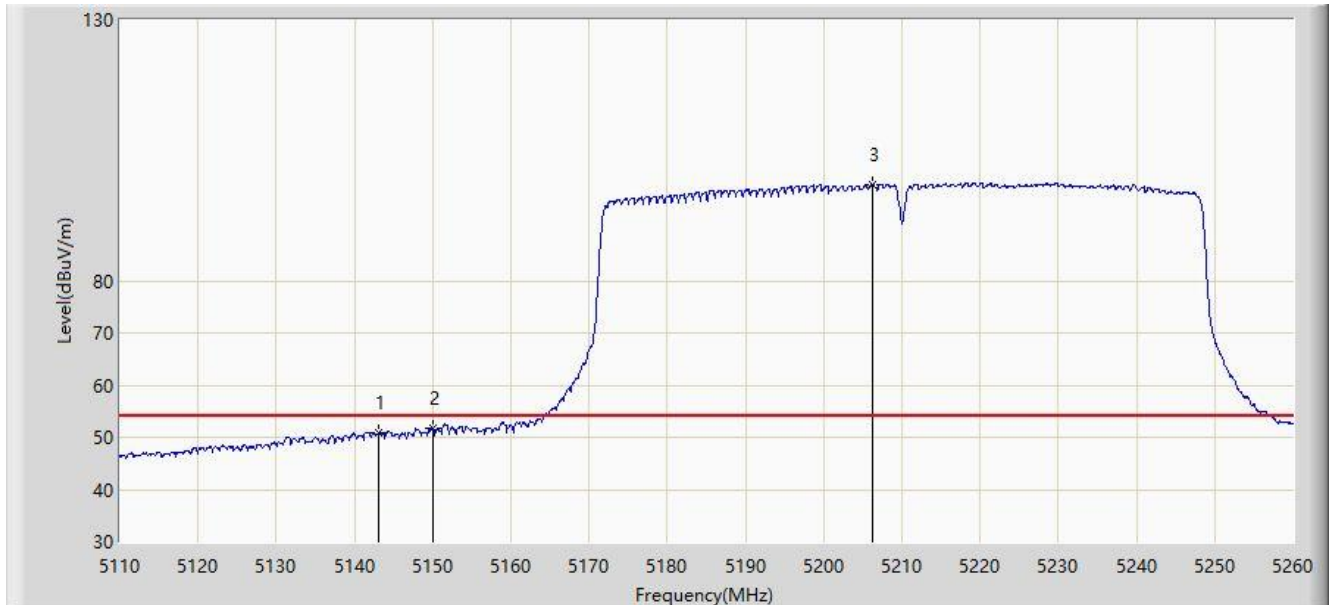


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5143.150	51.009	47.217	-2.991	54.000	3.793	AV
2	*	5150.000	51.713	47.941	-2.287	54.000	3.773	AV
3		5206.225	98.510	95.047	N/A	N/A	3.463	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

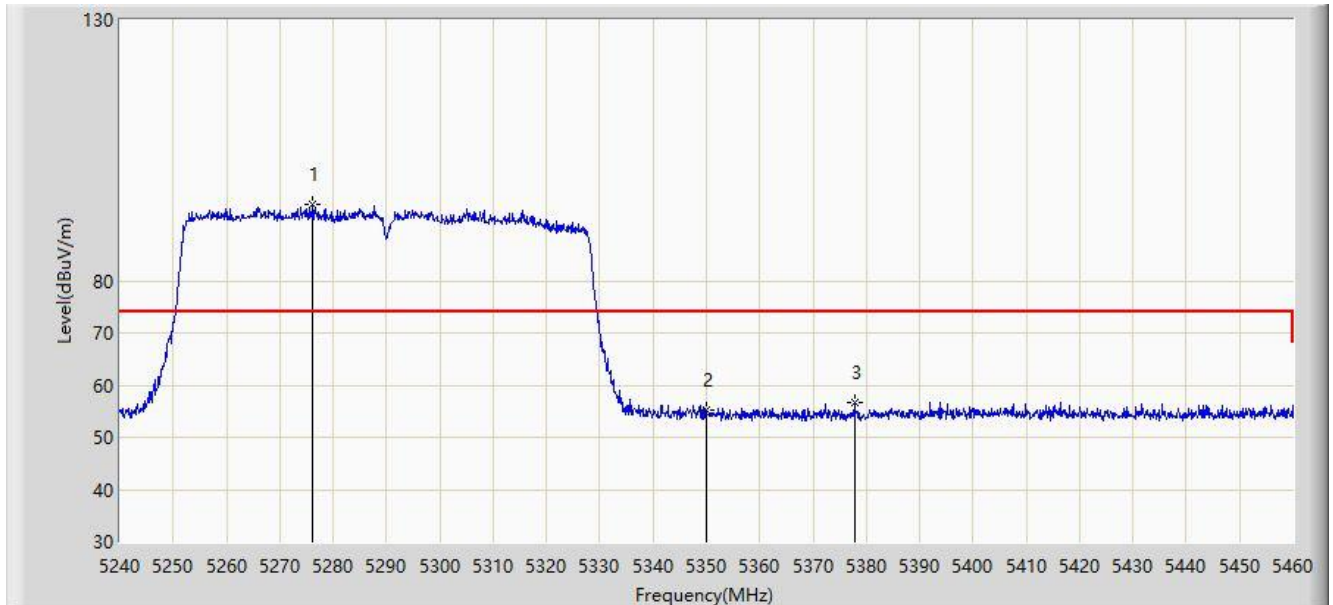


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5276.190	94.566	91.247	N/A	N/A	3.319	PK
2		5350.000	55.340	51.812	-18.660	74.000	3.527	PK
3	*	5377.720	56.598	53.057	-17.402	74.000	3.541	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

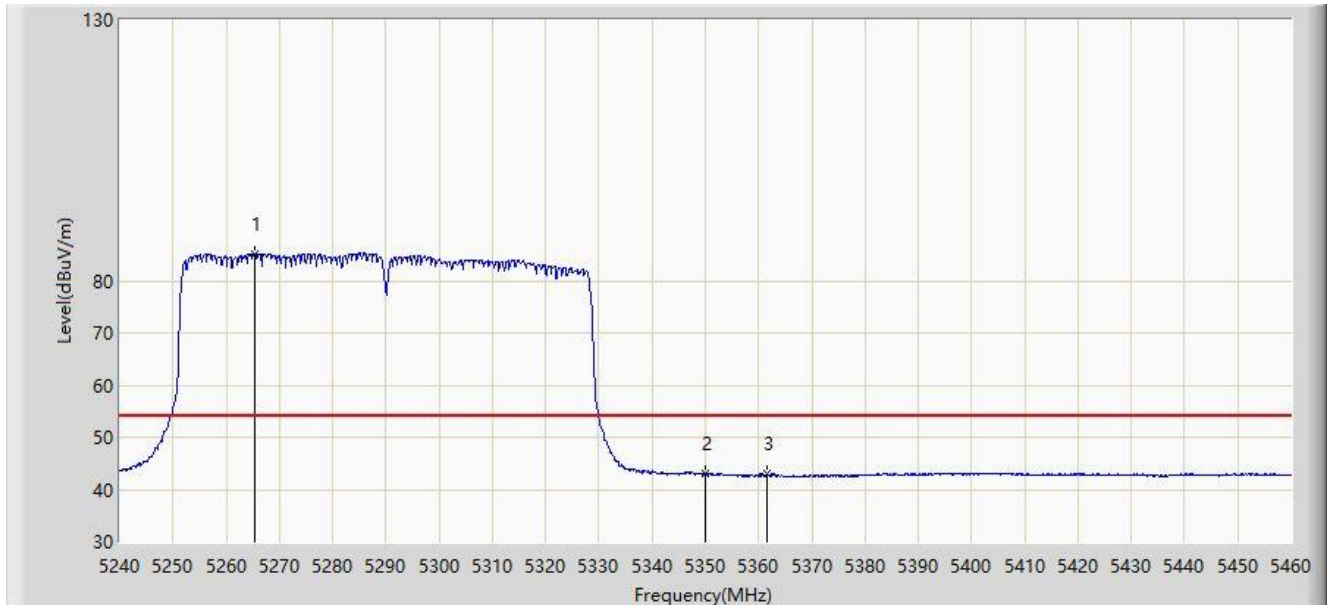


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5265.300	85.160	81.794	N/A	N/A	3.366	AV
2	*	5350.000	43.161	39.633	-10.839	54.000	3.527	AV
3		5361.660	42.901	39.475	-11.099	54.000	3.426	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

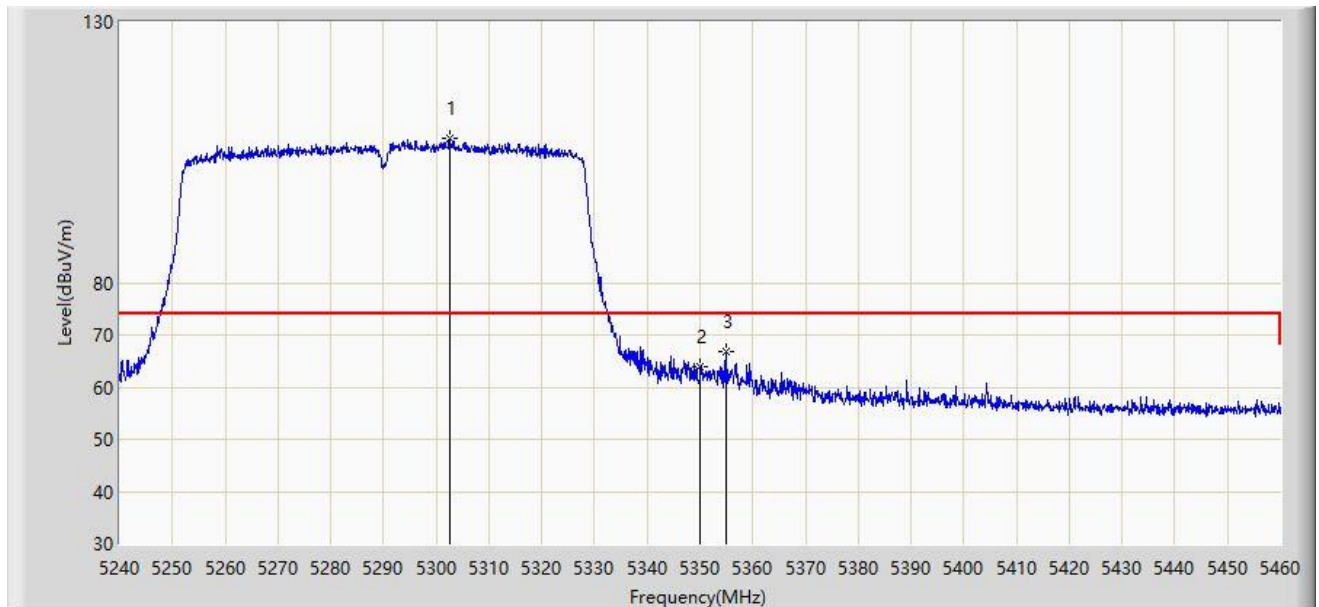


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5302.480	107.563	103.969	N/A	N/A	3.593	PK
2		5350.000	63.988	60.460	-10.012	74.000	3.527	PK
3	*	5354.840	66.823	63.333	-7.177	74.000	3.490	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

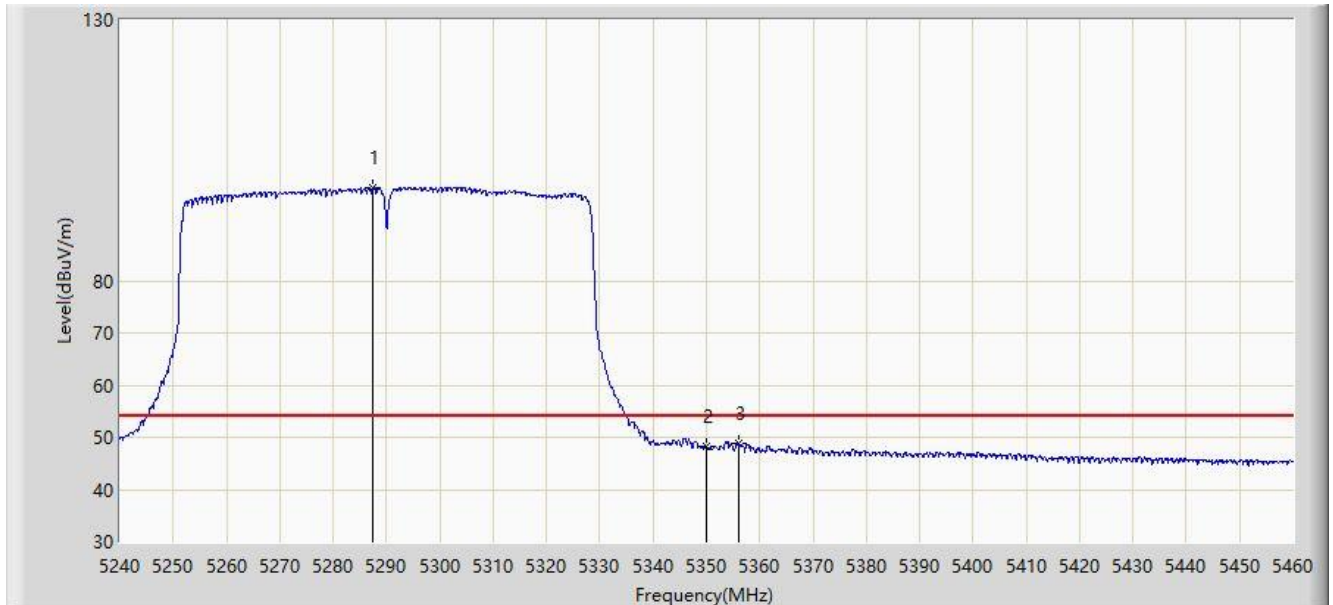


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5287.520	97.908	94.528	N/A	N/A	3.380	AV
2		5350.000	48.289	44.761	-5.711	54.000	3.527	AV
3	*	5355.940	48.811	45.331	-5.189	54.000	3.480	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

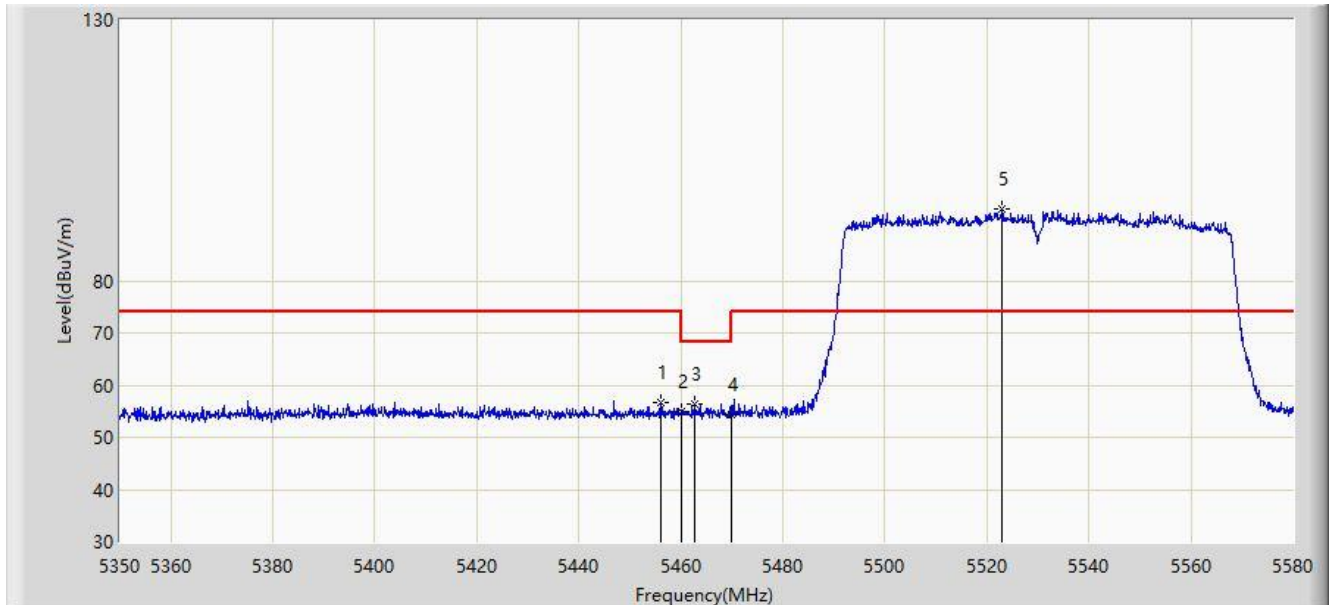


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.145	56.755	53.037	-17.245	74.000	3.718	PK
2		5460.000	54.904	51.166	-19.096	74.000	3.738	PK
3	*	5462.815	56.459	52.710	-11.741	68.200	3.749	PK
4		5470.000	54.425	50.648	-13.775	68.200	3.777	PK
5		5523.075	93.781	89.903	N/A	N/A	3.878	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

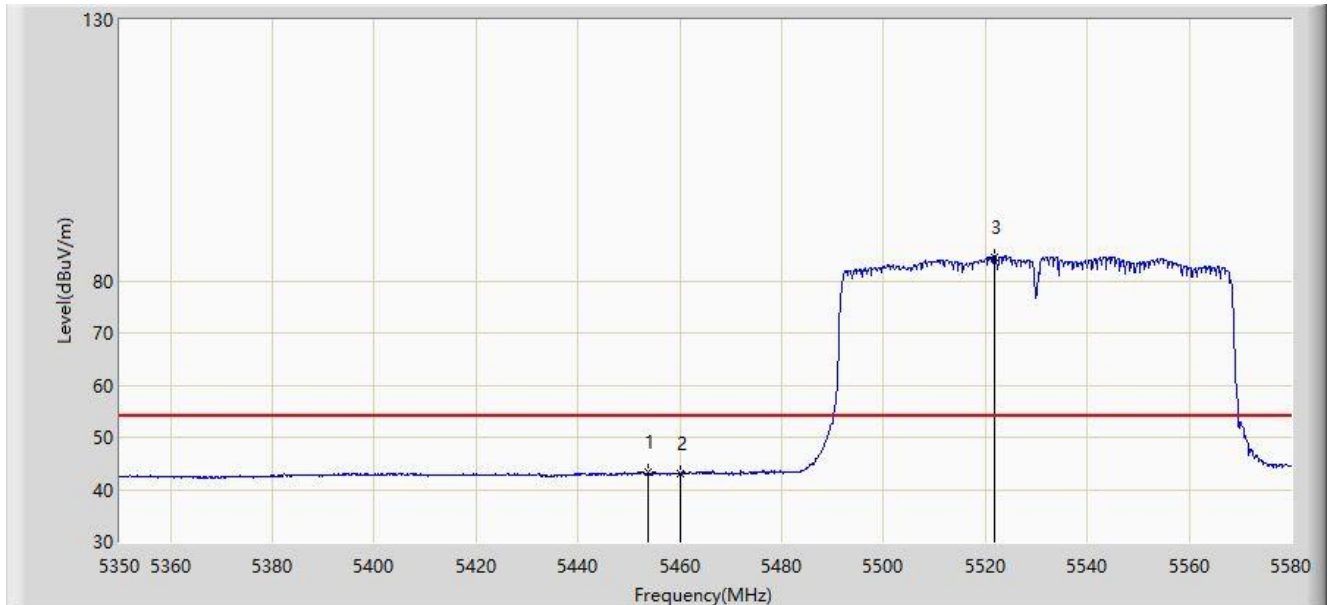


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5453.845	43.348	39.651	-10.652	54.000	3.697	AV
2		5460.000	43.063	39.325	-10.937	54.000	3.738	AV
3		5521.695	84.538	80.648	N/A	N/A	3.891	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

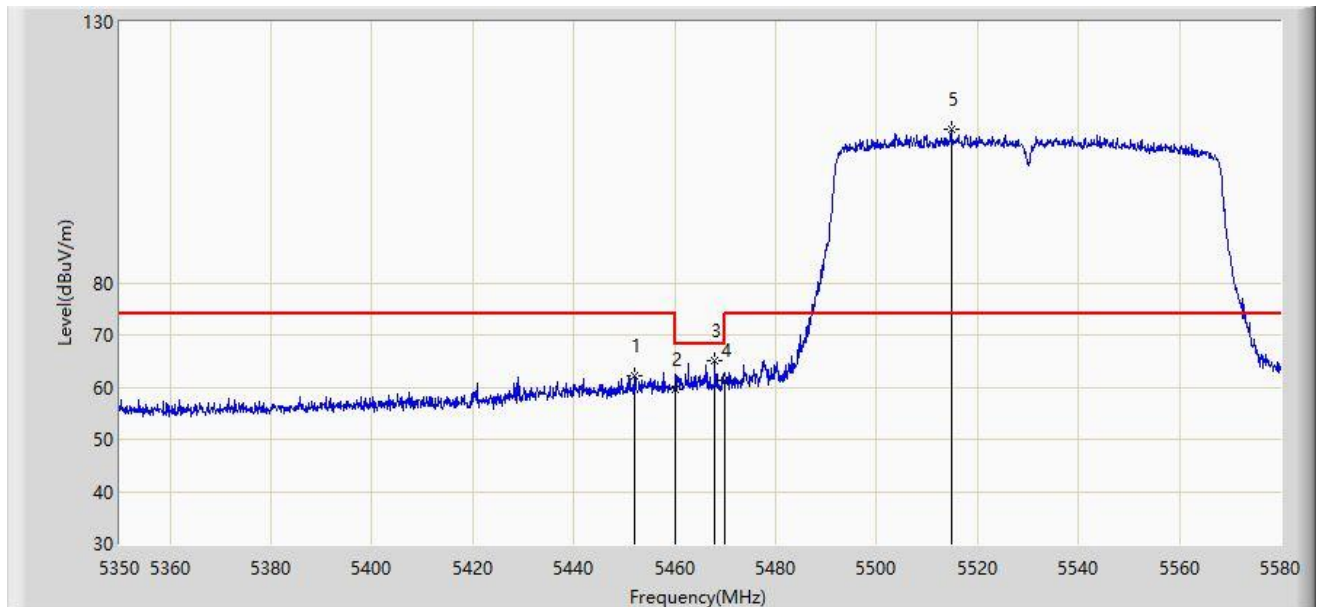


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5451.890	62.176	58.479	-11.824	74.000	3.697	PK
2		5460.000	59.588	55.850	-14.412	74.000	3.738	PK
3	*	5467.990	64.938	61.169	-3.262	68.200	3.770	PK
4		5470.000	61.203	57.426	-6.997	68.200	3.777	PK
5		5514.795	109.386	105.433	N/A	N/A	3.952	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

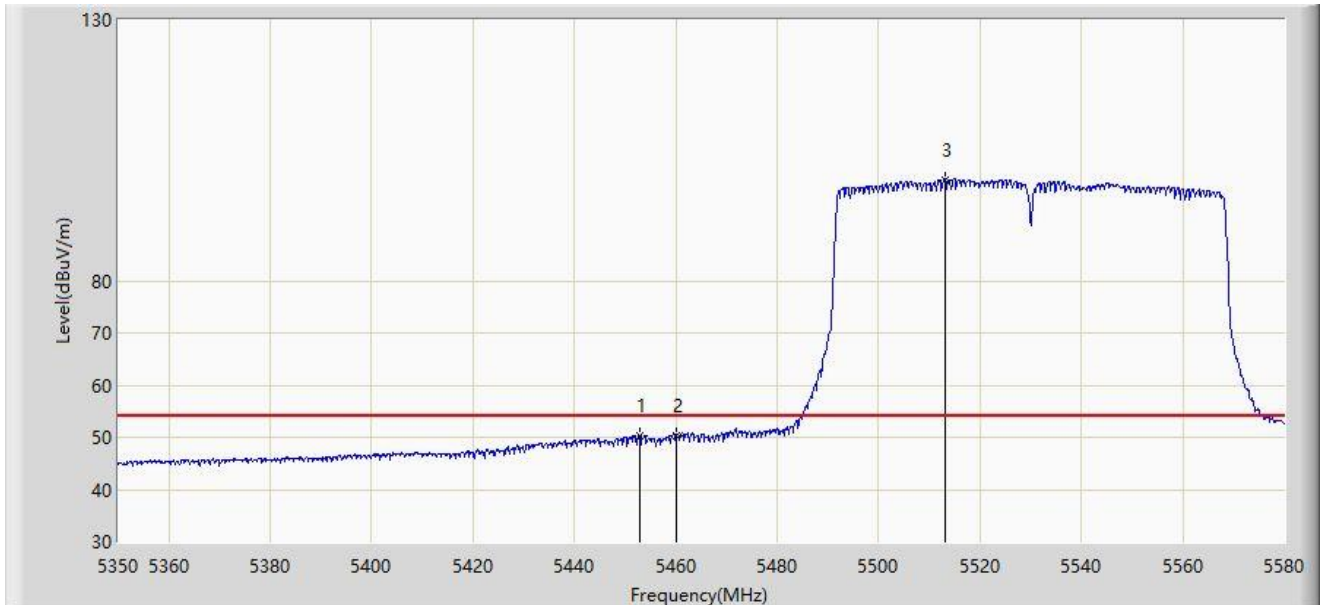


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5452.810	50.273	46.576	-3.727	54.000	3.697	AV
2	*	5460.000	50.282	46.544	-3.718	54.000	3.738	AV
3		5513.185	99.420	95.453	N/A	N/A	3.967	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

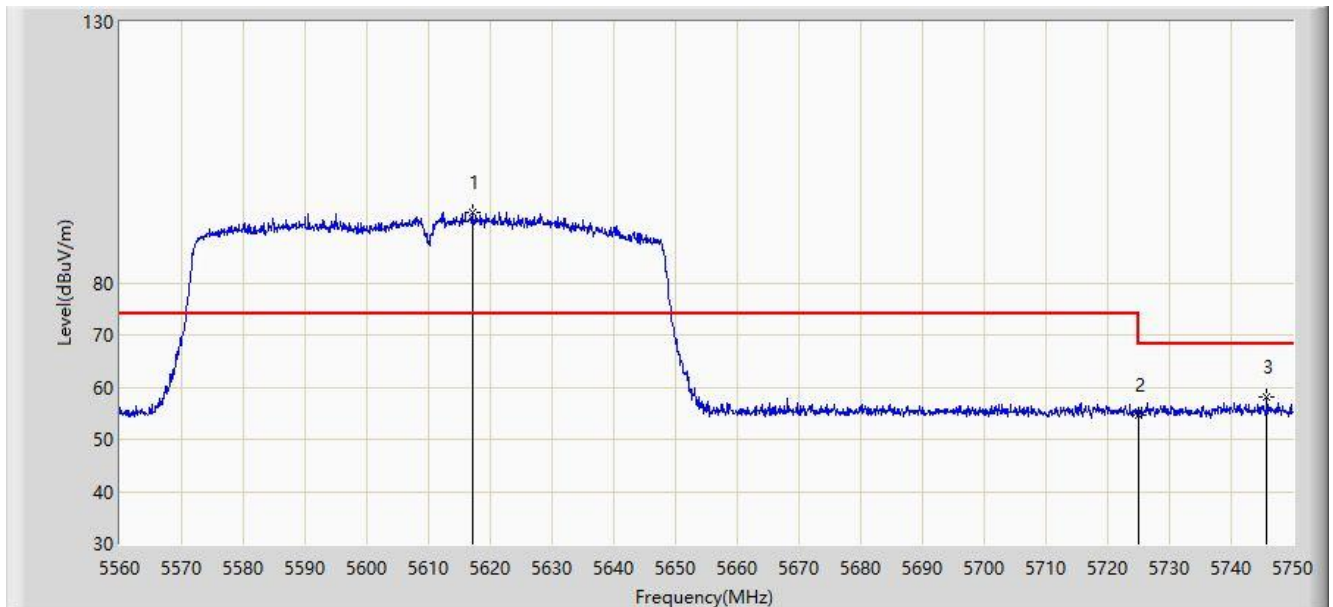


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5617.095	93.583	89.703	N/A	N/A	3.880	PK
2		5725.000	54.593	50.363	-13.607	68.200	4.230	PK
3	*	5745.820	58.161	53.756	-10.039	68.200	4.405	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

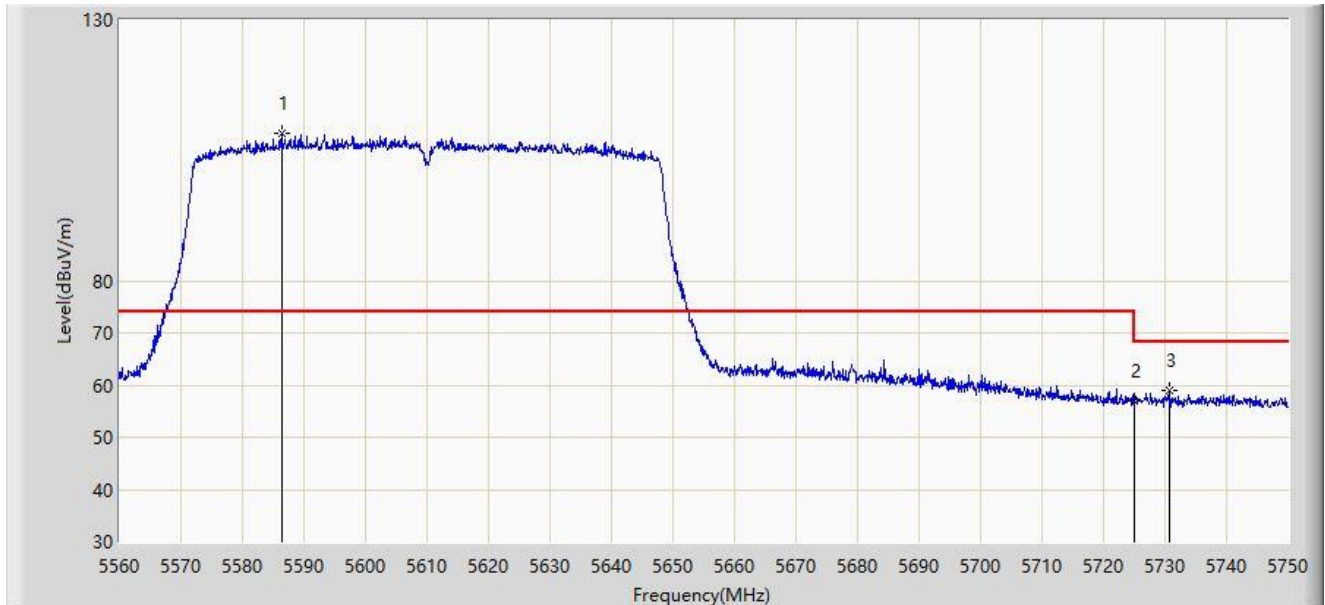


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5586.315	108.201	104.146	N/A	N/A	4.055	PK
2		5725.000	56.977	52.747	-11.223	68.200	4.230	PK
3	*	5730.810	58.842	54.569	-9.358	68.200	4.273	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

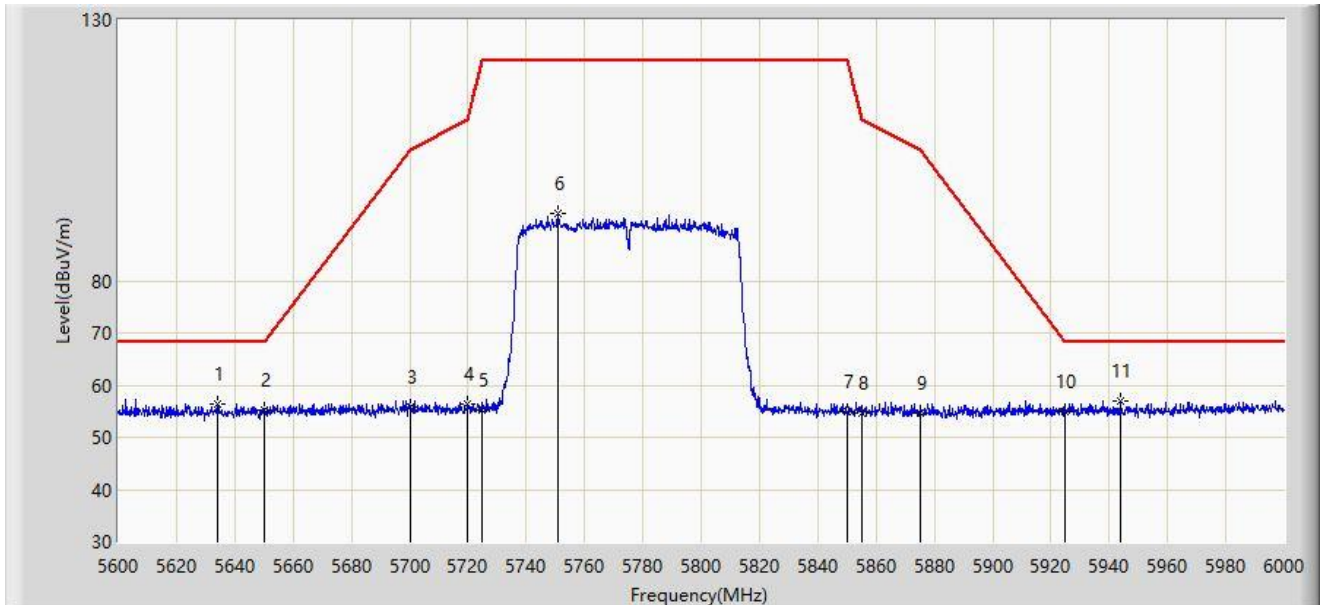


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5634.000	56.279	52.474	-11.921	68.200	3.805	PK
2		5650.000	55.125	51.065	-13.075	68.200	4.060	PK
3		5700.000	55.704	51.536	-49.496	105.200	4.168	PK
4		5720.000	56.295	52.075	-54.505	110.800	4.219	PK
5		5725.000	55.334	51.104	-66.866	122.200	4.230	PK
6		5750.800	92.819	88.406	N/A	N/A	4.413	PK
7		5850.000	54.784	50.132	-67.416	122.200	4.651	PK
8		5855.000	54.714	50.090	-56.086	110.800	4.624	PK
9		5875.000	54.726	50.182	-50.474	105.200	4.543	PK
10		5925.000	55.052	50.300	-13.148	68.200	4.751	PK
11	*	5943.800	56.895	52.262	-11.305	68.200	4.632	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

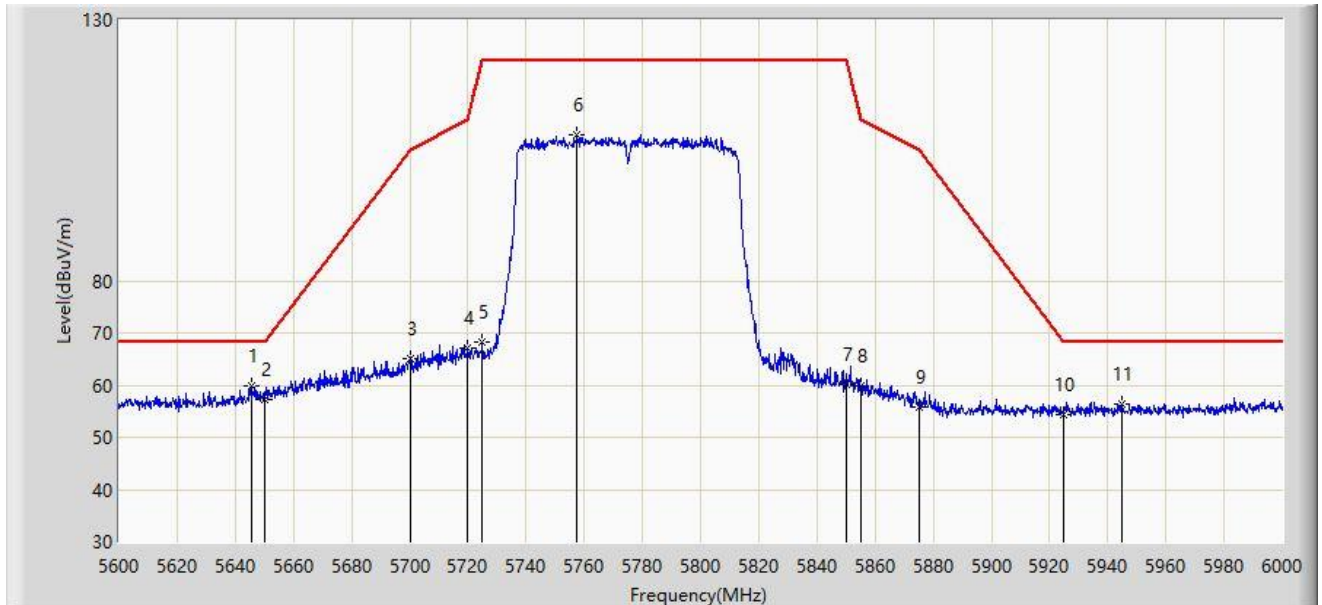


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5645.800	59.800	55.846	-8.400	68.200	3.954	PK
2		5650.000	57.201	53.141	-10.999	68.200	4.060	PK
3		5700.000	65.074	60.906	-40.126	105.200	4.168	PK
4		5720.000	66.980	62.760	-43.820	110.800	4.219	PK
5		5725.000	68.150	63.920	-54.050	122.200	4.230	PK
6		5757.400	107.954	103.530	N/A	N/A	4.424	PK
7		5850.000	60.244	55.592	-61.956	122.200	4.651	PK
8		5855.000	59.908	55.284	-50.892	110.800	4.624	PK
9		5875.000	55.796	51.252	-49.404	105.200	4.543	PK
10		5925.000	54.227	49.475	-13.973	68.200	4.751	PK
11		5944.800	56.273	51.646	-11.927	68.200	4.627	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

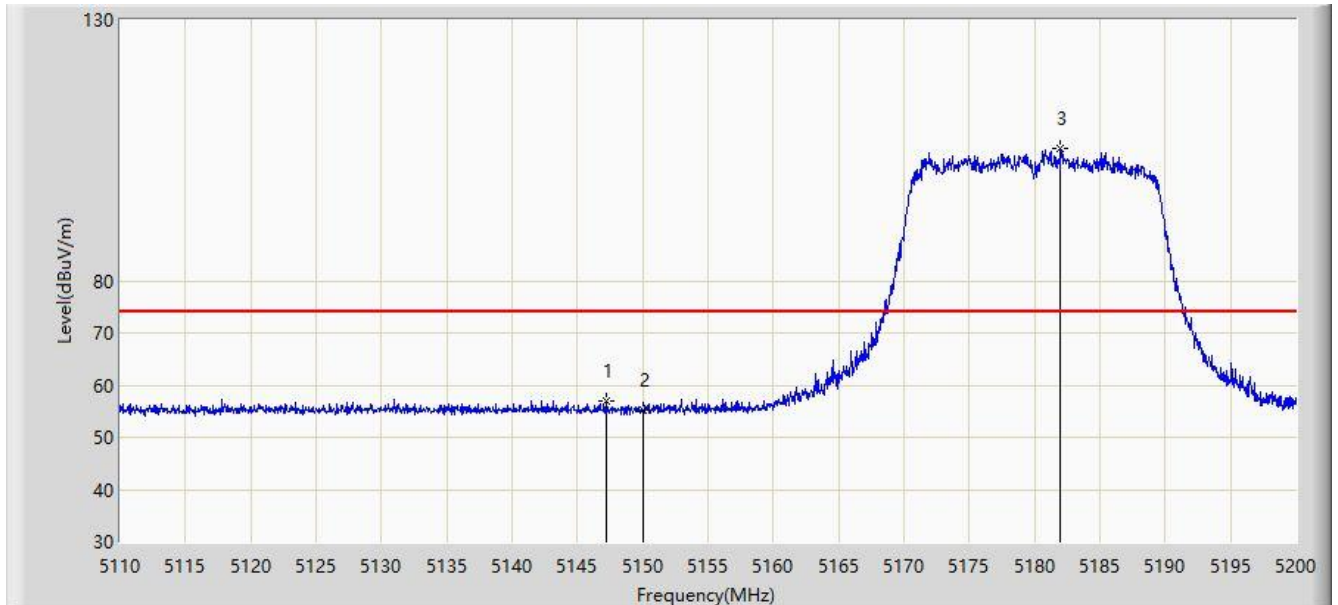


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.170	57.078	53.302	-16.922	74.000	3.776	PK
2		5150.000	55.264	51.492	-18.736	74.000	3.773	PK
3		5182.000	105.375	101.863	N/A	N/A	3.513	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

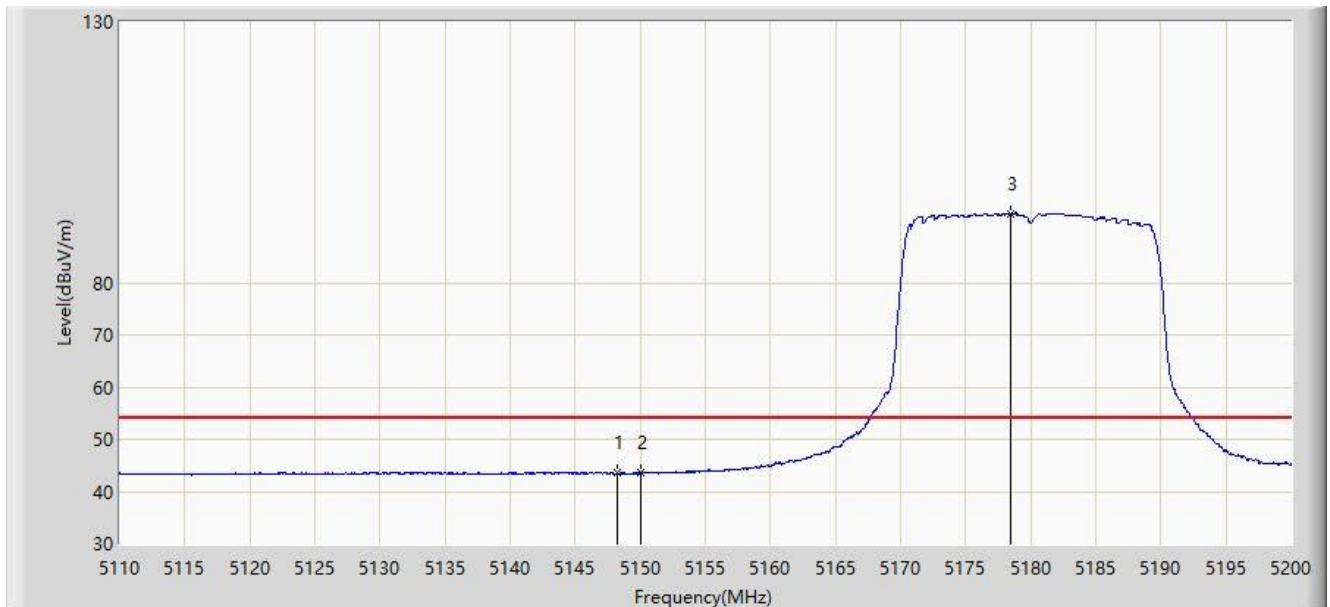


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5148.205	43.494	39.722	-10.506	54.000	3.772	AV
2	*	5150.000	43.556	39.784	-10.444	54.000	3.773	AV
3		5178.490	93.213	89.668	N/A	N/A	3.545	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

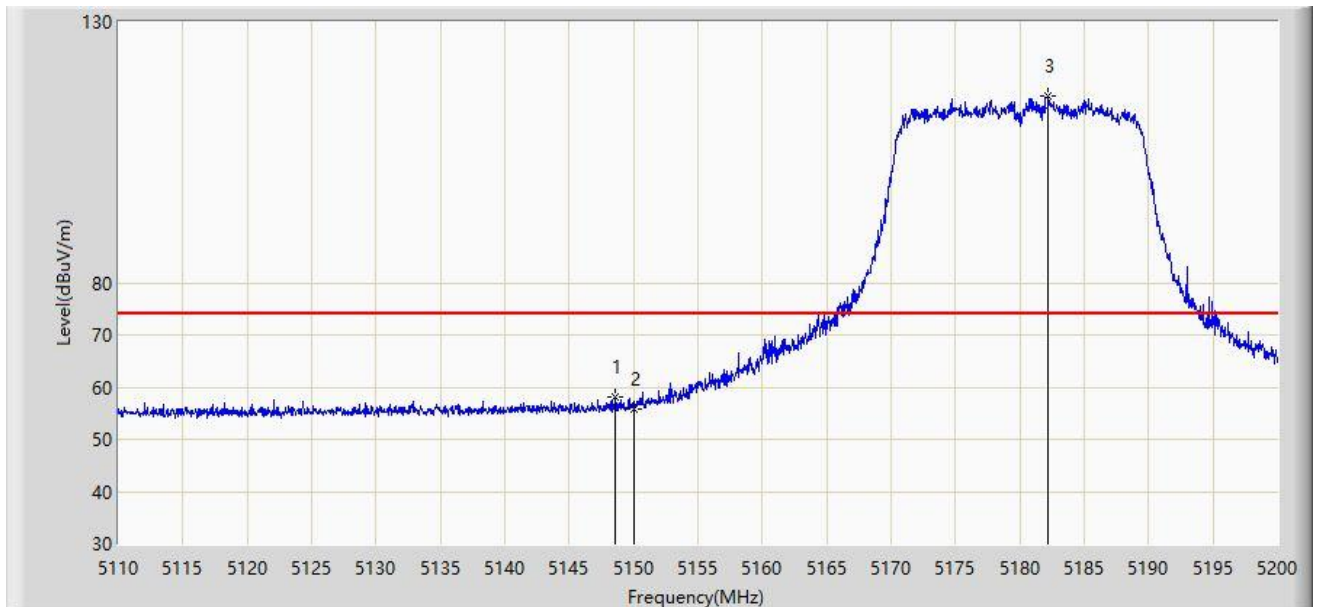


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.610	58.097	54.325	-15.903	74.000	3.772	PK
2		5150.000	55.766	51.994	-18.234	74.000	3.773	PK
3		5182.225	115.793	112.280	N/A	N/A	3.513	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

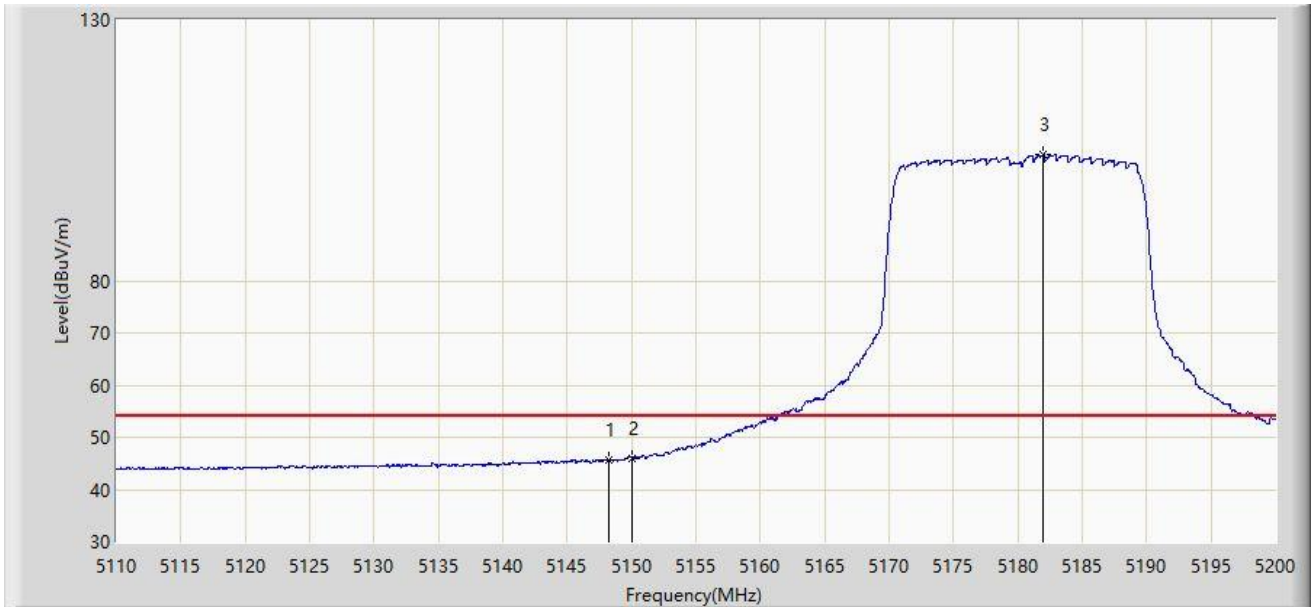


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5148.205	45.663	41.891	-8.337	54.000	3.772	AV
2	*	5150.000	46.082	42.310	-7.918	54.000	3.773	AV
3		5181.910	104.084	100.571	N/A	N/A	3.513	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

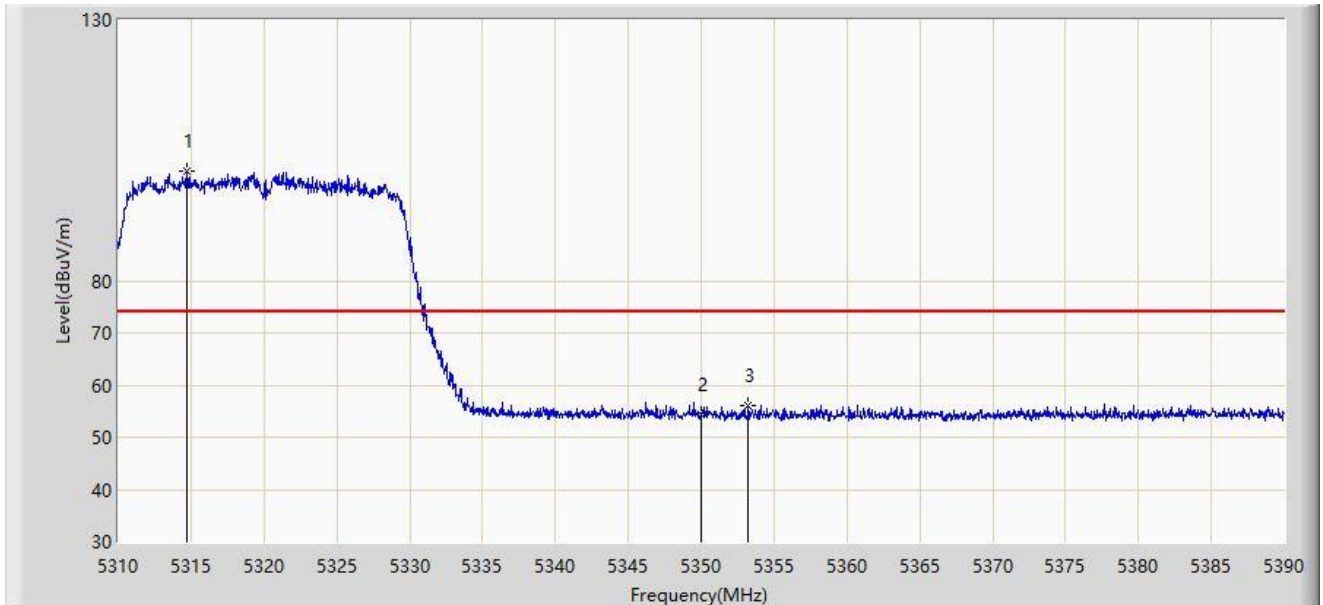


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5314.760	101.050	97.433	N/A	N/A	3.616	PK
2		5350.000	54.267	50.739	-19.733	74.000	3.527	PK
3	*	5353.200	56.051	52.546	-17.949	74.000	3.505	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

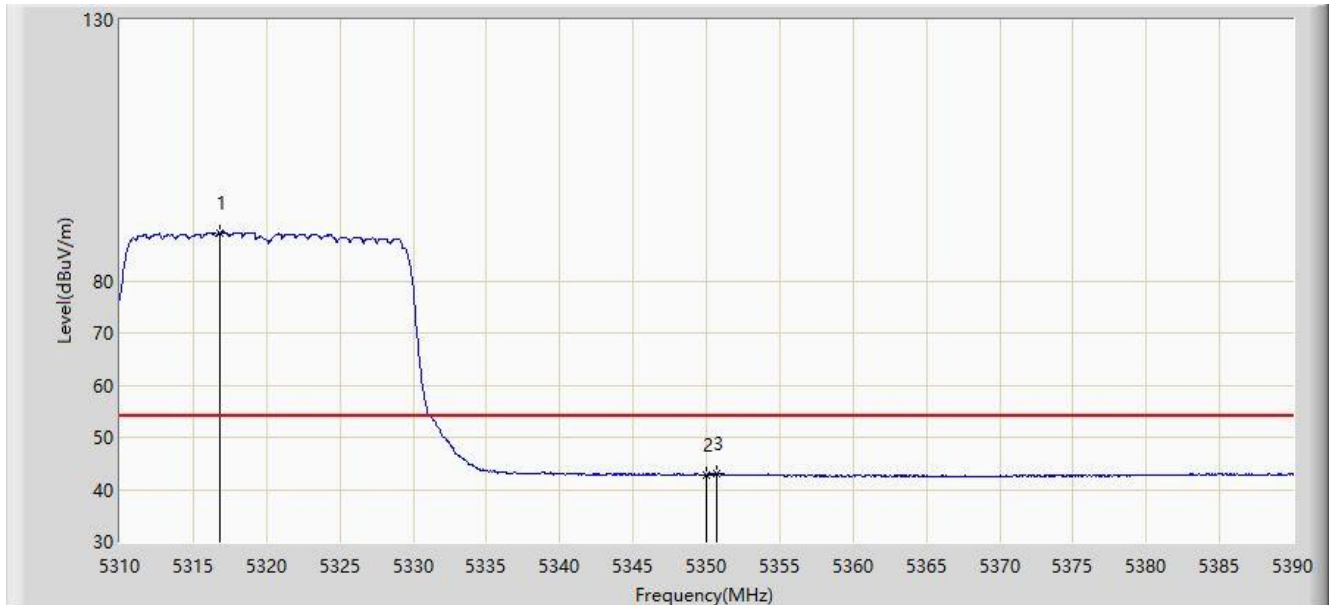


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5316.840	89.208	85.581	N/A	N/A	3.627	AV
2		5350.000	42.750	39.222	-11.250	54.000	3.527	AV
3	*	5350.680	43.018	39.494	-10.982	54.000	3.524	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

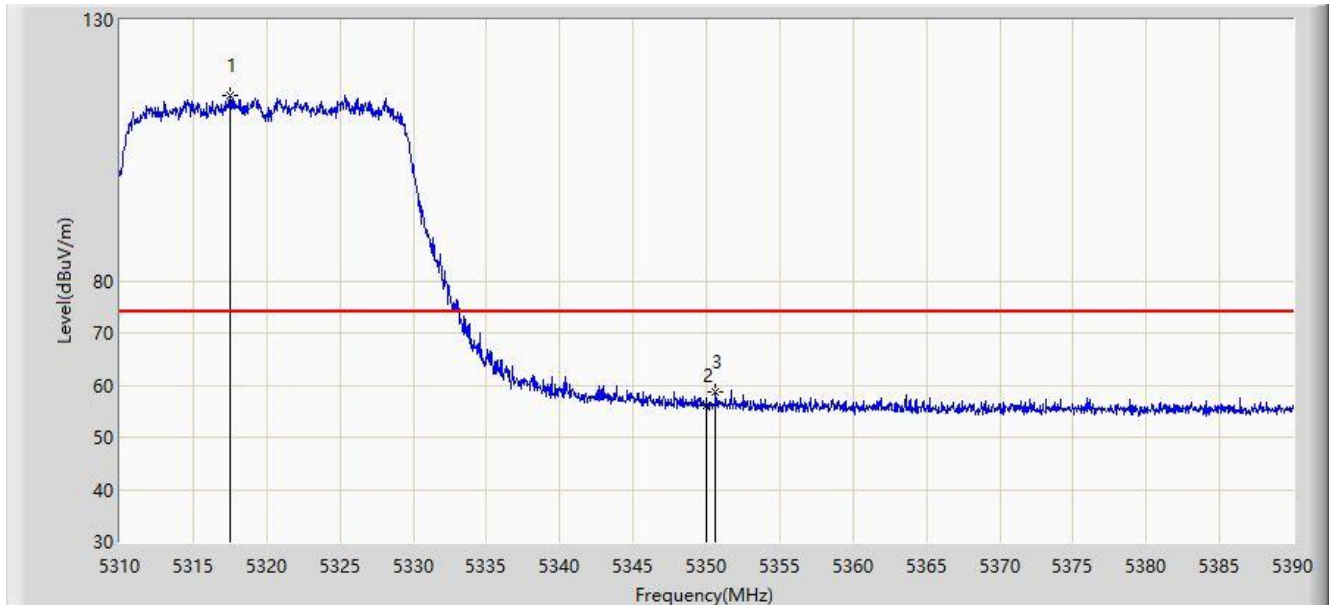


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.560	115.429	111.798	N/A	N/A	3.632	PK
2		5350.000	56.115	52.587	-17.885	74.000	3.527	PK
3	*	5350.640	58.792	55.268	-15.208	74.000	3.525	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

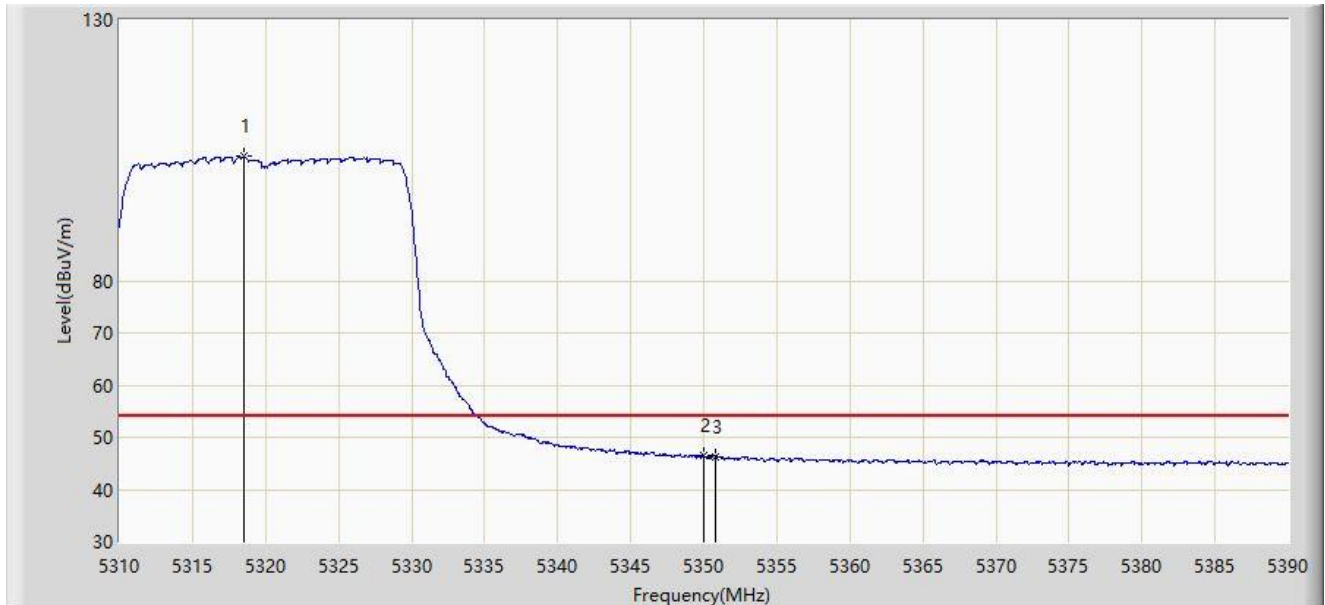


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5318.520	103.773	100.142	N/A	N/A	3.631	AV
2	*	5350.000	46.406	42.878	-7.594	54.000	3.527	AV
3		5350.840	46.367	42.844	-7.633	54.000	3.523	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

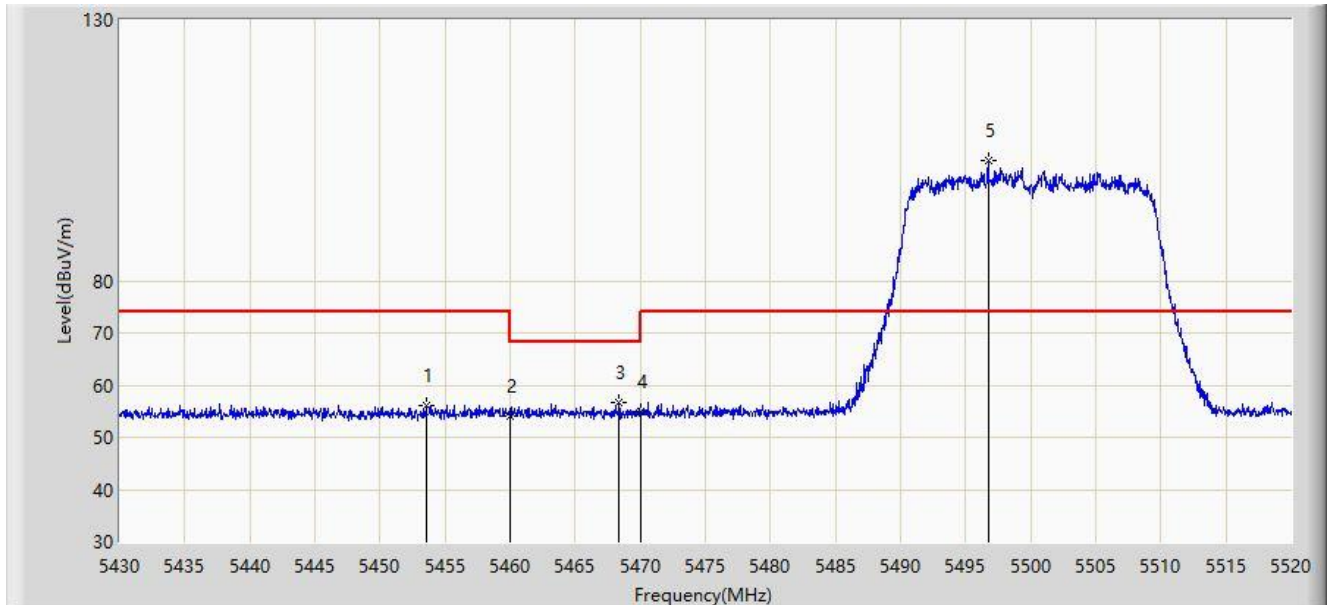


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5453.580	56.069	52.372	-17.931	74.000	3.697	PK
2		5460.000	54.072	50.334	-19.928	74.000	3.738	PK
3	*	5468.385	56.768	52.997	-11.432	68.200	3.771	PK
4		5470.000	54.923	51.146	-13.277	68.200	3.777	PK
5		5496.735	102.972	98.946	N/A	N/A	4.027	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

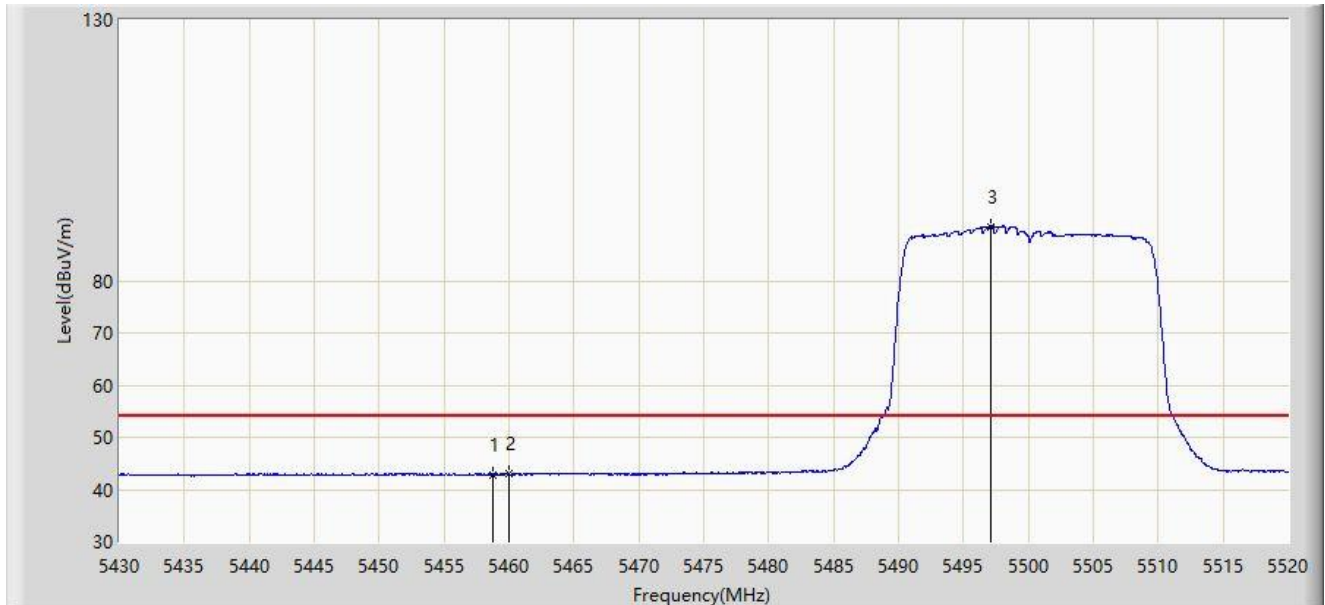


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.800	42.890	39.157	-11.110	54.000	3.733	AV
2	*	5460.000	42.912	39.174	-11.088	54.000	3.738	AV
3		5497.095	90.411	86.384	N/A	N/A	4.027	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

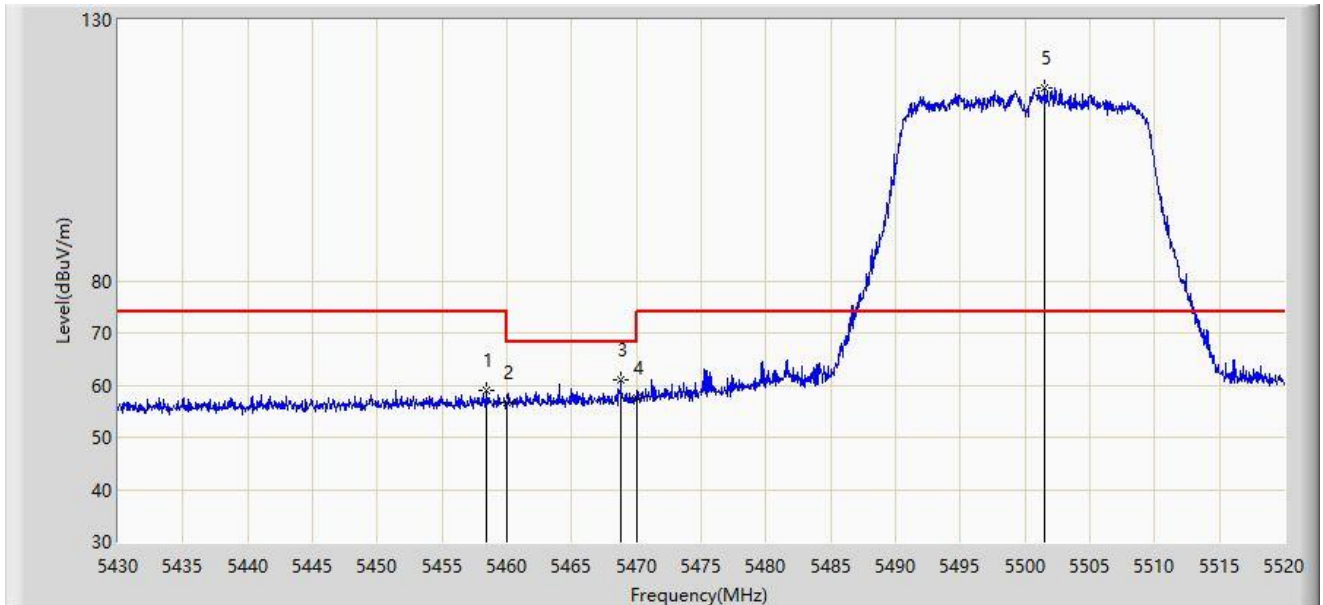


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.395	58.976	55.245	-15.024	74.000	3.731	PK
2		5460.000	56.703	52.965	-17.297	74.000	3.738	PK
3	*	5468.790	60.969	57.196	-7.231	68.200	3.772	PK
4		5470.000	57.594	53.817	-10.606	68.200	3.777	PK
5		5501.550	117.079	113.047	N/A	N/A	4.033	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

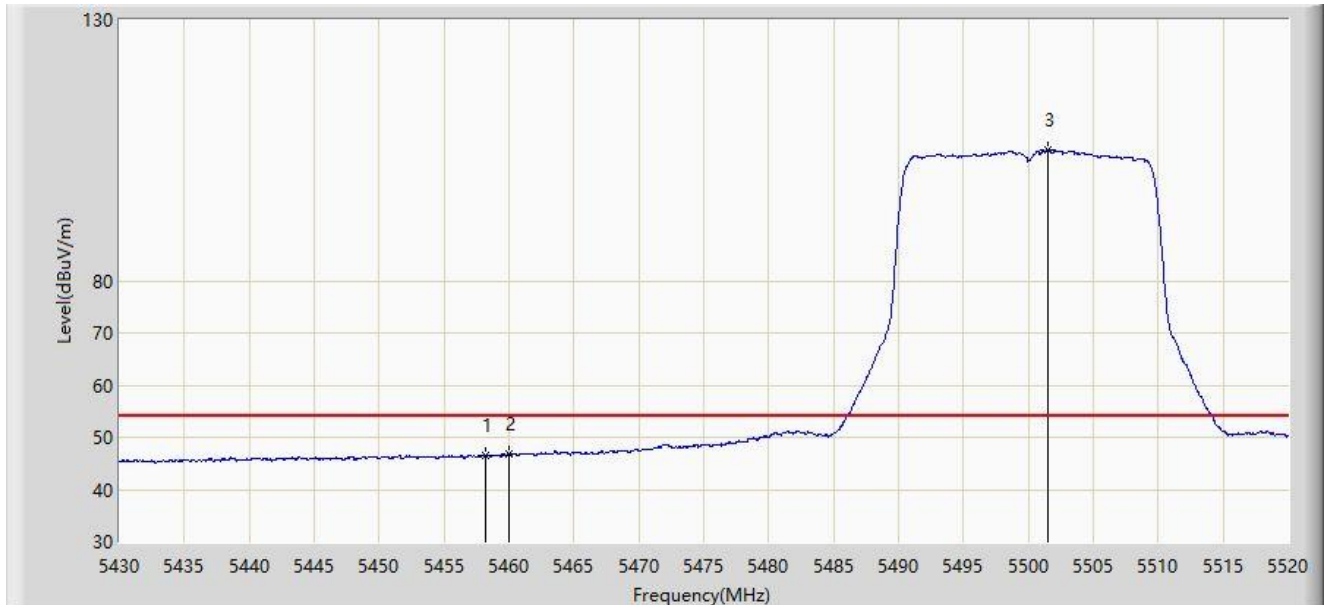


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.170	46.512	42.782	-7.488	54.000	3.730	AV
2	*	5460.000	46.722	42.984	-7.278	54.000	3.738	AV
3		5501.550	105.009	100.977	N/A	N/A	4.033	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

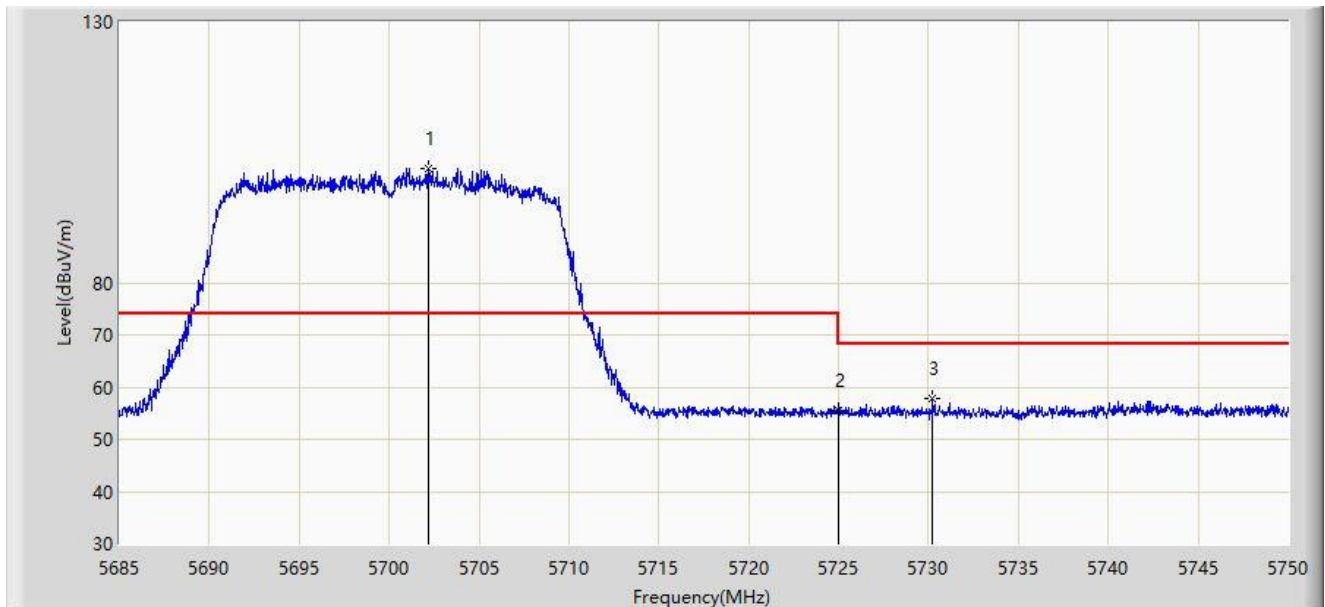


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5702.160	101.919	97.742	N/A	N/A	4.177	PK
2		5725.000	55.446	51.216	-12.754	68.200	4.230	PK
3	*	5730.240	57.727	53.460	-10.473	68.200	4.267	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

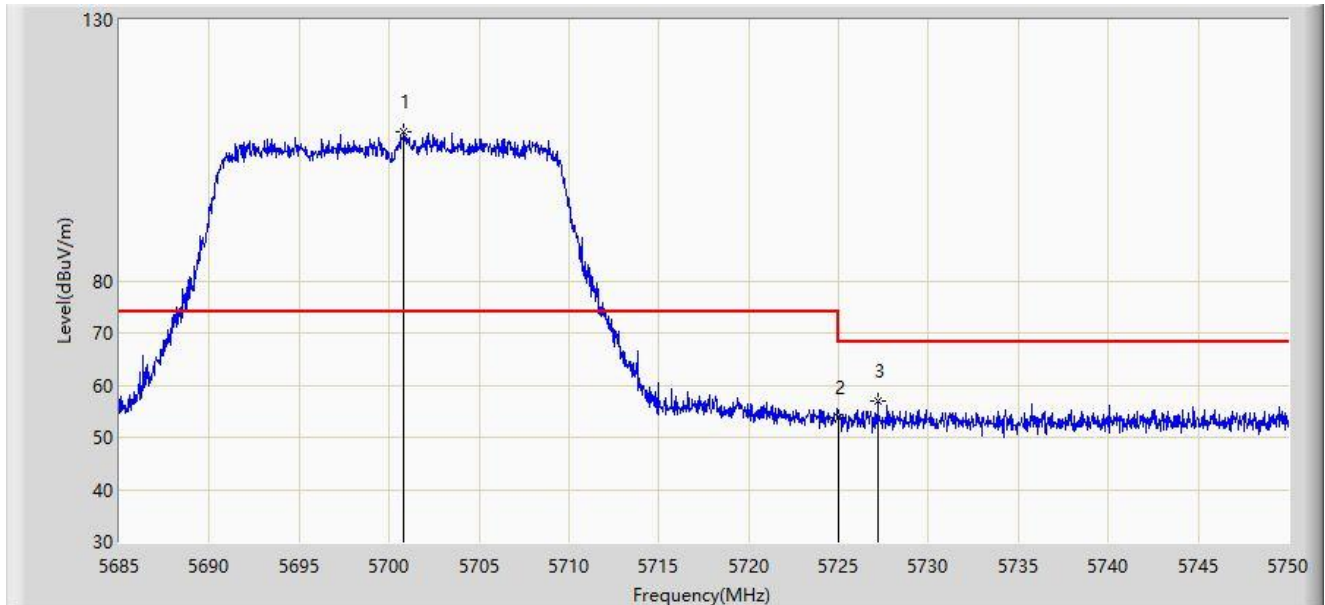


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5700.828	108.622	104.451	N/A	N/A	4.171	PK
2		5725.000	53.845	49.615	-14.355	68.200	4.230	PK
3	*	5727.185	56.927	52.689	-11.273	68.200	4.238	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

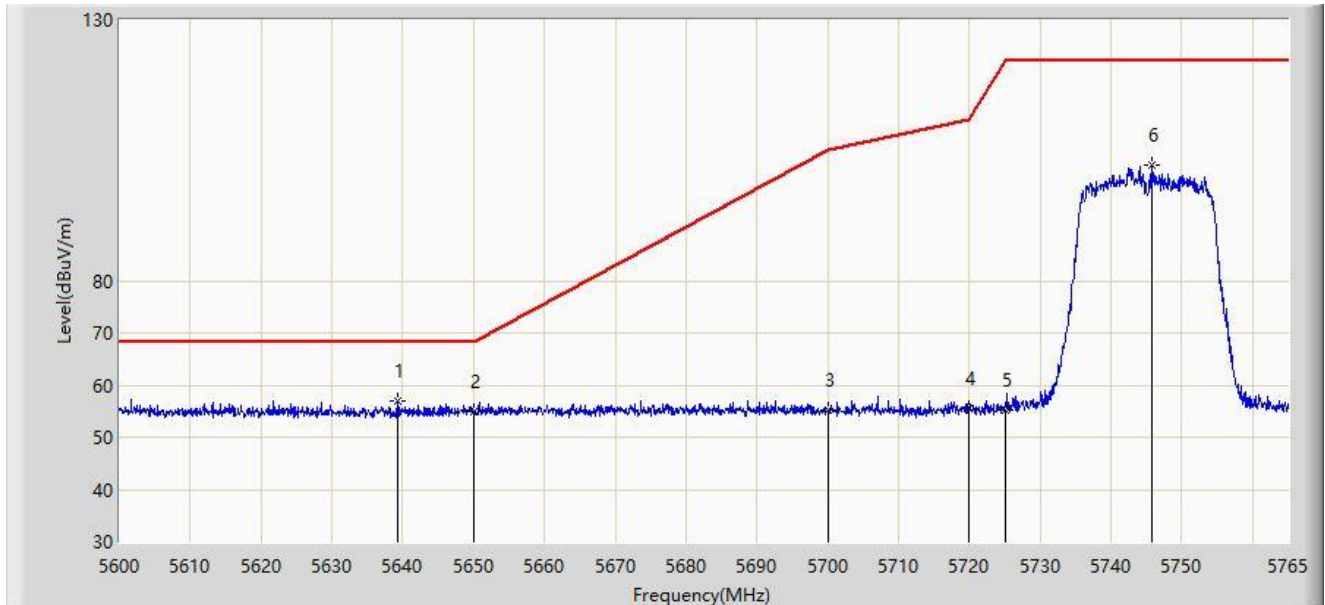


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5639.353	57.010	53.189	-11.190	68.200	3.821	PK
2		5650.000	54.846	50.786	-13.354	68.200	4.060	PK
3		5700.000	55.250	51.082	-49.950	105.200	4.168	PK
4		5720.000	55.606	51.386	-55.194	110.800	4.219	PK
5		5725.000	55.193	50.963	-67.007	122.200	4.230	PK
6		5745.777	102.181	97.776	N/A	N/A	4.405	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

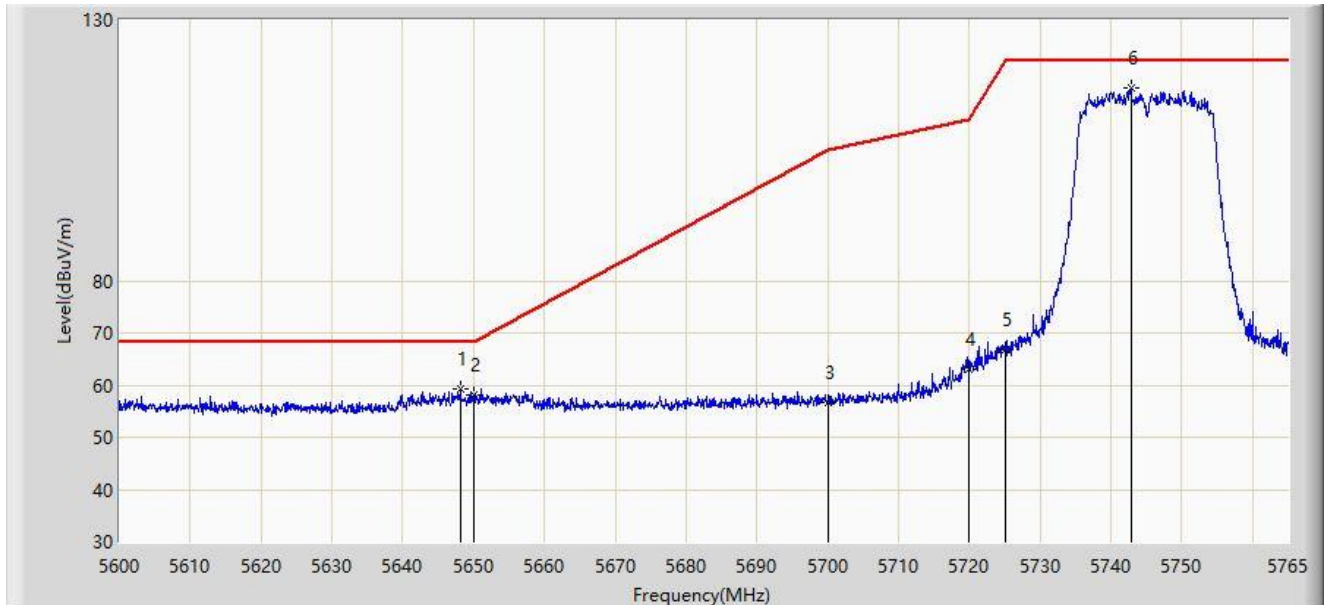


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5648.098	59.238	55.226	-8.962	68.200	4.013	PK
2		5650.000	58.174	54.114	-10.026	68.200	4.060	PK
3		5700.000	56.676	52.508	-48.524	105.200	4.168	PK
4		5720.000	63.171	58.951	-47.629	110.800	4.219	PK
5		5725.000	66.903	62.673	-55.297	122.200	4.230	PK
6		5742.808	116.862	112.473	N/A	N/A	4.390	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

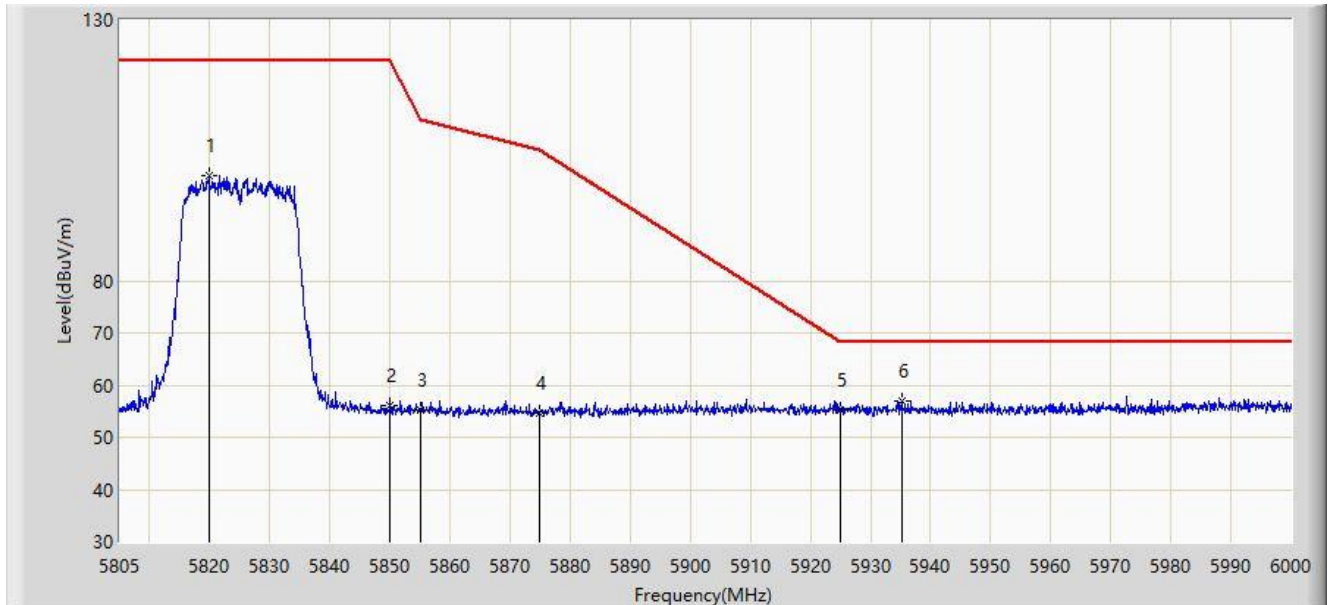


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5819.917	100.141	95.627	N/A	N/A	4.514	PK
2		5850.000	56.154	51.502	-66.046	122.200	4.651	PK
3		5855.000	55.080	50.456	-55.720	110.800	4.624	PK
4		5875.000	54.517	49.973	-50.683	105.200	4.543	PK
5		5925.000	55.159	50.407	-13.041	68.200	4.751	PK
6	*	5935.163	56.870	52.157	-11.330	68.200	4.713	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

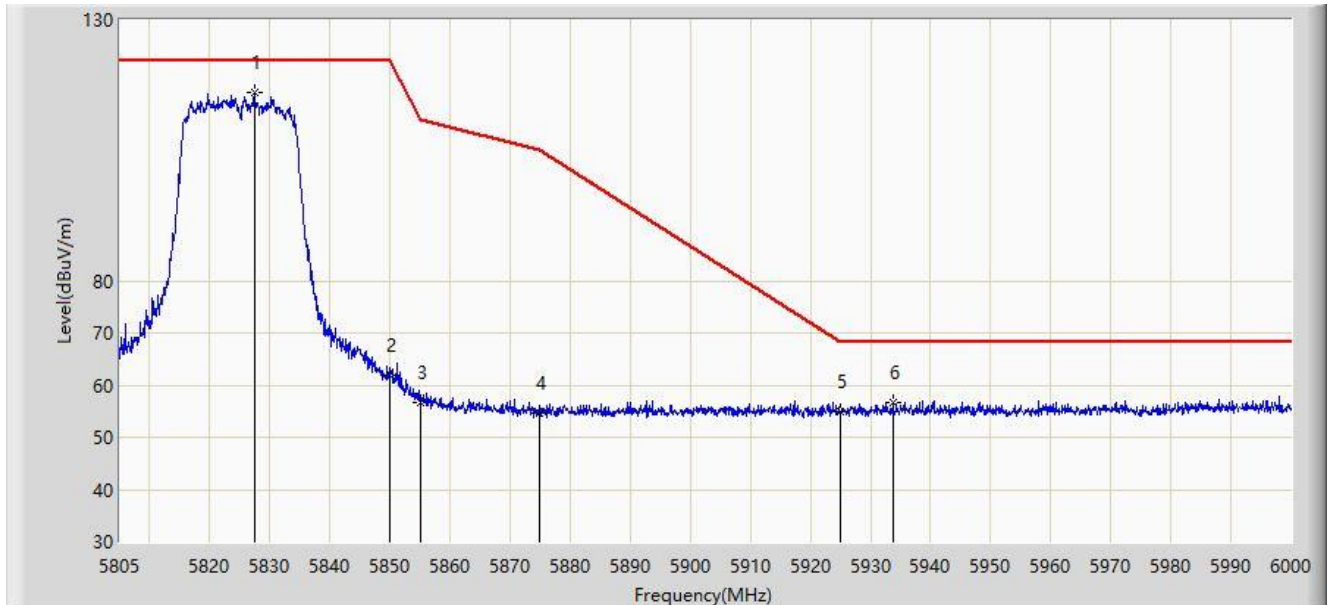


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5827.425	115.995	111.420	N/A	N/A	4.575	PK
2		5850.000	61.975	57.323	-60.225	122.200	4.651	PK
3		5855.000	56.706	52.082	-54.094	110.800	4.624	PK
4		5875.000	54.652	50.108	-50.548	105.200	4.543	PK
5		5925.000	54.899	50.147	-13.301	68.200	4.751	PK
6	*	5933.700	56.631	51.903	-11.569	68.200	4.729	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

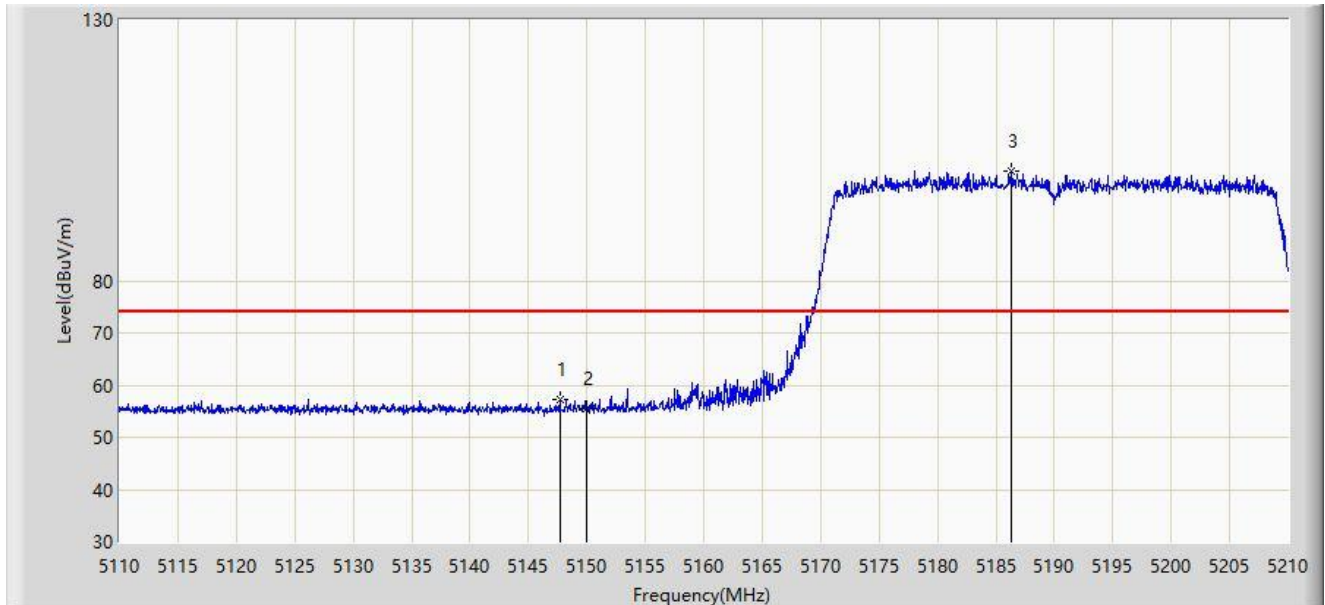


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.700	57.219	53.445	-16.781	74.000	3.773	PK
2		5150.000	55.483	51.711	-18.517	74.000	3.773	PK
3		5186.350	101.138	97.621	N/A	N/A	3.517	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

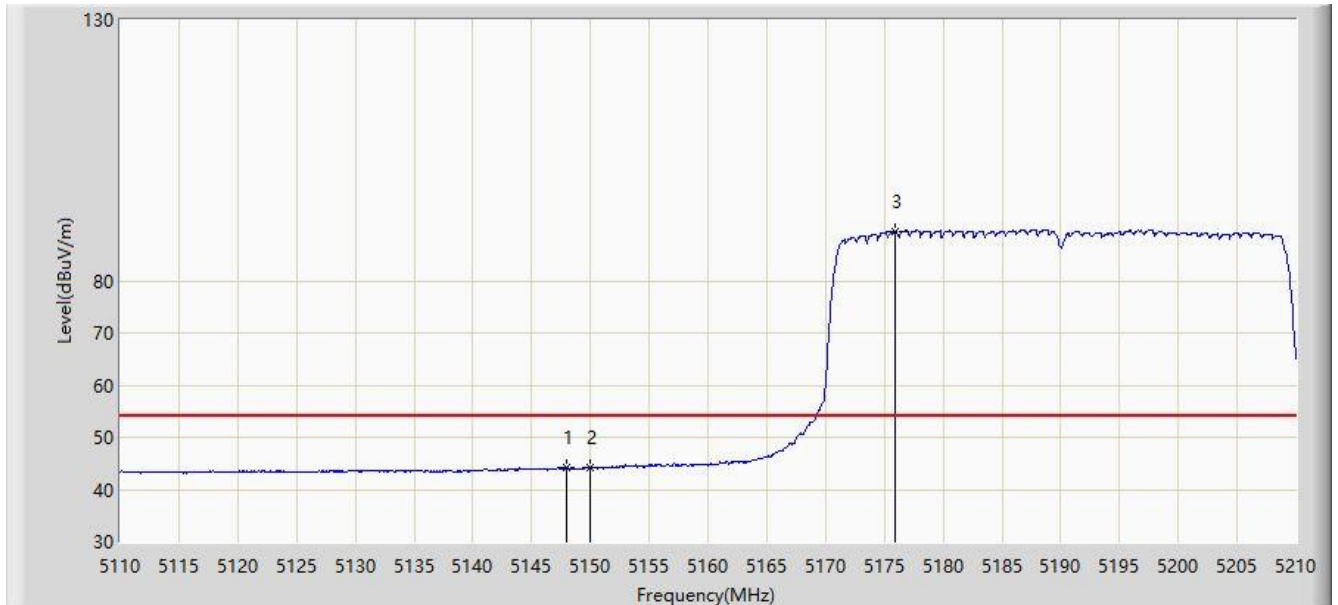


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5148.000	44.101	40.329	-9.899	54.000	3.772	AV
2	*	5150.000	44.200	40.428	-9.800	54.000	3.773	AV
3		5175.950	89.473	85.904	N/A	N/A	3.569	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

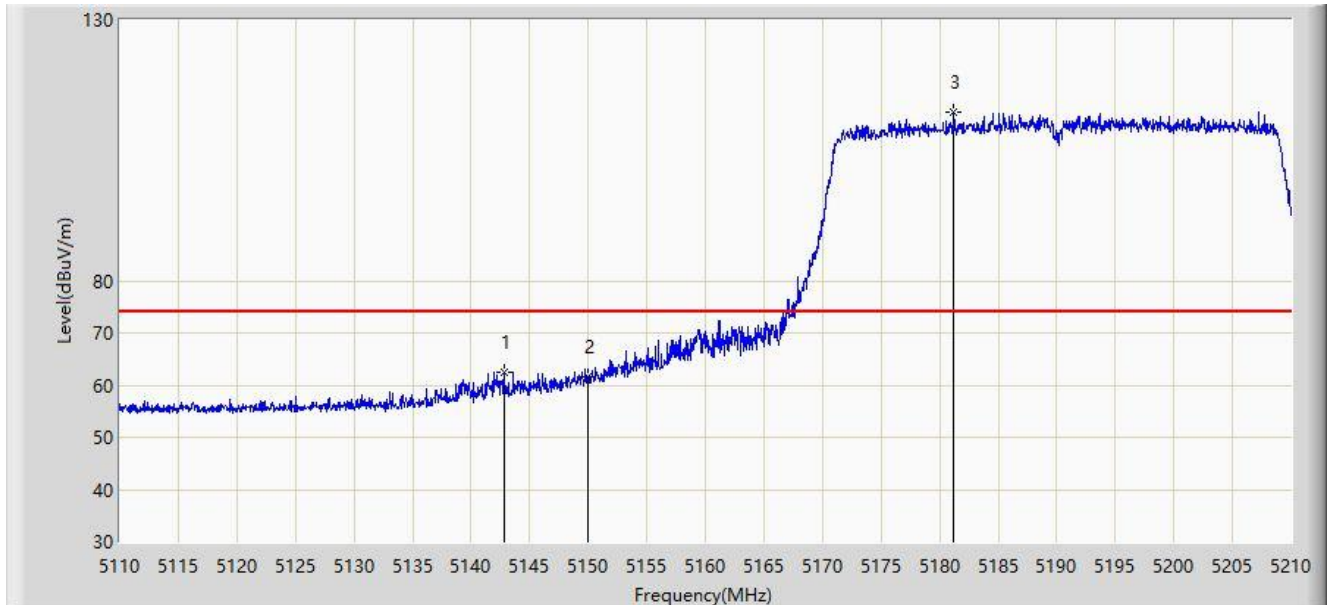


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5142.800	62.489	58.696	-11.511	74.000	3.794	PK
2		5150.000	61.485	57.713	-12.515	74.000	3.773	PK
3		5181.200	112.185	108.665	N/A	N/A	3.520	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

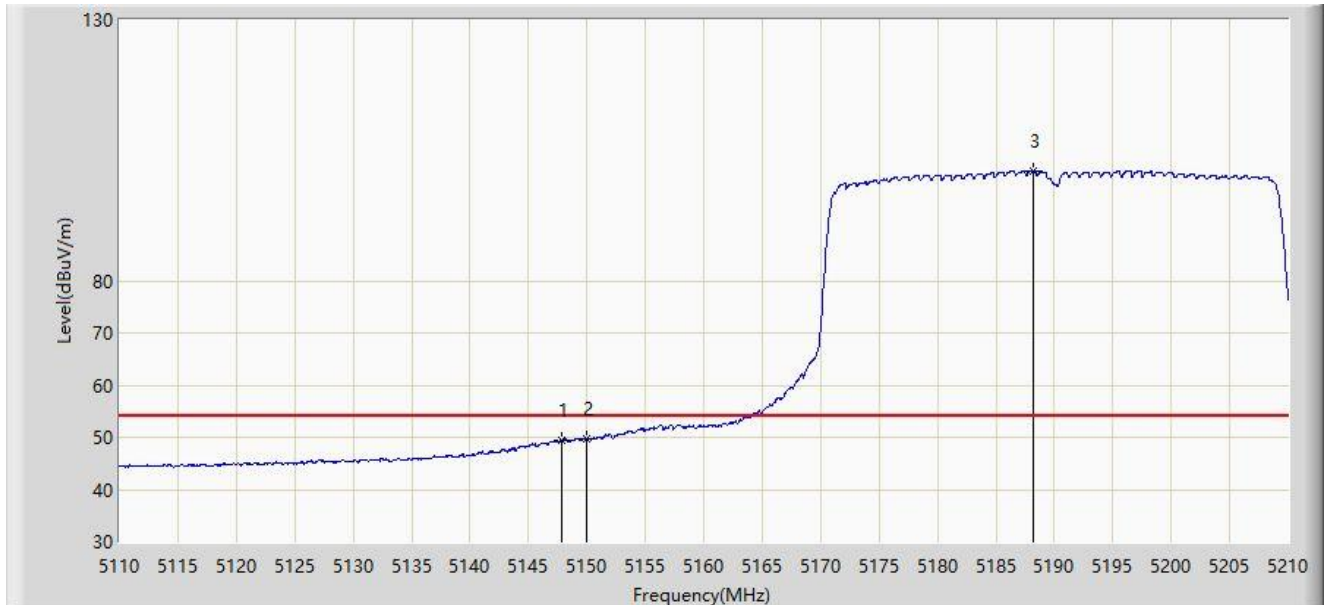


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5147.850	49.456	45.683	-4.544	54.000	3.773	AV
2	*	5150.000	49.830	46.058	-4.170	54.000	3.773	AV
3		5188.250	100.983	97.470	N/A	N/A	3.513	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

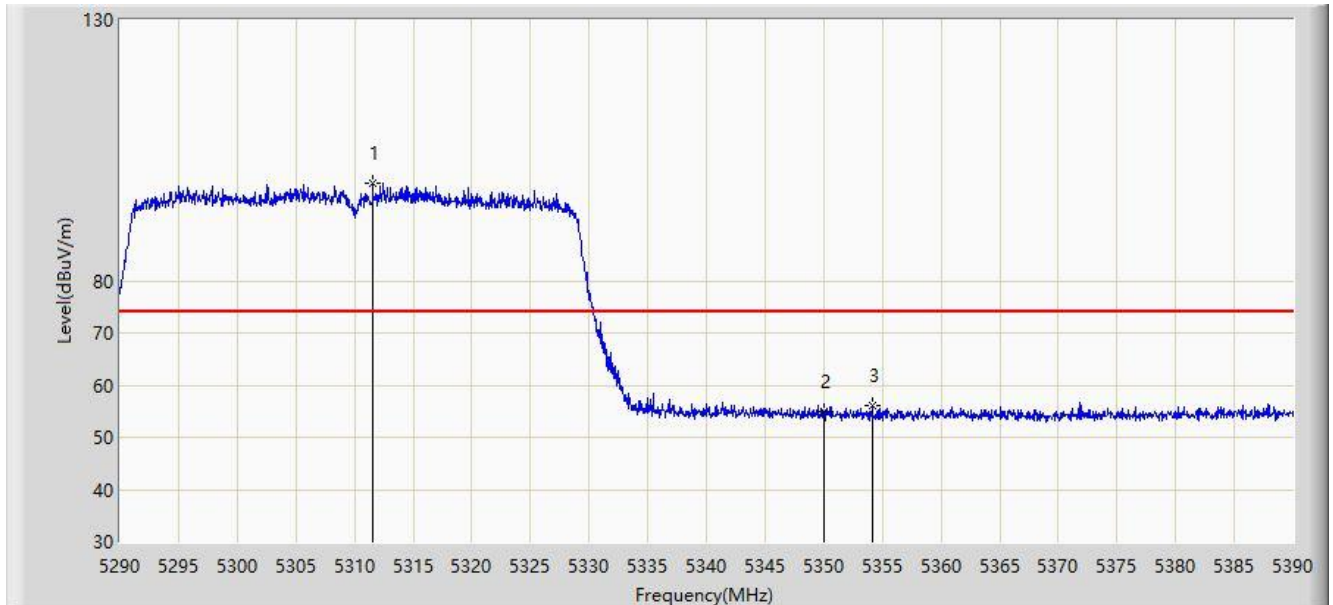


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.550	98.583	94.977	N/A	N/A	3.606	PK
2		5350.000	54.844	51.316	-19.156	74.000	3.527	PK
3	*	5354.100	56.176	52.679	-17.824	74.000	3.497	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

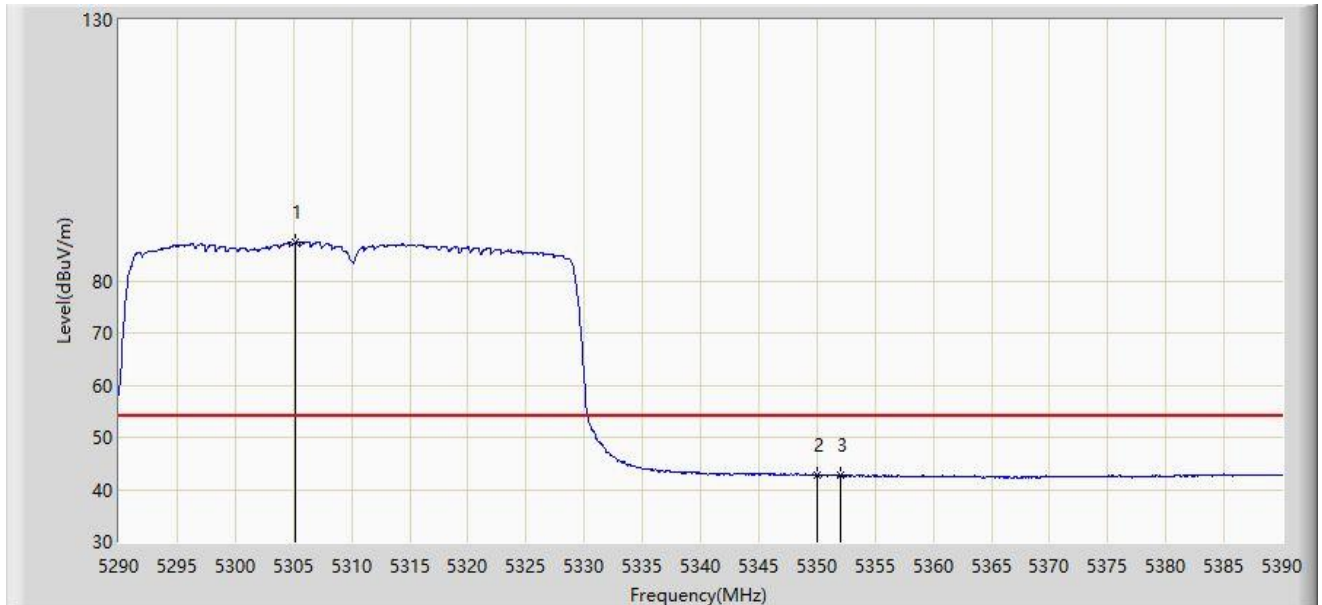


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5305.200	87.363	83.765	N/A	N/A	3.597	AV
2	*	5350.000	42.836	39.308	-11.164	54.000	3.527	AV
3		5352.050	42.812	39.296	-11.188	54.000	3.516	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

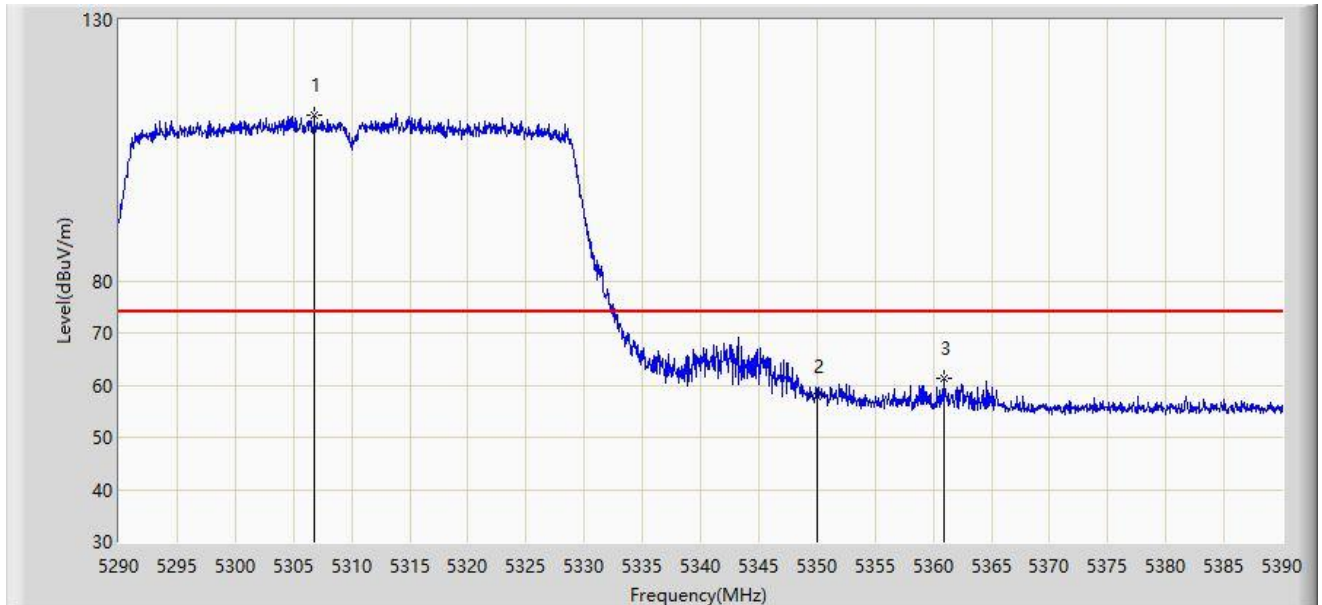


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5306.800	111.878	108.278	N/A	N/A	3.600	PK
2		5350.000	57.942	54.414	-16.058	74.000	3.527	PK
3	*	5360.950	61.297	57.864	-12.703	74.000	3.433	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

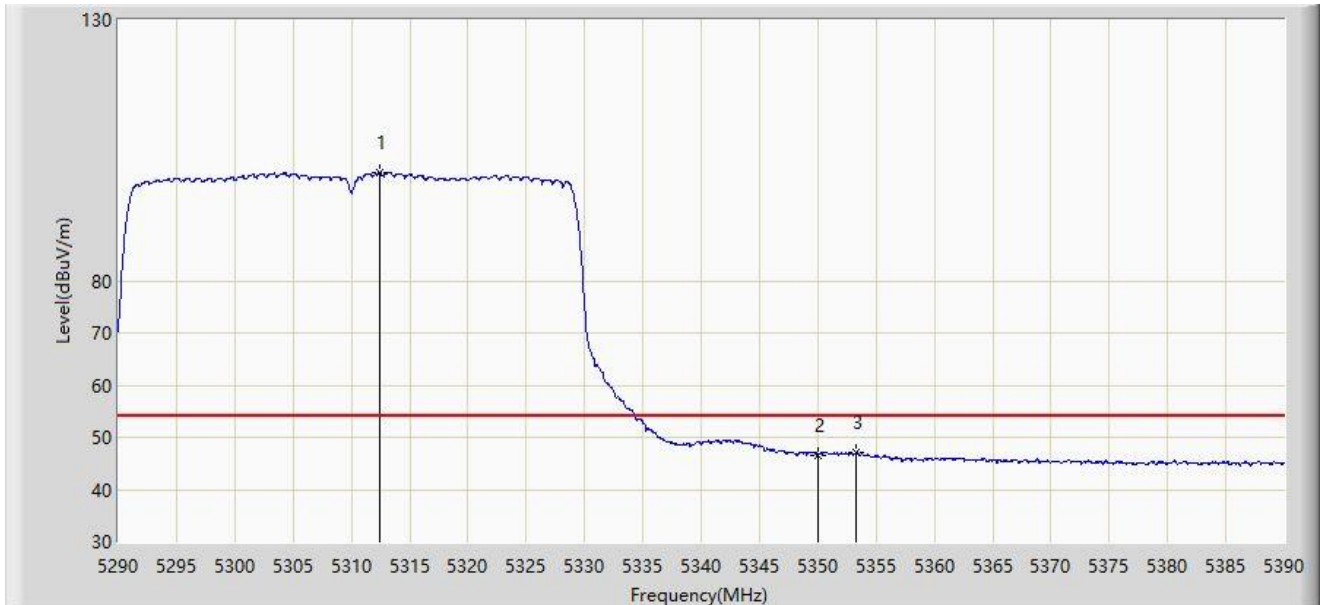


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.450	100.677	97.069	N/A	N/A	3.607	AV
2		5350.000	46.483	42.955	-7.517	54.000	3.527	AV
3	*	5353.300	46.967	43.463	-7.033	54.000	3.504	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

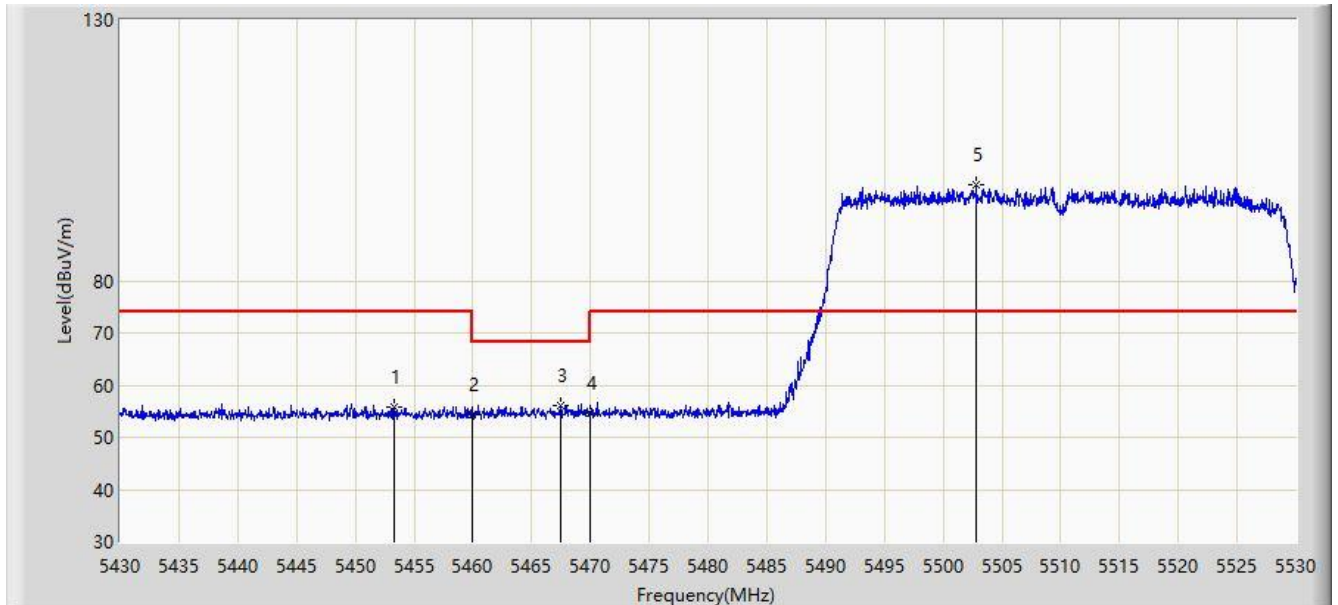


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5453.300	55.903	52.206	-18.097	74.000	3.697	PK
2		5460.000	54.320	50.582	-19.680	74.000	3.738	PK
3	*	5467.450	55.998	52.231	-12.202	68.200	3.767	PK
4		5470.000	54.648	50.871	-13.552	68.200	3.777	PK
5		5502.850	98.475	94.441	N/A	N/A	4.034	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

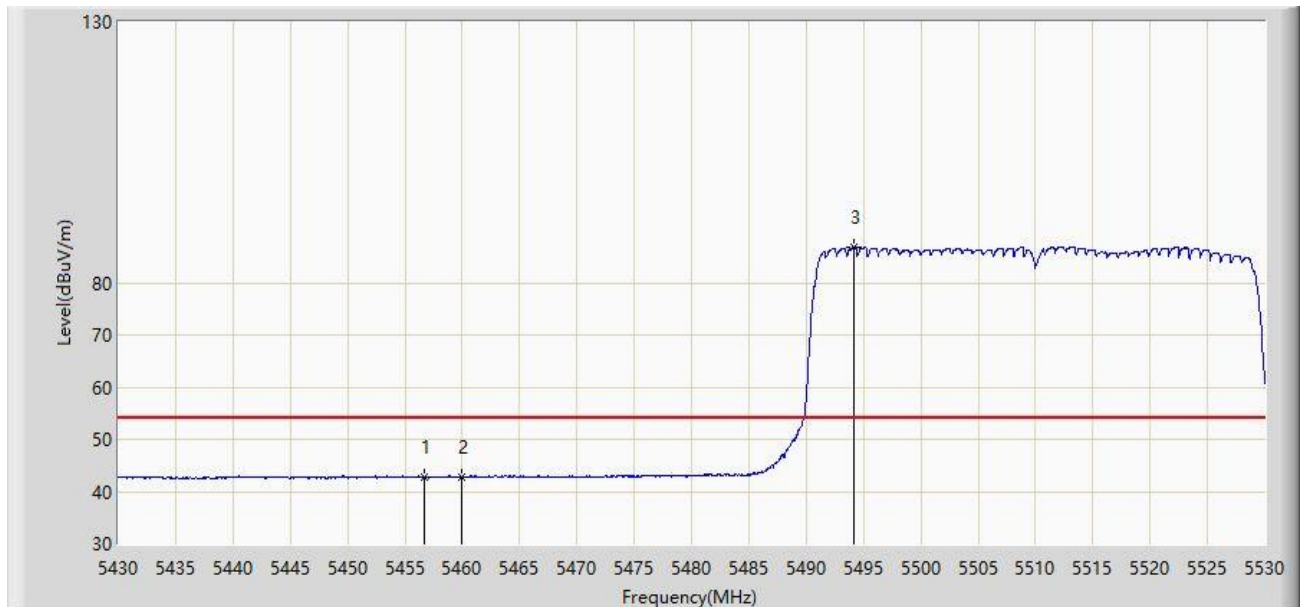


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5456.750	42.872	39.148	-11.128	54.000	3.724	AV
2		5460.000	42.708	38.970	-11.292	54.000	3.738	AV
3		5494.100	86.687	82.664	N/A	N/A	4.023	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

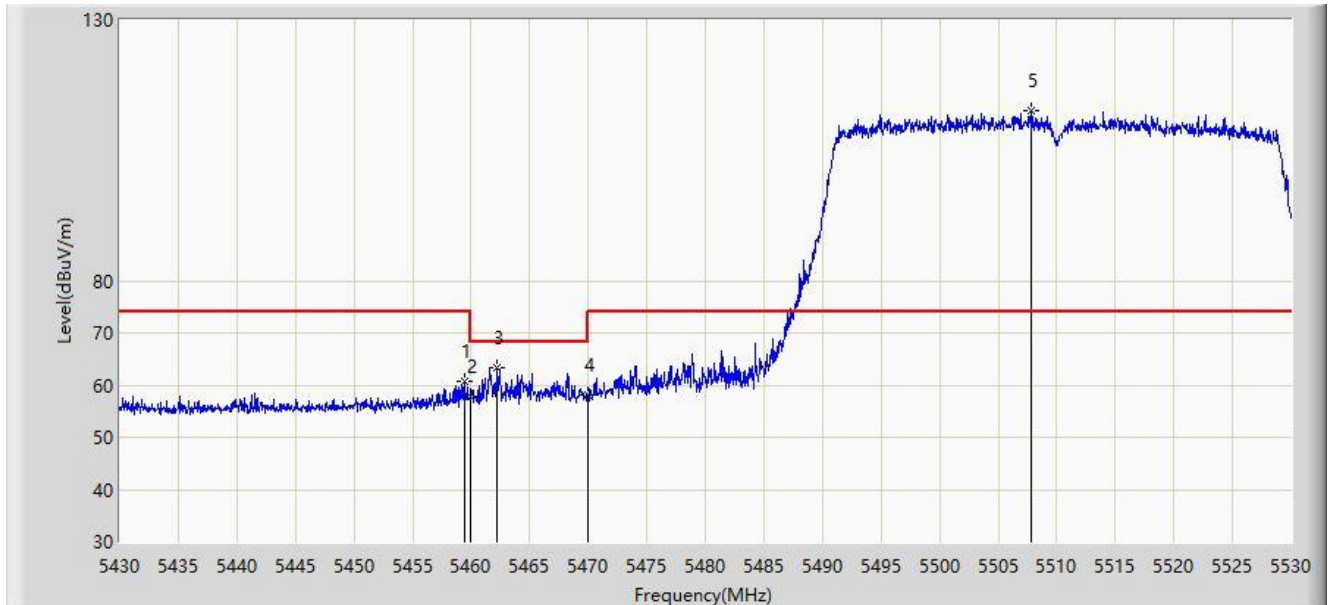


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.450	60.801	57.065	-13.199	74.000	3.735	PK
2		5460.000	57.814	54.076	-16.186	74.000	3.738	PK
3	*	5462.150	63.338	59.592	-4.862	68.200	3.746	PK
4		5470.000	58.010	54.233	-10.190	68.200	3.777	PK
5		5507.800	112.603	108.589	N/A	N/A	4.013	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

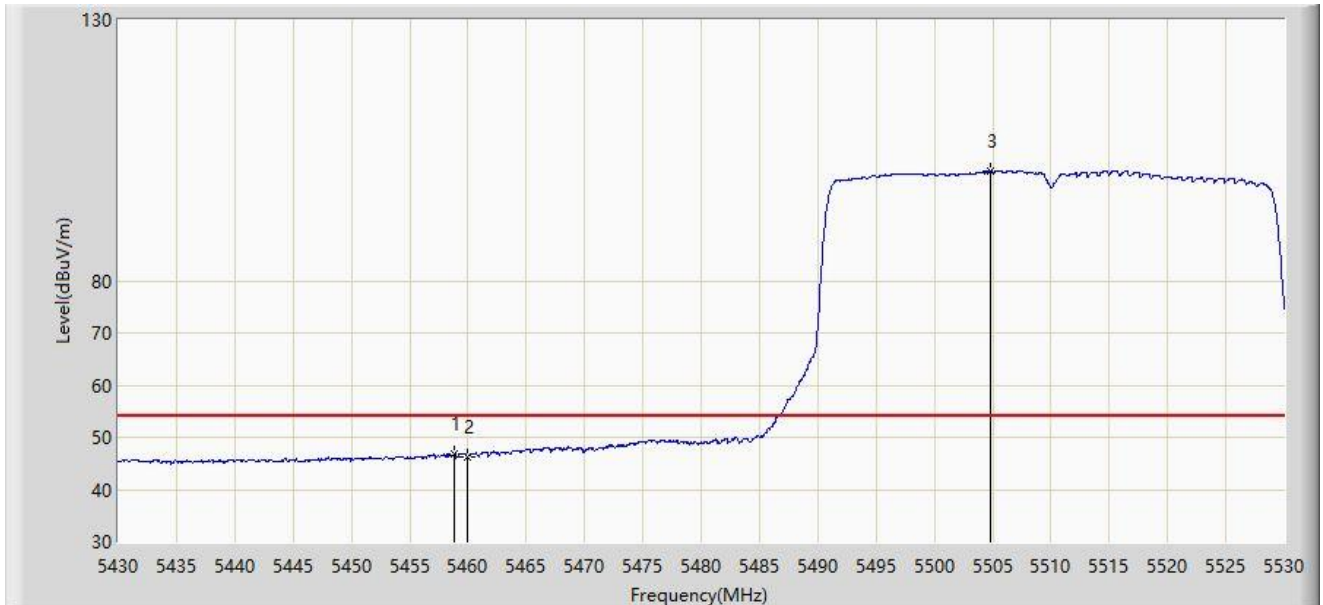


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5458.850	46.857	43.124	-7.143	54.000	3.733	AV
2		5460.000	46.318	42.580	-7.682	54.000	3.738	AV
3		5504.800	100.974	96.937	N/A	N/A	4.036	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

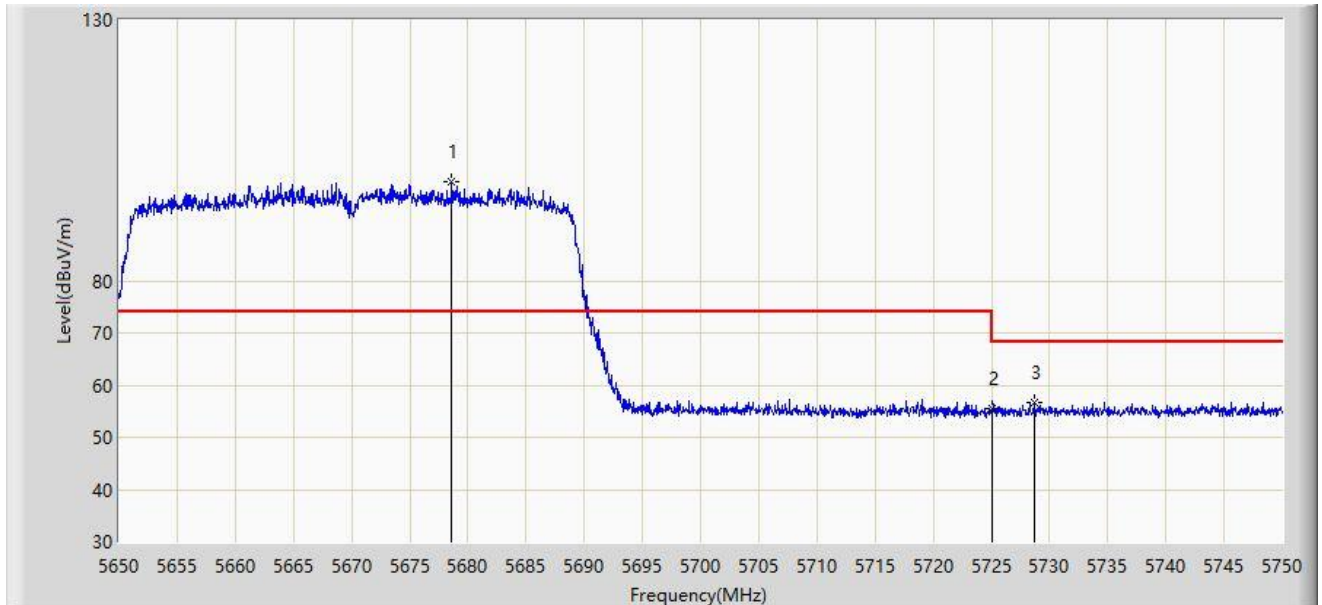


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5678.600	98.911	94.664	N/A	N/A	4.247	PK
2		5725.000	55.465	51.235	-12.735	68.200	4.230	PK
3	*	5728.750	56.803	52.550	-11.397	68.200	4.252	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

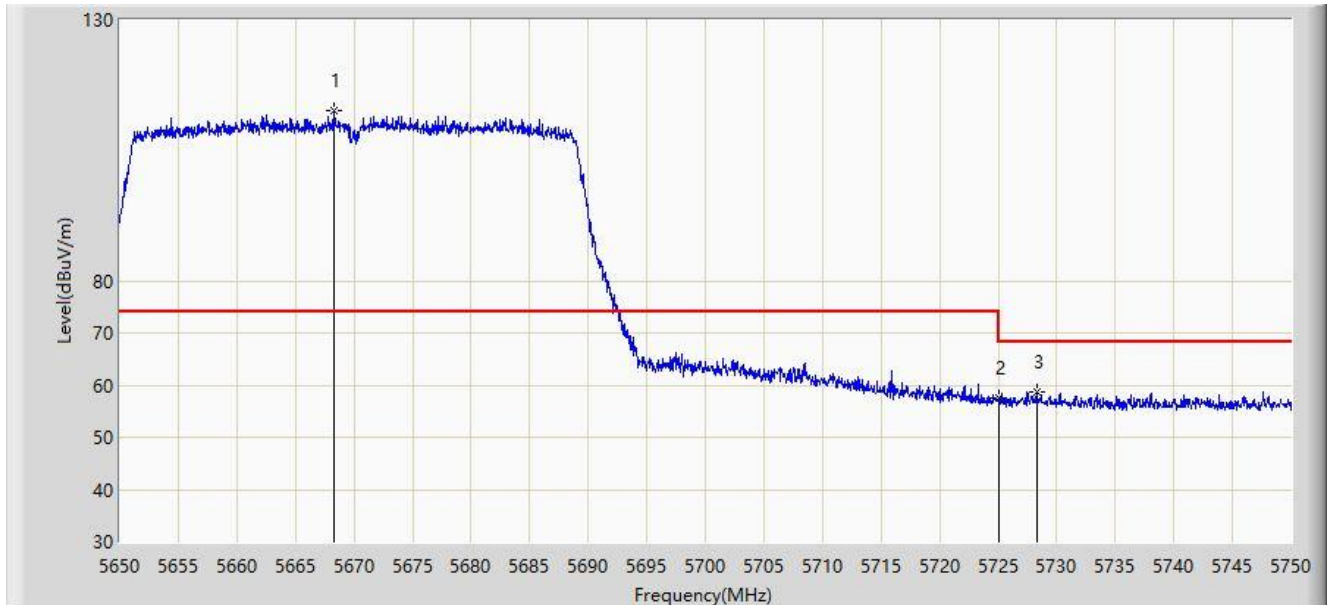


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5668.250	112.726	108.467	N/A	N/A	4.259	PK
2		5725.000	57.414	53.184	-10.786	68.200	4.230	PK
3	*	5728.300	58.718	54.470	-9.482	68.200	4.248	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

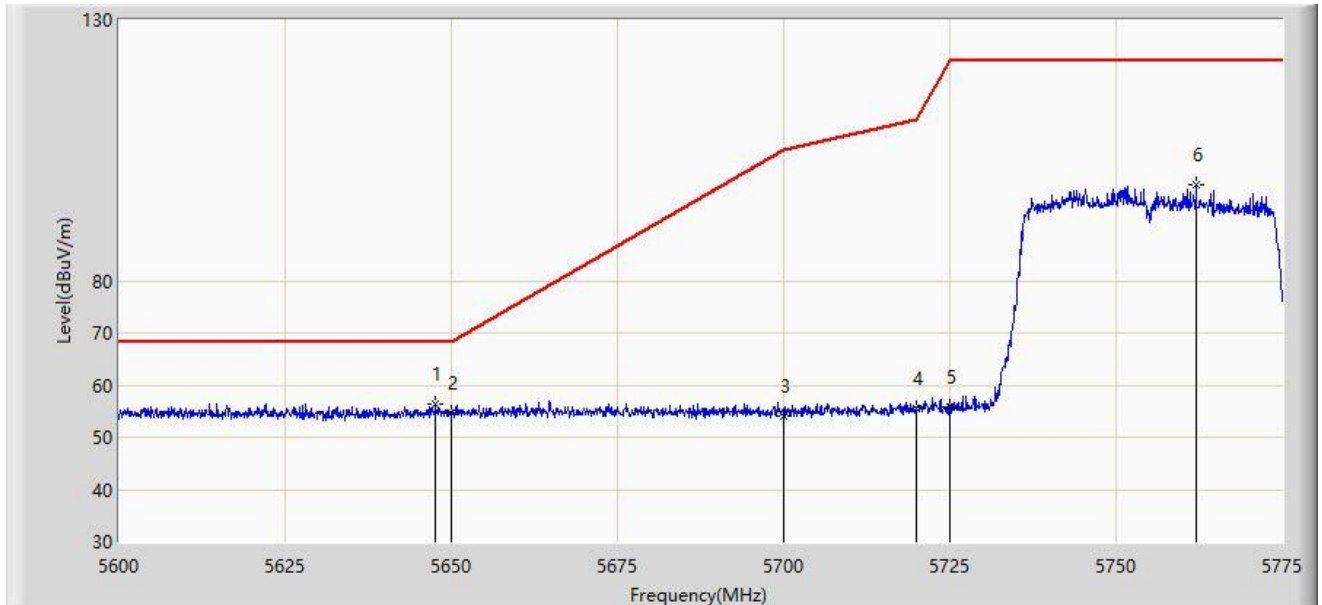


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.600	56.450	52.451	-11.750	68.200	3.999	PK
2		5650.000	54.617	50.557	-13.583	68.200	4.060	PK
3		5700.000	54.111	49.943	-51.089	105.200	4.168	PK
4		5720.000	55.409	51.189	-55.391	110.800	4.219	PK
5		5725.000	55.691	51.461	-66.509	122.200	4.230	PK
6		5762.050	98.539	94.108	N/A	N/A	4.431	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

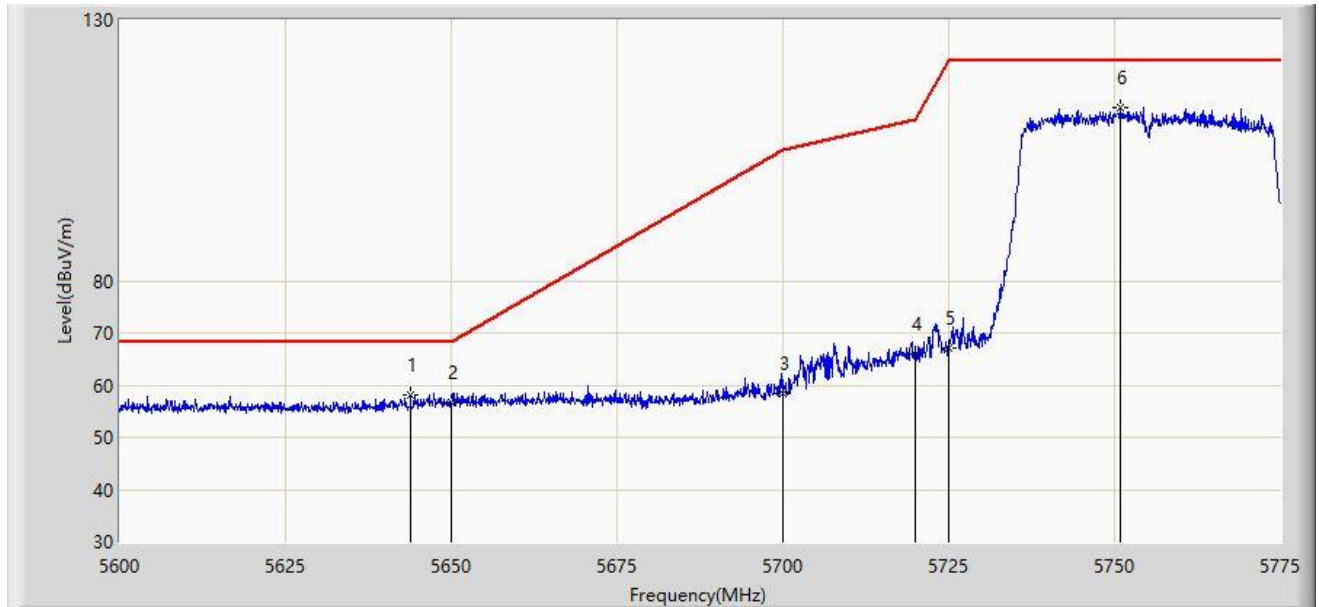


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5643.837	58.105	54.201	-10.095	68.200	3.905	PK
2		5650.000	56.582	52.522	-11.618	68.200	4.060	PK
3		5700.000	58.458	54.290	-46.742	105.200	4.168	PK
4		5720.000	65.806	61.586	-44.994	110.800	4.219	PK
5		5725.000	67.032	62.802	-55.168	122.200	4.230	PK
6		5750.850	113.321	108.908	N/A	N/A	4.413	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

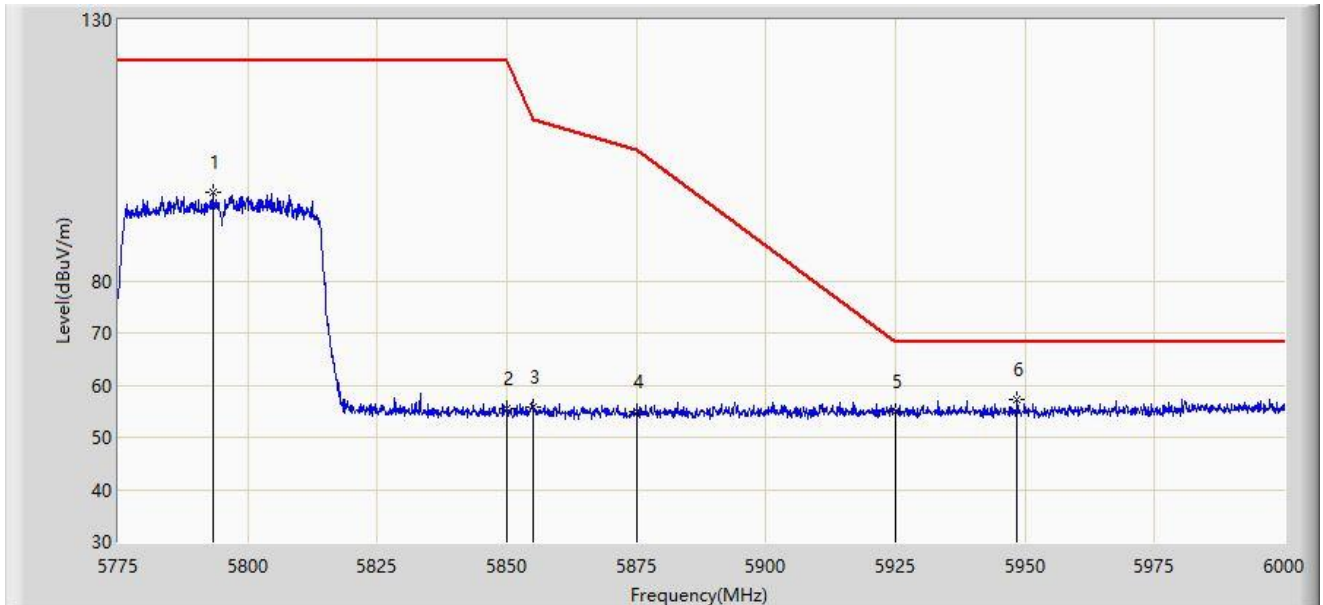


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5793.337	97.008	92.604	N/A	N/A	4.404	PK
2		5850.000	55.592	50.940	-66.608	122.200	4.651	PK
3		5855.000	55.927	51.303	-54.873	110.800	4.624	PK
4		5875.000	54.925	50.381	-50.275	105.200	4.543	PK
5		5925.000	55.003	50.251	-13.197	68.200	4.751	PK
6	*	5948.475	57.264	52.651	-10.936	68.200	4.613	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

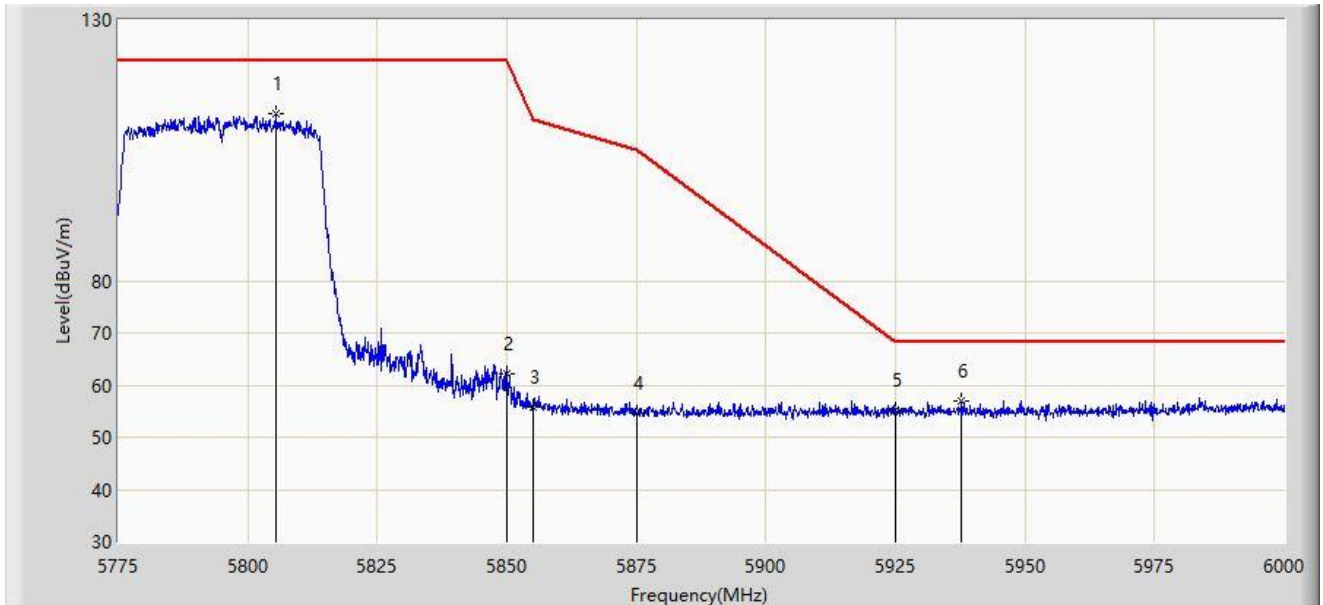


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5805.375	111.897	107.476	N/A	N/A	4.420	PK
2		5850.000	62.279	57.627	-59.921	122.200	4.651	PK
3		5855.000	55.915	51.291	-54.885	110.800	4.624	PK
4		5875.000	54.676	50.132	-50.524	105.200	4.543	PK
5		5925.000	55.074	50.322	-13.126	68.200	4.751	PK
6	*	5937.788	56.947	52.260	-11.253	68.200	4.687	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

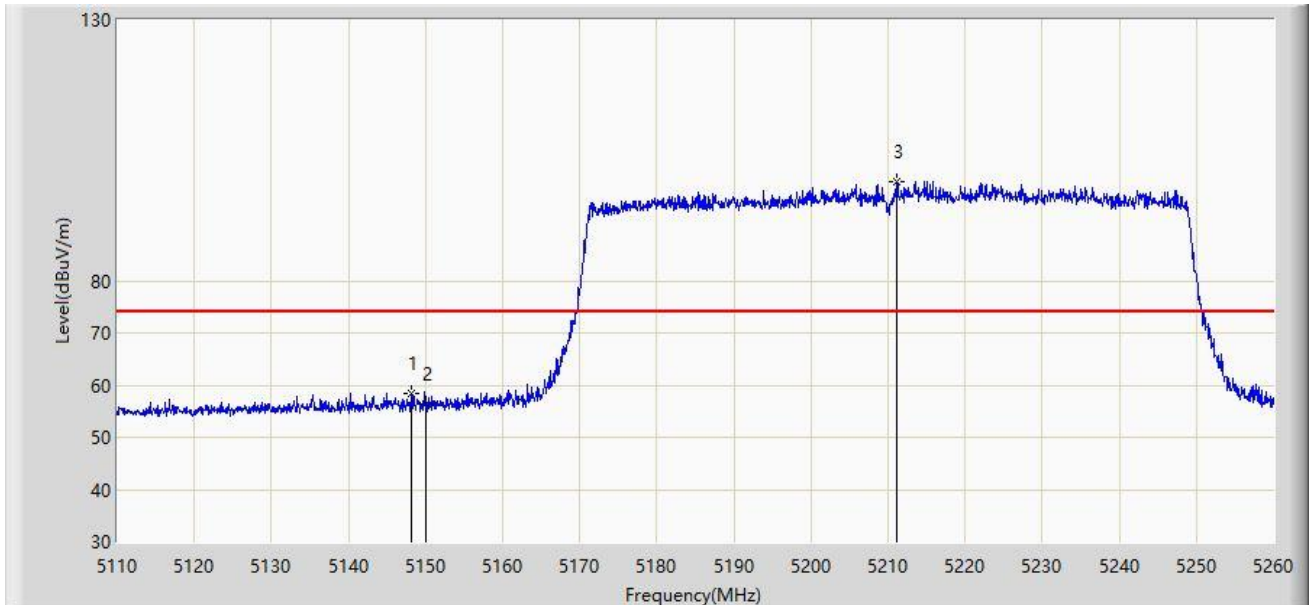


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.100	58.469	54.697	-15.531	74.000	3.772	PK
2		5150.000	56.233	52.461	-17.767	74.000	3.773	PK
3		5211.100	98.847	95.368	N/A	N/A	3.479	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

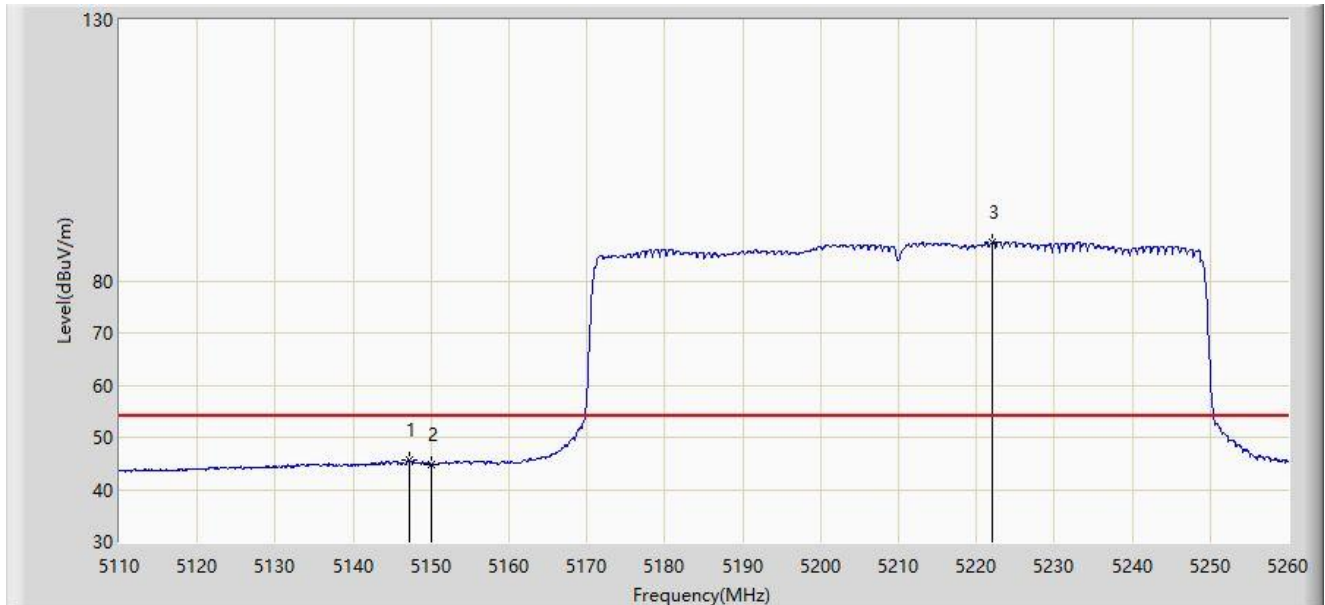


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.125	45.582	41.806	-8.418	54.000	3.776	AV
2		5150.000	44.832	41.060	-9.168	54.000	3.773	AV
3		5222.050	87.301	83.800	N/A	N/A	3.502	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

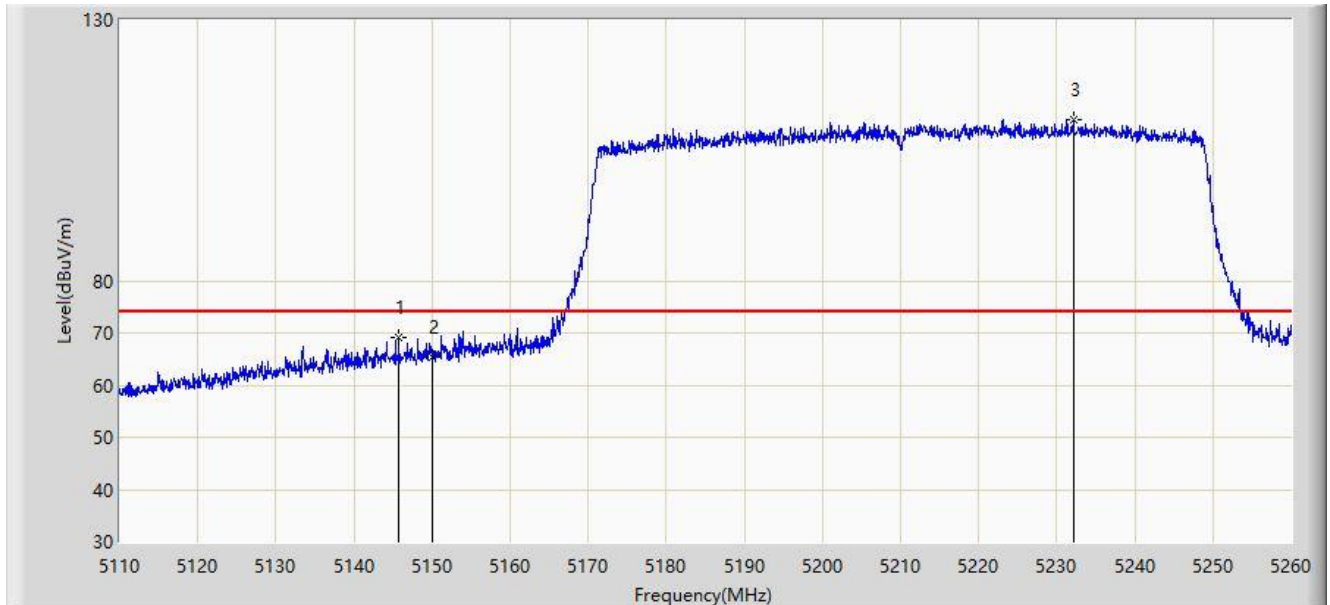


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.700	69.001	65.219	-4.999	74.000	3.782	PK
2		5150.000	65.220	61.448	-8.780	74.000	3.773	PK
3		5232.175	110.909	107.346	N/A	N/A	3.563	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

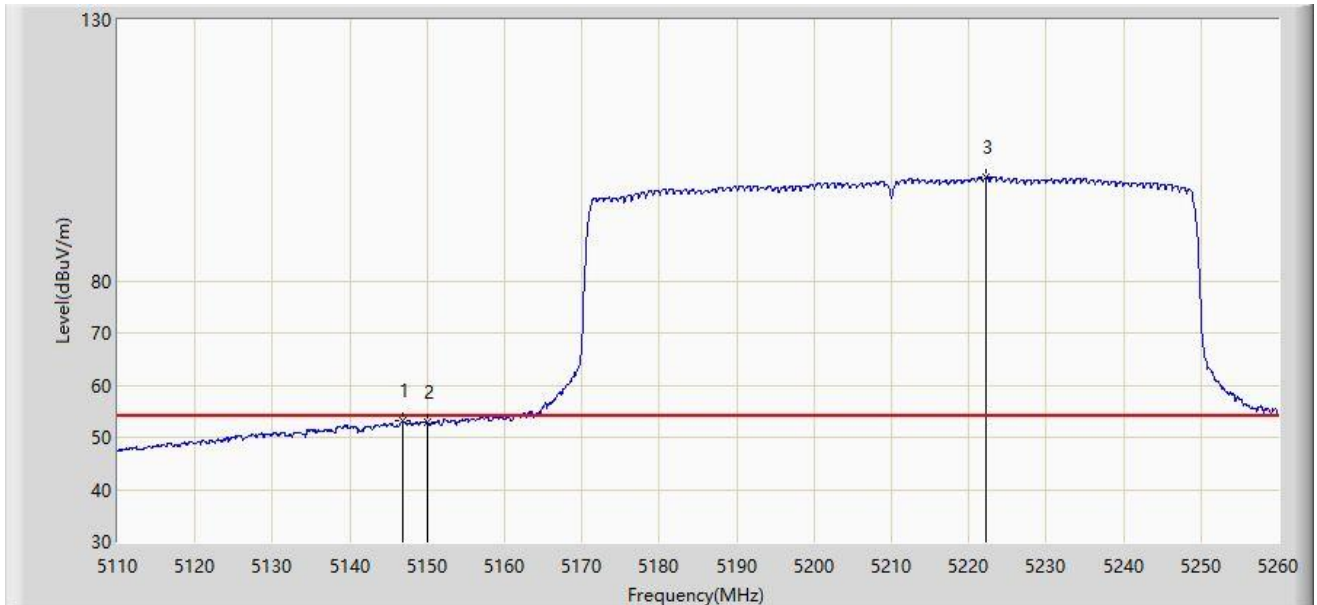


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.825	53.092	49.315	-0.908	54.000	3.777	AV
2		5150.000	52.795	49.023	-1.205	54.000	3.773	AV
3		5222.275	99.723	96.222	N/A	N/A	3.501	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

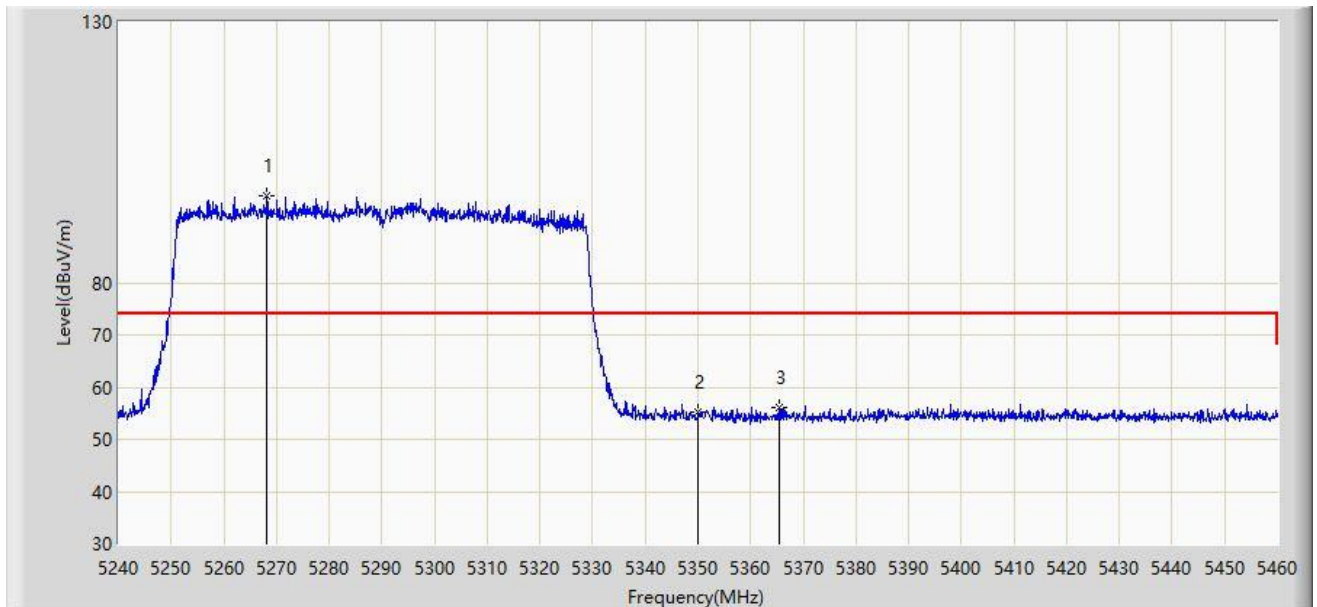


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5268.160	96.721	93.363	N/A	N/A	3.358	PK
2		5350.000	55.124	51.596	-18.876	74.000	3.527	PK
3	*	5365.400	56.016	52.624	-17.984	74.000	3.392	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

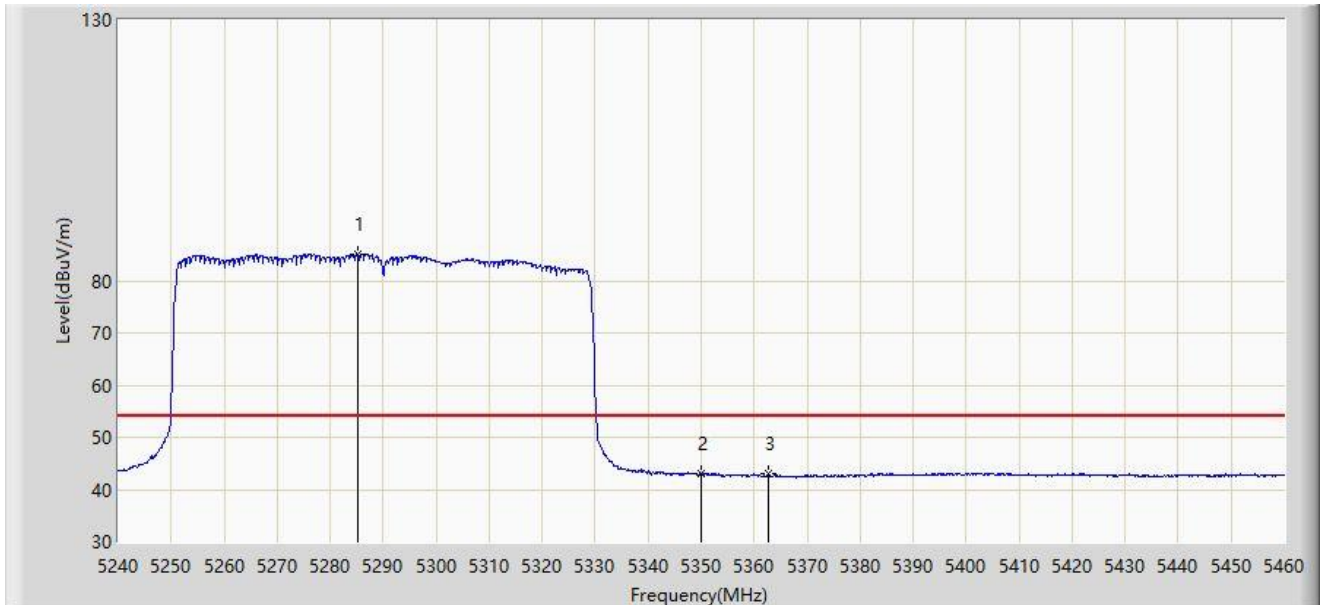


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5285.320	85.182	81.843	N/A	N/A	3.338	AV
2	*	5350.000	43.032	39.504	-10.968	54.000	3.527	AV
3		5362.650	42.914	39.497	-11.086	54.000	3.417	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

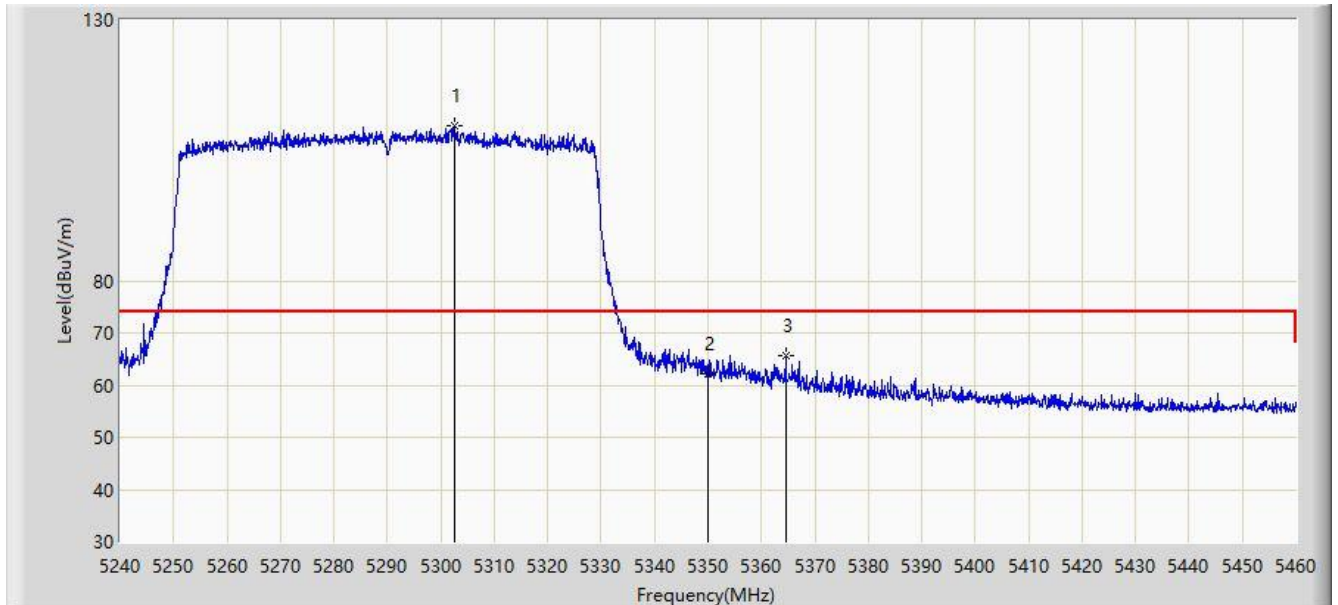


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5302.480	109.754	106.160	N/A	N/A	3.593	PK
2		5350.000	62.140	58.612	-11.860	74.000	3.527	PK
3	*	5364.520	65.663	62.263	-8.337	74.000	3.400	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

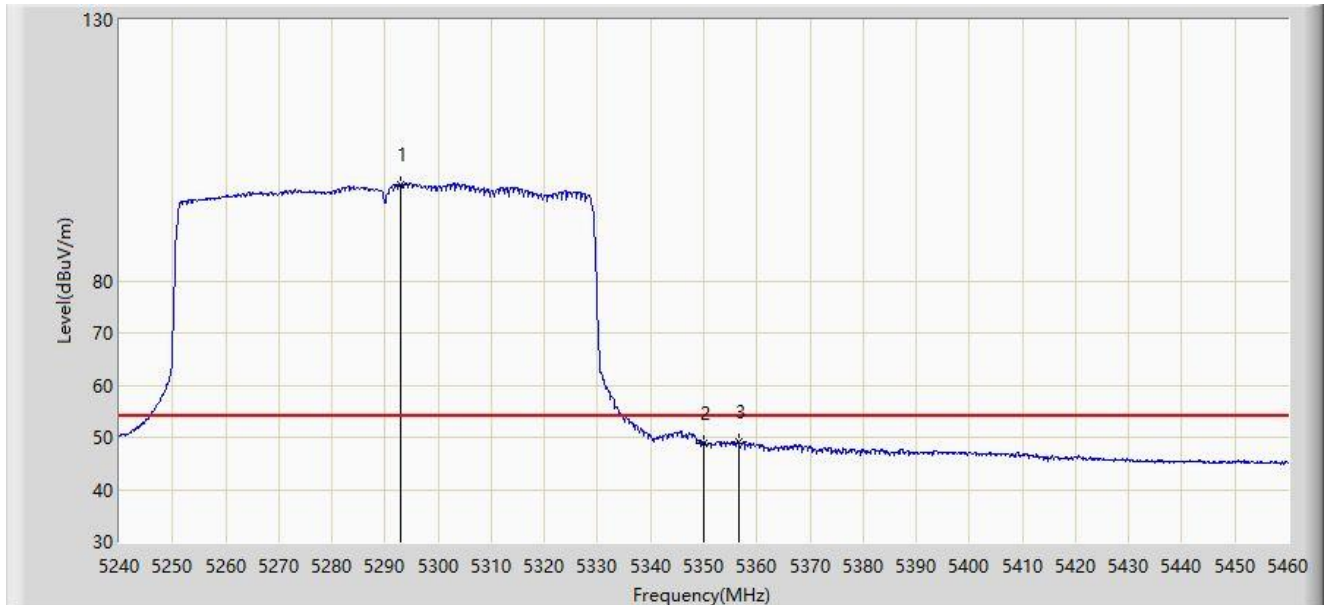


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5293.020	98.503	95.019	N/A	N/A	3.484	AV
2		5350.000	48.919	45.391	-5.081	54.000	3.527	AV
3	*	5356.710	49.228	45.756	-4.772	54.000	3.472	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

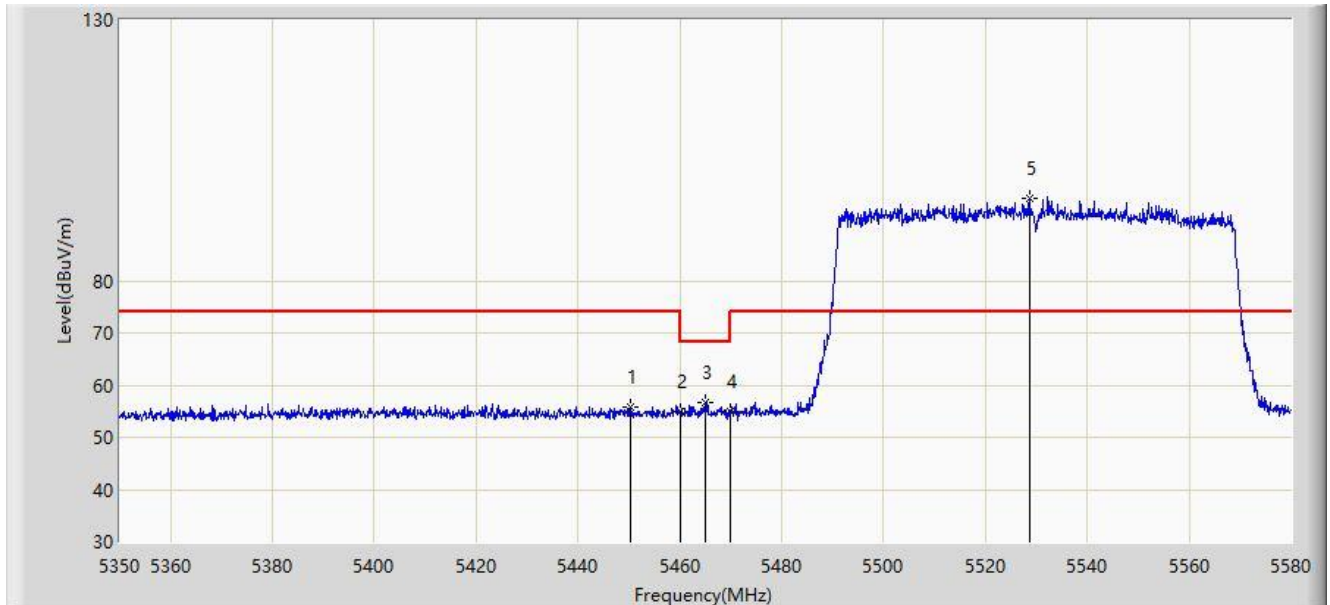


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5450.165	55.678	51.980	-18.322	74.000	3.698	PK
2		5460.000	54.897	51.159	-19.103	74.000	3.738	PK
3	*	5465.000	56.574	52.816	-11.626	68.200	3.757	PK
4		5470.000	54.790	51.013	-13.410	68.200	3.777	PK
5		5528.595	95.725	91.895	N/A	N/A	3.830	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

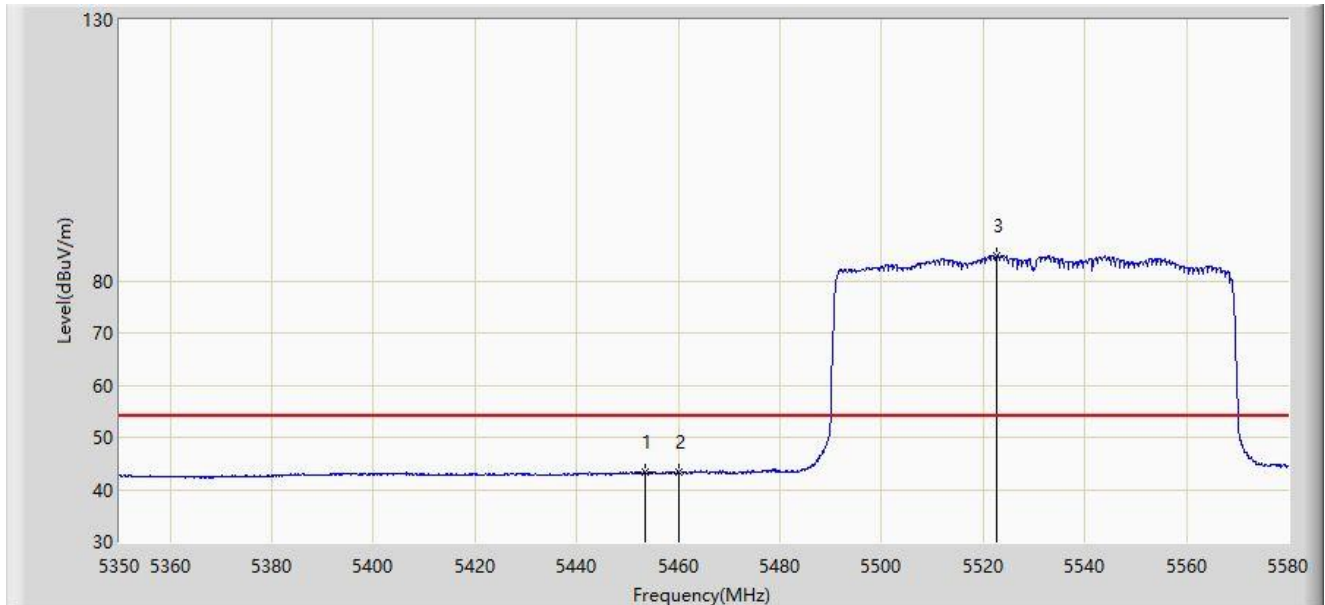


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5453.385	43.425	39.728	-10.575	54.000	3.697	AV
2		5460.000	43.222	39.484	-10.778	54.000	3.738	AV
3		5522.730	84.834	80.953	N/A	N/A	3.881	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

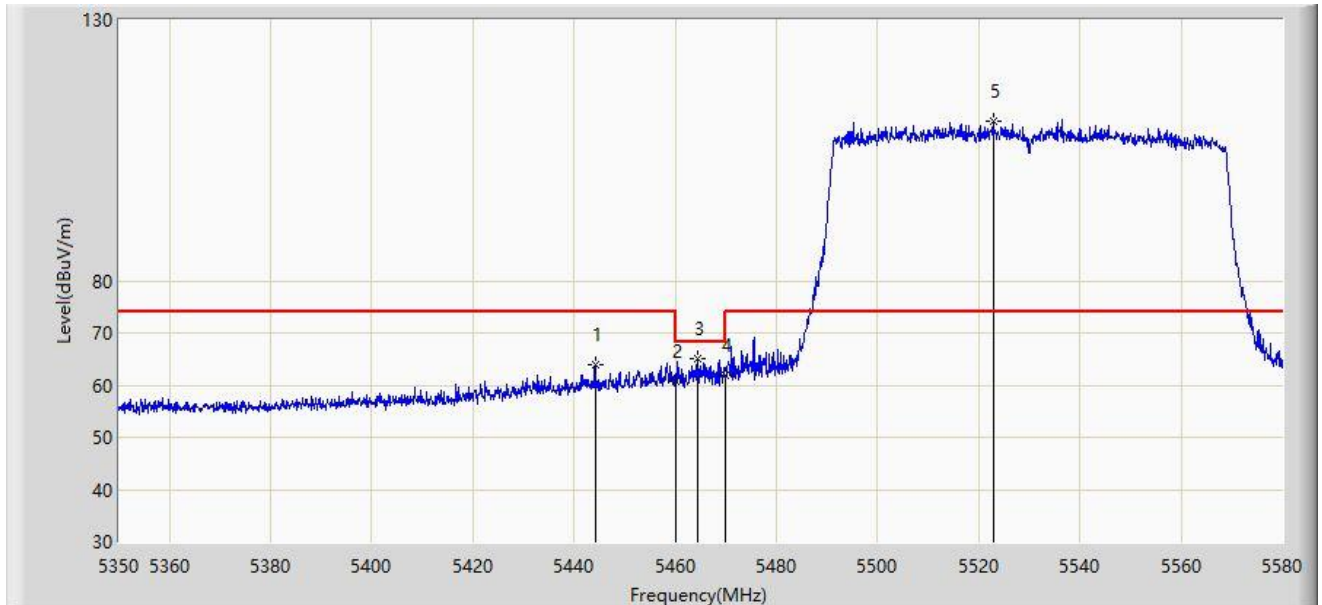


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5444.185	63.988	60.289	-10.012	74.000	3.700	PK
2		5460.000	60.695	56.957	-13.305	74.000	3.738	PK
3	*	5464.425	65.005	61.250	-3.195	68.200	3.756	PK
4		5470.000	61.803	58.026	-6.397	68.200	3.777	PK
5		5522.845	110.717	106.837	N/A	N/A	3.880	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

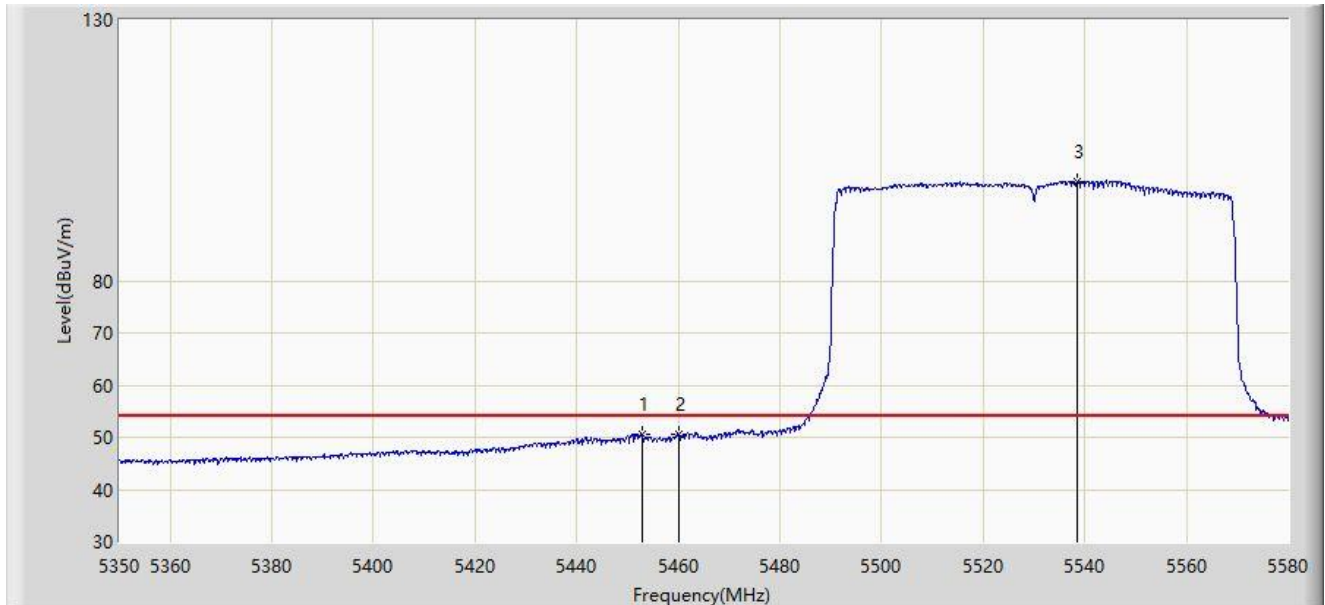


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5452.925	50.650	46.953	-3.350	54.000	3.697	AV
2		5460.000	50.465	46.727	-3.535	54.000	3.738	AV
3		5538.600	99.129	95.291	N/A	N/A	3.837	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

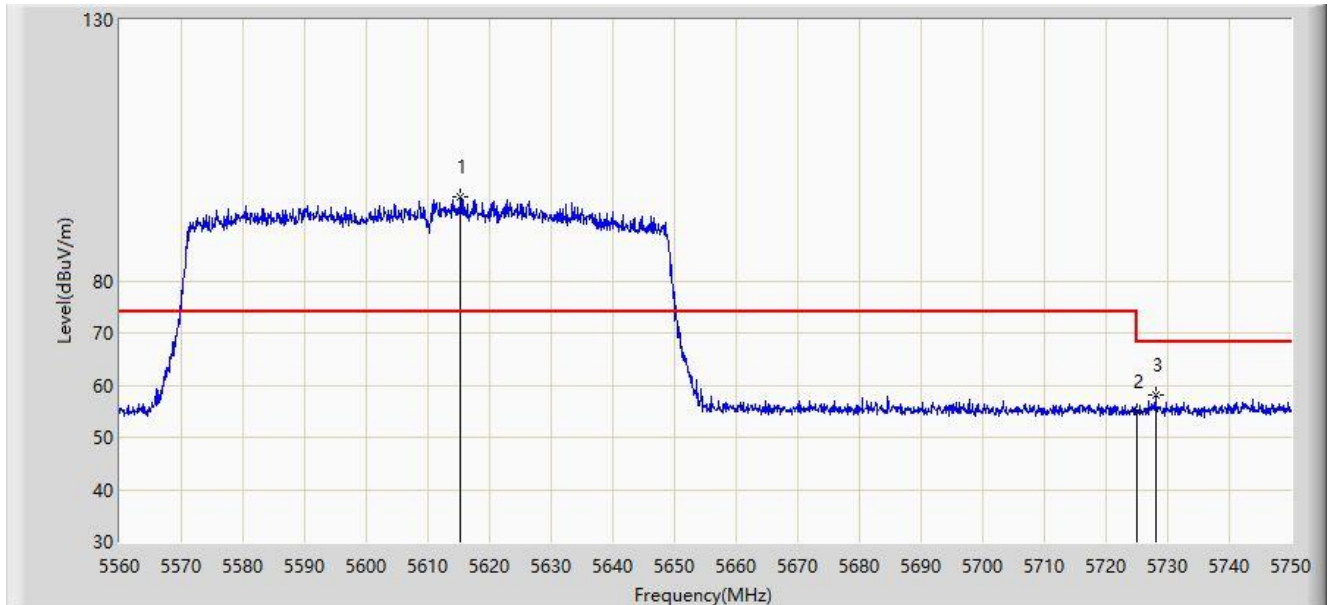


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5615.290	96.041	92.139	N/A	N/A	3.901	PK
2		5725.000	54.984	50.754	-13.216	68.200	4.230	PK
3	*	5728.055	58.029	53.783	-10.171	68.200	4.246	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

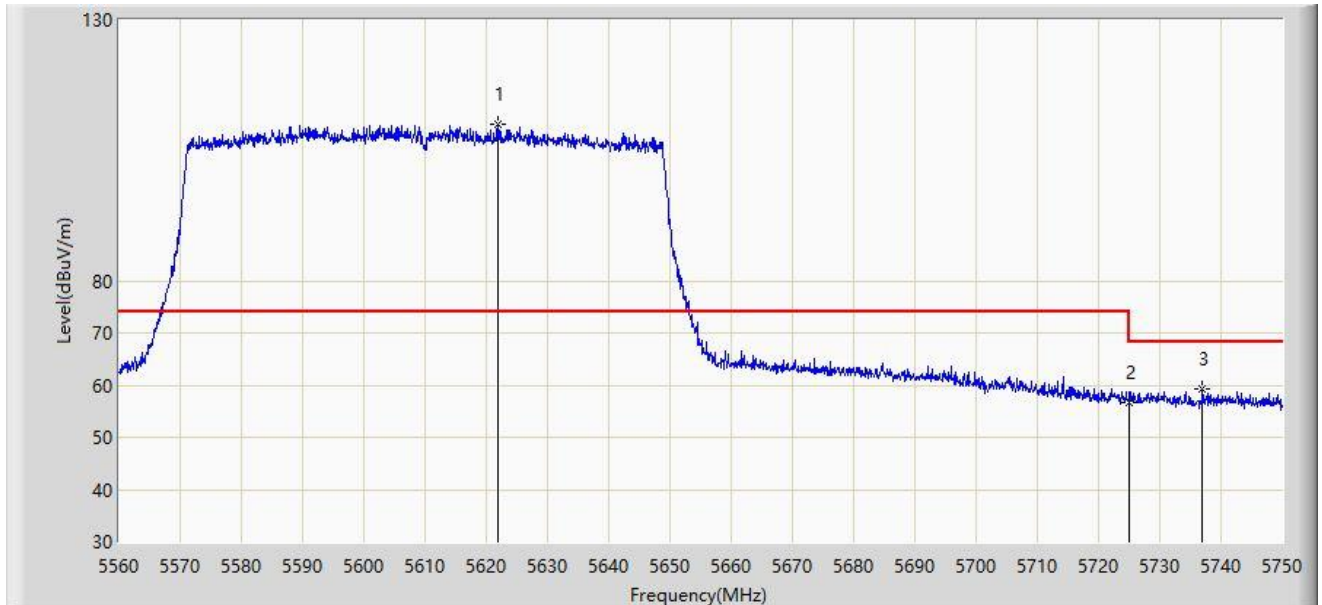


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5621.940	109.983	106.149	N/A	N/A	3.833	PK
2		5725.000	56.543	52.313	-11.657	68.200	4.230	PK
3	*	5736.985	59.293	54.960	-8.907	68.200	4.333	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

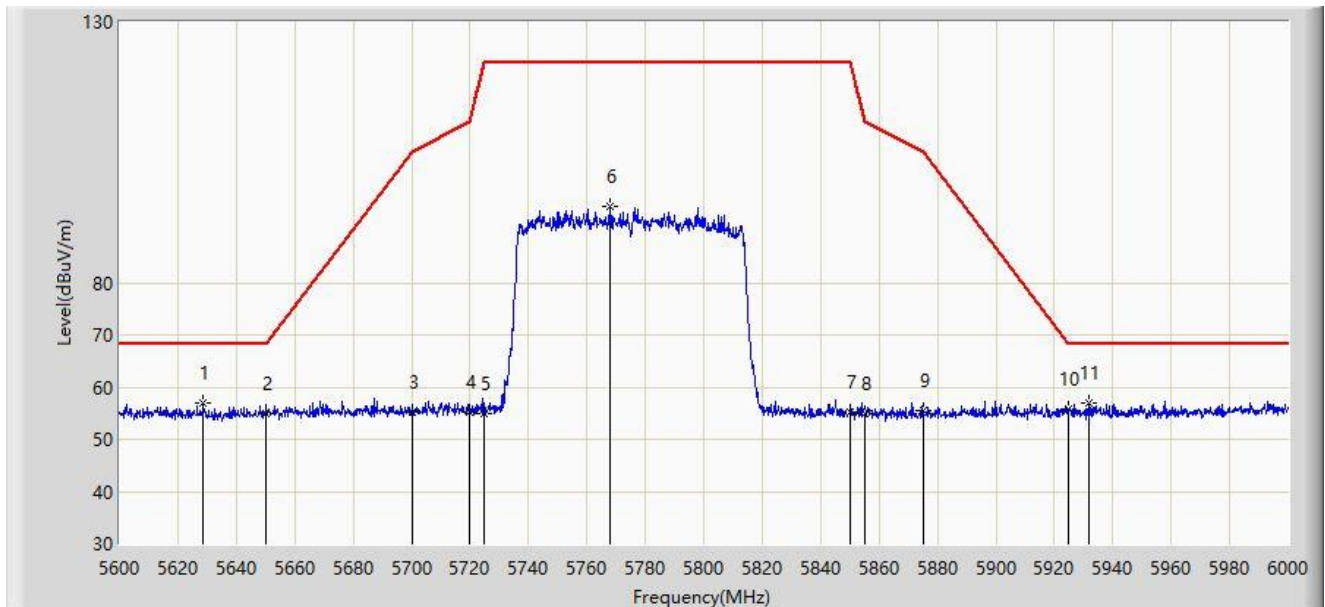


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5628.800	56.830	53.019	-11.370	68.200	3.811	PK
2		5650.000	54.859	50.799	-13.341	68.200	4.060	PK
3		5700.000	55.155	50.987	-50.045	105.200	4.168	PK
4		5720.000	55.283	51.063	-55.517	110.800	4.219	PK
5		5725.000	55.002	50.772	-67.198	122.200	4.230	PK
6		5767.800	94.728	90.316	N/A	N/A	4.412	PK
7		5850.000	55.286	50.634	-66.914	122.200	4.651	PK
8		5855.000	54.910	50.286	-55.890	110.800	4.624	PK
9		5875.000	55.366	50.822	-49.834	105.200	4.543	PK
10		5925.000	55.783	51.031	-12.417	68.200	4.751	PK
11	*	5931.600	56.833	52.083	-11.367	68.200	4.750	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-07-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

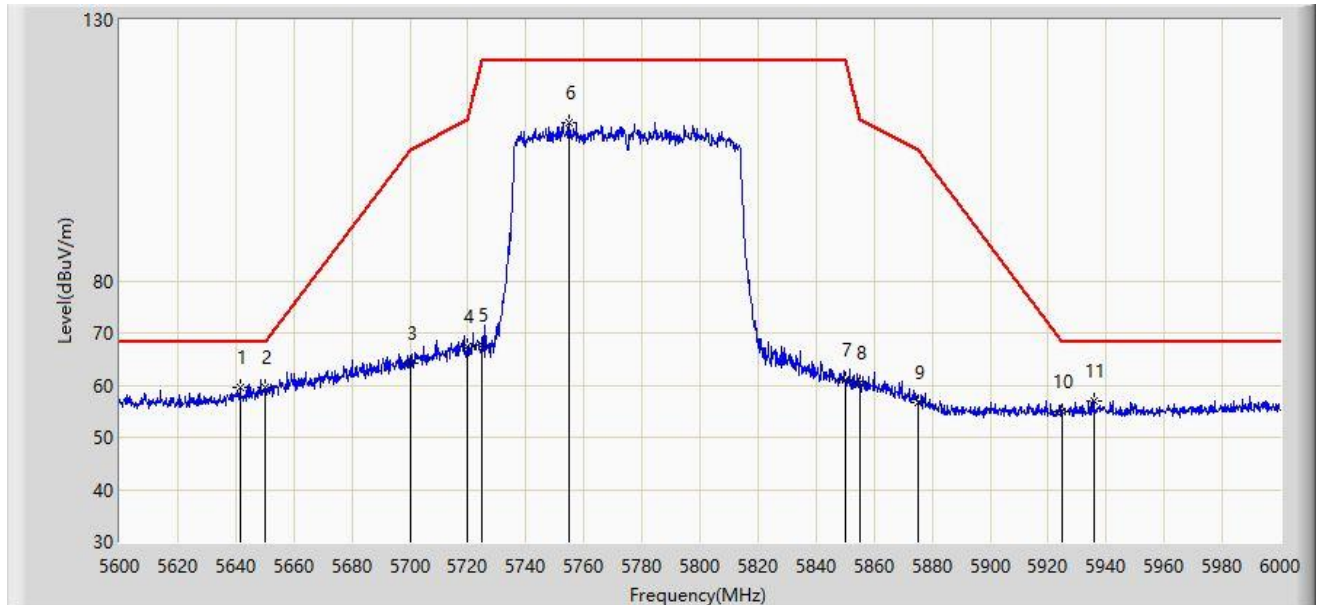

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5641.400	59.685	55.842	-8.515	68.200	3.842	PK
2	*	5650.000	59.705	55.645	-8.495	68.200	4.060	PK
3		5700.000	64.150	59.982	-41.050	105.200	4.168	PK
4		5720.000	67.255	63.035	-43.545	110.800	4.219	PK
5		5725.000	67.605	63.375	-54.595	122.200	4.230	PK
6		5754.800	110.418	105.999	N/A	N/A	4.419	PK
7		5850.000	60.937	56.285	-61.263	122.200	4.651	PK
8		5855.000	60.454	55.830	-50.346	110.800	4.624	PK
9		5875.000	56.811	52.267	-48.389	105.200	4.543	PK
10		5925.000	55.035	50.283	-13.165	68.200	4.751	PK
11		5935.800	56.883	52.176	-11.317	68.200	4.707	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

9. AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2023-12-21
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_C	Polarity: Line
EUT: ACCESS POINTAP	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5825MHz	

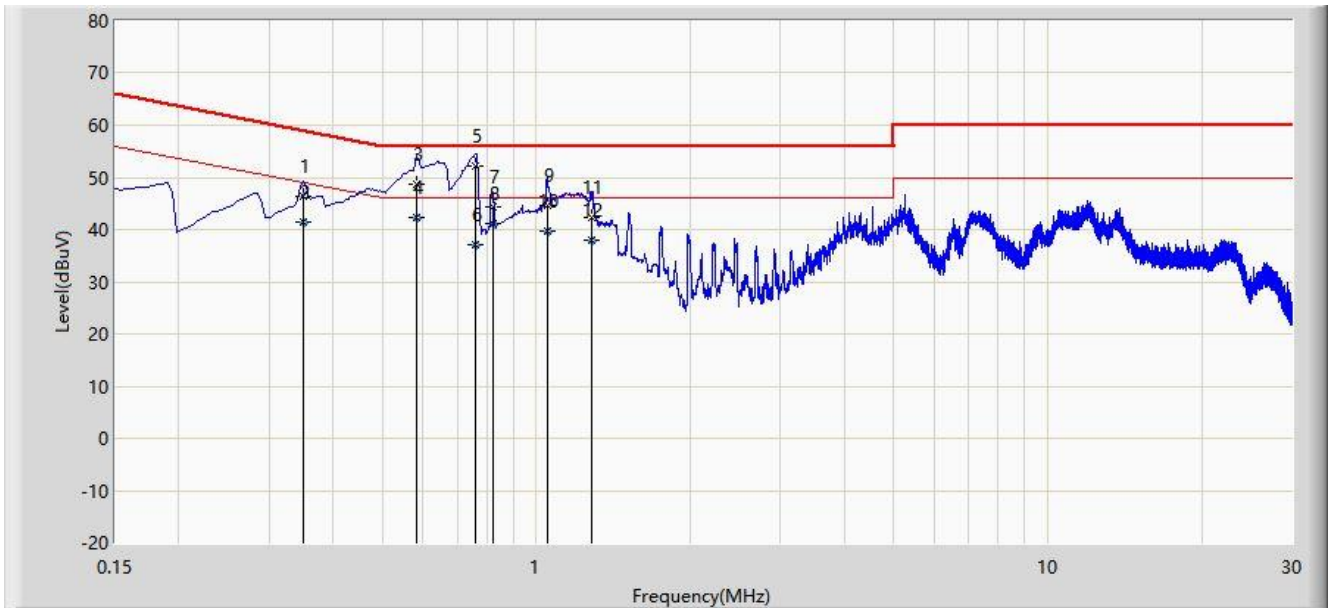


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.350	46.237	36.465	-12.725	58.962	9.773	QP
2		0.350	41.549	31.776	-7.413	48.962	9.773	AV
3		0.582	48.708	38.830	-7.292	56.000	9.878	QP
4	*	0.582	42.385	32.507	-3.615	46.000	9.878	AV
5		0.758	52.232	42.267	-3.768	56.000	9.966	QP
6		0.758	36.995	27.029	-9.005	46.000	9.966	AV
7		0.822	44.409	34.411	-11.591	56.000	9.999	QP
8		0.822	41.057	31.058	-4.943	46.000	9.999	AV
9		1.050	44.571	34.490	-11.429	56.000	10.081	QP
10		1.050	39.684	29.603	-6.316	46.000	10.081	AV
11		1.286	42.278	32.194	-13.722	56.000	10.084	QP
12		1.286	37.954	27.871	-8.046	46.000	10.084	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Date: 2023-12-21
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_C	Polarity: Neutral
EUT: ACCESS POINTAP	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5825MHz	

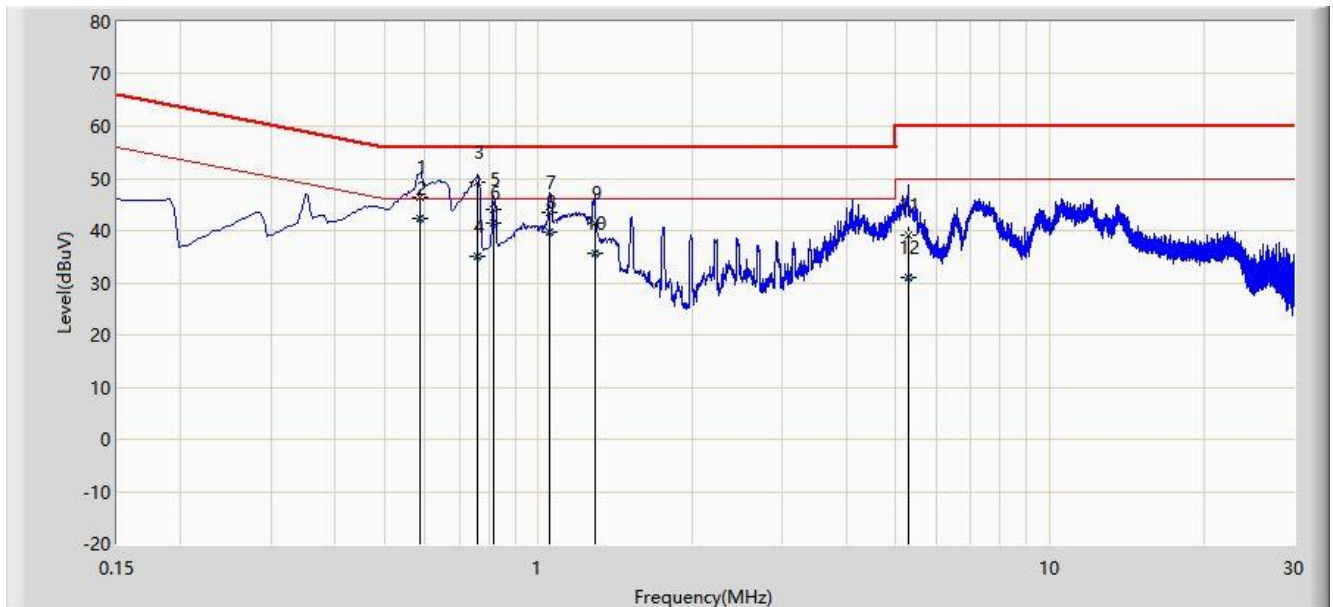

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.586	46.486	36.616	-9.514	56.000	9.870	QP
2	*	0.586	42.282	32.411	-3.718	46.000	9.870	AV
3		0.762	49.282	39.321	-6.718	56.000	9.961	QP
4		0.762	34.941	24.980	-11.059	46.000	9.961	AV
5		0.818	43.964	33.977	-12.036	56.000	9.987	QP
6		0.818	41.570	31.584	-4.430	46.000	9.987	AV
7		1.050	43.372	33.301	-12.628	56.000	10.071	QP
8		1.050	39.674	29.603	-6.326	46.000	10.071	AV
9		1.290	41.529	31.456	-14.471	56.000	10.074	QP
10		1.290	35.785	25.711	-10.215	46.000	10.074	AV
11		5.274	39.005	28.838	-20.995	60.000	10.167	QP
12		5.274	31.000	20.833	-19.000	50.000	10.167	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).