



802.11be-EHT80 In-Band Emission - Ant 1


Channel 7 (5985 MHz)

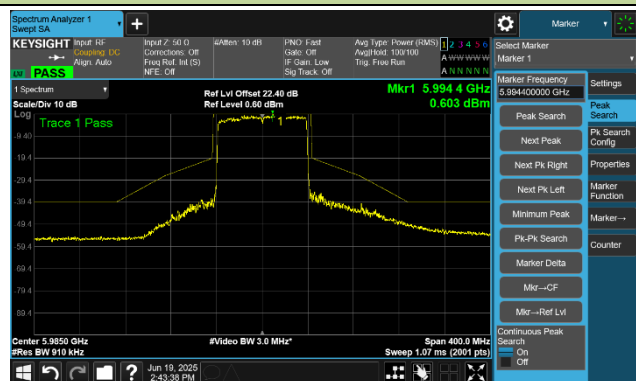


Channel 55 (6225 MHz)

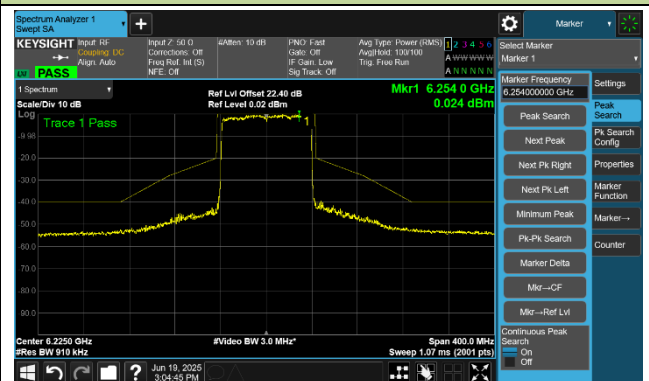


Channel 87 (6385 MHz)

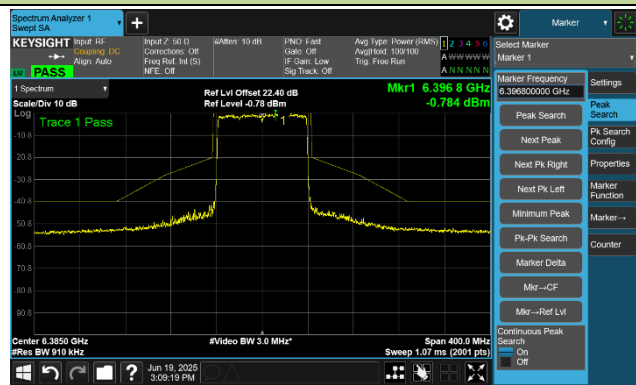


Channel 135 (6625 MHz)

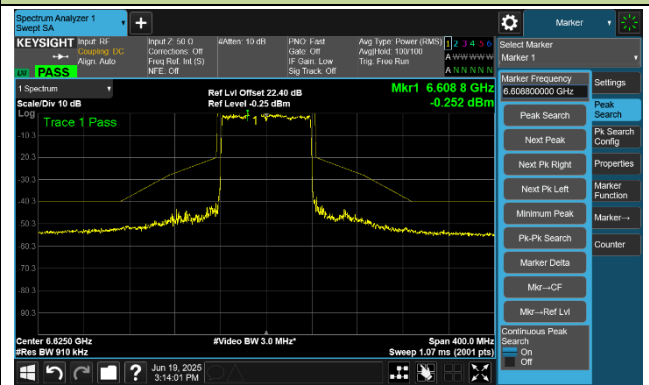

Channel 151 (6705 MHz)

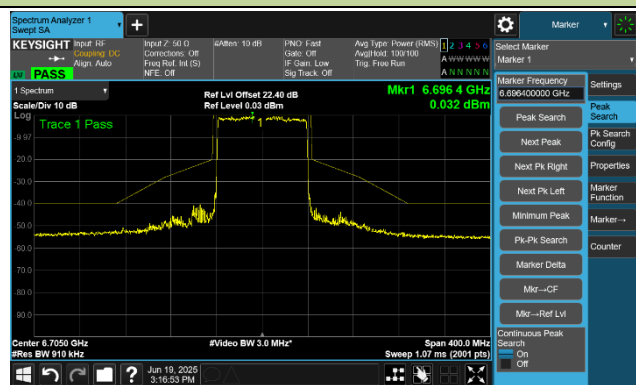


Channel 167 (6785 MHz)

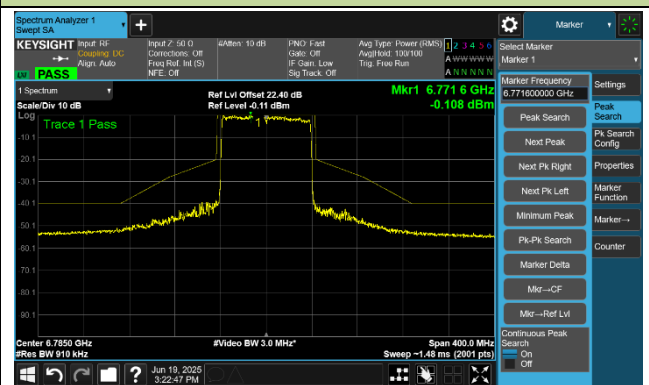


802.11be-EHT160 In-Band Emission - Ant 1


Channel 15 (6025 MHz)

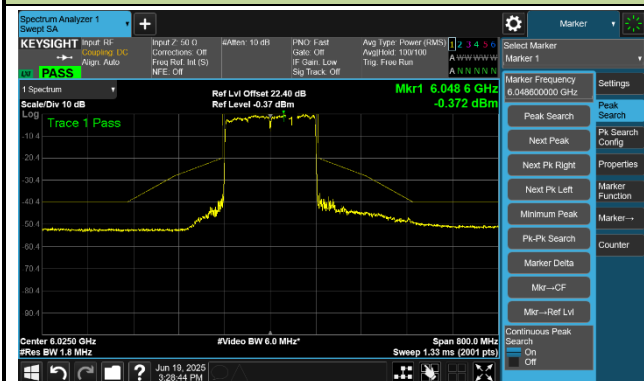


Channel 47 (6185 MHz)

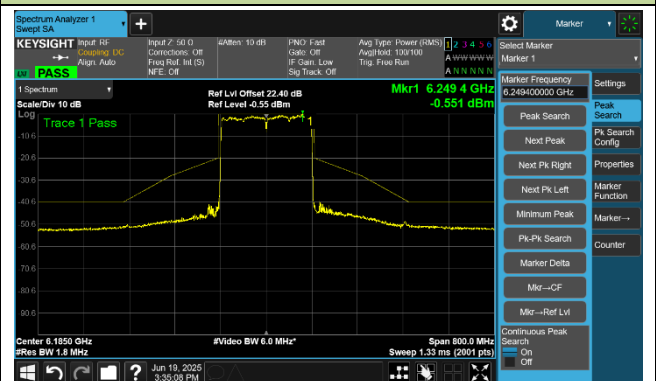

Channel 79 (6345 MHz)

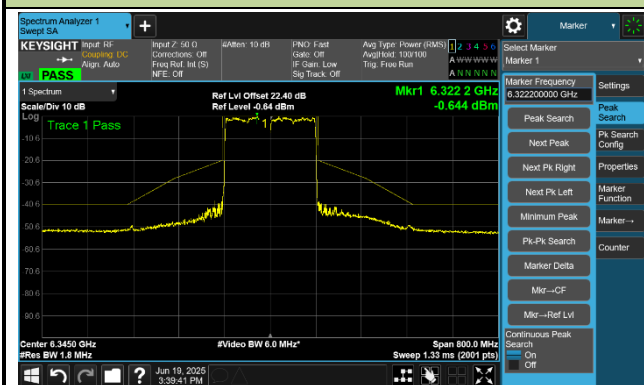


Channel 143 (6665 MHz)

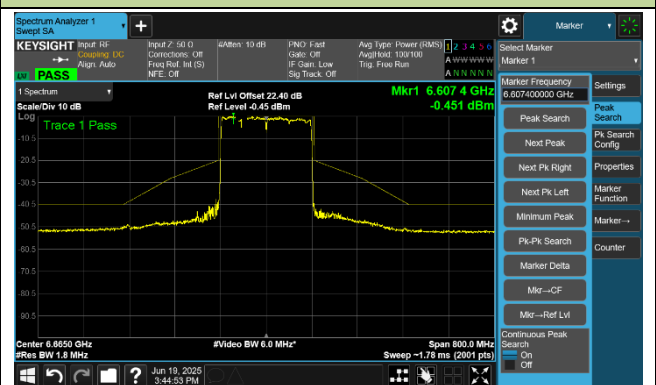


802.11be-EHT20 In-Band Emission - Ant 2


Channel 1 (5955 MHz)

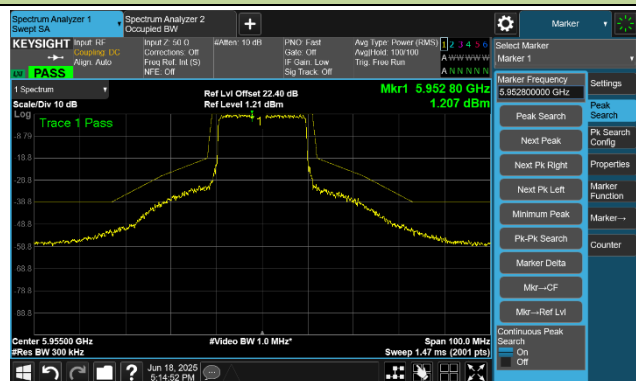


Channel 49 (6195 MHz)

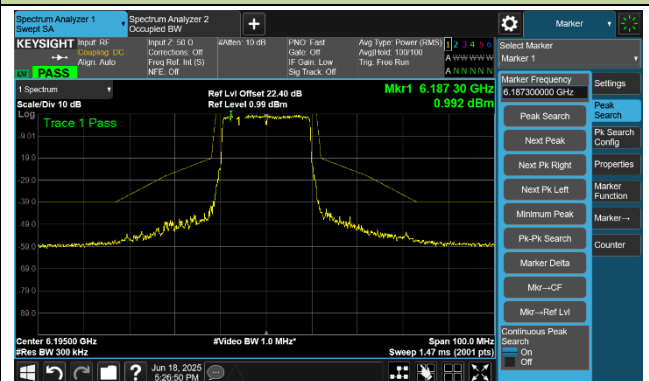


Channel 93 (6415 MHz)

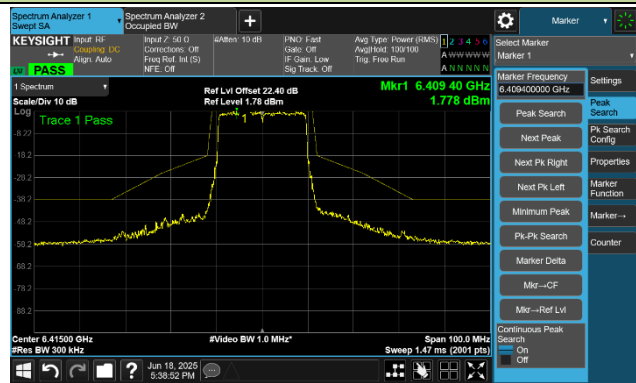


Channel 117 (6535 MHz)

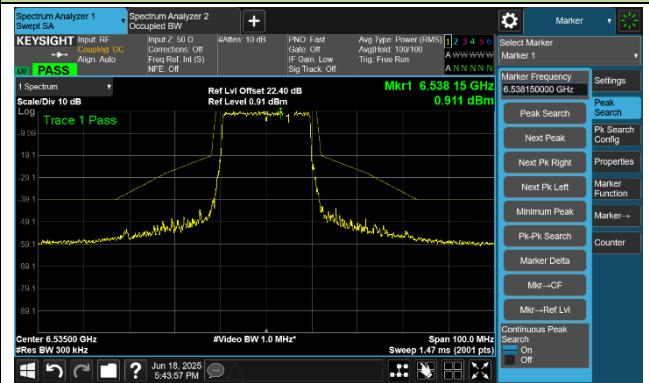

Channel 149 (6695 MHz)

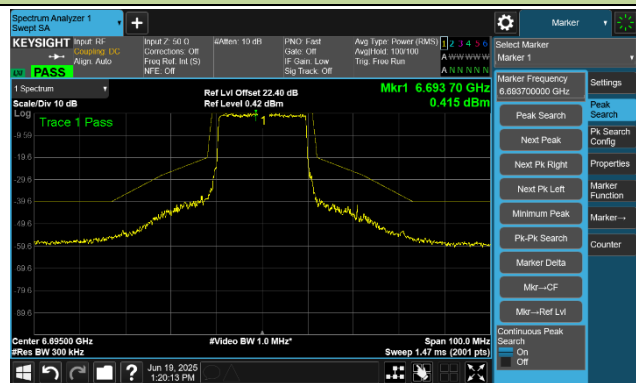


Channel 181 (6855 MHz)

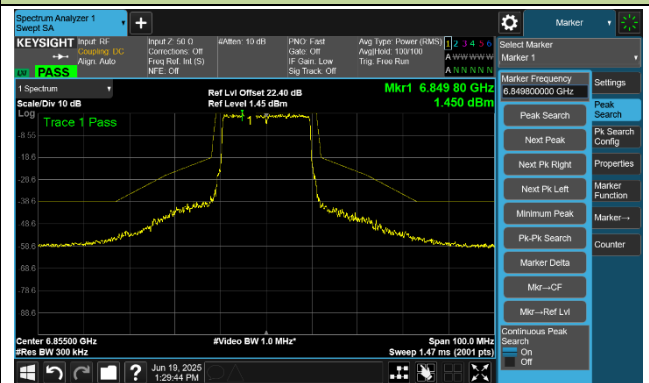


802.11be-EHT40 In-Band Emission - Ant 2


Channel 3 (5965 MHz)

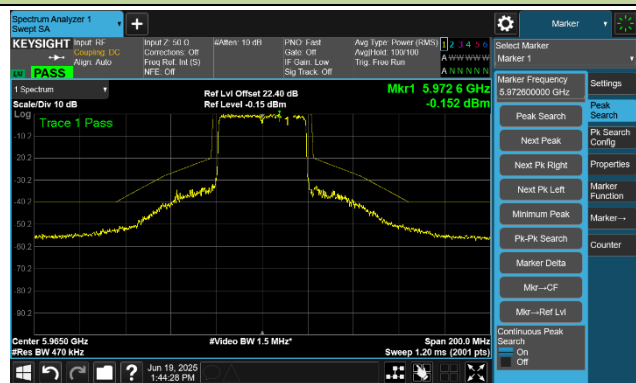


Channel 51 (6205 MHz)

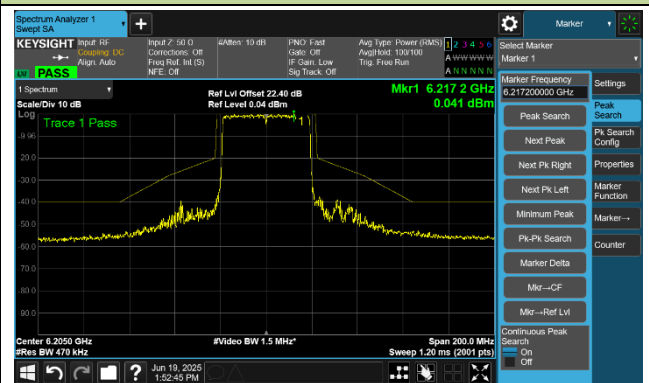


Channel 91 (6405 MHz)

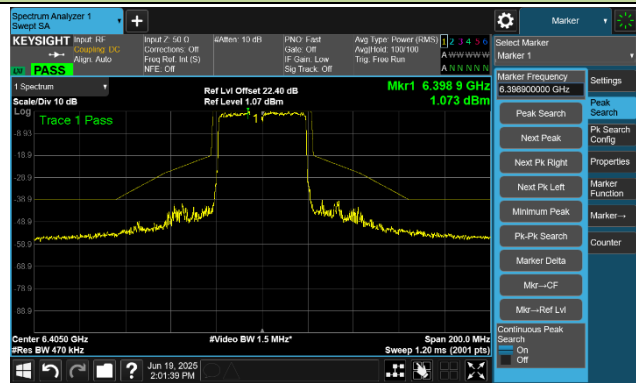


Channel 123 (6565 MHz)

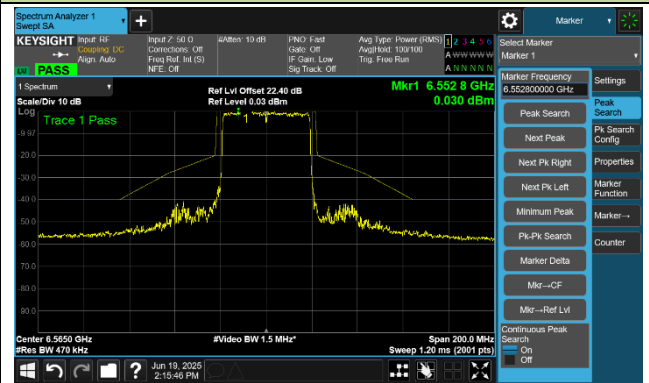

Channel 147 (6685 MHz)

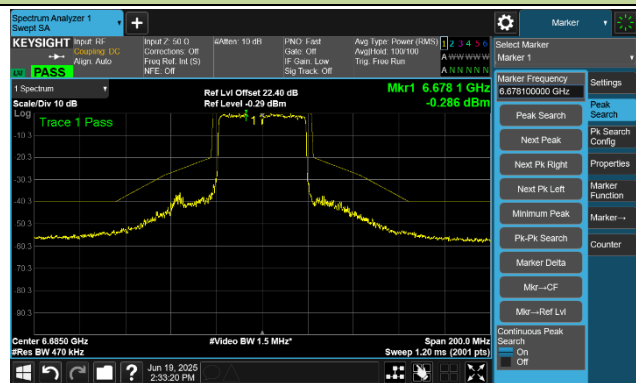


Channel 179 (6845 MHz)

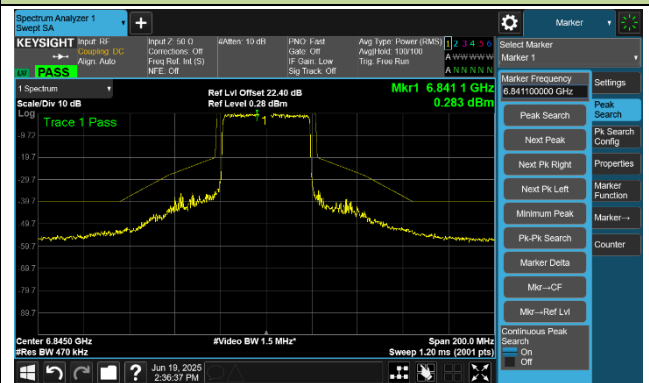


802.11be-EHT80 In-Band Emission - Ant 2


Channel 7 (5985 MHz)

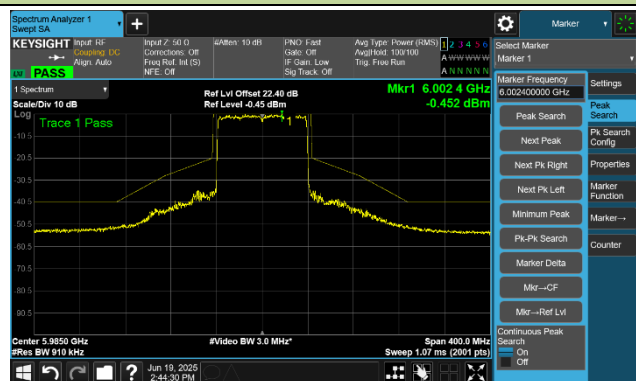


Channel 55 (6225 MHz)

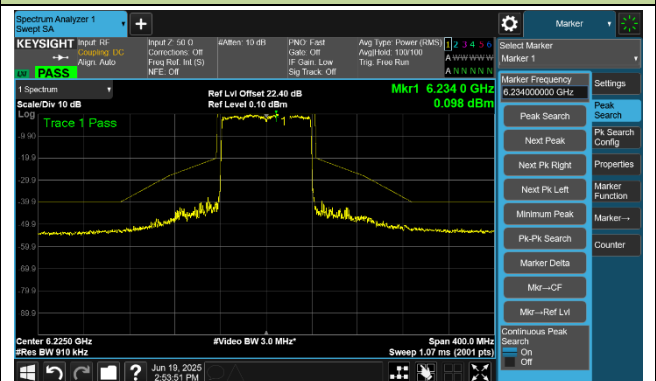


Channel 87 (6385 MHz)

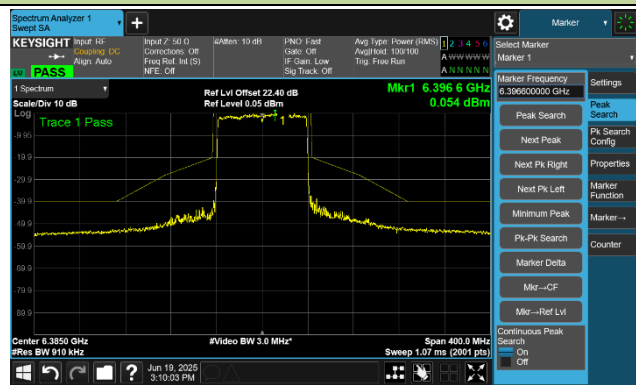


Channel 135 (6625 MHz)

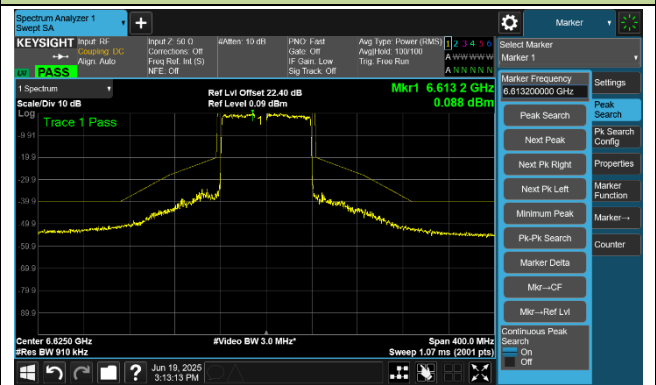

Channel 151 (6705 MHz)

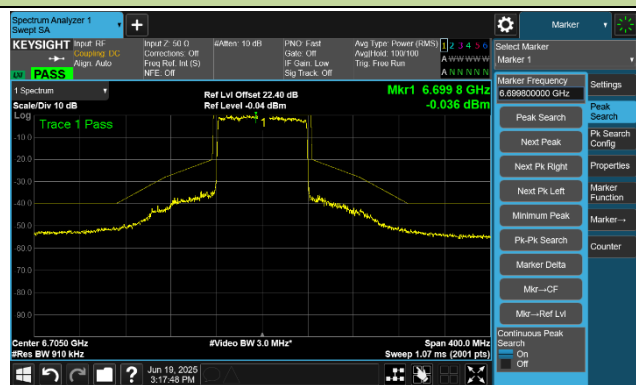


Channel 167 (6785 MHz)

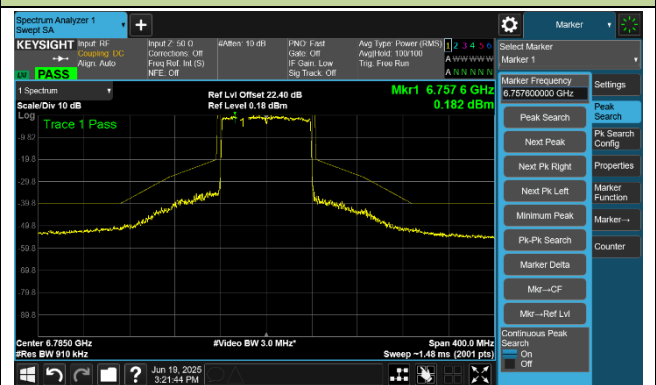


802.11be-EHT160 In-Band Emission - Ant 2

Channel 15 (6025 MHz)

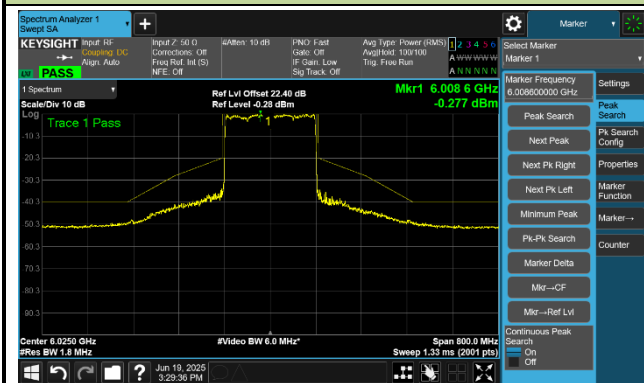


Channel 47 (6185 MHz)

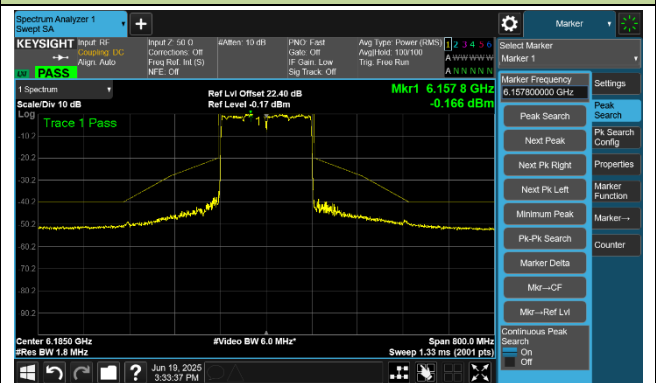

Channel 79 (6345 MHz)




Channel 143 (6665 MHz)

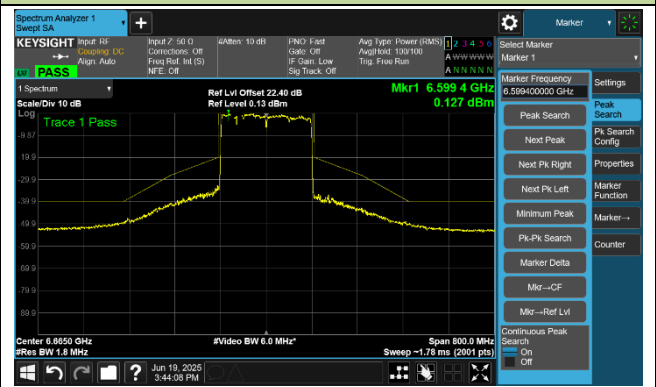


802.11be-EHT20 In-Band Emission - Ant 3


Channel 1 (5955 MHz)

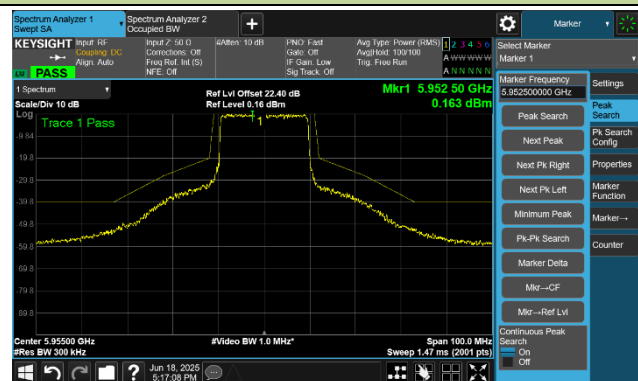


Channel 49 (6195 MHz)

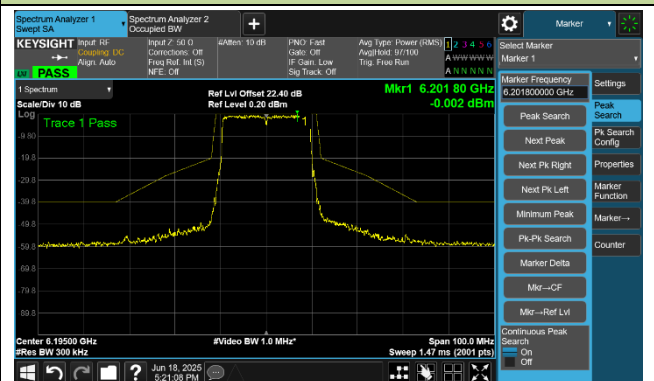


Channel 93 (6415 MHz)

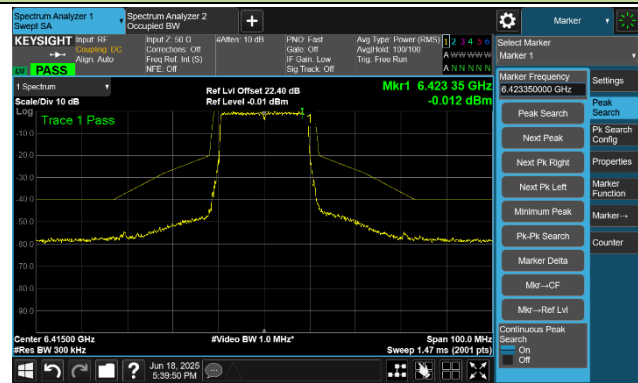


Channel 117 (6535 MHz)

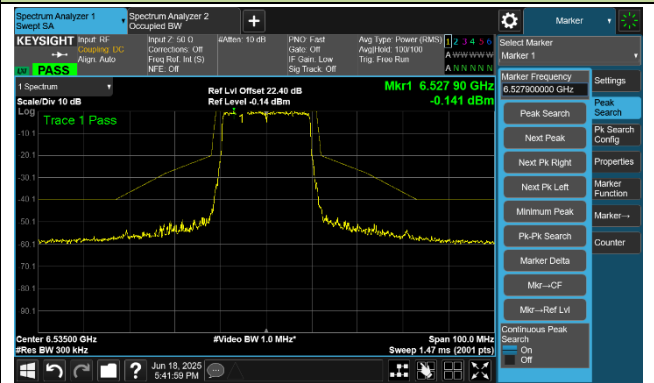

Channel 149 (6695 MHz)

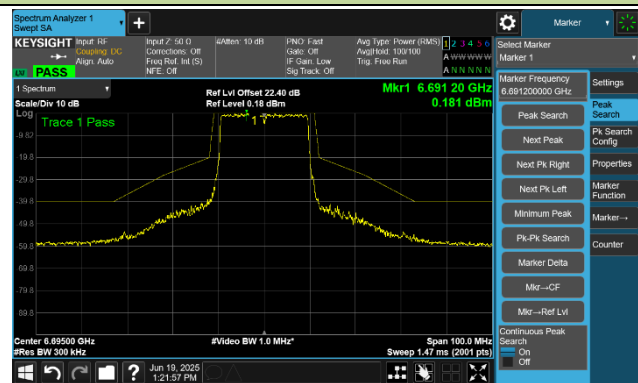


Channel 181 (6855 MHz)

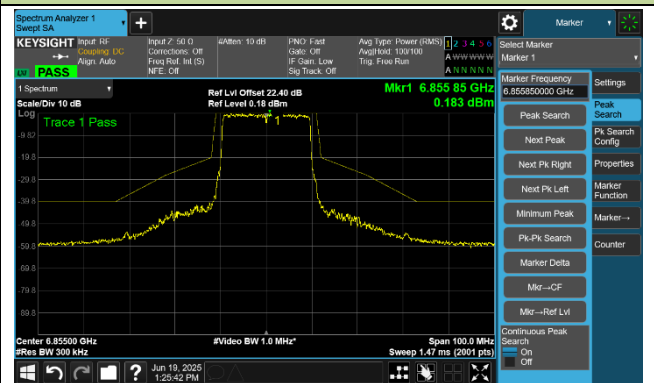


802.11be-EHT40 In-Band Emission - Ant 3


Channel 3 (5965 MHz)

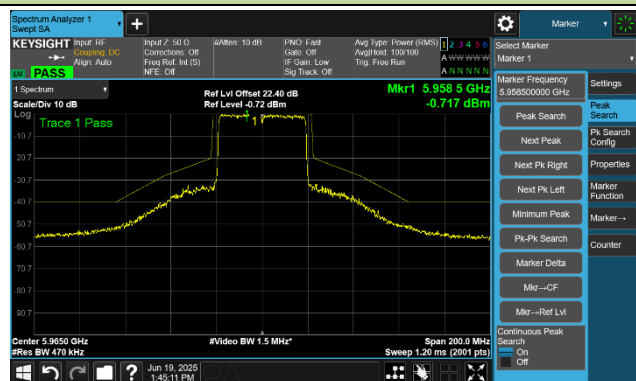


Channel 51 (6205 MHz)

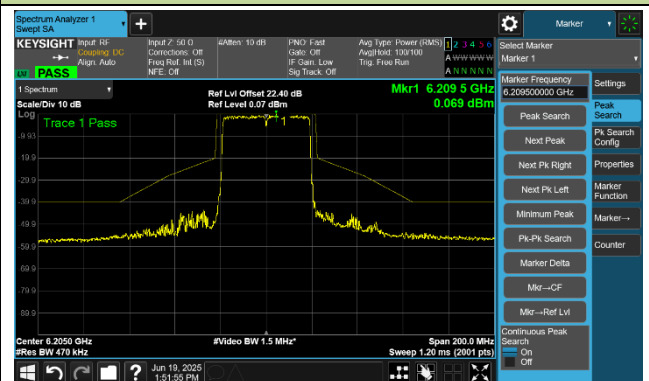


Channel 91 (6405 MHz)

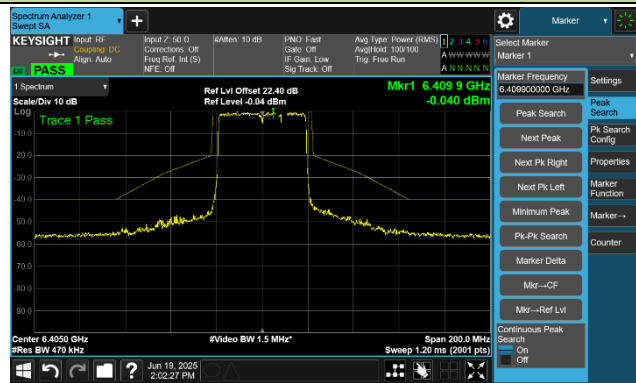


Channel 123 (6565 MHz)

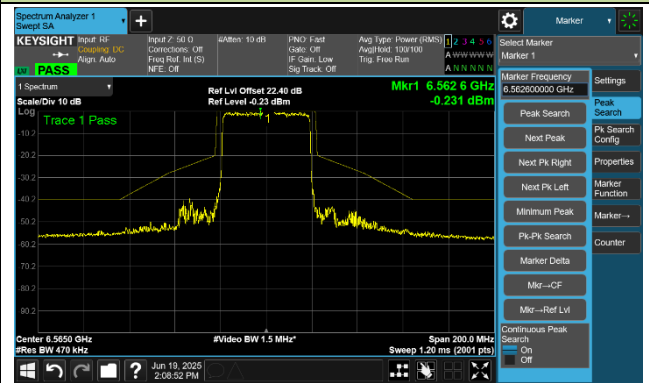

Channel 147 (6685 MHz)

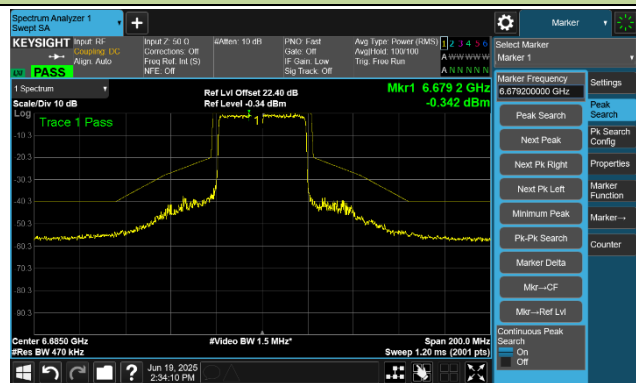


Channel 179 (6845 MHz)

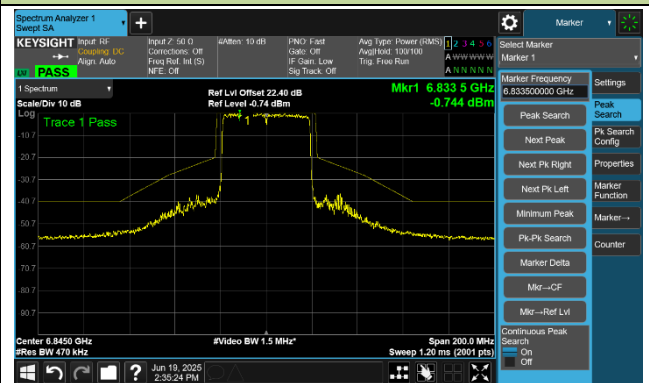


802.11be-EHT80 In-Band Emission - Ant 3


Channel 7 (5985 MHz)

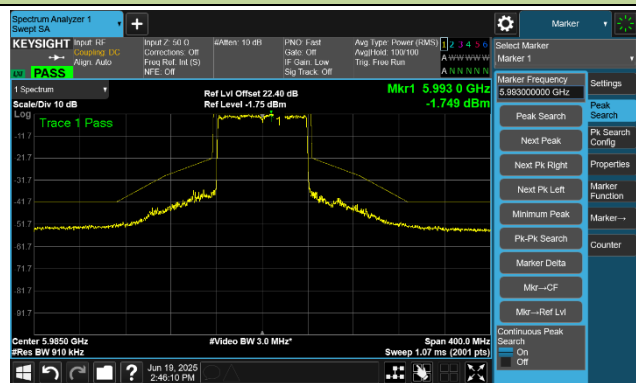


Channel 55 (6225 MHz)

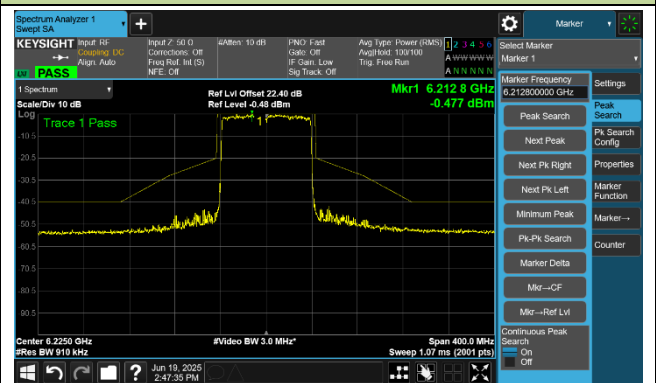


Channel 87 (6385 MHz)

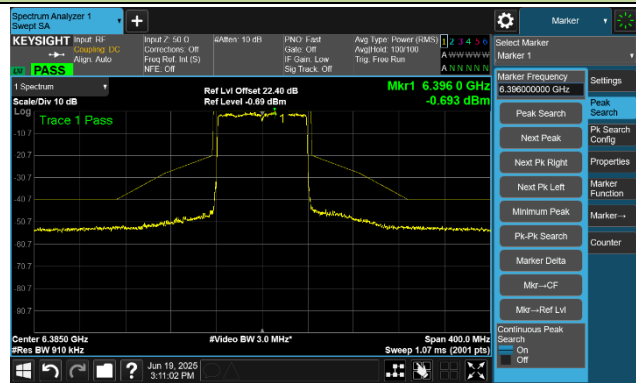


Channel 135 (6625 MHz)

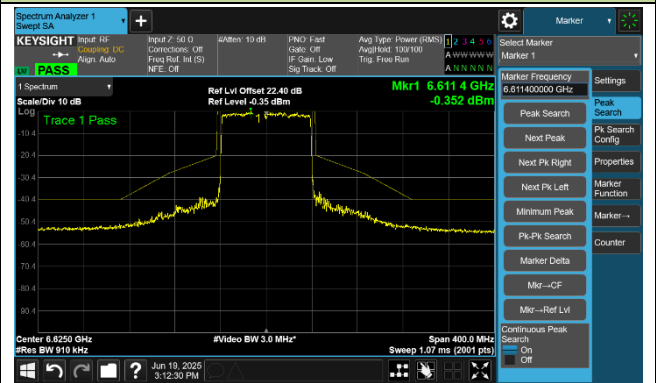

Channel 151 (6705 MHz)

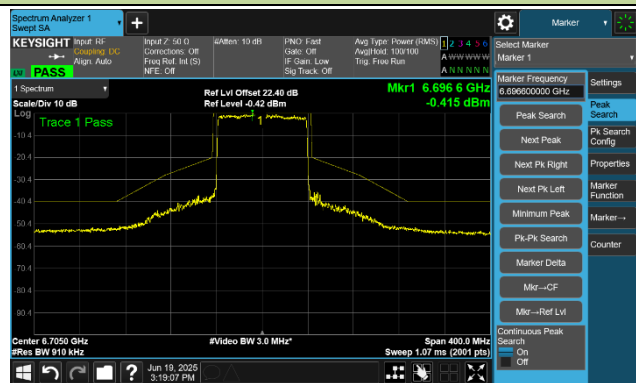


Channel 167 (6785 MHz)

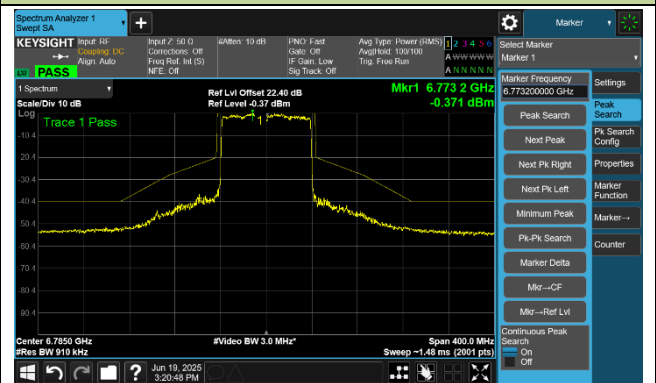


802.11be-EHT160 In-Band Emission - Ant 3


Channel 15 (6025 MHz)

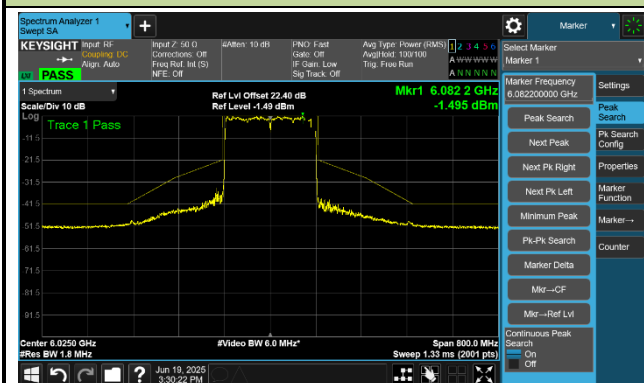


Channel 47 (6185 MHz)

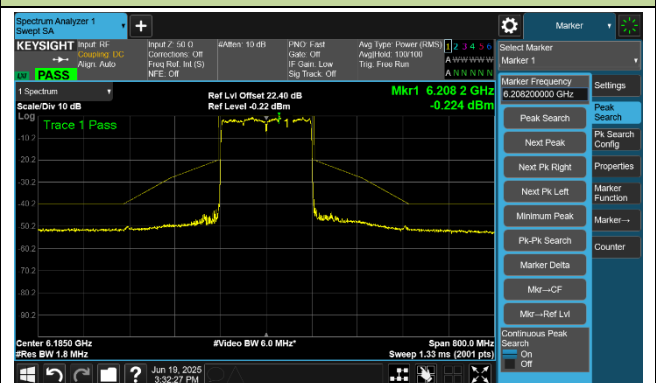

Channel 79 (6345 MHz)

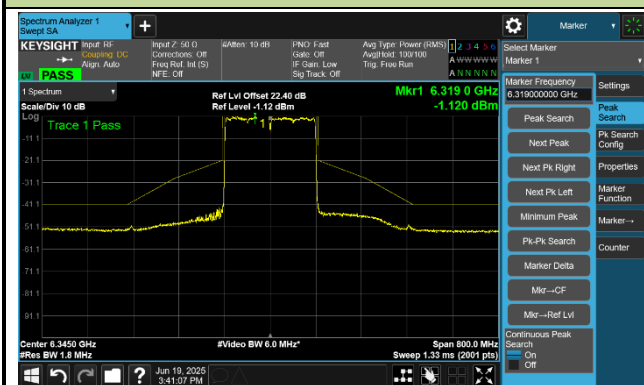

Channel 143 (6665 MHz)

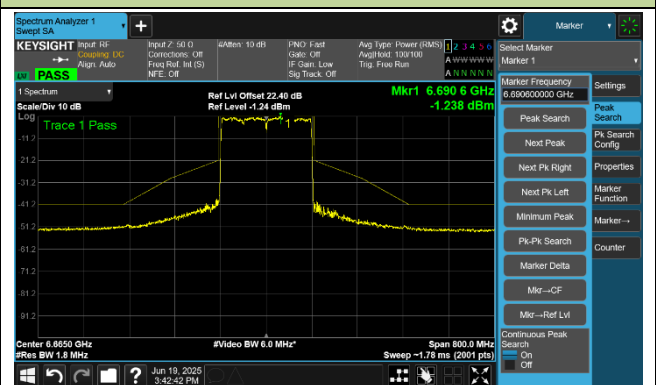

Note: The limit is based on 99% bandwidth, the limit is more stringent than the limit based on 26 dB bandwidth.

A.6 Frequency Stability Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2025-06-19 ~ 2025-06-20		
Test Mode	5955 MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	21.09	20.69	20.20	19.53
		- 20	22.13	22.15	22.12	22.06
		- 10	20.33	20.63	20.89	21.21
		0	14.52	15.85	16.93	17.79
		+ 10	12.91	13.54	14.17	14.78
		+ 20	11.29	11.00	10.70	10.36
		+ 30	0.06	0.46	1.47	2.49
		+ 40	5.97	4.50	3.09	1.92
		+ 50	9.67	9.64	9.61	9.56
115	138	+ 20	3.28	3.24	3.14	3.01
85	102	+ 20	2.96	2.96	2.92	2.88

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} × 10⁶.

A.7 Radiated Spurious Emission Test Result

2*2 Omni:

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8260.70	49.04	-1.50	47.54	74.00	-26.46	Peak	Horizontal
	11910.60	42.15	-0.51	41.64	54.00	-12.36	Average	Horizontal
	11910.60	54.34	-0.51	53.83	74.00	-20.17	Peak	Horizontal
*	14350.10	45.90	4.96	50.86	88.20	-37.34	Peak	Horizontal
*	16871.20	44.80	9.49	54.29	88.20	-33.91	Peak	Horizontal
	8129.80	48.42	-1.45	46.97	74.00	-27.03	Peak	Vertical
	12128.20	47.30	0.48	47.78	74.00	-26.22	Peak	Vertical
*	14438.50	45.23	5.21	50.44	88.20	-37.76	Peak	Vertical
*	17031.00	43.55	9.96	53.51	88.20	-34.69	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8396.70	47.49	-1.39	46.10	74.00	-27.90	Peak	Horizontal
	12277.80	47.05	0.73	47.78	74.00	-26.22	Peak	Horizontal
*	14659.50	44.50	6.19	50.69	88.20	-37.51	Peak	Horizontal
*	16925.60	44.05	10.23	54.29	88.20	-33.91	Peak	Horizontal
	8160.40	48.18	-1.52	46.66	74.00	-27.34	Peak	Vertical
	12118.00	47.51	0.52	48.02	74.00	-25.98	Peak	Vertical
*	14781.90	43.93	6.07	50.00	88.20	-38.20	Peak	Vertical
*	16255.80	45.91	8.17	54.08	88.20	-34.12	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8398.40	47.68	-1.38	46.30	74.00	-27.70	Peak	Horizontal
	12430.80	46.62	1.39	48.00	74.00	-26.00	Peak	Horizontal
*	14734.30	43.71	6.67	50.39	88.20	-37.81	Peak	Horizontal
*	16920.50	43.53	9.96	53.50	88.20	-34.70	Peak	Horizontal
	8197.80	48.58	-1.68	46.90	74.00	-27.10	Peak	Vertical
	12456.30	47.14	1.41	48.55	74.00	-25.45	Peak	Vertical
*	14516.70	43.81	6.10	49.90	88.20	-38.30	Peak	Vertical
*	16940.90	43.93	10.02	53.94	88.20	-34.26	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8338.90	47.56	-1.42	46.14	74.00	-27.86	Peak	Horizontal
	12335.60	47.27	0.75	48.02	74.00	-25.98	Peak	Horizontal
*	15057.30	45.11	6.19	51.30	88.20	-36.90	Peak	Horizontal
*	16539.70	45.18	8.63	53.81	88.20	-34.39	Peak	Horizontal
	8338.90	47.56	-1.42	46.14	74.00	-27.86	Peak	Vertical
	12335.60	47.27	0.75	48.02	74.00	-25.98	Peak	Vertical
*	15057.30	45.11	6.19	51.30	88.20	-36.90	Peak	Vertical
*	16539.70	45.18	8.63	53.81	88.20	-34.39	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8206.30	47.84	-1.69	46.14	74.00	-27.86	Peak	Horizontal
	12656.90	46.87	1.30	48.17	74.00	-25.83	Peak	Horizontal
*	14401.10	44.88	5.00	49.87	88.20	-38.33	Peak	Horizontal
*	16915.40	44.46	9.69	54.16	88.20	-34.04	Peak	Horizontal
	8369.50	47.96	-1.41	46.55	74.00	-27.45	Peak	Vertical
	12323.70	47.62	0.60	48.22	74.00	-25.78	Peak	Vertical
*	14781.90	44.28	6.07	50.35	88.20	-37.85	Peak	Vertical
*	17039.50	43.09	10.16	53.25	88.20	-34.95	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8315.10	48.01	-1.38	46.63	74.00	-27.37	Peak	Horizontal
	12656.90	47.54	1.30	48.85	74.00	-25.15	Peak	Horizontal
*	13704.10	47.30	3.17	50.48	88.20	-37.72	Peak	Horizontal
*	17031.00	43.56	9.96	53.51	88.20	-34.69	Peak	Horizontal
	8109.40	47.97	-1.31	46.65	74.00	-27.35	Peak	Vertical
	12223.40	47.17	0.65	47.82	74.00	-26.18	Peak	Vertical
*	14771.70	44.57	6.34	50.91	88.20	-37.29	Peak	Vertical
*	16946.00	43.46	9.85	53.31	88.20	-34.89	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8338.90	48.03	-1.42	46.61	74.00	-27.39	Peak	Horizontal
	12111.20	47.38	0.47	47.85	74.00	-26.15	Peak	Horizontal
*	14452.10	44.91	5.01	49.93	88.20	-38.27	Peak	Horizontal
*	16923.90	43.06	10.14	53.20	88.20	-35.00	Peak	Horizontal
	8123.00	47.76	-1.31	46.45	74.00	-27.55	Peak	Vertical
	12673.90	46.78	1.36	48.14	74.00	-25.86	Peak	Vertical
*	14538.80	44.94	5.45	50.39	88.20	-37.81	Peak	Vertical
*	17059.90	44.02	10.18	54.20	88.20	-34.00	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8111.10	48.82	-1.31	47.51	74.00	-26.49	Peak	Horizontal
	12398.50	47.12	1.16	48.28	74.00	-25.72	Peak	Horizontal
*	15203.50	44.60	6.16	50.75	88.20	-37.45	Peak	Horizontal
*	16556.70	45.27	8.71	53.98	88.20	-34.22	Peak	Horizontal
	8109.40	48.07	-1.31	46.76	74.00	-27.24	Peak	Vertical
	12600.80	47.08	1.14	48.22	74.00	-25.78	Peak	Vertical
*	14739.40	43.65	6.56	50.20	88.20	-38.00	Peak	Vertical
*	16859.30	43.88	9.81	53.69	88.20	-34.51	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8107.70	47.63	-1.31	46.32	74.00	-27.68	Peak	Horizontal
	12371.30	46.68	1.10	47.78	74.00	-26.22	Peak	Horizontal
*	14654.40	44.29	6.08	50.37	88.20	-37.83	Peak	Horizontal
*	16667.20	44.15	9.57	53.72	88.20	-34.48	Peak	Horizontal
	8366.10	48.12	-1.37	46.74	74.00	-27.26	Peak	Vertical
	12435.90	46.64	1.39	48.04	74.00	-25.96	Peak	Vertical
*	14358.60	45.31	5.30	50.60	88.20	-37.60	Peak	Vertical
*	17318.30	44.22	9.25	53.47	88.20	-34.73	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8046.50	48.07	-1.49	46.59	74.00	-27.41	Peak	Horizontal
	12310.10	47.21	0.67	47.88	74.00	-26.12	Peak	Horizontal
*	13731.30	47.05	3.37	50.42	88.20	-37.78	Peak	Horizontal
*	16653.60	43.50	9.98	53.48	88.20	-34.72	Peak	Horizontal
	8145.10	47.72	-1.62	46.10	74.00	-27.90	Peak	Vertical
	12447.80	47.01	1.40	48.41	74.00	-25.59	Peak	Vertical
*	14817.60	44.48	5.87	50.34	88.20	-37.86	Peak	Vertical
*	16556.70	45.07	8.71	53.78	88.20	-34.42	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8184.20	48.30	-1.60	46.70	74.00	-27.30	Peak	Horizontal
	12255.70	47.81	0.74	48.55	74.00	-25.45	Peak	Horizontal
*	13787.40	46.55	3.32	49.87	88.20	-38.33	Peak	Horizontal
*	16927.30	43.45	10.32	53.77	88.20	-34.43	Peak	Horizontal
	8199.50	47.94	-1.68	46.26	74.00	-27.74	Peak	Vertical
	12662.00	47.09	1.44	48.53	74.00	-25.47	Peak	Vertical
*	14520.10	44.36	5.96	50.31	88.20	-37.89	Peak	Vertical
*	16952.80	43.32	9.82	53.14	88.20	-35.06	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8111.10	48.00	-1.31	46.68	74.00	-27.32	Peak	Horizontal
	12276.10	47.34	0.75	48.08	74.00	-25.92	Peak	Horizontal
*	14727.50	43.90	6.58	50.48	88.20	-37.72	Peak	Horizontal
*	16915.40	43.80	9.69	53.49	88.20	-34.71	Peak	Horizontal
	8338.90	47.56	-1.42	46.14	74.00	-27.86	Peak	Vertical
	12281.20	47.43	0.69	48.12	74.00	-25.88	Peak	Vertical
*	14341.60	45.40	4.77	50.18	88.20	-38.02	Peak	Vertical
*	16932.40	44.18	10.30	54.48	88.20	-33.72	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8429.00	48.32	-1.15	47.18	74.00	-26.82	Peak	Horizontal
	12456.30	47.36	1.41	48.77	74.00	-25.23	Peak	Horizontal
*	14380.70	45.73	4.88	50.61	88.20	-37.59	Peak	Horizontal
*	16560.10	45.56	8.73	54.29	88.20	-33.91	Peak	Horizontal
	8291.30	48.08	-1.59	46.49	74.00	-27.51	Peak	Vertical
	12418.90	46.58	1.32	47.90	74.00	-26.10	Peak	Vertical
*	14360.30	45.21	5.36	50.57	88.20	-37.63	Peak	Vertical
*	16617.90	44.99	8.94	53.93	88.20	-34.27	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8306.60	47.89	-1.41	46.48	74.00	-27.52	Peak	Horizontal
	12469.90	46.87	1.39	48.26	74.00	-25.74	Peak	Horizontal
*	14419.80	45.74	5.10	50.84	88.20	-37.36	Peak	Horizontal
*	16910.30	43.99	9.48	53.47	88.20	-34.73	Peak	Horizontal
	8038.00	48.58	-1.44	47.14	74.00	-26.86	Peak	Vertical
	12571.90	46.49	1.69	48.18	74.00	-25.82	Peak	Vertical
*	14336.50	45.53	4.78	50.31	88.20	-37.89	Peak	Vertical
*	16646.80	44.07	9.84	53.91	88.20	-34.29	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8379.70	49.19	-1.50	47.69	74.00	-26.31	Peak	Horizontal
	12378.10	47.07	1.12	48.20	74.00	-25.80	Peak	Horizontal
*	14424.90	45.30	5.15	50.45	88.20	-37.75	Peak	Horizontal
*	17037.80	43.67	10.12	53.78	88.20	-34.42	Peak	Horizontal
	8383.10	48.09	-1.48	46.61	74.00	-27.39	Peak	Vertical
	12276.10	47.03	0.75	47.78	74.00	-26.22	Peak	Vertical
*	14759.80	43.68	6.15	49.83	88.20	-38.37	Peak	Vertical
*	17379.50	44.26	9.28	53.54	88.20	-34.66	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8296.40	47.71	-1.55	46.16	74.00	-27.84	Peak	Horizontal
	12299.90	47.49	0.68	48.17	74.00	-25.83	Peak	Horizontal
*	14358.60	45.06	5.30	50.35	88.20	-37.85	Peak	Horizontal
*	17024.20	43.45	9.68	53.13	88.20	-35.07	Peak	Horizontal
	8337.20	47.59	-1.42	46.17	74.00	-27.83	Peak	Vertical
	12469.90	46.64	1.39	48.03	74.00	-25.97	Peak	Vertical
*	15067.50	44.89	5.97	50.86	88.20	-37.34	Peak	Vertical
*	17039.50	43.58	10.16	53.74	88.20	-34.46	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8206.30	47.91	-1.69	46.22	74.00	-27.78	Peak	Horizontal
	12468.20	46.63	1.39	48.03	74.00	-25.97	Peak	Horizontal
*	14853.30	44.67	5.66	50.33	88.20	-37.87	Peak	Horizontal
*	17020.80	44.28	9.54	53.81	88.20	-34.39	Peak	Horizontal
	8400.10	48.09	-1.37	46.72	74.00	-27.28	Peak	Vertical
	12546.40	46.57	1.79	48.36	74.00	-25.64	Peak	Vertical
*	14435.10	45.48	5.20	50.68	88.20	-37.52	Peak	Vertical
*	17235.00	44.33	9.49	53.82	88.20	-34.38	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8259.00	47.95	-1.49	46.45	74.00	-27.55	Peak	Horizontal
	12371.30	46.79	1.10	47.89	74.00	-26.11	Peak	Horizontal
*	14668.00	43.73	6.38	50.11	88.20	-38.09	Peak	Horizontal
*	17071.80	43.83	9.75	53.58	88.20	-34.62	Peak	Horizontal
	8325.30	47.58	-1.41	46.17	74.00	-27.83	Peak	Vertical
	12350.90	47.20	0.95	48.15	74.00	-25.85	Peak	Vertical
*	14948.50	43.92	6.27	50.19	88.20	-38.01	Peak	Vertical
*	16927.30	43.79	10.32	54.11	88.20	-34.09	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8218.20	47.73	-1.57	46.16	74.00	-27.84	Peak	Horizontal
	12269.30	46.99	0.80	47.79	74.00	-26.21	Peak	Horizontal
*	14394.30	45.77	4.96	50.73	88.20	-37.47	Peak	Horizontal
*	17034.40	43.40	10.04	53.44	88.20	-34.76	Peak	Horizontal
	8306.60	48.29	-1.41	46.88	74.00	-27.12	Peak	Vertical
	12311.80	47.52	0.65	48.17	74.00	-25.83	Peak	Vertical
*	14848.20	44.37	5.78	50.15	88.20	-38.05	Peak	Vertical
*	17049.70	43.65	10.34	53.99	88.20	-34.21	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8418.80	48.17	-1.23	46.93	74.00	-27.07	Peak	Horizontal
	12439.30	46.80	1.39	48.19	74.00	-25.81	Peak	Horizontal
*	15009.70	45.00	5.43	50.43	88.20	-37.77	Peak	Horizontal
*	16939.20	44.29	10.07	54.36	88.20	-33.84	Peak	Horizontal
	8483.40	47.84	-1.34	46.50	74.00	-27.50	Peak	Vertical
	12556.60	46.50	1.77	48.27	74.00	-25.73	Peak	Vertical
*	14333.10	46.41	4.79	51.20	88.20	-37.00	Peak	Vertical
*	16657.00	43.73	10.06	53.78	88.20	-34.42	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8347.40	47.67	-1.40	46.27	74.00	-27.73	Peak	Horizontal
	12248.90	46.94	0.74	47.69	74.00	-26.31	Peak	Horizontal
*	15212.00	43.77	6.46	50.23	88.20	-37.97	Peak	Horizontal
*	17061.60	43.65	10.15	53.80	88.20	-34.40	Peak	Horizontal
	8214.80	48.48	-1.61	46.87	74.00	-27.13	Peak	Vertical
	12237.00	47.61	0.77	48.39	74.00	-25.61	Peak	Vertical
*	14445.30	45.09	5.23	50.32	88.20	-37.88	Peak	Vertical
*	16927.30	43.53	10.32	53.86	88.20	-34.34	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8315.10	48.09	-1.38	46.71	74.00	-27.29	Peak	Horizontal
	12306.70	47.12	0.69	47.81	74.00	-26.19	Peak	Horizontal
*	14389.20	45.33	4.93	50.27	88.20	-37.93	Peak	Horizontal
*	17032.70	44.04	10.00	54.03	88.20	-34.17	Peak	Horizontal
	8055.00	47.89	-1.53	46.35	74.00	-27.65	Peak	Vertical
	12277.80	47.52	0.73	48.25	74.00	-25.75	Peak	Vertical
*	14392.60	45.35	4.95	50.30	88.20	-37.90	Peak	Vertical
*	16555.00	44.86	8.71	53.57	88.20	-34.63	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

2*2 Directional:

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8155.30	46.91	-1.54	45.37	74.00	-28.63	Peak	Horizontal
	11907.20	44.24	-0.46	43.78	54.00	-10.22	Average	Horizontal
	11907.20	56.05	-0.46	55.59	74.00	-18.41	Peak	Horizontal
*	14725.80	43.87	6.56	50.43	88.20	-37.77	Peak	Horizontal
*	17253.70	43.82	9.65	53.47	88.20	-34.73	Peak	Horizontal
	8036.30	47.36	-1.58	45.78	74.00	-28.22	Peak	Vertical
	12393.40	46.92	1.16	48.07	74.00	-25.93	Peak	Vertical
*	14741.10	44.34	6.49	50.82	88.20	-37.38	Peak	Vertical
*	17359.10	44.09	9.63	53.73	88.20	-34.47	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8480.00	48.53	-1.36	47.17	74.00	-26.83	Peak	Horizontal
	12573.60	46.57	1.68	48.24	74.00	-25.76	Peak	Horizontal
*	14509.90	44.60	5.90	50.50	88.20	-37.70	Peak	Horizontal
*	17354.00	43.66	9.77	53.44	88.20	-34.76	Peak	Horizontal
	8029.50	48.34	-2.16	46.18	74.00	-27.82	Peak	Vertical
	12578.70	45.88	1.61	47.49	74.00	-26.51	Peak	Vertical
*	14363.70	45.00	5.37	50.37	88.20	-37.83	Peak	Vertical
*	16544.80	44.56	8.65	53.21	88.20	-34.99	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8253.90	48.05	-1.47	46.59	74.00	-27.41	Peak	Horizontal
	12430.80	46.80	1.39	48.18	74.00	-25.82	Peak	Horizontal
*	14370.50	45.88	5.15	51.02	88.20	-37.18	Peak	Horizontal
*	17401.60	44.10	9.13	53.23	88.20	-34.97	Peak	Horizontal
	8078.80	47.13	-1.74	45.40	74.00	-28.60	Peak	Vertical
	12539.60	46.21	1.72	47.93	74.00	-26.07	Peak	Vertical
*	13841.80	46.59	3.04	49.63	88.20	-38.57	Peak	Vertical
*	17223.10	43.54	9.40	52.94	88.20	-35.26	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8423.90	47.45	-1.19	46.26	74.00	-27.74	Peak	Horizontal
	12454.60	47.42	1.41	48.83	74.00	-25.17	Peak	Horizontal
*	14754.70	45.01	6.03	51.05	88.20	-37.15	Peak	Horizontal
*	16645.10	43.71	9.80	53.52	88.20	-34.68	Peak	Horizontal
	8403.50	48.08	-1.35	46.74	74.00	-27.26	Peak	Vertical
	12526.00	47.23	1.40	48.63	74.00	-25.37	Peak	Vertical
*	14509.90	44.73	5.90	50.63	88.20	-37.57	Peak	Vertical
*	17355.70	43.96	9.73	53.68	88.20	-34.52	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8476.60	47.23	-1.34	45.89	74.00	-28.11	Peak	Horizontal
	12393.40	46.77	1.16	47.92	74.00	-26.08	Peak	Horizontal
*	14753.00	44.85	6.00	50.84	88.20	-37.36	Peak	Horizontal
*	16932.40	43.28	10.30	53.58	88.20	-34.62	Peak	Horizontal
	8442.60	47.22	-1.13	46.09	74.00	-27.91	Peak	Vertical
	12441.00	46.59	1.39	47.98	74.00	-26.02	Peak	Vertical
*	14734.30	44.02	6.67	50.70	88.20	-37.50	Peak	Vertical
*	17202.70	44.73	9.25	53.97	88.20	-34.23	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8162.10	47.77	-1.52	46.25	74.00	-27.75	Peak	Horizontal
	12155.40	47.78	0.37	48.15	74.00	-25.85	Peak	Horizontal
*	14515.00	45.01	6.17	51.18	88.20	-37.02	Peak	Horizontal
*	17202.70	44.73	9.25	53.97	88.20	-34.23	Peak	Horizontal
	8423.90	47.36	-1.19	46.17	74.00	-27.83	Peak	Vertical
	12444.40	46.00	1.40	47.40	74.00	-26.60	Peak	Vertical
*	13780.60	46.75	3.37	50.13	88.20	-38.07	Peak	Vertical
*	17342.10	43.78	9.61	53.40	88.20	-34.80	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8097.50	48.01	-1.52	46.49	74.00	-27.51	Peak	Horizontal
	12469.90	47.02	1.39	48.41	74.00	-25.59	Peak	Horizontal
*	14516.70	44.74	6.10	50.84	88.20	-37.36	Peak	Horizontal
*	16658.70	44.15	9.98	54.12	88.20	-34.08	Peak	Horizontal
	8043.10	47.80	-1.47	46.33	74.00	-27.67	Peak	Vertical
	12454.60	47.39	1.41	48.80	74.00	-25.20	Peak	Vertical
*	14365.40	45.20	5.32	50.52	88.20	-37.68	Peak	Vertical
*	16653.60	43.49	9.98	53.47	88.20	-34.73	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8038.00	47.71	-1.44	46.27	74.00	-27.73	Peak	Horizontal
	12473.30	46.95	1.39	48.33	74.00	-25.67	Peak	Horizontal
*	13892.80	47.20	3.32	50.52	88.20	-37.68	Peak	Horizontal
*	16764.10	44.26	9.58	53.84	88.20	-34.36	Peak	Horizontal
	8286.20	47.19	-1.58	45.61	74.00	-28.39	Peak	Vertical
	12335.60	46.98	0.75	47.72	74.00	-26.28	Peak	Vertical
*	14953.60	44.50	6.10	50.60	88.20	-37.60	Peak	Vertical
*	17031.00	43.37	9.96	53.32	88.20	-34.88	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8403.50	47.25	-1.35	45.90	74.00	-28.10	Peak	Horizontal
	12026.20	48.29	-0.04	48.26	74.00	-25.74	Peak	Horizontal
*	13401.50	47.29	3.50	50.80	88.20	-37.40	Peak	Horizontal
*	17051.40	43.78	10.31	54.09	88.20	-34.11	Peak	Horizontal
	8466.40	47.45	-1.27	46.19	74.00	-27.81	Peak	Vertical
	11653.90	47.86	-0.02	47.84	74.00	-26.16	Peak	Vertical
*	13726.20	46.75	3.30	50.05	88.20	-38.15	Peak	Vertical
*	17360.80	44.65	9.59	54.24	88.20	-33.96	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8106.00	47.71	-1.31	46.40	74.00	-27.60	Peak	Horizontal
	12580.40	47.29	1.57	48.86	74.00	-25.14	Peak	Horizontal
*	13773.80	47.05	3.57	50.62	88.20	-37.58	Peak	Horizontal
*	16667.20	44.04	9.57	53.61	88.20	-34.59	Peak	Horizontal
	8451.10	47.10	-1.16	45.94	74.00	-28.06	Peak	Vertical
	12679.00	46.54	1.32	47.87	74.00	-26.13	Peak	Vertical
*	13554.50	46.36	3.60	49.97	88.20	-38.23	Peak	Vertical
*	17236.70	44.51	9.51	54.02	88.20	-34.18	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8066.90	47.88	-1.68	46.20	74.00	-27.80	Peak	Horizontal
	12486.90	46.54	1.23	47.77	74.00	-26.23	Peak	Horizontal
*	14940.00	44.27	6.56	50.82	88.20	-37.38	Peak	Horizontal
*	16650.20	43.66	9.91	53.57	88.20	-34.63	Peak	Horizontal
	8403.50	47.82	-1.35	46.47	74.00	-27.53	Peak	Vertical
	12590.60	46.72	1.30	48.01	74.00	-25.99	Peak	Vertical
*	15065.80	45.00	6.02	51.02	88.20	-37.18	Peak	Vertical
*	16631.50	44.53	9.36	53.88	88.20	-34.32	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8403.50	47.82	-1.35	46.47	74.00	-27.53	Peak	Horizontal
	12485.20	46.86	1.25	48.11	74.00	-25.89	Peak	Horizontal
*	13411.70	47.26	3.48	50.74	88.20	-37.46	Peak	Horizontal
*	16631.50	44.53	9.36	53.88	88.20	-34.32	Peak	Horizontal
	8369.50	47.53	-1.41	46.12	74.00	-27.88	Peak	Vertical
	12138.40	47.62	0.44	48.07	74.00	-25.93	Peak	Vertical
*	13761.90	46.42	3.56	49.98	88.20	-38.22	Peak	Vertical
*	16653.60	43.55	9.98	53.54	88.20	-34.66	Peak	Vertical

Note 1: “*” is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8440.90	47.66	-1.13	46.53	74.00	-27.47	Peak	Horizontal
	12415.50	47.28	1.27	48.55	74.00	-25.45	Peak	Horizontal
*	14283.80	45.91	4.62	50.53	88.20	-37.67	Peak	Horizontal
*	16925.60	43.22	10.23	53.45	88.20	-34.75	Peak	Horizontal
	8128.10	47.12	-1.42	45.70	74.00	-28.30	Peak	Vertical
	12571.90	46.04	1.69	47.73	74.00	-26.27	Peak	Vertical
*	13731.30	46.90	3.37	50.28	88.20	-37.92	Peak	Vertical
*	17031.00	43.35	9.96	53.31	88.20	-34.89	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8049.90	48.95	-1.51	47.44	74.00	-26.56	Peak	Horizontal
	12580.40	46.79	1.57	48.36	74.00	-25.64	Peak	Horizontal
*	13731.30	46.90	3.37	50.28	88.20	-37.92	Peak	Horizontal
*	16645.10	43.88	9.80	53.68	88.20	-34.52	Peak	Horizontal
	8245.40	47.15	-1.42	45.73	74.00	-28.27	Peak	Vertical
	12107.80	46.80	0.45	47.25	74.00	-26.75	Peak	Vertical
*	15201.80	45.46	6.10	51.56	88.20	-36.64	Peak	Vertical
*	17224.80	44.08	9.41	53.50	88.20	-34.70	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8056.70	48.76	-1.55	47.20	74.00	-26.80	Peak	Horizontal
	12490.30	47.16	1.18	48.34	74.00	-25.66	Peak	Horizontal
*	14674.80	44.45	6.38	50.82	88.20	-37.38	Peak	Horizontal
*	16658.70	43.59	9.98	53.56	88.20	-34.64	Peak	Horizontal
	8264.10	47.64	-1.51	46.13	74.00	-27.87	Peak	Vertical
	12449.50	46.80	1.40	48.21	74.00	-25.79	Peak	Vertical
*	14513.30	44.46	6.08	50.54	88.20	-37.66	Peak	Vertical
*	17134.70	44.50	9.52	54.02	88.20	-34.18	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8371.20	47.68	-1.43	46.25	74.00	-27.75	Peak	Horizontal
	12449.50	46.82	1.40	48.22	74.00	-25.78	Peak	Horizontal
*	14618.70	44.60	5.78	50.38	88.20	-37.82	Peak	Horizontal
*	17212.90	44.82	9.32	54.14	88.20	-34.06	Peak	Horizontal
	8109.40	47.01	-1.31	45.70	74.00	-28.30	Peak	Vertical
	12566.80	46.85	1.72	48.57	74.00	-25.43	Peak	Vertical
*	14950.20	44.47	6.22	50.68	88.20	-37.52	Peak	Vertical
*	17197.60	44.34	9.26	53.59	88.20	-34.61	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8327.00	46.90	-1.42	45.48	74.00	-28.52	Peak	Horizontal
	12265.90	46.97	0.78	47.75	74.00	-26.25	Peak	Horizontal
*	14668.00	44.52	6.38	50.89	88.20	-37.31	Peak	Horizontal
*	17364.20	43.51	9.50	53.01	88.20	-35.19	Peak	Horizontal
	8131.50	46.90	-1.49	45.41	74.00	-28.59	Peak	Vertical
	12459.70	46.96	1.41	48.37	74.00	-25.63	Peak	Vertical
*	14368.80	45.14	5.20	50.34	88.20	-37.86	Peak	Vertical
*	17374.40	44.06	9.30	53.35	88.20	-34.85	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8219.90	48.04	-1.55	46.48	74.00	-27.52	Peak	Horizontal
	11371.70	46.93	0.01	46.94	74.00	-27.06	Peak	Horizontal
*	14447.00	45.10	5.23	50.33	88.20	-37.87	Peak	Horizontal
*	16633.20	44.22	9.42	53.64	88.20	-34.56	Peak	Horizontal
	8058.40	47.92	-1.57	46.35	74.00	-27.65	Peak	Vertical
	12449.50	46.57	1.40	47.97	74.00	-26.03	Peak	Vertical
*	13760.20	46.61	3.49	50.10	88.20	-38.10	Peak	Vertical
*	17469.60	44.70	9.10	53.80	88.20	-34.40	Peak	Vertical

Note 1: “*” is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8148.50	48.02	-1.60	46.43	74.00	-27.57	Peak	Horizontal
	11572.30	47.44	0.24	47.69	74.00	-26.31	Peak	Horizontal
*	13778.90	46.32	3.42	49.74	88.20	-38.46	Peak	Horizontal
*	16527.80	44.28	8.75	53.03	88.20	-35.17	Peak	Horizontal
	8121.30	47.17	-1.31	45.86	74.00	-28.14	Peak	Vertical
	12325.40	47.26	0.62	47.88	74.00	-26.12	Peak	Vertical
*	14737.70	43.86	6.63	50.49	88.20	-37.71	Peak	Vertical
*	16648.50	43.68	9.88	53.55	88.20	-34.65	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8469.80	47.74	-1.29	46.45	74.00	-27.55	Peak	Horizontal
	12464.80	46.42	1.40	47.82	74.00	-26.18	Peak	Horizontal
*	14933.20	44.16	6.48	50.63	88.20	-37.57	Peak	Horizontal
*	16651.90	43.75	9.95	53.70	88.20	-34.50	Peak	Horizontal
	8488.50	47.66	-1.31	46.35	74.00	-27.65	Peak	Vertical
	12449.50	46.42	1.40	47.83	74.00	-26.17	Peak	Vertical
*	14588.10	44.52	5.64	50.17	88.20	-38.03	Peak	Vertical
*	16658.70	43.23	9.98	53.20	88.20	-35.00	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8107.70	47.27	-1.31	45.96	74.00	-28.04	Peak	Horizontal
	12454.60	46.61	1.41	48.01	74.00	-25.99	Peak	Horizontal
*	15055.60	45.58	6.14	51.72	88.20	-36.48	Peak	Horizontal
*	17114.30	44.78	9.53	54.32	88.20	-33.88	Peak	Horizontal
	8049.90	47.05	-1.51	45.54	74.00	-28.46	Peak	Vertical
	12441.00	46.18	1.39	47.58	74.00	-26.42	Peak	Vertical
*	15043.70	44.70	5.81	50.52	88.20	-37.68	Peak	Vertical
*	17439.00	44.71	8.85	53.56	88.20	-34.64	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8415.40	47.13	-1.26	45.87	74.00	-28.13	Peak	Horizontal
	12594.00	46.73	1.21	47.94	74.00	-26.06	Peak	Horizontal
*	14746.20	44.44	6.28	50.72	88.20	-37.48	Peak	Horizontal
*	17168.70	44.53	9.26	53.79	88.20	-34.41	Peak	Horizontal
	8459.60	47.56	-1.22	46.34	74.00	-27.66	Peak	Vertical
	12469.90	46.25	1.39	47.64	74.00	-26.36	Peak	Vertical
*	14373.90	44.81	5.03	49.85	88.20	-38.35	Peak	Vertical
*	16643.40	44.26	9.77	54.02	88.20	-34.18	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

4*4 Omni:

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8299.80	36.98	-1.50	35.48	54.00	-18.52	Average	Horizontal
	8299.80	48.48	-1.50	46.97	74.00	-27.03	Peak	Horizontal
	12420.60	36.66	1.34	38.00	54.00	-16.00	Average	Horizontal
	12420.60	47.17	1.34	48.51	74.00	-25.49	Peak	Horizontal
*	14727.50	44.08	6.58	50.66	88.20	-37.54	Peak	Horizontal
	15931.10	32.45	8.64	41.09	54.00	-12.91	Average	Horizontal
	15931.10	45.18	8.64	53.83	74.00	-20.17	Peak	Horizontal
*	16929.00	43.43	10.41	53.85	88.20	-34.35	Peak	Horizontal
	17940.50	31.89	11.93	43.82	54.00	-10.18	Average	Horizontal
	17940.50	43.87	11.93	55.80	74.00	-18.20	Peak	Horizontal
	8100.90	38.33	-1.44	36.89	54.00	-17.11	Average	Vertical
	8100.90	48.48	-1.44	47.05	74.00	-26.95	Peak	Vertical
	11742.30	37.89	-0.21	37.68	54.00	-16.32	Average	Vertical
	11742.30	49.01	-0.21	48.81	74.00	-25.19	Peak	Vertical
*	14734.30	44.79	6.67	51.47	88.20	-36.73	Peak	Vertical
	15824.00	36.62	7.82	44.44	54.00	-9.56	Average	Vertical
	15824.00	45.23	7.82	53.05	74.00	-20.95	Peak	Vertical
*	16937.50	43.81	10.13	53.94	88.20	-34.26	Peak	Vertical
	17969.40	32.65	11.26	43.91	54.00	-10.09	Average	Vertical
	17969.40	43.89	11.26	55.15	74.00	-18.85	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8211.40	47.92	-1.65	46.26	74.00	-27.74	Peak	Horizontal
	12509.00	46.92	1.14	48.05	74.00	-25.95	Peak	Horizontal
*	14717.30	44.08	6.45	50.52	88.20	-37.68	Peak	Horizontal
*	17044.60	43.77	10.28	54.05	88.20	-34.15	Peak	Horizontal
	8413.70	47.64	-1.28	46.36	74.00	-27.64	Peak	Vertical
	12254.00	47.70	0.73	48.43	74.00	-25.57	Peak	Vertical
*	14577.90	45.27	5.56	50.83	88.20	-37.37	Peak	Vertical
*	17049.70	43.30	10.34	53.64	88.20	-34.56	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8109.40	47.99	-1.31	46.68	74.00	-27.32	Peak	Horizontal
	12549.80	45.70	1.79	47.49	74.00	-26.51	Peak	Horizontal
*	14938.30	44.38	6.54	50.92	88.20	-37.28	Peak	Horizontal
*	16918.80	43.88	9.87	53.75	88.20	-34.45	Peak	Horizontal
	8073.70	47.50	-1.74	45.76	74.00	-28.24	Peak	Vertical
	12097.60	48.13	0.38	48.51	74.00	-25.49	Peak	Vertical
*	14788.70	44.38	5.95	50.33	88.20	-37.87	Peak	Vertical
*	16922.20	43.24	10.05	53.29	88.20	-34.91	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8379.70	48.02	-1.50	46.52	74.00	-27.48	Peak	Horizontal
	12537.90	46.63	1.68	48.31	74.00	-25.69	Peak	Horizontal
*	14511.60	44.11	5.99	50.10	88.20	-38.10	Peak	Horizontal
*	16553.30	46.00	8.70	54.70	88.20	-33.50	Peak	Horizontal
	8383.10	48.03	-1.48	46.56	74.00	-27.44	Peak	Vertical
	12435.90	46.82	1.39	48.21	74.00	-25.79	Peak	Vertical
*	14662.90	44.43	6.27	50.69	88.20	-37.51	Peak	Vertical
*	17054.80	43.29	10.26	53.54	88.20	-34.66	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8461.30	47.40	-1.23	46.17	74.00	-27.83	Peak	Horizontal
	12396.80	46.83	1.16	47.99	74.00	-26.01	Peak	Horizontal
*	14321.20	45.44	4.71	50.16	88.20	-38.04	Peak	Horizontal
*	16949.40	43.77	9.83	53.61	88.20	-34.59	Peak	Horizontal
	8114.50	48.15	-1.31	46.84	74.00	-27.16	Peak	Vertical
	12430.80	46.68	1.39	48.07	74.00	-25.93	Peak	Vertical
*	14365.40	44.67	5.32	49.98	88.20	-38.22	Peak	Vertical
*	16927.30	43.16	10.32	53.48	88.20	-34.72	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8311.70	48.01	-1.37	46.64	74.00	-27.36	Peak	Horizontal
	12386.60	47.49	1.14	48.63	74.00	-25.37	Peak	Horizontal
*	14362.00	45.27	5.43	50.70	88.20	-37.50	Peak	Horizontal
*	16932.40	43.80	10.30	54.10	88.20	-34.10	Peak	Horizontal
	8032.90	47.71	-1.87	45.84	74.00	-28.16	Peak	Vertical
	12539.60	46.11	1.72	47.83	74.00	-26.17	Peak	Vertical
*	14686.70	44.06	6.37	50.43	88.20	-37.77	Peak	Vertical
*	16578.80	44.63	8.69	53.33	88.20	-34.87	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8422.20	47.78	-1.20	46.58	74.00	-27.42	Peak	Horizontal
	11922.50	48.86	-0.47	48.39	74.00	-25.61	Peak	Horizontal
*	15040.30	44.46	5.74	50.21	88.20	-37.99	Peak	Horizontal
*	17369.30	44.89	9.36	54.25	88.20	-33.95	Peak	Horizontal
	8046.50	47.85	-1.49	46.36	74.00	-27.64	Peak	Vertical
	12152.00	46.91	0.39	47.30	74.00	-26.70	Peak	Vertical
*	15052.20	44.14	6.05	50.19	88.20	-38.01	Peak	Vertical
*	17066.70	42.60	10.01	52.61	88.20	-35.59	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8364.40	48.14	-1.35	46.79	74.00	-27.21	Peak	Horizontal
	12469.90	46.56	1.39	47.95	74.00	-26.05	Peak	Horizontal
*	14725.80	44.06	6.56	50.61	88.20	-37.59	Peak	Horizontal
*	17354.00	43.82	9.77	53.59	88.20	-34.61	Peak	Horizontal
	8136.60	48.80	-1.59	47.21	74.00	-26.79	Peak	Vertical
	12461.40	46.30	1.41	47.71	74.00	-26.29	Peak	Vertical
*	14730.90	44.11	6.63	50.73	88.20	-37.47	Peak	Vertical
*	17291.10	44.52	9.00	53.52	88.20	-34.68	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8255.60	48.32	-1.47	46.85	74.00	-27.15	Peak	Horizontal
	12366.20	47.22	1.08	48.30	74.00	-25.70	Peak	Horizontal
*	14742.80	43.63	6.42	50.05	88.20	-38.15	Peak	Horizontal
*	17372.70	44.13	9.30	53.43	88.20	-34.77	Peak	Horizontal
	8242.00	47.77	-1.40	46.37	74.00	-27.63	Peak	Vertical
	12667.10	46.86	1.41	48.27	74.00	-25.73	Peak	Vertical
*	14356.90	45.34	5.23	50.57	88.20	-37.63	Peak	Vertical
*	16566.90	44.63	8.75	53.38	88.20	-34.82	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8425.60	47.44	-1.17	46.26	74.00	-27.74	Peak	Horizontal
	12383.20	46.11	1.14	47.25	74.00	-26.75	Peak	Horizontal
*	14685.00	43.93	6.38	50.30	88.20	-37.90	Peak	Horizontal
*	16927.30	43.39	10.32	53.71	88.20	-34.49	Peak	Horizontal
	8354.20	48.08	-1.36	46.72	74.00	-27.28	Peak	Vertical
	12398.50	46.47	1.16	47.63	74.00	-26.37	Peak	Vertical
*	14360.30	45.35	5.36	50.72	88.20	-37.48	Peak	Vertical
*	16536.30	44.64	8.64	53.28	88.20	-34.92	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8116.20	48.53	-1.31	47.21	74.00	-26.79	Peak	Horizontal
	12424.00	46.52	1.38	47.90	74.00	-26.10	Peak	Horizontal
*	14358.60	44.46	5.30	49.76	88.20	-38.44	Peak	Horizontal
*	16942.60	44.13	9.96	54.09	88.20	-34.11	Peak	Horizontal
	8238.60	47.37	-1.42	45.96	74.00	-28.04	Peak	Vertical
	12145.20	47.56	0.42	47.97	74.00	-26.03	Peak	Vertical
*	14511.60	44.36	5.99	50.35	88.20	-37.85	Peak	Vertical
*	17053.10	43.20	10.29	53.49	88.20	-34.71	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8381.40	47.61	-1.49	46.12	74.00	-27.88	Peak	Horizontal
	12549.80	45.85	1.79	47.64	74.00	-26.36	Peak	Horizontal
*	15113.40	44.62	5.86	50.48	88.20	-37.72	Peak	Horizontal
*	17049.70	43.18	10.34	53.52	88.20	-34.68	Peak	Horizontal
	8109.40	46.84	-1.31	45.53	74.00	-28.47	Peak	Vertical
	12529.40	46.73	1.48	48.21	74.00	-25.79	Peak	Vertical
*	14685.00	44.03	6.38	50.40	88.20	-37.80	Peak	Vertical
*	16927.30	42.89	10.32	53.22	88.20	-34.98	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8325.30	47.21	-1.41	45.80	74.00	-28.20	Peak	Horizontal
	12259.10	47.54	0.75	48.30	74.00	-25.70	Peak	Horizontal
*	14516.70	43.79	6.10	49.89	88.20	-38.31	Peak	Horizontal
*	16543.10	44.87	8.65	53.52	88.20	-34.68	Peak	Horizontal
	8121.30	47.51	-1.31	46.19	74.00	-27.81	Peak	Vertical
	12390.00	47.23	1.15	48.38	74.00	-25.62	Peak	Vertical
*	14928.10	44.13	6.42	50.54	88.20	-37.66	Peak	Vertical
*	17331.90	43.84	9.47	53.31	88.20	-34.89	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8384.80	48.62	-1.46	47.16	74.00	-26.84	Peak	Horizontal
	12276.10	48.00	0.75	48.75	74.00	-25.25	Peak	Horizontal
*	14941.70	44.58	6.50	51.08	88.20	-37.12	Peak	Horizontal
*	17206.10	44.72	9.27	53.99	88.20	-34.21	Peak	Horizontal
	8386.50	48.72	-1.45	47.26	74.00	-26.74	Peak	Vertical
	12568.50	46.93	1.71	48.64	74.00	-25.36	Peak	Vertical
*	14729.20	43.91	6.60	50.51	88.20	-37.69	Peak	Vertical
*	17107.50	44.49	9.56	54.05	88.20	-34.15	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8328.70	47.80	-1.42	46.38	74.00	-27.62	Peak	Horizontal
	12267.60	47.72	0.79	48.51	74.00	-25.49	Peak	Horizontal
*	14763.20	43.95	6.23	50.18	88.20	-38.02	Peak	Horizontal
*	16733.50	44.41	9.50	53.92	88.20	-34.28	Peak	Horizontal
	8153.60	48.61	-1.55	47.06	74.00	-26.94	Peak	Vertical
	12301.60	47.59	0.69	48.28	74.00	-25.72	Peak	Vertical
*	14377.30	45.40	4.92	50.32	88.20	-37.88	Peak	Vertical
*	16930.70	43.29	10.36	53.64	88.20	-34.56	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8119.60	47.70	-1.31	46.38	74.00	-27.62	Peak	Horizontal
	12327.10	47.52	0.64	48.16	74.00	-25.84	Peak	Horizontal
*	14882.20	44.47	5.80	50.27	88.20	-37.93	Peak	Horizontal
*	16658.70	43.22	9.98	53.20	88.20	-35.00	Peak	Horizontal
	8123.00	47.54	-1.31	46.22	74.00	-27.78	Peak	Vertical
	12590.60	46.58	1.30	47.88	74.00	-26.12	Peak	Vertical
*	14387.50	45.64	4.92	50.56	88.20	-37.64	Peak	Vertical
*	16932.40	44.13	10.30	54.43	88.20	-33.77	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8444.30	47.56	-1.13	46.44	74.00	-27.56	Peak	Horizontal
	12590.60	46.58	1.30	47.88	74.00	-26.12	Peak	Horizontal
*	14387.50	45.64	4.92	50.56	88.20	-37.64	Peak	Horizontal
*	16932.40	44.13	10.30	54.43	88.20	-33.77	Peak	Horizontal
	8456.20	46.95	-1.20	45.75	74.00	-28.25	Peak	Vertical
	12305.00	46.85	0.71	47.56	74.00	-26.44	Peak	Vertical
*	14509.90	44.40	5.90	50.30	88.20	-37.90	Peak	Vertical
*	17024.20	44.59	9.68	54.27	88.20	-33.93	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8126.40	48.20	-1.38	46.82	74.00	-27.18	Peak	Horizontal
	11653.90	48.00	-0.02	47.98	74.00	-26.02	Peak	Horizontal
*	14768.30	43.90	6.34	50.24	88.20	-37.96	Peak	Horizontal
*	16561.80	44.98	8.73	53.71	88.20	-34.49	Peak	Horizontal
	8240.30	47.82	-1.41	46.41	74.00	-27.59	Peak	Vertical
	12230.20	47.36	0.71	48.07	74.00	-25.93	Peak	Vertical
*	14734.30	43.80	6.67	50.47	88.20	-37.73	Peak	Vertical
*	16565.20	44.91	8.75	53.65	88.20	-34.55	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8123.00	47.83	-1.31	46.52	74.00	-27.48	Peak	Horizontal
	12475.00	47.13	1.38	48.51	74.00	-25.49	Peak	Horizontal
*	14370.50	45.68	5.15	50.83	88.20	-37.37	Peak	Horizontal
*	16770.90	44.03	9.50	53.53	88.20	-34.67	Peak	Horizontal
	8121.30	48.03	-1.31	46.72	74.00	-27.28	Peak	Vertical
	12536.20	47.08	1.64	48.72	74.00	-25.28	Peak	Vertical
*	14353.50	45.93	5.10	51.03	88.20	-37.17	Peak	Vertical
*	16546.50	45.84	8.66	54.50	88.20	-33.70	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8117.90	47.27	-1.31	45.96	74.00	-28.04	Peak	Horizontal
	12446.10	46.60	1.40	48.00	74.00	-26.00	Peak	Horizontal
*	14768.30	43.83	6.34	50.17	88.20	-38.03	Peak	Horizontal
*	17056.50	43.71	10.23	53.94	88.20	-34.26	Peak	Horizontal
	8320.20	47.32	-1.40	45.92	74.00	-28.08	Peak	Vertical
	12128.20	47.63	0.48	48.11	74.00	-25.89	Peak	Vertical
*	14618.70	44.62	5.78	50.40	88.20	-37.80	Peak	Vertical
*	16849.10	44.33	10.05	54.37	88.20	-33.83	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8316.80	47.70	-1.39	46.31	74.00	-27.69	Peak	Horizontal
	11684.50	48.06	0.25	48.31	74.00	-25.69	Peak	Horizontal
*	14940.00	44.23	6.56	50.79	88.20	-37.41	Peak	Horizontal
*	16526.10	45.48	8.77	54.25	88.20	-33.95	Peak	Horizontal
	8429.00	47.66	-1.15	46.51	74.00	-27.49	Peak	Vertical
	12412.10	47.05	1.23	48.28	74.00	-25.72	Peak	Vertical
*	14360.30	44.86	5.36	50.22	88.20	-37.98	Peak	Vertical
*	16922.20	43.52	10.05	53.57	88.20	-34.63	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-25
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8082.20	48.28	-1.73	46.54	74.00	-27.46	Peak	Horizontal
	12218.30	48.42	0.58	49.01	74.00	-24.99	Peak	Horizontal
*	14722.40	44.07	6.51	50.58	88.20	-37.62	Peak	Horizontal
*	16653.60	43.13	9.98	53.12	88.20	-35.08	Peak	Horizontal
	8386.50	48.36	-1.45	46.90	74.00	-27.10	Peak	Vertical
	12276.10	47.57	0.75	48.32	74.00	-25.68	Peak	Vertical
*	14934.90	44.73	6.50	51.23	88.20	-36.97	Peak	Vertical
*	17056.50	44.82	10.23	55.05	88.20	-33.15	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

4*4 Directional:

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8051.60	48.20	-1.52	46.69	74.00	-27.31	Peak	Horizontal
	12469.90	47.18	1.39	48.58	74.00	-25.42	Peak	Horizontal
*	14931.50	44.77	6.46	51.23	88.20	-36.97	Peak	Horizontal
*	17036.10	43.45	10.08	53.53	88.20	-34.67	Peak	Horizontal
	8056.70	49.19	-1.55	47.63	74.00	-26.37	Peak	Vertical
	12231.90	47.67	0.73	48.40	74.00	-25.60	Peak	Vertical
*	14356.90	45.71	5.23	50.94	88.20	-37.26	Peak	Vertical
*	16660.40	44.45	9.90	54.35	88.20	-33.85	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8162.10	47.99	-1.52	46.47	74.00	-27.53	Peak	Horizontal
	12544.70	46.72	1.80	48.52	74.00	-25.48	Peak	Horizontal
*	14438.50	45.08	5.21	50.29	88.20	-37.91	Peak	Horizontal
*	16854.20	43.89	9.93	53.82	88.20	-34.38	Peak	Horizontal
	8048.20	47.87	-1.50	46.37	74.00	-27.63	Peak	Vertical
	12393.40	47.18	1.16	48.33	74.00	-25.67	Peak	Vertical
*	14933.20	43.91	6.48	50.39	88.20	-37.81	Peak	Vertical
*	16510.80	45.82	8.48	54.31	88.20	-33.89	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8116.20	48.27	-1.31	46.95	74.00	-27.05	Peak	Horizontal
	12265.90	47.12	0.78	47.90	74.00	-26.10	Peak	Horizontal
*	14717.30	45.18	6.45	51.62	88.20	-36.58	Peak	Horizontal
*	16828.70	43.86	9.89	53.75	88.20	-34.45	Peak	Horizontal
	8197.80	47.97	-1.68	46.29	74.00	-27.71	Peak	Vertical
	12269.30	47.15	0.80	47.95	74.00	-26.05	Peak	Vertical
*	14730.90	44.05	6.63	50.68	88.20	-37.52	Peak	Vertical
*	17061.60	43.47	10.15	53.62	88.20	-34.58	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8279.40	48.84	-1.57	47.28	74.00	-26.72	Peak	Horizontal
	12456.30	46.49	1.41	47.90	74.00	-26.10	Peak	Horizontal
*	14741.10	43.70	6.49	50.18	88.20	-38.02	Peak	Horizontal
*	16917.10	44.08	9.78	53.86	88.20	-34.34	Peak	Horizontal
	8315.10	48.33	-1.38	46.95	74.00	-27.05	Peak	Vertical
	12379.80	46.80	1.13	47.93	74.00	-26.07	Peak	Vertical
*	14951.90	43.95	6.16	50.11	88.20	-38.09	Peak	Vertical
*	16529.50	45.47	8.73	54.19	88.20	-34.01	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8344.00	48.18	-1.43	46.75	74.00	-27.25	Peak	Horizontal
	12505.60	47.10	1.14	48.24	74.00	-25.76	Peak	Horizontal
*	14515.00	43.78	6.17	49.95	88.20	-38.25	Peak	Horizontal
*	17330.20	44.41	9.45	53.86	88.20	-34.34	Peak	Horizontal
	8281.10	47.35	-1.57	45.78	74.00	-28.22	Peak	Vertical
	12240.40	47.07	0.76	47.83	74.00	-26.17	Peak	Vertical
*	14457.20	46.74	4.79	51.52	88.20	-36.68	Peak	Vertical
*	17048.00	44.21	10.36	54.58	88.20	-33.62	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8111.10	47.82	-1.31	46.51	74.00	-27.49	Peak	Horizontal
	12498.80	46.71	1.15	47.86	74.00	-26.14	Peak	Horizontal
*	13709.20	51.61	3.16	54.78	88.20	-33.42	Peak	Horizontal
*	16539.70	45.29	8.63	53.92	88.20	-34.28	Peak	Horizontal
	8308.30	47.25	-1.39	45.86	74.00	-28.14	Peak	Vertical
	12143.50	47.50	0.42	47.92	74.00	-26.08	Peak	Vertical
*	13700.70	48.98	3.18	52.16	88.20	-36.04	Peak	Vertical
*	16544.80	45.07	8.65	53.72	88.20	-34.48	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8201.20	47.63	-1.68	45.95	74.00	-28.05	Peak	Horizontal
	12468.20	47.04	1.39	48.44	74.00	-25.56	Peak	Horizontal
*	14280.40	45.99	4.75	50.73	88.20	-37.47	Peak	Horizontal
*	16628.10	45.36	9.22	54.58	88.20	-33.62	Peak	Horizontal
	8043.10	47.34	-1.47	45.87	74.00	-28.13	Peak	Vertical
	12488.60	46.62	1.20	47.82	74.00	-26.18	Peak	Vertical
*	13801.00	46.03	3.53	49.56	88.20	-38.64	Peak	Vertical
*	17371.00	44.34	9.31	53.65	88.20	-34.55	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8083.90	47.99	-1.73	46.26	74.00	-27.74	Peak	Horizontal
	11324.10	48.47	-0.16	48.31	74.00	-25.69	Peak	Horizontal
*	13962.50	46.36	3.41	49.77	88.20	-38.43	Peak	Horizontal
*	17175.50	44.94	9.30	54.25	88.20	-33.95	Peak	Horizontal
	8072.00	48.22	-1.74	46.48	74.00	-27.52	Peak	Vertical
	12458.00	46.76	1.41	48.17	74.00	-25.83	Peak	Vertical
*	13661.60	46.68	3.06	49.75	88.20	-38.45	Peak	Vertical
*	16986.80	43.92	9.39	53.31	88.20	-34.89	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8367.80	47.15	-1.39	45.76	74.00	-28.24	Peak	Horizontal
	12439.30	46.63	1.39	48.02	74.00	-25.98	Peak	Horizontal
*	14666.30	43.96	6.34	50.30	88.20	-37.90	Peak	Horizontal
*	16646.80	43.33	9.84	53.17	88.20	-35.03	Peak	Horizontal
	8406.90	47.16	-1.32	45.83	74.00	-28.17	Peak	Vertical
	12044.90	47.56	-0.18	47.37	74.00	-26.63	Peak	Vertical
*	13770.40	46.47	3.68	50.14	88.20	-38.06	Peak	Vertical
*	17223.10	43.68	9.40	53.08	88.20	-35.12	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8355.90	47.28	-1.35	45.93	74.00	-28.07	Peak	Horizontal
	12554.90	46.68	1.77	48.45	74.00	-25.55	Peak	Horizontal
*	13620.80	47.27	3.08	50.35	88.20	-37.85	Peak	Horizontal
*	16925.60	43.64	10.23	53.87	88.20	-34.33	Peak	Horizontal
	8359.30	47.27	-1.33	45.95	74.00	-28.05	Peak	Vertical
	12247.20	46.84	0.75	47.58	74.00	-26.42	Peak	Vertical
*	14379.00	45.43	4.87	50.29	88.20	-37.91	Peak	Vertical
*	17231.60	44.03	9.47	53.50	88.20	-34.70	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8148.50	48.15	-1.60	46.56	74.00	-27.44	Peak	Horizontal
	12563.40	45.62	1.74	47.36	74.00	-26.64	Peak	Horizontal
*	14583.00	44.59	5.61	50.20	88.20	-38.00	Peak	Horizontal
*	17134.70	44.03	9.52	53.55	88.20	-34.65	Peak	Horizontal
	8338.90	47.17	-1.42	45.75	74.00	-28.25	Peak	Vertical
	12553.20	46.01	1.78	47.79	74.00	-26.21	Peak	Vertical
*	14513.30	43.84	6.08	49.92	88.20	-38.28	Peak	Vertical
*	16643.40	43.51	9.77	53.28	88.20	-34.92	Peak	Vertical

Note 1: “*” is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8044.80	48.41	-1.48	46.93	74.00	-27.07	Peak	Horizontal
	12463.10	46.64	1.40	48.04	74.00	-25.96	Peak	Horizontal
*	13687.10	52.34	2.99	55.33	88.20	-32.87	Peak	Horizontal
*	16835.50	43.52	10.02	53.54	88.20	-34.66	Peak	Horizontal
	8454.50	47.53	-1.18	46.35	74.00	-27.65	Peak	Vertical
	12510.70	47.09	1.16	48.26	74.00	-25.74	Peak	Vertical
*	13676.90	48.72	2.96	51.68	88.20	-36.52	Peak	Vertical
*	16634.90	44.12	9.49	53.61	88.20	-34.59	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8034.60	48.54	-1.73	46.81	74.00	-27.19	Peak	Horizontal
	12082.30	47.80	0.25	48.05	74.00	-25.95	Peak	Horizontal
*	13801.00	46.45	3.53	49.98	88.20	-38.22	Peak	Horizontal
*	16842.30	43.33	10.14	53.47	88.20	-34.73	Peak	Horizontal
	8260.70	47.08	-1.50	45.58	74.00	-28.42	Peak	Vertical
	11007.90	48.36	-0.14	48.22	74.00	-25.78	Peak	Vertical
*	13727.90	46.91	3.32	50.24	88.20	-37.96	Peak	Vertical
*	16723.30	43.33	9.65	52.98	88.20	-35.22	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8303.20	47.20	-1.46	45.74	74.00	-28.26	Peak	Horizontal
	11460.10	48.22	-0.07	48.15	74.00	-25.85	Peak	Horizontal
*	14355.20	44.90	5.16	50.06	88.20	-38.14	Peak	Horizontal
*	16650.20	43.83	9.91	53.74	88.20	-34.46	Peak	Horizontal
	8184.20	47.96	-1.60	46.35	74.00	-27.65	Peak	Vertical
	12563.40	46.42	1.74	48.16	74.00	-25.84	Peak	Vertical
*	14516.70	43.98	6.10	50.08	88.20	-38.12	Peak	Vertical
*	16655.30	43.74	10.02	53.76	88.20	-34.44	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8276.00	48.55	-1.56	46.99	74.00	-27.01	Peak	Horizontal
	11659.00	48.12	0.04	48.16	74.00	-25.84	Peak	Horizontal
*	14934.90	44.09	6.50	50.58	88.20	-37.62	Peak	Horizontal
*	16648.50	44.56	9.88	54.43	88.20	-33.77	Peak	Horizontal
	8143.40	47.96	-1.64	46.32	74.00	-27.68	Peak	Vertical
	11574.00	47.64	0.25	47.89	74.00	-26.11	Peak	Vertical
*	14365.40	44.75	5.32	50.07	88.20	-38.13	Peak	Vertical
*	17002.10	44.22	9.05	53.27	88.20	-34.93	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8143.40	47.96	-1.64	46.32	74.00	-27.68	Peak	Horizontal
	12577.00	46.61	1.66	48.27	74.00	-25.73	Peak	Horizontal
*	15176.30	45.31	6.18	51.49	88.20	-36.71	Peak	Horizontal
*	16651.90	44.11	9.95	54.06	88.20	-34.14	Peak	Horizontal
	8422.20	47.57	-1.20	46.37	74.00	-27.63	Peak	Vertical
	12614.40	47.06	1.02	48.07	74.00	-25.93	Peak	Vertical
*	14632.30	43.84	5.99	49.82	88.20	-38.38	Peak	Vertical
*	16667.20	43.76	9.57	53.33	88.20	-34.87	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8075.40	48.03	-1.74	46.29	74.00	-27.71	Peak	Horizontal
	11591.00	47.35	0.11	47.47	74.00	-26.53	Peak	Horizontal
*	13763.60	45.94	3.63	49.57	88.20	-38.63	Peak	Horizontal
*	16697.80	44.02	9.32	53.33	88.20	-34.87	Peak	Horizontal
	8408.60	47.24	-1.31	45.93	74.00	-28.07	Peak	Vertical
	12566.80	46.60	1.72	48.32	74.00	-25.68	Peak	Vertical
*	14397.70	45.51	4.98	50.49	88.20	-37.71	Peak	Vertical
*	16713.10	43.80	9.39	53.18	88.20	-35.02	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8228.40	47.60	-1.47	46.13	74.00	-27.87	Peak	Horizontal
	12498.80	46.80	1.15	47.95	74.00	-26.05	Peak	Horizontal
*	13597.00	53.04	3.34	56.38	88.20	-31.82	Peak	Horizontal
*	17025.90	43.47	9.75	53.22	88.20	-34.98	Peak	Horizontal
	8179.10	47.81	-1.55	46.26	74.00	-27.74	Peak	Vertical
	12537.90	46.34	1.68	48.02	74.00	-25.98	Peak	Vertical
*	13580.00	47.52	3.21	50.73	88.20	-37.47	Peak	Vertical
*	16646.80	44.05	9.84	53.89	88.20	-34.31	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8102.60	47.70	-1.39	46.31	74.00	-27.69	Peak	Horizontal
	12517.50	46.39	1.27	47.66	74.00	-26.34	Peak	Horizontal
*	13619.10	46.99	3.13	50.11	88.20	-38.09	Peak	Horizontal
*	16657.00	43.73	10.06	53.79	88.20	-34.41	Peak	Horizontal
	8106.00	47.98	-1.31	46.67	74.00	-27.33	Peak	Vertical
	12430.80	46.08	1.39	47.46	74.00	-26.54	Peak	Vertical
*	14577.90	45.28	5.56	50.85	88.20	-37.35	Peak	Vertical
*	17218.00	44.84	9.36	54.20	88.20	-34.00	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8095.80	47.95	-1.56	46.39	74.00	-27.61	Peak	Horizontal
	12590.60	46.63	1.30	47.93	74.00	-26.07	Peak	Horizontal
*	13814.60	46.21	3.52	49.73	88.20	-38.47	Peak	Horizontal
*	17291.10	44.68	9.00	53.68	88.20	-34.52	Peak	Horizontal
	8124.70	46.93	-1.35	45.58	74.00	-28.42	Peak	Vertical
	12655.20	46.94	1.26	48.20	74.00	-25.80	Peak	Vertical
*	15212.00	43.99	6.46	50.45	88.20	-37.75	Peak	Vertical
*	17355.70	43.94	9.73	53.67	88.20	-34.53	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8056.70	47.60	-1.55	46.04	74.00	-27.96	Peak	Horizontal
	12510.70	46.93	1.16	48.09	74.00	-25.91	Peak	Horizontal
*	14271.90	45.06	4.61	49.67	88.20	-38.53	Peak	Horizontal
*	16765.80	44.42	9.56	53.98	88.20	-34.22	Peak	Horizontal
	8048.20	48.72	-1.50	47.22	74.00	-26.78	Peak	Vertical
	12119.70	47.60	0.51	48.11	74.00	-25.89	Peak	Vertical
*	14399.40	46.09	4.99	51.08	88.20	-37.12	Peak	Vertical
*	17109.20	43.65	9.55	53.20	88.20	-35.00	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-27
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8063.50	47.46	-1.64	45.83	74.00	-28.17	Peak	Horizontal
	12575.30	46.93	1.67	48.60	74.00	-25.40	Peak	Horizontal
*	14509.90	44.74	5.90	50.64	88.20	-37.56	Peak	Horizontal
*	16641.70	43.71	9.73	53.44	88.20	-34.76	Peak	Horizontal
	8058.40	47.88	-1.57	46.31	74.00	-27.69	Peak	Vertical
	11985.40	47.53	0.10	47.62	74.00	-26.38	Peak	Vertical
*	14358.60	45.81	5.30	51.11	88.20	-37.09	Peak	Vertical
*	17119.40	44.09	9.53	53.62	88.20	-34.58	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The Result of Radiated Emission below 1 GHz:

Site	SIP-AC3	Test Date	2025-08-22
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Mero Zhou
Factor	VULB 9168_00999	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 6785 MHz		

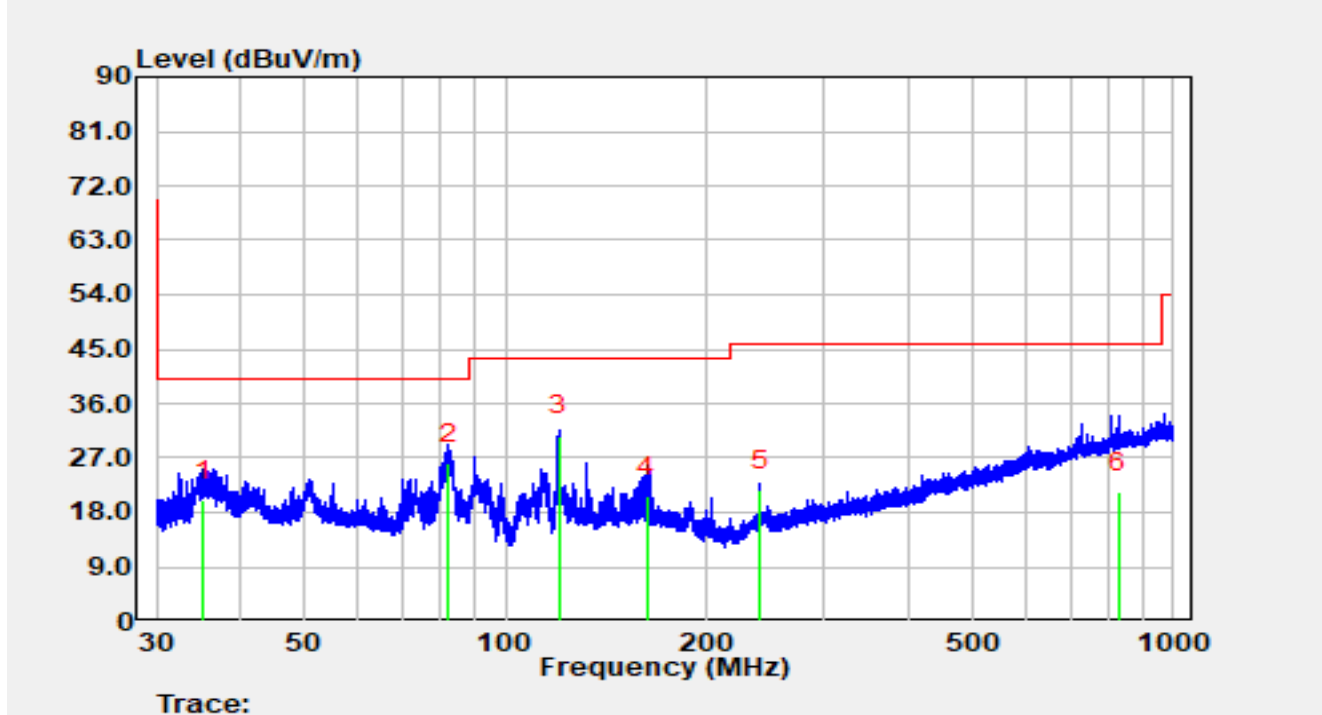


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		35.325	1.20	18.79	19.99	-20.01	40.00	QP
2		81.927	11.20	14.92	26.12	-13.88	40.00	QP
3	*	119.982	13.40	17.31	30.71	-12.79	43.50	QP
4		162.839	0.80	19.85	20.65	-22.85	43.50	QP
5		239.987	3.10	18.49	21.59	-24.41	46.00	QP
6		828.946	-9.50	30.75	21.25	-24.75	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	SIP-AC3	Test Date	2025-08-22
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Mero Zhou
Factor	VULB 9168_00999	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 6785 MHz		

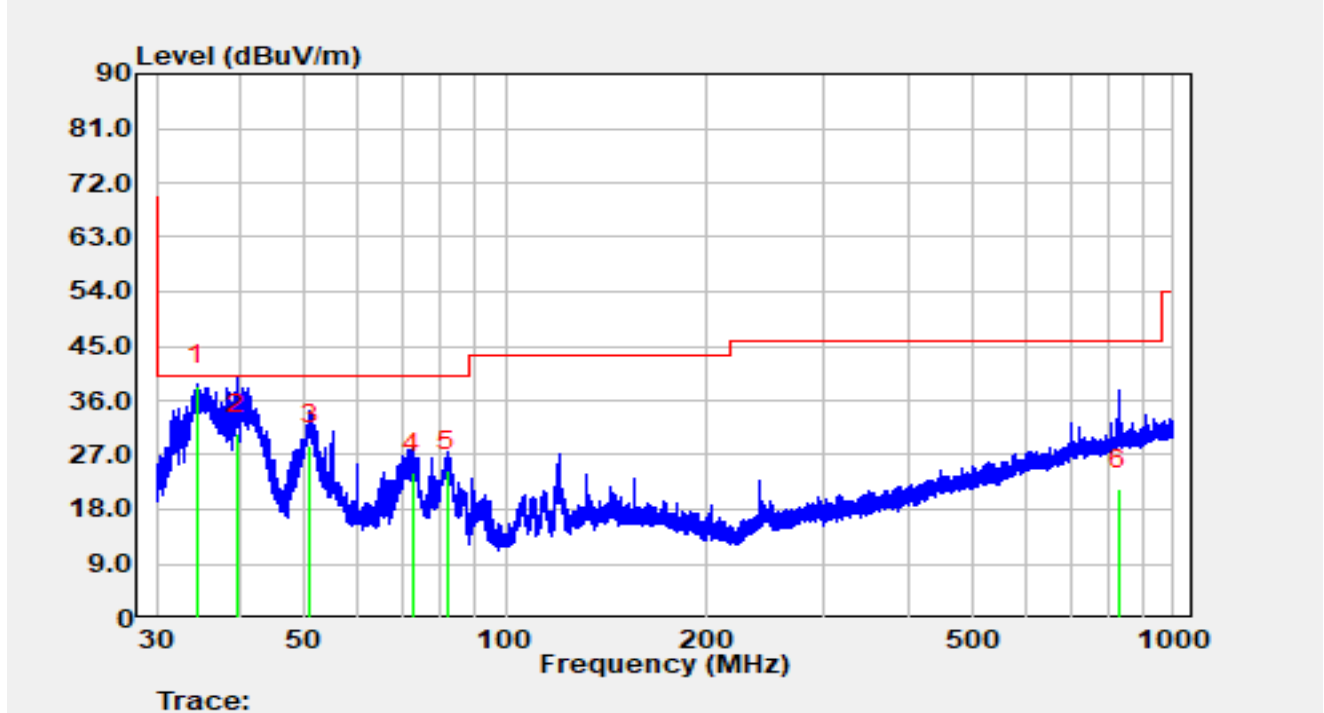

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	34.541	19.80	18.70	38.50	-1.50	40.00	QP
2		39.548	10.80	19.61	30.41	-9.59	40.00	QP
3		50.978	8.20	20.39	28.59	-11.41	40.00	QP
4		72.515	6.50	17.53	24.03	-15.97	40.00	QP
5		81.697	9.40	14.98	24.38	-15.62	40.00	QP
6		827.784	-9.50	30.76	21.26	-24.74	46.00	QP


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.8 Radiated Restricted Band Edge Test Result

2*2 Omni:

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

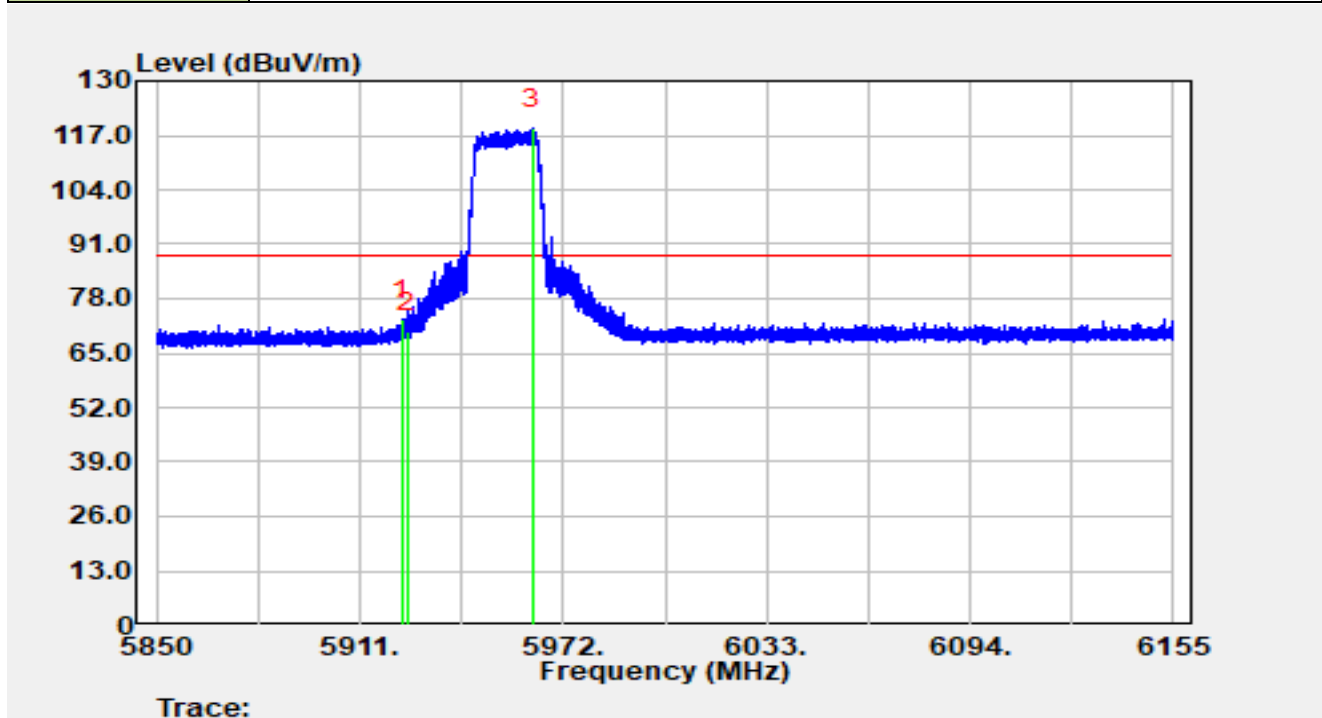


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.444	30.63	42.38	73.02	-15.18	88.20	Peak
2		5925.000	27.58	42.40	69.98	-18.22	88.20	Peak
3		5962.728	76.14	42.48	118.62	N/A	N/A	Peak

Notes:

1. “*” means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

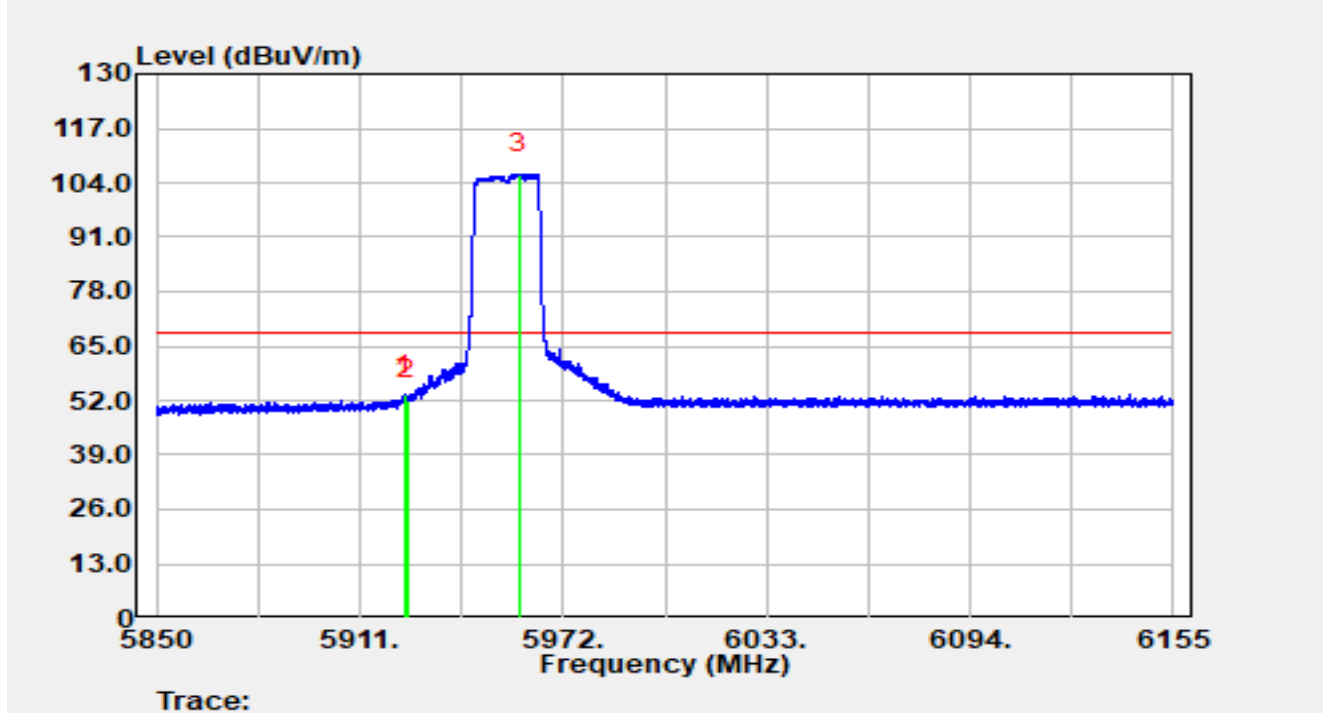


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.237	10.86	42.39	53.25	-14.95	68.20	Average
2		5925.000	9.71	42.40	52.10	-16.10	68.20	Average
3		5958.824	63.66	42.47	106.12	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

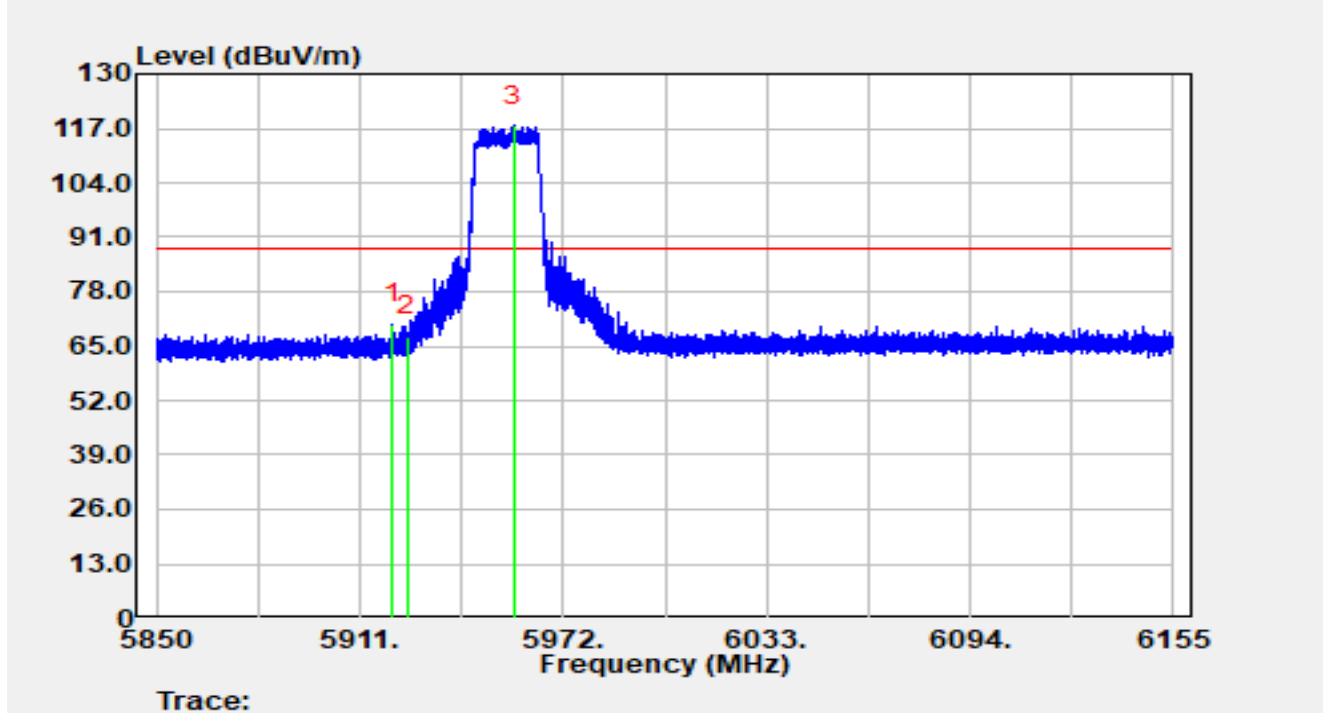


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.913	27.97	42.36	70.33	-17.87	88.20	Peak
2		5925.000	24.87	42.40	67.27	-20.93	88.20	Peak
3		5957.085	75.27	42.46	117.73	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

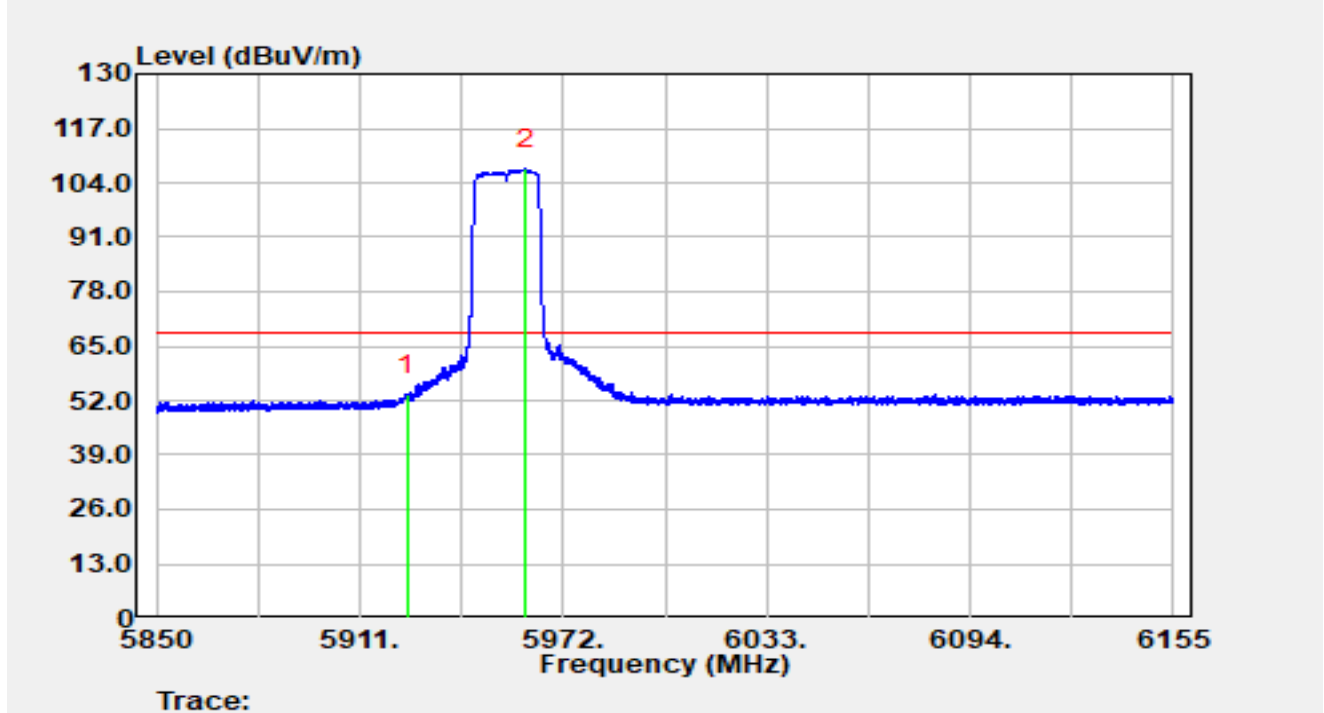


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	10.99	42.40	53.39	-14.81	68.20	Average
2		5960.715	64.73	42.48	107.21	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

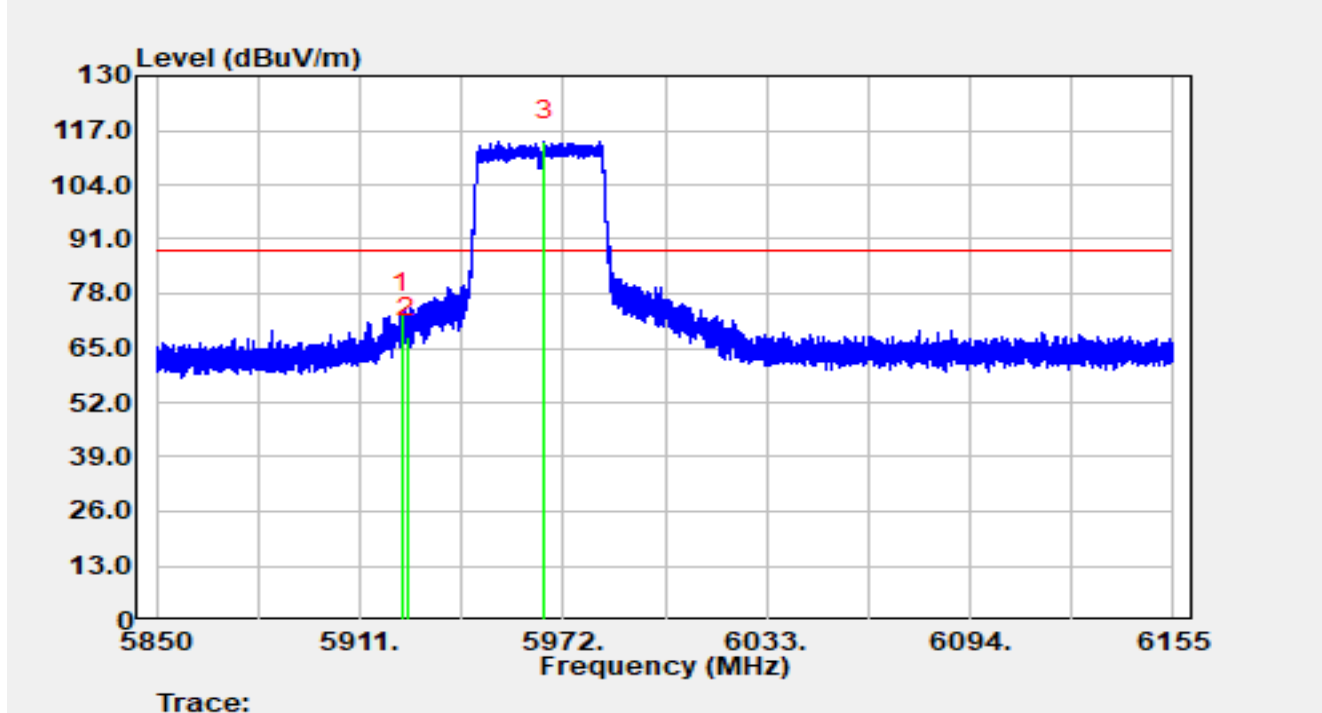


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.749	31.00	42.39	73.38	-14.82	88.20	Peak
2		5925.000	25.27	42.40	67.66	-20.54	88.20	Peak
3		5966.418	71.99	42.50	114.49	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

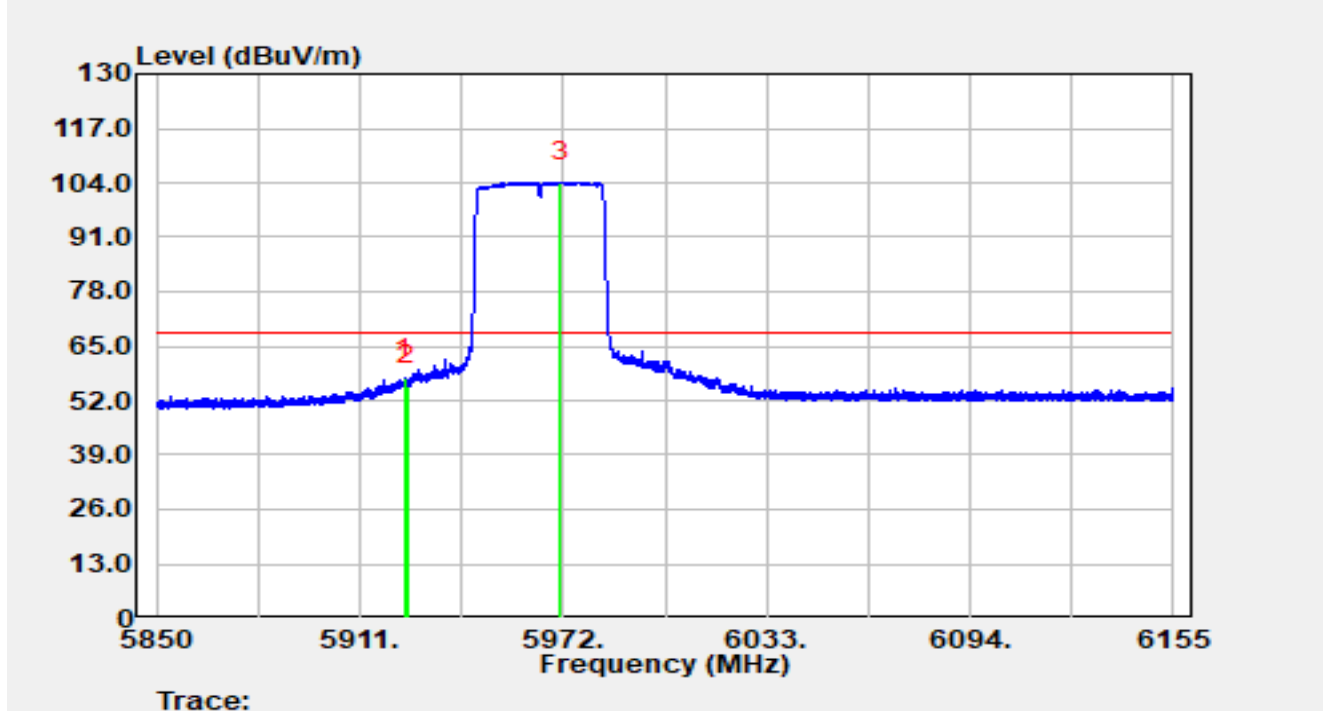


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.572	14.90	42.39	57.29	-10.91	68.20	Average
2		5925.000	13.11	42.40	55.50	-12.70	68.20	Average
3		5971.146	61.66	42.52	104.18	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

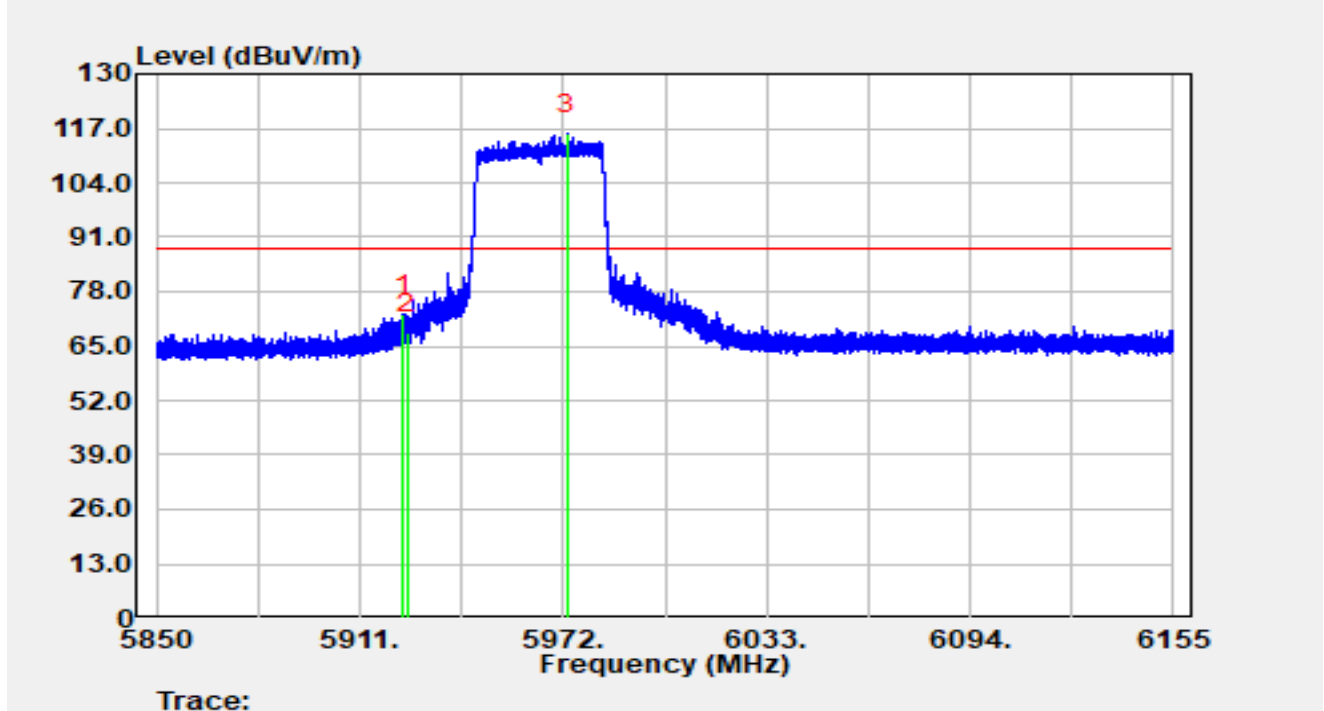


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.115	30.05	42.39	72.44	-15.76	88.20	Peak
2		5925.000	25.61	42.40	68.00	-20.20	88.20	Peak
3		5973.159	73.10	42.53	115.63	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

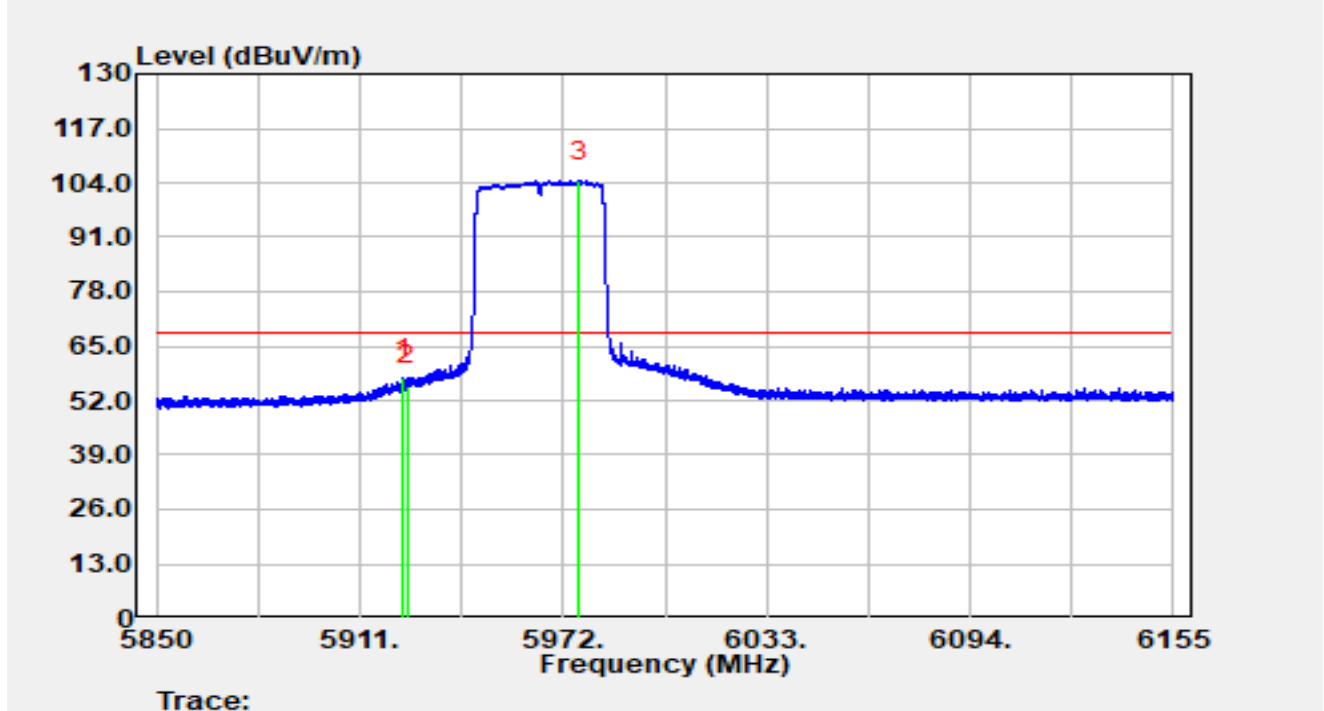


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.115	14.91	42.39	57.30	-10.90	68.20	Average
2		5925.000	13.04	42.40	55.44	-12.76	68.20	Average
3		5976.880	61.83	42.55	104.38	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

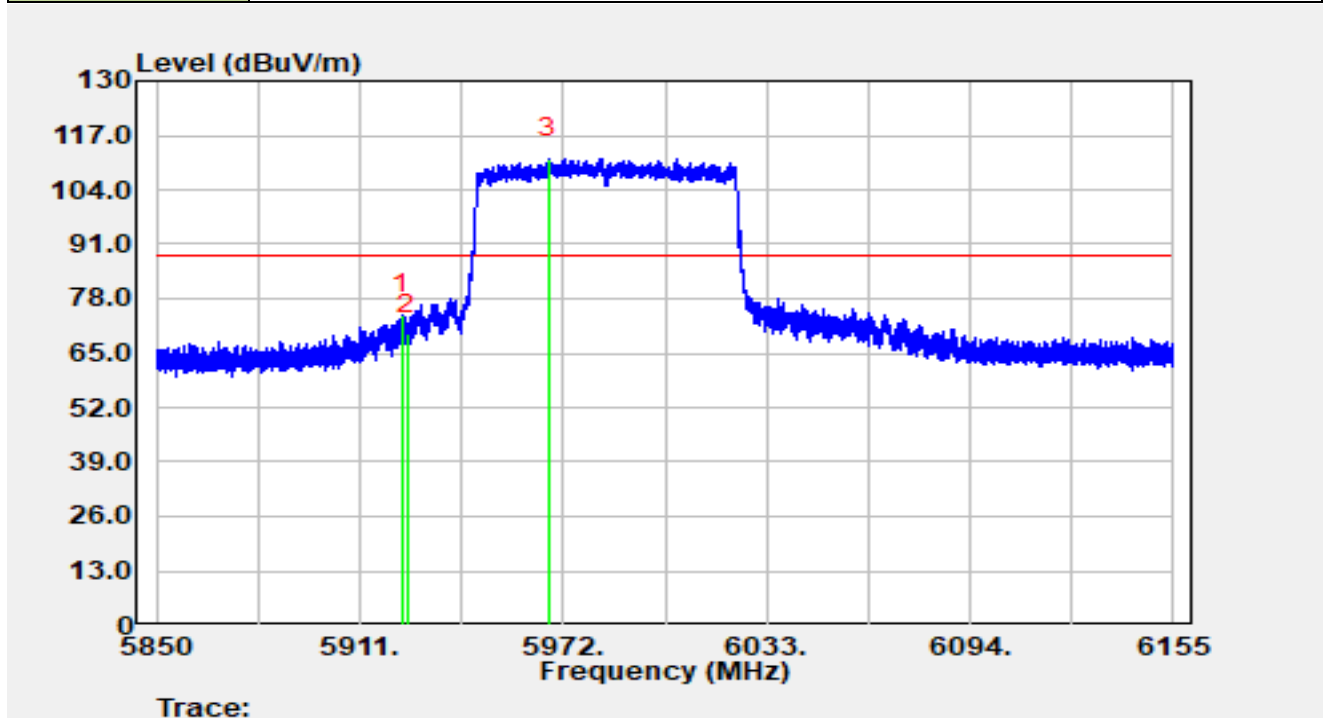


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.505	31.82	42.38	74.20	-14.00	88.20	Peak
2		5925.000	27.02	42.40	69.42	-18.78	88.20	Peak
3		5967.456	69.07	42.50	111.57	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

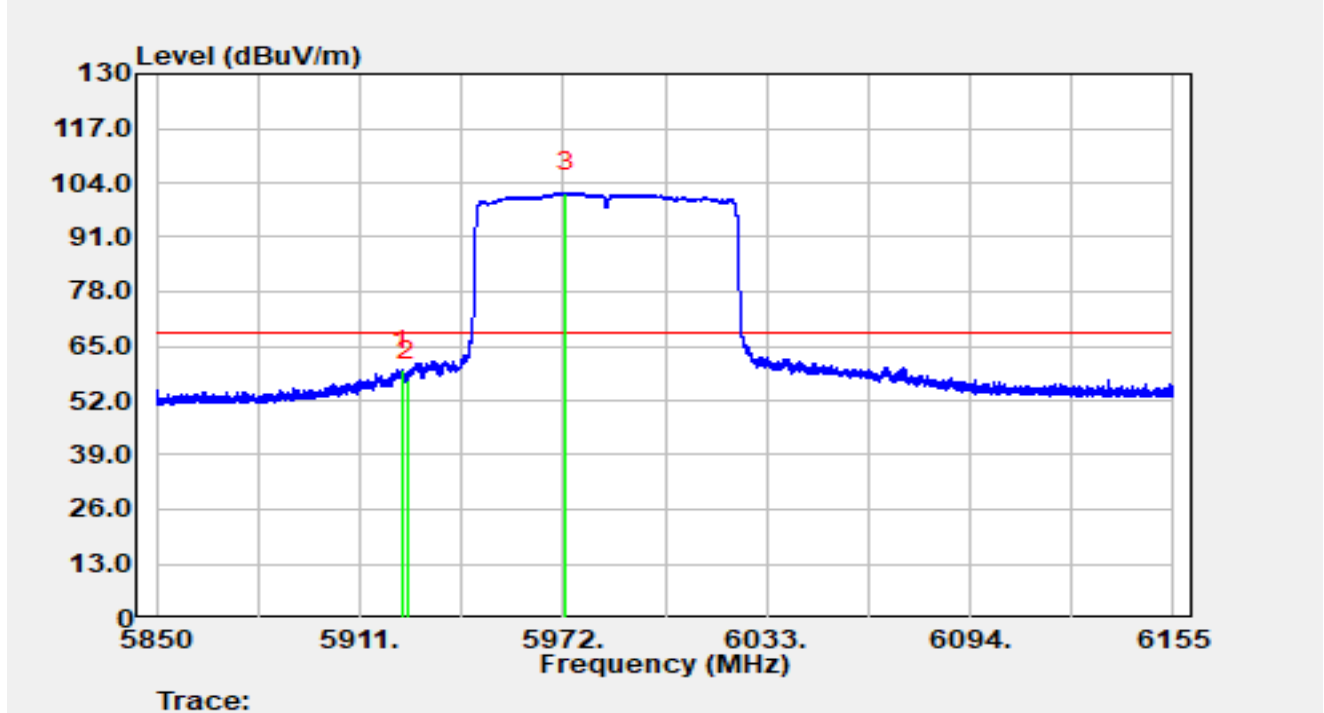


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.597	16.88	42.38	59.26	-8.94	68.20	Average
2		5925.000	14.34	42.40	56.74	-11.46	68.20	Average
3		5972.641	59.25	42.53	101.77	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

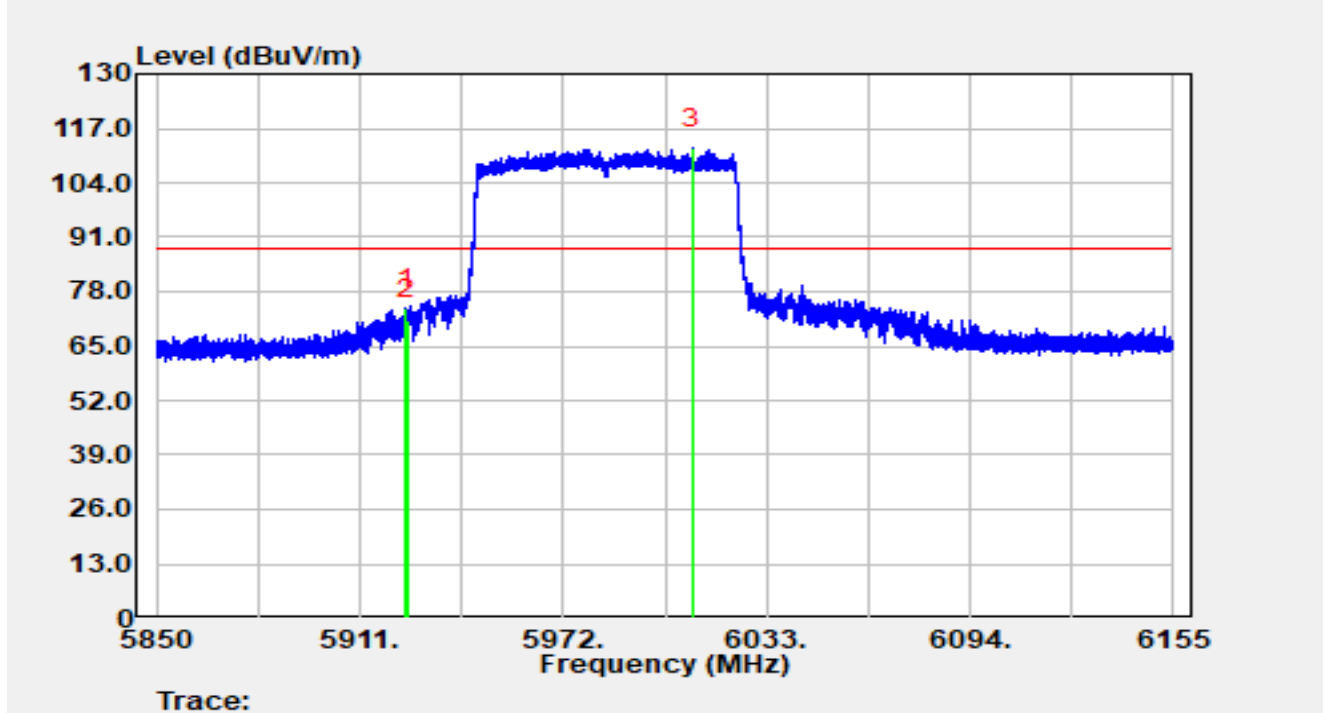


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.633	31.62	42.39	74.02	-14.18	88.20	Peak
2		5925.000	28.78	42.40	71.18	-17.02	88.20	Peak
3		6010.552	69.47	42.63	112.10	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

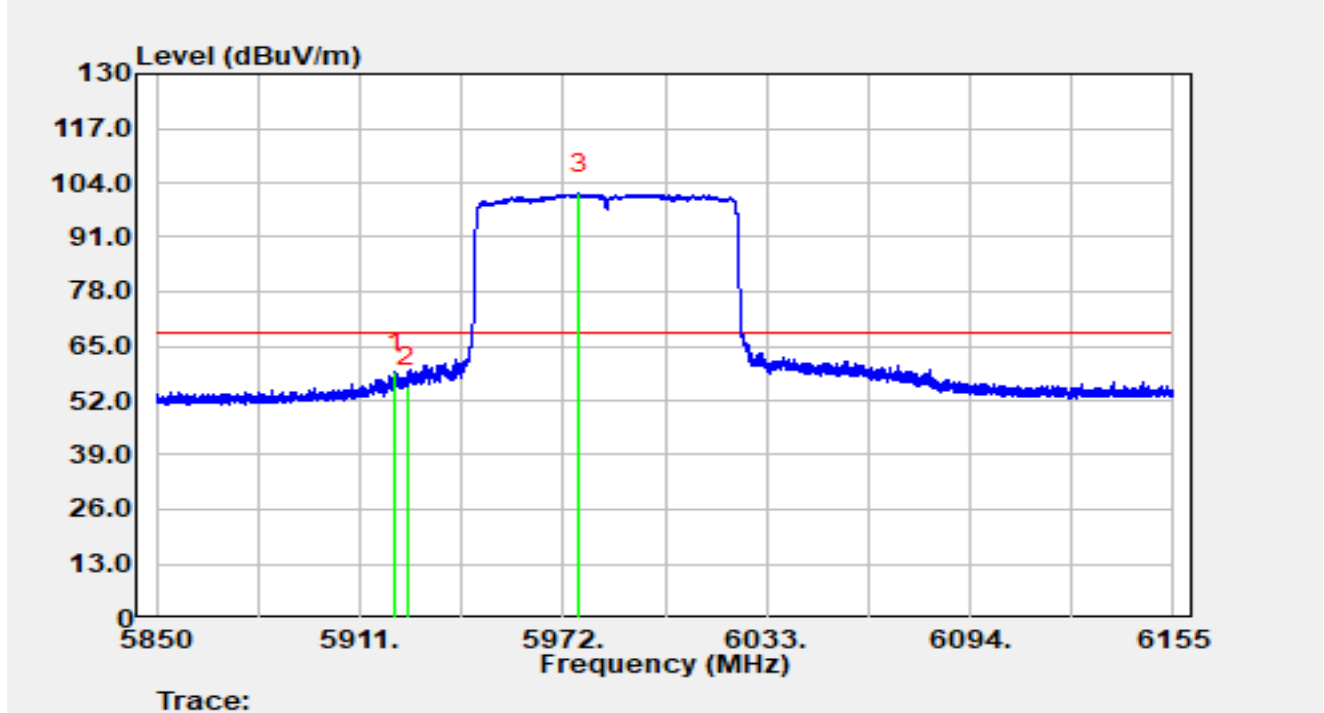


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.797	16.35	42.37	58.72	-9.48	68.20	Average
2		5925.000	12.82	42.40	55.22	-12.98	68.20	Average
3		5976.819	58.89	42.55	101.43	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

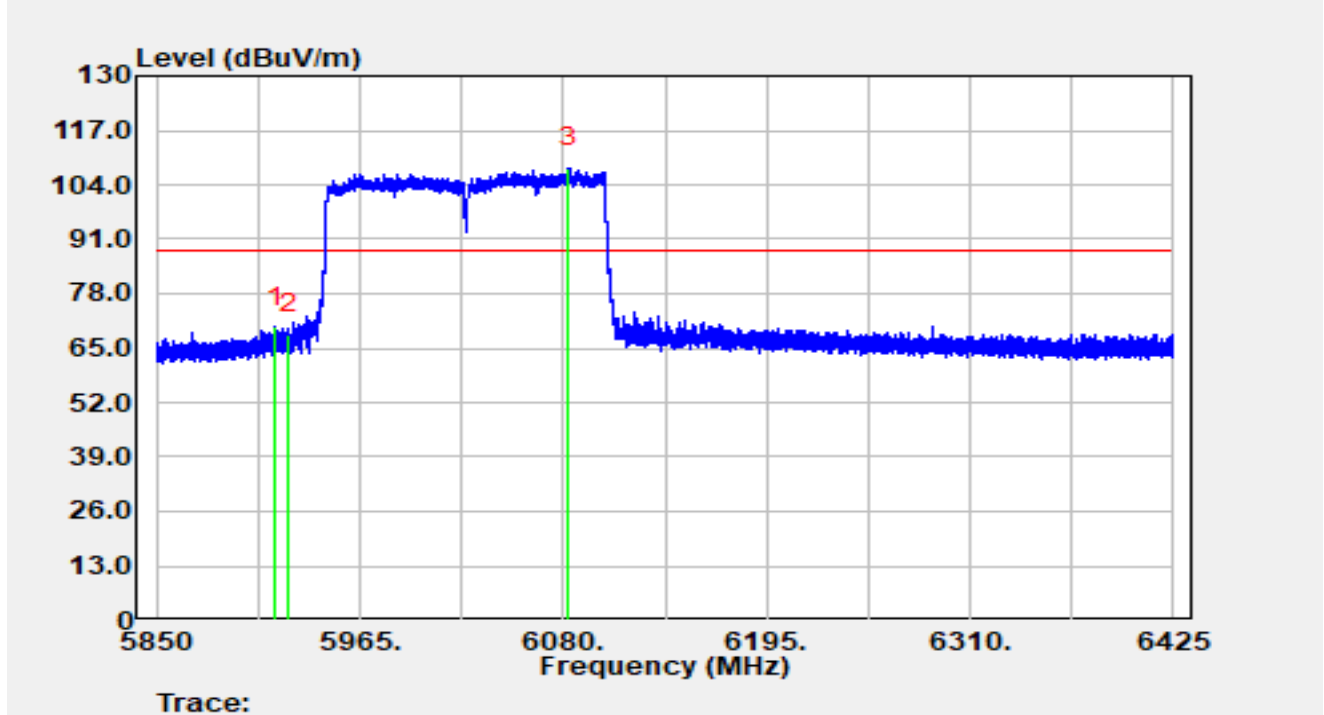


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.873	27.71	42.33	70.03	-18.17	88.20	Peak
2		5925.000	25.96	42.40	68.36	-19.84	88.20	Peak
3		6083.047	65.30	42.74	108.05	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

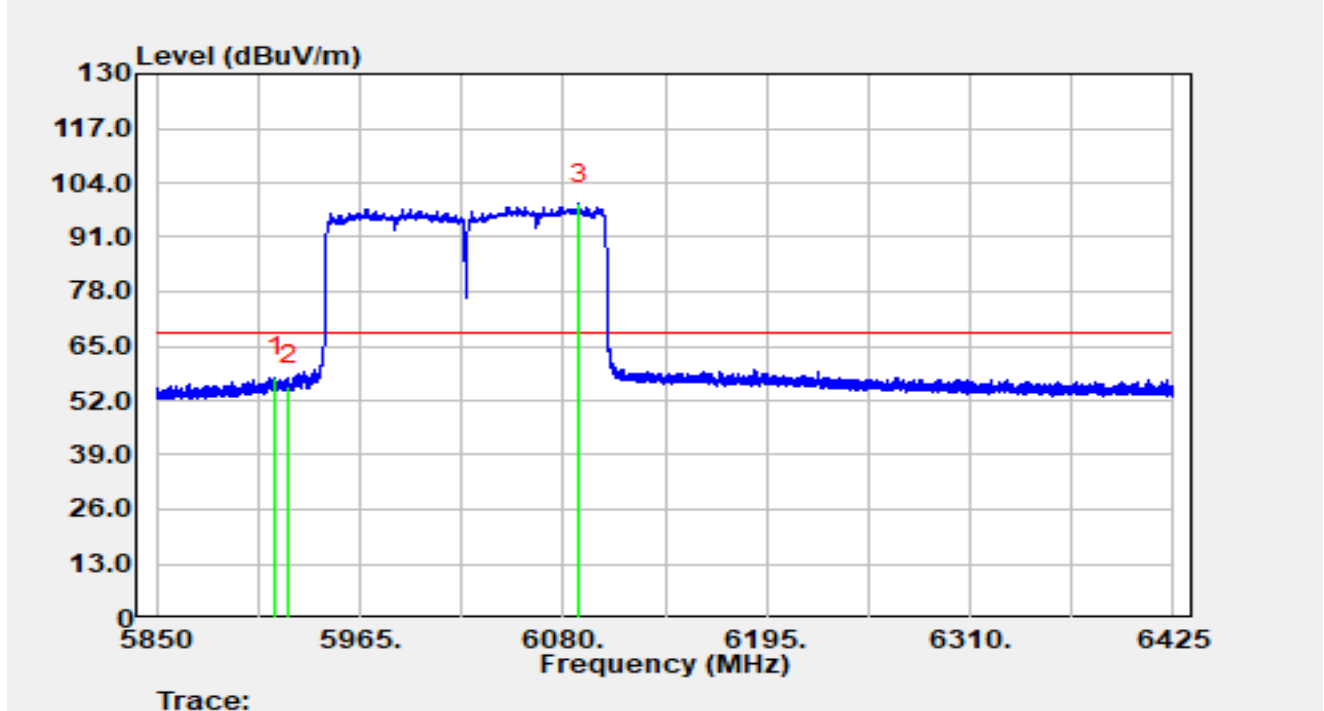


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.275	15.30	42.33	57.63	-10.57	68.20	Average
2		5925.000	13.16	42.40	55.55	-12.65	68.20	Average
3		6088.683	56.20	42.74	98.94	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

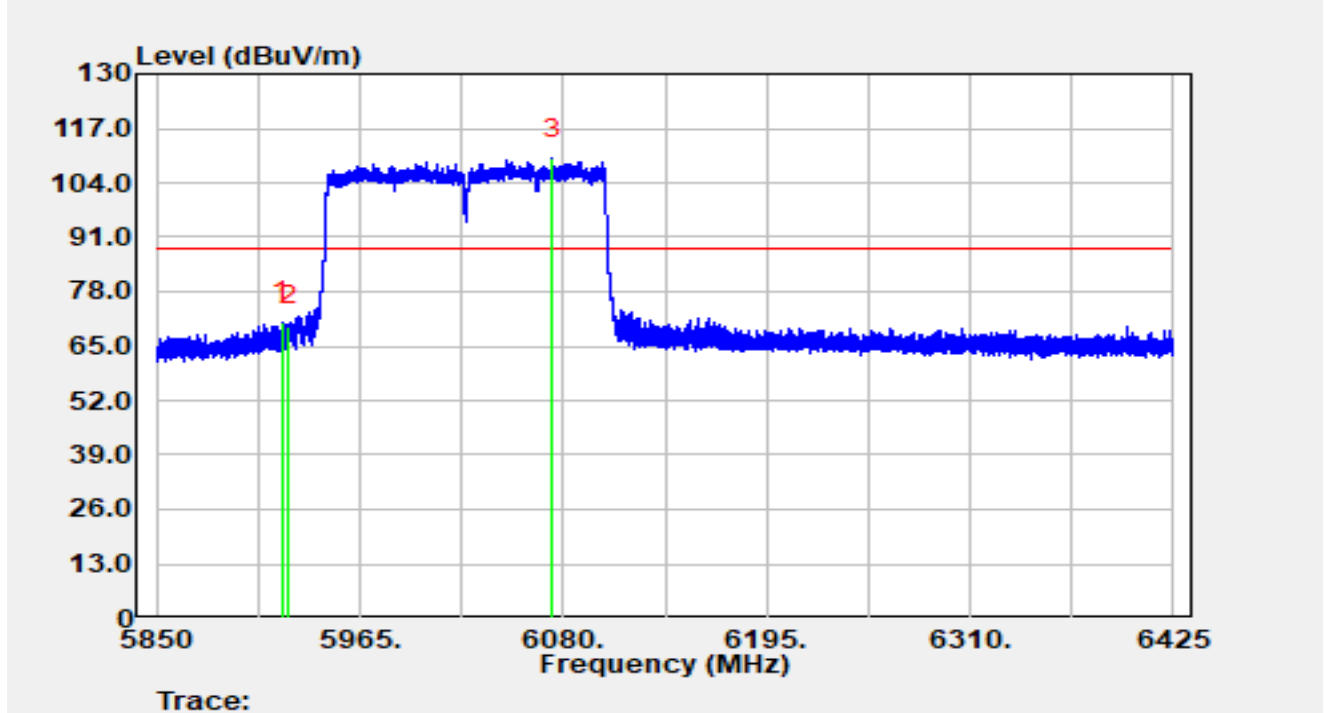


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.300	28.52	42.36	70.88	-17.32	88.20	Peak
2		5925.000	27.49	42.40	69.89	-18.31	88.20	Peak
3		6073.675	67.03	42.76	109.79	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

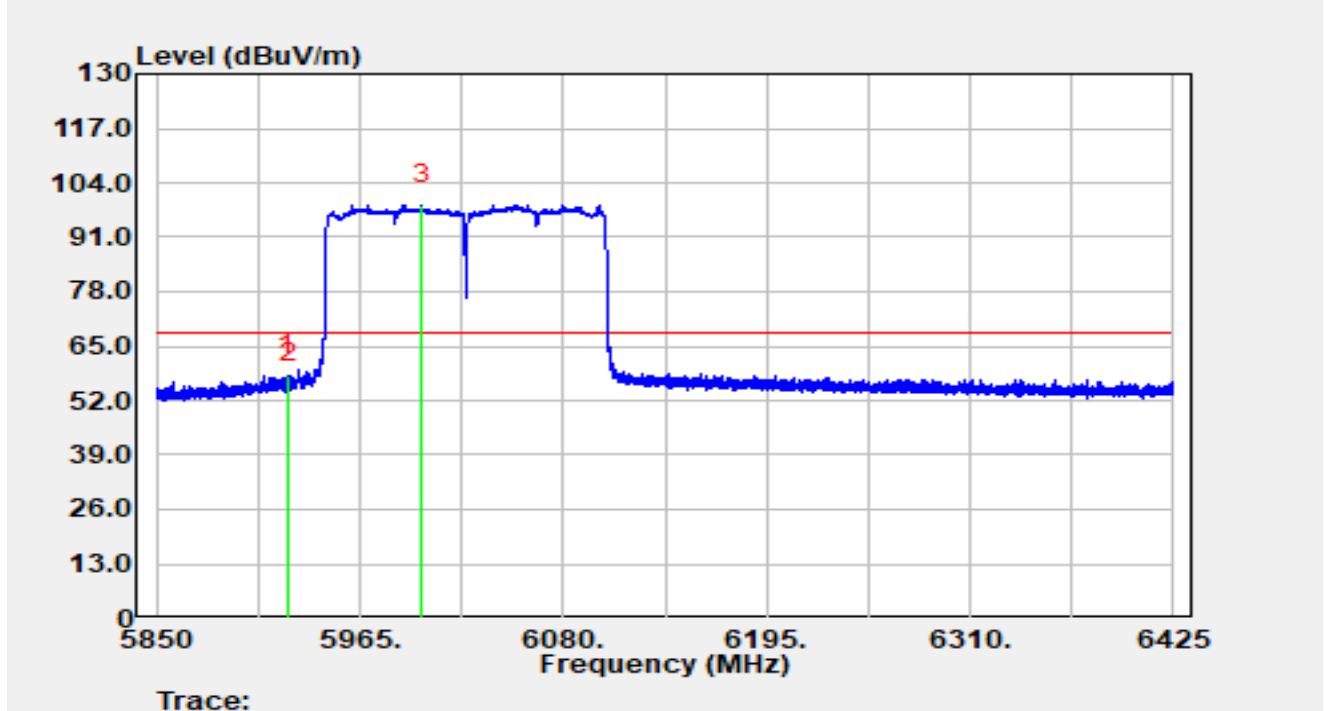


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.232	15.69	42.39	58.08	-10.12	68.20	Average
2		5925.000	13.71	42.40	56.11	-12.09	68.20	Average
3		6000.075	56.11	42.56	98.67	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

2*2 Directional:

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

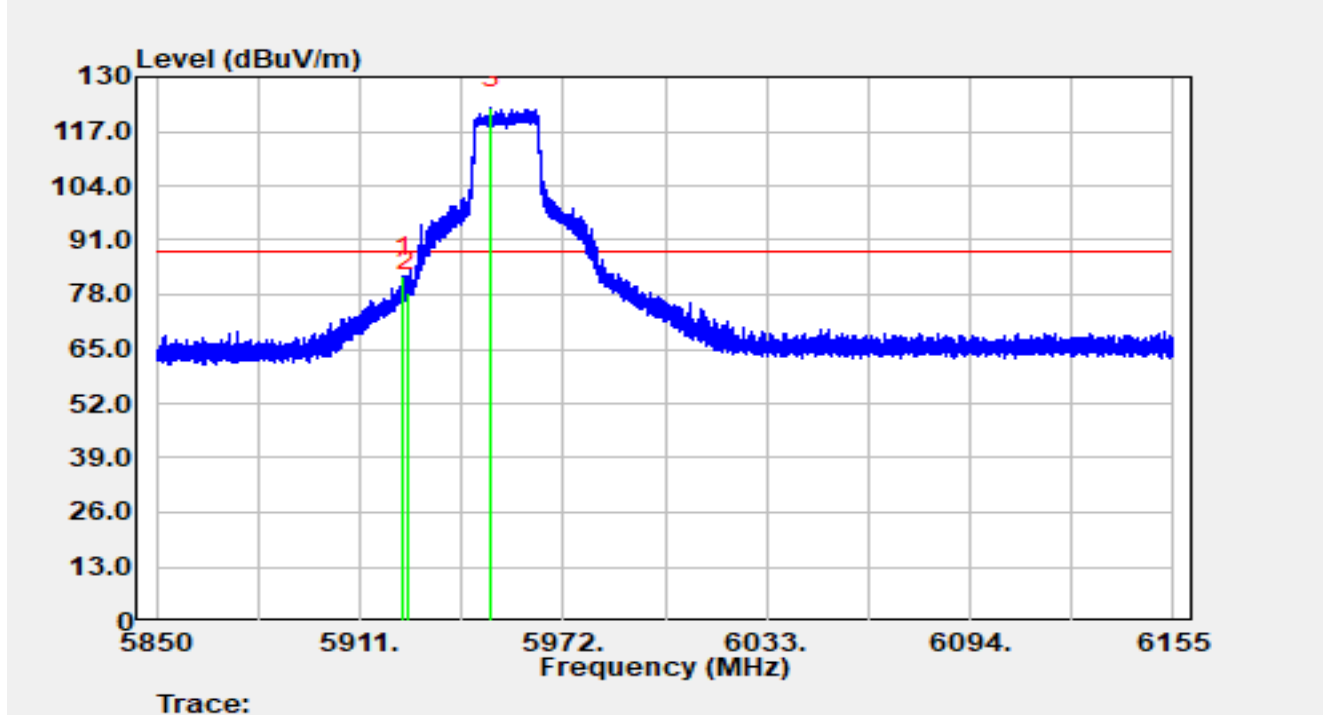


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.176	39.87	42.39	82.26	-5.94	88.20	Peak
2		5925.000	36.22	42.40	78.61	-9.59	88.20	Peak
3		5950.498	79.99	42.44	122.42	N/A	N/A	Peak

Notes:

1. “*” means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

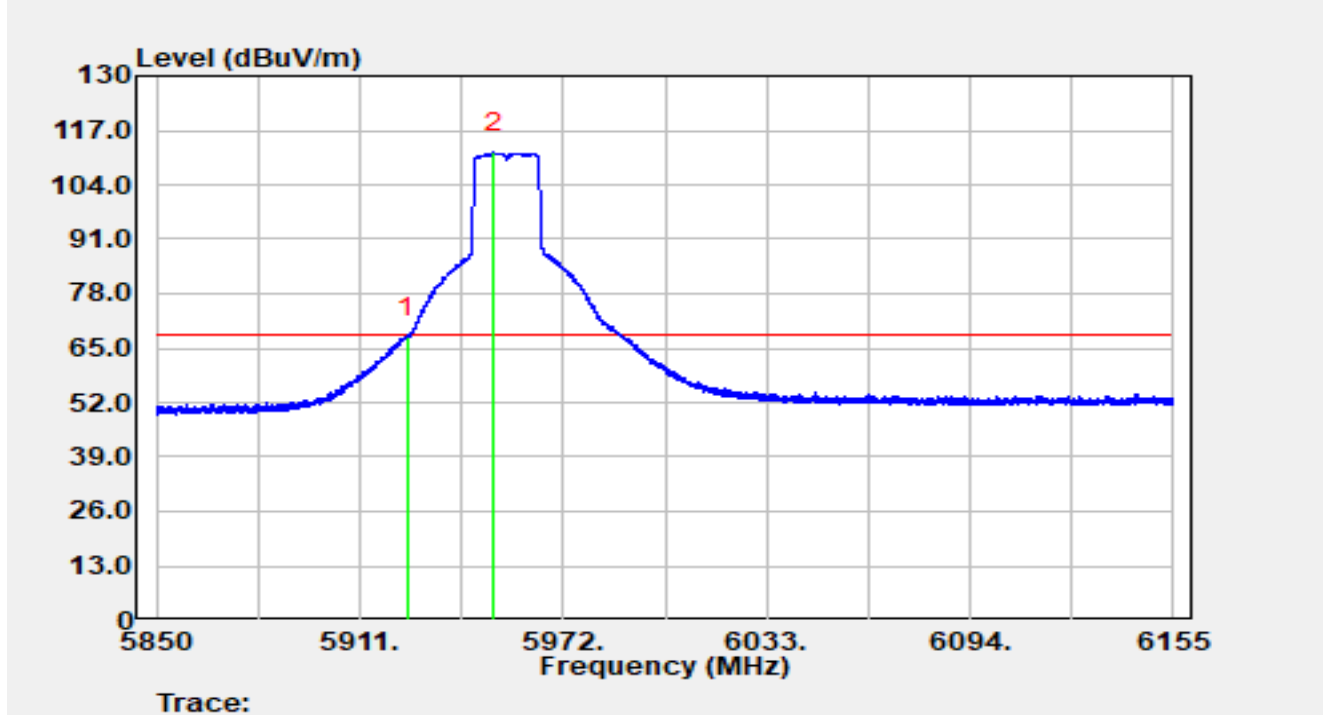


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	25.18	42.40	67.58	-0.62	68.20	Average
2		5951.138	69.17	42.44	111.61	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

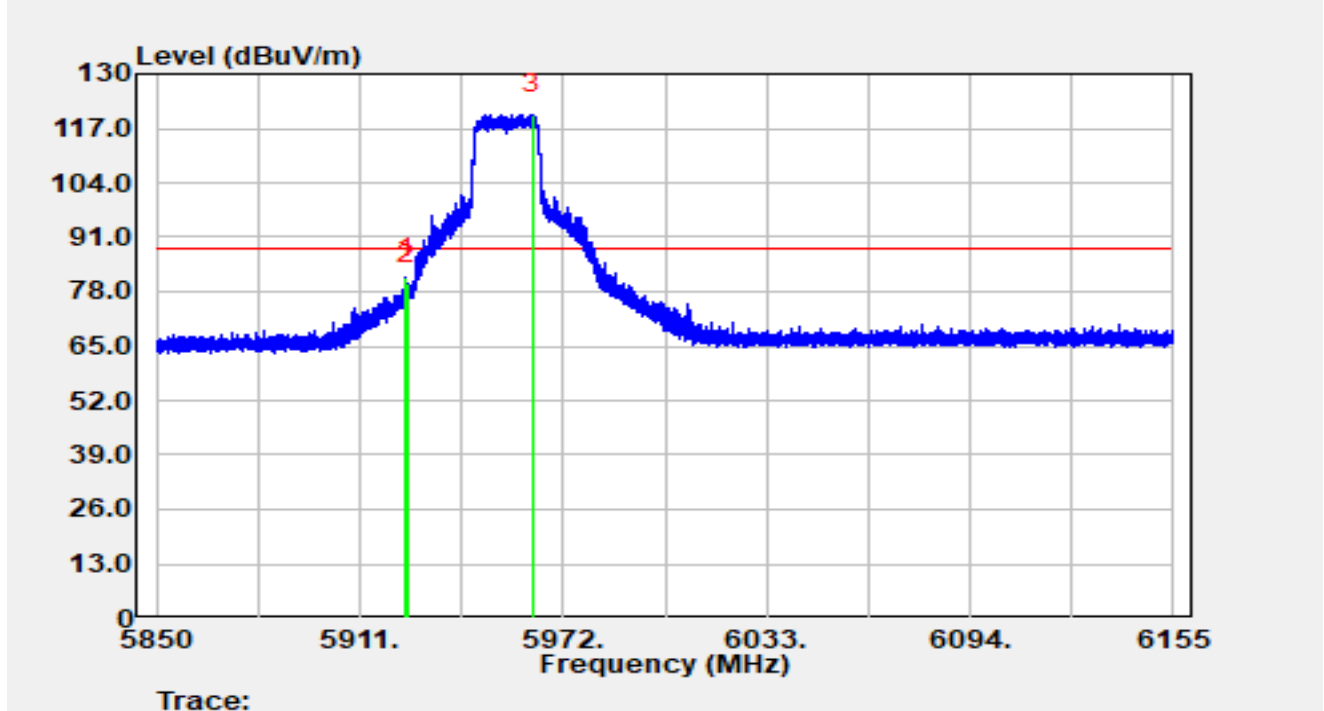


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.755	39.02	42.39	81.41	-6.79	88.20	Peak
2		5925.000	37.37	42.40	79.77	-8.43	88.20	Peak
3		5962.758	77.92	42.48	120.40	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

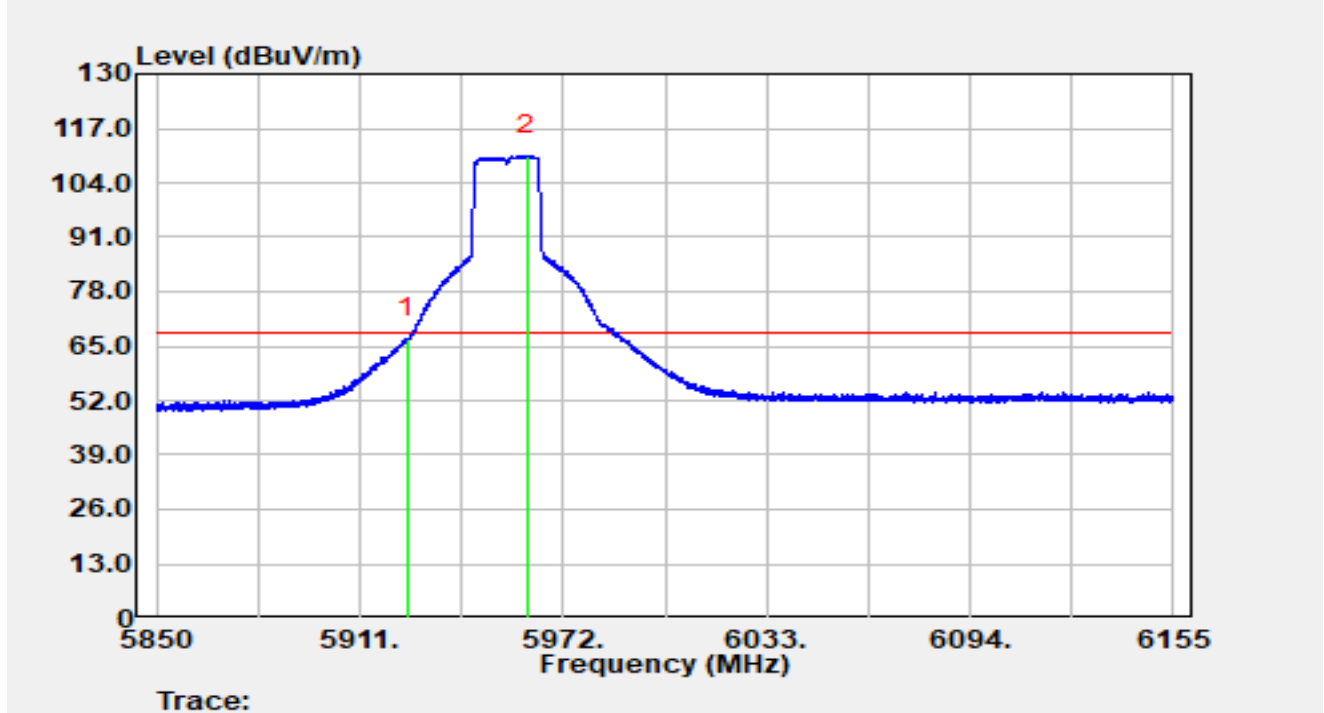


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	24.33	42.40	66.72	-1.48	68.20	Average
2		5961.172	67.93	42.48	110.41	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

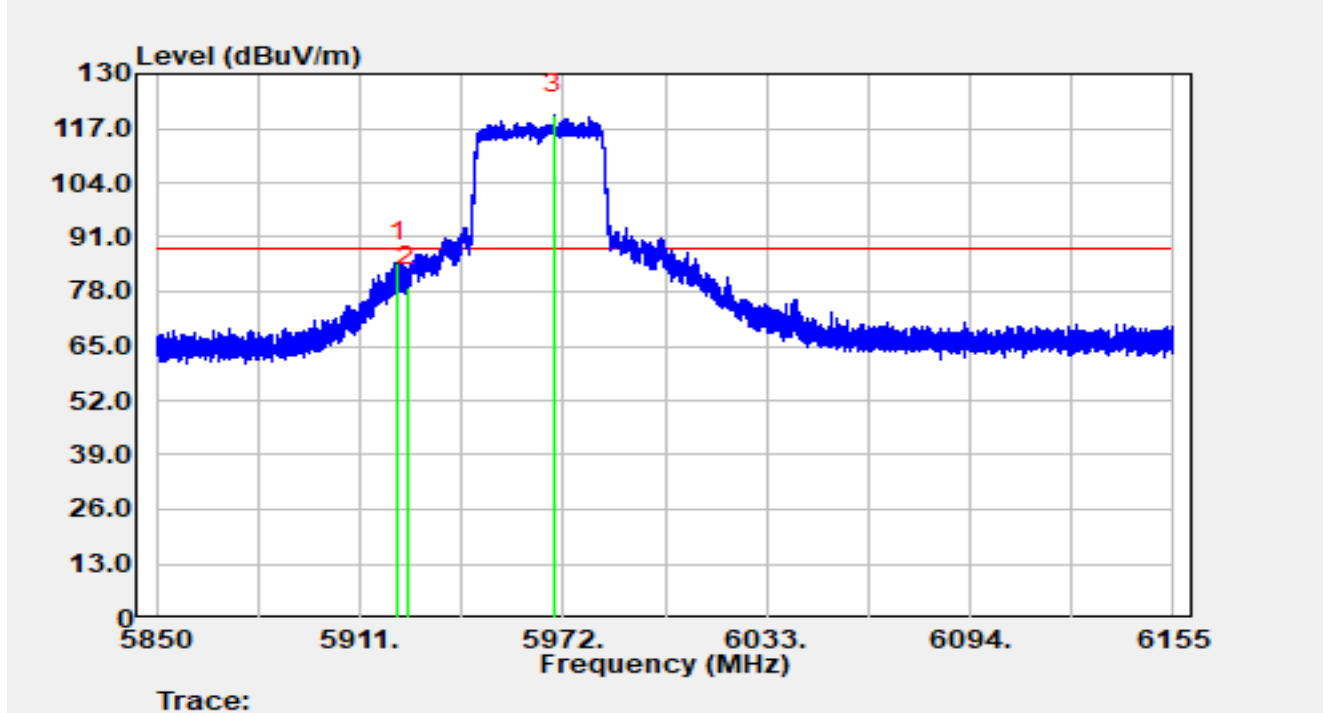


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.376	42.74	42.37	85.11	-3.09	88.20	Peak
2		5925.000	36.65	42.40	79.05	-9.15	88.20	Peak
3		5969.255	77.82	42.51	120.33	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

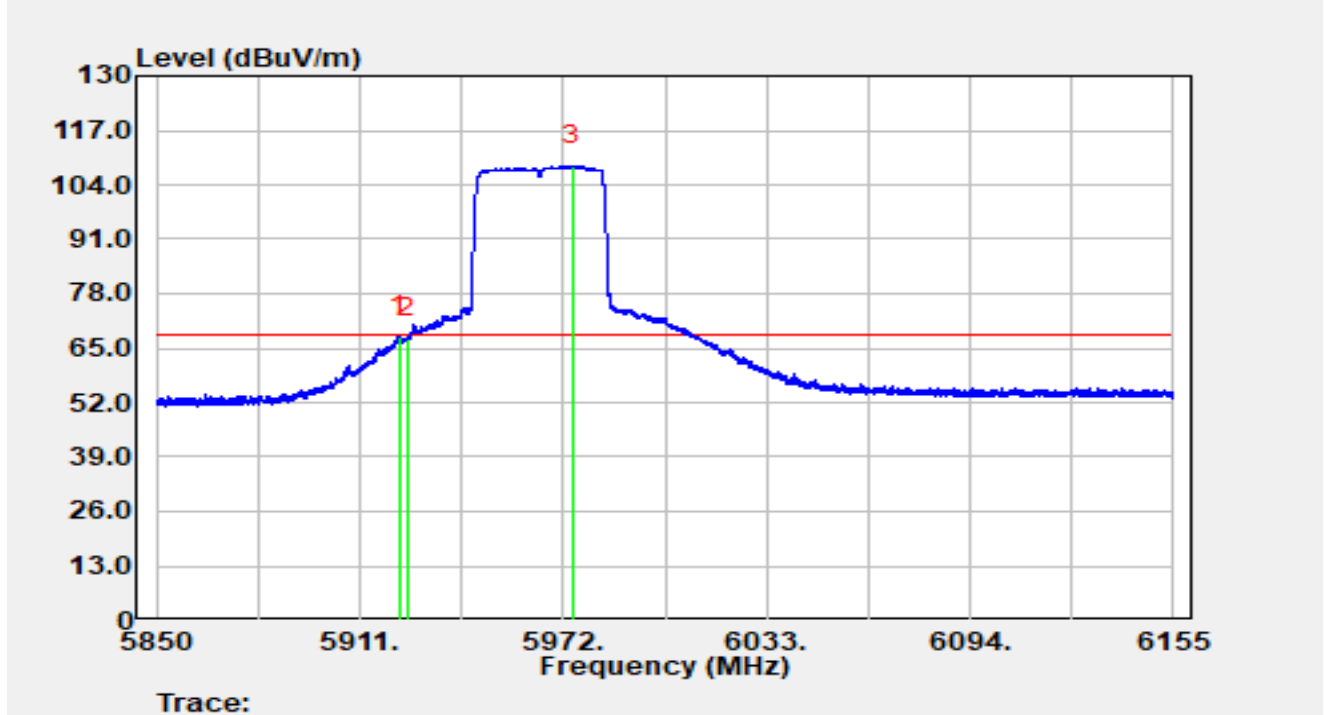


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.621	25.33	42.38	67.70	-0.50	68.20	Average
2		5925.000	24.95	42.40	67.34	-0.86	68.20	Average
3		5974.562	65.93	42.54	108.46	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

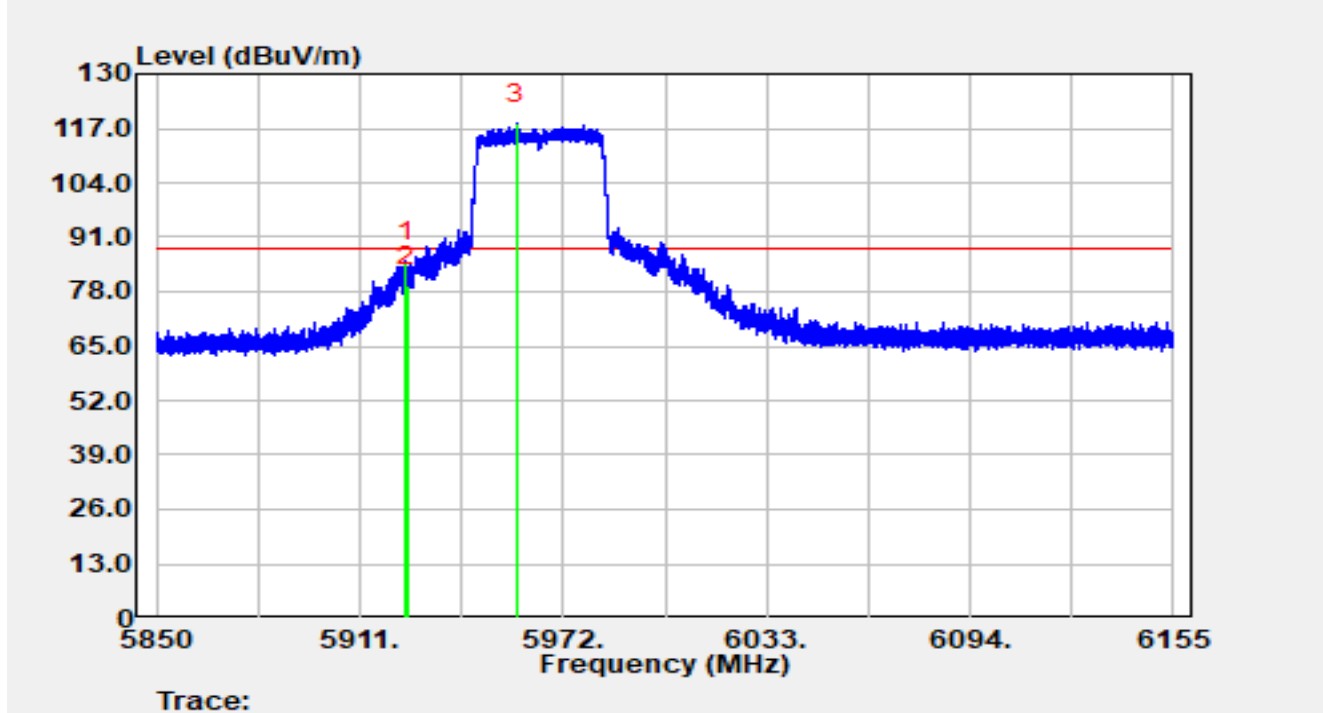


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.816	42.95	42.39	85.34	-2.86	88.20	Peak
2		5925.000	36.93	42.40	79.33	-8.87	88.20	Peak
3		5957.909	75.68	42.47	118.14	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

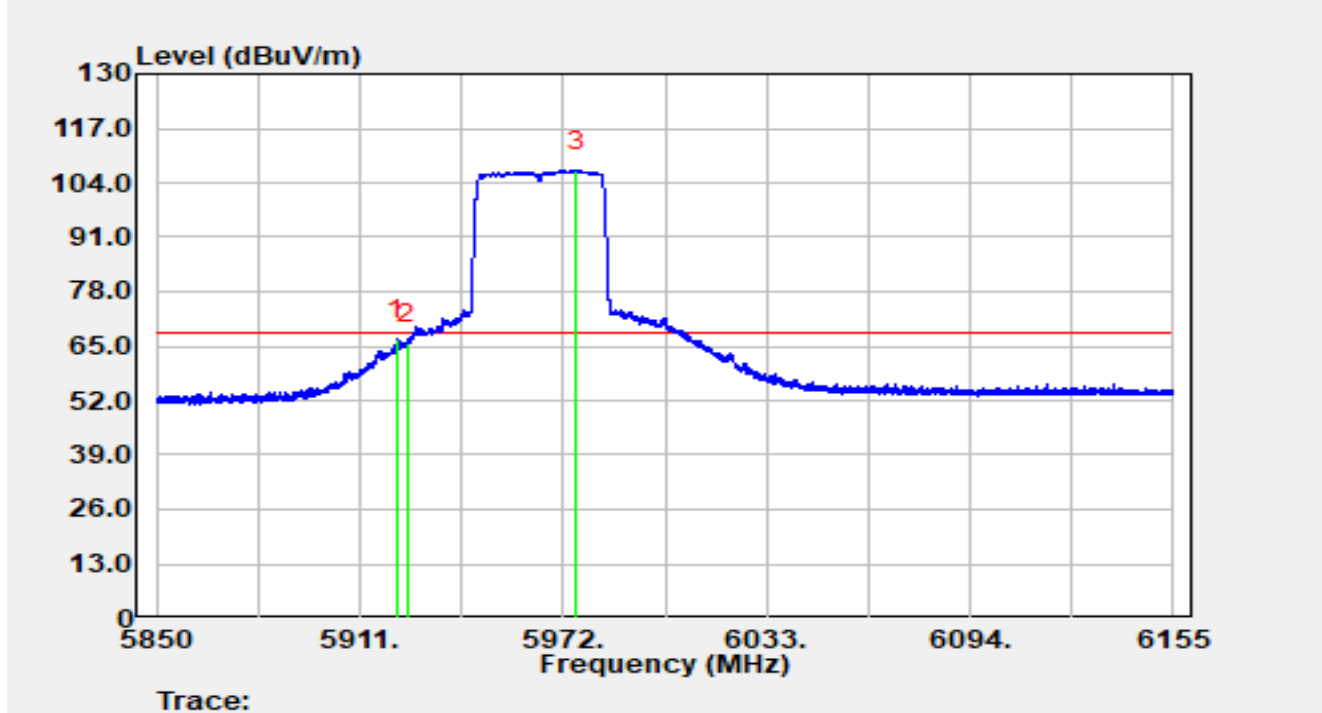


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.163	24.13	42.37	66.50	-1.70	68.20	Average
2		5925.000	23.23	42.40	65.63	-2.57	68.20	Average
3		5975.843	64.40	42.54	106.94	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

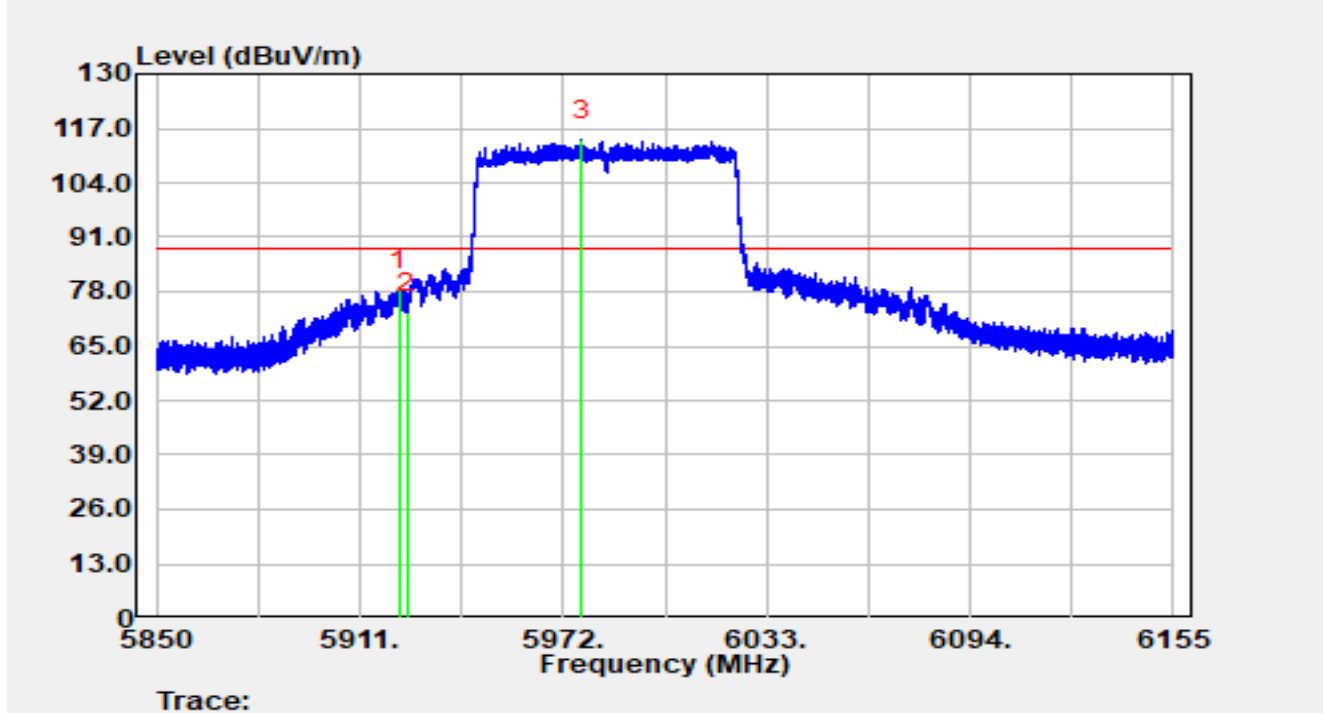


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.712	36.05	42.38	78.42	-9.78	88.20	Peak
2		5925.000	30.66	42.40	73.05	-15.15	88.20	Peak
3		5977.459	71.51	42.55	114.06	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

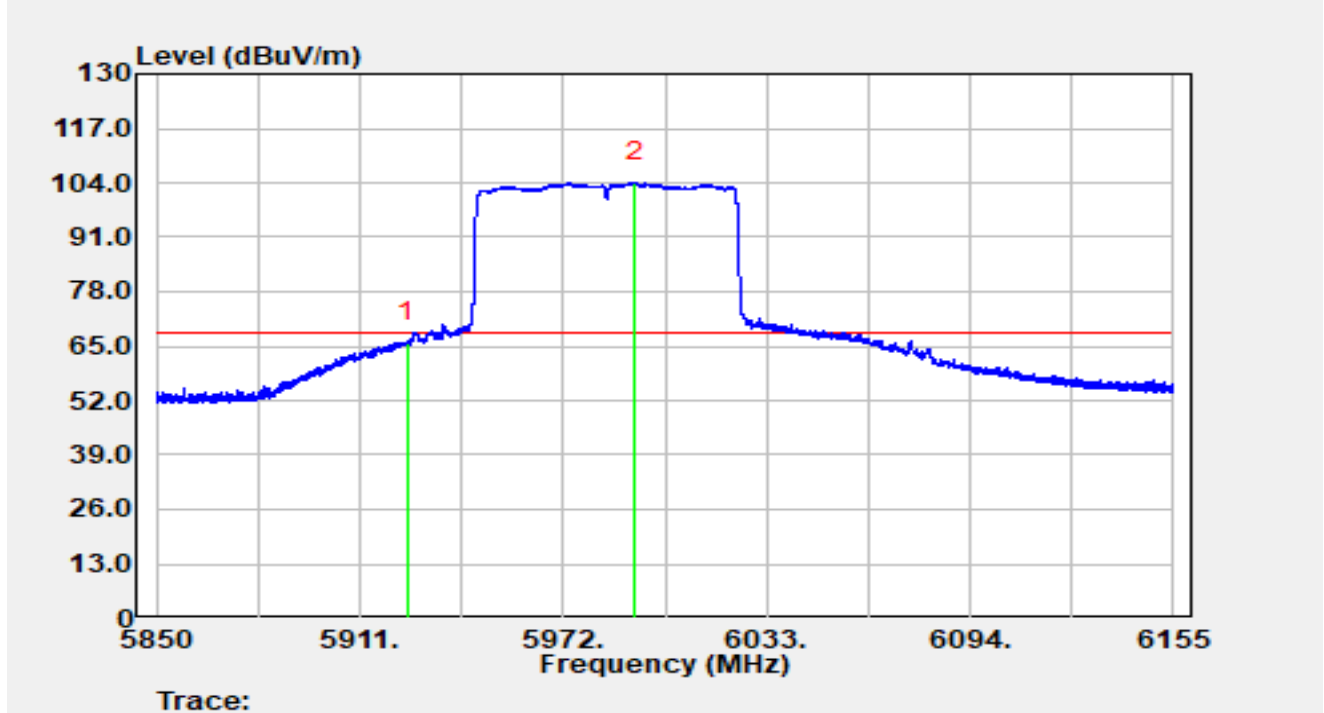


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	23.58	42.40	65.98	-2.22	68.20	Average
2		5993.472	61.46	42.55	104.01	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

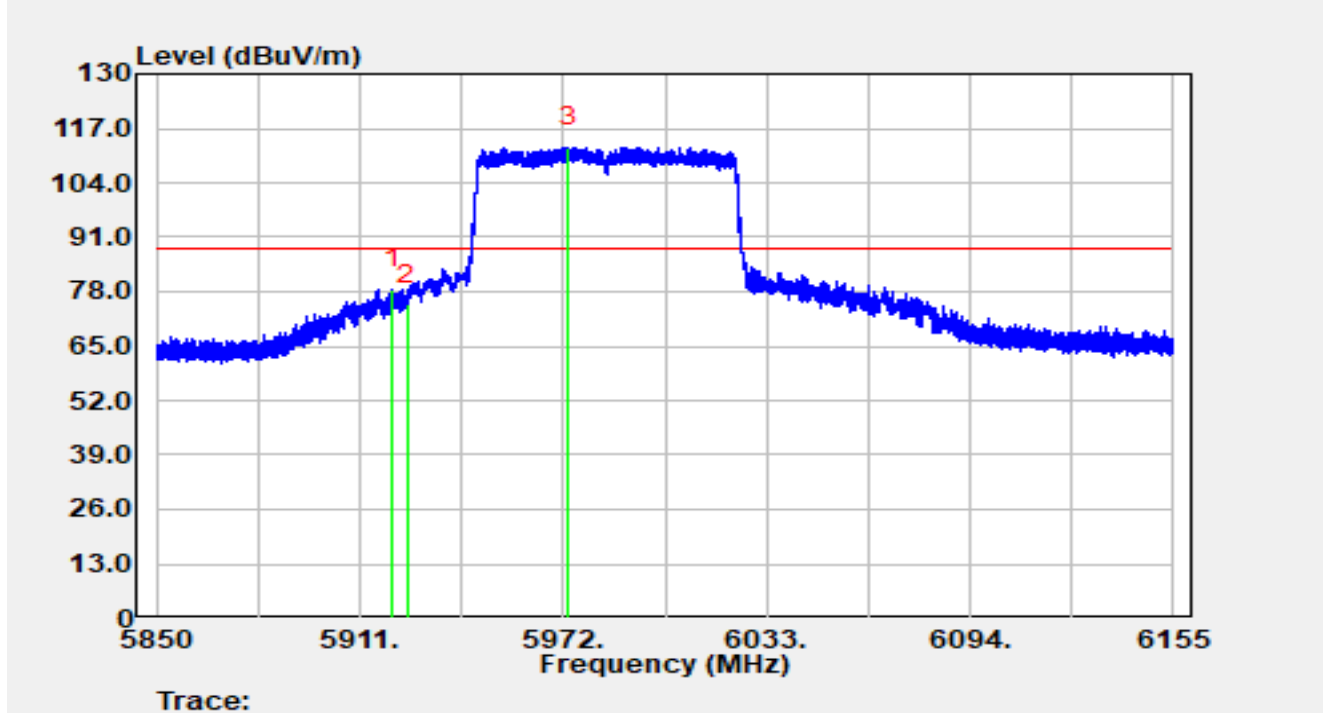


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.882	36.34	42.36	78.70	-9.50	88.20	Peak
2		5925.000	32.46	42.40	74.86	-13.34	88.20	Peak
3		5973.556	70.00	42.53	112.53	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

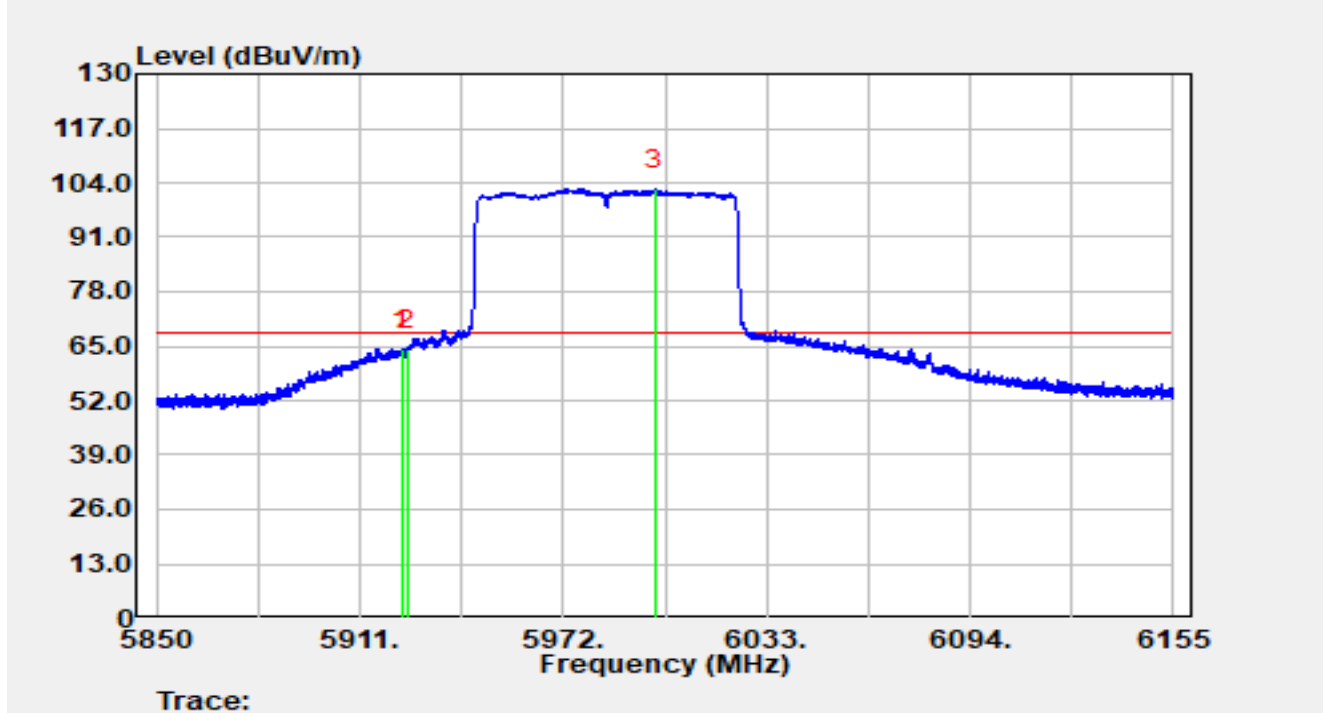


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.688	21.79	42.38	64.17	-4.03	68.20	Average
2		5925.000	21.75	42.40	64.15	-4.05	68.20	Average
3		5999.542	59.92	42.55	102.48	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 6025 MHz		

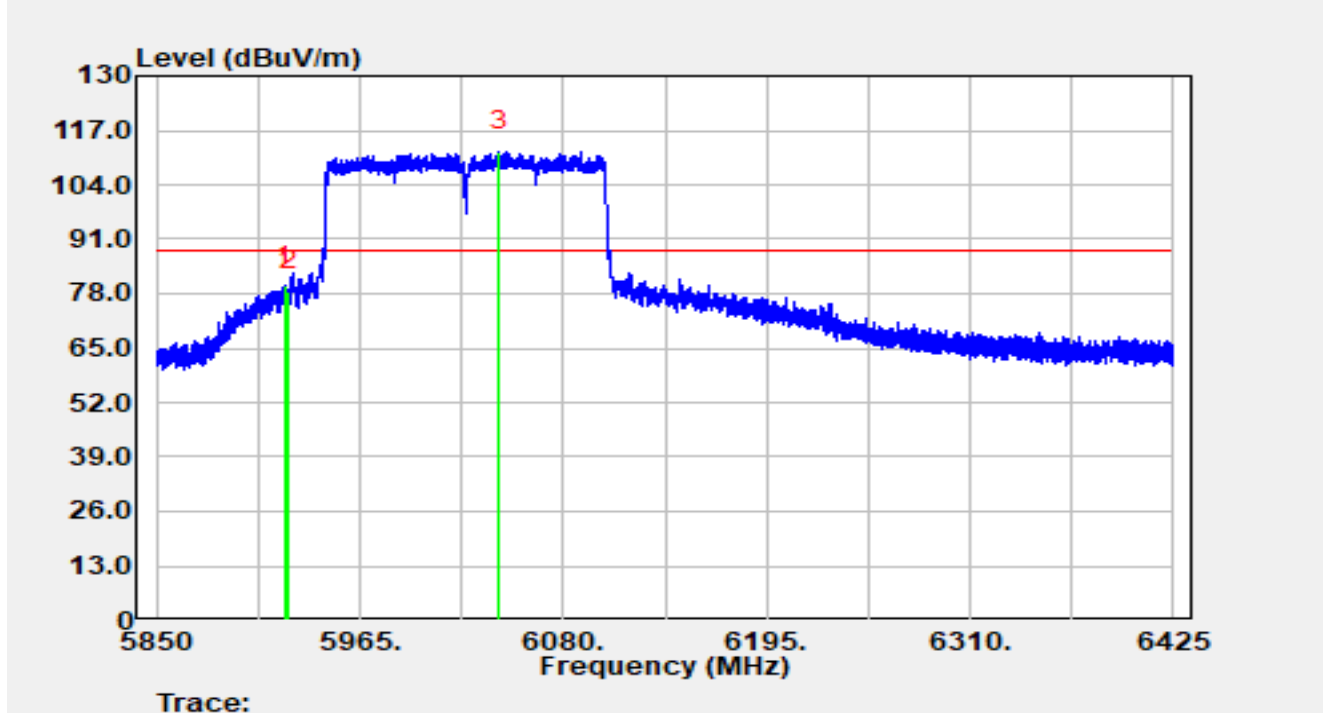


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.507	37.58	42.37	79.96	-8.24	88.20	Peak
2		5925.000	36.27	42.40	78.67	-9.53	88.20	Peak
3		6043.373	69.14	42.73	111.87	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 6025 MHz		

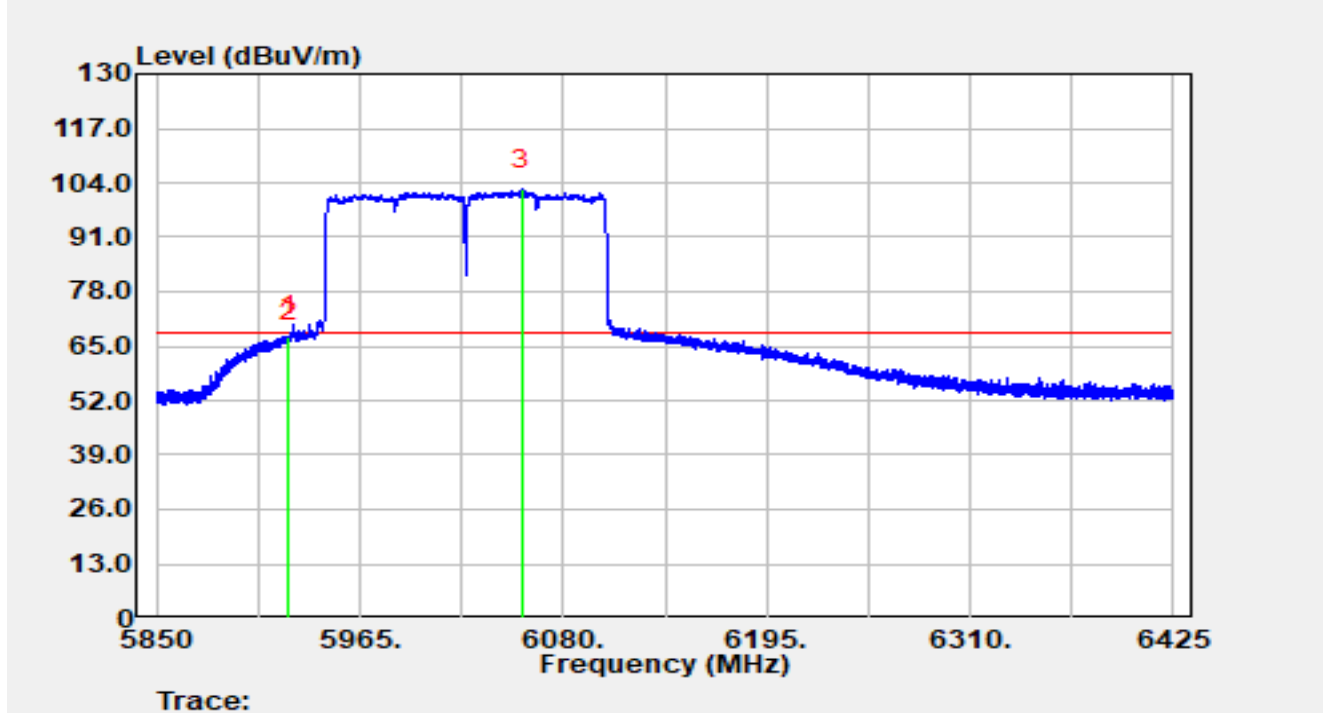


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.405	25.06	42.39	67.45	-0.75	68.20	Average
2		5925.000	23.42	42.40	65.82	-2.38	68.20	Average
3		6056.310	59.60	42.76	102.36	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 6025 MHz		

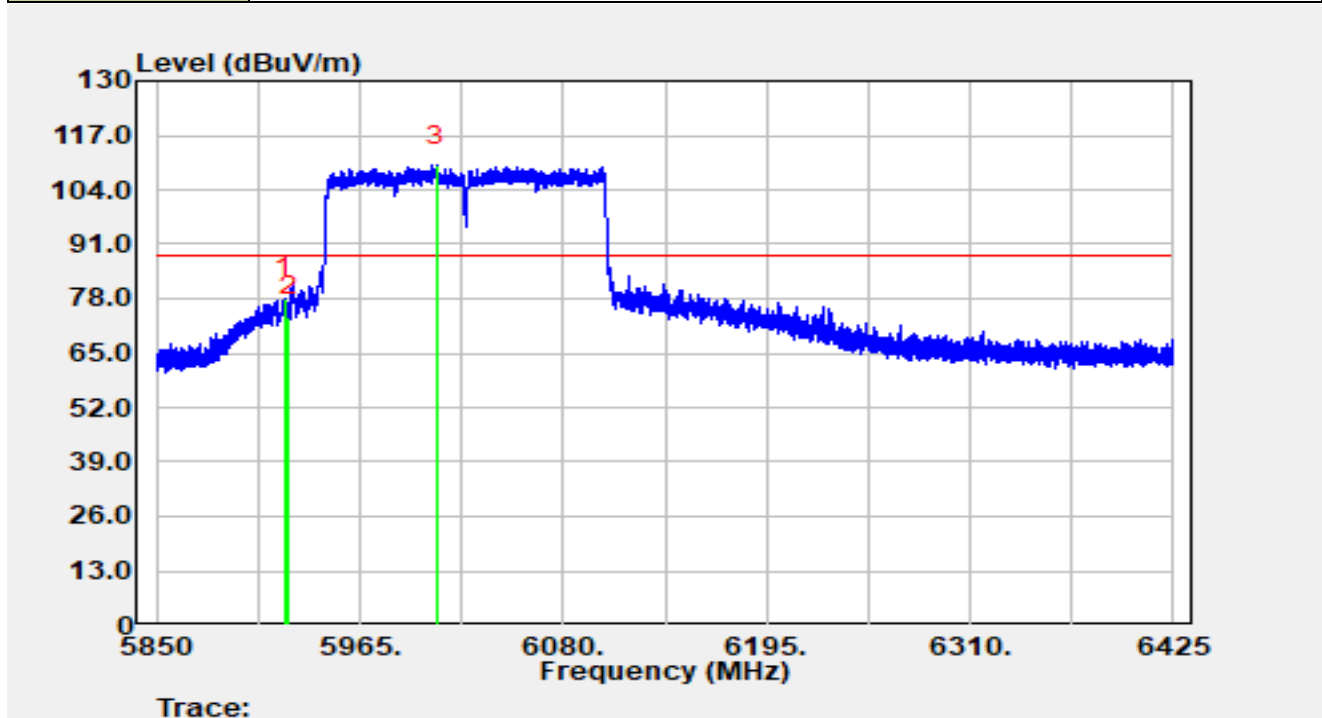


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.680	35.66	42.38	78.03	-10.17	88.20	Peak
2		5925.000	31.36	42.40	73.76	-14.44	88.20	Peak
3		6008.585	67.23	42.62	109.85	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 6025 MHz		

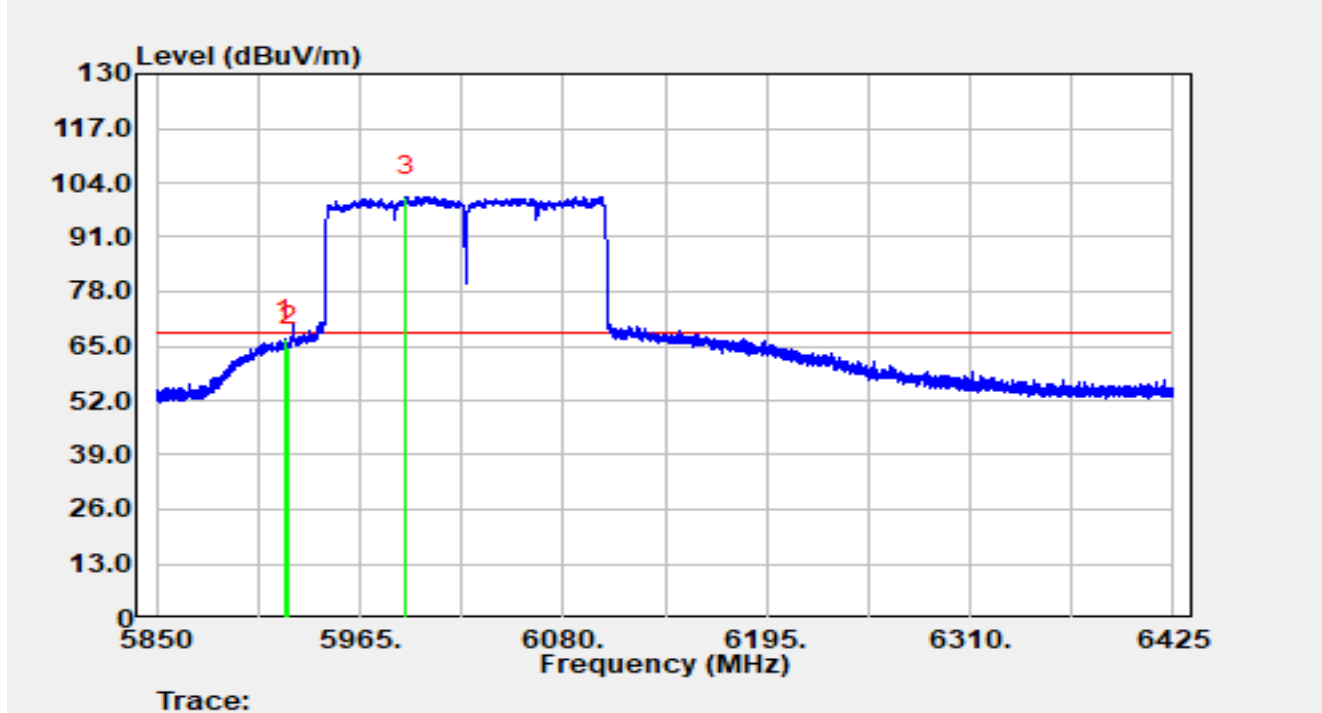


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.393	24.20	42.37	66.57	-1.63	68.20	Average
2		5924.980	22.47	42.40	64.87	-3.33	68.20	Average
3		5991.335	58.15	42.55	100.70	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

4*4 Omni:

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

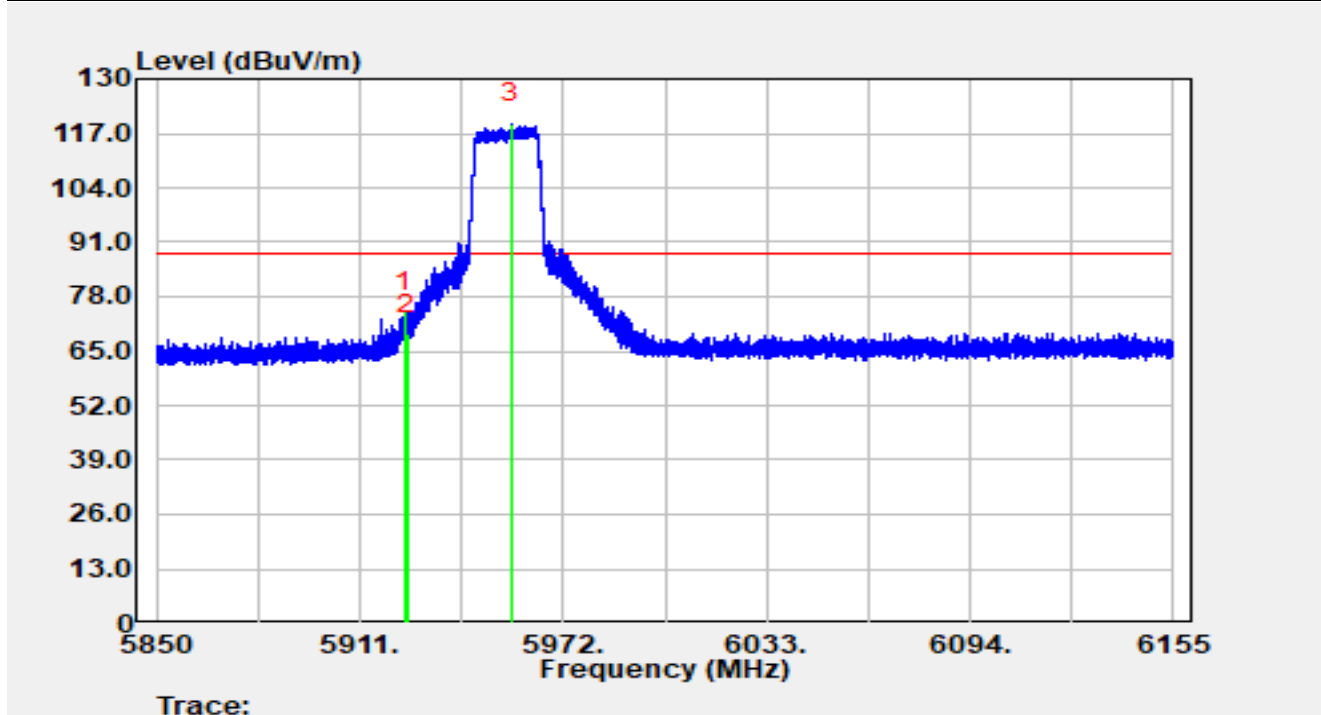


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.481	32.03	42.39	74.42	-13.78	88.20	Peak
2		5925.000	26.74	42.40	69.14	-19.06	88.20	Peak
3		5956.506	76.84	42.46	119.30	N/A	N/A	Peak

Notes:

1. “*” means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

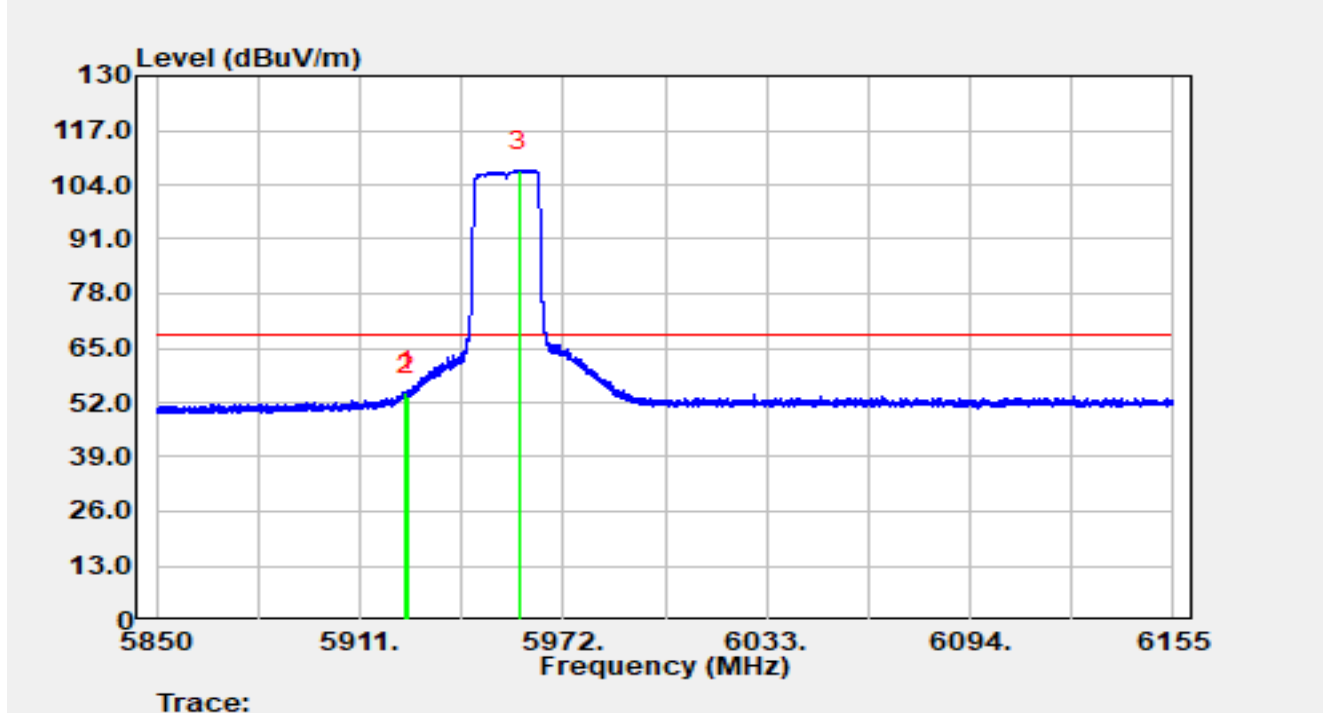


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.786	12.16	42.39	54.56	-13.64	68.20	Average
2		5925.000	11.08	42.40	53.48	-14.72	68.20	Average
3		5958.610	64.96	42.47	107.43	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

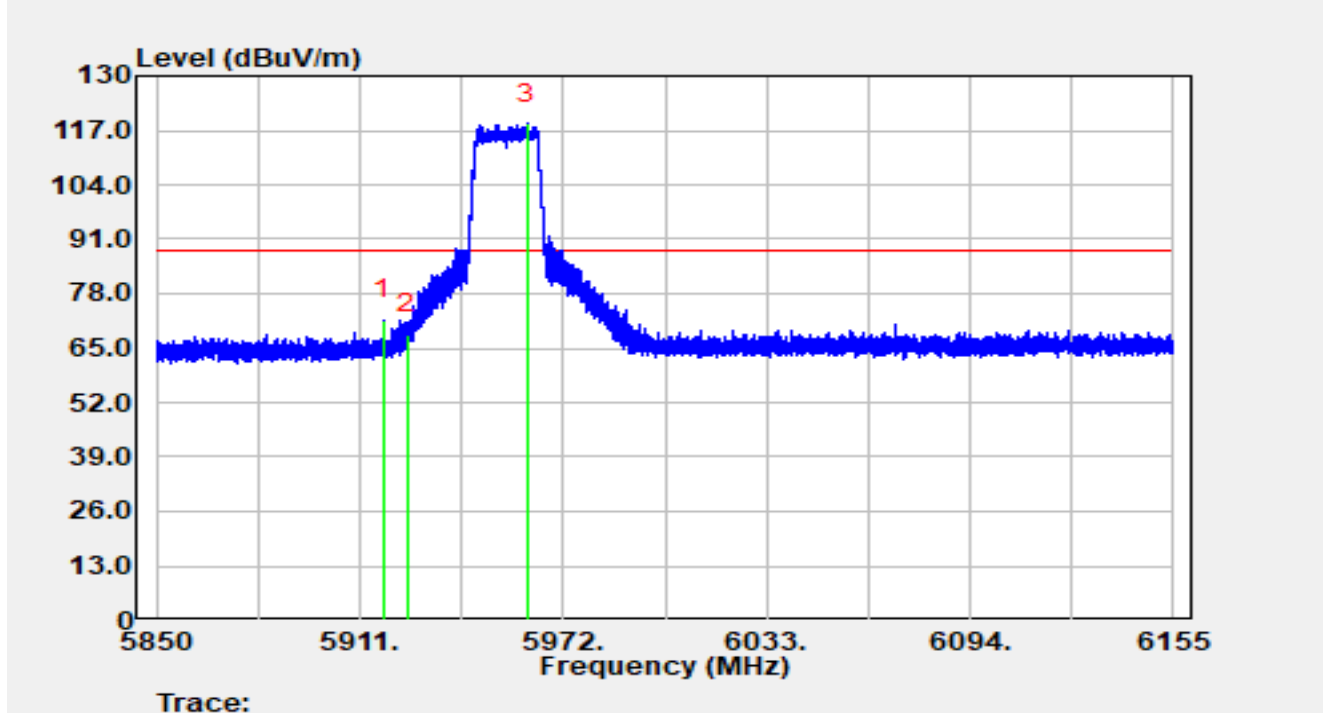


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.137	29.39	42.34	71.73	-16.47	88.20	Peak
2		5925.000	25.93	42.40	68.32	-19.88	88.20	Peak
3		5961.111	76.00	42.48	118.48	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

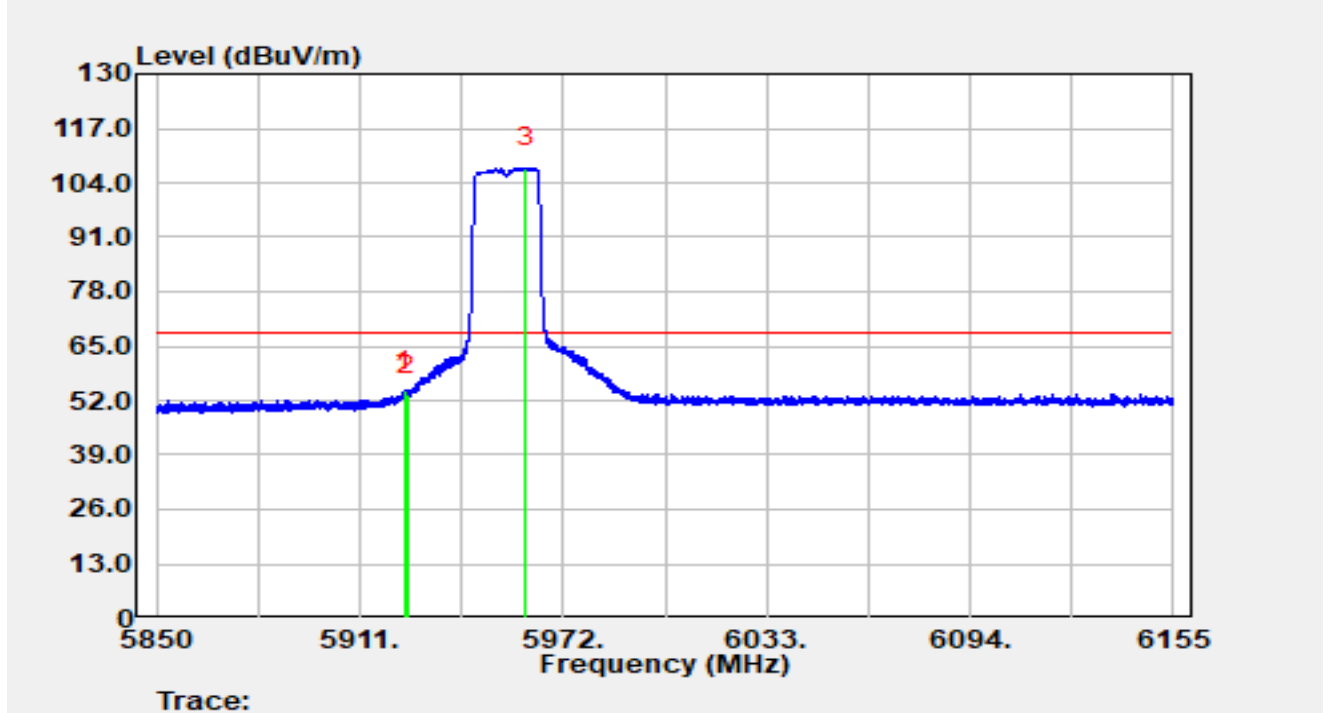


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.420	11.88	42.39	54.27	-13.93	68.20	Average
2		5925.000	10.97	42.40	53.37	-14.83	68.20	Average
3		5960.593	65.20	42.48	107.67	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

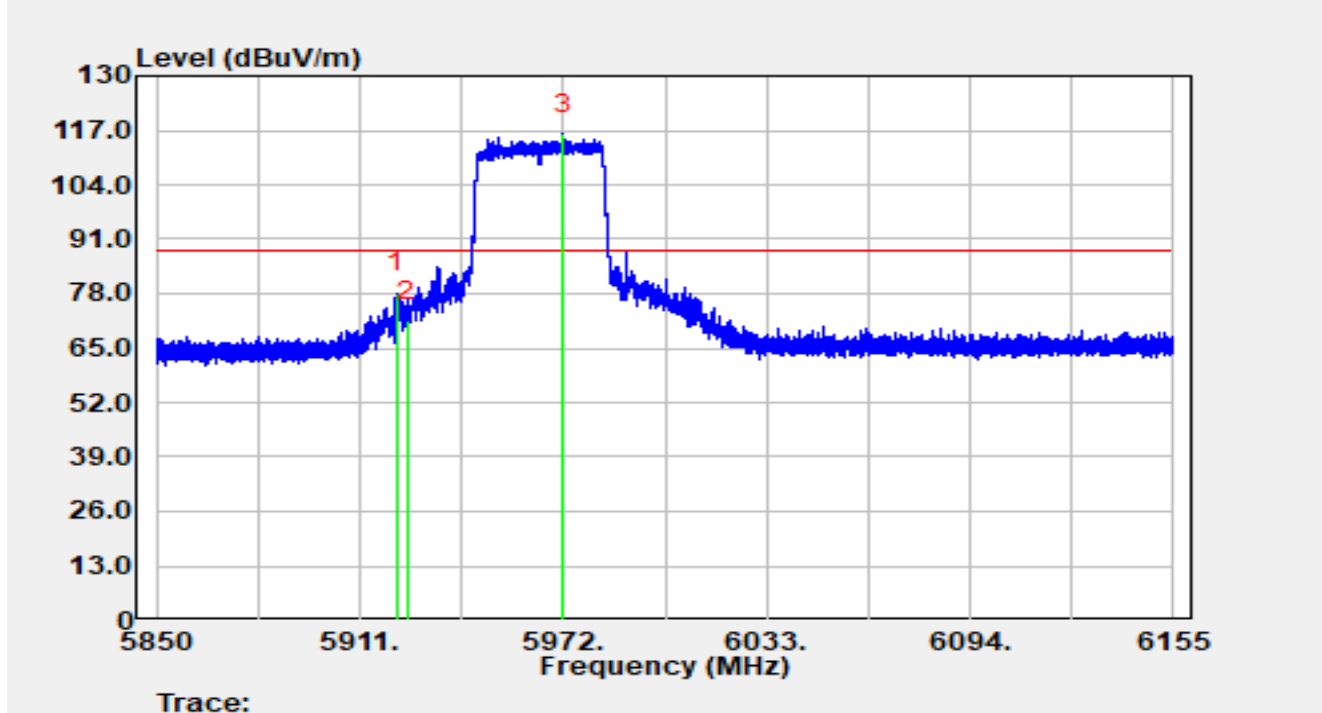


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.163	35.77	42.37	78.14	-10.06	88.20	Peak
2		5925.000	29.06	42.40	71.46	-16.74	88.20	Peak
3		5971.848	73.53	42.52	116.05	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

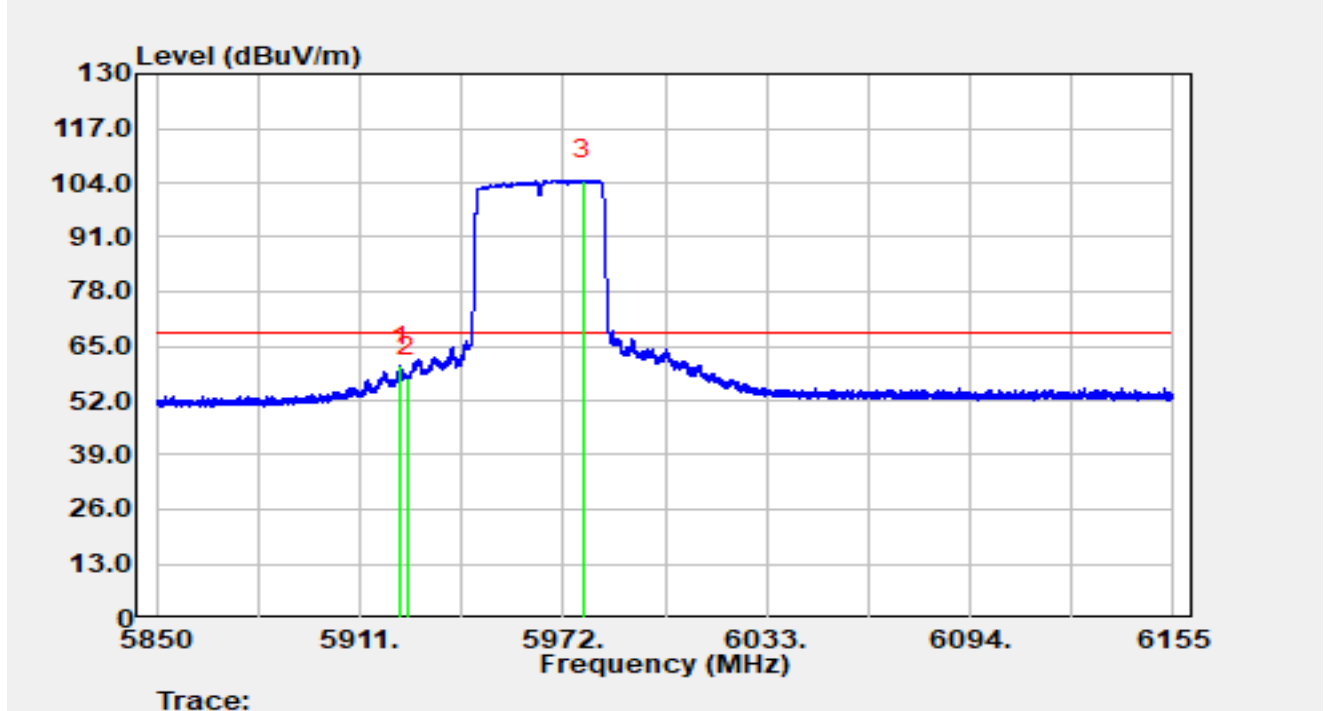


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.139	17.82	42.38	60.20	-8.00	68.20	Average
2		5925.000	15.06	42.40	57.46	-10.74	68.20	Average
3		5977.917	62.02	42.55	104.57	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

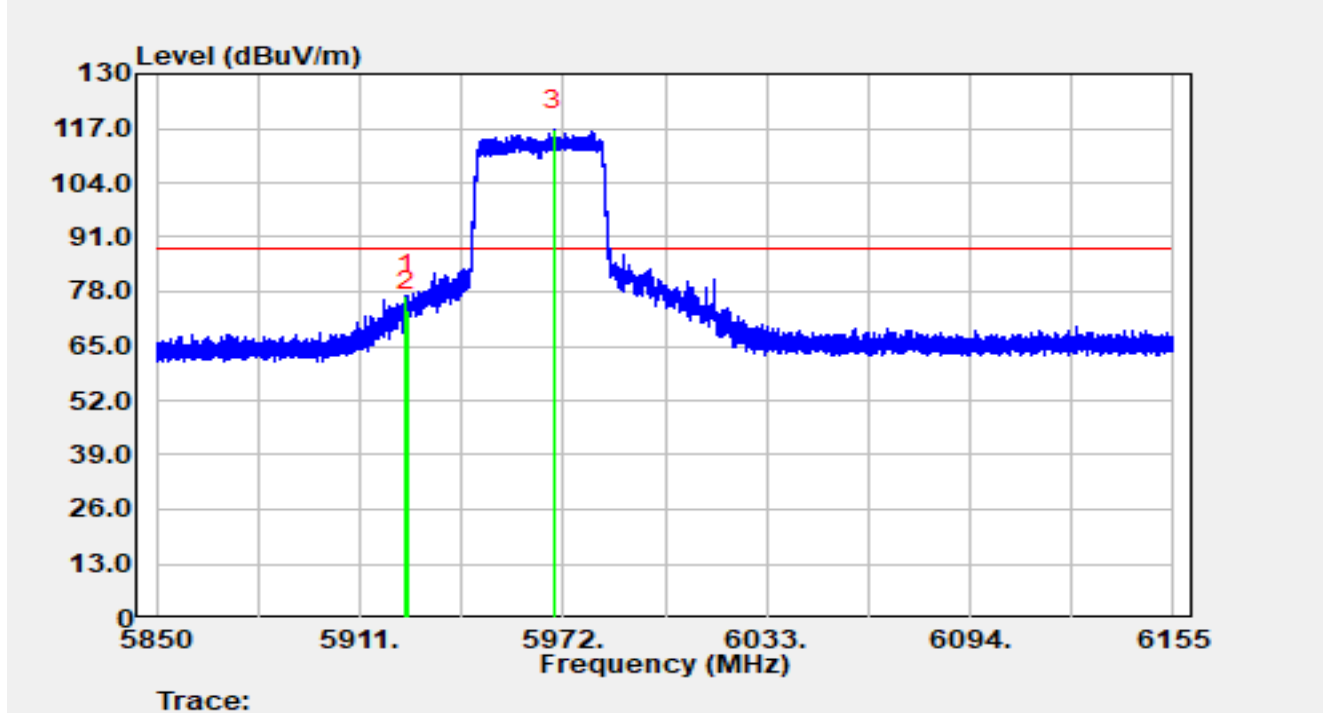


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.694	34.71	42.39	77.10	-11.10	88.20	Peak
2		5925.000	31.15	42.40	73.54	-14.66	88.20	Peak
3		5969.072	74.13	42.51	116.65	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

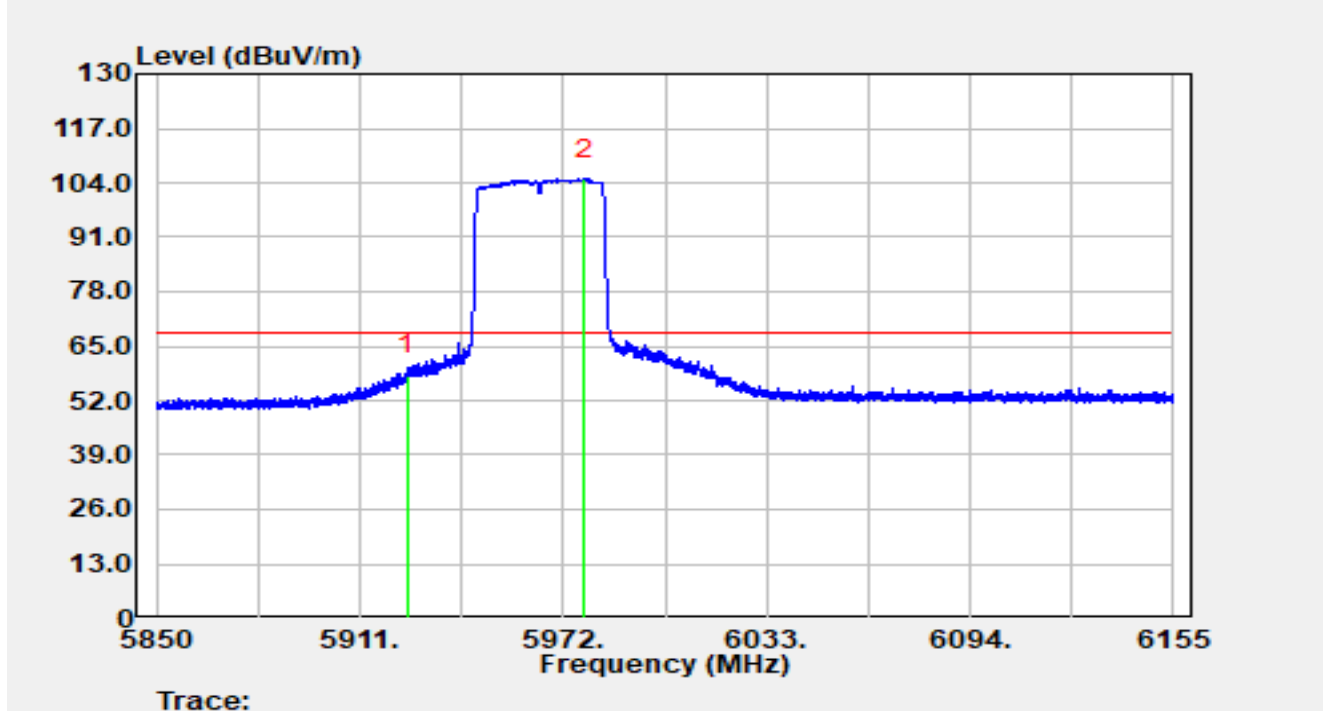


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	15.70	42.40	58.09	-10.11	68.20	Average
2		5978.497	62.37	42.55	104.92	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

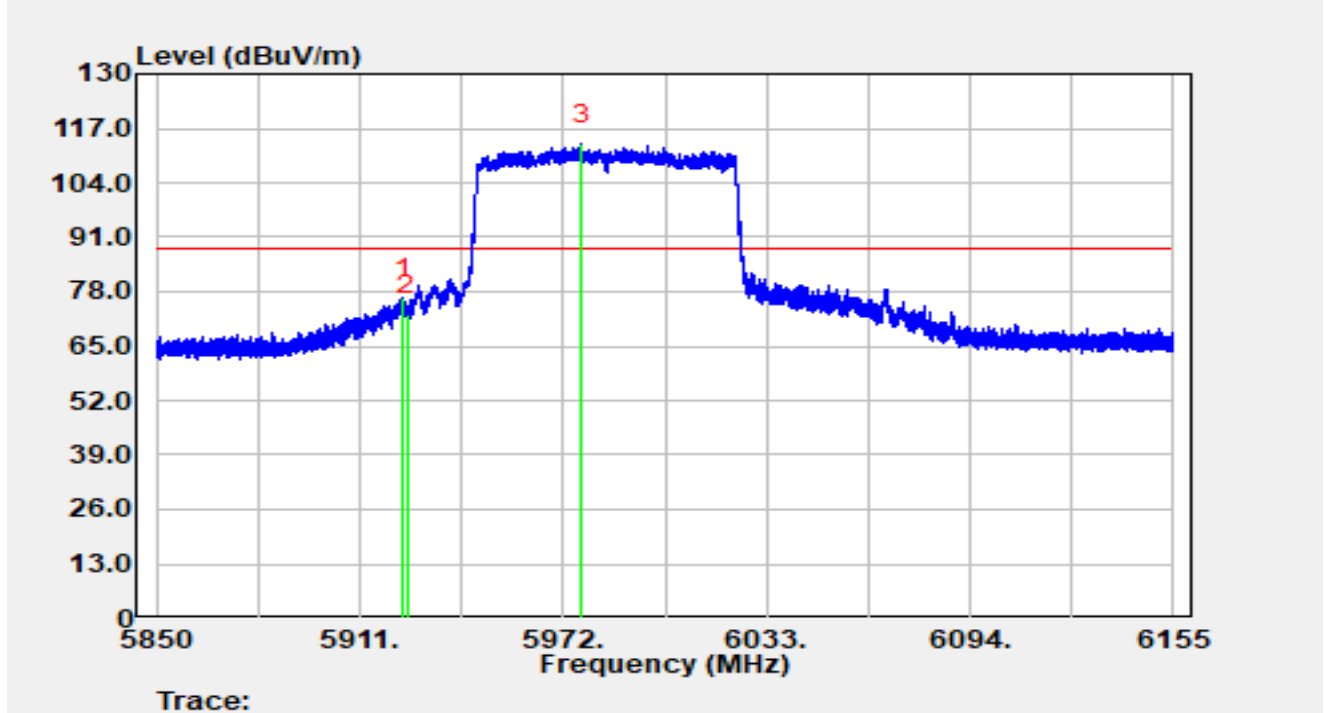


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.871	34.00	42.39	76.39	-11.81	88.20	Peak
2		5925.000	30.12	42.40	72.52	-15.68	88.20	Peak
3		5977.521	70.53	42.55	113.08	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

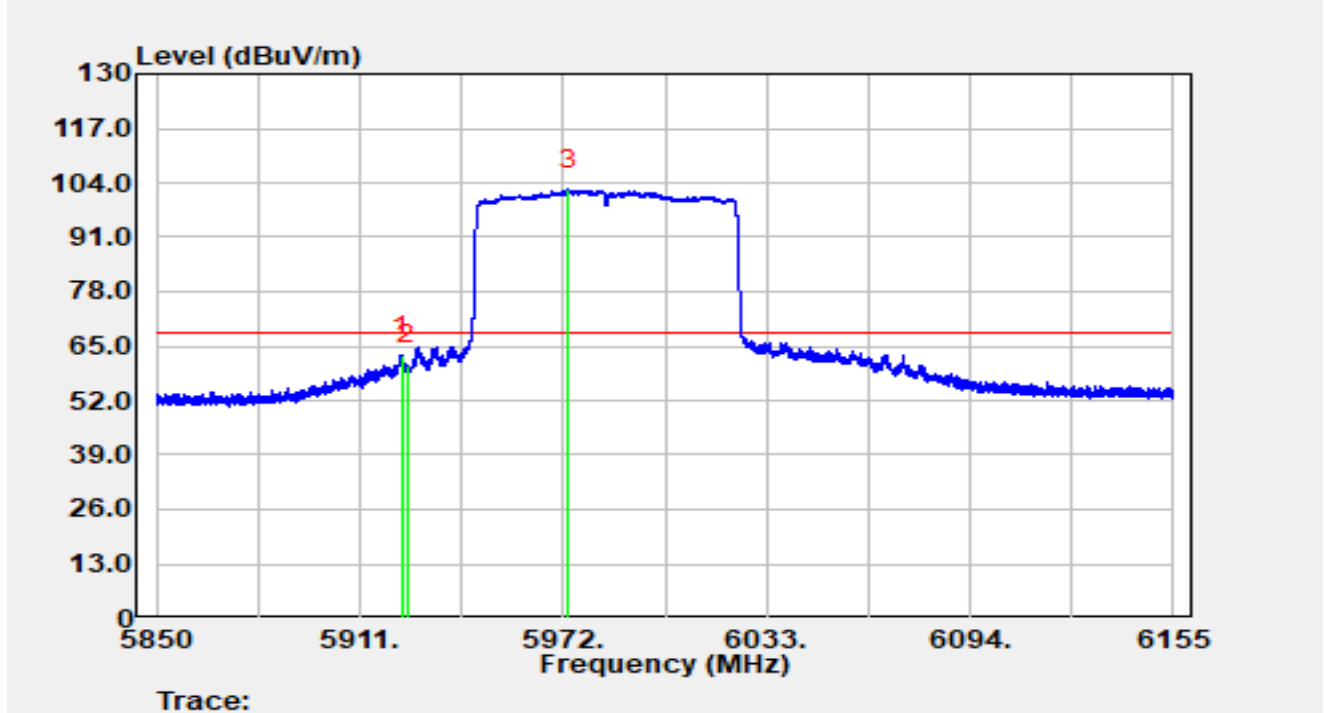


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.749	20.21	42.39	62.60	-5.60	68.20	Average
2		5925.000	18.14	42.40	60.54	-7.66	68.20	Average
3		5973.617	59.77	42.53	102.30	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

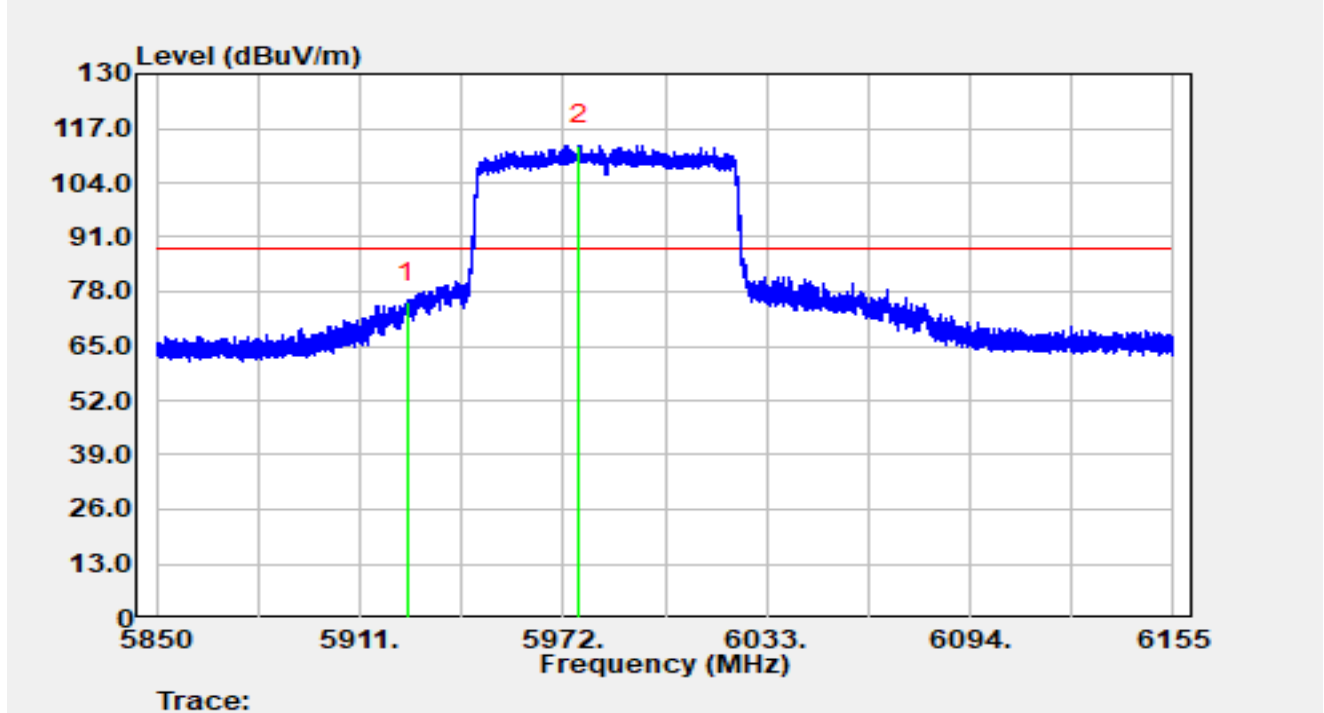


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	33.14	42.40	75.54	-12.66	88.20	Peak
2		5976.636	70.48	42.55	113.03	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

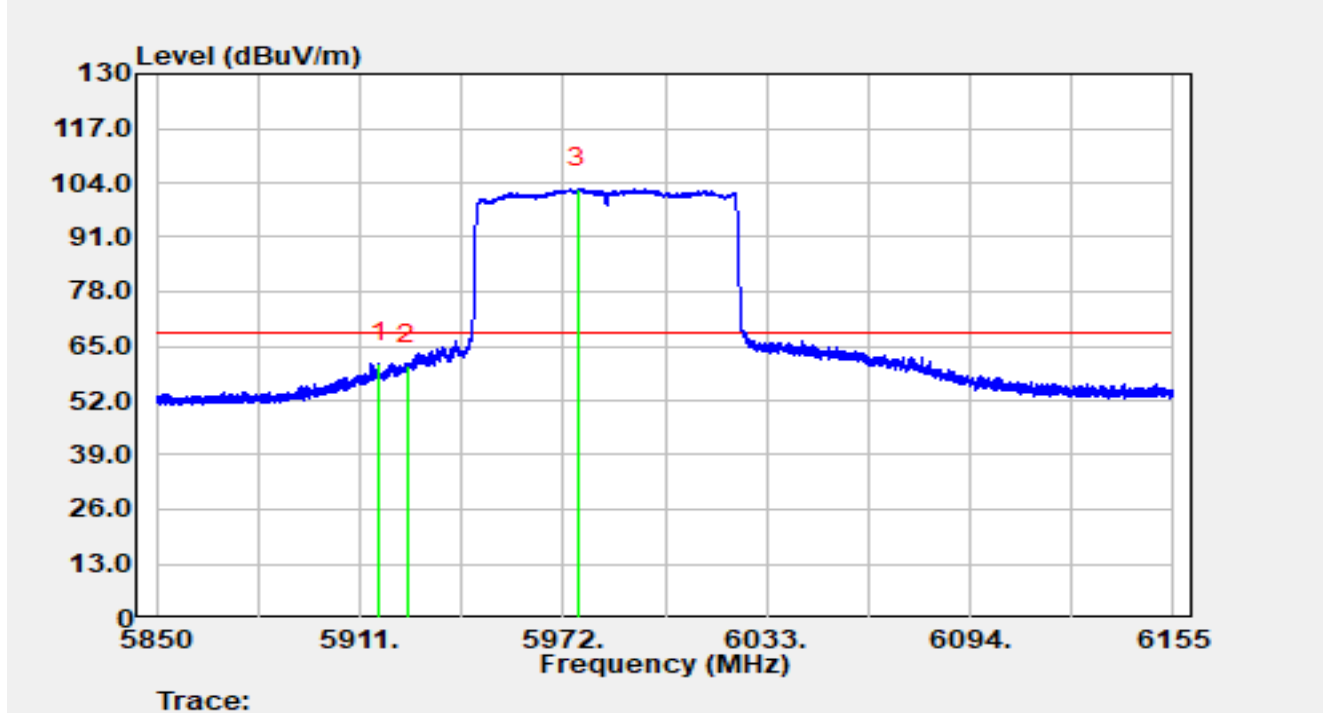


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.673	18.54	42.32	60.86	-7.34	68.20	Average
2		5925.000	17.97	42.40	60.37	-7.83	68.20	Average
3		5976.483	60.01	42.55	102.56	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

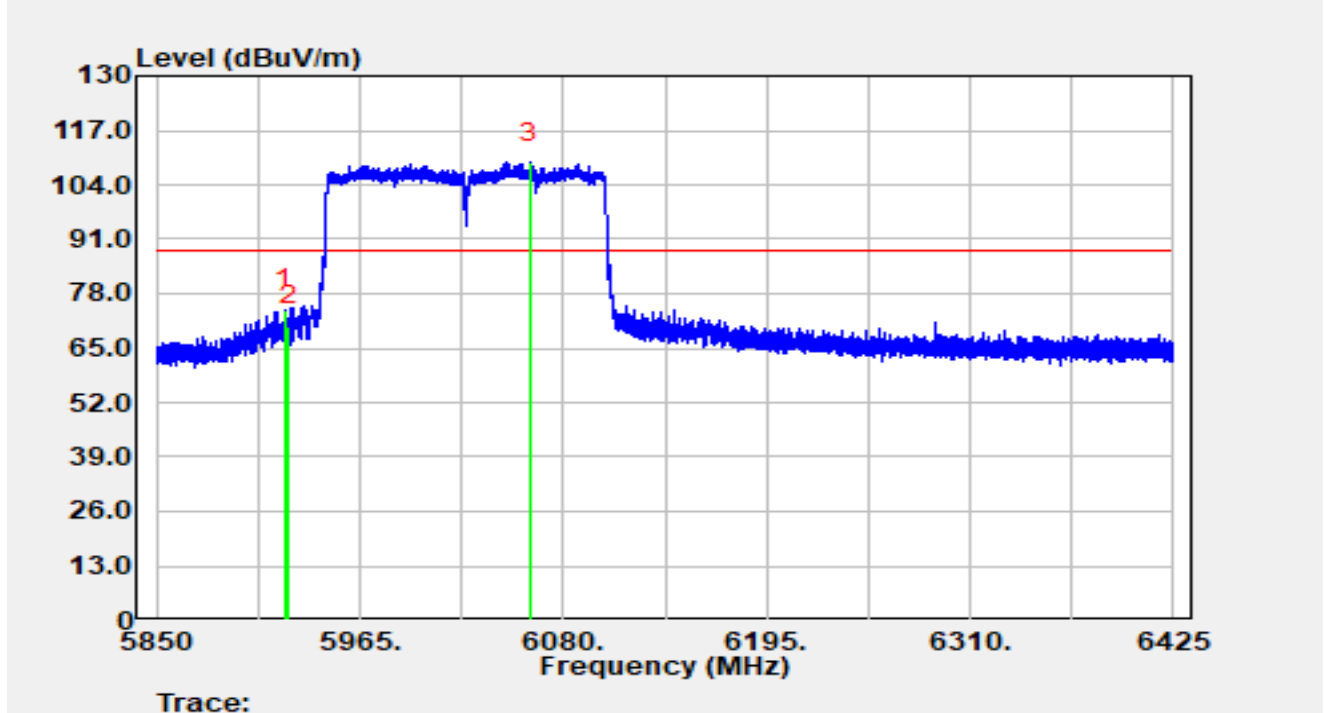


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.623	31.81	42.38	74.19	-14.01	88.20	Peak
2		5925.000	27.82	42.40	70.21	-17.99	88.20	Peak
3		6061.197	66.45	42.77	109.22	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

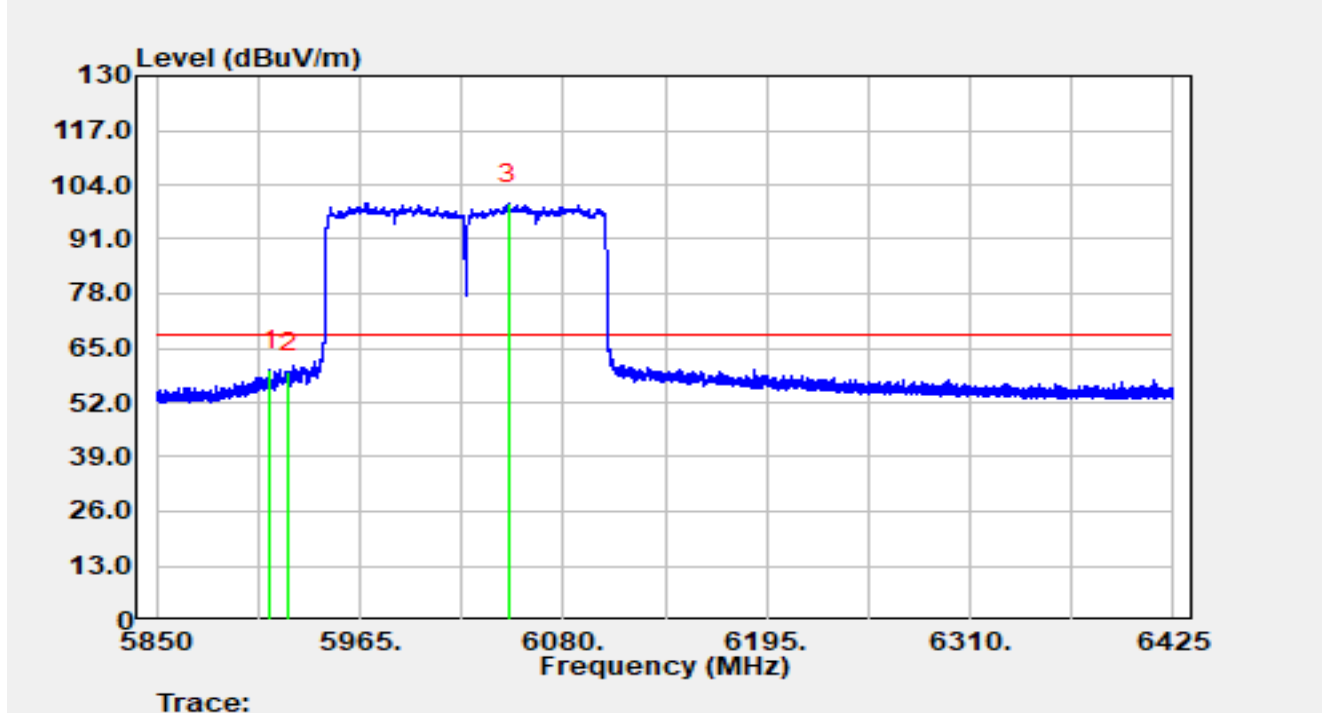


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5913.998	17.34	42.30	59.64	-8.56	68.20	Average
2		5925.000	16.81	42.40	59.20	-9.00	68.20	Average
3		6048.720	56.70	42.74	99.44	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

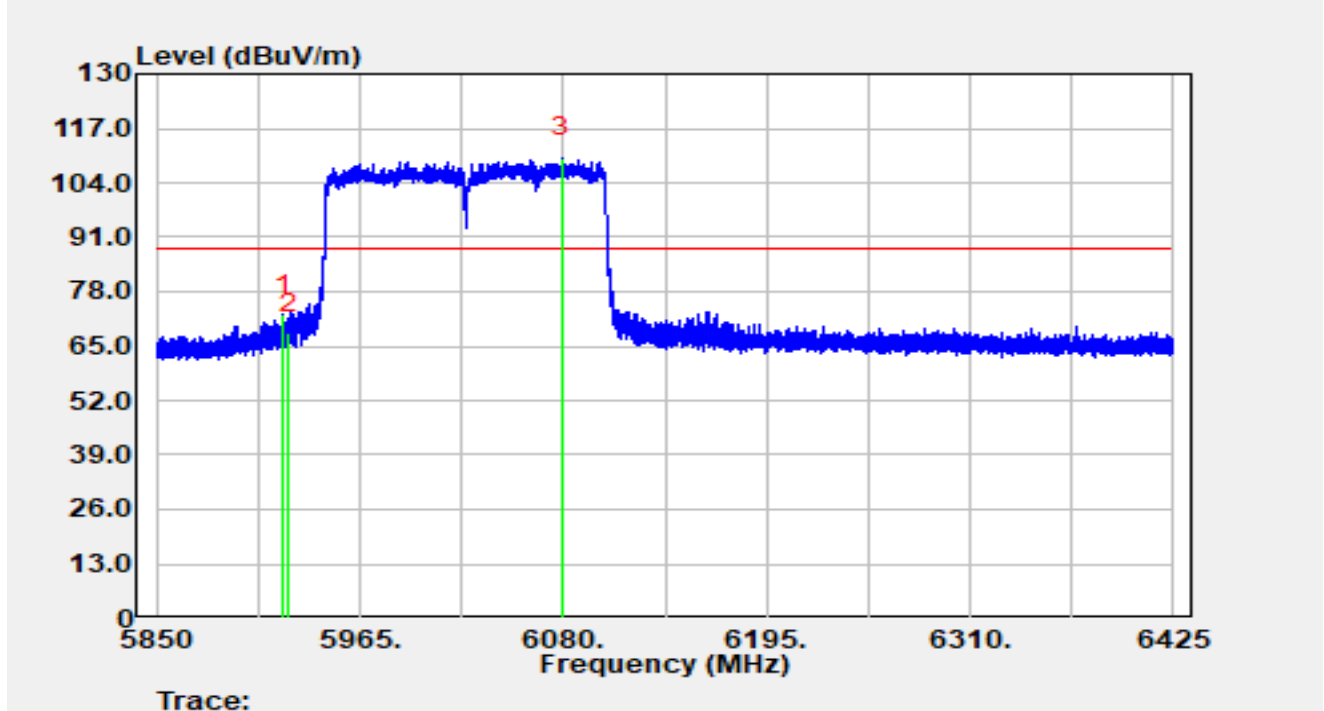


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.415	30.19	42.36	72.56	-15.64	88.20	Peak
2		5925.000	25.66	42.40	68.05	-20.15	88.20	Peak
3		6078.792	67.35	42.75	110.10	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

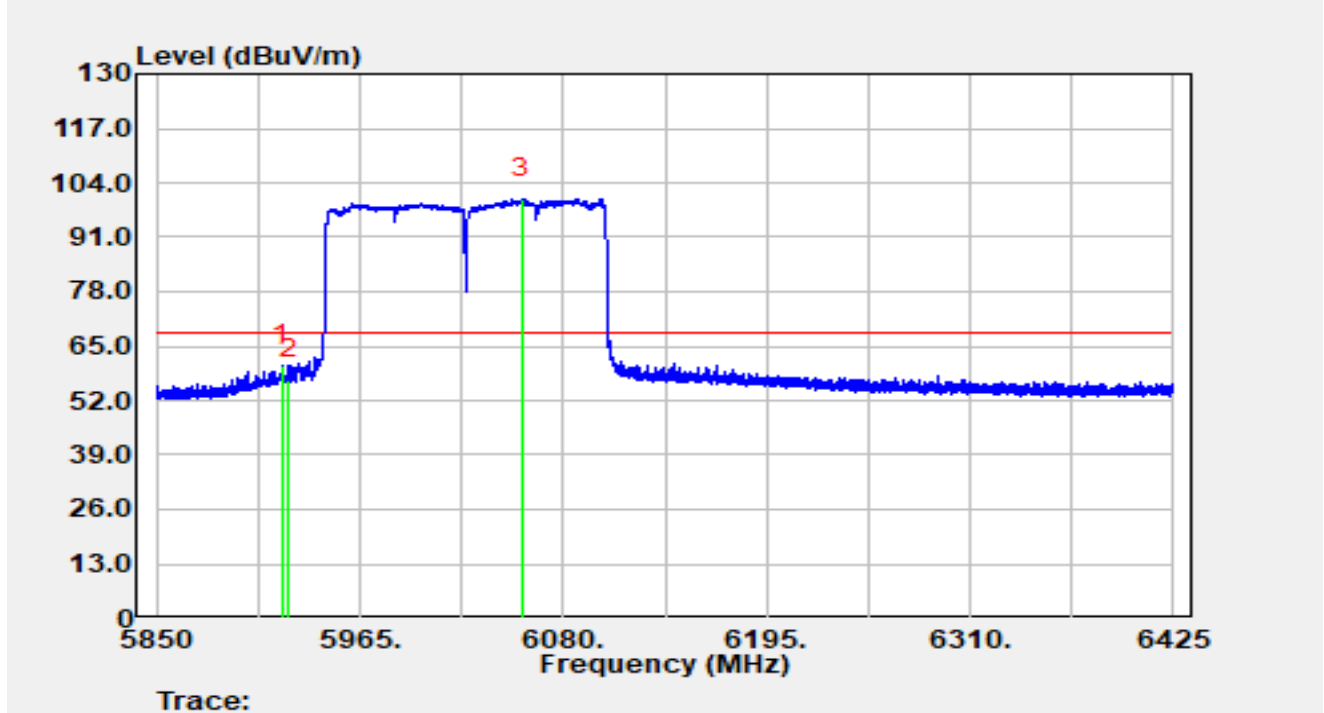


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.897	18.02	42.36	60.38	-7.82	68.20	Average
2		5925.000	14.62	42.40	57.02	-11.18	68.20	Average
3		6056.310	57.37	42.76	100.13	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

4*4 Directional:

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

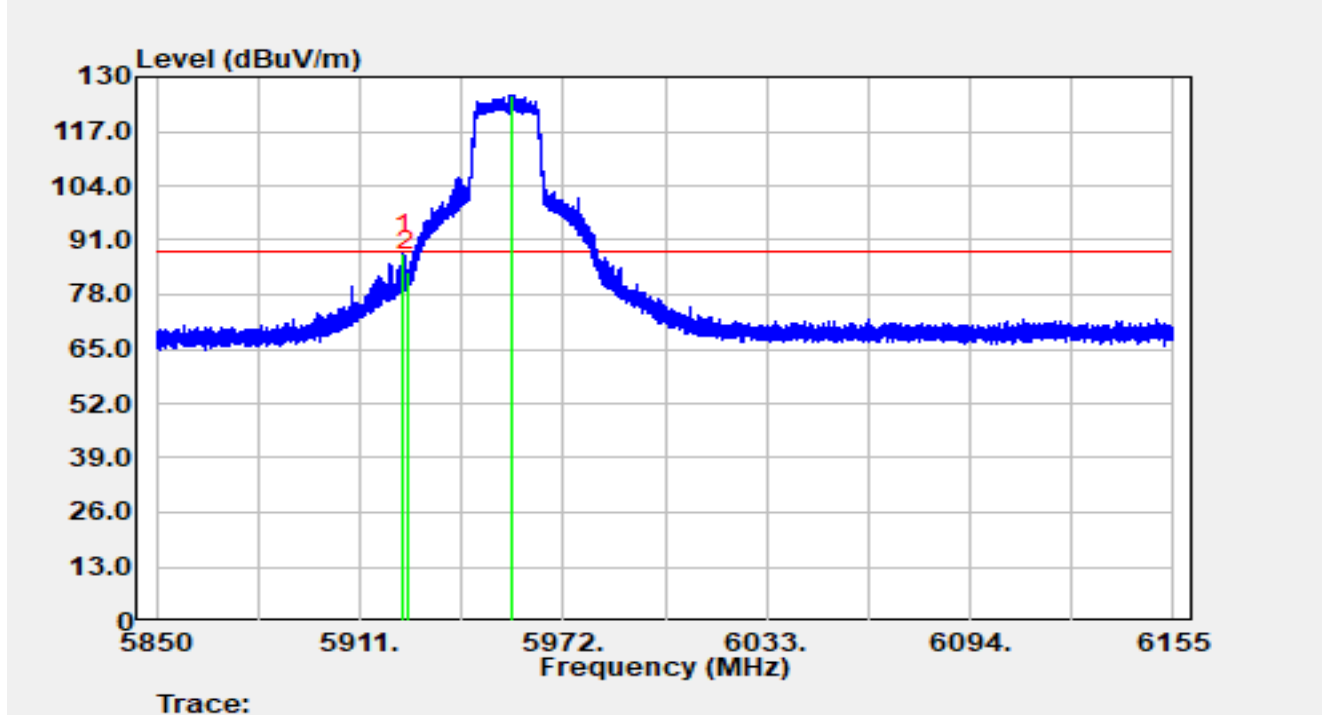


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.084	45.23	42.39	87.62	-0.58	88.20	Peak
2		5925.000	41.09	42.40	83.48	-4.72	88.20	Peak
3		5956.476	83.06	42.46	125.52	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

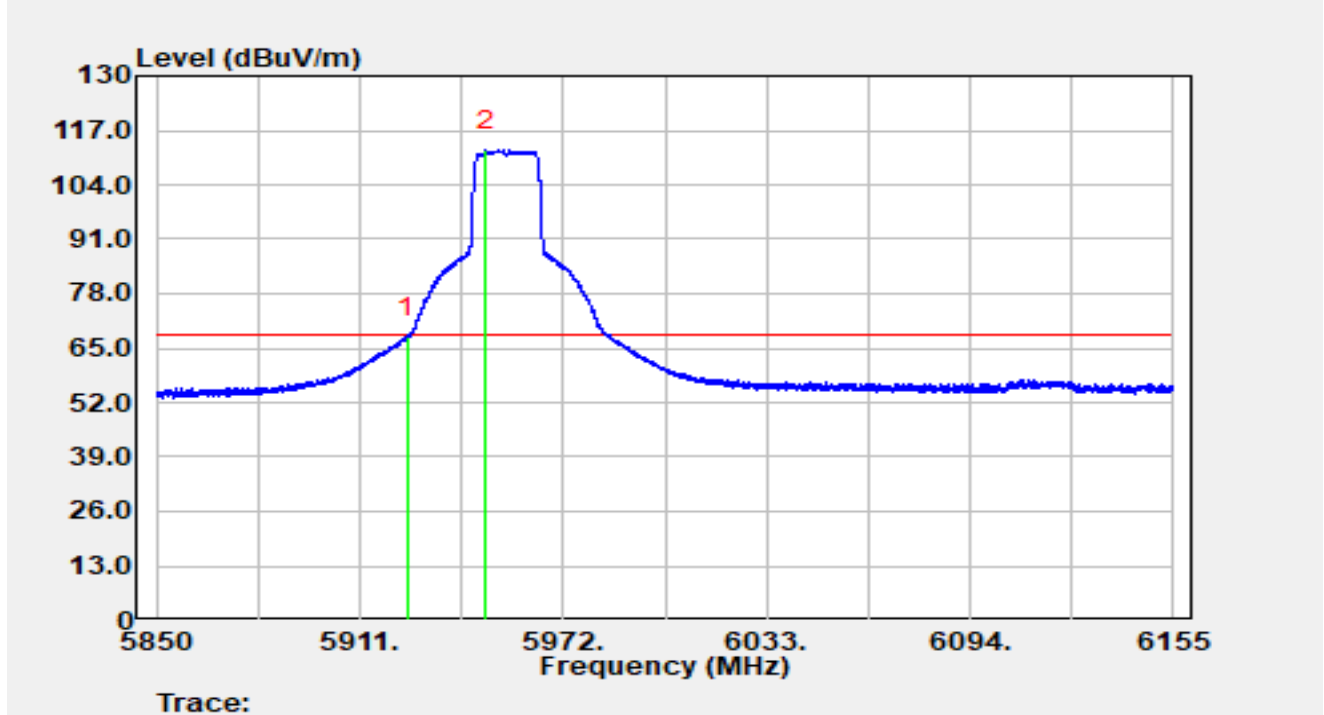


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	25.21	42.40	67.61	-0.59	68.20	Average
2		5948.637	69.71	42.43	112.14	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

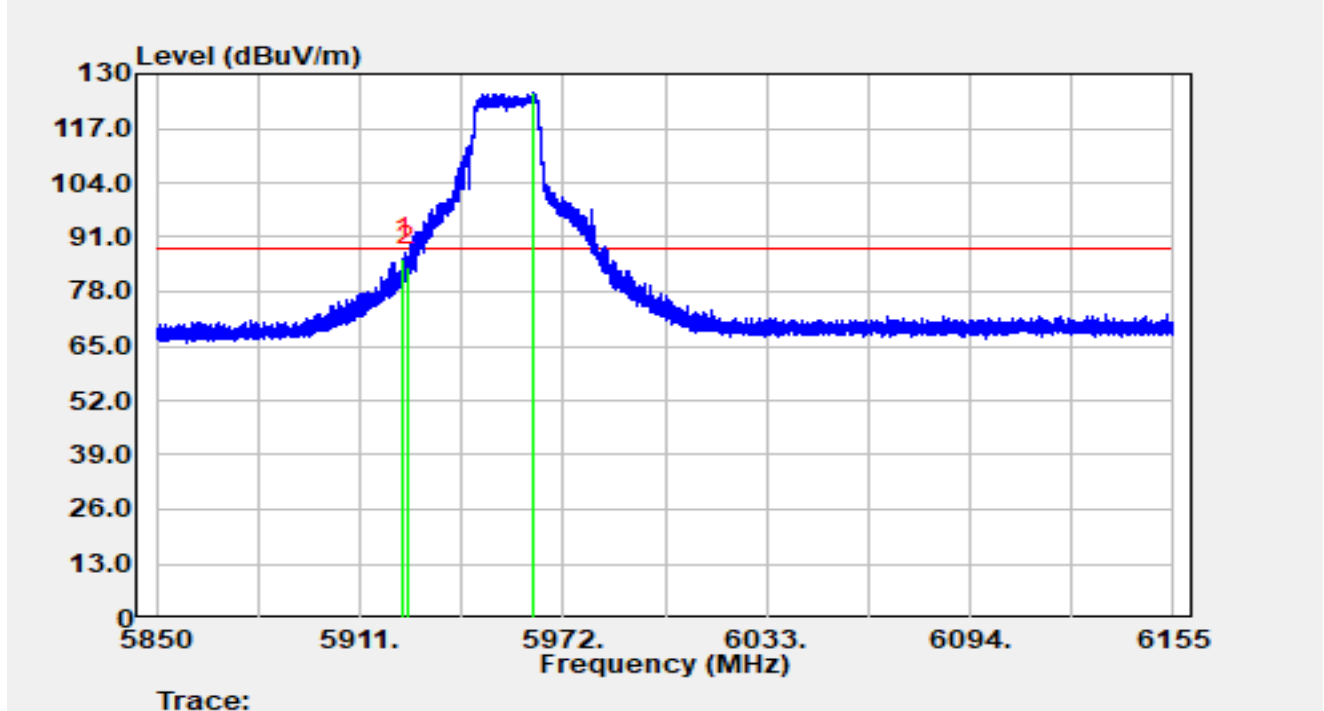


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.146	43.69	42.39	86.08	-2.12	88.20	Peak
2		5925.000	41.72	42.40	84.11	-4.09	88.20	Peak
3		5963.186	83.13	42.49	125.62	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

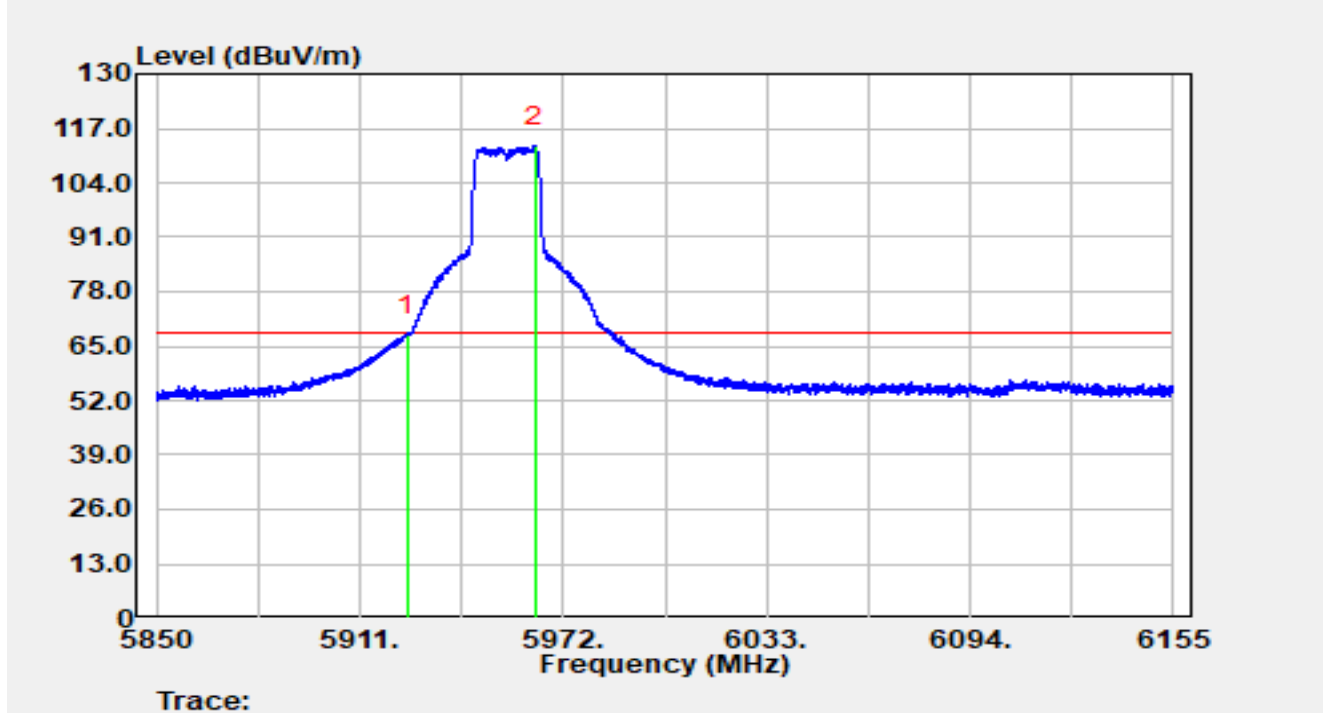


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	25.16	42.40	67.55	-0.65	68.20	Average
2		5963.582	70.18	42.49	112.67	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

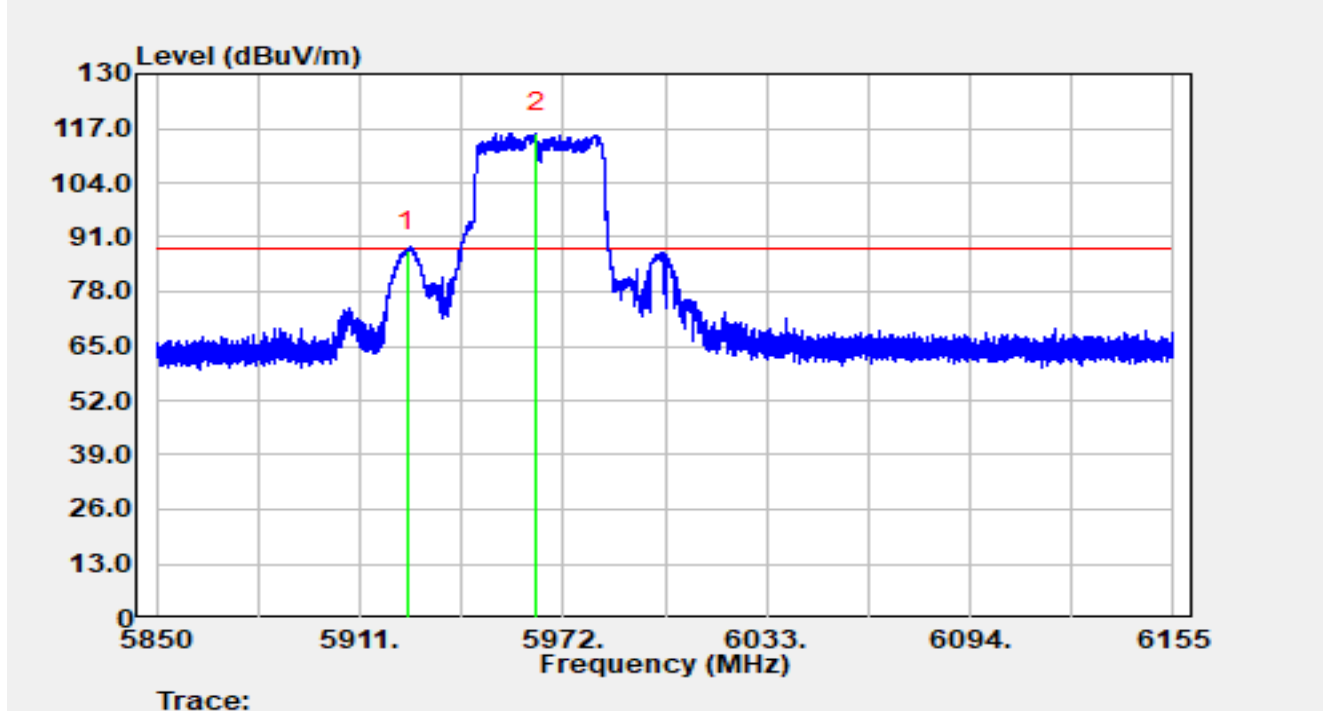


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	45.25	42.40	87.65	-0.55	88.20	Peak
2		5963.917	73.41	42.49	115.90	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

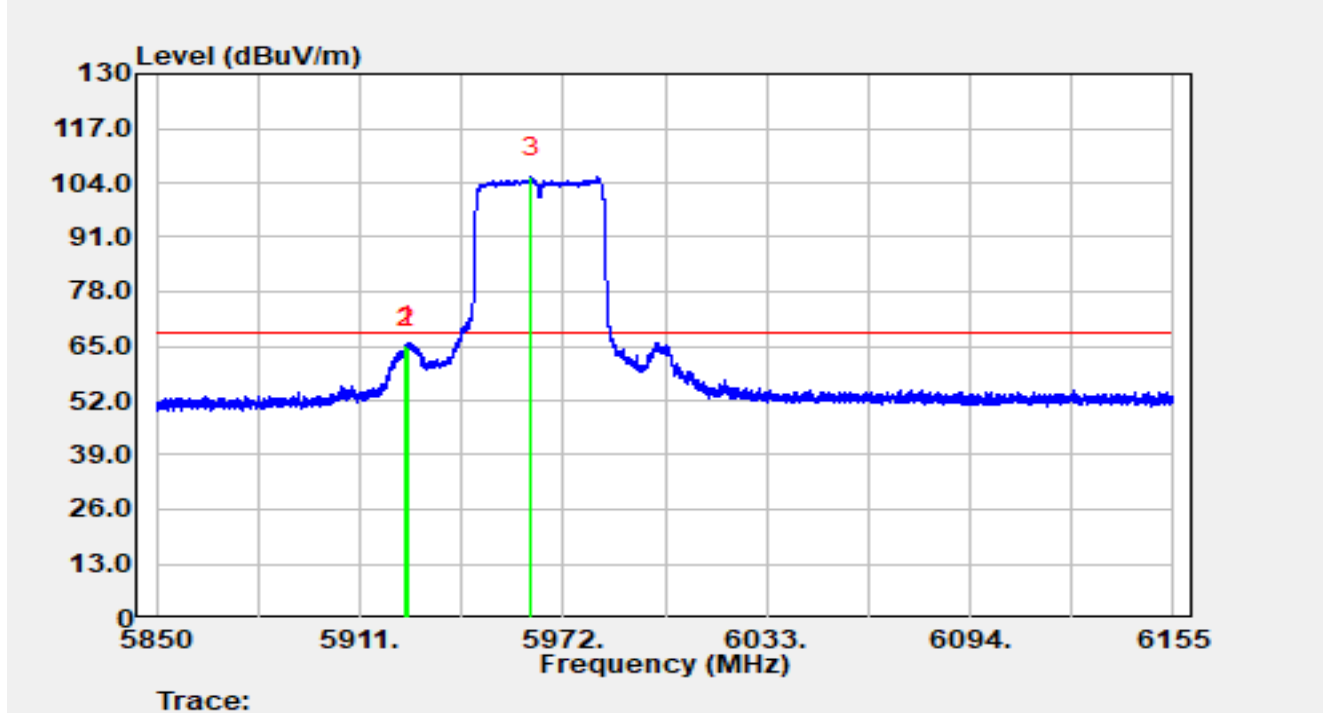


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.633	22.77	42.39	65.16	-3.04	68.20	Average
2		5925.000	22.35	42.40	64.75	-3.45	68.20	Average
3		5962.484	62.89	42.48	105.37	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

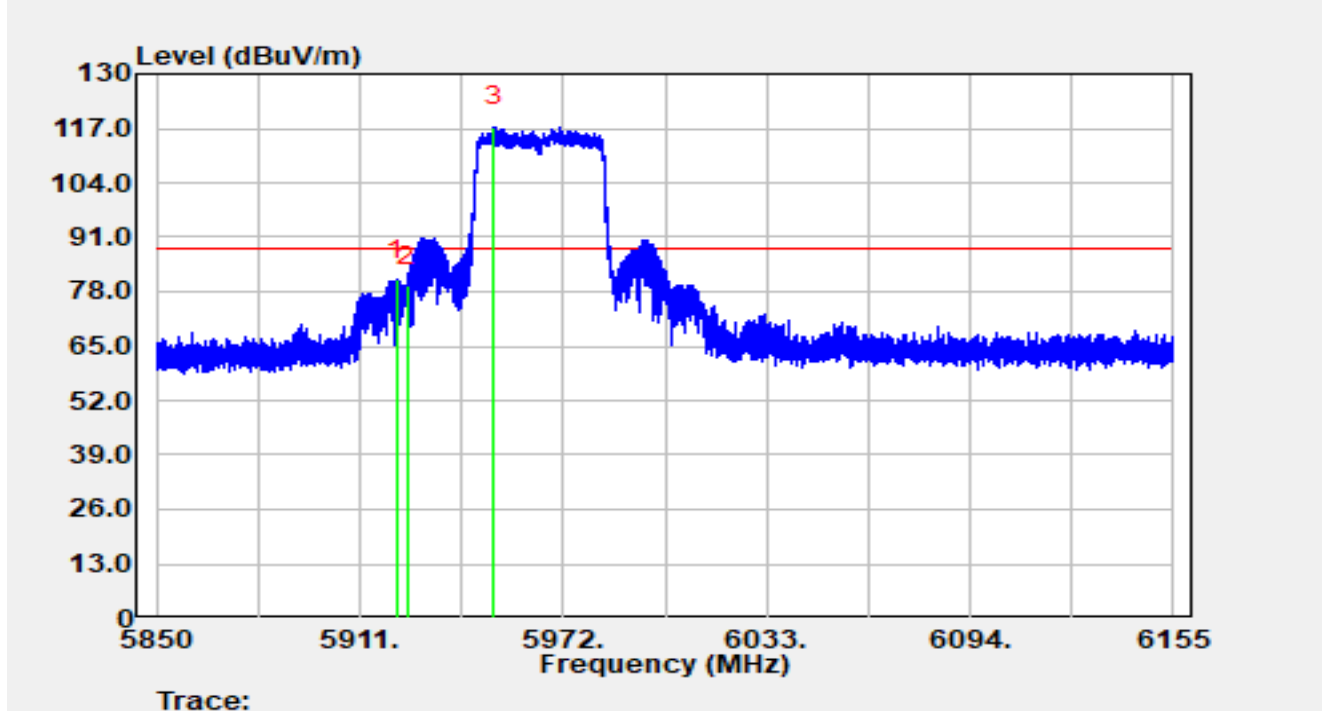


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.980	38.45	42.37	80.82	-7.38	88.20	Peak
2		5925.000	37.05	42.40	79.44	-8.76	88.20	Peak
3		5951.291	74.98	42.44	117.42	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

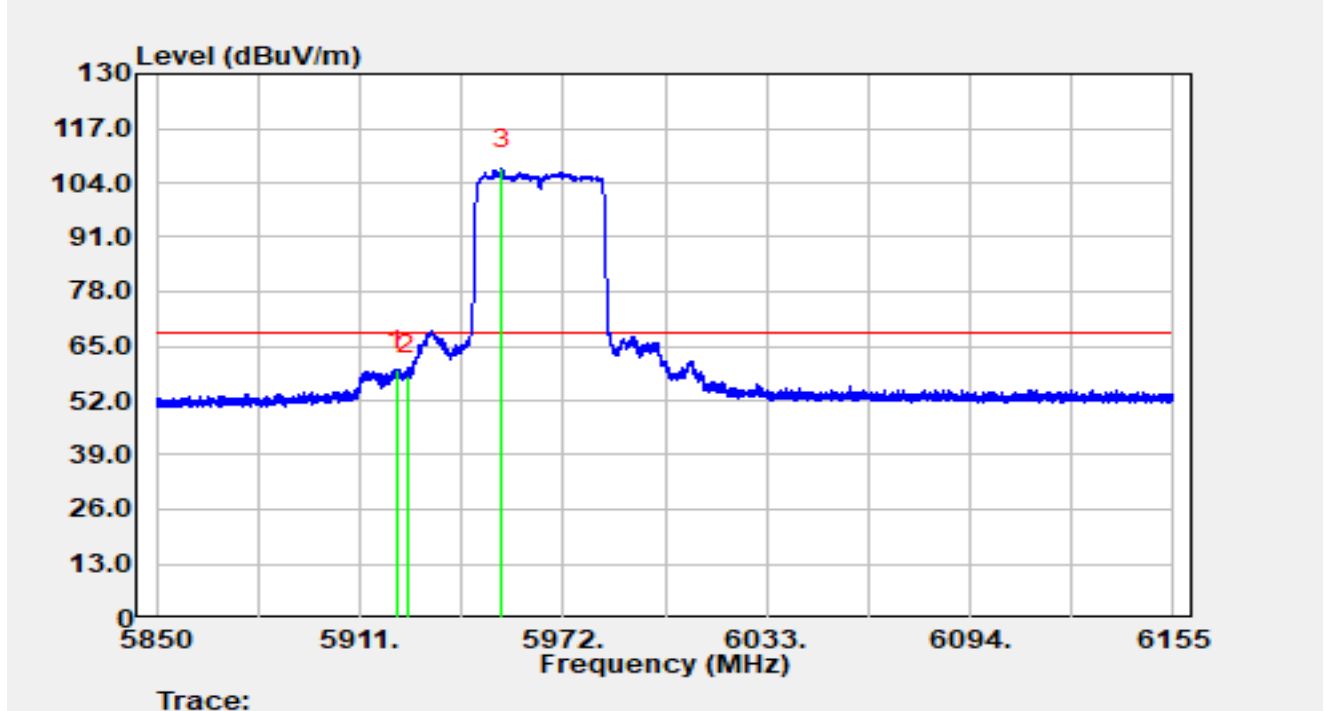


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.980	16.97	42.37	59.34	-8.86	68.20	Average
2		5925.000	15.49	42.40	57.89	-10.31	68.20	Average
3		5953.669	64.76	42.45	107.20	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

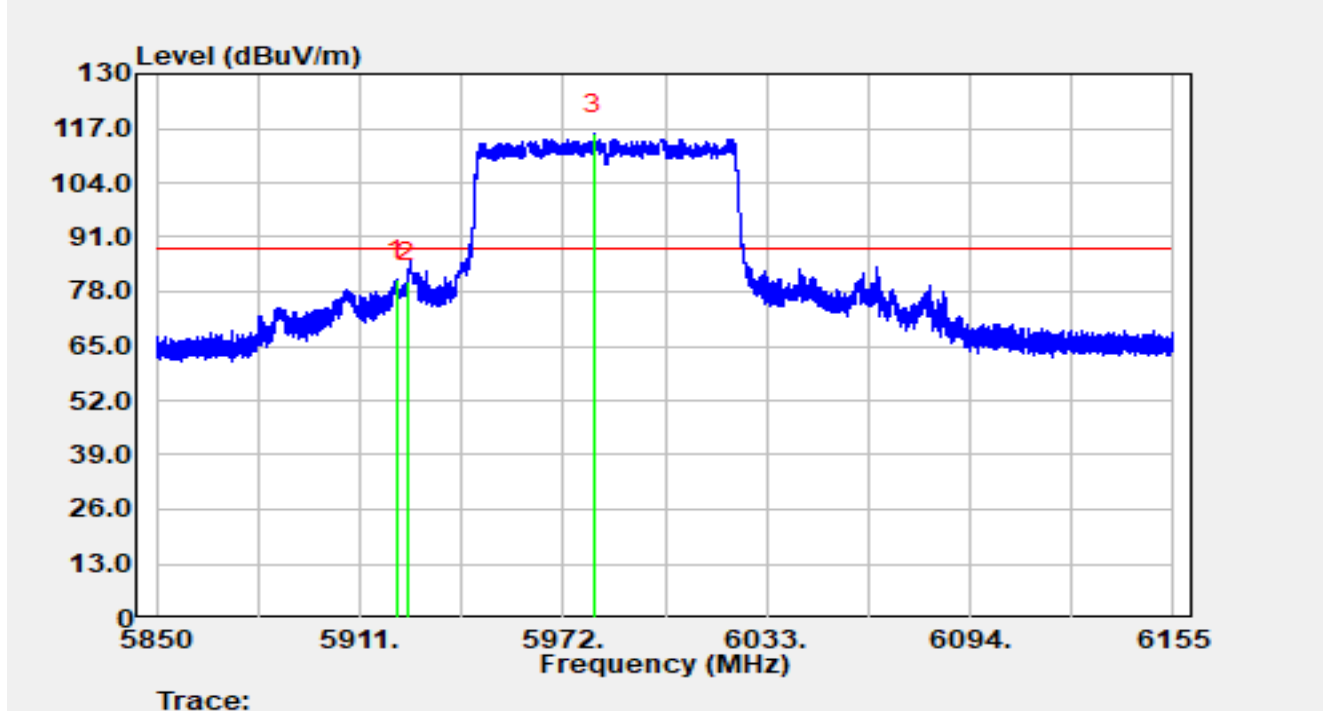


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.858	38.38	42.37	80.75	-7.45	88.20	Peak
2		5925.000	37.82	42.40	80.22	-7.98	88.20	Peak
3		5981.303	73.19	42.57	115.76	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

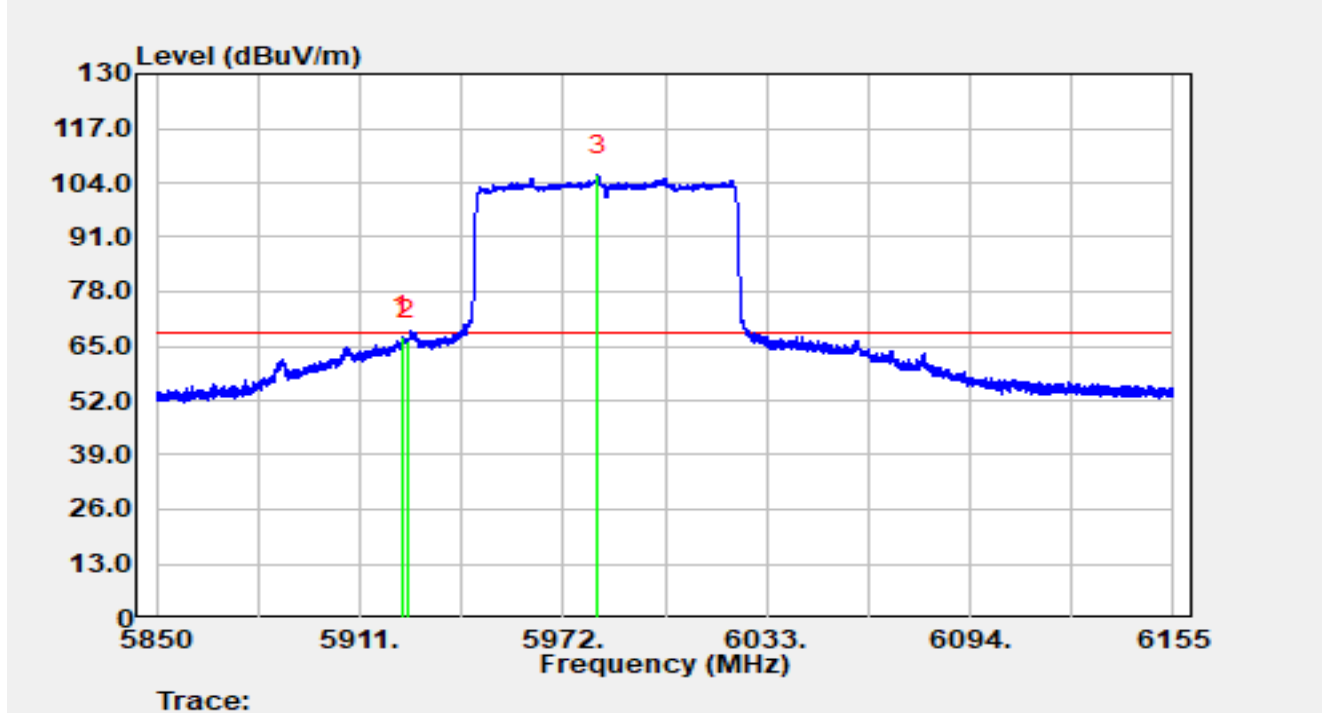


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.779	25.02	42.39	67.40	-0.80	68.20	Average
2		5925.000	23.90	42.40	66.29	-1.91	68.20	Average
3		5982.461	63.20	42.56	105.76	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

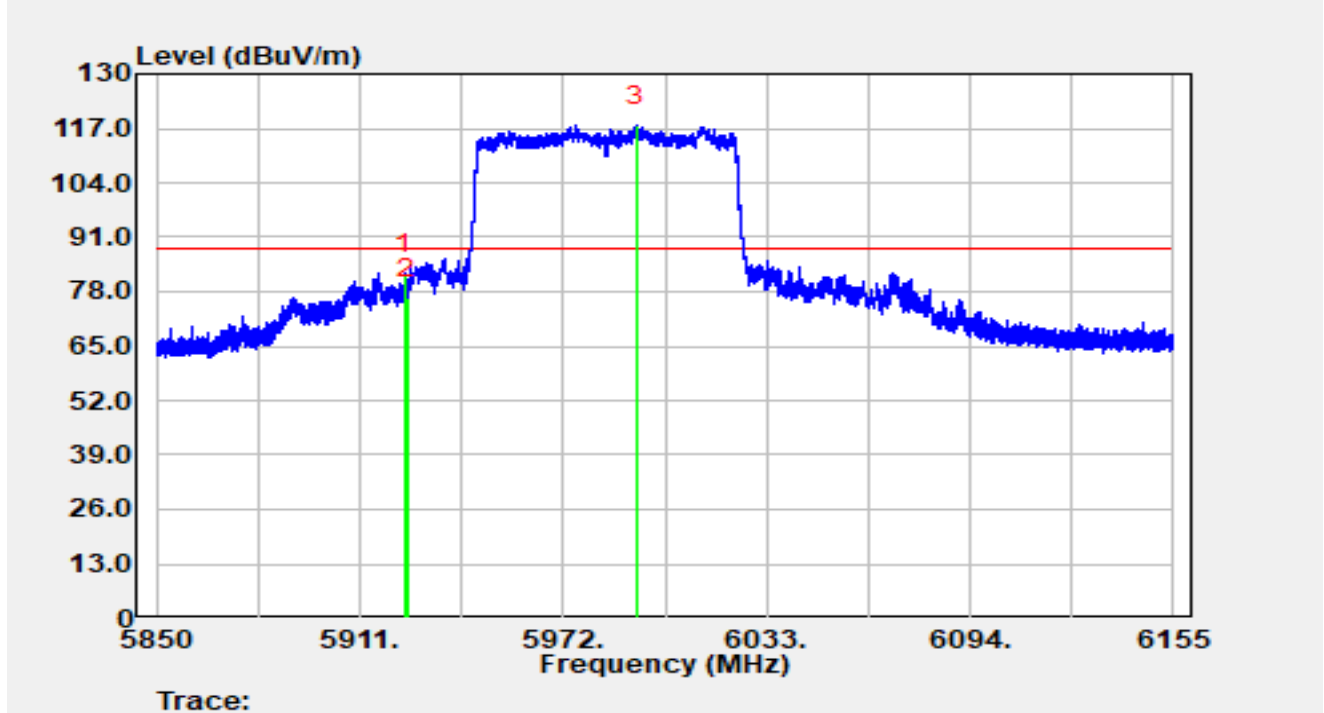


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.359	39.93	42.39	82.32	-5.88	88.20	Peak
2		5925.000	33.90	42.40	76.30	-11.90	88.20	Peak
3		5993.747	75.17	42.55	117.72	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

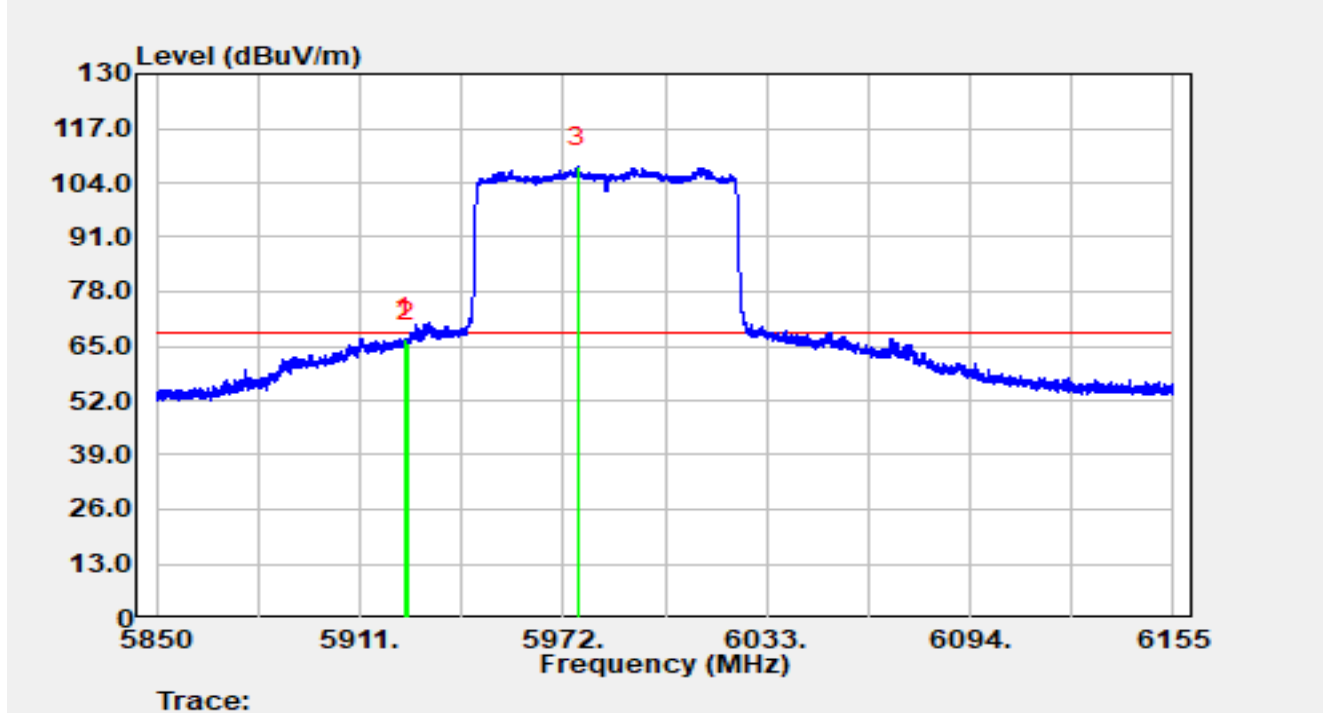


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.298	24.44	42.39	66.83	-1.37	68.20	Average
2		5925.000	23.43	42.40	65.82	-2.38	68.20	Average
3		5976.483	65.35	42.55	107.89	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-25
Temperature	22.1 °C	Humidity	63.5%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

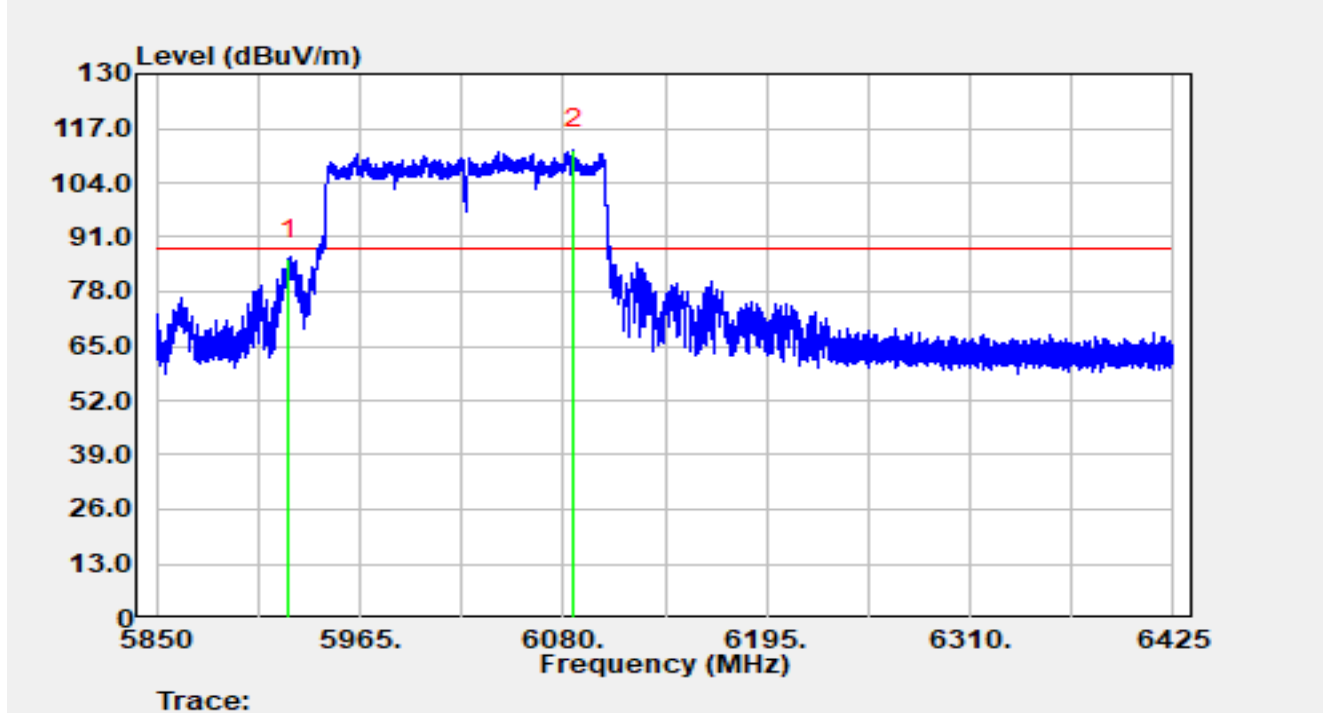

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	43.26	42.40	85.65	-2.55	88.20	Peak
2		6085.865	69.32	42.74	112.06	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).