


|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/20 - 16:00 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHZ_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

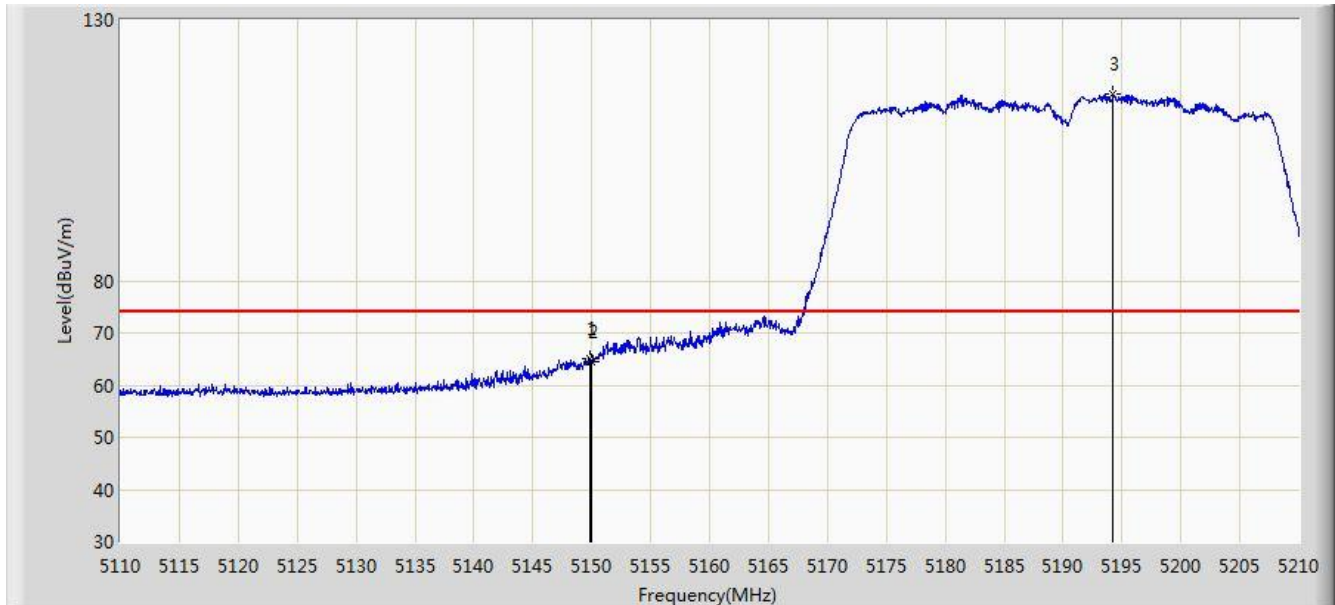


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.850        | 65.186                 | 61.016               | -8.814          | 74.000         | 4.170       | PK   |
| 2  |      |      | 5150.000        | 64.470                 | 60.301               | -9.530          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5194.200        | 115.820                | 111.801              | N/A             | N/A            | 4.018       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/20 - 15:58 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHZ_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

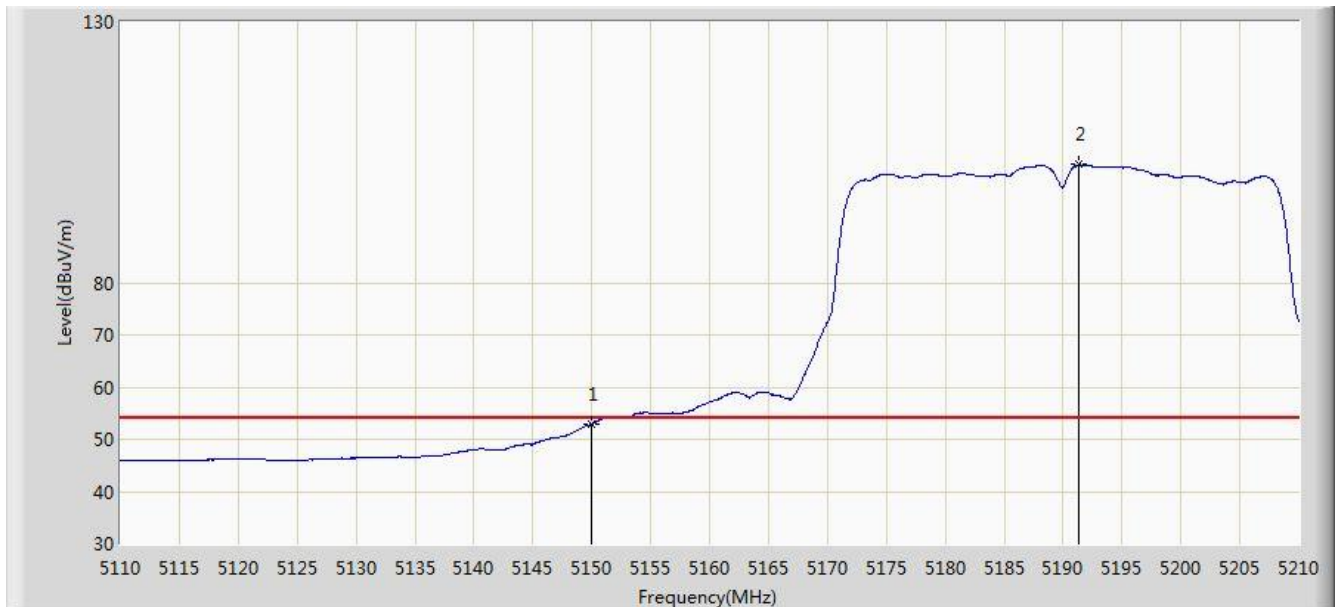


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.971                 | 48.802               | -1.029          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5191.300        | 102.624                | 98.595               | N/A             | N/A            | 4.028       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/20 - 16:27 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHZ_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

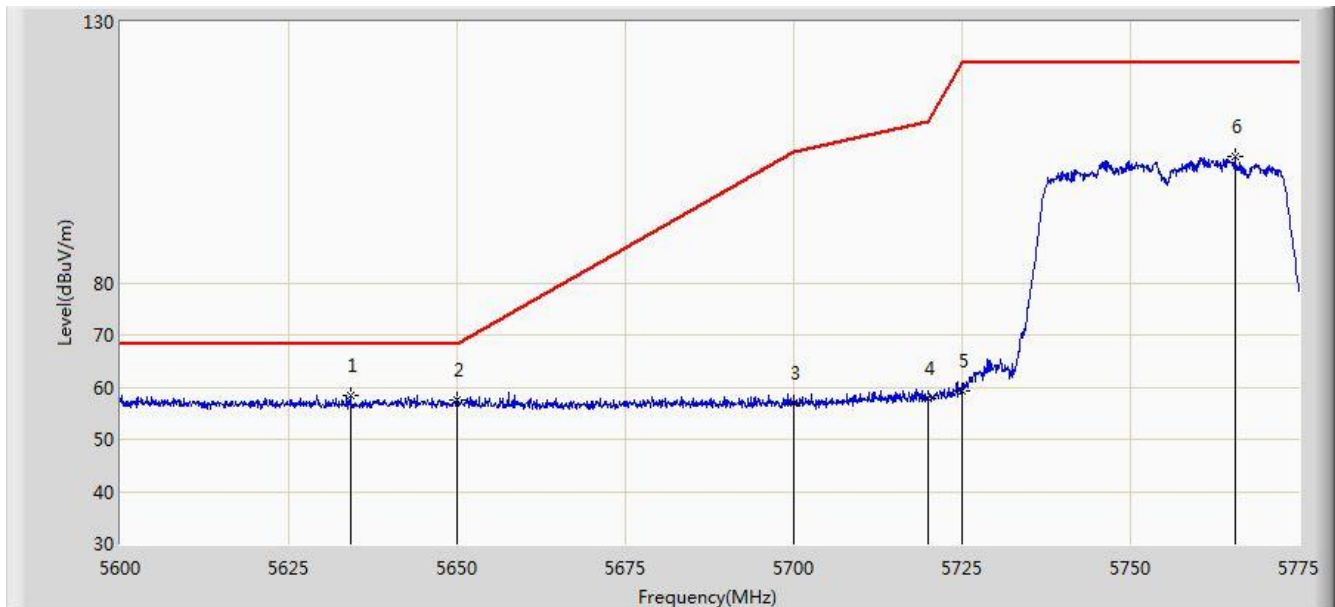


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5634.125        | 58.421                 | 53.800               | -9.779          | 68.200         | 4.621       | PK   |
| 2  |      |      | 5650.000        | 57.642                 | 52.971               | -10.558         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 56.819                 | 51.941               | -48.381         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 57.732                 | 52.735               | -53.068         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 59.309                 | 54.280               | -62.891         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5765.462        | 104.201                | 98.933               | N/A             | N/A            | 5.267       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/20 - 16:33 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHZ_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

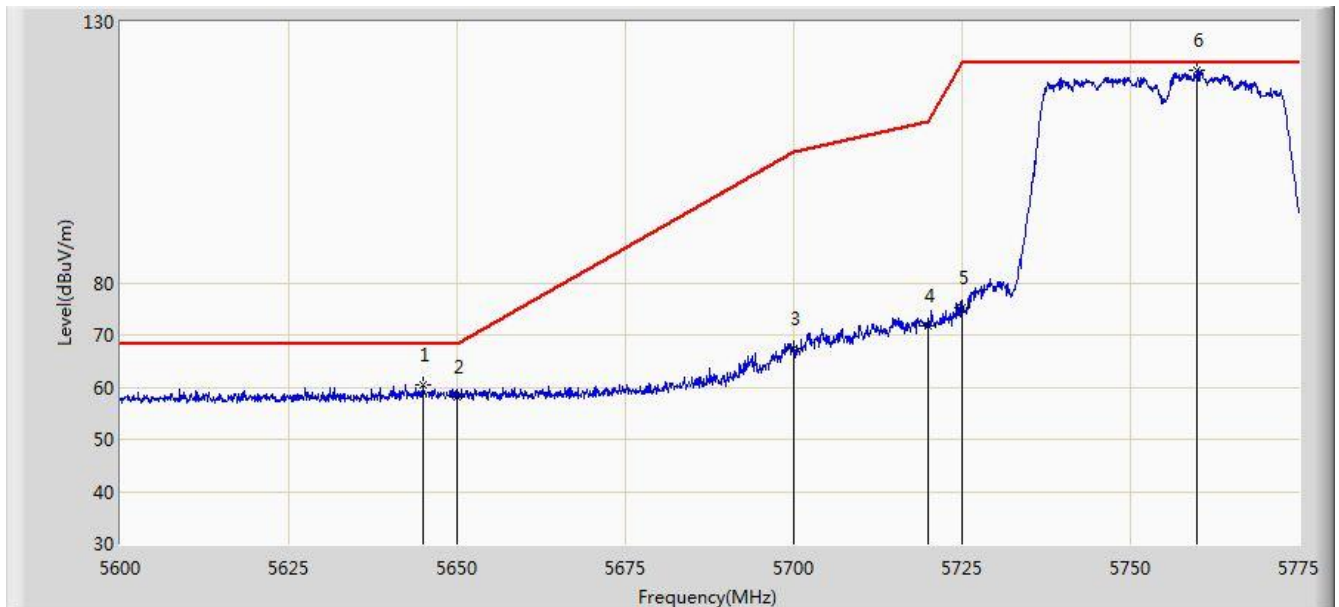


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5644.888        | 60.415                 | 55.761               | -7.785          | 68.200         | 4.654       | PK   |
| 2  |      |      | 5650.000        | 58.226                 | 53.555               | -9.974          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 67.447                 | 62.569               | -37.753         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 71.865                 | 66.868               | -38.935         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 75.235                 | 70.206               | -46.965         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5759.950        | 120.600                | 115.360              | N/A             | N/A            | 5.240       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/20 - 16:41 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHZ_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

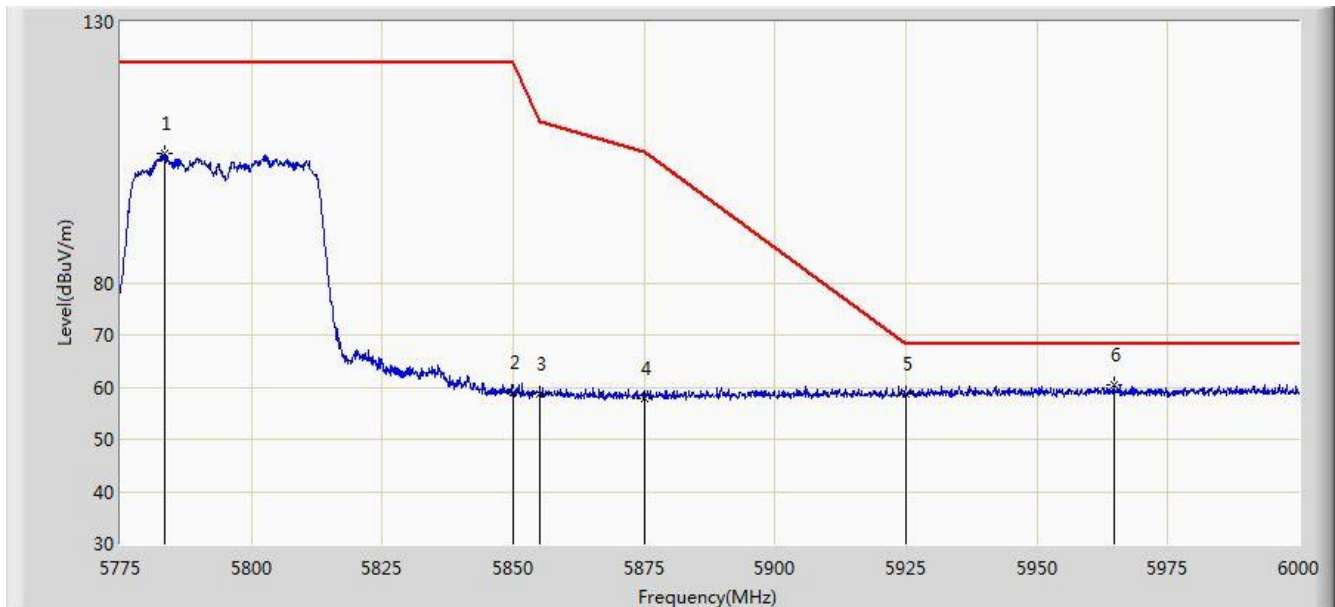


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5783.550        | 104.749                | 99.390               | N/A             | N/A            | 5.360       | PK   |
| 2  |      |      | 5850.000        | 58.873                 | 53.147               | -63.327         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 58.657                 | 52.911               | -52.143         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 57.836                 | 52.016               | -47.364         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 58.575                 | 52.609               | -9.625          | 68.200         | 5.967       | PK   |
| 6  |      | *    | 5964.675        | 60.407                 | 54.355               | -7.793          | 68.200         | 6.053       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/20 - 16:37 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHZ_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

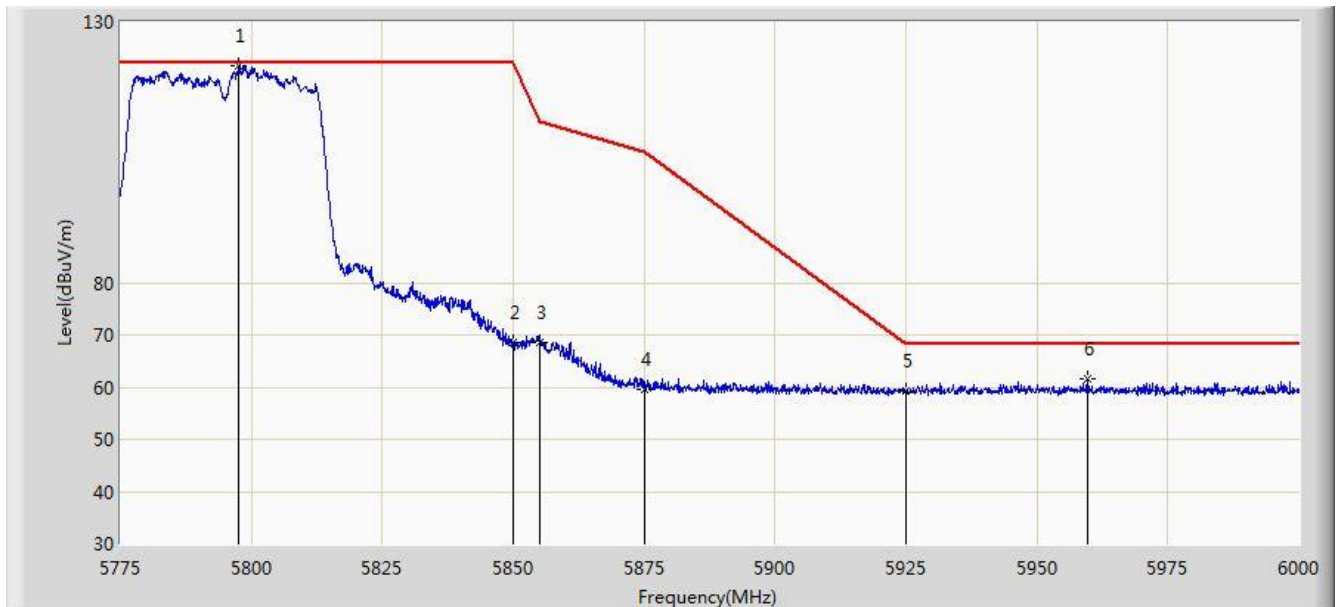


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5797.612        | 121.579                | 116.147              | N/A             | N/A            | 5.431       | PK   |
| 2  |      |      | 5850.000        | 68.453                 | 62.727               | -53.747         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 68.427                 | 62.681               | -42.373         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 59.707                 | 53.887               | -45.493         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 59.288                 | 53.322               | -8.912          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5959.612        | 61.476                 | 55.433               | -6.724          | 68.200         | 6.043       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/20 - 17:00 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHZ_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

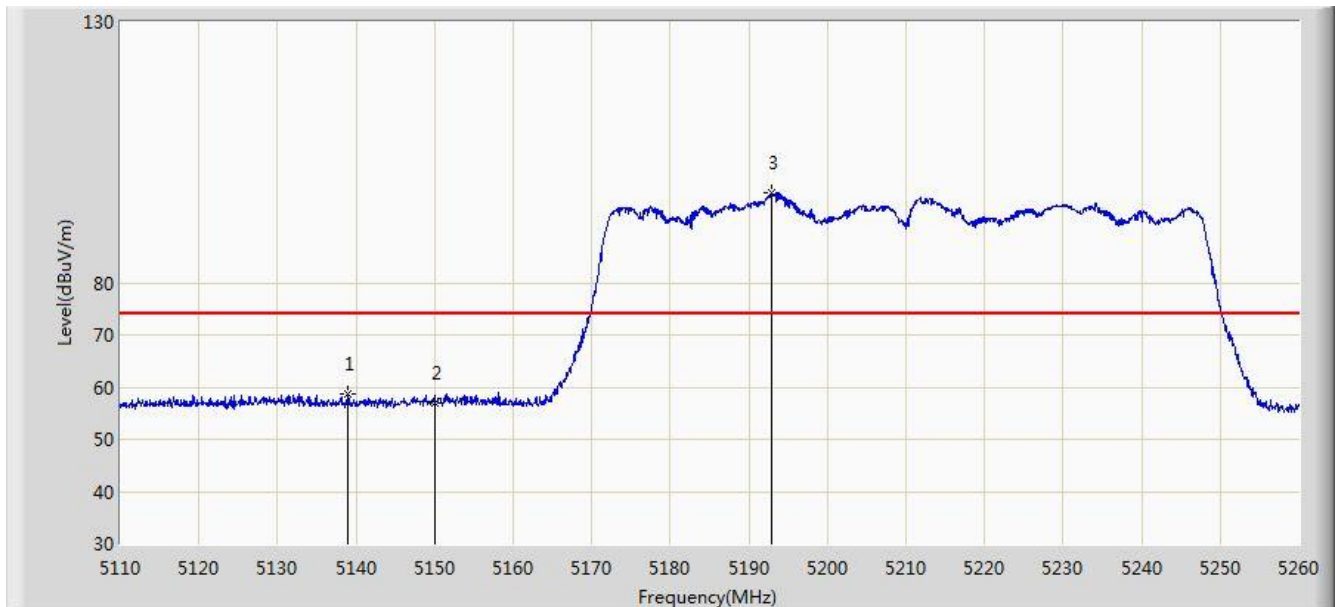


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5138.875        | 58.612                 | 54.437               | -15.388         | 74.000         | 4.175       | PK   |
| 2  |      |      | 5150.000        | 56.947                 | 52.778               | -17.053         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5192.875        | 97.223                 | 93.200               | N/A             | N/A            | 4.023       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/20 - 17:02 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHZ_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

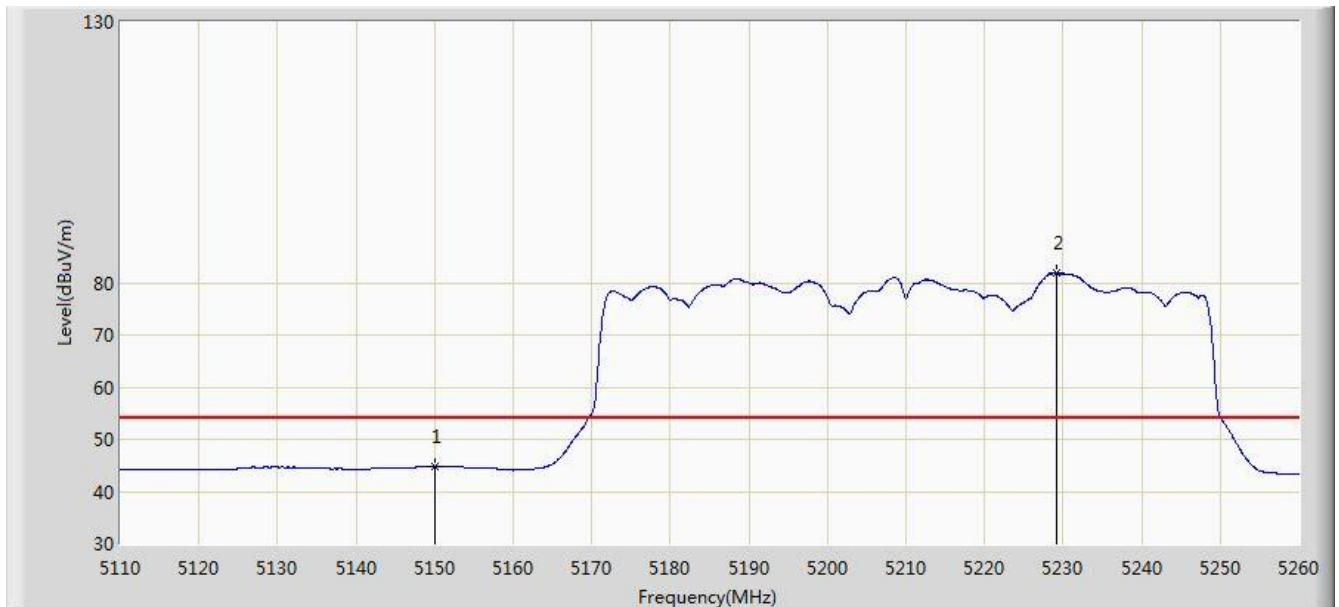


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 44.734                 | 40.565               | -9.266          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5229.100        | 81.856                 | 77.944               | N/A             | N/A            | 3.913       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/20 - 16:59 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHZ_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

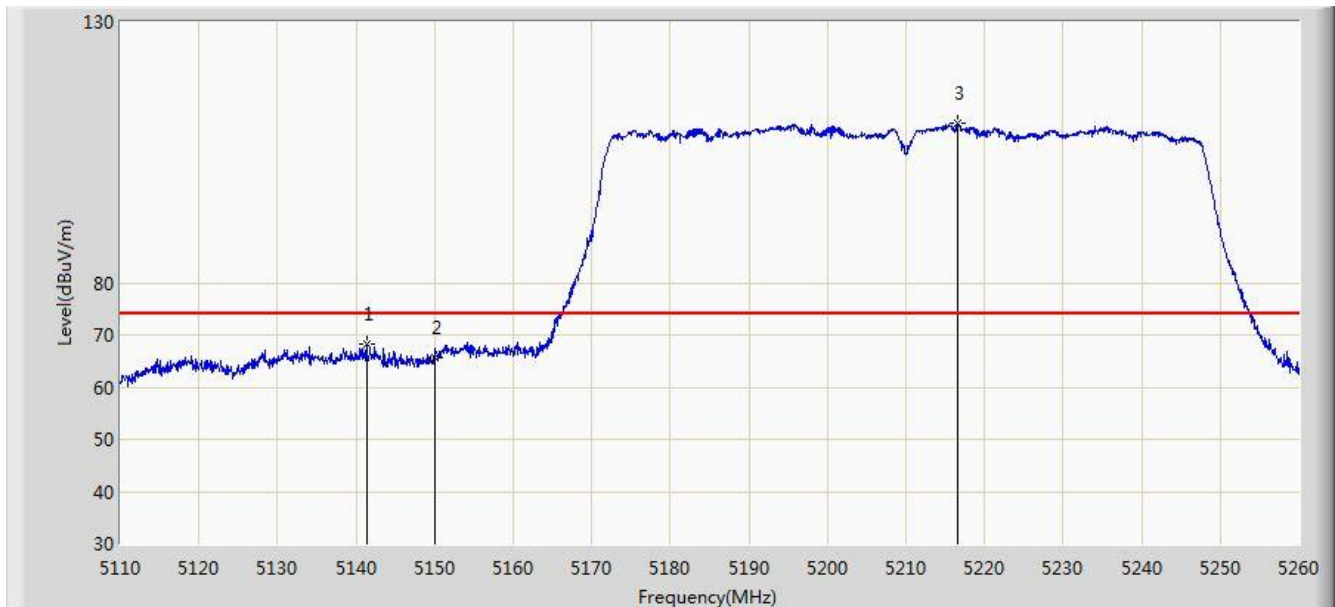


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5141.350        | 68.271                 | 64.095               | -5.729          | 74.000         | 4.175       | PK   |
| 2  |      |      | 5150.000        | 65.530                 | 61.361               | -8.470          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5216.500        | 110.485                | 106.536              | N/A             | N/A            | 3.950       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/20 - 16:56 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHZ_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

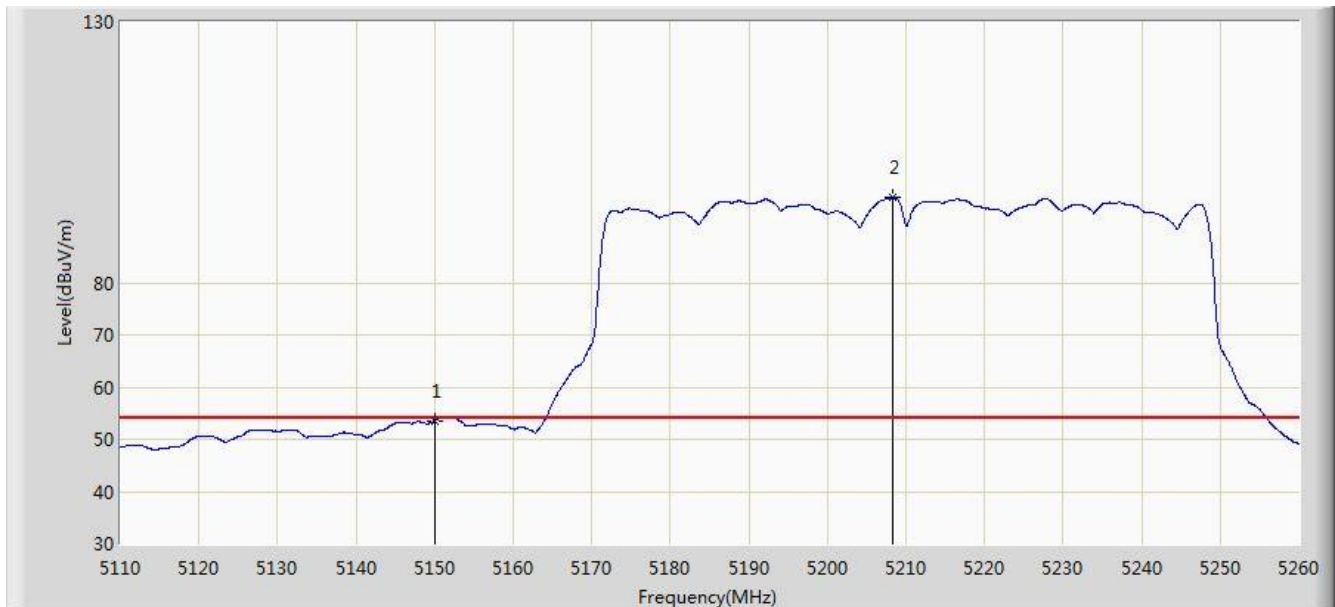


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.521                 | 49.352               | -0.479          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5208.325        | 96.356                 | 92.382               | N/A             | N/A            | 3.973       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/20 - 17:38 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHZ_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

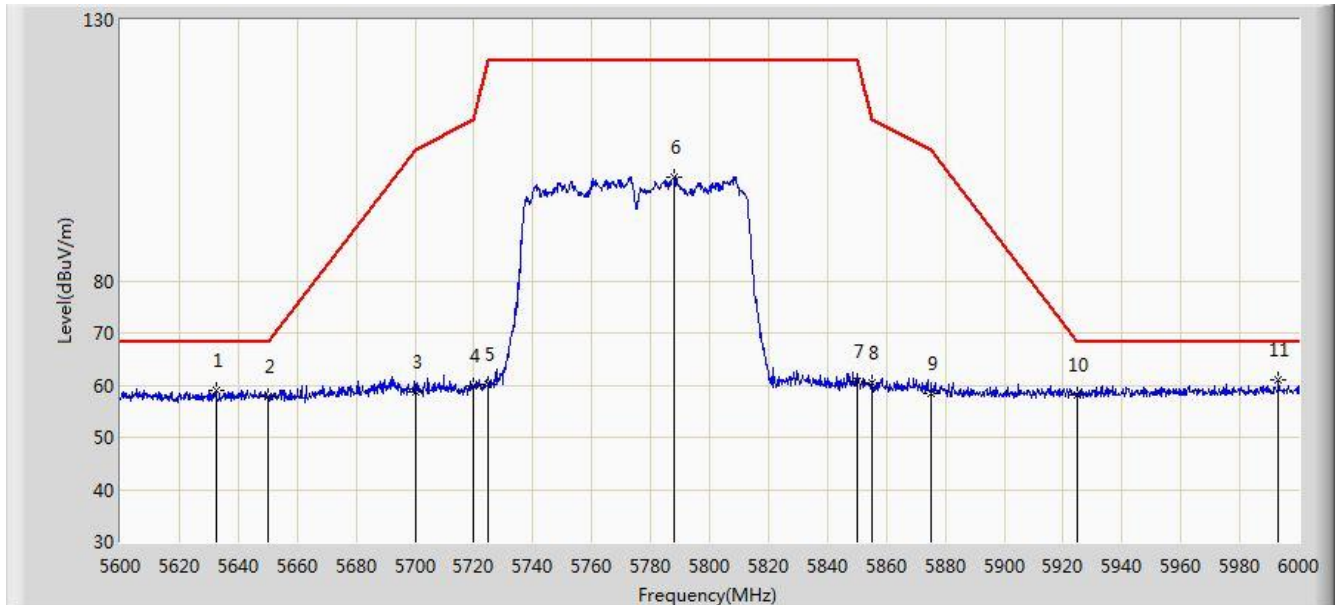


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5632.400        | 58.966                 | 54.350               | -9.234          | 68.200         | 4.616       | PK   |
| 2  |      |      | 5650.000        | 57.946                 | 53.275               | -10.254         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 58.779                 | 53.901               | -46.421         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 59.896                 | 54.899               | -50.904         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 60.208                 | 55.179               | -61.992         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5788.000        | 99.916                 | 94.534               | N/A             | N/A            | 5.381       | PK   |
| 7  |      |      | 5850.000        | 60.776                 | 55.050               | -61.424         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 60.328                 | 54.582               | -50.472         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 58.448                 | 52.628               | -46.752         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 58.042                 | 52.076               | -10.158         | 68.200         | 5.967       | PK   |
| 11 |      | *    | 5993.200        | 61.048                 | 54.949               | -7.152          | 68.200         | 6.099       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/09/12 - 11:33 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHZ_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

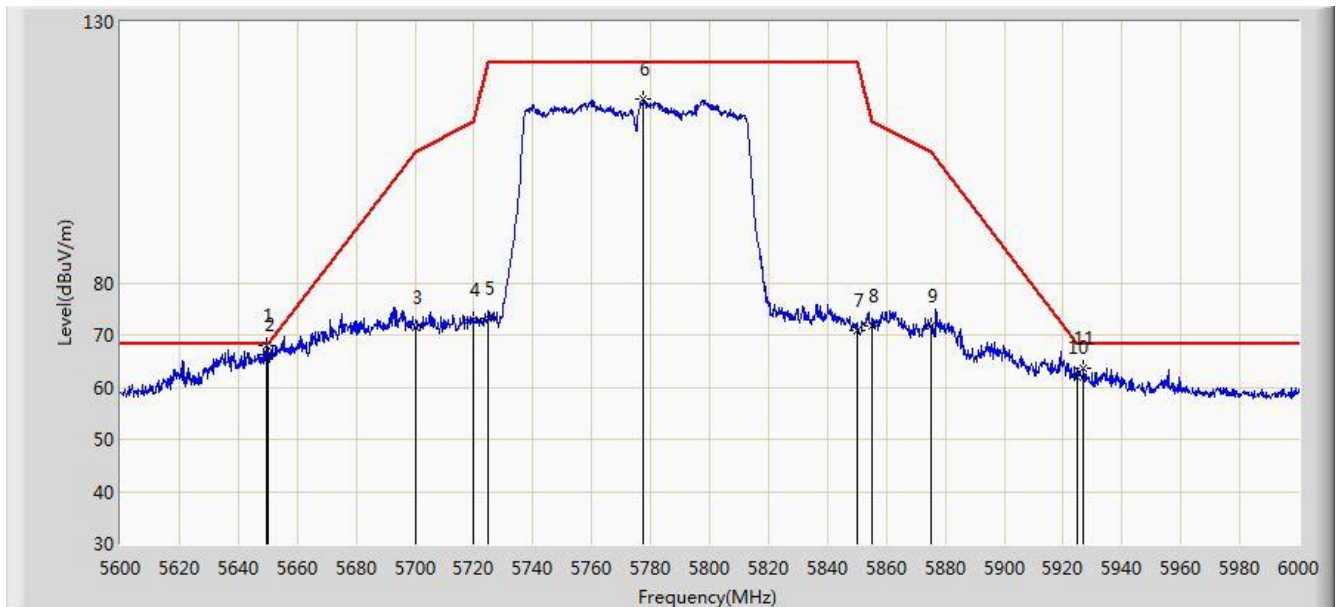


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5649.400        | 67.949                 | 63.280               | -0.251          | 68.200         | 4.669       | PK   |
| 2  |      |      | 5650.000        | 66.105                 | 61.434               | -2.095          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 71.543                 | 66.665               | -33.657         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 72.957                 | 67.960               | -37.843         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 73.214                 | 68.185               | -48.986         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5777.600        | 115.132                | 109.802              | N/A             | N/A            | 5.330       | PK   |
| 7  |      |      | 5850.000        | 70.975                 | 65.249               | -51.225         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 71.775                 | 66.029               | -39.025         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 71.721                 | 65.901               | -33.479         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 61.889                 | 55.922               | -6.311          | 68.200         | 5.967       | PK   |
| 11 |      |      | 5927.000        | 63.605                 | 57.634               | -4.595          | 68.200         | 5.971       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/09 - 19:27 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

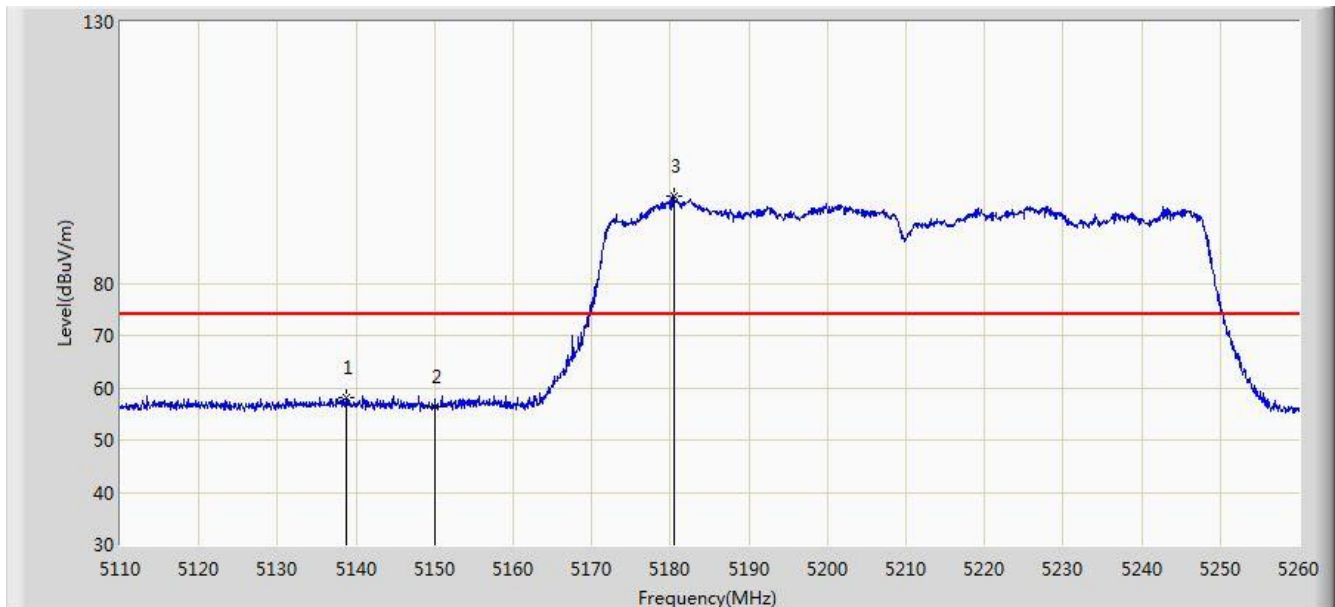


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5138.800        | 58.169                 | 53.994               | -15.831         | 74.000         | 4.175       | PK   |
| 2  |      |      | 5150.000        | 56.261                 | 52.092               | -17.739         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5180.425        | 96.654                 | 92.587               | N/A             | N/A            | 4.067       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/09 - 19:29 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

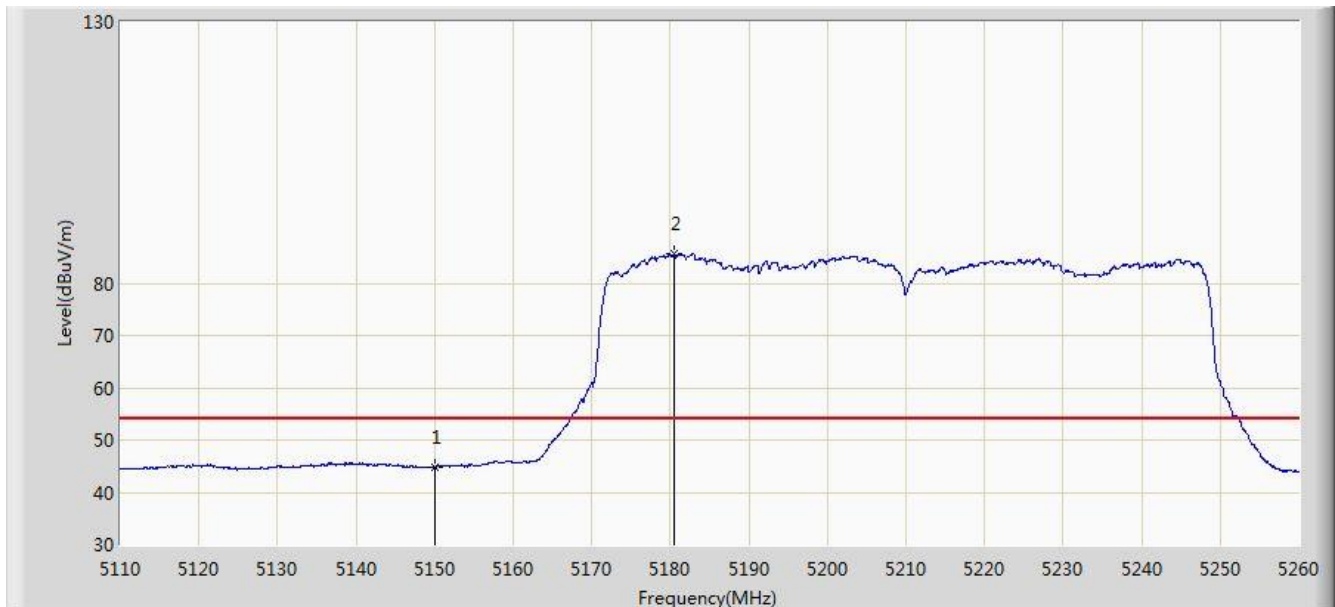


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 44.902                 | 40.733               | -9.098          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5180.425        | 85.537                 | 81.470               | N/A             | N/A            | 4.067       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/09 - 19:27 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

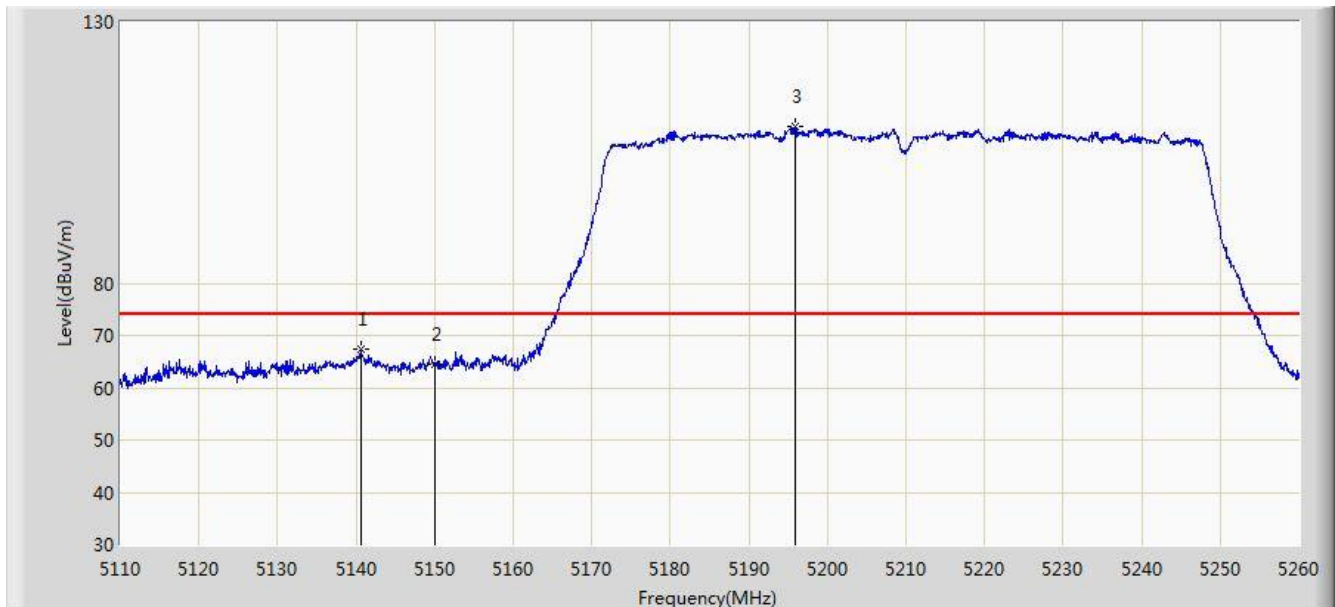


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5140.600        | 67.261                 | 63.086               | -6.739          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 64.371                 | 60.202               | -9.629          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5195.875        | 110.040                | 106.027              | N/A             | N/A            | 4.013       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/09 - 19:25 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

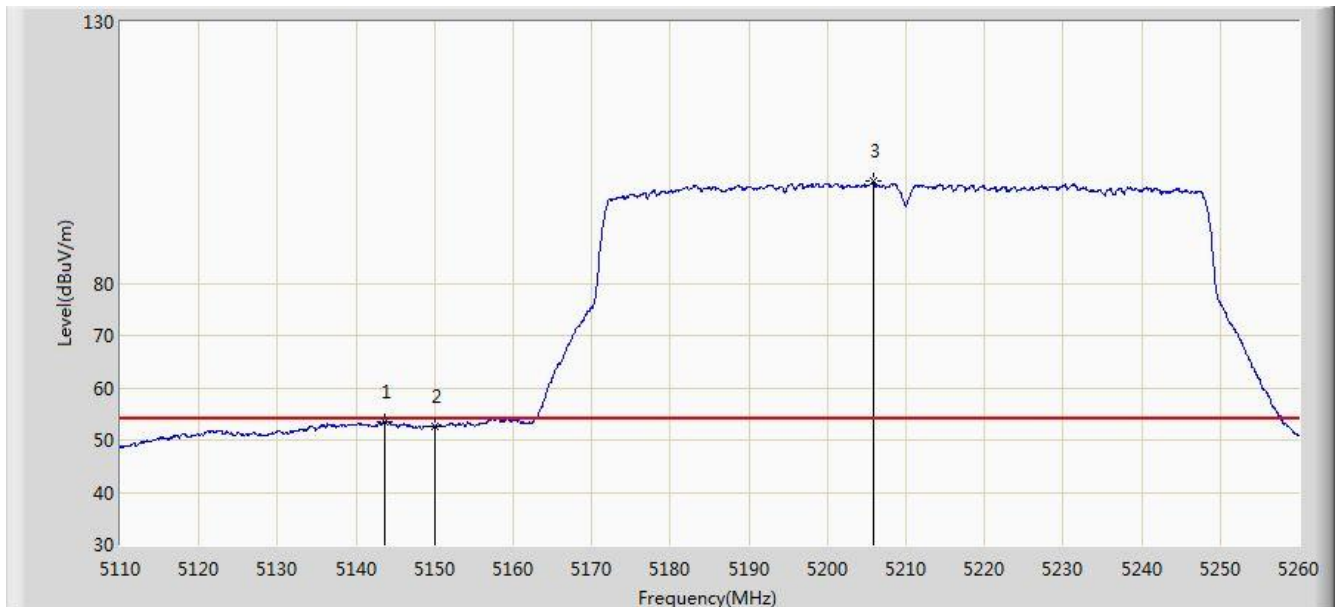


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5143.600        | 53.569                 | 49.393               | -0.431          | 54.000         | 4.175       | AV   |
| 2  |      |      | 5150.000        | 52.574                 | 48.405               | -1.426          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5205.850        | 99.436                 | 95.455               | N/A             | N/A            | 3.980       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/10 - 14:44 |
| Limit: FCC_Part15.407_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

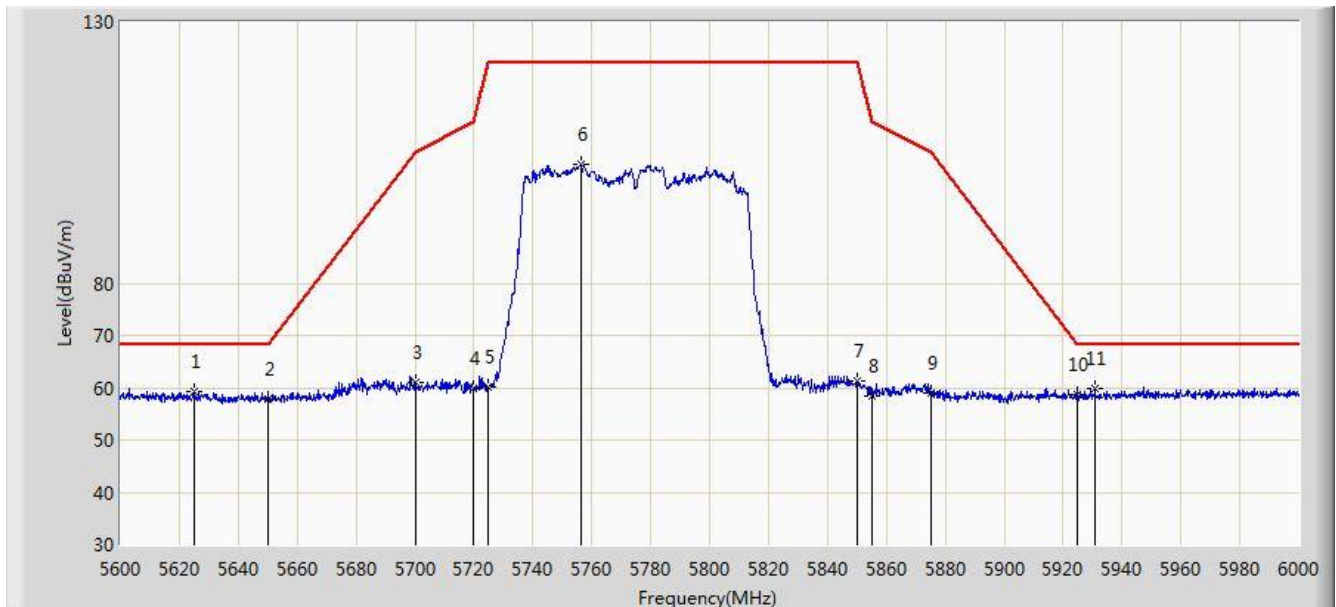


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5625.000        | 59.288                 | 54.693               | -8.912          | 68.200         | 4.595       | PK   |
| 2  |      |      | 5650.000        | 57.806                 | 53.135               | -10.394         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 60.892                 | 56.014               | -44.308         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 59.726                 | 54.729               | -51.074         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 60.242                 | 55.213               | -61.958         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5756.200        | 102.887                | 97.669               | N/A             | N/A            | 5.219       | PK   |
| 7  |      |      | 5850.000        | 61.449                 | 55.723               | -60.751         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 58.550                 | 52.804               | -52.250         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 59.033                 | 53.213               | -46.167         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 58.715                 | 52.749               | -9.485          | 68.200         | 5.967       | PK   |
| 11 |      | *    | 5930.800        | 59.810                 | 53.829               | -8.390          | 68.200         | 5.981       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/10 - 14:46 |
| Limit: FCC_Part15.407_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

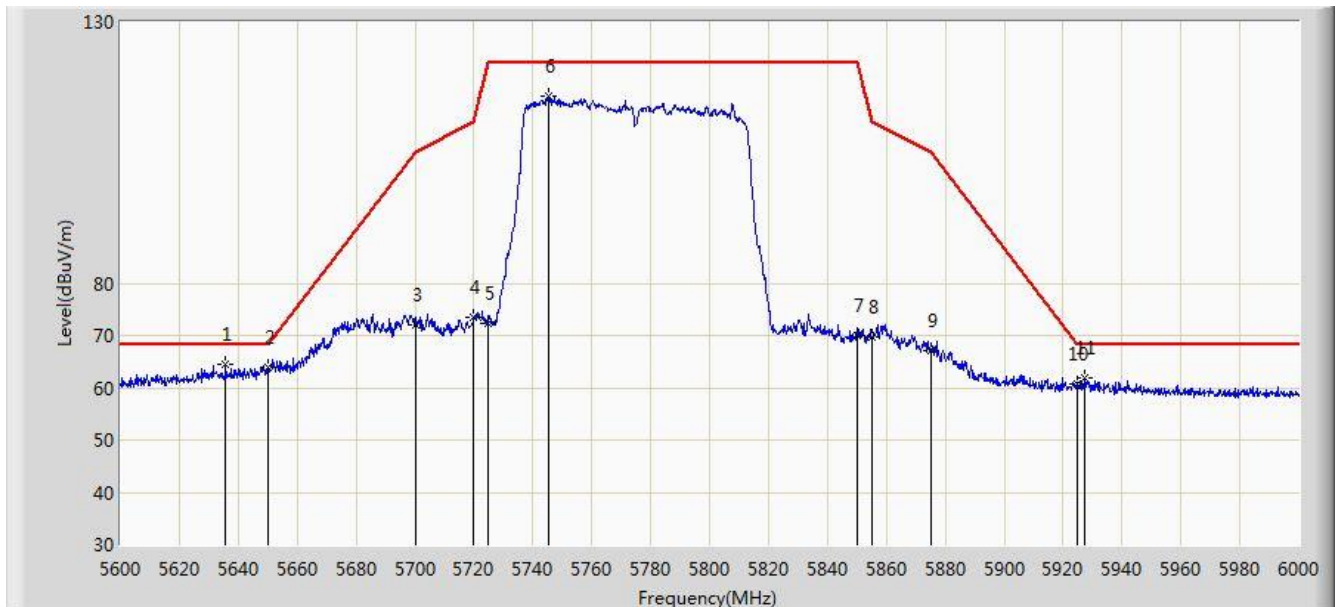


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5635.800        | 64.551                 | 59.925               | -3.649          | 68.200         | 4.625       | PK   |
| 2  |      |      | 5650.000        | 63.896                 | 59.225               | -4.304          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 72.146                 | 67.268               | -33.054         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 73.503                 | 68.506               | -37.297         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 72.208                 | 67.179               | -49.992         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5745.200        | 115.695                | 110.539              | N/A             | N/A            | 5.156       | PK   |
| 7  |      |      | 5850.000        | 70.046                 | 64.320               | -52.154         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 69.722                 | 63.976               | -41.078         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 67.154                 | 61.334               | -38.046         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 60.644                 | 54.678               | -7.556          | 68.200         | 5.967       | PK   |
| 11 |      |      | 5927.400        | 61.930                 | 55.958               | -6.270          | 68.200         | 5.973       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/09 - 19:52 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

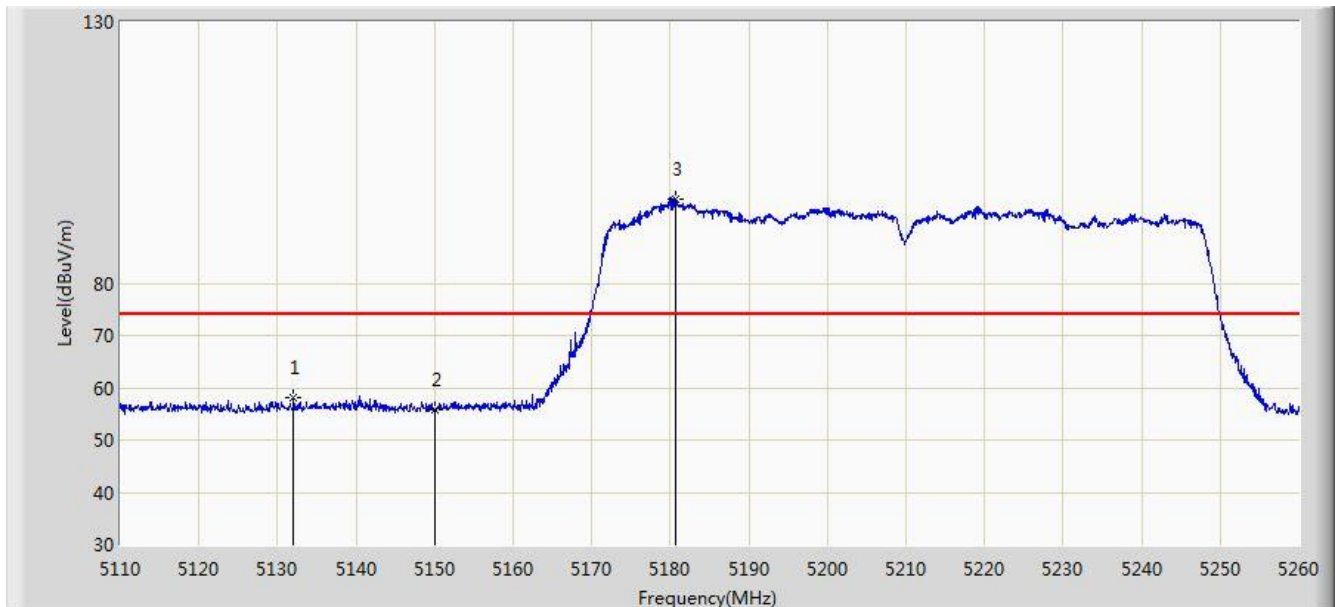


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5132.050        | 58.169                 | 53.994               | -15.831         | 74.000         | 4.175       | PK   |
| 2  |      |      | 5150.000        | 55.816                 | 51.647               | -18.184         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5180.650        | 96.008                 | 91.941               | N/A             | N/A            | 4.067       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/09 - 19:53 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

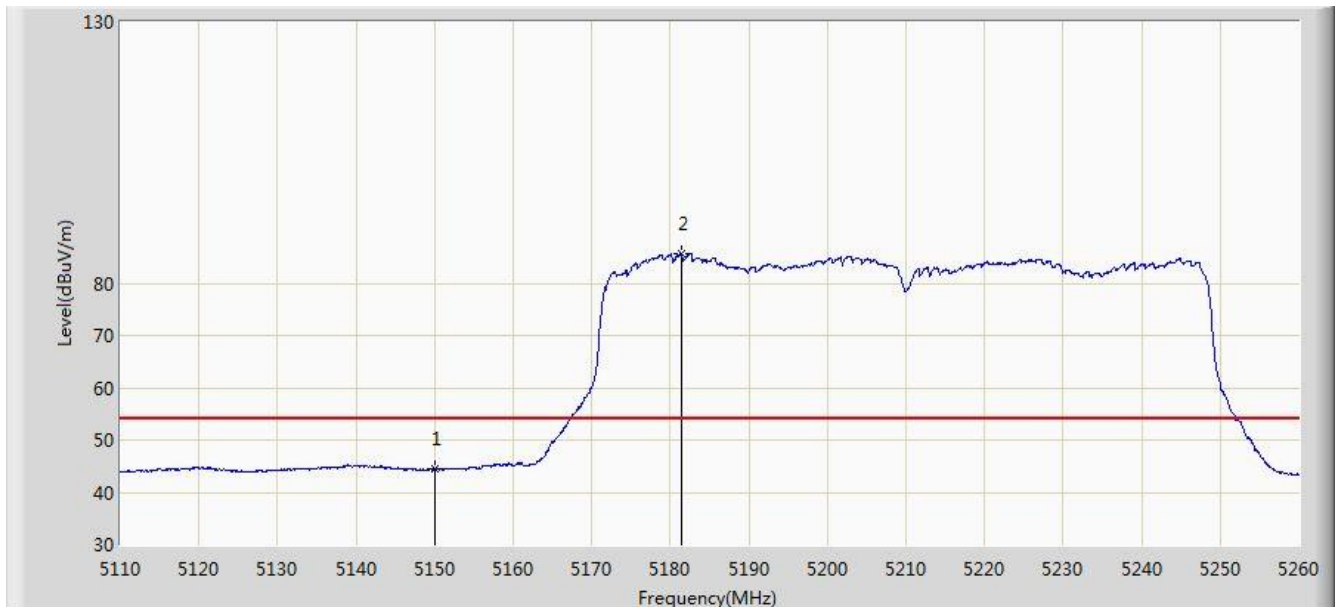


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 44.450                 | 40.281               | -9.550          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5181.475        | 85.575                 | 81.511               | N/A             | N/A            | 4.064       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/09 - 19:50 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

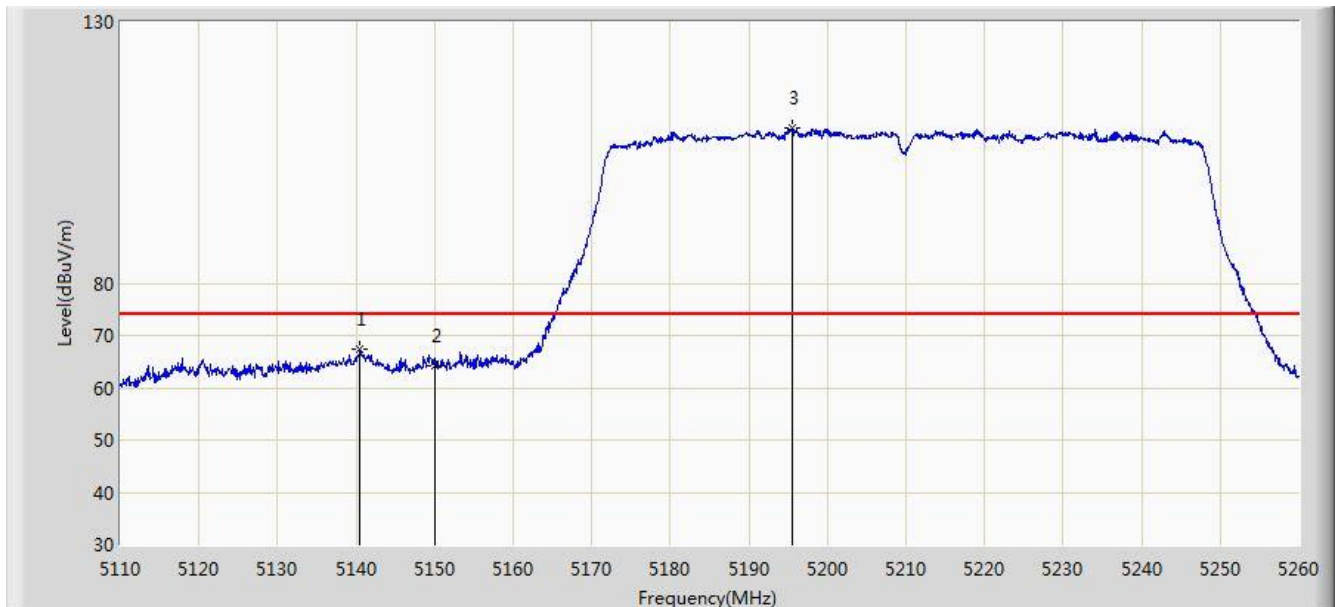


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5140.525        | 67.516                 | 63.341               | -6.484          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 64.315                 | 60.146               | -9.685          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5195.575        | 109.634                | 105.620              | N/A             | N/A            | 4.014       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/09 - 19:48 |
| Limit: FCC_Part15.209_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

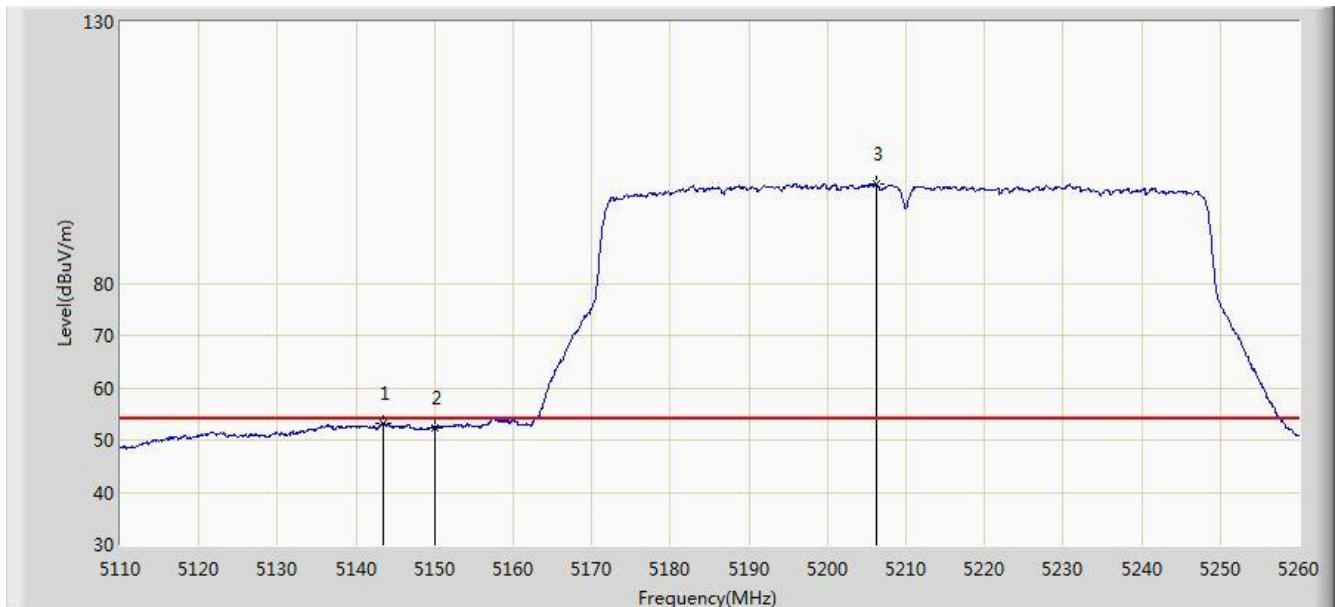


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5143.375        | 53.184                 | 49.008               | -0.816          | 54.000         | 4.176       | AV   |
| 2  |      |      | 5150.000        | 52.427                 | 48.258               | -1.573          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5206.225        | 99.025                 | 95.045               | N/A             | N/A            | 3.980       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/10 - 15:32 |
| Limit: FCC_Part15.407_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

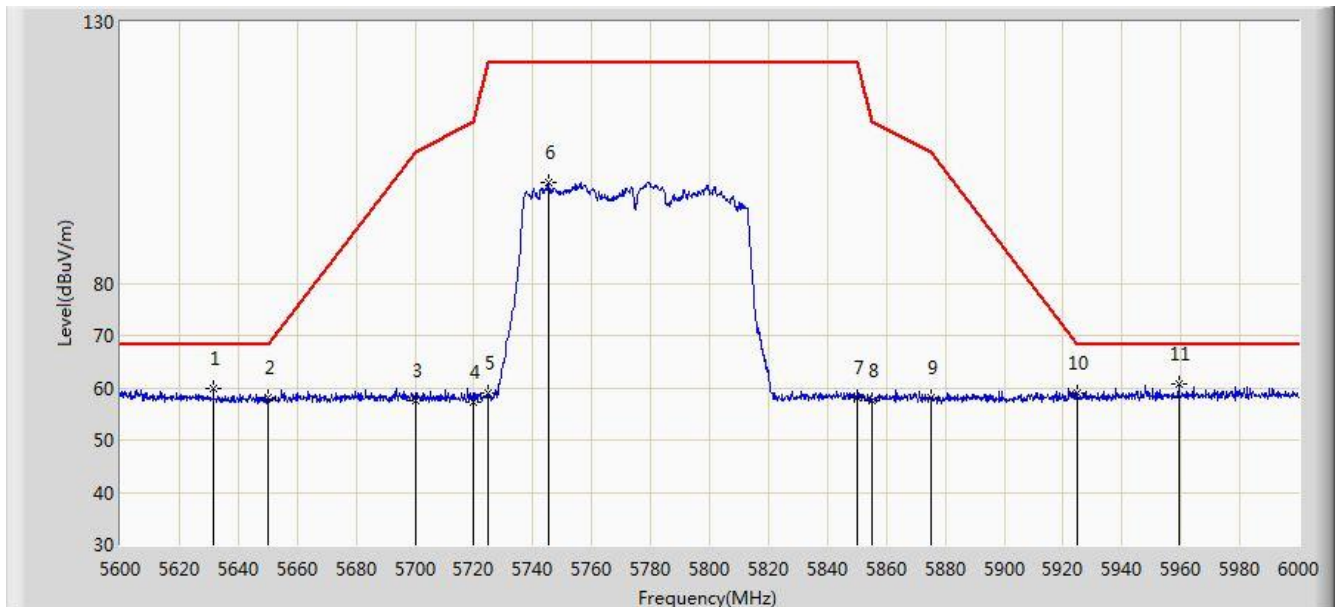


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5631.600        | 59.911                 | 55.297               | -8.289          | 68.200         | 4.614       | PK   |
| 2  |      |      | 5650.000        | 58.080                 | 53.409               | -10.120         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 57.680                 | 52.802               | -47.520         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 57.192                 | 52.195               | -53.608         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 58.954                 | 53.925               | -63.246         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5745.200        | 99.252                 | 94.096               | N/A             | N/A            | 5.156       | PK   |
| 7  |      |      | 5850.000        | 58.045                 | 52.319               | -64.155         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 57.478                 | 51.732               | -53.322         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 58.189                 | 52.369               | -47.011         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 59.009                 | 53.043               | -9.191          | 68.200         | 5.967       | PK   |
| 11 |      | *    | 5959.400        | 60.717                 | 54.674               | -7.483          | 68.200         | 6.042       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                      |                          |
|------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                            | Time: 2017/09/10 - 15:34 |
| Limit: FCC_Part15.407_RE(3m)                                                                         | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                    | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

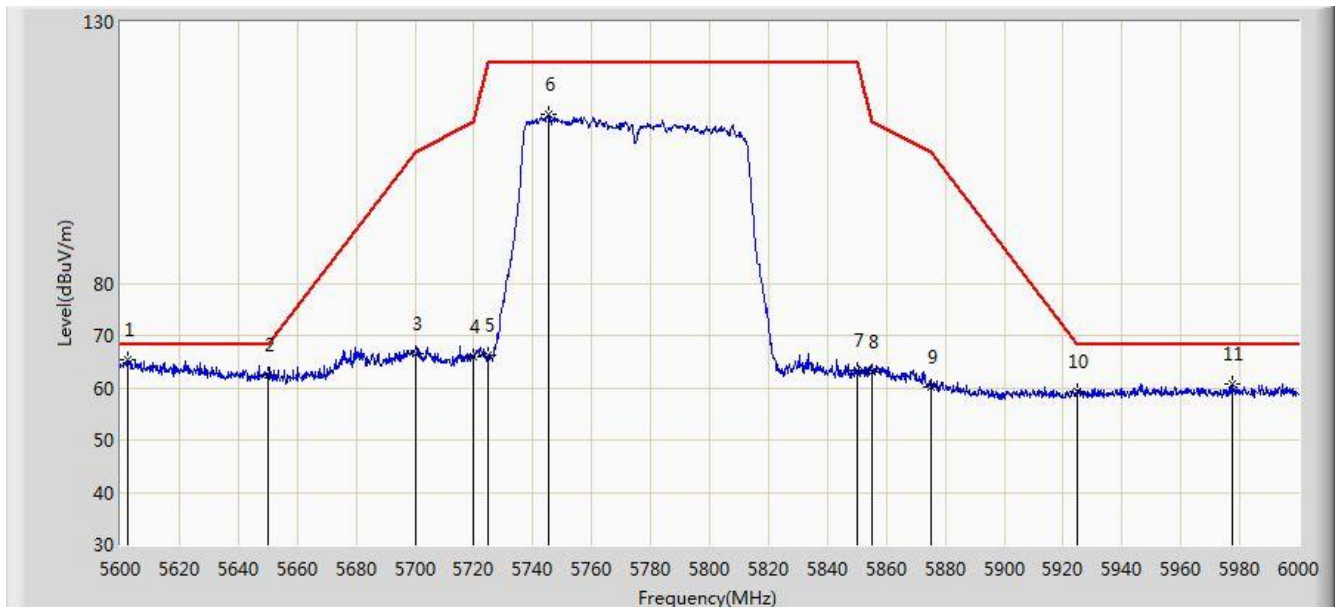


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5602.600        | 65.437                 | 60.903               | -2.763          | 68.200         | 4.534       | PK   |
| 2  |      |      | 5650.000        | 62.455                 | 57.784               | -5.745          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 66.379                 | 61.501               | -38.821         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 65.858                 | 60.861               | -44.942         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 66.153                 | 61.124               | -56.047         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5745.200        | 112.174                | 107.018              | N/A             | N/A            | 5.156       | PK   |
| 7  |      |      | 5850.000        | 63.319                 | 57.593               | -58.881         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 62.928                 | 57.182               | -47.872         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 60.069                 | 54.249               | -45.131         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 59.334                 | 53.368               | -8.866          | 68.200         | 5.967       | PK   |
| 11 |      |      | 5977.400        | 60.760                 | 54.687               | -7.440          | 68.200         | 6.073       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 20:26 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

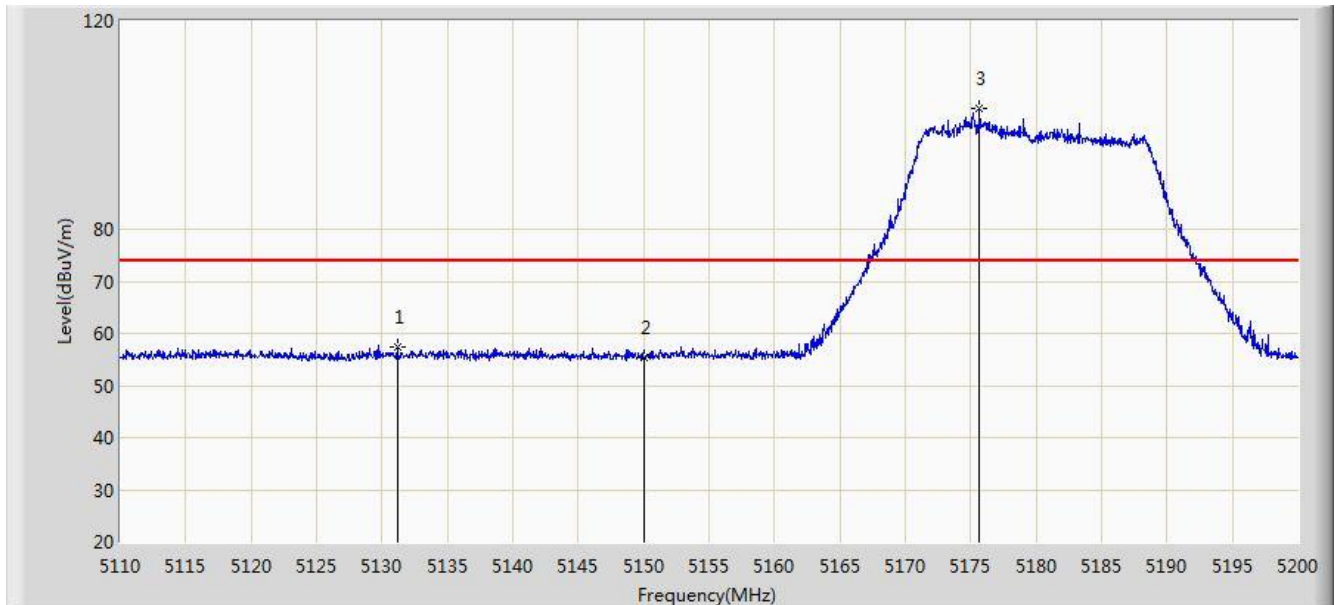


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5131.195        | 57.435                 | 53.260               | -16.565         | 74.000         | 4.175       | PK   |
| 2  |      |      | 5150.000        | 55.486                 | 51.317               | -18.514         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5175.655        | 103.184                | 99.100               | N/A             | N/A            | 4.085       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 20:29 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

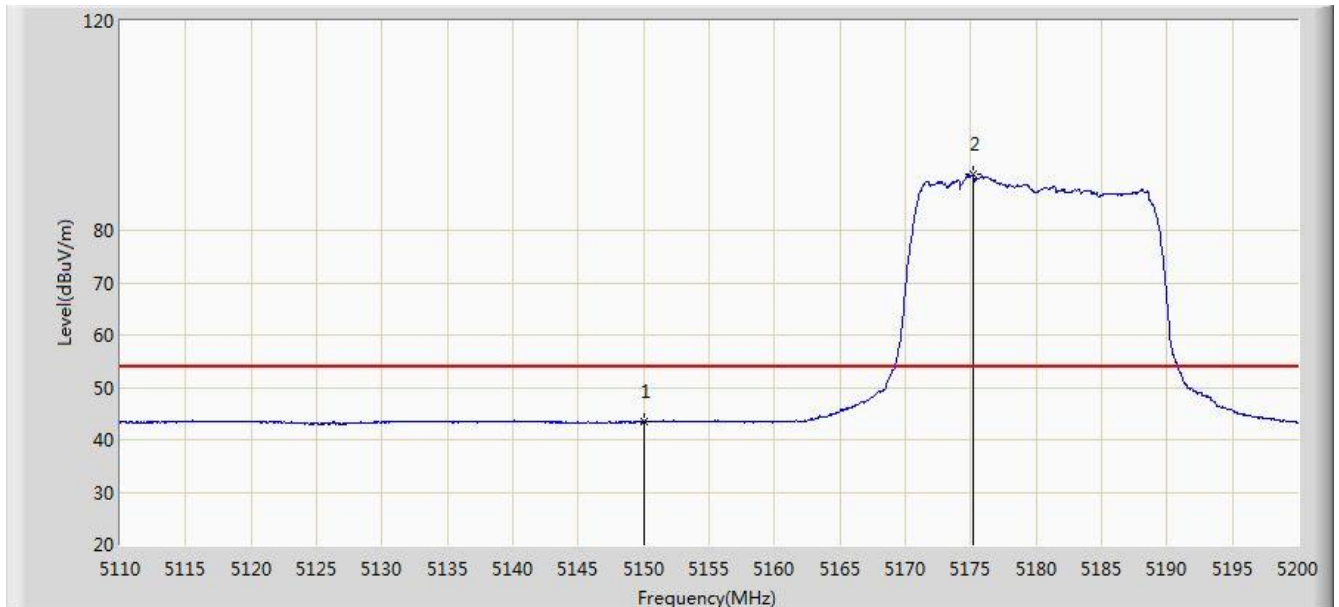


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 43.401                 | 39.232               | -10.599         | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5175.205        | 90.662                 | 86.576               | N/A             | N/A            | 4.086       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 20:45 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

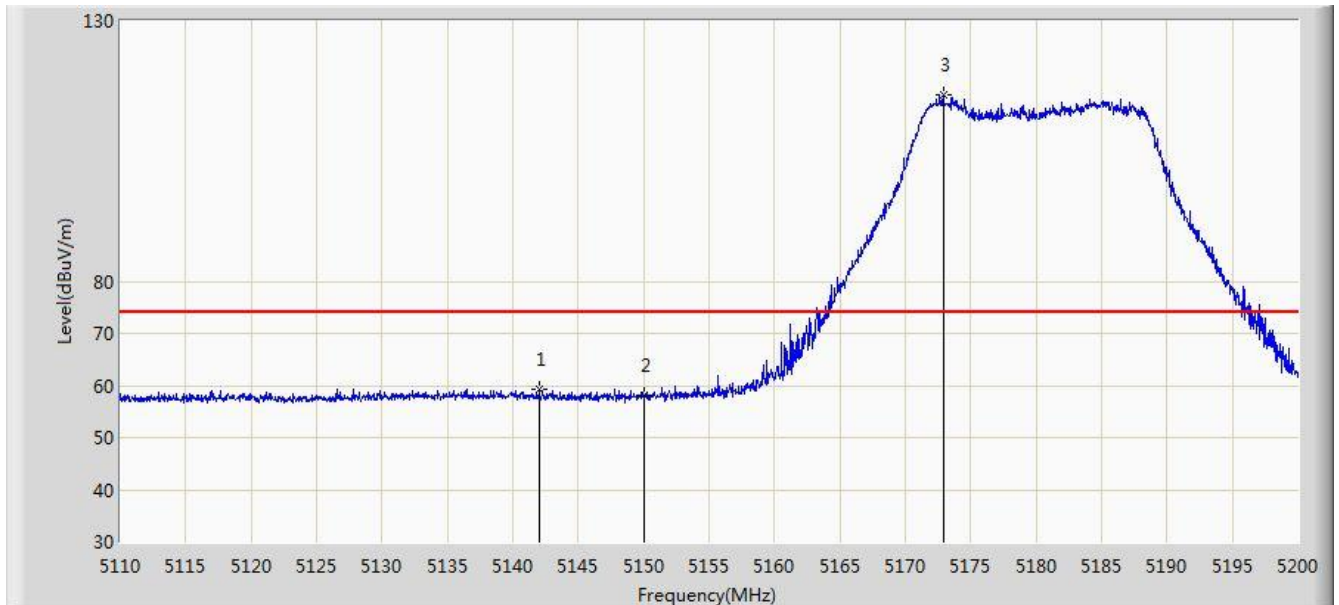


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5142.040        | 59.200                 | 55.024               | -14.800         | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 58.119                 | 53.950               | -15.881         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5172.910        | 115.917                | 111.823              | N/A             | N/A            | 4.094       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 20:49 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

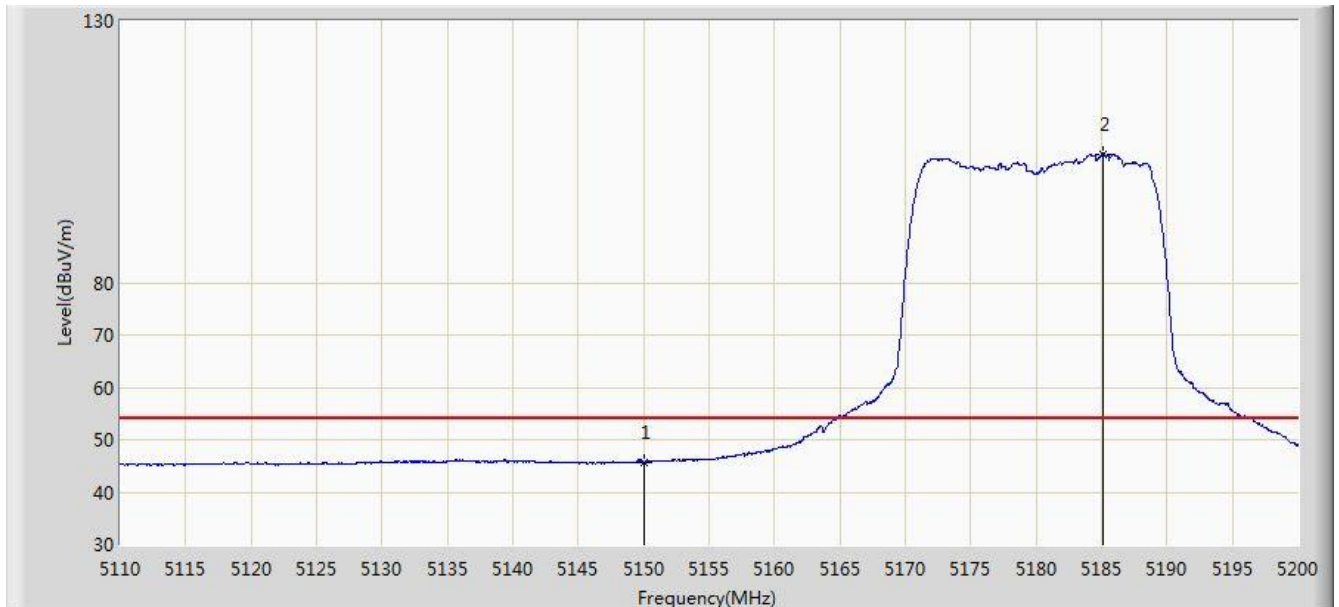


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 45.723                 | 41.554               | -8.277          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5185.105        | 104.527                | 100.476              | N/A             | N/A            | 4.050       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 21:40 |
| Limit: FCC_Part15.407_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

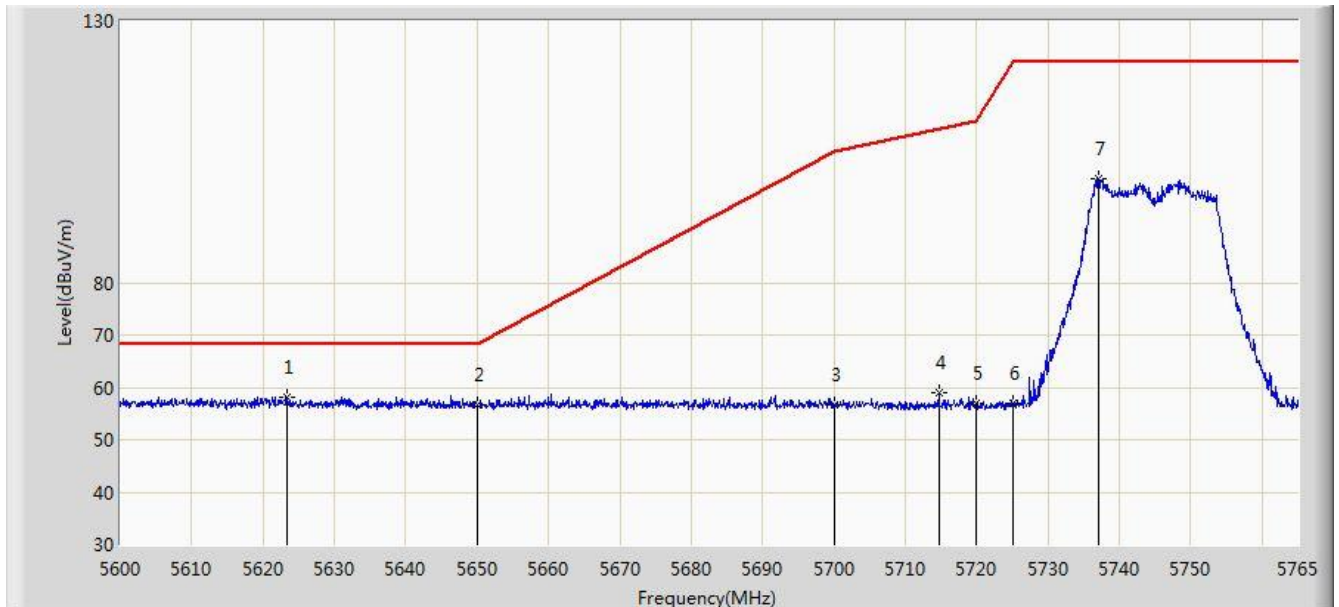


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5623.430        | 58.150                 | 53.560               | -10.050         | 68.200         | 4.590       | PK   |
| 2  |      |      | 5650.000        | 56.564                 | 51.893               | -11.636         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 56.556                 | 51.678               | -48.644         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5714.675        | 58.882                 | 53.919               | -50.429         | 109.311        | 4.963       | PK   |
| 5  |      |      | 5720.000        | 56.975                 | 51.978               | -53.825         | 110.800        | 4.997       | PK   |
| 6  |      |      | 5725.000        | 56.933                 | 51.904               | -65.267         | 122.200        | 5.029       | PK   |
| 7  |      |      | 5737.115        | 99.752                 | 94.646               | N/A             | N/A            | 5.106       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 21:43 |
| Limit: FCC_Part15.407_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

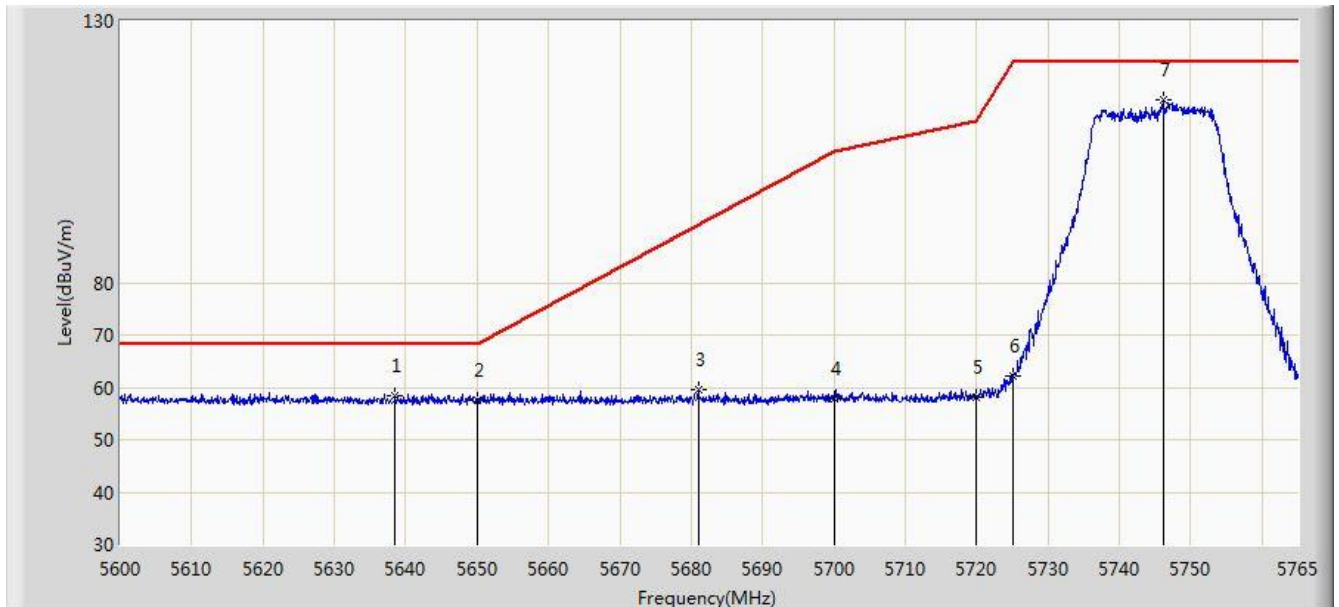


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5638.527        | 58.545                 | 53.911               | -9.655          | 68.200         | 4.634       | PK   |
| 2  |      |      | 5650.000        | 57.519                 | 52.848               | -10.681         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5681.015        | 59.561                 | 54.770               | -31.628         | 91.189         | 4.792       | PK   |
| 4  |      |      | 5700.000        | 57.966                 | 53.088               | -47.234         | 105.200        | 4.878       | PK   |
| 5  |      |      | 5720.000        | 58.211                 | 53.214               | -52.589         | 110.800        | 4.997       | PK   |
| 6  |      |      | 5725.000        | 62.148                 | 57.119               | -60.052         | 122.200        | 5.029       | PK   |
| 7  |      | *    | 5746.107        | 114.811                | 109.650              | N/A             | N/A            | 5.161       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 21:45 |
| Limit: FCC_Part15.407_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

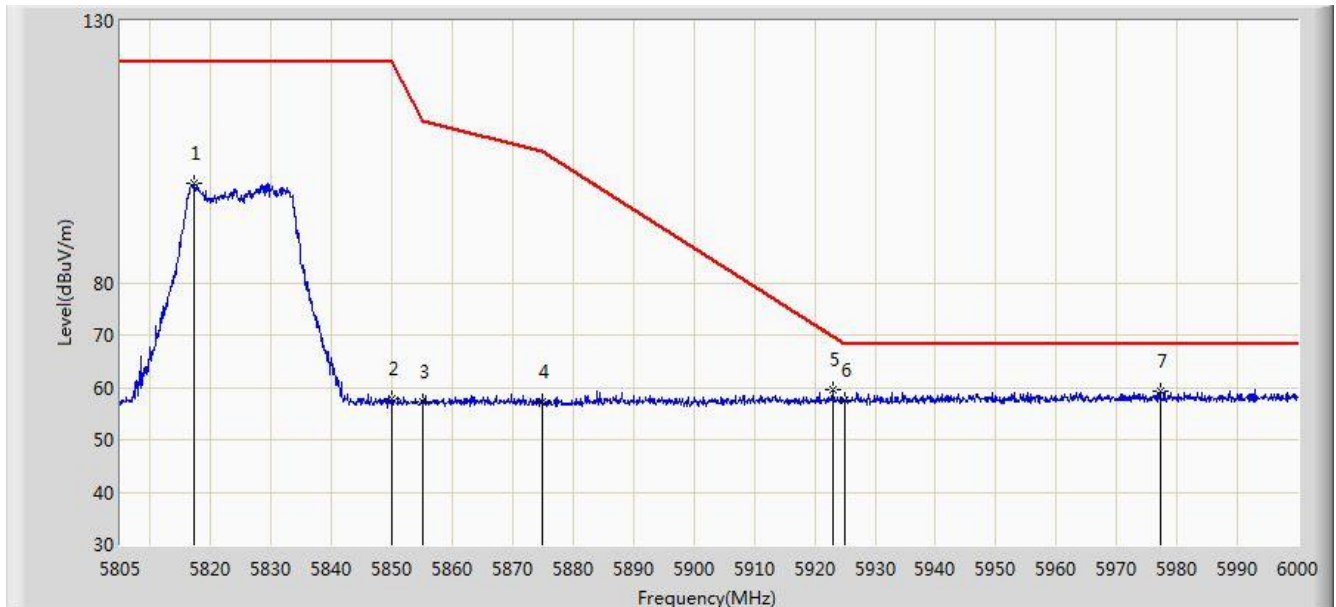


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5817.187        | 99.129                 | 93.587               | N/A             | N/A            | 5.542       | PK   |
| 2  |      |      | 5850.000        | 57.862                 | 52.136               | -64.338         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 57.377                 | 51.631               | -53.423         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 57.146                 | 51.326               | -48.054         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5922.975        | 59.692                 | 53.731               | -10.000         | 69.692         | 5.962       | PK   |
| 6  |      |      | 5925.000        | 57.417                 | 51.451               | -10.783         | 68.200         | 5.967       | PK   |
| 7  |      | *    | 5977.185        | 59.289                 | 53.216               | -8.911          | 68.200         | 6.073       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 22:11 |
| Limit: FCC_Part15.407_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

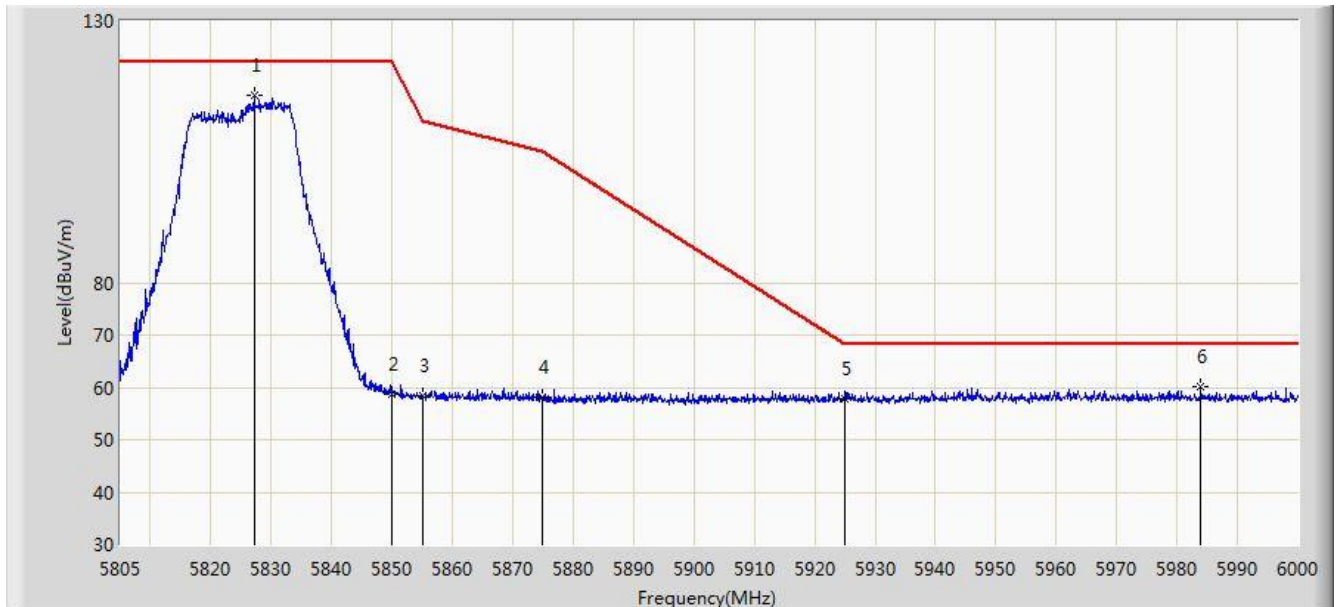


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5827.132        | 115.883                | 110.283              | N/A             | N/A            | 5.600       | PK   |
| 2  |      |      | 5850.000        | 58.594                 | 52.868               | -63.606         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 58.495                 | 52.749               | -52.305         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 58.235                 | 52.415               | -46.965         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 57.811                 | 51.845               | -10.389         | 68.200         | 5.967       | PK   |
| 6  |      |      | 5983.913        | 60.184                 | 54.100               | -8.016          | 68.200         | 6.085       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 22:13 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

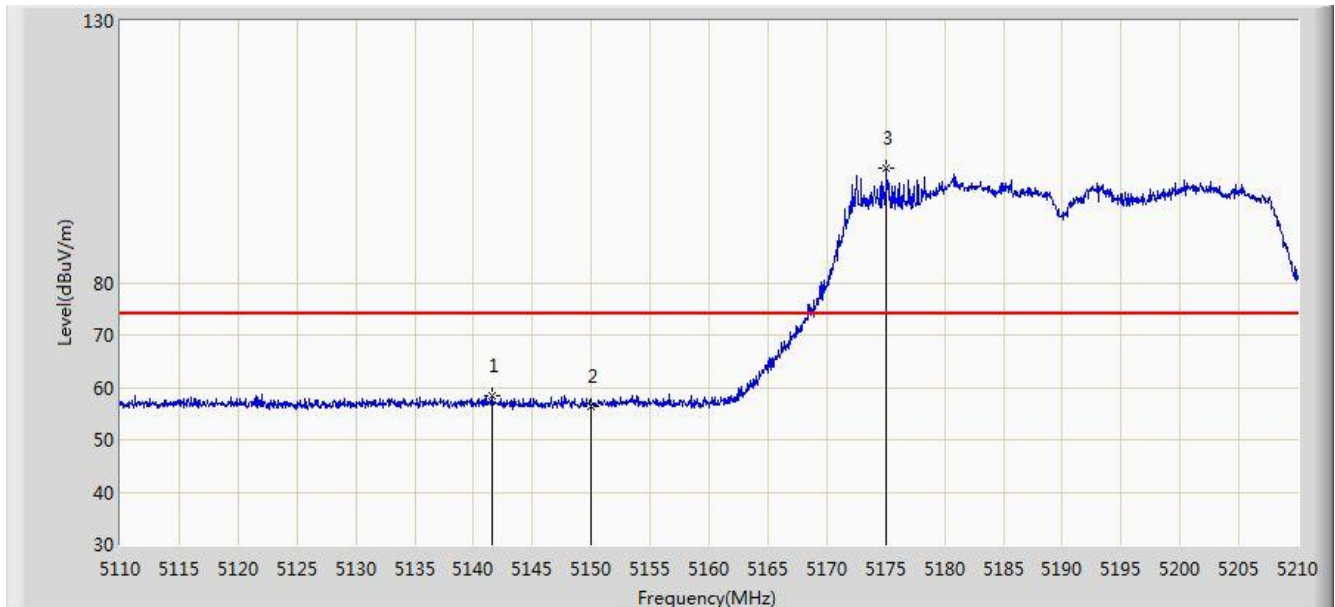


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5141.600        | 58.428                 | 54.252               | -15.572         | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 56.507                 | 52.338               | -17.493         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5175.100        | 101.874                | 97.788               | N/A             | N/A            | 4.087       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 22:17 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

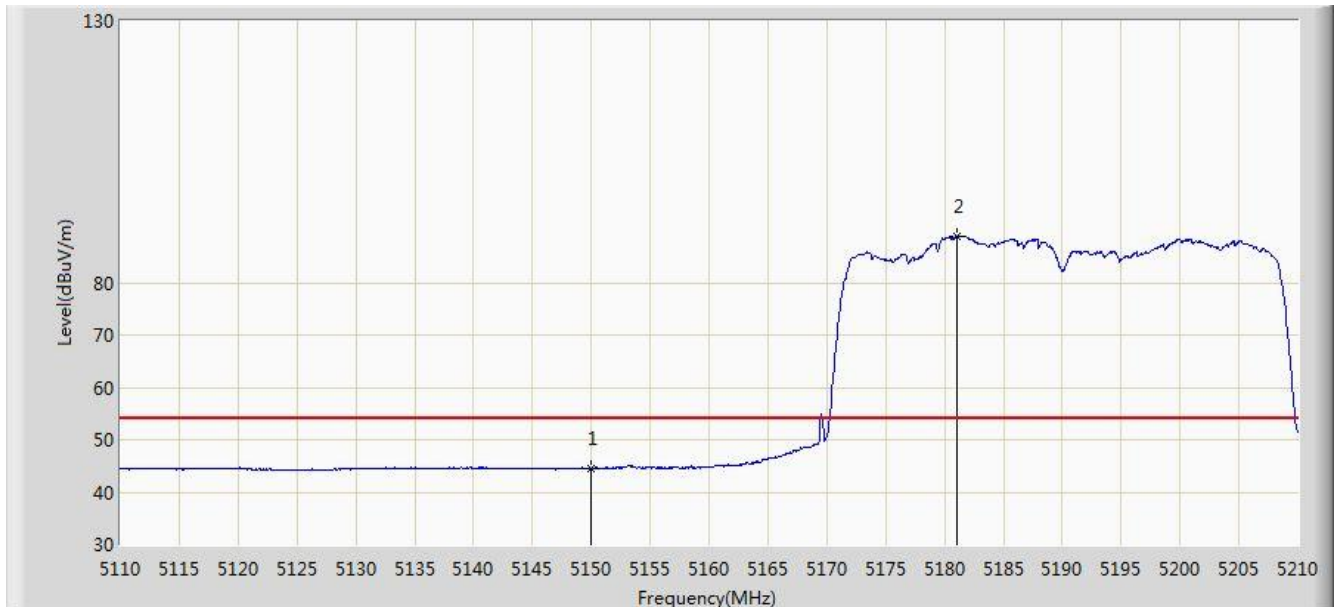


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 44.594                 | 40.425               | -9.406          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5181.050        | 88.878                 | 84.813               | N/A             | N/A            | 4.064       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 22:19 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

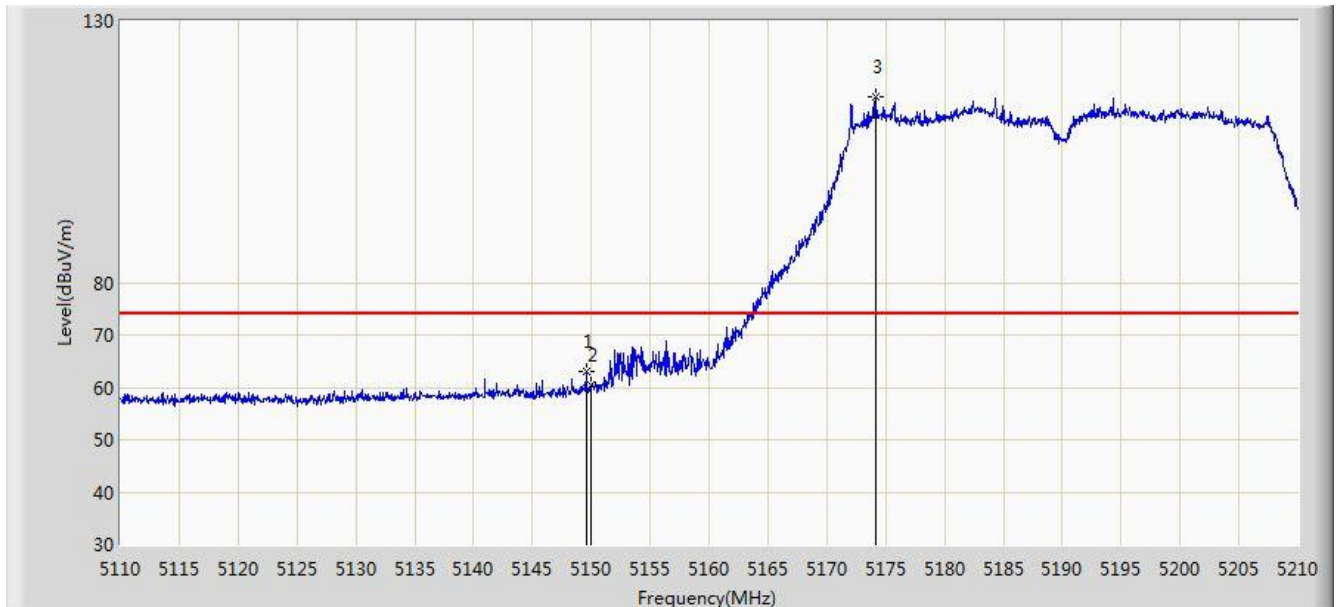


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.550        | 63.040                 | 58.869               | -10.960         | 74.000         | 4.170       | PK   |
| 2  |      |      | 5150.000        | 60.397                 | 56.228               | -13.603         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5174.100        | 115.462                | 111.372              | N/A             | N/A            | 4.090       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 22:20 |
| Limit: FCC_Part15.209_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

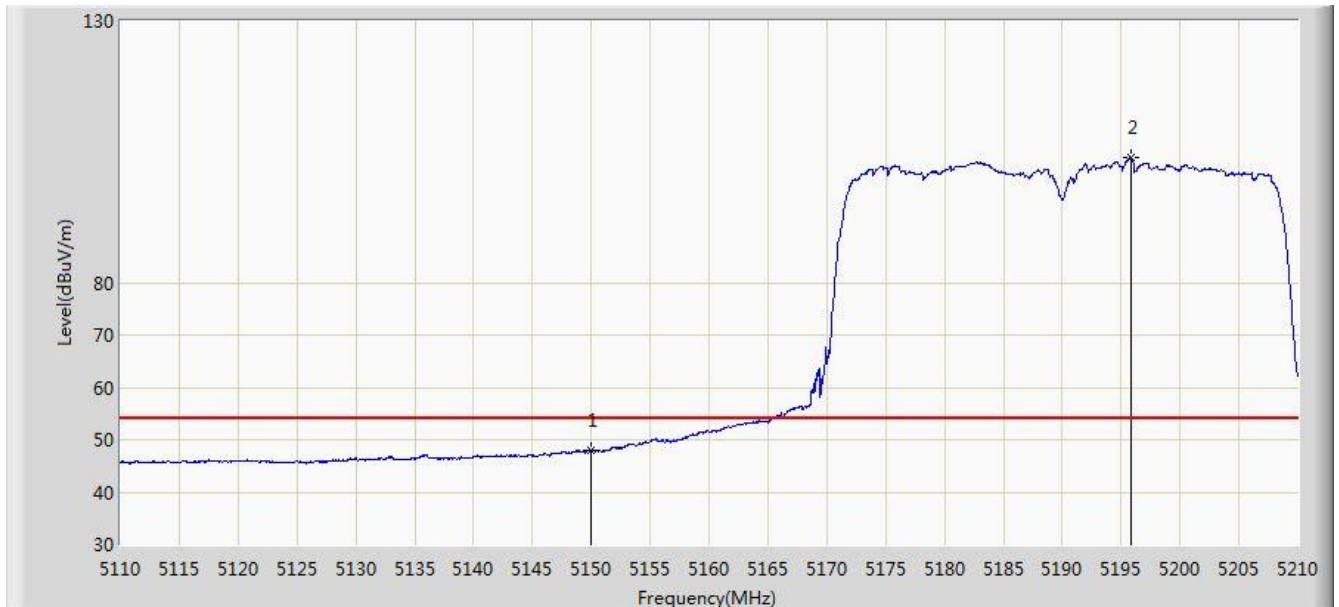


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 47.975                 | 43.806               | -6.025          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5195.800        | 103.840                | 99.827               | N/A             | N/A            | 4.013       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 22:56 |
| Limit: FCC_Part15.407_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

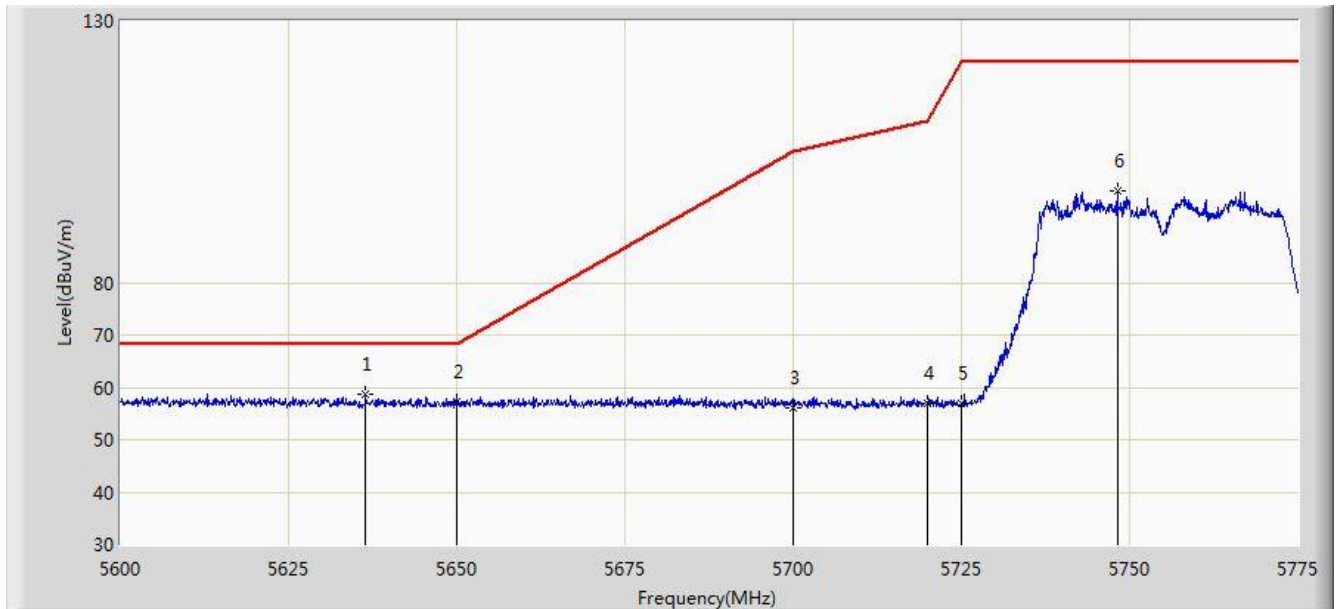


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5636.400        | 58.623                 | 53.996               | -9.577          | 68.200         | 4.627       | PK   |
| 2  |      |      | 5650.000        | 57.347                 | 52.676               | -10.853         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 56.136                 | 51.258               | -49.064         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 56.864                 | 51.867               | -53.936         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 56.812                 | 51.783               | -65.388         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5748.138        | 97.619                 | 92.446               | N/A             | N/A            | 5.173       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 22:59 |
| Limit: FCC_Part15.407_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

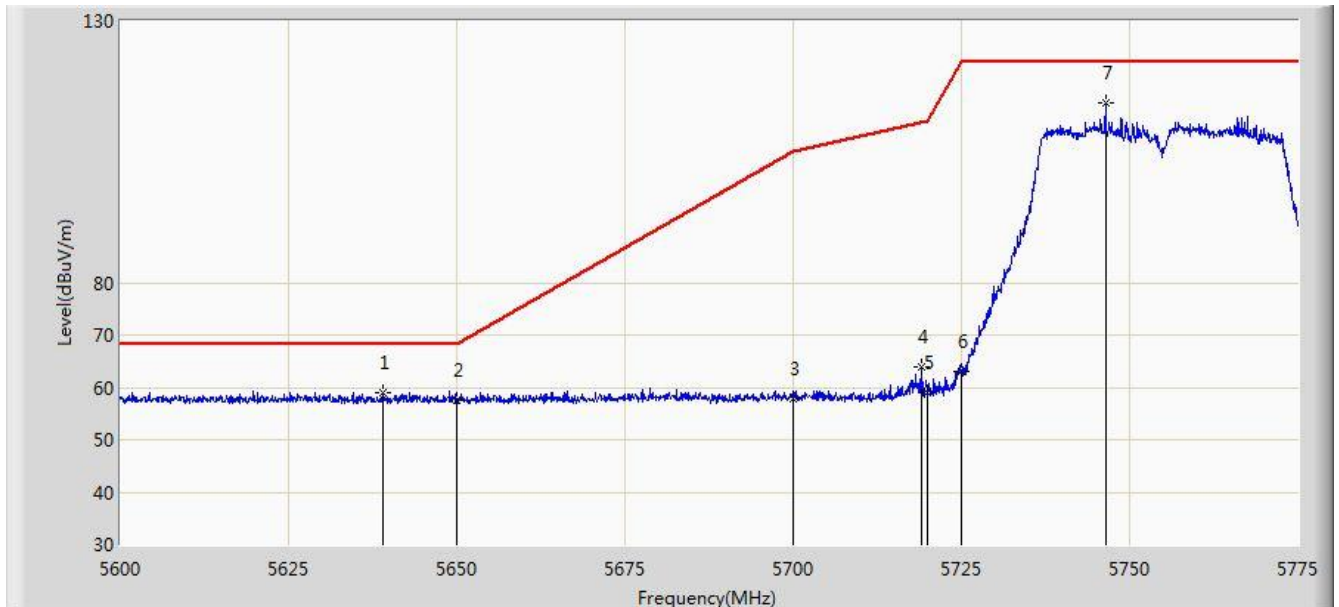


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5638.937        | 59.038                 | 54.403               | -9.162          | 68.200         | 4.635       | PK   |
| 2  |      |      | 5650.000        | 57.674                 | 53.003               | -10.526         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 57.778                 | 52.900               | -47.422         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5719.087        | 63.857                 | 58.866               | -46.688         | 110.545        | 4.992       | PK   |
| 5  |      |      | 5720.000        | 58.883                 | 53.886               | -51.917         | 110.800        | 4.997       | PK   |
| 6  |      |      | 5725.000        | 63.066                 | 58.037               | -59.134         | 122.200        | 5.029       | PK   |
| 7  |      | *    | 5746.475        | 114.425                | 109.262              | N/A             | N/A            | 5.163       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 23:02 |
| Limit: FCC_Part15.407_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

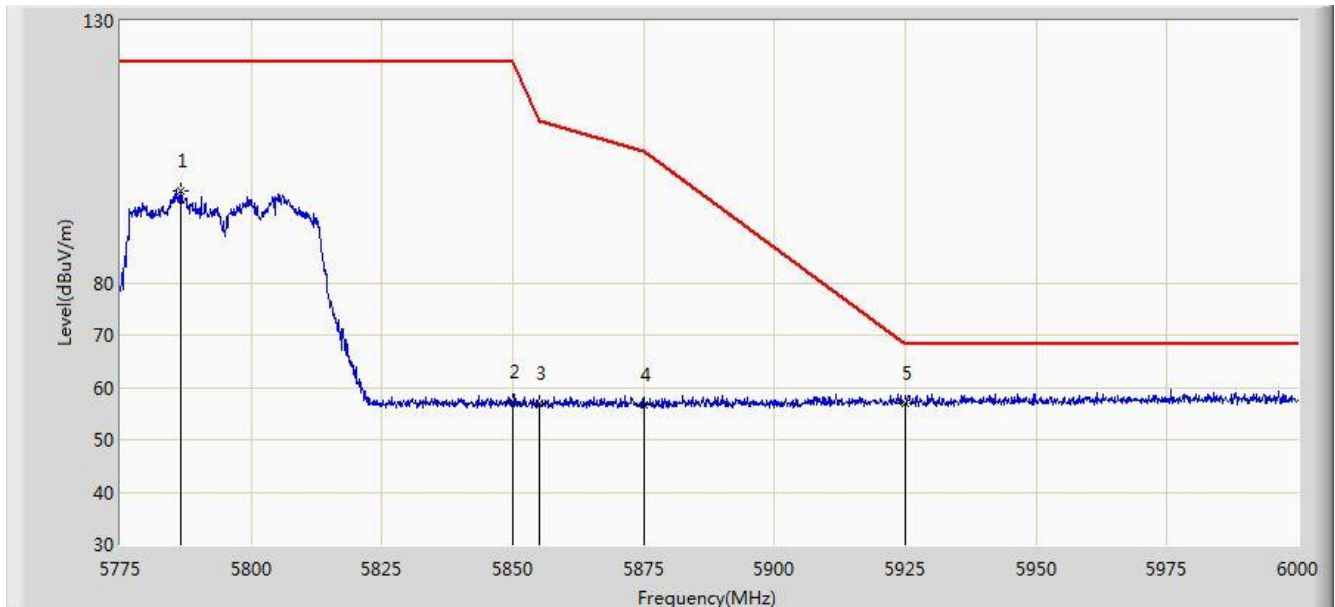


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5786.700        | 97.676                 | 92.301               | N/A             | N/A            | 5.375       | PK   |
| 2  |      |      | 5850.000        | 57.116                 | 51.390               | -65.084         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 56.953                 | 51.207               | -53.847         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 56.742                 | 50.922               | -48.458         | 105.200        | 5.820       | PK   |
| 5  |      | *    | 5925.000        | 56.959                 | 50.993               | -11.241         | 68.200         | 5.967       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                    | Time: 2017/09/06 - 23:05 |
| Limit: FCC_Part15.407_RE(3m)                                                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                  | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                            | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

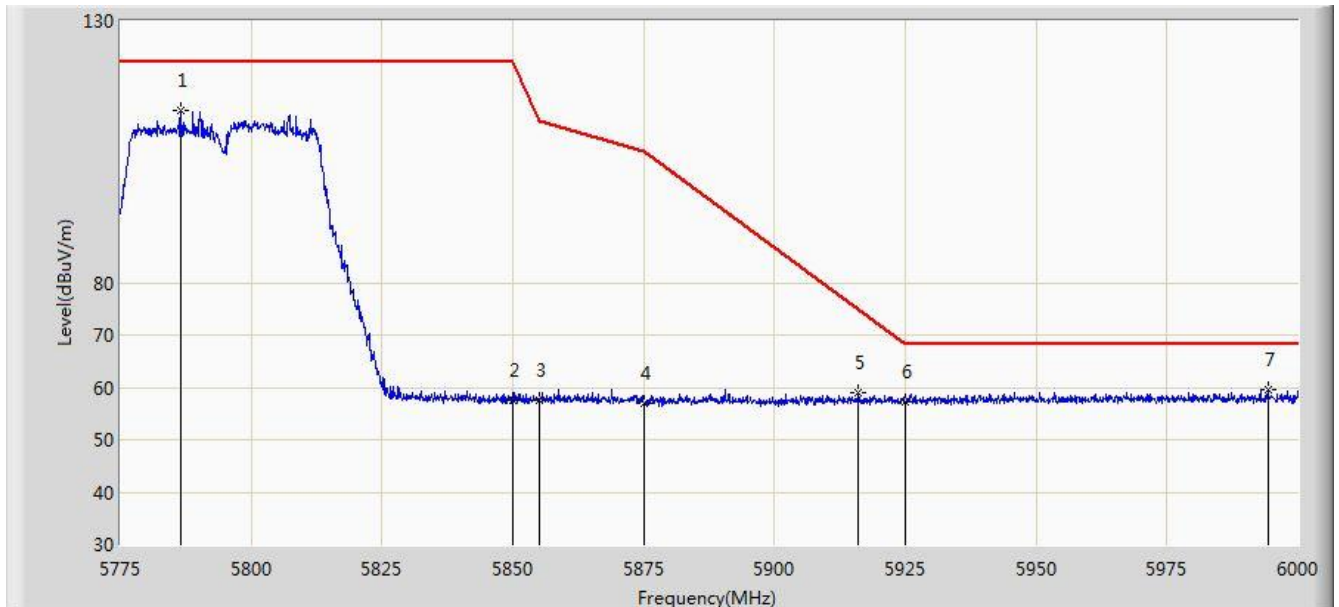


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5786.475        | 112.915                | 107.541              | N/A             | N/A            | 5.374       | PK   |
| 2  |      |      | 5850.000        | 57.404                 | 51.678               | -64.796         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 57.513                 | 51.767               | -53.287         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 57.098                 | 51.278               | -48.102         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5916.075        | 59.060                 | 53.115               | -15.722         | 74.782         | 5.945       | PK   |
| 6  |      |      | 5925.000        | 57.331                 | 51.365               | -10.869         | 68.200         | 5.967       | PK   |
| 7  |      | *    | 5994.375        | 59.666                 | 53.565               | -8.534          | 68.200         | 6.100       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/06 - 23:07 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

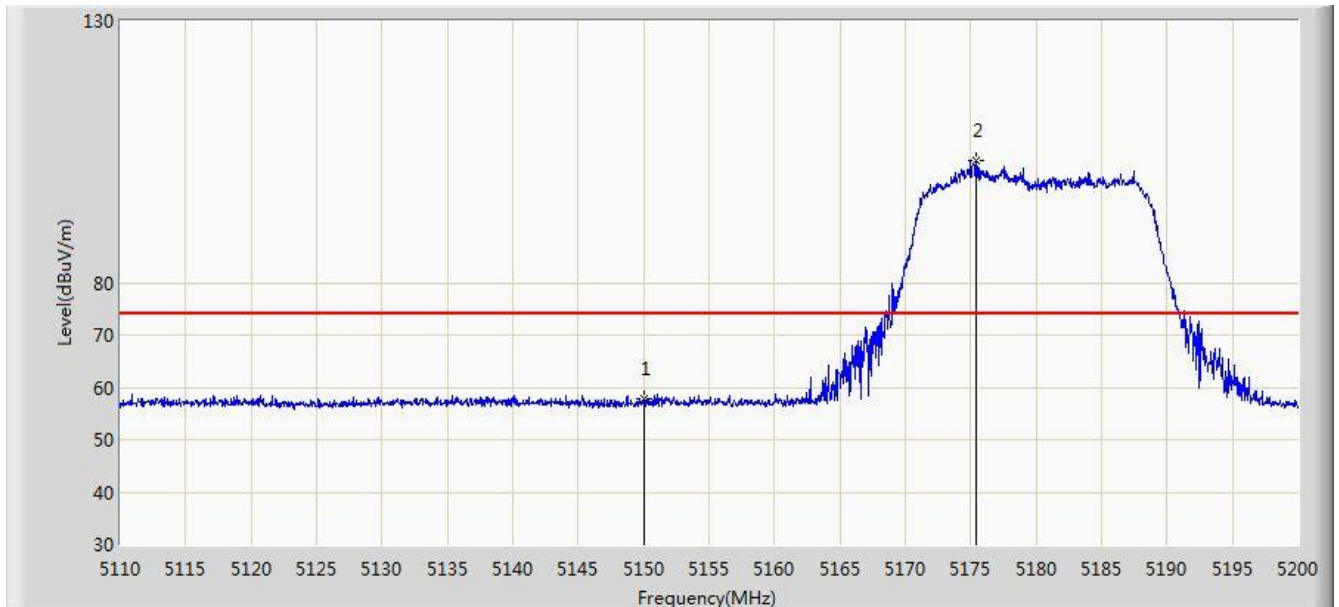


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 57.733                 | 53.564               | -16.267         | 74.000         | 4.170       | PK   |
| 2  |      | *    | 5175.385        | 103.456                | 99.371               | N/A             | N/A            | 4.085       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/06 - 23:12 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

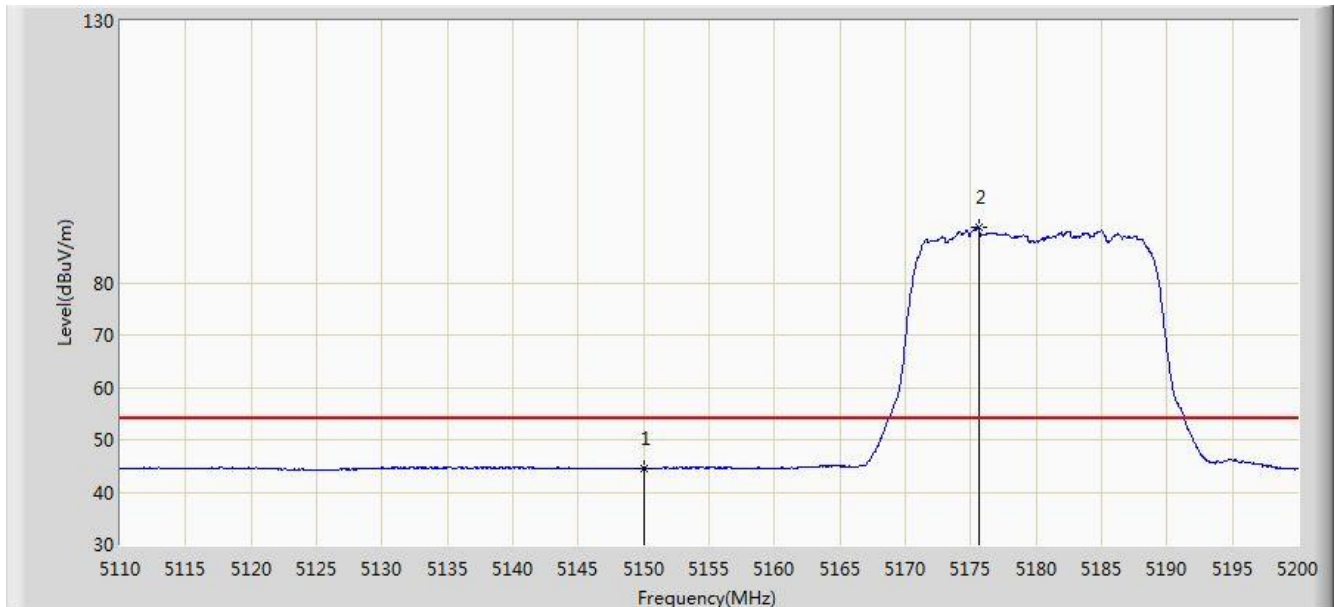


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 44.636                 | 40.467               | -9.364          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5175.610        | 90.702                 | 86.618               | N/A             | N/A            | 4.085       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/06 - 23:14 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

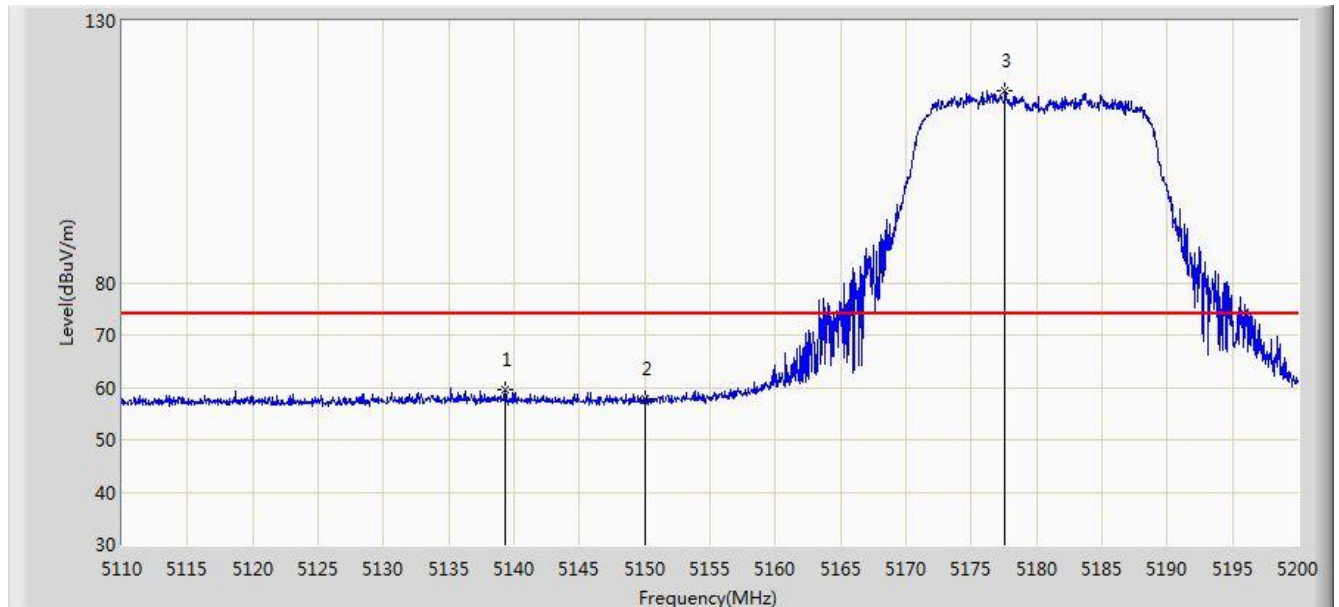


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5139.340        | 59.631                 | 55.456               | -14.369         | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 57.717                 | 53.548               | -16.283         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5177.590        | 116.530                | 112.453              | N/A             | N/A            | 4.077       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/06 - 23:15 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

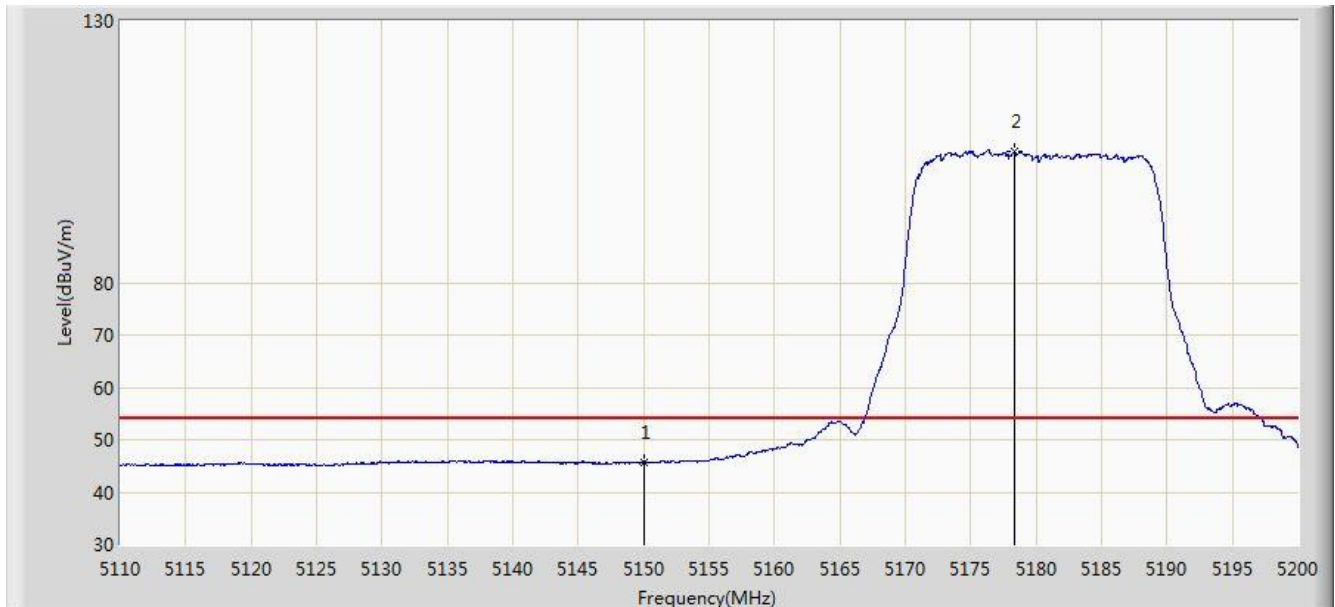


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 45.653                 | 41.484               | -8.347          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5178.400        | 105.091                | 101.016              | N/A             | N/A            | 4.074       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/06 - 23:43 |
| Limit: FCC_Part15.407_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

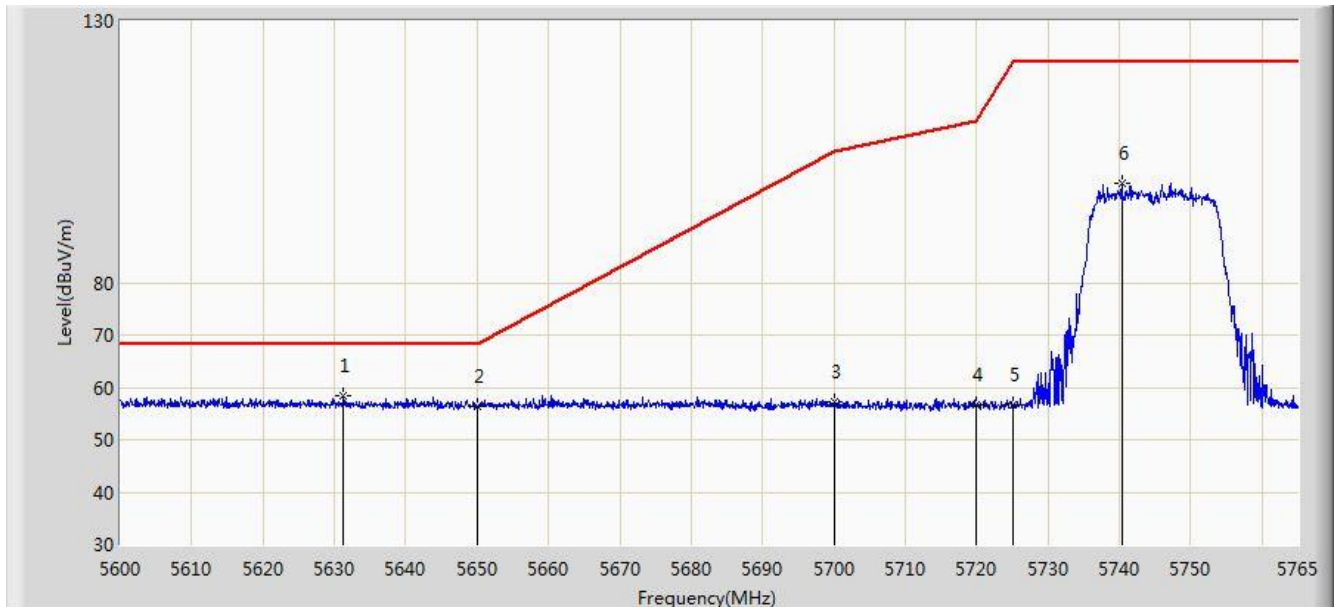


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5631.268        | 58.275                 | 53.662               | -9.925          | 68.200         | 4.613       | PK   |
| 2  |      |      | 5650.000        | 56.460                 | 51.789               | -11.740         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 57.167                 | 52.289               | -48.033         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 56.649                 | 51.652               | -54.151         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 56.726                 | 51.697               | -65.474         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5740.415        | 98.869                 | 93.742               | N/A             | N/A            | 5.127       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/06 - 23:46 |
| Limit: FCC_Part15.407_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

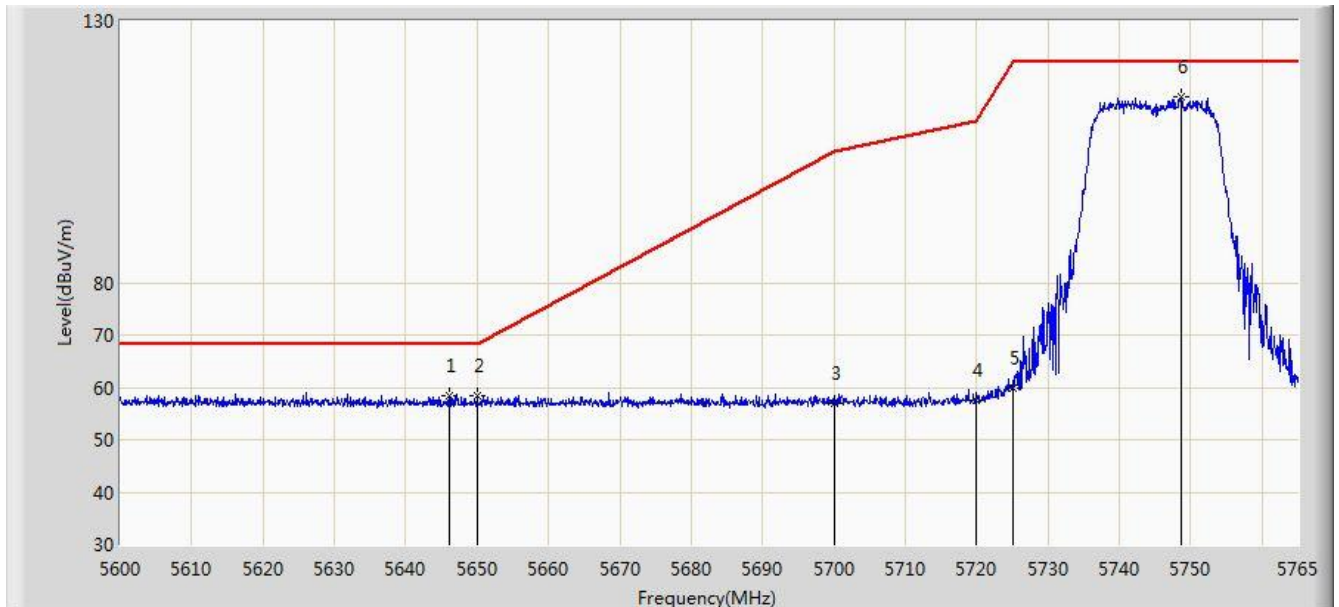


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5646.035        | 58.543                 | 53.885               | -9.657          | 68.200         | 4.658       | PK   |
| 2  |      |      | 5650.000        | 58.297                 | 53.626               | -9.903          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 56.992                 | 52.114               | -48.208         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 57.626                 | 52.629               | -53.174         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 59.805                 | 54.776               | -62.395         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5748.748        | 115.641                | 110.465              | N/A             | N/A            | 5.177       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/06 - 23:48 |
| Limit: FCC_Part15.407_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

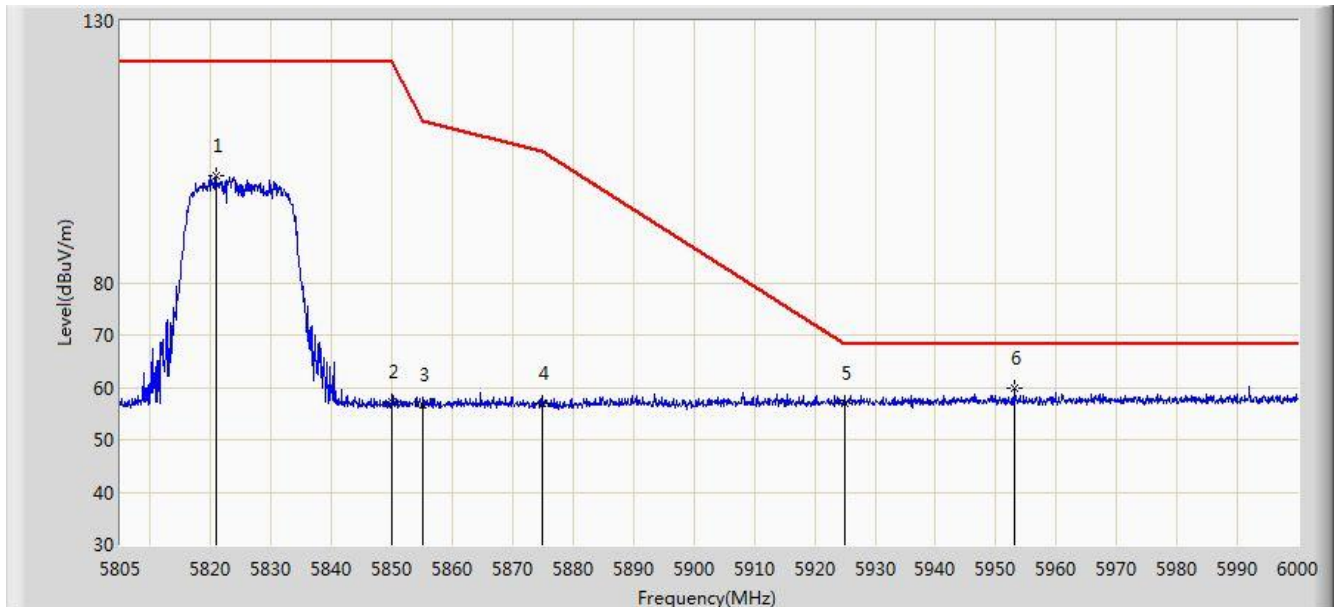


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5820.893        | 100.503                | 94.939               | N/A             | N/A            | 5.564       | PK   |
| 2  |      |      | 5850.000        | 57.386                 | 51.660               | -64.814         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 56.528                 | 50.782               | -54.272         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 56.914                 | 51.094               | -48.286         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 57.038                 | 51.072               | -11.162         | 68.200         | 5.967       | PK   |
| 6  |      | *    | 5953.005        | 59.771                 | 53.739               | -8.429          | 68.200         | 6.032       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/06 - 23:52 |
| Limit: FCC_Part15.407_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

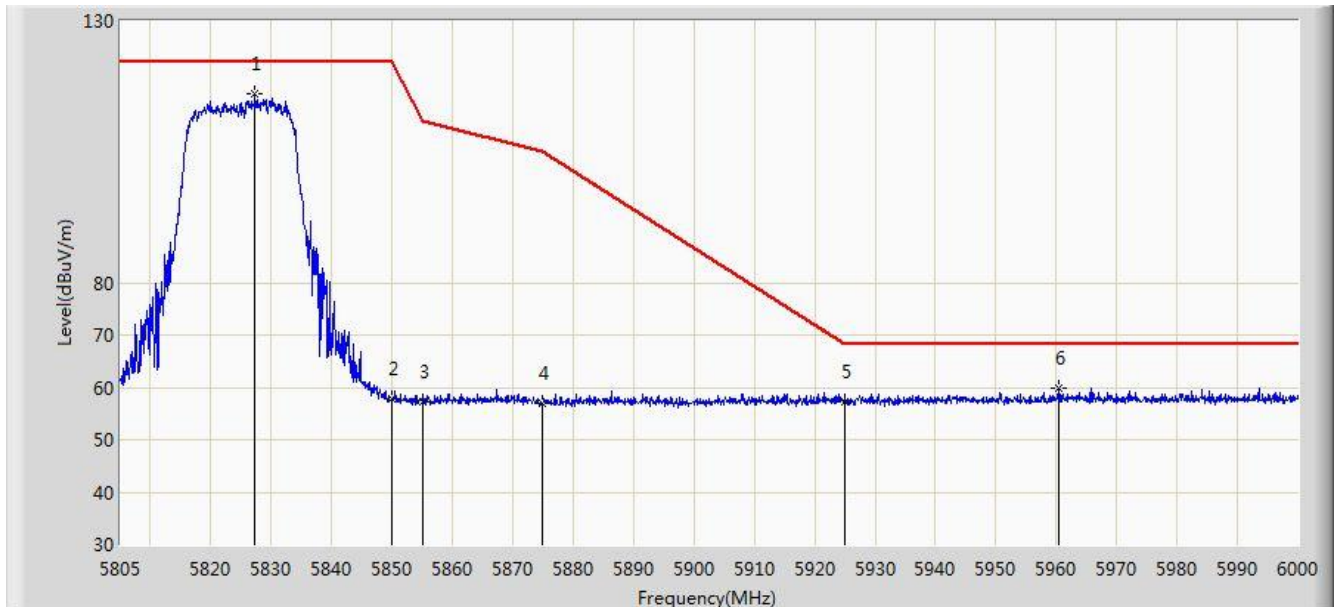


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5827.328        | 116.115                | 110.513              | N/A             | N/A            | 5.602       | PK   |
| 2  |      |      | 5850.000        | 57.716                 | 51.990               | -64.484         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 57.343                 | 51.597               | -53.457         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 56.891                 | 51.071               | -48.309         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 57.302                 | 51.336               | -10.898         | 68.200         | 5.967       | PK   |
| 6  |      |      | 5960.317        | 59.787                 | 53.743               | -8.413          | 68.200         | 6.044       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/06 - 23:56 |
| Limit: FCC_Part15.407_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

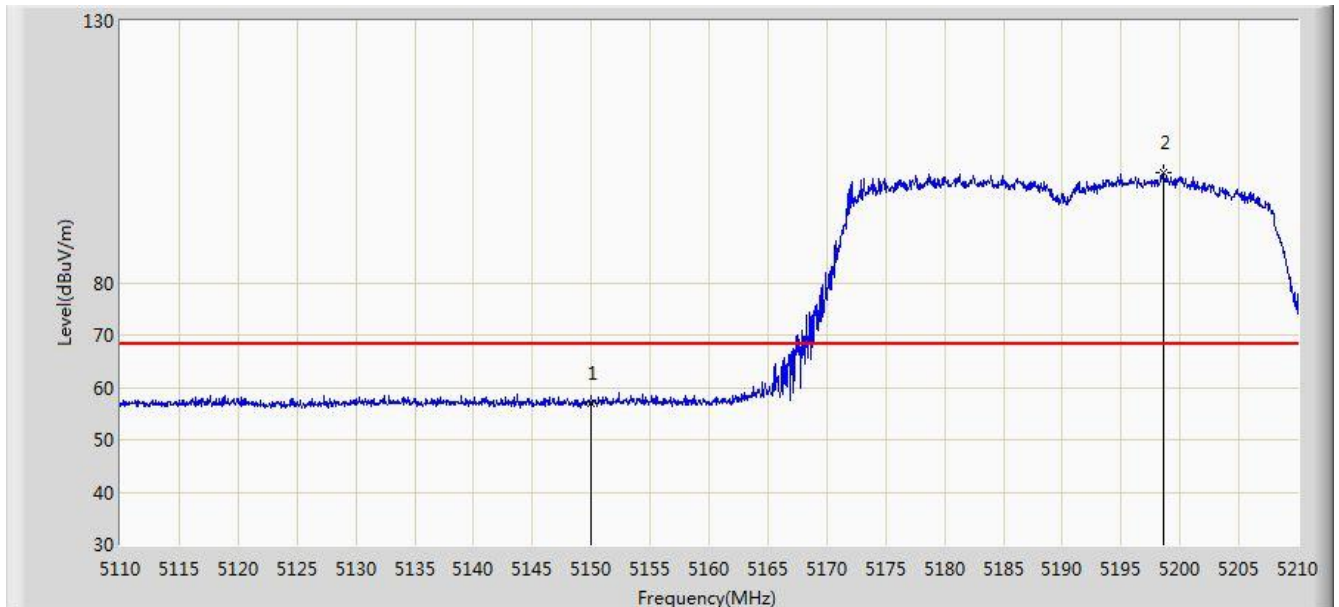


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 56.812                 | 52.643               | -11.388         | 68.200         | 4.170       | PK   |
| 2  |      | *    | 5198.600        | 101.132                | 97.129               | N/A             | N/A            | 4.002       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/06 - 23:58 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

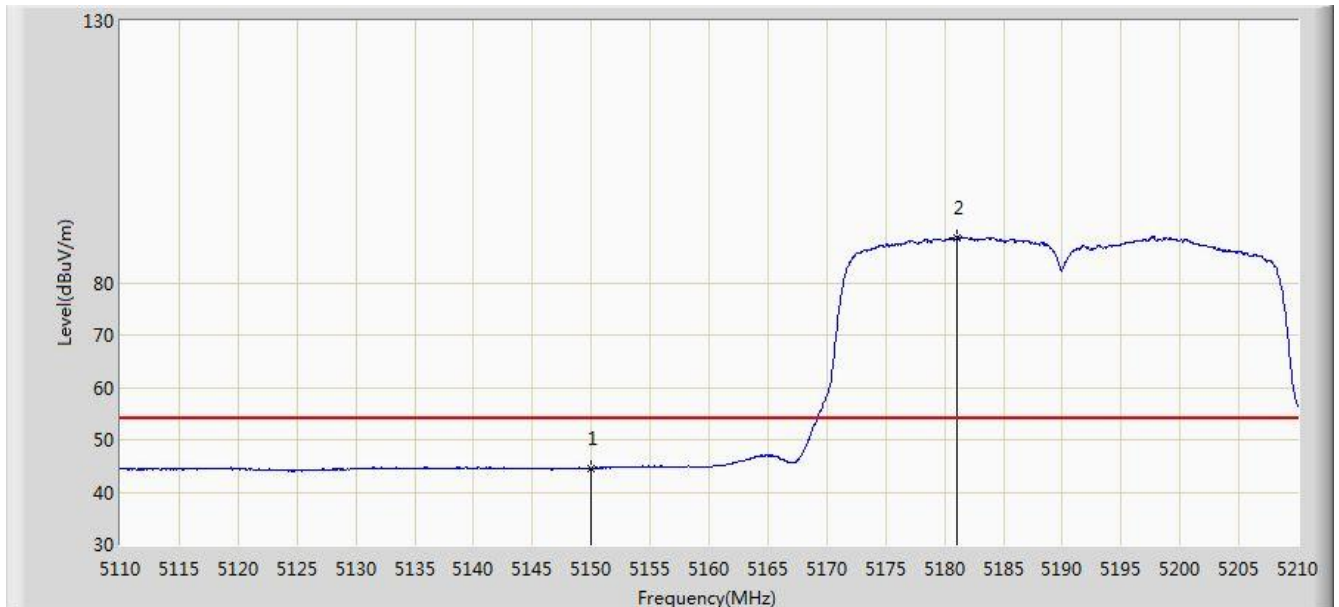


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 44.593                 | 40.424               | -9.407          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5181.000        | 88.634                 | 84.569               | N/A             | N/A            | 4.065       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/06 - 23:59 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

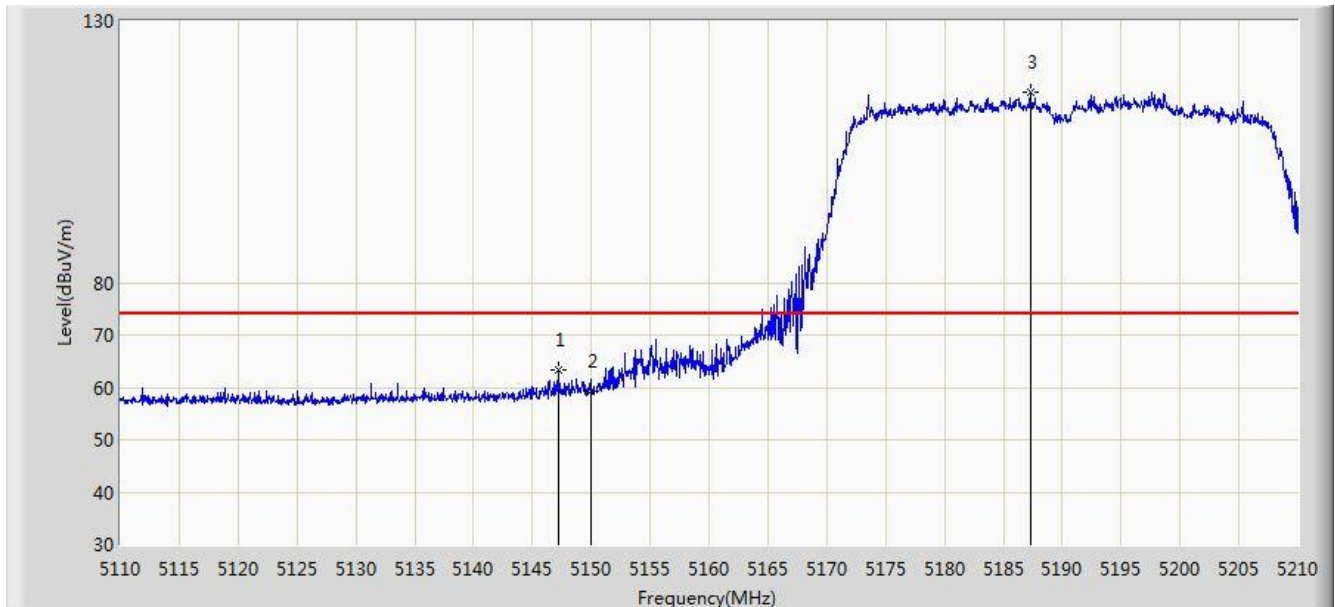


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.200        | 63.245                 | 59.069               | -10.755         | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 59.155                 | 54.986               | -14.845         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5187.300        | 116.234                | 112.191              | N/A             | N/A            | 4.043       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/07 - 00:00 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

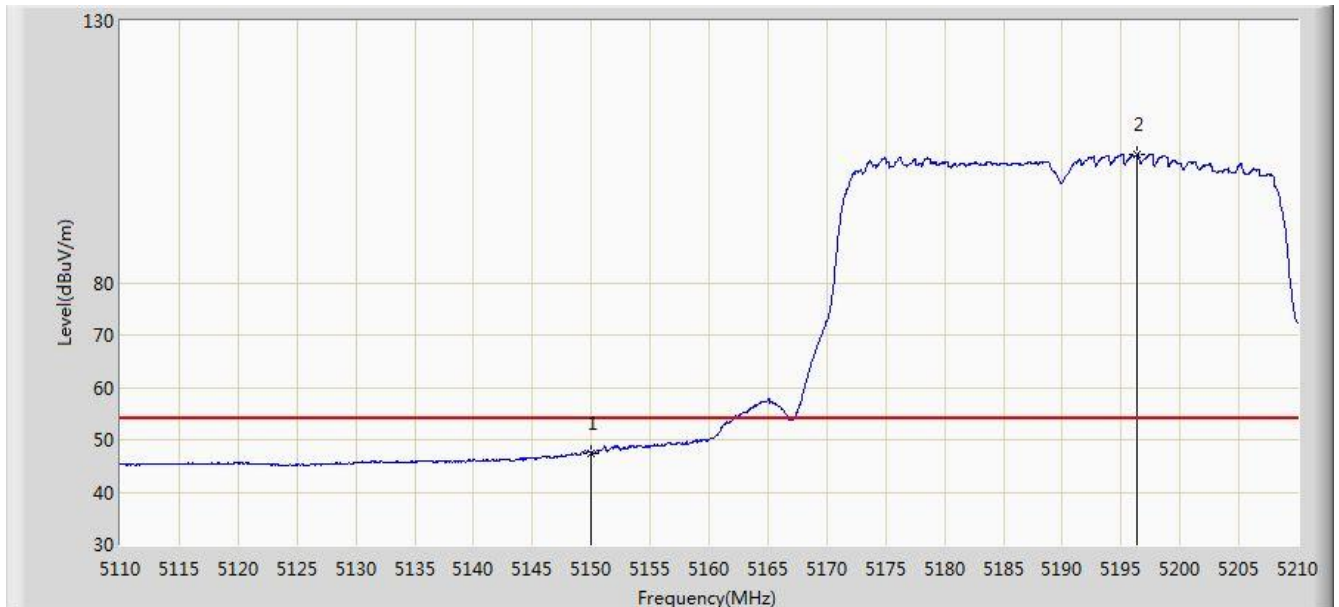


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 47.419                 | 43.250               | -6.581          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5196.300        | 104.390                | 100.379              | N/A             | N/A            | 4.011       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/07 - 00:22 |
| Limit: FCC_Part15.407_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

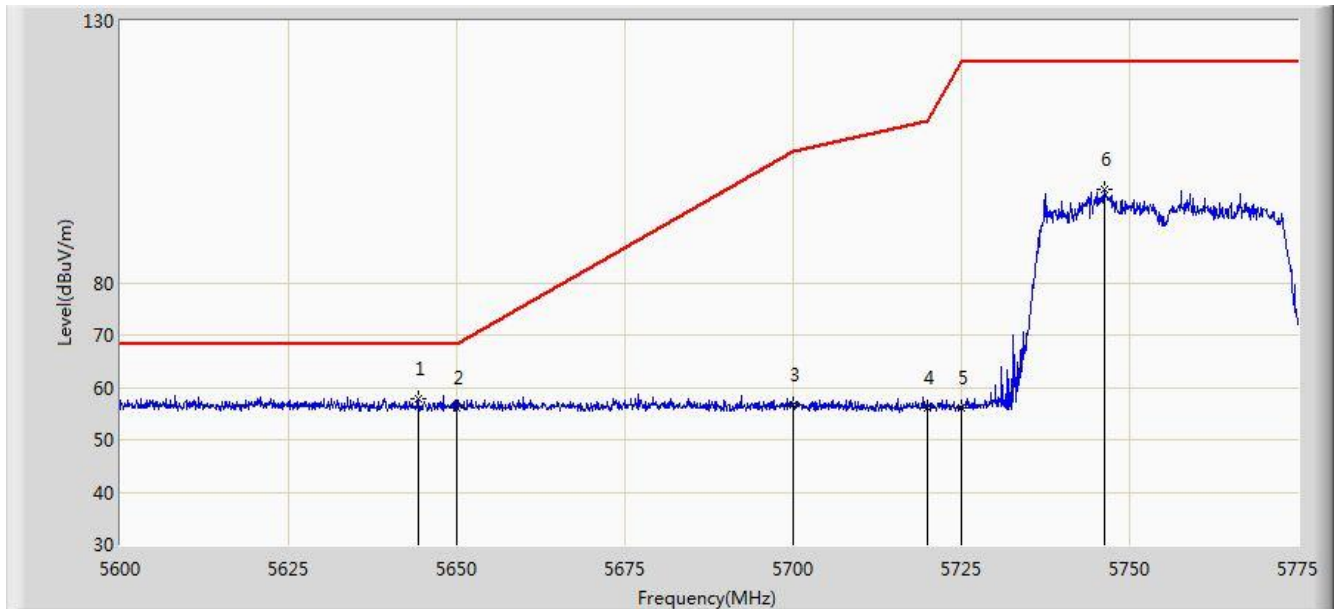


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5644.275        | 57.687                 | 53.035               | -10.513         | 68.200         | 4.652       | PK   |
| 2  |      |      | 5650.000        | 55.960                 | 51.289               | -12.240         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 56.803                 | 51.925               | -48.397         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 56.132                 | 51.135               | -54.668         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 56.227                 | 51.198               | -65.973         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5746.300        | 97.829                 | 92.667               | N/A             | N/A            | 5.163       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/07 - 00:24 |
| Limit: FCC_Part15.407_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

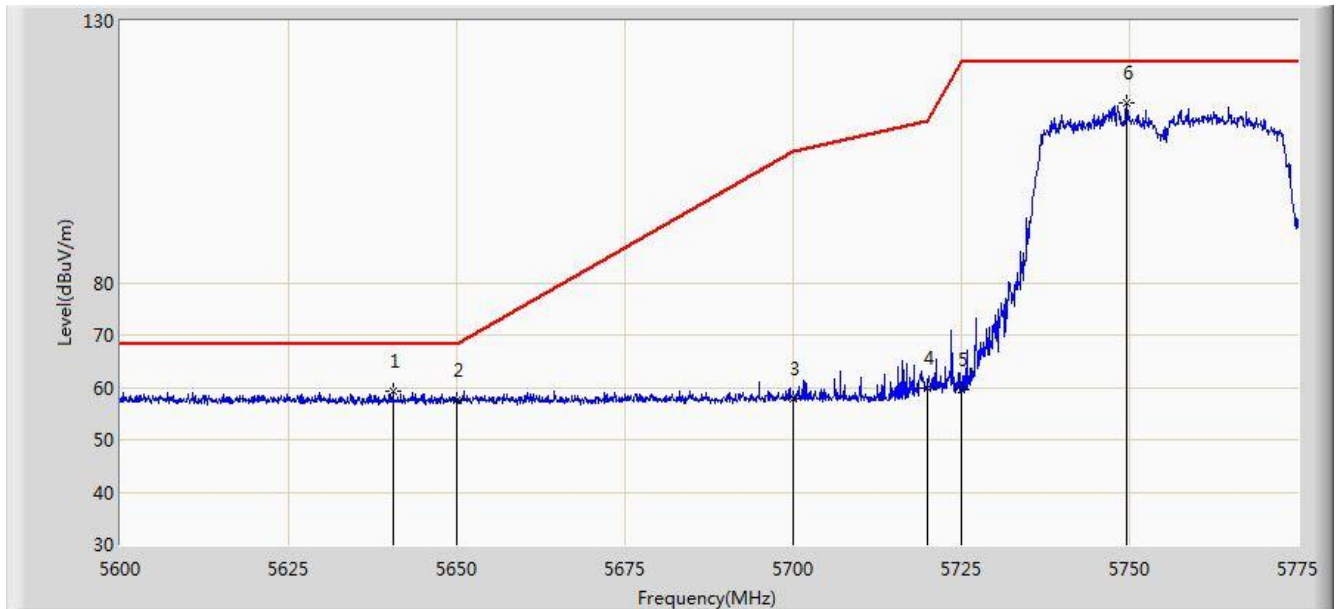


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5640.513        | 59.203                 | 54.563               | -8.997          | 68.200         | 4.640       | PK   |
| 2  |      |      | 5650.000        | 57.658                 | 52.987               | -10.542         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 57.948                 | 53.070               | -47.252         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 59.943                 | 54.946               | -50.857         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 59.662                 | 54.633               | -62.538         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5749.625        | 114.266                | 109.085              | N/A             | N/A            | 5.180       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/07 - 00:24 |
| Limit: FCC_Part15.407_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

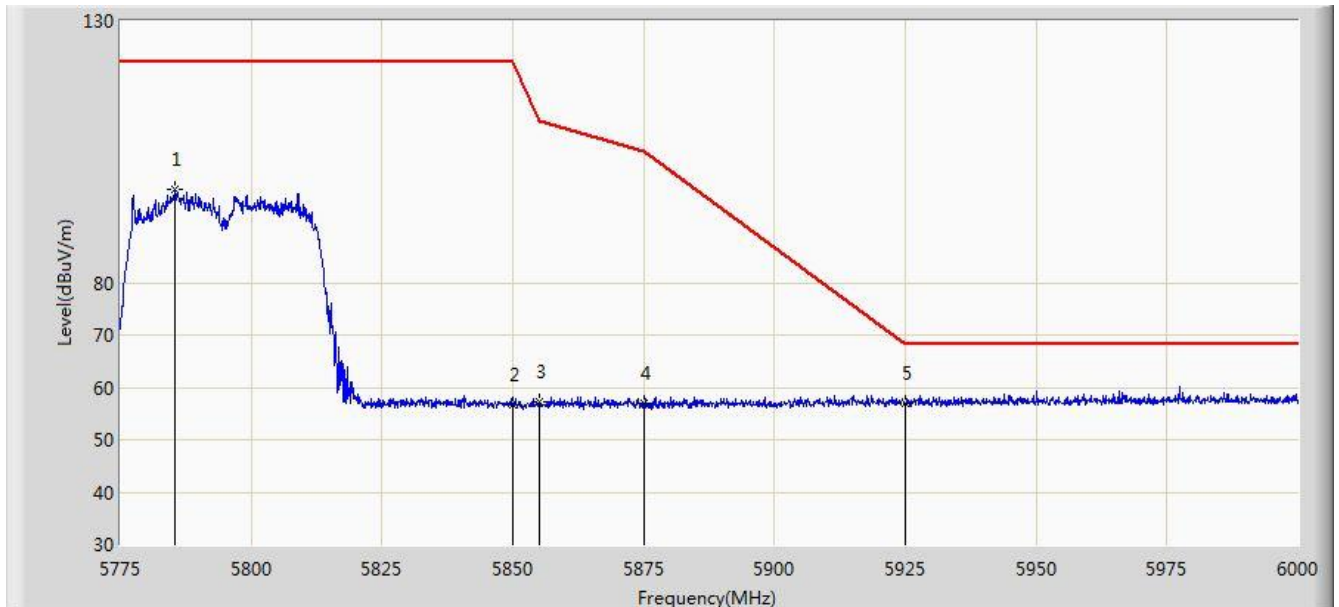


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5785.462        | 97.781                 | 92.412               | N/A             | N/A            | 5.368       | PK   |
| 2  |      |      | 5850.000        | 56.574                 | 50.848               | -65.626         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 57.111                 | 51.365               | -53.689         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 56.814                 | 50.994               | -48.386         | 105.200        | 5.820       | PK   |
| 5  |      | *    | 5925.000        | 57.016                 | 51.050               | -11.184         | 68.200         | 5.967       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/07 - 00:30 |
| Limit: FCC_Part15.407_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

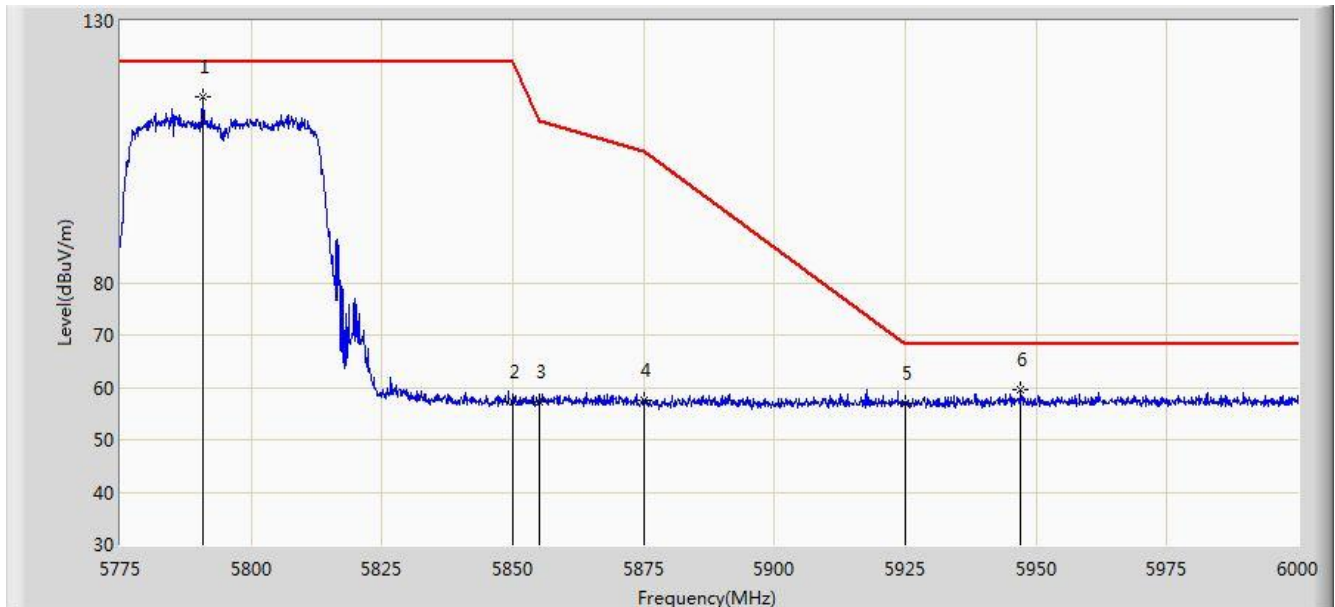


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5790.750        | 115.575                | 110.179              | N/A             | N/A            | 5.396       | PK   |
| 2  |      |      | 5850.000        | 57.245                 | 51.519               | -64.955         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 57.193                 | 51.447               | -53.607         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 57.550                 | 51.730               | -47.650         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 56.992                 | 51.026               | -11.208         | 68.200         | 5.967       | PK   |
| 6  |      |      | 5947.125        | 59.638                 | 53.617               | -8.562          | 68.200         | 6.021       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/07 - 00:32 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

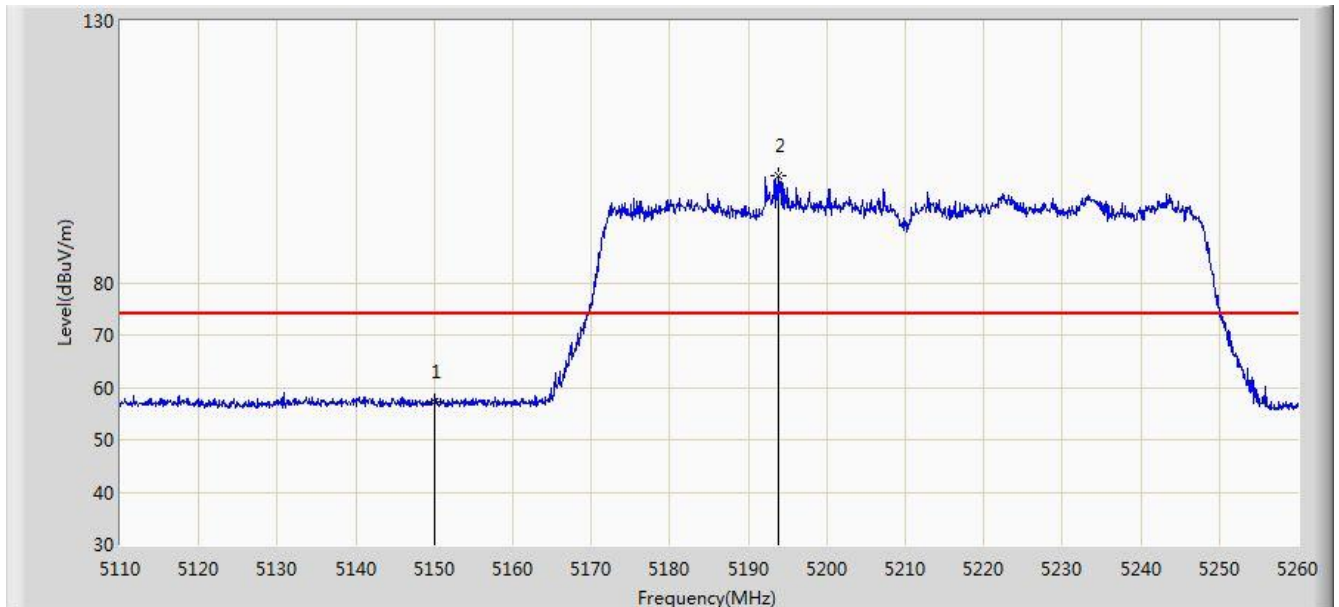


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 57.169                 | 53.000               | -16.831         | 74.000         | 4.170       | PK   |
| 2  |      | *    | 5193.775        | 100.483                | 96.463               | N/A             | N/A            | 4.020       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/07 - 00:38 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

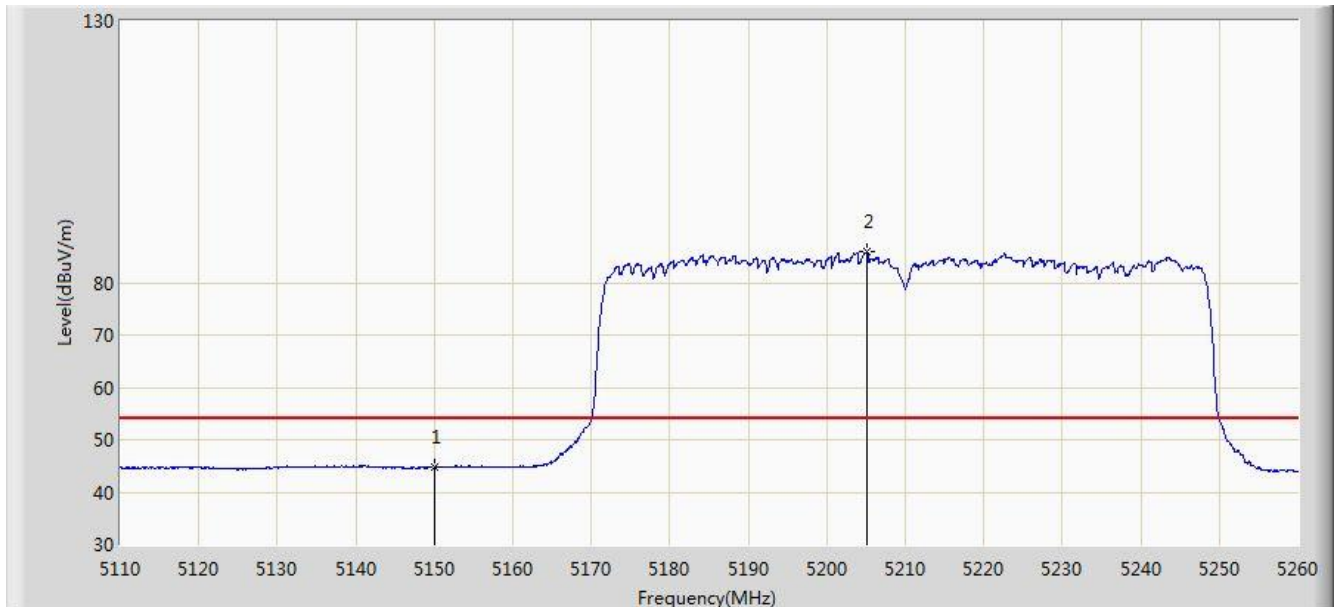


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 44.668                 | 40.499               | -9.332          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5205.100        | 85.824                 | 81.841               | N/A             | N/A            | 3.984       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/07 - 00:39 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

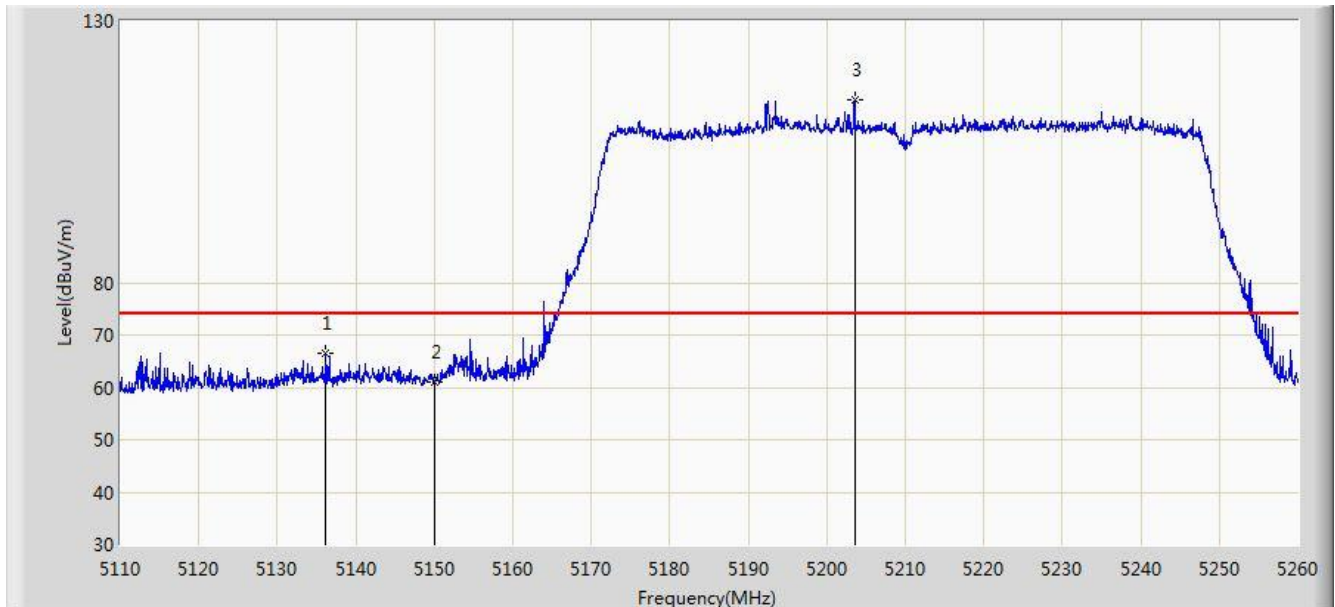


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5136.175        | 66.542                 | 62.367               | -7.458          | 74.000         | 4.175       | PK   |
| 2  |      |      | 5150.000        | 60.998                 | 56.829               | -13.002         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5203.525        | 114.943                | 110.955              | N/A             | N/A            | 3.987       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/07 - 00:40 |
| Limit: FCC_Part15.209_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

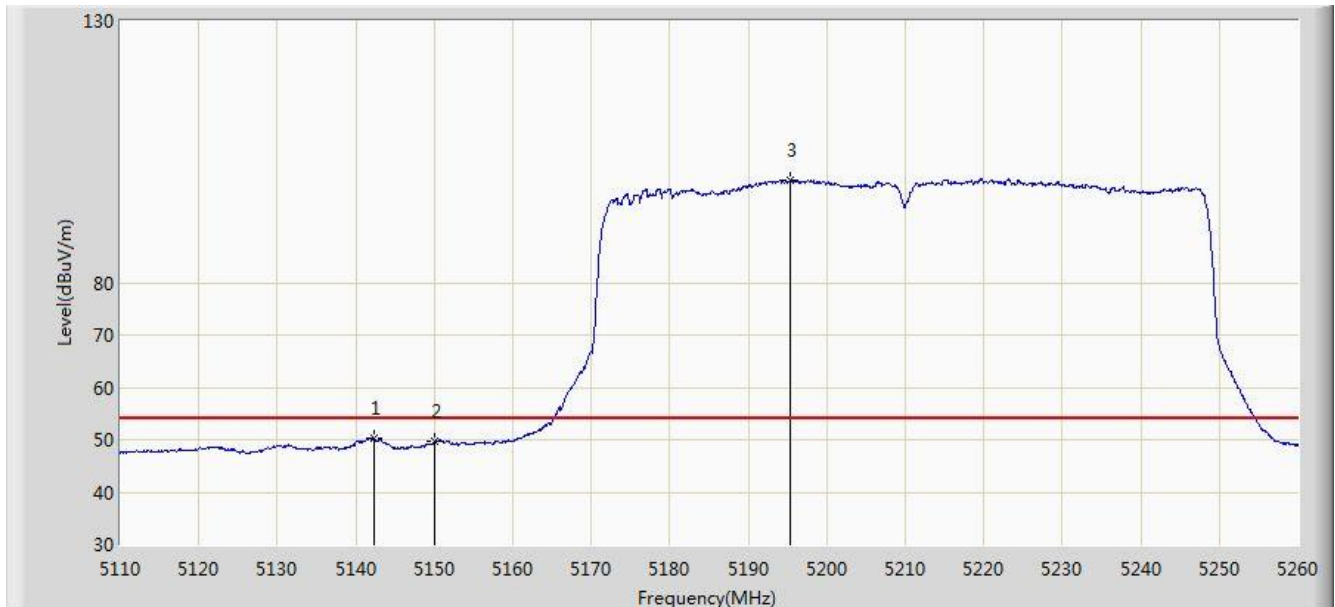


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5142.325        | 50.408                 | 46.232               | -3.592          | 54.000         | 4.175       | AV   |
| 2  |      |      | 5150.000        | 49.642                 | 45.473               | -4.358          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5195.275        | 99.435                 | 95.420               | N/A             | N/A            | 4.015       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/07 - 00:56 |
| Limit: FCC_Part15.407_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

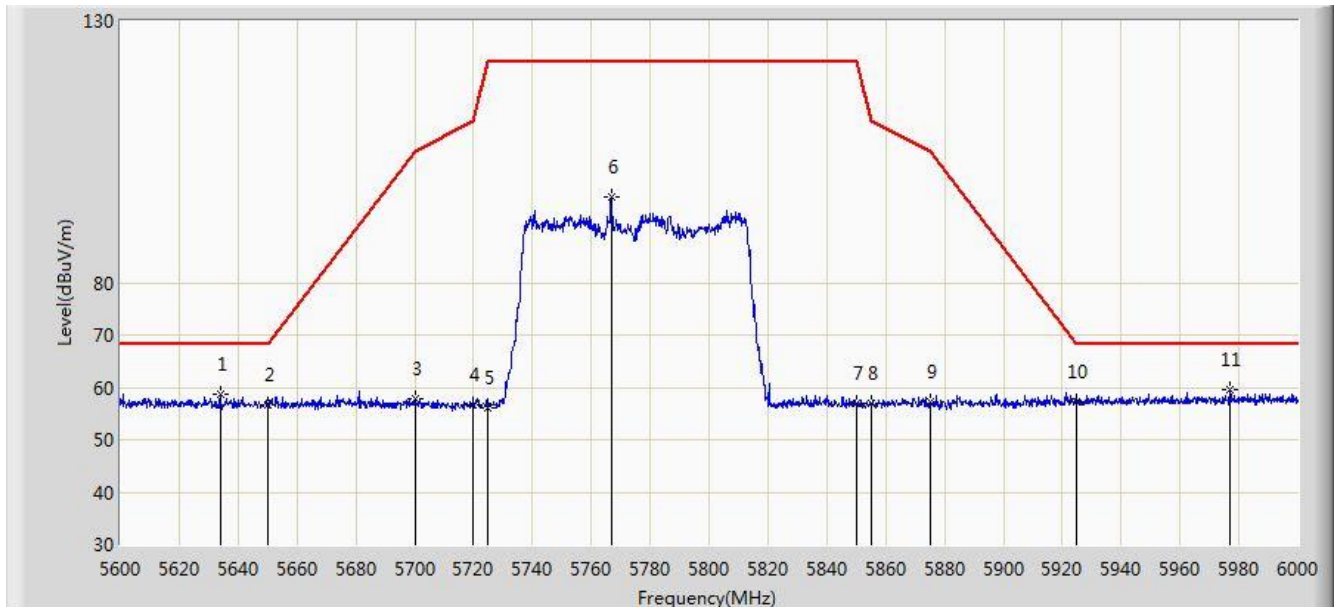


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5634.000        | 58.612                 | 53.991               | -9.588          | 68.200         | 4.621       | PK   |
| 2  |      |      | 5650.000        | 56.733                 | 52.062               | -11.467         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 57.853                 | 52.975               | -47.347         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 56.804                 | 51.807               | -53.996         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 56.188                 | 51.159               | -66.012         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5766.800        | 96.470                 | 91.195               | N/A             | N/A            | 5.274       | PK   |
| 7  |      |      | 5850.000        | 57.089                 | 51.363               | -65.111         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 56.909                 | 51.163               | -53.891         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 57.151                 | 51.331               | -48.049         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 57.304                 | 51.338               | -10.896         | 68.200         | 5.967       | PK   |
| 11 |      | *    | 5976.800        | 59.423                 | 53.351               | -8.777          | 68.200         | 6.072       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                |                          |
|------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                      | Time: 2017/09/07 - 00:58 |
| Limit: FCC_Part15.407_RE(3m)                                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode) |                          |

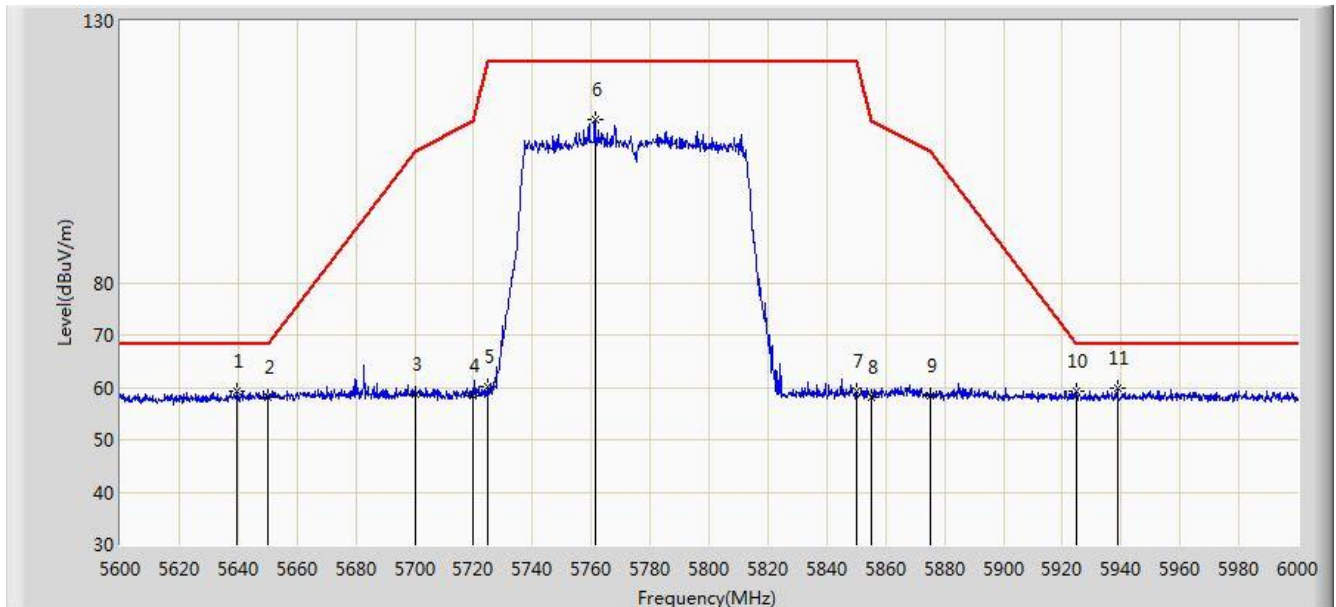


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5639.800        | 59.398                 | 54.761               | -8.802          | 68.200         | 4.638       | PK   |
| 2  |      |      | 5650.000        | 58.143                 | 53.472               | -10.057         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 58.731                 | 53.853               | -46.469         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 58.456                 | 53.459               | -52.344         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 60.141                 | 55.112               | -62.059         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5761.200        | 111.067                | 105.821              | N/A             | N/A            | 5.246       | PK   |
| 7  |      |      | 5850.000        | 59.180                 | 53.454               | -63.020         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 58.225                 | 52.479               | -52.575         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 58.416                 | 52.596               | -46.784         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 59.146                 | 53.180               | -9.054          | 68.200         | 5.967       | PK   |
| 11 |      | *    | 5938.600        | 59.847                 | 53.847               | -8.353          | 68.200         | 6.001       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                  |                          |
|------------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                        | Time: 2017/09/30 - 14:12 |
| Limit: FCC_Part15.209_RE(3m)                                                                                     | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                      | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                                | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beam-Forming Mode) |                          |

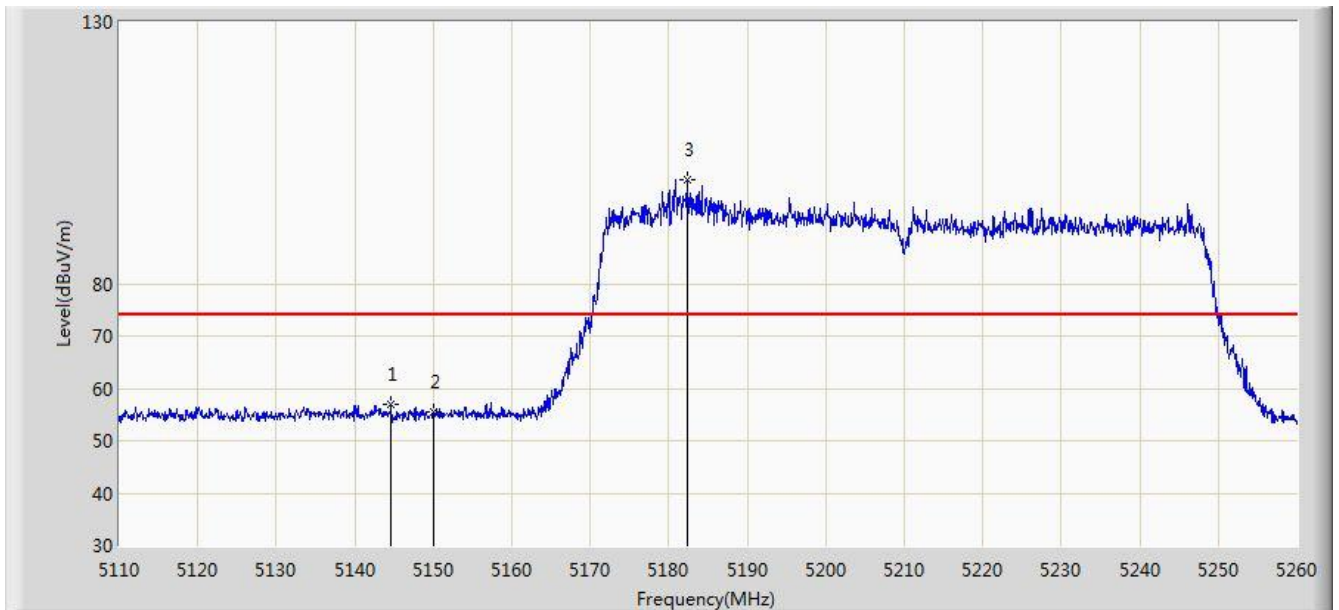


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5144.650        | 56.943                 | 52.767               | -17.057         | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 55.367                 | 51.198               | -18.633         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5182.300        | 99.942                 | 95.881               | N/A             | N/A            | 4.060       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                  |                          |
|------------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                        | Time: 2017/09/30 - 14:13 |
| Limit: FCC_Part15.209_RE(3m)                                                                                     | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                      | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                                | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beam-Forming Mode) |                          |

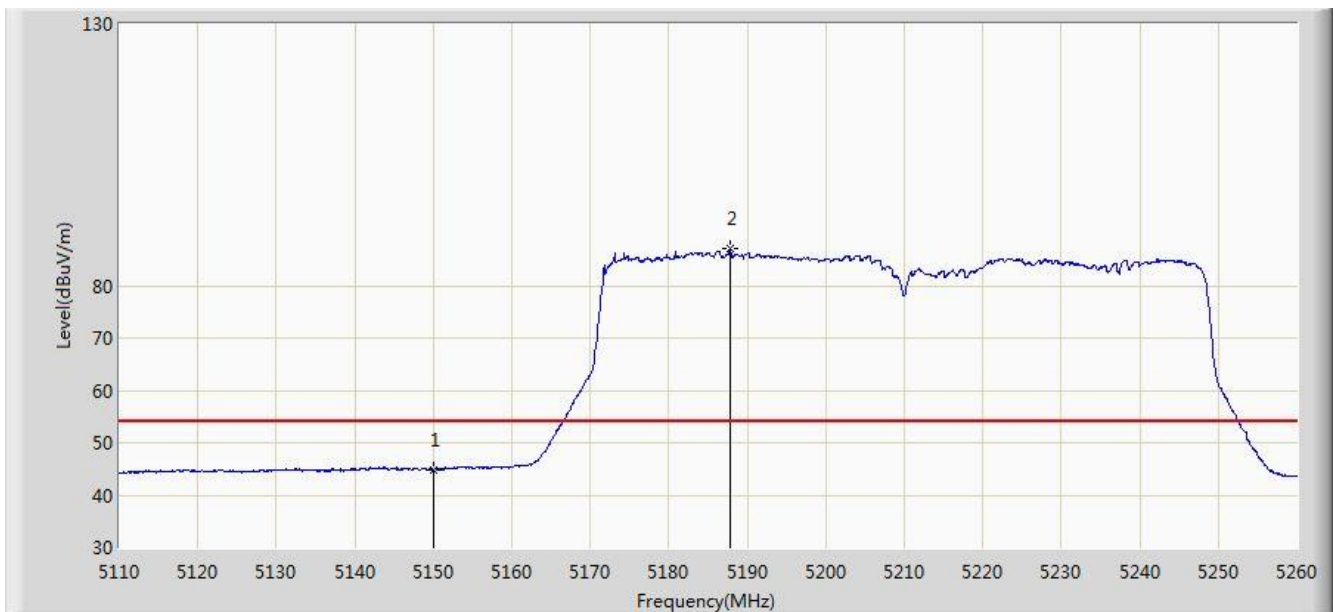


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 44.825                 | 40.656               | -9.175          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5187.850        | 86.991                 | 82.950               | N/A             | N/A            | 4.041       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                  |                          |
|------------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                        | Time: 2017/09/30 - 14:11 |
| Limit: FCC_Part15.209_RE(3m)                                                                                     | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                      | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                                | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beam-Forming Mode) |                          |

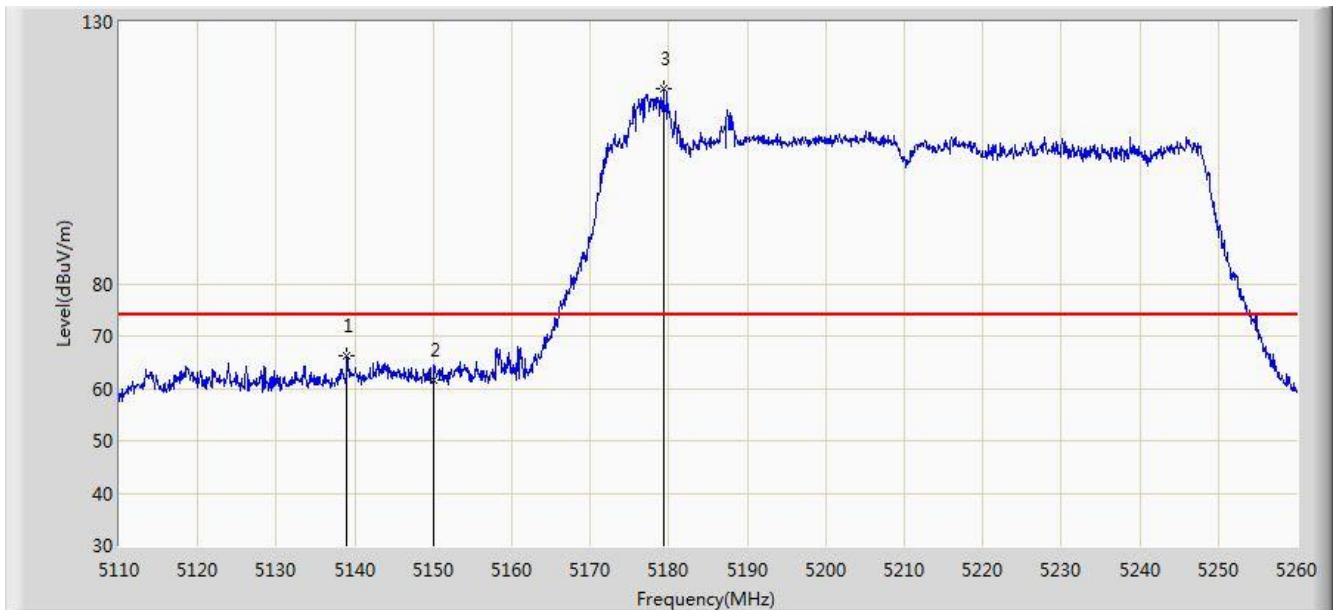


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5139.025        | 66.230                 | 62.055               | -7.770          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 61.465                 | 57.296               | -12.535         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5179.375        | 117.358                | 113.287              | N/A             | N/A            | 4.071       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                  |                          |
|------------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                        | Time: 2017/09/30 - 14:11 |
| Limit: FCC_Part15.209_RE(3m)                                                                                     | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                      | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                                | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beam-Forming Mode) |                          |

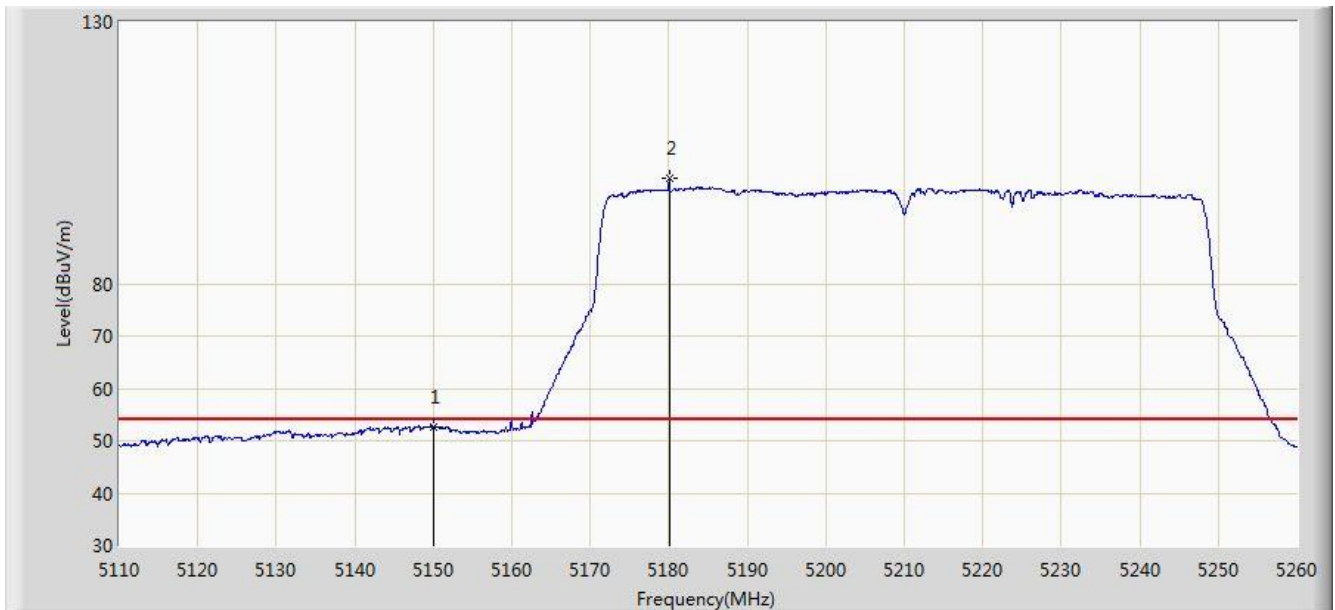


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.565                 | 48.396               | -1.435          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5180.050        | 100.181                | 96.112               | N/A             | N/A            | 4.069       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                  |                          |
|------------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                        | Time: 2017/09/30 - 14:33 |
| Limit: FCC_Part15.407_RE(3m)                                                                                     | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                      | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                                | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beam-Forming Mode) |                          |

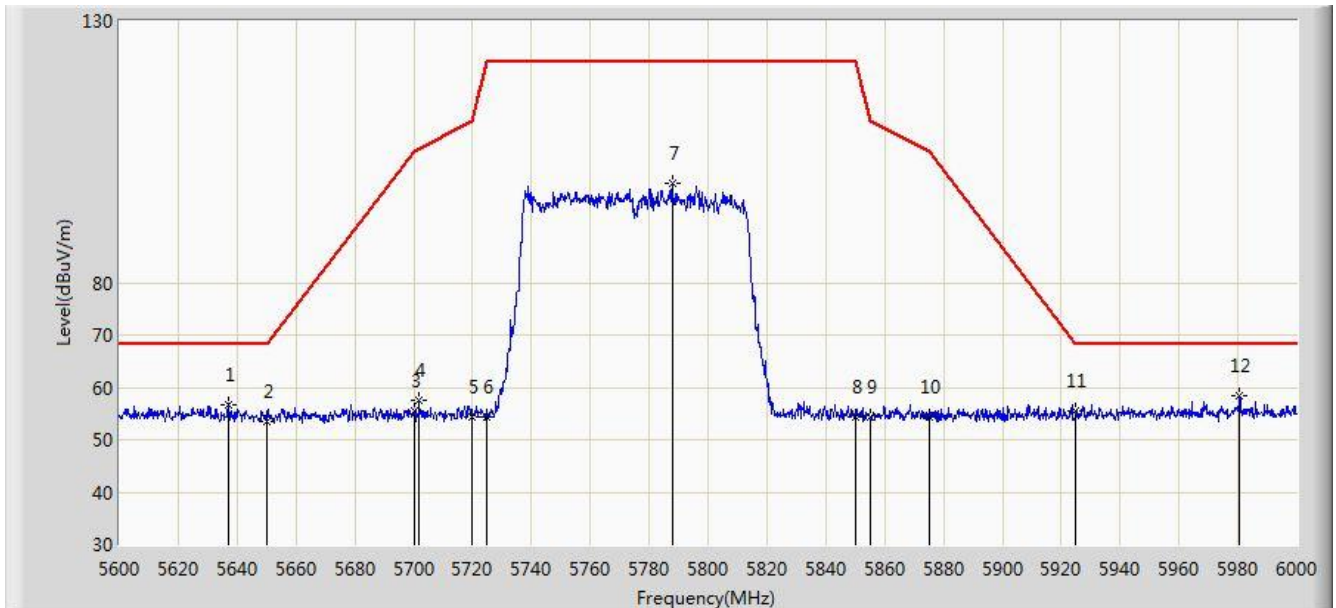


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5637.200        | 56.758                 | 52.128               | -11.442         | 68.200         | 4.630       | PK   |
| 2  |      |      | 5650.000        | 53.623                 | 48.952               | -14.577         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 55.370                 | 50.492               | -49.830         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5701.800        | 57.488                 | 52.600               | -48.217         | 105.705        | 4.887       | PK   |
| 5  |      |      | 5720.000        | 54.355                 | 49.358               | -56.445         | 110.800        | 4.997       | PK   |
| 6  |      |      | 5725.000        | 54.220                 | 49.191               | -67.980         | 122.200        | 5.029       | PK   |
| 7  |      |      | 5787.800        | 98.925                 | 93.544               | N/A             | N/A            | 5.381       | PK   |
| 8  |      |      | 5850.000        | 54.291                 | 48.565               | -67.909         | 122.200        | 5.726       | PK   |
| 9  |      |      | 5855.000        | 54.289                 | 48.543               | -56.511         | 110.800        | 5.746       | PK   |
| 10 |      |      | 5875.000        | 54.243                 | 48.423               | -50.957         | 105.200        | 5.820       | PK   |
| 11 |      |      | 5925.000        | 55.367                 | 49.401               | -12.833         | 68.200         | 5.967       | PK   |
| 12 |      | *    | 5980.600        | 58.307                 | 52.228               | -9.893          | 68.200         | 6.079       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                  |                          |
|------------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                        | Time: 2017/09/30 - 14:38 |
| Limit: FCC_Part15.407_RE(3m)                                                                                     | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                      | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                                | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3<br>(Beam-Forming Mode) |                          |

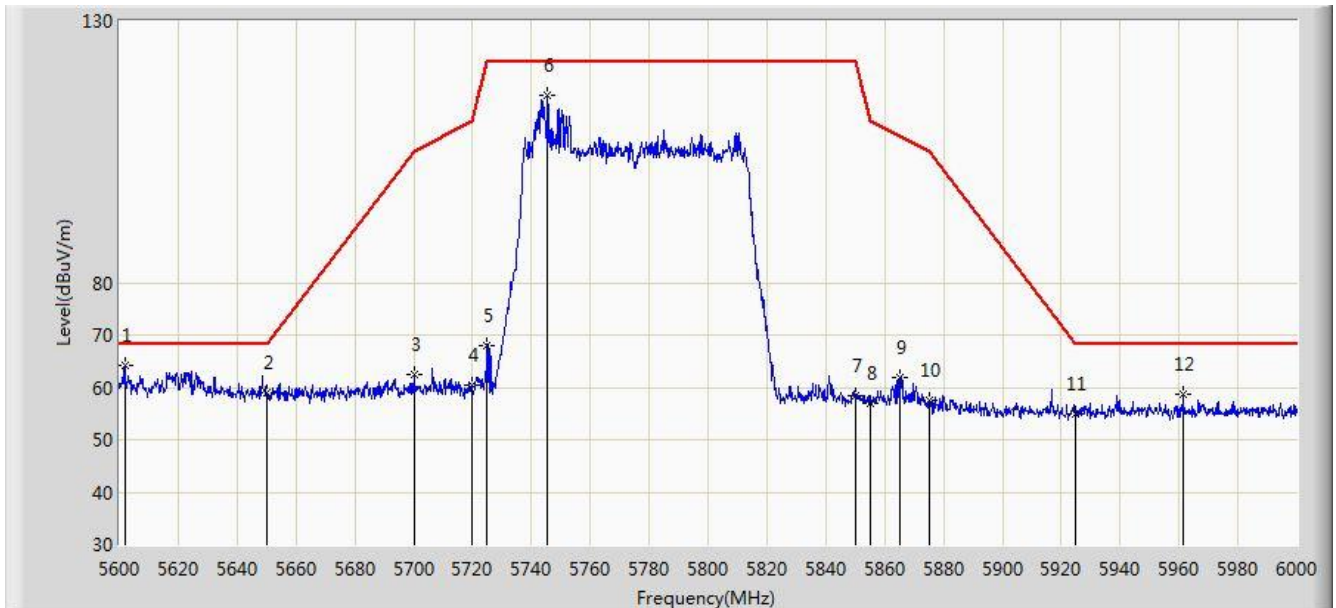


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5601.800        | 64.331                 | 59.799               | -3.869          | 68.200         | 4.531       | PK   |
| 2  |      |      | 5650.000        | 58.982                 | 54.311               | -9.218          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 62.350                 | 57.472               | -42.850         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 60.297                 | 55.300               | -50.503         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 68.017                 | 62.988               | -54.183         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5745.600        | 115.908                | 110.750              | N/A             | N/A            | 5.158       | PK   |
| 7  |      |      | 5850.000        | 58.346                 | 52.620               | -63.854         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 56.818                 | 51.072               | -53.982         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5865.400        | 61.955                 | 56.168               | -45.931         | 107.886        | 5.787       | PK   |
| 10 |      |      | 5875.000        | 57.656                 | 51.836               | -47.544         | 105.200        | 5.820       | PK   |
| 11 |      |      | 5925.000        | 55.066                 | 49.100               | -13.134         | 68.200         | 5.967       | PK   |
| 12 |      |      | 5961.400        | 58.745                 | 52.699               | -9.455          | 68.200         | 6.047       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                  |                          |
|------------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                        | Time: 2017/09/30 - 14:40 |
| Limit: FCC_Part15.209_RE(3m)                                                                                     | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                      | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                                | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beam-Forming Mode) |                          |

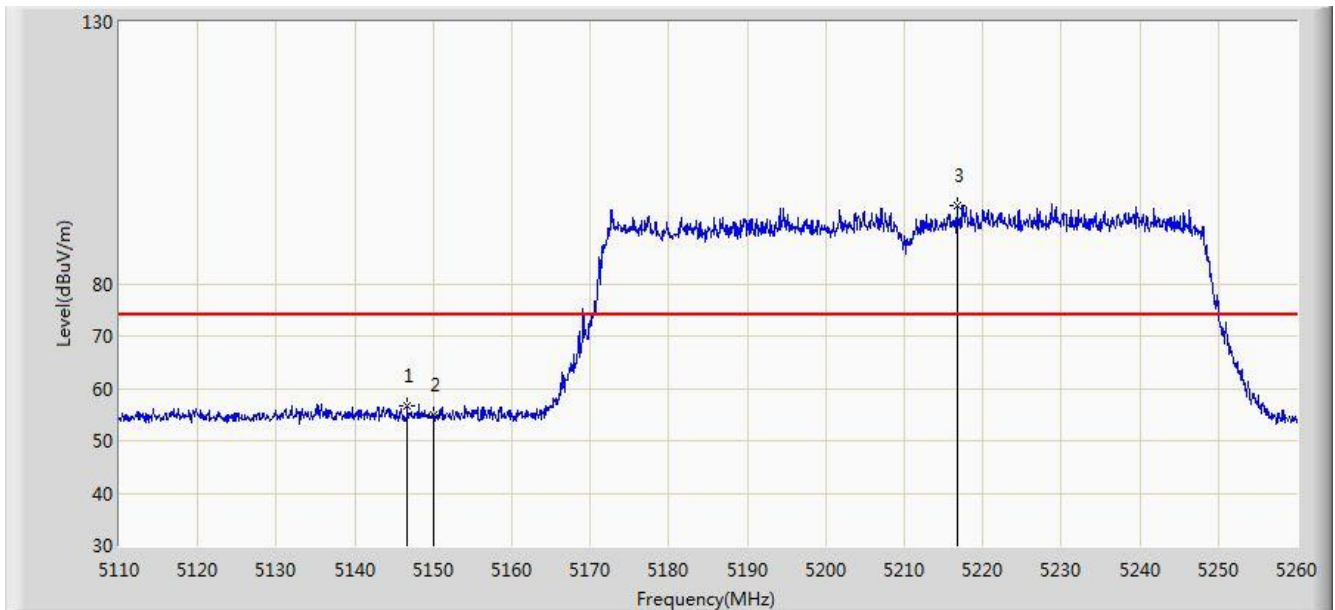


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5146.675        | 56.703                 | 52.527               | -17.297         | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 54.856                 | 50.687               | -19.144         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5216.725        | 95.016                 | 91.067               | N/A             | N/A            | 3.949       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                  |                          |
|------------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                        | Time: 2017/09/30 - 14:46 |
| Limit: FCC_Part15.209_RE(3m)                                                                                     | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                      | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                                | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beam-Forming Mode) |                          |

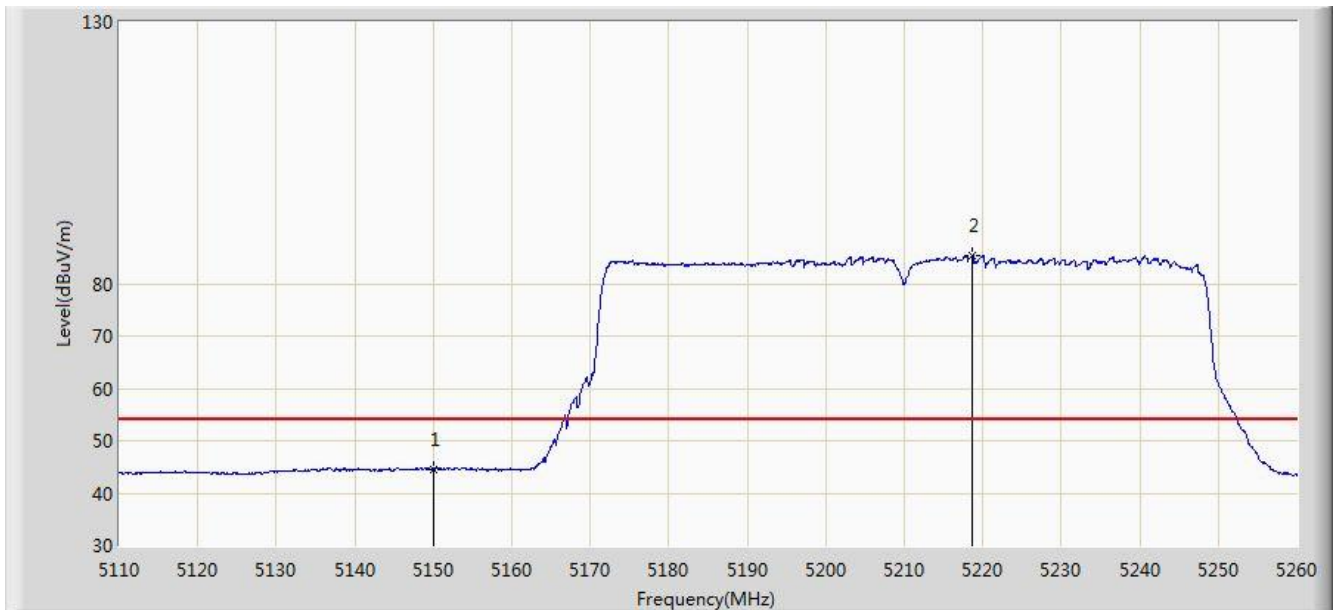


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 44.559                 | 40.390               | -9.441          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5218.600        | 85.225                 | 81.282               | N/A             | N/A            | 3.943       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                  |                          |
|------------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                        | Time: 2017/09/30 - 14:47 |
| Limit: FCC_Part15.209_RE(3m)                                                                                     | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                      | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                                | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beam-Forming Mode) |                          |

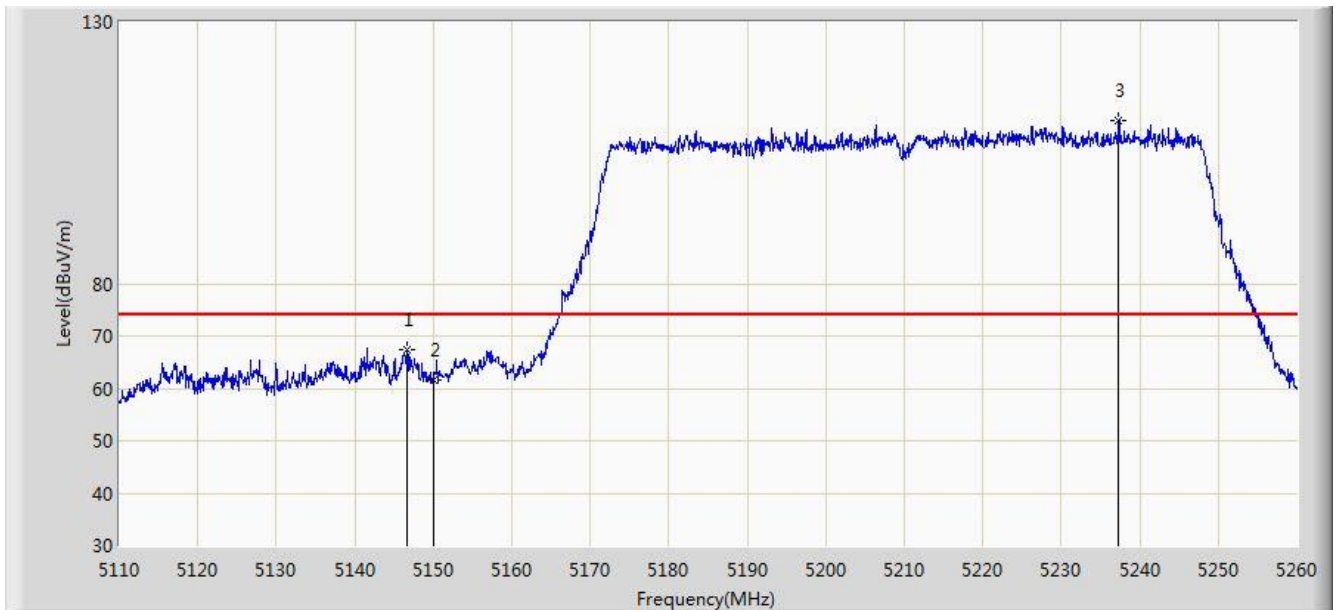


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5146.675        | 67.528                 | 63.352               | -6.472          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 61.639                 | 57.470               | -12.361         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5237.275        | 111.134                | 107.246              | N/A             | N/A            | 3.887       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                  |                          |
|------------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                        | Time: 2017/09/30 - 14:48 |
| Limit: FCC_Part15.209_RE(3m)                                                                                     | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                      | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                                | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beam-Forming Mode) |                          |

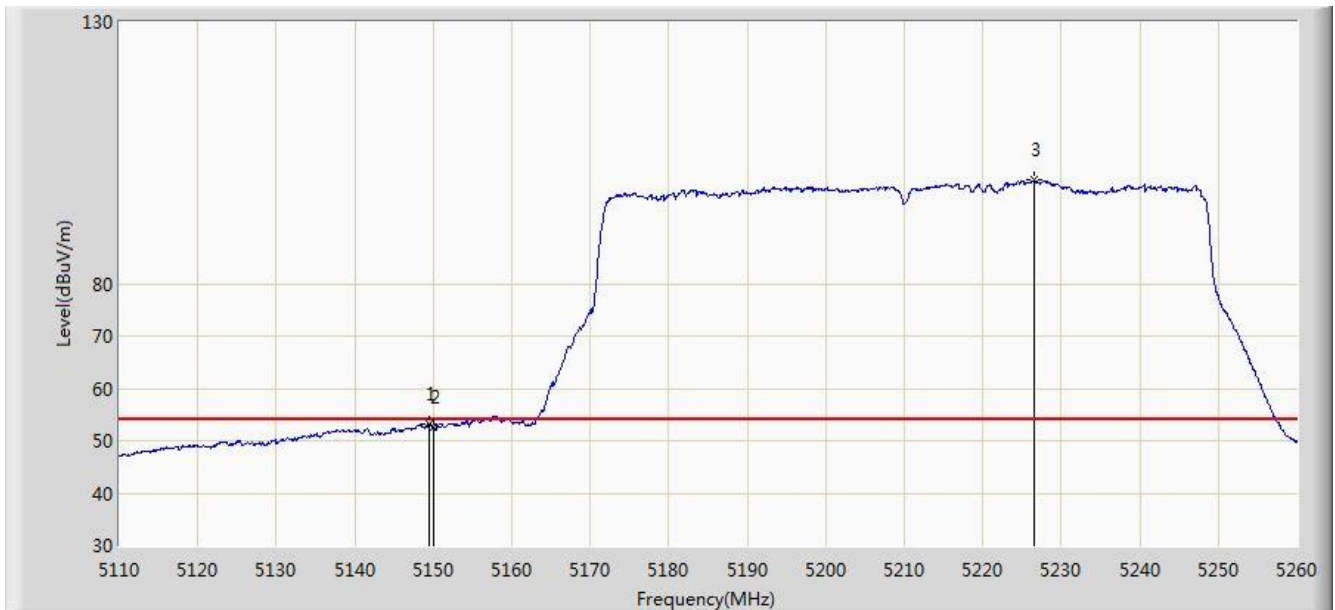


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.525        | 53.140                 | 48.969               | -0.860          | 54.000         | 4.170       | AV   |
| 2  |      |      | 5150.000        | 52.565                 | 48.396               | -1.435          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5226.550        | 99.728                 | 95.808               | N/A             | N/A            | 3.919       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                  |                          |
|------------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                        | Time: 2017/09/30 - 15:05 |
| Limit: FCC_Part15.407_RE(3m)                                                                                     | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                      | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                                                | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beam-Forming Mode) |                          |

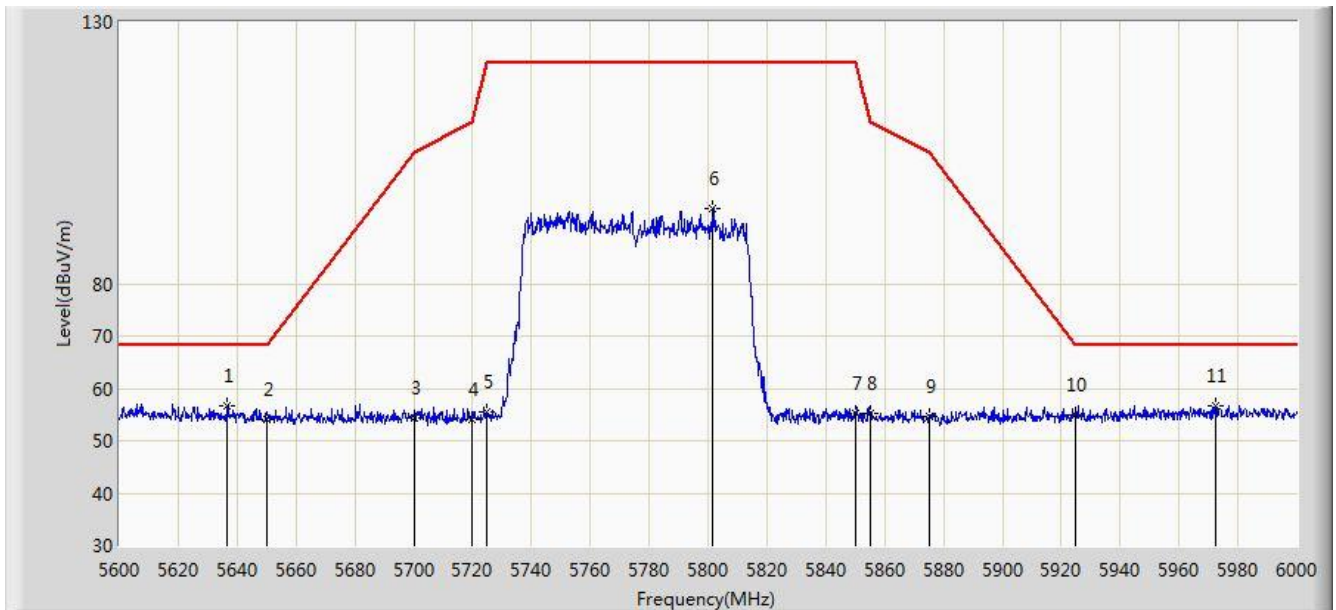


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5636.800        | 56.626                 | 51.998               | -11.574         | 68.200         | 4.628       | PK   |
| 2  |      |      | 5650.000        | 54.018                 | 49.347               | -14.182         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 54.438                 | 49.560               | -50.762         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 53.929                 | 48.932               | -56.871         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 55.404                 | 50.375               | -66.796         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5801.600        | 94.407                 | 88.953               | N/A             | N/A            | 5.454       | PK   |
| 7  |      |      | 5850.000        | 55.183                 | 49.457               | -67.017         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 55.229                 | 49.483               | -55.571         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 54.503                 | 48.683               | -50.697         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 55.033                 | 49.067               | -13.167         | 68.200         | 5.967       | PK   |
| 11 |      |      | 5972.200        | 56.564                 | 50.499               | -11.636         | 68.200         | 6.065       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                                                  |                          |
|------------------------------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                                        | Time: 2017/09/30 - 15:09 |
| Limit: FCC_Part15.407_RE(3m)                                                                                     | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                                                      | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                                                | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3<br>(Beam-Forming Mode) |                          |

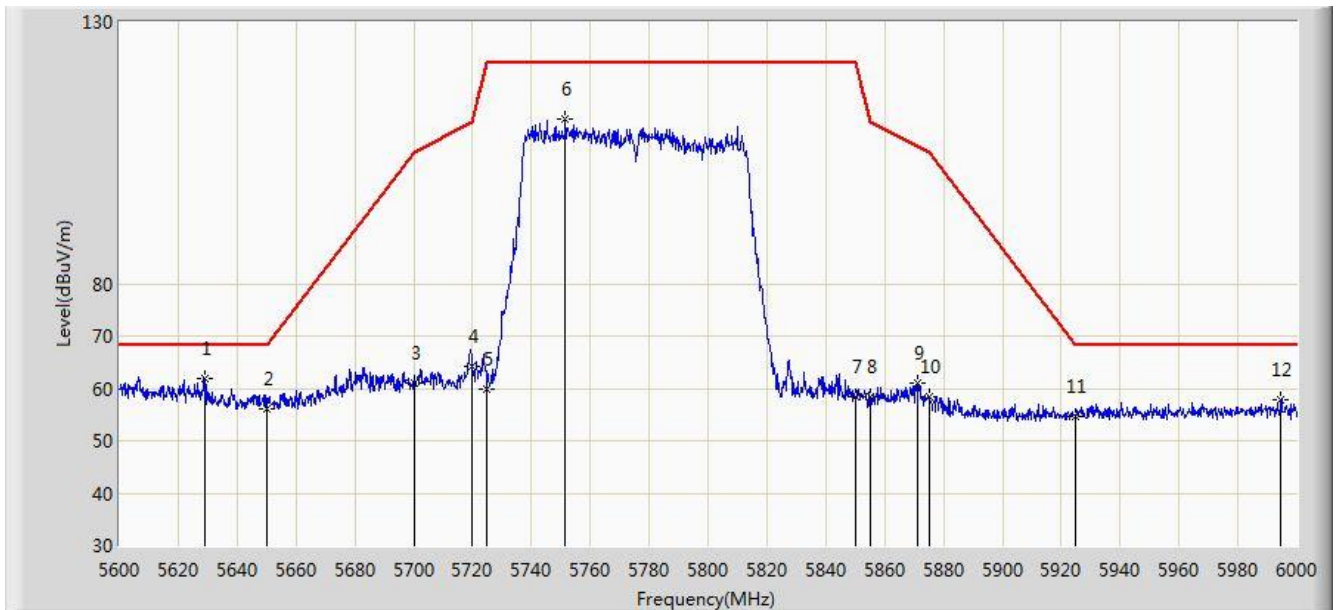


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5629.000        | 61.851                 | 57.245               | -6.349          | 68.200         | 4.607       | PK   |
| 2  |      |      | 5650.000        | 56.005                 | 51.334               | -12.195         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 61.044                 | 56.166               | -44.156         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 64.153                 | 59.156               | -46.647         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 59.903                 | 54.874               | -62.297         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5751.400        | 111.471                | 106.280              | N/A             | N/A            | 5.191       | PK   |
| 7  |      |      | 5850.000        | 58.509                 | 52.783               | -63.691         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 58.383                 | 52.637               | -52.417         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5871.000        | 60.875                 | 55.069               | -45.443         | 106.318        | 5.806       | PK   |
| 10 |      |      | 5875.000        | 58.453                 | 52.633               | -46.747         | 105.200        | 5.820       | PK   |
| 11 |      |      | 5925.000        | 54.563                 | 48.597               | -13.637         | 68.200         | 5.967       | PK   |
| 12 |      |      | 5994.600        | 57.822                 | 51.721               | -10.378         | 68.200         | 6.101       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**For Directional Antenna (AP-ANT-48):**

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/08/24 - 04:50 |
| Limit: FCC_Part15.209_RE(3m)                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

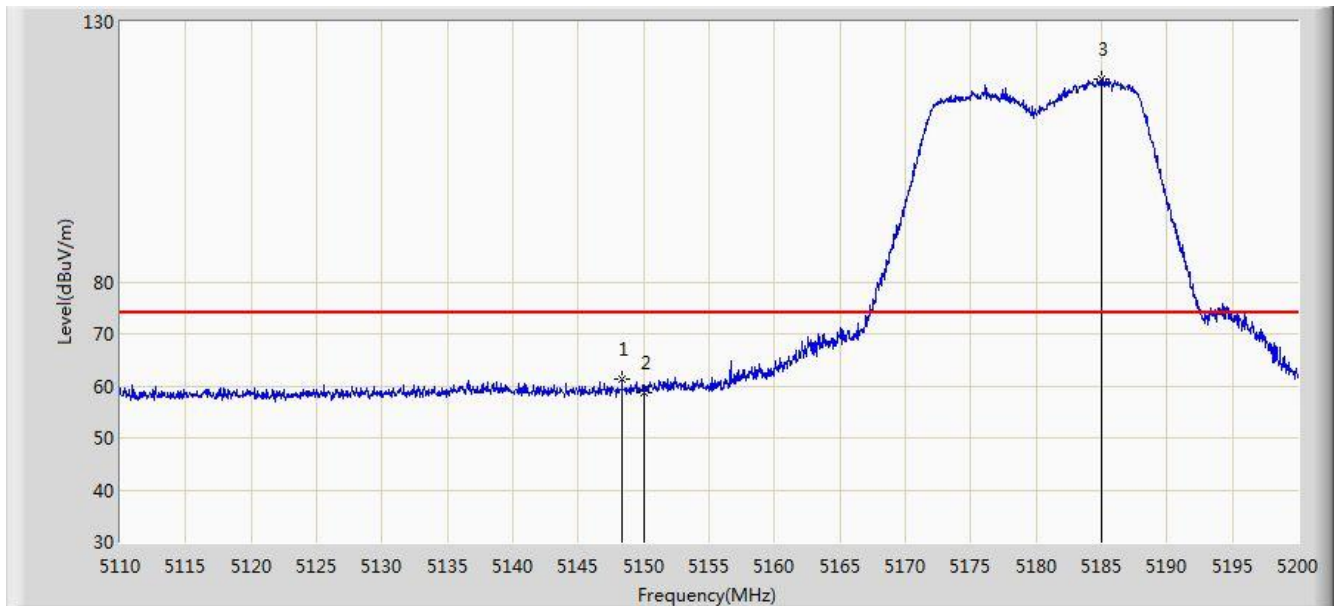


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.340        | 61.401                 | 57.227               | -12.599         | 74.000         | 4.174       | PK   |
| 2  |      |      | 5150.000        | 58.594                 | 54.425               | -15.406         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5185.015        | 119.122                | 115.071              | N/A             | N/A            | 4.052       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/08/24 - 04:53 |
| Limit: FCC_Part15.209_RE(3m)                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

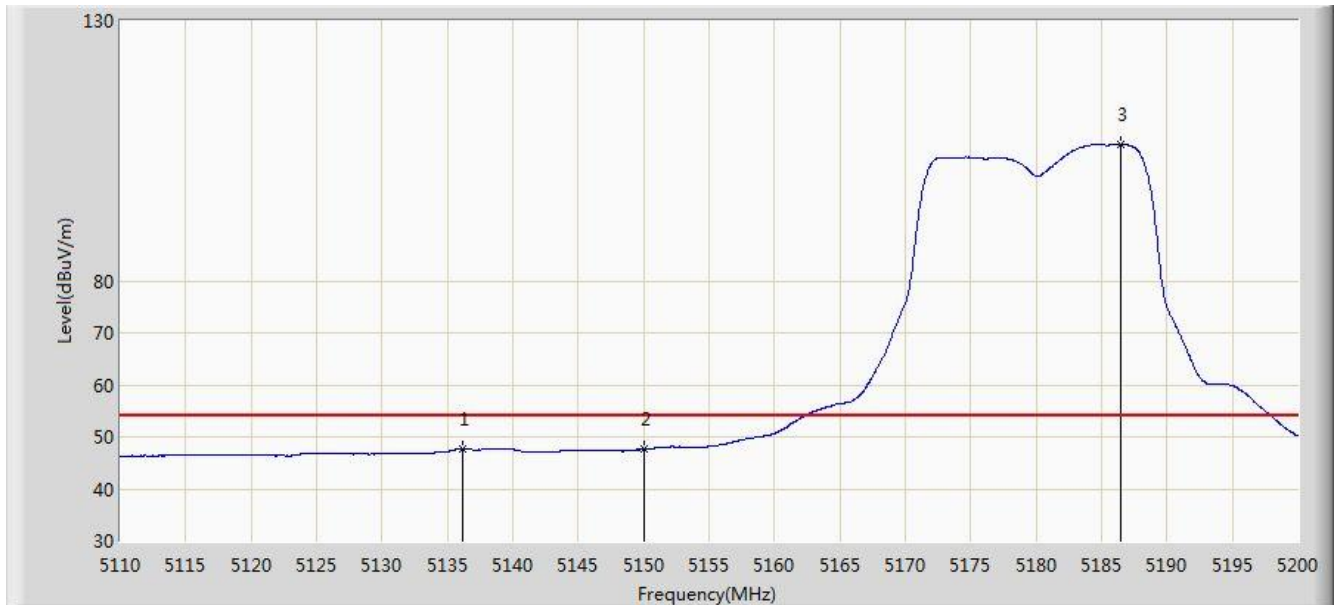


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5136.145        | 47.773                 | 43.598               | -6.227          | 54.000         | 4.175       | AV   |
| 2  |      |      | 5150.000        | 47.621                 | 43.452               | -6.379          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5186.455        | 106.350                | 102.304              | N/A             | N/A            | 4.046       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/08/24 - 04:55 |
| Limit: FCC_Part15.209_RE(3m)                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

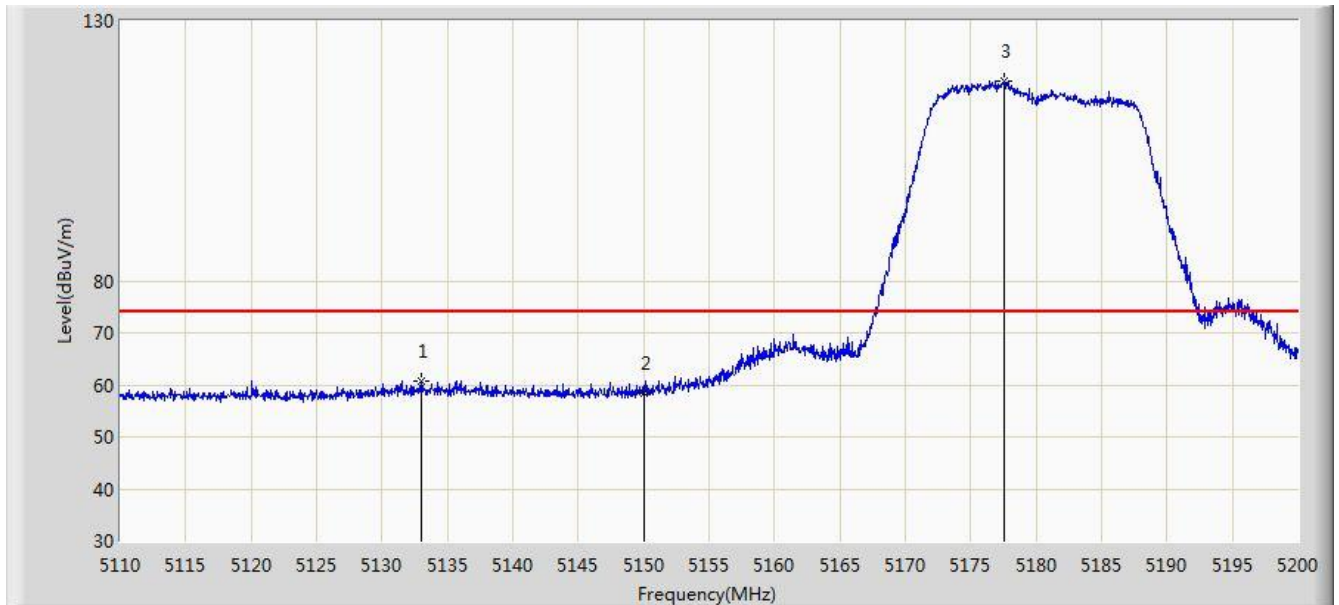


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5133.040        | 60.755                 | 56.580               | -13.245         | 74.000         | 4.175       | PK   |
| 2  |      |      | 5150.000        | 58.407                 | 54.238               | -15.593         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5177.545        | 118.394                | 114.316              | N/A             | N/A            | 4.077       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/08/24 - 04:57 |
| Limit: FCC_Part15.209_RE(3m)                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

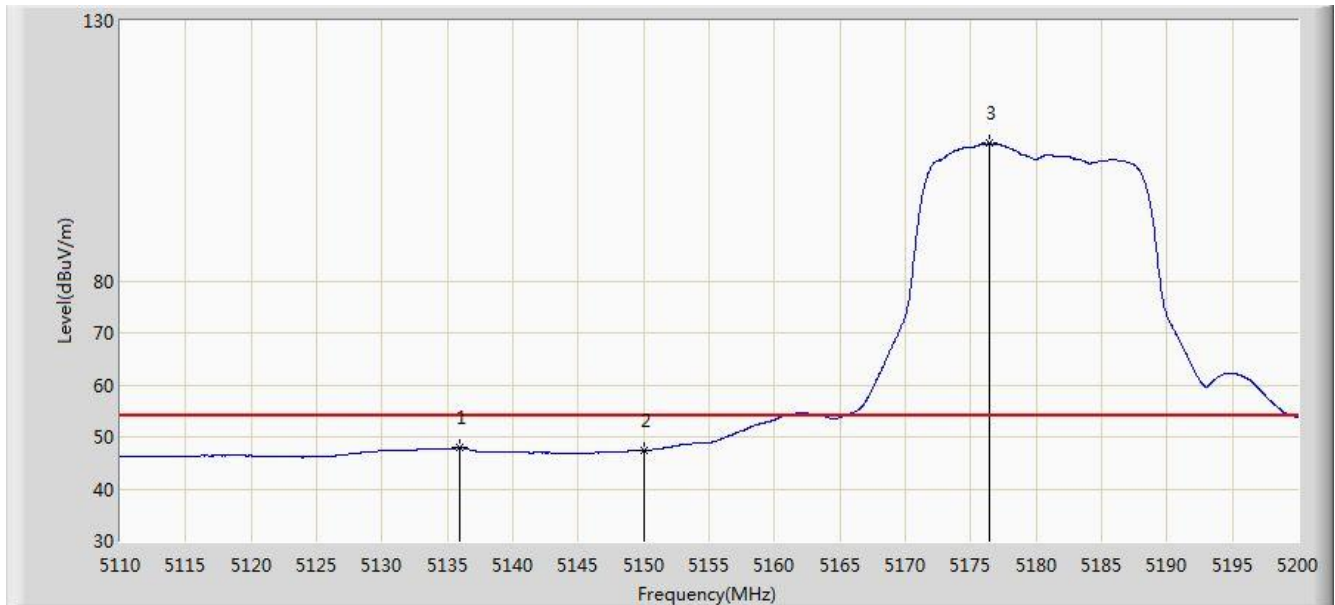


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5135.920        | 47.982                 | 43.807               | -6.018          | 54.000         | 4.175       | AV   |
| 2  |      |      | 5150.000        | 47.431                 | 43.262               | -6.569          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5176.420        | 106.421                | 102.339              | N/A             | N/A            | 4.081       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)


|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/08/24 - 05:33 |
| Limit: FCC_Part15.407_RE(3m)                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

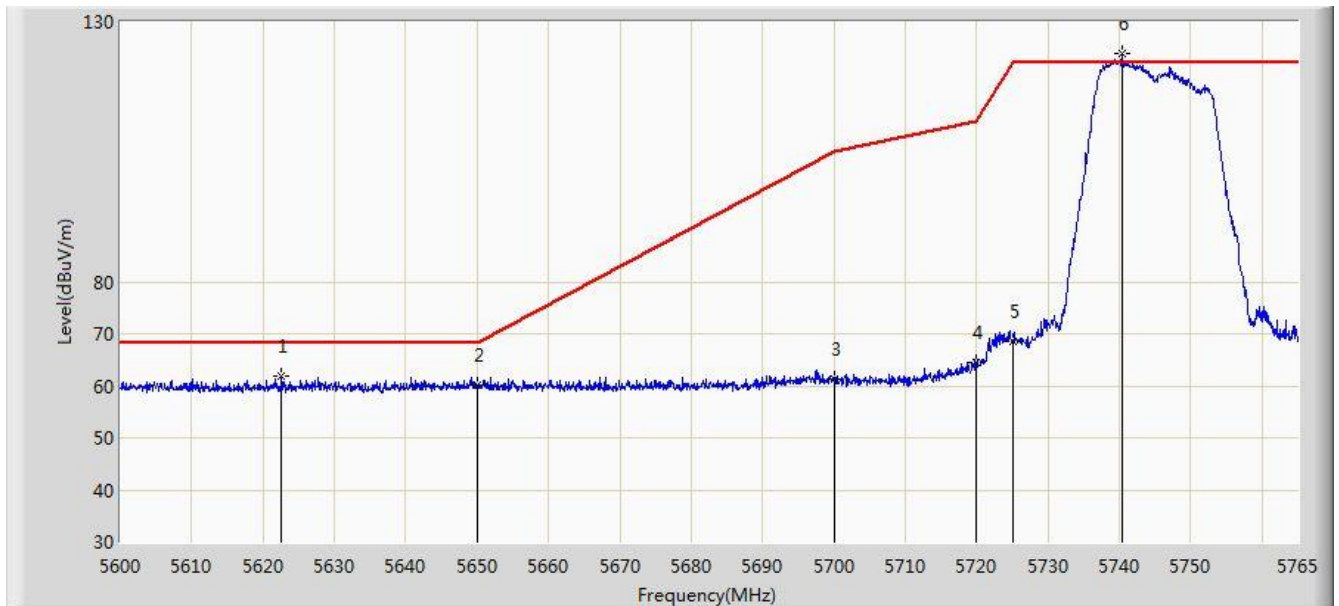

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/08/24 - 05:41 |
| Limit: FCC_Part15.407_RE(3m)                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

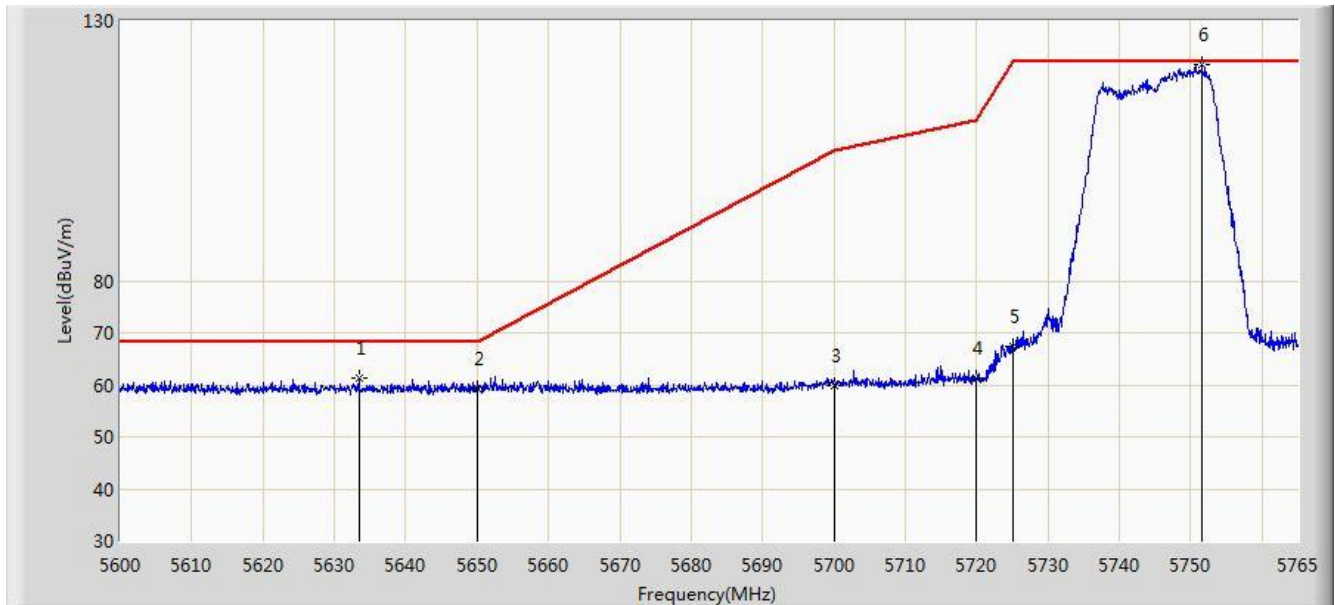


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5633.413        | 61.310                 | 56.691               | -6.890          | 68.200         | 4.618       | PK   |
| 2  |      |      | 5650.000        | 59.314                 | 54.643               | -8.886          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 59.962                 | 55.084               | -45.238         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 61.218                 | 56.221               | -49.582         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 67.451                 | 62.422               | -54.749         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5751.553        | 121.470                | 116.278              | N/A             | N/A            | 5.192       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/08/24 - 05:46 |
| Limit: FCC_Part15.407_RE(3m)                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

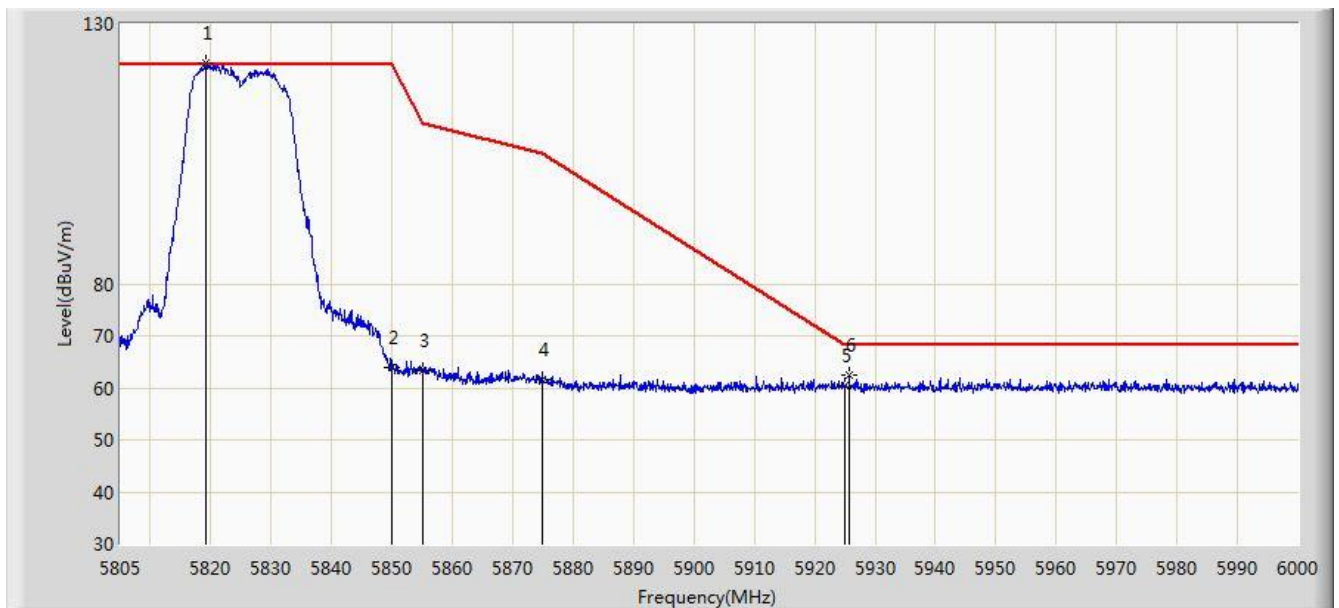


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5819.235        | 122.466                | 116.912              | N/A             | N/A            | 5.554       | PK   |
| 2  |      |      | 5850.000        | 63.838                 | 58.112               | -58.362         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 63.469                 | 57.723               | -47.331         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 61.534                 | 55.714               | -43.666         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 60.393                 | 54.427               | -7.807          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5925.705        | 62.451                 | 56.483               | -5.749          | 68.200         | 5.968       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2017/08/24 - 05:50 |
| Limit: FCC_Part15.407_RE(3m)                                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                    | Polarity: Vertical       |
| EUT: ACCESS POINT                                                              | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

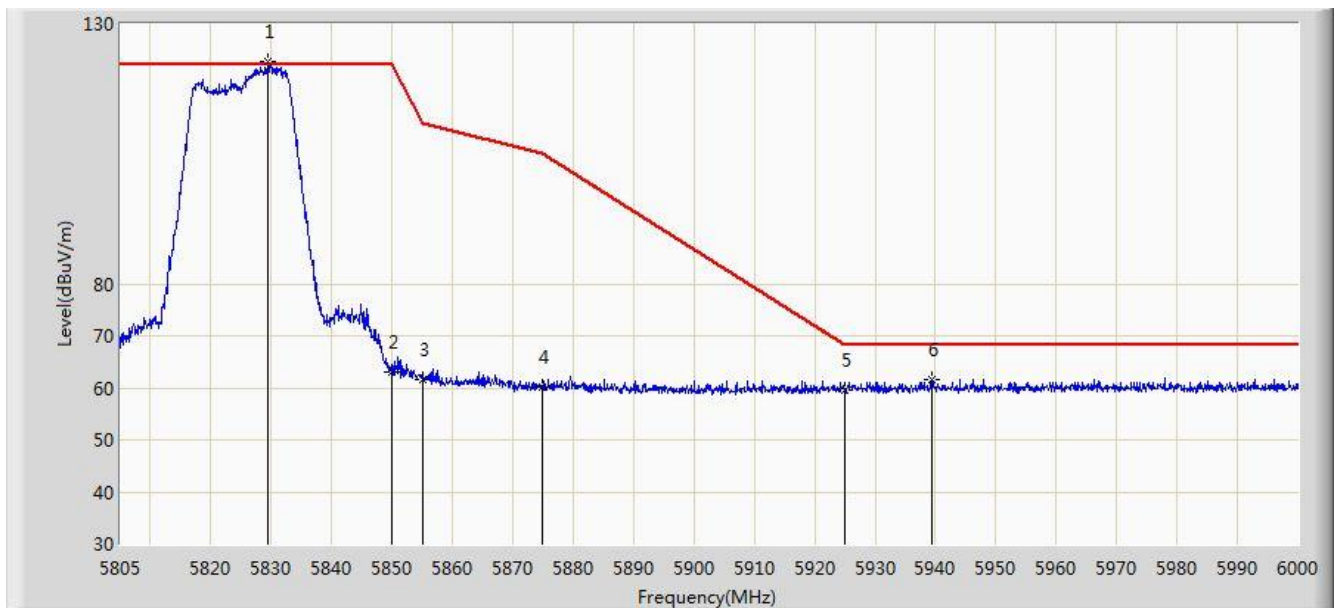


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5829.473        | 122.818                | 117.204              | N/A             | N/A            | 5.614       | PK   |
| 2  |      |      | 5850.000        | 63.115                 | 57.389               | -59.085         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 61.525                 | 55.779               | -49.275         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 60.289                 | 54.469               | -44.911         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 59.432                 | 53.466               | -8.768          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5939.355        | 61.664                 | 55.662               | -6.536          | 68.200         | 6.002       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 05:56 |
| Limit: FCC_Part15.209_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

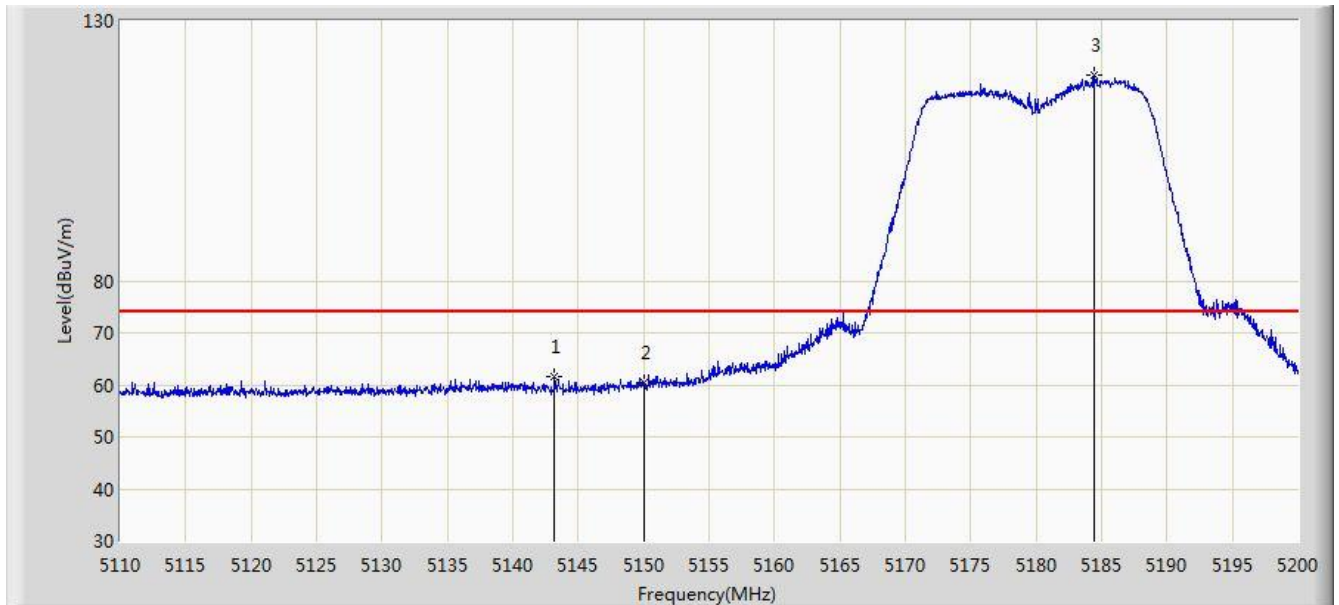

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5143.165        | 61.579                 | 57.403               | -12.421         | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 60.534                 | 56.365               | -13.466         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5184.385        | 119.531                | 115.478              | N/A             | N/A            | 4.053       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 05:58 |
| Limit: FCC_Part15.209_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5136.100        | 47.820                 | 43.645               | -6.180          | 54.000         | 4.175       | AV   |
| 2  |      |      | 5150.000        | 47.767                 | 43.598               | -6.233          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5185.600        | 107.414                | 103.365              | N/A             | N/A            | 4.049       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 06:00 |
| Limit: FCC_Part15.209_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

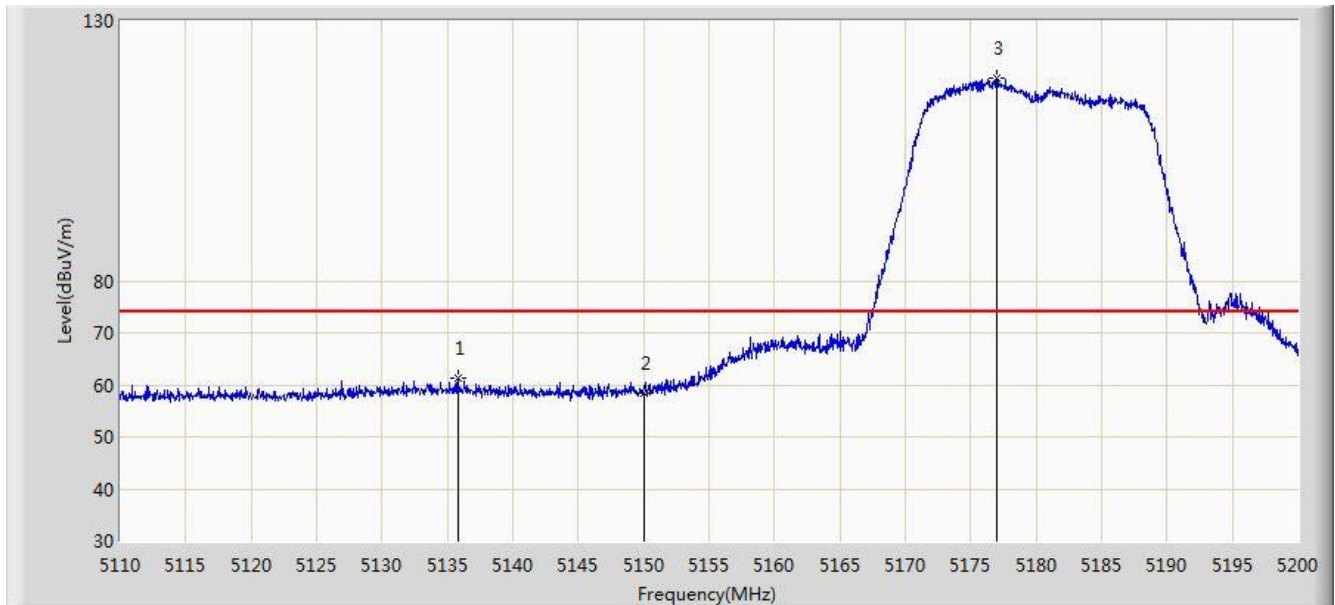


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5135.785        | 61.423                 | 57.248               | -12.577         | 74.000         | 4.175       | PK   |
| 2  |      |      | 5150.000        | 58.440                 | 54.271               | -15.560         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5177.005        | 118.924                | 114.845              | N/A             | N/A            | 4.080       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 06:03 |
| Limit: FCC_Part15.209_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

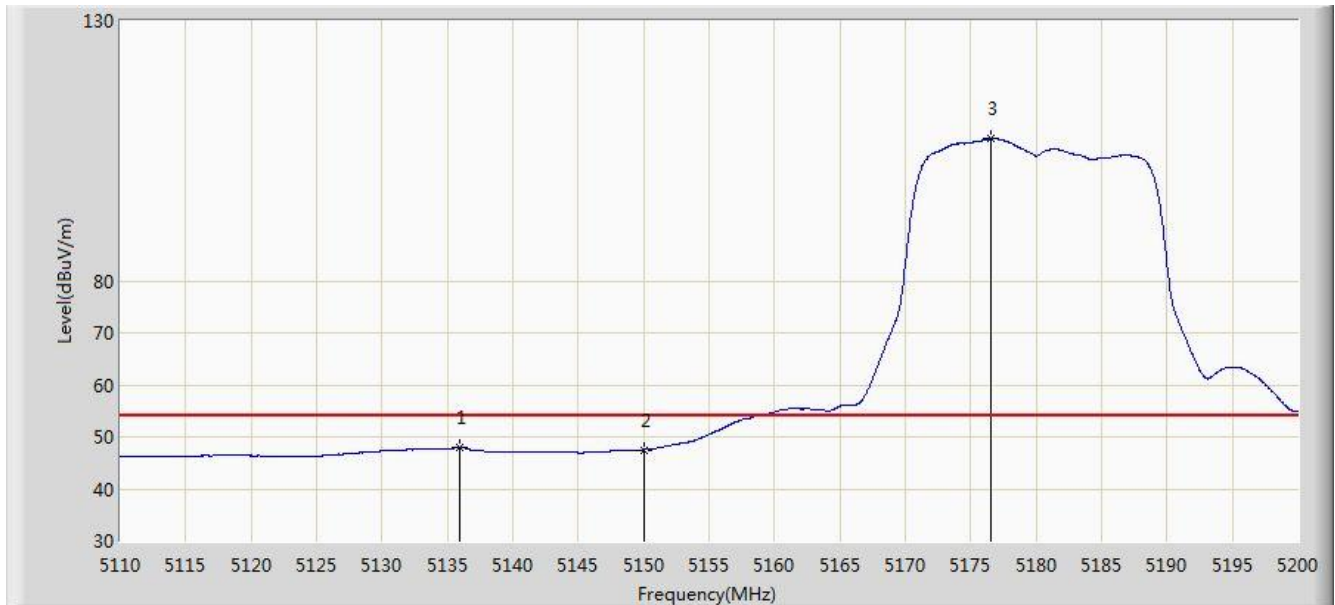


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5135.965        | 48.033                 | 43.858               | -5.967          | 54.000         | 4.175       | AV   |
| 2  |      |      | 5150.000        | 47.530                 | 43.361               | -6.470          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5176.555        | 107.320                | 103.239              | N/A             | N/A            | 4.081       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 06:38 |
| Limit: FCC_Part15.407_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

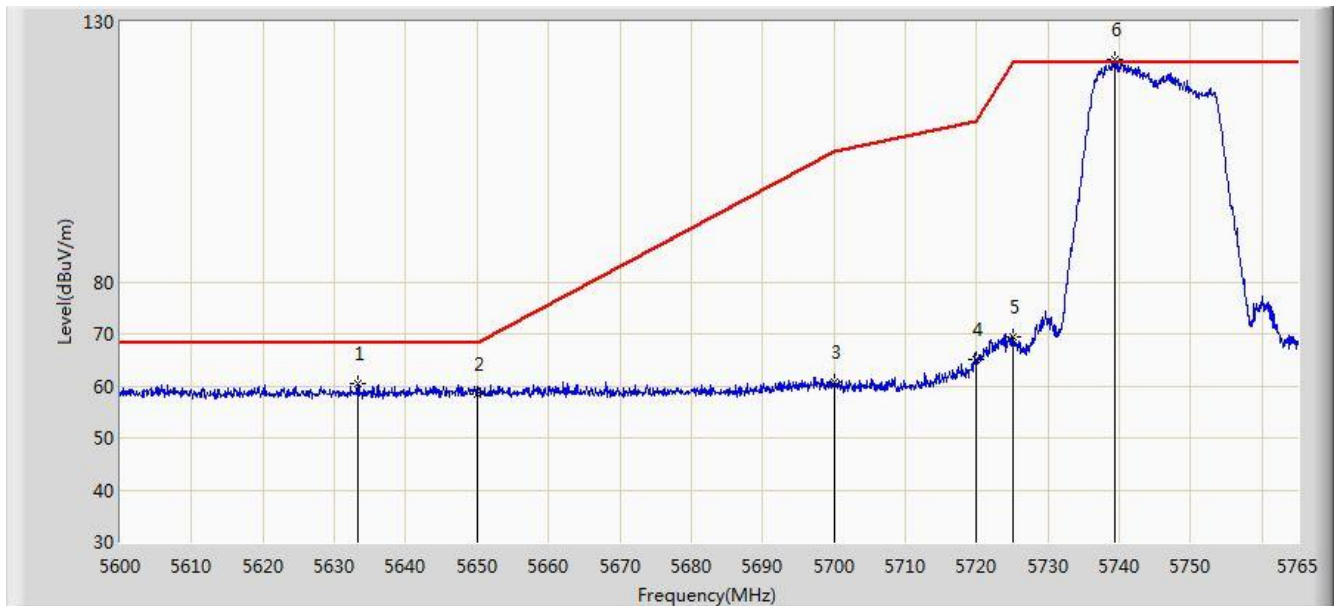


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5633.248        | 60.349                 | 55.731               | -7.851          | 68.200         | 4.618       | PK   |
| 2  |      |      | 5650.000        | 58.365                 | 53.694               | -9.835          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 60.624                 | 55.746               | -44.576         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 65.016                 | 60.019               | -45.784         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 69.313                 | 64.284               | -52.887         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5739.425        | 122.778                | 117.657              | N/A             | N/A            | 5.122       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 06:46 |
| Limit: FCC_Part15.407_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

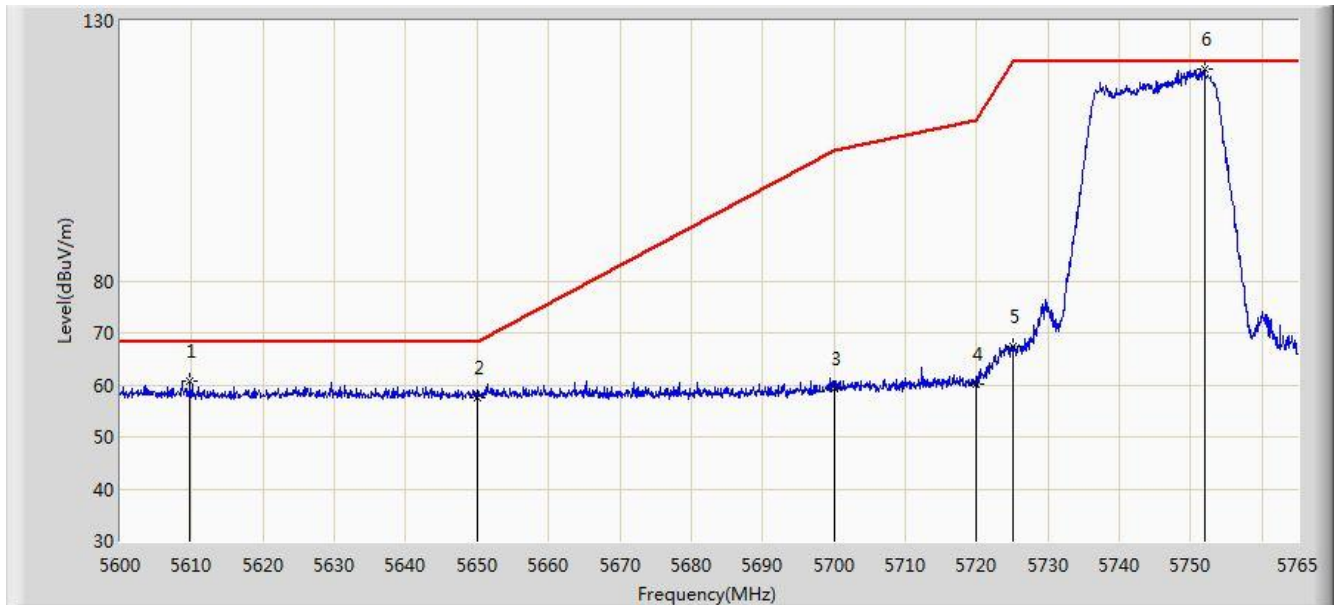


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5609.735        | 60.715                 | 56.164               | -7.485          | 68.200         | 4.551       | PK   |
| 2  |      |      | 5650.000        | 57.601                 | 52.930               | -10.599         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 59.246                 | 54.368               | -45.954         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 60.161                 | 55.164               | -50.639         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 67.275                 | 62.246               | -54.925         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5751.882        | 120.650                | 115.456              | N/A             | N/A            | 5.194       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 06:53 |
| Limit: FCC_Part15.407_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

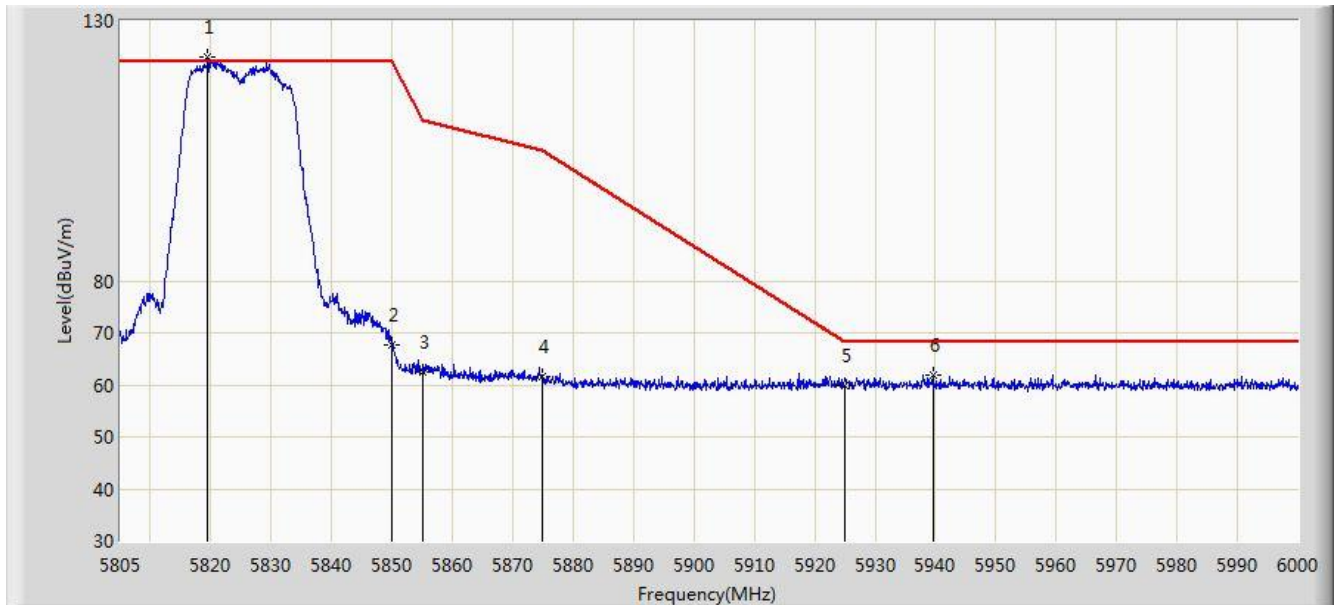


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5819.430        | 123.033                | 117.478              | N/A             | N/A            | 5.556       | PK   |
| 2  |      |      | 5850.000        | 67.624                 | 61.898               | -54.576         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 62.551                 | 56.805               | -48.249         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 61.651                 | 55.831               | -43.549         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 59.750                 | 53.784               | -8.450          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5939.550        | 61.939                 | 55.936               | -6.261          | 68.200         | 6.003       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 07:03 |
| Limit: FCC_Part15.407_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

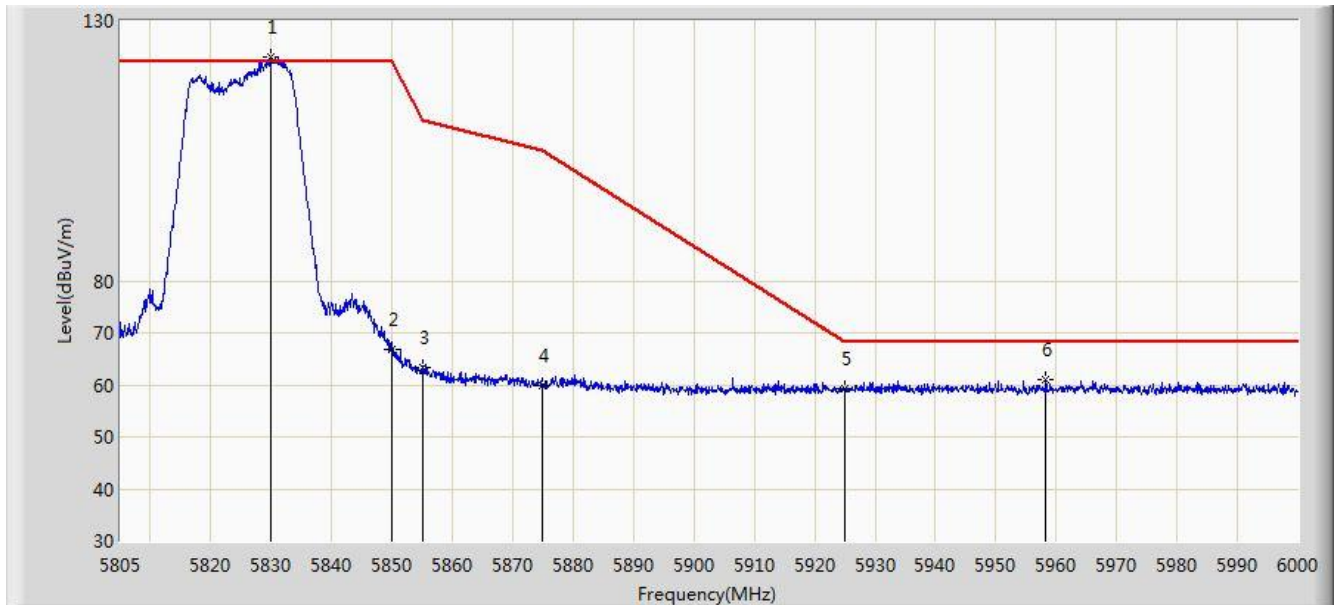


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5829.862        | 123.070                | 117.454              | N/A             | N/A            | 5.616       | PK   |
| 2  |      |      | 5850.000        | 66.865                 | 61.139               | -55.335         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 63.355                 | 57.609               | -47.445         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 59.934                 | 54.114               | -45.266         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 59.202                 | 53.236               | -8.998          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5958.270        | 60.958                 | 54.917               | -7.242          | 68.200         | 6.041       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 07:38 |
| Limit: FCC_Part15.209_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

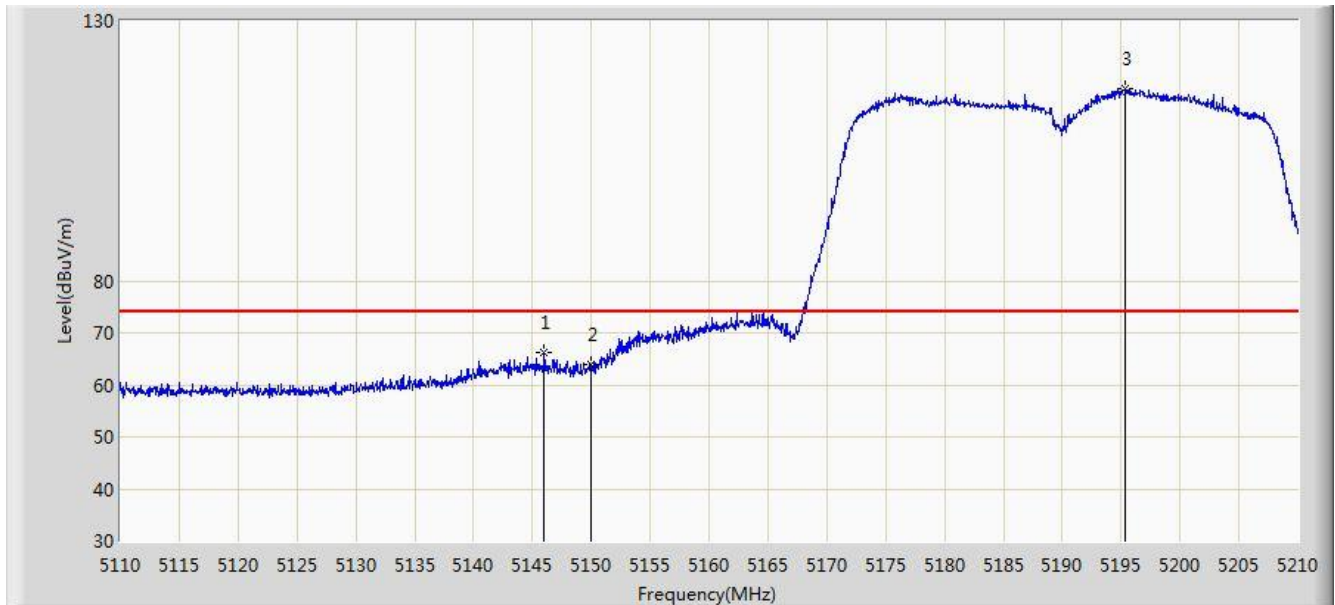


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5146.000        | 66.145                 | 61.969               | -7.855          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 63.828                 | 59.659               | -10.172         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5195.400        | 116.861                | 112.847              | N/A             | N/A            | 4.013       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 07:41 |
| Limit: FCC_Part15.209_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

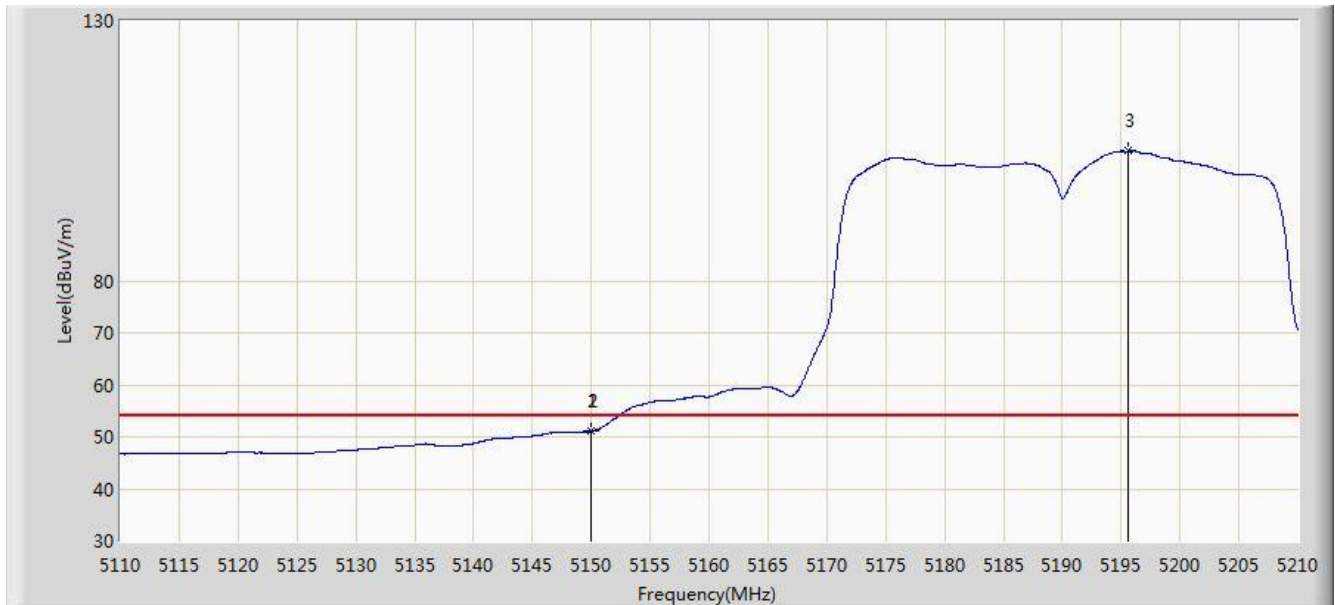


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.950        | 51.148                 | 46.979               | -2.852          | 54.000         | 4.170       | AV   |
| 2  |      |      | 5150.000        | 51.143                 | 46.974               | -2.857          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5195.550        | 104.939                | 100.925              | N/A             | N/A            | 4.014       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 07:37 |
| Limit: FCC_Part15.209_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

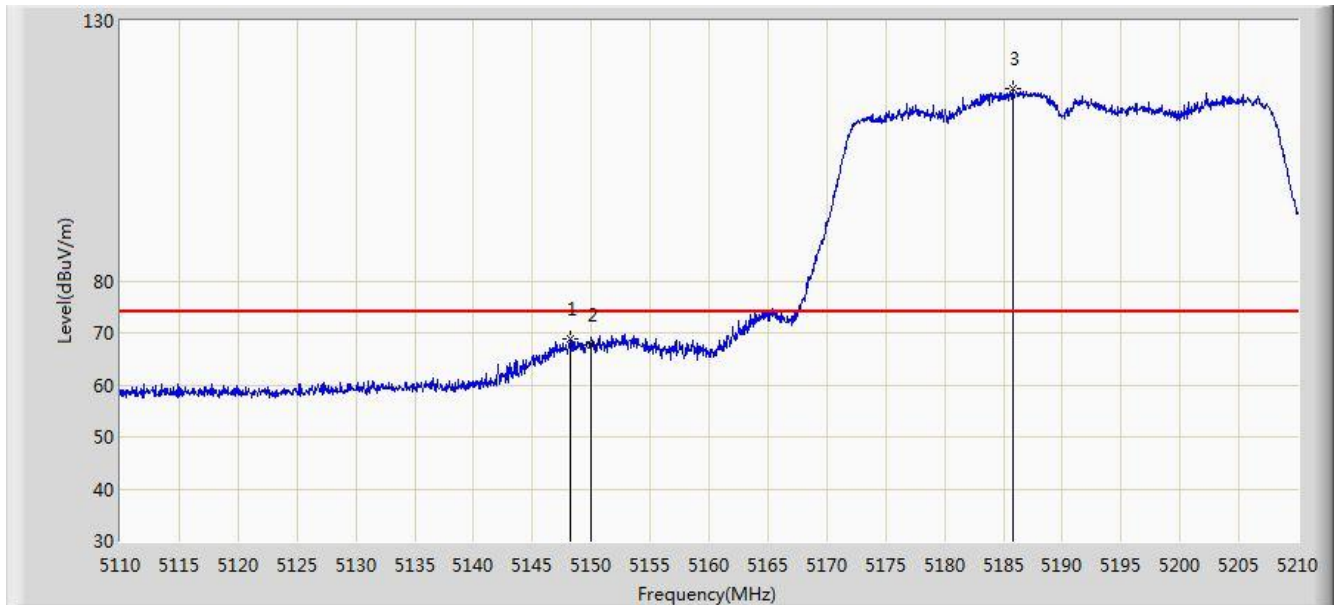


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.200        | 68.751                 | 64.576               | -5.249          | 74.000         | 4.174       | PK   |
| 2  |      |      | 5150.000        | 67.635                 | 63.466               | -6.365          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5185.800        | 116.977                | 112.929              | N/A             | N/A            | 4.048       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 07:36 |
| Limit: FCC_Part15.209_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

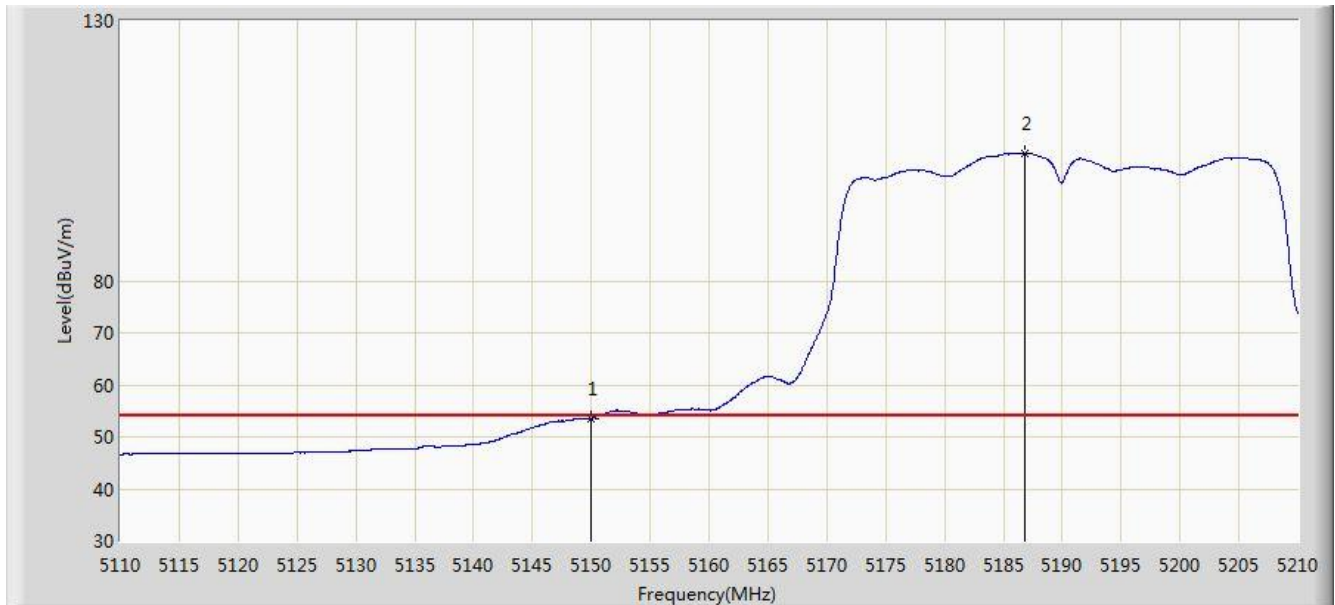


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.535                 | 49.366               | -0.465          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5186.800        | 104.602                | 100.557              | N/A             | N/A            | 4.045       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 08:16 |
| Limit: FCC_Part15.407_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

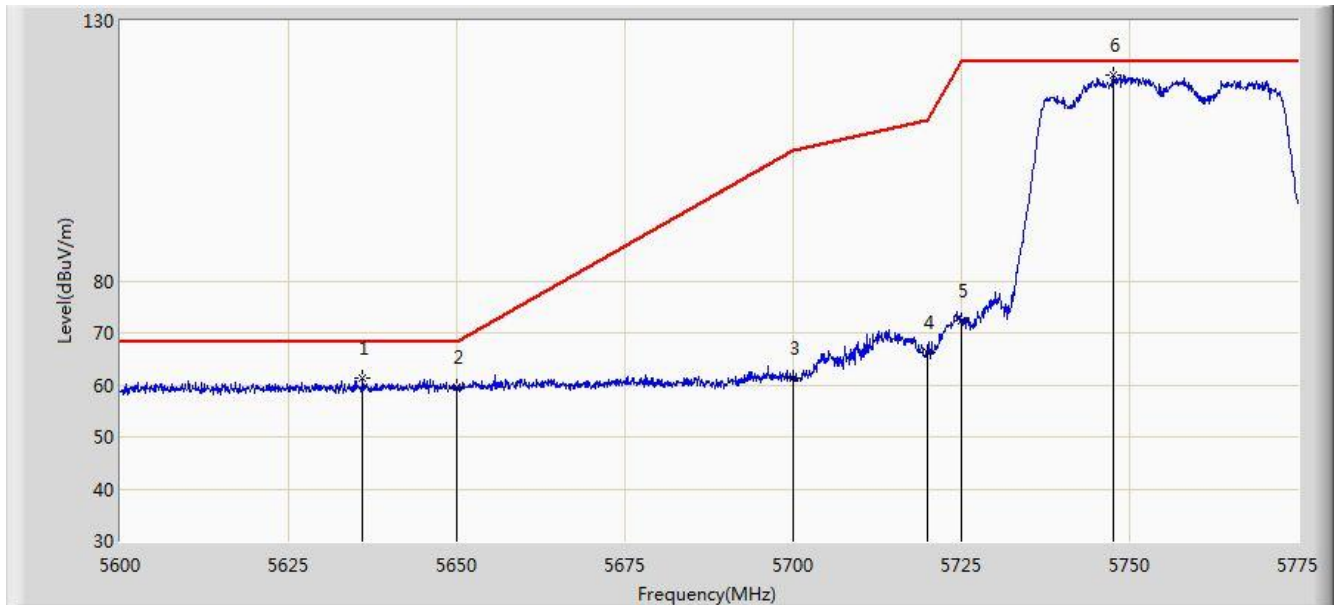


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5636.050        | 61.449                 | 56.823               | -6.751          | 68.200         | 4.627       | PK   |
| 2  |      |      | 5650.000        | 59.444                 | 54.773               | -8.756          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 61.229                 | 56.351               | -43.971         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 66.281                 | 61.284               | -44.519         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 72.322                 | 67.293               | -49.878         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5747.612        | 119.556                | 114.386              | N/A             | N/A            | 5.170       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 08:23 |
| Limit: FCC_Part15.407_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

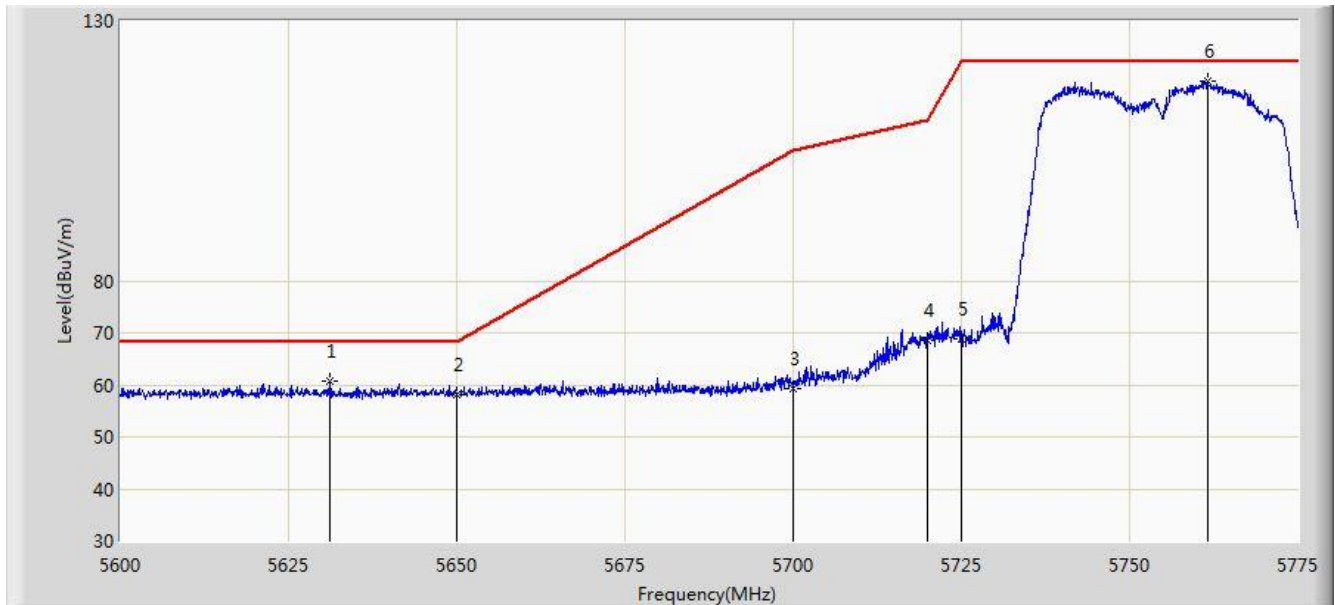


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5631.237        | 60.622                 | 56.009               | -7.578          | 68.200         | 4.613       | PK   |
| 2  |      |      | 5650.000        | 58.195                 | 53.524               | -10.005         | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 59.415                 | 54.537               | -45.785         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 68.413                 | 63.416               | -42.387         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 68.756                 | 63.727               | -53.444         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5761.612        | 118.468                | 113.220              | N/A             | N/A            | 5.248       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 08:28 |
| Limit: FCC_Part15.407_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

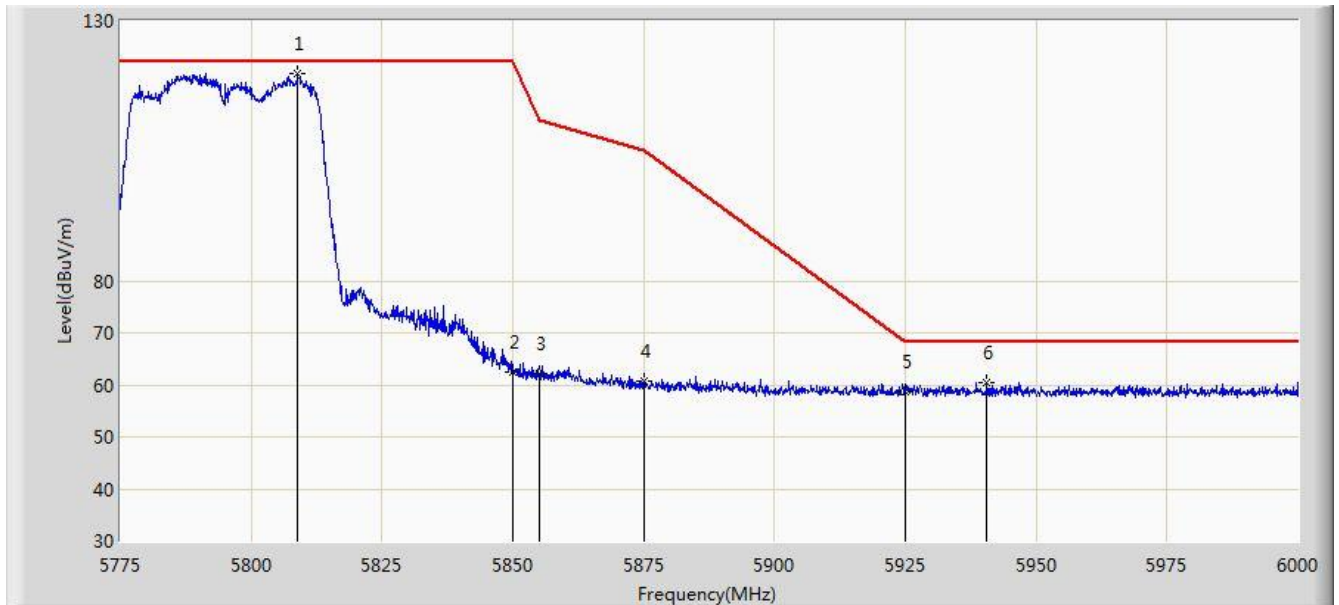


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5808.862        | 119.763                | 114.269              | N/A             | N/A            | 5.494       | PK   |
| 2  |      |      | 5850.000        | 62.604                 | 56.878               | -59.596         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 62.099                 | 56.353               | -48.701         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 60.625                 | 54.805               | -44.575         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 58.608                 | 52.642               | -9.592          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5940.487        | 60.558                 | 54.553               | -7.642          | 68.200         | 6.005       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2017/08/24 - 08:34 |
| Limit: FCC_Part15.407_RE(3m)                                                        | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                   | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

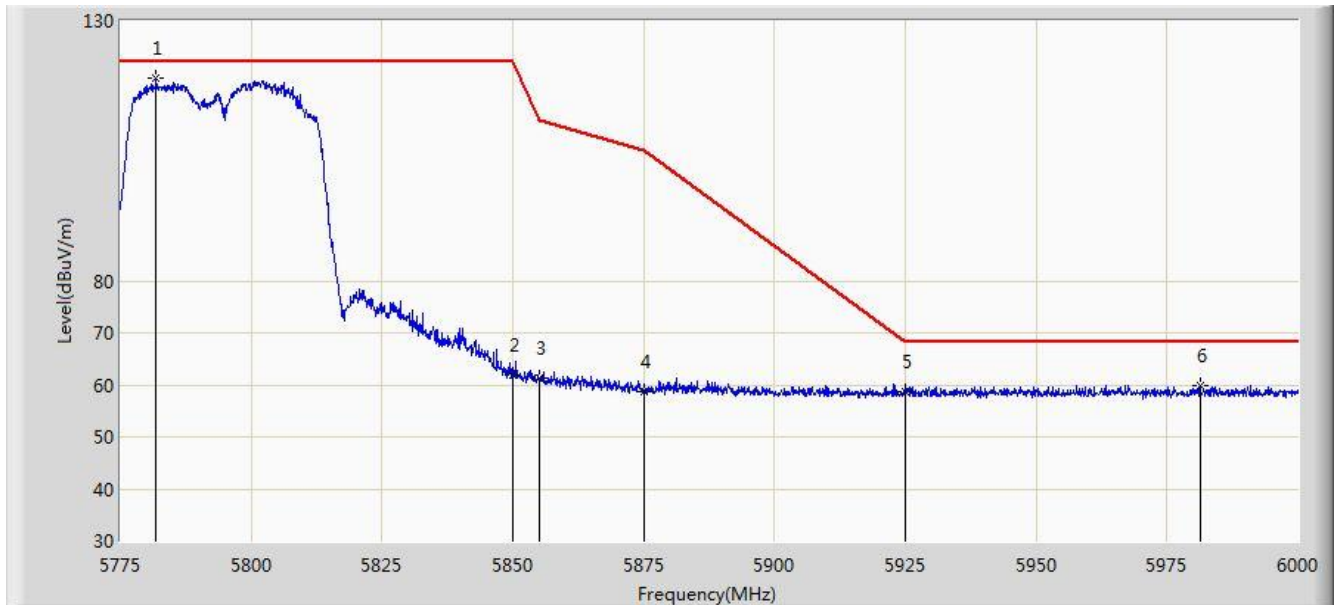


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5781.862        | 119.124                | 113.773              | N/A             | N/A            | 5.350       | PK   |
| 2  |      |      | 5850.000        | 62.002                 | 56.276               | -60.198         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 61.392                 | 55.646               | -49.408         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 58.800                 | 52.980               | -46.400         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 58.696                 | 52.730               | -9.504          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5981.325        | 59.982                 | 53.902               | -8.218          | 68.200         | 6.080       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 01:59 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

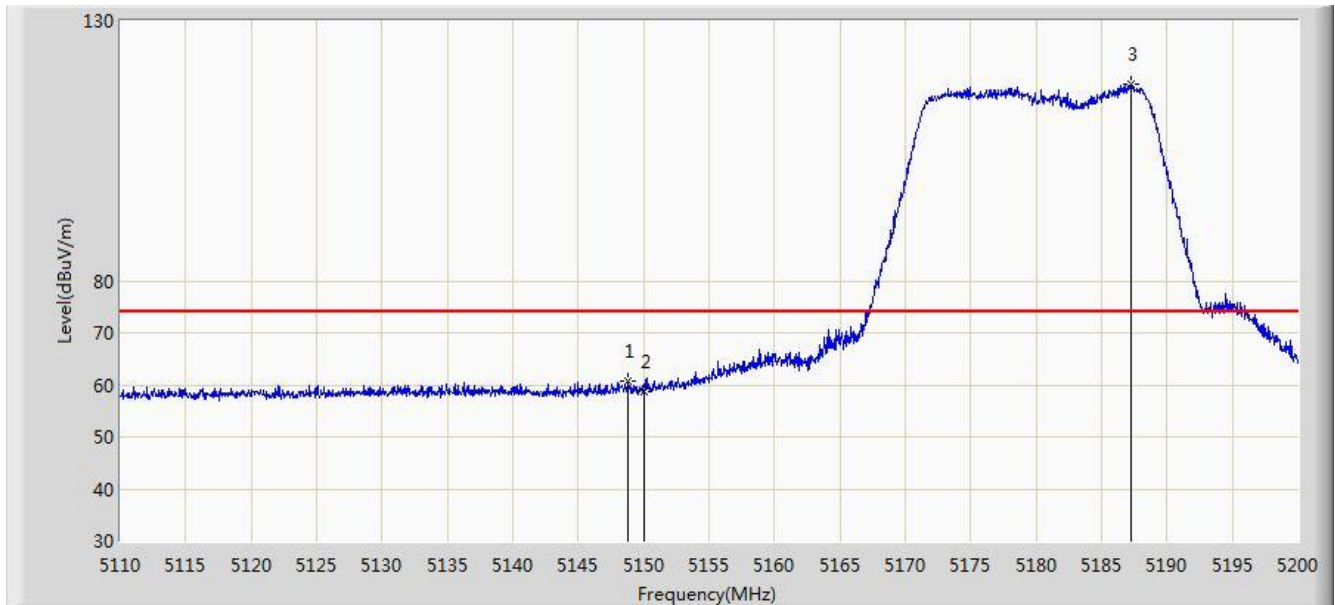


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.835        | 60.842                 | 56.669               | -13.158         | 74.000         | 4.173       | PK   |
| 2  |      |      | 5150.000        | 58.552                 | 54.383               | -15.448         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5187.220        | 117.700                | 113.657              | N/A             | N/A            | 4.043       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 02:09 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

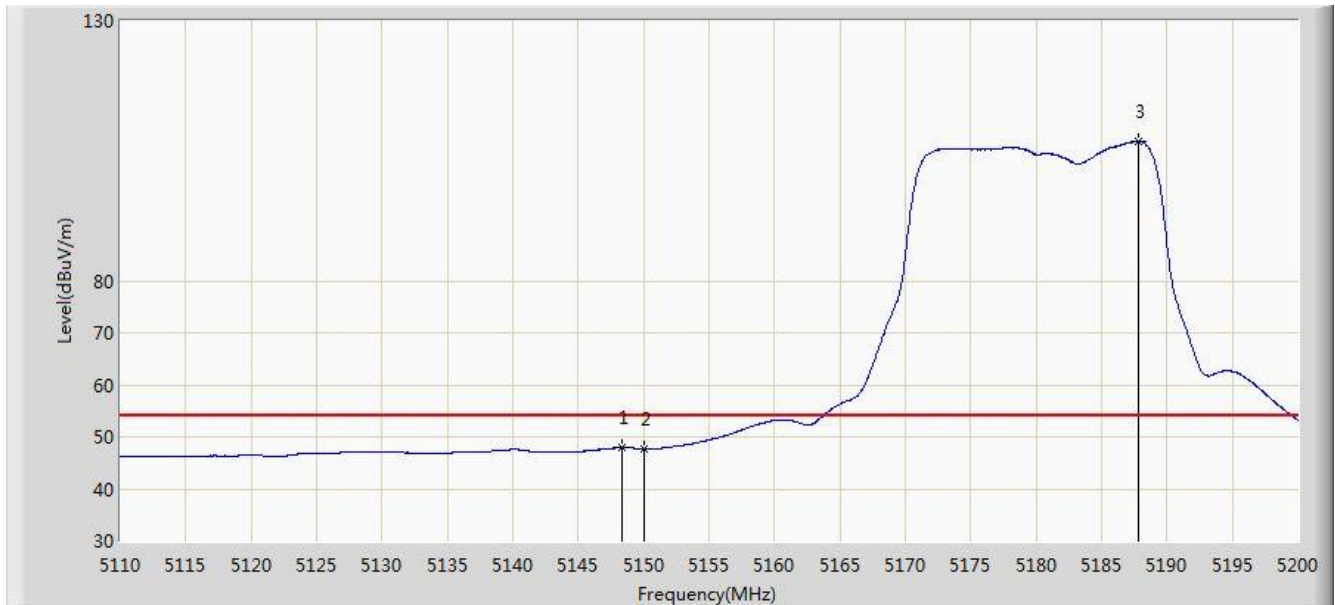


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.385        | 47.939                 | 43.765               | -6.061          | 54.000         | 4.174       | AV   |
| 2  |      |      | 5150.000        | 47.763                 | 43.594               | -6.237          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5187.850        | 106.755                | 102.714              | N/A             | N/A            | 4.041       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 02:09 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

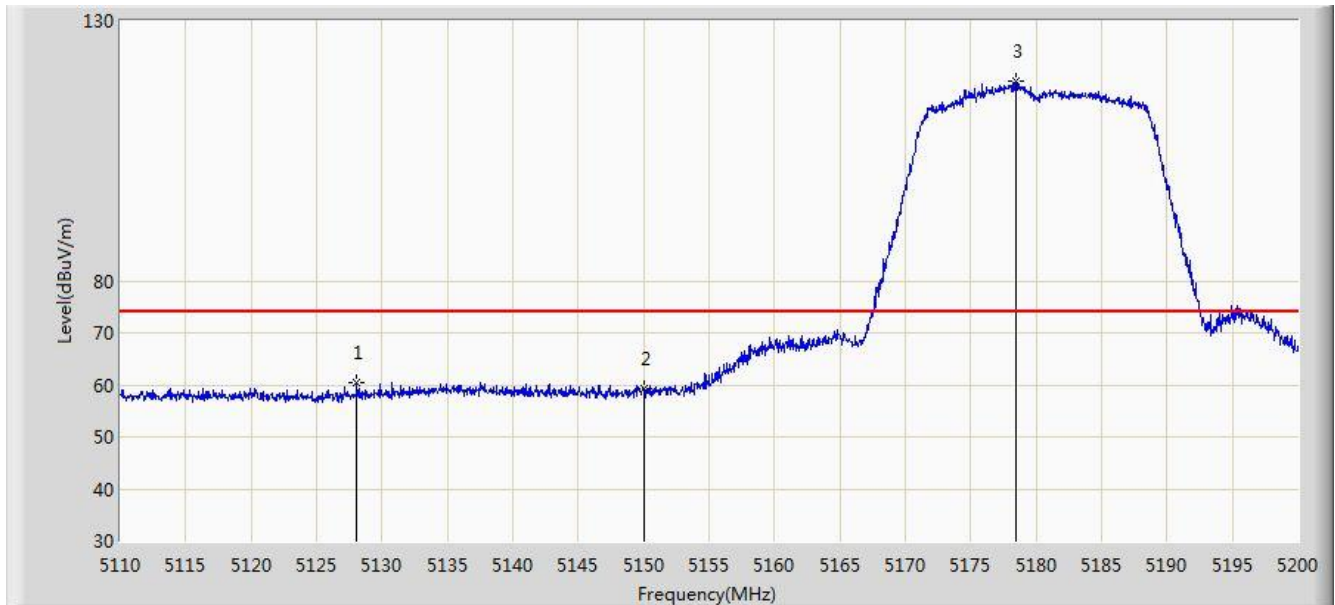


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5128.090        | 60.492                 | 56.317               | -13.508         | 74.000         | 4.174       | PK   |
| 2  |      |      | 5150.000        | 59.173                 | 55.004               | -14.827         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5178.445        | 118.441                | 114.367              | N/A             | N/A            | 4.074       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 02:12 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

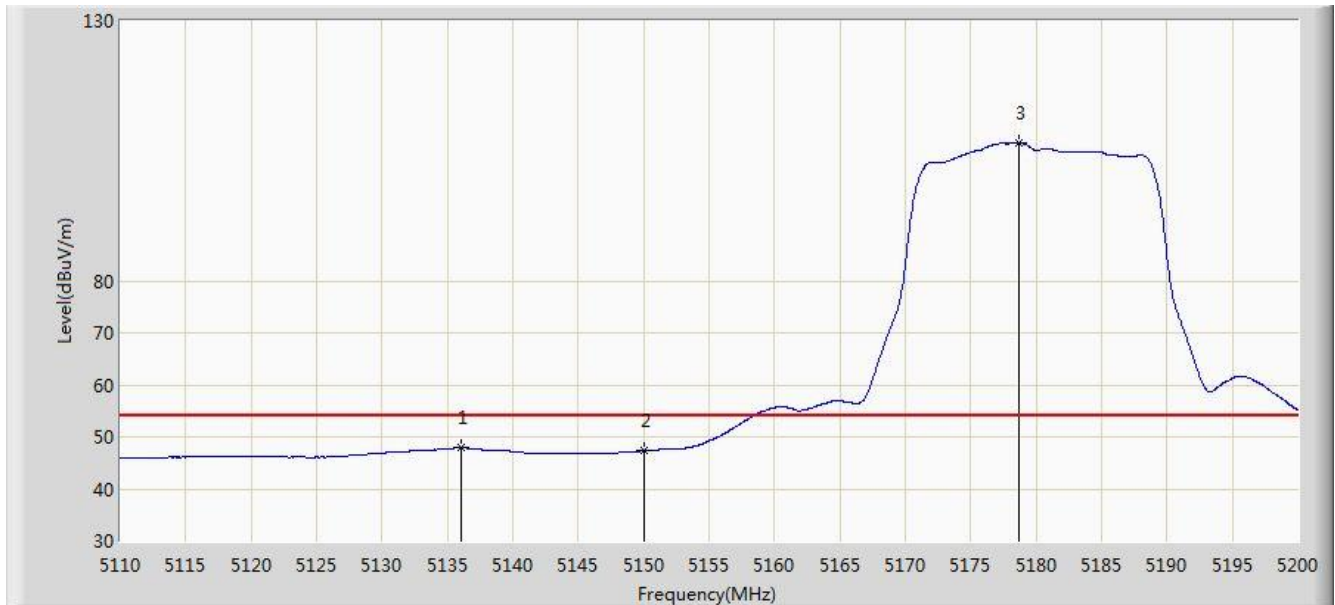


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5136.055        | 47.962                 | 43.787               | -6.038          | 54.000         | 4.175       | AV   |
| 2  |      |      | 5150.000        | 47.328                 | 43.159               | -6.672          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5178.670        | 106.599                | 102.525              | N/A             | N/A            | 4.073       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 02:45 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

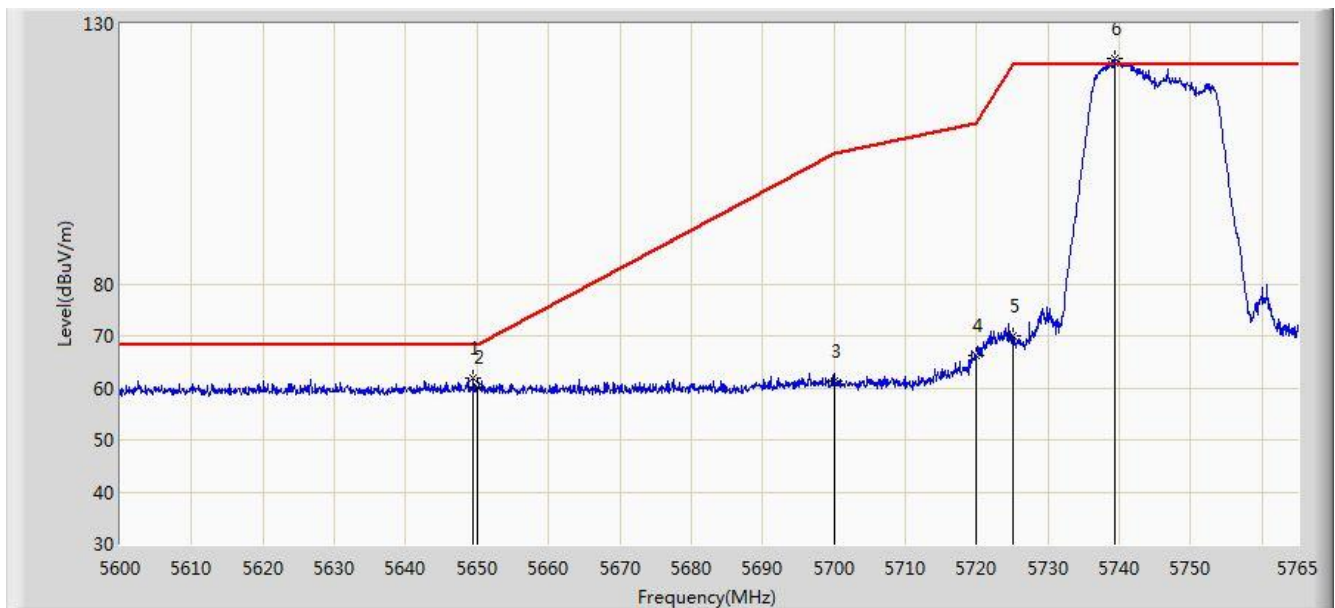


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5649.500        | 61.929                 | 57.260               | -6.271          | 68.200         | 4.669       | PK   |
| 2  |      |      | 5650.000        | 60.041                 | 55.370               | -8.159          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 61.319                 | 56.441               | -43.881         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 66.310                 | 61.313               | -44.490         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 69.907                 | 64.878               | -52.293         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5739.425        | 123.292                | 118.171              | N/A             | N/A            | 5.122       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 02:51 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

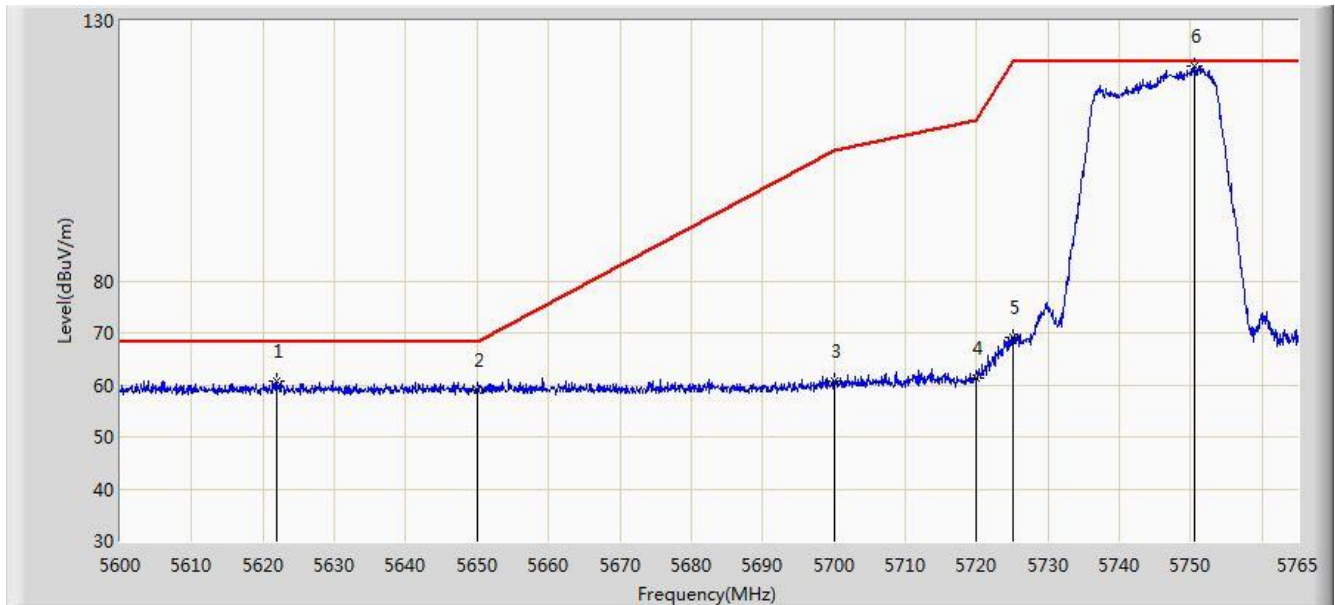


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5621.862        | 60.733                 | 56.147               | -7.467          | 68.200         | 4.586       | PK   |
| 2  |      |      | 5650.000        | 58.856                 | 54.185               | -9.344          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 60.701                 | 55.823               | -44.499         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 61.348                 | 56.351               | -49.452         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 69.159                 | 64.130               | -53.041         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5750.480        | 121.365                | 116.179              | N/A             | N/A            | 5.186       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 02:55 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

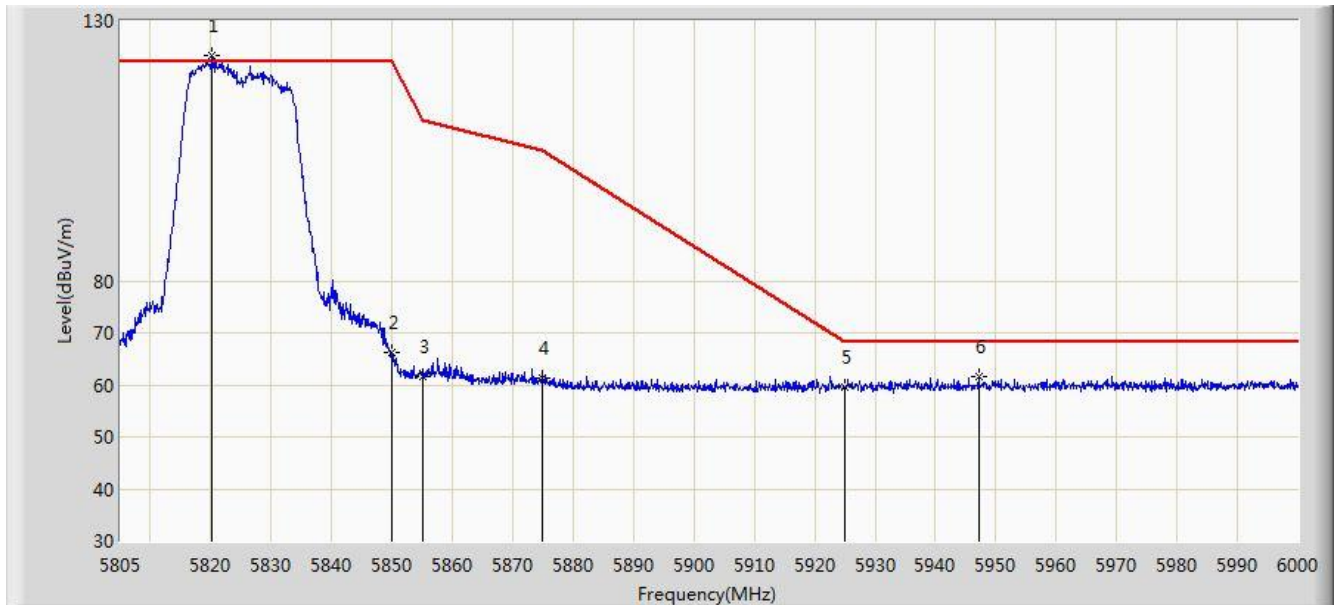


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5820.210        | 123.248                | 117.688              | N/A             | N/A            | 5.559       | PK   |
| 2  |      |      | 5850.000        | 66.239                 | 60.513               | -55.961         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 61.518                 | 55.772               | -49.282         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 61.298                 | 55.478               | -43.902         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 59.473                 | 53.507               | -8.727          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5947.155        | 61.622                 | 55.601               | -6.578          | 68.200         | 6.021       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 03:01 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

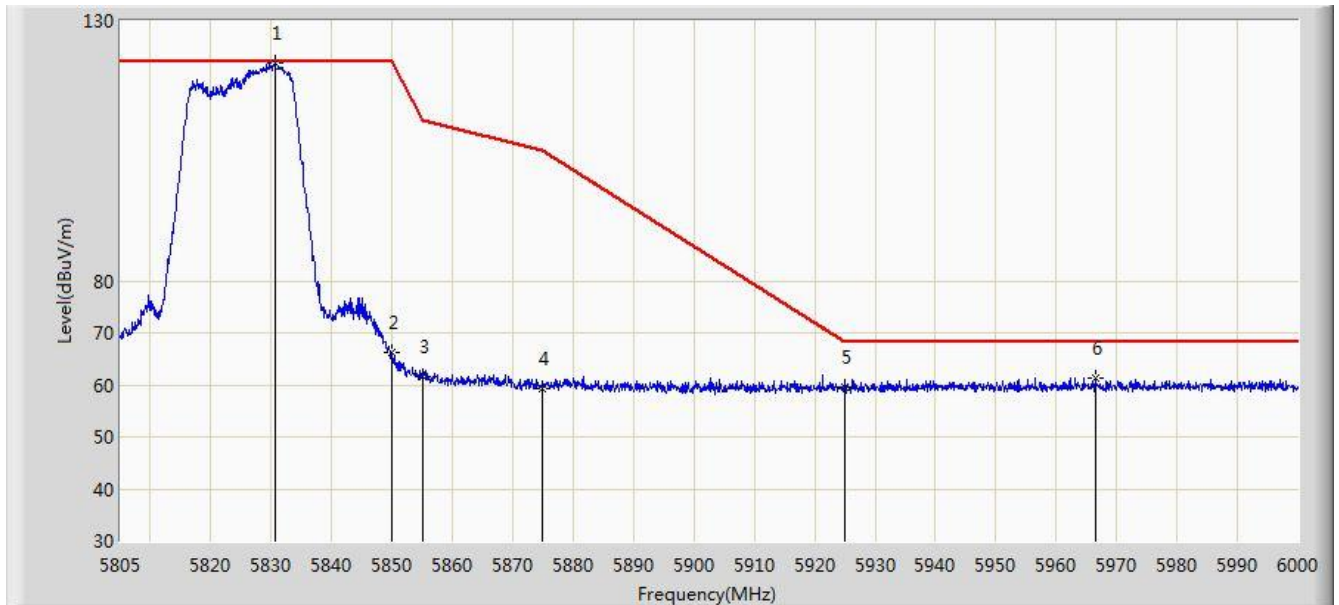


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5830.545        | 121.843                | 116.223              | N/A             | N/A            | 5.621       | PK   |
| 2  |      |      | 5850.000        | 66.104                 | 60.378               | -56.096         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 61.679                 | 55.933               | -49.121         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 59.397                 | 53.577               | -45.803         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 59.477                 | 53.511               | -8.723          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5966.460        | 61.413                 | 55.358               | -6.787          | 68.200         | 6.055       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 03:24 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

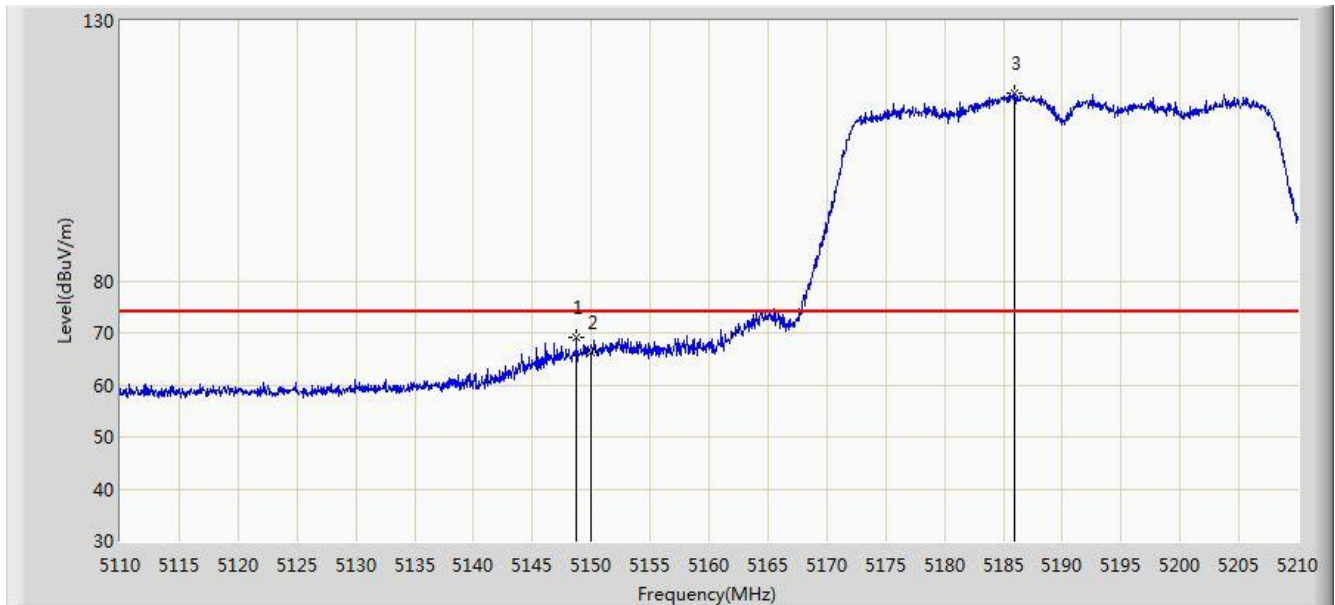


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.750        | 69.147                 | 64.974               | -4.853          | 74.000         | 4.174       | PK   |
| 2  |      |      | 5150.000        | 66.100                 | 61.931               | -7.900          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5185.900        | 116.207                | 112.159              | N/A             | N/A            | 4.049       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 03:21 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

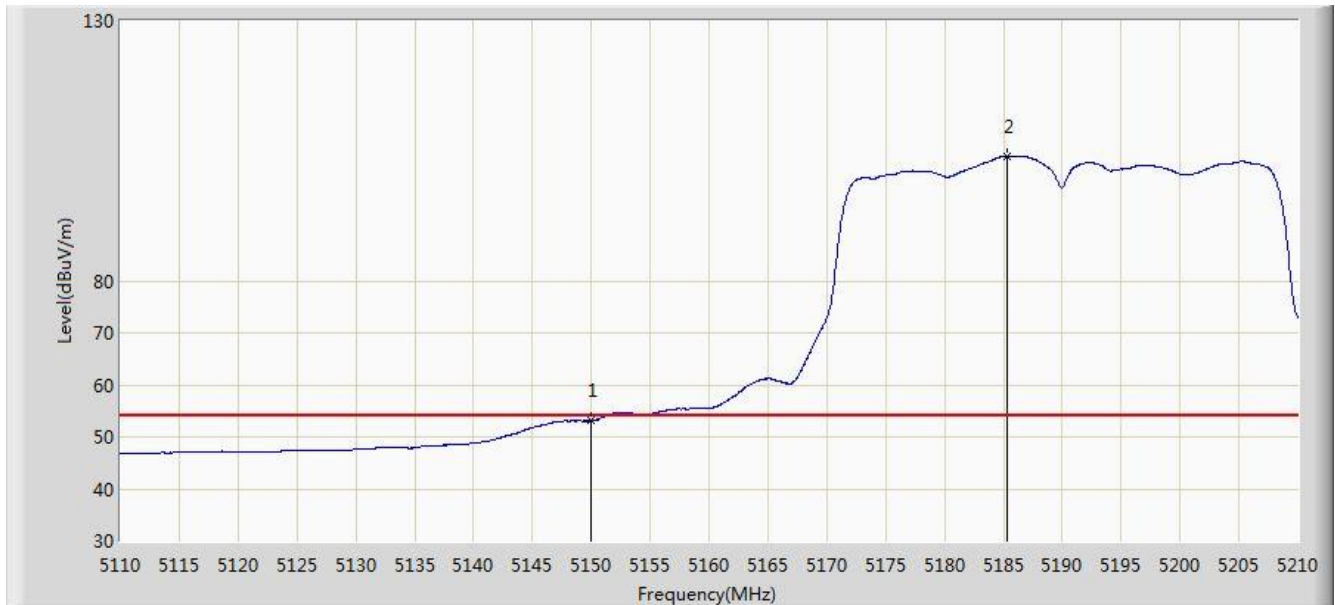


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.107                 | 48.938               | -0.893          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5185.350        | 104.007                | 99.957               | N/A             | N/A            | 4.050       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 03:24 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

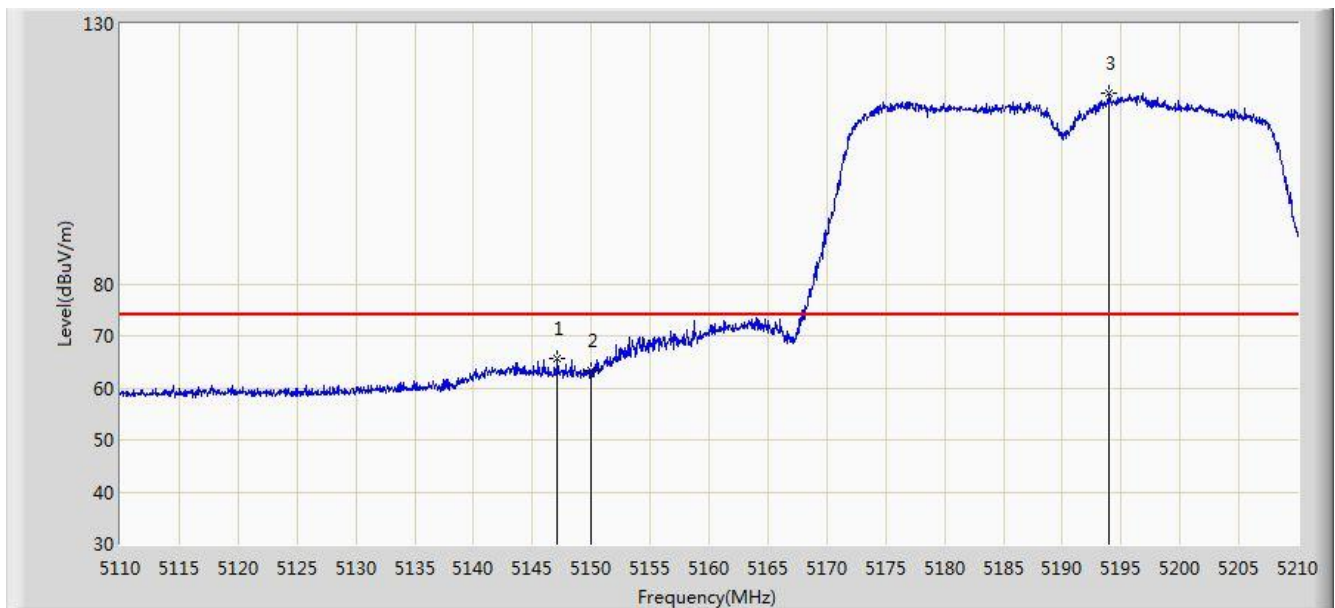


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.150        | 65.720                 | 61.544               | -8.280          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 63.249                 | 59.080               | -10.751         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5194.000        | 116.649                | 112.630              | N/A             | N/A            | 4.019       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 03:31 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

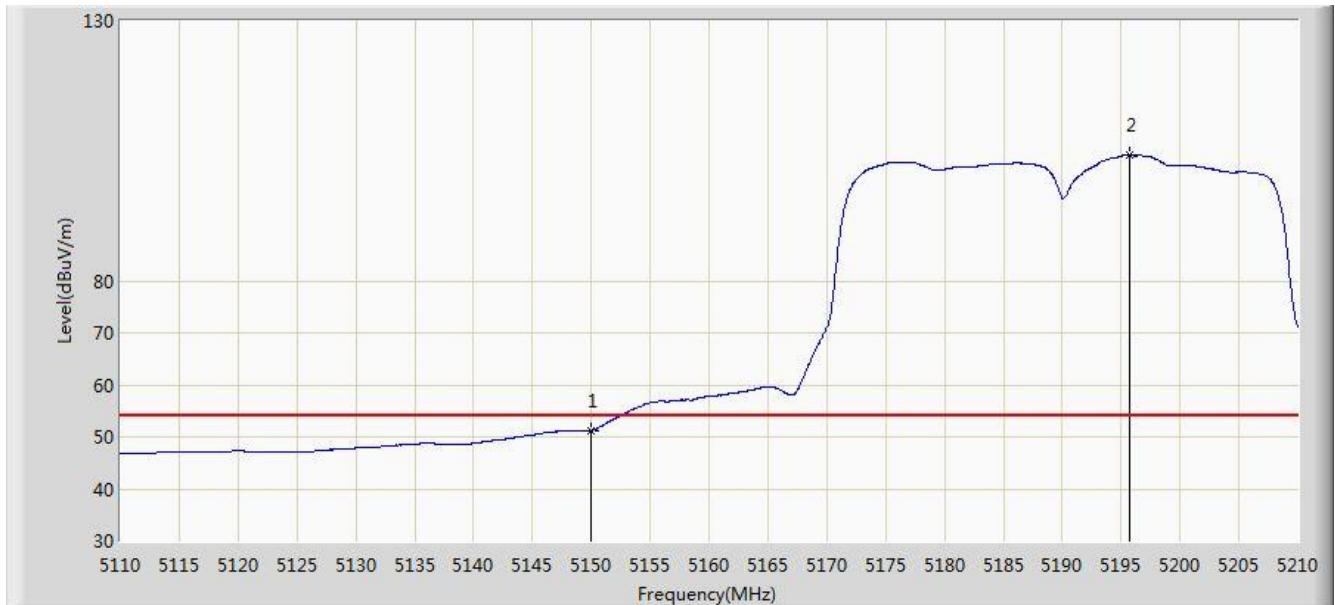


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.237                 | 47.068               | -2.763          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5195.750        | 104.183                | 100.170              | N/A             | N/A            | 4.013       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 03:59 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

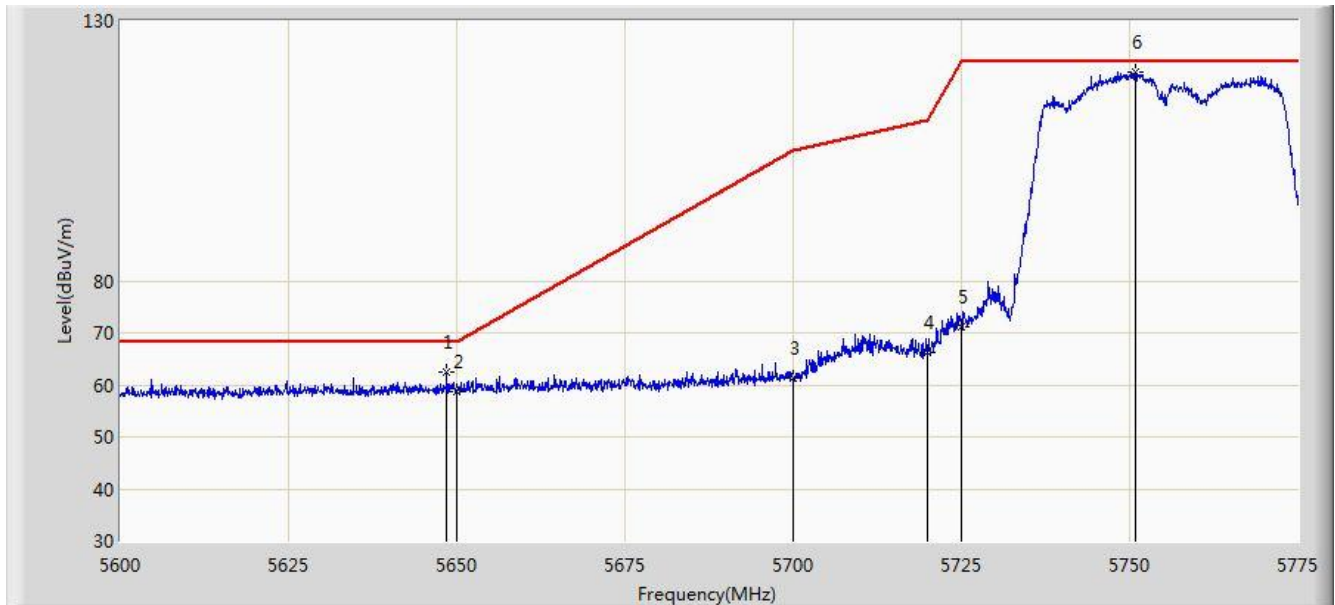


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5648.562        | 62.500                 | 57.834               | -5.700          | 68.200         | 4.666       | PK   |
| 2  |      |      | 5650.000        | 58.795                 | 54.124               | -9.405          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 61.253                 | 56.375               | -43.947         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 66.156                 | 61.159               | -44.644         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 71.132                 | 66.103               | -51.068         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5750.937        | 120.246                | 115.057              | N/A             | N/A            | 5.188       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 04:05 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

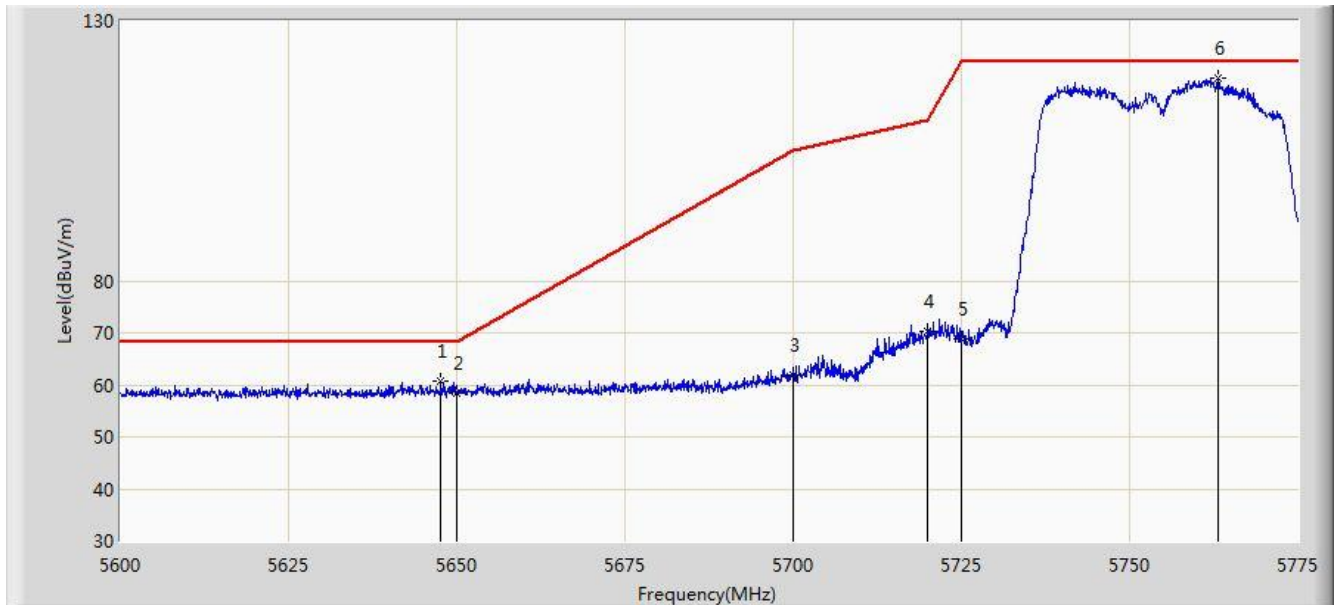


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5647.687        | 60.693                 | 56.030               | -7.507          | 68.200         | 4.663       | PK   |
| 2  |      |      | 5650.000        | 58.496                 | 53.825               | -9.704          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 61.806                 | 56.928               | -43.394         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 70.247                 | 65.250               | -40.553         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 68.751                 | 63.722               | -53.449         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5763.100        | 118.936                | 113.680              | N/A             | N/A            | 5.256       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 04:11 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

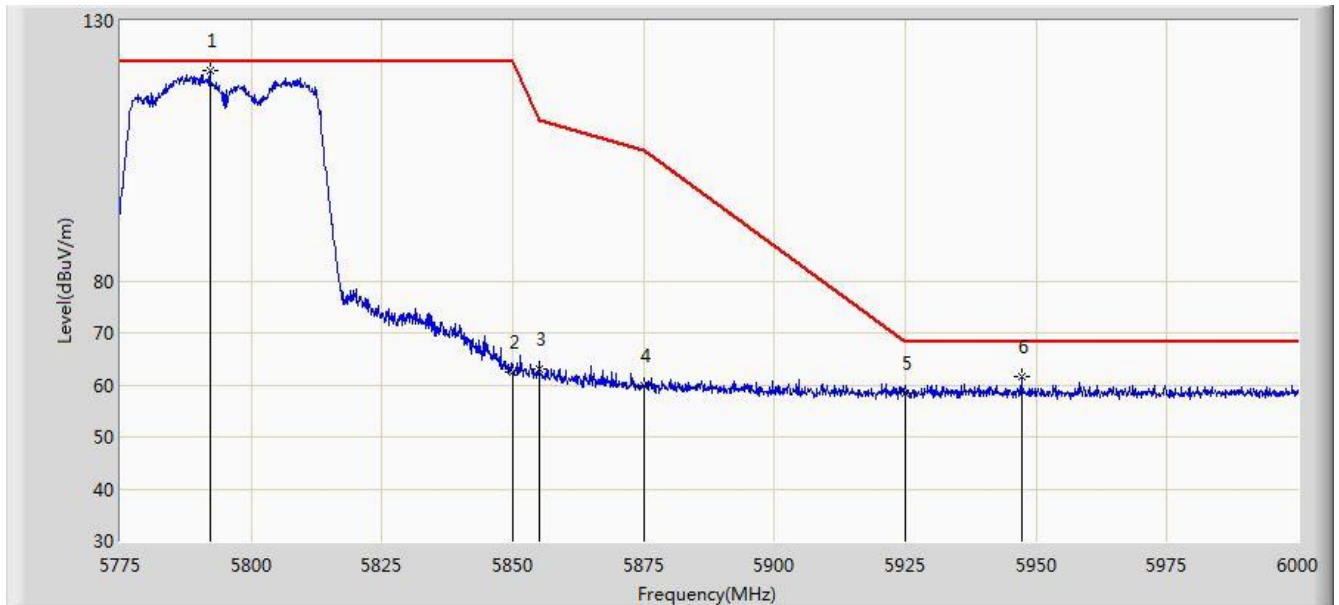


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5792.100        | 120.471                | 115.069              | N/A             | N/A            | 5.403       | PK   |
| 2  |      |      | 5850.000        | 62.476                 | 56.750               | -59.724         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 63.163                 | 57.417               | -47.637         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 59.741                 | 53.921               | -45.459         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 58.523                 | 52.557               | -9.677          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5947.237        | 61.460                 | 55.439               | -6.740          | 68.200         | 6.021       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 04:17 |
| Limit: FCC_Part15.407_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

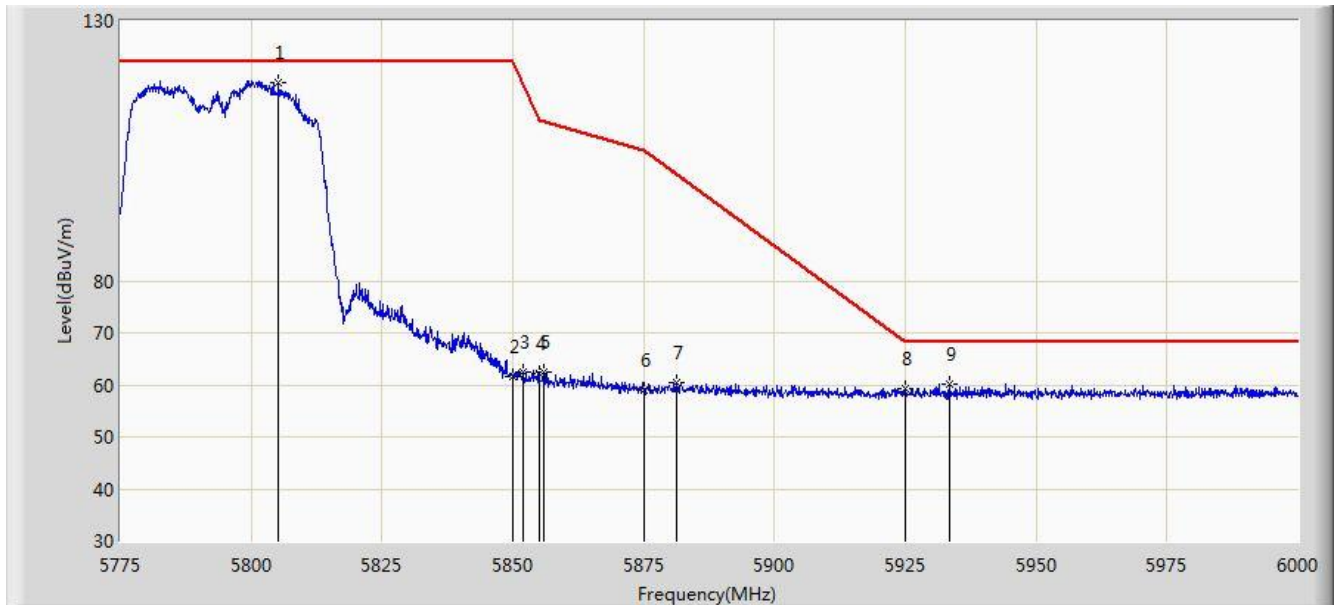


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5805.150        | 118.227                | 112.753              | N/A             | N/A            | 5.474       | PK   |
| 2  |      |      | 5850.000        | 61.548                 | 55.822               | -60.652         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5851.837        | 62.515                 | 56.782               | -55.495         | 118.011        | 5.734       | PK   |
| 4  |      |      | 5855.000        | 62.041                 | 56.295               | -48.759         | 110.800        | 5.746       | PK   |
| 5  |      |      | 5856.000        | 62.492                 | 56.742               | -48.027         | 110.520        | 5.751       | PK   |
| 6  |      |      | 5875.000        | 58.845                 | 53.025               | -46.355         | 105.200        | 5.820       | PK   |
| 7  |      |      | 5881.425        | 60.492                 | 54.650               | -40.684         | 101.176        | 5.841       | PK   |
| 8  |      |      | 5925.000        | 59.167                 | 53.201               | -9.033          | 68.200         | 5.967       | PK   |
| 9  |      |      | 5933.513        | 60.185                 | 54.197               | -8.015          | 68.200         | 5.988       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 05:08 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

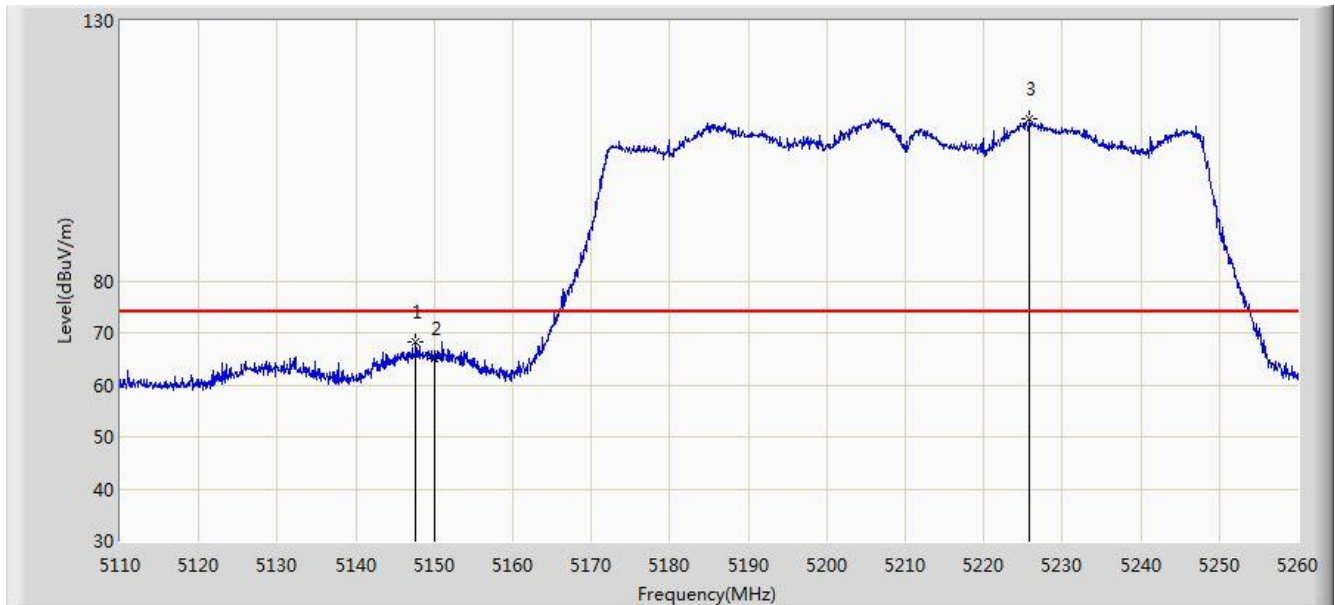


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.575        | 68.308                 | 64.132               | -5.692          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 65.152                 | 60.983               | -8.848          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5225.800        | 111.148                | 107.226              | N/A             | N/A            | 3.922       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                       |                          |
|---------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                             | Time: 2017/08/25 - 04:56 |
| Limit: FCC_Part15.209_RE(3m)                                                          | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                                                     | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (CDD Mode) |                          |

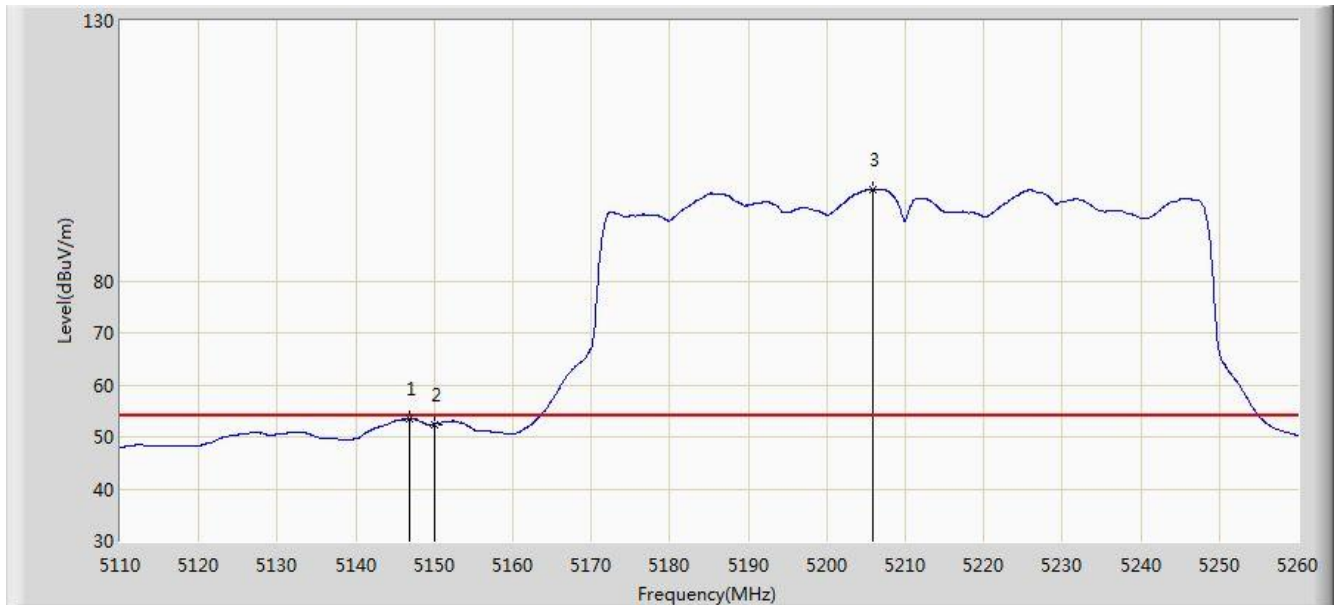

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5146.825        | 53.450                 | 49.274               | -0.550          | 54.000         | 4.176       | AV   |
| 2  |      |      | 5150.000        | 52.458                 | 48.289               | -1.542          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5205.775        | 97.676                 | 93.695               | N/A             | N/A            | 3.981       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)