

REVISIONS


REV	DESCRIPTION	DATE	APPROVE

NOTE:

- 1.MATERIAL: PC FILM(SABIC-LEXAN 8B35), t=0.127mm
- 2.ADHESIVE: 3M-467,t=0.05 mm
3. COLOR: PMS BLACK C ■
PMS GRAY 3C ■
刀模: ———,R=0.2
4. UL APPROVED, PGDQ2.CM-100-010
- 5.被貼物:塑膠
- 6.TEMPERATURE RESISTANT= 120° C
- 7.印刷公差:尺寸30mm以下~120mm為±0.3mm,120~315mm為±0.5mm,315以上±0.8mm
- 8.片狀入料


9.TEST REQUIREMENTS OR OTHER EQUIVALENT TEST METHOD

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	□□□□□	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5 % is affected.

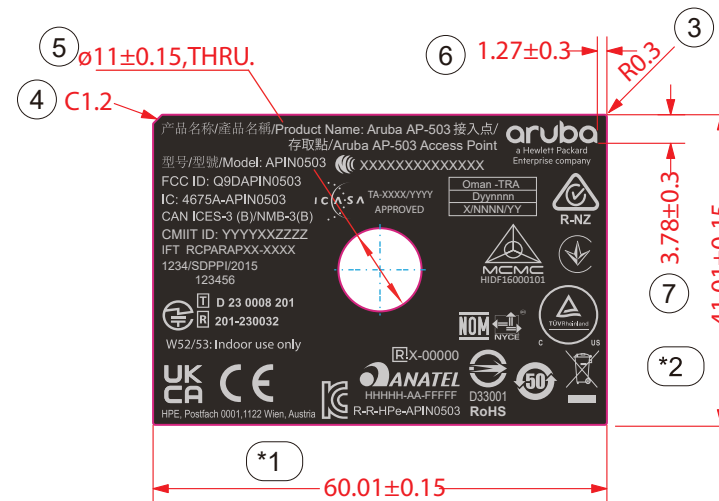

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:
INTEGRAL DIMENSIONS ± 0.2
1 PLACE DECIMAL ± 0.2
ANGULAR DIMENSIONS ± 2°
HOLES UNDER Ø5.00 ± 0.2

THIRD ANGLE PROJECTION




WNC
Wistron NeWeb Corp.

啟碁科技股份有限公司

20 Park Avenue II, Hsinchu Science Park,
Hsinchu 308, Taiwan, R.O.C.
Tel: 886-3-6667799 Fax: 886-3-5788726

DWG TITLE

DRAWN		SIZE	DWG NO.	REV
ENGR		A4		1
APVD		SCALE	1/1	SHEET 1 OF 1

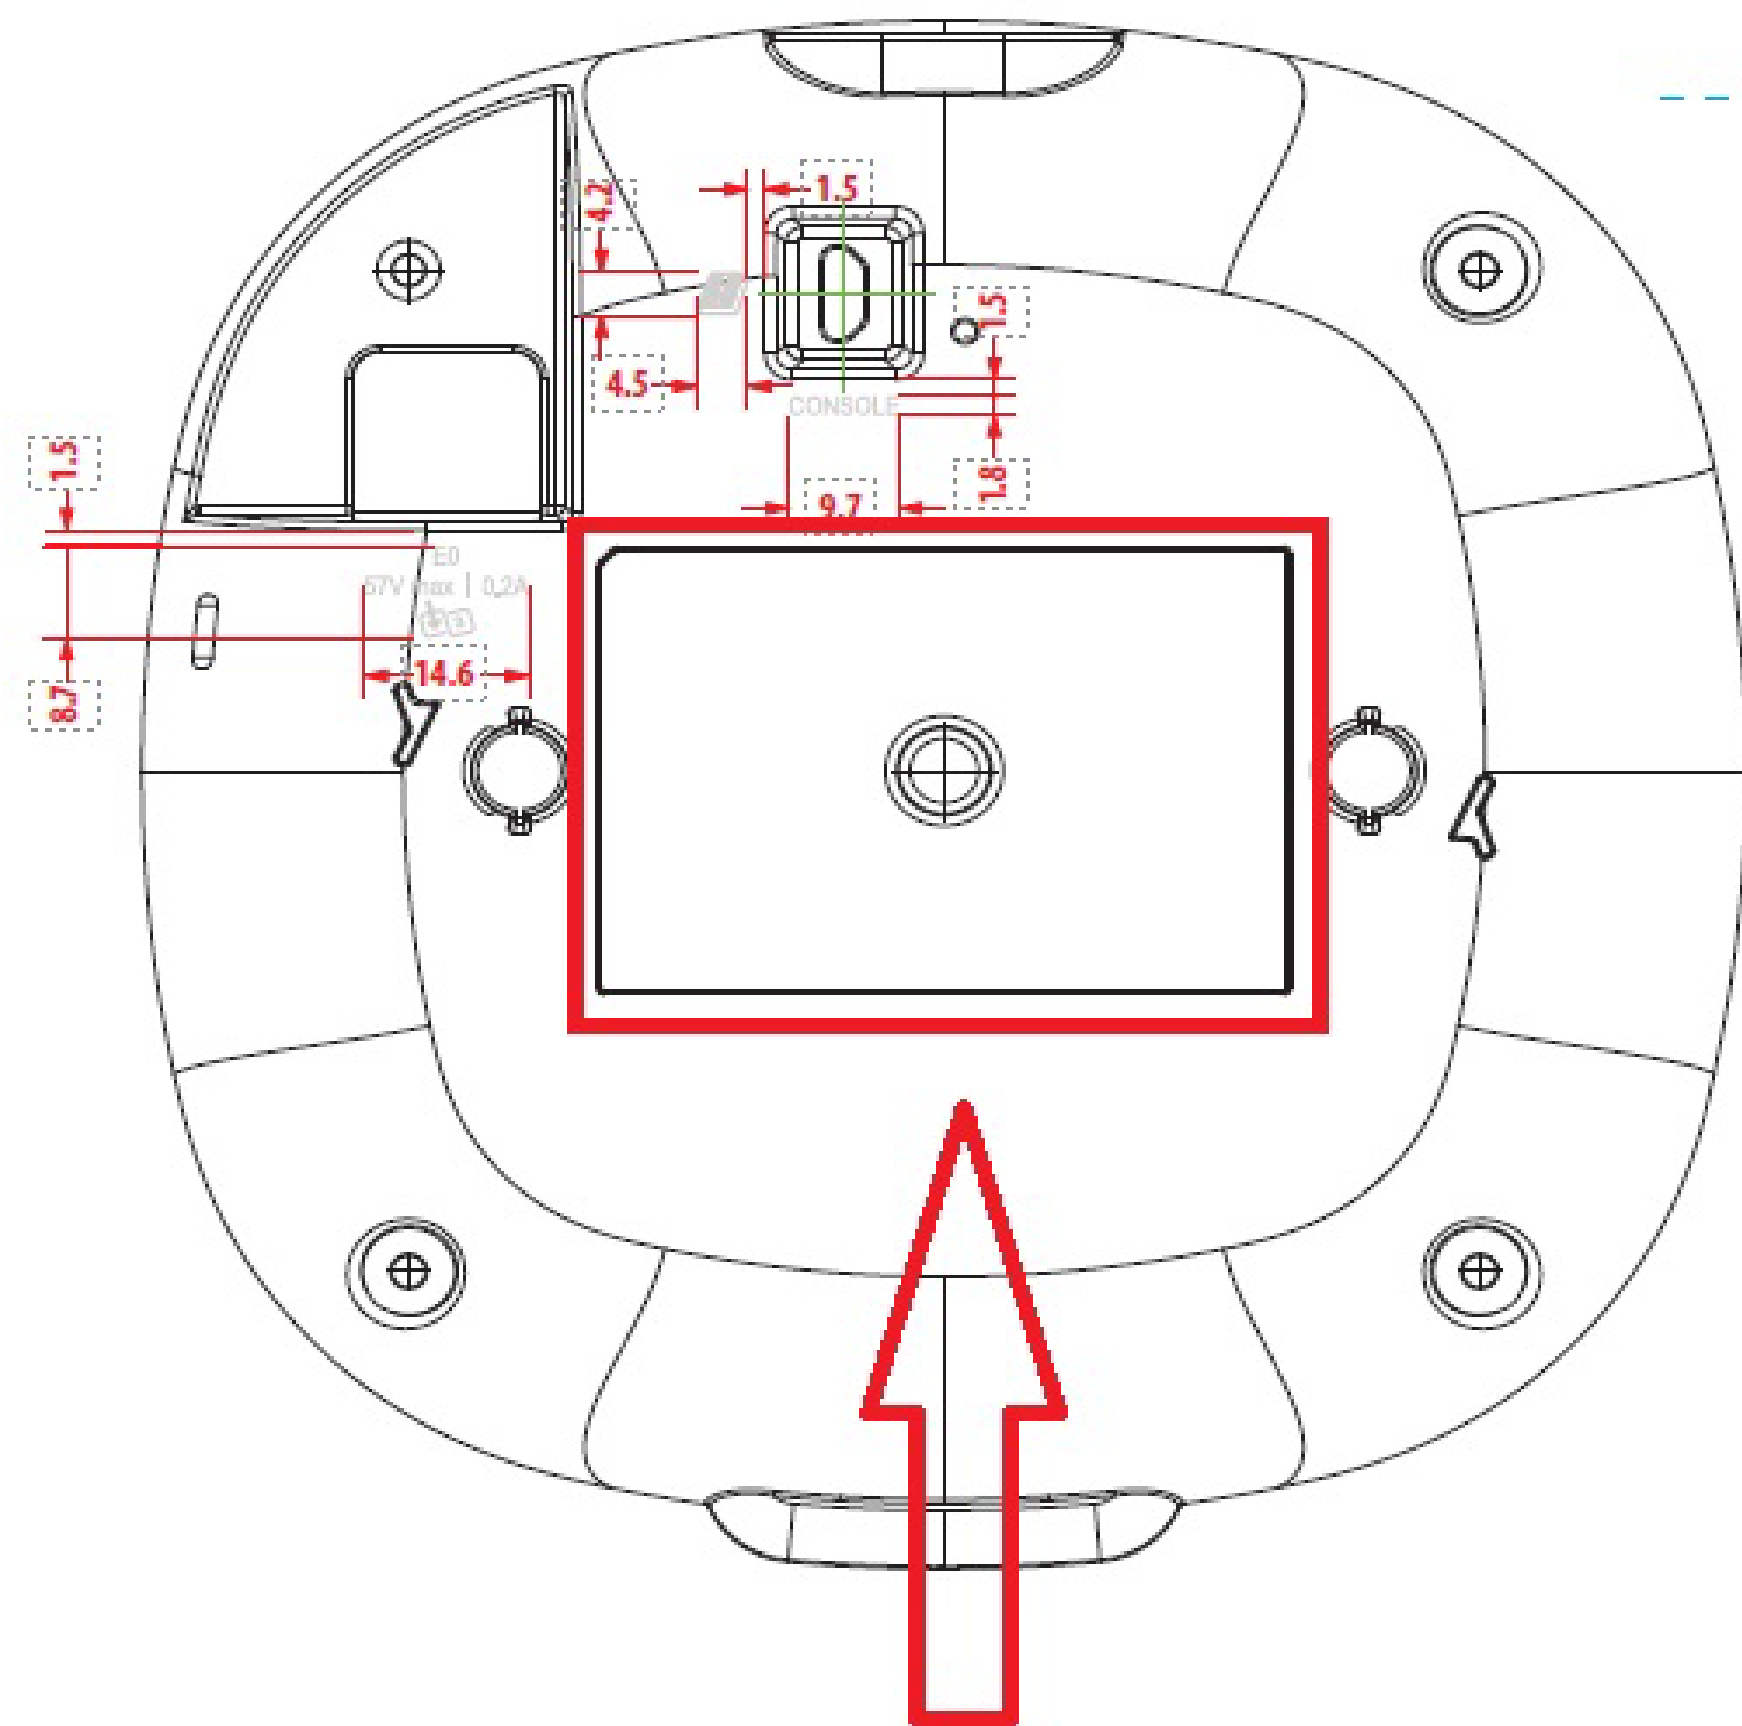

Label Location

