MEASUREMENT REPORT

FCC PART 15.407 WLAN 802.11a/n/ac/ax

FCC ID:	Q9DAPIN0504505
APPLICANT:	Hewlett Packard Enterprise Company
Application Type:	Certification
Product:	ACCESS POINT
Model No.:	APIN0504, APIN0505
Brand Name:	aruba a Hewlett Packard Enterprise company, Hewlett Packard Enterprise
FCC Classification:	Unlicensed National Information Infrastructure (NII)
FCC Rule Part(s):	Part15 Subpart E (Section 15.407)
Test Procedure(s):	ANSI C63.10-2013, KDB 789033 D02v02r01, KDB 662911 D01v02r01
Test Date:	June 03 ~ July 14, 2019

Reviewed By: (Paddy Chen)

Approved By: (Chenz Ker)

Testing Laboratory 3261

The test results relate only to the samples tested.
This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.
The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1906TW0102-U4	Rev. 01	Initial report	07-15-2019	Invalid
1906TW0102-U4	Rev. 02	Update antenna port plot	10-01-2019	Invalid
1906TW0102-U4	Rev. 03	Update frequency stability test procedure	10-03-2019	Valid

CONTENTS

Description Page

§2.1033General Information 6

1. INTRODUCTION 7

1.1. Scope 7
1.2. MRT Test Location 7

2. PRODUCT INFORMATION 8

2.1. Equipment Description 8
2.2. Product Specification Subjective to this Report 8
2.3. Working Frequencies for this report 9
2.4. Description of Available Antennas 10
2.5. Description of Antenna RF Port 12
2.6. Test Mode 13
2.7. Description of Test Software 13
2.8. Device Capabilities 14
2.9. EMI Suppression Device(s)/Modifications 17
2.10. Labeling Requirements 17

3. DESCRIPTION OF TEST 18

3.1. Evaluation Procedure 18
3.2. AC Line Conducted Emissions 18
3.3. Radiated Emissions 19

4. ANTENNA REQUIREMENTS 20

5. TEST EQUIPMENT CALIBRATION DATE 21

6. MEASUREMENT UNCERTAINTY 22

7. TEST RESULT 23

7.1. Summary 23
7.2. 26dB Bandwidth Measurement 24
7.2.1. Test Limit 24
7.2.2. Test Procedure used 24
7.2.3. Test Setting 24
7.2.4. Test Setup 24
7.2.5. Test Result 25
7.3. 6dB Bandwidth Measurement 32
7.3.1. Test Limit 32
7.3.2. Test Procedure used 32

7.3.3. Test Setting 32
7.3.4. Test Setup 32
7.3.5. Test Result 33
7.4. Output Power Measurement 39
7.4.1. Test Limit 39
7.4.2. Test Procedure Used 39
7.4.3. Test Setting 39
7.4.4. Test Setup 39
7.4.5. Test Result 40
7.5. Transmit Power Control 45
7.5.1. Test Limit 45
7.5.2. Test Procedure Used 45
7.5.3. Test Setting 45
7.5.4. Test Setup 45
7.5.5. Test Result 45
7.6. Power Spectral Density Measurement 46
7.6.1. Test Limit 46
7.6.2. Test Procedure Used 46
7.6.3. Test Setting 46
7.6.4. Test Setup 47
7.6.5. Test Result 48
7.7. Frequency Stability Measurement 73
7.7.1. Test Limit 73
7.7.2. Test Procedure Used 73
7.7.3. Test Setup 74
7.7.4. Test Result 75
7.8. Radiated Spurious Emission Measurement 76
7.8.1. Test Limit 76
7.8.2. Test Procedure Used 76
7.8.3. Test Setting 76
7.8.4. Test Setup 78
7.8.5. Test Result 79
7.9. Radiated Restricted Band Edge Measurement 207
7.9.1. Test Limit 207
7.9.2. Test Procedure Used 208
7.9.3. Test Setting 208
7.9.4. Test Setup 209
7.9.5. Test Result 210
7.10. AC Conducted Emissions Measurement 418

7.10.1. Test Limit 418
7.10.2. Test Procedure 418
7.10.3. Test Setup 419
7.10.4. Test Result..... 420

8. CONCLUSION..... 424

Appendix A - Test Setup Photograph 425

Appendix B - EUT Photograph..... 426

§2.1033General Information

Applicant:	Hewlett Packard Enterprise Company
Applicant Address:	3333 Scott Blvd, Santa Clara, CA 94089, USA
Manufacturer:	Hewlett Packard Enterprise Company
Manufacturer Address:	3333 Scott Blvd, Santa Clara, CA 94089, USA
Test Site:	MRT Technology (Taiwan) Co., Ltd
Test Site Address:	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
Test Device Serial No.:	APIN0504: Conducted Sample S/N: DB196B0112 Radiated Sample S/N: DB196B0122
	APIN0505: Conducted Sample S/N: DB195B013F Radiated Sample S/N: DB196B0029

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- **MRT facility is a FCC registered (Reg. No. 153292) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.**
- **MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.**
- **MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.**

1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices includingintentional and/or unintentional radiators for compliance with the technical rules and regulations of the FederalCommunications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

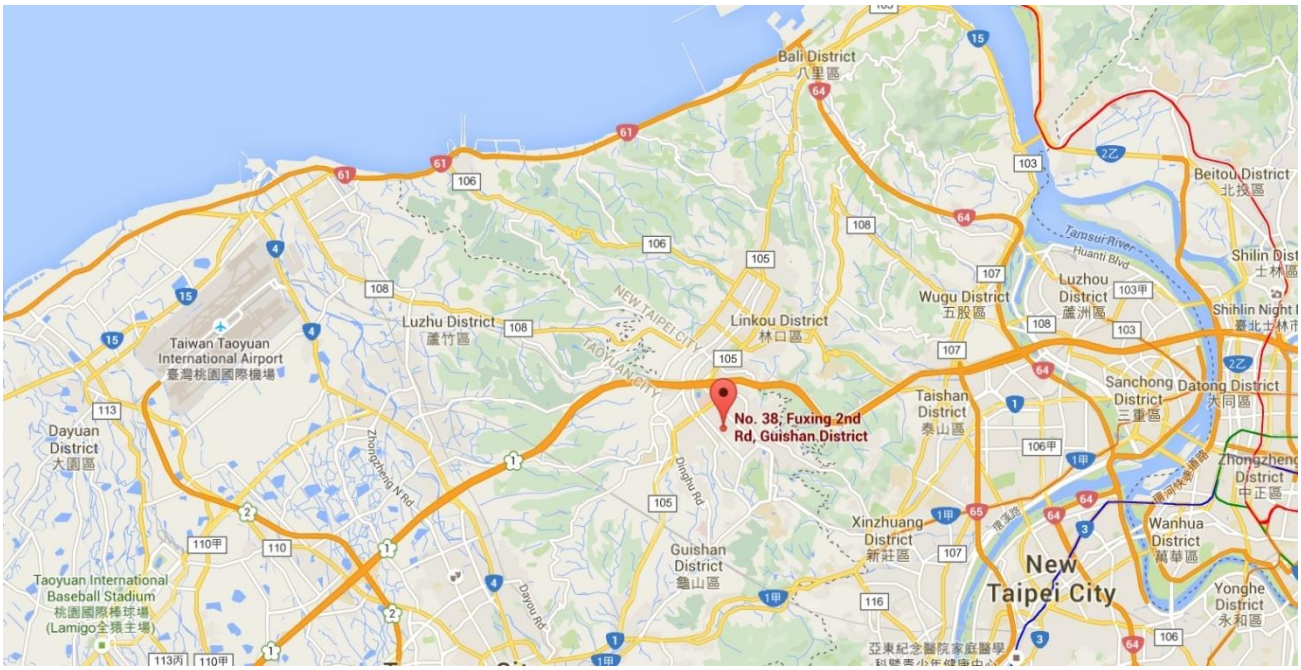

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	ACCESS POINT
Model No.:	APIN0504, APIN0505
Brand Name:	aruba a Hewlett Packard Enterprise company , Hewlett Packard Enterprise
Wi-Fi Specification:	802.11a/b/g/n/ac/ax
Bluetooth Specification:	v4.2 single mode
Zigbee Specification:	802.15.4
Software Version:	6.2.1A1 bring up F.100
Operating Temperature:	0 ~ 50 °C
Power Type:	AC Adapter or POE input
Operating Environment:	Indoor Use

Note: The difference between models is that EUT use different antenna and appearance, APIN0504 use some external antennas, but APIN0505 use internal antenna, other hardware and software are the same. Besides, each model has its own power parameter value.

2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180~5240MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190~5230MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5775MHz
Type of Modulation:	802.11a/n/ac: OFDM 802.11ax: OFDMA
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps 802.11ax: up to 2402Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	149	5745 MHz	153	5765 MHz
157	5785 MHz	161	5805 MHz	165	5825 MHz

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	151	5755 MHz
159	5795 MHz	--	--	--	--

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	155	5775 MHz	--	--

2.4. Description of Available Antennas

APIN0504

Antenna No.	Directionality	Frequency Band (GHz)	Model No.	Max Peak Gain (dBi)	BF Dir Gain (dBi)	CDD Dir Gain (dBi)	
						For Power	For PSD
Wi-Fi External Antenna List (2.4GHz 2*2 MIMO, 5GHz 2*2 MIMO)							
1	Omni	2.4	AP-ANT-1W	3.8	6.81	3.8	6.81
		5		5.8	8.81	5.8	8.81
2	Omni	2.4	AP-ANT-13B	2.3	5.31	2.3	5.31
		5		4.0	7.01	4.0	7.01
3	Omni	2.4	AP-ANT-19	3.0	6.01	3.0	6.01
		5		**6.0**	9.01	6.0	9.01
4	Omni	2.4	AP-ANT-20W	**2.0**	5.01	2.0	5.01
		5		**2.0**	5.01	2.0	5.01
5	Omni	2.4	AP-ANT-40	**4.0**	7.01	4.0	7.01
		5		5.0	8.01	5.0	8.01
6 (Note 3)	Directional	2.4	AP-ANT-25A	5.0	5.0	5.0	8.01
		5		5.0	5.0	5.0	8.01
7 (Note 3)	Directional	2.4	AP-ANT-28	**7.5**	7.5	7.5	10.51
		5		**7.5**	7.5	7.5	10.51
Bluetooth & ZigBee Internal Antenna							
PCB		2.4		3.3			

APIN0505

Directionality	Frequency Band (GHz)	Max Peak Gain (dBi)	BF Dir Gain (dBi)	CDD Dir Gain (dBi)	
				For Power	For PSD
Wi-Fi Internal Antenna List (2.4GHz 2*2 MIMO, 5GHz 4*4 MIMO)					
Omni	2.4	4.29	7.08	4.29	7.08
Omni	5	5.63	8.64	5.63	8.64
Bluetooth & ZigBee Internal Antenna					
PCB	2.4	3.3			

Note:

1. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
   For CDD transmissions, directional gain is calculated as follows, N_{ANT} = 2, N_{SS} = 1.
   If all antennas have the same gain, G_{ANT}, Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.
   - For power spectral density (PSD) measurements on all devices,
     Array Gain = 10 log (N_{ANT}/ N_{SS}) dB = 3.01;
   - For power measurements on IEEE 802.11 devices,
     Array Gain = 0 dB for $N_{ANT} \leq 4$;
2. The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax, not include 802.11a/b/g. Directional gain = G_{ANT} + Array Gain, BF Gain was declared by the applicant.
3. Two type antennas are cross polarized, the detail refer to antenna specification.
4. For APIN0504, low gain antenna AP-ANT-20W was selected to perform all RF testing that can got maximum power setting. High gain Omni antenna AP-ANT-19 & AP-ANT-40 and directional antenna AP-ANT-28 were selected to perform radiated spurious emission and band edge testing. High gain antenna power setting will be reduced according to difference value of antenna gain declared by applicant.
5. For APIN0505, its directional gain was declared by the applicant, the detail refers to antenna specification.

2.5. Description of Antenna RF Port

Antenna RF Port				
--	2.4GHz RF Port		5GHz RF Port	
Software Control Port	Ant 0	Ant 1	Ant 0	Ant 1
APIN0504				
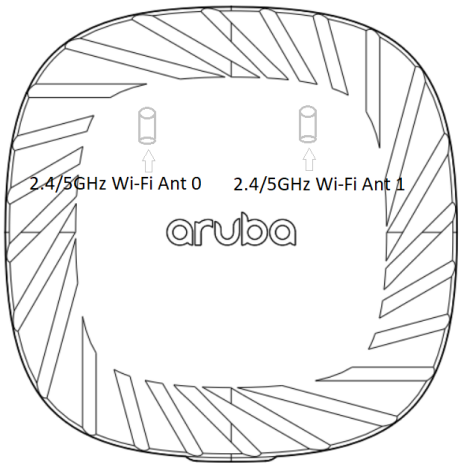 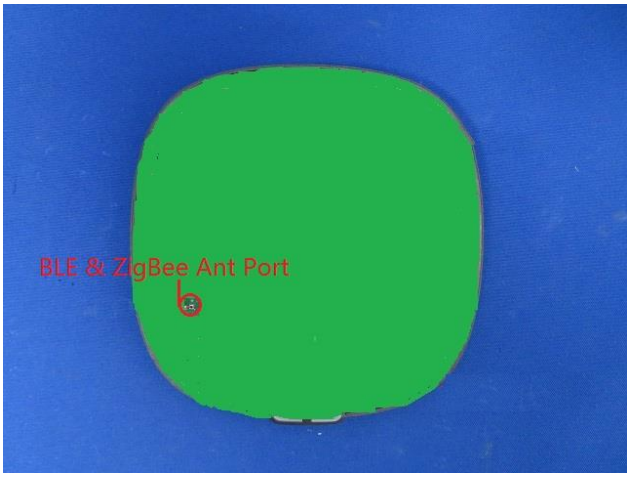				
APIN0505				
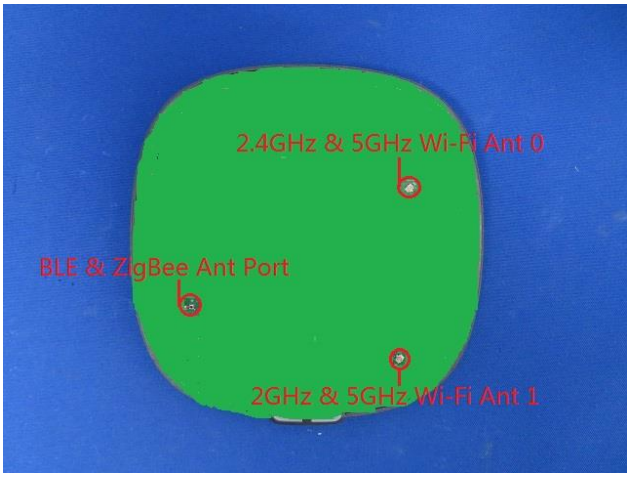				

2.6. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps)
	Mode 2: Transmit by 802.11ac-VHT20 (MCS0)
	Mode 3: Transmit by 802.11ac-VHT40 (MCS0)
	Mode 4: Transmit by 802.11ac-VHT80 (MCS0)
	Mode 5: Transmit by 802.11ax-HE20 (MCS0)
	Mode 6: Transmit by 802.11ax-HE40 (MCS0)
	Mode 7: Transmit by 802.11ax-HE80 (MCS0)

2.7. Description of Test Software

The test utility software used during testing was “accessMTool”, and the version was “v3.0.0.7”. Detail power setting refer to operation description.

2.8. Device Capabilities

This device contains the following capabilities:

802.11a/b/g/n/ac/ax Wi-Fi and Bluetooth v4.2 single mode and Zigbee devices

Note: 5GHz (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz per the guidance of Section B)2)b) of KDB 789033 D02v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Model No.	Test Mode	Duty Cycle
APIN0504	802.11a	94.49%
	802.11ac-VHT20	98.21%
	802.11ac-VHT40	96.64%
	802.11ac-VHT80	93.70%
	802.11ax-HE20	97.36%
	802.11ax-HE40	94.94%
	802.11ax-HE80	91.14%
APIN0505	802.11a	93.36%
	802.11ac-VHT20	98.21%
	802.11ac-VHT40	96.40%
	802.11ac-VHT80	92.83%
	802.11ax-HE20	97.23%
	802.11ax-HE40	95.27%
	802.11ax-HE80	91.17%

Duty Cycle (T = Transmission Duration) - APIN0504	
802.11a (T = 2.057ms)	802.11ac-VHT20 (T = 1.915ms)
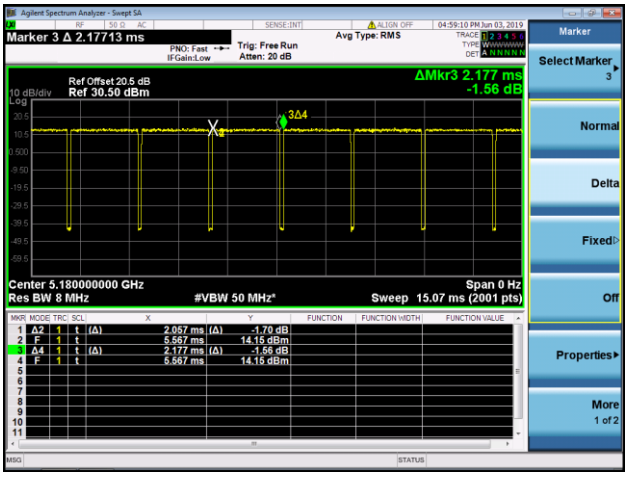	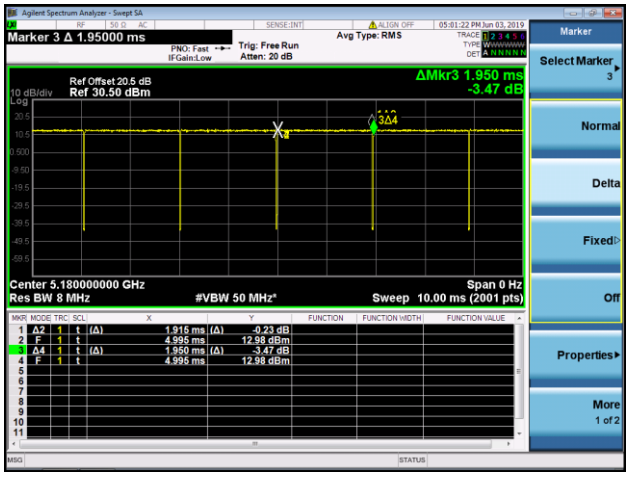

802.11ac-VHT40 (T = 947.5us)

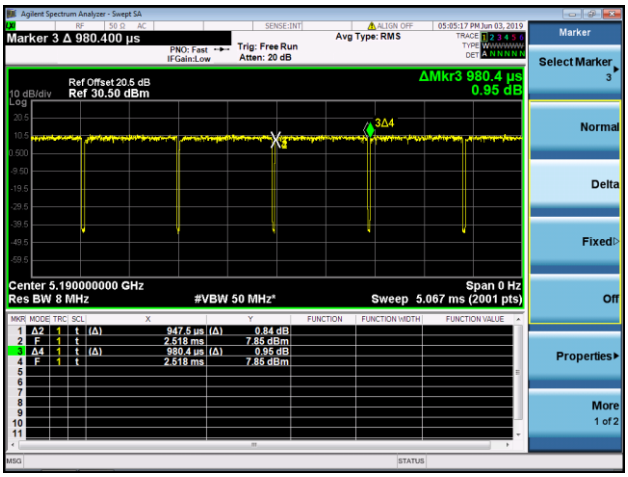

802.11ac-VHT80 (T = 456.9us)

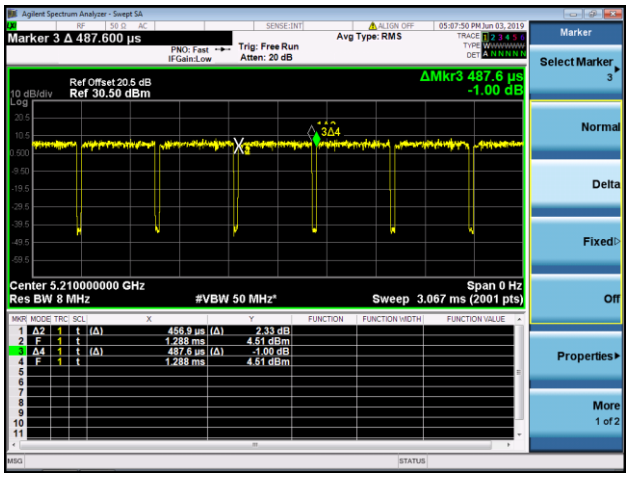

802.11ax-HE20 (T = 1.475ms)

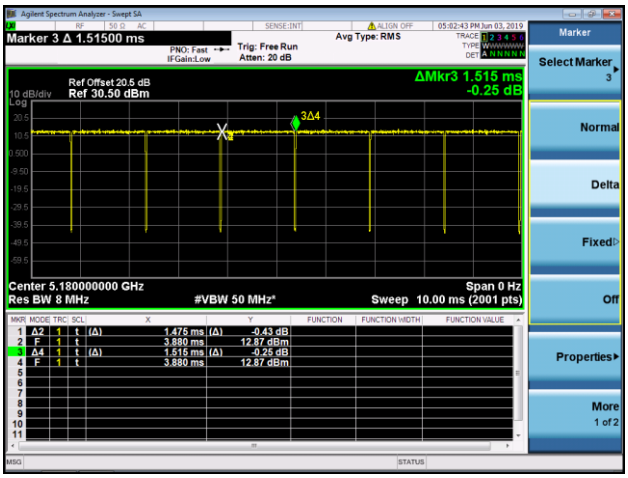

802.11ax-HE40 (T = 762.5us)

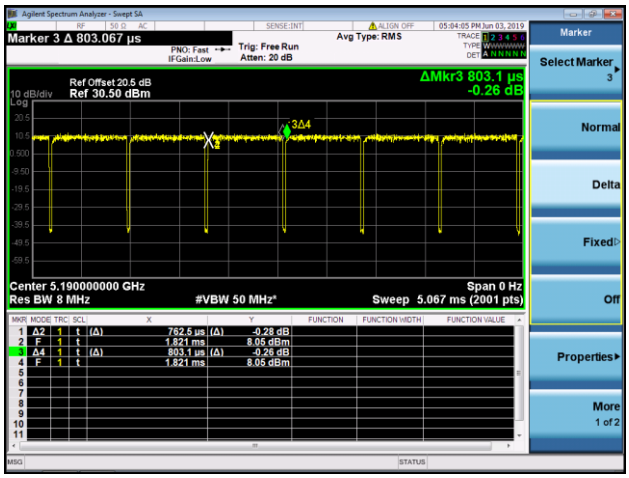

802.11ax-HE80 (T = 394.1us)

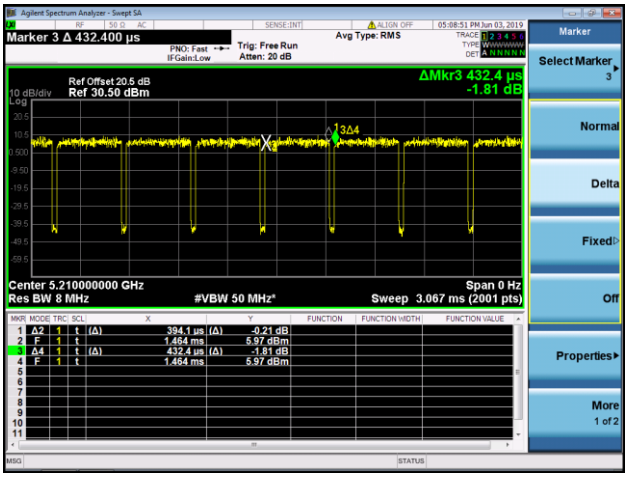

Duty Cycle (T = Transmission Duration) - APIN0505

802.11a (T = 2.040ms)	802.11ac-VHT20 (T = 1.920ms)
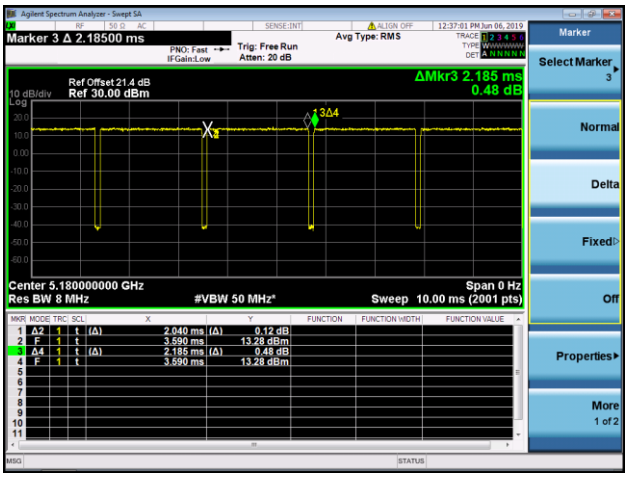	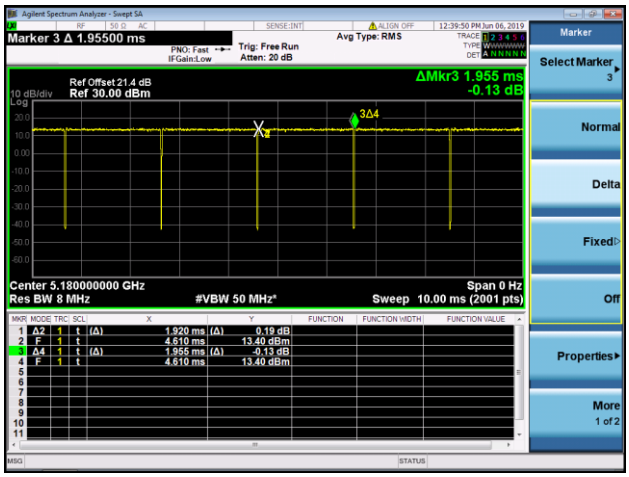
802.11ac-VHT40 (T = 947.5us)	802.11ac-VHT80 (T = 456.9us)
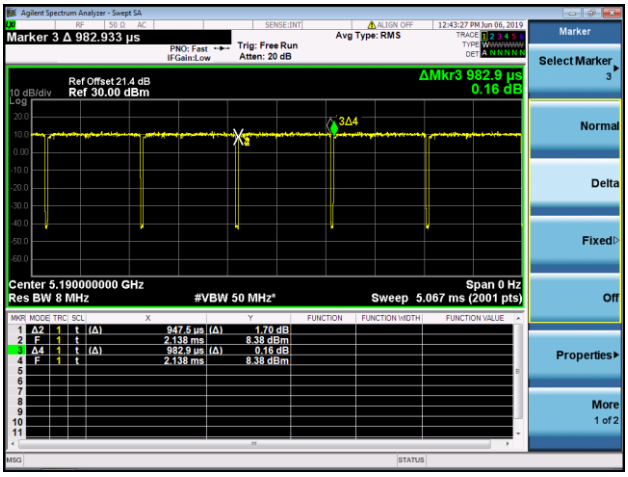	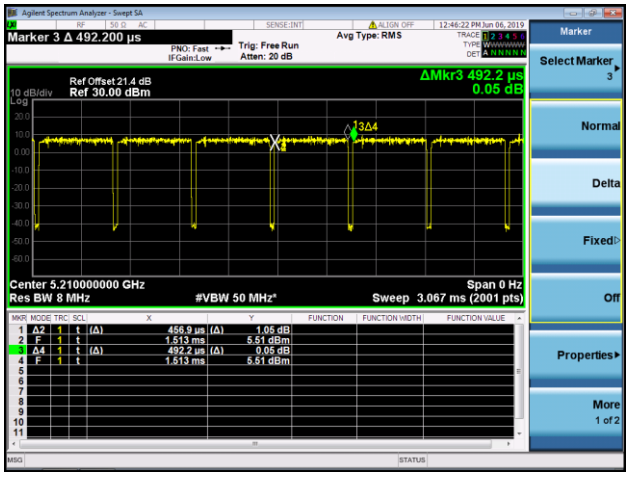
802.11ax-HE20 (T = 1.474ms)	802.11ax-HE40 (T = 765.1us)
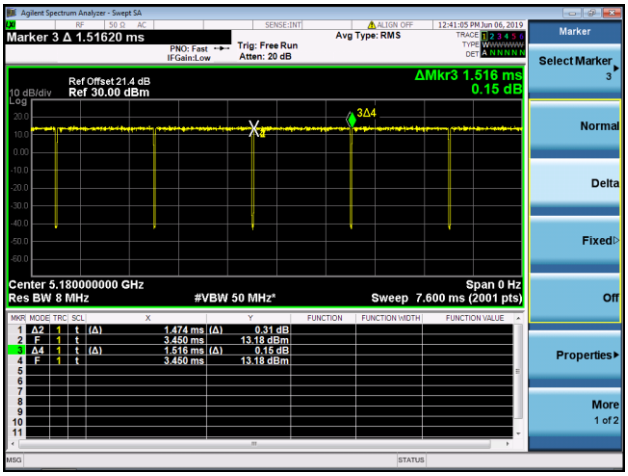	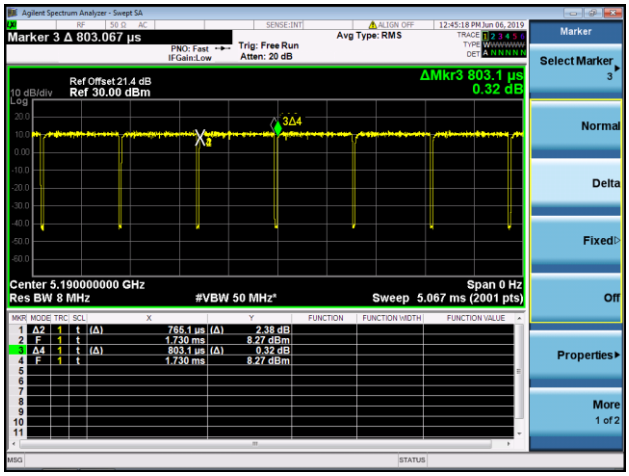

802.11ax-HE80 (T = 400.0us)	
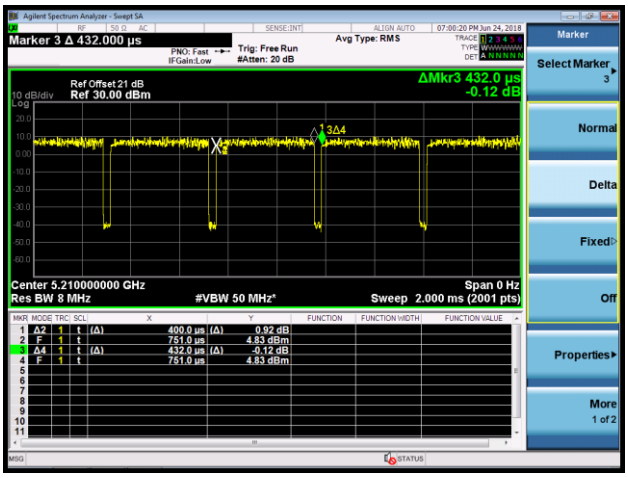	

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

<u>Per 2.1074 & 15.19; Docket 95-19</u>

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphletsupplied to the user and be readily visible to the purchaser at the time of purchase. However, when the deviceis so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label andlabel location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed WirelessDevices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in themeasurement.

Deviation from measurement procedure…….....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remotecontrolled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated tomaximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by theresponsible party can be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator shall be considered sufficient to comply with theprovisions of this section."

For APIN0505

- The antenna of the ACCESS POINT is permanently attached.
- There are no provisions for connection to an external antenna.

For APIN0504

- The antenna of the ACCESS POINT uses a reversed SMA connector.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV 216	MRTTWA00019	1 year	2020/03/25
Two-Line V-Network	R&S	ENV 216	MRTTWA00020	1 year	2020/04/25
8-Wire ISN (T8)	R&S	ENY81	MRTTWA00018	1 year	2020/04/23
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2020/05/29
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2020/05/30

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Acitve Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2020/04/29
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2020/06/04
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2020/04/22
Breitband Horn antenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2020/04/23
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2020/04/24
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2020/04/24
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2020/03/26
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2020/03/25
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2019/10/30
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2020/04/22
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2020/05/30

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2020/04/22
Wideband Radio Communication Taster	R&S	CMW 500	MRTTWA00041	1 year	2020/01/28
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2019/10/30
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2020/07/11
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2020/03/26
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2020/05/30

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 150kHz~30MHz: 2.53dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 9kHz ~ 1GHz: 4.25dB 1GHz ~ 40GHz: 4.45dB

7. TEST RESULT

7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	≥ 500kHz		Pass	Section 7.3
15.407(a)(1)(ii), (3)	Maximum Conducted Output Power	≤ 30 dBm		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	≤ 24 dBm		N/A	Section 7.5
15.407(a)(1)(ii), (3), (5)	Peak Power Spectral Density	≤ 17 dBm/MHz UNII-1 ≤ 30 dBm/500kHz UNII-3		Pass	Section 7.6
15.407(g)	Frequency Stability	± 20 ppm		Pass	Section 7.7
15.407(b)(1), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits(Restricted Bands andRadiated Emission Limits)	Emissions in restrictedbands must meet theradiated limits detailed in15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
3) Test Items “6dB Bandwidth” & “Band Edge / Out-of-Band Emissions” have been assessed MIMO transmission, and showed the worst test data in this report. Besides, two items were accessed by APIN0514 only due its high power than APIN0505.

7.2. 26dB Bandwidth Measurement

7.2.1.Test Limit

N/A

7.2.2.Test Procedure used

ANSI C63-2013 - Section 12.4.1

7.2.3.Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW ≥ 3×RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4.Test Setup

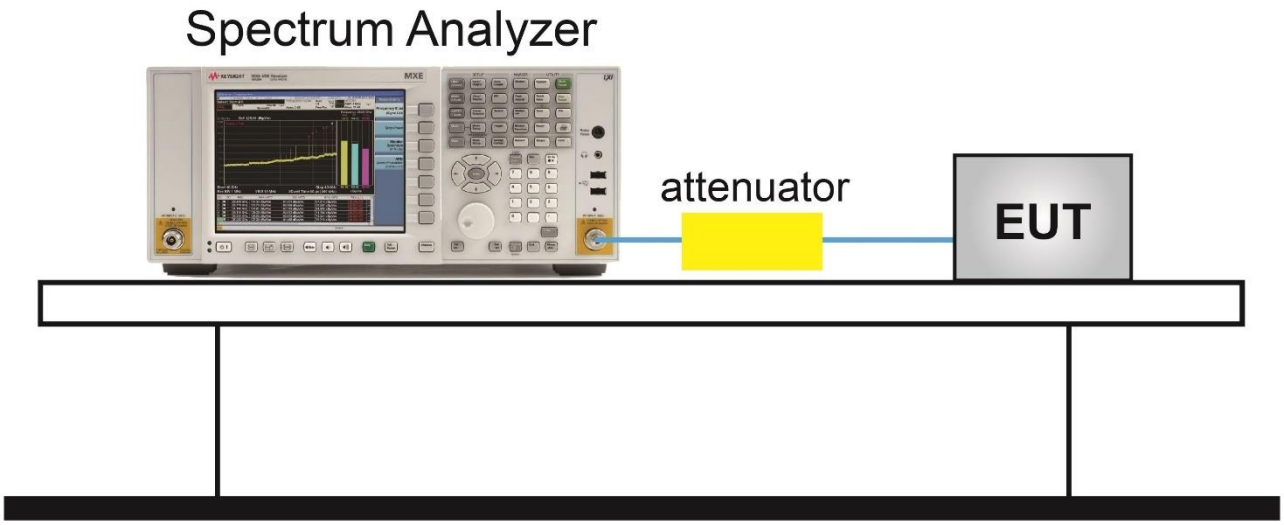

7.2.5.Test Result

Product	ACCESS POINT	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	59%
Test Site	SR2	Test Date	2019/06/05
Model No.	APIN0504	Test Item	26dB Bandwidth

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 0 / Ant 0 + 1					
802.11a	6Mbps	36	5180	22.05	16.80
802.11a	6Mbps	44	5220	21.58	16.71
802.11a	6Mbps	48	5240	21.24	16.71
802.11a	6Mbps	149	5745	21.66	16.68
802.11a	6Mbps	157	5785	21.70	16.75
802.11a	6Mbps	165	5825	21.72	16.82
802.11ac-VHT20	MCS0	36	5180	22.08	17.88
802.11ac-VHT20	MCS0	44	5220	21.26	17.81
802.11ac-VHT20	MCS0	48	5240	21.45	17.86
802.11ac-VHT20	MCS0	149	5745	21.15	17.82
802.11ac-VHT20	MCS0	157	5785	21.60	17.87
802.11ac-VHT20	MCS0	165	5825	21.93	17.93
802.11ac-VHT40	MCS0	38	5190	39.39	36.31
802.11ac-VHT40	MCS0	46	5230	39.74	36.29
802.11ac-VHT40	MCS0	151	5755	39.82	36.30
802.11ac-VHT40	MCS0	159	5795	39.33	36.39
802.11ac-VHT80	MCS0	42	5210	80.83	75.75
802.11ac-VHT80	MCS0	155	5775	80.48	75.88
802.11ax-HE20	MCS0	36	5180	21.31	19.10
802.11ax-HE20	MCS0	44	5220	22.03	19.04
802.11ax-HE20	MCS0	48	5240	21.22	19.03
802.11ax-HE20	MCS0	149	5745	21.25	19.06
802.11ax-HE20	MCS0	157	5785	23.02	19.04
802.11ax-HE20	MCS0	165	5825	22.70	19.14

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 0 / Ant 0 + 1					
802.11ax-HE40	MCS0	38	5190	39.81	37.62
802.11ax-HE40	MCS0	46	5230	39.74	37.69
802.11ax-HE40	MCS0	151	5755	39.87	37.67
802.11ax-HE40	MCS0	159	5795	39.83	37.68
802.11ax-HE80	MCS0	42	5210	81.34	77.05
802.11ax-HE80	MCS0	155	5775	81.15	76.96

802.11a 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1

Channel 36 (5180MHz)

Channel 44 (5220MHz)

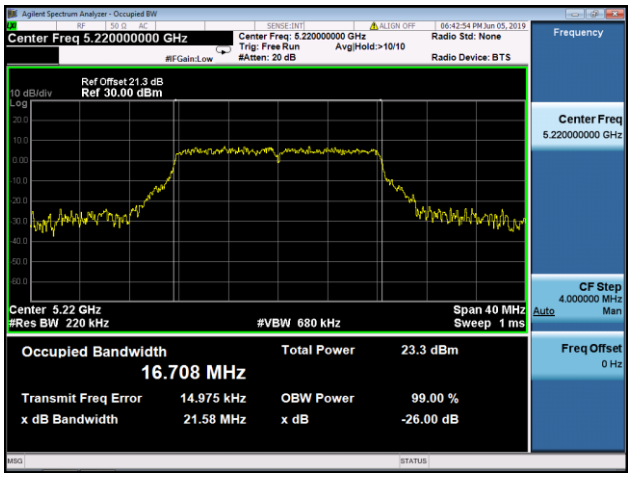

Channel 48 (5240MHz)

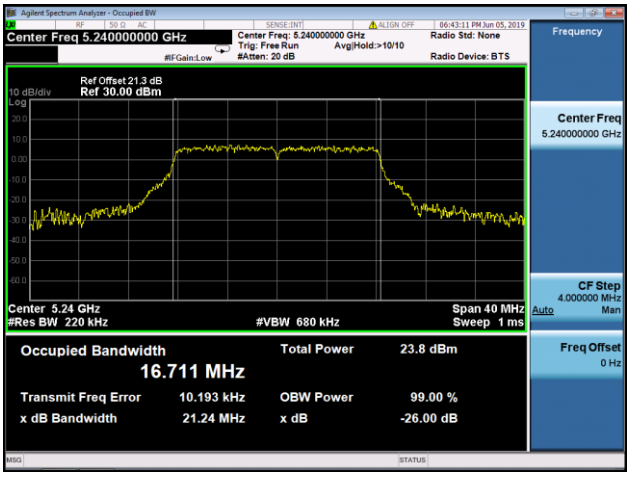

Channel 149 (5745MHz)

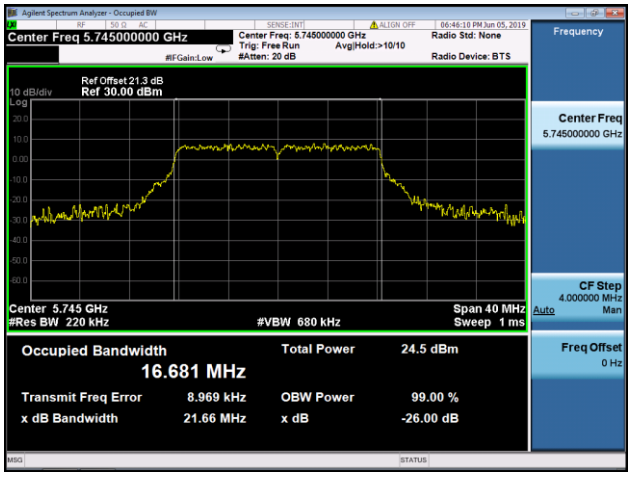

Channel 157 (5785MHz)

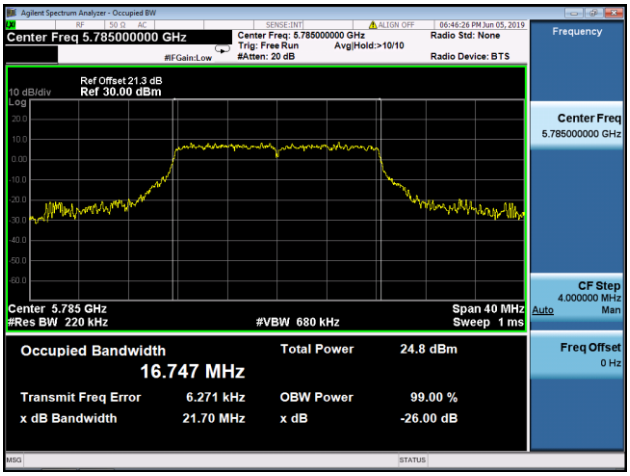

Channel 165 (5825MHz)

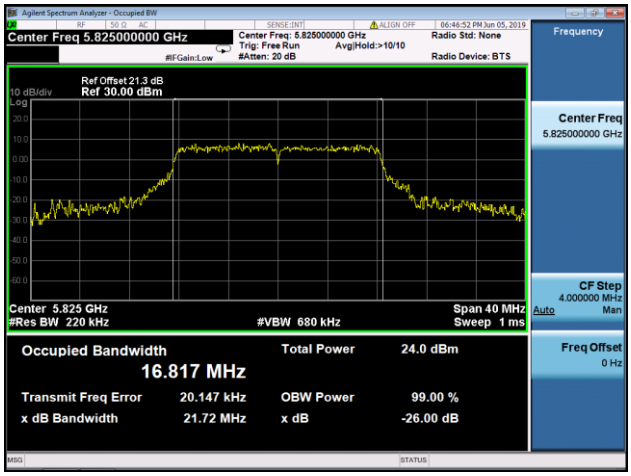

802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1

Channel 36 (5180MHz)

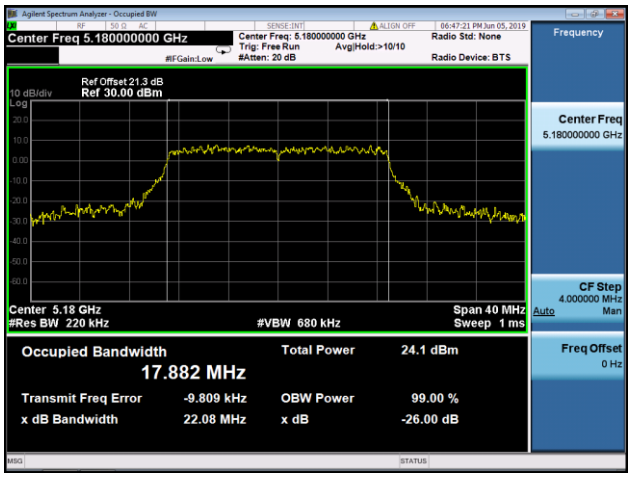

Channel 44 (5220MHz)

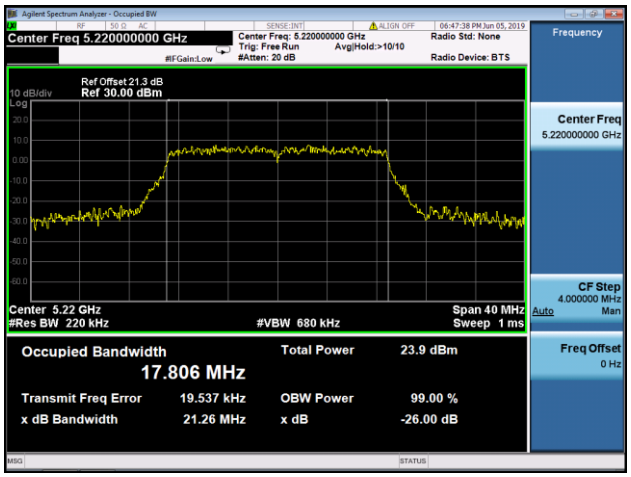

Channel 48 (5240MHz)

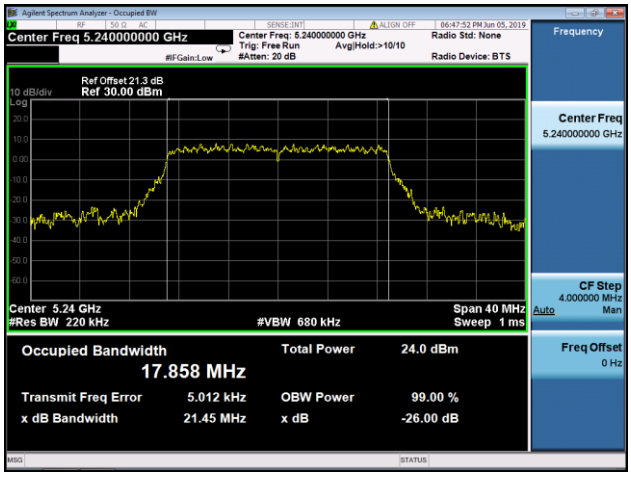

Channel 149 (5745MHz)

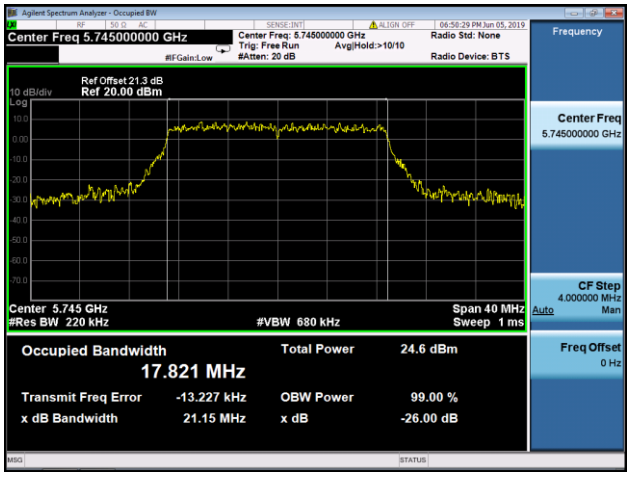

Channel 157 (5785MHz)

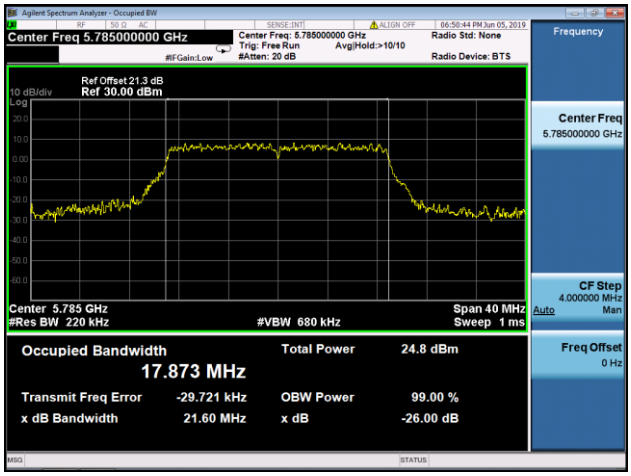

Channel 165 (5825MHz)

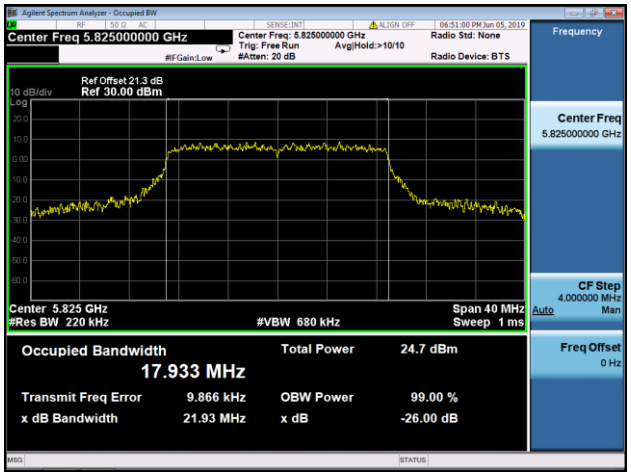

802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1

Channel 38 (5190MHz)

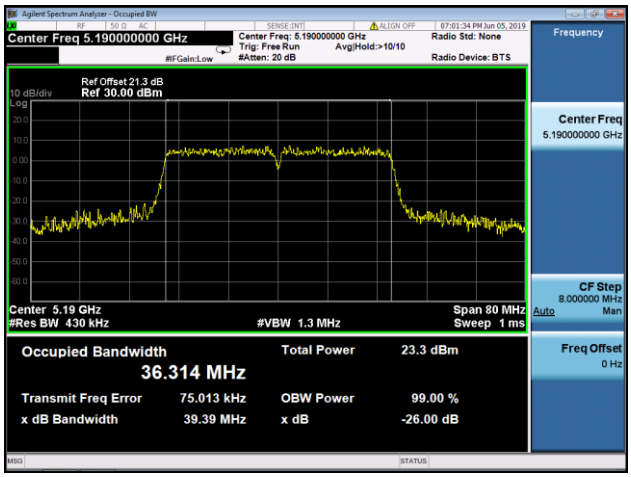

Channel 46 (5230MHz)

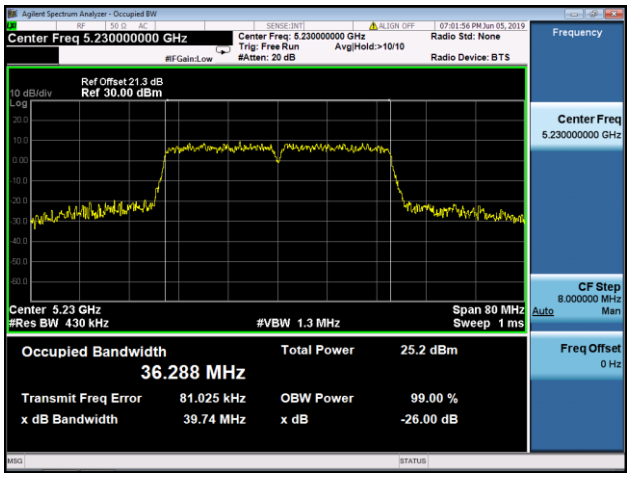

Channel 151 (5755MHz)

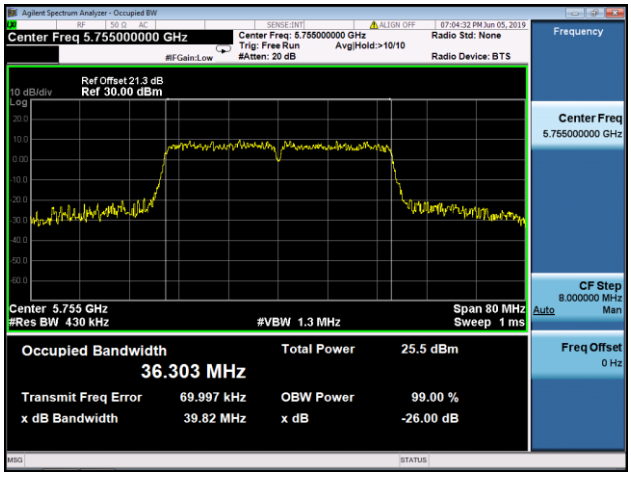

Channel 151 (5795MHz)

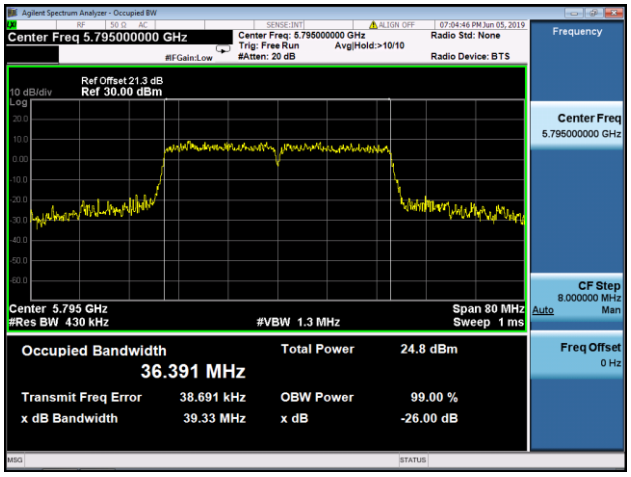

802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1

Channel 42 (5210MHz)

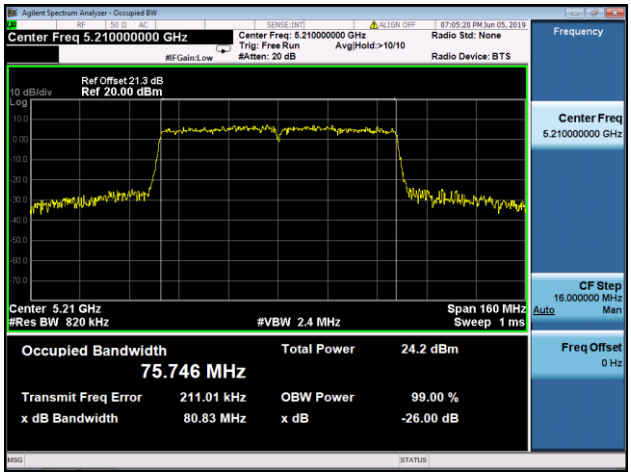

Channel 155 (5775MHz)

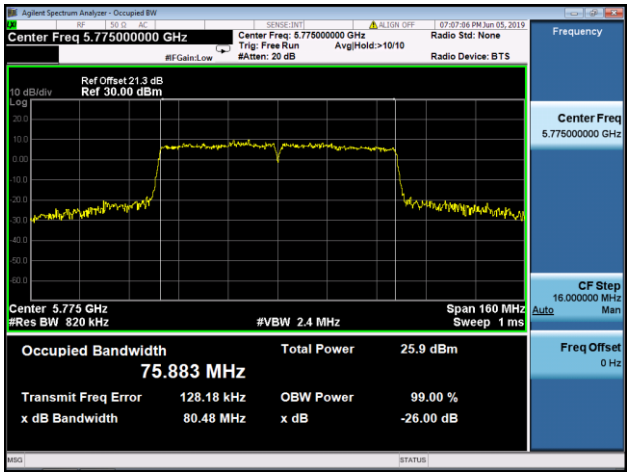

802.11ax-HE20 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1

Channel 36 (5180MHz)

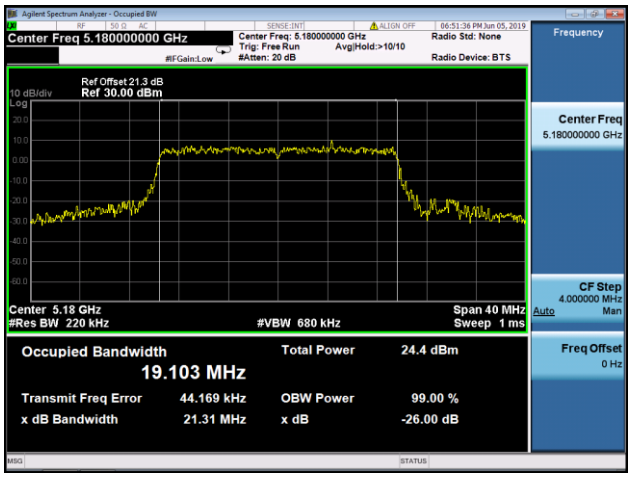

Channel 44 (5220MHz)

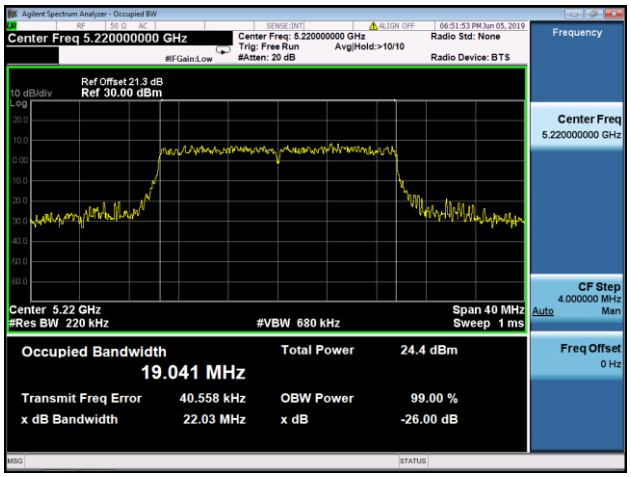

Channel 48 (5240MHz)

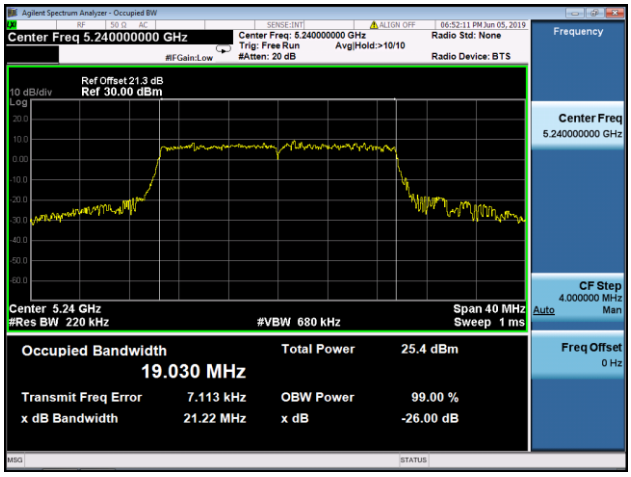

Channel 149 (5745MHz)

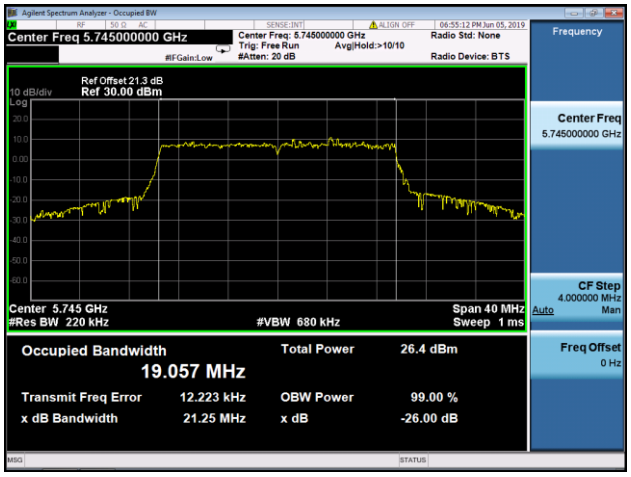

Channel 157 (5785MHz)

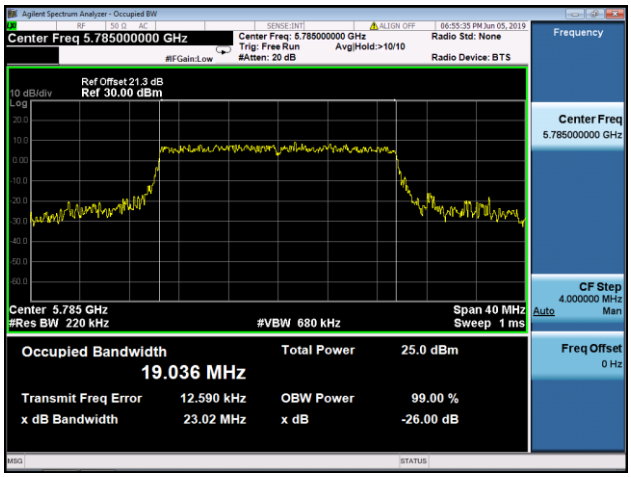

Channel 165 (5825MHz)

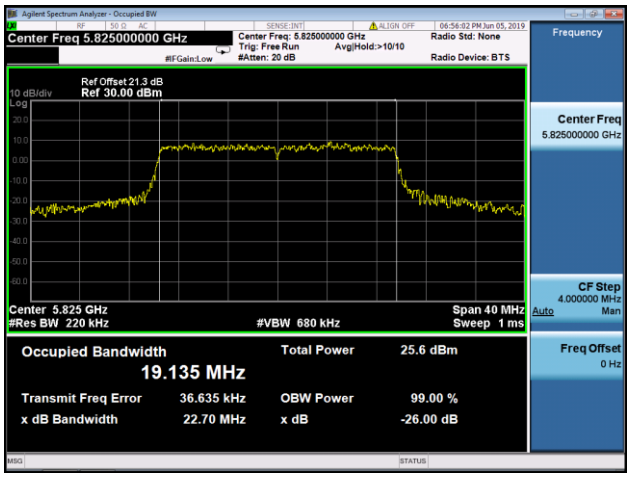

802.11ax-HE40 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1

Channel 38 (5190MHz)

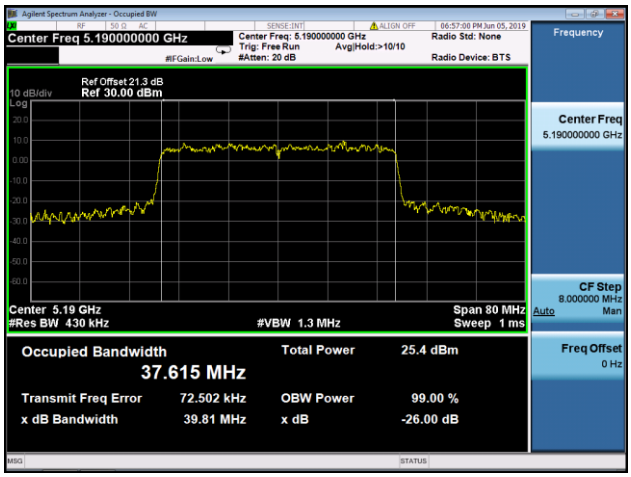

Channel 46 (5230MHz)

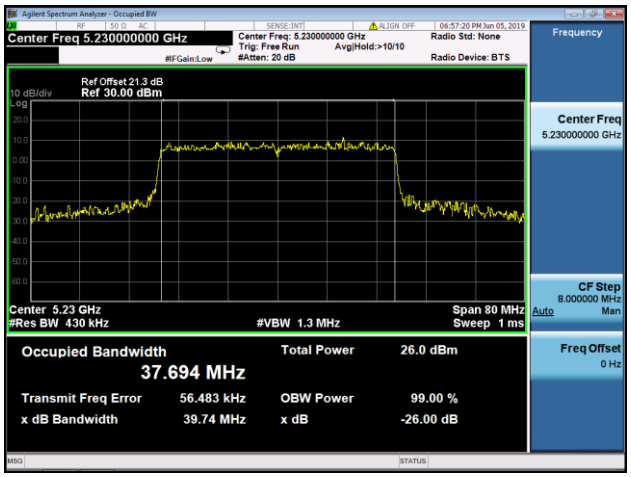

Channel 151 (5755MHz)

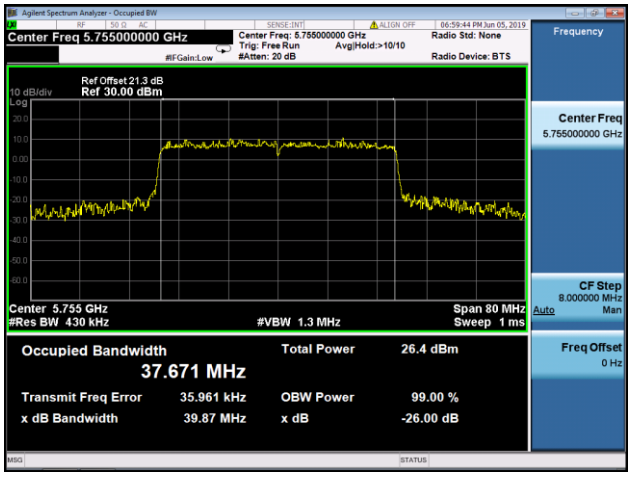

Channel 159 (5795MHz)

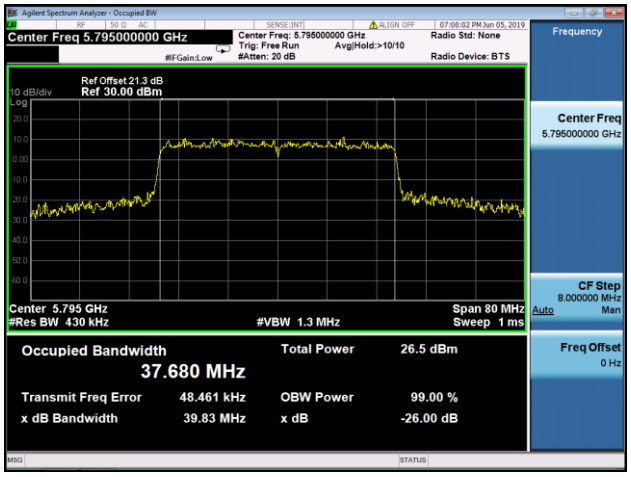

802.11ax-HE80 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1

Channel 42 (5210MHz)

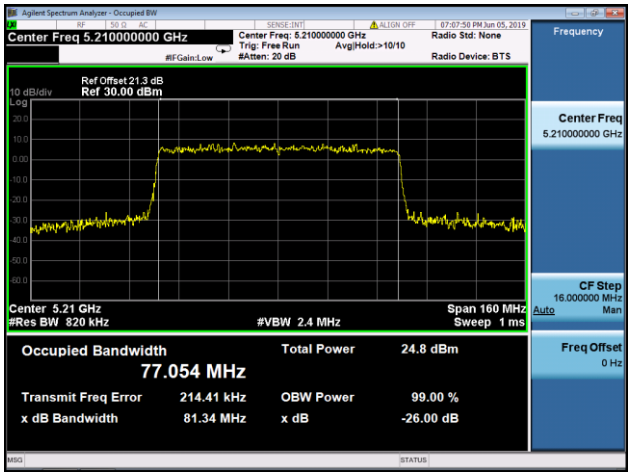

Channel 155 (5775MHz)

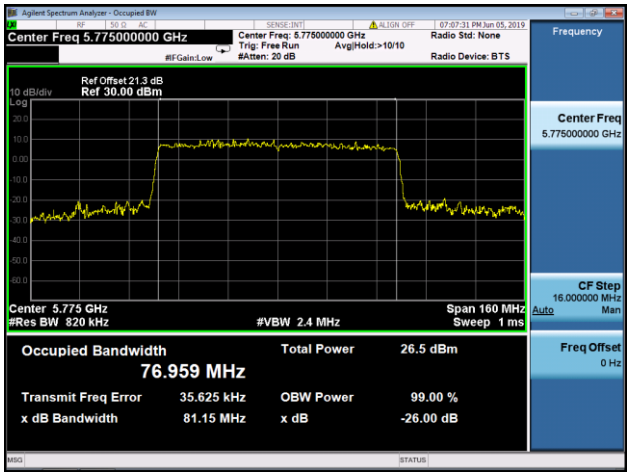

7.3. 6dB Bandwidth Measurement

7.3.1.Test Limit

The minimum 6dBbandwidth shall be at least 500 kHz.

7.3.2.Test Procedure used

ANSI C63-2013 - Section 12.4.2

7.3.3.Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW≧ 3 × RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4.Test Setup

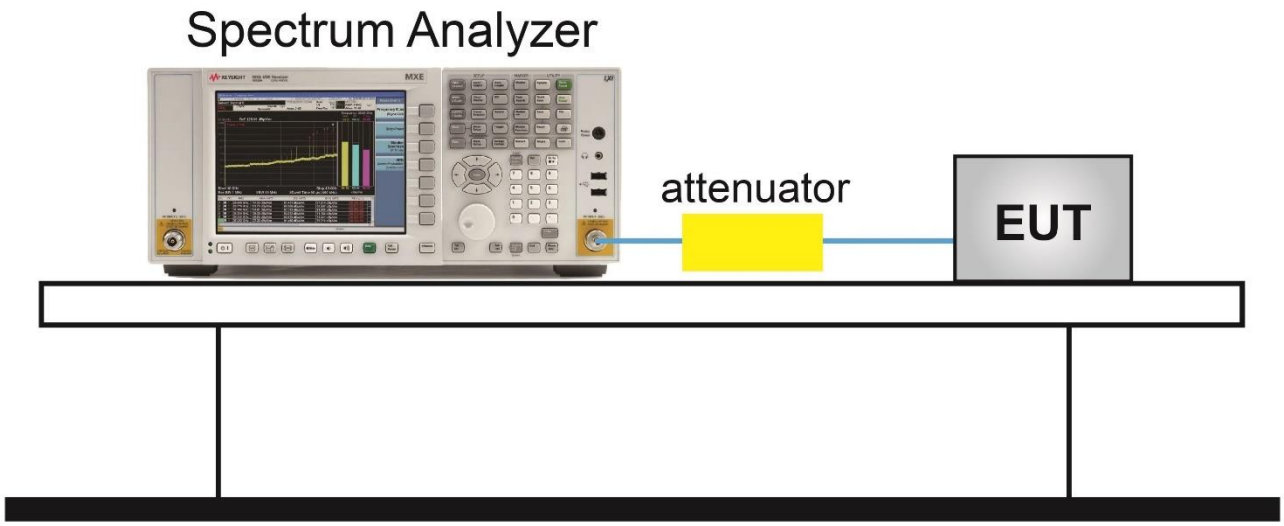

7.3.5.Test Result

Product	ACCESS POINT	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	59%
Test Site	SR2	Test Date	2019/06/05
Model No.	APIN0504	Test Item	6dB Bandwidth

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 0 / Ant 0 + 1						
802.11a	6Mbps	149	5745	16.41	≥ 0.5	Pass
802.11a	6Mbps	157	5785	16.38	≥ 0.5	Pass
802.11a	6Mbps	165	5825	16.36	≥ 0.5	Pass
802.11ac-VHT20	MCS0	149	5745	17.62	≥ 0.5	Pass
802.11ac-VHT20	MCS0	157	5785	17.60	≥ 0.5	Pass
802.11ac-VHT20	MCS0	165	5825	17.62	≥ 0.5	Pass
802.11ac-VHT40	MCS0	151	5755	36.38	≥ 0.5	Pass
802.11ac-VHT40	MCS0	159	5795	36.38	≥ 0.5	Pass
802.11ac-VHT80	MCS0	155	5775	75.85	≥ 0.5	Pass
802.11ax-HE20	MCS0	149	5745	18.99	≥ 0.5	Pass
802.11ax-HE20	MCS0	157	5785	18.95	≥ 0.5	Pass
802.11ax-HE20	MCS0	165	5825	18.99	≥ 0.5	Pass
802.11ax-HE40	MCS0	151	5755	36.97	≥ 0.5	Pass
802.11ax-HE40	MCS0	159	5795	37.63	≥ 0.5	Pass
802.11ax-HE80	MCS0	155	5775	76.59	≥ 0.5	Pass

802.11a 6dB Bandwidth - Ant 0 / Ant 0 + 1	
Channel 149 (5745MHz)	Channel 157 (5785MHz)
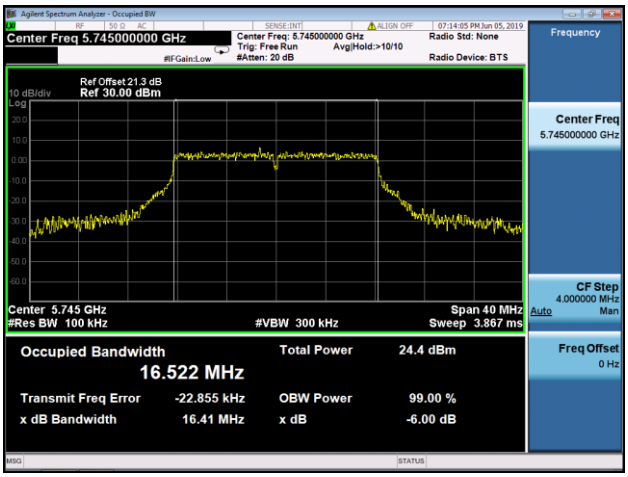	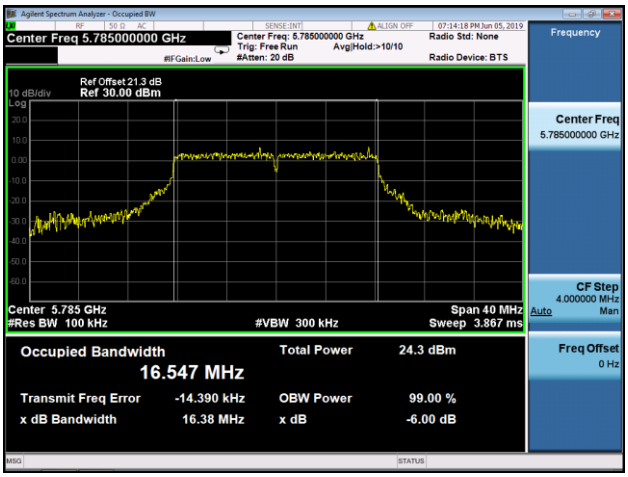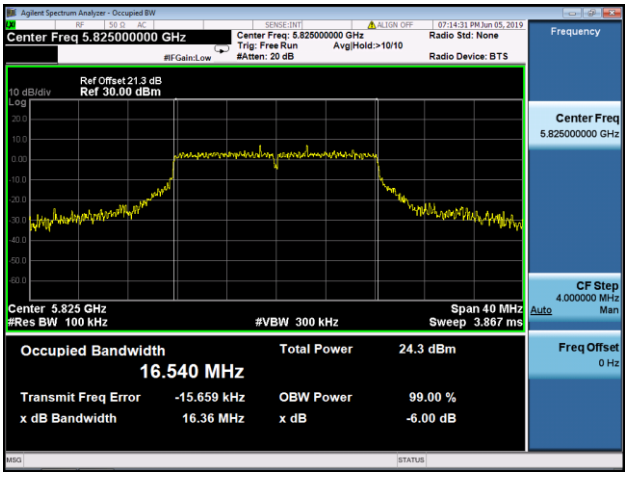
Channel 165 (5825MHz)