


PART NUMBER BLOCK	
PART NUMBER	REV

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

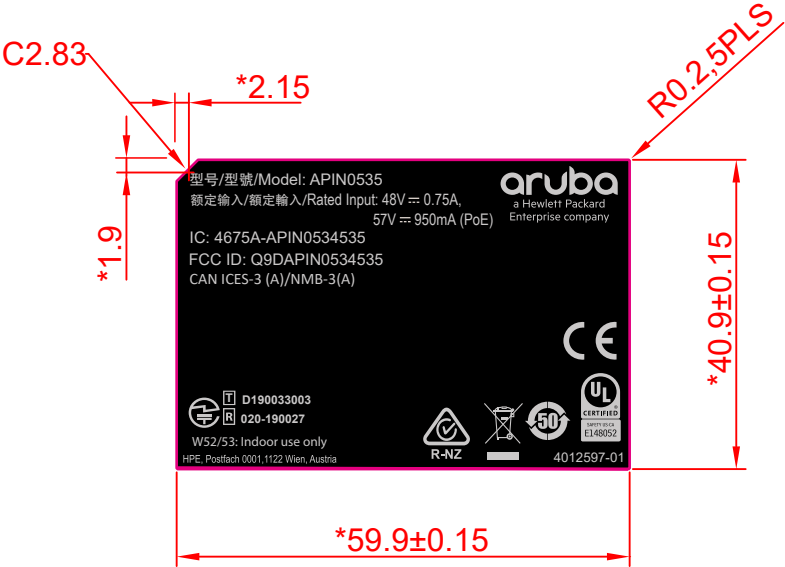

- NOTE:
1. MATERIAL: WHITE MATTE PET, 金利寶HTYL75(EB) T=0.075
ADHESIVE: ACRYLIC 背膠
 2. FINISH: FINISH: 上霧PET,金利寶TPATM(T)(30)J ,T=0.025
 3. COLOR: PMS BLACK C ■
PMS GRAY 3C ■
刀模: ■,R=0.2
 4. UL APPROVED, PGDQ2.
 - 5.被貼物:鋁壓鑄
 - 6.TEMPERATURE RESISTANT= 120° C
 - 7.印刷公差:尺寸30mm以下為±0.2mm,30~120mm為±0.3mm,120~315mm為±0.5mm,315以上±0.8mm
 8. 捲狀出貨,離型紙左右間距各3±0.5mm, 上下間距各3±0.3mm
 - 9.TEST REQUIREMENTS

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

		UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:				WNC Wistron NeWeb Corp. 啟碁科技股份有限公司 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726			
		INTEGER DIMENSIONS ± 0.5 1 PLACE DECIMAL ± 0.2		ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2		DWG TITLE LABEL,4012597-01, AP-535, RVAQ-52I			
		MATERIAL: SEE NOTES							
		FINISH: SEE NOTES							
	RVAQ-52I	THIRD ANGLE PROJECTION		DRAWN			SIZE A4	DWG NO.	REV
NEXT ASSY	USED ON			ENGR					
APPLICATION				APVD			SCALE 1/1	SHEET 1 OF 1	