


PART NUMBER BLOCK	
PART NUMBER	REV

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

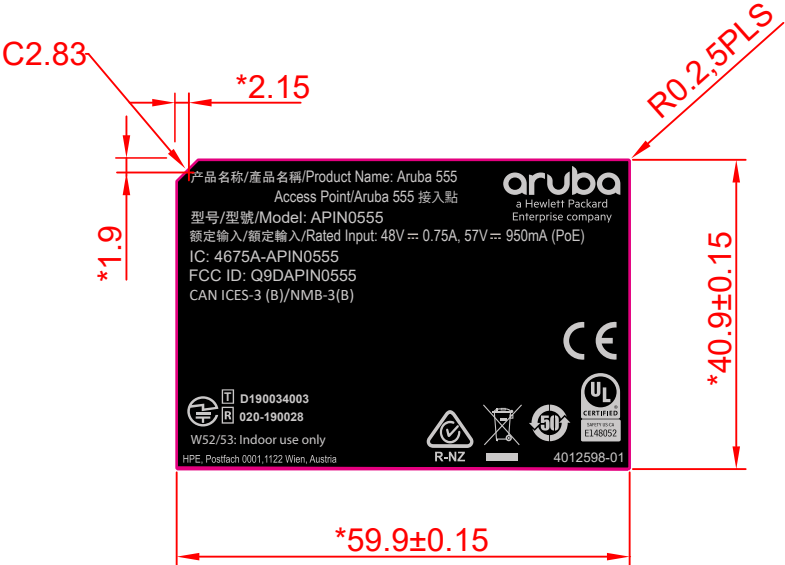


NOTE:

- 1.MATERIAL: PC FILM(SABIC-LEXAN 8B35), t=0.127
2.ADHESIVE: 3M-467,t=0.05 mm
3. COLOR: PMS BLACK C ■
PMS GRAY 3C ■
刀模: ■,R=0.2
4. UL APPROVED, PGDQ2.
5.被貼物:鋁壓鑄
6.TEMPERATURE RESISTANT= 120° C
7.印刷公差:尺寸30mm以下為±0.2mm,30~120mm為±0.3mm,120~315mm為±0.5mm,315以上±0.8mm
8.片狀入料

9.TEST REQUIREMENTS

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

		UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:				WNC Wistron NeWeb Corp. 啟碁科技股份有限公司 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726			
		INTEGER DIMENSIONS 1 PLACE DECIMAL		± 0.5 ± 0.2					ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2
		MATERIAL: SEE NOTES				DWG TITLE LABEL, 4012598-01, AP-555, RVAQ-53I			
		FINISH: SEE NOTES							
	RVAQ-53I	THIRD ANGLE PROJECTION		DRAWN			SIZE A4	DWG NO.	REV
NEXT ASSY	USED ON			ENGR					
APPLICATION				APVD					
						SCALE 1/1		SHEET 1 OF 1	