

REVISIONS


REV	DESCRIPTION	DATE	APPROVE

NOTE:

- 1.MATERIAL: PC FILM(SABIC-LEXAN 8B35), t=0.127
2.ADHESIVE: 3M-467,t=0.05 mm
3. COLOR: PMS BLACK C ■
PMS GRAY 3C ■
刀模: ■,R=0.2
4. UL APPROVED, PGDQ2.CM-100-PCM
5.被貼物:鋁壓鑄
6.TEMPERATURE RESISTANT= 120° C
7.印刷公差:尺寸30mm以下~120mm為±0.3mm,120~315mm為±0.5mm,315以上±0.8mm
8.片狀入料


9.TEST REQUIREMENTS

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1		ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

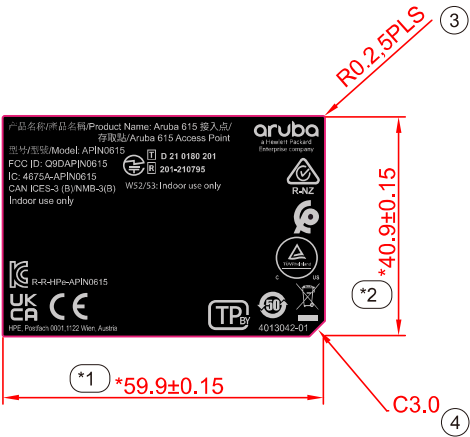

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2		THIRD ANGLE PROJECTION 		WNC Wistron NeWeb Corp. 啟碁科技股份有限公司 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
DWG TITLE					
DRAWN		SIZE	DWG NO.		REV
ENGR		A4			1
APVD		SCALE	1/1	SHEET	1 OF 1

Label Location

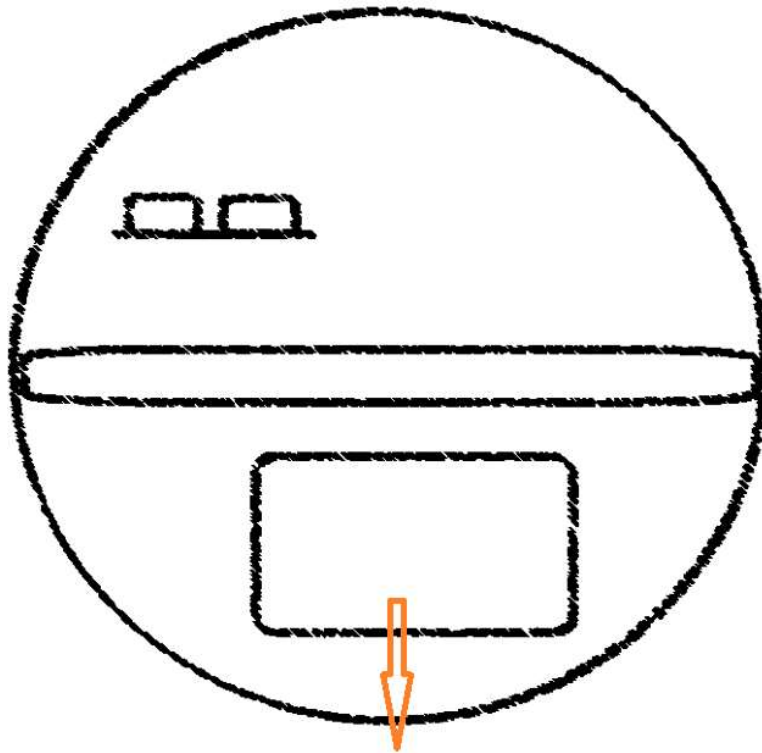

Label Location