



## 802.11ax-HE80 - Ant 1

## Channel 135 (6625MHz)

## The Reference Level

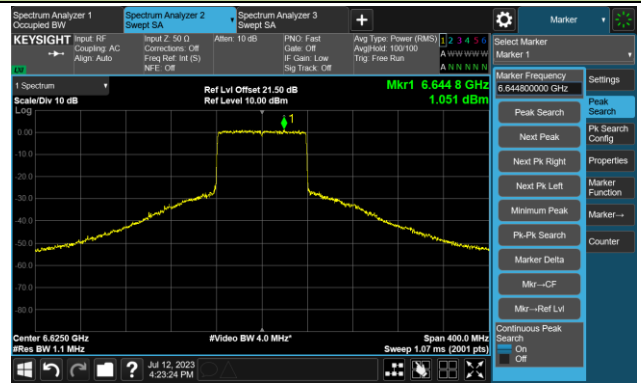


## The Mask Data

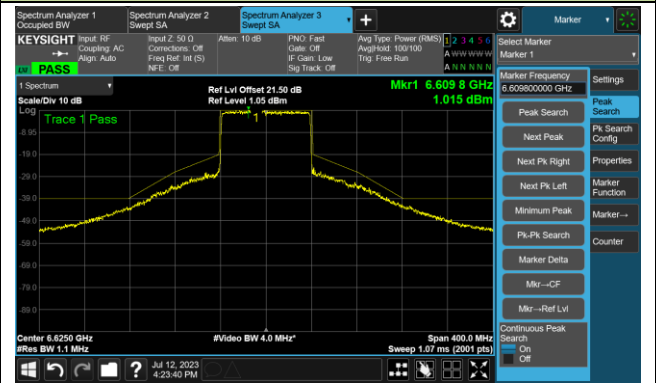


## Channel 151 (6705MHz)

## The Reference Level

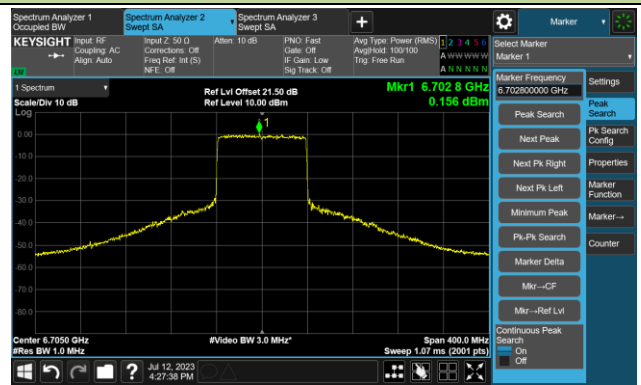


## The Mask Data

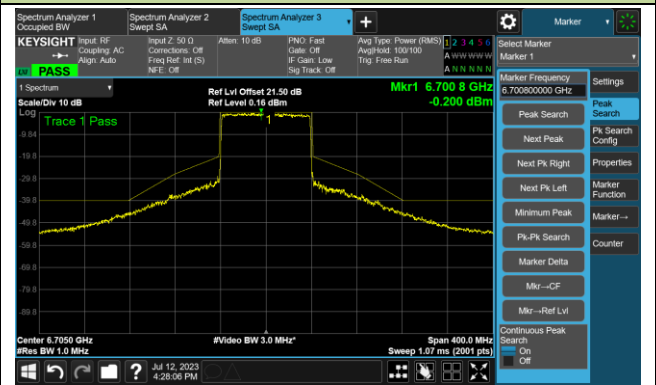


## Channel 167 (6785MHz)

## The Reference Level

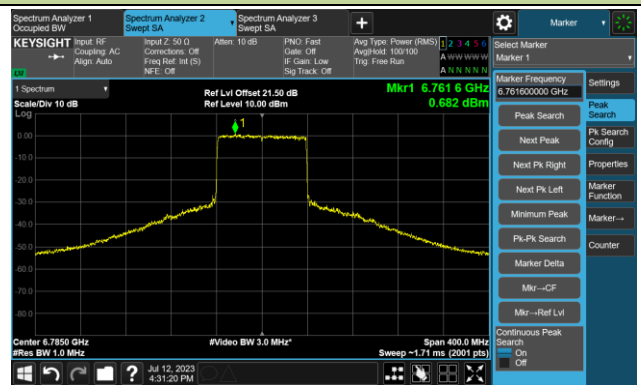


## The Mask Data

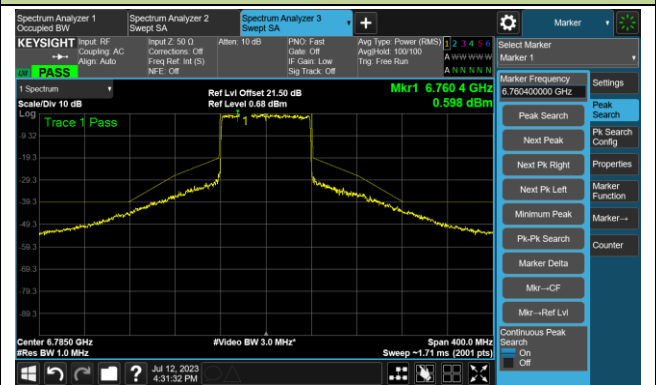


## 802.11ax-HE160 - Ant 1

## Channel 15 (6025MHz)

## The Reference Level

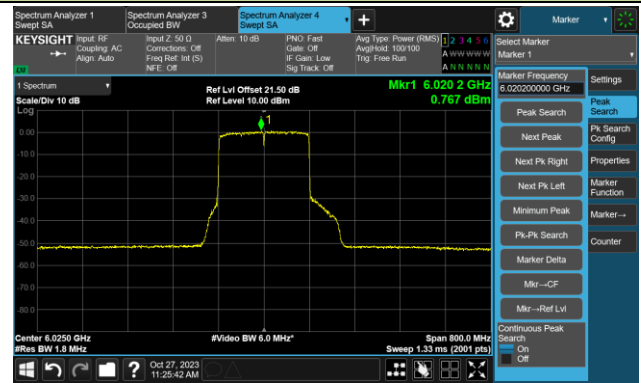


## The Mask Data

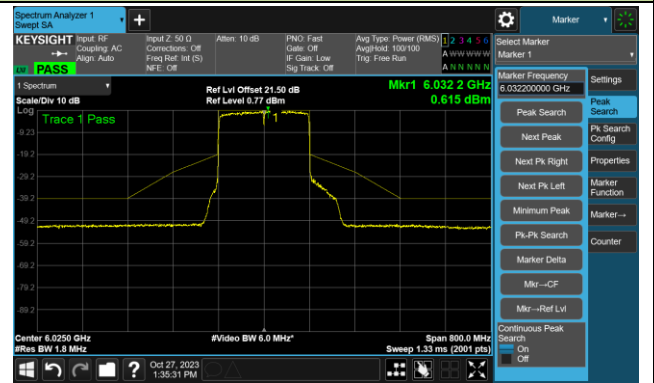

## Channel 47 (6185MHz)

## The Reference Level

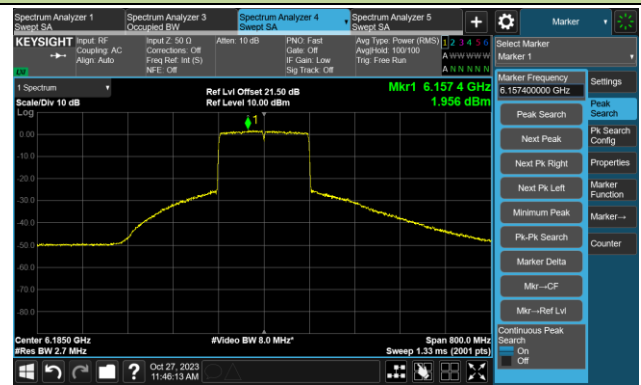

## The Mask Data




## Channel 79 (6345MHz)

## The Reference Level




## The Mask Data

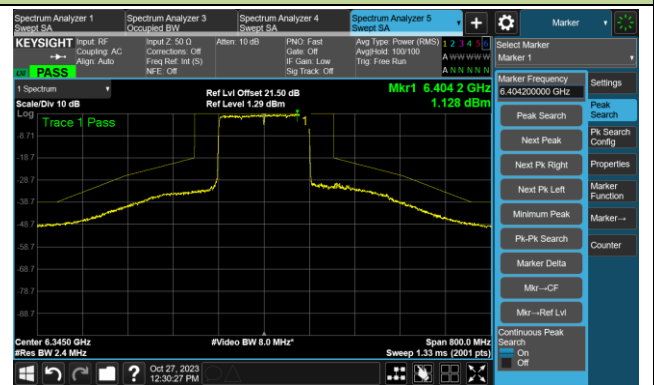


## 802.11ax-HE160 - Ant 1

## Channel 143 (6665MHz)

## The Reference Level

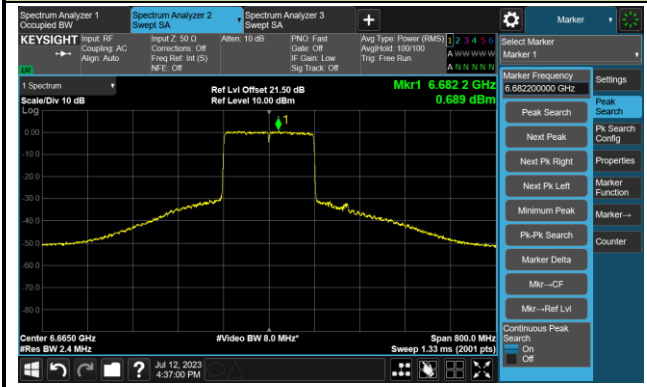

## The Mask Data

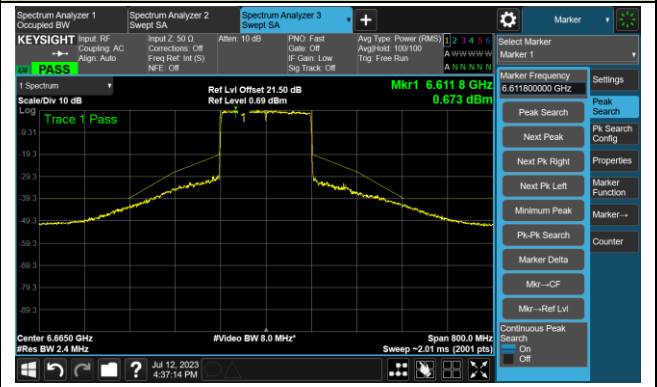

### A.6 Frequency Stability Test Result

|           |                        |               |           |
|-----------|------------------------|---------------|-----------|
| Test Site | WZ-TR3                 | Test Engineer | Amy Zhang |
| Test Date | 2023-07-19~2023-07-20  |               |           |
| Test Mode | 5955MHz (Carrier Mode) |               |           |

| Voltage (%) | Power (VAC) | Temp (°C) | Frequency Tolerance (ppm) |           |           |            |
|-------------|-------------|-----------|---------------------------|-----------|-----------|------------|
|             |             |           | 0 minutes                 | 2 minutes | 5 minutes | 10 minutes |
| 100         | 120         | - 30      | 17.25                     | 17.25     | 17.29     | 17.25      |
|             |             | - 20      | 17.83                     | 17.88     | 17.92     | 17.92      |
|             |             | - 10      | 12.79                     | 15.31     | 15.56     | 15.76      |
|             |             | 0         | 12.18                     | 12.18     | 12.13     | 12.13      |
|             |             | + 10      | 33.02                     | 33.06     | 33.11     | 33.15      |
|             |             | + 20      | 27.69                     | 27.78     | 27.86     | 27.90      |
|             |             | + 30      | 25.51                     | 25.64     | 25.72     | 25.76      |
|             |             | + 40      | -5.62                     | -5.33     | -5.04     | -4.91      |
|             |             | + 50      | 20.02                     | -6.04     | -6.08     | -6.04      |
| 115         | 138         | + 20      | 14.85                     | 14.60     | 14.23     | 14.06      |
| 85          | 102         | + 20      | 13.85                     | 13.72     | 13.60     | 13.47      |

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} \*10<sup>6</sup>.

## A.7 Radiated Spurious Emission Test Result

### ANT-311

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 1          |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 8828.5          | 33.9                 | 12.6          | 46.5                   | 88.2           | -41.7       | Peak     | Horizontal   |
| *    | 10358.5         | 35.8                 | 14.9          | 50.7                   | 88.2           | -37.5       | Peak     | Horizontal   |
|      | 11089.5         | 33.5                 | 16.7          | 50.2                   | 74.0           | -23.8       | Peak     | Horizontal   |
|      | 11650.5         | 32.6                 | 17.8          | 50.4                   | 74.0           | -23.6       | Peak     | Horizontal   |
| *    | 8786.0          | 33.5                 | 12.6          | 46.1                   | 88.2           | -42.1       | Peak     | Vertical     |
| *    | 10358.5         | 36.8                 | 14.9          | 51.7                   | 88.2           | -36.5       | Peak     | Vertical     |
|      | 10860.0         | 33.0                 | 16.2          | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |
|      | 11344.5         | 31.8                 | 17.2          | 49.0                   | 74.0           | -25.0       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 49         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 35.3                 | 14.9          | 50.2                   | 88.2           | -38.0       | Peak     | Horizontal   |
|      | 11455.0         | 32.2                 | 17.3          | 49.5                   | 74.0           | -24.5       | Peak     | Horizontal   |
| *    | 14430.0         | 32.8                 | 19.5          | 52.3                   | 88.2           | -35.9       | Peak     | Horizontal   |
|      | 16079.0         | 32.0                 | 18.2          | 50.2                   | 74.0           | -23.8       | Peak     | Horizontal   |
| *    | 10358.5         | 36.8                 | 14.9          | 51.7                   | 88.2           | -36.5       | Peak     | Vertical     |
|      | 11438.0         | 32.5                 | 17.1          | 49.6                   | 74.0           | -24.4       | Peak     | Vertical     |
|      | 11633.5         | 31.6                 | 17.7          | 49.3                   | 74.0           | -24.7       | Peak     | Vertical     |
| *    | 14846.5         | 32.1                 | 20.1          | 52.2                   | 88.2           | -36.0       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 93         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 10919.5         | 32.0                 | 16.5          | 48.5                   | 74.0           | -25.5       | Peak     | Horizontal   |
|      | 11718.5         | 31.9                 | 17.8          | 49.7                   | 74.0           | -24.3       | Peak     | Horizontal   |
| *    | 14421.5         | 32.5                 | 19.3          | 51.8                   | 88.2           | -36.4       | Peak     | Horizontal   |
| *    | 14940.0         | 32.1                 | 20.3          | 52.4                   | 88.2           | -35.8       | Peak     | Horizontal   |
| *    | 10358.5         | 35.5                 | 14.9          | 50.4                   | 88.2           | -37.8       | Peak     | Vertical     |
|      | 11497.5         | 31.3                 | 17.5          | 48.8                   | 74.0           | -25.2       | Peak     | Vertical     |
|      | 11973.5         | 31.7                 | 17.1          | 48.8                   | 74.0           | -25.2       | Peak     | Vertical     |
| *    | 14838.0         | 31.7                 | 20.2          | 51.9                   | 88.2           | -36.3       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 117        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 35.3                 | 14.9          | 50.2                   | 88.2           | -38.0       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11548.5         | 32.0                 | 17.7          | 49.7                   | 74.0           | -24.3       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 12194.5         | 31.3                 | 17.7          | 49.0                   | 74.0           | -25.0       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 14880.5         | 32.5                 | 19.6          | 52.1                   | 88.2           | -36.1       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 35.9                 | 14.9          | 50.8                   | 88.2           | -37.4       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11336.0         | 32.0                 | 17.3          | 49.3                   | 74.0           | -24.7       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11642.0         | 31.7                 | 17.9          | 49.6                   | 74.0           | -24.4       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 14064.5         | 32.3                 | 19.1          | 51.4                   | 88.2           | -36.8       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 153        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 34.0                 | 14.9          | 48.9                   | 88.2           | -39.3       | Peak     | Horizontal   |
|      | 10800.5         | 32.1                 | 16.2          | 48.3                   | 74.0           | -25.7       | Peak     | Horizontal   |
|      | 11820.5         | 31.7                 | 17.5          | 49.2                   | 74.0           | -24.8       | Peak     | Horizontal   |
| *    | 14413.0         | 32.0                 | 19.2          | 51.2                   | 88.2           | -37.0       | Peak     | Horizontal   |
| *    | 10358.5         | 35.5                 | 14.9          | 50.4                   | 88.2           | -37.8       | Peak     | Vertical     |
|      | 11659.0         | 31.4                 | 17.7          | 49.1                   | 74.0           | -24.9       | Peak     | Vertical     |
| *    | 15025.0         | 32.1                 | 19.7          | 51.8                   | 88.2           | -36.4       | Peak     | Vertical     |
|      | 16121.5         | 32.8                 | 17.7          | 50.5                   | 74.0           | -23.5       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 181        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 35.3                 | 14.9          | 50.2                   | 88.2           | -38.0       | Peak     | Horizontal   |
|      | 10970.5         | 32.6                 | 16.0          | 48.6                   | 74.0           | -25.4       | Peak     | Horizontal   |
|      | 11548.5         | 31.6                 | 17.7          | 49.3                   | 74.0           | -24.7       | Peak     | Horizontal   |
| *    | 13707.5         | 32.3                 | 19.0          | 51.3                   | 88.2           | -36.9       | Peak     | Horizontal   |
| *    | 10358.5         | 37.2                 | 14.9          | 52.1                   | 88.2           | -36.1       | Peak     | Vertical     |
|      | 11472.0         | 31.9                 | 17.4          | 49.3                   | 74.0           | -24.7       | Peak     | Vertical     |
|      | 12305.0         | 31.3                 | 17.6          | 48.9                   | 74.0           | -25.1       | Peak     | Vertical     |
| *    | 13707.5         | 39.3                 | 19.0          | 58.3                   | 88.2           | -29.9       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 3          |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 35.3                 | 14.9          | 50.2                   | 88.2           | -38.0       | Peak     | Horizontal   |
|      | 11132.0         | 32.1                 | 16.2          | 48.3                   | 74.0           | -25.7       | Peak     | Horizontal   |
|      | 11676.0         | 31.9                 | 17.3          | 49.2                   | 74.0           | -24.8       | Peak     | Horizontal   |
| *    | 14744.5         | 32.6                 | 19.7          | 52.3                   | 88.2           | -35.9       | Peak     | Horizontal   |
| *    | 10358.5         | 37.3                 | 14.9          | 52.2                   | 88.2           | -36.0       | Peak     | Vertical     |
|      | 11072.5         | 33.7                 | 16.4          | 50.1                   | 74.0           | -23.9       | Peak     | Vertical     |
|      | 11531.5         | 32.1                 | 17.3          | 49.4                   | 74.0           | -24.6       | Peak     | Vertical     |
| *    | 14625.5         | 32.8                 | 19.5          | 52.3                   | 88.2           | -35.9       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 51         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 35.0                 | 14.9          | 49.9                   | 88.2           | -38.3       | Peak     | Horizontal   |
|      | 11106.5         | 32.0                 | 16.6          | 48.6                   | 74.0           | -25.4       | Peak     | Horizontal   |
|      | 11718.5         | 31.4                 | 17.8          | 49.2                   | 74.0           | -24.8       | Peak     | Horizontal   |
| *    | 14319.5         | 33.3                 | 19.4          | 52.7                   | 88.2           | -35.5       | Peak     | Horizontal   |
| *    | 10358.5         | 37.1                 | 14.9          | 52.0                   | 88.2           | -36.2       | Peak     | Vertical     |
|      | 11081.0         | 32.6                 | 16.6          | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |
|      | 11718.5         | 31.8                 | 17.8          | 49.6                   | 74.0           | -24.4       | Peak     | Vertical     |
| *    | 13707.5         | 32.1                 | 19.0          | 51.1                   | 88.2           | -37.1       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 91         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 34.0                 | 14.9          | 48.9                   | 88.2           | -39.3       | Peak     | Horizontal   |
|      | 10928.0         | 32.4                 | 16.5          | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
|      | 11710.0         | 31.7                 | 17.8          | 49.5                   | 74.0           | -24.5       | Peak     | Horizontal   |
| *    | 14438.5         | 32.2                 | 19.7          | 51.9                   | 88.2           | -36.3       | Peak     | Horizontal   |
| *    | 10358.5         | 36.2                 | 14.9          | 51.1                   | 88.2           | -37.1       | Peak     | Vertical     |
|      | 11489.0         | 32.2                 | 17.7          | 49.9                   | 74.0           | -24.1       | Peak     | Vertical     |
| *    | 14345.0         | 31.9                 | 19.6          | 51.5                   | 88.2           | -36.7       | Peak     | Vertical     |
|      | 15433.0         | 31.1                 | 19.0          | 50.1                   | 74.0           | -23.9       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 123        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 35.7                 | 14.9          | 50.6                   | 88.2           | -37.6       | Peak     | Horizontal   |
|      | 11642.0         | 31.3                 | 17.9          | 49.2                   | 74.0           | -24.8       | Peak     | Horizontal   |
|      | 12262.5         | 31.3                 | 17.4          | 48.7                   | 74.0           | -25.3       | Peak     | Horizontal   |
| *    | 15254.5         | 32.7                 | 18.8          | 51.5                   | 88.2           | -36.7       | Peak     | Horizontal   |
| *    | 10358.5         | 36.0                 | 14.9          | 50.9                   | 88.2           | -37.3       | Peak     | Vertical     |
|      | 11548.5         | 31.8                 | 17.7          | 49.5                   | 74.0           | -24.5       | Peak     | Vertical     |
|      | 12237.0         | 32.2                 | 17.5          | 49.7                   | 74.0           | -24.3       | Peak     | Vertical     |
| *    | 14838.0         | 33.1                 | 20.2          | 53.3                   | 88.2           | -34.9       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 147        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 35.0                 | 14.9          | 49.9                   | 88.2           | -38.3       | Peak     | Horizontal   |
|      | 11174.5         | 30.5                 | 16.9          | 47.4                   | 74.0           | -26.6       | Peak     | Horizontal   |
|      | 11574.0         | 31.9                 | 17.6          | 49.5                   | 74.0           | -24.5       | Peak     | Horizontal   |
| *    | 14345.0         | 32.2                 | 19.6          | 51.8                   | 88.2           | -36.4       | Peak     | Horizontal   |
| *    | 10358.5         | 38.0                 | 14.9          | 52.9                   | 88.2           | -35.3       | Peak     | Vertical     |
|      | 11650.5         | 32.0                 | 17.8          | 49.8                   | 74.0           | -24.2       | Peak     | Vertical     |
| *    | 14948.5         | 31.7                 | 19.9          | 51.6                   | 88.2           | -36.6       | Peak     | Vertical     |
|      | 15424.5         | 31.5                 | 19.1          | 50.6                   | 74.0           | -23.4       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 179        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 34.7                 | 14.9          | 49.6                   | 88.2           | -38.6       | Peak     | Horizontal   |
|      | 11089.5         | 33.1                 | 16.7          | 49.8                   | 74.0           | -24.2       | Peak     | Horizontal   |
|      | 11642.0         | 31.9                 | 17.9          | 49.8                   | 74.0           | -24.2       | Peak     | Horizontal   |
| *    | 14379.0         | 32.2                 | 19.5          | 51.7                   | 88.2           | -36.5       | Peak     | Horizontal   |
| *    | 10358.5         | 36.4                 | 14.9          | 51.3                   | 88.2           | -36.9       | Peak     | Vertical     |
|      | 11140.5         | 32.3                 | 16.4          | 48.7                   | 74.0           | -25.3       | Peak     | Vertical     |
|      | 11650.5         | 31.4                 | 17.8          | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |
| *    | 13707.5         | 36.1                 | 19.0          | 55.1                   | 88.2           | -33.1       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 7          |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 34.5                 | 14.9          | 49.4                   | 88.2           | -38.8       | Peak     | Horizontal   |
|      | 11081.0         | 32.3                 | 16.6          | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
|      | 11506.0         | 31.9                 | 17.4          | 49.3                   | 74.0           | -24.7       | Peak     | Horizontal   |
| *    | 14115.5         | 32.3                 | 19.2          | 51.5                   | 88.2           | -36.7       | Peak     | Horizontal   |
| *    | 10358.5         | 36.6                 | 14.9          | 51.5                   | 88.2           | -36.7       | Peak     | Vertical     |
|      | 10996.0         | 32.2                 | 16.3          | 48.5                   | 74.0           | -25.5       | Peak     | Vertical     |
|      | 11531.5         | 31.7                 | 17.3          | 49.0                   | 74.0           | -25.0       | Peak     | Vertical     |
| *    | 14532.0         | 32.8                 | 19.7          | 52.5                   | 88.2           | -35.7       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 55         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 34.8                 | 14.9          | 49.7                   | 88.2           | -38.5       | Peak     | Horizontal   |
|      | 11089.5         | 32.3                 | 16.7          | 49.0                   | 74.0           | -25.0       | Peak     | Horizontal   |
|      | 11710.0         | 31.5                 | 17.8          | 49.3                   | 74.0           | -24.7       | Peak     | Horizontal   |
| *    | 13656.5         | 32.8                 | 18.7          | 51.5                   | 88.2           | -36.7       | Peak     | Horizontal   |
| *    | 10358.5         | 36.0                 | 14.9          | 50.9                   | 88.2           | -37.3       | Peak     | Vertical     |
|      | 11242.5         | 32.3                 | 17.0          | 49.3                   | 74.0           | -24.7       | Peak     | Vertical     |
|      | 12203.0         | 31.2                 | 17.6          | 48.8                   | 74.0           | -25.2       | Peak     | Vertical     |
| *    | 14209.0         | 32.7                 | 19.2          | 51.9                   | 88.2           | -36.3       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 87         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 34.1                 | 14.9          | 49.0                   | 88.2           | -39.2       | Peak     | Horizontal   |
|      | 11472.0         | 32.2                 | 17.4          | 49.6                   | 74.0           | -24.4       | Peak     | Horizontal   |
|      | 11633.5         | 31.5                 | 17.7          | 49.2                   | 74.0           | -24.8       | Peak     | Horizontal   |
| *    | 14107.0         | 32.4                 | 19.2          | 51.6                   | 88.2           | -36.6       | Peak     | Horizontal   |
| *    | 10358.5         | 36.7                 | 14.9          | 51.6                   | 88.2           | -36.6       | Peak     | Vertical     |
|      | 11480.5         | 31.7                 | 17.5          | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |
|      | 12313.5         | 31.6                 | 17.4          | 49.0                   | 74.0           | -25.0       | Peak     | Vertical     |
| *    | 14829.5         | 32.0                 | 20.0          | 52.0                   | 88.2           | -36.2       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 135        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11472.0         | 32.2                 | 17.4          | 49.6                   | 74.0           | -24.4       | Peak     | Horizontal   |
|      | 12016.0         | 32.3                 | 16.8          | 49.1                   | 74.0           | -24.9       | Peak     | Horizontal   |
| *    | 13809.5         | 32.3                 | 18.4          | 50.7                   | 88.2           | -37.5       | Peak     | Horizontal   |
| *    | 16912.0         | 30.6                 | 21.7          | 52.3                   | 88.2           | -35.9       | Peak     | Horizontal   |
| *    | 10358.5         | 35.2                 | 14.9          | 50.1                   | 88.2           | -38.1       | Peak     | Vertical     |
|      | 11361.5         | 31.9                 | 17.1          | 49.0                   | 74.0           | -25.0       | Peak     | Vertical     |
|      | 12169.0         | 31.6                 | 17.3          | 48.9                   | 74.0           | -25.1       | Peak     | Vertical     |
| *    | 14328.0         | 32.3                 | 19.6          | 51.9                   | 88.2           | -36.3       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 151        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 36.5                 | 14.9          | 51.4                   | 88.2           | -36.8       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11429.5         | 31.5                 | 17.2          | 48.7                   | 74.0           | -25.3       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 12211.5         | 30.9                 | 17.4          | 48.3                   | 74.0           | -25.7       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 14447.0         | 32.1                 | 19.9          | 52.0                   | 88.2           | -36.2       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8089.0          | 33.4                 | 11.8          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 36.4                 | 14.9          | 51.3                   | 88.2           | -36.9       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11438.0         | 32.0                 | 17.1          | 49.1                   | 74.0           | -24.9       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 14770.0         | 32.6                 | 19.6          | 52.2                   | 88.2           | -36.0       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 167        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 7553.5          | 34.1                 | 11.9          | 46.0                   | 74.0           | -28.0       | Peak     | Horizontal   |
| *    | 10358.5         | 35.1                 | 14.9          | 50.0                   | 88.2           | -38.2       | Peak     | Horizontal   |
|      | 11557.0         | 32.3                 | 17.8          | 50.1                   | 74.0           | -23.9       | Peak     | Horizontal   |
| *    | 14889.0         | 32.0                 | 19.4          | 51.4                   | 88.2           | -36.8       | Peak     | Horizontal   |
| *    | 10358.5         | 35.9                 | 14.9          | 50.8                   | 88.2           | -37.4       | Peak     | Vertical     |
|      | 11480.5         | 32.4                 | 17.5          | 49.9                   | 74.0           | -24.1       | Peak     | Vertical     |
| *    | 13546.0         | 32.4                 | 19.1          | 51.5                   | 88.2           | -36.7       | Peak     | Vertical     |
|      | 15424.5         | 31.6                 | 19.1          | 50.7                   | 74.0           | -23.3       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Carl Jiang |
| Test Site | WZ-AC1                                                                                                                                                                            | Test Date     | 2023-11-18 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 15         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9891.0          | 35.9                 | 13.1          | 49.0                   | 88.2           | -39.2       | Peak     | Horizontal   |
|      | 11030.0         | 35.2                 | 14.0          | 49.2                   | 74.0           | -24.8       | Peak     | Horizontal   |
|      | 12092.5         | 37.0                 | 12.4          | 49.4                   | 74.0           | -24.6       | Peak     | Horizontal   |
| *    | 13061.5         | 36.3                 | 12.6          | 48.9                   | 88.2           | -39.3       | Peak     | Horizontal   |
| *    | 10171.5         | 33.2                 | 13.3          | 46.5                   | 88.2           | -41.7       | Peak     | Vertical     |
|      | 11072.5         | 36.1                 | 14.0          | 50.1                   | 74.0           | -23.9       | Peak     | Vertical     |
|      | 12058.5         | 36.1                 | 12.5          | 48.6                   | 74.0           | -25.4       | Peak     | Vertical     |
| *    | 13189.0         | 35.8                 | 12.9          | 48.7                   | 88.2           | -39.5       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Carl Jiang |
| Test Site | WZ-AC1                                                                                                                                                                            | Test Date     | 2023-11-18 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 47         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10239.5         | 34.8                 | 13.4          | 48.2                   | 88.2           | -40.0       | Peak     | Horizontal   |
|      | 11336.0         | 37.1                 | 13.4          | 50.5                   | 74.0           | -23.5       | Peak     | Horizontal   |
|      | 11931.0         | 36.7                 | 12.3          | 49.0                   | 74.0           | -25.0       | Peak     | Horizontal   |
| *    | 13070.0         | 35.4                 | 12.6          | 48.0                   | 88.2           | -40.2       | Peak     | Horizontal   |
| *    | 9933.5          | 36.1                 | 13.1          | 49.2                   | 88.2           | -39.0       | Peak     | Vertical     |
|      | 11081.0         | 35.2                 | 14.0          | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |
|      | 11523.0         | 36.3                 | 13.6          | 49.9                   | 74.0           | -24.1       | Peak     | Vertical     |
| *    | 12951.0         | 34.9                 | 12.7          | 47.6                   | 88.2           | -40.6       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Carl Jiang |
| Test Site | WZ-AC1                                                                                                                                                                            | Test Date     | 2023-11-18 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 79         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9814.5          | 34.6                 | 13.2          | 47.8                   | 88.2           | -40.4       | Peak     | Horizontal   |
|      | 10800.5         | 35.7                 | 14.1          | 49.8                   | 74.0           | -24.2       | Peak     | Horizontal   |
|      | 12322.0         | 36.2                 | 12.4          | 48.6                   | 74.0           | -25.4       | Peak     | Horizontal   |
| *    | 13155.0         | 35.7                 | 12.7          | 48.4                   | 88.2           | -39.8       | Peak     | Horizontal   |
| *    | 9848.5          | 35.6                 | 12.9          | 48.5                   | 88.2           | -39.7       | Peak     | Vertical     |
|      | 11480.5         | 36.1                 | 13.6          | 49.7                   | 74.0           | -24.3       | Peak     | Vertical     |
|      | 12262.5         | 37.4                 | 12.5          | 49.9                   | 74.0           | -24.1       | Peak     | Vertical     |
| *    | 12891.5         | 35.2                 | 12.7          | 47.9                   | 88.2           | -40.3       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-28 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 143        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8437.5          | 33.6                 | 11.5          | 45.1                   | 74.0           | -28.9       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 34.5                 | 14.9          | 49.4                   | 88.2           | -38.8       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11081.0         | 31.6                 | 16.6          | 48.2                   | 74.0           | -25.8       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11582.5         | 32.0                 | 17.5          | 49.5                   | 74.0           | -24.5       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 36.3                 | 14.9          | 51.2                   | 88.2           | -37.0       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 10681.5         | 33.2                 | 16.1          | 49.3                   | 74.0           | -24.7       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11667.5         | 31.7                 | 17.5          | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 13852.0         | 30.4                 | 18.7          | 49.1                   | 88.2           | -39.1       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

**ANT-312:**

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-12 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 1          |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 9474.5          | 32.8                 | 13.5          | 46.3                   | 74.0           | -27.7       | Peak     | Horizontal   |
| *    | 10477.5         | 35.8                 | 15.1          | 50.9                   | 88.2           | -37.3       | Peak     | Horizontal   |
|      | 11642.0         | 31.9                 | 17.9          | 49.8                   | 74.0           | -24.2       | Peak     | Horizontal   |
| *    | 14192.0         | 33.3                 | 19.2          | 52.5                   | 88.2           | -35.7       | Peak     | Horizontal   |
| *    | 10477.5         | 39.3                 | 15.1          | 54.4                   | 88.2           | -33.8       | Peak     | Vertical     |
|      | 11489.0         | 31.8                 | 17.7          | 49.5                   | 74.0           | -24.5       | Peak     | Vertical     |
|      | 12305.0         | 31.1                 | 17.6          | 48.7                   | 74.0           | -25.3       | Peak     | Vertical     |
| *    | 13495.0         | 31.6                 | 19.2          | 50.8                   | 88.2           | -37.4       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-12 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 49         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 9075.0          | 33.1                 | 13.0          | 46.1                   | 74.0           | -27.9       | Peak     | Horizontal   |
| *    | 10477.5         | 35.2                 | 15.1          | 50.3                   | 88.2           | -37.9       | Peak     | Horizontal   |
|      | 12143.5         | 32.8                 | 17.2          | 50.0                   | 74.0           | -24.0       | Peak     | Horizontal   |
| *    | 13886.0         | 32.1                 | 19.0          | 51.1                   | 88.2           | -37.1       | Peak     | Horizontal   |
|      | 9134.5          | 33.7                 | 13.2          | 46.9                   | 74.0           | -27.1       | Peak     | Vertical     |
| *    | 10477.5         | 38.6                 | 15.1          | 53.7                   | 88.2           | -34.5       | Peak     | Vertical     |
|      | 11523.0         | 31.7                 | 17.1          | 48.8                   | 74.0           | -25.2       | Peak     | Vertical     |
| *    | 16682.5         | 33.8                 | 20.3          | 54.1                   | 88.2           | -34.1       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-12 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 93         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9644.5          | 33.6                 | 13.4          | 47.0                   | 88.2           | -41.2       | Peak     | Horizontal   |
| *    | 10477.5         | 34.5                 | 15.1          | 49.6                   | 88.2           | -38.6       | Peak     | Horizontal   |
|      | 11557.0         | 31.5                 | 17.8          | 49.3                   | 74.0           | -24.7       | Peak     | Horizontal   |
|      | 12186.0         | 31.1                 | 17.7          | 48.8                   | 74.0           | -25.2       | Peak     | Horizontal   |
| *    | 10477.5         | 38.8                 | 15.1          | 53.9                   | 88.2           | -34.3       | Peak     | Vertical     |
|      | 11089.5         | 31.5                 | 16.7          | 48.2                   | 74.0           | -25.8       | Peak     | Vertical     |
|      | 11642.0         | 31.0                 | 17.9          | 48.9                   | 74.0           | -25.1       | Peak     | Vertical     |
| *    | 14345.0         | 31.4                 | 19.6          | 51.0                   | 88.2           | -37.2       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-12 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 117        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10477.5         | 36.4                 | 15.1          | 51.5                   | 88.2           | -36.7       | Peak     | Horizontal   |
|      | 11557.0         | 31.4                 | 17.8          | 49.2                   | 74.0           | -24.8       | Peak     | Horizontal   |
|      | 12279.5         | 31.4                 | 17.5          | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
| *    | 12866.0         | 31.6                 | 17.1          | 48.7                   | 88.2           | -39.5       | Peak     | Horizontal   |
| *    | 10477.5         | 36.4                 | 15.1          | 51.5                   | 88.2           | -36.7       | Peak     | Vertical     |
|      | 11021.5         | 31.5                 | 16.2          | 47.7                   | 74.0           | -26.3       | Peak     | Vertical     |
|      | 13265.5         | 32.5                 | 17.8          | 50.3                   | 74.0           | -23.7       | Peak     | Vertical     |
| *    | 14948.5         | 32.1                 | 19.9          | 52.0                   | 88.2           | -36.2       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-12 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 153        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 33.2                 | 14.9          | 48.1                   | 88.2           | -40.1       | Peak     | Horizontal   |
|      | 11327.5         | 31.8                 | 17.3          | 49.1                   | 74.0           | -24.9       | Peak     | Horizontal   |
|      | 12262.5         | 30.6                 | 17.4          | 48.0                   | 74.0           | -26.0       | Peak     | Horizontal   |
| *    | 14022.0         | 30.5                 | 19.0          | 49.5                   | 88.2           | -38.7       | Peak     | Horizontal   |
| *    | 10358.5         | 34.4                 | 14.9          | 49.3                   | 88.2           | -38.9       | Peak     | Vertical     |
|      | 11506.0         | 31.4                 | 17.4          | 48.8                   | 74.0           | -25.2       | Peak     | Vertical     |
|      | 11888.5         | 31.2                 | 17.2          | 48.4                   | 74.0           | -25.6       | Peak     | Vertical     |
| *    | 13427.0         | 33.6                 | 18.6          | 52.2                   | 88.2           | -36.0       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-12 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 181        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 33.1                 | 14.9          | 48.0                   | 88.2           | -40.2       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 10919.5         | 31.2                 | 16.5          | 47.7                   | 74.0           | -26.3       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11710.0         | 30.5                 | 17.8          | 48.3                   | 74.0           | -25.7       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 13707.5         | 30.5                 | 19.0          | 49.5                   | 88.2           | -38.7       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 33.7                 | 14.9          | 48.6                   | 88.2           | -39.6       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11463.5         | 31.1                 | 17.4          | 48.5                   | 74.0           | -25.5       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 12177.5         | 30.7                 | 17.6          | 48.3                   | 74.0           | -25.7       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 13707.5         | 35.8                 | 19.0          | 54.8                   | 88.2           | -33.4       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-12 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 3          |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 34.8                 | 14.9          | 49.7                   | 88.2           | -38.5       | Peak     | Horizontal   |
|      | 11480.5         | 30.7                 | 17.5          | 48.2                   | 74.0           | -25.8       | Peak     | Horizontal   |
|      | 12288.0         | 29.9                 | 17.6          | 47.5                   | 74.0           | -26.5       | Peak     | Horizontal   |
| *    | 13699.0         | 30.0                 | 18.7          | 48.7                   | 88.2           | -39.5       | Peak     | Horizontal   |
| *    | 10358.5         | 34.8                 | 14.9          | 49.7                   | 88.2           | -38.5       | Peak     | Vertical     |
|      | 11480.5         | 30.7                 | 17.5          | 48.2                   | 74.0           | -25.8       | Peak     | Vertical     |
|      | 11803.5         | 30.5                 | 17.6          | 48.1                   | 74.0           | -25.9       | Peak     | Vertical     |
| *    | 13699.0         | 30.0                 | 18.7          | 48.7                   | 88.2           | -39.5       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-12 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 51         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 34.2                 | 14.9          | 49.1                   | 88.2           | -39.1       | Peak     | Horizontal   |
|      | 11140.5         | 31.0                 | 16.4          | 47.4                   | 74.0           | -26.6       | Peak     | Horizontal   |
|      | 11752.5         | 30.7                 | 17.4          | 48.1                   | 74.0           | -25.9       | Peak     | Horizontal   |
| *    | 12925.5         | 30.8                 | 17.2          | 48.0                   | 88.2           | -40.2       | Peak     | Horizontal   |
| *    | 8718.0          | 32.0                 | 12.4          | 44.4                   | 88.2           | -43.8       | Peak     | Vertical     |
| *    | 10358.5         | 33.8                 | 14.9          | 48.7                   | 88.2           | -39.5       | Peak     | Vertical     |
|      | 11072.5         | 31.3                 | 16.4          | 47.7                   | 74.0           | -26.3       | Peak     | Vertical     |
|      | 11608.0         | 31.5                 | 17.1          | 48.6                   | 74.0           | -25.4       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-12 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 91         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 34.1                 | 14.9          | 49.0                   | 88.2           | -39.2       | Peak     | Horizontal   |
|      | 11081.0         | 30.5                 | 16.6          | 47.1                   | 74.0           | -26.9       | Peak     | Horizontal   |
|      | 11676.0         | 30.8                 | 17.3          | 48.1                   | 74.0           | -25.9       | Peak     | Horizontal   |
| *    | 13699.0         | 30.6                 | 18.7          | 49.3                   | 88.2           | -38.9       | Peak     | Horizontal   |
| *    | 10358.5         | 34.1                 | 14.9          | 49.0                   | 88.2           | -39.2       | Peak     | Vertical     |
|      | 11472.0         | 30.6                 | 17.4          | 48.0                   | 74.0           | -26.0       | Peak     | Vertical     |
|      | 12194.5         | 30.8                 | 17.7          | 48.5                   | 74.0           | -25.5       | Peak     | Vertical     |
| *    | 13724.5         | 31.1                 | 19.0          | 50.1                   | 88.2           | -38.1       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-12 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 123        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 32.3                 | 14.9          | 47.2                   | 88.2           | -41.0       | Peak     | Horizontal   |
|      | 11514.5         | 31.3                 | 17.2          | 48.5                   | 74.0           | -25.5       | Peak     | Horizontal   |
|      | 12305.0         | 30.6                 | 17.6          | 48.2                   | 74.0           | -25.8       | Peak     | Horizontal   |
| *    | 13716.0         | 30.2                 | 19.1          | 49.3                   | 88.2           | -38.9       | Peak     | Horizontal   |
| *    | 9882.5          | 32.7                 | 13.6          | 46.3                   | 88.2           | -41.9       | Peak     | Vertical     |
| *    | 10358.5         | 34.1                 | 14.9          | 49.0                   | 88.2           | -39.2       | Peak     | Vertical     |
|      | 11089.5         | 31.3                 | 16.7          | 48.0                   | 74.0           | -26.0       | Peak     | Vertical     |
|      | 14472.5         | 32.9                 | 19.4          | 52.3                   | 74.0           | -21.7       | Peak     | Vertical     |
|      | 14472.5         | 25.5                 | 19.4          | 44.9                   | 54.0           | -9.1        | Average  | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-12 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 147        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 34.1                 | 14.9          | 49.0                   | 88.2           | -39.2       | Peak     | Horizontal   |
|      | 11106.5         | 32.0                 | 16.6          | 48.6                   | 74.0           | -25.4       | Peak     | Horizontal   |
|      | 11489.0         | 31.2                 | 17.7          | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
| *    | 12900.0         | 30.7                 | 17.4          | 48.1                   | 88.2           | -40.1       | Peak     | Horizontal   |
| *    | 10358.5         | 34.9                 | 14.9          | 49.8                   | 88.2           | -38.4       | Peak     | Vertical     |
|      | 11225.5         | 31.8                 | 16.8          | 48.6                   | 74.0           | -25.4       | Peak     | Vertical     |
|      | 11803.5         | 32.0                 | 17.6          | 49.6                   | 74.0           | -24.4       | Peak     | Vertical     |
| *    | 13146.5         | 30.0                 | 18.0          | 48.0                   | 88.2           | -40.2       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-12 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 179        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 33.8                 | 14.9          | 48.7                   | 88.2           | -39.5       | Peak     | Horizontal   |
|      | 10860.0         | 34.2                 | 16.2          | 50.4                   | 74.0           | -23.6       | Peak     | Horizontal   |
|      | 11812.0         | 31.0                 | 17.6          | 48.6                   | 74.0           | -25.4       | Peak     | Horizontal   |
| *    | 13614.0         | 31.6                 | 18.5          | 50.1                   | 88.2           | -38.1       | Peak     | Horizontal   |
| *    | 10358.5         | 35.0                 | 14.9          | 49.9                   | 88.2           | -38.3       | Peak     | Vertical     |
|      | 11472.0         | 31.6                 | 17.4          | 49.0                   | 74.0           | -25.0       | Peak     | Vertical     |
|      | 12211.5         | 31.5                 | 17.4          | 48.9                   | 74.0           | -25.1       | Peak     | Vertical     |
| *    | 13707.5         | 34.1                 | 19.0          | 53.1                   | 88.2           | -35.1       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-13 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 7          |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 8888.0          | 32.2                 | 12.7          | 44.9                   | 88.2           | -43.3       | Peak     | Horizontal   |
| *    | 10358.5         | 33.9                 | 14.9          | 48.8                   | 88.2           | -39.4       | Peak     | Horizontal   |
|      | 11497.5         | 31.4                 | 17.5          | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
|      | 12305.0         | 30.6                 | 17.6          | 48.2                   | 74.0           | -25.8       | Peak     | Horizontal   |
| *    | 10358.5         | 34.7                 | 14.9          | 49.6                   | 88.2           | -38.6       | Peak     | Vertical     |
|      | 10987.5         | 32.2                 | 16.2          | 48.4                   | 74.0           | -25.6       | Peak     | Vertical     |
|      | 11548.5         | 31.9                 | 17.7          | 49.6                   | 74.0           | -24.4       | Peak     | Vertical     |
| *    | 13146.5         | 30.8                 | 18.0          | 48.8                   | 88.2           | -39.4       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-13 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 55         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9899.5          | 33.2                 | 13.5          | 46.7                   | 88.2           | -41.5       | Peak     | Horizontal   |
| *    | 10358.5         | 33.5                 | 14.9          | 48.4                   | 88.2           | -39.8       | Peak     | Horizontal   |
|      | 11438.0         | 31.5                 | 17.1          | 48.6                   | 74.0           | -25.4       | Peak     | Horizontal   |
|      | 12237.0         | 31.1                 | 17.5          | 48.6                   | 74.0           | -25.4       | Peak     | Horizontal   |
| *    | 9746.5          | 34.1                 | 13.3          | 47.4                   | 88.2           | -40.8       | Peak     | Vertical     |
| *    | 10358.5         | 35.2                 | 14.9          | 50.1                   | 88.2           | -38.1       | Peak     | Vertical     |
|      | 11455.0         | 31.0                 | 17.3          | 48.3                   | 74.0           | -25.7       | Peak     | Vertical     |
|      | 12220.0         | 31.9                 | 17.4          | 49.3                   | 74.0           | -24.7       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-13 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 87         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 34.5                 | 14.9          | 49.4                   | 88.2           | -38.8       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11021.5         | 32.2                 | 16.2          | 48.4                   | 74.0           | -25.6       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11608.0         | 31.9                 | 17.1          | 49.0                   | 74.0           | -25.0       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 13937.0         | 31.6                 | 19.1          | 50.7                   | 88.2           | -37.5       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 37.1                 | 14.9          | 52.0                   | 88.2           | -36.2       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11548.5         | 31.5                 | 17.7          | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 12194.5         | 31.2                 | 17.7          | 48.9                   | 74.0           | -25.1       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 13639.5         | 30.8                 | 19.0          | 49.8                   | 88.2           | -38.4       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-13 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 135        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 36.9                 | 14.9          | 51.8                   | 88.2           | -36.4       | Peak     | Horizontal   |
|      | 11531.5         | 32.3                 | 17.3          | 49.6                   | 74.0           | -24.4       | Peak     | Horizontal   |
|      | 12194.5         | 30.8                 | 17.7          | 48.5                   | 74.0           | -25.5       | Peak     | Horizontal   |
| *    | 12823.5         | 31.9                 | 17.1          | 49.0                   | 88.2           | -39.2       | Peak     | Horizontal   |
| *    | 8828.5          | 32.7                 | 12.6          | 45.3                   | 88.2           | -42.9       | Peak     | Vertical     |
| *    | 10358.5         | 36.9                 | 14.9          | 51.8                   | 88.2           | -36.4       | Peak     | Vertical     |
|      | 11098.0         | 32.1                 | 16.7          | 48.8                   | 74.0           | -25.2       | Peak     | Vertical     |
|      | 11531.5         | 32.3                 | 17.3          | 49.6                   | 74.0           | -24.4       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-13 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 151        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 34.9                 | 14.9          | 49.8                   | 88.2           | -38.4       | Peak     | Horizontal   |
|      | 10894.0         | 32.7                 | 16.2          | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
|      | 11812.0         | 31.5                 | 17.6          | 49.1                   | 74.0           | -24.9       | Peak     | Horizontal   |
| *    | 13172.0         | 31.8                 | 18.0          | 49.8                   | 88.2           | -38.4       | Peak     | Horizontal   |
| *    | 10358.5         | 36.3                 | 14.9          | 51.2                   | 88.2           | -37.0       | Peak     | Vertical     |
|      | 10894.0         | 32.1                 | 16.2          | 48.3                   | 74.0           | -25.7       | Peak     | Vertical     |
|      | 11633.5         | 31.0                 | 17.7          | 48.7                   | 74.0           | -25.3       | Peak     | Vertical     |
| *    | 14931.5         | 32.5                 | 20.2          | 52.7                   | 88.2           | -35.5       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-13 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 167        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.5         | 34.6                 | 14.9          | 49.5                   | 88.2           | -38.7       | Peak     | Horizontal   |
|      | 11463.5         | 31.5                 | 17.4          | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
|      | 12288.0         | 31.0                 | 17.6          | 48.6                   | 74.0           | -25.4       | Peak     | Horizontal   |
| *    | 14370.5         | 33.0                 | 19.6          | 52.6                   | 88.2           | -35.6       | Peak     | Horizontal   |
| *    | 9814.5          | 33.7                 | 13.6          | 47.3                   | 88.2           | -40.9       | Peak     | Vertical     |
| *    | 10358.5         | 35.6                 | 14.9          | 50.5                   | 88.2           | -37.7       | Peak     | Vertical     |
|      | 11055.5         | 32.4                 | 16.1          | 48.5                   | 74.0           | -25.5       | Peak     | Vertical     |
|      | 11786.5         | 31.7                 | 17.5          | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Carl Jiang |
| Test Site | WZ-AC1                                                                                                                                                                            | Test Date     | 2023-11-18 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 15         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10120.5         | 35.9                 | 13.1          | 49.0                   | 88.2           | -39.2       | Peak     | Horizontal   |
|      | 11089.5         | 36.2                 | 13.9          | 50.1                   | 74.0           | -23.9       | Peak     | Horizontal   |
|      | 11735.5         | 35.1                 | 12.3          | 47.4                   | 74.0           | -26.6       | Peak     | Horizontal   |
| *    | 13070.0         | 35.6                 | 12.6          | 48.2                   | 88.2           | -40.0       | Peak     | Horizontal   |
| *    | 9993.0          | 33.7                 | 13.0          | 46.7                   | 88.2           | -41.5       | Peak     | Vertical     |
|      | 10953.5         | 35.4                 | 14.1          | 49.5                   | 74.0           | -24.5       | Peak     | Vertical     |
|      | 11897.0         | 35.3                 | 12.2          | 47.5                   | 74.0           | -26.5       | Peak     | Vertical     |
| *    | 13070.0         | 34.6                 | 12.6          | 47.2                   | 88.2           | -41.0       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Carl Jiang |
| Test Site | WZ-AC1                                                                                                                                                                            | Test Date     | 2023-11-18 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 47         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10197.0         | 34.7                 | 13.4          | 48.1                   | 88.2           | -40.1       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11140.5         | 35.5                 | 13.7          | 49.2                   | 74.0           | -24.8       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11948.0         | 36.5                 | 12.3          | 48.8                   | 74.0           | -25.2       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 12891.5         | 34.6                 | 12.7          | 47.3                   | 88.2           | -40.9       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 9678.5          | 36.8                 | 12.8          | 49.6                   | 88.2           | -38.6       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 10817.5         | 35.6                 | 13.9          | 49.5                   | 74.0           | -24.5       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11846.0         | 34.6                 | 12.3          | 46.9                   | 74.0           | -27.1       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 13010.5         | 35.1                 | 12.7          | 47.8                   | 88.2           | -40.4       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Carl Jiang |
| Test Site | WZ-AC1                                                                                                                                                                            | Test Date     | 2023-11-18 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 79         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9695.5          | 36.1                 | 12.8          | 48.9                   | 88.2           | -39.3       | Peak     | Horizontal   |
|      | 11523.0         | 35.6                 | 13.6          | 49.2                   | 74.0           | -24.8       | Peak     | Horizontal   |
|      | 12381.5         | 36.6                 | 12.1          | 48.7                   | 74.0           | -25.3       | Peak     | Horizontal   |
| *    | 12985.0         | 36.3                 | 12.7          | 49.0                   | 88.2           | -39.2       | Peak     | Horizontal   |
| *    | 9772.0          | 35.9                 | 12.9          | 48.8                   | 88.2           | -39.4       | Peak     | Vertical     |
|      | 10996.0         | 35.2                 | 14.4          | 49.6                   | 74.0           | -24.4       | Peak     | Vertical     |
|      | 12109.5         | 36.7                 | 12.4          | 49.1                   | 74.0           | -24.9       | Peak     | Vertical     |
| *    | 13155.0         | 35.0                 | 12.7          | 47.7                   | 88.2           | -40.5       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Edith Yu   |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-07-13 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 143        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9789.0          | 33.3                 | 13.5          | 46.8                   | 88.2           | -41.4       | Peak     | Horizontal   |
| *    | 10358.5         | 34.4                 | 14.9          | 49.3                   | 88.2           | -38.9       | Peak     | Horizontal   |
|      | 11123.5         | 31.2                 | 16.3          | 47.5                   | 74.0           | -26.5       | Peak     | Horizontal   |
|      | 11557.0         | 32.4                 | 17.8          | 50.2                   | 74.0           | -23.8       | Peak     | Horizontal   |
| *    | 10358.5         | 35.5                 | 14.9          | 50.4                   | 88.2           | -37.8       | Peak     | Vertical     |
|      | 11497.5         | 31.9                 | 17.5          | 49.4                   | 74.0           | -24.6       | Peak     | Vertical     |
|      | 11735.5         | 30.4                 | 17.7          | 48.1                   | 74.0           | -25.9       | Peak     | Vertical     |
| *    | 12866.0         | 30.6                 | 17.1          | 47.7                   | 88.2           | -40.5       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**ANT-348:**

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 1          |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 8735.0          | 32.9                 | 11.0          | 43.9                   | 88.2           | -44.3       | Peak     | Horizontal   |
| *    | 10018.5         | 33.7                 | 12.2          | 45.9                   | 88.2           | -42.3       | Peak     | Horizontal   |
|      | 11897.0         | 33.4                 | 16.8          | 50.2                   | 74.0           | -23.8       | Peak     | Horizontal   |
|      | 16053.5         | 31.4                 | 20.6          | 52.0                   | 74.0           | -22.0       | Peak     | Horizontal   |
| *    | 10358.5         | 33.7                 | 13.4          | 47.1                   | 88.2           | -41.1       | Peak     | Vertical     |
|      | 10817.5         | 32.2                 | 14.5          | 46.7                   | 74.0           | -27.3       | Peak     | Vertical     |
|      | 11820.5         | 32.7                 | 16.8          | 49.5                   | 74.0           | -24.5       | Peak     | Vertical     |
| *    | 13724.5         | 31.6                 | 17.8          | 49.4                   | 88.2           | -38.8       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 49         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 10698.5         | 32.8                 | 14.1          | 46.9                   | 74.0           | -27.1       | Peak     | Horizontal   |
|      | 11625.0         | 31.9                 | 16.1          | 48.0                   | 74.0           | -26.0       | Peak     | Horizontal   |
| *    | 13019.0         | 31.2                 | 17.6          | 48.8                   | 88.2           | -39.4       | Peak     | Horizontal   |
| *    | 17056.5         | 31.3                 | 22.5          | 53.8                   | 88.2           | -34.4       | Peak     | Horizontal   |
| *    | 8811.5          | 32.6                 | 11.2          | 43.8                   | 88.2           | -44.4       | Peak     | Vertical     |
| *    | 10358.5         | 34.5                 | 13.4          | 47.9                   | 88.2           | -40.3       | Peak     | Vertical     |
|      | 12143.5         | 32.0                 | 16.7          | 48.7                   | 74.0           | -25.3       | Peak     | Vertical     |
| *    | 14336.5         | 33.2                 | 17.7          | 50.9                   | 88.2           | -37.3       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 93         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9678.5          | 33.9                 | 11.5          | 45.4                   | 88.2           | -42.8       | Peak     | Horizontal   |
|      | 10817.5         | 31.9                 | 14.5          | 46.4                   | 74.0           | -27.6       | Peak     | Horizontal   |
|      | 11803.5         | 31.3                 | 16.9          | 48.2                   | 74.0           | -25.8       | Peak     | Horizontal   |
| *    | 16589.0         | 30.9                 | 22.1          | 53.0                   | 88.2           | -35.2       | Peak     | Horizontal   |
|      | 8148.5          | 33.9                 | 10.5          | 44.4                   | 74.0           | -29.6       | Peak     | Vertical     |
| *    | 10358.5         | 35.3                 | 13.4          | 48.7                   | 88.2           | -39.5       | Peak     | Vertical     |
|      | 12296.5         | 31.8                 | 17.4          | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |
| *    | 13724.5         | 31.4                 | 17.8          | 49.2                   | 88.2           | -39.0       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 117        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 8726.5          | 33.0                 | 11.0          | 44.0                   | 88.2           | -44.2       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 33.1                 | 13.4          | 46.5                   | 88.2           | -41.7       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11412.5         | 32.0                 | 15.6          | 47.6                   | 74.0           | -26.4       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 12245.5         | 31.0                 | 17.3          | 48.3                   | 74.0           | -25.7       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 8803.0          | 33.3                 | 11.2          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 35.6                 | 13.4          | 49.0                   | 88.2           | -39.2       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11718.5         | 30.9                 | 16.8          | 47.7                   | 74.0           | -26.3       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 12203.0         | 32.2                 | 17.2          | 49.4                   | 74.0           | -24.6       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 153        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 8131.5          | 33.3                 | 10.7          | 44.0                   | 74.0           | -30.0       | Peak     | Horizontal   |
| *    | 10095.0         | 33.4                 | 12.4          | 45.8                   | 88.2           | -42.4       | Peak     | Horizontal   |
|      | 11812.0         | 32.4                 | 16.9          | 49.3                   | 74.0           | -24.7       | Peak     | Horizontal   |
| *    | 16912.0         | 30.6                 | 22.6          | 53.2                   | 88.2           | -35.0       | Peak     | Horizontal   |
| *    | 10358.5         | 34.8                 | 13.4          | 48.2                   | 88.2           | -40.0       | Peak     | Vertical     |
|      | 11191.5         | 31.7                 | 15.1          | 46.8                   | 74.0           | -27.2       | Peak     | Vertical     |
|      | 12305.0         | 30.9                 | 17.5          | 48.4                   | 74.0           | -25.6       | Peak     | Vertical     |
| *    | 15110.0         | 33.0                 | 18.2          | 51.2                   | 88.2           | -37.0       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 181        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 8284.5          | 34.3                 | 10.4          | 44.7                   | 74.0           | -29.3       | Peak     | Horizontal   |
| *    | 8896.5          | 33.1                 | 11.4          | 44.5                   | 88.2           | -43.7       | Peak     | Horizontal   |
| *    | 9993.0          | 31.4                 | 12.1          | 43.5                   | 88.2           | -44.7       | Peak     | Horizontal   |
|      | 12313.5         | 32.0                 | 17.3          | 49.3                   | 74.0           | -24.7       | Peak     | Horizontal   |
|      | 8259.0          | 34.0                 | 10.4          | 44.4                   | 74.0           | -29.6       | Peak     | Vertical     |
| *    | 10358.5         | 34.1                 | 13.4          | 47.5                   | 88.2           | -40.7       | Peak     | Vertical     |
|      | 11421.0         | 31.8                 | 15.6          | 47.4                   | 74.0           | -26.6       | Peak     | Vertical     |
| *    | 13716.0         | 32.7                 | 17.9          | 50.6                   | 88.2           | -37.6       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 3          |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8131.5          | 33.5                 | 10.7          | 44.2                   | 74.0           | -29.8       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10044.0         | 33.0                 | 12.4          | 45.4                   | 88.2           | -42.8       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 12305.0         | 32.5                 | 17.5          | 50.0                   | 74.0           | -24.0       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 17158.5         | 31.8                 | 22.4          | 54.2                   | 88.2           | -34.0       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8318.5          | 34.0                 | 10.3          | 44.3                   | 74.0           | -29.7       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 35.0                 | 13.4          | 48.4                   | 88.2           | -39.8       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11514.5         | 32.5                 | 15.5          | 48.0                   | 74.0           | -26.0       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 14387.5         | 32.7                 | 17.2          | 49.9                   | 88.2           | -38.3       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 51         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8284.5          | 33.1                 | 10.4          | 43.5                   | 74.0           | -30.5       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10341.5         | 33.3                 | 13.4          | 46.7                   | 88.2           | -41.5       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11718.5         | 32.5                 | 16.8          | 49.3                   | 74.0           | -24.7       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 14863.5         | 31.7                 | 18.1          | 49.8                   | 88.2           | -38.4       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8437.5          | 33.2                 | 10.8          | 44.0                   | 74.0           | -30.0       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 34.5                 | 13.4          | 47.9                   | 88.2           | -40.3       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 12305.0         | 31.9                 | 17.5          | 49.4                   | 74.0           | -24.6       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 17141.5         | 31.4                 | 22.8          | 54.2                   | 88.2           | -34.0       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 91         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 8344.0          | 34.4                 | 10.5          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|      | 11744.0         | 32.2                 | 16.6          | 48.8                   | 74.0           | -25.2       | Peak     | Horizontal   |
| *    | 15101.5         | 33.4                 | 18.1          | 51.5                   | 88.2           | -36.7       | Peak     | Horizontal   |
| *    | 16597.5         | 32.0                 | 21.9          | 53.9                   | 88.2           | -34.3       | Peak     | Horizontal   |
|      | 8276.0          | 33.9                 | 10.5          | 44.4                   | 74.0           | -29.6       | Peak     | Vertical     |
| *    | 10358.5         | 35.8                 | 13.4          | 49.2                   | 88.2           | -39.0       | Peak     | Vertical     |
|      | 11778.0         | 32.3                 | 16.6          | 48.9                   | 74.0           | -25.1       | Peak     | Vertical     |
| *    | 17141.5         | 31.0                 | 22.8          | 53.8                   | 88.2           | -34.4       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 123        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 8820.0          | 32.9                 | 11.2          | 44.1                   | 88.2           | -44.1       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 34.0                 | 13.4          | 47.4                   | 88.2           | -40.8       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11404.0         | 31.8                 | 15.6          | 47.4                   | 74.0           | -26.6       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 12245.5         | 31.5                 | 17.3          | 48.8                   | 74.0           | -25.2       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8301.5          | 33.7                 | 10.3          | 44.0                   | 74.0           | -30.0       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 35.0                 | 13.4          | 48.4                   | 88.2           | -39.8       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11795.0         | 31.9                 | 16.9          | 48.8                   | 74.0           | -25.2       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 14200.5         | 32.3                 | 17.4          | 49.7                   | 88.2           | -38.5       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 147        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8131.5          | 33.3                 | 10.7          | 44.0                   | 74.0           | -30.0       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10171.5         | 33.6                 | 12.6          | 46.2                   | 88.2           | -42.0       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11650.5         | 31.8                 | 16.5          | 48.3                   | 74.0           | -25.7       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 13818.0         | 32.1                 | 17.1          | 49.2                   | 88.2           | -39.0       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8123.0          | 33.6                 | 10.8          | 44.4                   | 74.0           | -29.6       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 33.8                 | 13.4          | 47.2                   | 88.2           | -41.0       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 12296.5         | 31.9                 | 17.4          | 49.3                   | 74.0           | -24.7       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 13784.0         | 31.4                 | 17.5          | 48.9                   | 88.2           | -39.3       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 179        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8208.0          | 34.1                 | 10.4          | 44.5                   | 74.0           | -29.5       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 9661.5          | 33.4                 | 11.5          | 44.9                   | 88.2           | -43.3       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11863.0         | 31.8                 | 16.5          | 48.3                   | 74.0           | -25.7       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 13605.5         | 31.8                 | 17.4          | 49.2                   | 88.2           | -39.0       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8335.5          | 33.4                 | 10.4          | 43.8                   | 74.0           | -30.2       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 33.1                 | 13.4          | 46.5                   | 88.2           | -41.7       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11633.5         | 32.0                 | 16.3          | 48.3                   | 74.0           | -25.7       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 17150.0         | 31.5                 | 22.8          | 54.3                   | 88.2           | -33.9       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 7          |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 8335.5          | 34.2                 | 10.4          | 44.6                   | 74.0           | -29.4       | Peak     | Horizontal   |
|      | 10724.0         | 33.6                 | 13.9          | 47.5                   | 74.0           | -26.5       | Peak     | Horizontal   |
| *    | 12713.0         | 31.7                 | 17.4          | 49.1                   | 88.2           | -39.1       | Peak     | Horizontal   |
| *    | 13614.0         | 32.9                 | 17.4          | 50.3                   | 88.2           | -37.9       | Peak     | Horizontal   |
|      | 8191.0          | 32.8                 | 10.5          | 43.3                   | 74.0           | -30.7       | Peak     | Vertical     |
| *    | 10358.5         | 34.0                 | 13.4          | 47.4                   | 88.2           | -40.8       | Peak     | Vertical     |
|      | 11948.0         | 32.0                 | 16.3          | 48.3                   | 74.0           | -25.7       | Peak     | Vertical     |
| *    | 14940.0         | 32.4                 | 18.6          | 51.0                   | 88.2           | -37.2       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 55         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 8097.5          | 32.9                 | 10.7          | 43.6                   | 74.0           | -30.4       | Peak     | Horizontal   |
| *    | 10061.0         | 33.1                 | 12.2          | 45.3                   | 88.2           | -42.9       | Peak     | Horizontal   |
|      | 11523.0         | 32.2                 | 15.3          | 47.5                   | 74.0           | -26.5       | Peak     | Horizontal   |
| *    | 13707.5         | 31.0                 | 17.7          | 48.7                   | 88.2           | -39.5       | Peak     | Horizontal   |
|      | 8250.5          | 33.4                 | 10.3          | 43.7                   | 74.0           | -30.3       | Peak     | Vertical     |
| *    | 8735.0          | 32.9                 | 11.0          | 43.9                   | 88.2           | -44.3       | Peak     | Vertical     |
| *    | 10358.5         | 35.6                 | 13.4          | 49.0                   | 88.2           | -39.2       | Peak     | Vertical     |
|      | 12288.0         | 31.7                 | 17.4          | 49.1                   | 74.0           | -24.9       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 87         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8361.0          | 33.3                 | 10.5          | 43.8                   | 74.0           | -30.2       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 8871.0          | 32.6                 | 11.3          | 43.9                   | 88.2           | -44.3       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10069.5         | 33.4                 | 12.2          | 45.6                   | 88.2           | -42.6       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11548.5         | 31.8                 | 16.0          | 47.8                   | 74.0           | -26.2       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8250.5          | 32.4                 | 10.3          | 42.7                   | 74.0           | -31.3       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10358.5         | 34.7                 | 13.4          | 48.1                   | 88.2           | -40.1       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 12305.0         | 31.5                 | 17.5          | 49.0                   | 74.0           | -25.0       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 17150.0         | 31.0                 | 22.8          | 53.8                   | 88.2           | -34.4       | Peak     | Vertical     |
| <p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p> |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 135        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 8403.5          | 33.0                 | 10.8          | 43.8                   | 74.0           | -30.2       | Peak     | Horizontal   |
| *    | 10316.0         | 33.0                 | 13.3          | 46.3                   | 88.2           | -41.9       | Peak     | Horizontal   |
|      | 11727.0         | 32.2                 | 16.8          | 49.0                   | 74.0           | -25.0       | Peak     | Horizontal   |
| *    | 16555.0         | 32.8                 | 21.8          | 54.6                   | 88.2           | -33.6       | Peak     | Horizontal   |
|      | 8131.5          | 32.0                 | 10.7          | 42.7                   | 74.0           | -31.3       | Peak     | Vertical     |
| *    | 10358.5         | 34.9                 | 13.4          | 48.3                   | 88.2           | -39.9       | Peak     | Vertical     |
|      | 11880.0         | 32.0                 | 16.7          | 48.7                   | 74.0           | -25.3       | Peak     | Vertical     |
| *    | 14319.5         | 32.1                 | 17.4          | 49.5                   | 88.2           | -38.7       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 151        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 8335.5          | 33.8                 | 10.4          | 44.2                   | 74.0           | -29.8       | Peak     | Horizontal   |
| *    | 10358.5         | 33.4                 | 13.4          | 46.8                   | 88.2           | -41.4       | Peak     | Horizontal   |
|      | 10673.0         | 32.5                 | 14.5          | 47.0                   | 74.0           | -27.0       | Peak     | Horizontal   |
| *    | 13988.0         | 32.1                 | 16.9          | 49.0                   | 88.2           | -39.2       | Peak     | Horizontal   |
| *    | 8743.5          | 33.2                 | 11.1          | 44.3                   | 88.2           | -43.9       | Peak     | Vertical     |
| *    | 10358.5         | 34.3                 | 13.4          | 47.7                   | 88.2           | -40.5       | Peak     | Vertical     |
|      | 11472.0         | 31.8                 | 15.7          | 47.5                   | 74.0           | -26.5       | Peak     | Vertical     |
|      | 12305.0         | 31.5                 | 17.5          | 49.0                   | 74.0           | -25.0       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 167        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9814.5          | 34.7                 | 11.7          | 46.4                   | 88.2           | -41.8       | Peak     | Horizontal   |
|      | 11871.5         | 31.7                 | 16.6          | 48.3                   | 74.0           | -25.7       | Peak     | Horizontal   |
|      | 12670.5         | 32.3                 | 17.1          | 49.4                   | 74.0           | -24.6       | Peak     | Horizontal   |
| *    | 14243.0         | 32.5                 | 17.5          | 50.0                   | 88.2           | -38.2       | Peak     | Horizontal   |
|      | 8335.5          | 33.1                 | 10.4          | 43.5                   | 74.0           | -30.5       | Peak     | Vertical     |
| *    | 10358.5         | 35.0                 | 13.4          | 48.4                   | 88.2           | -39.8       | Peak     | Vertical     |
|      | 11701.5         | 32.0                 | 16.4          | 48.4                   | 74.0           | -25.6       | Peak     | Vertical     |
| *    | 13614.0         | 32.2                 | 17.4          | 49.6                   | 88.2           | -38.6       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Carl Jiang |
| Test Site | WZ-AC1                                                                                                                                                                            | Test Date     | 2023-11-17 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 15         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9848.5          | 35.5                 | 12.9          | 48.4                   | 88.2           | -39.8       | Peak     | Horizontal   |
|      | 11446.5         | 36.2                 | 13.6          | 49.8                   | 74.0           | -24.2       | Peak     | Horizontal   |
|      | 12118.0         | 34.3                 | 12.5          | 46.8                   | 74.0           | -27.2       | Peak     | Horizontal   |
| *    | 12942.5         | 35.6                 | 12.7          | 48.3                   | 88.2           | -39.9       | Peak     | Horizontal   |
| *    | 10197.0         | 34.7                 | 13.4          | 48.1                   | 88.2           | -40.1       | Peak     | Vertical     |
|      | 10834.5         | 35.5                 | 14.0          | 49.5                   | 74.0           | -24.5       | Peak     | Vertical     |
|      | 11523.0         | 36.2                 | 13.6          | 49.8                   | 74.0           | -24.2       | Peak     | Vertical     |
| *    | 12721.5         | 37.9                 | 12.4          | 50.3                   | 88.2           | -37.9       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Carl Jiang |
| Test Site | WZ-AC1                                                                                                                                                                            | Test Date     | 2023-11-17 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 47         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10180.0         | 34.9                 | 13.5          | 48.4                   | 88.2           | -39.8       | Peak     | Horizontal   |
|      | 11523.0         | 36.1                 | 13.6          | 49.7                   | 74.0           | -24.3       | Peak     | Horizontal   |
|      | 12041.5         | 36.0                 | 12.5          | 48.5                   | 74.0           | -25.5       | Peak     | Horizontal   |
| *    | 13180.5         | 36.3                 | 12.9          | 49.2                   | 88.2           | -39.0       | Peak     | Horizontal   |
| *    | 9644.5          | 37.5                 | 12.7          | 50.2                   | 88.2           | -38.0       | Peak     | Vertical     |
|      | 11421.0         | 35.1                 | 13.5          | 48.6                   | 74.0           | -25.4       | Peak     | Vertical     |
|      | 11786.5         | 36.0                 | 12.3          | 48.3                   | 74.0           | -25.7       | Peak     | Vertical     |
| *    | 13010.5         | 35.2                 | 12.7          | 47.9                   | 88.2           | -40.3       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Carl Jiang |
| Test Site | WZ-AC1                                                                                                                                                                            | Test Date     | 2023-11-17 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 79         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9806.0          | 36.3                 | 13.2          | 49.5                   | 88.2           | -38.7       | Peak     | Horizontal   |
|      | 11021.5         | 34.8                 | 14.1          | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
|      | 12220.0         | 34.9                 | 12.6          | 47.5                   | 74.0           | -26.5       | Peak     | Horizontal   |
| *    | 13010.5         | 34.5                 | 12.7          | 47.2                   | 88.2           | -41.0       | Peak     | Horizontal   |
| *    | 10358.5         | 35.3                 | 13.5          | 48.8                   | 88.2           | -39.4       | Peak     | Vertical     |
|      | 10996.0         | 34.8                 | 14.4          | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |
|      | 12075.5         | 36.2                 | 12.5          | 48.7                   | 74.0           | -25.3       | Peak     | Vertical     |
| *    | 13010.5         | 35.0                 | 12.7          | 47.7                   | 88.2           | -40.5       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)


Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | ACCESS POINT                                                                                                                                                                      | Test Engineer | Dick Shen  |
| Test Site | WZ-AC2                                                                                                                                                                            | Test Date     | 2023-08-06 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 143        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                                                                                                                                                                                                                                                       | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                            | 8344.0          | 33.6                 | 10.5          | 44.1                   | 74.0           | -29.9       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                          | 8964.5          | 32.6                 | 11.7          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                          | 10358.5         | 34.5                 | 13.4          | 47.9                   | 88.2           | -40.3       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                            | 11820.5         | 31.5                 | 16.8          | 48.3                   | 74.0           | -25.7       | Peak     | Horizontal   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                            | 8480.0          | 32.8                 | 10.9          | 43.7                   | 74.0           | -30.3       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                          | 8896.5          | 32.2                 | 11.4          | 43.6                   | 88.2           | -44.6       | Peak     | Vertical     |
| *                                                                                                                                                                                                                                                                                                                                                                                                                                          | 10358.5         | 34.6                 | 13.4          | 48.0                   | 88.2           | -40.2       | Peak     | Vertical     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                            | 12288.0         | 30.9                 | 17.4          | 48.3                   | 74.0           | -25.7       | Peak     | Vertical     |
| Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.<br>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

**The Result of Radiated Emission in 9kHz ~ 30MHz:**

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC1                                    | Test Date: 2023-08-24 |
| Limit: FCC_Part 15.209_RSE(3m)                  | Engineer: Carl Jiang  |
| Probe: FMZB1519_0.009-30MHz                     | Polarity: Coaxial     |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 6625MHz |                       |

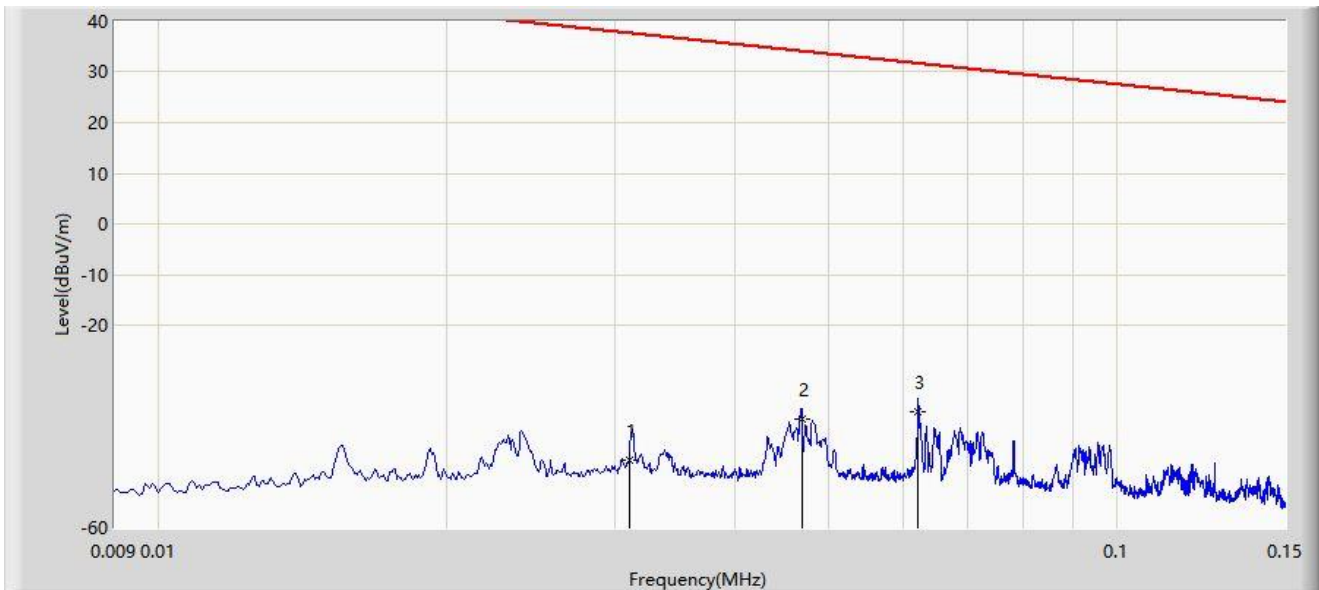

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 0.031           | -46.623                | 20.826               | -84.387     | 37.764         | -61.302       | PK   |
| 2  |      | 0.047           | -38.598                | 25.710               | -72.749     | 34.151         | -62.325       | PK   |
| 3  | *    | 0.062           | -37.003                | 27.893               | -68.749     | 31.746         | -62.475       | PK   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC1                                    | Test Date: 2023-08-24 |
| Limit: FCC_Part 15.209_RSE(3m)                  | Engineer: Carl Jiang  |
| Probe: FMZB1519_0.009-30MHz                     | Polarity: Coaxial     |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 6625MHz |                       |

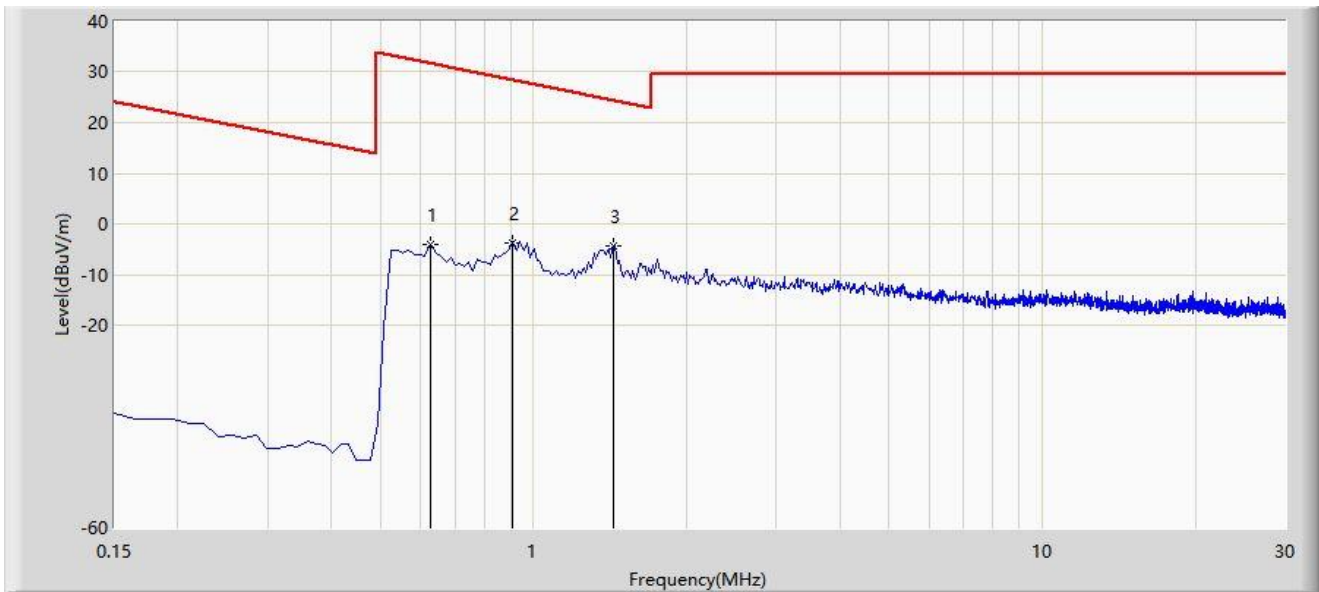

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 0.628           | -4.197                 | 18.193               | -35.848     | 31.651         | -22.348       | PK   |
| 2  |      | 0.911           | -3.630                 | 18.688               | -32.059     | 28.429         | -22.301       | PK   |
| 3  | *    | 1.434           | -4.284                 | 18.056               | -28.783     | 24.499         | -22.339       | PK   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC1                                    | Test Date: 2023-08-24 |
| Limit: FCC_Part 15.209_RSE(3m)                  | Engineer: Carl Jiang  |
| Probe: FMZB1519_0.009-30MHz                     | Polarity: Coplanar    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 6625MHz |                       |

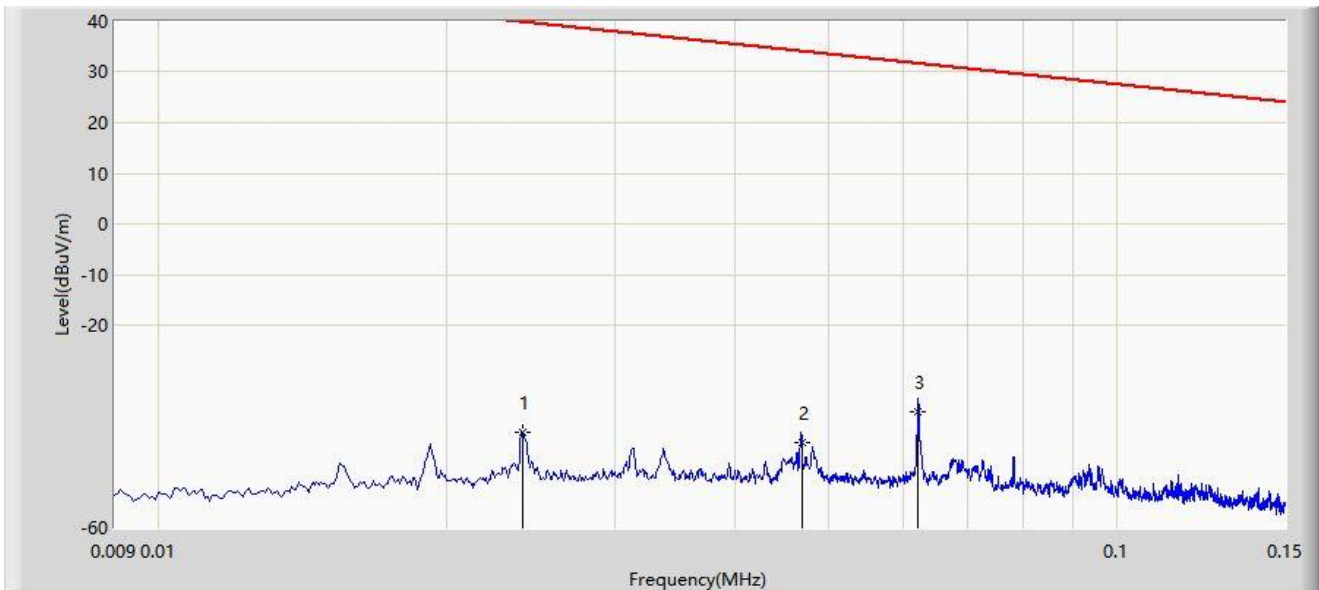

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 0.024           | -41.148                | 19.436               | -81.133     | 39.985         | -60.476       | PK   |
| 2  |      | 0.047           | -43.116                | 21.042               | -77.267     | 34.151         | -62.325       | PK   |
| 3  | *    | 0.062           | -37.155                | 28.096               | -68.901     | 31.746         | -62.475       | PK   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC1                                    | Test Date: 2023-08-24 |
| Limit: FCC_Part 15.209_RSE(3m)                  | Engineer: Carl Jiang  |
| Probe: FMZB1519_0.009-30MHz                     | Polarity: Coplanar    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 6625MHz |                       |

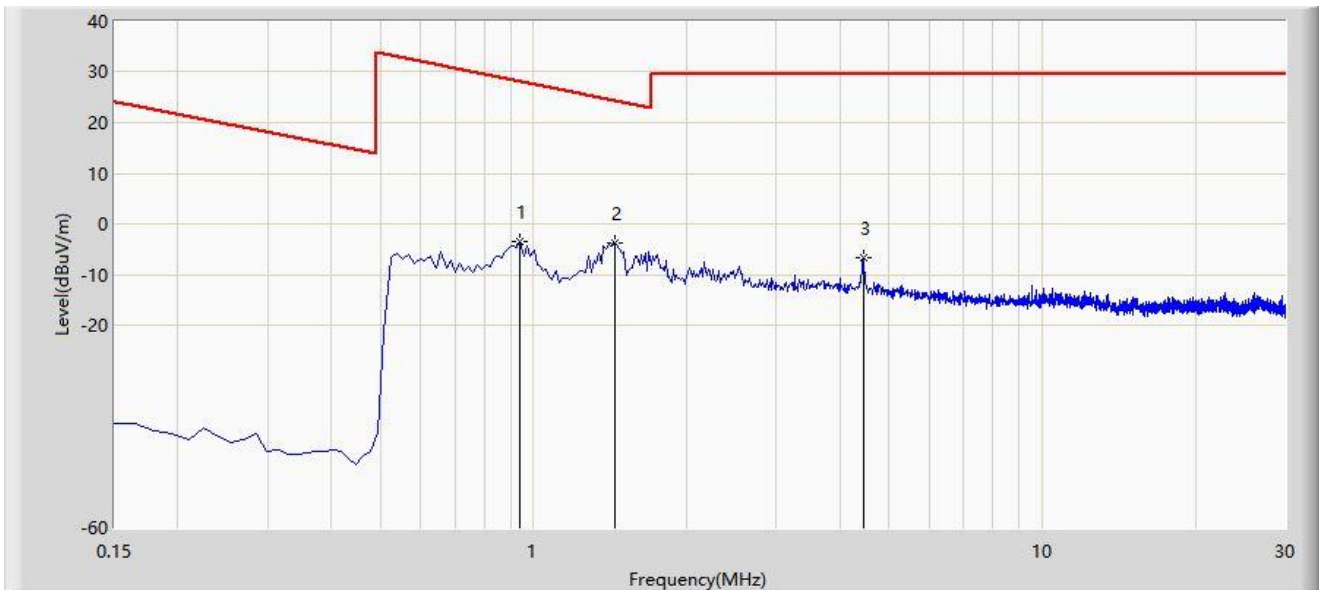

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 0.941           | -3.451                 | 18.854               | -31.599     | 28.148         | -22.303       | PK   |
| 2  | *    | 1.448           | -3.784                 | 18.557               | -28.199     | 24.415         | -22.340       | PK   |
| 3  |      | 4.448           | -6.646                 | 15.648               | -36.146     | 29.500         | -22.285       | PK   |

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

### The Result of Radiated Emission in 30M ~ 1GHz:

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC1                                    | Test Date: 2023-08-22 |
| Limit: FCC_Part15.209_RSE(3m)                   | Engineer: Carl Jiang  |
| Probe: VULB 9168_25-2000MHz                     | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 6625MHz |                       |

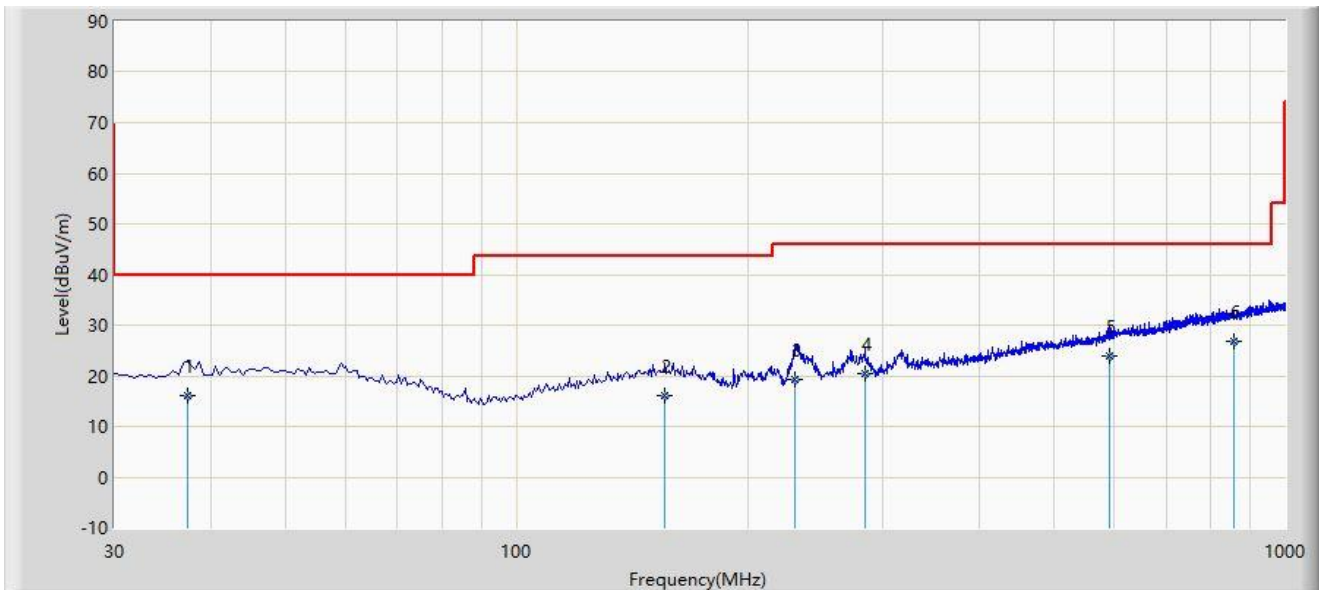

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 37.280          | 15.953                 | -1.770               | -24.047     | 40.000         | 17.723        | QP   |
| 2  |      | 156.230         | 16.167                 | -2.120               | -27.333     | 43.500         | 18.286        | QP   |
| 3  |      | 230.110         | 19.199                 | 4.110                | -26.801     | 46.000         | 15.089        | QP   |
| 4  |      | 284.560         | 20.362                 | 2.150                | -25.638     | 46.000         | 18.212        | QP   |
| 5  |      | 591.560         | 23.995                 | -1.250               | -22.005     | 46.000         | 25.245        | QP   |
| 6  | *    | 857.230         | 26.894                 | -2.360               | -19.106     | 46.000         | 29.255        | QP   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC1                                    | Test Date: 2023-08-22 |
| Temperature: 25°C                               | Humidity: 61%         |
| Limit: FCC_Part15.209_RSE(3m)                   | Engineer: Carl Jiang  |
| Probe: VULB 9168_25-2000MHz                     | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 6625MHz |                       |

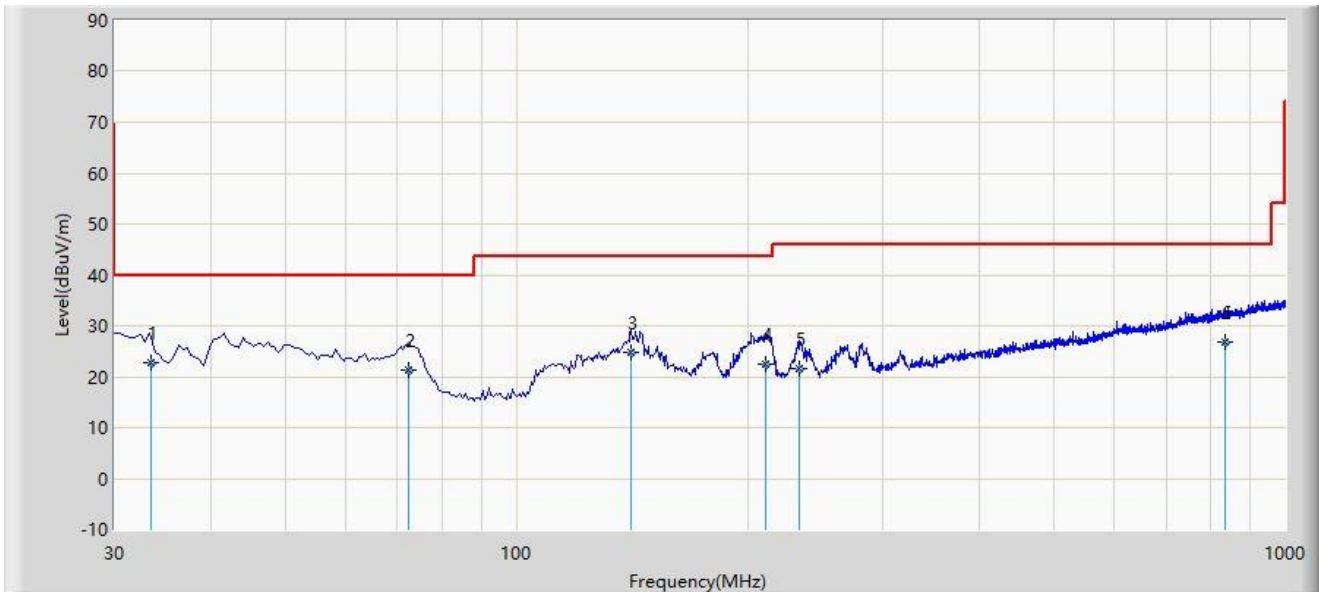

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 33.450          | 22.617                 | 5.230                | -17.383     | 40.000         | 17.387        | QP   |
| 2  |      | 72.380          | 21.189                 | 5.230                | -18.811     | 40.000         | 15.959        | QP   |
| 3  |      | 141.050         | 24.720                 | 6.890                | -18.780     | 43.500         | 17.830        | QP   |
| 4  |      | 211.360         | 22.451                 | 7.560                | -21.049     | 43.500         | 14.891        | QP   |
| 5  |      | 233.450         | 21.698                 | 6.210                | -24.302     | 46.000         | 15.488        | QP   |
| 6  |      | 834.120         | 26.716                 | -2.150               | -19.284     | 46.000         | 28.866        | QP   |

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

### The Result of Radiated Emission in 18G ~ 40GHz:

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-24 |
| Limit: FCC_Part15.209_RSE(3m)_6G&5.9G(Client)   | Engineer: Dick Shen   |
| Probe: BBHA9170_993_18-40GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit By 802.11ax-HE80 at 6625MHz |                       |

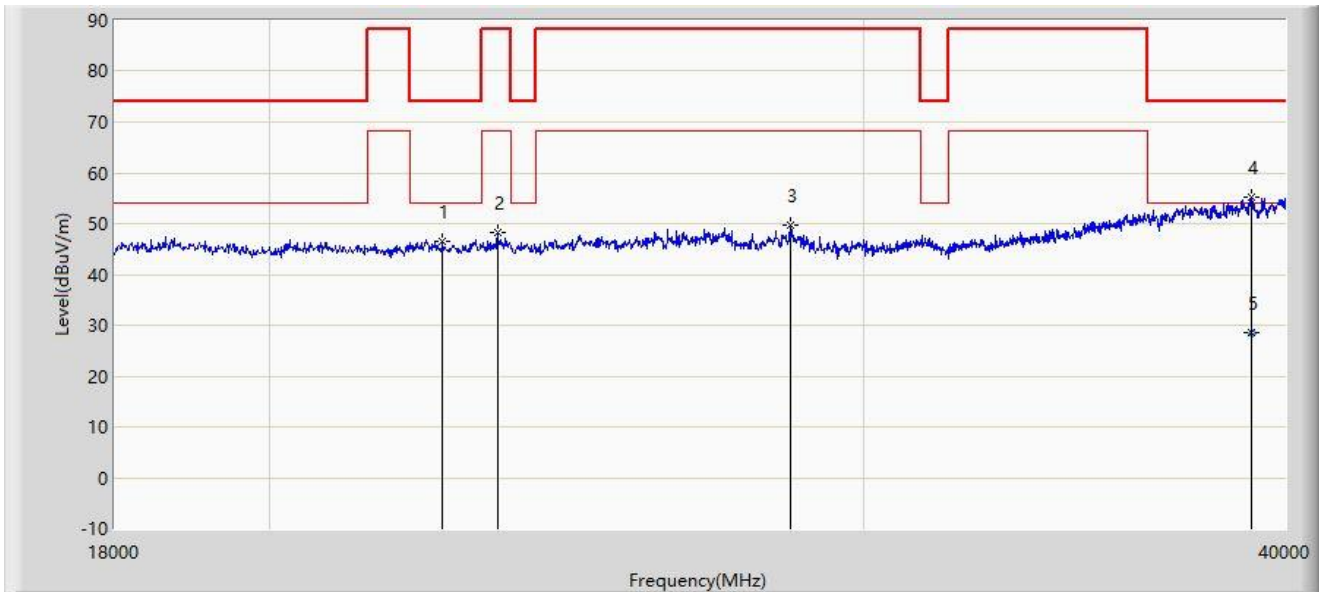

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 22521.000       | 46.632                 | 54.491               | -27.368     | 74.000         | -7.859        | PK   |
| 2  |      | 23379.000       | 48.334                 | 55.216               | -39.866     | 88.200         | -6.881        | PK   |
| 3  |      | 28560.000       | 49.623                 | 56.852               | -38.577     | 88.200         | -7.229        | PK   |
| 4  | *    | 39076.000       | 55.148                 | 56.504               | -18.852     | 74.000         | -1.356        | PK   |
| 5  |      | 39076.000       | 28.544                 | 29.900               | -25.456     | 54.000         | -1.356        | AV   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-24 |
| Limit: FCC_Part15.209_RSE(3m)_6G&5.9G(Client)   | Engineer: Dick Shen   |
| Probe: BBHA9170_993_18-40GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit By 802.11ax-HE80 at 6625MHz |                       |

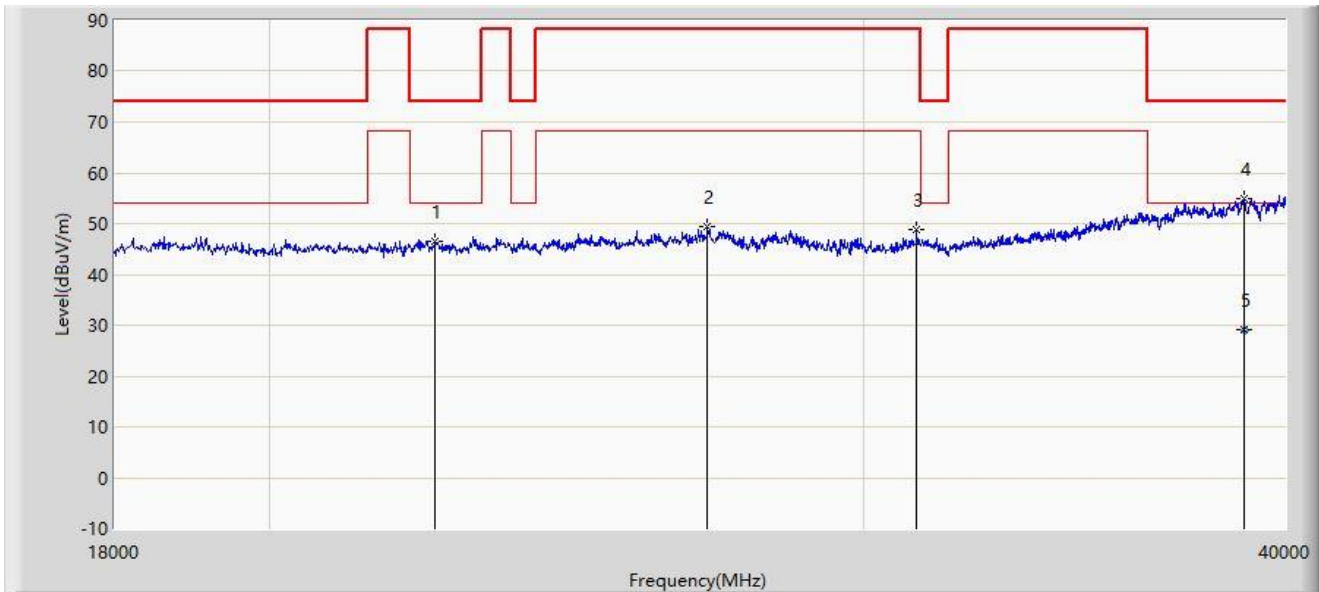

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 22400.000       | 46.399                 | 54.457               | -27.601     | 74.000         | -8.058        | PK   |
| 2  |      | 26976.000       | 49.427                 | 55.659               | -38.773     | 88.200         | -6.232        | PK   |
| 3  |      | 31112.000       | 48.698                 | 56.146               | -39.502     | 88.200         | -7.448        | PK   |
| 4  | *    | 38900.000       | 55.018                 | 56.898               | -18.982     | 74.000         | -1.880        | PK   |
| 5  |      | 38900.000       | 29.120                 | 31.000               | -24.880     | 54.000         | -1.880        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

## A.8 Radiated Restricted Band Edge Test Result

### ANT-311:

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-28 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

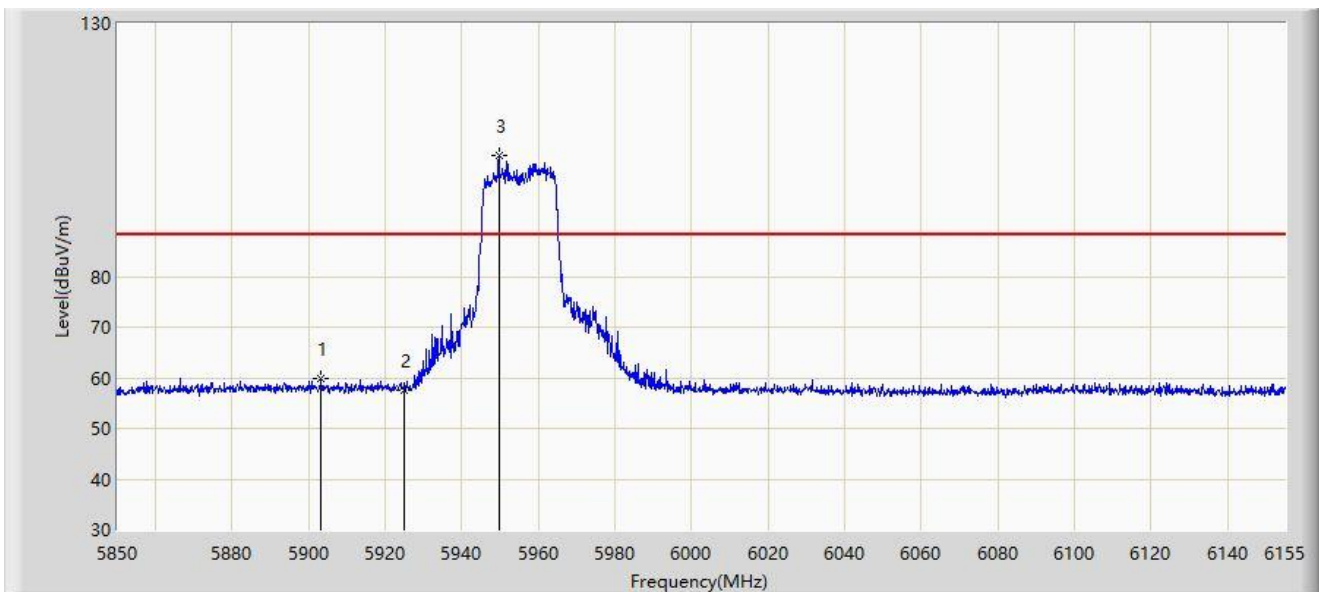


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5903.223        | 59.959                 | 54.800               | -28.241     | 88.200         | 5.159         | PK   |
| 2  |      | 5925.000        | 57.598                 | 52.328               | -30.602     | 88.200         | 5.271         | PK   |
| 3  |      | 5949.583        | 103.938                | 98.553               | N/A         | N/A            | 5.385         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-28 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

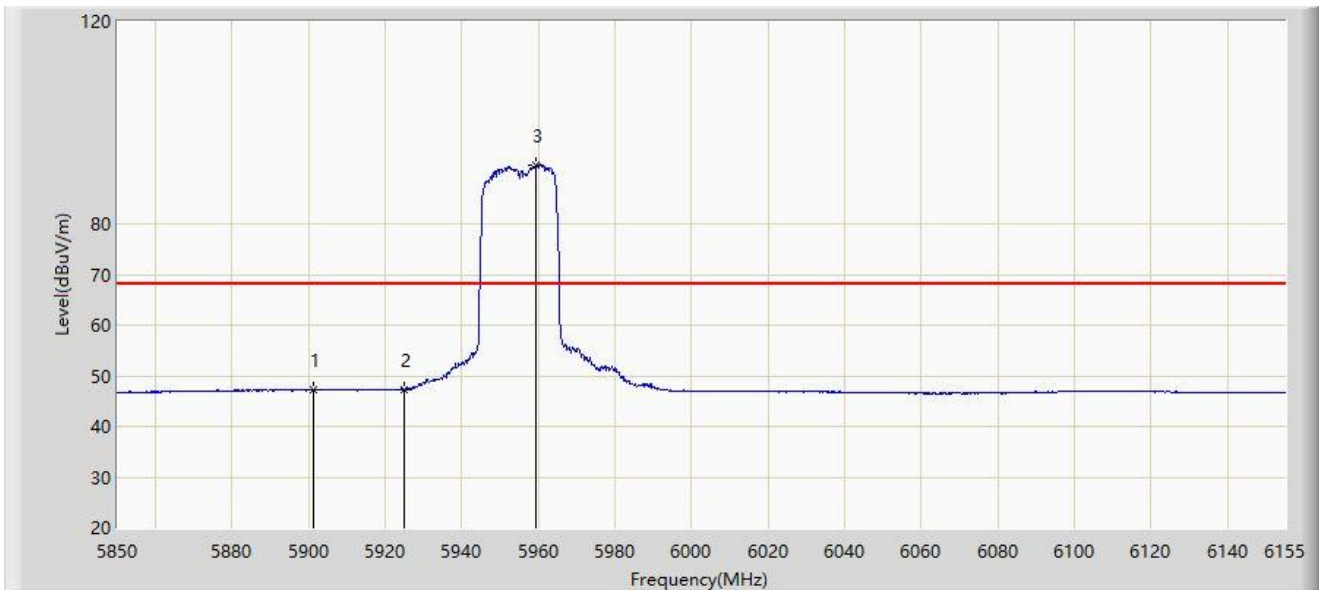


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5901.087        | 47.197                 | 42.043               | -21.003     | 68.200         | 5.155         | AV   |
| 2  | *    | 5925.000        | 47.347                 | 42.077               | -20.853     | 68.200         | 5.271         | AV   |
| 3  |      | 5959.342        | 91.629                 | 86.213               | N/A         | N/A            | 5.416         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-28 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

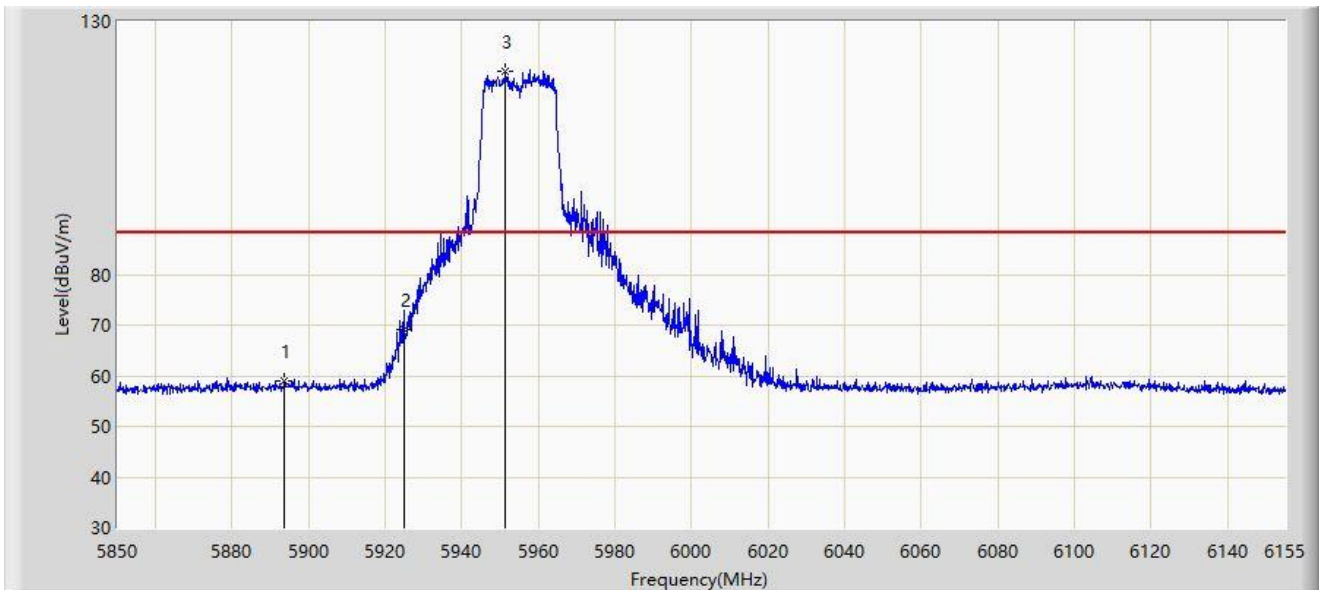


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5893.615        | 59.078                 | 53.922               | -29.122     | 88.200         | 5.156         | PK   |
| 2  | *    | 5925.000        | 69.027                 | 63.757               | -19.173     | 88.200         | 5.271         | PK   |
| 3  |      | 5951.413        | 120.242                | 114.851              | N/A         | N/A            | 5.391         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-28 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

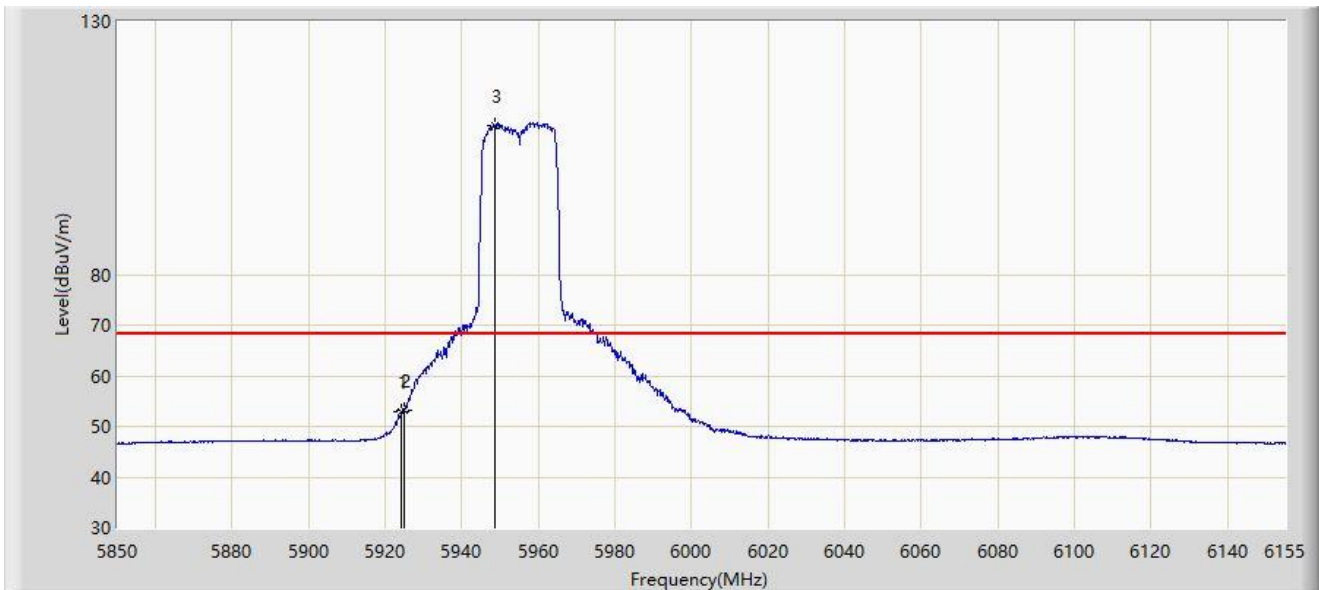


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5924.115        | 52.854                 | 47.589               | -15.346     | 68.200         | 5.265         | AV   |
| 2  | *    | 5925.000        | 53.263                 | 47.993               | -14.937     | 68.200         | 5.271         | AV   |
| 3  |      | 5948.667        | 109.355                | 103.973              | N/A         | N/A            | 5.382         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-28 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

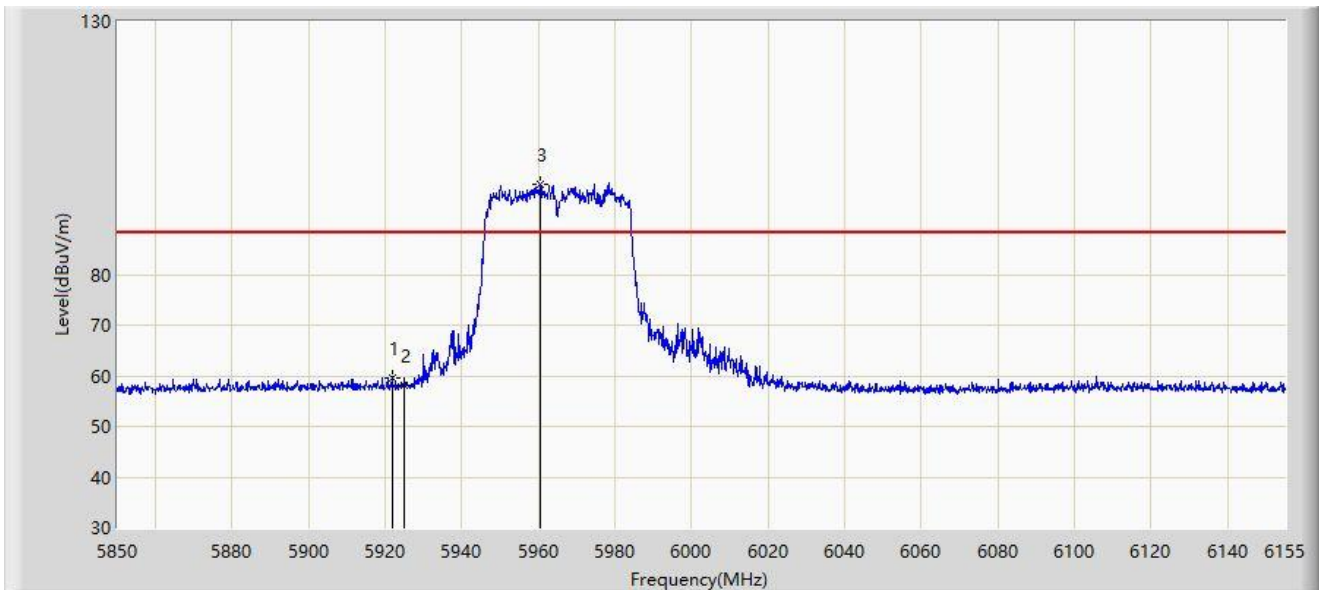


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5921.675        | 59.710                 | 54.463               | -28.490     | 88.200         | 5.247         | PK   |
| 2  |      | 5925.000        | 58.159                 | 52.889               | -30.041     | 88.200         | 5.271         | PK   |
| 3  |      | 5960.562        | 97.866                 | 92.452               | N/A         | N/A            | 5.414         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-28 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

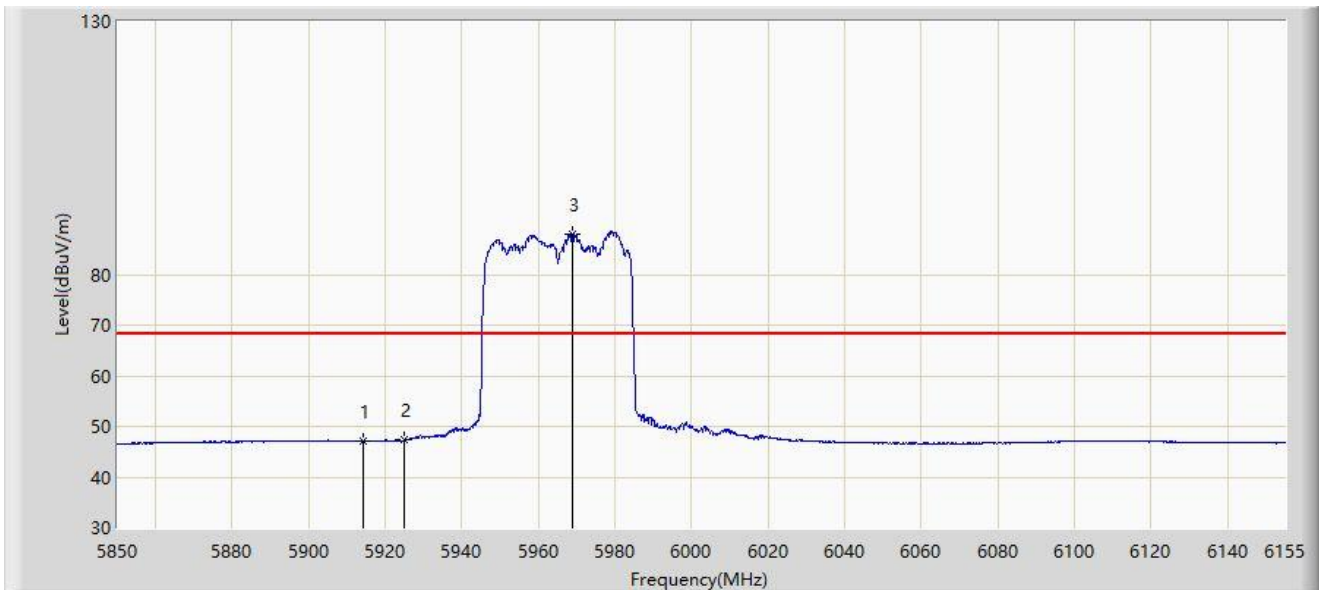


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5914.355        | 47.125                 | 41.932               | -21.075     | 68.200         | 5.193         | AV   |
| 2  | *    | 5925.000        | 47.298                 | 42.028               | -20.902     | 68.200         | 5.271         | AV   |
| 3  |      | 5968.950        | 88.072                 | 82.737               | N/A         | N/A            | 5.335         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-28 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

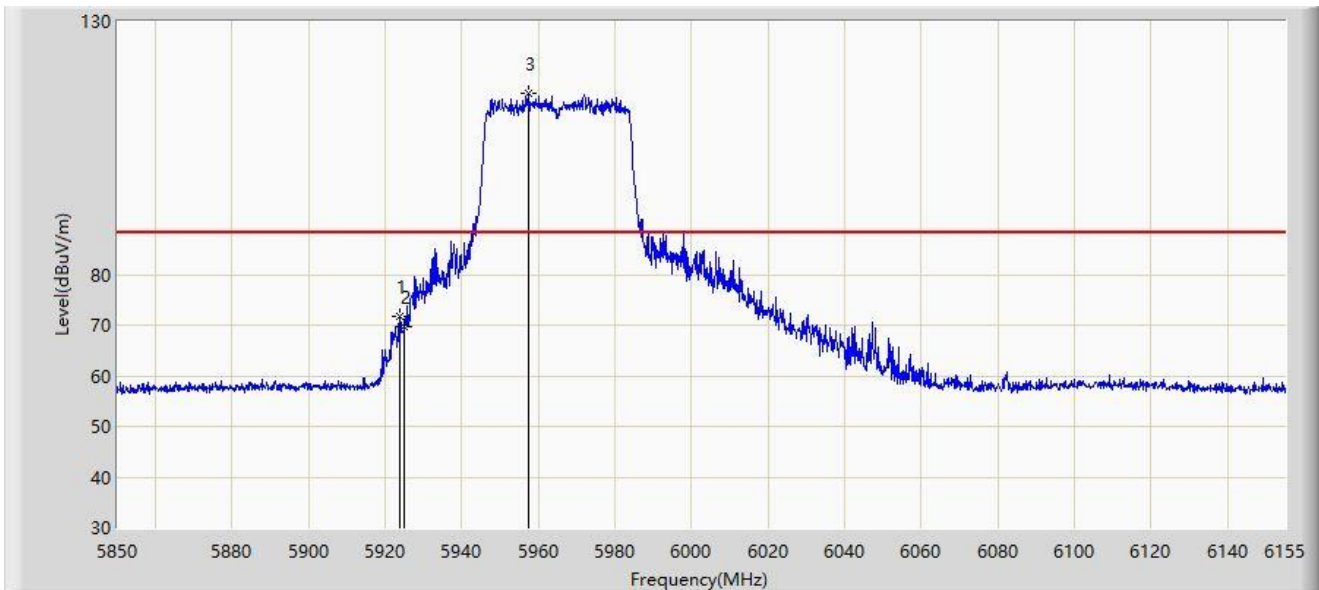


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5923.658        | 71.877                 | 66.615               | -16.323     | 88.200         | 5.262         | PK   |
| 2  |      | 5925.000        | 69.746                 | 64.476               | -18.454     | 88.200         | 5.271         | PK   |
| 3  |      | 5957.360        | 115.679                | 110.269              | N/A         | N/A            | 5.409         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-28 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

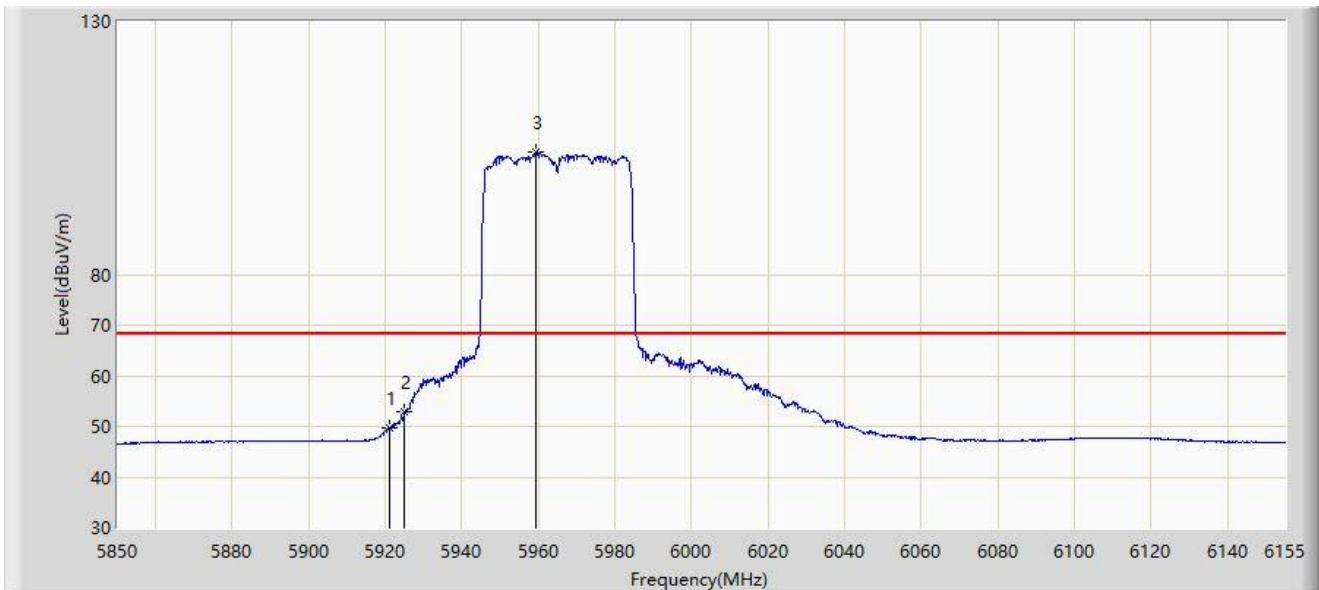


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5920.913        | 49.721                 | 44.480               | -18.479     | 68.200         | 5.242         | AV   |
| 2  | *    | 5925.000        | 52.832                 | 47.562               | -15.368     | 68.200         | 5.271         | AV   |
| 3  |      | 5959.342        | 104.120                | 98.704               | N/A         | N/A            | 5.416         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-28 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

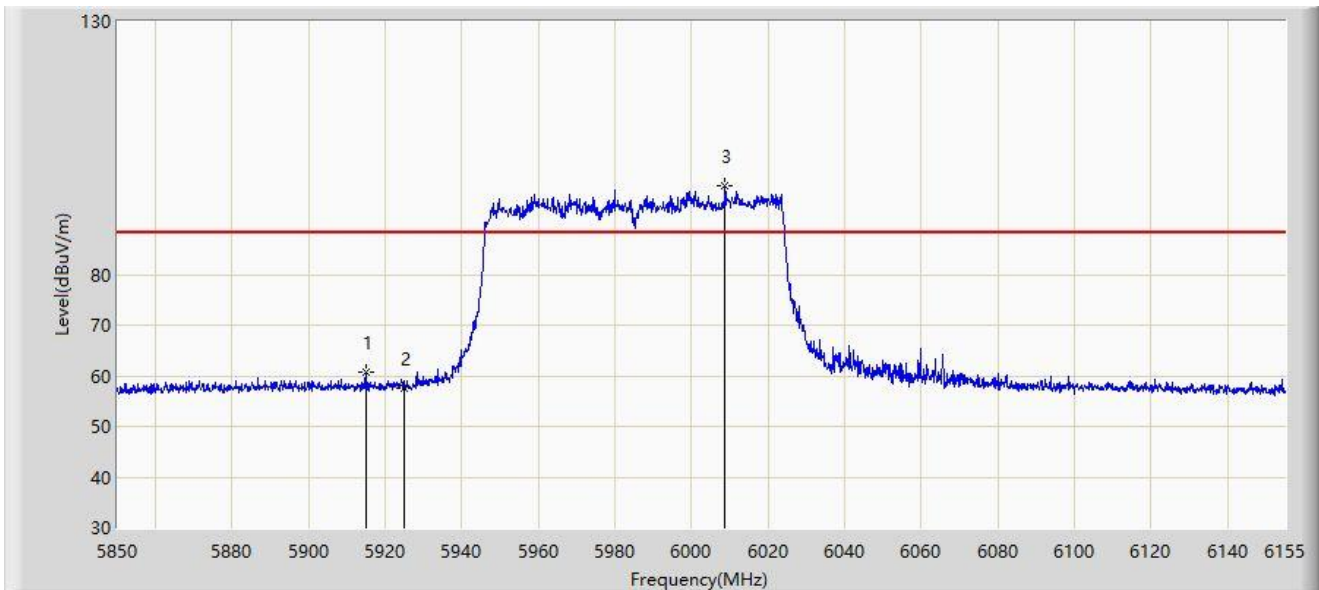


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5914.812        | 60.690                 | 55.493               | -27.510     | 88.200         | 5.196         | PK   |
| 2  |      | 5925.000        | 57.646                 | 52.376               | -30.554     | 88.200         | 5.271         | PK   |
| 3  |      | 6008.752        | 97.648                 | 92.126               | N/A         | N/A            | 5.521         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-28 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

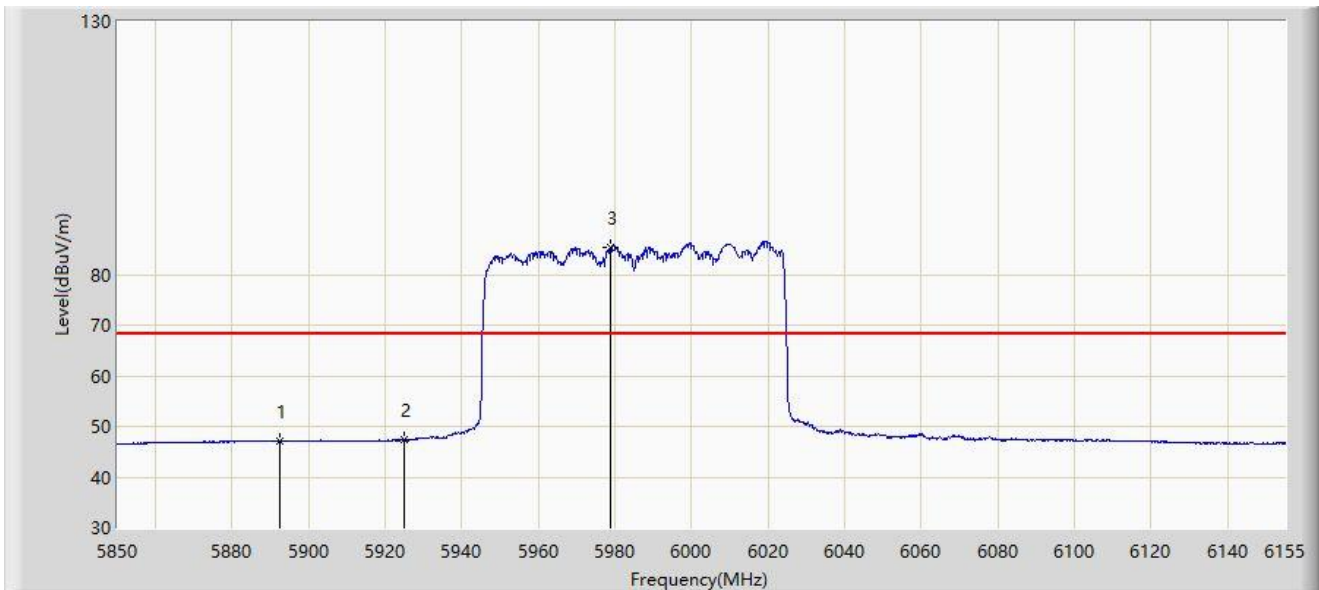


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5892.547        | 47.182                 | 42.021               | -21.018     | 68.200         | 5.162         | AV   |
| 2  | *    | 5925.000        | 47.263                 | 41.993               | -20.937     | 68.200         | 5.271         | AV   |
| 3  |      | 5978.862        | 85.440                 | 80.192               | N/A         | N/A            | 5.248         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-28 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

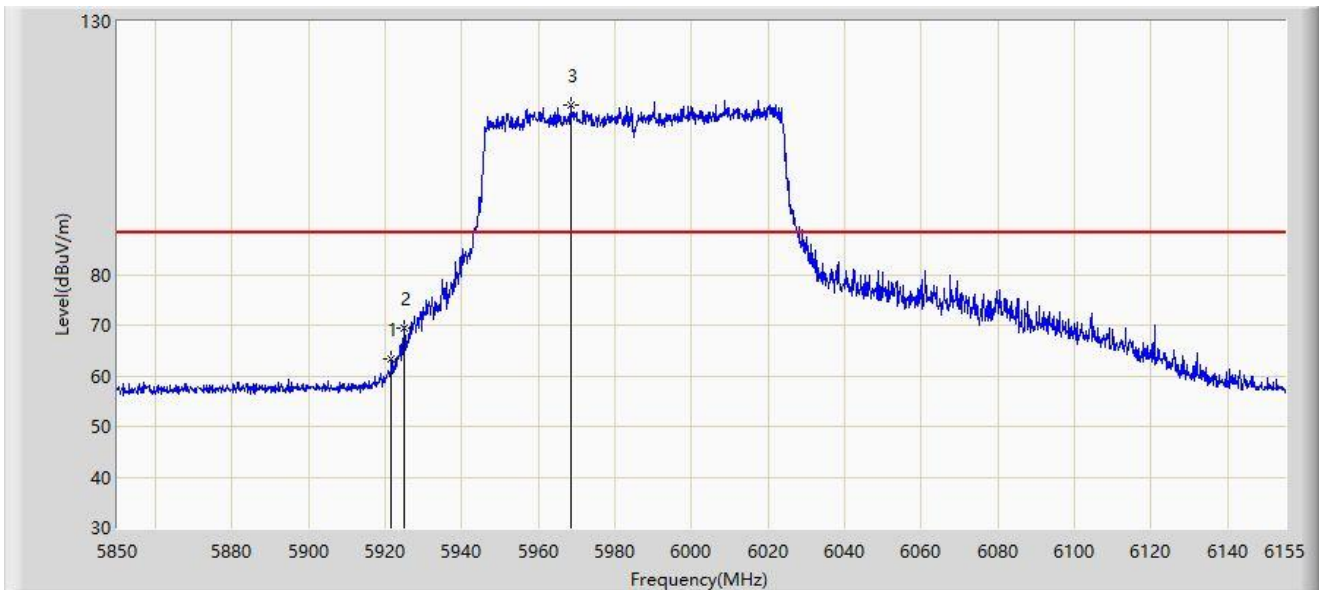


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5921.522        | 63.404                 | 58.158               | -24.796     | 88.200         | 5.246         | PK   |
| 2  | *    | 5925.000        | 69.479                 | 64.209               | -18.721     | 88.200         | 5.271         | PK   |
| 3  |      | 5968.645        | 113.423                | 108.086              | N/A         | N/A            | 5.337         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-28 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

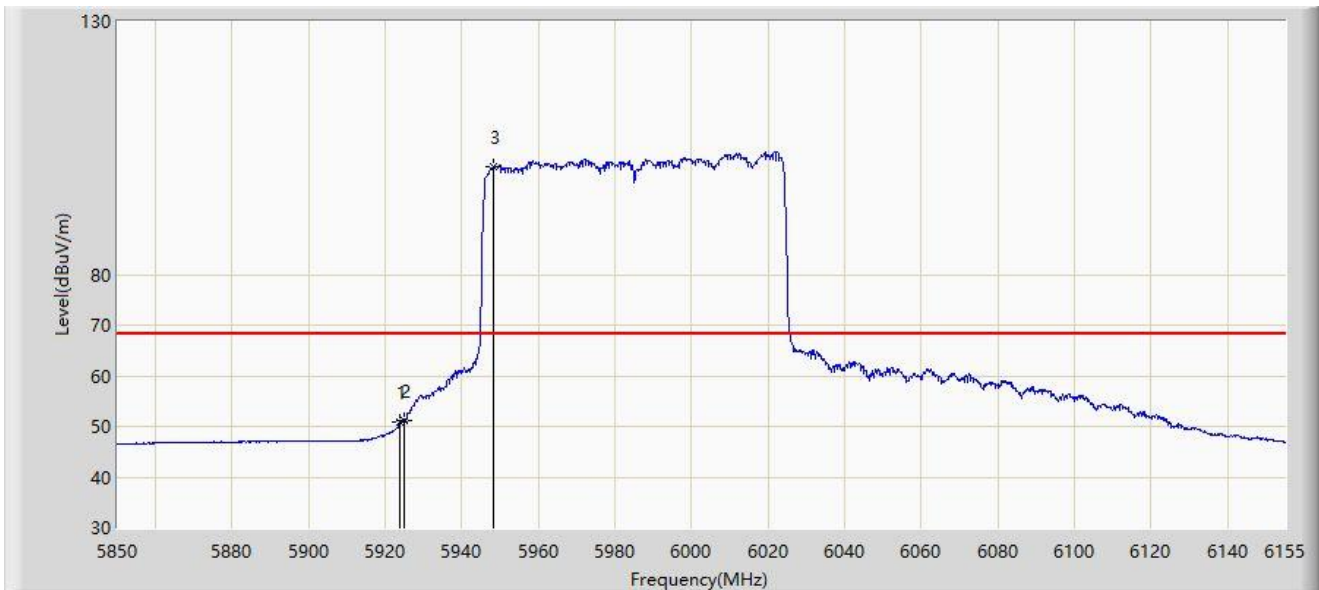


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5923.658        | 50.934                 | 45.672               | -17.266     | 68.200         | 5.262         | AV   |
| 2  | *    | 5925.000        | 51.123                 | 45.853               | -17.077     | 68.200         | 5.271         | AV   |
| 3  |      | 5948.210        | 101.275                | 95.895               | N/A         | N/A            | 5.380         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC1                                     | Test Date: 2023-11-18 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

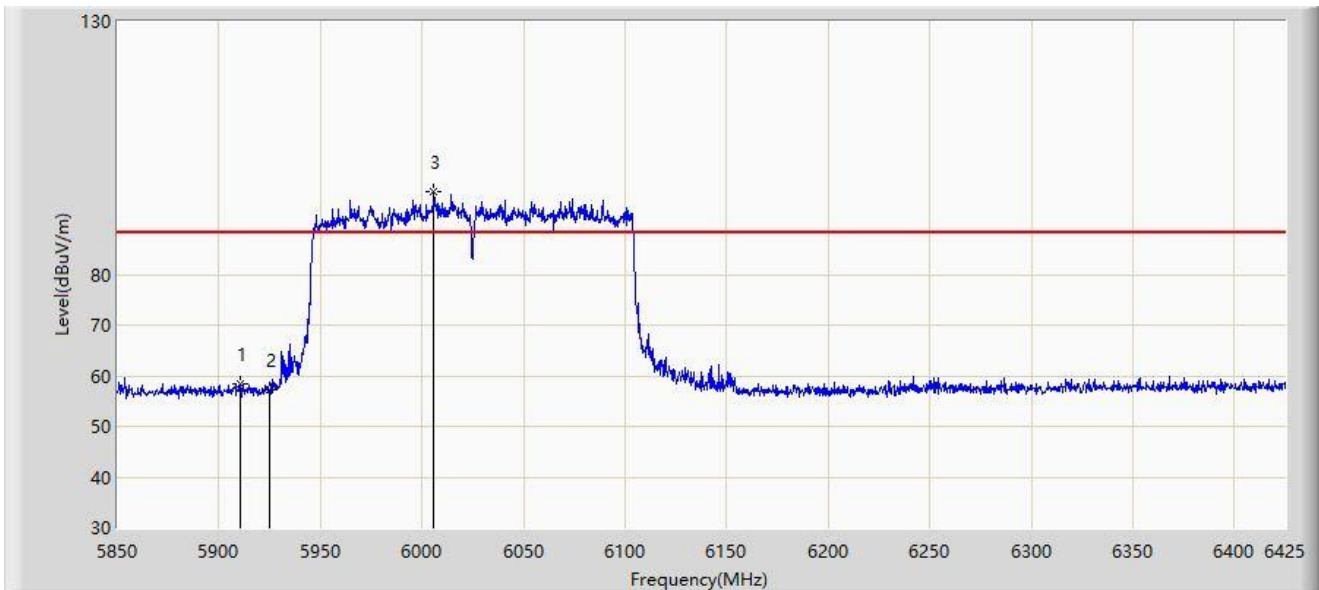


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5910.375        | 58.393                 | 53.745               | -29.807     | 88.200         | 4.647         | PK   |
| 2  |      | 5925.000        | 57.225                 | 52.594               | -30.975     | 88.200         | 4.631         | PK   |
| 3  |      | 6005.825        | 96.260                 | 91.433               | N/A         | N/A            | 4.828         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC1                                     | Test Date: 2023-11-18 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

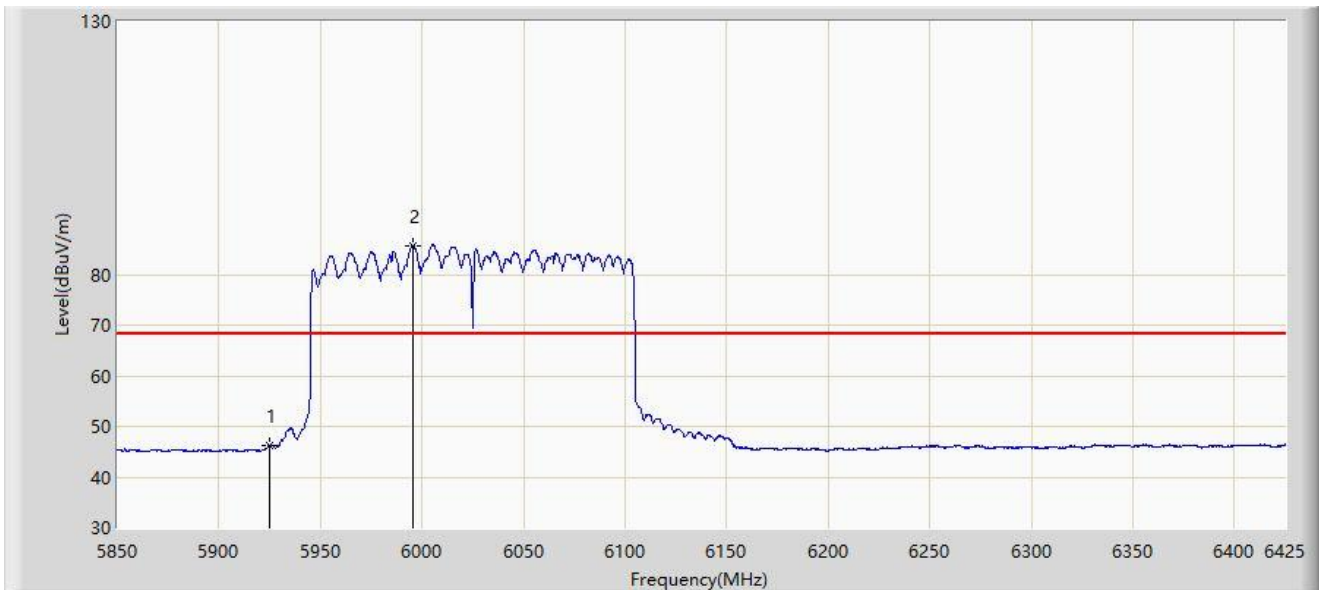


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 46.350                 | 41.719               | -21.850     | 68.200         | 4.631         | AV   |
| 2  |      | 5995.475        | 85.769                 | 80.986               | N/A         | N/A            | 4.784         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC1                                     | Test Date: 2023-11-18 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

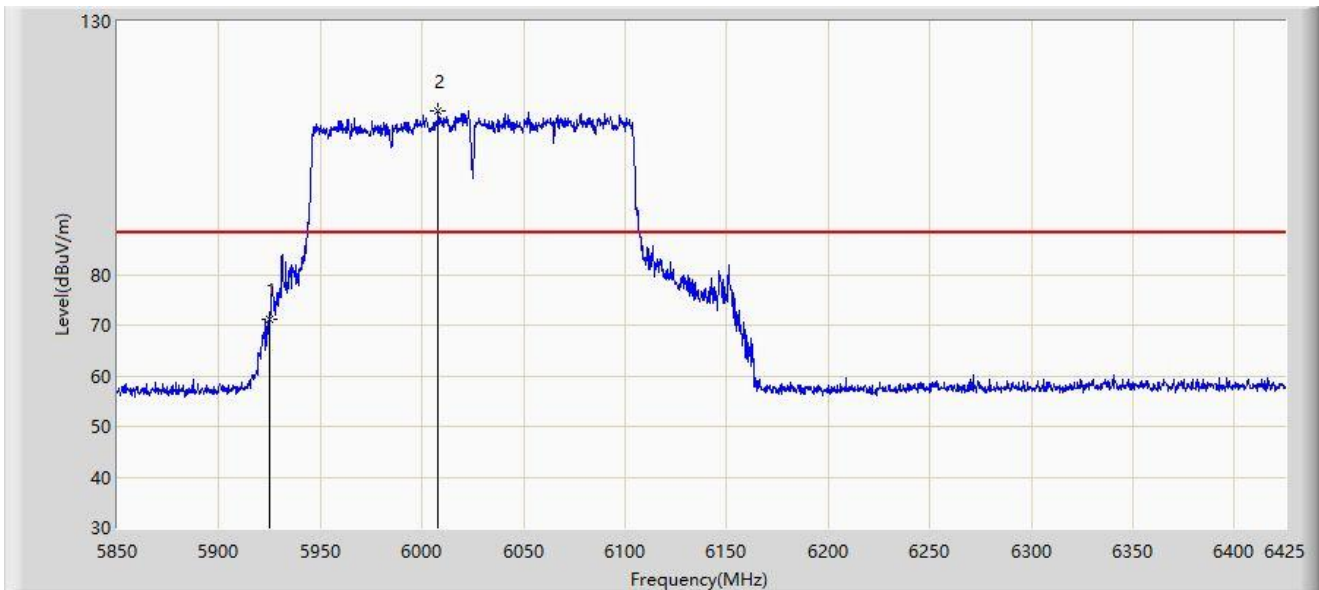


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 71.298                 | 66.667               | -16.902     | 88.200         | 4.631         | PK   |
| 2  |      | 6008.125        | 112.333                | 107.498              | N/A         | N/A            | 4.834         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC1                                     | Test Date: 2023-11-18 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

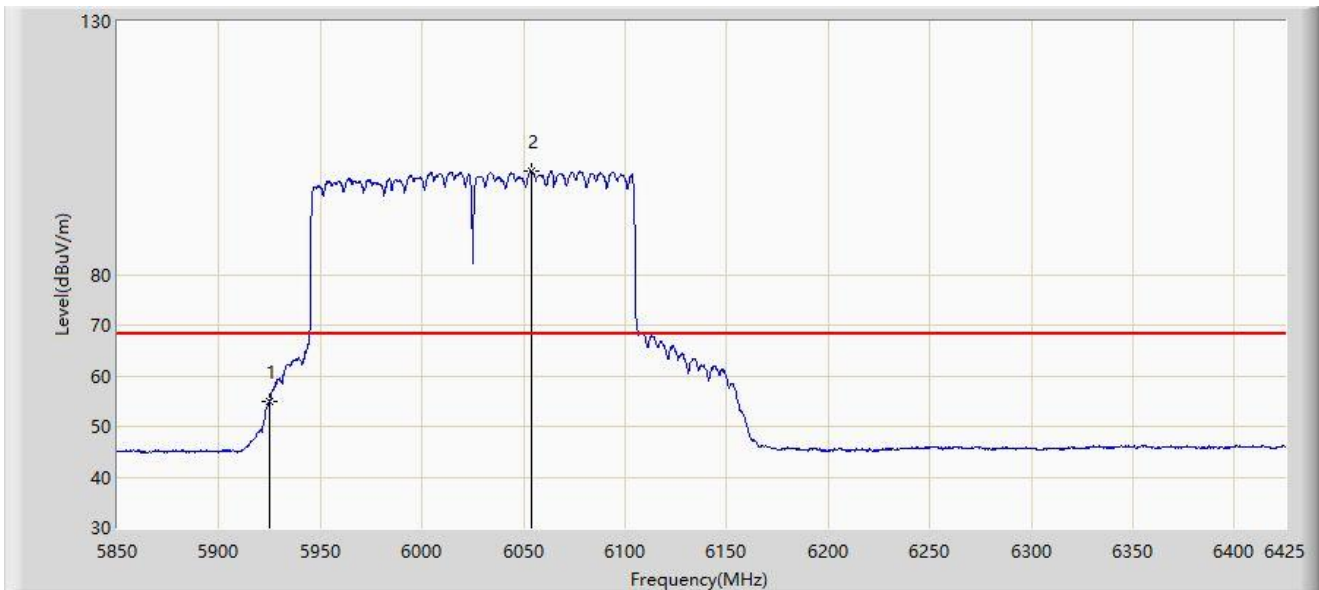

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 55.000                 | 50.369               | -13.200     | 68.200         | 4.631         | AV   |
| 2  |      | 6053.837        | 100.414                | 95.715               | N/A         | N/A            | 4.699         | AV   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

**ANT-312:**

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-09 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Edith Yu    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: By POE         |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

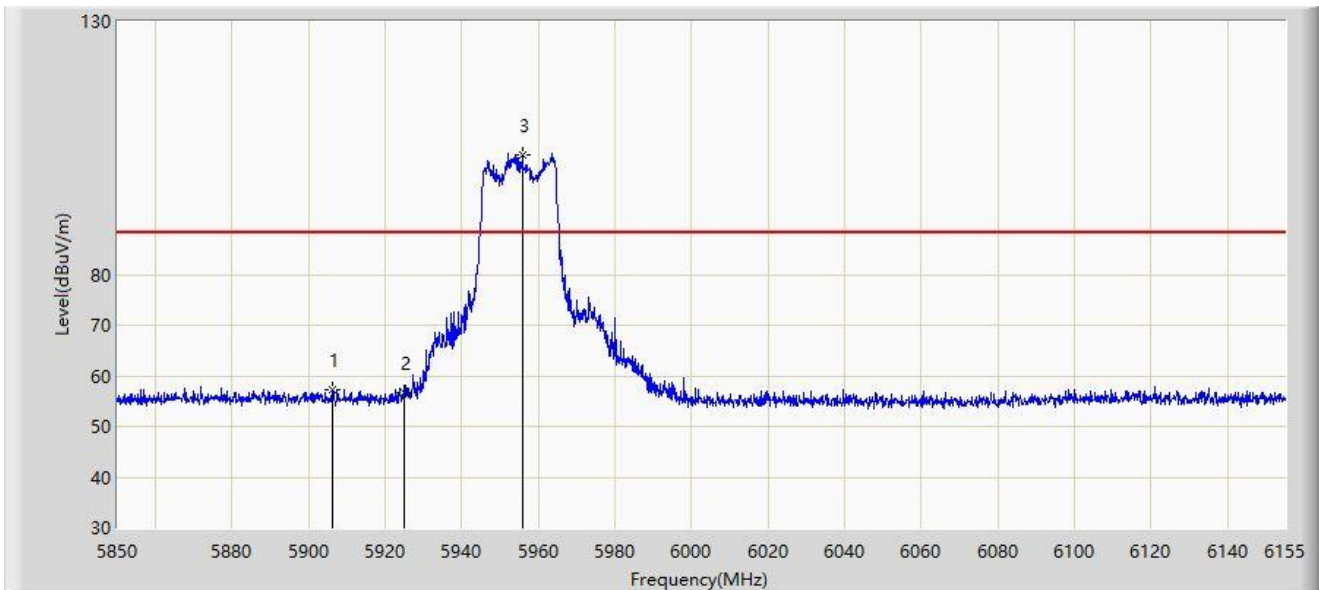


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5906.272        | 57.195                 | 52.030               | -31.005     | 88.200         | 5.165         | PK   |
| 2  |      | 5925.000        | 56.581                 | 51.311               | -31.619     | 88.200         | 5.271         | PK   |
| 3  |      | 5955.683        | 103.689                | 98.285               | N/A         | N/A            | 5.405         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-09 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Edith Yu    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: By POE         |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

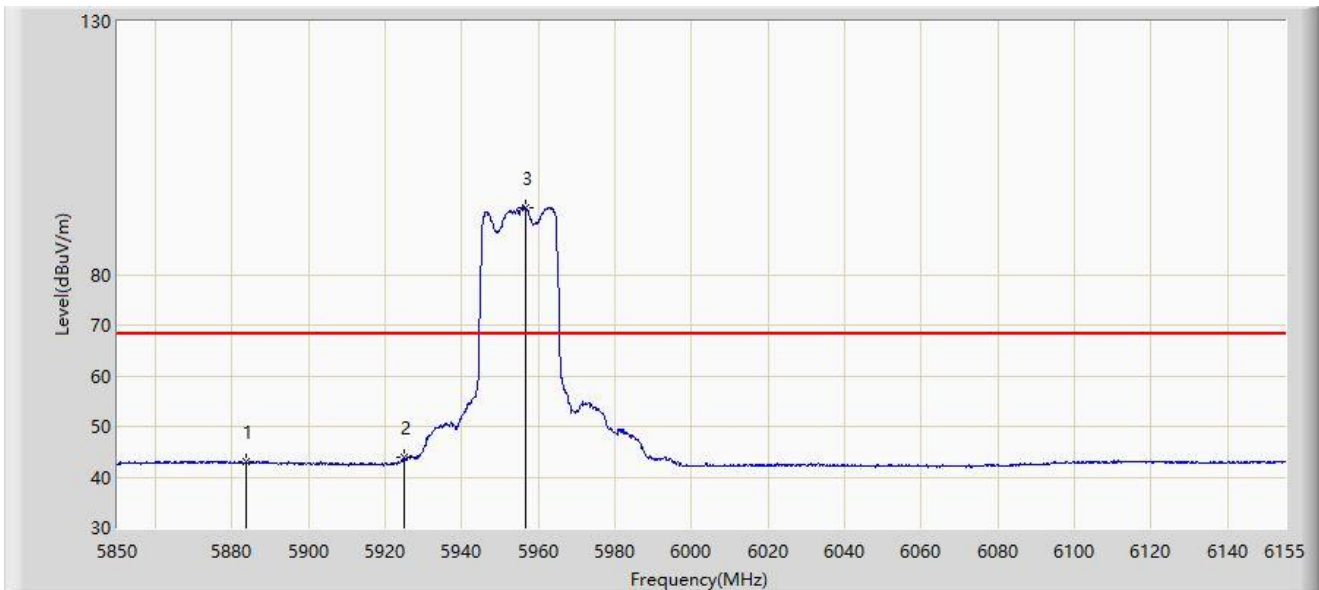


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5883.550        | 42.989                 | 37.818               | -25.211     | 68.200         | 5.171         | AV   |
| 2  | *    | 5925.000        | 43.830                 | 38.560               | -24.370     | 68.200         | 5.271         | AV   |
| 3  |      | 5956.598        | 93.203                 | 87.796               | N/A         | N/A            | 5.407         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-09 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Edith Yu    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: By POE         |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

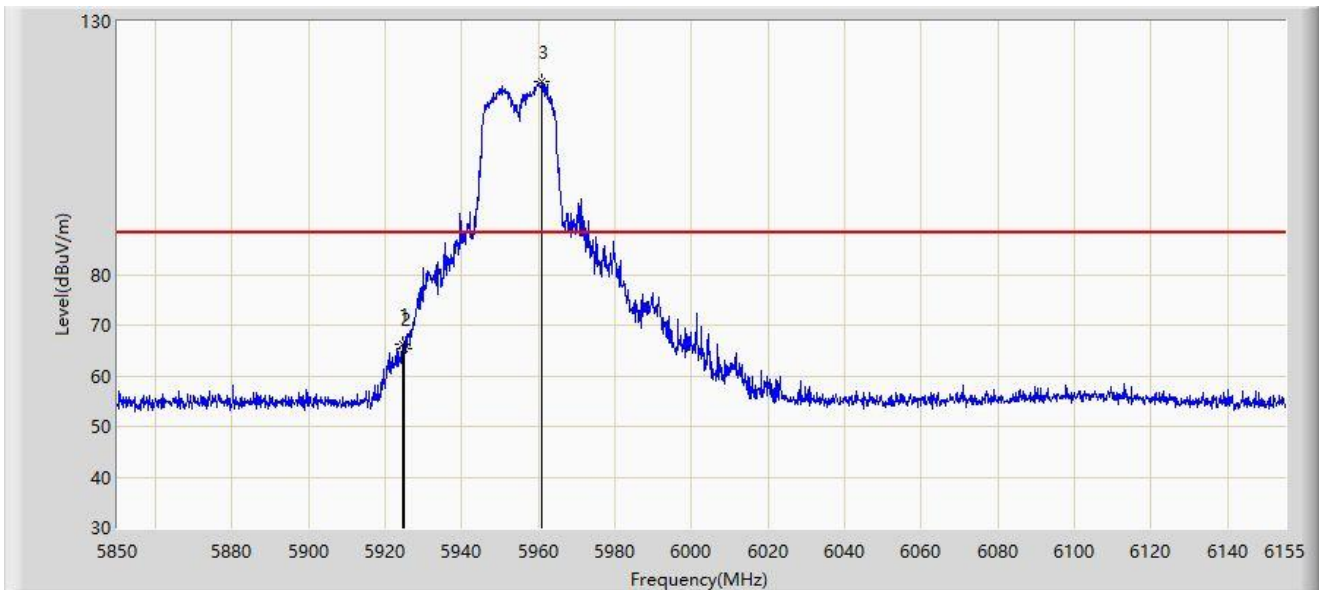


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5924.420        | 66.294                 | 61.027               | -21.906     | 88.200         | 5.266         | PK   |
| 2  |      | 5925.000        | 65.261                 | 59.991               | -22.939     | 88.200         | 5.271         | PK   |
| 3  |      | 5961.020        | 118.104                | 112.695              | N/A         | N/A            | 5.409         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-09 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Edith Yu    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: By POE         |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

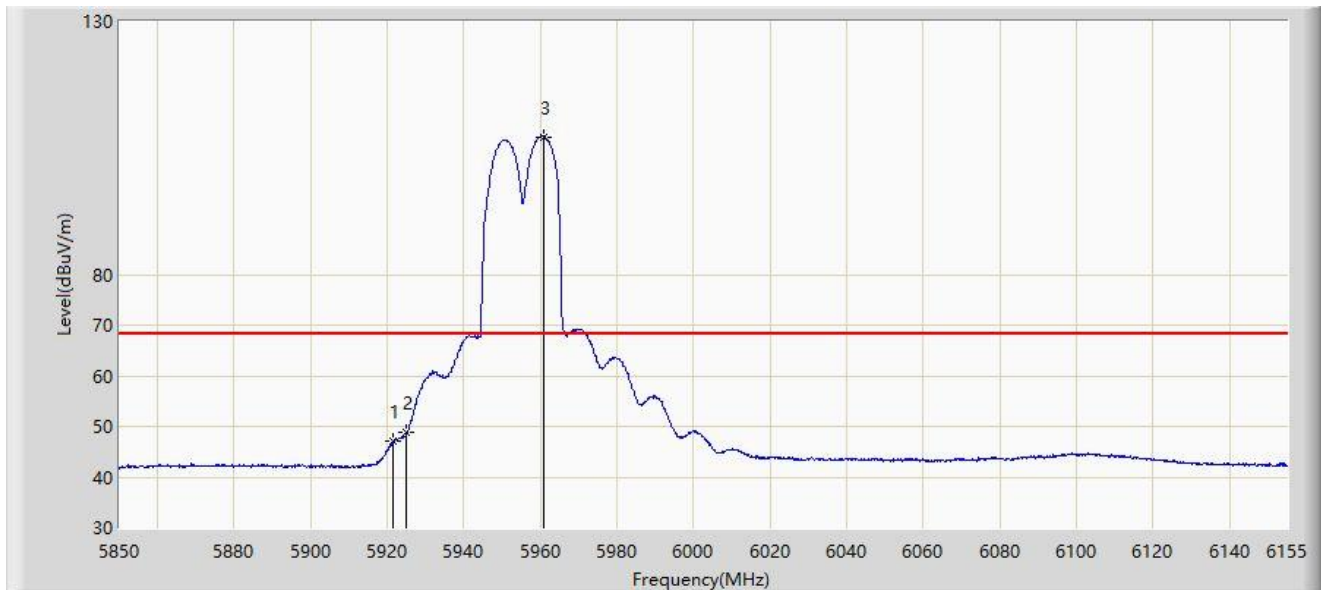


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5921.522        | 47.107                 | 41.861               | -21.093     | 68.200         | 5.246         | AV   |
| 2  | *    | 5925.000        | 48.841                 | 43.571               | -19.359     | 68.200         | 5.271         | AV   |
| 3  |      | 5960.868        | 107.220                | 101.809              | N/A         | N/A            | 5.410         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-09 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Edith Yu    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: By POE         |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

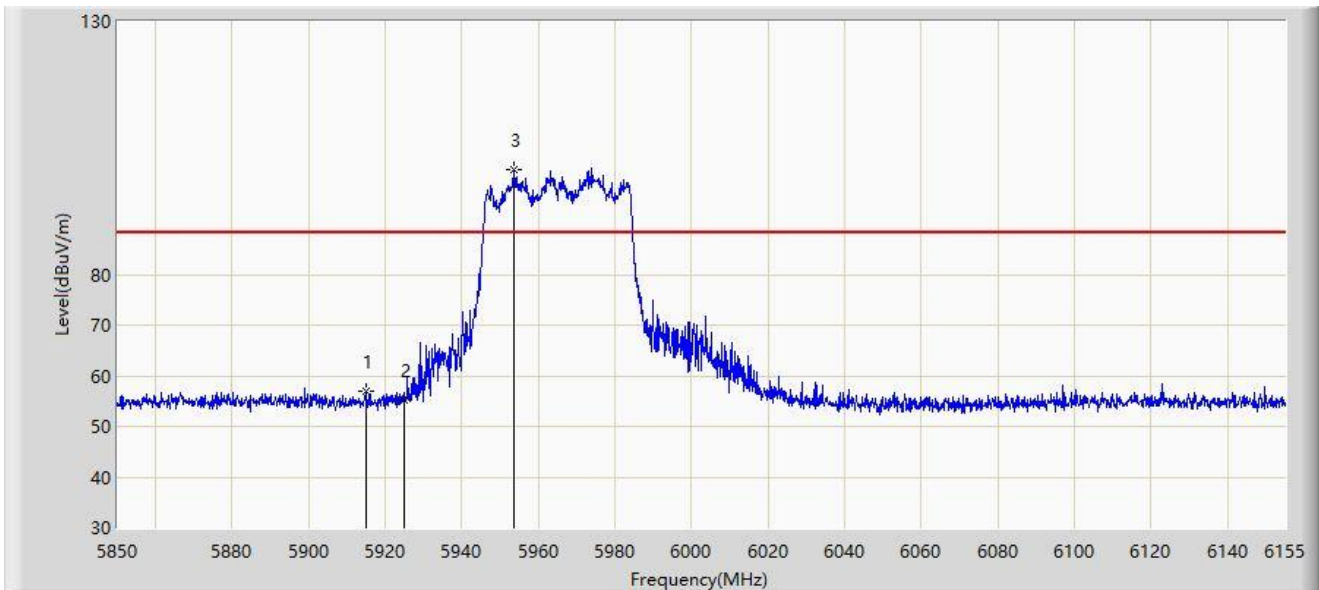


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5914.812        | 56.910                 | 51.713               | -31.290     | 88.200         | 5.196         | PK   |
| 2  |      | 5925.000        | 55.248                 | 49.978               | -32.952     | 88.200         | 5.271         | PK   |
| 3  |      | 5953.700        | 100.723                | 95.325               | N/A         | N/A            | 5.398         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-09 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Edith Yu    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: By POE         |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

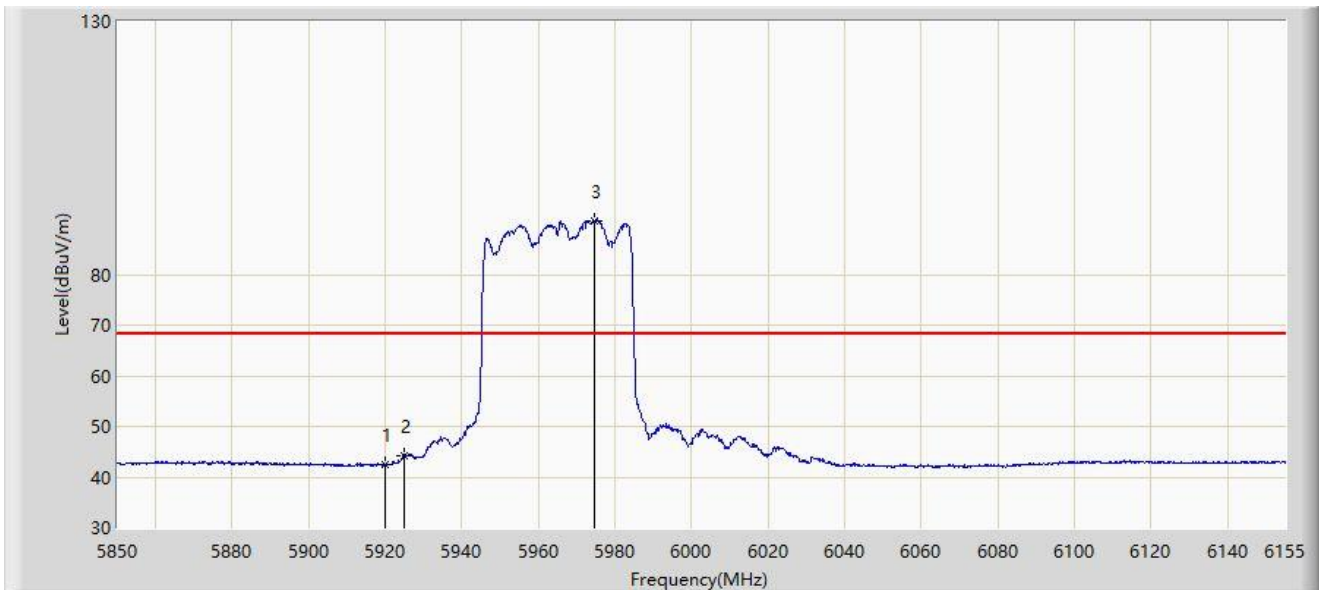


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5919.998        | 42.584                 | 37.349               | -25.616     | 68.200         | 5.235         | AV   |
| 2  | *    | 5925.000        | 44.162                 | 38.892               | -24.038     | 68.200         | 5.271         | AV   |
| 3  |      | 5974.440        | 90.716                 | 85.432               | N/A         | N/A            | 5.284         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-09 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Edith Yu    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: By POE         |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

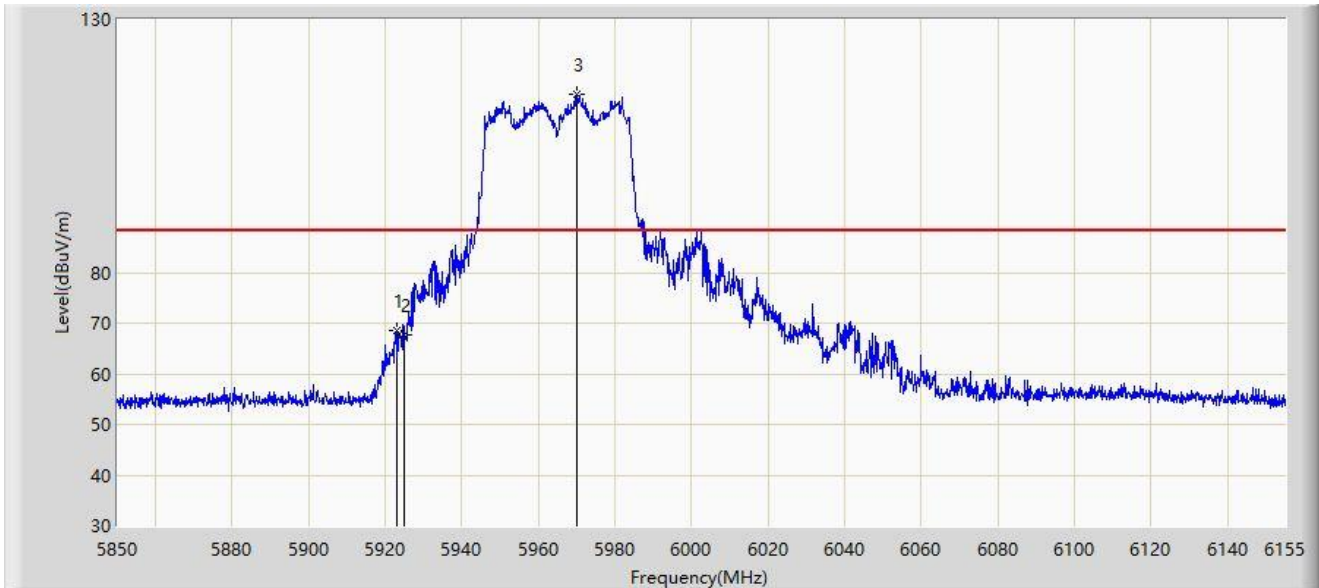


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5922.895        | 68.579                 | 63.323               | -19.621     | 88.200         | 5.256         | PK   |
| 2  |      | 5925.000        | 67.727                 | 62.457               | -20.473     | 88.200         | 5.271         | PK   |
| 3  |      | 5970.170        | 115.162                | 109.839              | N/A         | N/A            | 5.323         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-09 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Edith Yu    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: By POE         |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

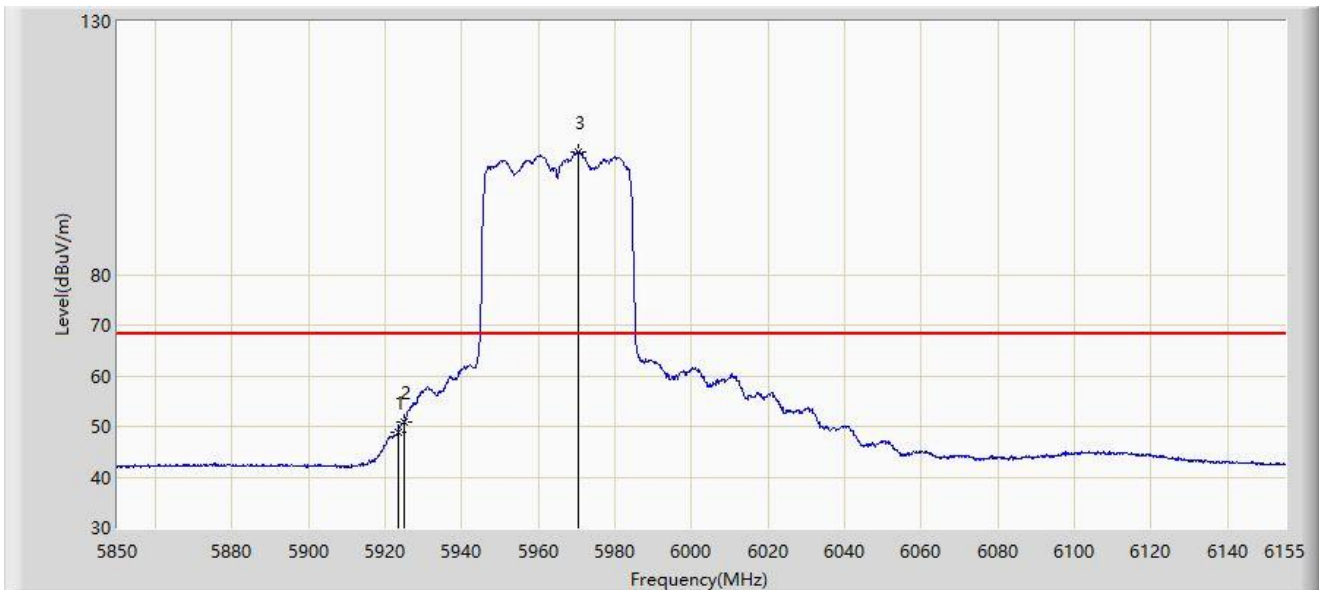


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5923.200        | 48.841                 | 43.583               | -19.359     | 68.200         | 5.258         | AV   |
| 2  | *    | 5925.000        | 50.934                 | 45.664               | -17.266     | 68.200         | 5.271         | AV   |
| 3  |      | 5970.322        | 104.137                | 98.815               | N/A         | N/A            | 5.322         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-09 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Edith Yu    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: By POE         |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

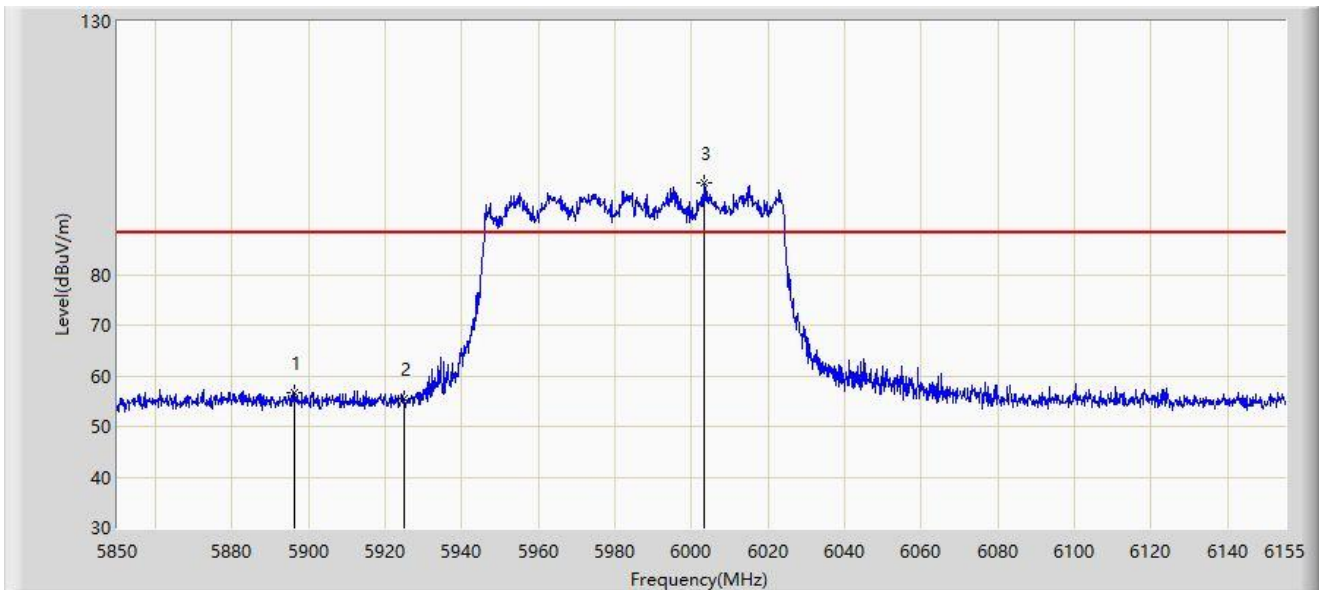


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5896.360        | 56.662                 | 51.518               | -31.538     | 88.200         | 5.144         | PK   |
| 2  |      | 5925.000        | 55.425                 | 50.155               | -32.775     | 88.200         | 5.271         | PK   |
| 3  |      | 6003.110        | 98.101                 | 92.648               | N/A         | N/A            | 5.454         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-09 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Edith Yu    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: By POE         |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

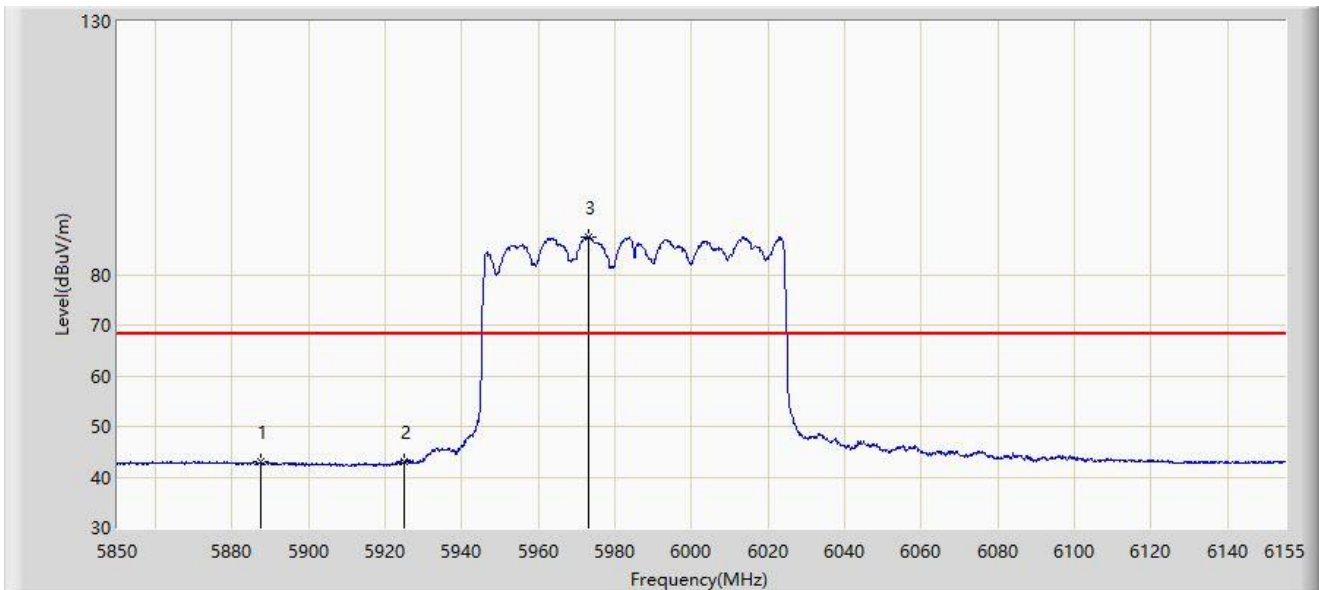


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5887.362        | 43.022                 | 37.841               | -25.178     | 68.200         | 5.182         | AV   |
| 2  | *    | 5925.000        | 43.065                 | 37.795               | -25.135     | 68.200         | 5.271         | AV   |
| 3  |      | 5973.220        | 87.459                 | 82.164               | N/A         | N/A            | 5.296         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-09 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Edith Yu    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: By POE         |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

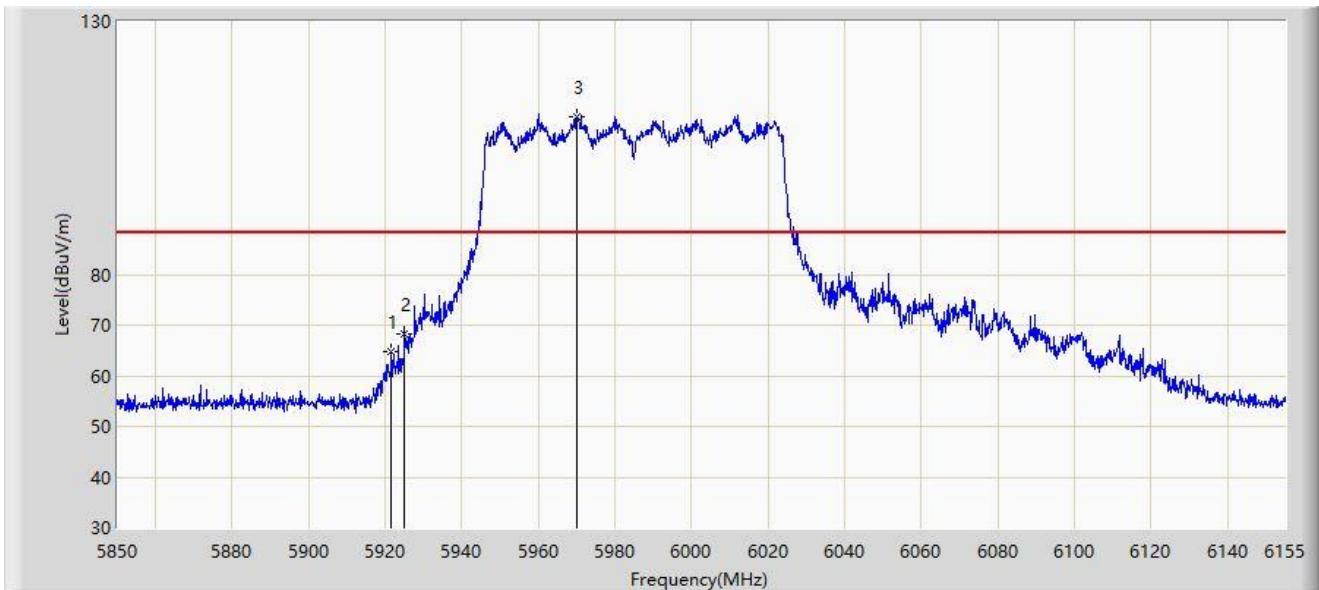


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5921.522        | 64.892                 | 59.646               | -23.308     | 88.200         | 5.246         | PK   |
| 2  | *    | 5925.000        | 68.196                 | 62.926               | -20.004     | 88.200         | 5.271         | PK   |
| 3  |      | 5969.865        | 111.231                | 105.905              | N/A         | N/A            | 5.326         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-07-09 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Edith Yu    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: By POE         |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

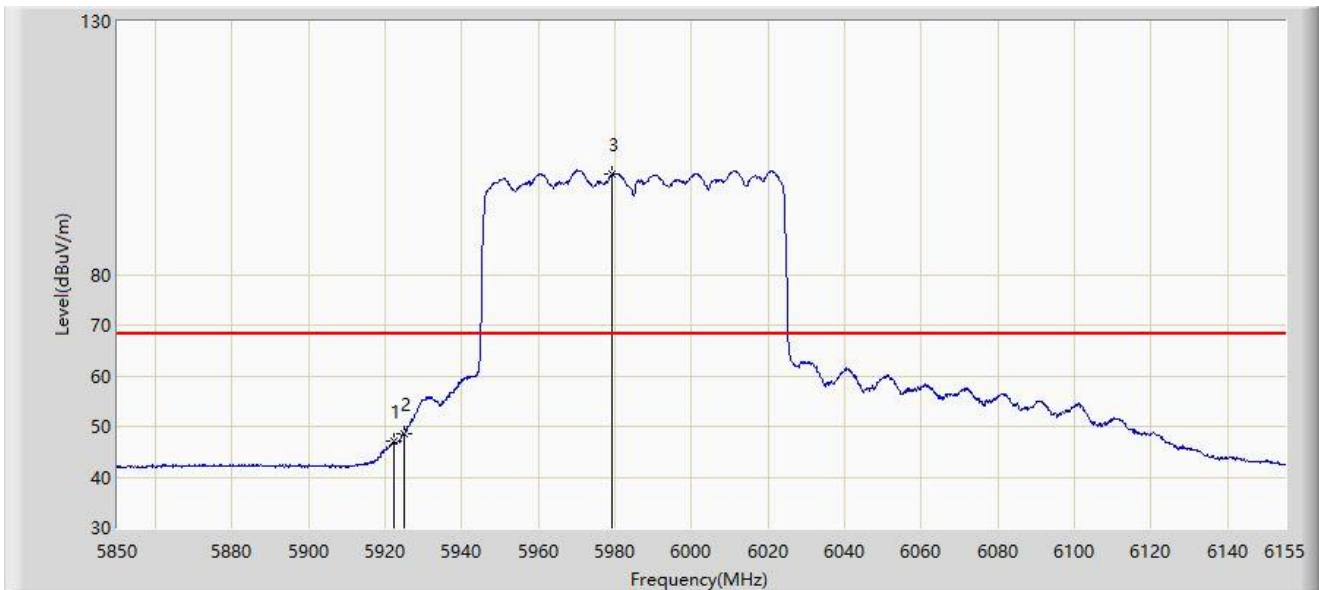


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5922.132        | 47.167                 | 41.917               | -21.033     | 68.200         | 5.251         | AV   |
| 2  | *    | 5925.000        | 48.534                 | 43.264               | -19.666     | 68.200         | 5.271         | AV   |
| 3  |      | 5979.320        | 99.721                 | 94.474               | N/A         | N/A            | 5.247         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC1                                     | Test Date: 2023-11-18 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

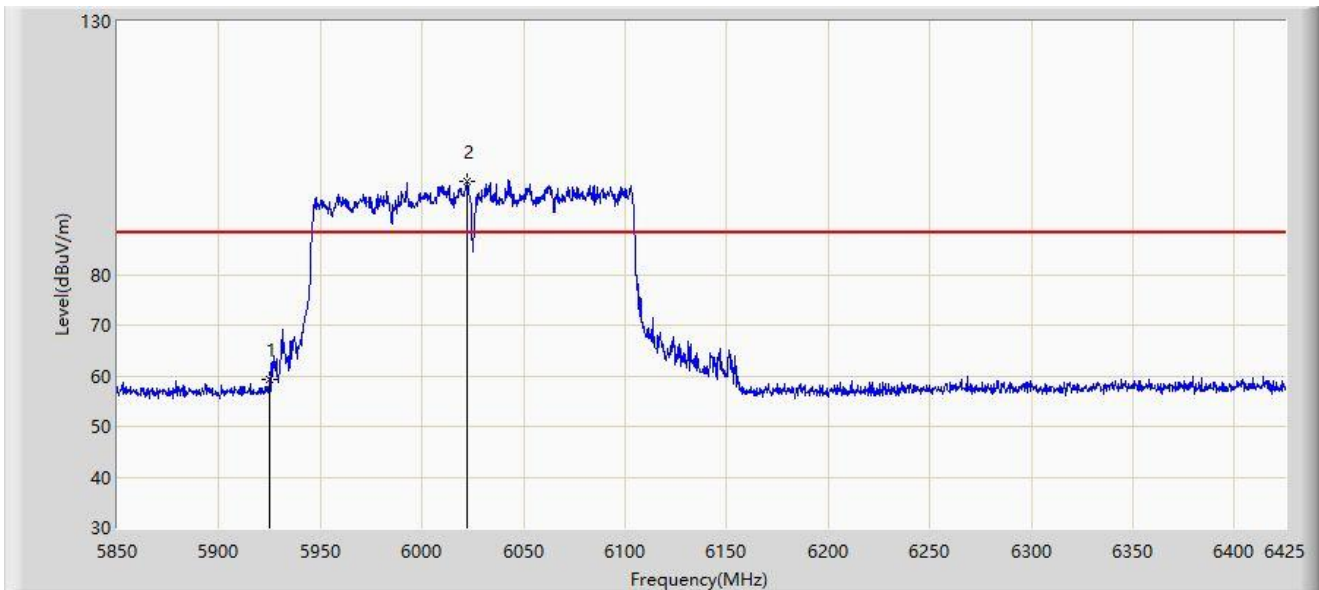


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 59.379                 | 54.748               | -28.821     | 88.200         | 4.631         | PK   |
| 2  |      | 6022.500        | 98.521                 | 93.846               | N/A         | N/A            | 4.675         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC1                                     | Test Date: 2023-11-18 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

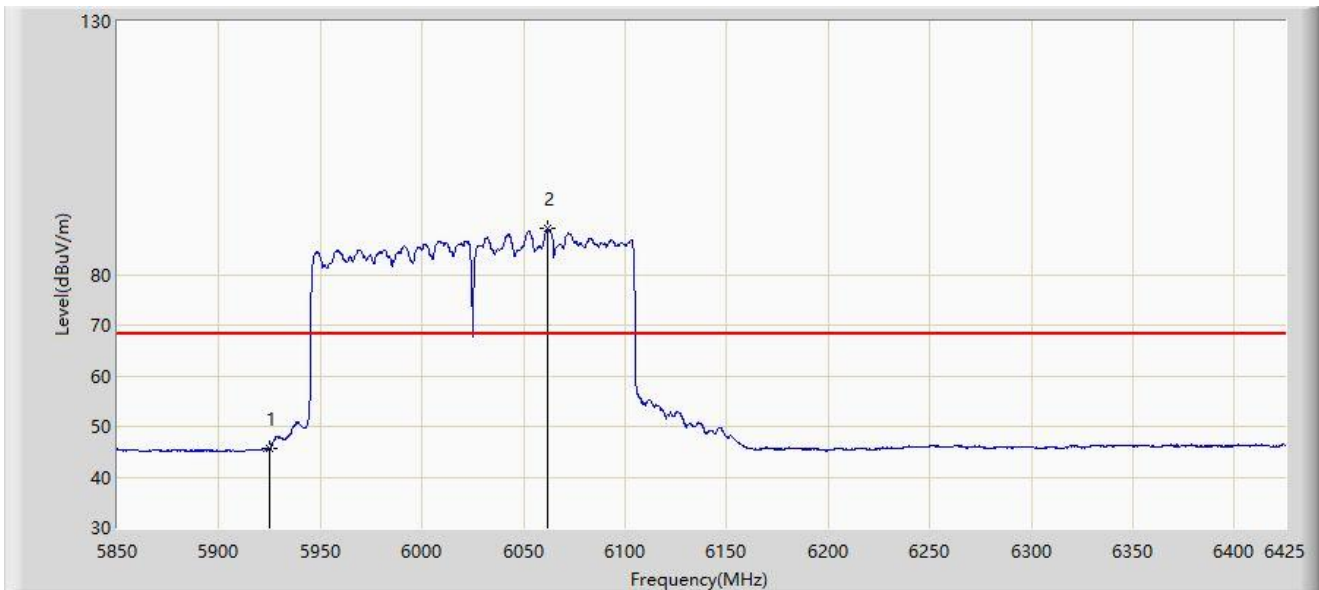


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 45.688                 | 41.057               | -22.512     | 68.200         | 4.631         | AV   |
| 2  |      | 6062.175        | 88.986                 | 84.216               | N/A         | N/A            | 4.770         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC1                                     | Test Date: 2023-11-18 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

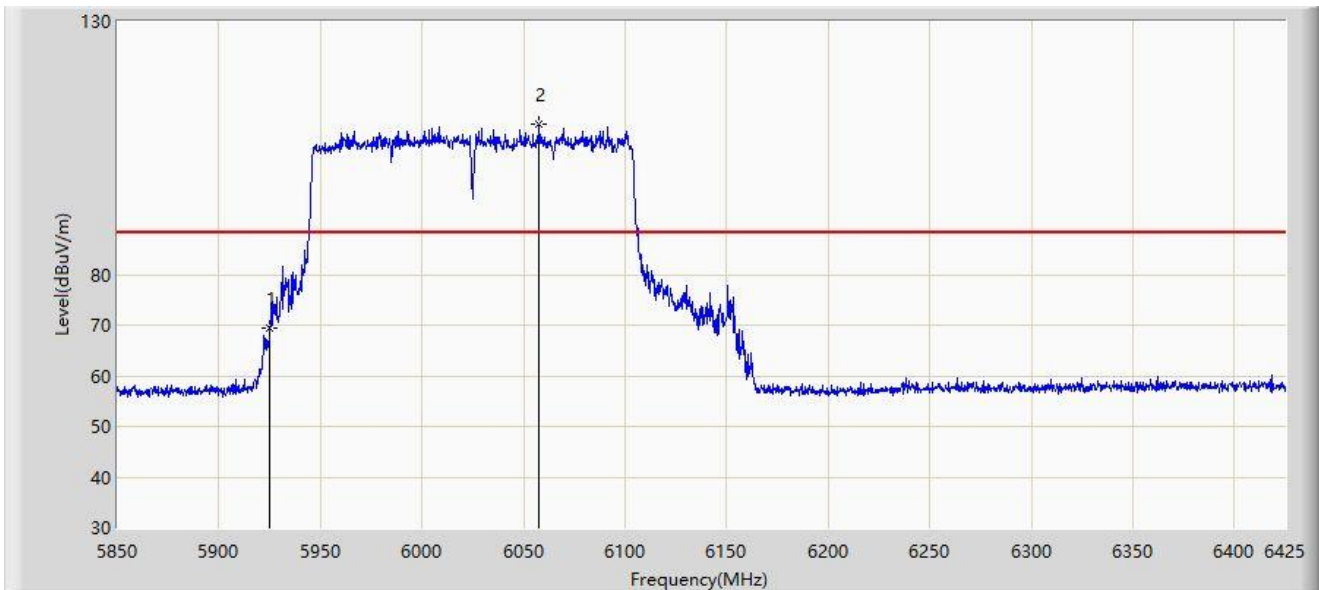


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 69.395                 | 64.764               | -18.805     | 88.200         | 4.631         | PK   |
| 2  |      | 6057.862        | 109.847                | 105.114              | N/A         | N/A            | 4.733         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC1                                     | Test Date: 2023-11-18 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

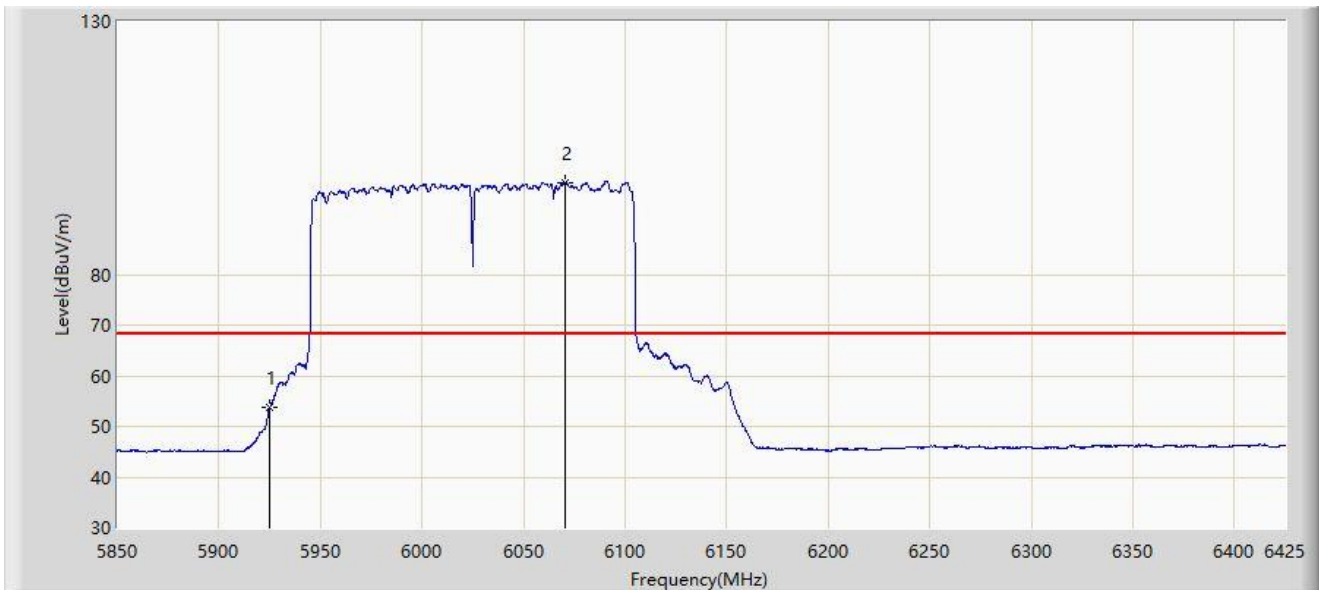

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 53.789                 | 49.158               | -14.411     | 68.200         | 4.631         | AV   |
| 2  |      | 6070.225        | 98.173                 | 93.342               | N/A         | N/A            | 4.830         | AV   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

**ANT-348:**

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-02 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: Horn 3117_1-18GHz                        | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

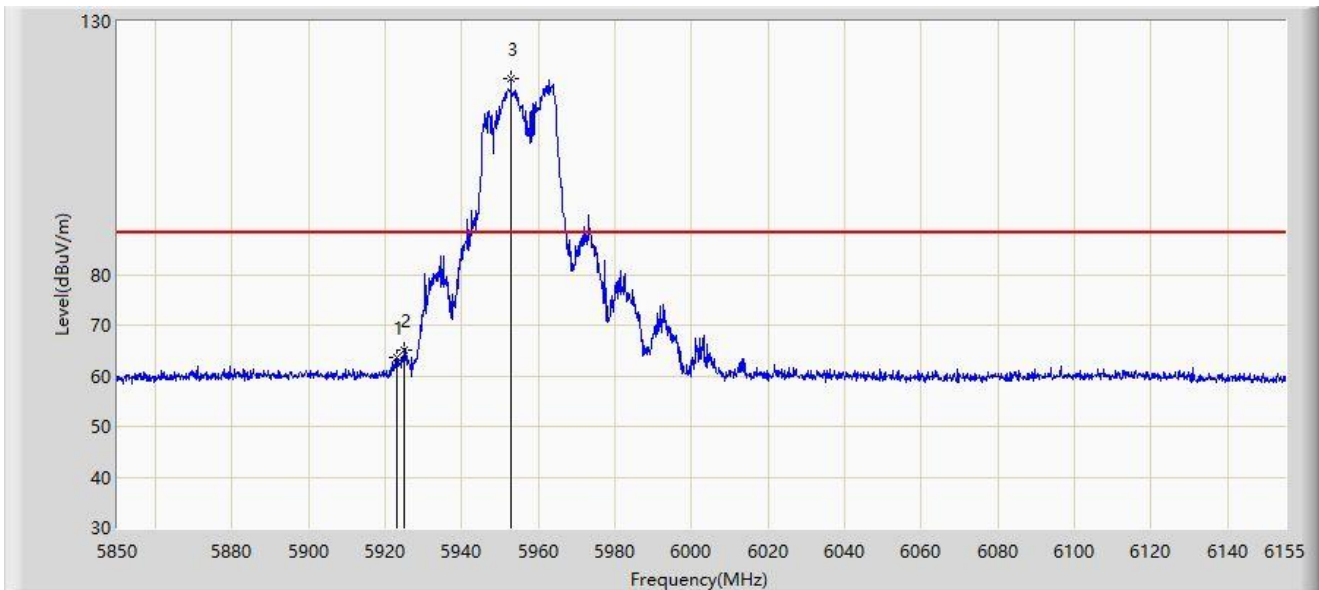


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5923.047        | 63.501                 | 55.656               | -24.699     | 88.200         | 7.845         | PK   |
| 2  | *    | 5925.000        | 65.195                 | 57.335               | -23.005     | 88.200         | 7.861         | PK   |
| 3  |      | 5952.785        | 118.792                | 110.779              | N/A         | N/A            | 8.013         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-02 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: Horn 3117_1-18GHz                        | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

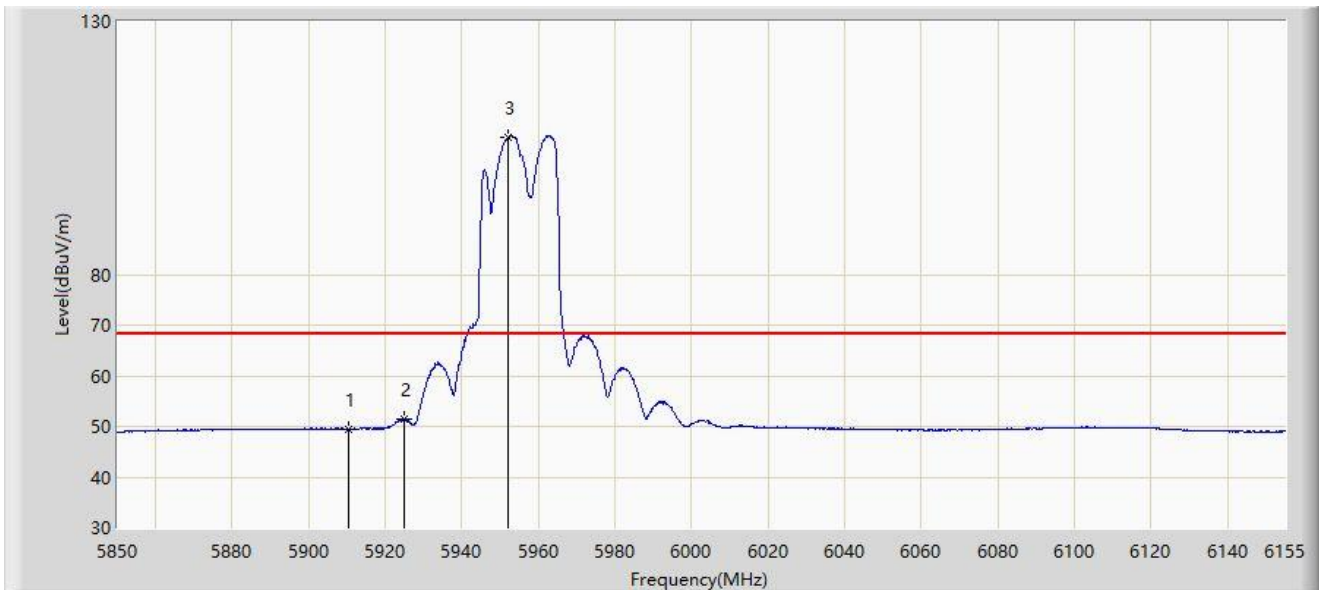


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5910.542        | 49.474                 | 41.724               | -18.726     | 68.200         | 7.749         | AV   |
| 2  | *    | 5925.000        | 51.464                 | 43.604               | -16.736     | 68.200         | 7.861         | AV   |
| 3  |      | 5952.175        | 107.238                | 99.227               | N/A         | N/A            | 8.011         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-02 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: Horn 3117_1-18GHz                        | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

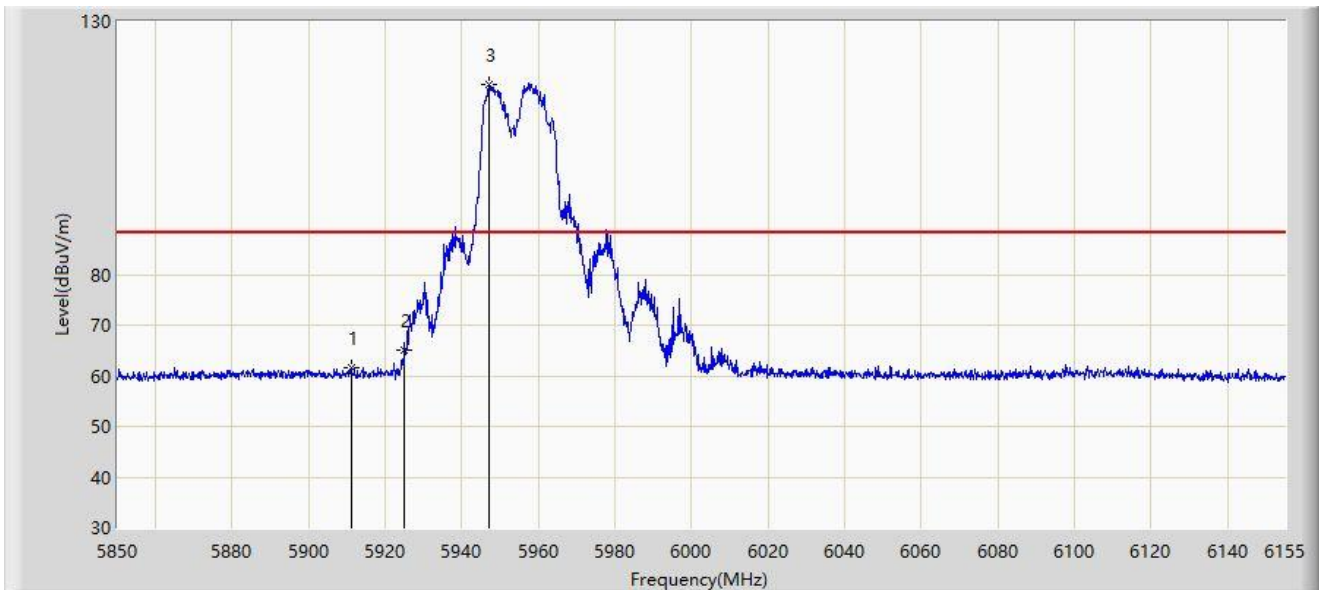


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5911.000        | 61.605                 | 53.854               | -26.595     | 88.200         | 7.752         | PK   |
| 2  | *    | 5925.000        | 65.080                 | 57.220               | -23.120     | 88.200         | 7.861         | PK   |
| 3  |      | 5946.990        | 117.499                | 109.507              | N/A         | N/A            | 7.993         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-02 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: Horn 3117_1-18GHz                        | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

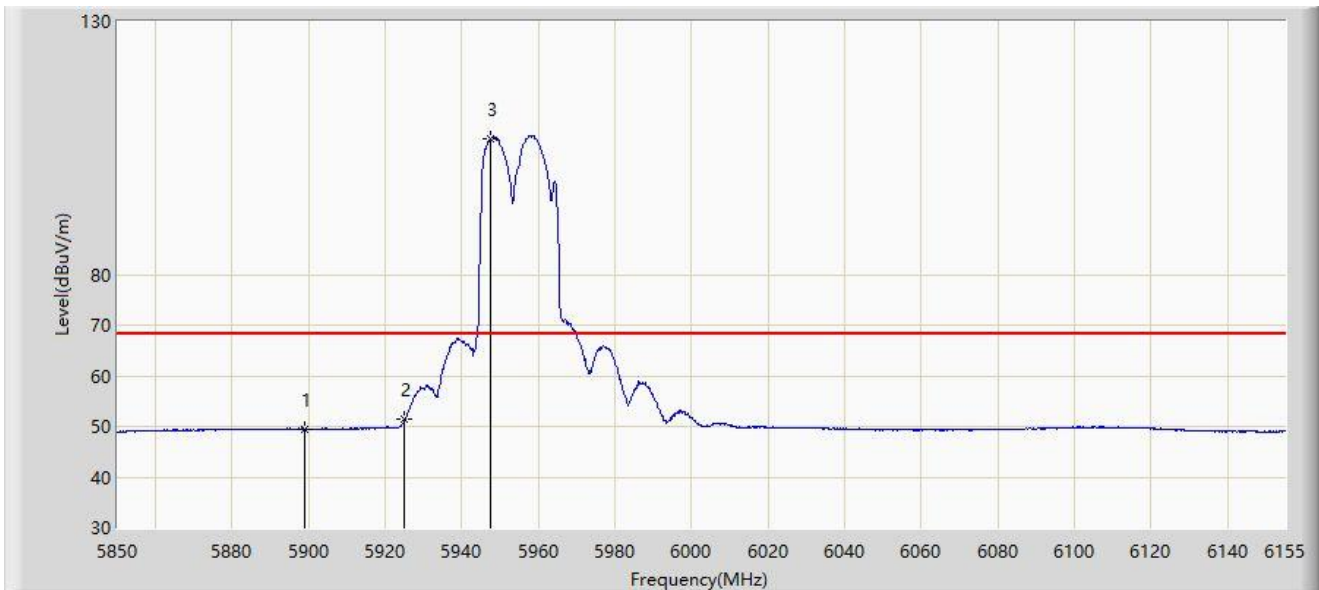


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5899.105        | 49.520                 | 41.810               | -18.680     | 68.200         | 7.710         | AV   |
| 2  | *    | 5925.000        | 51.362                 | 43.502               | -16.838     | 68.200         | 7.861         | AV   |
| 3  |      | 5947.600        | 106.908                | 98.913               | N/A         | N/A            | 7.995         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-02 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: Horn 3117_1-18GHz                        | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

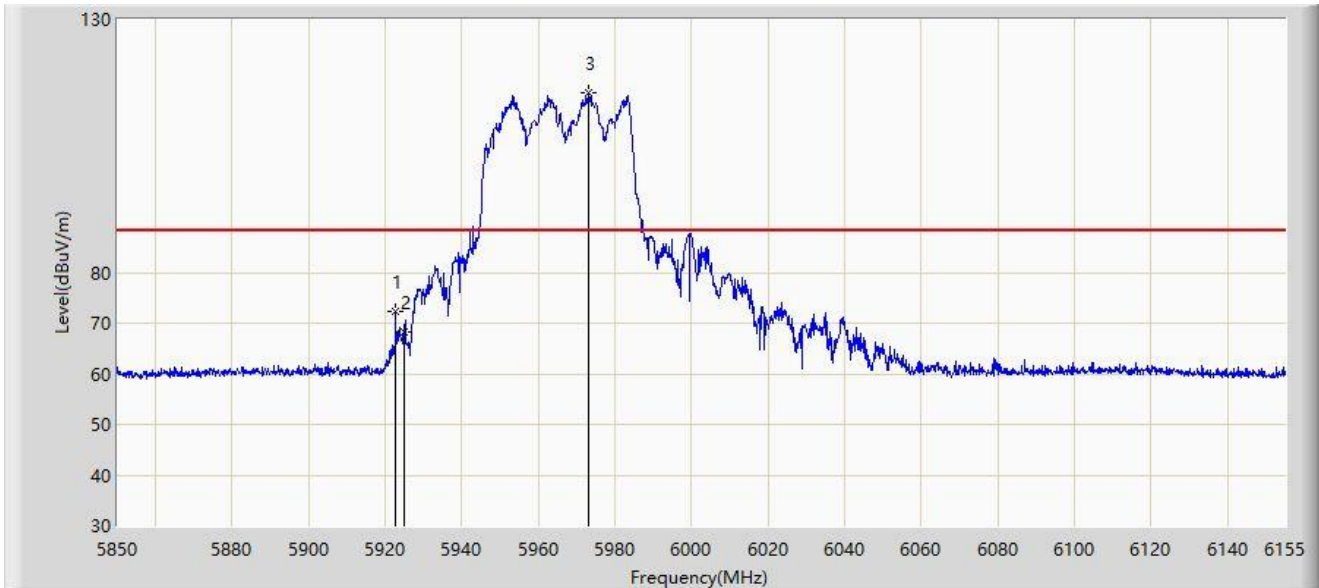


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5922.590        | 72.397                 | 64.556               | -15.803     | 88.200         | 7.841         | PK   |
| 2  |      | 5925.000        | 68.273                 | 60.413               | -19.927     | 88.200         | 7.861         | PK   |
| 3  |      | 5973.220        | 115.388                | 107.468              | N/A         | N/A            | 7.920         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-02 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: Horn 3117_1-18GHz                        | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

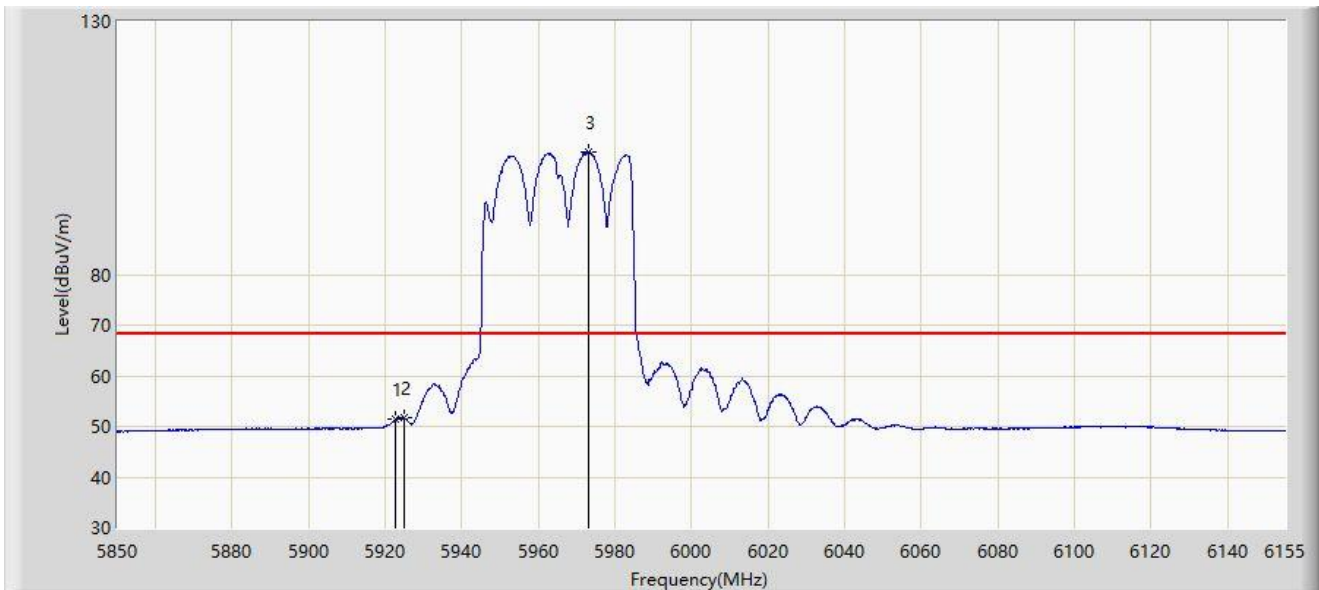


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5922.743        | 51.324                 | 43.482               | -16.876     | 68.200         | 7.842         | AV   |
| 2  | *    | 5925.000        | 51.608                 | 43.748               | -16.592     | 68.200         | 7.861         | AV   |
| 3  |      | 5973.220        | 104.102                | 96.182               | N/A         | N/A            | 7.920         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-02 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: Horn 3117_1-18GHz                        | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

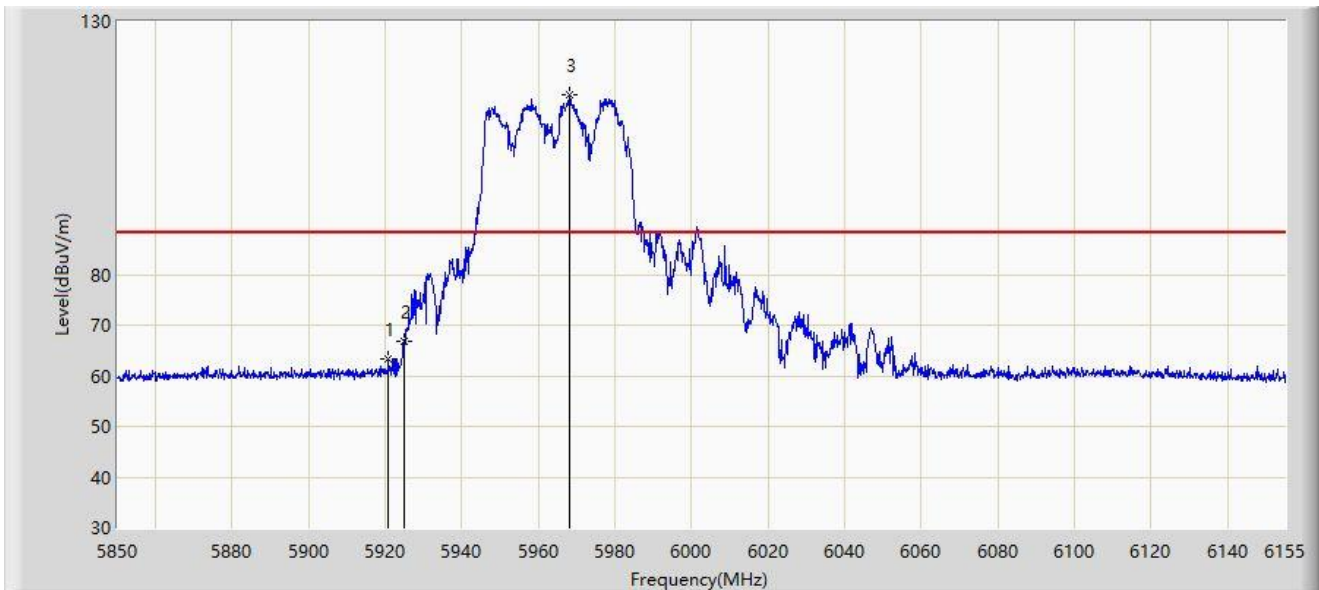


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5920.760        | 63.266                 | 55.441               | -24.934     | 88.200         | 7.826         | PK   |
| 2  | *    | 5925.000        | 66.942                 | 59.082               | -21.258     | 88.200         | 7.861         | PK   |
| 3  |      | 5968.187        | 115.562                | 107.597              | N/A         | N/A            | 7.966         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-02 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: Horn 3117_1-18GHz                        | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

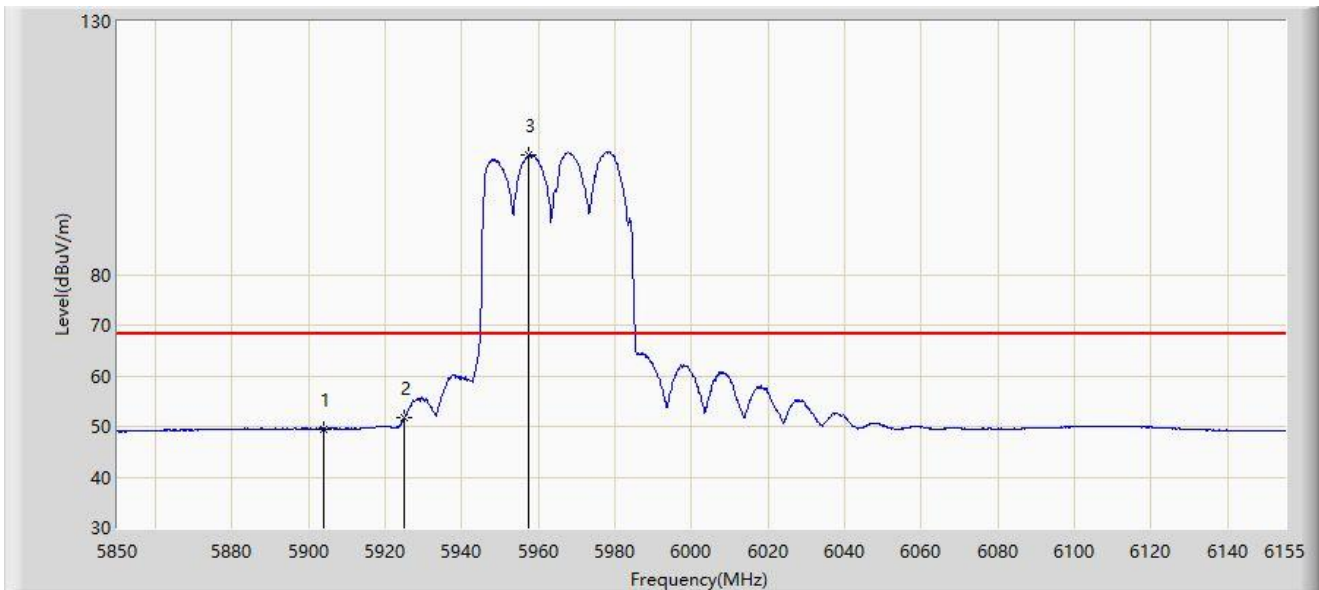


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5903.985        | 49.494                 | 41.768               | -18.706     | 68.200         | 7.726         | AV   |
| 2  | *    | 5925.000        | 51.722                 | 43.862               | -16.478     | 68.200         | 7.861         | AV   |
| 3  |      | 5957.513        | 103.507                | 95.477               | N/A         | N/A            | 8.031         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-02 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: Horn 3117_1-18GHz                        | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

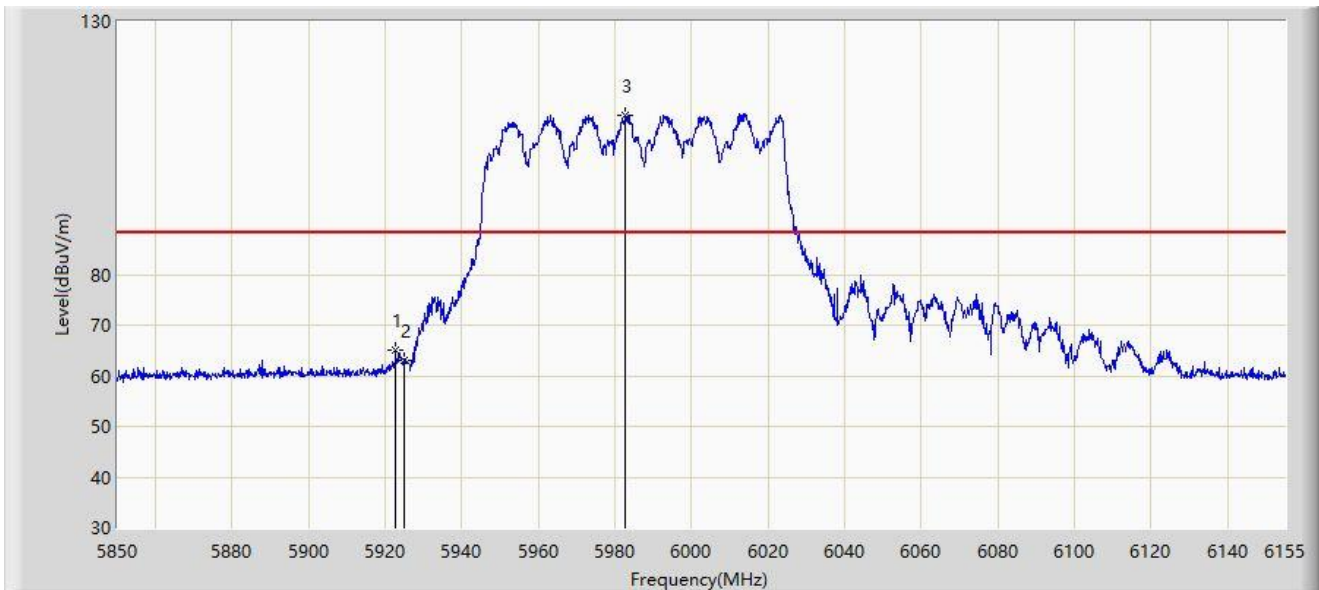


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5922.590        | 64.942                 | 57.101               | -23.258     | 88.200         | 7.841         | PK   |
| 2  |      | 5925.000        | 63.160                 | 55.300               | -25.040     | 88.200         | 7.861         | PK   |
| 3  |      | 5982.675        | 111.535                | 103.651              | N/A         | N/A            | 7.884         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-02 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: Horn 3117_1-18GHz                        | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

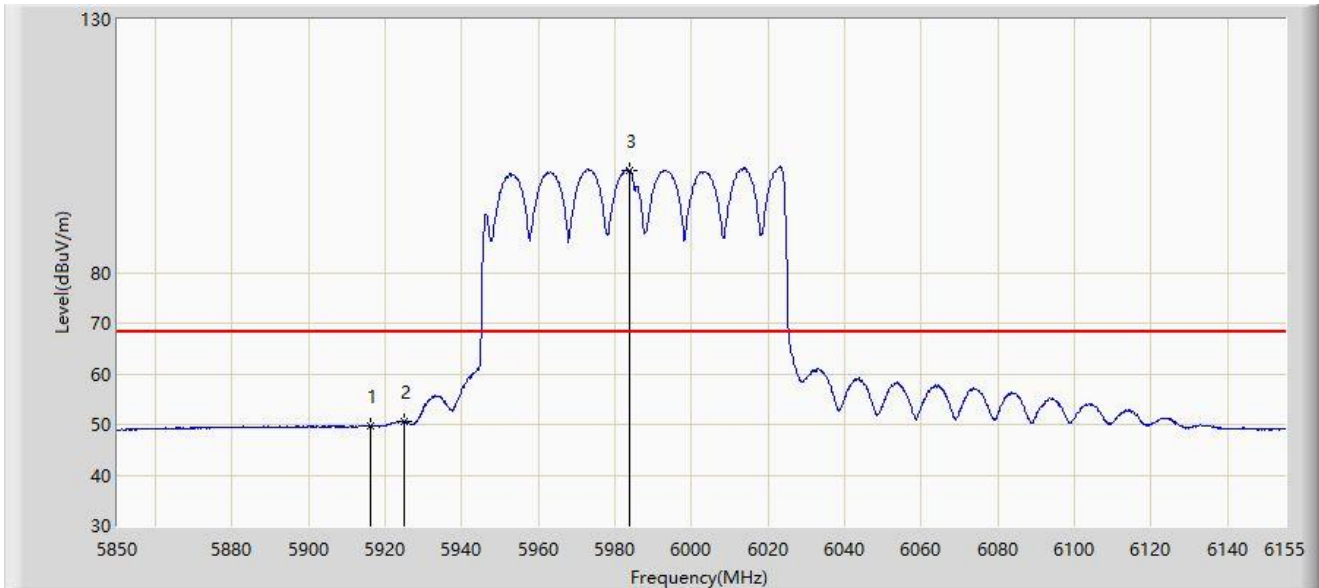


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5916.033        | 49.739                 | 41.954               | -18.461     | 68.200         | 7.785         | AV   |
| 2  | *    | 5925.000        | 50.466                 | 42.606               | -17.734     | 68.200         | 7.861         | AV   |
| 3  |      | 5983.590        | 100.210                | 92.317               | N/A         | N/A            | 7.893         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-02 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: Horn 3117_1-18GHz                        | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

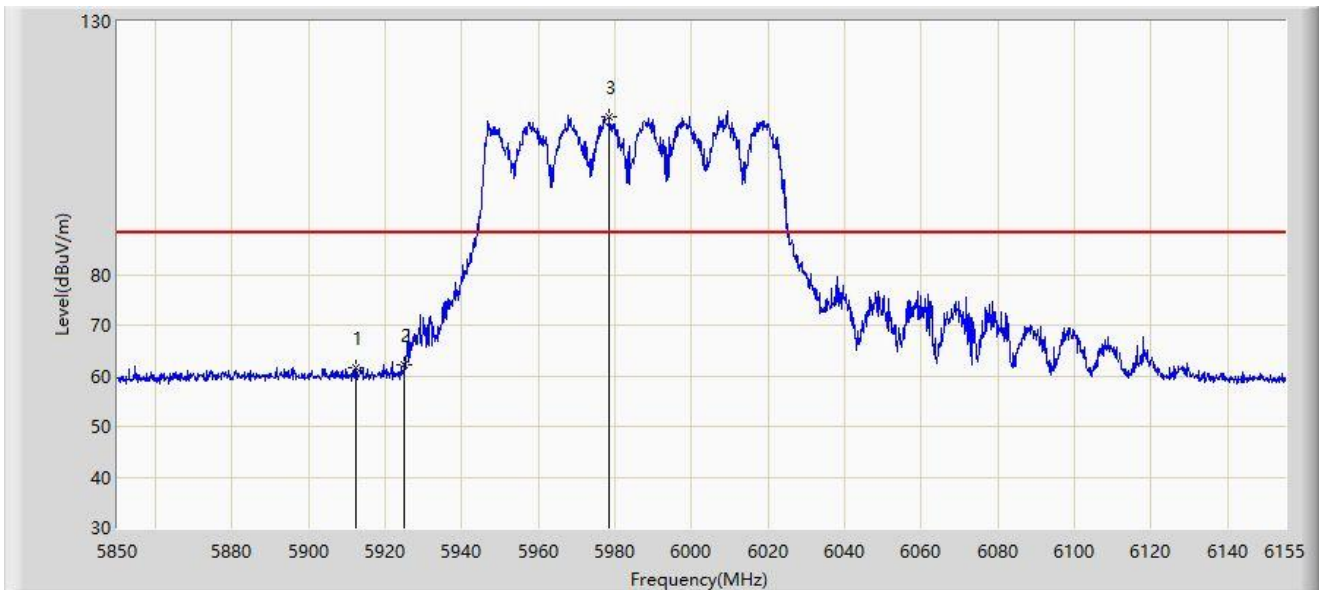


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5912.220        | 61.724                 | 53.968               | -26.476     | 88.200         | 7.756         | PK   |
| 2  | *    | 5925.000        | 62.126                 | 54.266               | -26.074     | 88.200         | 7.861         | PK   |
| 3  |      | 5978.558        | 111.042                | 103.167              | N/A         | N/A            | 7.875         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-08-02 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Dick Shen   |
| Probe: Horn 3117_1-18GHz                        | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

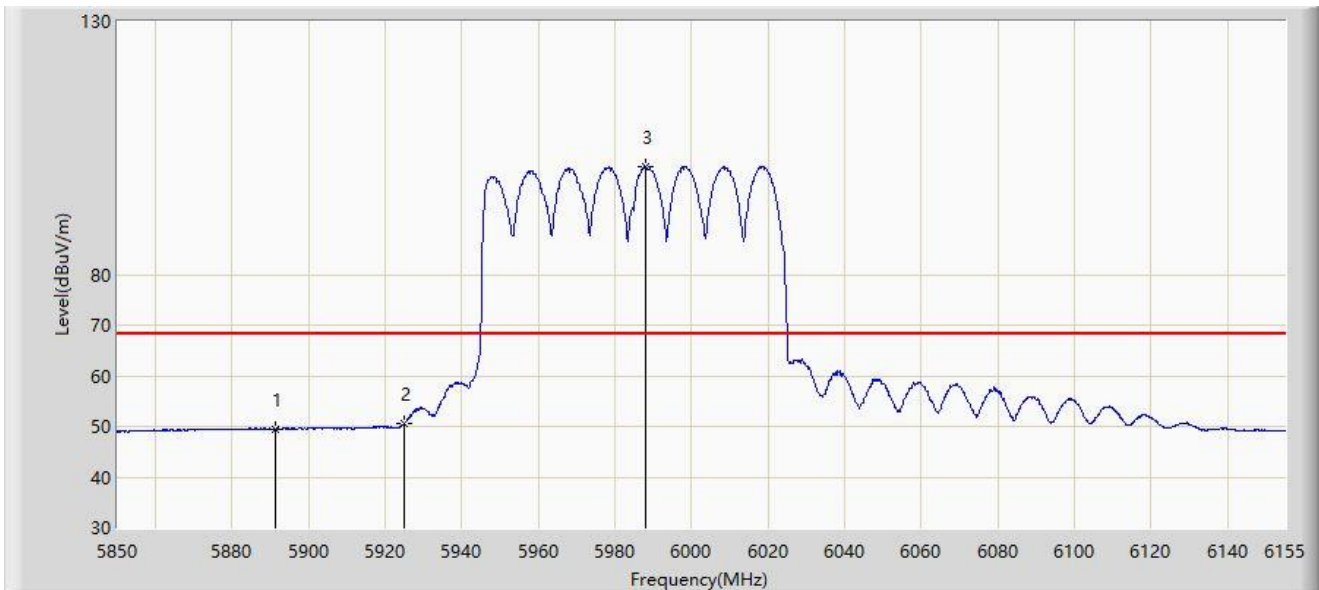


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5891.175        | 49.498                 | 41.777               | -18.702     | 68.200         | 7.721         | AV   |
| 2  | *    | 5925.000        | 50.706                 | 42.846               | -17.494     | 68.200         | 7.861         | AV   |
| 3  |      | 5987.860        | 101.302                | 93.370               | N/A         | N/A            | 7.932         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC1                                     | Test Date: 2023-11-17 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

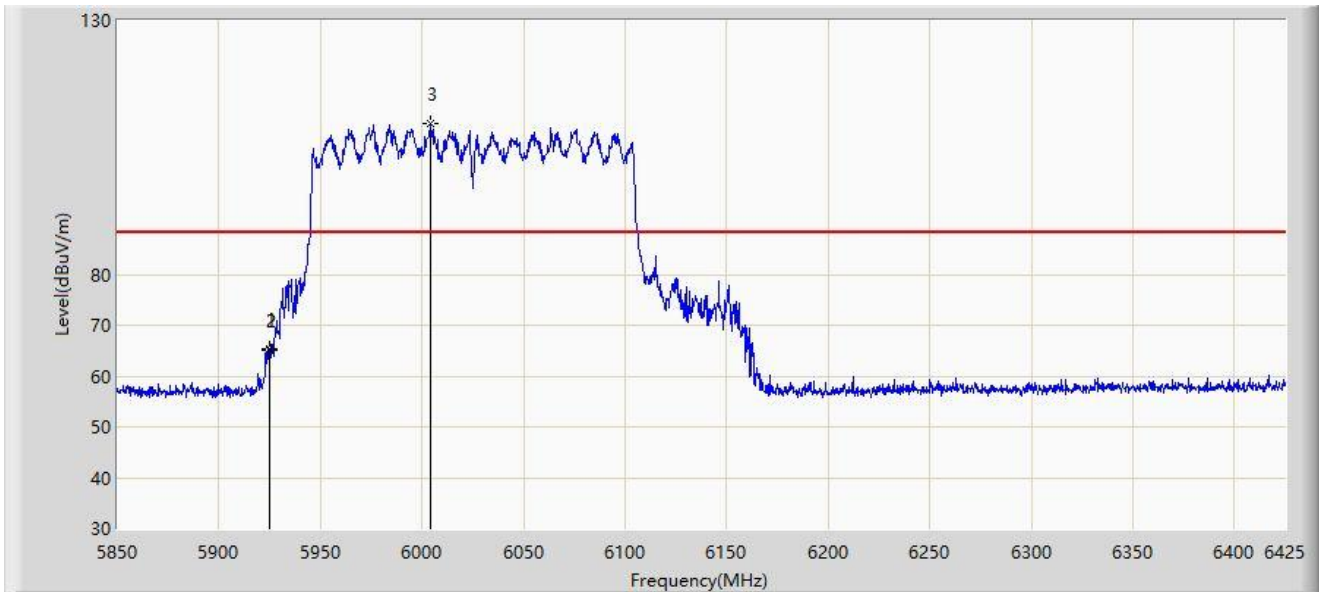


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5924.750        | 65.443                 | 60.812               | -22.757     | 88.200         | 4.631         | PK   |
| 2  |      | 5925.000        | 64.992                 | 60.361               | -23.208     | 88.200         | 4.631         | PK   |
| 3  |      | 6004.100        | 109.807                | 104.986              | N/A         | N/A            | 4.822         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC1                                     | Test Date: 2023-11-17 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

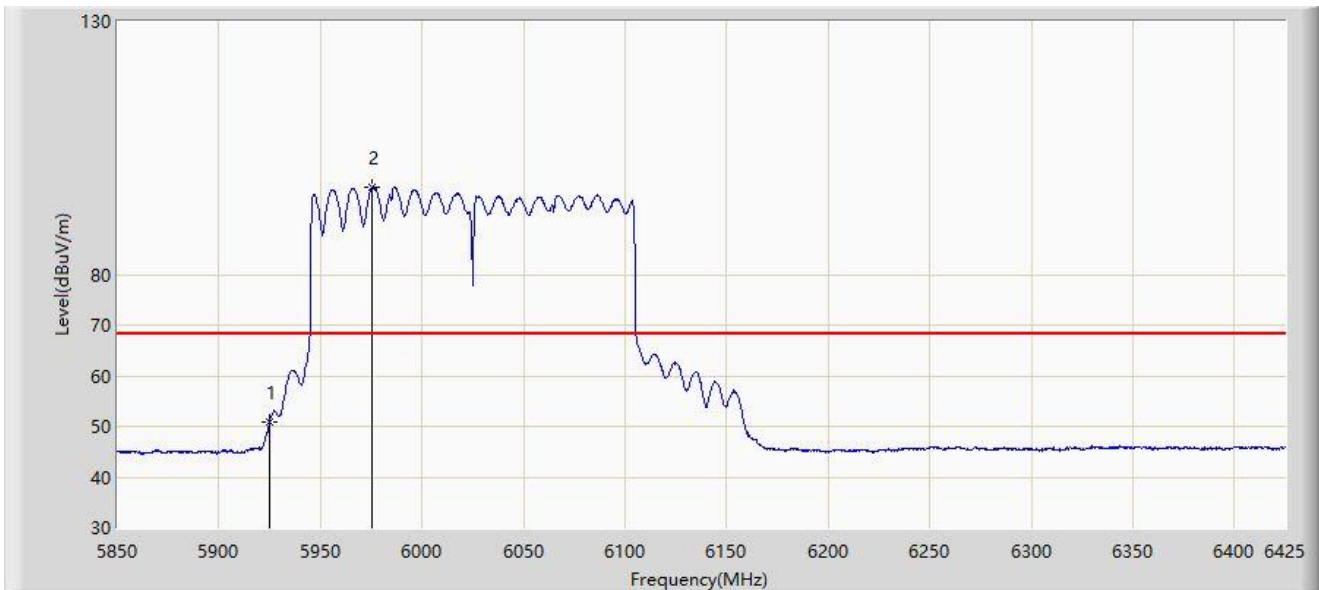


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 50.938                 | 46.307               | -17.262     | 68.200         | 4.631         | AV   |
| 2  |      | 5975.638        | 97.338                 | 92.754               | N/A         | N/A            | 4.585         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC1                                     | Test Date: 2023-11-17 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

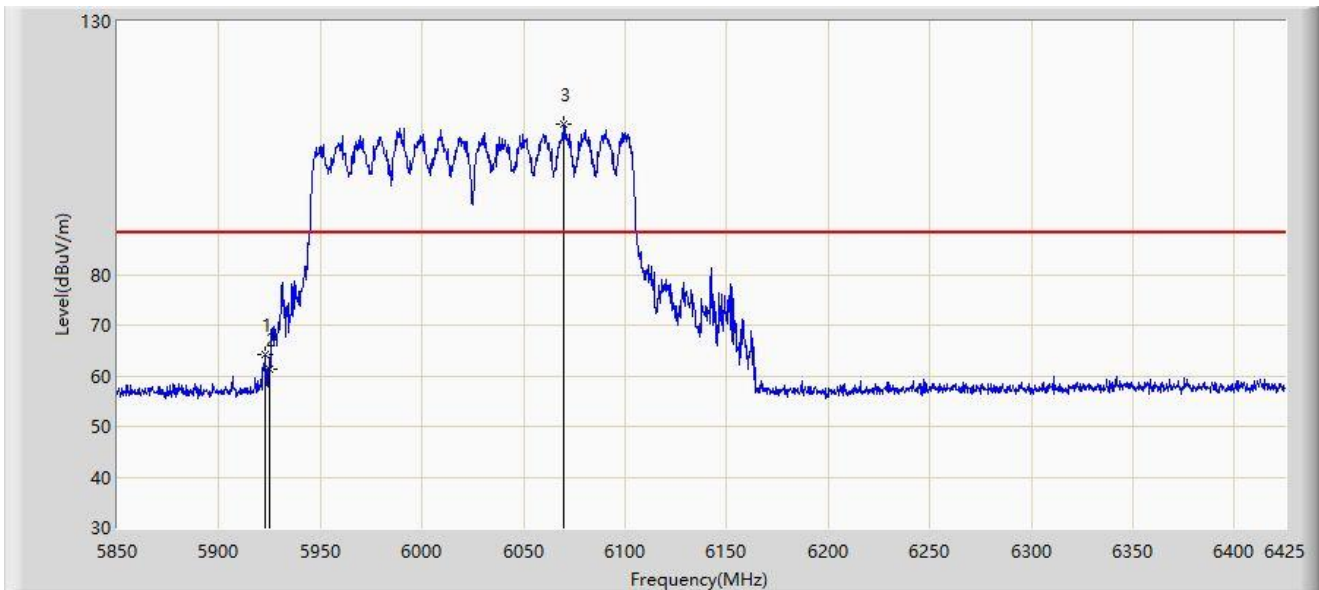


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5922.450        | 64.161                 | 59.528               | -24.039     | 88.200         | 4.634         | PK   |
| 2  |      | 5925.000        | 61.421                 | 56.790               | -26.779     | 88.200         | 4.631         | PK   |
| 3  |      | 6069.650        | 109.694                | 104.865              | N/A         | N/A            | 4.829         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC1                                     | Test Date: 2023-11-17 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

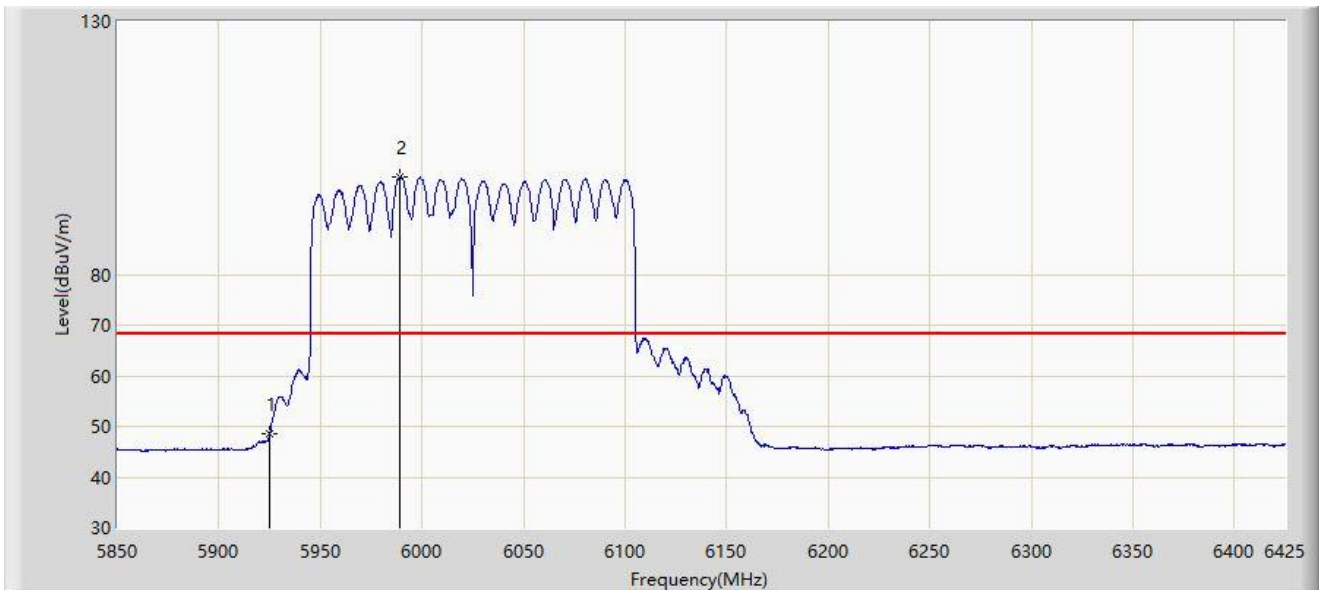

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 48.537                 | 43.906               | -19.663     | 68.200         | 4.631         | AV   |
| 2  |      | 5988.862        | 99.220                 | 94.488               | N/A         | N/A            | 4.732         | AV   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

### A.9 AC Conducted Emissions Test Result

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-SR2                                    | Test Date: 2023-08-24 |
| Limit: FCC_Part15.207_CE_AC Power               | Engineer: Linda Wei   |
| Probe: ENV216_101683_Filter Off_C               | Polarity: Line        |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 6625MHz |                       |

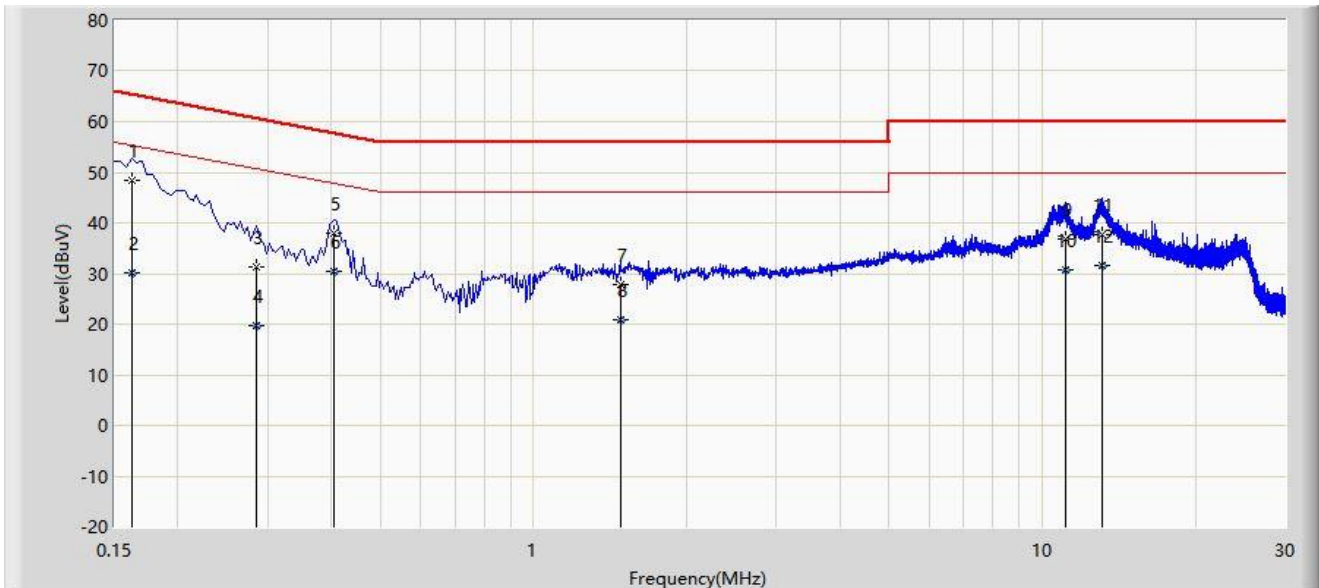


| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  | *    | 0.162           | 48.475               | 38.758               | -16.886     | 65.361       | 9.717       | QP   |
| 2  |      | 0.162           | 30.272               | 20.555               | -25.089     | 55.361       | 9.717       | AV   |
| 3  |      | 0.286           | 31.274               | 21.527               | -29.366     | 60.640       | 9.747       | QP   |
| 4  |      | 0.286           | 19.653               | 9.906                | -30.987     | 50.640       | 9.747       | AV   |
| 5  |      | 0.406           | 38.086               | 28.288               | -19.643     | 57.730       | 9.798       | QP   |
| 6  |      | 0.406           | 30.456               | 20.657               | -17.274     | 47.730       | 9.798       | AV   |
| 7  |      | 1.482           | 27.874               | 17.788               | -28.126     | 56.000       | 10.086      | QP   |
| 8  |      | 1.482           | 20.729               | 10.643               | -25.271     | 46.000       | 10.086      | AV   |
| 9  |      | 11.134          | 36.862               | 26.565               | -23.138     | 60.000       | 10.297      | QP   |
| 10 |      | 11.134          | 30.751               | 20.454               | -19.249     | 50.000       | 10.297      | AV   |
| 11 |      | 13.074          | 37.685               | 27.391               | -22.315     | 60.000       | 10.294      | QP   |
| 12 |      | 13.074          | 31.723               | 21.429               | -18.277     | 50.000       | 10.294      | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-SR2                                    | Test Date: 2023-08-24 |
| Limit: FCC_Part15.207_CE_AC Power               | Engineer: Linda Wei   |
| Probe: ENV216_101683_Filter Off_C               | Polarity: Neutral     |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 6625MHz |                       |

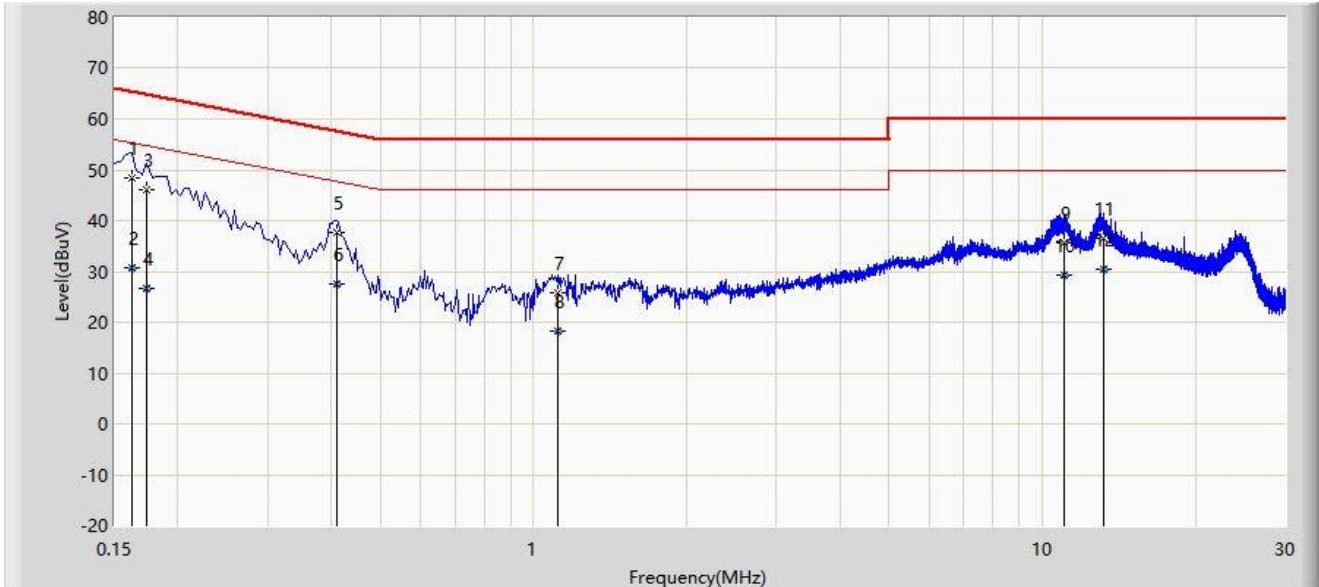

| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  | *    | 0.162           | 48.425               | 38.718               | -16.936     | 65.361       | 9.707       | QP   |
| 2  |      | 0.162           | 30.665               | 20.958               | -24.696     | 55.361       | 9.707       | AV   |
| 3  |      | 0.174           | 46.057               | 36.348               | -18.710     | 64.767       | 9.710       | QP   |
| 4  |      | 0.174           | 26.797               | 17.088               | -27.970     | 54.767       | 9.710       | AV   |
| 5  |      | 0.410           | 37.747               | 27.957               | -19.901     | 57.648       | 9.790       | QP   |
| 6  |      | 0.410           | 27.508               | 17.718               | -20.140     | 47.648       | 9.790       | AV   |
| 7  |      | 1.114           | 25.693               | 15.622               | -30.307     | 56.000       | 10.071      | QP   |
| 8  |      | 1.114           | 18.224               | 8.153                | -27.776     | 46.000       | 10.071      | AV   |
| 9  |      | 11.050          | 35.667               | 25.380               | -24.333     | 60.000       | 10.287      | QP   |
| 10 |      | 11.050          | 29.404               | 19.116               | -20.596     | 50.000       | 10.287      | AV   |
| 11 |      | 13.194          | 36.514               | 26.230               | -23.486     | 60.000       | 10.284      | QP   |
| 12 |      | 13.194          | 30.440               | 20.156               | -19.560     | 50.000       | 10.284      | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## **Appendix B – Test Setup Photograph**

Refer to “2306RSU040-UT” file.

## **Appendix C – EUT Photograph**

Refer to “2306RSU040-UE” file.

\_\_\_\_\_ The End \_\_\_\_\_