



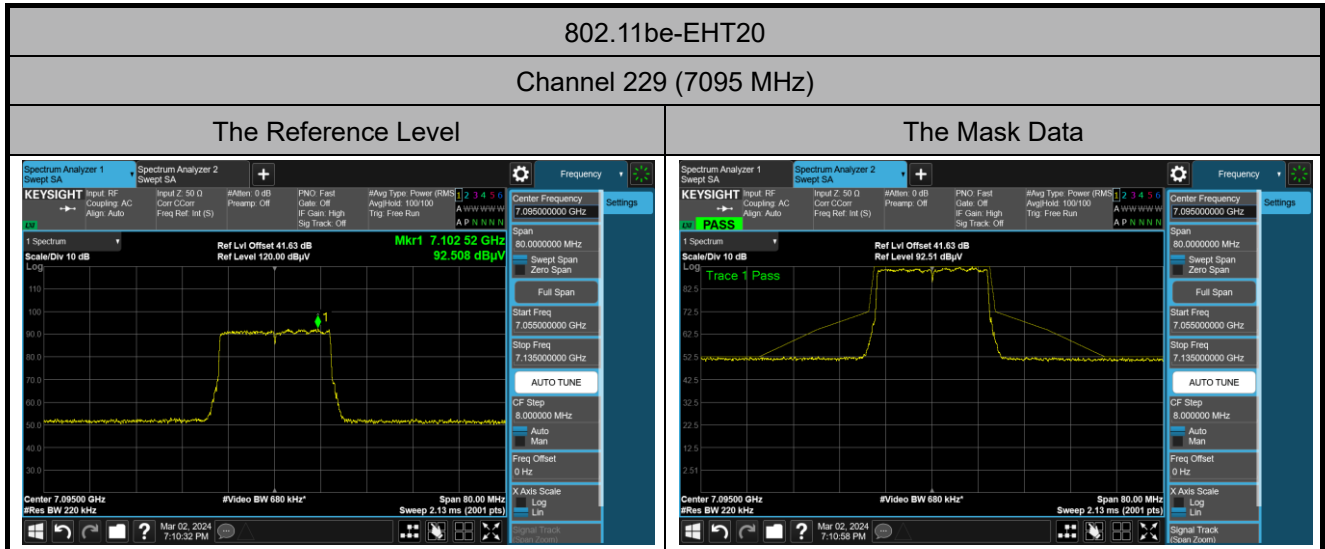


802.11be-EHT40

Channel 123 (6565 MHz)

The Reference Level

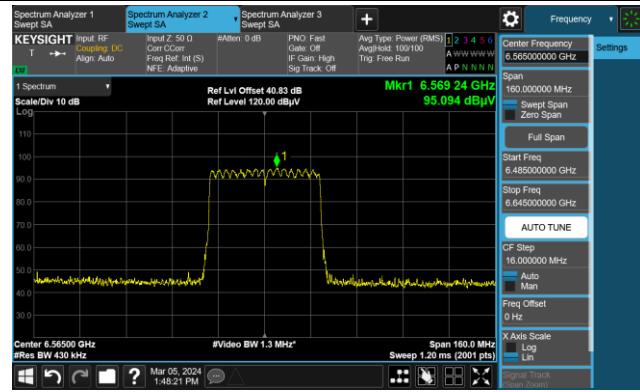


The Mask Data

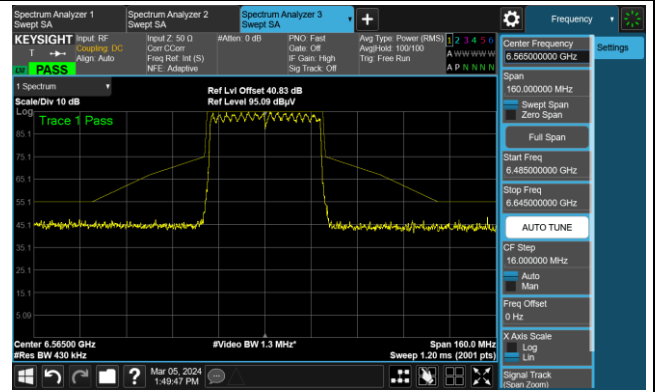


Channel 147 (6685 MHz)

The Reference Level

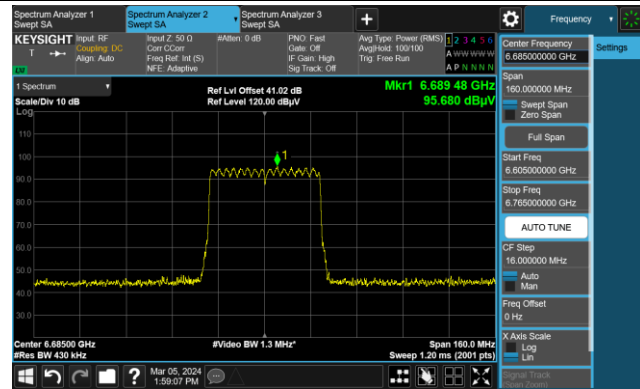


The Mask Data

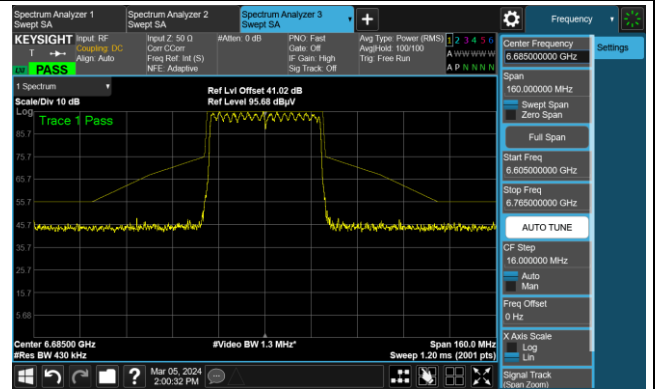


Channel 179 (6845 MHz)

The Reference Level

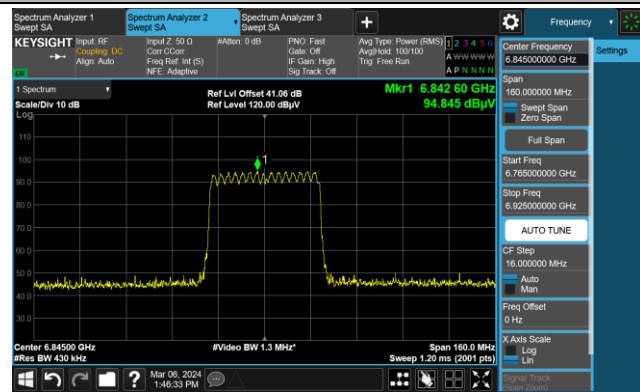


The Mask Data

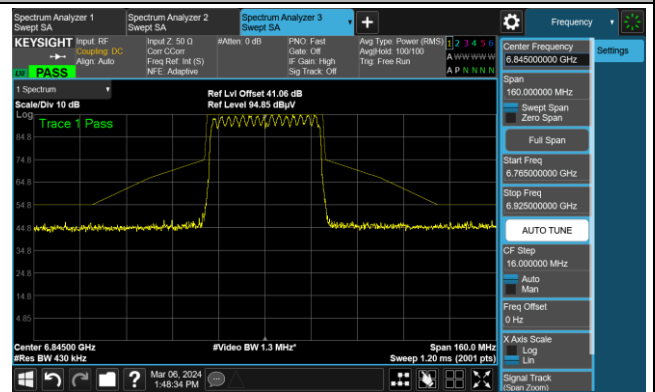


802.11be-EHT40

Channel 187 (6885 MHz)

The Reference Level

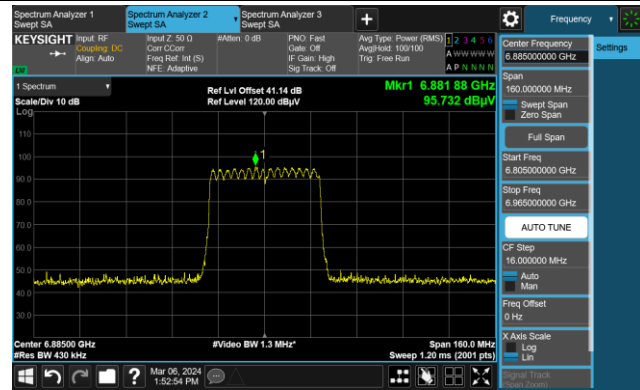


The Mask Data

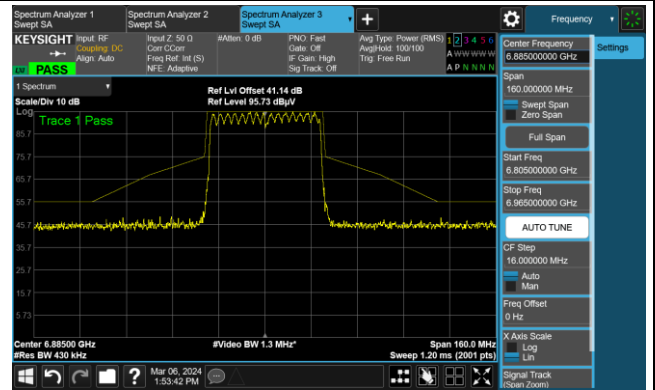


Channel 195 (6925 MHz)

The Reference Level

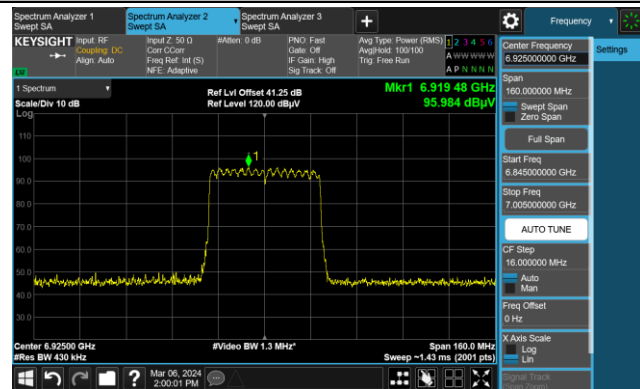


The Mask Data

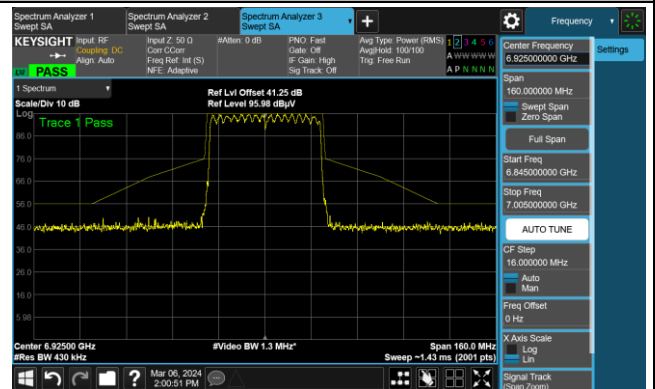


Channel 211 (7005 MHz)

The Reference Level

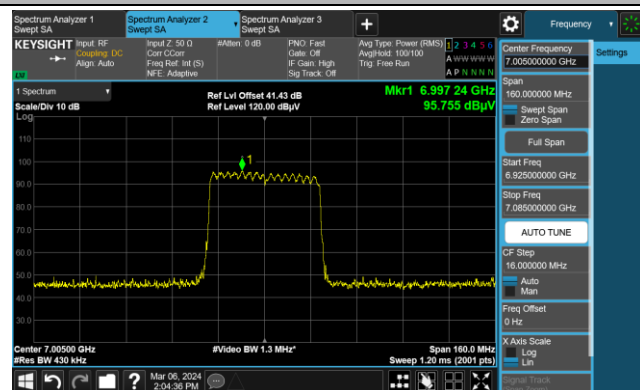


The Mask Data

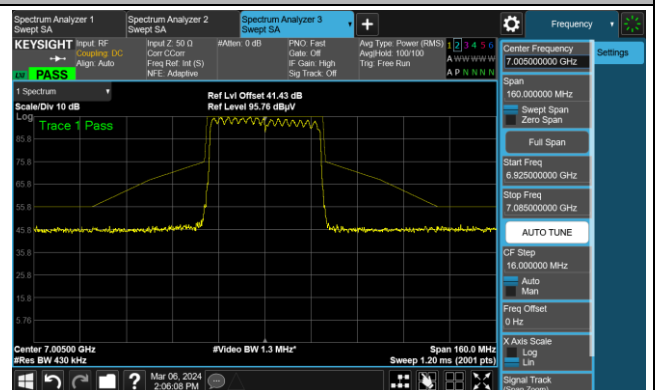


802.11be-EHT40

Channel 227 (7085 MHz)

The Reference Level

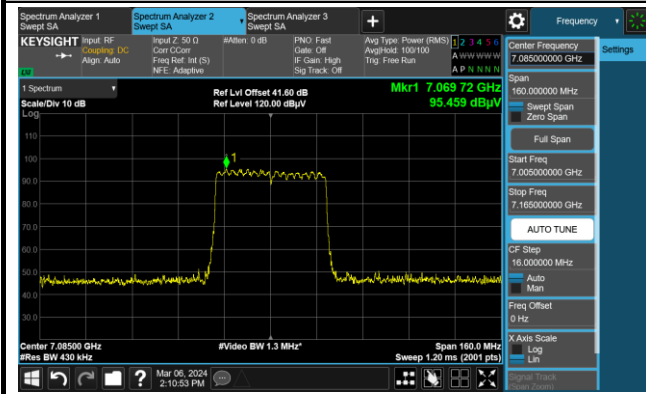


The Mask Data

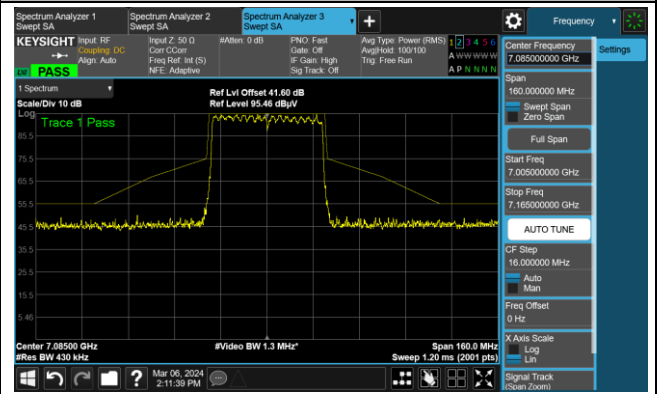


802.11be-EHT80

Channel 135 (6625 MHz)

The Reference Level

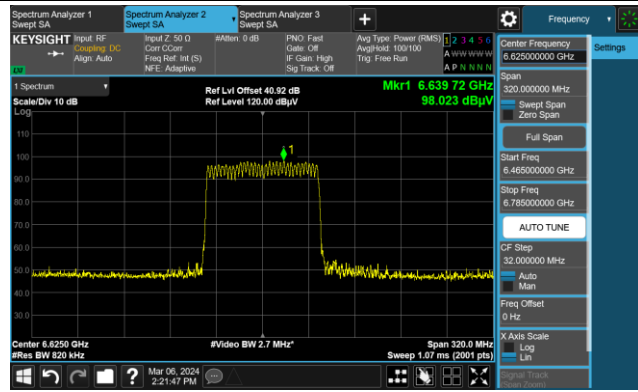


The Mask Data

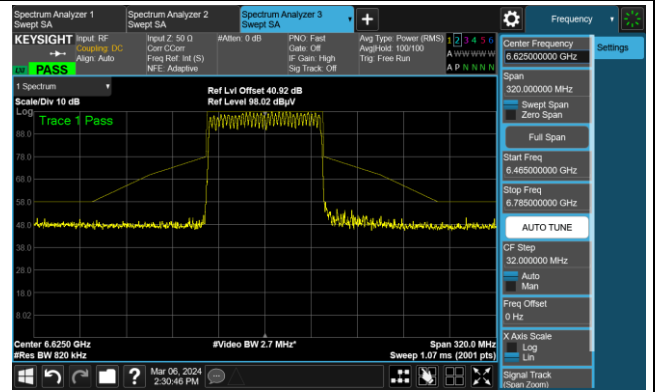


Channel 151 (6705 MHz)

The Reference Level

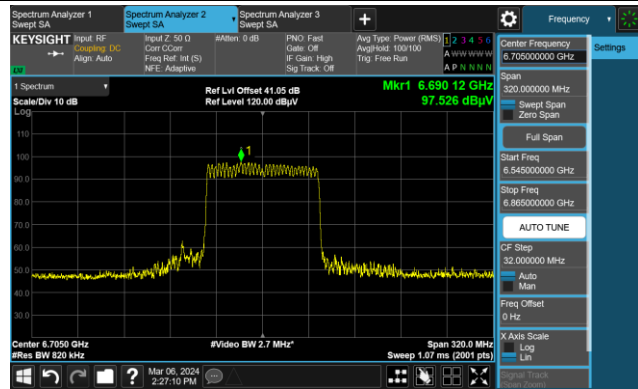


The Mask Data

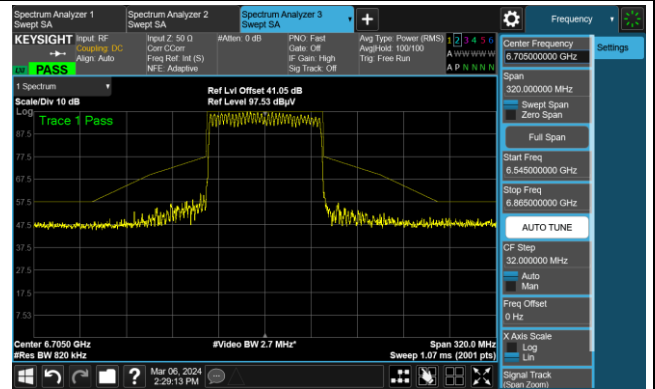


Channel 167 (6785 MHz)

The Reference Level

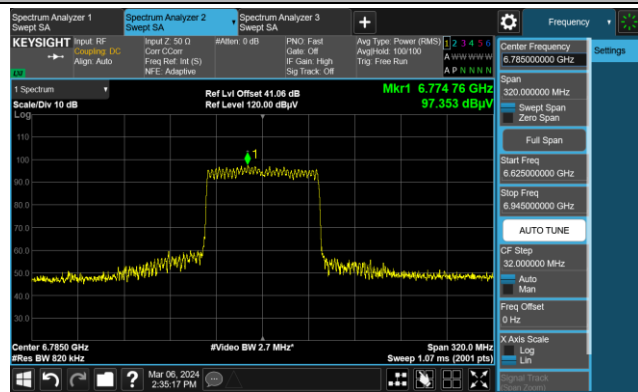


The Mask Data

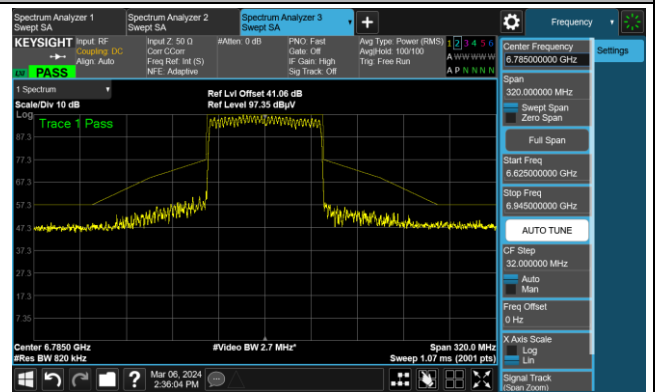


802.11be-EHT80

Channel 183 (6865 MHz)

The Reference Level

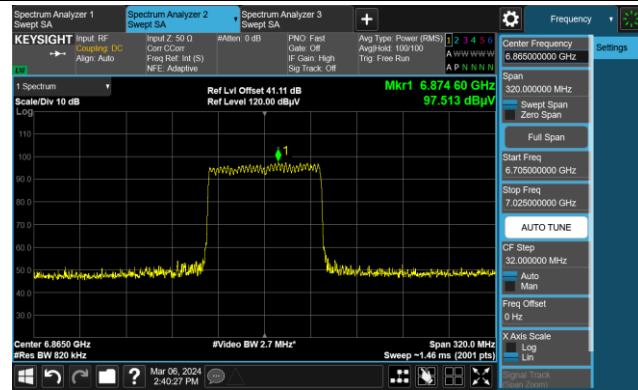


The Mask Data

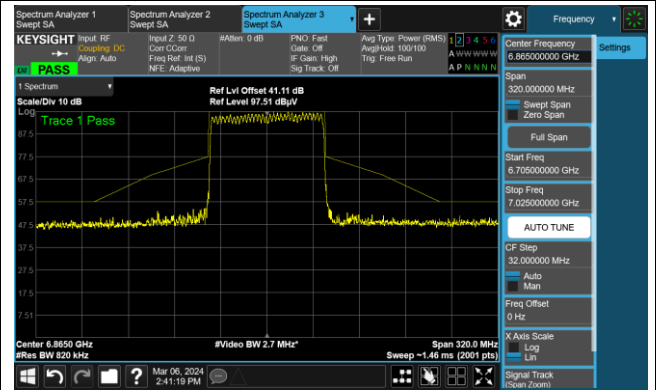


Channel 199 (6945 MHz)

The Reference Level

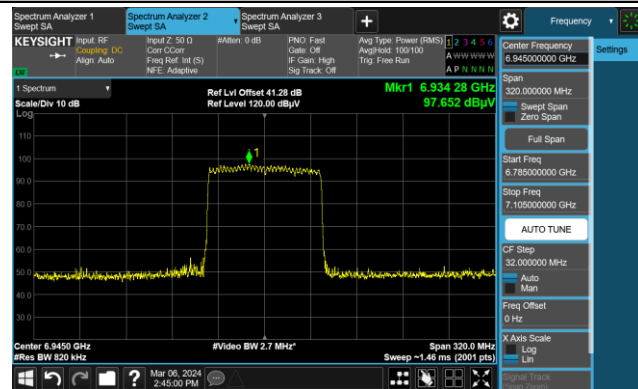


The Mask Data

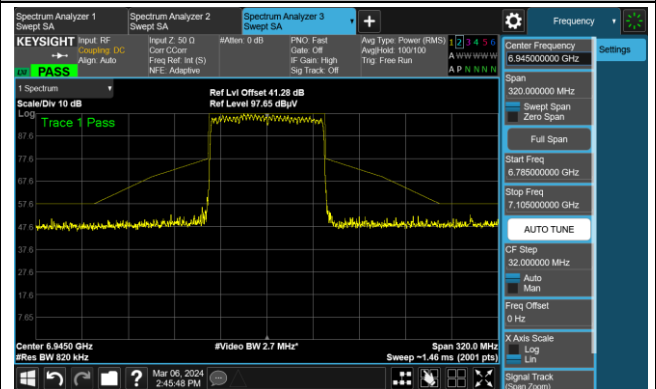


Channel 215 (7025 MHz)

The Reference Level

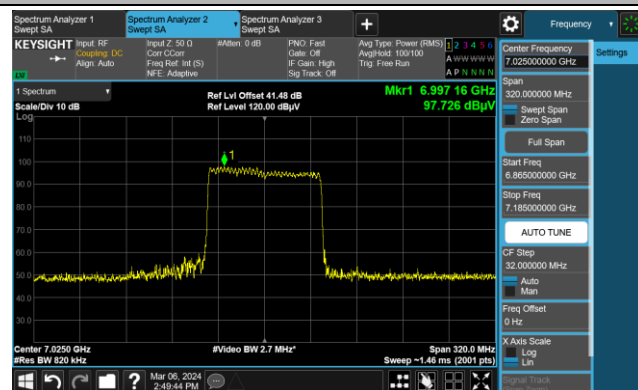

The Mask Data

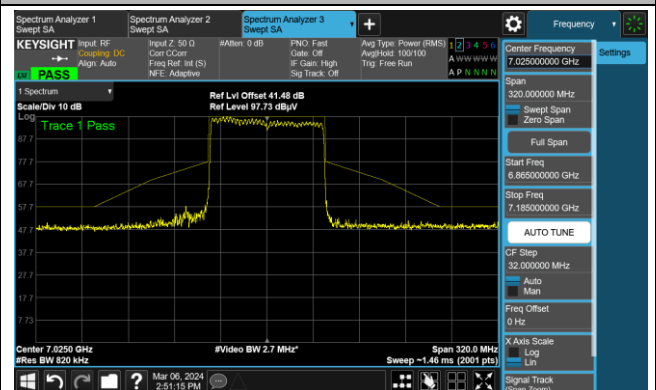


802.11be-EHT160

Channel 143 (6665 MHz)

The Reference Level




The Mask Data

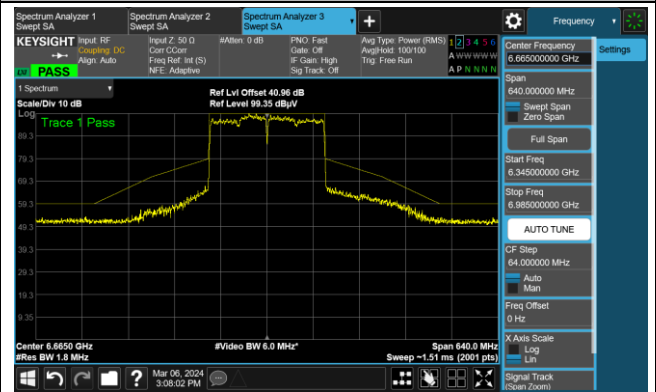


Channel 175 (6825 MHz)

The Reference Level

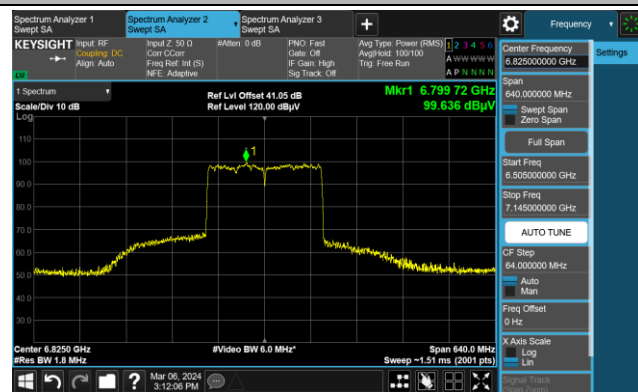


The Mask Data

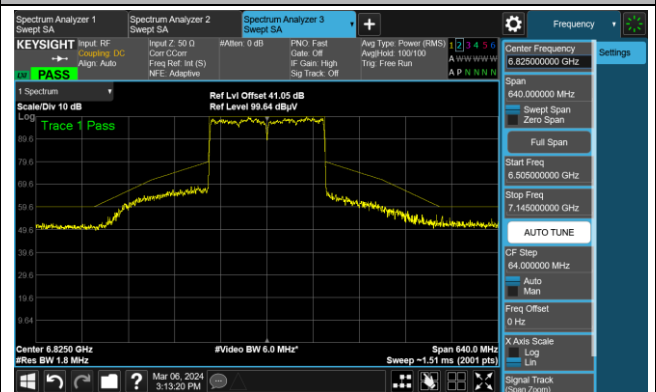


Channel 207 (6985 MHz)

The Reference Level

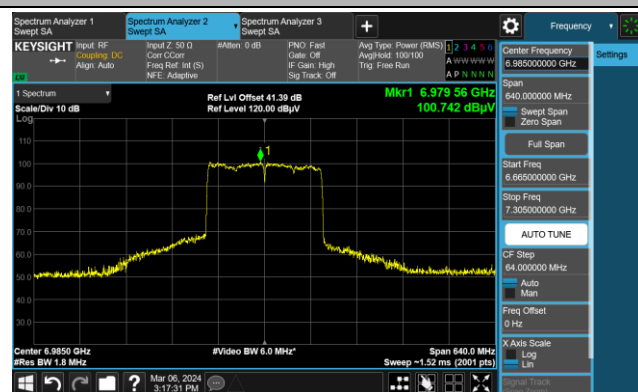


The Mask Data

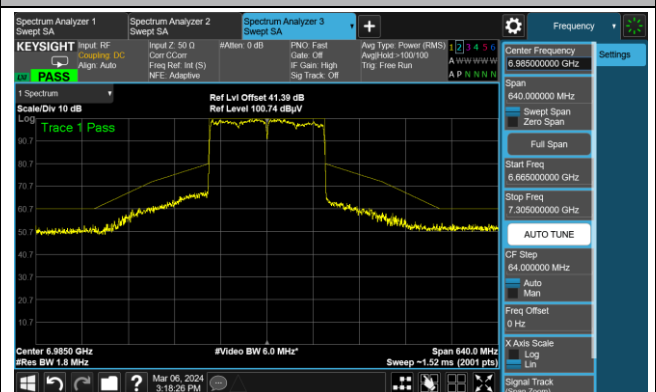


802.11be-EHT320-1

Channel 159 (6745 MHz)

The Reference Level

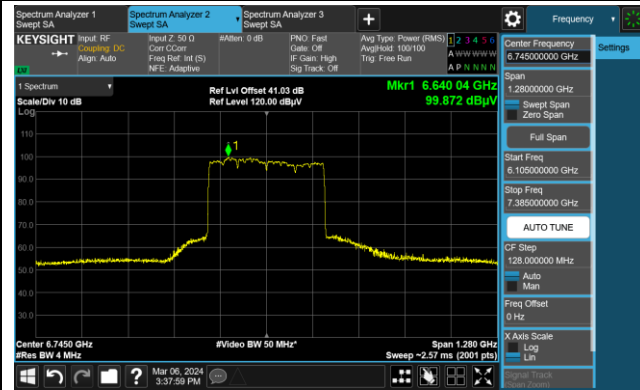


The Mask Data

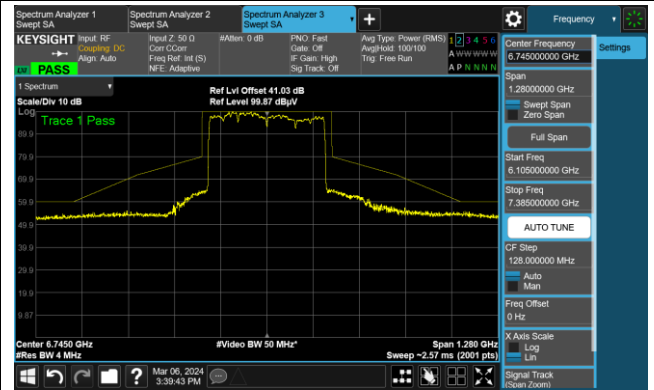


802.11be-EHT320-2

Channel 191 (6905 MHz)

The Reference Level

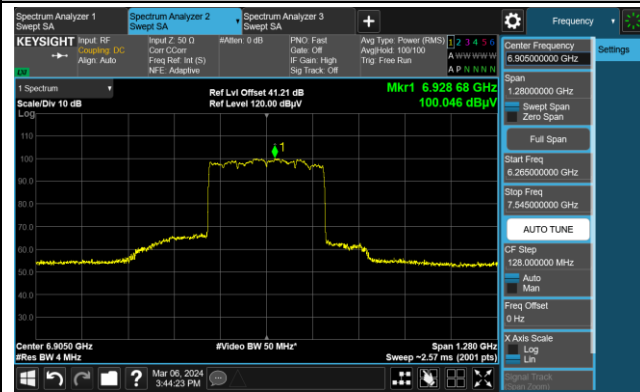

The Mask Data

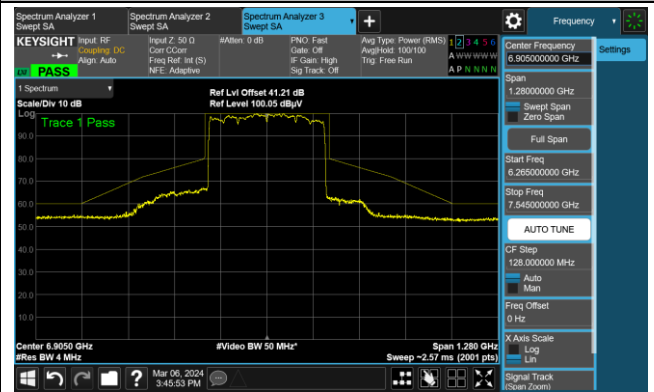

A.6 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Luis Yang
Test Date	2024-03-04	Test Mode	6535 MHz (Carrier Mode)

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	19.87	19.95	19.99	20.04
		- 20	21.76	21.81	21.86	21.90
		- 10	22.25	22.24	22.23	22.23
		0	20.62	20.51	20.38	20.32
		+ 10	17.90	17.76	17.68	17.56
		+ 20	12.58	12.45	12.38	12.27
		+ 30	8.46	8.39	8.27	8.23
		+ 40	5.05	4.91	4.81	4.66
		+ 50	0.65	0.63	0.59	0.56
115	138	+ 20	10.56	10.34	10.23	10.14
85	102	+ 20	10.05	9.98	9.92	9.87

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} × 10⁶.

A.7 Contention Based Protocol Test Result

Test Site	WZ-SR5	Test Engineer	Ant Wang
Test Date	2025-12-12 ~ 2025-12-14		

Test Channel	Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	AWGN Power (dBm)	Ant. Gain (dBi)	Adjust Power (dBm)	Detection Limit (dBm)	Detected Number	Detection Probability (%)	Limit (%)	Test Result
Operation Band: U-NII 7											
149	20	6695	6695	-70	4.55	-74.55	≤ -62.0	10	100	90	Pass
159	320	6745	6590	-69	4.55	-73.55	≤ -62.0	10	100	90	Pass
159	320	6745	6745	-66	4.55	-70.55	≤ -62.0	10	100	90	Pass
159	320	6745	6900	-71	4.55	-75.55	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 8											
213	20	7015	7015	-68	4.55	-72.55	≤ -62.0	10	100	90	Pass
191	320	6905	6750	-67	4.55	-71.55	≤ -62.0	10	100	90	Pass
191	320	6905	6905	-66	4.55	-70.55	≤ -62.0	10	100	90	Pass
191	320	6905	7060	-66	4.55	-70.55	≤ -62.0	10	100	90	Pass

Note 1: Adjust Power (dBm) = AWGN Power (dBm) - Antenna Gain (dBi).

Note 2: Conducted measurements are used.


Note 3: The Ant. Gain is the minimum gain of the two antennas, which refers to the antenna specification document.

Test Site	WZ-SR5	Test Engineer	Ant Wang
Test Date	2025-12-12 ~ 2025-12-14		


Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Tx Status
Operation Band: U-NII 7				
20	6695	6695	-76.55	ON
			-75.55	Minimal
			-74.55	OFF
320	6745	6590	-77.55	ON
			-76.55	Minimal
			-73.55	OFF
320	6745	6745	-75.55	ON
			-74.55	Minimal
			-70.55	OFF
320	6745	6900	-77.55	ON
			-76.55	Minimal
			-75.55	OFF
Operation Band: U-NII 8				
20	7015	7015	-75.55	ON
			-74.55	Minimal
			-72.55	OFF
320	6905	6750	-73.55	ON
			-72.55	Minimal
			-71.55	OFF
320	6905	6905	-77.55	ON
			-76.55	Minimal
			-70.55	OFF
320	6905	7060	-72.55	ON
			-71.55	Minimal
			-70.55	OFF
Note: OFF: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds. Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently. ON: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds.				

EUT Tx Waveform


802.11be-EHT20 / CH149

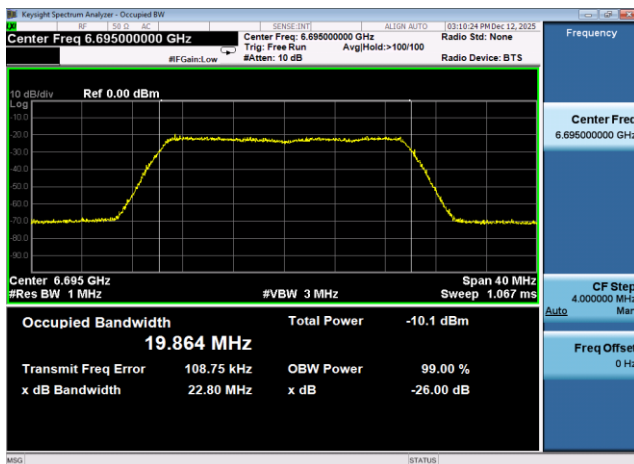


802.11be-EHT320 / CH159

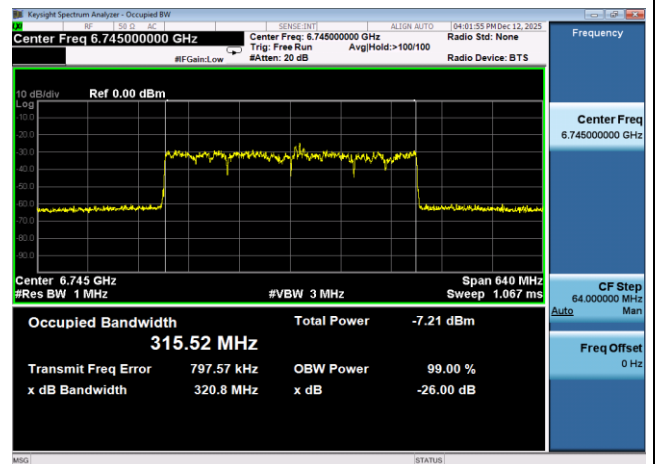

802.11be-EHT20 / CH213

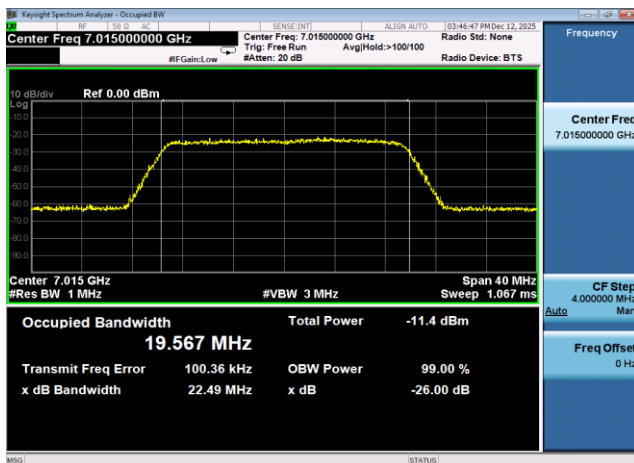


802.11be-EHT320 / CH191

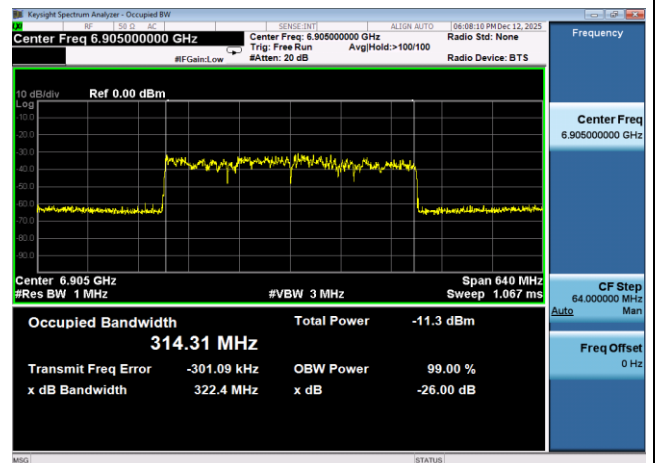


Incumbent Signal Calibration Plots (NII-7 Band)


802.11be-EHT20 / CH149

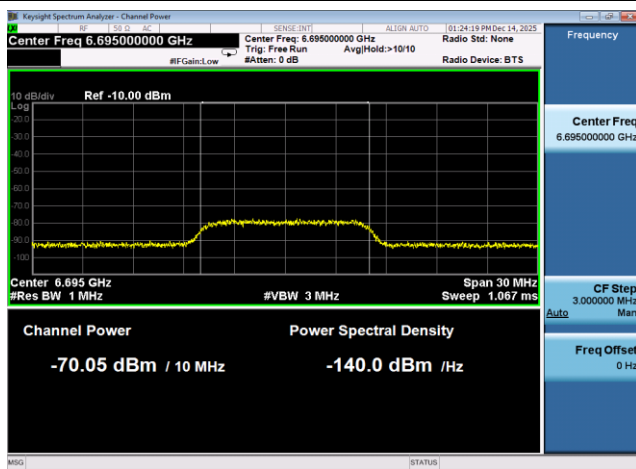


802.11be-EHT320 / CH159 (Low Edge)

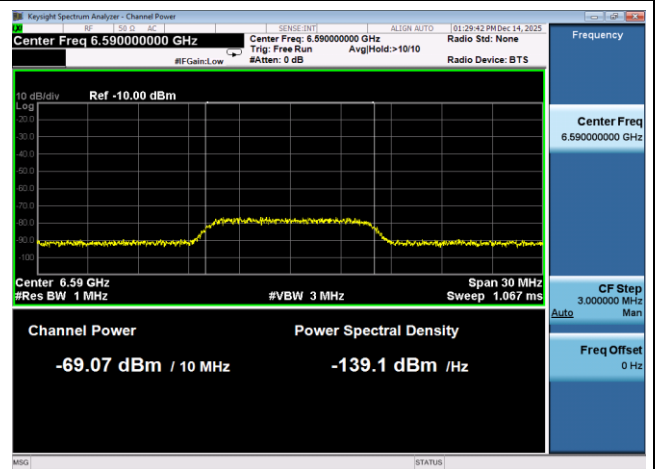

802.11be-EHT320 / CH159 (Middle)

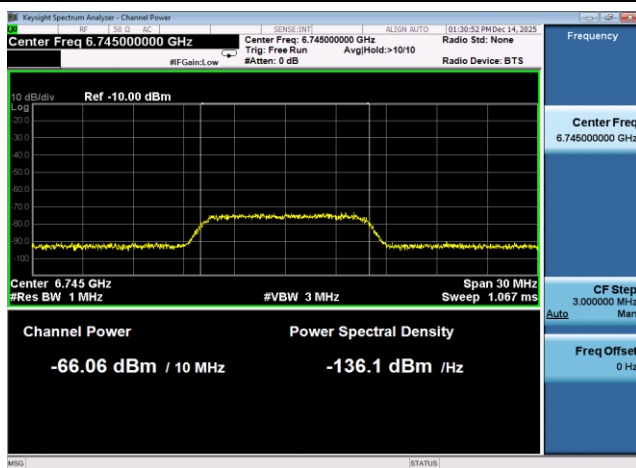


802.11be-EHT320 / CH159 (High Edge)

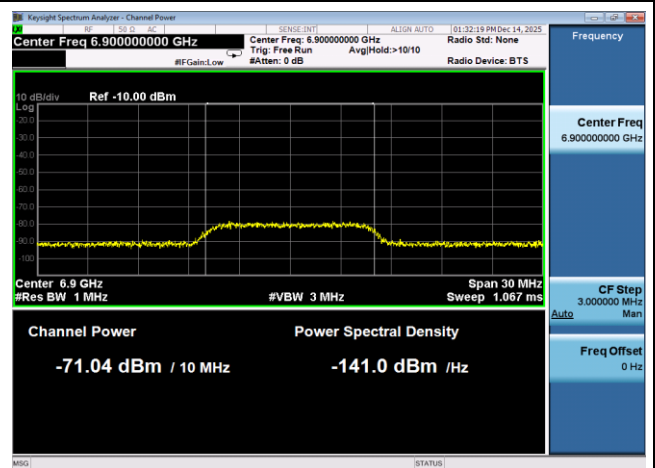


Incumbent Signal Calibration Plots (NII-8 Band)


802.11be-EHT20 / CH213

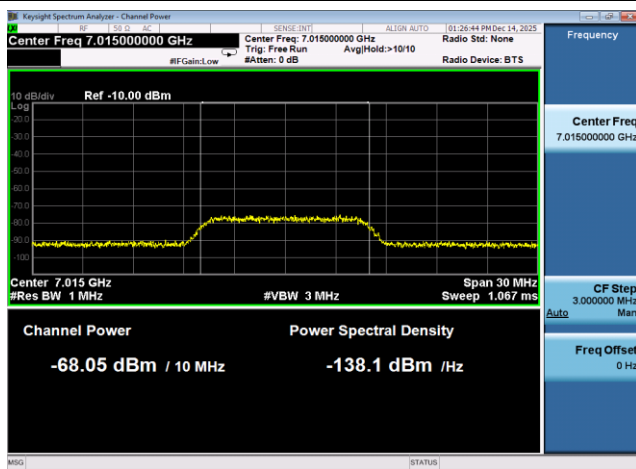


802.11be-EHT320 / CH191 (Low Edge)

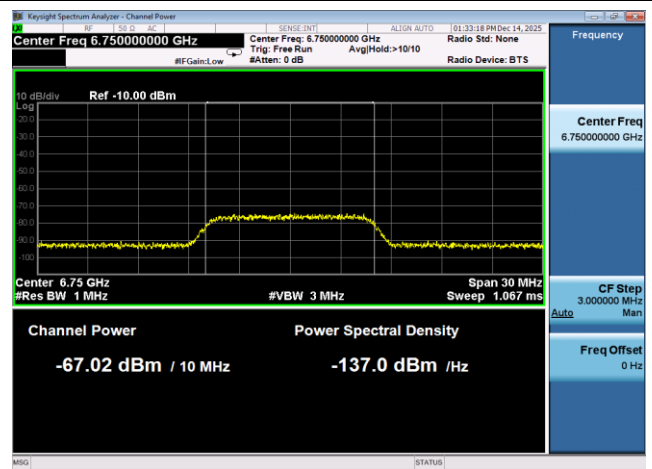

802.11be-EHT320 / CH191 (Middle)

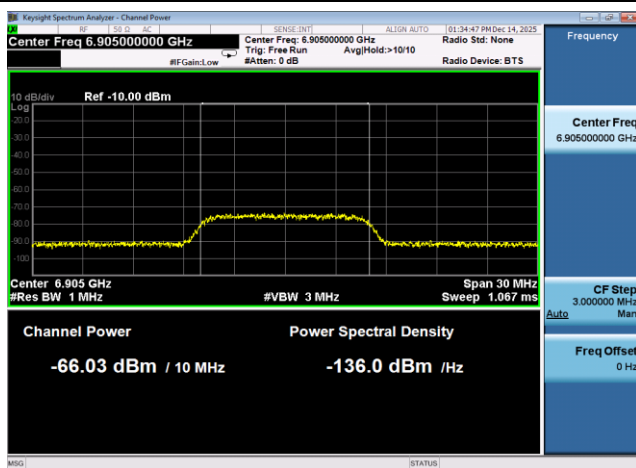


802.11be-EHT320 / CH191 (High Edge)

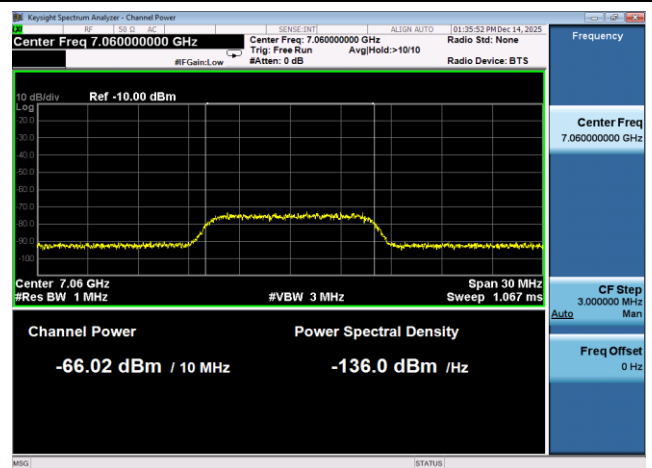

Test Result of EUT ceased transmission (NII-7 Band)


802.11be-EHT20 / CH149

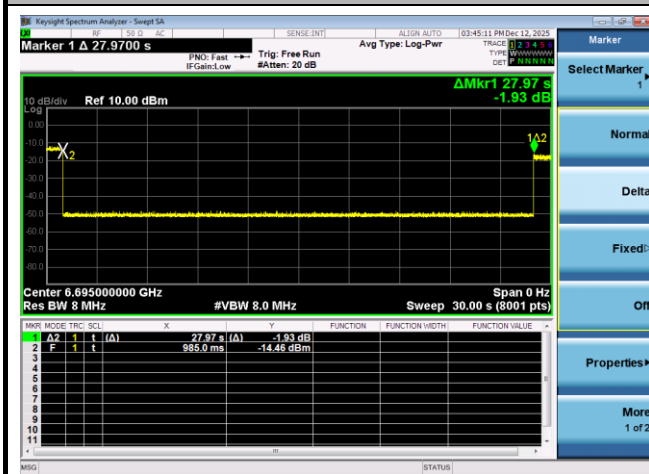


802.11be-EHT320 / CH159 (Low Edge)



802.11be-EHT320 / CH159 (Middle)

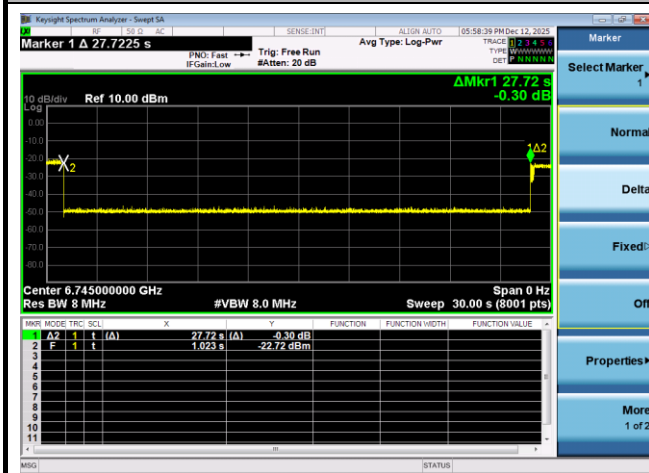


802.11be-EHT320 / CH159 (High Edge)

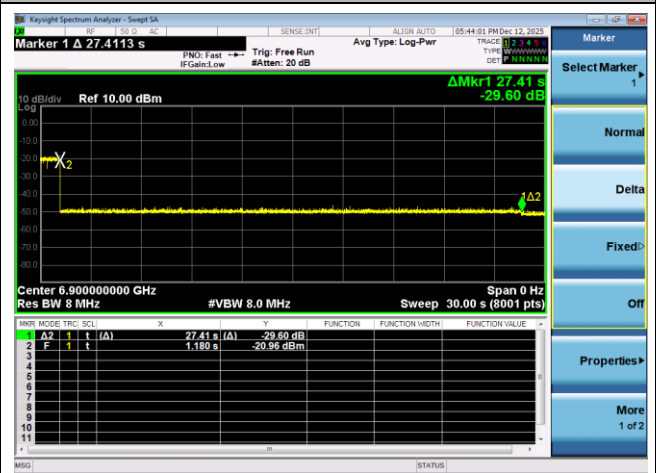


Test Result of EUT ceased transmission (NII-8 Band)


802.11be-EHT20 / CH213

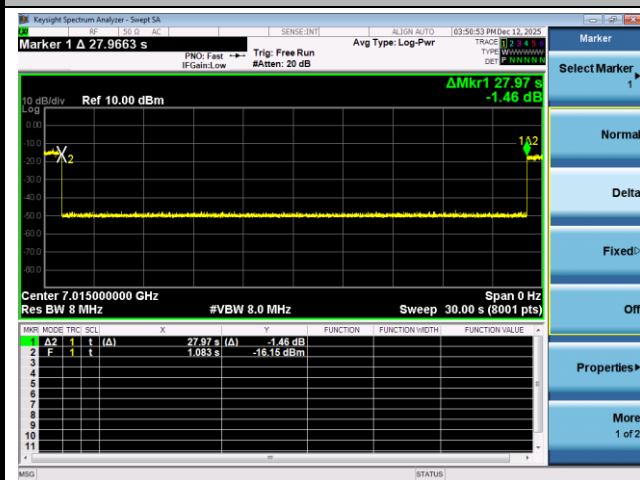

802.11be-EHT320 / CH191 (Low Edge)

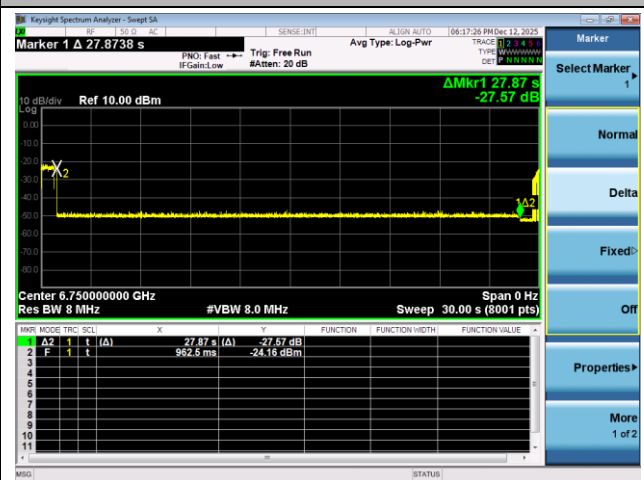

802.11be-EHT320 / CH191 (Middle)

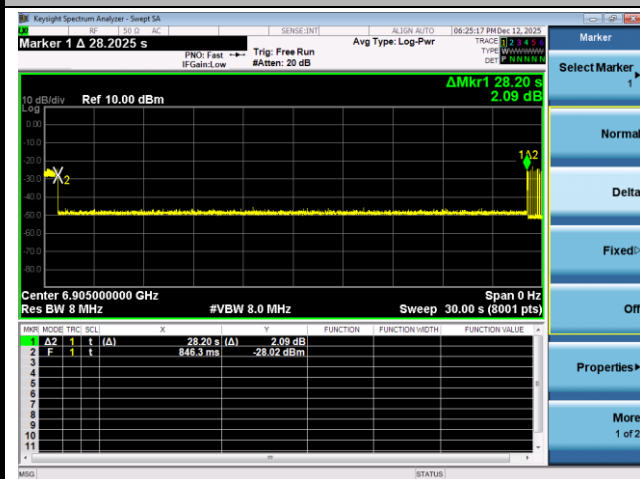

802.11be-EHT320 / CH191 (High Edge)



A.8 Radiated Spurious Emission Test Result

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11174.5	29.5	17.0	46.5	74.0	-27.5	Peak	Horizontal
	11582.5	29.6	17.5	47.1	74.0	-26.9	Peak	Horizontal
*	12840.5	29.5	17.1	46.6	88.2	-41.6	Peak	Horizontal
*	13852.0	29.2	19.0	48.2	88.2	-40.0	Peak	Horizontal
*	9899.5	30.6	13.6	44.2	88.2	-44.0	Peak	Vertical
	11327.5	31.0	17.4	48.4	74.0	-25.6	Peak	Vertical
	11718.5	31.3	17.8	49.1	74.0	-24.9	Peak	Vertical
*	13792.5	29.1	18.8	47.9	88.2	-40.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11642.0	30.7	17.9	48.6	74.0	-25.4	Peak	Horizontal
	12543.0	31.2	16.8	48.0	74.0	-26.0	Peak	Horizontal
*	13979.5	30.0	19.1	49.1	88.2	-39.1	Peak	Horizontal
*	14880.5	31.1	19.1	50.2	88.2	-38.0	Peak	Horizontal
	11310.5	30.4	17.3	47.7	74.0	-26.3	Peak	Vertical
	11642.0	30.3	17.9	48.2	74.0	-25.8	Peak	Vertical
*	13665.0	29.7	18.6	48.3	88.2	-39.9	Peak	Vertical
*	14064.5	31.8	19.8	51.6	88.2	-36.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10035.5	31.7	13.9	45.6	88.2	-42.6	Peak	Horizontal
	11880.0	31.2	17.3	48.5	74.0	-25.5	Peak	Horizontal
	12169.0	30.4	17.4	47.8	74.0	-26.2	Peak	Horizontal
*	13639.5	31.5	19.1	50.6	88.2	-37.6	Peak	Horizontal
*	9857.0	31.0	13.5	44.5	88.2	-43.7	Peak	Vertical
*	10307.5	30.2	14.9	45.1	88.2	-43.1	Peak	Vertical
	10919.5	31.5	16.7	48.2	74.0	-25.8	Peak	Vertical
	11574.0	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE20	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9721.0	31.6	13.5	45.1	88.2	-43.1	Peak	Horizontal
*	9942.0	31.7	13.8	45.5	88.2	-42.7	Peak	Horizontal
	11548.5	30.7	17.7	48.4	74.0	-25.6	Peak	Horizontal
	11871.5	30.9	17.3	48.2	74.0	-25.8	Peak	Horizontal
*	9899.5	32.1	13.6	45.7	88.2	-42.5	Peak	Vertical
*	10265.0	31.2	14.6	45.8	88.2	-42.4	Peak	Vertical
	11531.5	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical
	12305.0	31.3	17.6	48.9	74.0	-25.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE20	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9678.5	31.0	13.5	44.5	88.2	-43.7	Peak	Horizontal
*	10120.5	30.9	14.1	45.0	88.2	-43.2	Peak	Horizontal
	11285.0	30.7	16.9	47.6	74.0	-26.4	Peak	Horizontal
	11786.5	29.0	17.6	46.6	74.0	-27.4	Peak	Horizontal
*	9772.0	31.4	13.5	44.9	88.2	-43.3	Peak	Vertical
*	10035.5	33.0	13.9	46.9	88.2	-41.3	Peak	Vertical
	11548.5	30.9	17.7	48.6	74.0	-25.4	Peak	Vertical
	12067.0	31.1	17.0	48.1	74.0	-25.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE20	Test Channel	209
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10035.5	31.5	13.9	45.4	88.2	-42.8	Peak	Horizontal
*	10494.5	30.7	15.4	46.1	88.2	-42.1	Peak	Horizontal
	11021.5	30.2	16.4	46.6	74.0	-27.4	Peak	Horizontal
	11557.0	30.5	17.9	48.4	74.0	-25.6	Peak	Horizontal
*	9636.0	31.5	13.4	44.9	88.2	-43.3	Peak	Vertical
*	10078.0	31.0	13.7	44.7	88.2	-43.5	Peak	Vertical
	10902.5	32.6	16.6	49.2	74.0	-24.8	Peak	Vertical
	11982.0	30.7	17.3	48.0	74.0	-26.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE20	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9899.5	31.6	13.6	45.2	88.2	-43.0	Peak	Horizontal
*	10307.5	30.5	14.9	45.4	88.2	-42.8	Peak	Horizontal
	11378.5	29.1	17.3	46.4	74.0	-27.6	Peak	Horizontal
	12194.5	30.8	17.8	48.6	74.0	-25.4	Peak	Horizontal
*	9814.5	31.1	13.7	44.8	88.2	-43.4	Peak	Vertical
*	10214.0	30.2	14.3	44.5	88.2	-43.7	Peak	Vertical
	11123.5	29.5	16.4	45.9	74.0	-28.1	Peak	Vertical
	11574.0	31.5	17.7	49.2	74.0	-24.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9678.5	31.0	13.5	44.5	88.2	-43.7	Peak	Horizontal
*	10214.0	30.2	14.3	44.5	88.2	-43.7	Peak	Horizontal
	10732.5	31.6	15.9	47.5	74.0	-26.5	Peak	Horizontal
	11548.5	31.3	17.7	49.0	74.0	-25.0	Peak	Horizontal
*	9916.5	33.0	13.7	46.7	88.2	-41.5	Peak	Vertical
*	10214.0	30.2	14.3	44.5	88.2	-43.7	Peak	Vertical
	11531.5	30.4	17.3	47.7	74.0	-26.3	Peak	Vertical
	12245.5	31.8	17.6	49.4	74.0	-24.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9857.0	32.0	13.5	45.5	88.2	-42.7	Peak	Horizontal
*	10214.0	30.7	14.3	45.0	88.2	-43.2	Peak	Horizontal
	11497.5	31.3	17.6	48.9	74.0	-25.1	Peak	Horizontal
	12067.0	31.0	17.0	48.0	74.0	-26.0	Peak	Horizontal
*	9636.0	31.8	13.4	45.2	88.2	-43.0	Peak	Vertical
*	9993.0	30.7	13.7	44.4	88.2	-43.8	Peak	Vertical
	11106.5	31.1	16.7	47.8	74.0	-26.2	Peak	Vertical
	11795.0	31.0	17.7	48.7	74.0	-25.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9721.0	31.3	13.5	44.8	88.2	-43.4	Peak	Horizontal
*	10350.0	30.2	15.2	45.4	88.2	-42.8	Peak	Horizontal
	11208.5	32.5	16.9	49.4	74.0	-24.6	Peak	Horizontal
	12220.0	29.2	17.5	46.7	74.0	-27.3	Peak	Horizontal
*	10214.0	31.0	14.3	45.3	88.2	-42.9	Peak	Vertical
	11225.5	31.5	16.9	48.4	74.0	-25.6	Peak	Vertical
	11676.0	31.7	17.3	49.0	74.0	-25.0	Peak	Vertical
*	14447.0	31.3	20.4	51.7	88.2	-36.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE40	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10171.5	30.0	14.1	44.1	88.2	-44.1	Peak	Horizontal
	11378.5	31.0	17.3	48.3	74.0	-25.7	Peak	Horizontal
	12194.5	30.9	17.8	48.7	74.0	-25.3	Peak	Horizontal
*	12951.0	28.8	17.3	46.1	88.2	-42.1	Peak	Horizontal
*	9857.0	31.0	13.5	44.5	88.2	-43.7	Peak	Vertical
*	10265.0	30.6	14.6	45.2	88.2	-43.0	Peak	Vertical
	11344.5	30.8	17.3	48.1	74.0	-25.9	Peak	Vertical
	11795.0	30.4	17.7	48.1	74.0	-25.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE40	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9993.0	31.4	13.7	45.1	88.2	-43.1	Peak	Horizontal
*	10214.0	30.8	14.3	45.1	88.2	-43.1	Peak	Horizontal
	11497.5	31.7	17.6	49.3	74.0	-24.7	Peak	Horizontal
	11786.5	29.9	17.6	47.5	74.0	-26.5	Peak	Horizontal
*	10035.5	31.2	13.9	45.1	88.2	-43.1	Peak	Vertical
*	10171.5	30.0	14.1	44.1	88.2	-44.1	Peak	Vertical
	11242.5	30.6	17.1	47.7	74.0	-26.3	Peak	Vertical
	11718.5	30.6	17.8	48.4	74.0	-25.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE40	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11565.5	31.6	17.8	49.4	74.0	-24.6	Peak	Horizontal
	11897.0	31.7	17.4	49.1	74.0	-24.9	Peak	Horizontal
*	13605.5	30.6	18.7	49.3	88.2	-38.9	Peak	Horizontal
*	14770.0	32.9	19.4	52.3	88.2	-35.9	Peak	Horizontal
*	9678.5	32.6	13.5	46.1	88.2	-42.1	Peak	Vertical
*	10265.0	30.5	14.6	45.1	88.2	-43.1	Peak	Vertical
	11285.0	32.0	16.9	48.9	74.0	-25.1	Peak	Vertical
	11727.0	30.5	17.9	48.4	74.0	-25.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE40	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9899.5	31.1	13.6	44.7	88.2	-43.5	Peak	Horizontal
*	10265.0	30.0	14.6	44.6	88.2	-43.6	Peak	Horizontal
	11540.0	32.2	17.6	49.8	74.0	-24.2	Peak	Horizontal
	11897.0	28.9	17.4	46.3	74.0	-27.7	Peak	Horizontal
*	9721.0	31.5	13.5	45.0	88.2	-43.2	Peak	Vertical
*	9899.5	33.4	13.6	47.0	88.2	-41.2	Peak	Vertical
	11123.5	29.9	16.4	46.3	74.0	-27.7	Peak	Vertical
	11659.0	31.1	17.7	48.8	74.0	-25.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10078.0	30.7	13.7	44.4	88.2	-43.8	Peak	Horizontal
*	10494.5	29.8	15.4	45.2	88.2	-43.0	Peak	Horizontal
	11489.0	31.8	17.7	49.5	74.0	-24.5	Peak	Horizontal
	12058.5	29.5	17.0	46.5	74.0	-27.5	Peak	Horizontal
*	9899.5	30.7	13.6	44.3	88.2	-43.9	Peak	Vertical
*	10265.0	31.5	14.6	46.1	88.2	-42.1	Peak	Vertical
	10911.0	32.0	16.6	48.6	74.0	-25.4	Peak	Vertical
	11710.0	30.6	17.8	48.4	74.0	-25.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9704.0	33.6	13.5	47.1	88.2	-41.1	Peak	Horizontal
*	10307.5	31.9	14.9	46.8	88.2	-41.4	Peak	Horizontal
	11302.0	31.2	17.2	48.4	74.0	-25.6	Peak	Horizontal
	11684.5	29.0	17.3	46.3	74.0	-27.7	Peak	Horizontal
*	9636.0	32.0	13.4	45.4	88.2	-42.8	Peak	Vertical
*	10078.0	31.7	13.7	45.4	88.2	-42.8	Peak	Vertical
	11072.5	29.9	16.5	46.4	74.0	-27.6	Peak	Vertical
	11710.0	30.7	17.8	48.5	74.0	-25.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9729.5	33.4	13.5	46.9	88.2	-41.3	Peak	Horizontal
*	10214.0	30.3	14.3	44.6	88.2	-43.6	Peak	Horizontal
	11489.0	30.5	17.7	48.2	74.0	-25.8	Peak	Horizontal
	11786.5	30.3	17.6	47.9	74.0	-26.1	Peak	Horizontal
*	9942.0	32.4	13.8	46.2	88.2	-42.0	Peak	Vertical
*	10350.0	30.4	15.2	45.6	88.2	-42.6	Peak	Vertical
	11523.0	31.2	17.2	48.4	74.0	-25.6	Peak	Vertical
	11786.5	28.9	17.6	46.5	74.0	-27.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE80	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9942.0	32.4	13.8	46.2	88.2	-42.0	Peak	Horizontal
*	10120.5	30.9	14.1	45.0	88.2	-43.2	Peak	Horizontal
	11455.0	30.9	17.4	48.3	74.0	-25.7	Peak	Horizontal
	12160.5	31.3	17.2	48.5	74.0	-25.5	Peak	Horizontal
*	9925.0	33.9	13.7	47.6	88.2	-40.6	Peak	Vertical
*	10537.0	31.3	15.2	46.5	88.2	-41.7	Peak	Vertical
	11718.5	31.4	17.8	49.2	74.0	-24.8	Peak	Vertical
	12194.5	31.2	17.8	49.0	74.0	-25.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE80	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9993.0	31.0	13.7	44.7	88.2	-43.5	Peak	Horizontal
*	10265.0	30.5	14.6	45.1	88.2	-43.1	Peak	Horizontal
	11378.5	29.0	17.3	46.3	74.0	-27.7	Peak	Horizontal
	12194.5	31.2	17.8	49.0	74.0	-25.0	Peak	Horizontal
*	9678.5	31.6	13.5	45.1	88.2	-43.1	Peak	Vertical
*	10035.5	31.2	13.9	45.1	88.2	-43.1	Peak	Vertical
	11276.5	30.2	17.0	47.2	74.0	-26.8	Peak	Vertical
	11650.5	30.8	17.8	48.6	74.0	-25.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE80	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10027.0	33.4	13.9	47.3	88.2	-40.9	Peak	Horizontal
*	10120.5	29.8	14.1	43.9	88.2	-44.3	Peak	Horizontal
	12058.5	29.4	17.0	46.4	74.0	-27.6	Peak	Horizontal
	12339.0	32.6	16.8	49.4	74.0	-24.6	Peak	Horizontal
*	9772.0	31.3	13.5	44.8	88.2	-43.4	Peak	Vertical
*	10035.5	31.1	13.9	45.0	88.2	-43.2	Peak	Vertical
	11727.0	30.5	17.9	48.4	74.0	-25.6	Peak	Vertical
	12305.0	31.1	17.6	48.7	74.0	-25.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10928.0	31.2	16.7	47.9	74.0	-26.1	Peak	Horizontal
	11480.5	30.3	17.6	47.9	74.0	-26.1	Peak	Horizontal
*	13852.0	29.8	19.0	48.8	88.2	-39.4	Peak	Horizontal
*	14430.0	33.3	20.1	53.4	88.2	-34.8	Peak	Horizontal
*	10078.0	31.6	13.7	45.3	88.2	-42.9	Peak	Vertical
*	10494.5	30.0	15.4	45.4	88.2	-42.8	Peak	Vertical
	11200.0	31.8	16.8	48.6	74.0	-25.4	Peak	Vertical
	11531.5	29.1	17.3	46.4	74.0	-27.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE160	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9721.0	32.6	13.5	46.1	88.2	-42.1	Peak	Horizontal
*	10035.5	31.3	13.9	45.2	88.2	-43.0	Peak	Horizontal
	11625.0	30.7	17.6	48.3	74.0	-25.7	Peak	Horizontal
	11999.0	31.2	17.0	48.2	74.0	-25.8	Peak	Horizontal
*	9899.5	31.3	13.6	44.9	88.2	-43.3	Peak	Vertical
*	10307.5	30.9	14.9	45.8	88.2	-42.4	Peak	Vertical
	11285.0	32.4	16.9	49.3	74.0	-24.7	Peak	Vertical
	12007.5	30.0	17.0	47.0	74.0	-27.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11ax-HE160	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10078.0	30.3	13.7	44.0	88.2	-44.2	Peak	Horizontal
*	10307.5	32.1	14.9	47.0	88.2	-41.2	Peak	Horizontal
	11166.0	31.0	17.0	48.0	74.0	-26.0	Peak	Horizontal
	11540.0	30.1	17.6	47.7	74.0	-26.3	Peak	Horizontal
*	9899.5	31.1	13.6	44.7	88.2	-43.5	Peak	Vertical
*	10214.0	29.1	14.3	43.4	88.2	-44.8	Peak	Vertical
	10783.5	31.0	16.1	47.1	74.0	-26.9	Peak	Vertical
	11438.0	30.4	17.2	47.6	74.0	-26.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10171.5	31.4	14.1	45.5	88.2	-42.7	Peak	Horizontal
*	10443.5	32.5	15.5	48.0	88.2	-40.2	Peak	Horizontal
	11072.5	30.3	16.5	46.8	74.0	-27.2	Peak	Horizontal
	11650.5	30.5	17.8	48.3	74.0	-25.7	Peak	Horizontal
*	9933.5	32.4	13.8	46.2	88.2	-42.0	Peak	Vertical
*	10571.0	31.3	15.3	46.6	88.2	-41.6	Peak	Vertical
	11225.5	30.9	16.9	47.8	74.0	-26.2	Peak	Vertical
	11744.0	31.4	17.6	49.0	74.0	-25.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9899.5	33.3	13.6	46.9	88.2	-41.3	Peak	Horizontal
*	10282.0	32.7	14.8	47.5	88.2	-40.7	Peak	Horizontal
	11072.5	29.4	16.5	45.9	74.0	-28.1	Peak	Horizontal
	12220.0	31.8	17.5	49.3	74.0	-24.7	Peak	Horizontal
*	10044.0	32.3	13.9	46.2	88.2	-42.0	Peak	Vertical
*	10307.5	30.7	14.9	45.6	88.2	-42.6	Peak	Vertical
	10817.5	31.3	16.5	47.8	74.0	-26.2	Peak	Vertical
	11642.0	30.8	17.9	48.7	74.0	-25.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10018.5	32.6	13.8	46.4	88.2	-41.8	Peak	Horizontal
*	10435.0	31.8	15.5	47.3	88.2	-40.9	Peak	Horizontal
	10928.0	31.3	16.7	48.0	74.0	-26.0	Peak	Horizontal
	11540.0	31.2	17.6	48.8	74.0	-25.2	Peak	Horizontal
*	9687.0	32.9	13.5	46.4	88.2	-41.8	Peak	Vertical
*	9899.5	32.0	13.6	45.6	88.2	-42.6	Peak	Vertical
	11429.5	30.6	17.3	47.9	74.0	-26.1	Peak	Vertical
	11642.0	31.1	17.9	49.0	74.0	-25.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT20	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9593.5	32.1	13.3	45.4	88.2	-42.8	Peak	Horizontal
*	10035.5	31.4	13.9	45.3	88.2	-42.9	Peak	Horizontal
	11251.0	31.2	17.2	48.4	74.0	-25.6	Peak	Horizontal
	11718.5	30.8	17.8	48.6	74.0	-25.4	Peak	Horizontal
*	9746.5	33.3	13.4	46.7	88.2	-41.5	Peak	Vertical
*	10443.5	32.0	15.5	47.5	88.2	-40.7	Peak	Vertical
	11021.5	30.9	16.4	47.3	74.0	-26.7	Peak	Vertical
	11557.0	31.8	17.9	49.7	74.0	-24.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT20	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9857.0	31.5	13.5	45.0	88.2	-43.2	Peak	Horizontal
*	10307.5	30.5	14.9	45.4	88.2	-42.8	Peak	Horizontal
	11582.5	32.4	17.5	49.9	74.0	-24.1	Peak	Horizontal
	11829.0	31.0	17.4	48.4	74.0	-25.6	Peak	Horizontal
*	9925.0	32.7	13.7	46.4	88.2	-41.8	Peak	Vertical
*	10401.0	30.3	15.1	45.4	88.2	-42.8	Peak	Vertical
	11251.0	31.1	17.2	48.3	74.0	-25.7	Peak	Vertical
	11727.0	30.4	17.9	48.3	74.0	-25.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT20	Test Channel	209
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9678.5	33.0	13.5	46.5	88.2	-41.7	Peak	Horizontal
*	10120.5	31.6	14.1	45.7	88.2	-42.5	Peak	Horizontal
	10792.0	31.9	16.4	48.3	74.0	-25.7	Peak	Horizontal
	11140.5	31.2	16.4	47.6	74.0	-26.4	Peak	Horizontal
*	9959.0	33.6	13.9	47.5	88.2	-40.7	Peak	Vertical
*	10265.0	30.8	14.6	45.4	88.2	-42.8	Peak	Vertical
	11489.0	31.1	17.7	48.8	74.0	-25.2	Peak	Vertical
	11965.0	30.9	17.2	48.1	74.0	-25.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT20	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9814.5	31.8	13.7	45.5	88.2	-42.7	Peak	Horizontal
*	10171.5	30.6	14.1	44.7	88.2	-43.5	Peak	Horizontal
	10834.5	32.4	16.4	48.8	74.0	-25.2	Peak	Horizontal
	11506.0	31.8	17.4	49.2	74.0	-24.8	Peak	Horizontal
*	10205.5	32.6	14.3	46.9	88.2	-41.3	Peak	Vertical
*	10350.0	32.1	15.2	47.3	88.2	-40.9	Peak	Vertical
	11327.5	31.5	17.4	48.9	74.0	-25.1	Peak	Vertical
	11846.0	29.2	17.1	46.3	74.0	-27.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9857.0	31.5	13.5	45.0	88.2	-43.2	Peak	Horizontal
*	10350.0	31.8	15.2	47.0	88.2	-41.2	Peak	Horizontal
	11429.5	31.2	17.3	48.5	74.0	-25.5	Peak	Horizontal
	12058.5	31.7	17.0	48.7	74.0	-25.3	Peak	Horizontal
*	10010.0	32.6	13.8	46.4	88.2	-41.8	Peak	Vertical
*	10324.5	32.2	15.1	47.3	88.2	-40.9	Peak	Vertical
	11174.5	30.5	17.0	47.5	74.0	-26.5	Peak	Vertical
	11846.0	29.7	17.1	46.8	74.0	-27.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9721.0	32.5	13.5	46.0	88.2	-42.2	Peak	Horizontal
*	10528.5	32.4	15.3	47.7	88.2	-40.5	Peak	Horizontal
	10885.5	32.3	16.3	48.6	74.0	-25.4	Peak	Horizontal
	11659.0	31.2	17.7	48.9	74.0	-25.1	Peak	Horizontal
*	9959.0	31.9	13.9	45.8	88.2	-42.4	Peak	Vertical
*	10265.0	31.7	14.6	46.3	88.2	-41.9	Peak	Vertical
	11285.0	32.3	16.9	49.2	74.0	-24.8	Peak	Vertical
	11863.0	30.9	17.2	48.1	74.0	-25.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10120.5	31.8	14.1	45.9	88.2	-42.3	Peak	Horizontal
*	10452.0	31.9	15.4	47.3	88.2	-40.9	Peak	Horizontal
	10877.0	30.1	16.3	46.4	74.0	-27.6	Peak	Horizontal
	11514.5	31.3	17.3	48.6	74.0	-25.4	Peak	Horizontal
*	10010.0	32.3	13.8	46.1	88.2	-42.1	Peak	Vertical
*	10435.0	32.1	15.5	47.6	88.2	-40.6	Peak	Vertical
	11259.5	31.0	17.1	48.1	74.0	-25.9	Peak	Vertical
	11633.5	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT40	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9602.0	33.6	13.3	46.9	88.2	-41.3	Peak	Horizontal
*	9857.0	30.8	13.5	44.3	88.2	-43.9	Peak	Horizontal
	11166.0	31.3	17.0	48.3	74.0	-25.7	Peak	Horizontal
	11650.5	30.6	17.8	48.4	74.0	-25.6	Peak	Horizontal
*	9721.0	31.1	13.5	44.6	88.2	-43.6	Peak	Vertical
*	10265.0	31.5	14.6	46.1	88.2	-42.1	Peak	Vertical
	11217.0	32.0	16.8	48.8	74.0	-25.2	Peak	Vertical
	11480.5	29.1	17.6	46.7	74.0	-27.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT40	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9916.5	33.9	13.7	47.6	88.2	-40.6	Peak	Horizontal
*	10401.0	30.3	15.1	45.4	88.2	-42.8	Peak	Horizontal
	10834.5	30.4	16.4	46.8	74.0	-27.2	Peak	Horizontal
	11523.0	31.3	17.2	48.5	74.0	-25.5	Peak	Horizontal
*	10341.5	32.3	15.1	47.4	88.2	-40.8	Peak	Vertical
	11174.5	31.3	17.0	48.3	74.0	-25.7	Peak	Vertical
	11701.5	31.3	17.5	48.8	74.0	-25.2	Peak	Vertical
*	13962.5	31.7	19.5	51.2	88.2	-37.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT40	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9993.0	31.6	13.7	45.3	88.2	-42.9	Peak	Horizontal
*	10401.0	30.8	15.1	45.9	88.2	-42.3	Peak	Horizontal
	10928.0	31.1	16.7	47.8	74.0	-26.2	Peak	Horizontal
	11625.0	31.4	17.6	49.0	74.0	-25.0	Peak	Horizontal
*	9814.5	31.0	13.7	44.7	88.2	-43.5	Peak	Vertical
*	10333.0	32.6	15.1	47.7	88.2	-40.5	Peak	Vertical
	10834.5	32.2	16.4	48.6	74.0	-25.4	Peak	Vertical
	11616.5	31.4	17.4	48.8	74.0	-25.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT40	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10095.0	31.8	13.8	45.6	88.2	-42.6	Peak	Horizontal
*	10350.0	31.2	15.2	46.4	88.2	-41.8	Peak	Horizontal
	11429.5	31.2	17.3	48.5	74.0	-25.5	Peak	Horizontal
	12279.5	30.8	17.4	48.2	74.0	-25.8	Peak	Horizontal
*	10027.0	32.5	13.9	46.4	88.2	-41.8	Peak	Vertical
*	10290.5	32.6	14.8	47.4	88.2	-40.8	Peak	Vertical
	10987.5	31.5	16.4	47.9	74.0	-26.1	Peak	Vertical
	11642.0	30.5	17.9	48.4	74.0	-25.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9942.0	31.9	13.8	45.7	88.2	-42.5	Peak	Horizontal
*	10307.5	30.6	14.9	45.5	88.2	-42.7	Peak	Horizontal
	11378.5	29.8	17.3	47.1	74.0	-26.9	Peak	Horizontal
	12135.0	31.3	17.3	48.6	74.0	-25.4	Peak	Horizontal
*	9942.0	31.9	13.8	45.7	88.2	-42.5	Peak	Vertical
*	10443.5	31.1	15.5	46.6	88.2	-41.6	Peak	Vertical
	11251.0	30.2	17.2	47.4	74.0	-26.6	Peak	Vertical
	11650.5	31.3	17.8	49.1	74.0	-24.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9806.0	32.8	13.8	46.6	88.2	-41.6	Peak	Horizontal
*	10350.0	30.7	15.2	45.9	88.2	-42.3	Peak	Horizontal
	11208.5	31.0	16.9	47.9	74.0	-26.1	Peak	Horizontal
	11897.0	31.4	17.4	48.8	74.0	-25.2	Peak	Horizontal
*	9772.0	30.2	13.5	43.7	88.2	-44.5	Peak	Vertical
*	10044.0	32.3	13.9	46.2	88.2	-42.0	Peak	Vertical
	10622.0	32.8	15.2	48.0	74.0	-26.0	Peak	Vertical
	11319.0	30.7	17.4	48.1	74.0	-25.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10035.5	31.0	13.9	44.9	88.2	-43.3	Peak	Horizontal
*	10307.5	31.3	14.9	46.2	88.2	-42.0	Peak	Horizontal
	10851.5	31.6	16.5	48.1	74.0	-25.9	Peak	Horizontal
	11565.5	30.9	17.8	48.7	74.0	-25.3	Peak	Horizontal
*	9848.5	32.6	13.5	46.1	88.2	-42.1	Peak	Vertical
*	10146.0	32.8	13.9	46.7	88.2	-41.5	Peak	Vertical
	10928.0	31.8	16.7	48.5	74.0	-25.5	Peak	Vertical
	11327.5	29.0	17.4	46.4	74.0	-27.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT80	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9899.5	32.0	13.6	45.6	88.2	-42.6	Peak	Horizontal
*	10120.5	31.8	14.1	45.9	88.2	-42.3	Peak	Horizontal
	11072.5	32.3	16.5	48.8	74.0	-25.2	Peak	Horizontal
	11455.0	31.2	17.4	48.6	74.0	-25.4	Peak	Horizontal
*	9899.5	32.4	13.6	46.0	88.2	-42.2	Peak	Vertical
*	10290.5	30.9	14.8	45.7	88.2	-42.5	Peak	Vertical
	10783.5	30.3	16.1	46.4	74.0	-27.6	Peak	Vertical
	11217.0	30.8	16.8	47.6	74.0	-26.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT80	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9772.0	30.6	13.5	44.1	88.2	-44.1	Peak	Horizontal
*	10171.5	30.6	14.1	44.7	88.2	-43.5	Peak	Horizontal
	10843.0	31.9	16.5	48.4	74.0	-25.6	Peak	Horizontal
	11863.0	31.4	17.2	48.6	74.0	-25.4	Peak	Horizontal
*	9925.0	32.4	13.7	46.1	88.2	-42.1	Peak	Vertical
*	10273.5	32.4	14.7	47.1	88.2	-41.1	Peak	Vertical
	11472.0	31.5	17.5	49.0	74.0	-25.0	Peak	Vertical
	11684.5	29.1	17.3	46.4	74.0	-27.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT80	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10010.0	32.6	13.8	46.4	88.2	-41.8	Peak	Horizontal
*	10435.0	31.8	15.5	47.3	88.2	-40.9	Peak	Horizontal
	11506.0	31.2	17.4	48.6	74.0	-25.4	Peak	Horizontal
	11744.0	30.7	17.6	48.3	74.0	-25.7	Peak	Horizontal
*	9950.5	33.3	13.8	47.1	88.2	-41.1	Peak	Vertical
*	10435.0	32.2	15.5	47.7	88.2	-40.5	Peak	Vertical
	11557.0	30.7	17.9	48.6	74.0	-25.4	Peak	Vertical
	12152.0	31.4	17.2	48.6	74.0	-25.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9593.5	32.7	13.3	46.0	88.2	-42.2	Peak	Horizontal
*	10035.5	32.9	13.9	46.8	88.2	-41.4	Peak	Horizontal
	11336.0	30.5	17.4	47.9	74.0	-26.1	Peak	Horizontal
	11735.5	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
*	10078.0	32.1	13.7	45.8	88.2	-42.4	Peak	Vertical
*	10477.5	31.5	15.3	46.8	88.2	-41.4	Peak	Vertical
	11565.5	30.2	17.8	48.0	74.0	-26.0	Peak	Vertical
	12262.5	32.1	17.4	49.5	74.0	-24.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT160	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10078.0	32.1	13.7	45.8	88.2	-42.4	Peak	Horizontal
*	10214.0	31.1	14.3	45.4	88.2	-42.8	Peak	Horizontal
	11072.5	30.7	16.5	47.2	74.0	-26.8	Peak	Horizontal
	11727.0	31.7	17.9	49.6	74.0	-24.4	Peak	Horizontal
*	9738.0	33.5	13.5	47.0	88.2	-41.2	Peak	Vertical
*	10435.0	30.5	15.5	46.0	88.2	-42.2	Peak	Vertical
	10749.5	32.4	16.0	48.4	74.0	-25.6	Peak	Vertical
	11633.5	30.8	17.7	48.5	74.0	-25.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT160	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10120.5	31.0	14.1	45.1	88.2	-43.1	Peak	Horizontal
*	10282.0	32.9	14.8	47.7	88.2	-40.5	Peak	Horizontal
	10656.0	32.2	15.8	48.0	74.0	-26.0	Peak	Horizontal
	11803.5	30.3	17.7	48.0	74.0	-26.0	Peak	Horizontal
*	9678.5	33.1	13.5	46.6	88.2	-41.6	Peak	Vertical
*	10537.0	30.7	15.2	45.9	88.2	-42.3	Peak	Vertical
	10834.5	32.0	16.4	48.4	74.0	-25.6	Peak	Vertical
	11650.5	30.5	17.8	48.3	74.0	-25.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT320-1	Test Channel	159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10035.5	31.1	13.9	45.0	88.2	-43.2	Peak	Horizontal
*	10307.5	29.7	14.9	44.6	88.2	-43.6	Peak	Horizontal
	11123.5	30.7	16.4	47.1	74.0	-26.9	Peak	Horizontal
	11480.5	31.3	17.6	48.9	74.0	-25.1	Peak	Horizontal
*	10027.0	32.2	13.9	46.1	88.2	-42.1	Peak	Vertical
*	10545.5	32.0	15.2	47.2	88.2	-41.0	Peak	Vertical
	10809.0	32.0	16.5	48.5	74.0	-25.5	Peak	Vertical
	11633.5	30.9	17.7	48.6	74.0	-25.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-02-22
Test Mode	802.11be-EHT320-2	Test Channel	191
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9916.5	32.7	13.7	46.4	88.2	-41.8	Peak	Horizontal
*	10384.0	31.9	15.1	47.0	88.2	-41.2	Peak	Horizontal
	11047.0	30.9	16.2	47.1	74.0	-26.9	Peak	Horizontal
	11812.0	31.0	17.7	48.7	74.0	-25.3	Peak	Horizontal
*	9899.5	31.6	13.6	45.2	88.2	-43.0	Peak	Vertical
*	10265.0	30.4	14.6	45.0	88.2	-43.2	Peak	Vertical
	10783.5	32.6	16.1	48.7	74.0	-25.3	Peak	Vertical
	11557.0	30.7	17.9	48.6	74.0	-25.4	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission for 30 MHz ~ 1 GHz:

Site	WZ-AC1	Test Date	2025-12-27
Temperature	20.9 °C	Humidity	35.6%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 6535 MHz		

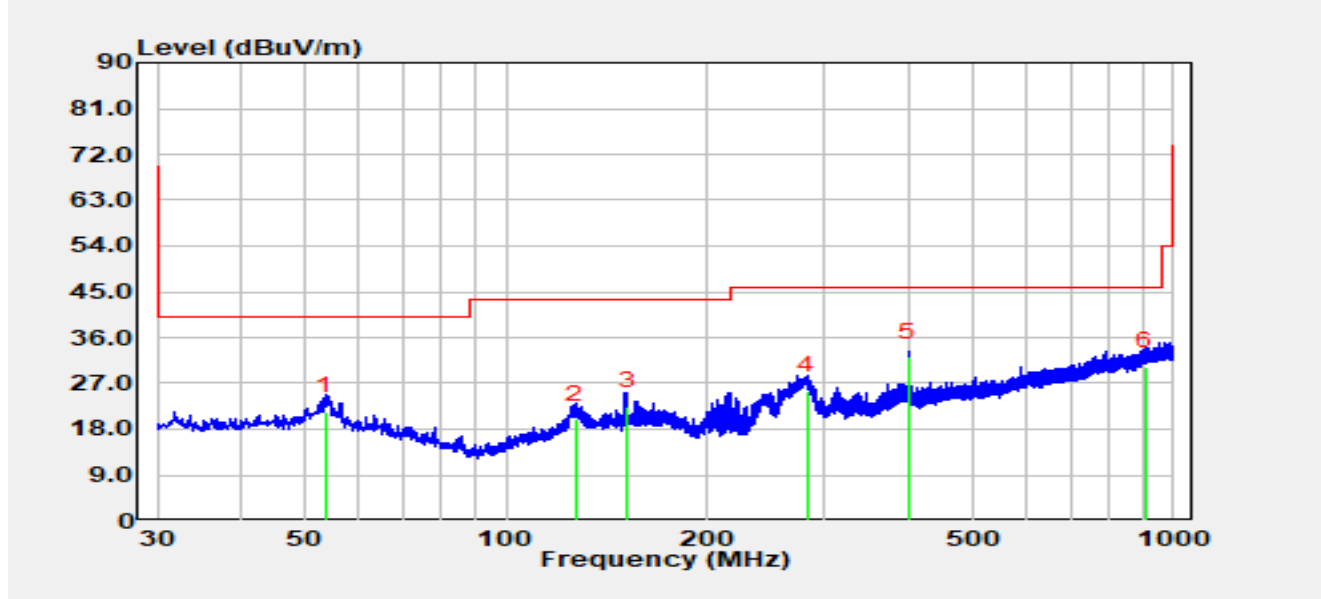


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		53.47	3.24	18.23	21.47	-18.53	40.00	QP
2		127.10	3.16	16.75	19.91	-23.59	43.50	QP
3		151.93	4.28	18.15	22.43	-21.07	43.50	QP
4		282.59	7.26	18.28	25.54	-20.46	46.00	QP
5	*	400.00	11.03	21.23	32.26	-13.74	46.00	QP
6		908.72	0.21	30.06	30.27	-15.73	46.00	QP

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of the radiated emissions in the frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz is close to the ambient noise level, and all emissions are at least 20 dB below the applicable limit. Therefore, the data is not presented in this report.

Site	WZ-AC1	Test Date	2025-12-27
Temperature	20.9 °C	Humidity	35.6%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 6535 MHz		

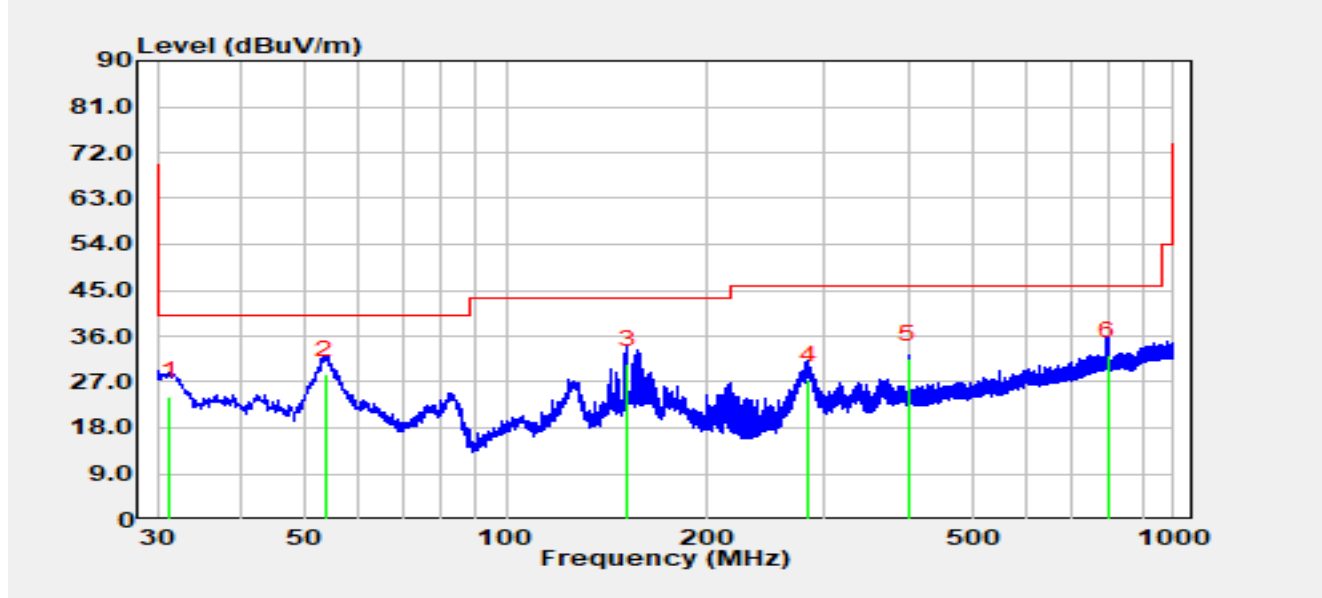


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		31.26	7.22	17.02	24.24	-15.76	40.00	QP
2	*	53.47	10.26	18.23	28.49	-11.51	40.00	QP
3		152.03	12.41	18.15	30.56	-12.94	43.50	QP
4		283.27	9.14	18.31	27.45	-18.55	46.00	QP
5		400.00	10.24	21.23	31.47	-14.53	46.00	QP
6		798.73	3.28	28.85	32.13	-13.87	46.00	QP

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of the radiated emissions in the frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz is close to the ambient noise level, and all emissions are at least 20 dB below the applicable limit. Therefore, the data is not presented in this report.

A.9 Radiated Band Edge Test Result

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 7095 MHz	

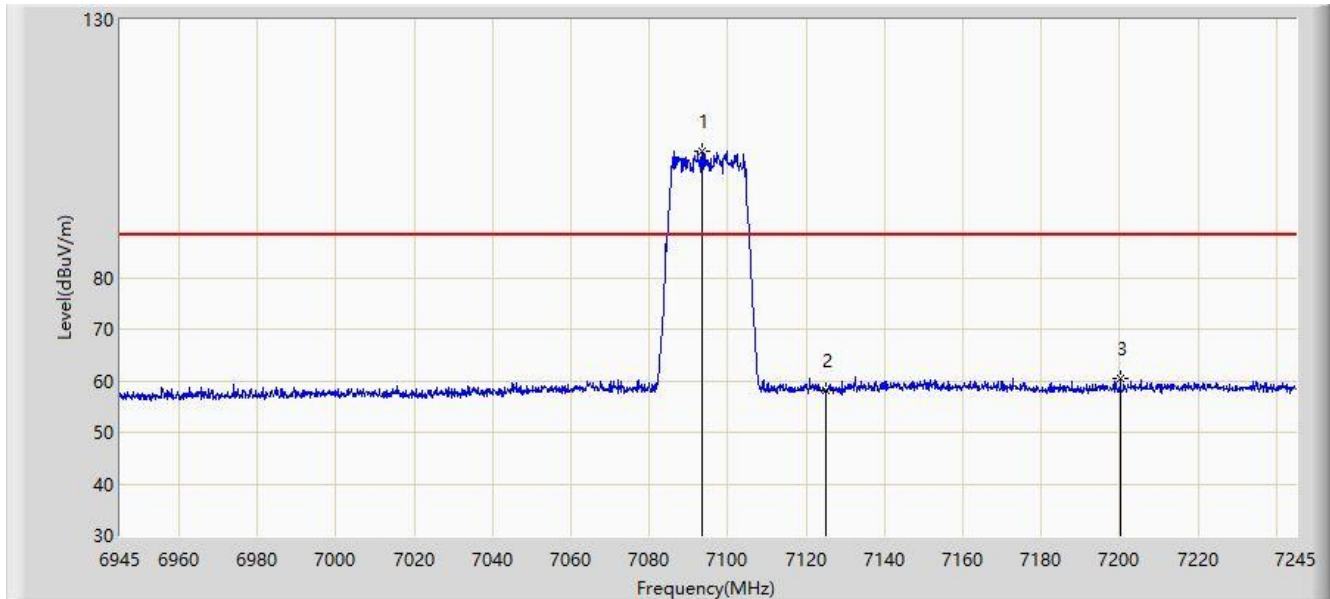


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7093.650	104.540	93.559	N/A	N/A	10.981	PK
2		7125.000	58.068	46.854	-30.132	88.200	11.214	PK
3	*	7200.300	60.336	48.977	-27.864	88.200	11.359	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 7095 MHz	

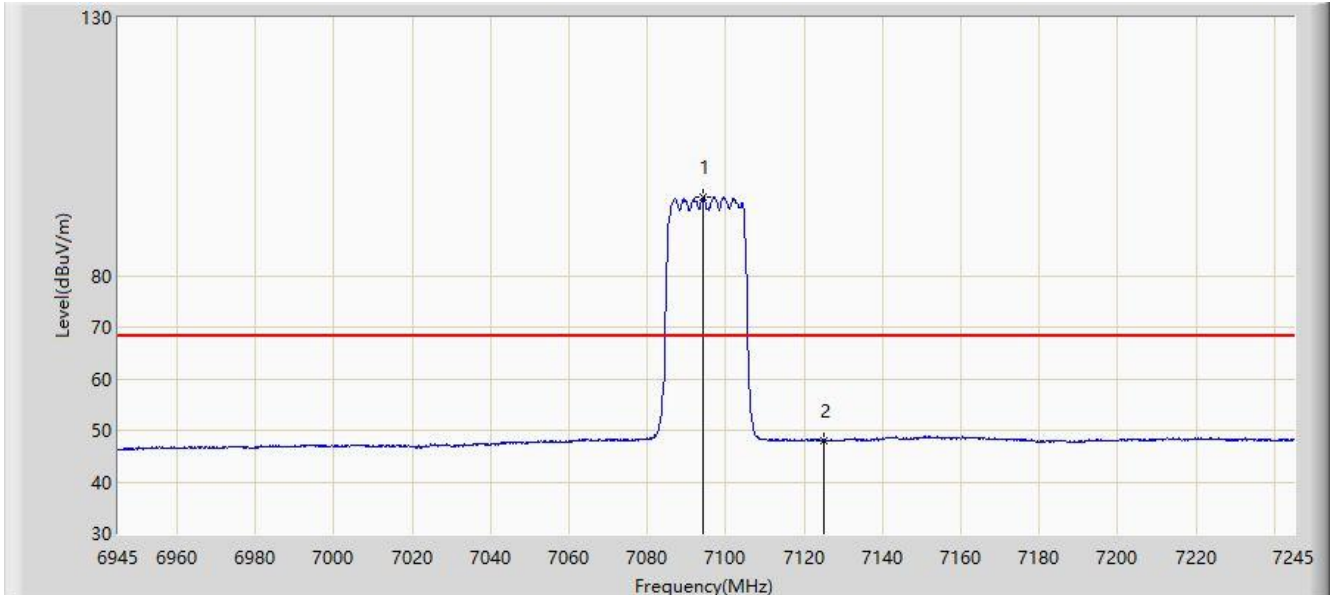


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7094.400	95.208	84.229	N/A	N/A	10.979	AV
2	*	7125.000	48.054	36.840	-20.146	68.200	11.214	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 7095 MHz	

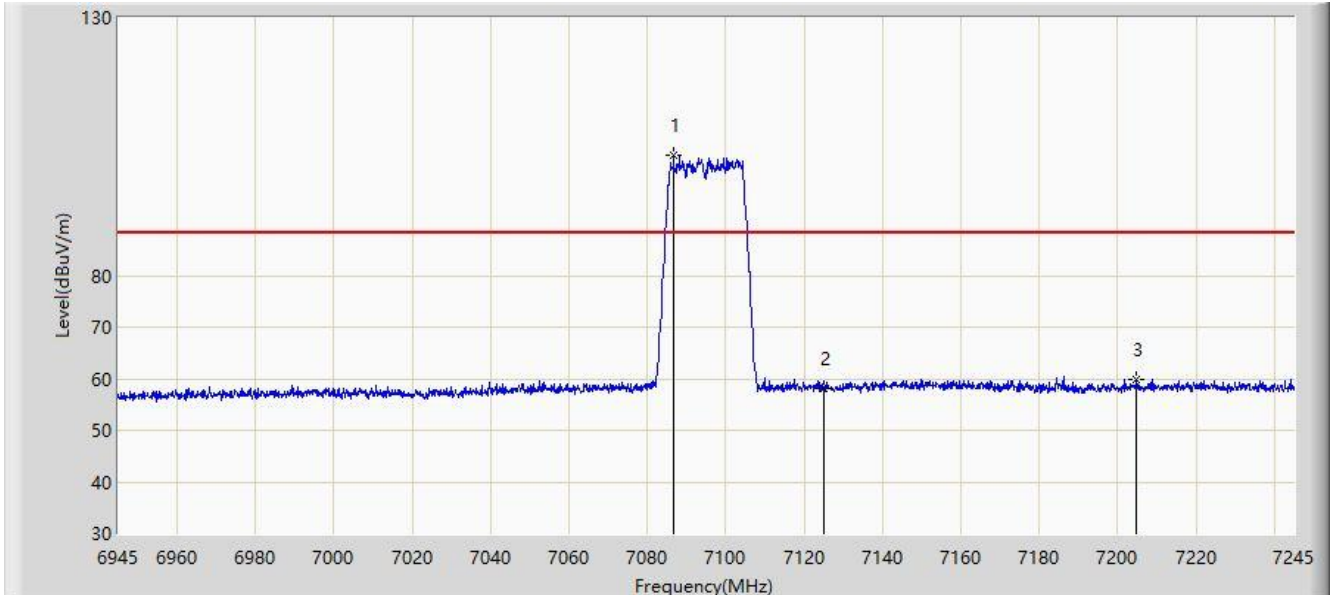


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7086.750	103.235	92.228	N/A	N/A	11.007	PK
2		7125.000	58.210	46.996	-29.990	88.200	11.214	PK
3	*	7204.950	59.999	48.658	-28.201	88.200	11.341	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 7095 MHz	

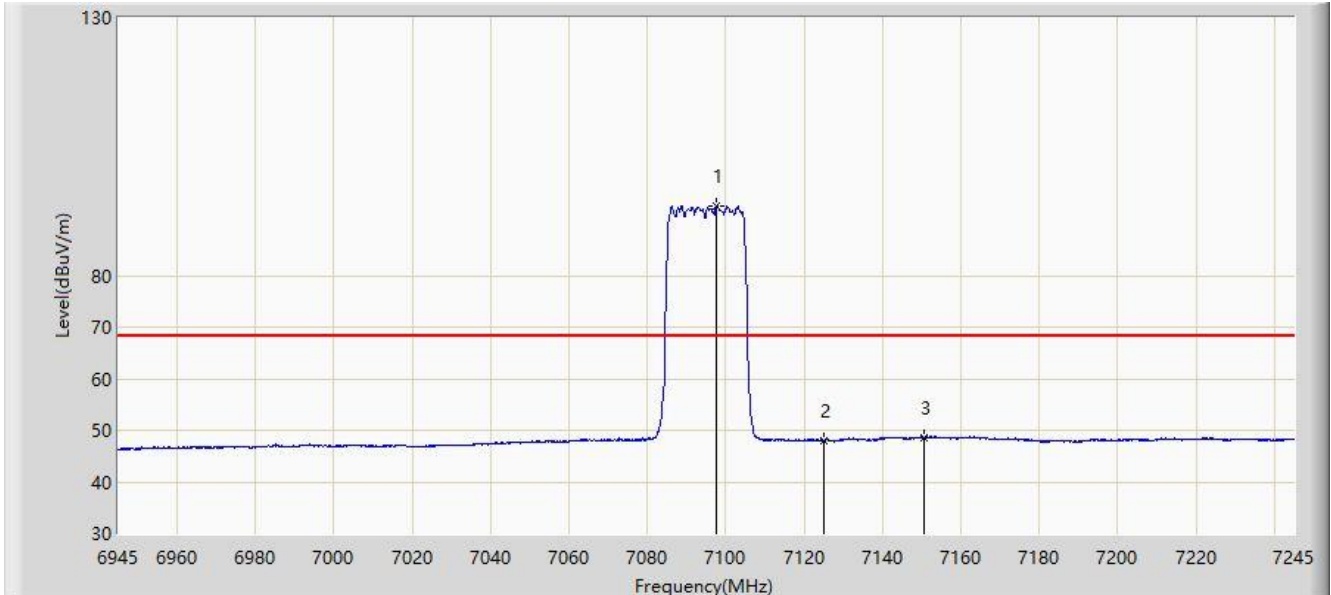


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7097.700	93.609	82.641	N/A	N/A	10.968	AV
2		7125.000	48.077	36.863	-20.123	68.200	11.214	AV
3	*	7150.650	48.585	36.851	-19.615	68.200	11.734	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 7085 MHz	

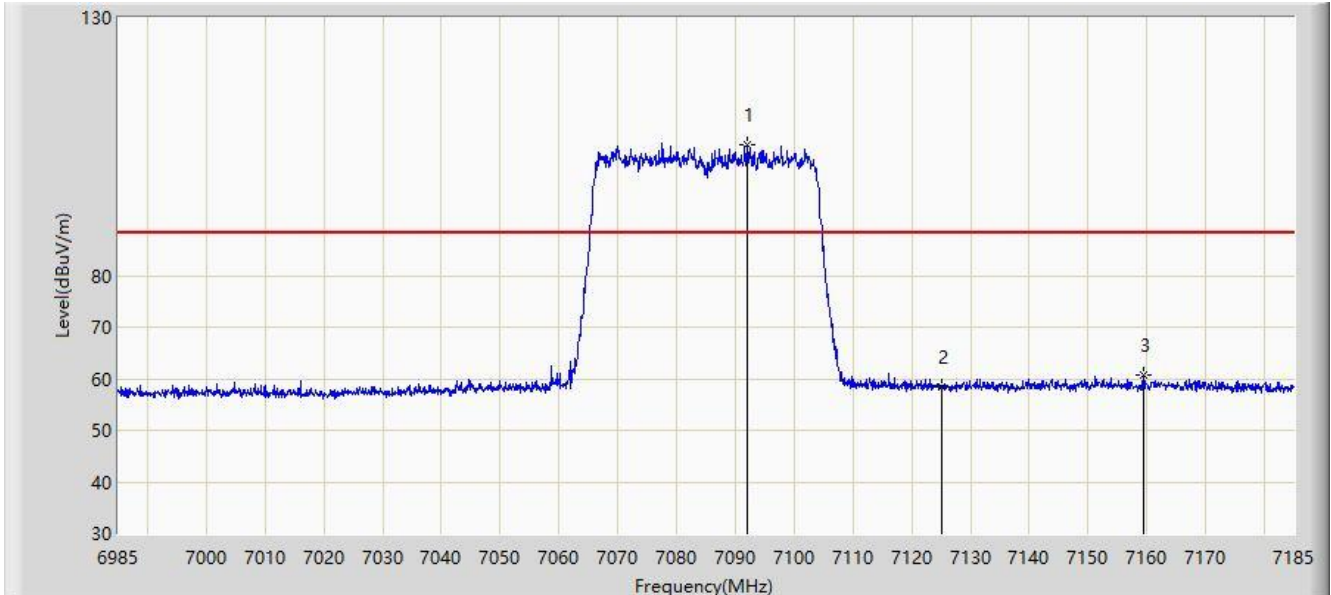


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7091.900	105.348	94.507	N/A	N/A	10.840	PK
2		7125.000	58.271	47.207	-29.929	88.200	11.064	PK
3	*	7159.400	60.611	49.166	-27.589	88.200	11.445	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 7085 MHz	

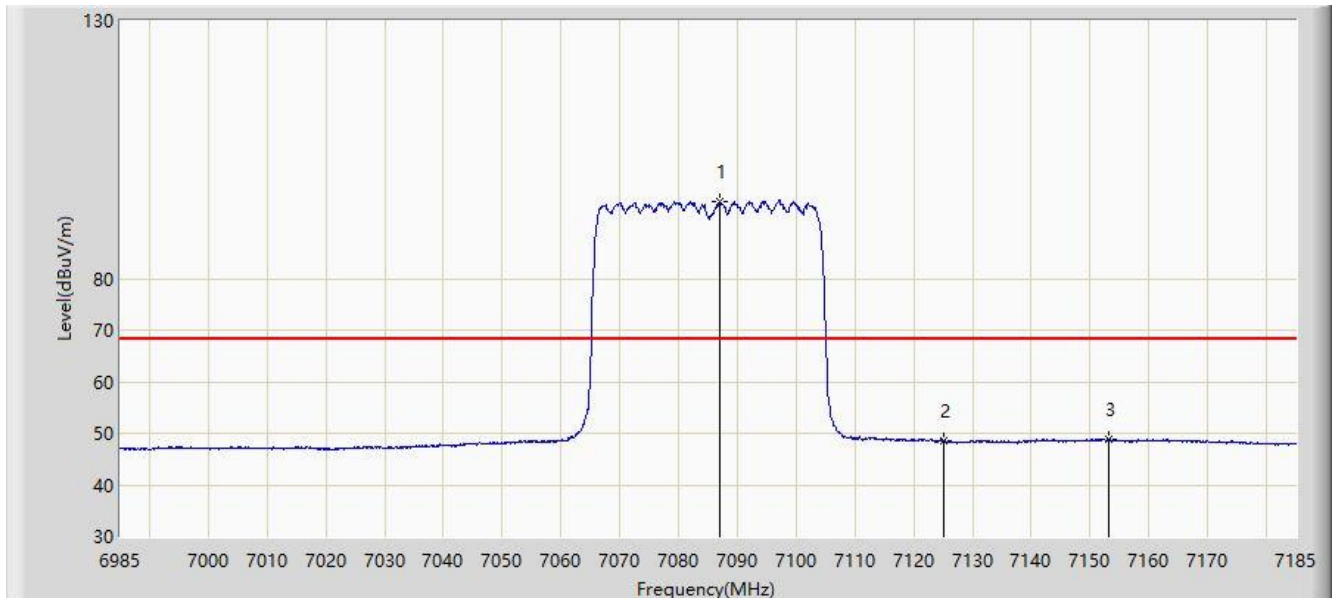


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7087.000	94.851	83.845	N/A	N/A	11.007	AV
2		7125.000	48.583	37.369	-19.617	68.200	11.214	AV
3	*	7153.100	48.796	37.080	-19.404	68.200	11.715	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 7085 MHz	

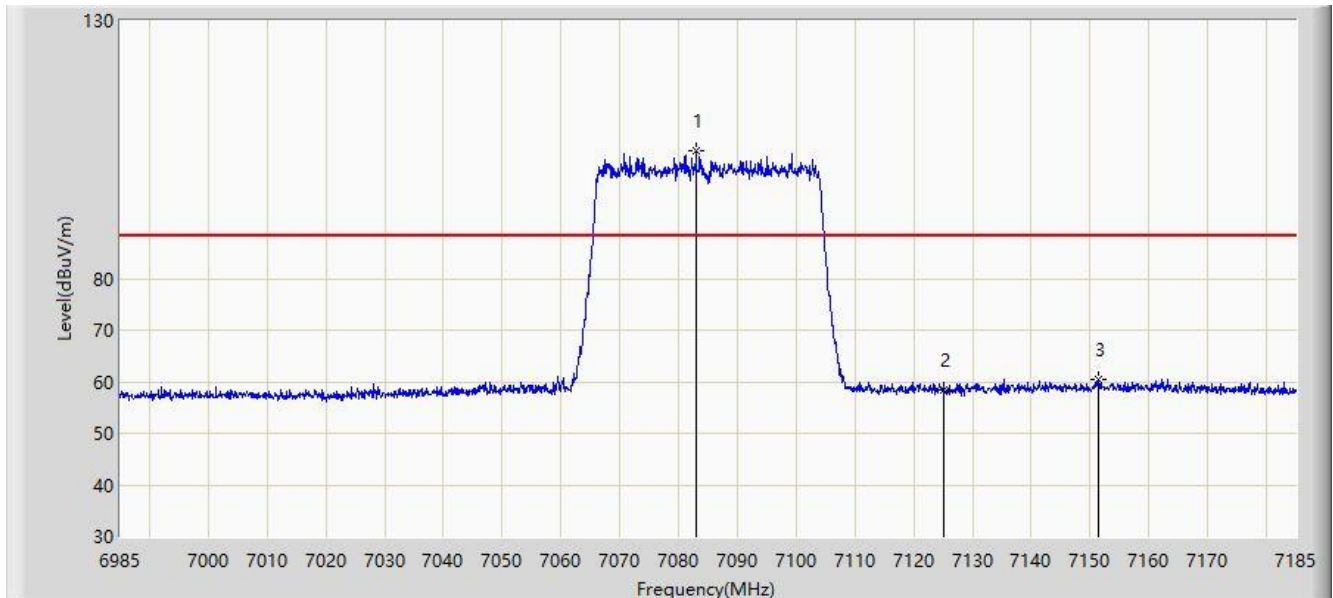


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7083.000	104.668	93.643	N/A	N/A	11.026	PK
2		7125.000	58.341	47.127	-29.859	88.200	11.214	PK
3	*	7151.500	60.369	48.641	-27.831	88.200	11.728	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 7085 MHz	

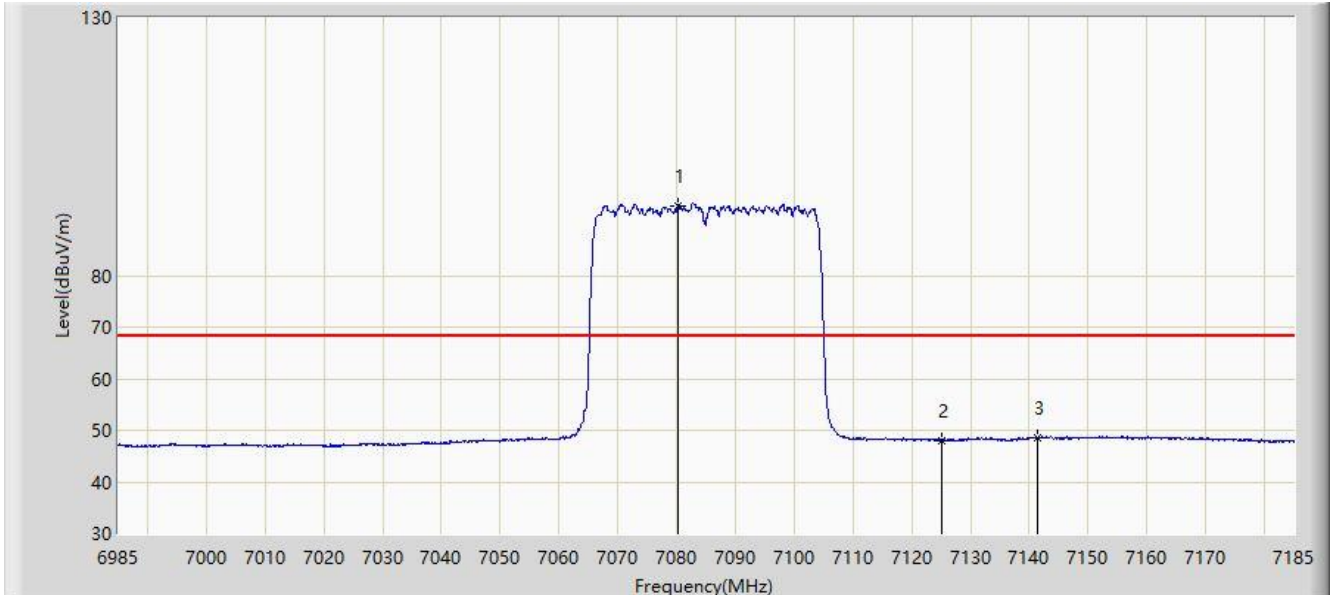


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7080.200	93.597	82.558	N/A	N/A	11.039	AV
2		7125.000	47.992	36.778	-20.208	68.200	11.214	AV
3	*	7141.400	48.542	36.870	-19.658	68.200	11.672	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 7025 MHz	

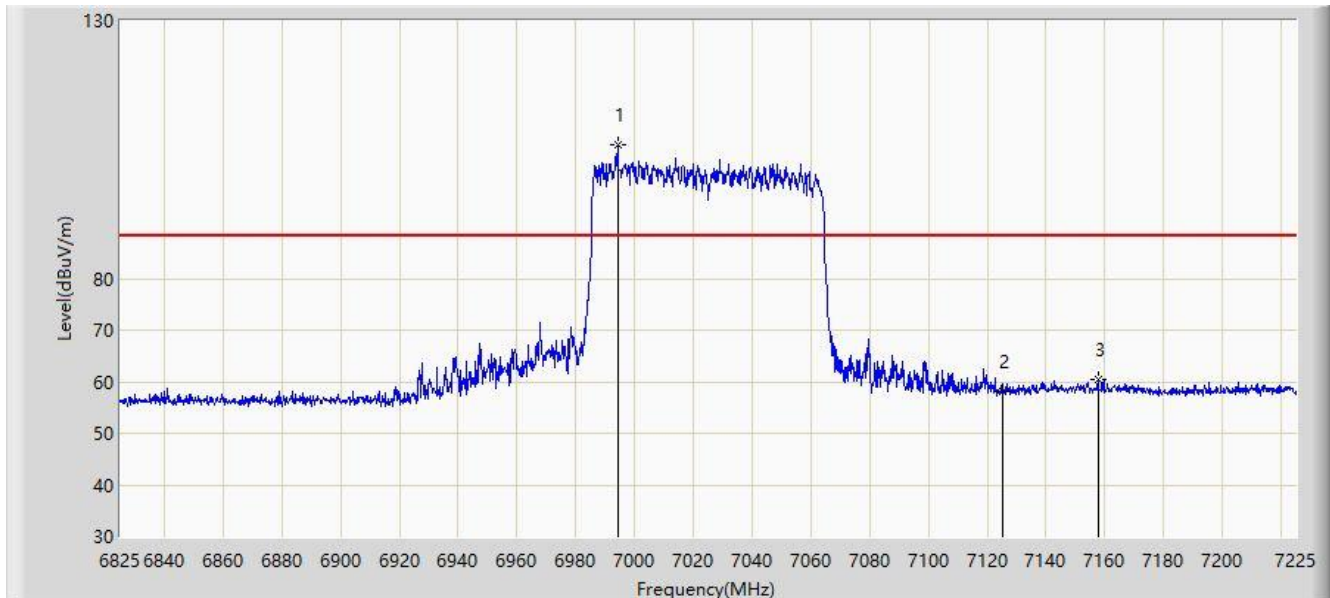


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6994.200	105.800	95.668	N/A	N/A	10.132	PK
2		7125.000	58.020	46.806	-30.180	88.200	11.214	PK
3	*	7157.600	60.432	48.801	-27.768	88.200	11.631	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 7025 MHz	

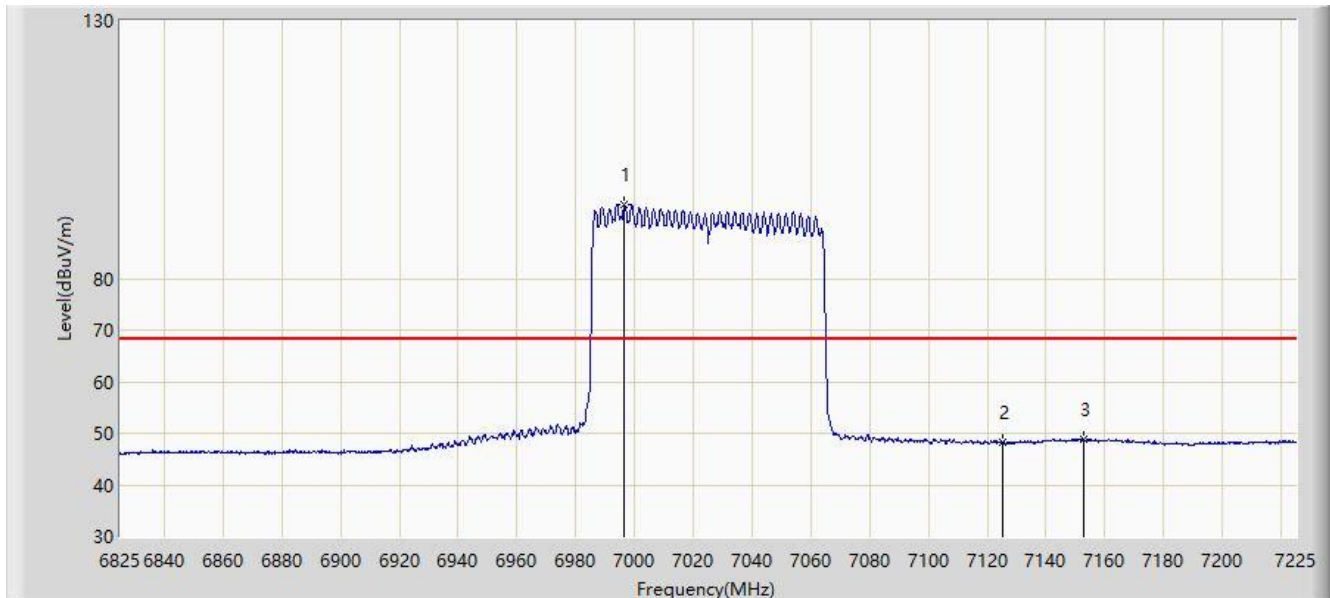


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6996.400	94.265	84.118	N/A	N/A	10.147	AV
2		7125.000	48.148	36.934	-20.052	68.200	11.214	AV
3	*	7152.600	48.801	37.082	-19.399	68.200	11.719	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 7025 MHz	

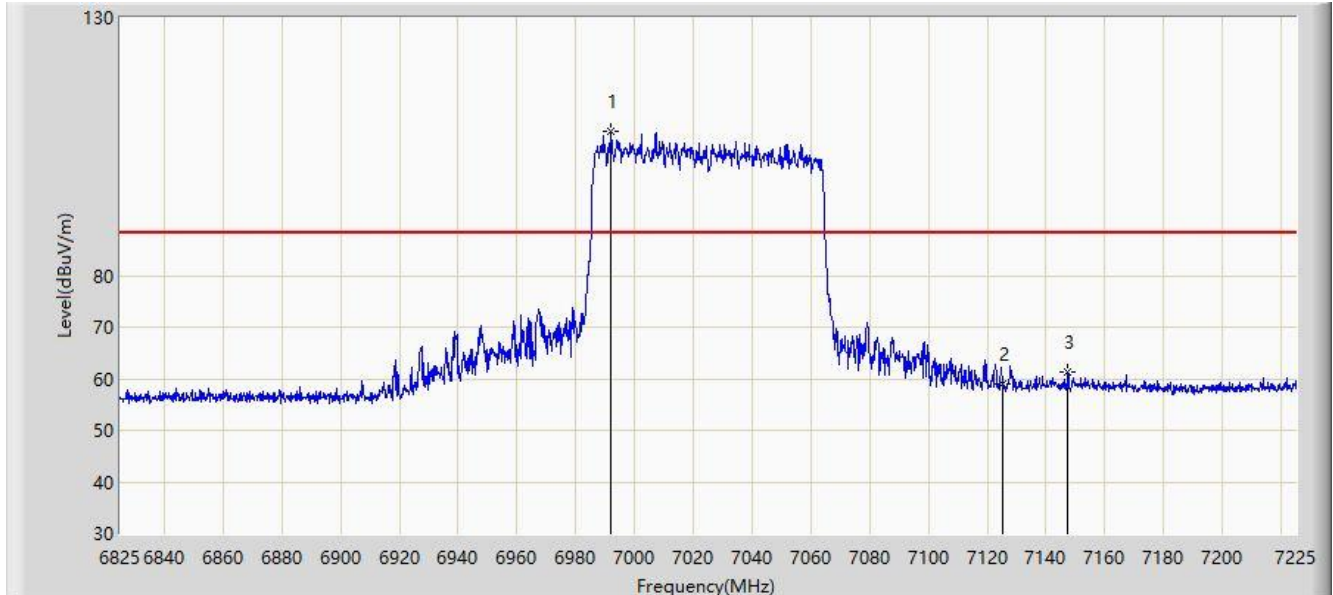


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6992.000	108.023	97.905	N/A	N/A	10.117	PK
2		7125.000	58.937	47.723	-29.263	88.200	11.214	PK
3	*	7147.400	61.238	49.480	-26.962	88.200	11.758	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 7025 MHz	

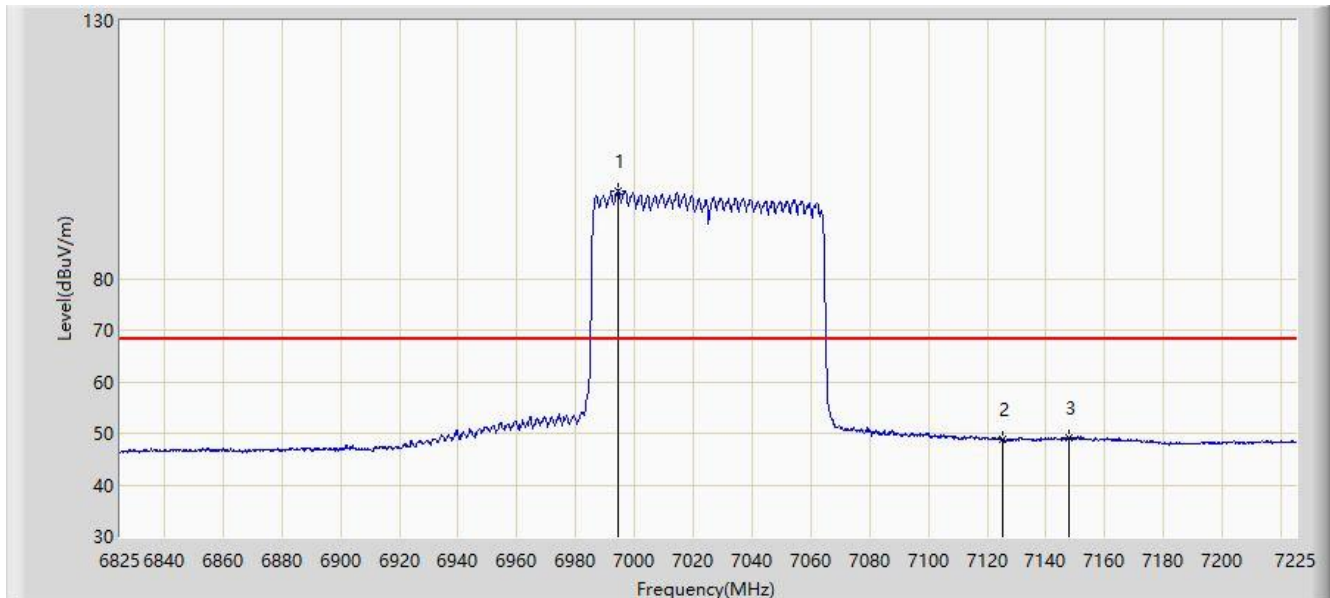


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6994.600	97.085	86.950	N/A	N/A	10.136	AV
2		7125.000	48.922	37.708	-19.278	68.200	11.214	AV
3	*	7147.800	49.158	37.403	-19.042	68.200	11.755	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 6985 MHz	

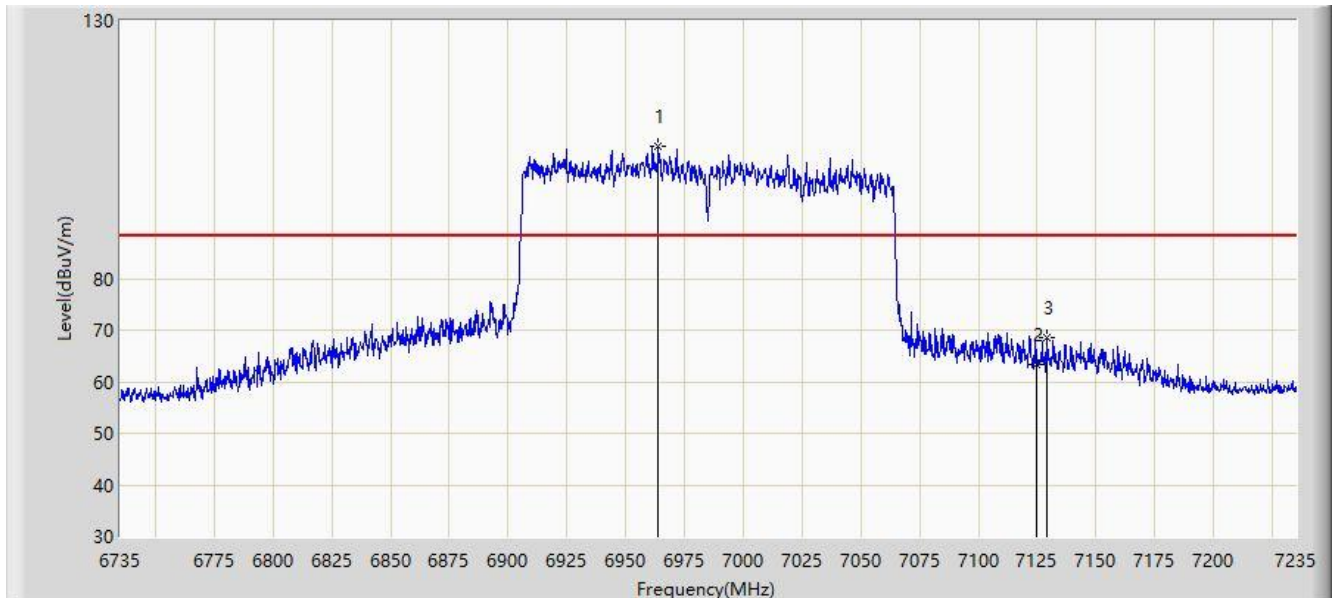

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6964.000	105.695	95.955	N/A	N/A	9.739	PK
2		7125.000	63.447	52.233	-24.753	88.200	11.214	PK
3	*	7129.250	68.432	57.116	-19.768	88.200	11.316	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).