


Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 6985 MHz	

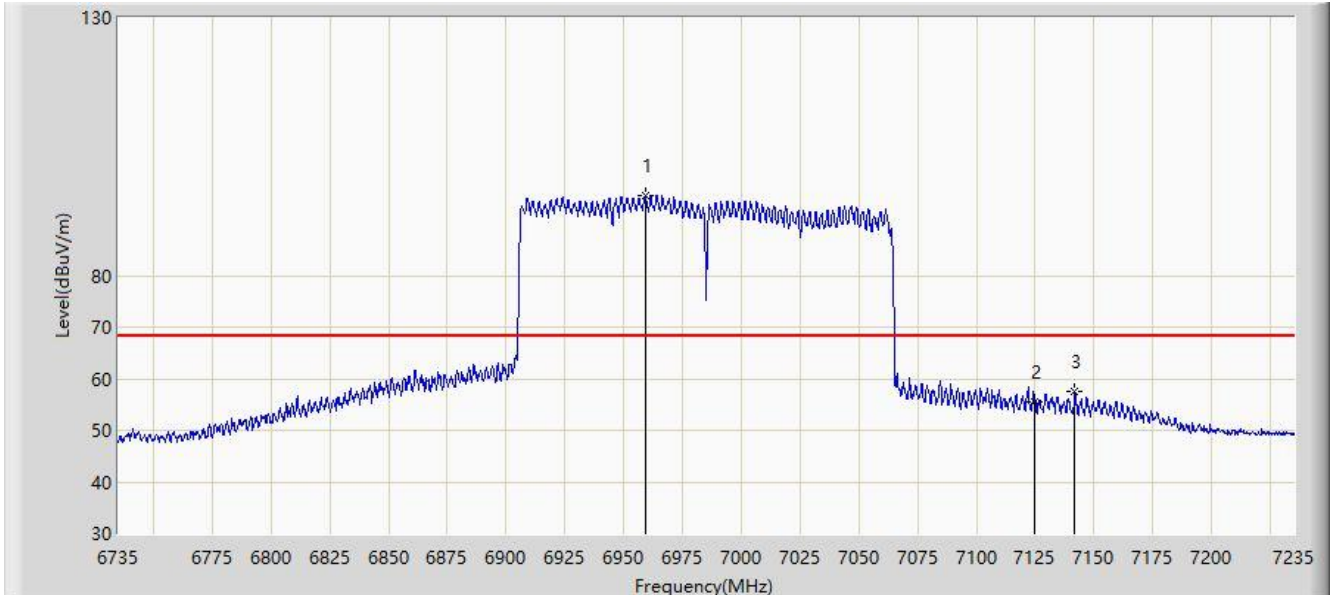


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6959.000	95.537	85.917	N/A	N/A	9.620	AV
2		7125.000	55.371	44.157	-12.829	68.200	11.214	AV
3	*	7141.750	57.414	45.735	-10.786	68.200	11.679	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 6985 MHz	

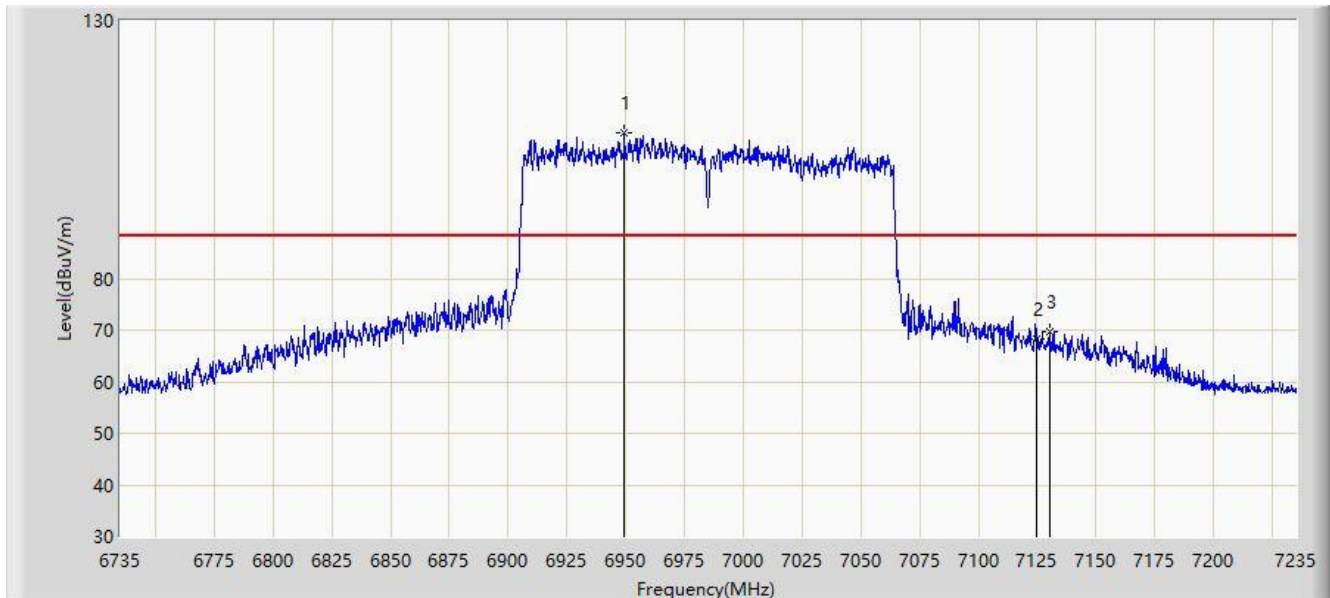


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6949.500	108.283	98.885	N/A	N/A	9.398	PK
2		7125.000	68.157	56.943	-20.043	88.200	11.214	PK
3	*	7130.500	69.657	58.298	-18.543	88.200	11.359	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 6985 MHz	

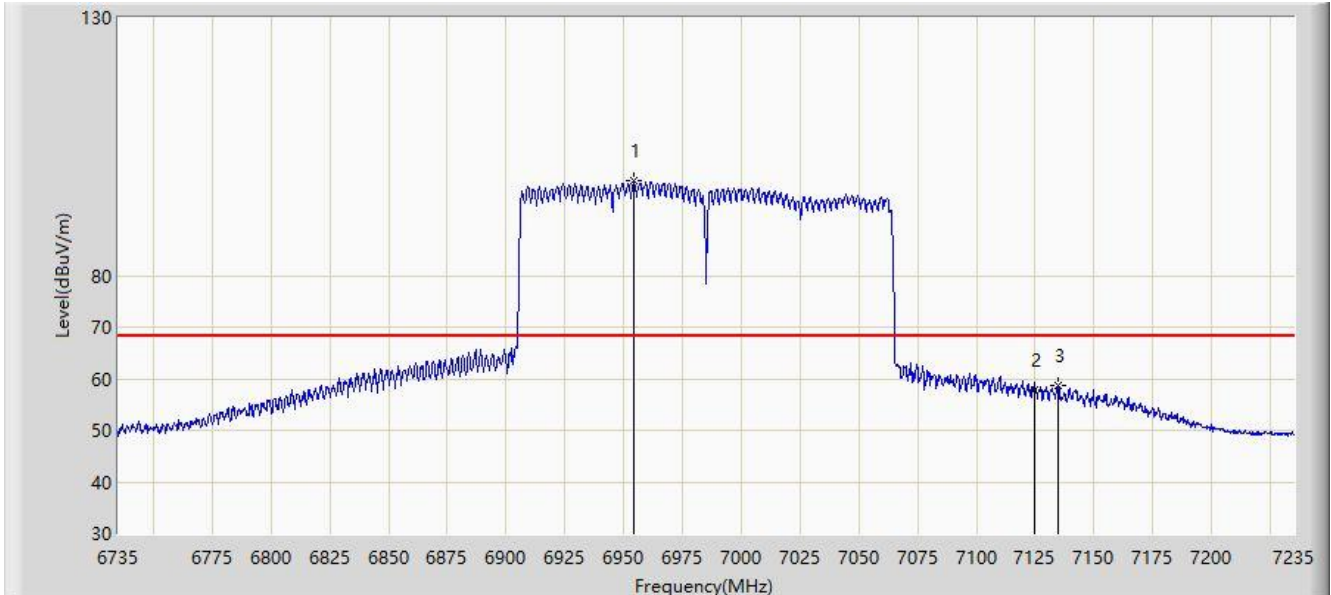


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6954.500	98.277	88.765	N/A	N/A	9.512	AV
2		7125.000	57.825	46.611	-10.375	68.200	11.214	AV
3	*	7135.000	58.807	47.293	-9.393	68.200	11.514	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 7095 MHz	

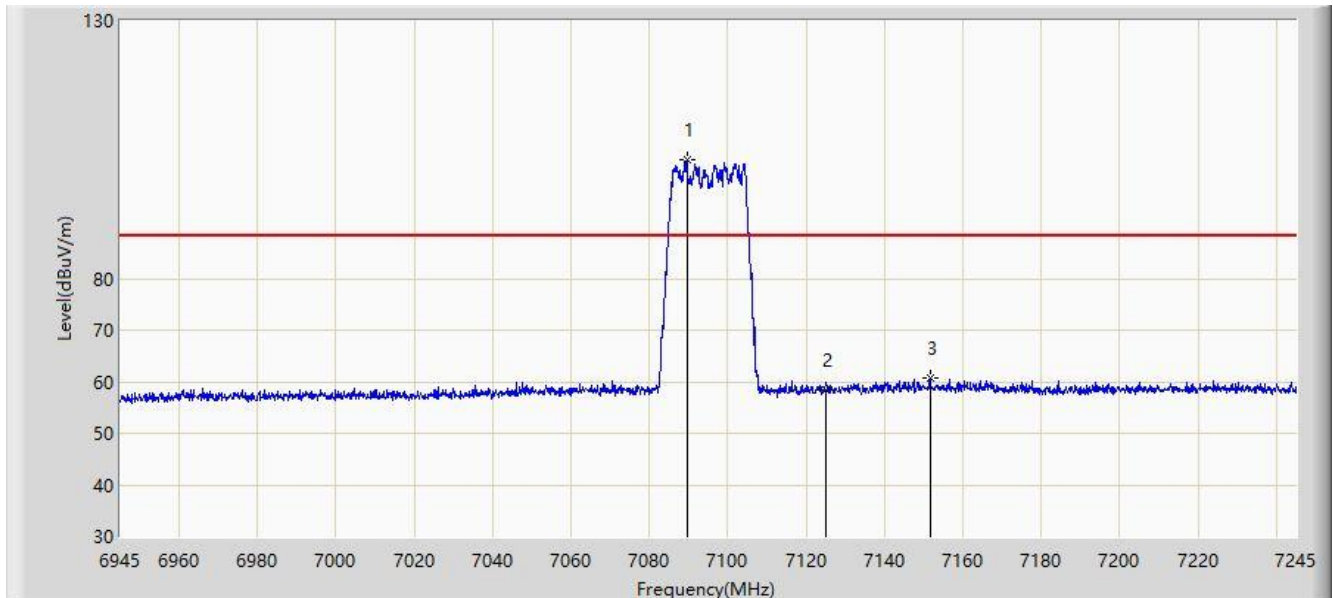


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7089.600	103.075	92.079	N/A	N/A	10.996	PK
2		7125.000	58.471	47.257	-29.729	88.200	11.214	PK
3	*	7151.700	60.701	48.975	-27.499	88.200	11.726	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 7095 MHz	

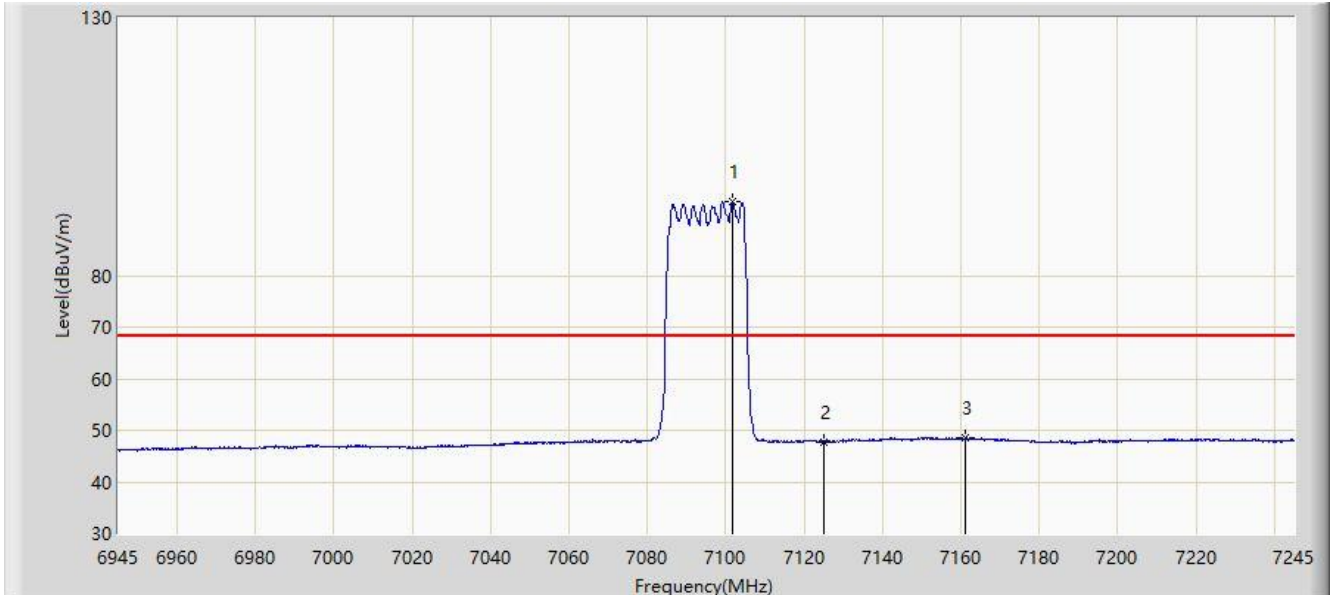


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7101.750	94.261	83.306	N/A	N/A	10.955	AV
2		7125.000	47.770	36.556	-20.430	68.200	11.214	AV
3	*	7161.300	48.510	36.959	-19.690	68.200	11.551	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 7095 MHz	

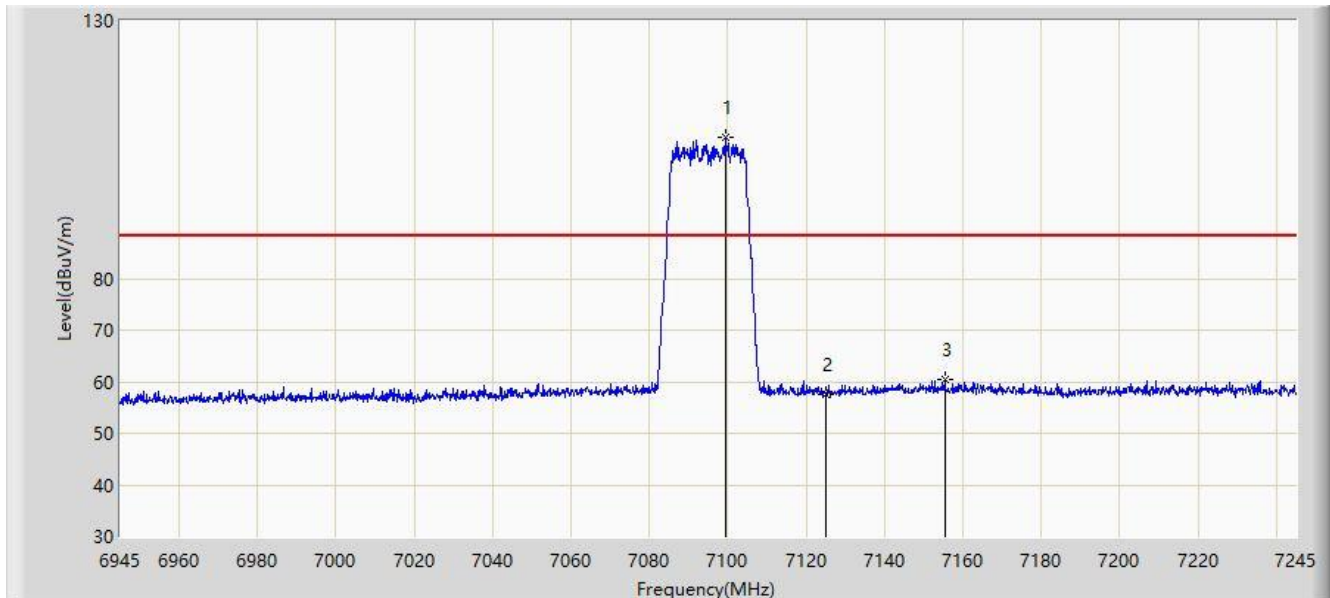


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7099.350	107.518	96.555	N/A	N/A	10.963	PK
2		7125.000	57.672	46.458	-30.528	88.200	11.214	PK
3	*	7155.450	60.528	48.850	-27.672	88.200	11.678	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 7095 MHz	

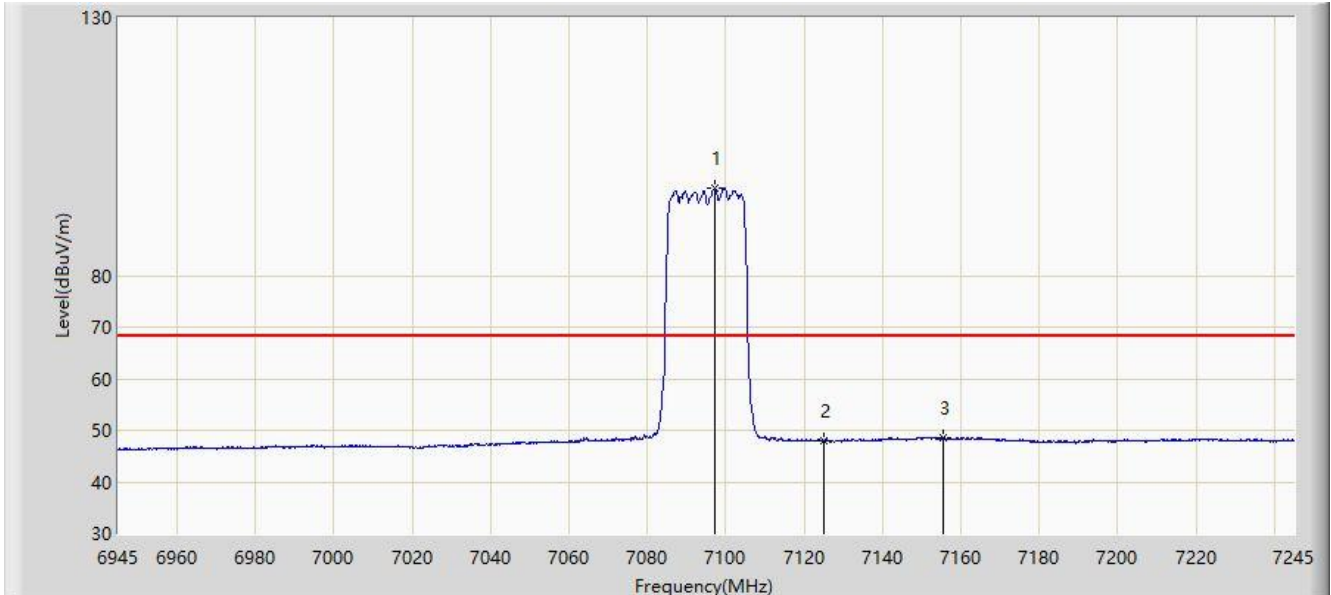


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7097.400	97.004	86.035	N/A	N/A	10.968	AV
2		7125.000	47.969	36.755	-20.231	68.200	11.214	AV
3	*	7155.450	48.571	36.893	-19.629	68.200	11.678	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 7085 MHz	

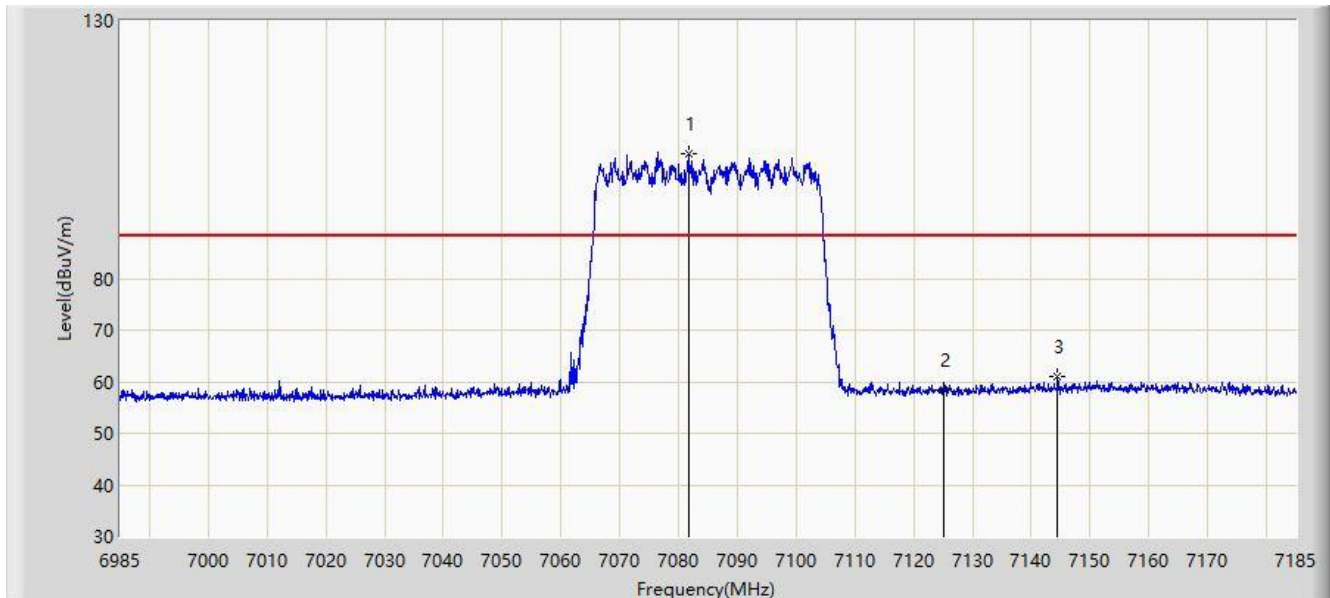


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7081.700	104.220	93.188	N/A	N/A	11.031	PK
2		7125.000	58.420	47.206	-29.780	88.200	11.214	PK
3	*	7144.500	61.003	49.268	-27.197	88.200	11.734	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 7085 MHz	

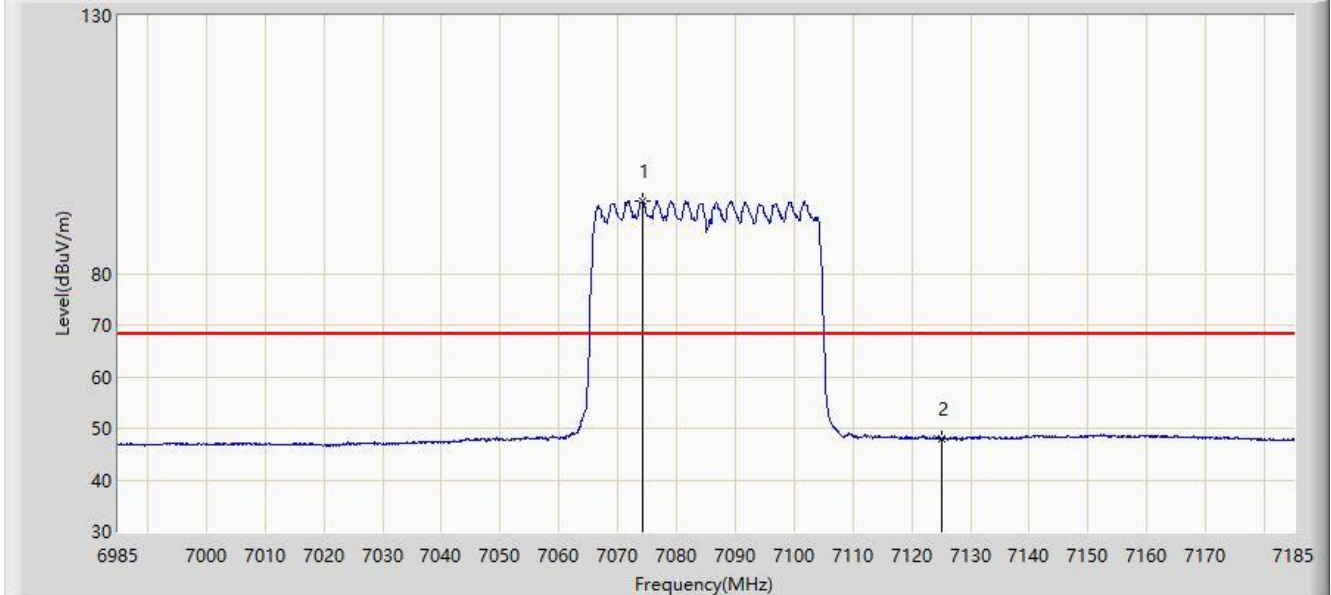


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7074.100	94.134	83.063	N/A	N/A	11.070	AV
2	*	7125.000	47.916	36.702	-20.284	68.200	11.214	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 7085 MHz	

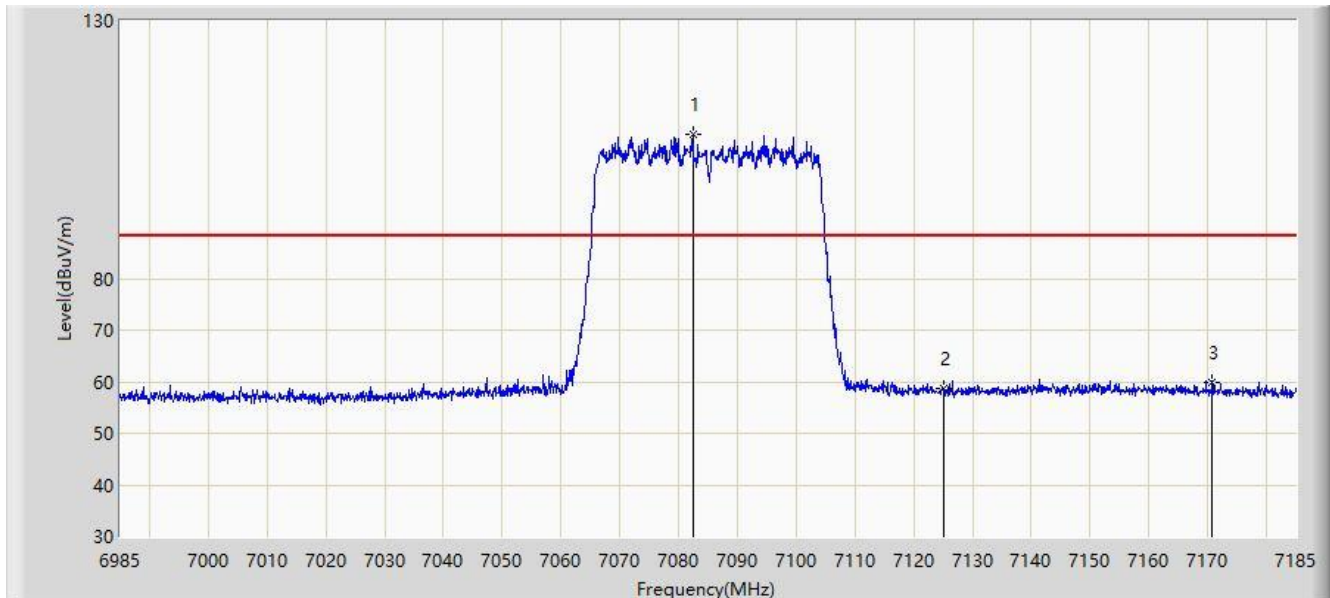


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7082.400	107.958	96.930	N/A	N/A	11.028	PK
2		7125.000	58.587	47.373	-29.613	88.200	11.214	PK
3	*	7170.800	60.000	48.656	-28.200	88.200	11.344	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 7085 MHz	

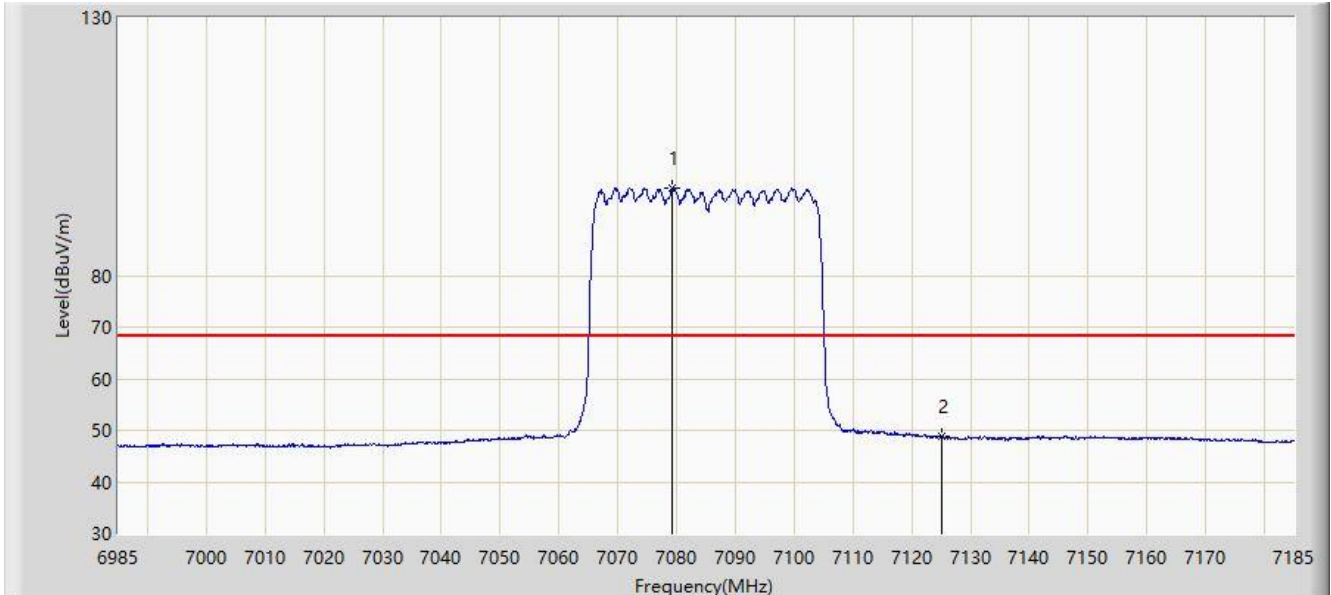


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7079.300	97.014	85.970	N/A	N/A	11.044	AV
2	*	7125.000	48.698	37.484	-19.502	68.200	11.214	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 7025 MHz	

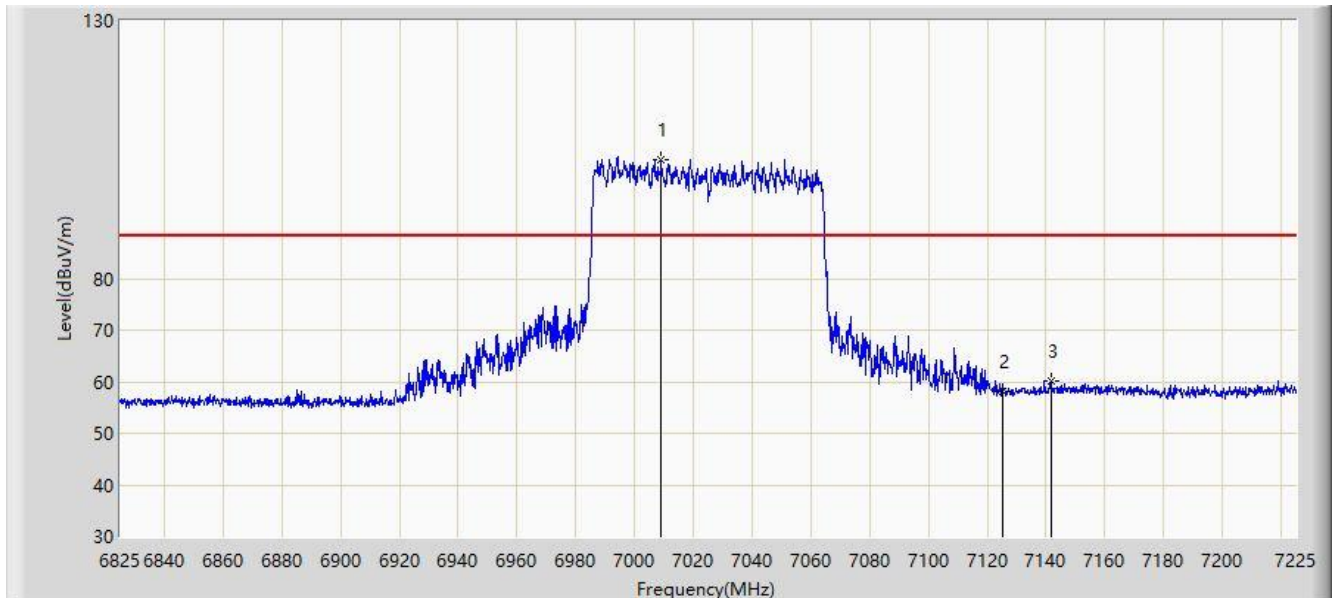


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7009.200	103.101	92.947	N/A	N/A	10.154	PK
2		7125.000	58.131	46.917	-30.069	88.200	11.214	PK
3	*	7141.600	60.133	48.457	-28.067	88.200	11.675	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 7025 MHz	

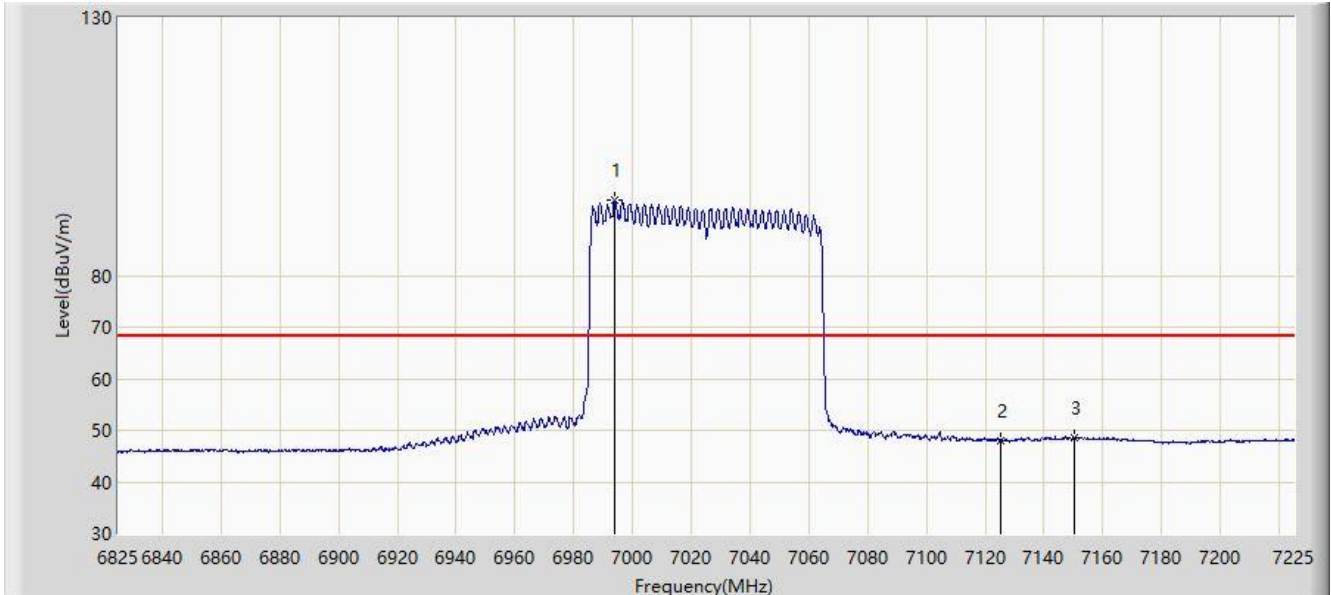


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6994.000	94.567	84.436	N/A	N/A	10.132	AV
2		7125.000	48.098	36.884	-20.102	68.200	11.214	AV
3	*	7150.400	48.586	36.850	-19.614	68.200	11.736	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-03
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 7025 MHz	

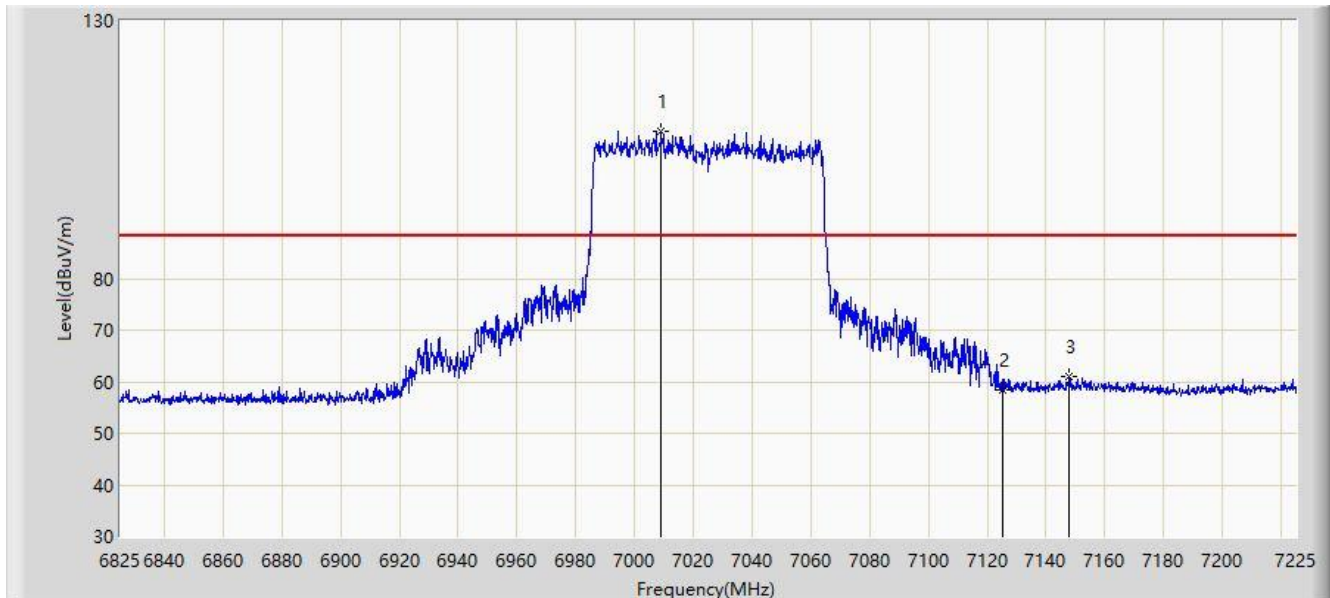


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7009.000	108.665	98.510	N/A	N/A	10.155	PK
2		7125.000	58.375	47.161	-29.825	88.200	11.214	PK
3	*	7148.000	61.056	49.302	-27.144	88.200	11.754	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-03
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 7025 MHz	

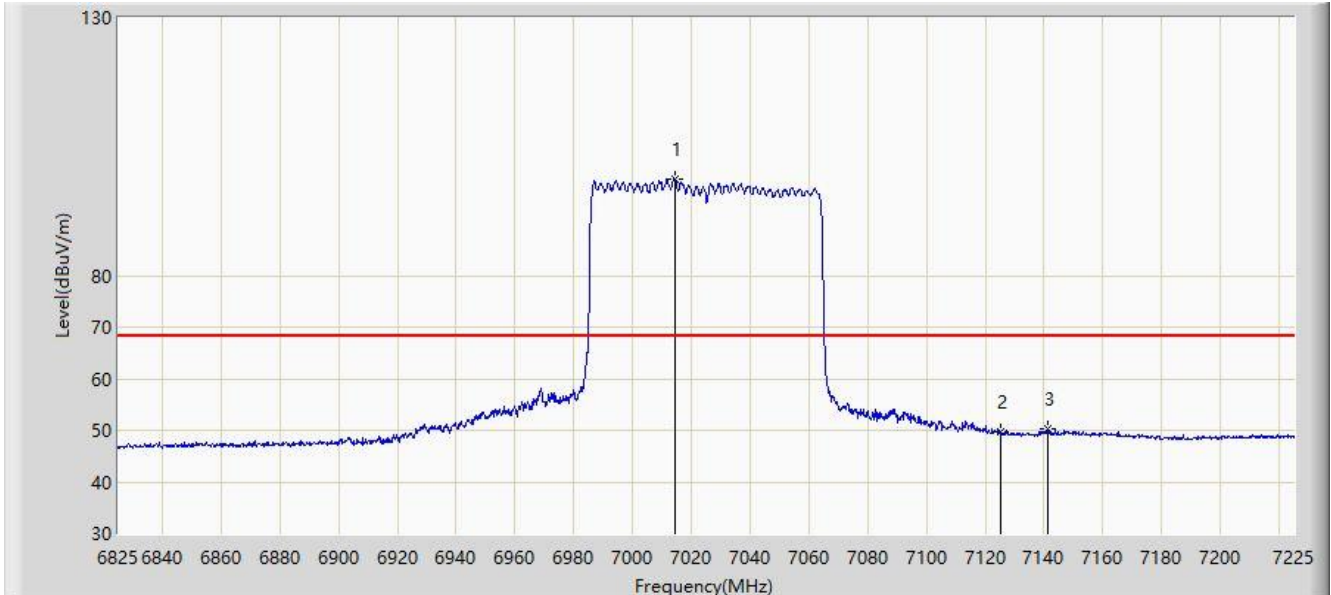


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7014.600	98.612	88.476	N/A	N/A	10.136	AV
2		7125.000	49.592	38.378	-18.608	68.200	11.214	AV
3	*	7141.400	50.319	38.647	-17.881	68.200	11.672	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 6985 MHz	

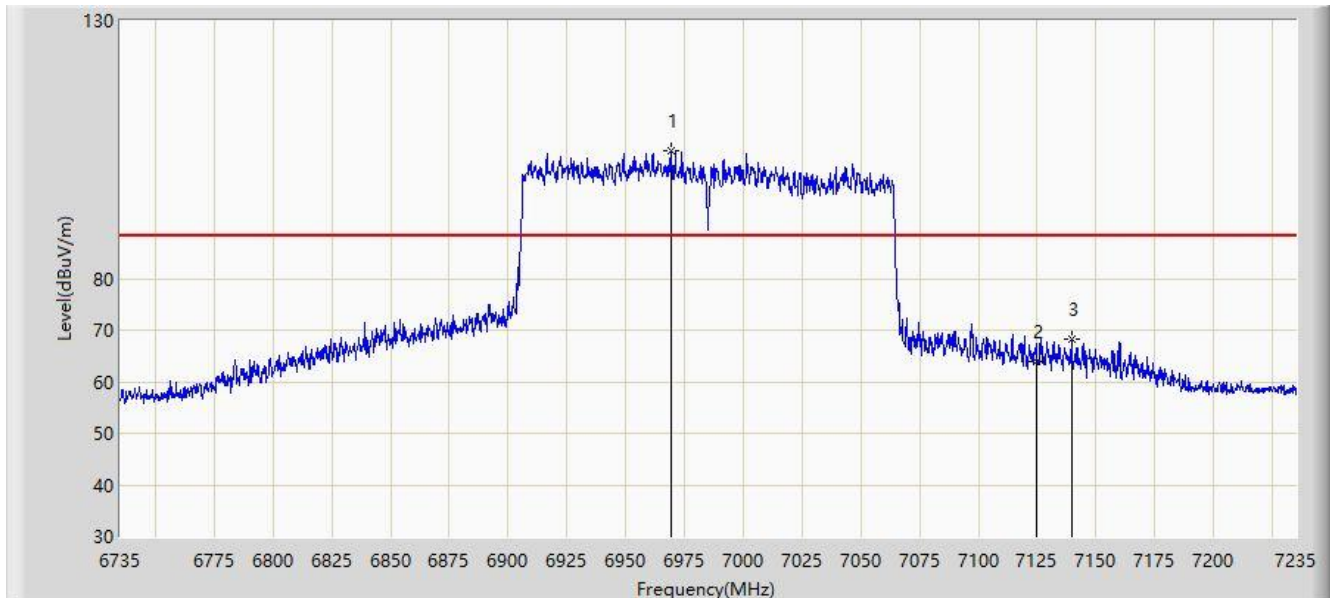


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6969.500	104.691	94.844	N/A	N/A	9.847	PK
2		7125.000	63.935	52.721	-24.265	88.200	11.214	PK
3	*	7139.750	68.241	56.603	-19.959	88.200	11.638	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 6985 MHz	

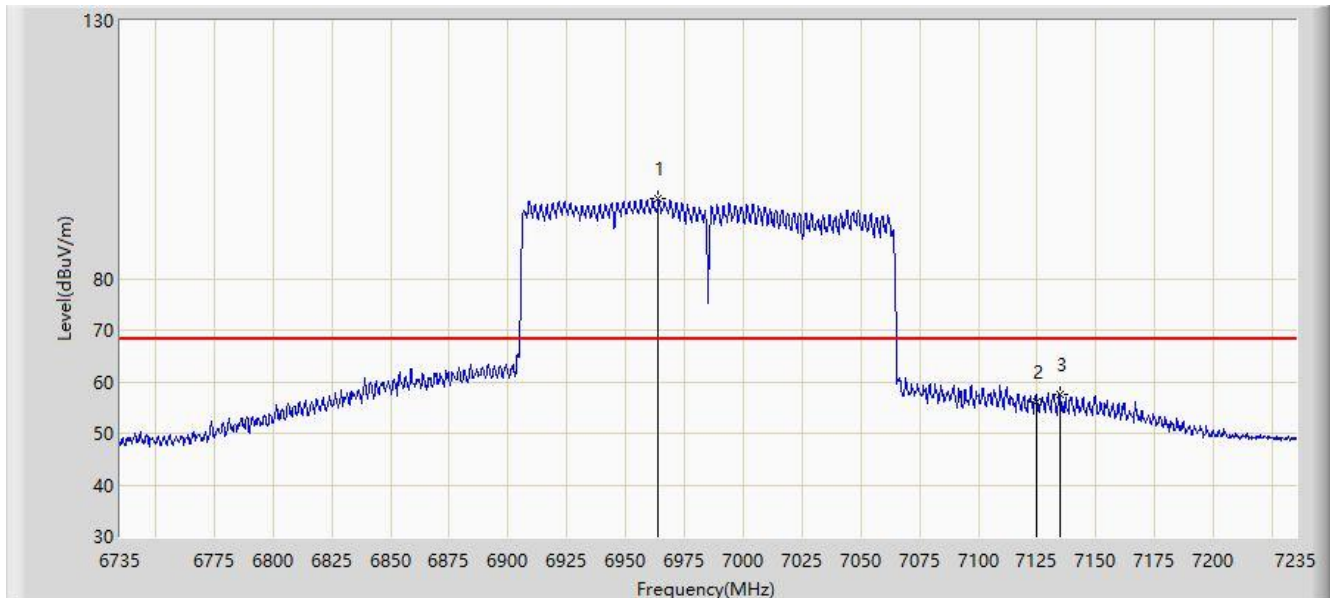


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6964.000	95.422	85.682	N/A	N/A	9.739	AV
2		7125.000	56.097	44.883	-12.103	68.200	11.214	AV
3	*	7134.500	57.602	46.105	-10.598	68.200	11.496	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 6985 MHz	

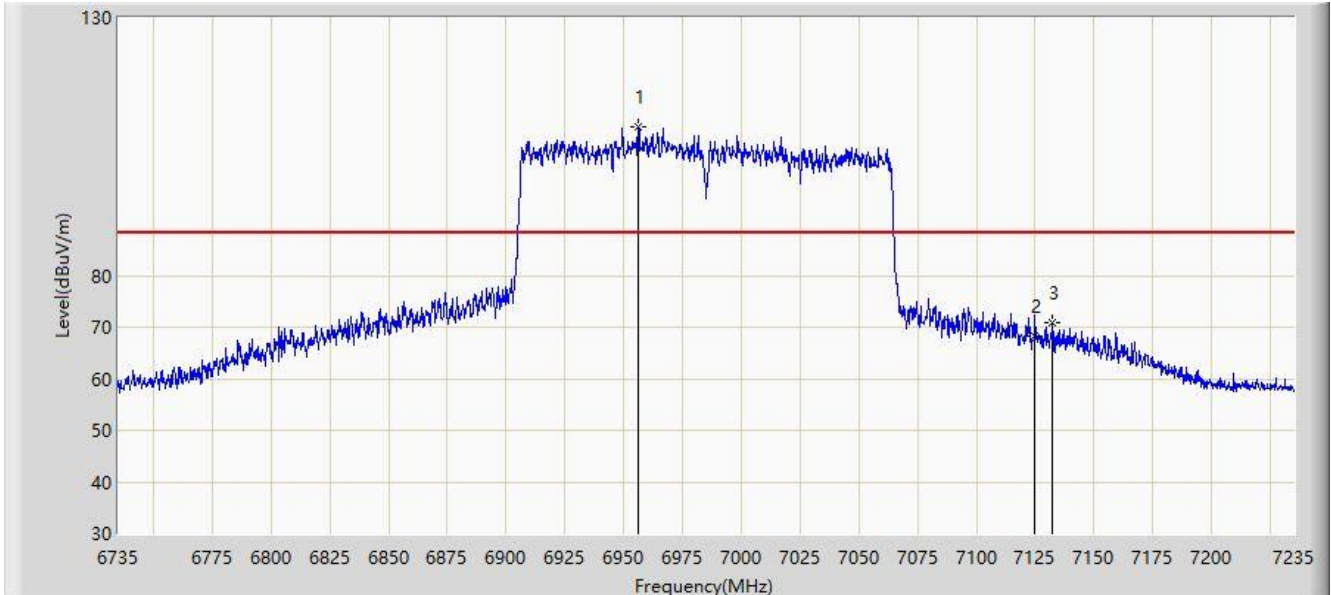


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6956.250	108.718	99.164	N/A	N/A	9.553	PK
2		7125.000	68.167	56.953	-20.033	88.200	11.214	PK
3	*	7132.250	70.897	59.478	-17.303	88.200	11.419	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 6985 MHz	

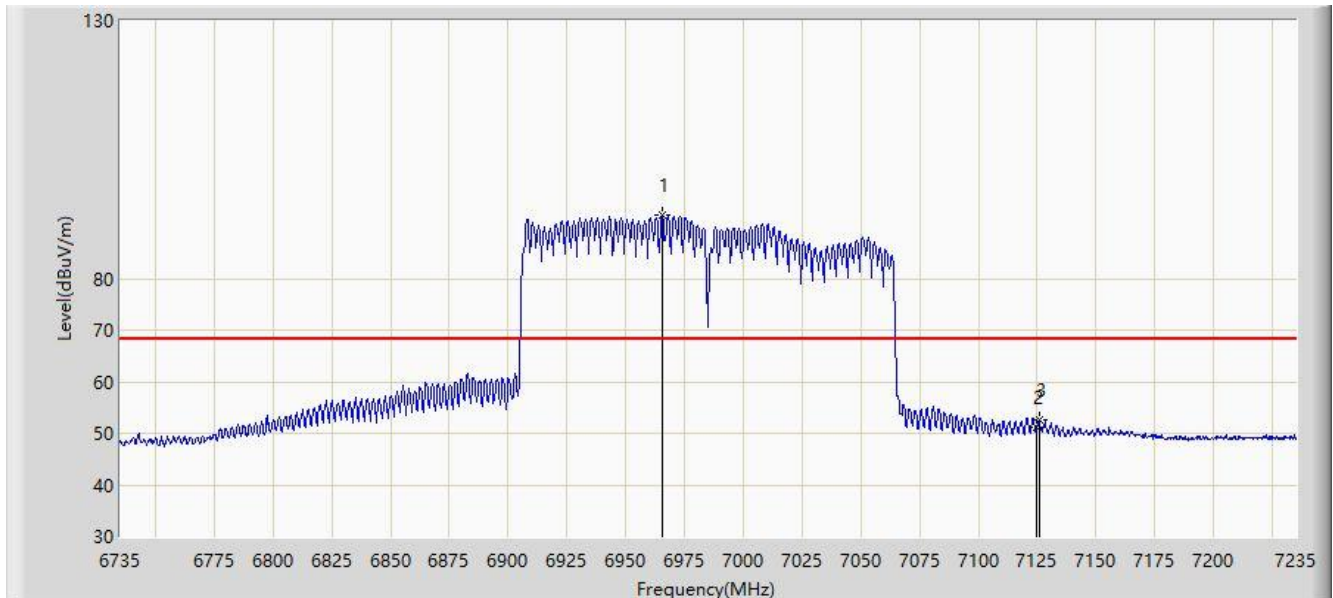


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6965.500	92.198	82.423	N/A	N/A	9.776	AV
2		7125.000	51.283	40.069	-16.917	68.200	11.214	AV
3	*	7125.750	52.628	41.399	-15.572	68.200	11.229	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT320 at 6745 MHz	

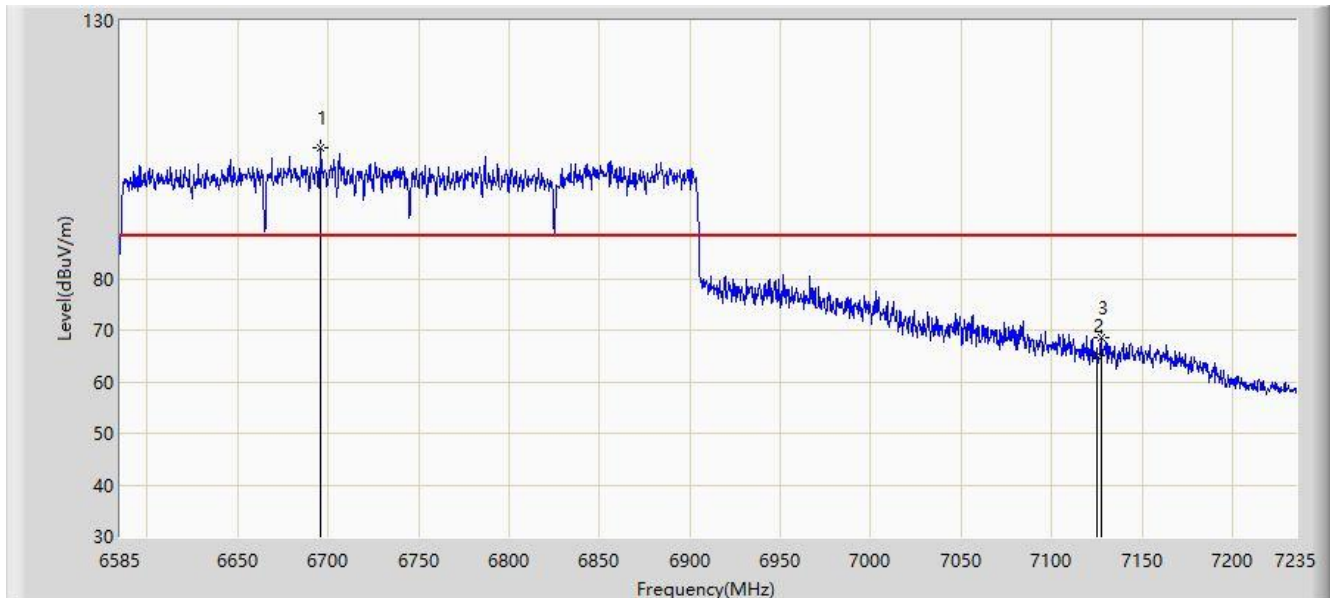


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6696.150	105.301	97.107	N/A	N/A	8.194	PK
2		7125.000	65.118	53.904	-23.082	88.200	11.214	PK
3	*	7127.425	68.425	57.162	-19.775	88.200	11.264	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT320 at 6745 MHz	

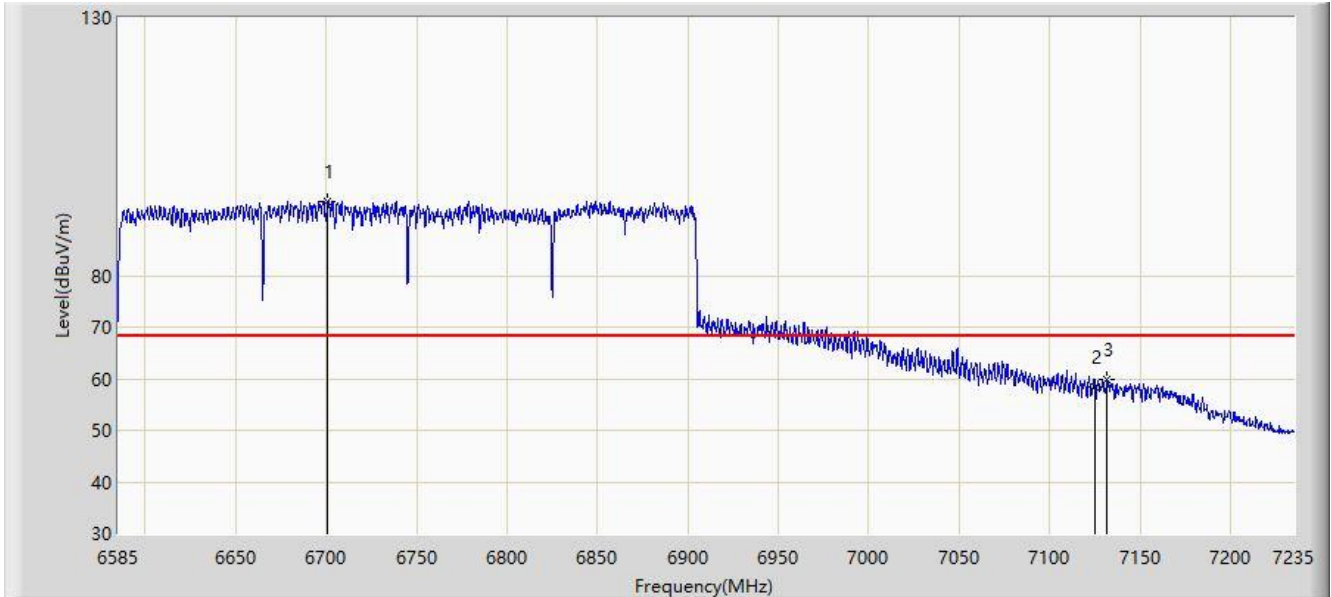


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6701.025	94.440	86.351	N/A	N/A	8.089	AV
2		7125.000	58.262	47.048	-9.938	68.200	11.214	AV
3	*	7131.650	59.864	48.465	-8.336	68.200	11.399	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT320 at 6745 MHz	

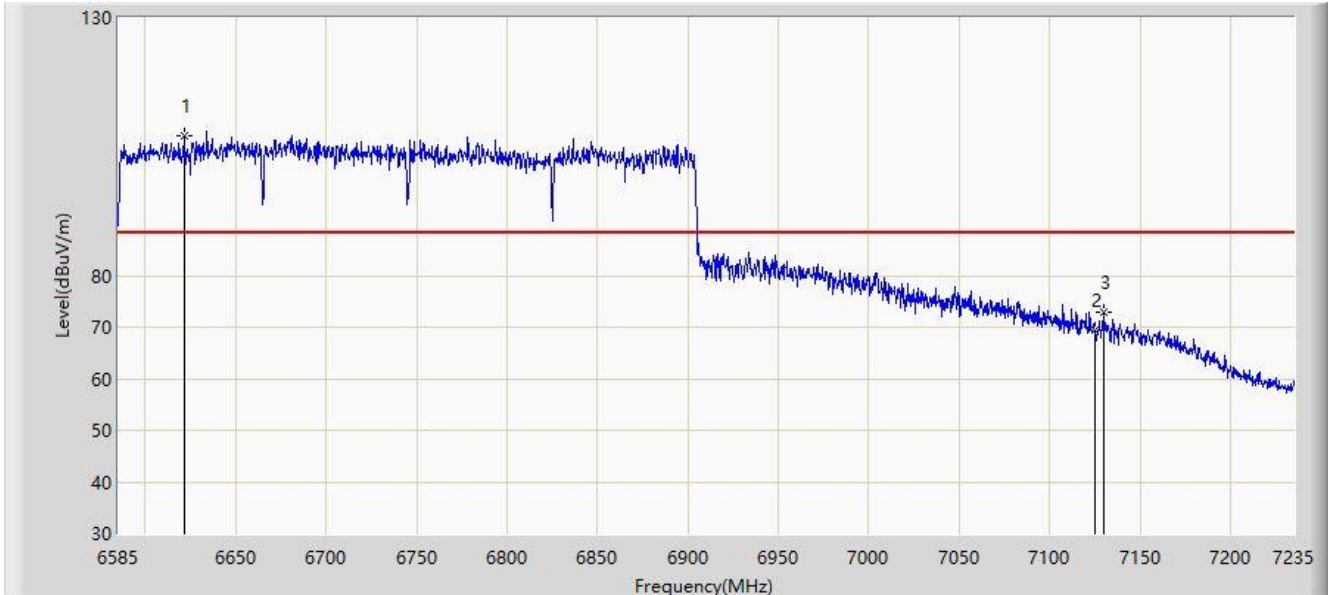


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6621.400	107.109	99.255	N/A	N/A	7.855	PK
2		7125.000	69.486	58.272	-18.714	88.200	11.214	PK
3	*	7129.700	72.850	61.518	-15.350	88.200	11.332	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT320 at 6745 MHz	

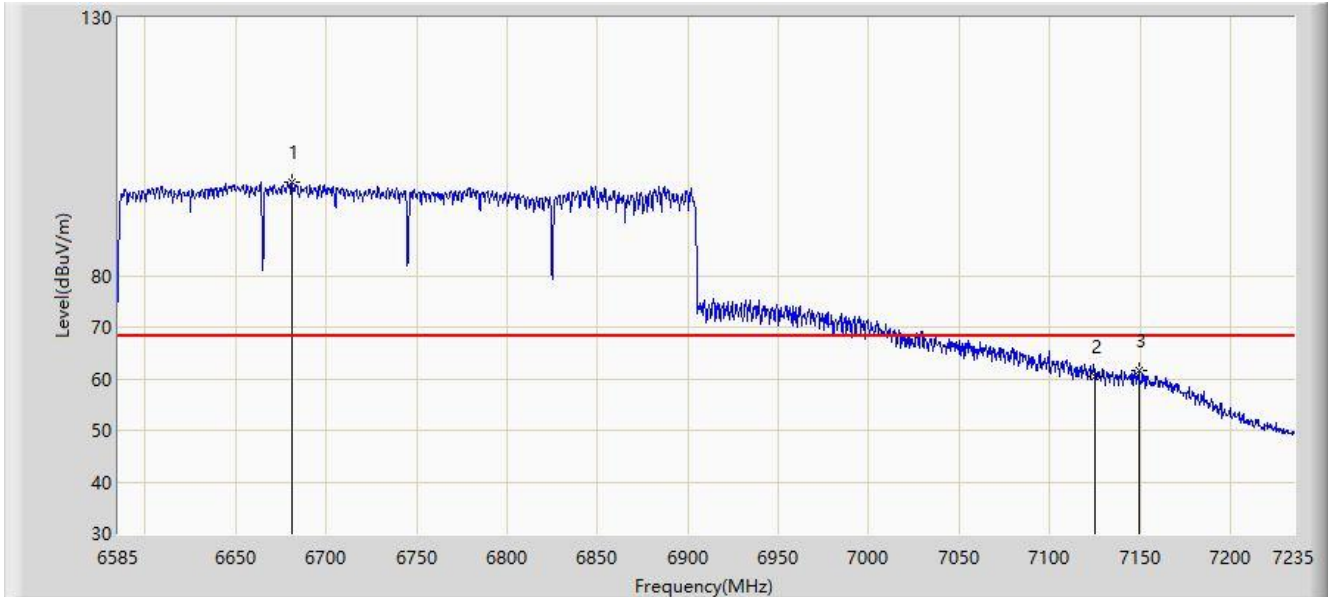


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6680.875	98.000	89.285	N/A	N/A	8.715	AV
2		7125.000	60.410	49.196	-7.790	68.200	11.214	AV
3	*	7149.200	61.533	49.788	-6.667	68.200	11.745	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT320 at 6905 MHz	

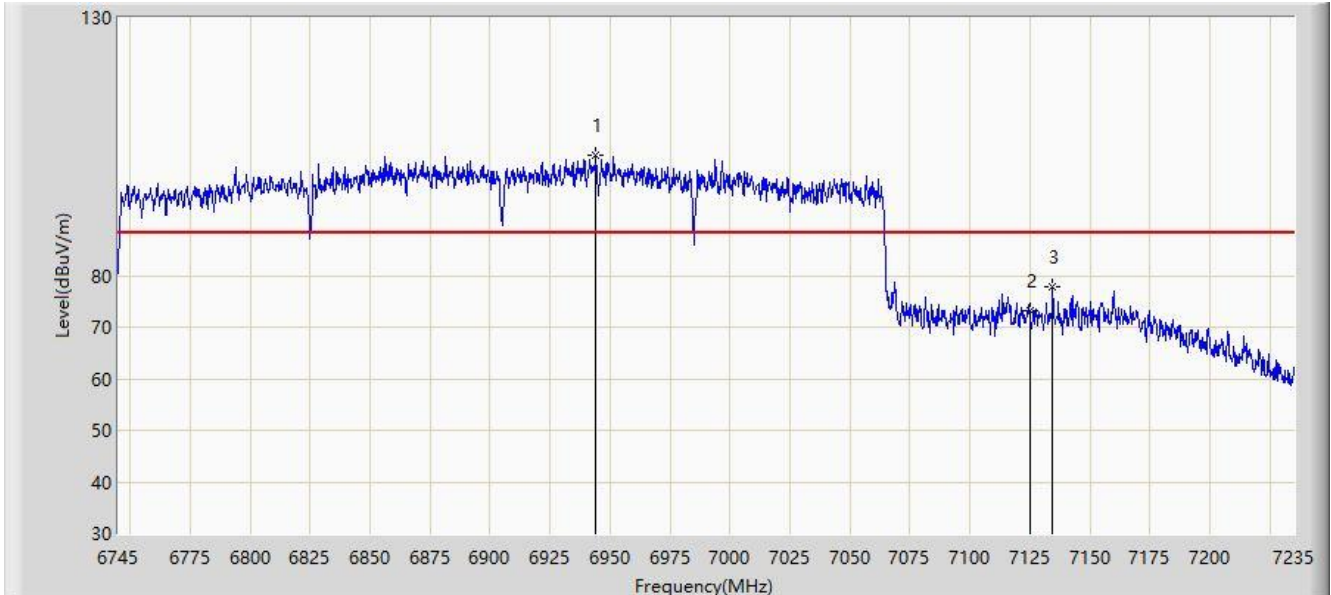


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6944.185	103.317	93.985	N/A	N/A	9.333	PK
2		7125.000	73.165	61.951	-15.035	88.200	11.214	PK
3	*	7134.305	77.809	66.319	-10.391	88.200	11.489	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT320 at 6905 MHz	

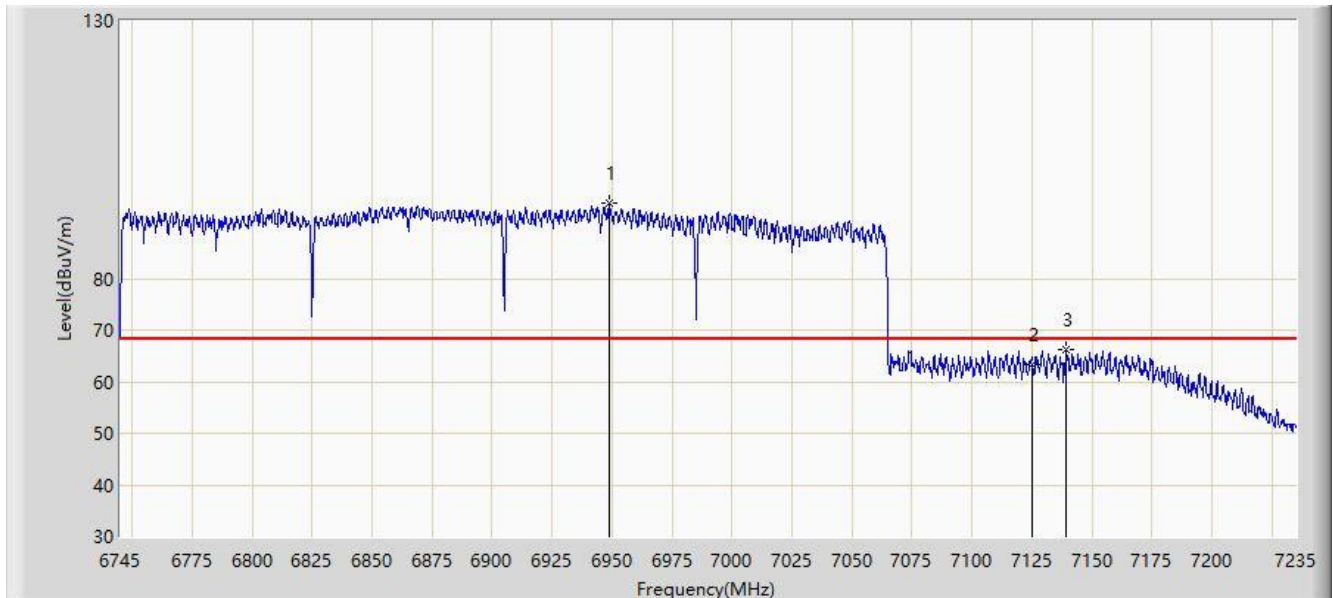


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6948.840	94.573	85.184	N/A	N/A	9.389	AV
2		7125.000	63.223	52.009	-4.977	68.200	11.214	AV
3	*	7139.205	66.303	54.676	-1.897	68.200	11.627	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT320 at 6905 MHz	

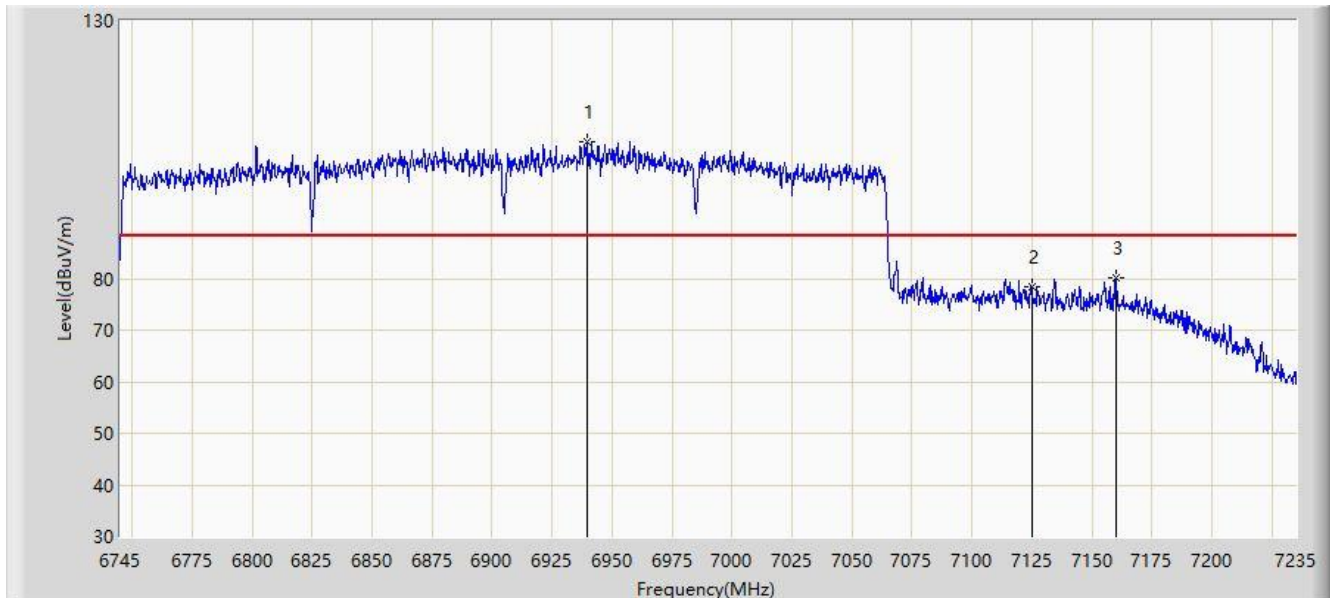


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6939.530	106.654	97.378	N/A	N/A	9.275	PK
2		7125.000	78.430	67.216	-9.770	88.200	11.214	PK
3	*	7159.785	80.152	68.568	-8.048	88.200	11.584	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-22
Limit: FCC_6G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT320 at 6905 MHz	

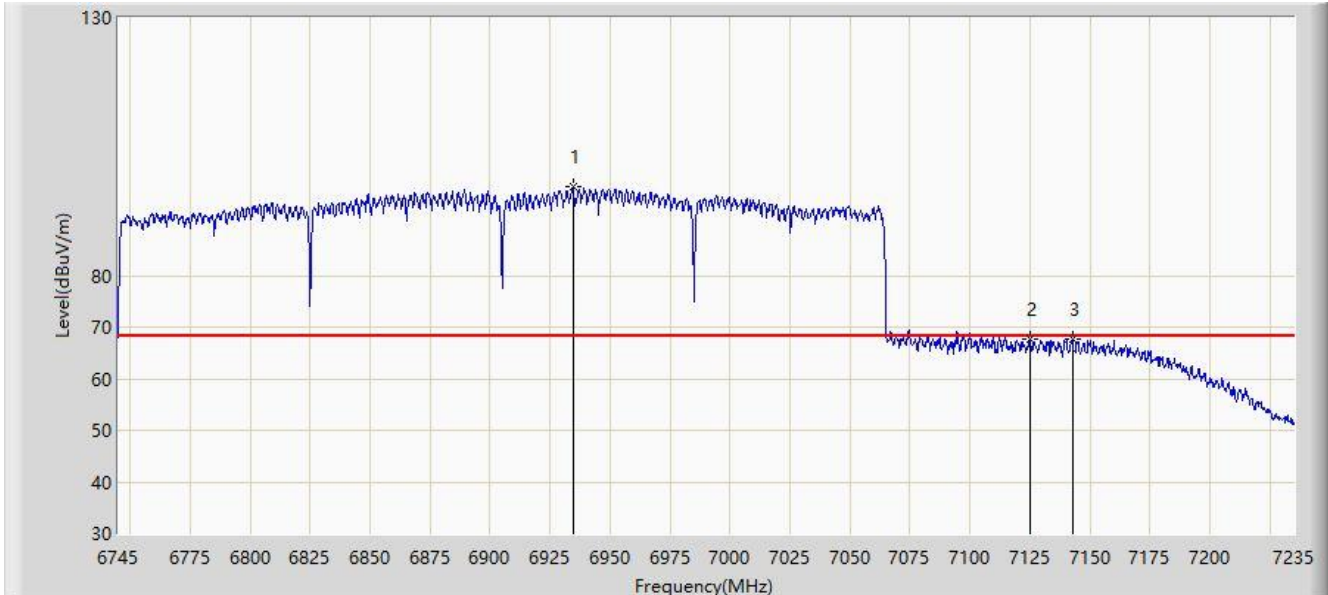

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6934.630	97.171	87.954	N/A	N/A	9.217	AV
2	*	7125.000	67.600	56.386	-0.600	68.200	11.214	AV
3		7142.880	67.569	55.867	-0.631	68.200	11.702	AV


Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.10 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-12-26
Temperature	18.0 °C	Humidity	30.4%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by 802.11ax-HE20 at 6535 MHz		

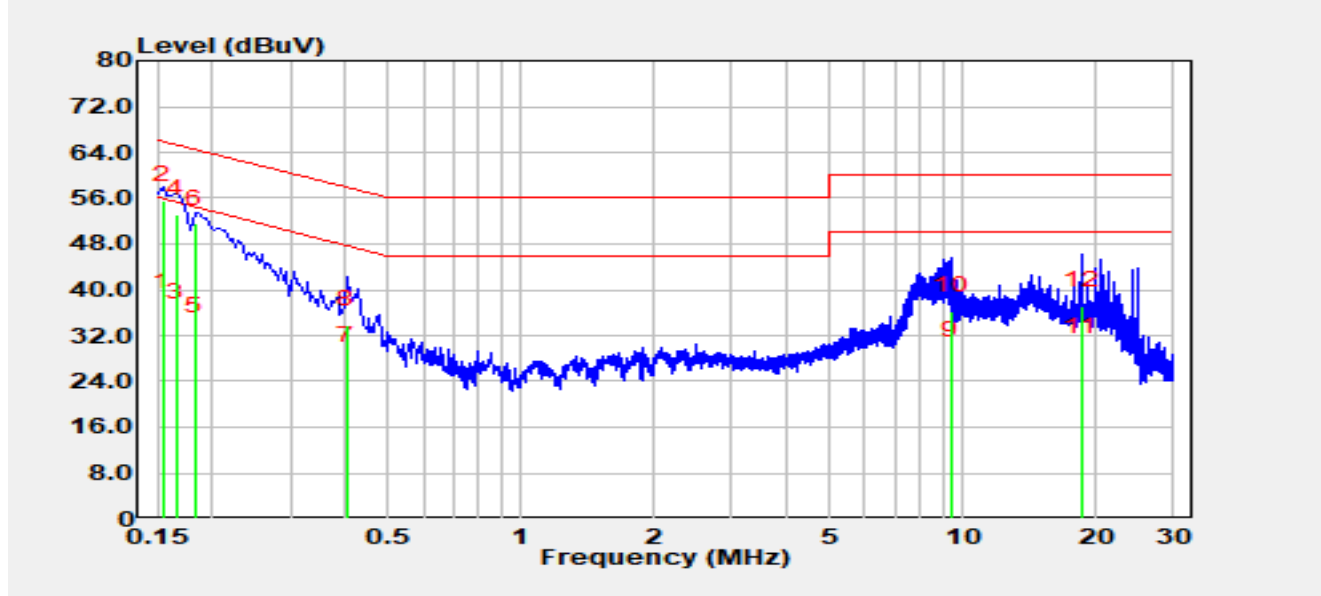


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	27.40	9.67	37.07	-18.71	55.78	Average
2	*	0.15	46.00	9.67	55.67	-10.11	65.78	QP
3		0.17	25.60	9.67	35.27	-19.88	55.16	Average
4		0.17	43.60	9.67	53.27	-11.88	65.16	QP
5		0.18	23.10	9.68	32.78	-21.61	54.39	Average
6		0.18	41.80	9.68	51.48	-12.91	64.39	QP
7		0.40	17.90	9.76	27.66	-20.16	47.81	Average
8		0.40	24.20	9.76	33.96	-23.86	57.81	QP
9		9.41	18.30	10.25	28.55	-21.45	50.00	Average
10		9.41	26.00	10.25	36.25	-23.75	60.00	QP
11		18.50	18.50	10.54	29.04	-20.96	50.00	Average
12		18.50	26.60	10.54	37.14	-22.86	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2025-12-26
Temperature	18.0 °C	Humidity	30.4%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 802.11ax-HE20 at 6535 MHz		

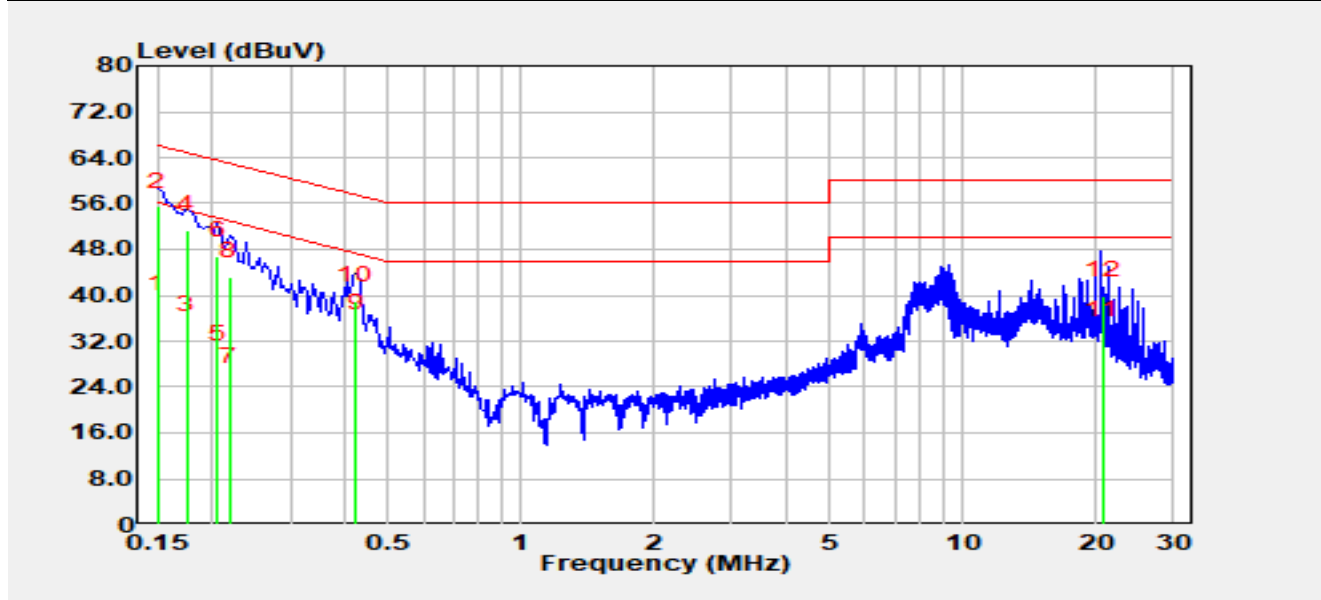

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	27.80	9.79	37.59	-18.41	56.00	Average
2	*	0.15	45.70	9.79	55.49	-10.51	66.00	QP
3		0.18	24.30	9.80	34.10	-20.62	54.72	Average
4		0.18	41.60	9.80	51.40	-13.32	64.72	QP
5		0.21	19.00	9.80	28.80	-24.57	53.37	Average
6		0.21	37.00	9.80	46.80	-16.57	63.37	QP
7		0.22	15.20	9.80	25.00	-27.90	52.89	Average
8		0.22	33.50	9.80	43.30	-19.60	62.89	QP
9		0.42	24.30	9.87	34.17	-13.23	47.41	Average
10		0.42	29.10	9.87	38.97	-18.43	57.41	QP
11		20.69	22.20	10.73	32.93	-17.07	50.00	Average
12		20.69	29.20	10.73	39.93	-20.07	60.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1013119-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1013119-UE” file.

_____ The End _____