



802.11be-EHT160 (Nss = 4)


Channel 15 (6025 MHz)

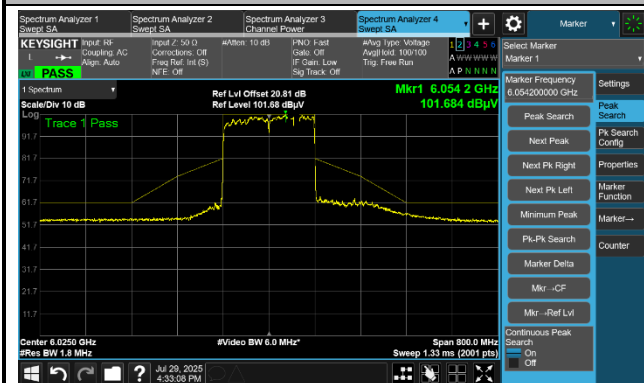


Channel 47 (6185 MHz)

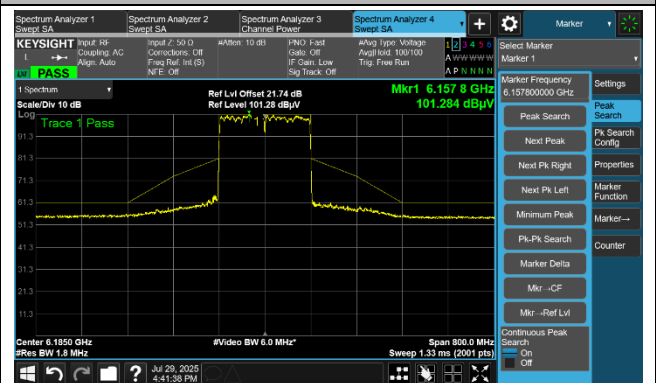


Channel 79 (6345 MHz)

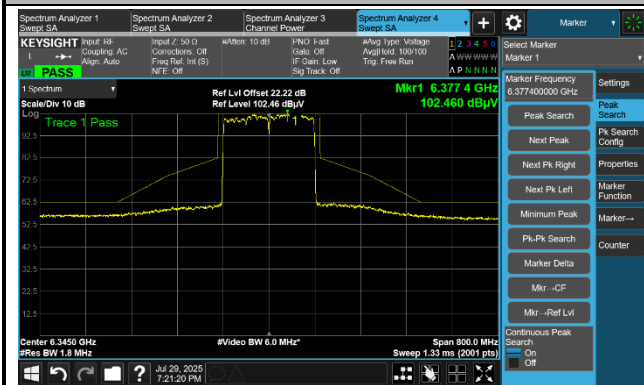


Channel 111 (6505 MHz)

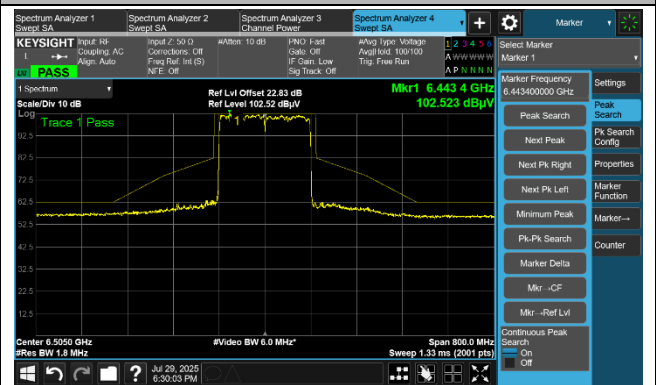


Channel 143 (6665 MHz)

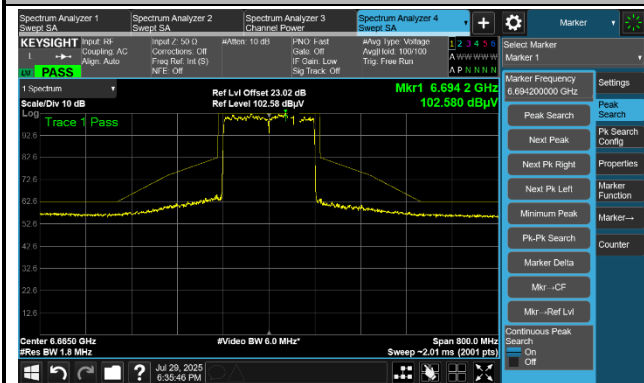

Channel 175 (6825 MHz)

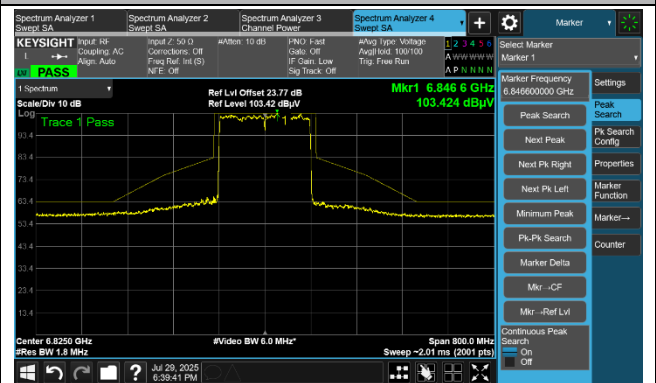

Channel 207 (6985 MHz)

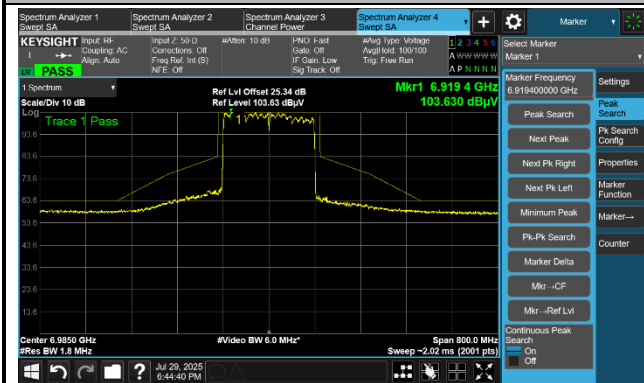

A.6 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Molly Wu
Test Date	2025-08-13		
Test Mode	5955 MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	-30	22.19	22.16	22.16	22.11
		-20	22.30	22.32	22.39	22.41
		-10	20.48	20.58	20.64	20.66
		0	15.98	15.79	14.63	14.78
		+10	12.24	11.89	11.78	12.40
		+20	3.79	3.70	3.66	4.75
		+30	1.46	1.56	2.07	1.83
		+40	-2.24	-2.35	-1.28	-0.82
		+50	-3.00	-2.79	-2.90	-2.98
115	138	+20	9.12	9.15	9.13	8.28
85	102	+20	6.79	6.84	6.81	6.44

Note: Frequency Tolerance (ppm) = $\{[\text{Measured Frequency (Hz)} - \text{Declared Frequency (Hz)}] / \text{Declared Frequency (Hz)}\} \times 10^6$.

A.7 Contention Based Protocol Test Result

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-09-23		

Test Channel	Bandwidth (MHz)	Freq (MHz)	AWGN Freq (MHz)	AWGN Power (dBm)	Ant. Gain (dBi)	Adjust Power (dBm)	Detection Limit (dBm)	Detected Number	Detection Probability (%)	Limit (%)	Test Result
Operation Band: U-NII 5											
33	20	6115	6115	-65.17	4.3	-69.47	≤ -62.0	10	100	90	Pass
47	160	6185	6110	-65.04	4.3	-69.34	≤ -62.0	10	100	90	Pass
47	160	6185	6185	-64.96	4.3	-69.26	≤ -62.0	10	100	90	Pass
47	160	6185	6260	-64.73	4.3	-69.03	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 6											
97	20	6435	6435	-62.20	4.3	-66.50	≤ -62.0	10	100	90	Pass
103	160	6505	6430	-64.95	4.3	-69.25	≤ -62.0	10	100	90	Pass
103	160	6505	6505	-65.09	4.3	-69.39	≤ -62.0	10	100	90	Pass
103	160	6505	6580	-65.17	4.3	-69.47	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 7											
153	20	6715	6715	-62.26	4.3	-66.56	≤ -62.0	10	100	90	Pass
143	160	6665	6590	-65.22	4.3	-69.52	≤ -62.0	10	100	90	Pass
143	160	6665	6665	-64.94	4.3	-69.24	≤ -62.0	10	100	90	Pass
143	160	6665	6740	-65.05	4.3	-69.35	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 8											
213	20	7015	7015	-61.55	4.3	-65.85	≤ -62.0	10	100	90	Pass
207	160	6985	6910	-64.74	4.3	-69.04	≤ -62.0	10	100	90	Pass
207	160	6985	6985	-64.46	4.3	-68.76	≤ -62.0	10	100	90	Pass
207	160	6985	7060	-64.55	4.3	-68.85	≤ -62.0	10	100	90	Pass

Note 1: Adjust Power (dBm) = AWGN Power (dBm) - Antenna Gain (dBi).

Note 2: Conducted measurements are used.


Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-09-23		

Bandwidth (MHz)	Freq (MHz)	AWGN Freq (MHz)	Adjust Power (dBm)	EUT Tx Status
Operation Band: U-NII 5				
20	6115	6115	-80.6	ON
			-79.6	Minimal
			-69.47	OFF
160	6180	6110	-80.5	ON
			-79.5	Minimal
			-69.34	OFF
160	6185	6185	-80.4	ON
			-79.4	Minimal
			-69.26	OFF
160	6185	6260	-80.2	ON
			-79.2	Minimal
			-69.03	OFF
Operation Band: U-NII 6				
20	6435	6435	-80	ON
			-79	Minimal
			-66.5	OFF
80	6505	6430	-81.4	ON
			-80.4	Minimal
			-69.25	OFF
80	6505	6505	-81.4	ON
			-80.4	Minimal
			-69.39	OFF
80	6505	6580	-82.1	ON
			-81.1	Minimal
			-69.47	OFF


Bandwidth (MHz)	Freq (MHz)	AWGN Freq (MHz)	Adjust Power (dBm)	EUT Status
Operation Band: U-NII 7				
20	6715	6715	-80.4	ON
			-79.4	Minimal
			-66.56	OFF
160	6665	6590	-79.9	ON
			-78.9	Minimal
			-69.52	OFF
160	6665	6665	-80.5	ON
			-79.5	Minimal
			-69.24	OFF
160	6665	6740	-80	ON
			-79	Minimal
			-69.35	OFF
Operation Band: U-NII 8				
20	7015	7015	-81.5	ON
			-80.5	Minimal
			-65.85	OFF
160	6985	6910	-81.7	ON
			-80.7	Minimal
			-69.04	OFF
160	6985	6985	-81	ON
			-80	Minimal
			-68.76	OFF
160	6985	7060	-81.1	ON
			-80.1	Minimal
			-68.85	OFF
Note: OFF: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently ON: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds				

EUT Tx Waveform


802.11be-EHT20 / CH33

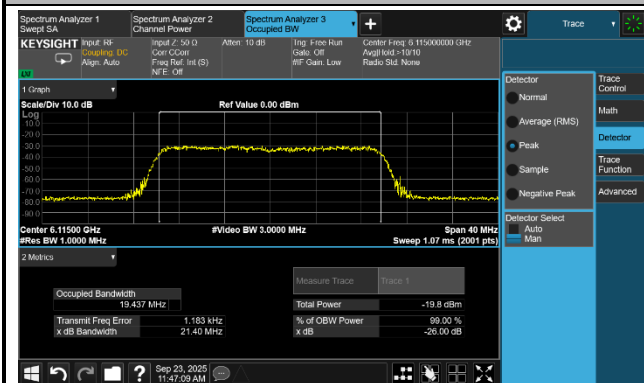


802.11be-EHT160 / CH47

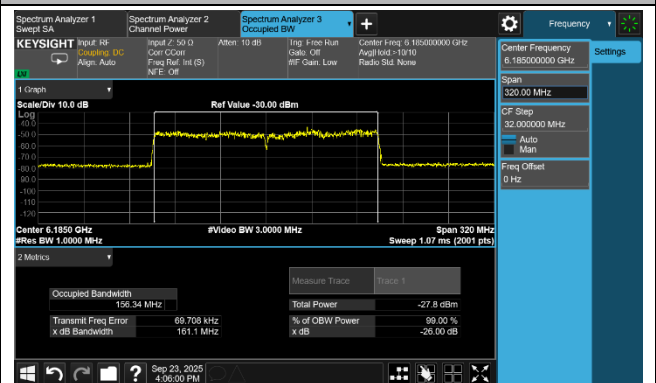


802.11be-EHT20 / CH97

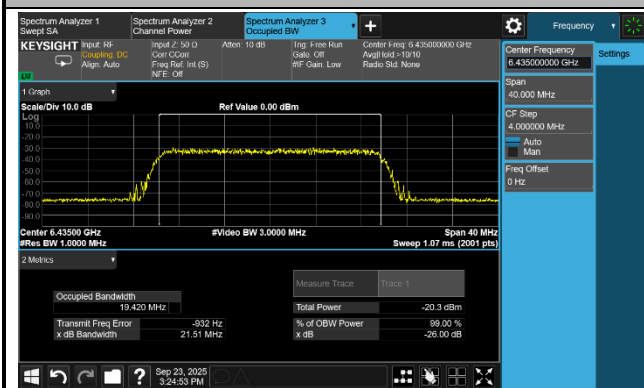


802.11be-EHT160 / CH111

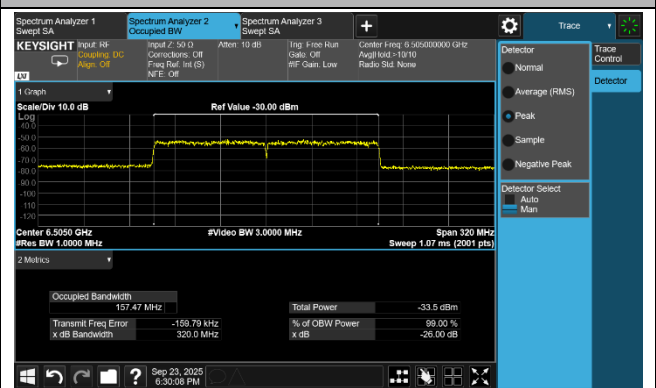


802.11be-EHT20 / CH153

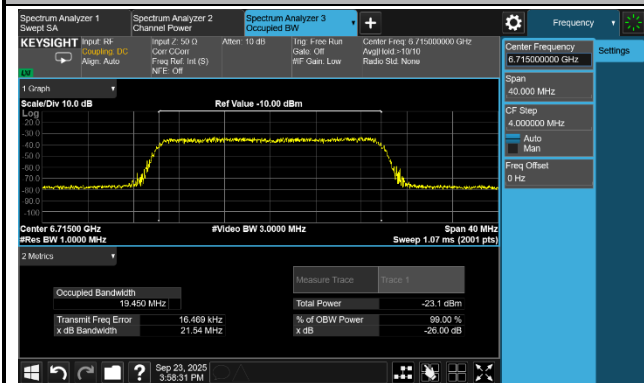


802.11be-EHT160 / CH143

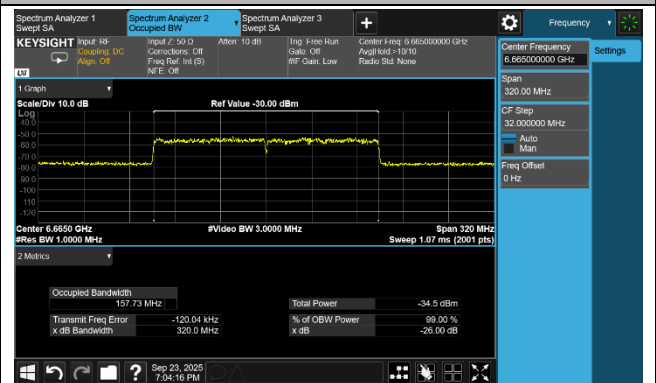

802.11be-EHT20 / CH213

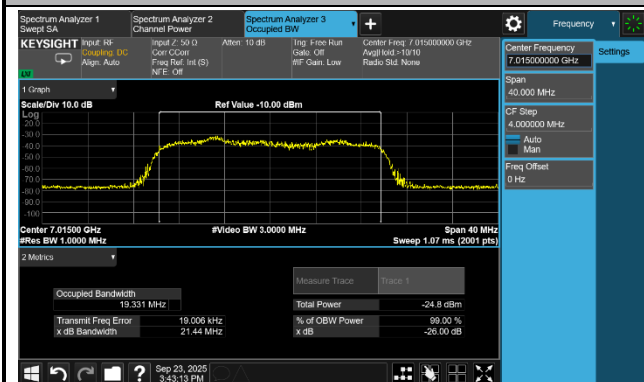


802.11be-EHT160 / CH207

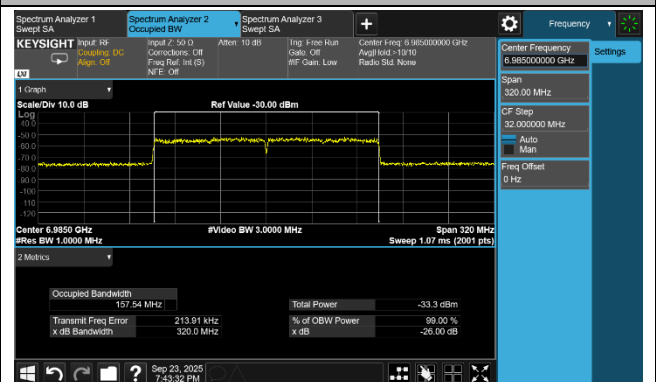


Incumbent Signal Calibration Plots (NII-5 Band)


802.11be-EHT20 / CH33

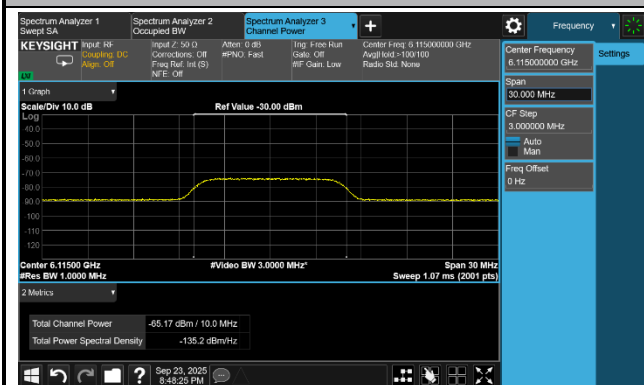


802.11be-EHT160 / CH47 (Low Edge)

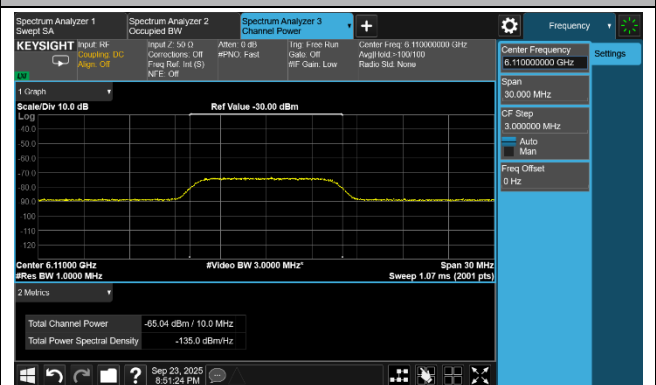

802.11be-EHT160 / CH47 (Middle)

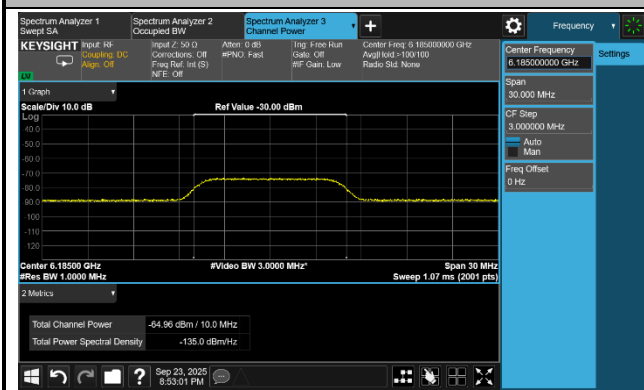


802.11be-EHT160 / CH47 (High Edge)

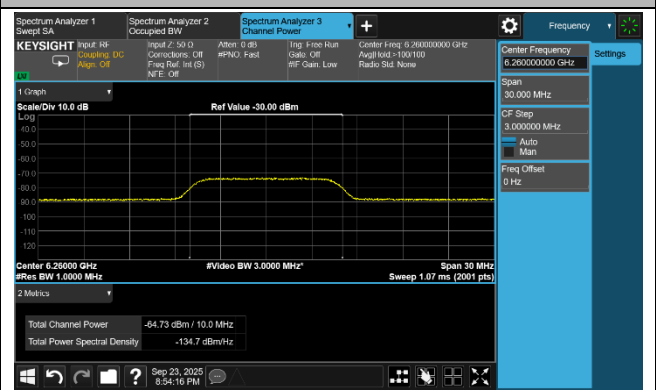


Incumbent Signal Calibration Plots (NII-6 Band)


802.11be-EHT20 / CH97

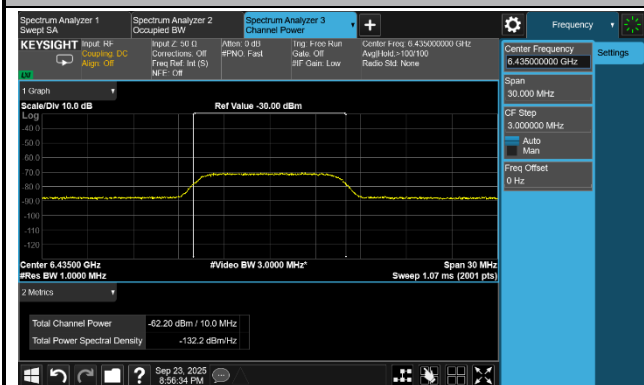


802.11be-EHT160 / CH111 (Low Edge)

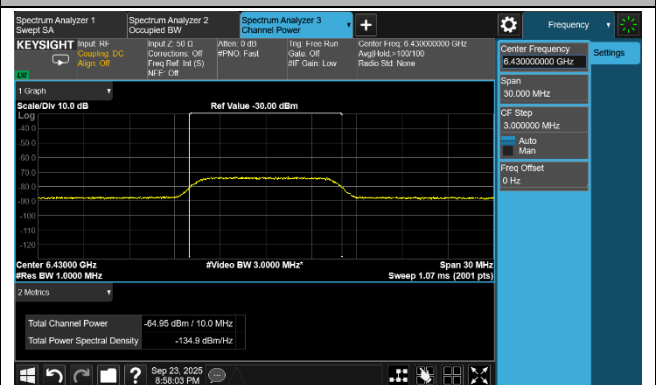

802.11be-EHT160 / CH111 (Middle)

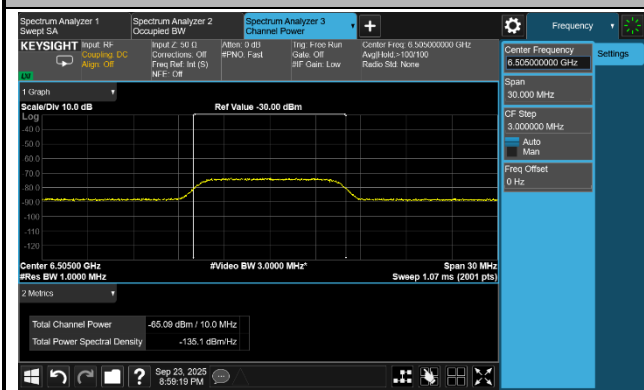


802.11be-EHT160 / CH111 (High Edge)

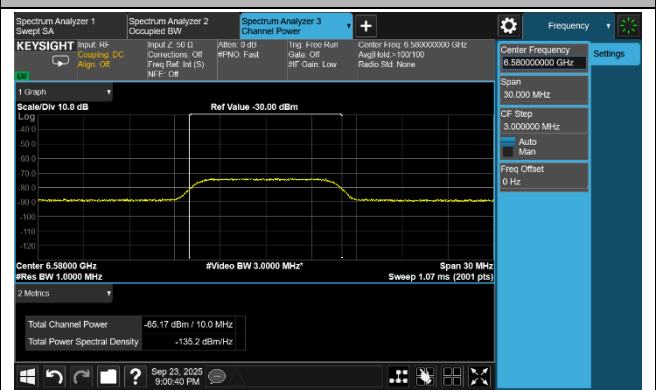


Incumbent Signal Calibration Plots (NII-7 Band)


802.11be-EHT20 / CH153

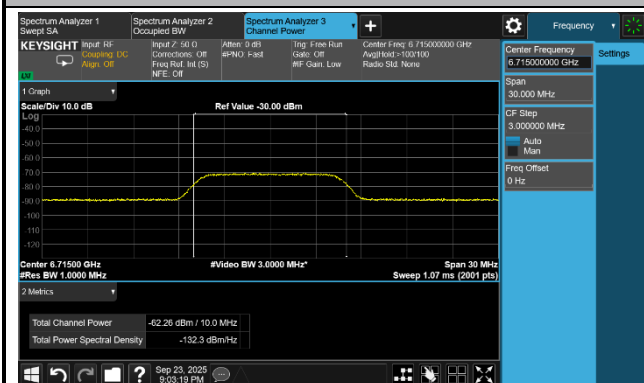


802.11be-EHT160 / CH143 (Low Edge)

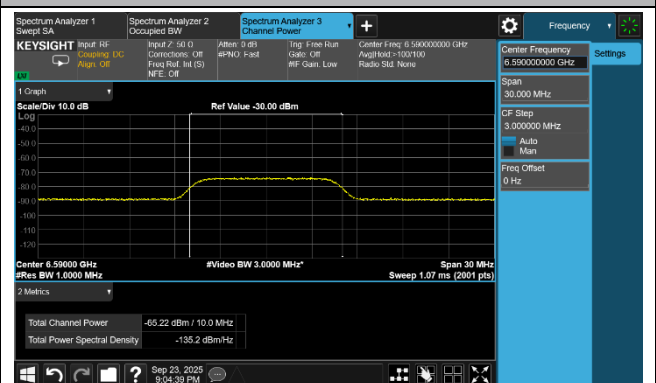

802.11be-EHT160 / CH143 (Middle)

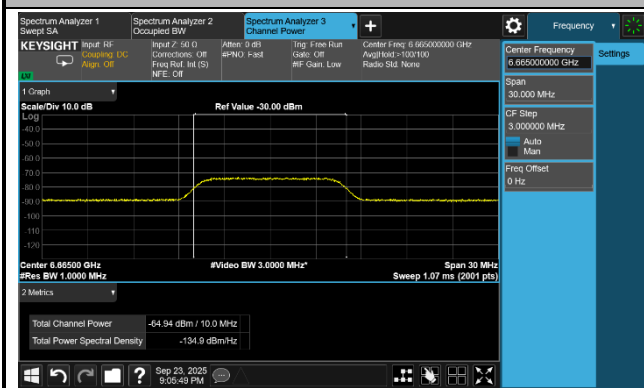


802.11be-EHT160 / CH143 (High Edge)

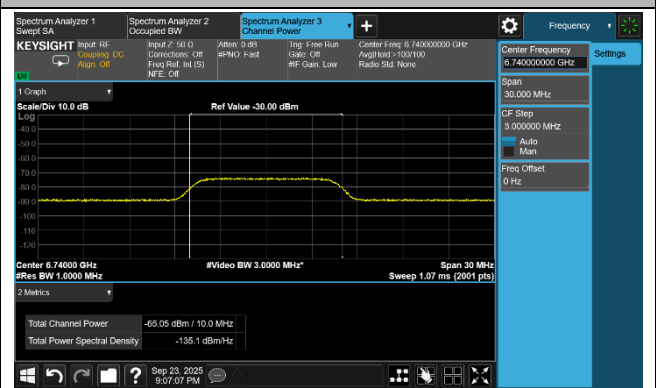


Incumbent Signal Calibration Plots (NII-8 Band)


802.11be-EHT20 / CH213

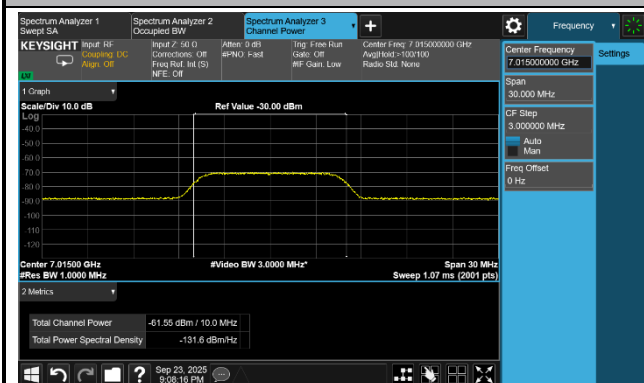


802.11be-EHT160 / CH207 (Low Edge)

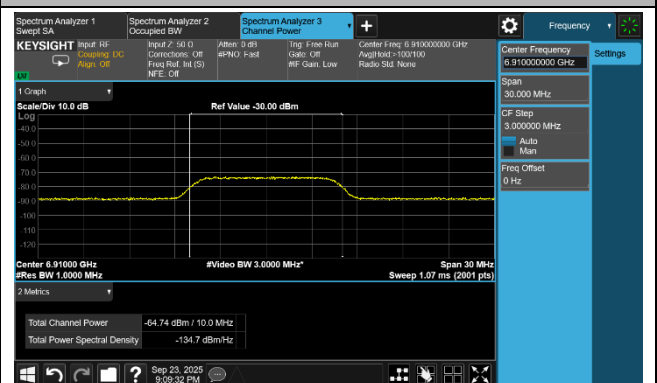

802.11be-EHT160 / CH207 (Middle)

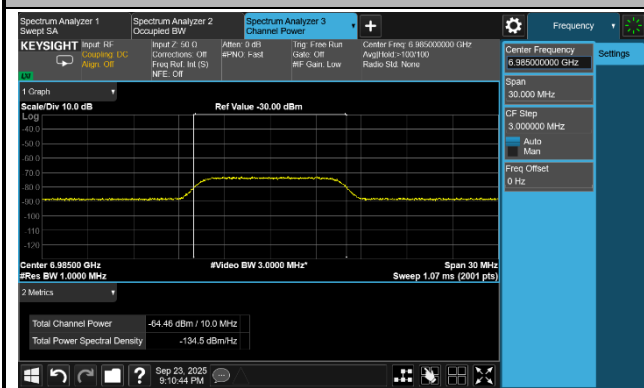


802.11be-EHT160 / CH207 (High Edge)

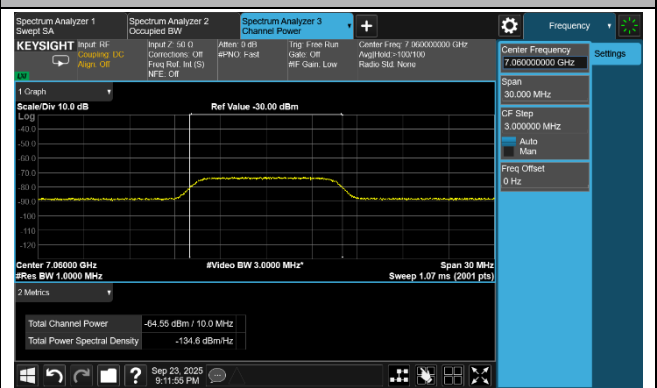


Test Result of EUT ceased transmission (NII-5 Band)


802.11be-EHT20 / CH33

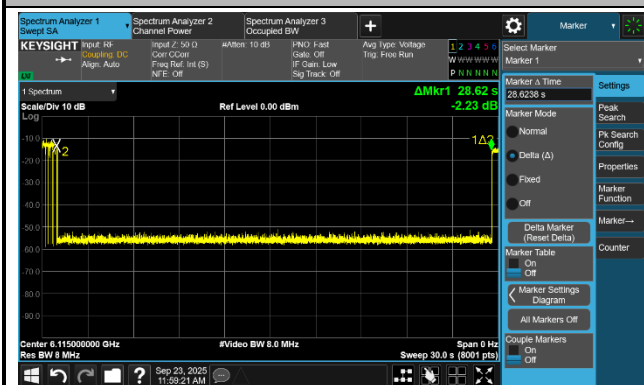


802.11be-EHT160 / CH47 (Low Edge)

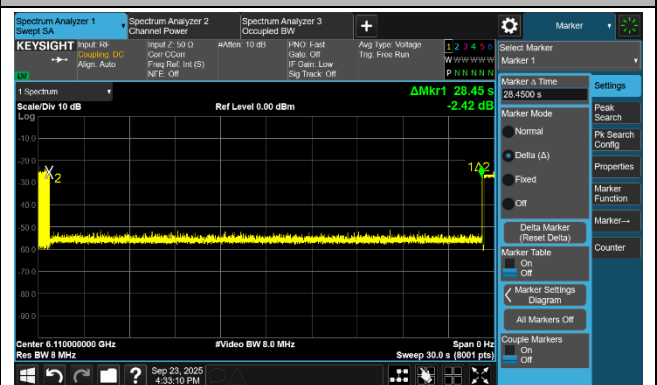

802.11be-EHT160 / CH47 (Middle)

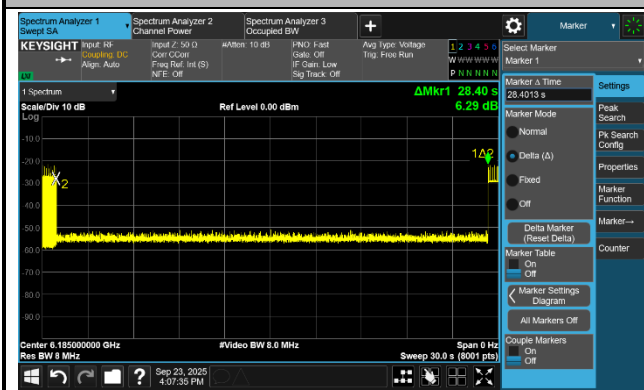

802.11be-EHT160 / CH47 (High Edge)

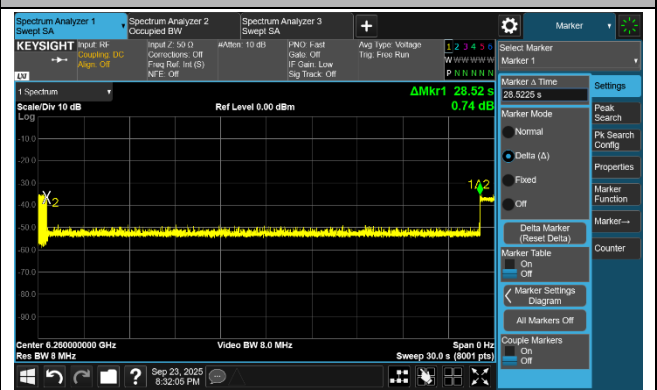


Test Result of EUT ceased transmission (NII-6 Band)


802.11be-EHT20 / CH97




802.11be-EHT160 / CH111 (Low Edge)

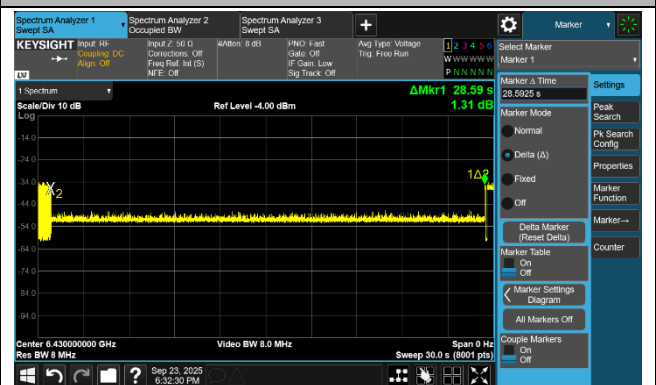

802.11be-EHT160 / CH111 (Middle)

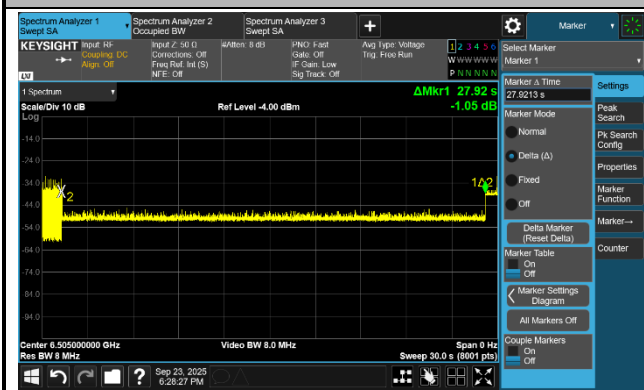

802.11be-EHT160 / CH111 (High Edge)

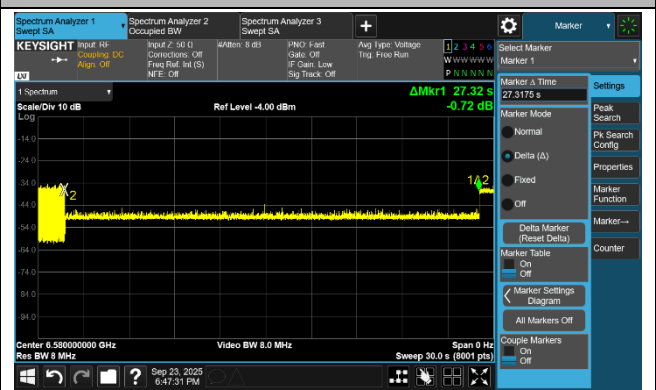

Test Result of EUT ceased transmission (NII-7 Band)

802.11be-EHT20 / CH153




802.11be-EHT160 / CH143 (Low Edge)



802.11be-EHT160 / CH143 (Middle)



802.11be-EHT160 / CH143 (High Edge)

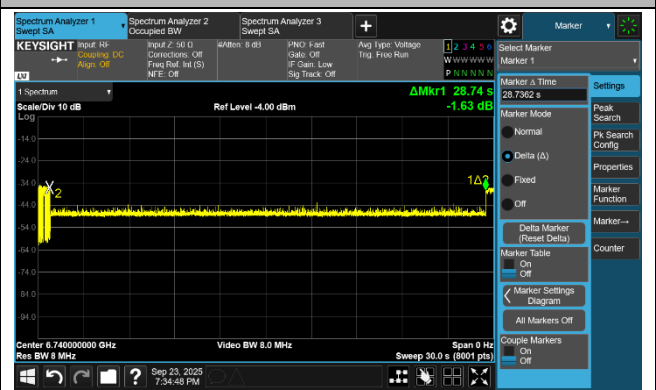


Test Result of EUT ceased transmission (NII-8 Band)


802.11be-EHT20 / CH213




802.11be-EHT160 / CH207 (Low Edge)

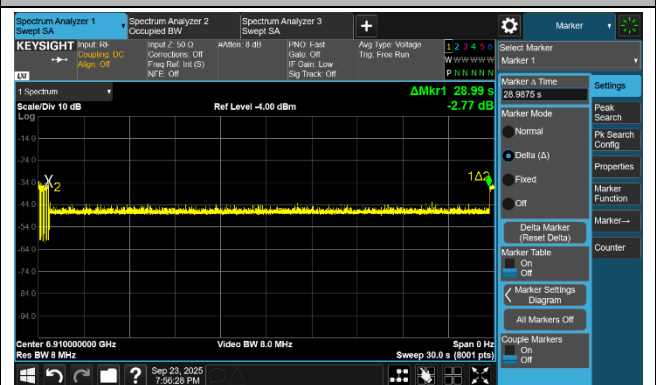

802.11be-EHT160 / CH207 (Middle)

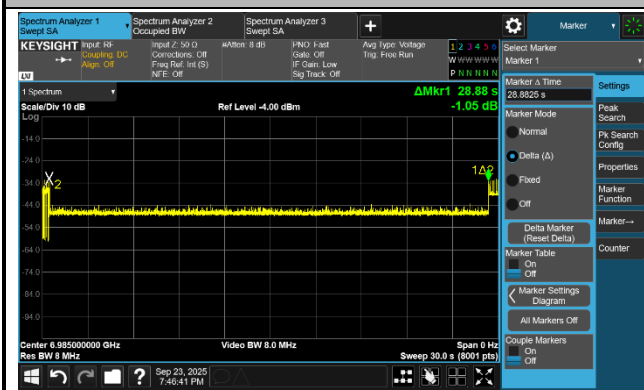

802.11be-EHT160 / CH207 (High Edge)

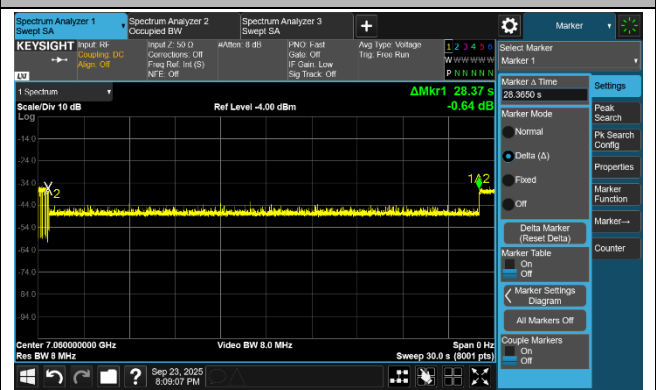

A.8 Radiated Spurious Emission Test Result

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11898.70	36.67	13.32	49.99	74.00	-24.01	Peak	Horizontal
*	14520.10	36.84	15.80	52.64	88.20	-35.56	Peak	Horizontal
*	17643.00	36.03	19.69	55.72	88.20	-32.48	Peak	Horizontal
	17986.40	21.74	24.03	45.77	54.00	-8.23	Average	Horizontal
	17986.40	35.59	24.03	59.62	74.00	-14.38	Peak	Horizontal
	11337.70	36.57	14.27	50.84	74.00	-23.16	Peak	Vertical
*	14290.60	36.52	15.84	52.36	88.20	-35.84	Peak	Vertical
*	17585.20	35.31	19.32	54.63	88.20	-33.57	Peak	Vertical
	17971.10	21.54	23.59	45.13	54.00	-8.87	Average	Vertical
	17971.10	35.10	23.59	58.69	74.00	-15.31	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11633.50	37.14	13.75	50.89	74.00	-23.11	Peak	Horizontal
*	14241.30	36.63	15.70	52.33	88.20	-35.87	Peak	Horizontal
*	17585.20	36.02	19.32	55.34	88.20	-32.86	Peak	Horizontal
	17898.00	22.43	22.96	45.39	54.00	-8.61	Average	Horizontal
	17898.00	36.19	22.96	59.15	74.00	-14.85	Peak	Horizontal
	11645.40	37.21	13.75	50.96	74.00	-23.04	Peak	Vertical
*	14226.00	36.82	15.39	52.21	88.20	-35.99	Peak	Vertical
*	17512.10	35.53	18.55	54.08	88.20	-34.12	Peak	Vertical
	17930.30	21.58	23.04	44.62	54.00	-9.38	Average	Vertical
	17930.30	36.33	23.04	59.37	74.00	-14.63	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11286.70	35.79	14.27	50.06	74.00	-23.94	Peak	Horizontal
*	13761.90	36.94	14.68	51.62	88.20	-36.58	Peak	Horizontal
*	17440.70	35.79	18.12	53.91	88.20	-34.29	Peak	Horizontal
	17996.60	21.68	24.13	45.81	54.00	-8.19	Average	Horizontal
	17996.60	34.75	24.13	58.88	74.00	-15.12	Peak	Horizontal
	11033.40	36.04	14.68	50.72	74.00	-23.28	Peak	Vertical
*	14877.10	37.06	15.65	52.71	88.20	-35.49	Peak	Vertical
*	17636.20	35.19	19.55	54.74	88.20	-33.46	Peak	Vertical
	17988.10	21.81	24.05	45.86	54.00	-8.14	Average	Vertical
	17988.10	35.07	24.05	59.12	74.00	-14.88	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11040.20	35.95	14.65	50.60	74.00	-23.40	Peak	Horizontal
*	14299.10	36.19	15.82	52.01	88.20	-36.19	Peak	Horizontal
*	17551.20	35.92	18.79	54.71	88.20	-33.49	Peak	Horizontal
	17991.50	21.51	24.08	45.59	54.00	-8.41	Average	Horizontal
	17991.50	35.47	24.08	59.55	74.00	-14.45	Peak	Horizontal
	11364.90	36.17	14.27	50.44	74.00	-23.56	Peak	Vertical
*	14452.10	36.11	16.09	52.20	88.20	-36.00	Peak	Vertical
*	17576.70	35.81	19.15	54.96	88.20	-33.24	Peak	Vertical
	17998.80	22.05	24.15	46.20	54.00	-7.80	Average	Vertical
	17998.80	35.93	24.15	60.08	74.00	-13.92	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11366.60	36.35	14.28	50.63	74.00	-23.37	Peak	Horizontal
*	14402.80	35.92	15.96	51.88	88.20	-36.32	Peak	Horizontal
*	17643.00	36.06	19.69	55.75	88.20	-32.45	Peak	Horizontal
	17989.80	21.75	24.07	45.82	54.00	-8.18	Average	Horizontal
	17989.80	35.23	24.07	59.30	74.00	-14.70	Peak	Horizontal
	11455.00	36.04	14.17	50.21	74.00	-23.79	Peak	Vertical
*	14452.10	35.85	16.09	51.94	88.20	-36.26	Peak	Vertical
*	17512.10	36.32	18.55	54.87	88.20	-33.33	Peak	Vertical
	17960.90	21.64	23.36	45.00	54.00	-9.00	Average	Vertical
	17960.90	36.29	23.36	59.65	74.00	-14.35	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11395.50	36.00	14.25	50.25	74.00	-23.75	Peak	Horizontal
*	14924.70	36.35	15.39	51.74	88.20	-36.46	Peak	Horizontal
*	17682.10	35.67	19.98	55.65	88.20	-32.55	Peak	Horizontal
	17996.60	21.84	24.13	45.97	54.00	-8.03	Average	Horizontal
	17996.60	36.28	24.13	60.41	74.00	-13.59	Peak	Horizontal
	11494.10	36.35	14.12	50.47	74.00	-23.53	Peak	Vertical
*	14312.70	35.68	15.90	51.58	88.20	-36.62	Peak	Vertical
*	17644.70	34.67	19.64	54.31	88.20	-33.89	Peak	Vertical
	17909.90	21.39	22.88	44.27	54.00	-9.73	Average	Vertical
	17909.90	35.94	22.88	58.82	74.00	-15.18	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11534.90	36.37	14.05	50.42	74.00	-23.58	Peak	Horizontal
*	14355.20	36.24	15.99	52.23	88.20	-35.97	Peak	Horizontal
*	17593.70	35.83	19.18	55.01	88.20	-33.19	Peak	Horizontal
	17989.80	21.44	24.07	45.51	54.00	-8.49	Average	Horizontal
	17989.80	35.39	24.07	59.46	74.00	-14.54	Peak	Horizontal
	11534.90	36.37	14.05	50.42	74.00	-23.58	Peak	Vertical
*	14355.20	36.24	15.99	52.23	88.20	-35.97	Peak	Vertical
*	17593.70	35.83	19.18	55.01	88.20	-33.19	Peak	Vertical
	17989.80	21.44	24.07	45.51	54.00	-8.49	Average	Vertical
	17989.80	35.39	24.07	59.46	74.00	-14.54	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11220.40	36.33	14.23	50.56	74.00	-23.44	Peak	Horizontal
*	14691.80	35.93	16.06	51.99	88.20	-36.21	Peak	Horizontal
*	17617.50	35.91	18.89	54.80	88.20	-33.40	Peak	Horizontal
	17974.50	21.23	23.71	44.94	54.00	-9.06	Average	Horizontal
	17974.50	34.86	23.71	58.57	74.00	-15.43	Peak	Horizontal
	11053.80	35.61	14.58	50.19	74.00	-23.81	Peak	Vertical
*	14678.20	35.90	15.98	51.88	88.20	-36.32	Peak	Vertical
*	17644.70	35.16	19.64	54.80	88.20	-33.40	Peak	Vertical
	17986.40	21.51	24.03	45.54	54.00	-8.46	Average	Vertical
	17986.40	34.65	24.03	58.68	74.00	-15.32	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10860.00	35.87	15.01	50.88	74.00	-23.12	Peak	Horizontal
*	14334.80	35.84	15.85	51.69	88.20	-36.51	Peak	Horizontal
*	17653.20	35.43	19.36	54.79	88.20	-33.41	Peak	Horizontal
	17993.20	21.54	24.10	45.64	54.00	-8.36	Average	Horizontal
	17993.20	34.33	24.10	58.43	74.00	-15.57	Peak	Horizontal
	11431.20	35.71	14.32	50.03	74.00	-23.97	Peak	Vertical
*	14686.70	35.32	16.04	51.36	88.20	-36.84	Peak	Vertical
*	17590.30	34.80	19.27	54.07	88.20	-34.13	Peak	Vertical
	17932.00	21.32	23.06	44.38	54.00	-9.62	Average	Vertical
	17932.00	35.88	23.06	58.94	74.00	-15.06	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11432.90	36.40	14.31	50.71	74.00	-23.29	Peak	Horizontal
*	14319.50	35.58	15.90	51.48	88.20	-36.72	Peak	Horizontal
*	17588.60	34.75	19.31	54.06	88.20	-34.14	Peak	Horizontal
	17993.20	21.46	24.10	45.56	54.00	-8.44	Average	Horizontal
	17993.20	34.60	24.10	58.70	74.00	-15.30	Peak	Horizontal
	10987.50	35.75	14.90	50.65	74.00	-23.35	Peak	Vertical
*	14375.60	36.21	16.12	52.33	88.20	-35.87	Peak	Vertical
*	17622.60	36.12	18.98	55.10	88.20	-33.10	Peak	Vertical
	17976.20	21.93	23.77	45.70	54.00	-8.30	Average	Vertical
	17976.20	35.26	23.77	59.03	74.00	-14.97	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11232.30	36.20	14.23	50.43	74.00	-23.57	Peak	Horizontal
*	14358.60	35.86	16.00	51.86	88.20	-36.34	Peak	Horizontal
*	17654.90	34.58	19.31	53.89	88.20	-34.31	Peak	Horizontal
	17989.80	21.34	24.07	45.41	54.00	-8.59	Average	Horizontal
	17989.80	35.35	24.07	59.42	74.00	-14.58	Peak	Horizontal
	11460.10	36.21	14.13	50.34	74.00	-23.66	Peak	Vertical
*	14589.80	35.81	15.99	51.80	88.20	-36.40	Peak	Vertical
*	17643.00	35.28	19.69	54.97	88.20	-33.23	Peak	Vertical
	17985.36	21.17	24.02	45.19	54.00	-8.81	Average	Vertical
	17985.36	35.29	24.02	59.31	74.00	-14.69	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	209
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11220.40	35.70	14.23	49.93	74.00	-24.07	Peak	Horizontal
*	14627.20	35.75	15.85	51.60	88.20	-36.60	Peak	Horizontal
*	17663.40	35.55	19.41	54.96	88.20	-33.24	Peak	Horizontal
	17998.30	21.07	24.15	45.22	54.00	-8.78	Average	Horizontal
	17998.30	34.47	24.15	58.62	74.00	-15.38	Peak	Horizontal
	11332.60	36.50	14.26	50.76	74.00	-23.24	Peak	Vertical
*	14899.20	36.26	15.61	51.87	88.20	-36.33	Peak	Vertical
*	17632.80	34.47	19.41	53.88	88.20	-34.32	Peak	Vertical
	17955.80	21.26	23.31	44.57	54.00	-9.43	Average	Vertical
	17955.80	34.72	23.31	58.03	74.00	-15.97	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE20 (Nss = 4)	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10851.50	35.20	15.02	50.22	74.00	-23.78	Peak	Horizontal
*	14911.10	36.44	15.52	51.96	88.20	-36.24	Peak	Horizontal
*	17677.00	35.32	20.03	55.35	88.20	-32.85	Peak	Horizontal
	17979.60	21.92	23.88	45.80	54.00	-8.20	Average	Horizontal
	17979.60	35.12	23.88	59.00	74.00	-15.00	Peak	Horizontal
	10916.10	35.90	14.96	50.86	74.00	-23.14	Peak	Vertical
*	14936.60	36.24	15.44	51.68	88.20	-36.52	Peak	Vertical
*	17556.30	35.44	18.83	54.27	88.20	-33.93	Peak	Vertical
	17889.50	21.86	22.89	44.75	54.00	-9.25	Average	Vertical
	17889.50	35.22	22.89	58.11	74.00	-15.89	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10739.30	35.52	14.92	50.44	74.00	-23.56	Peak	Horizontal
*	14441.90	36.54	16.10	52.64	88.20	-35.56	Peak	Horizontal
*	17634.50	34.98	19.48	54.46	88.20	-33.74	Peak	Horizontal
	17996.60	21.88	24.13	46.01	54.00	-7.99	Average	Horizontal
	17996.60	34.93	24.13	59.06	74.00	-14.94	Peak	Horizontal
	10769.90	35.05	14.94	49.99	74.00	-24.01	Peak	Vertical
*	14435.10	36.24	15.95	52.19	88.20	-36.01	Peak	Vertical
*	17643.00	34.45	19.69	54.14	88.20	-34.06	Peak	Vertical
	17940.50	21.69	23.15	44.84	54.00	-9.16	Average	Vertical
	17940.50	36.18	23.15	59.33	74.00	-14.67	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10810.70	35.64	14.95	50.59	74.00	-23.41	Peak	Horizontal
*	14367.10	36.01	16.06	52.07	88.20	-36.13	Peak	Horizontal
*	17559.70	35.29	18.86	54.15	88.20	-34.05	Peak	Horizontal
	17960.90	21.35	23.36	44.71	54.00	-9.29	Average	Horizontal
	17960.90	35.21	23.36	58.57	74.00	-15.43	Peak	Horizontal
	10900.80	35.69	14.88	50.57	74.00	-23.43	Peak	Vertical
*	14394.30	36.06	16.02	52.08	88.20	-36.12	Peak	Vertical
*	17544.40	35.01	18.72	53.73	88.20	-34.47	Peak	Vertical
	17998.30	21.12	24.15	45.27	54.00	-8.73	Average	Vertical
	17998.30	34.09	24.15	58.24	74.00	-15.76	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11256.10	35.66	14.11	49.77	74.00	-24.23	Peak	Horizontal
*	14804.00	36.02	15.85	51.87	88.20	-36.33	Peak	Horizontal
*	17530.80	36.06	18.56	54.62	88.20	-33.58	Peak	Horizontal
	17942.20	21.94	23.17	45.11	54.00	-8.89	Average	Horizontal
	17942.20	35.33	23.17	58.50	74.00	-15.50	Peak	Horizontal
	10894.00	35.86	14.94	50.80	74.00	-23.20	Peak	Vertical
*	14333.10	35.83	15.85	51.68	88.20	-36.52	Peak	Vertical
*	17682.10	34.63	19.98	54.61	88.20	-33.59	Peak	Vertical
	17976.20	21.52	23.77	45.29	54.00	-8.71	Average	Vertical
	17976.20	34.47	23.77	58.24	74.00	-15.76	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11050.40	35.81	14.60	50.41	74.00	-23.59	Peak	Horizontal
*	14295.70	35.50	15.81	51.31	88.20	-36.89	Peak	Horizontal
*	17610.70	35.61	18.77	54.38	88.20	-33.82	Peak	Horizontal
	17981.30	21.17	23.94	45.11	54.00	-8.89	Average	Horizontal
	17981.30	34.18	23.94	58.12	74.00	-15.88	Peak	Horizontal
	11234.00	36.29	14.22	50.51	74.00	-23.49	Peak	Vertical
*	14940.00	36.11	15.46	51.57	88.20	-36.63	Peak	Vertical
*	17675.30	35.00	19.98	54.98	88.20	-33.22	Peak	Vertical
	17984.70	21.69	24.02	45.71	54.00	-8.29	Average	Vertical
	17984.70	34.62	24.02	58.64	74.00	-15.36	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10727.40	35.77	14.98	50.75	74.00	-23.25	Peak	Horizontal
*	14375.60	35.19	16.12	51.31	88.20	-36.89	Peak	Horizontal
*	17513.80	34.94	18.57	53.51	88.20	-34.69	Peak	Horizontal
	17762.00	21.66	20.54	42.20	54.00	-11.80	Average	Horizontal
	17762.00	35.66	20.54	56.20	74.00	-17.80	Peak	Horizontal
	10844.70	35.20	15.02	50.22	74.00	-23.78	Peak	Vertical
*	14314.40	35.81	15.91	51.72	88.20	-36.48	Peak	Vertical
*	17464.50	35.37	18.32	53.69	88.20	-34.51	Peak	Vertical
	17989.64	21.45	24.06	45.51	54.00	-8.49	Average	Vertical
	17989.64	34.04	24.06	58.10	74.00	-15.90	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10686.60	35.54	14.86	50.40	74.00	-23.60	Peak	Horizontal
*	14678.20	35.49	15.98	51.47	88.20	-36.73	Peak	Horizontal
*	17386.30	35.54	18.06	53.60	88.20	-34.60	Peak	Horizontal
	17903.10	21.45	22.93	44.38	54.00	-9.62	Average	Horizontal
	17903.10	34.37	22.93	57.30	74.00	-16.70	Peak	Horizontal
	10781.80	35.27	14.96	50.23	74.00	-23.77	Peak	Vertical
*	14674.80	35.30	15.96	51.26	88.20	-36.94	Peak	Vertical
*	17673.60	35.75	19.90	55.65	88.20	-32.55	Peak	Vertical
	17988.10	21.28	24.05	45.33	54.00	-8.67	Average	Vertical
	17988.10	34.53	24.05	58.58	74.00	-15.42	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10829.40	35.73	14.85	50.58	74.00	-23.42	Peak	Horizontal
*	14542.20	35.23	15.88	51.11	88.20	-37.09	Peak	Horizontal
*	17639.60	33.94	19.70	53.64	88.20	-34.56	Peak	Horizontal
	17998.30	21.08	24.15	45.23	54.00	-8.77	Average	Horizontal
	17998.30	33.98	24.15	58.13	74.00	-15.87	Peak	Horizontal
	10907.60	35.59	14.90	50.49	74.00	-23.51	Peak	Vertical
*	14538.80	35.65	15.89	51.54	88.20	-36.66	Peak	Vertical
*	17593.70	34.83	19.18	54.01	88.20	-34.19	Peak	Vertical
	17942.20	21.59	23.17	44.76	54.00	-9.24	Average	Vertical
	17942.20	35.01	23.17	58.18	74.00	-15.82	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10979.00	35.61	14.91	50.52	74.00	-23.48	Peak	Horizontal
*	13552.80	36.62	14.36	50.98	88.20	-37.22	Peak	Horizontal
*	17678.70	34.26	20.02	54.28	88.20	-33.92	Peak	Horizontal
	17998.30	21.53	24.15	45.68	54.00	-8.32	Average	Horizontal
	17998.30	34.26	24.15	58.41	74.00	-15.59	Peak	Horizontal
	11040.20	36.02	14.65	50.67	74.00	-23.33	Peak	Vertical
*	14195.40	35.59	15.63	51.22	88.20	-36.98	Peak	Vertical
*	17629.40	34.39	19.26	53.65	88.20	-34.55	Peak	Vertical
	17988.10	21.13	24.05	45.18	54.00	-8.82	Average	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10865.10	35.25	15.02	50.27	74.00	-23.73	Peak	Horizontal
*	14396.00	35.82	16.00	51.82	88.20	-36.38	Peak	Horizontal
*	17637.90	35.26	19.63	54.89	88.20	-33.31	Peak	Horizontal
	17991.50	21.37	24.08	45.45	54.00	-8.55	Average	Horizontal
	17991.50	34.84	24.08	58.92	74.00	-15.08	Peak	Horizontal
	11213.60	36.01	14.22	50.23	74.00	-23.77	Peak	Vertical
*	14311.00	35.59	15.89	51.48	88.20	-36.72	Peak	Vertical
*	17578.40	34.73	19.18	53.91	88.20	-34.29	Peak	Vertical
	17977.90	20.95	23.82	44.77	54.00	-9.23	Average	Vertical
	17977.90	34.31	23.82	58.13	74.00	-15.87	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10996.00	35.81	14.87	50.68	74.00	-23.32	Peak	Horizontal
*	14290.60	35.57	15.84	51.41	88.20	-36.79	Peak	Horizontal
*	17619.20	35.20	18.92	54.12	88.20	-34.08	Peak	Horizontal
	17979.60	21.79	23.88	45.67	54.00	-8.33	Average	Horizontal
	17979.60	34.50	23.88	58.38	74.00	-15.62	Peak	Horizontal
	11477.10	36.18	14.17	50.35	74.00	-23.65	Peak	Vertical
*	14547.30	35.07	15.87	50.94	88.20	-37.26	Peak	Vertical
*	17634.50	35.71	19.48	55.19	88.20	-33.01	Peak	Vertical
	17954.10	21.77	23.29	45.06	54.00	-8.94	Average	Vertical
	17954.10	35.62	23.29	58.91	74.00	-15.09	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11511.10	35.69	14.11	49.80	74.00	-24.20	Peak	Horizontal
*	14768.30	35.37	15.89	51.26	88.20	-36.94	Peak	Horizontal
*	17603.90	36.33	18.80	55.13	88.20	-33.07	Peak	Horizontal
	17996.60	20.84	24.13	44.97	54.00	-9.03	Average	Horizontal
	17996.60	33.90	24.13	58.03	74.00	-15.97	Peak	Horizontal
	10997.70	35.01	14.86	49.87	74.00	-24.13	Peak	Vertical
*	14513.30	35.91	15.76	51.67	88.20	-36.53	Peak	Vertical
*	17561.40	35.18	18.88	54.06	88.20	-34.14	Peak	Vertical
	17950.70	21.78	23.25	45.03	54.00	-8.97	Average	Vertical
	17950.70	35.14	23.25	58.39	74.00	-15.61	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11575.70	36.98	13.91	50.89	74.00	-23.11	Peak	Horizontal
*	14436.80	36.24	15.99	52.23	88.20	-35.97	Peak	Horizontal
*	17586.90	36.41	19.34	55.75	88.20	-32.45	Peak	Horizontal
	17955.80	23.74	23.31	47.05	54.00	-6.95	Average	Horizontal
	11409.10	36.28	14.27	50.55	74.00	-23.45	Peak	Vertical
*	14605.10	36.16	15.93	52.09	88.20	-36.11	Peak	Vertical
*	17527.40	36.00	18.55	54.55	88.20	-33.65	Peak	Vertical
	17969.40	21.86	23.54	45.40	54.00	-8.60	Average	Vertical
	17969.40	35.30	23.54	58.84	74.00	-15.16	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE40 (Nss = 4)	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11497.50	36.64	14.13	50.77	74.00	-23.23	Peak	Horizontal
*	14079.80	36.92	15.26	52.18	88.20	-36.02	Peak	Horizontal
*	17561.40	35.36	18.88	54.24	88.20	-33.96	Peak	Horizontal
	17991.50	21.81	24.08	45.89	54.00	-8.11	Average	Horizontal
	17991.50	35.64	24.08	59.72	74.00	-14.28	Peak	Horizontal
	10790.30	35.92	14.99	50.91	74.00	-23.09	Peak	Vertical
*	14188.60	37.75	15.61	53.36	88.20	-34.84	Peak	Vertical
*	16810.00	36.76	15.89	52.65	88.20	-35.55	Peak	Vertical
	17986.40	21.63	24.03	45.66	54.00	-8.34	Average	Vertical
	17986.40	34.96	24.03	58.99	74.00	-15.01	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE80 (Nss = 4)	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11466.90	36.67	14.15	50.82	74.00	-23.18	Peak	Horizontal
*	14576.20	36.74	15.93	52.67	88.20	-35.53	Peak	Horizontal
*	17586.90	35.87	19.34	55.21	88.20	-32.99	Peak	Horizontal
	17989.80	21.37	24.07	45.44	54.00	-8.56	Average	Horizontal
	17989.80	35.61	24.07	59.68	74.00	-14.32	Peak	Horizontal
	10769.90	35.79	14.94	50.73	74.00	-23.27	Peak	Vertical
*	14336.50	36.17	15.86	52.03	88.20	-36.17	Peak	Vertical
*	17585.20	36.44	19.32	55.76	88.20	-32.44	Peak	Vertical
	17988.10	21.78	24.05	45.83	54.00	-8.17	Average	Vertical
	17988.10	35.19	24.05	59.24	74.00	-14.76	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE80 (Nss = 4)	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10973.90	35.94	14.91	50.85	74.00	-23.15	Peak	Horizontal
*	14911.10	36.40	15.52	51.92	88.20	-36.28	Peak	Horizontal
*	17585.20	35.69	19.32	55.01	88.20	-33.19	Peak	Horizontal
	17983.00	21.46	24.00	45.46	54.00	-8.54	Average	Horizontal
	17983.00	35.50	24.00	59.50	74.00	-14.50	Peak	Horizontal
	11534.90	36.29	14.05	50.34	74.00	-23.66	Peak	Vertical
*	13471.20	37.58	14.09	51.67	88.20	-36.53	Peak	Vertical
*	17539.30	35.95	18.66	54.61	88.20	-33.59	Peak	Vertical
	17889.50	21.26	22.89	44.15	54.00	-9.85	Average	Vertical
	17889.50	35.99	22.89	58.88	74.00	-15.12	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE80 (Nss = 4)	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10946.70	35.73	14.97	50.70	74.00	-23.30	Peak	Horizontal
*	14183.50	35.94	15.59	51.53	88.20	-36.67	Peak	Horizontal
*	17637.90	36.07	19.63	55.70	88.20	-32.50	Peak	Horizontal
	17994.90	21.14	24.12	45.26	54.00	-8.74	Average	Horizontal
	17994.90	34.55	24.12	58.67	74.00	-15.33	Peak	Horizontal
	11149.00	36.19	14.30	50.49	74.00	-23.51	Peak	Vertical
*	14661.20	36.52	15.84	52.36	88.20	-35.84	Peak	Vertical
*	17643.00	35.46	19.69	55.15	88.20	-33.05	Peak	Vertical
	17962.60	21.37	23.38	44.75	54.00	-9.25	Average	Vertical
	17962.60	35.03	23.38	58.41	74.00	-15.59	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE80 (Nss = 4)	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11346.20	36.26	14.24	50.50	74.00	-23.50	Peak	Horizontal
*	14822.70	35.87	15.69	51.56	88.20	-36.64	Peak	Horizontal
*	17677.00	35.49	20.03	55.52	88.20	-32.68	Peak	Horizontal
	17996.57	21.52	24.13	45.65	54.00	-8.35	Average	Horizontal
	17996.57	34.25	24.13	58.38	74.00	-15.62	Peak	Horizontal
	10992.60	35.65	14.89	50.54	74.00	-23.46	Peak	Vertical
*	14897.50	35.90	15.62	51.52	88.20	-36.68	Peak	Vertical
*	17556.30	34.97	18.83	53.80	88.20	-34.40	Peak	Vertical
	17955.80	21.64	23.31	44.95	54.00	-9.05	Average	Vertical
	17955.80	35.56	23.31	58.87	74.00	-15.13	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE80 (Nss = 4)	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10897.40	35.74	14.91	50.65	74.00	-23.35	Peak	Horizontal
*	14261.70	36.10	15.75	51.85	88.20	-36.35	Peak	Horizontal
*	17673.60	35.29	19.90	55.19	88.20	-33.01	Peak	Horizontal
	17979.60	21.72	23.88	45.60	54.00	-8.40	Average	Horizontal
	17979.60	34.48	23.88	58.36	74.00	-15.64	Peak	Horizontal
	11715.10	37.11	13.45	50.56	74.00	-23.44	Peak	Vertical
*	14435.10	36.41	15.95	52.36	88.20	-35.84	Peak	Vertical
*	17692.30	35.88	19.87	55.75	88.20	-32.45	Peak	Vertical
	17945.60	21.79	23.21	45.00	54.00	-9.00	Average	Vertical
	17945.60	35.93	23.21	59.14	74.00	-14.86	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE80 (Nss = 4)	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11120.10	36.48	14.41	50.89	74.00	-23.11	Peak	Horizontal
*	14560.90	36.17	15.86	52.03	88.20	-36.17	Peak	Horizontal
*	17588.60	35.05	19.31	54.36	88.20	-33.84	Peak	Horizontal
	17998.30	21.71	24.15	45.86	54.00	-8.14	Average	Horizontal
	17998.30	35.08	24.15	59.23	74.00	-14.77	Peak	Horizontal
	10769.90	36.05	14.94	50.99	74.00	-23.01	Peak	Vertical
*	14810.80	36.35	15.79	52.14	88.20	-36.06	Peak	Vertical
*	17530.80	35.87	18.56	54.43	88.20	-33.77	Peak	Vertical
	17984.70	21.59	24.02	45.61	54.00	-8.39	Average	Vertical
	17984.70	35.07	24.02	59.09	74.00	-14.91	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE80 (Nss = 4)	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10843.00	35.90	15.01	50.91	74.00	-23.09	Peak	Horizontal
*	14270.20	36.74	15.86	52.60	88.20	-35.60	Peak	Horizontal
*	17637.90	35.37	19.63	55.00	88.20	-33.20	Peak	Horizontal
	17974.50	21.73	23.71	45.44	54.00	-8.56	Average	Horizontal
	17974.50	35.45	23.71	59.16	74.00	-14.84	Peak	Horizontal
	11125.20	36.11	14.38	50.49	74.00	-23.51	Peak	Vertical
*	14666.30	36.91	15.91	52.82	88.20	-35.38	Peak	Vertical
*	17592.00	35.92	19.24	55.16	88.20	-33.04	Peak	Vertical
	17972.80	21.39	23.65	45.04	54.00	-8.96	Average	Vertical
	17972.80	34.84	23.65	58.49	74.00	-15.51	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE80 (Nss = 4)	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11536.60	35.88	14.05	49.93	74.00	-24.07	Peak	Horizontal
*	14518.40	36.00	15.79	51.79	88.20	-36.41	Peak	Horizontal
*	17593.70	35.28	19.18	54.46	88.20	-33.74	Peak	Horizontal
	17891.20	21.29	22.91	44.20	54.00	-9.80	Average	Horizontal
	17891.20	35.40	22.91	58.31	74.00	-15.69	Peak	Horizontal
	10865.10	35.81	15.02	50.83	74.00	-23.17	Peak	Vertical
*	14836.30	36.36	15.66	52.02	88.20	-36.18	Peak	Vertical
*	17561.40	35.55	18.88	54.43	88.20	-33.77	Peak	Vertical
	17989.80	20.98	24.07	45.05	54.00	-8.95	Average	Vertical
	17989.80	34.88	24.07	58.95	74.00	-15.05	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE80 (Nss = 4)	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10882.10	35.72	14.99	50.71	74.00	-23.29	Peak	Horizontal
*	14744.50	35.64	15.76	51.40	88.20	-36.80	Peak	Horizontal
*	17673.60	34.84	19.90	54.74	88.20	-33.46	Peak	Horizontal
	17986.40	21.21	24.03	45.24	54.00	-8.76	Average	Horizontal
	17986.40	35.46	24.03	59.49	74.00	-14.51	Peak	Horizontal
	11065.70	36.31	14.51	50.82	74.00	-23.18	Peak	Vertical
*	14375.60	35.77	16.12	51.89	88.20	-36.31	Peak	Vertical
*	17690.60	35.05	19.89	54.94	88.20	-33.26	Peak	Vertical
	17994.90	21.16	24.12	45.28	54.00	-8.72	Average	Vertical
	17994.90	35.36	24.12	59.48	74.00	-14.52	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE80 (Nss = 4)	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11123.50	36.24	14.39	50.63	74.00	-23.37	Peak	Horizontal
*	14849.90	36.13	15.70	51.83	88.20	-36.37	Peak	Horizontal
*	17687.20	35.48	19.92	55.40	88.20	-32.80	Peak	Horizontal
	17984.70	21.53	24.02	45.55	54.00	-8.45	Average	Horizontal
	17984.70	34.54	24.02	58.56	74.00	-15.44	Peak	Horizontal
	10853.20	35.36	15.02	50.38	74.00	-23.62	Peak	Vertical
*	14676.50	35.91	15.97	51.88	88.20	-36.32	Peak	Vertical
*	17639.60	35.85	19.70	55.55	88.20	-32.65	Peak	Vertical
	17976.20	21.98	23.77	45.75	54.00	-8.25	Average	Vertical
	17976.20	35.40	23.77	59.17	74.00	-14.83	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE80 (Nss = 4)	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10667.90	35.27	14.98	50.25	74.00	-23.75	Peak	Horizontal
*	14683.30	35.34	16.02	51.36	88.20	-36.84	Peak	Horizontal
*	17673.60	34.99	19.90	54.89	88.20	-33.31	Peak	Horizontal
	17988.10	21.14	24.05	45.19	54.00	-8.81	Average	Horizontal
	17988.10	34.24	24.05	58.29	74.00	-15.71	Peak	Horizontal
	10856.60	35.48	15.01	50.49	74.00	-23.51	Peak	Vertical
*	14608.50	35.91	15.90	51.81	88.20	-36.39	Peak	Vertical
*	17578.40	34.55	19.18	53.73	88.20	-34.47	Peak	Vertical
	17991.50	21.44	24.08	45.52	54.00	-8.48	Average	Vertical
	17991.50	34.33	24.08	58.41	74.00	-15.59	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE160 (Nss = 4)	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10644.10	35.39	14.98	50.37	74.00	-23.63	Peak	Horizontal
*	14351.80	35.95	15.97	51.92	88.20	-36.28	Peak	Horizontal
*	17675.30	35.49	19.98	55.47	88.20	-32.73	Peak	Horizontal
	17903.10	21.78	22.93	44.71	54.00	-9.29	Average	Horizontal
	17903.10	35.50	22.93	58.43	74.00	-15.57	Peak	Horizontal
	10856.60	35.90	15.01	50.91	74.00	-23.09	Peak	Vertical
*	14407.90	35.38	15.93	51.31	88.20	-36.89	Peak	Vertical
*	17653.20	35.04	19.36	54.40	88.20	-33.80	Peak	Vertical
	17933.70	21.94	23.08	45.02	54.00	-8.98	Average	Vertical
	17933.70	35.59	23.08	58.67	74.00	-15.33	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE160 (Nss = 4)	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10674.70	35.13	14.94	50.07	74.00	-23.93	Peak	Horizontal
*	14458.90	35.25	16.04	51.29	88.20	-36.91	Peak	Horizontal
*	17636.20	34.73	19.55	54.28	88.20	-33.92	Peak	Horizontal
	17974.50	21.76	23.71	45.47	54.00	-8.53	Average	Horizontal
	17974.50	34.93	23.71	58.64	74.00	-15.36	Peak	Horizontal
	10980.70	35.36	14.91	50.27	74.00	-23.73	Peak	Vertical
*	14348.40	35.24	15.94	51.18	88.20	-37.02	Peak	Vertical
*	17663.40	35.54	19.41	54.95	88.20	-33.25	Peak	Vertical
	17979.60	21.02	23.88	44.90	54.00	-9.10	Average	Vertical
	17979.60	34.37	23.88	58.25	74.00	-15.75	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE160 (Nss = 4)	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10861.70	35.33	15.01	50.34	74.00	-23.66	Peak	Horizontal
*	14625.50	36.42	15.84	52.26	88.20	-35.94	Peak	Horizontal
*	17641.30	34.84	19.73	54.57	88.20	-33.63	Peak	Horizontal
	17979.60	21.56	23.88	45.44	54.00	-8.56	Average	Horizontal
	17979.60	35.02	23.88	58.90	74.00	-15.10	Peak	Horizontal
	10800.50	35.54	14.98	50.52	74.00	-23.48	Peak	Vertical
*	14346.70	36.30	15.92	52.22	88.20	-35.98	Peak	Vertical
*	17583.50	36.04	19.28	55.32	88.20	-32.88	Peak	Vertical
	17955.80	21.65	23.31	44.96	54.00	-9.04	Average	Vertical
	17955.80	35.09	23.31	58.40	74.00	-15.60	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE160 (Nss = 4)	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10837.90	35.60	14.95	50.55	74.00	-23.45	Peak	Horizontal
*	14802.30	35.95	15.85	51.80	88.20	-36.40	Peak	Horizontal
*	17496.80	35.30	18.56	53.86	88.20	-34.34	Peak	Horizontal
	17989.80	21.65	24.07	45.72	54.00	-8.28	Average	Horizontal
	17989.80	34.72	24.07	58.79	74.00	-15.21	Peak	Horizontal
	11492.40	36.48	14.13	50.61	74.00	-23.39	Peak	Vertical
*	14462.30	36.07	16.01	52.08	88.20	-36.12	Peak	Vertical
*	17651.50	35.55	19.42	54.97	88.20	-33.23	Peak	Vertical
	17994.90	21.64	24.12	45.76	54.00	-8.24	Average	Vertical
	17994.90	34.02	24.12	58.14	74.00	-15.86	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE160 (Nss = 4)	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11449.90	36.41	14.22	50.63	74.00	-23.37	Peak	Horizontal
*	14532.00	35.52	15.90	51.42	88.20	-36.78	Peak	Horizontal
*	17660.00	35.76	19.25	55.01	88.20	-33.19	Peak	Horizontal
	17940.50	21.71	23.15	44.86	54.00	-9.14	Average	Horizontal
	17940.50	36.93	23.15	60.08	74.00	-13.92	Peak	Horizontal
	11511.10	36.49	14.11	50.60	74.00	-23.40	Peak	Vertical
*	14151.20	35.64	15.28	50.92	88.20	-37.28	Peak	Vertical
*	17678.70	34.65	20.02	54.67	88.20	-33.53	Peak	Vertical
	17957.50	21.83	23.33	45.16	54.00	-8.84	Average	Vertical
	17957.50	34.79	23.33	58.12	74.00	-15.88	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE160 (Nss = 4)	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10759.70	35.07	14.93	50.00	74.00	-24.00	Peak	Horizontal
*	14691.80	35.56	16.06	51.62	88.20	-36.58	Peak	Horizontal
*	17563.10	35.04	18.90	53.94	88.20	-34.26	Peak	Horizontal
	17977.90	21.93	23.82	45.75	54.00	-8.25	Average	Horizontal
	17977.90	34.71	23.82	58.53	74.00	-15.47	Peak	Horizontal
	11057.20	36.09	14.56	50.65	74.00	-23.35	Peak	Vertical
*	14424.90	36.20	15.79	51.99	88.20	-36.21	Peak	Vertical
*	17643.00	35.17	19.69	54.86	88.20	-33.34	Peak	Vertical
	17993.20	21.41	24.10	45.51	54.00	-8.49	Average	Vertical
	17993.20	35.04	24.10	59.14	74.00	-14.86	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11ax-HE160 (Nss = 4)	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11589.30	36.19	13.87	50.06	74.00	-23.94	Peak	Horizontal
*	14350.10	35.80	15.95	51.75	88.20	-36.45	Peak	Horizontal
*	17682.10	34.90	19.98	54.88	88.20	-33.32	Peak	Horizontal
	17984.70	21.19	24.02	45.21	54.00	-8.79	Average	Horizontal
	17984.70	34.46	24.02	58.48	74.00	-15.52	Peak	Horizontal
	11659.00	36.63	13.69	50.32	74.00	-23.68	Peak	Vertical
*	14295.70	35.45	15.81	51.26	88.20	-36.94	Peak	Vertical
*	17620.90	35.61	18.95	54.56	88.20	-33.64	Peak	Vertical
	17979.60	21.33	23.88	45.21	54.00	-8.79	Average	Vertical
	17979.60	34.19	23.88	58.07	74.00	-15.93	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11487.30	36.54	14.14	50.68	74.00	-23.32	Peak	Horizontal
*	14404.50	35.67	15.95	51.62	88.20	-36.58	Peak	Horizontal
*	17631.10	35.05	19.33	54.38	88.20	-33.82	Peak	Horizontal
	17983.00	21.96	24.00	45.96	54.00	-8.04	Average	Horizontal
	17983.00	36.12	24.00	60.12	74.00	-13.88	Peak	Horizontal
	10761.40	34.84	14.93	49.77	74.00	-24.23	Peak	Vertical
*	14448.70	35.56	16.11	51.67	88.20	-36.53	Peak	Vertical
*	17673.60	35.31	19.90	55.21	88.20	-32.99	Peak	Vertical
	17984.70	21.13	24.02	45.15	54.00	-8.85	Average	Vertical
	17984.70	34.13	24.02	58.15	74.00	-15.85	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10870.20	35.72	15.01	50.73	74.00	-23.27	Peak	Horizontal
*	14321.20	35.21	15.89	51.10	88.20	-37.10	Peak	Horizontal
*	17595.40	34.44	19.11	53.55	88.20	-34.65	Peak	Horizontal
	17967.70	21.43	23.48	44.91	54.00	-9.09	Average	Horizontal
	17967.70	34.87	23.48	58.35	74.00	-15.65	Peak	Horizontal
	10729.10	35.65	14.97	50.62	74.00	-23.38	Peak	Vertical
*	14220.90	35.94	15.46	51.40	88.20	-36.80	Peak	Vertical
*	17690.60	34.99	19.89	54.88	88.20	-33.32	Peak	Vertical
	17971.10	21.19	23.59	44.78	54.00	-9.22	Average	Vertical
	17971.10	34.81	23.59	58.40	74.00	-15.60	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11040.20	35.80	14.65	50.45	74.00	-23.55	Peak	Horizontal
*	14319.50	35.23	15.90	51.13	88.20	-37.07	Peak	Horizontal
*	17639.60	34.34	19.70	54.04	88.20	-34.16	Peak	Horizontal
	17979.60	21.67	23.88	45.55	54.00	-8.45	Average	Horizontal
	17979.60	34.50	23.88	58.38	74.00	-15.62	Peak	Horizontal
	10875.30	35.82	14.99	50.81	74.00	-23.19	Peak	Vertical
*	14562.60	36.37	15.86	52.23	88.20	-35.97	Peak	Vertical
*	17588.60	34.18	19.31	53.49	88.20	-34.71	Peak	Vertical
	17976.20	22.04	23.77	45.81	54.00	-8.19	Average	Vertical
	17976.20	35.06	23.77	58.83	74.00	-15.17	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11278.20	35.90	14.22	50.12	74.00	-23.88	Peak	Horizontal
*	14931.50	36.36	15.40	51.76	88.20	-36.44	Peak	Horizontal
*	17593.70	34.52	19.18	53.70	88.20	-34.50	Peak	Horizontal
	17989.80	21.14	24.07	45.21	54.00	-8.79	Average	Horizontal
	17989.80	34.65	24.07	58.72	74.00	-15.28	Peak	Horizontal
	10759.70	34.76	14.93	49.69	74.00	-24.31	Peak	Vertical
*	13879.20	36.01	15.10	51.11	88.20	-37.09	Peak	Vertical
*	17690.60	34.83	19.89	54.72	88.20	-33.48	Peak	Vertical
	17971.10	22.13	23.59	45.72	54.00	-8.28	Average	Vertical
	17971.10	35.12	23.59	58.71	74.00	-15.29	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11395.50	36.37	14.25	50.62	74.00	-23.38	Peak	Horizontal
*	14098.50	36.53	15.28	51.81	88.20	-36.39	Peak	Horizontal
*	17551.20	36.58	18.79	55.37	88.20	-32.83	Peak	Horizontal
	17977.90	21.56	23.82	45.38	54.00	-8.62	Average	Horizontal
	17977.90	35.30	23.82	59.12	74.00	-14.88	Peak	Horizontal
	10686.60	35.56	14.86	50.42	74.00	-23.58	Peak	Vertical
*	14372.20	35.42	16.09	51.51	88.20	-36.69	Peak	Vertical
*	17639.60	34.68	19.70	54.38	88.20	-33.82	Peak	Vertical
	17984.70	20.87	24.02	44.89	54.00	-9.11	Average	Vertical
	17984.70	34.30	24.02	58.32	74.00	-15.68	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10907.60	34.86	14.90	49.76	74.00	-24.24	Peak	Horizontal
*	14858.40	35.64	15.70	51.34	88.20	-36.86	Peak	Horizontal
*	17675.30	34.95	19.98	54.93	88.20	-33.27	Peak	Horizontal
	17983.00	21.84	24.00	45.84	54.00	-8.16	Average	Horizontal
	17983.00	34.58	24.00	58.58	74.00	-15.42	Peak	Horizontal
	11363.20	36.32	14.27	50.59	74.00	-23.41	Peak	Vertical
*	14350.10	35.31	15.95	51.26	88.20	-36.94	Peak	Vertical
*	17578.40	34.51	19.18	53.69	88.20	-34.51	Peak	Vertical
	17969.40	21.47	23.54	45.01	54.00	-8.99	Average	Vertical
	17969.40	34.55	23.54	58.09	74.00	-15.91	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10802.20	34.68	14.98	49.66	74.00	-24.34	Peak	Horizontal
*	14210.70	36.18	15.59	51.77	88.20	-36.43	Peak	Horizontal
*	17682.10	34.74	19.98	54.72	88.20	-33.48	Peak	Horizontal
	17983.00	21.03	24.00	45.03	54.00	-8.97	Average	Horizontal
	17983.00	34.62	24.00	58.62	74.00	-15.38	Peak	Horizontal
	11009.60	35.41	14.81	50.22	74.00	-23.78	Peak	Vertical
*	14826.10	35.51	15.68	51.19	88.20	-37.01	Peak	Vertical
*	17637.90	34.37	19.63	54.00	88.20	-34.20	Peak	Vertical
	17969.40	21.31	23.54	44.85	54.00	-9.15	Average	Vertical
	17969.40	34.33	23.54	57.87	74.00	-16.13	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11254.40	36.54	14.11	50.65	74.00	-23.35	Peak	Horizontal
*	14278.70	35.45	15.94	51.39	88.20	-36.81	Peak	Horizontal
*	17632.80	34.16	19.41	53.57	88.20	-34.63	Peak	Horizontal
	17988.10	21.16	24.05	45.21	54.00	-8.79	Average	Horizontal
	17988.10	34.64	24.05	58.69	74.00	-15.31	Peak	Horizontal
	10880.40	35.27	14.99	50.26	74.00	-23.74	Peak	Vertical
*	14368.80	35.35	16.07	51.42	88.20	-36.78	Peak	Vertical
*	17641.30	34.99	19.73	54.72	88.20	-33.48	Peak	Vertical
	17991.50	21.12	24.08	45.20	54.00	-8.80	Average	Vertical
	17991.50	33.85	24.08	57.93	74.00	-16.07	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10904.20	35.67	14.89	50.56	74.00	-23.44	Peak	Horizontal
*	14678.20	35.89	15.98	51.87	88.20	-36.33	Peak	Horizontal
*	17590.30	34.52	19.27	53.79	88.20	-34.41	Peak	Horizontal
	17986.40	21.72	24.03	45.75	54.00	-8.25	Average	Horizontal
	17986.40	34.33	24.03	58.36	74.00	-15.64	Peak	Horizontal
	11286.70	36.08	14.27	50.35	74.00	-23.65	Peak	Vertical
*	14278.70	36.80	15.94	52.74	88.20	-35.46	Peak	Vertical
*	17474.70	35.99	18.32	54.31	88.20	-33.89	Peak	Vertical
	17995.16	21.14	24.12	45.26	54.00	-8.74	Average	Vertical
	17995.16	34.67	24.12	58.79	74.00	-15.21	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11344.50	35.73	14.24	49.97	74.00	-24.03	Peak	Horizontal
*	14664.60	36.14	15.89	52.03	88.20	-36.17	Peak	Horizontal
*	17569.90	34.04	18.98	53.02	88.20	-35.18	Peak	Horizontal
	17959.20	21.46	23.34	44.80	54.00	-9.20	Average	Horizontal
	17959.20	34.73	23.34	58.07	74.00	-15.93	Peak	Horizontal
	10946.70	35.47	14.97	50.44	74.00	-23.56	Peak	Vertical
*	14530.30	35.43	15.89	51.32	88.20	-36.88	Peak	Vertical
*	17636.20	35.18	19.55	54.73	88.20	-33.47	Peak	Vertical
	17989.80	21.71	24.07	45.78	54.00	-8.22	Average	Vertical
	17989.80	34.14	24.07	58.21	74.00	-15.79	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10858.30	36.00	15.01	51.01	74.00	-22.99	Peak	Horizontal
*	14326.30	35.42	15.87	51.29	88.20	-36.91	Peak	Horizontal
*	17627.70	35.29	19.19	54.48	88.20	-33.72	Peak	Horizontal
	17906.50	21.56	22.90	44.46	54.00	-9.54	Average	Horizontal
	17906.50	35.60	22.90	58.50	74.00	-15.50	Peak	Horizontal
	10764.80	35.46	14.94	50.40	74.00	-23.60	Peak	Vertical
*	14331.40	35.84	15.85	51.69	88.20	-36.51	Peak	Vertical
*	17617.50	34.71	18.89	53.60	88.20	-34.60	Peak	Vertical
	17983.00	21.31	24.00	45.31	54.00	-8.69	Average	Vertical
	17983.00	34.28	24.00	58.28	74.00	-15.72	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	209
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10860.00	35.53	15.01	50.54	74.00	-23.46	Peak	Horizontal
*	14785.30	35.35	15.87	51.22	88.20	-36.98	Peak	Horizontal
*	17571.60	34.52	19.03	53.55	88.20	-34.65	Peak	Horizontal
	17969.40	21.05	23.54	44.59	54.00	-9.41	Average	Horizontal
	17969.40	35.91	23.54	59.45	74.00	-14.55	Peak	Horizontal
	11019.80	36.03	14.76	50.79	74.00	-23.21	Peak	Vertical
*	14268.50	35.46	15.84	51.30	88.20	-36.90	Peak	Vertical
*	17605.60	35.39	18.76	54.15	88.20	-34.05	Peak	Vertical
	17984.70	21.88	24.02	45.90	54.00	-8.10	Average	Vertical
	17984.70	34.75	24.02	58.77	74.00	-15.23	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT20 (Nss = 4)	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11079.30	35.98	14.50	50.48	74.00	-23.52	Peak	Horizontal
*	14401.10	36.63	15.97	52.60	88.20	-35.60	Peak	Horizontal
*	17603.90	35.08	18.80	53.88	88.20	-34.32	Peak	Horizontal
	17966.00	21.77	23.42	45.19	54.00	-8.81	Average	Horizontal
	17966.00	36.53	23.42	59.95	74.00	-14.05	Peak	Horizontal
	10958.60	35.41	14.94	50.35	74.00	-23.65	Peak	Vertical
*	14396.00	35.61	16.00	51.61	88.20	-36.59	Peak	Vertical
*	17224.80	36.37	17.15	53.52	88.20	-34.68	Peak	Vertical
	17981.30	21.36	23.94	45.30	54.00	-8.70	Average	Vertical
	17981.30	35.40	23.94	59.34	74.00	-14.66	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11062.30	36.24	14.53	50.77	74.00	-23.23	Peak	Horizontal
*	13940.40	35.99	15.15	51.14	88.20	-37.06	Peak	Horizontal
*	17600.50	35.40	18.92	54.32	88.20	-33.88	Peak	Horizontal
	17966.00	21.58	23.42	45.00	54.00	-9.00	Average	Horizontal
	17966.00	34.57	23.42	57.99	74.00	-16.01	Peak	Horizontal
	10846.40	36.00	15.02	51.02	74.00	-22.98	Peak	Vertical
*	14586.40	36.02	16.00	52.02	88.20	-36.18	Peak	Vertical
*	17535.90	34.86	18.61	53.47	88.20	-34.73	Peak	Vertical
	17983.00	21.06	24.00	45.06	54.00	-8.94	Average	Vertical
	17983.00	35.47	24.00	59.47	74.00	-14.53	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10973.90	35.38	14.91	50.29	74.00	-23.71	Peak	Horizontal
*	14370.50	35.99	16.08	52.07	88.20	-36.13	Peak	Horizontal
*	17644.70	34.72	19.64	54.36	88.20	-33.84	Peak	Horizontal
	17983.00	21.68	24.00	45.68	54.00	-8.32	Average	Horizontal
	17983.00	34.14	24.00	58.14	74.00	-15.86	Peak	Horizontal
	11477.10	36.18	14.17	50.35	74.00	-23.65	Peak	Vertical
*	14906.00	35.90	15.57	51.47	88.20	-36.73	Peak	Vertical
*	17670.20	34.30	19.74	54.04	88.20	-34.16	Peak	Vertical
	17983.00	21.49	24.00	45.49	54.00	-8.51	Average	Vertical
	17983.00	35.15	24.00	59.15	74.00	-14.85	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10880.40	35.38	14.99	50.37	74.00	-23.63	Peak	Horizontal
*	14282.10	35.38	15.91	51.29	88.20	-36.91	Peak	Horizontal
*	17646.40	35.02	19.58	54.60	88.20	-33.60	Peak	Horizontal
	17986.87	21.18	24.04	45.22	54.00	-8.78	Average	Horizontal
	17986.87	34.72	24.04	58.76	74.00	-15.24	Peak	Horizontal
	10982.40	35.45	14.91	50.36	74.00	-23.64	Peak	Vertical
*	14865.20	36.08	15.68	51.76	88.20	-36.44	Peak	Vertical
*	17631.10	35.06	19.33	54.39	88.20	-33.81	Peak	Vertical
	17949.00	21.53	23.23	44.76	54.00	-9.24	Average	Vertical
	17949.00	35.23	23.23	58.46	74.00	-15.54	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11261.20	36.18	14.11	50.29	74.00	-23.71	Peak	Horizontal
*	14317.80	35.39	15.91	51.30	88.20	-36.90	Peak	Horizontal
*	17583.50	35.04	19.28	54.32	88.20	-33.88	Peak	Horizontal
	17977.90	21.24	23.82	45.06	54.00	-8.94	Average	Horizontal
	17977.90	35.10	23.82	58.92	74.00	-15.08	Peak	Horizontal
	11672.60	36.55	13.55	50.09	74.00	-23.91	Peak	Vertical
*	14759.80	35.53	15.84	51.37	88.20	-36.83	Peak	Vertical
*	17656.60	36.83	19.26	56.09	88.20	-32.11	Peak	Vertical
	17984.70	21.91	24.02	45.93	54.00	-8.07	Average	Vertical
	17984.70	34.15	24.02	58.17	74.00	-15.83	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10844.70	35.80	15.02	50.82	74.00	-23.18	Peak	Horizontal
*	14370.50	35.62	16.08	51.70	88.20	-36.50	Peak	Horizontal
*	17639.60	34.99	19.70	54.69	88.20	-33.51	Peak	Horizontal
	17979.60	22.58	23.88	46.46	54.00	-7.54	Average	Horizontal
	11053.80	36.03	14.58	50.61	74.00	-23.39	Peak	Vertical
*	14375.60	35.44	16.12	51.56	88.20	-36.64	Peak	Vertical
*	17585.20	34.93	19.32	54.25	88.20	-33.95	Peak	Vertical
	17969.40	21.07	23.54	44.61	54.00	-9.39	Average	Vertical
	17969.40	36.05	23.54	59.59	74.00	-14.41	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10873.60	34.92	15.00	49.92	74.00	-24.08	Peak	Horizontal
*	14351.80	36.23	15.97	52.20	88.20	-36.00	Peak	Horizontal
*	17648.10	35.14	19.53	54.67	88.20	-33.53	Peak	Horizontal
	17989.80	21.45	24.07	45.52	54.00	-8.48	Average	Horizontal
	17989.80	33.96	24.07	58.03	74.00	-15.97	Peak	Horizontal
	11133.70	35.46	14.34	49.80	74.00	-24.20	Peak	Vertical
*	14175.00	36.08	15.55	51.63	88.20	-36.57	Peak	Vertical
*	17639.60	34.53	19.70	54.23	88.20	-33.97	Peak	Vertical
	17976.20	21.72	23.77	45.49	54.00	-8.51	Average	Vertical
	17976.20	34.34	23.77	58.11	74.00	-15.89	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11186.40	35.76	14.29	50.05	74.00	-23.95	Peak	Horizontal
*	14316.10	35.61	15.91	51.52	88.20	-36.68	Peak	Horizontal
*	17626.00	34.64	19.12	53.76	88.20	-34.44	Peak	Horizontal
	17942.20	21.07	23.17	44.24	54.00	-9.76	Average	Horizontal
	17942.20	34.70	23.17	57.87	74.00	-16.13	Peak	Horizontal
	10793.70	35.71	15.00	50.71	74.00	-23.29	Peak	Vertical
*	14423.20	35.83	15.79	51.62	88.20	-36.58	Peak	Vertical
*	17637.90	34.33	19.63	53.96	88.20	-34.24	Peak	Vertical
	17983.00	21.28	24.00	45.28	54.00	-8.72	Average	Vertical
	17983.00	35.70	24.00	59.70	74.00	-14.30	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11482.20	36.47	14.16	50.63	74.00	-23.37	Peak	Horizontal
*	13714.30	36.86	14.57	51.43	88.20	-36.77	Peak	Horizontal
*	17588.60	34.72	19.31	54.03	88.20	-34.17	Peak	Horizontal
	17984.70	21.38	24.02	45.40	54.00	-8.60	Average	Horizontal
	17984.70	34.76	24.02	58.78	74.00	-15.22	Peak	Horizontal
	10985.80	35.47	14.91	50.38	74.00	-23.62	Peak	Vertical
*	14290.60	35.49	15.84	51.33	88.20	-36.87	Peak	Vertical
*	17636.20	34.76	19.55	54.31	88.20	-33.89	Peak	Vertical
	17994.90	21.68	24.12	45.80	54.00	-8.20	Average	Vertical
	17994.90	34.32	24.12	58.44	74.00	-15.56	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10965.40	35.70	14.93	50.63	74.00	-23.37	Peak	Horizontal
*	14380.70	35.90	16.13	52.03	88.20	-36.17	Peak	Horizontal
*	17522.30	36.02	18.54	54.56	88.20	-33.64	Peak	Horizontal
	17986.40	21.18	24.03	45.21	54.00	-8.79	Average	Horizontal
	17986.40	35.12	24.03	59.15	74.00	-14.85	Peak	Horizontal
	11511.10	35.93	14.11	50.04	74.00	-23.96	Peak	Vertical
*	14028.80	36.23	15.36	51.59	88.20	-36.61	Peak	Vertical
*	17588.60	35.96	19.31	55.27	88.20	-32.93	Peak	Vertical
	17928.60	21.98	23.03	45.01	54.00	-8.99	Average	Vertical
	17928.60	34.88	23.03	57.91	74.00	-16.09	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10848.10	34.97	15.02	49.99	74.00	-24.01	Peak	Horizontal
*	14338.20	35.95	15.87	51.82	88.20	-36.38	Peak	Horizontal
*	17590.30	34.38	19.27	53.65	88.20	-34.55	Peak	Horizontal
	17945.60	21.36	23.21	44.57	54.00	-9.43	Average	Horizontal
	17945.60	35.16	23.21	58.37	74.00	-15.63	Peak	Horizontal
	11081.00	35.68	14.50	50.18	74.00	-23.82	Peak	Vertical
*	14372.20	35.12	16.09	51.21	88.20	-36.99	Peak	Vertical
*	17365.90	36.46	17.57	54.03	88.20	-34.17	Peak	Vertical
	17984.70	21.56	24.02	45.58	54.00	-8.42	Average	Vertical
	17984.70	36.00	24.02	60.02	74.00	-13.98	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11545.10	36.14	14.01	50.15	74.00	-23.85	Peak	Horizontal
*	14375.60	35.25	16.12	51.37	88.20	-36.83	Peak	Horizontal
*	17673.60	34.41	19.90	54.31	88.20	-33.89	Peak	Horizontal
	17957.50	21.42	23.33	44.75	54.00	-9.25	Average	Horizontal
	17957.50	35.31	23.33	58.64	74.00	-15.36	Peak	Horizontal
	11109.90	36.19	14.43	50.62	74.00	-23.38	Peak	Vertical
*	14355.20	35.94	15.99	51.93	88.20	-36.27	Peak	Vertical
*	17590.30	35.20	19.27	54.47	88.20	-33.73	Peak	Vertical
	17972.80	21.81	23.65	45.46	54.00	-8.54	Average	Vertical
	17972.80	36.52	23.65	60.17	74.00	-13.83	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10939.90	35.61	14.95	50.56	74.00	-23.44	Peak	Horizontal
*	14413.00	35.63	15.89	51.52	88.20	-36.68	Peak	Horizontal
*	17653.20	34.66	19.36	54.02	88.20	-34.18	Peak	Horizontal
	17972.80	21.74	23.65	45.39	54.00	-8.61	Average	Horizontal
	17972.80	34.85	23.65	58.50	74.00	-15.50	Peak	Horizontal
	10875.30	35.36	14.99	50.35	74.00	-23.65	Peak	Vertical
*	14809.10	35.55	15.80	51.35	88.20	-36.85	Peak	Vertical
*	17425.40	35.17	17.91	53.08	88.20	-35.12	Peak	Vertical
	17933.70	21.36	23.08	44.44	54.00	-9.56	Average	Vertical
	17933.70	35.95	23.08	59.03	74.00	-14.97	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT40 (Nss = 4)	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10968.80	35.35	14.92	50.27	74.00	-23.73	Peak	Horizontal
*	14200.50	36.29	15.63	51.92	88.20	-36.28	Peak	Horizontal
*	17632.80	34.81	19.41	54.22	88.20	-33.98	Peak	Horizontal
	17991.50	21.95	24.08	46.03	54.00	-7.97	Average	Horizontal
	17991.50	34.06	24.08	58.14	74.00	-15.86	Peak	Horizontal
	11256.10	36.36	14.11	50.47	74.00	-23.53	Peak	Vertical
*	15115.10	37.10	14.76	51.86	88.20	-36.34	Peak	Vertical
*	17585.20	34.55	19.32	53.87	88.20	-34.33	Peak	Vertical
	17889.50	21.34	22.89	44.23	54.00	-9.77	Average	Vertical
	17889.50	35.29	22.89	58.18	74.00	-15.82	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT80 (Nss = 4)	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10948.40	35.79	14.96	50.75	74.00	-23.25	Peak	Horizontal
*	14358.60	36.71	16.00	52.71	88.20	-35.49	Peak	Horizontal
*	17563.10	35.06	18.90	53.96	88.20	-34.24	Peak	Horizontal
	17988.45	21.63	24.05	45.68	54.00	-8.32	Average	Horizontal
	17988.45	35.65	24.05	59.70	74.00	-14.30	Peak	Horizontal
	10851.50	35.81	15.02	50.83	74.00	-23.17	Peak	Vertical
*	14763.20	36.13	15.87	52.00	88.20	-36.20	Peak	Vertical
*	17590.30	35.14	19.27	54.41	88.20	-33.79	Peak	Vertical
	17991.50	21.64	24.08	45.72	54.00	-8.28	Average	Vertical
	17991.50	34.97	24.08	59.05	74.00	-14.95	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT80 (Nss = 4)	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10854.90	35.69	15.01	50.70	74.00	-23.30	Peak	Horizontal
*	14428.30	35.95	15.82	51.77	88.20	-36.43	Peak	Horizontal
*	17580.10	36.21	19.22	55.43	88.20	-32.77	Peak	Horizontal
	17984.70	21.17	24.02	45.19	54.00	-8.81	Average	Horizontal
	17984.70	33.87	24.02	57.89	74.00	-16.11	Peak	Horizontal
	11055.50	35.46	14.57	50.03	74.00	-23.97	Peak	Vertical
*	13835.00	37.18	14.80	51.98	88.20	-36.22	Peak	Vertical
*	17483.20	35.11	18.41	53.52	88.20	-34.68	Peak	Vertical
	17983.00	21.33	24.00	45.33	54.00	-8.67	Average	Vertical
	17983.00	34.87	24.00	58.87	74.00	-15.13	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT80 (Nss = 4)	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11349.60	35.83	14.23	50.06	74.00	-23.94	Peak	Horizontal
*	14676.50	35.48	15.97	51.45	88.20	-36.75	Peak	Horizontal
*	17541.00	34.58	18.68	53.26	88.20	-34.94	Peak	Horizontal
	17986.40	21.41	24.03	45.44	54.00	-8.56	Average	Horizontal
	17986.40	34.56	24.03	58.59	74.00	-15.41	Peak	Horizontal
	11441.40	36.39	14.30	50.69	74.00	-23.31	Peak	Vertical
*	14333.10	35.24	15.85	51.09	88.20	-37.11	Peak	Vertical
*	17578.40	35.11	19.18	54.29	88.20	-33.91	Peak	Vertical
	17977.90	21.62	23.82	45.44	54.00	-8.56	Average	Vertical
	17977.90	34.94	23.82	58.76	74.00	-15.24	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT80 (Nss = 4)	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11506.00	36.38	14.15	50.53	74.00	-23.47	Peak	Horizontal
*	14430.00	36.58	15.84	52.42	88.20	-35.78	Peak	Horizontal
*	17566.50	34.76	18.93	53.69	88.20	-34.51	Peak	Horizontal
	17994.90	21.84	24.12	45.96	54.00	-8.04	Average	Horizontal
	17994.90	34.78	24.12	58.90	74.00	-15.10	Peak	Horizontal
	11256.10	36.23	14.11	50.34	74.00	-23.66	Peak	Vertical
*	14878.80	36.94	15.65	52.59	88.20	-35.61	Peak	Vertical
*	17561.40	35.22	18.88	54.10	88.20	-34.10	Peak	Vertical
	17979.60	21.45	23.88	45.33	54.00	-8.67	Average	Vertical
	17979.60	34.63	23.88	58.51	74.00	-15.49	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT80 (Nss = 4)	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11470.30	36.84	14.15	50.99	74.00	-23.01	Peak	Horizontal
*	15098.10	36.65	14.78	51.43	88.20	-36.77	Peak	Horizontal
*	17646.40	35.34	19.58	54.92	88.20	-33.28	Peak	Horizontal
	17998.30	21.35	24.15	45.50	54.00	-8.50	Average	Horizontal
	17998.30	33.80	24.15	57.95	74.00	-16.05	Peak	Horizontal
	10865.10	35.37	15.02	50.39	74.00	-23.61	Peak	Vertical
*	14326.30	36.05	15.87	51.92	88.20	-36.28	Peak	Vertical
*	17646.40	35.26	19.58	54.84	88.20	-33.36	Peak	Vertical
	17945.60	21.17	23.21	44.38	54.00	-9.62	Average	Vertical
	17945.60	35.52	23.21	58.73	74.00	-15.27	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT80 (Nss = 4)	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10843.00	35.57	15.01	50.58	74.00	-23.42	Peak	Horizontal
*	14220.90	36.00	15.46	51.46	88.20	-36.74	Peak	Horizontal
*	17634.50	34.73	19.48	54.21	88.20	-33.99	Peak	Horizontal
	17977.90	21.11	23.82	44.93	54.00	-9.07	Average	Horizontal
	17977.90	35.43	23.82	59.25	74.00	-14.75	Peak	Horizontal
	10921.20	35.37	14.98	50.35	74.00	-23.65	Peak	Vertical
*	15155.90	36.49	14.69	51.18	88.20	-37.02	Peak	Vertical
*	17585.20	36.48	19.32	55.80	88.20	-32.40	Peak	Vertical
	17957.50	21.97	23.33	45.30	54.00	-8.70	Average	Vertical
	17957.50	34.74	23.33	58.07	74.00	-15.93	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT80 (Nss = 4)	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10907.60	35.61	14.90	50.51	74.00	-23.49	Peak	Horizontal
*	14333.10	35.38	15.85	51.23	88.20	-36.97	Peak	Horizontal
*	17629.40	35.07	19.26	54.33	88.20	-33.87	Peak	Horizontal
	17971.10	21.41	23.59	45.00	54.00	-9.00	Average	Horizontal
	17971.10	35.10	23.59	58.69	74.00	-15.31	Peak	Horizontal
	11570.60	36.03	13.91	49.94	74.00	-24.06	Peak	Vertical
*	14753.00	34.82	15.78	50.60	88.20	-37.60	Peak	Vertical
*	17648.10	35.39	19.53	54.92	88.20	-33.28	Peak	Vertical
	17994.90	21.32	24.12	45.44	54.00	-8.56	Average	Vertical
	17994.90	34.32	24.12	58.44	74.00	-15.56	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT80 (Nss = 4)	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11507.70	36.57	14.13	50.70	74.00	-23.30	Peak	Horizontal
*	14311.00	35.61	15.89	51.50	88.20	-36.70	Peak	Horizontal
*	17569.90	35.74	18.98	54.72	88.20	-33.48	Peak	Horizontal
	17986.40	21.75	24.03	45.78	54.00	-8.22	Average	Horizontal
	17986.40	34.42	24.03	58.45	74.00	-15.55	Peak	Horizontal
	10905.90	35.61	14.89	50.50	74.00	-23.50	Peak	Vertical
*	14098.50	35.94	15.28	51.22	88.20	-36.98	Peak	Vertical
*	17134.70	36.69	16.69	53.38	88.20	-34.82	Peak	Vertical
	17966.00	21.04	23.42	44.46	54.00	-9.54	Average	Vertical
	17966.00	34.59	23.42	58.01	74.00	-15.99	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT80 (Nss = 4)	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11910.60	36.99	13.32	50.31	74.00	-23.69	Peak	Horizontal
*	14365.40	35.03	16.04	51.07	88.20	-37.13	Peak	Horizontal
*	17617.50	35.44	18.89	54.33	88.20	-33.87	Peak	Horizontal
	17954.10	21.98	23.29	45.27	54.00	-8.73	Average	Horizontal
	17954.10	34.87	23.29	58.16	74.00	-15.84	Peak	Horizontal
	10851.50	35.25	15.02	50.27	74.00	-23.73	Peak	Vertical
*	14384.10	35.15	16.11	51.26	88.20	-36.94	Peak	Vertical
*	17585.20	34.56	19.32	53.88	88.20	-34.32	Peak	Vertical
	17993.20	21.08	24.10	45.18	54.00	-8.82	Average	Vertical
	17993.20	34.47	24.10	58.57	74.00	-15.43	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT80 (Nss = 4)	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11502.60	36.28	14.14	50.42	74.00	-23.58	Peak	Horizontal
*	14385.80	35.25	16.10	51.35	88.20	-36.85	Peak	Horizontal
*	17386.30	34.69	18.06	52.75	88.20	-35.45	Peak	Horizontal
	17996.60	21.16	24.13	45.29	54.00	-8.71	Average	Horizontal
	17996.60	34.21	24.13	58.34	74.00	-15.66	Peak	Horizontal
	11121.80	35.62	14.40	50.02	74.00	-23.98	Peak	Vertical
*	14309.30	35.41	15.88	51.29	88.20	-36.91	Peak	Vertical
*	17571.60	34.21	19.03	53.24	88.20	-34.96	Peak	Vertical
	17935.40	21.89	23.10	44.99	54.00	-9.01	Average	Vertical
	17935.40	35.25	23.10	58.35	74.00	-15.65	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT80 (Nss = 4)	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10863.40	35.12	15.01	50.13	74.00	-23.87	Peak	Horizontal
*	14404.50	36.18	15.95	52.13	88.20	-36.07	Peak	Horizontal
*	17637.90	35.34	19.63	54.97	88.20	-33.23	Peak	Horizontal
	17991.50	21.88	24.08	45.96	54.00	-8.04	Average	Horizontal
	17991.50	35.09	24.08	59.17	74.00	-14.83	Peak	Horizontal
	10997.70	35.56	14.86	50.42	74.00	-23.58	Peak	Vertical
*	14668.00	36.36	15.93	52.29	88.20	-35.91	Peak	Vertical
*	17325.10	36.69	17.28	53.97	88.20	-34.23	Peak	Vertical
	17971.10	22.03	23.59	45.62	54.00	-8.38	Average	Vertical
	17971.10	34.92	23.59	58.51	74.00	-15.49	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT160 (Nss = 4)	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10888.90	35.28	14.97	50.25	74.00	-23.75	Peak	Horizontal
*	14322.90	35.34	15.88	51.22	88.20	-36.98	Peak	Horizontal
*	17637.90	34.28	19.63	53.91	88.20	-34.29	Peak	Horizontal
	17993.20	21.46	24.10	45.56	54.00	-8.44	Average	Horizontal
	17993.20	34.55	24.10	58.65	74.00	-15.35	Peak	Horizontal
	10885.50	35.39	14.98	50.37	74.00	-23.63	Peak	Vertical
*	14611.90	35.62	15.88	51.50	88.20	-36.70	Peak	Vertical
*	17559.70	35.44	18.86	54.30	88.20	-33.90	Peak	Vertical
	17984.70	21.19	24.02	45.21	54.00	-8.79	Average	Vertical
	17984.70	33.97	24.02	57.99	74.00	-16.01	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT160 (Nss = 4)	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11118.40	35.89	14.42	50.31	74.00	-23.69	Peak	Horizontal
*	14844.80	36.39	15.68	52.07	88.20	-36.13	Peak	Horizontal
*	17537.60	34.63	18.63	53.26	88.20	-34.94	Peak	Horizontal
	17988.10	21.79	24.05	45.84	54.00	-8.16	Average	Horizontal
	17988.10	34.64	24.05	58.69	74.00	-15.31	Peak	Horizontal
	10951.80	35.50	14.95	50.45	74.00	-23.55	Peak	Vertical
*	14372.20	35.48	16.09	51.57	88.20	-36.63	Peak	Vertical
*	17581.80	34.62	19.25	53.87	88.20	-34.33	Peak	Vertical
	17996.60	21.76	24.13	45.89	54.00	-8.11	Average	Vertical
	17996.60	35.20	24.13	59.33	74.00	-14.67	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT160 (Nss = 4)	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11065.70	36.26	14.51	50.77	74.00	-23.23	Peak	Horizontal
*	14695.20	35.32	16.06	51.38	88.20	-36.82	Peak	Horizontal
*	17520.60	36.28	18.55	54.83	88.20	-33.37	Peak	Horizontal
	17989.80	21.57	24.07	45.64	54.00	-8.36	Average	Horizontal
	17989.80	34.66	24.07	58.73	74.00	-15.27	Peak	Horizontal
	11548.50	36.54	13.98	50.52	74.00	-23.48	Peak	Vertical
*	14601.70	35.57	15.95	51.52	88.20	-36.68	Peak	Vertical
*	17639.60	34.64	19.70	54.34	88.20	-33.86	Peak	Vertical
	17986.40	21.35	24.03	45.38	54.00	-8.62	Average	Vertical
	17986.40	34.92	24.03	58.95	74.00	-15.05	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT160 (Nss = 4)	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11548.50	36.54	13.98	50.52	74.00	-23.48	Peak	Horizontal
*	14601.70	35.57	15.95	51.52	88.20	-36.68	Peak	Horizontal
*	17639.60	35.52	19.70	55.22	88.20	-32.98	Peak	Horizontal
	17986.40	21.35	24.03	45.38	54.00	-8.62	Average	Horizontal
	17986.40	34.92	24.03	58.95	74.00	-15.05	Peak	Horizontal
	10999.40	35.21	14.86	50.07	74.00	-23.93	Peak	Vertical
*	14433.40	35.35	15.92	51.27	88.20	-36.93	Peak	Vertical
*	17586.90	35.75	19.34	55.09	88.20	-33.11	Peak	Vertical
	17984.70	21.07	24.02	45.09	54.00	-8.91	Average	Vertical
	17984.70	34.22	24.02	58.24	74.00	-15.76	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT160 (Nss = 4)	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10848.10	35.40	15.02	50.42	74.00	-23.58	Peak	Horizontal
*	14686.70	35.26	16.04	51.30	88.20	-36.90	Peak	Horizontal
*	17575.00	34.72	19.12	53.84	88.20	-34.36	Peak	Horizontal
	17960.90	21.29	23.36	44.65	54.00	-9.35	Average	Horizontal
	17960.90	35.27	23.36	58.63	74.00	-15.37	Peak	Horizontal
	10953.50	35.19	14.95	50.14	74.00	-23.86	Peak	Vertical
*	14651.00	36.06	15.74	51.80	88.20	-36.40	Peak	Vertical
*	17394.80	35.84	17.97	53.81	88.20	-34.39	Peak	Vertical
	17996.60	21.17	24.13	45.30	54.00	-8.70	Average	Vertical
	17996.60	34.55	24.13	58.68	74.00	-15.32	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT160 (Nss = 4)	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10999.40	35.76	14.86	50.62	74.00	-23.38	Peak	Horizontal
*	14601.70	35.38	15.95	51.33	88.20	-36.87	Peak	Horizontal
*	17551.20	35.04	18.79	53.83	88.20	-34.37	Peak	Horizontal
	17938.80	21.83	23.14	44.97	54.00	-9.03	Average	Horizontal
	17938.80	35.77	23.14	58.91	74.00	-15.09	Peak	Horizontal
	10841.30	35.18	14.99	50.17	74.00	-23.83	Peak	Vertical
*	14810.80	35.81	15.79	51.60	88.20	-36.60	Peak	Vertical
*	17561.40	36.22	18.88	55.10	88.20	-33.10	Peak	Vertical
	17988.10	21.39	24.05	45.44	54.00	-8.56	Average	Vertical
	17988.10	35.20	24.05	59.25	74.00	-14.75	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT160 (Nss = 4)	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10985.80	35.44	14.91	50.35	74.00	-23.65	Peak	Horizontal
*	14880.50	36.09	15.65	51.74	88.20	-36.46	Peak	Horizontal
*	17646.40	35.85	19.58	55.43	88.20	-32.77	Peak	Horizontal
	17989.80	21.92	24.07	45.99	54.00	-8.01	Average	Horizontal
	17989.80	34.89	24.07	58.96	74.00	-15.04	Peak	Horizontal
	11001.10	35.60	14.85	50.45	74.00	-23.55	Peak	Vertical
*	14358.60	35.76	16.00	51.76	88.20	-36.44	Peak	Vertical
*	17648.10	35.94	19.53	55.47	88.20	-32.73	Peak	Vertical
	17996.60	21.59	24.13	45.72	54.00	-8.28	Average	Vertical
	17996.60	34.83	24.13	58.96	74.00	-15.04	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT160 (Nss = 4)	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4936.80	36.05	3.94	39.99	74.00	-34.01	Peak	Horizontal
*	5925.00	33.37	5.32	38.69	88.20	-49.51	Peak	Horizontal
*	7125.00	37.00	8.75	45.75	88.20	-42.45	Peak	Horizontal
	7295.80	37.81	8.82	46.63	74.00	-27.37	Peak	Horizontal
	4763.90	36.43	3.39	39.82	74.00	-34.18	Peak	Vertical
*	5925.00	35.15	5.32	40.47	88.20	-47.73	Peak	Vertical
*	7125.00	36.10	8.75	44.85	88.20	-43.35	Peak	Vertical
	7395.90	37.54	8.92	46.46	74.00	-27.54	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Lucas Wang
Test Site	WZ-AC1	Test Date	2025-08-05
Test Mode	802.11be-EHT160 (Nss = 4)	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4954.30	35.44	4.06	39.50	74.00	-34.50	Peak	Horizontal
*	5925.20	34.41	5.31	39.72	88.20	-48.48	Peak	Horizontal
*	7125.00	36.87	8.75	45.62	88.20	-42.58	Peak	Horizontal
	7314.00	38.82	9.06	47.88	74.00	-26.12	Peak	Horizontal
	4797.50	36.34	3.58	39.92	74.00	-34.08	Peak	Vertical
*	5925.00	34.92	5.32	40.24	88.20	-47.96	Peak	Vertical
*	7125.00	36.41	8.75	45.16	88.20	-43.04	Peak	Vertical
	7314.00	37.41	9.06	46.47	74.00	-27.53	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 30 MHz:

Site	WZ-AC1	Test Date	2025-08-06
Temperature	24.7 °C	Humidity	54.2%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Lucas Wang
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

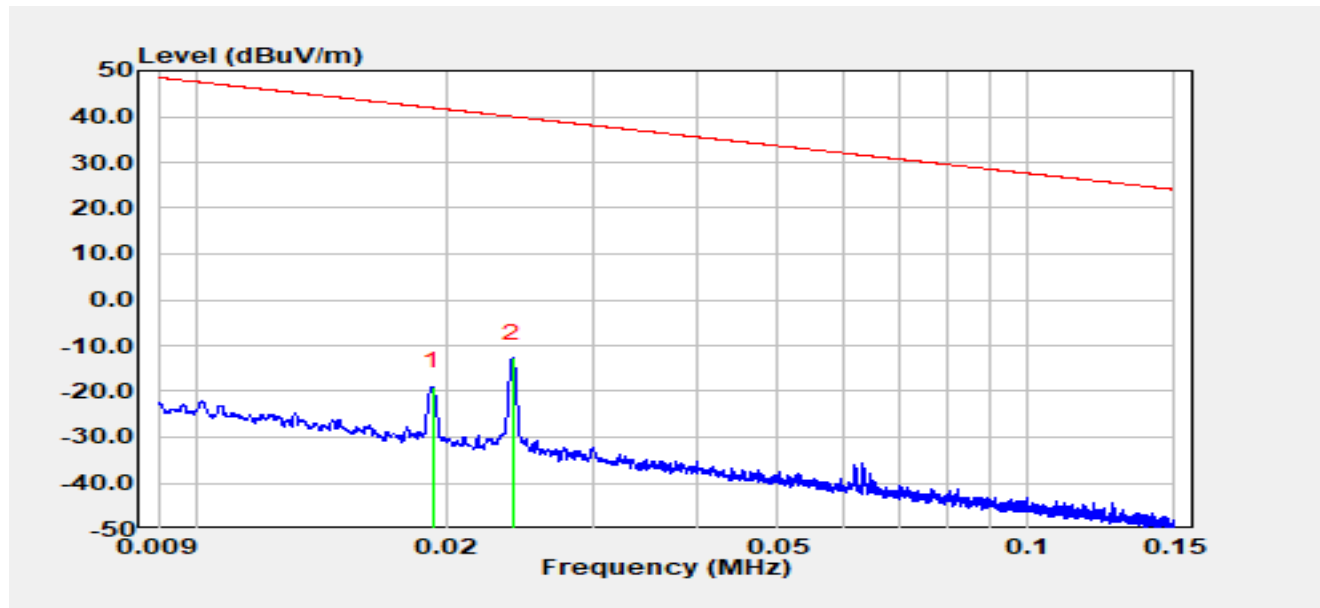


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.02	41.78	-60.66	-18.88	-60.80	41.91	Peak
2	*	0.02	48.15	-60.80	-12.66	-52.64	39.98	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-08-06
Temperature	24.7 °C	Humidity	54.2%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Lucas Wang
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

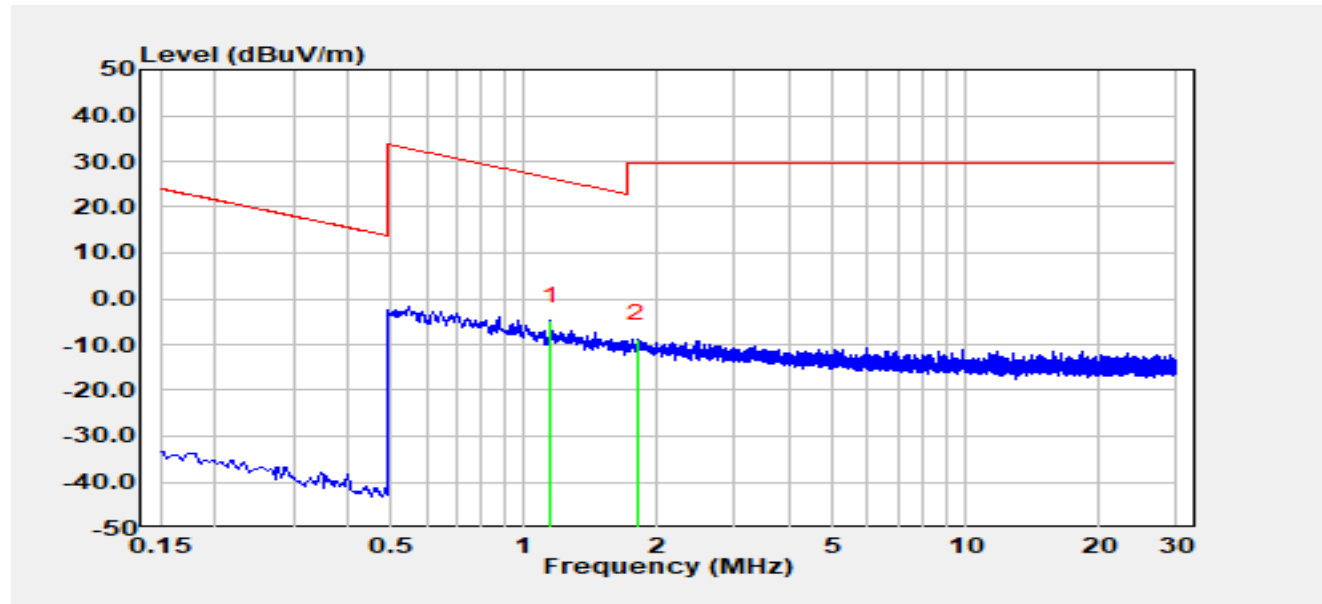


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	1.15	16.00	-20.90	-4.90	-31.33	26.43	Peak
2		1.81	12.12	-20.83	-8.71	-38.21	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-08-06
Temperature	24.7 °C	Humidity	54.2%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Lucas Wang
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

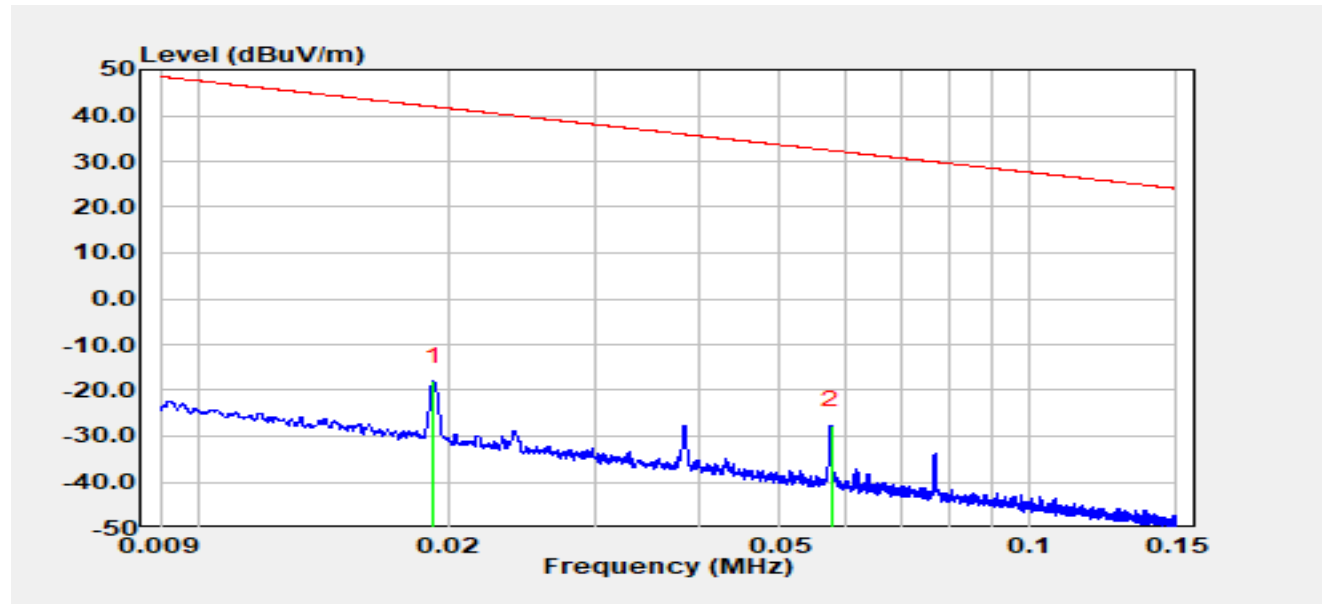


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.02	42.72	-60.65	-17.93	-59.87	41.94	Peak
2		0.06	33.45	-61.04	-27.58	-59.97	32.38	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-08-06
Temperature	24.7 °C	Humidity	54.2%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Lucas Wang
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

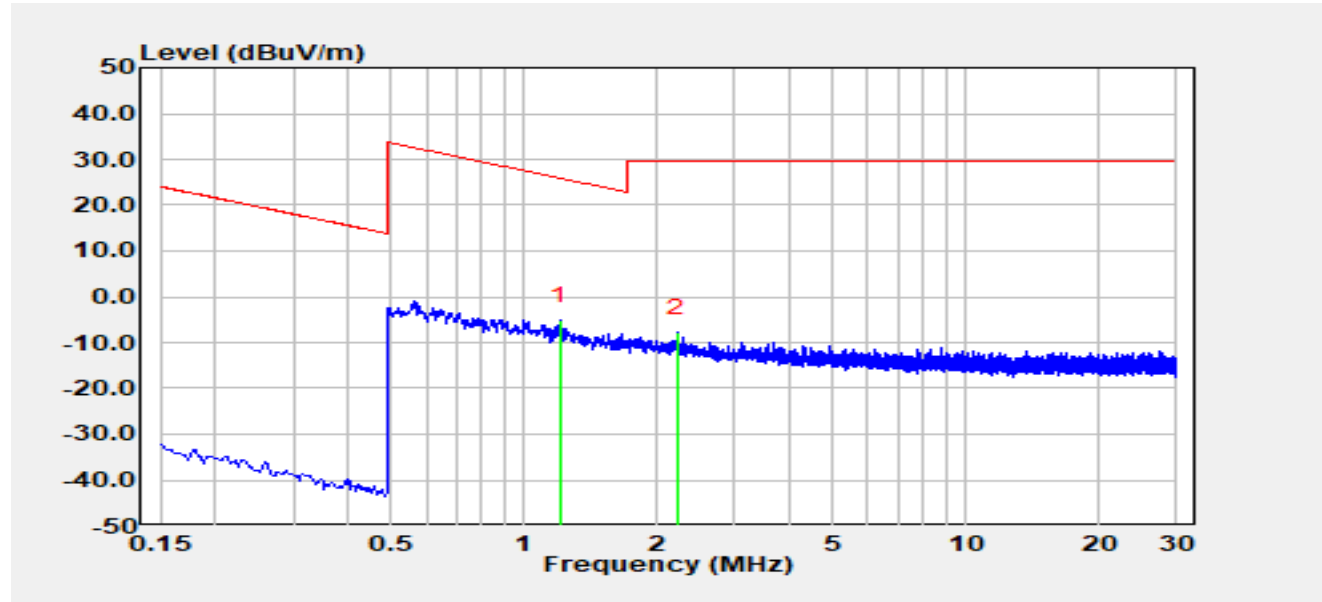


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	1.20	15.65	-20.89	-5.24	-31.25	26.02	Peak
2		2.22	12.87	-20.78	-7.91	-37.41	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission below 1 GHz:

Site	SIP-AC2	Test Date	2025-07-30
Temperature	23.1 °C	Humidity	65.3%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Fusco Pan
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

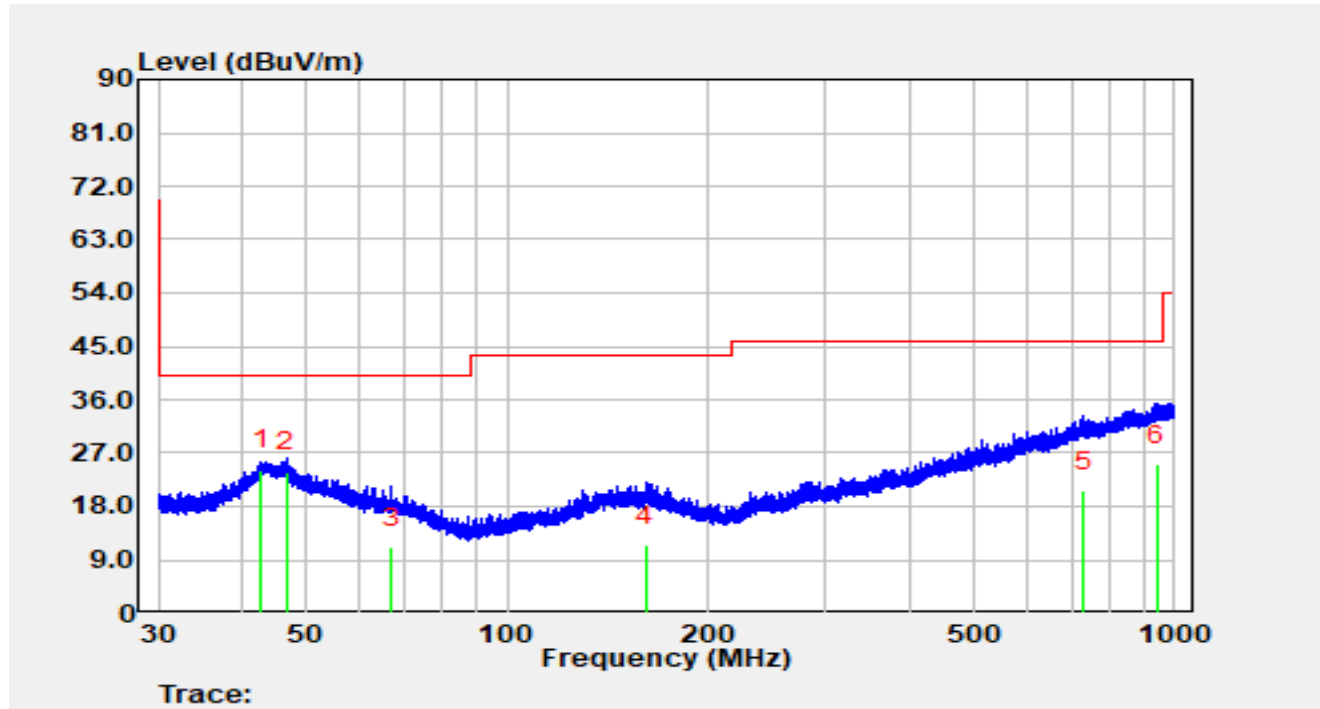


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	42.810	4.10	20.13	24.23	-15.77	40.00	QP
2		46.601	3.30	20.48	23.78	-16.22	40.00	QP
3		67.084	-7.30	18.39	11.09	-28.91	40.00	QP
4		161.248	-8.60	20.09	11.49	-32.01	43.50	QP
5		730.126	-9.30	29.95	20.65	-25.35	46.00	QP
6		941.800	-7.30	32.27	24.97	-21.03	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-07-30
Temperature	23.1 °C	Humidity	65.3%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Fusco Pan
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

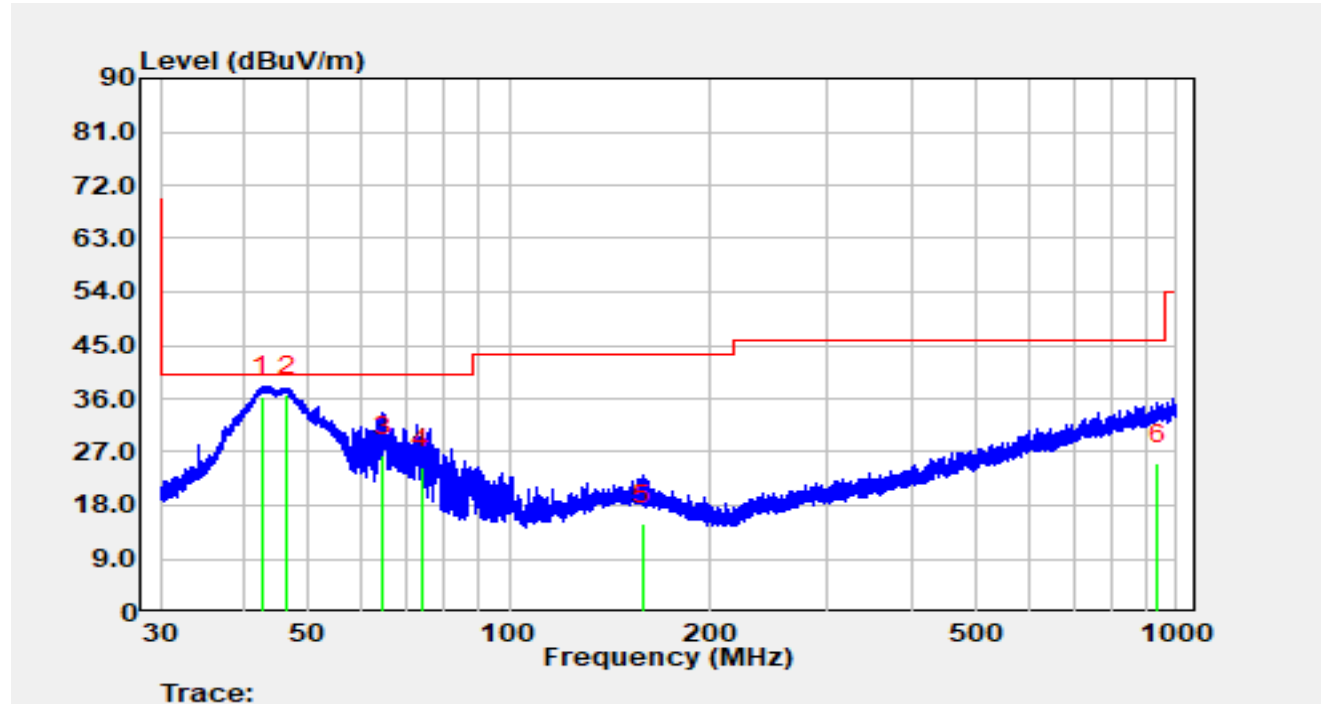


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		42.645	16.40	20.11	36.51	-3.49	40.00	QP
2	*	46.519	16.10	20.48	36.58	-3.42	40.00	QP
3		64.637	7.50	18.94	26.44	-13.56	40.00	QP
4		73.927	6.80	17.50	24.30	-15.70	40.00	QP
5		158.723	-5.30	20.12	14.82	-28.68	43.50	QP
6		937.517	-7.20	32.26	25.06	-20.94	46.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission above 18 GHz:

Site	WZ-AC2	Test Date	2025-08-06
Temperature	25.6 °C	Humidity	43.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Ajin Fan
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

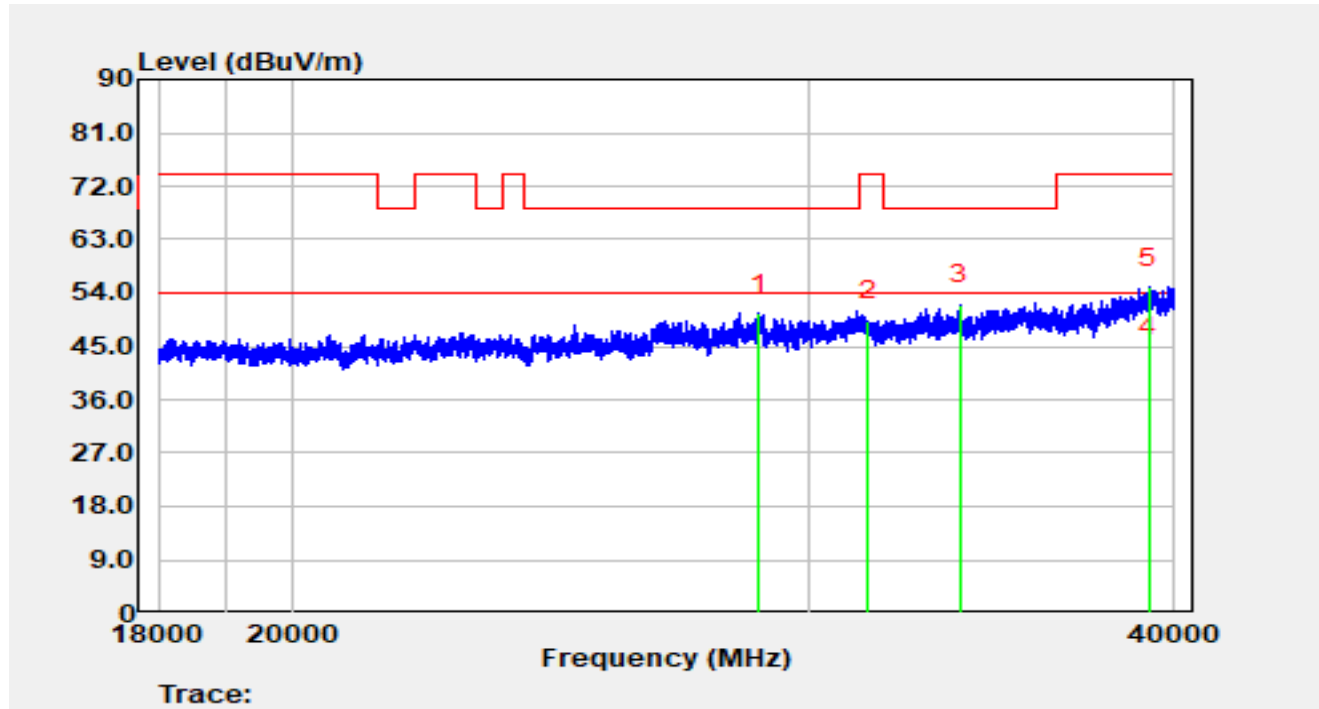


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		28850.40	56.07	-5.58	50.49	-17.71	68.20	Peak
2		31424.40	53.24	-3.97	49.27	-24.73	74.00	Peak
3		33809.20	56.46	-4.47	51.99	-16.21	68.20	Peak
4	*	39203.60	43.14	0.14	43.28	-10.72	54.00	Average
5		39203.60	54.73	0.14	54.88	-19.12	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Average measurement was not performed when peak measure level was lower than the average limit.

Site	WZ-AC2	Test Date	2025-08-06
Temperature	25.6 °C	Humidity	43.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Ajin Fan
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

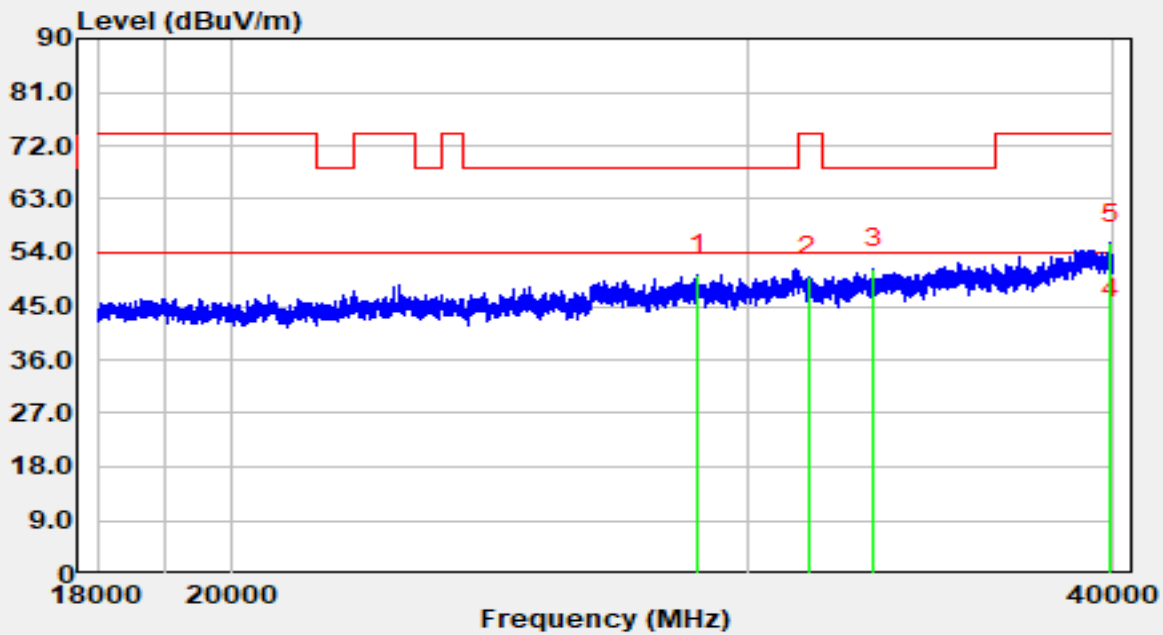

Trace:


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		28857.00	56.05	-5.70	50.34	-17.86	68.20	Peak
2		31472.80	54.17	-4.19	49.98	-24.02	74.00	Peak
3		33122.80	55.63	-4.32	51.31	-16.89	68.20	Peak
4	*	39927.40	42.14	0.94	43.08	-10.92	54.00	Average
5		39927.40	54.61	0.94	55.55	-18.45	74.00	Peak

Notes:

1. “ * ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Average measurement was not performed when peak measure level was lower than the average limit.

A.9 Radiated Restricted Band Edge Test Result

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 5955 MHz		

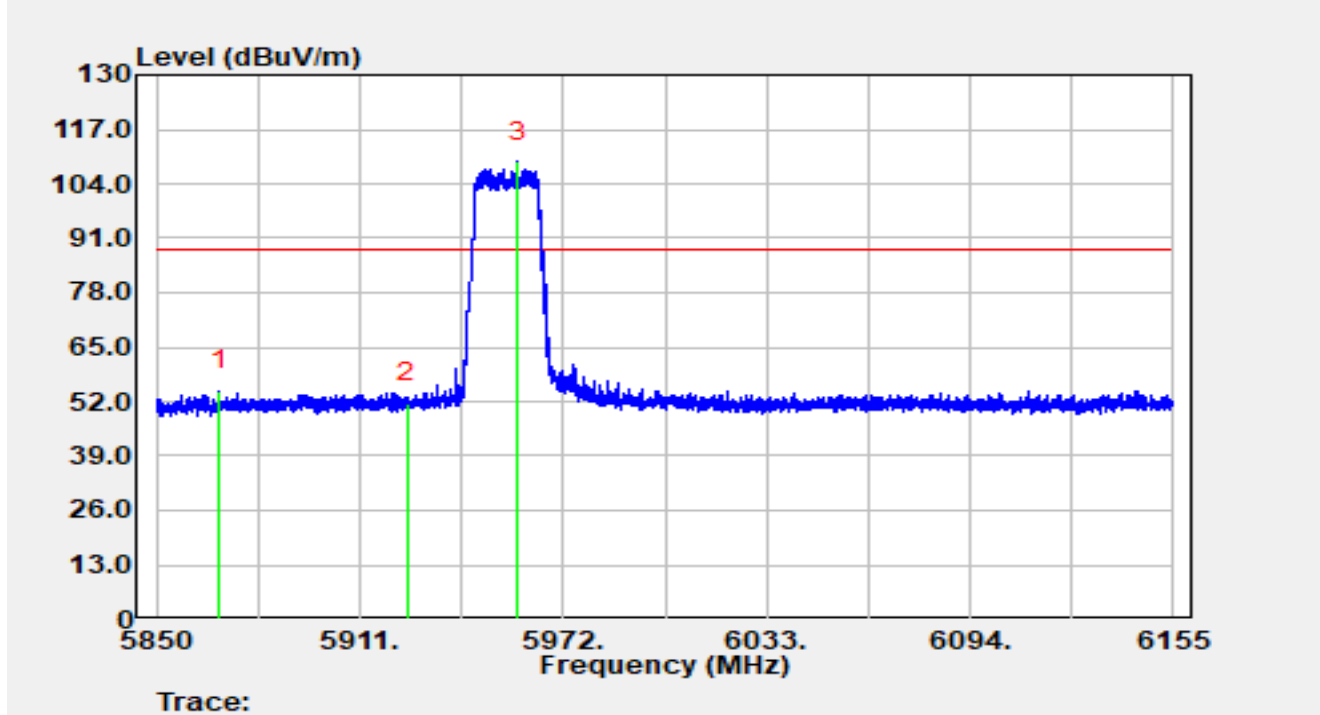


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5868.94	34.06	20.55	54.61	-33.59	88.20	Peak
2		5925.00	31.15	20.59	51.73	-36.47	88.20	Peak
3		5958.37	88.53	20.70	109.23	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 5955 MHz		

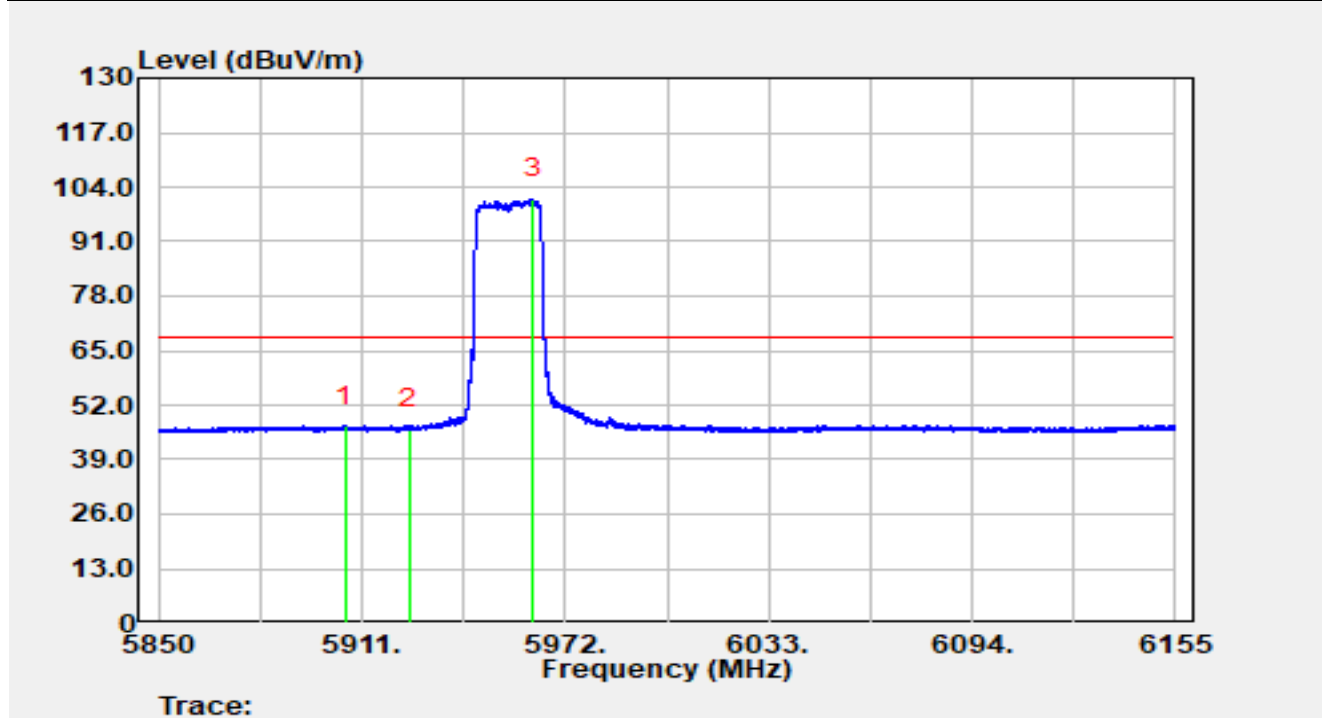


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5906.15	26.32	20.72	47.04	-21.16	68.20	Average
2		5925.00	25.70	20.59	46.29	-21.91	68.20	Average
3		5962.30	80.36	20.74	101.10	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 5955 MHz		

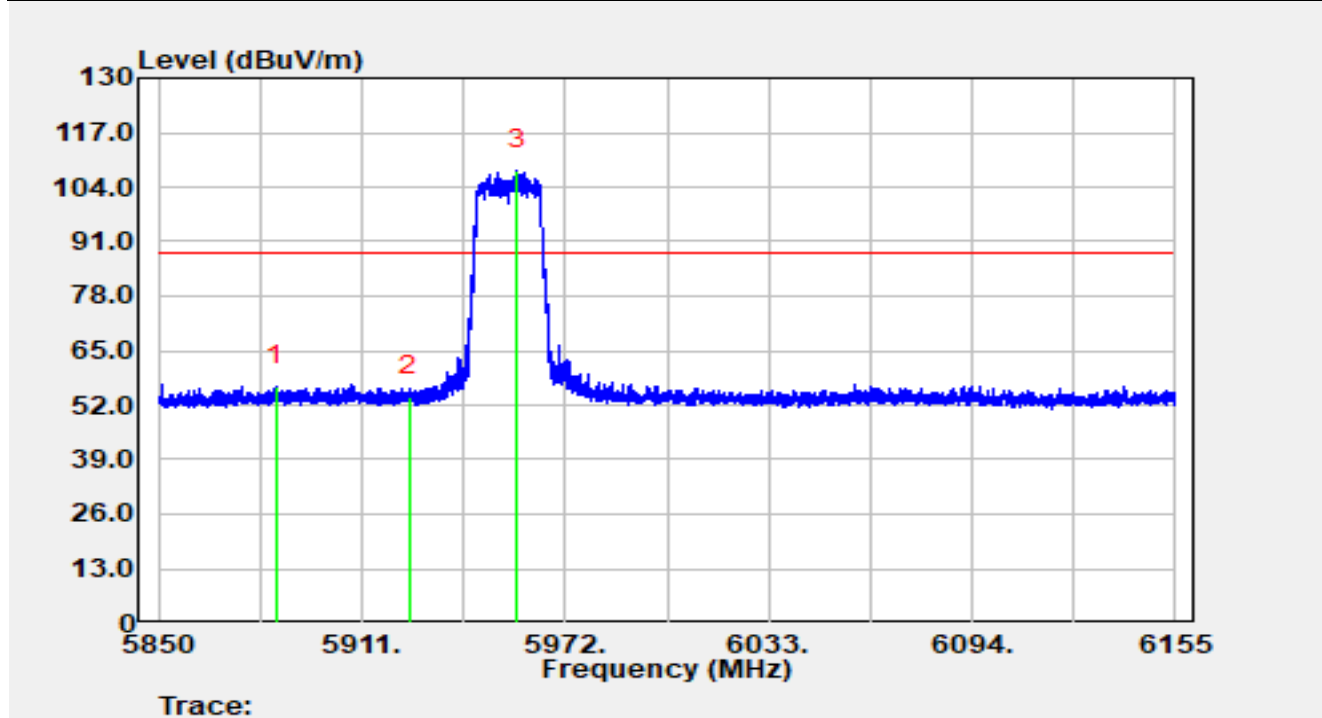


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5885.26	35.91	20.70	56.61	-31.59	88.20	Peak
2		5925.00	33.58	20.59	54.17	-34.03	88.20	Peak
3		5957.39	87.44	20.70	108.14	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 5955 MHz		

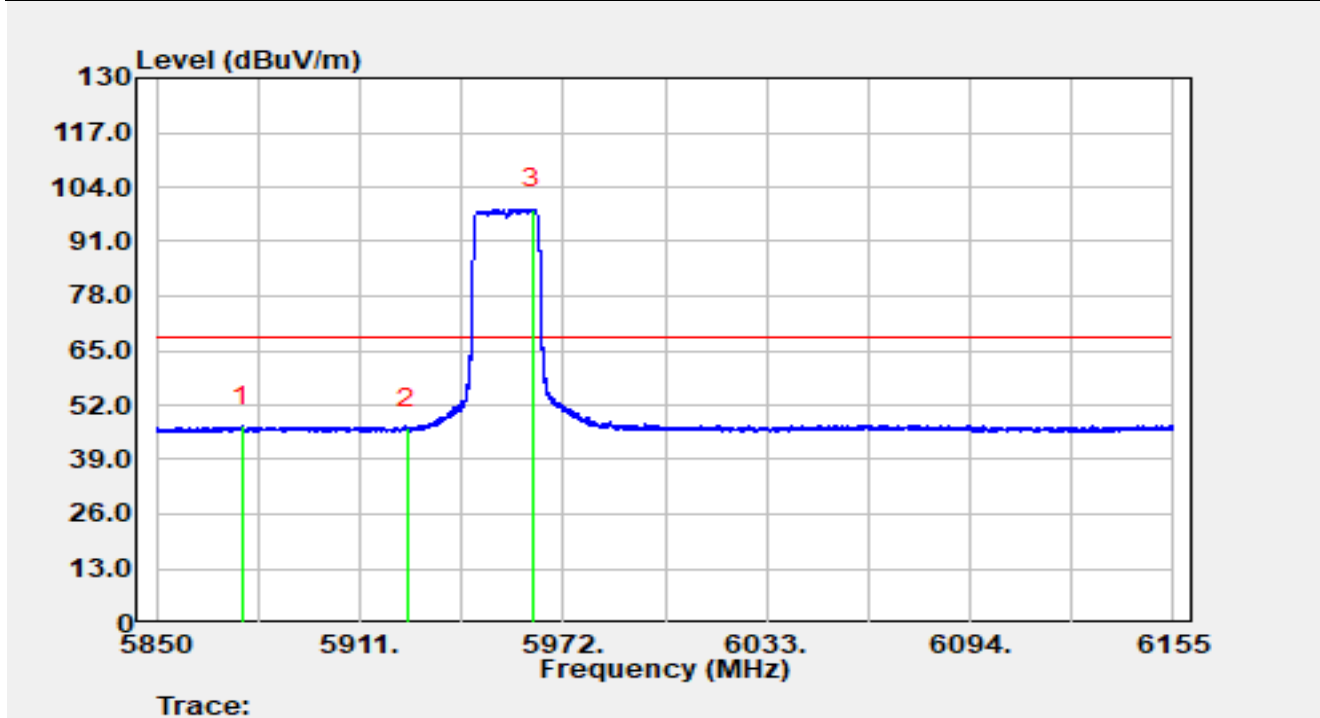


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5875.53	26.22	20.63	46.86	-21.34	68.20	Average
2		5925.00	25.85	20.59	46.43	-21.77	68.20	Average
3		5962.67	78.09	20.75	98.84	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 7095 MHz		

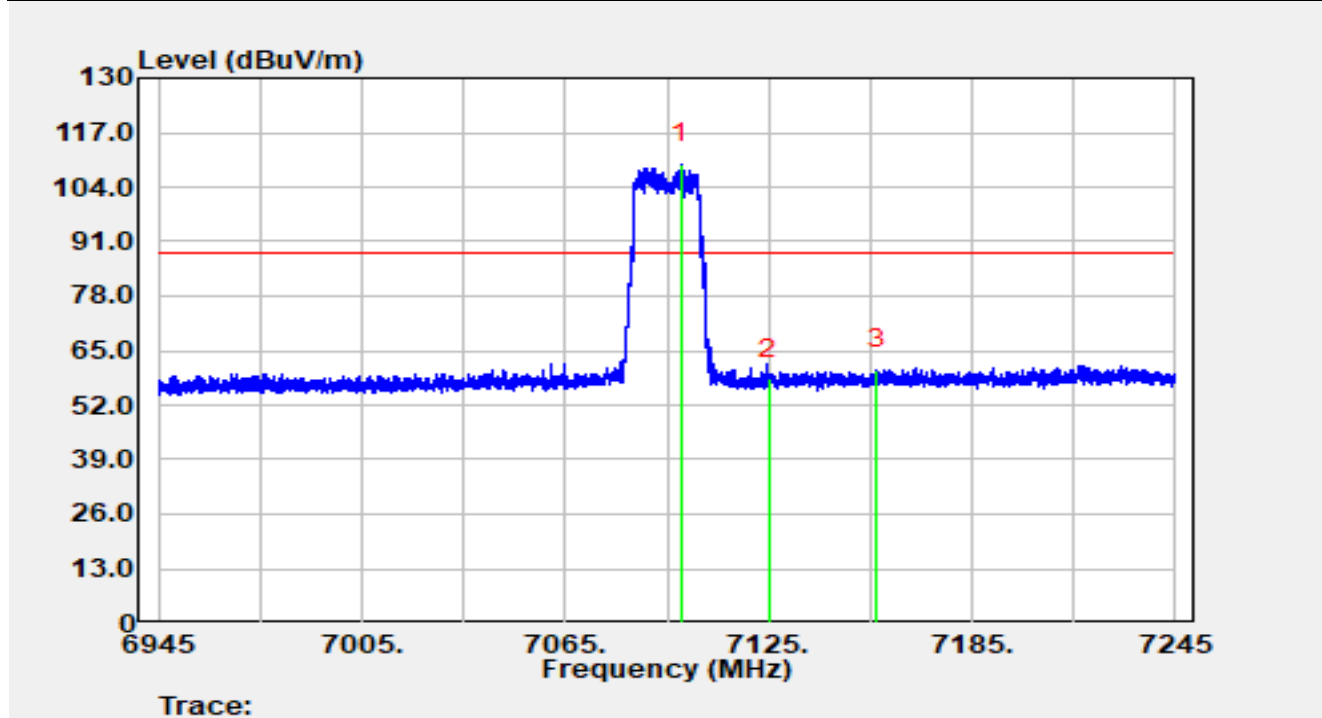


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7099.08	83.75	25.79	109.55	N/A	N/A	Peak
2		7125.00	32.12	26.17	58.28	-29.92	88.20	Peak
3	*	7156.80	34.07	26.50	60.56	-27.64	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 7095 MHz		

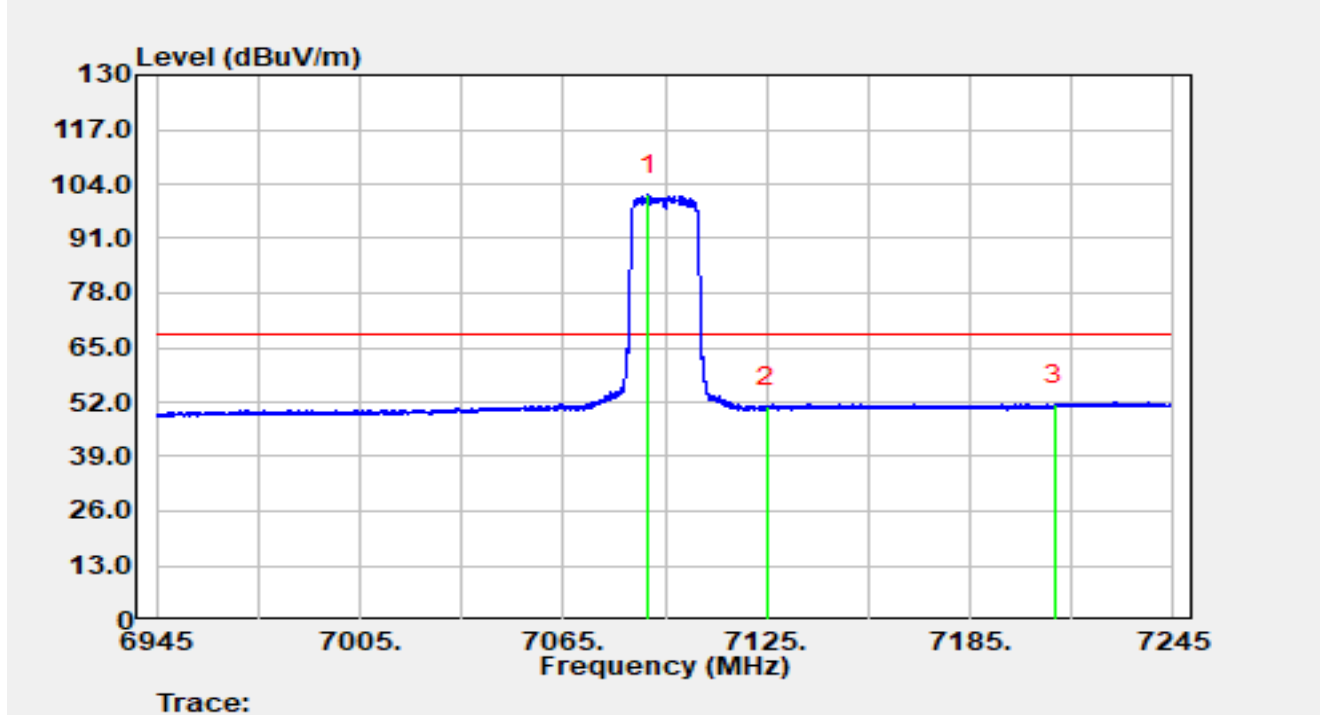


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7090.14	75.54	25.85	101.38	N/A	N/A	Average
2		7125.00	24.62	26.17	50.79	-17.41	68.20	Average
3	*	7209.84	24.81	26.68	51.49	-16.71	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 7095 MHz		

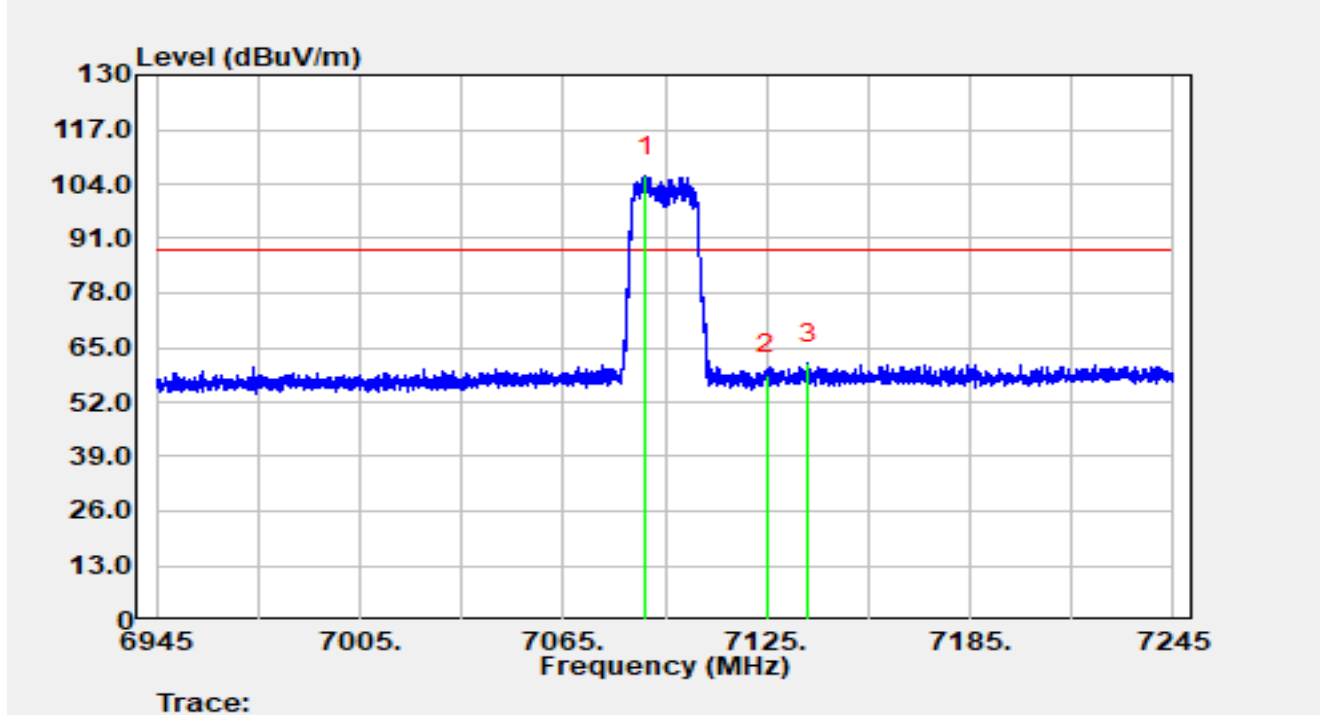


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7089.24	79.91	25.86	105.77	N/A	N/A	Peak
2		7125.00	32.34	26.17	58.51	-29.69	88.20	Peak
3	*	7137.09	34.94	26.38	61.31	-26.89	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 7095 MHz		

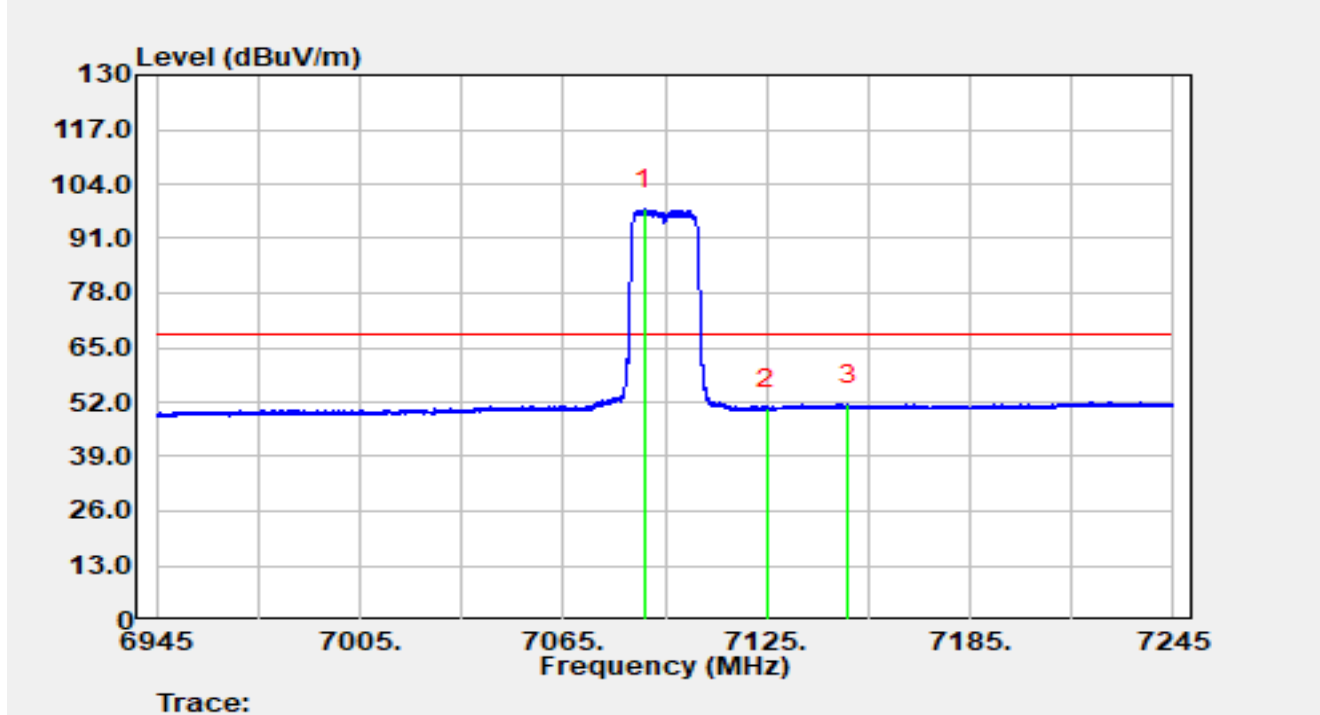


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7088.76	72.03	25.86	97.90	N/A	N/A	Average
2		7125.00	24.34	26.17	50.51	-17.69	68.20	Average
3	*	7148.94	24.90	26.51	51.42	-16.78	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5965 MHz		

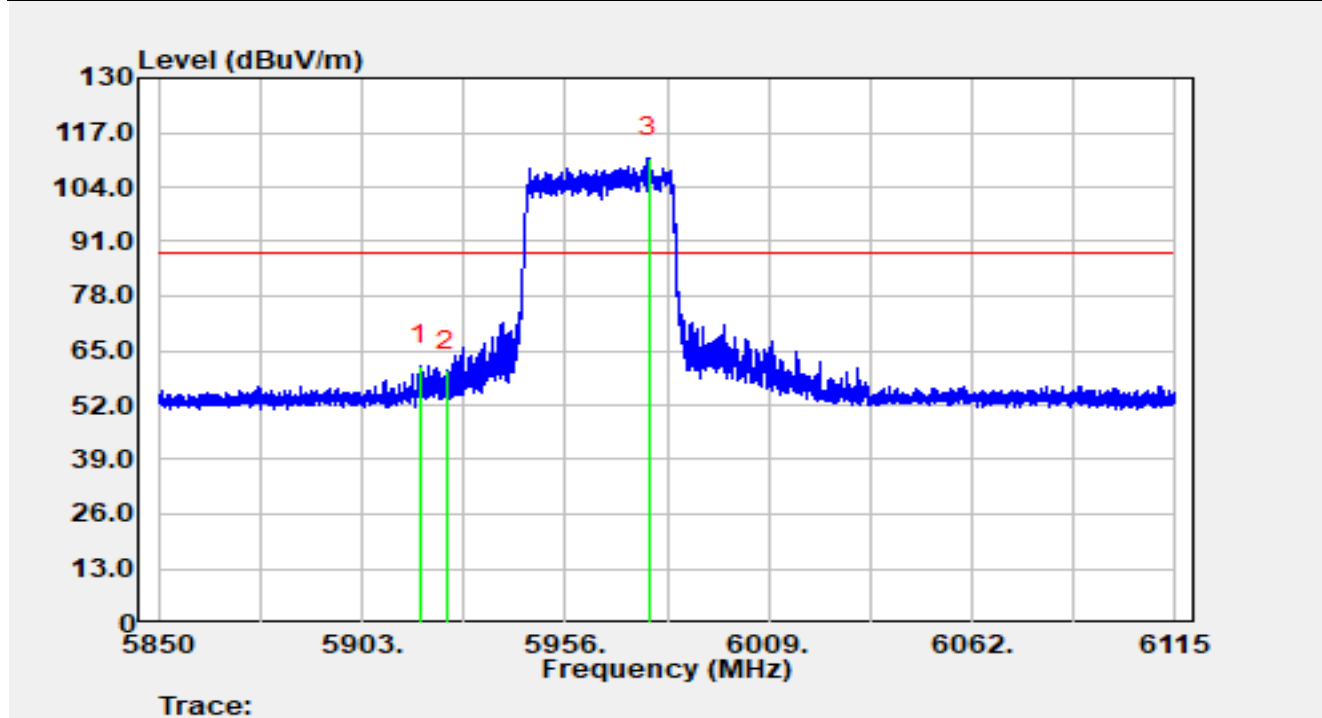


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.11	40.89	20.64	61.53	-26.67	88.20	Peak
2		5925.00	39.62	20.59	60.21	-27.99	88.20	Peak
3		5977.68	90.07	20.96	111.03	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5965 MHz		

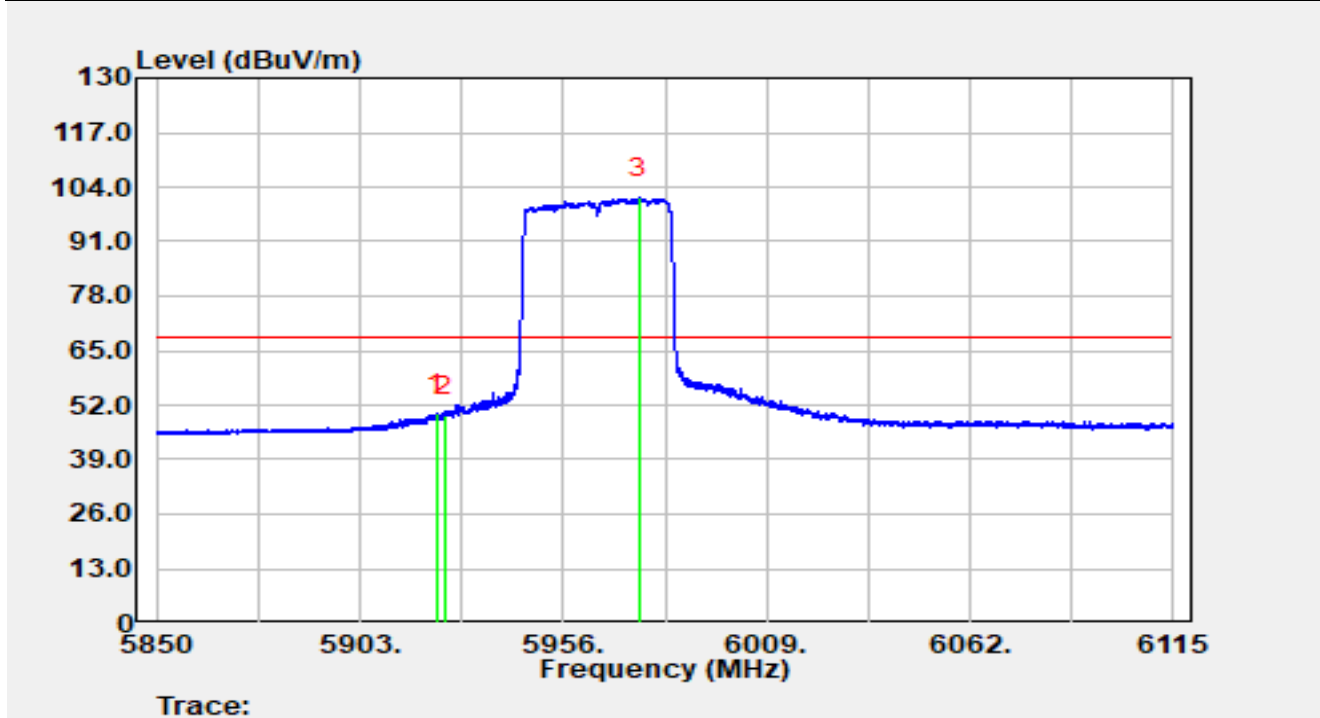


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.98	29.30	20.60	49.90	-18.30	68.20	Average
2		5925.00	28.72	20.59	49.31	-18.89	68.20	Average
3		5975.64	80.41	20.93	101.35	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5965 MHz		

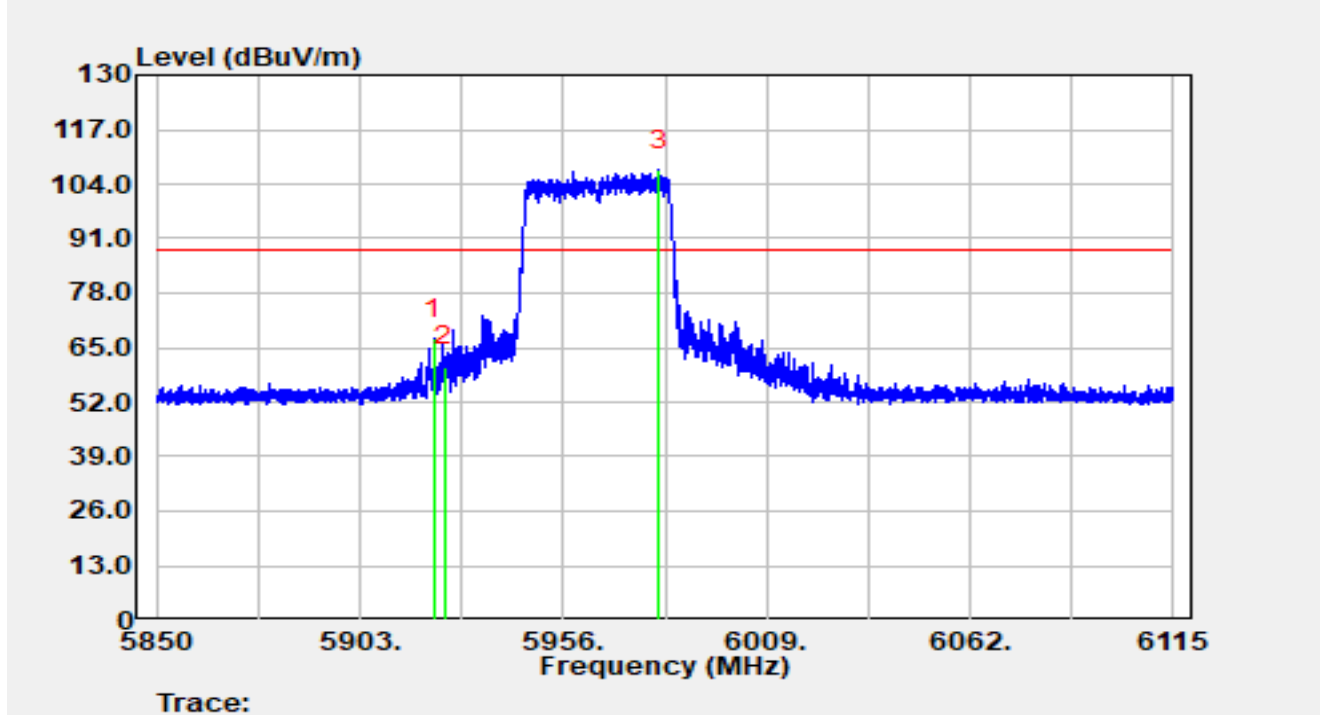


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.32	46.60	20.61	67.21	-20.99	88.20	Peak
2		5925.00	39.88	20.59	60.47	-27.73	88.20	Peak
3		5980.83	86.34	20.96	107.30	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5965 MHz		

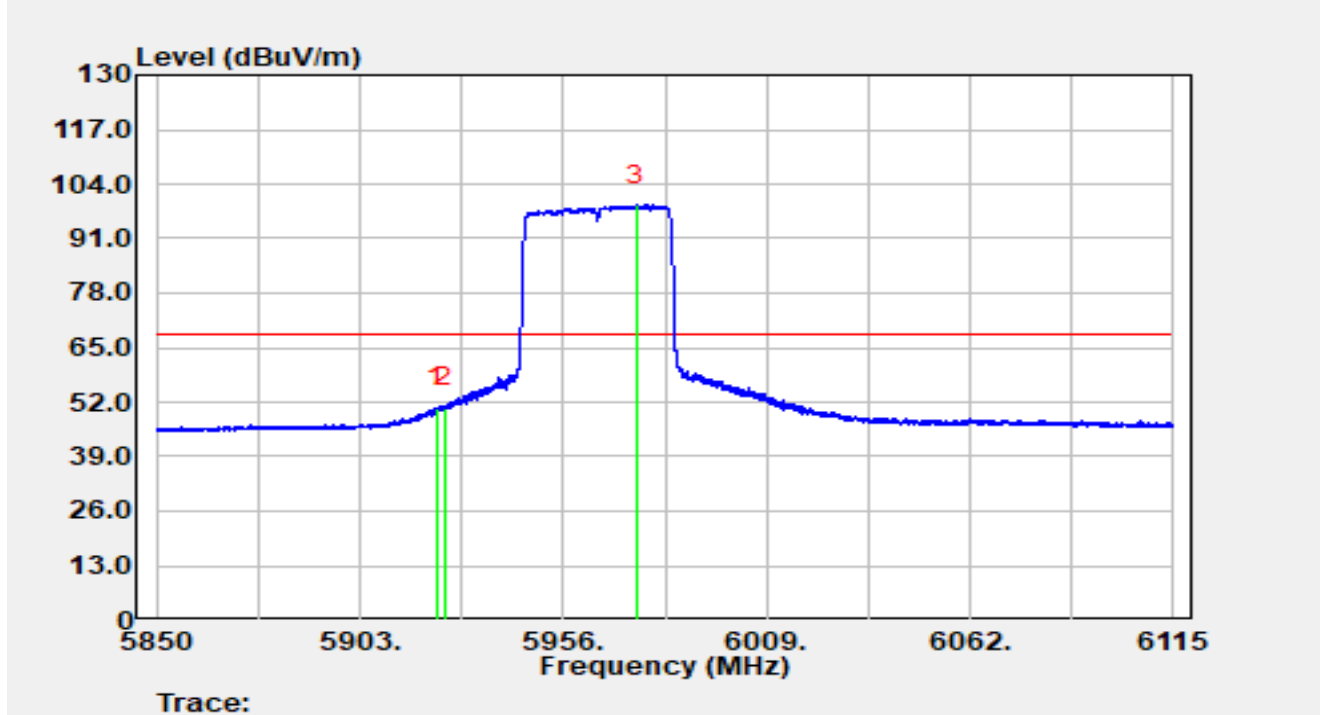


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5922.96	30.00	20.60	50.60	-17.60	68.20	Average
2	*	5925.00	30.19	20.59	50.77	-17.43	68.20	Average
3		5975.00	77.94	20.93	98.87	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 7085 MHz		

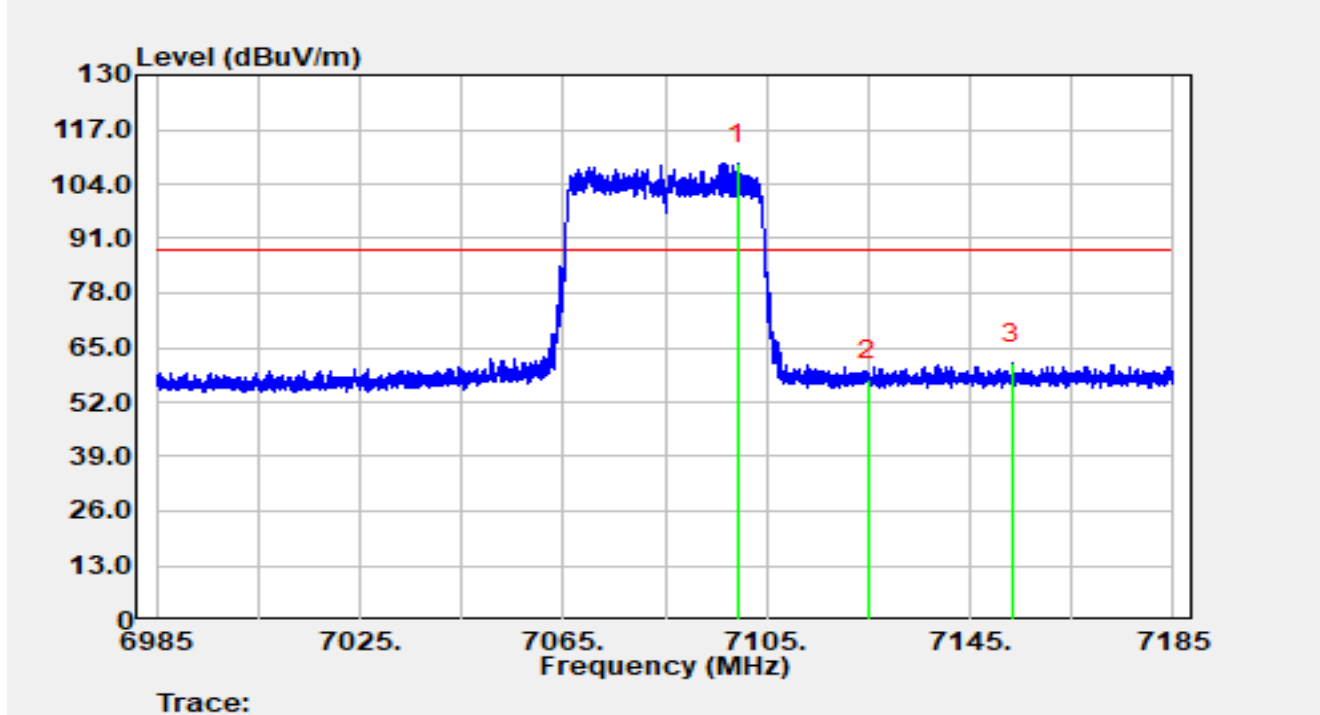


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7099.30	83.07	25.80	108.87	N/A	N/A	Peak
2		7125.00	30.99	26.17	57.15	-31.05	88.20	Peak
3	*	7153.36	34.75	26.50	61.25	-26.95	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 7085 MHz		

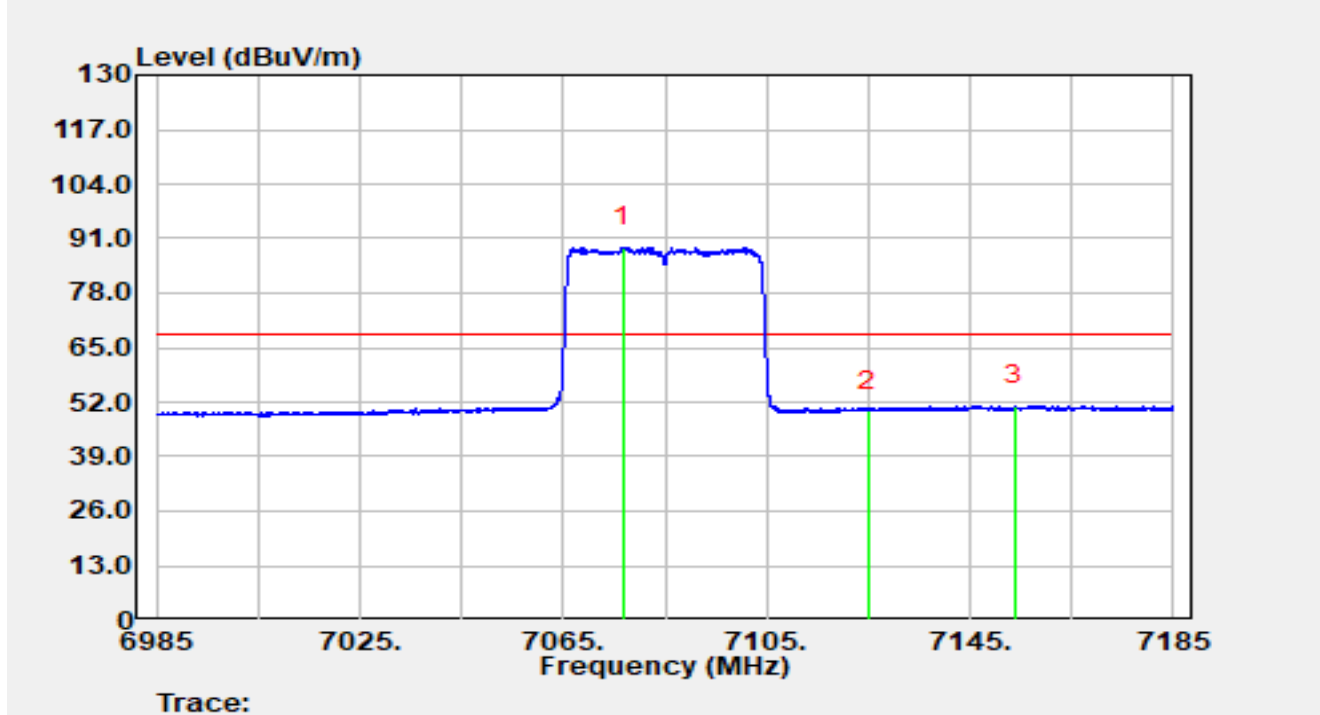


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7076.86	62.80	26.02	88.81	N/A	N/A	Average
2		7125.00	23.78	26.17	49.95	-18.25	68.20	Average
3	*	7153.68	24.56	26.50	51.06	-17.14	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 7085 MHz		

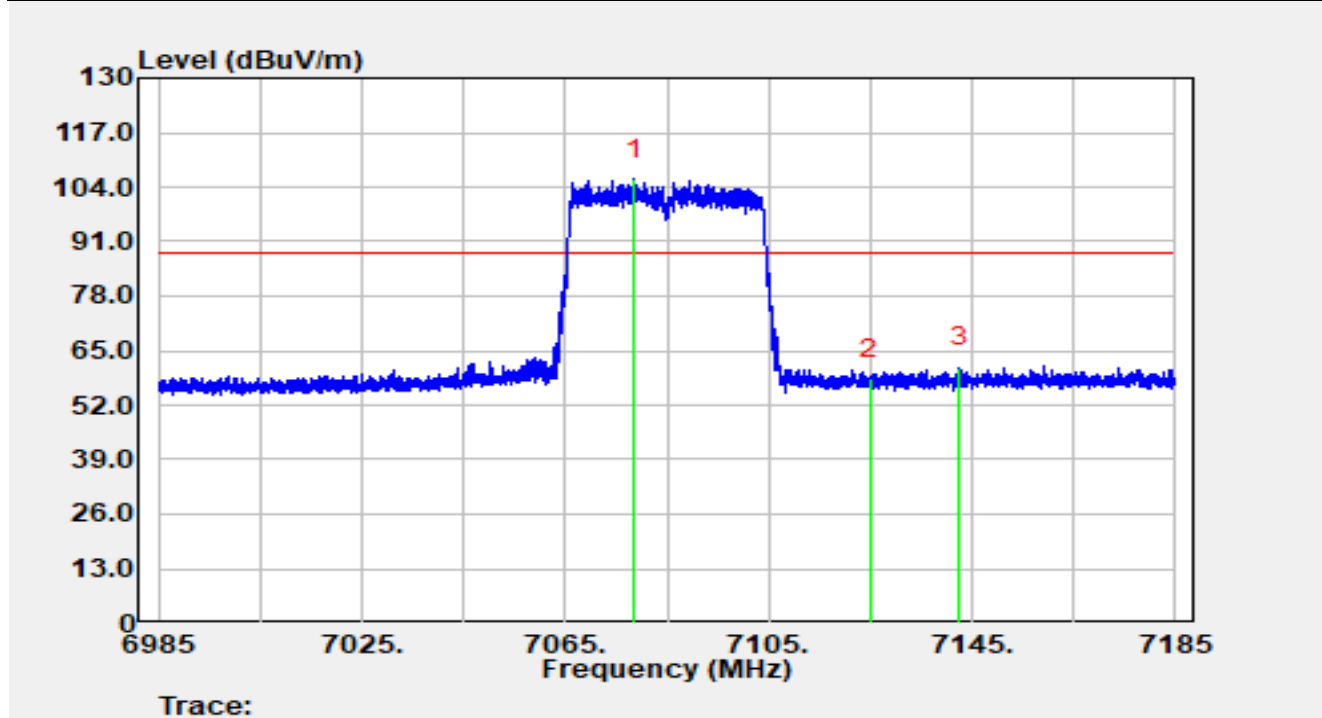


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7078.56	79.82	26.00	105.81	N/A	N/A	Peak
2		7125.00	32.08	26.17	58.25	-29.95	88.20	Peak
3	*	7142.60	34.41	26.45	60.86	-27.34	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 7085 MHz		

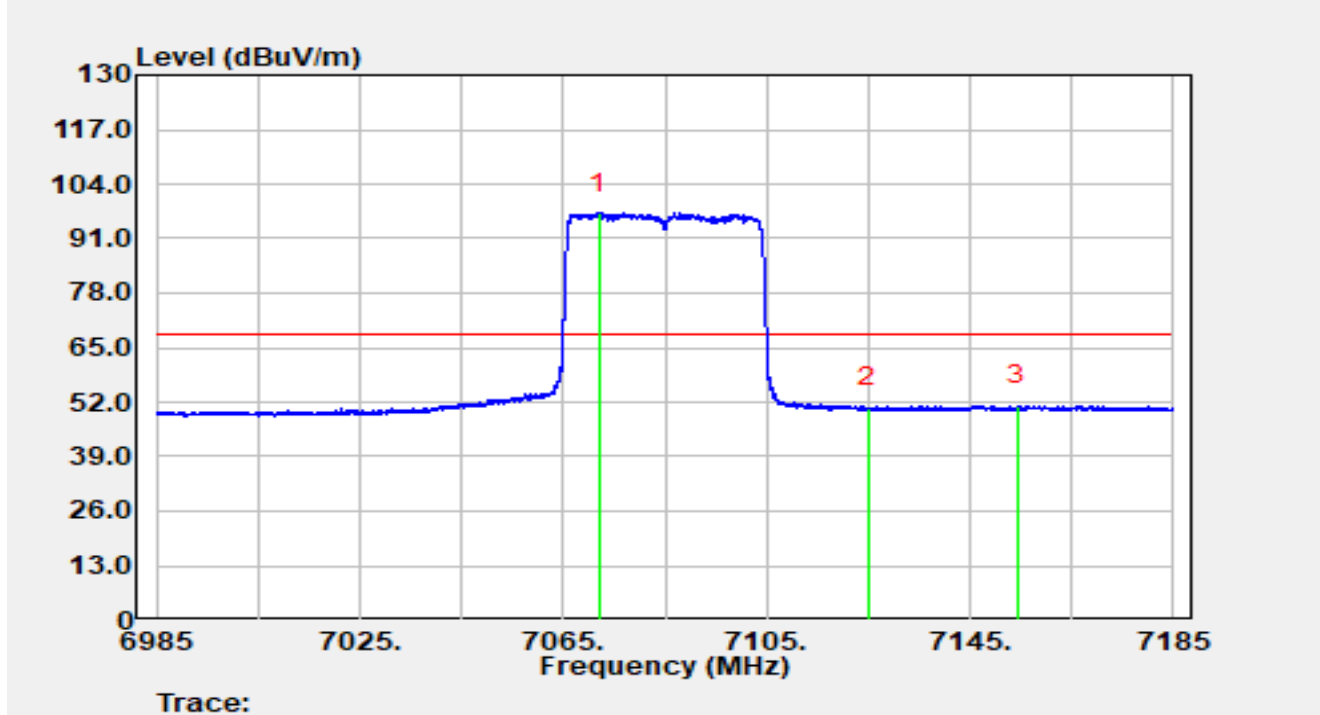


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7072.00	71.03	26.09	97.12	N/A	N/A	Average
2		7125.00	24.43	26.17	50.60	-17.60	68.20	Average
3	*	7154.28	24.66	26.50	51.16	-17.04	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 5985 MHz		

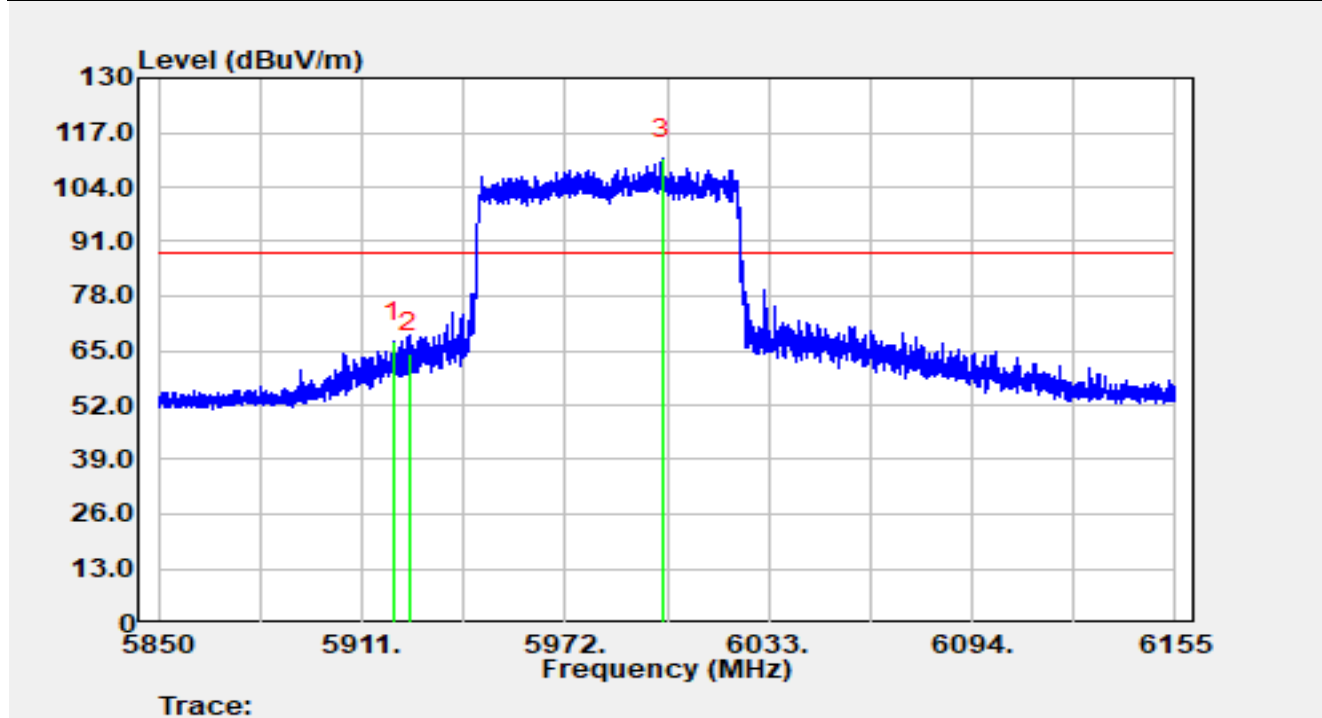


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.55	46.52	20.62	67.14	-21.06	88.20	Peak
2		5925.00	43.82	20.59	64.41	-23.79	88.20	Peak
3		6000.98	89.83	20.93	110.76	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 5985 MHz		

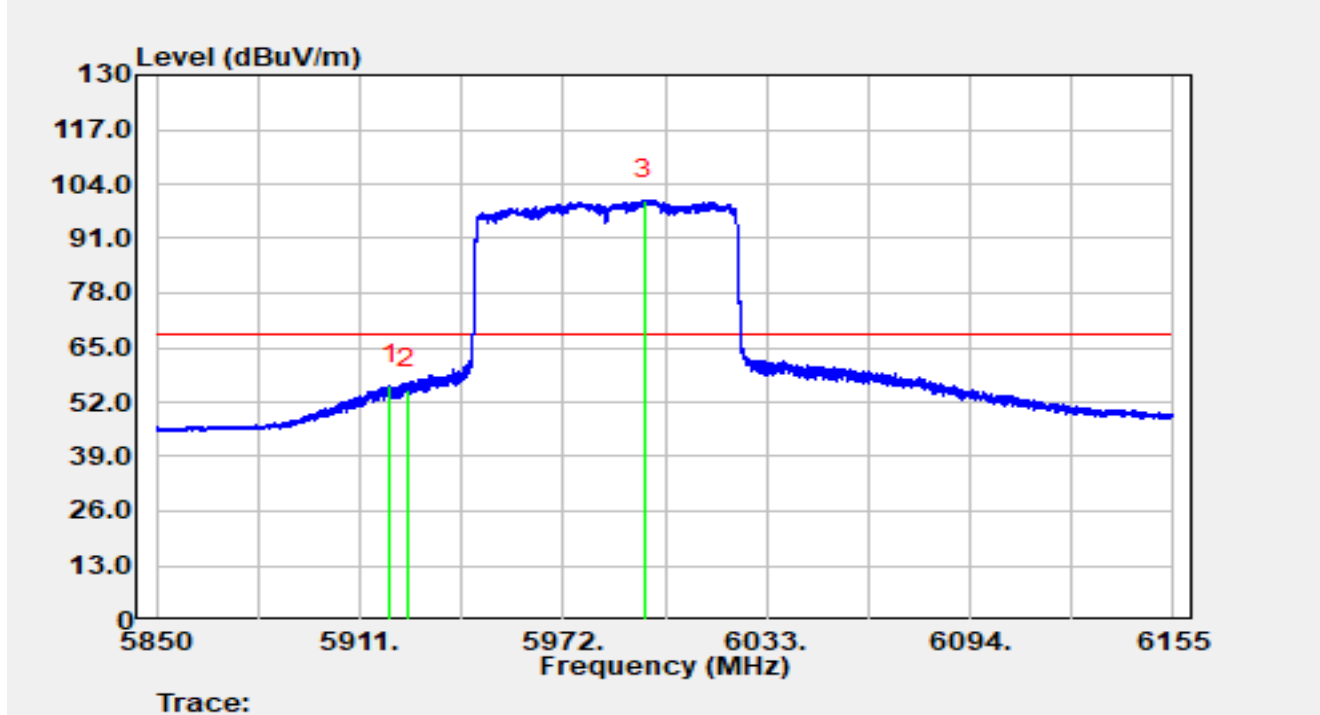


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.12	35.35	20.62	55.98	-12.22	68.20	Average
2		5925.00	34.42	20.59	55.01	-13.19	68.20	Average
3		5996.13	79.34	20.97	100.31	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 5985 MHz		

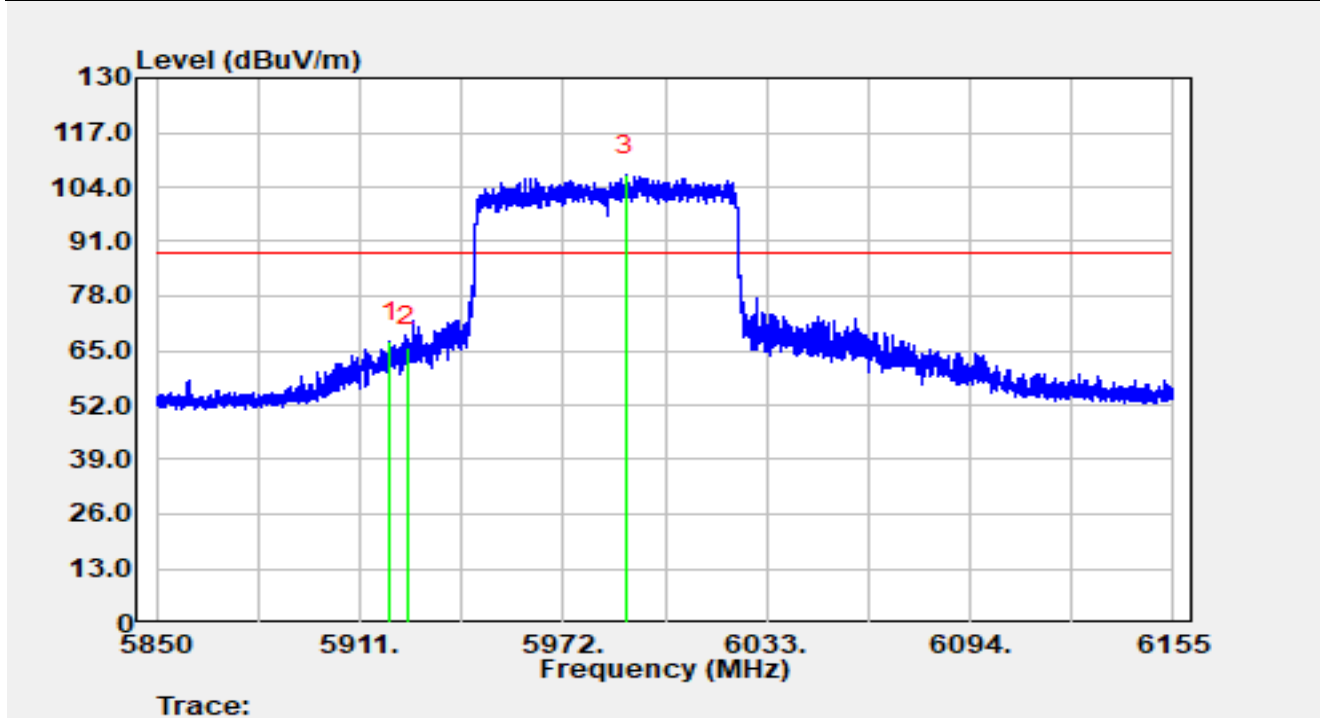


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.12	46.53	20.62	67.15	-21.05	88.20	Peak
2		5925.00	45.36	20.59	65.94	-22.26	88.20	Peak
3		5990.91	85.75	20.98	106.73	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 5985 MHz		

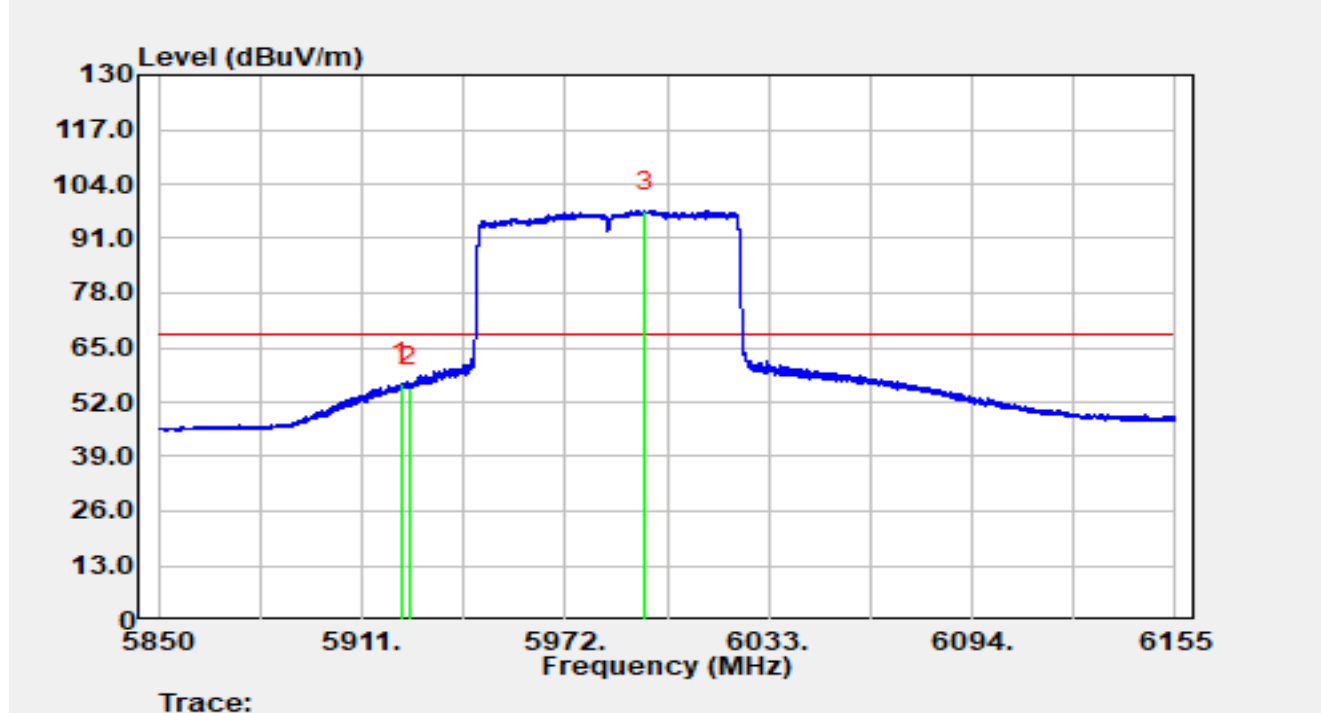

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.93	35.86	20.60	56.46	-11.74	68.20	Average
2		5925.00	34.85	20.59	55.44	-12.76	68.20	Average
3		5995.88	76.58	20.97	97.55	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).