


Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 7025 MHz		

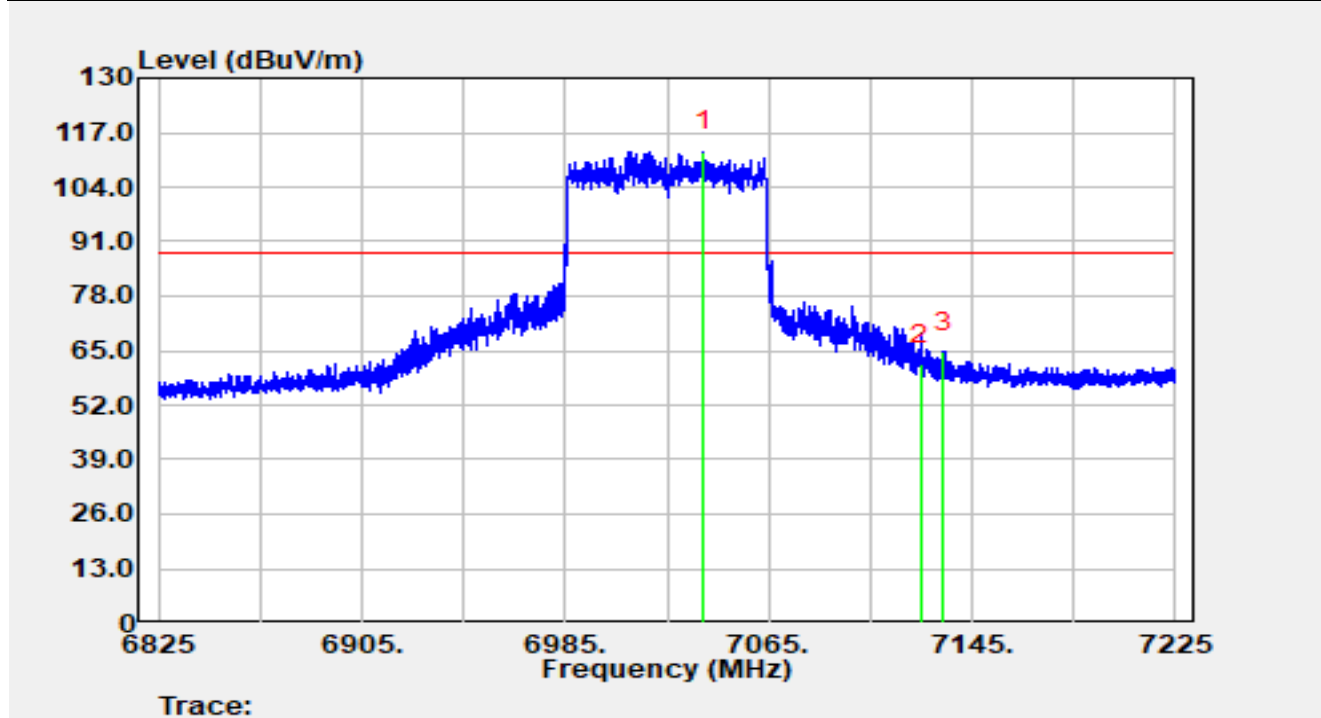


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7039.56	86.43	26.10	112.53	N/A	N/A	Peak
2		7125.00	35.56	26.17	61.72	-26.48	88.20	Peak
3	*	7133.96	38.31	26.33	64.64	-23.56	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 7025 MHz		

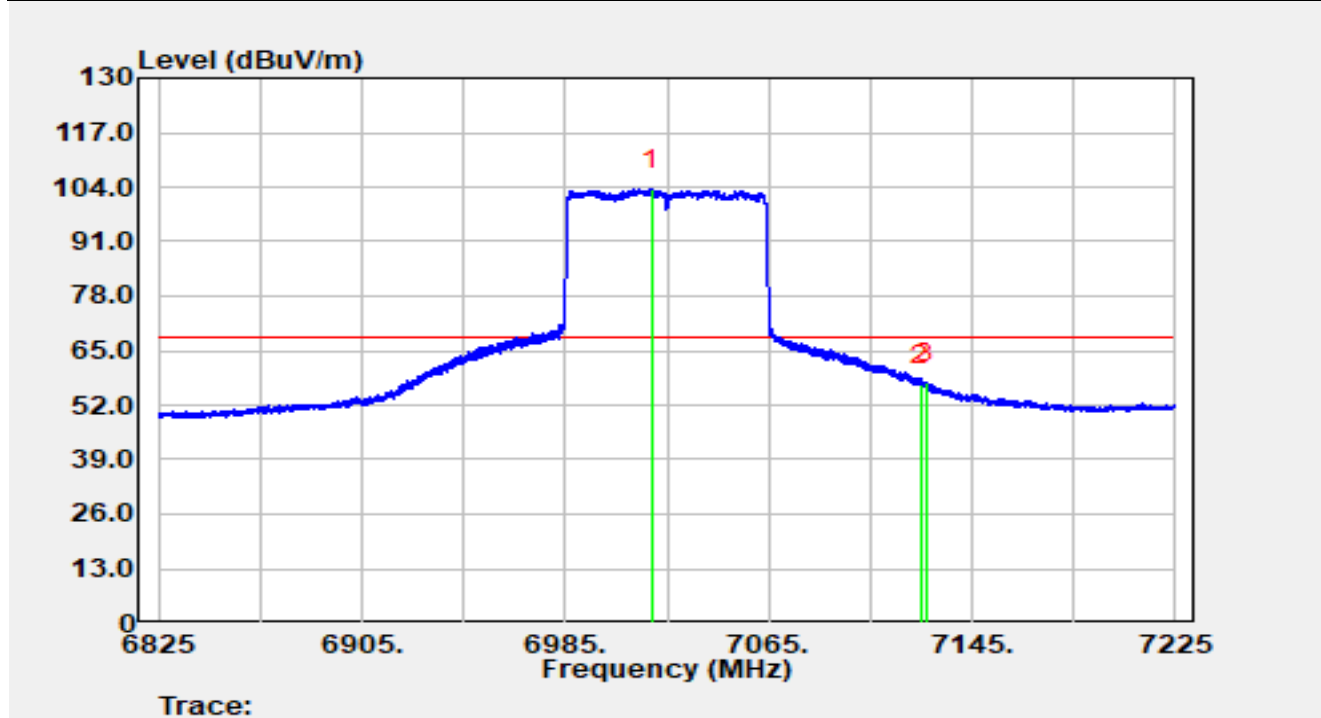


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7019.12	77.70	25.60	103.30	N/A	N/A	Average
2		7125.00	30.52	26.17	56.69	-11.51	68.20	Average
3	*	7126.84	30.97	26.21	57.18	-11.02	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 7025 MHz		

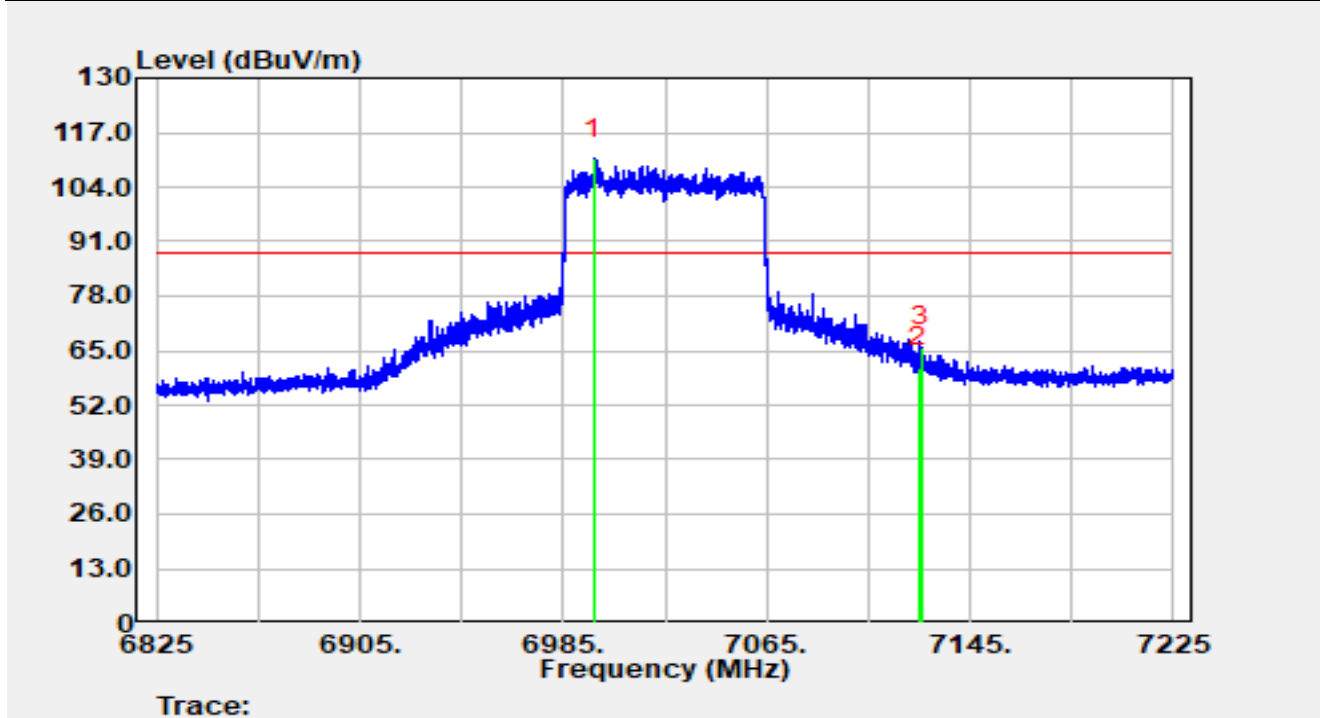


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6997.20	85.30	25.34	110.64	N/A	N/A	Peak
2		7125.00	34.76	26.17	60.93	-27.27	88.20	Peak
3	*	7125.84	39.73	26.19	65.92	-22.28	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 7025 MHz		

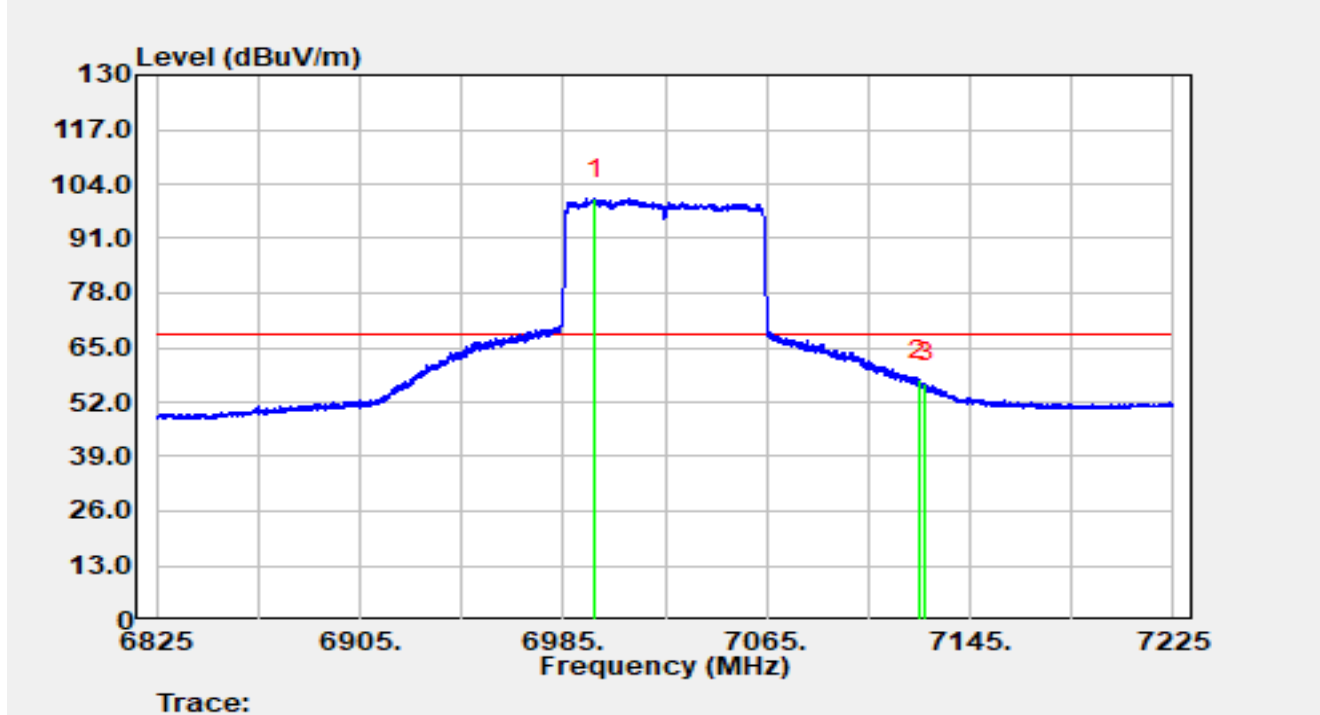


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6997.56	75.05	25.34	100.39	N/A	N/A	Average
2	*	7125.00	31.19	26.17	57.35	-10.85	68.20	Average
3		7127.44	30.19	26.22	56.42	-11.78	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6025 MHz		

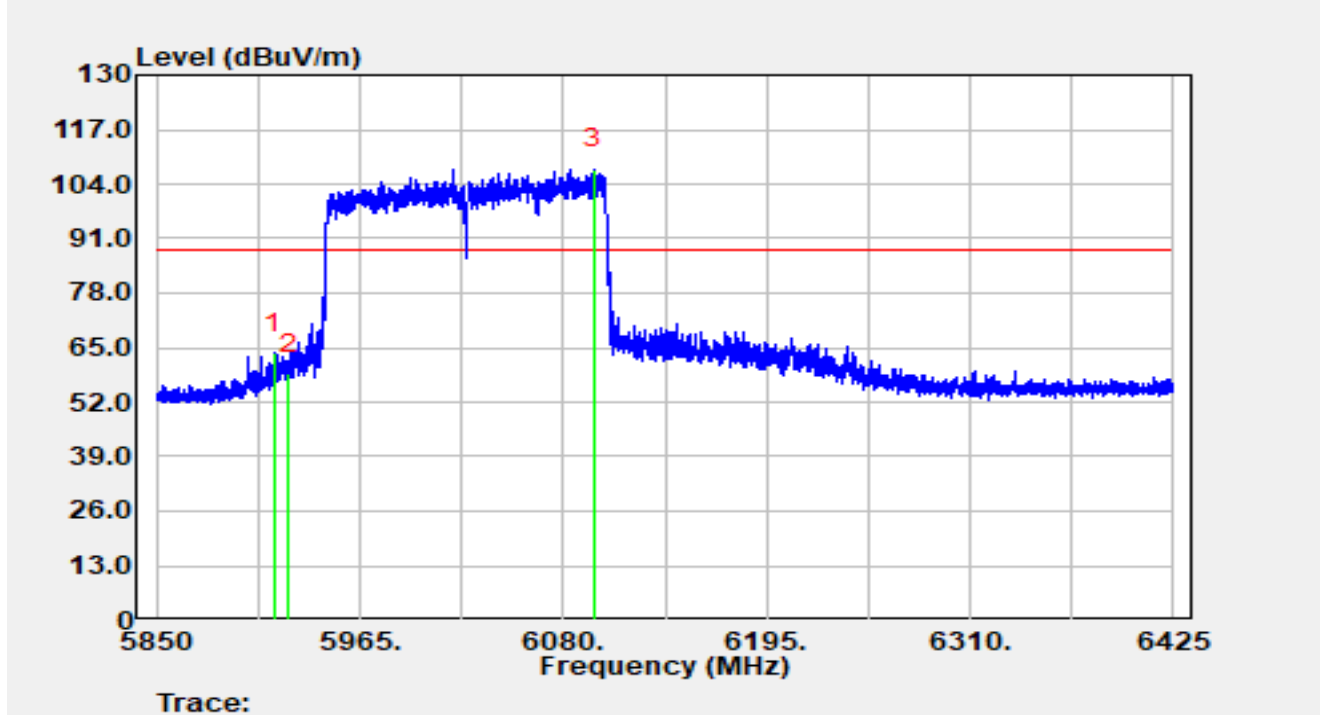


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.53	43.09	20.65	63.74	-24.46	88.20	Peak
2		5925.00	38.21	20.59	58.80	-29.40	88.20	Peak
3		6097.54	86.21	21.36	107.57	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6025 MHz		

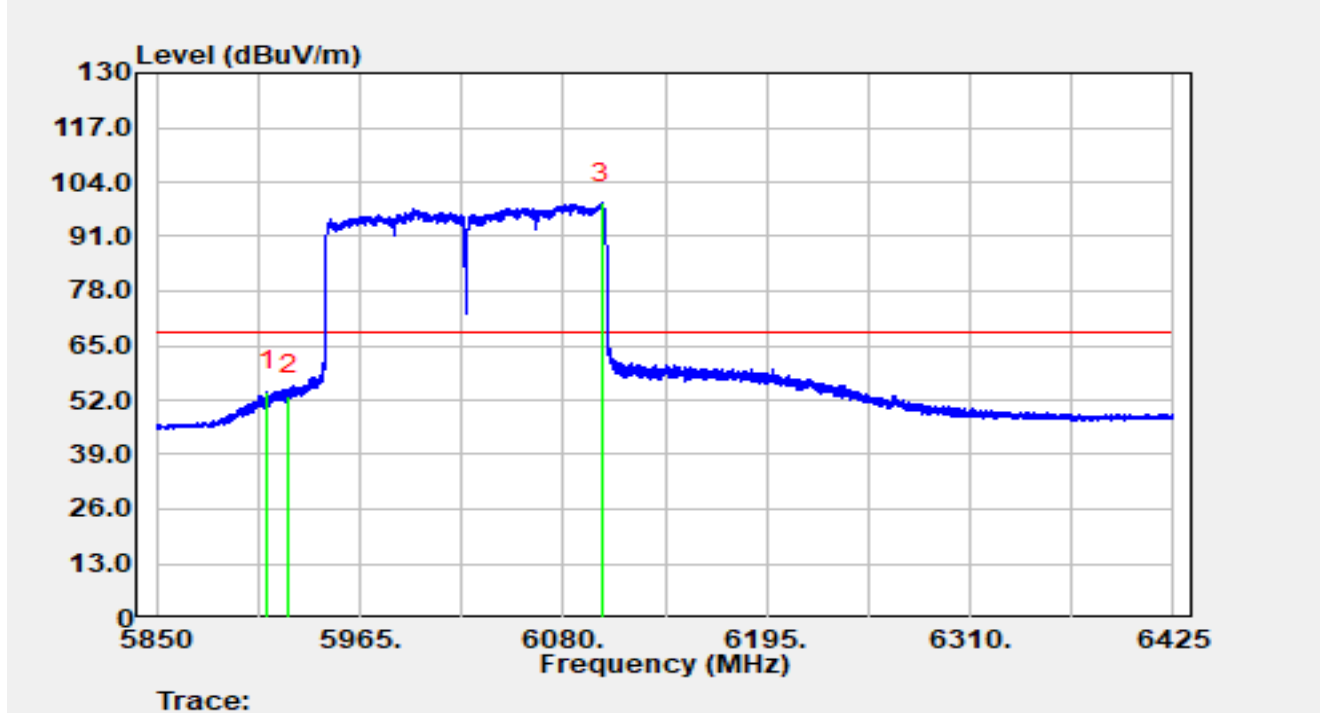


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5912.68	33.51	20.68	54.19	-14.01	68.20	Average
2		5925.00	32.44	20.59	53.03	-15.17	68.20	Average
3		6101.74	77.55	21.34	98.89	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6025 MHz		

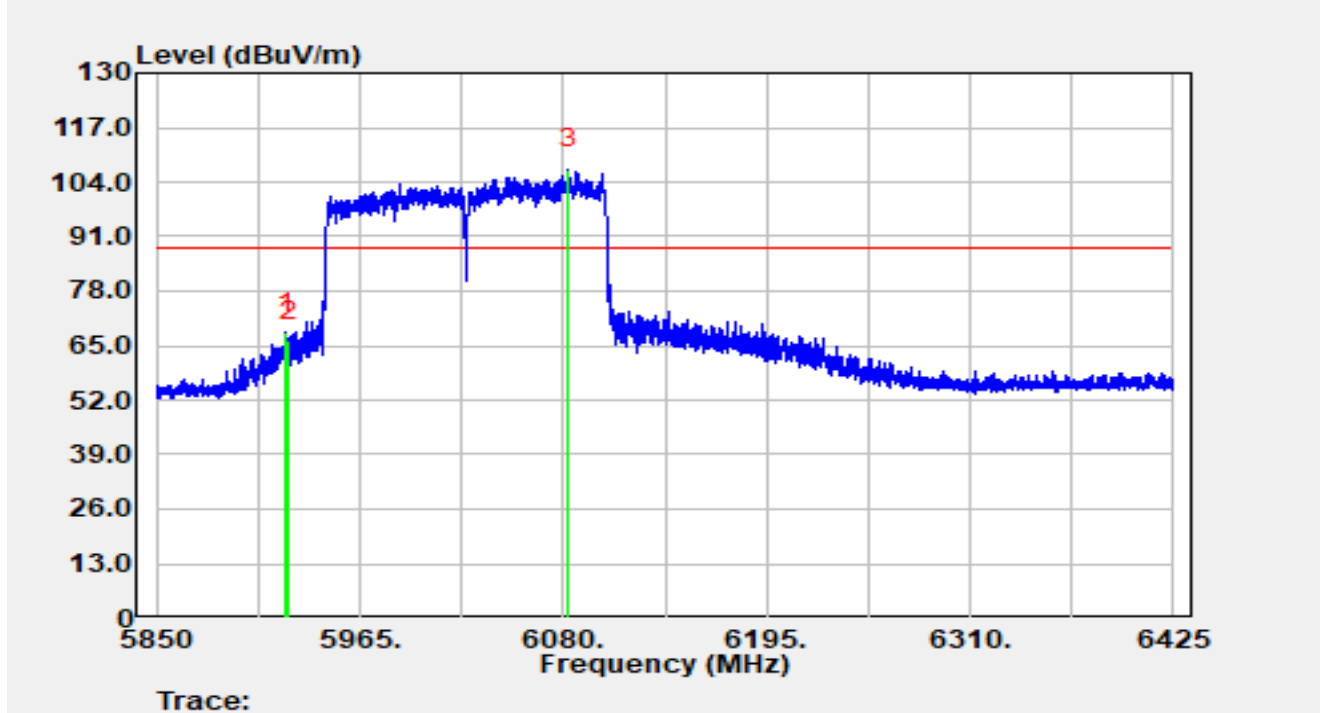


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.54	47.35	20.60	67.95	-20.25	88.20	Peak
2		5925.00	45.61	20.59	66.20	-22.00	88.20	Peak
3		6082.82	85.56	21.52	107.08	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6025 MHz		

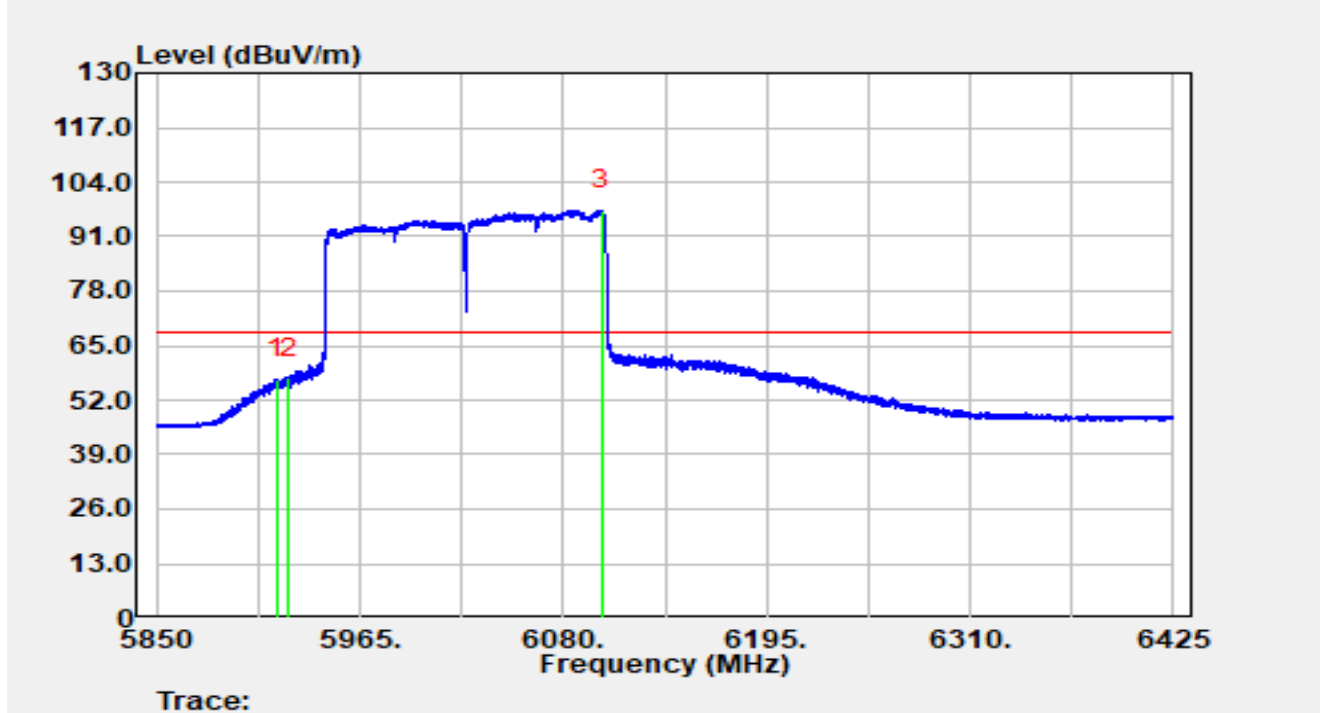


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5917.79	36.38	20.64	57.02	-11.18	68.20	Average
2	*	5925.00	36.59	20.59	57.18	-11.02	68.20	Average
3		6101.45	75.99	21.34	97.33	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

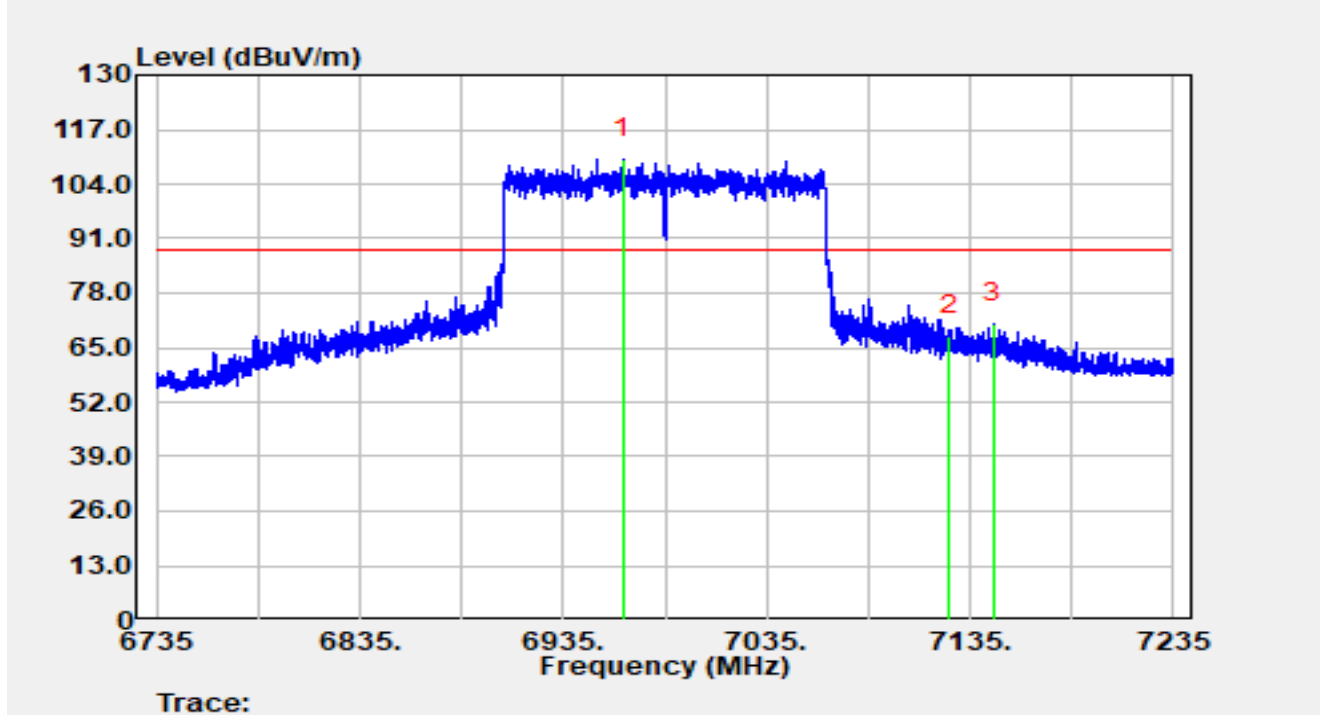


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6964.65	84.75	25.16	109.92	N/A	N/A	Peak
2		7125.00	41.65	26.17	67.82	-20.38	88.20	Peak
3	*	7146.70	44.18	26.51	70.69	-17.51	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

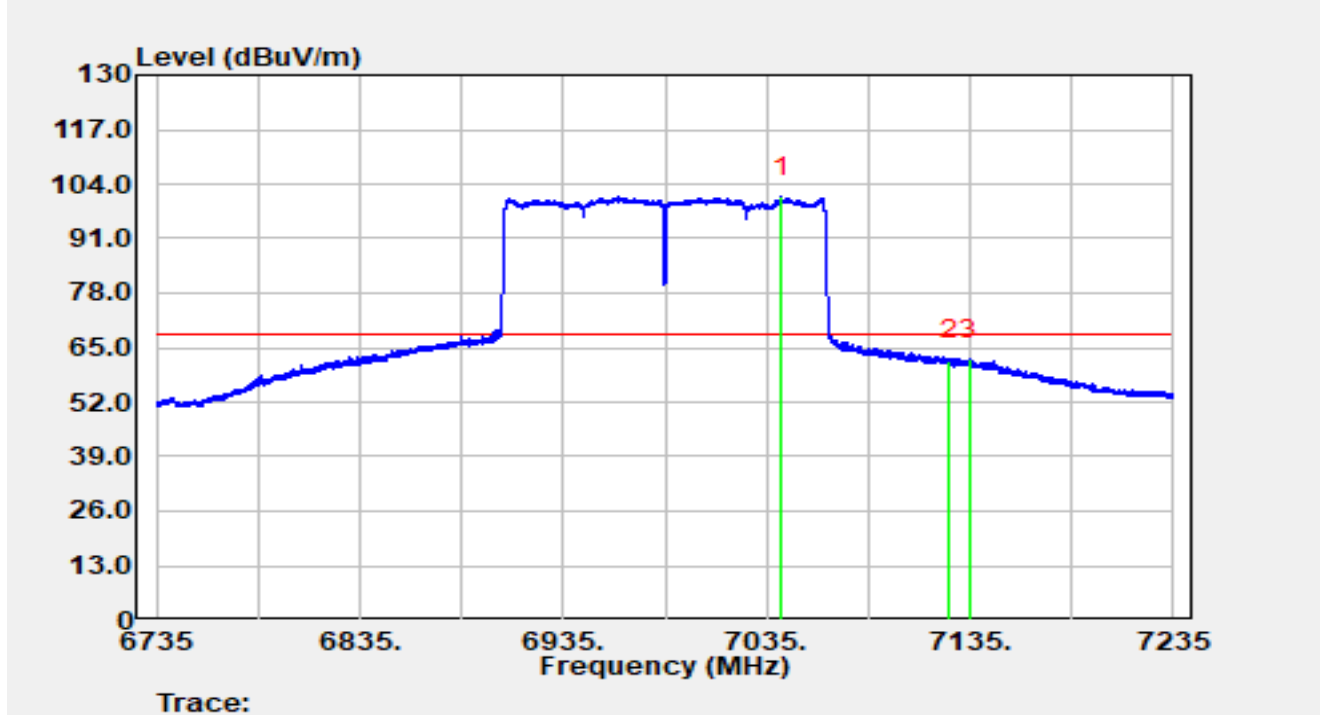


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7042.35	74.76	26.18	100.95	N/A	N/A	Average
2		7125.00	35.66	26.17	61.83	-6.37	68.20	Average
3	*	7134.70	35.90	26.34	62.24	-5.96	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

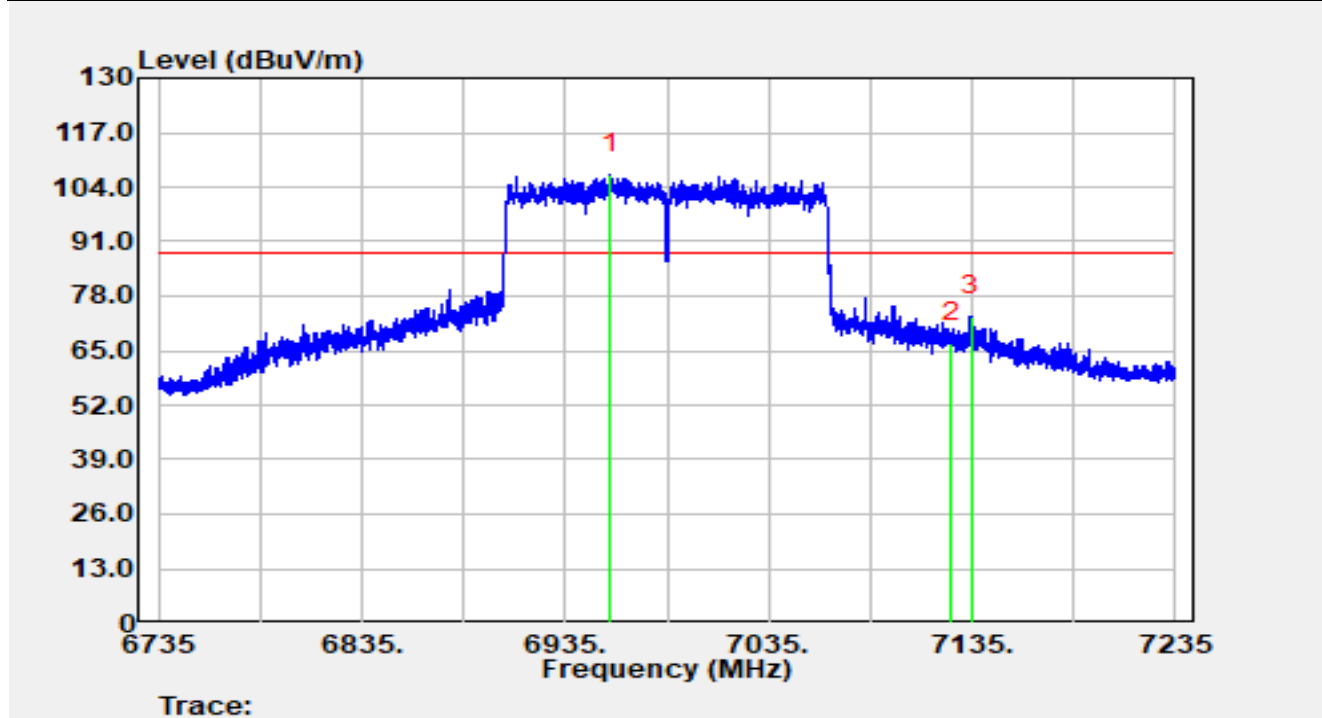


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6957.05	81.92	25.14	107.06	N/A	N/A	Peak
2		7125.00	40.64	26.17	66.80	-21.40	88.20	Peak
3	*	7134.35	46.80	26.34	73.14	-15.06	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

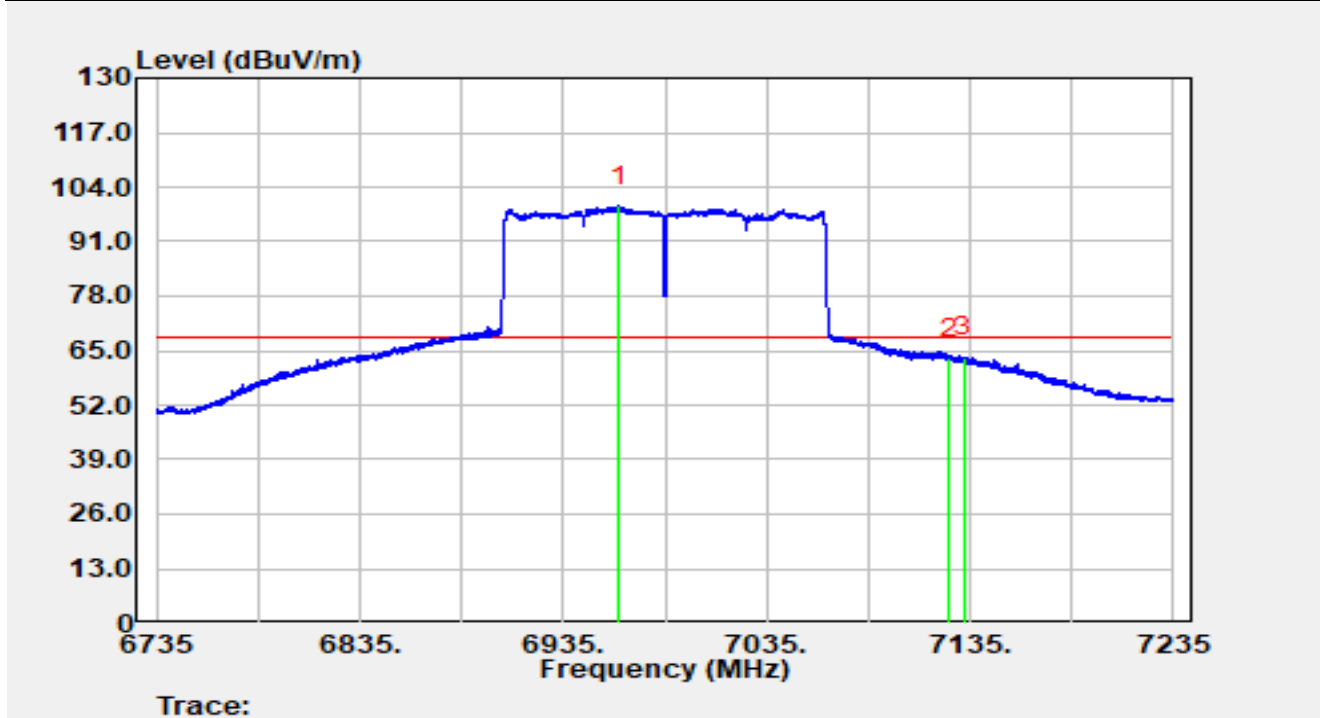


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6962.35	74.30	25.16	99.46	N/A	N/A	Average
2		7125.00	37.11	26.17	63.28	-4.92	68.20	Average
3	*	7131.95	37.05	26.31	63.35	-4.85	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

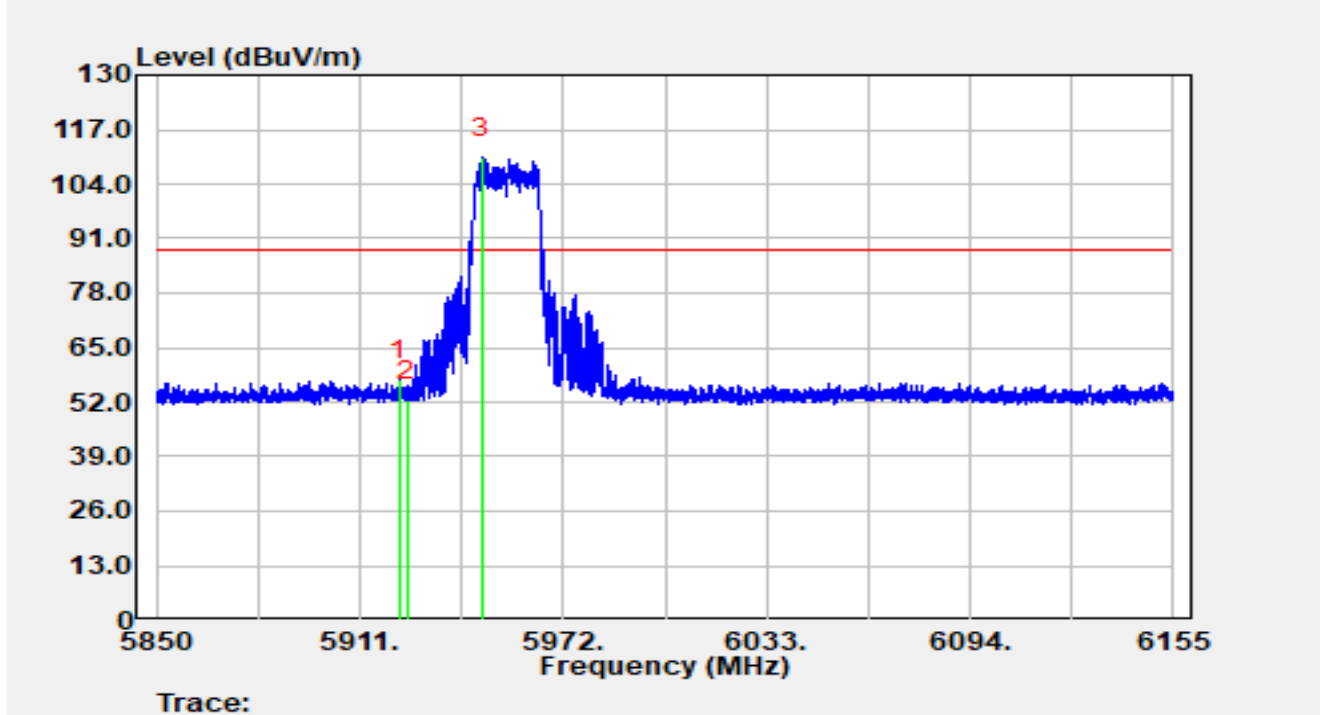


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.90	36.69	20.60	57.29	-30.91	88.20	Peak
2		5925.00	31.67	20.59	52.25	-35.95	88.20	Peak
3		5947.51	89.54	20.66	110.20	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

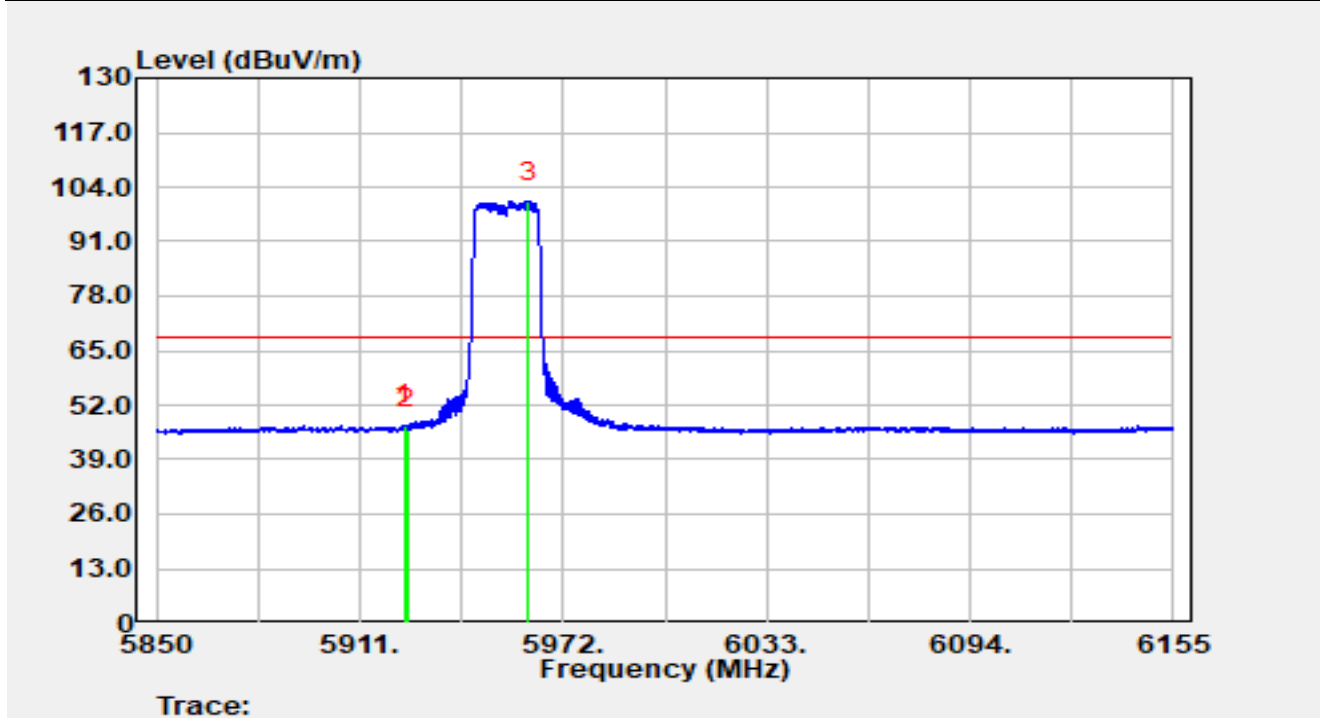


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.42	26.74	20.59	47.33	-20.87	68.20	Average
2		5925.00	25.60	20.59	46.19	-22.01	68.20	Average
3		5961.66	79.76	20.73	100.49	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

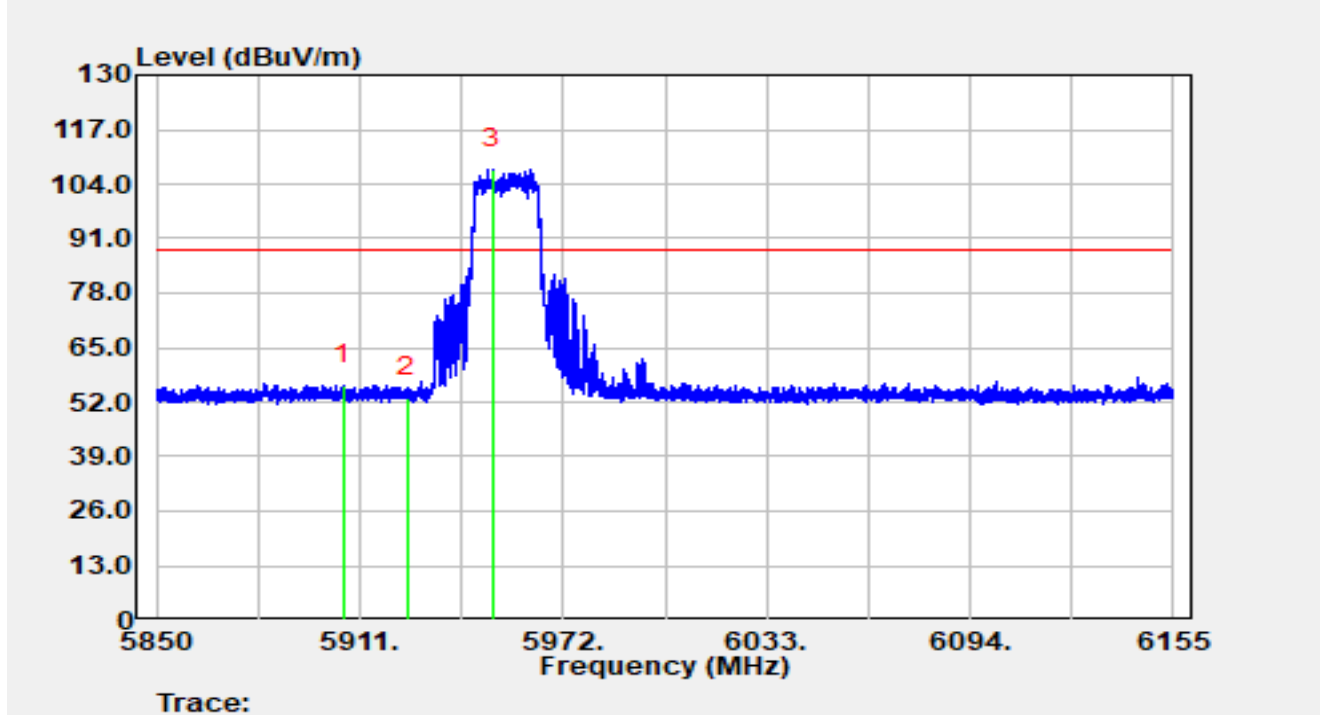


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5905.91	35.23	20.72	55.95	-32.25	88.20	Peak
2		5925.00	32.60	20.59	53.18	-35.02	88.20	Peak
3		5950.83	86.93	20.67	107.60	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

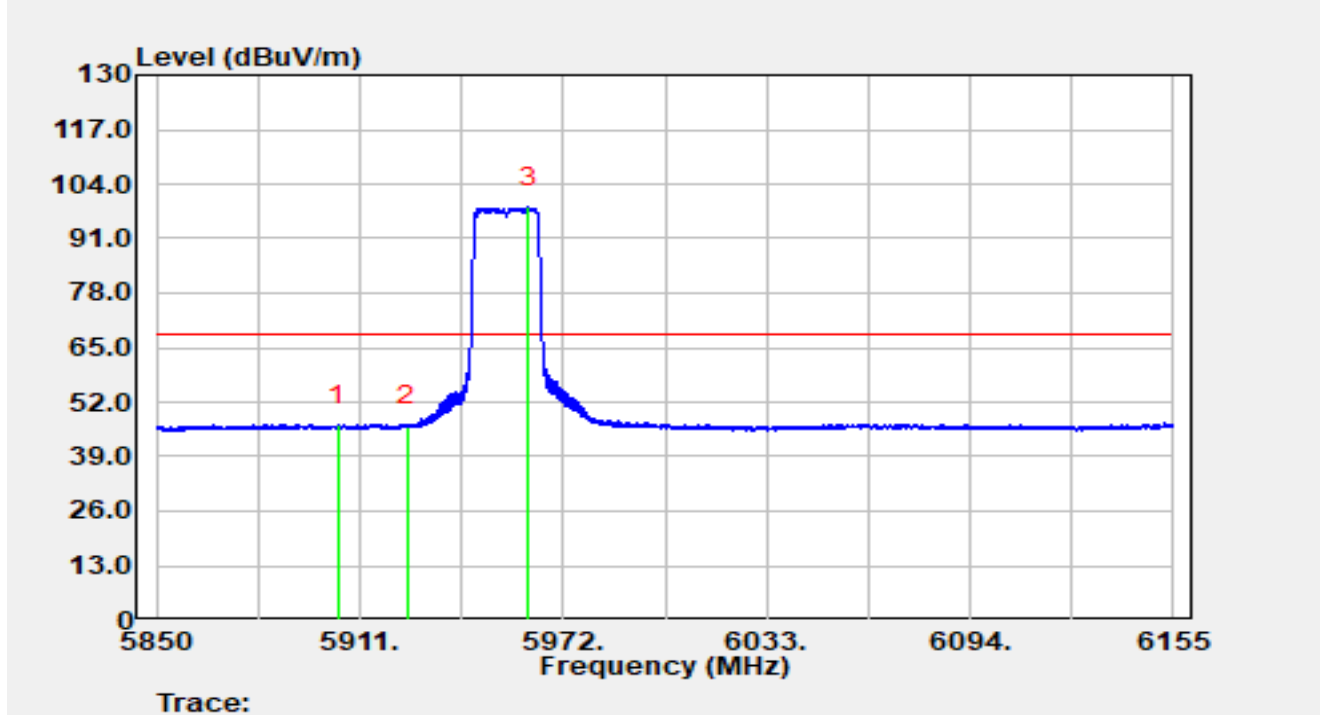


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5904.26	25.88	20.73	46.60	-21.60	68.20	Average
2		5925.00	25.59	20.59	46.18	-22.02	68.20	Average
3		5961.72	77.65	20.73	98.38	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 7095 MHz		

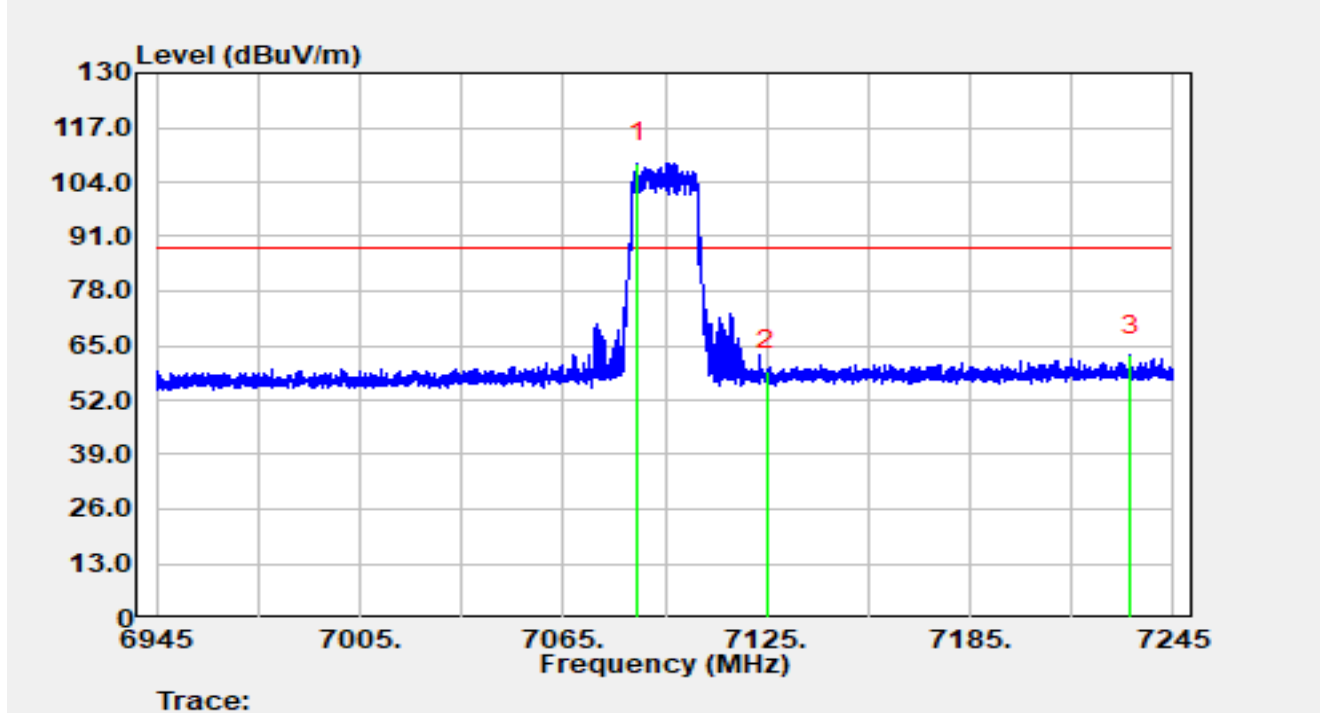


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7086.84	82.70	25.89	108.59	N/A	N/A	Peak
2		7125.00	32.85	26.17	59.02	-29.18	88.20	Peak
3	*	7232.16	35.65	26.90	62.55	-25.65	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 7095 MHz		

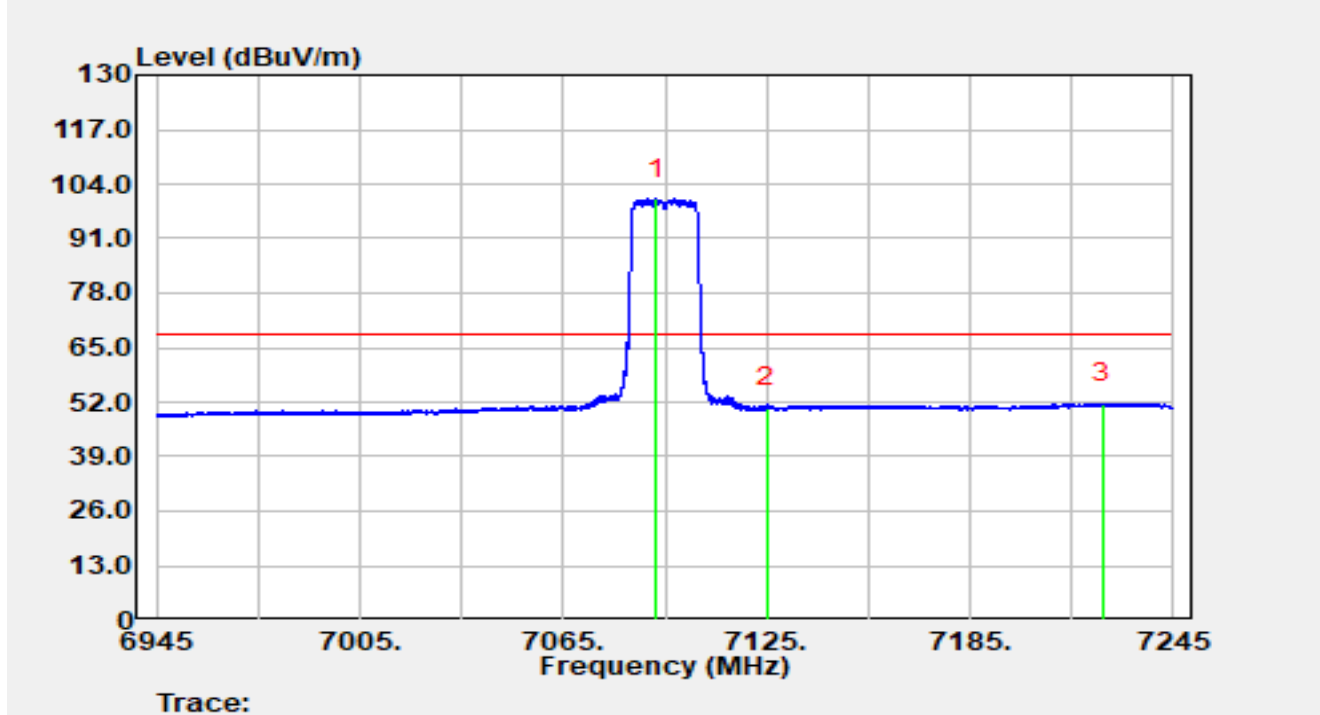


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7092.57	74.73	25.81	100.54	N/A	N/A	Average
2		7125.00	24.55	26.17	50.72	-17.48	68.20	Average
3	*	7224.27	24.78	26.88	51.66	-16.54	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 7095 MHz		

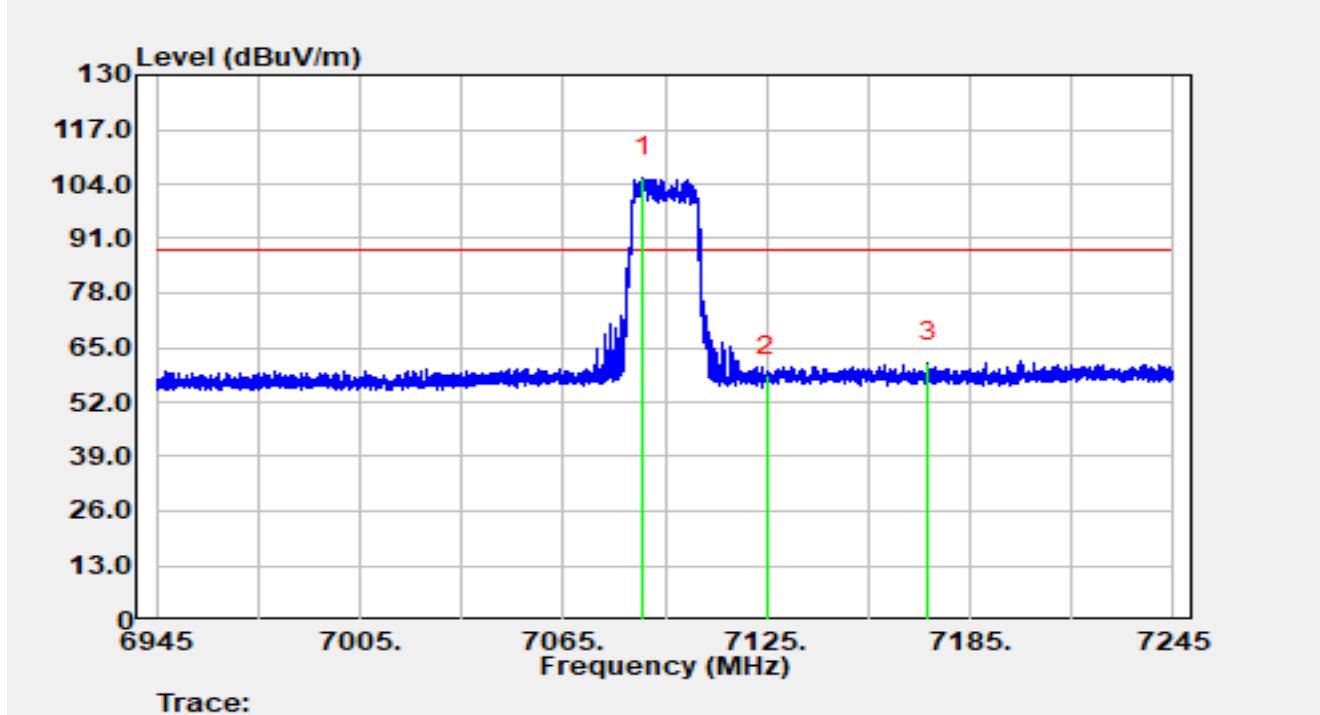


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7088.34	79.78	25.87	105.65	N/A	N/A	Peak
2		7125.00	32.12	26.17	58.29	-29.91	88.20	Peak
3	*	7172.61	35.02	26.39	61.41	-26.79	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 7095 MHz		

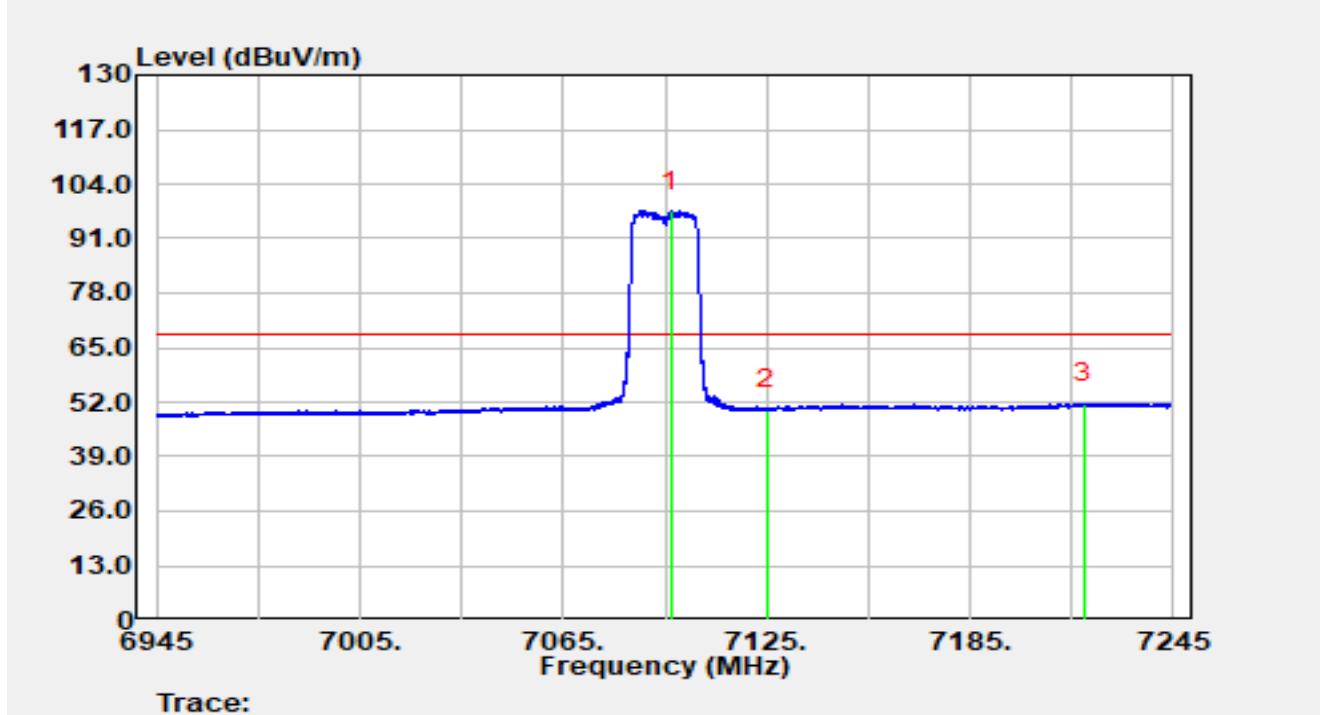


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7096.83	71.77	25.78	97.54	N/A	N/A	Average
2		7125.00	24.10	26.17	50.26	-17.94	68.20	Average
3	*	7218.39	24.87	26.87	51.74	-16.46	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

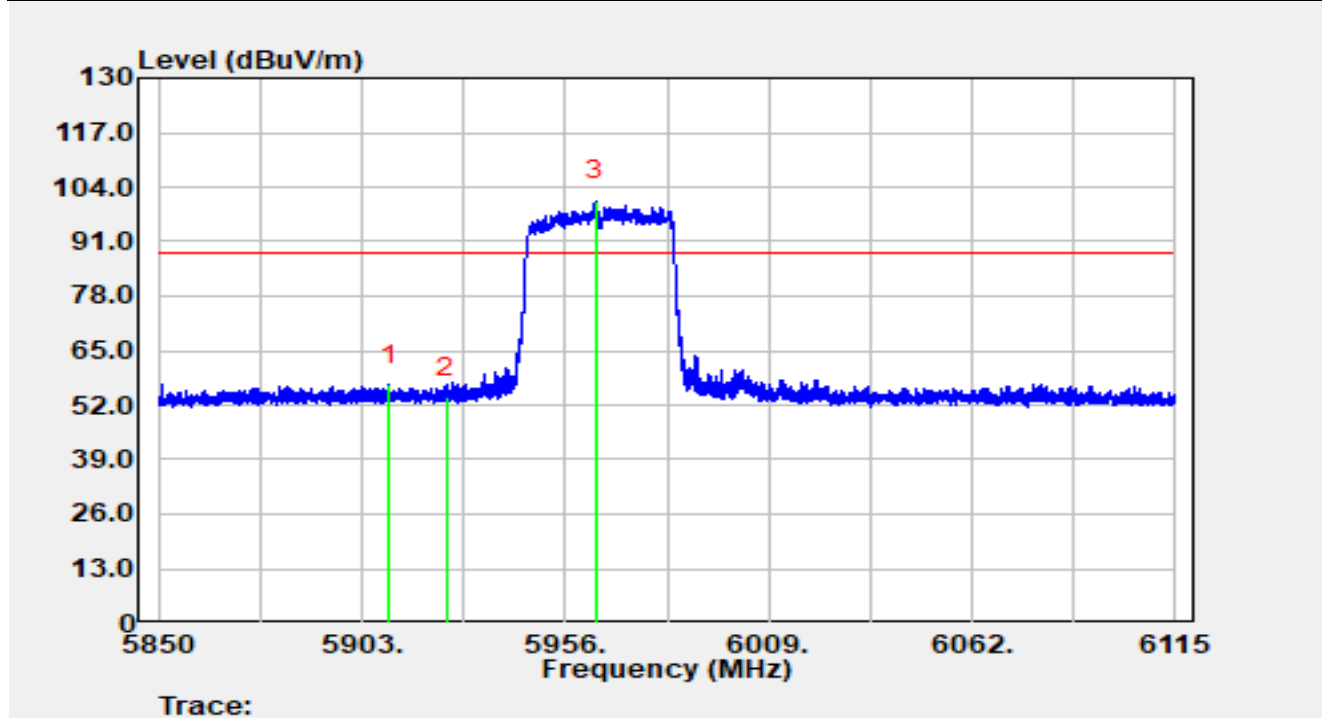


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5910.10	36.03	20.70	56.73	-31.47	88.20	Peak
2		5925.00	33.19	20.59	53.78	-34.42	88.20	Peak
3		5963.82	79.86	20.76	100.62	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

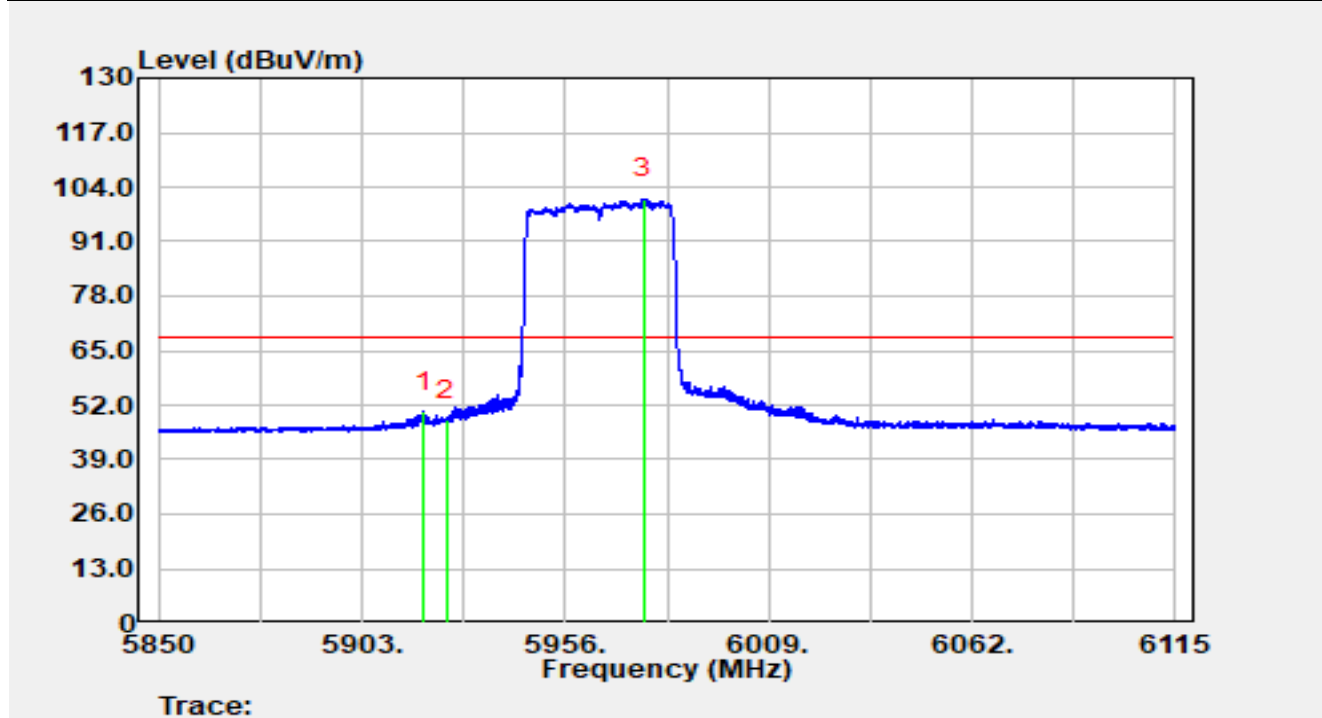


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.19	29.84	20.63	50.47	-17.73	68.20	Average
2		5925.00	27.94	20.59	48.53	-19.67	68.20	Average
3		5976.41	80.13	20.95	101.08	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

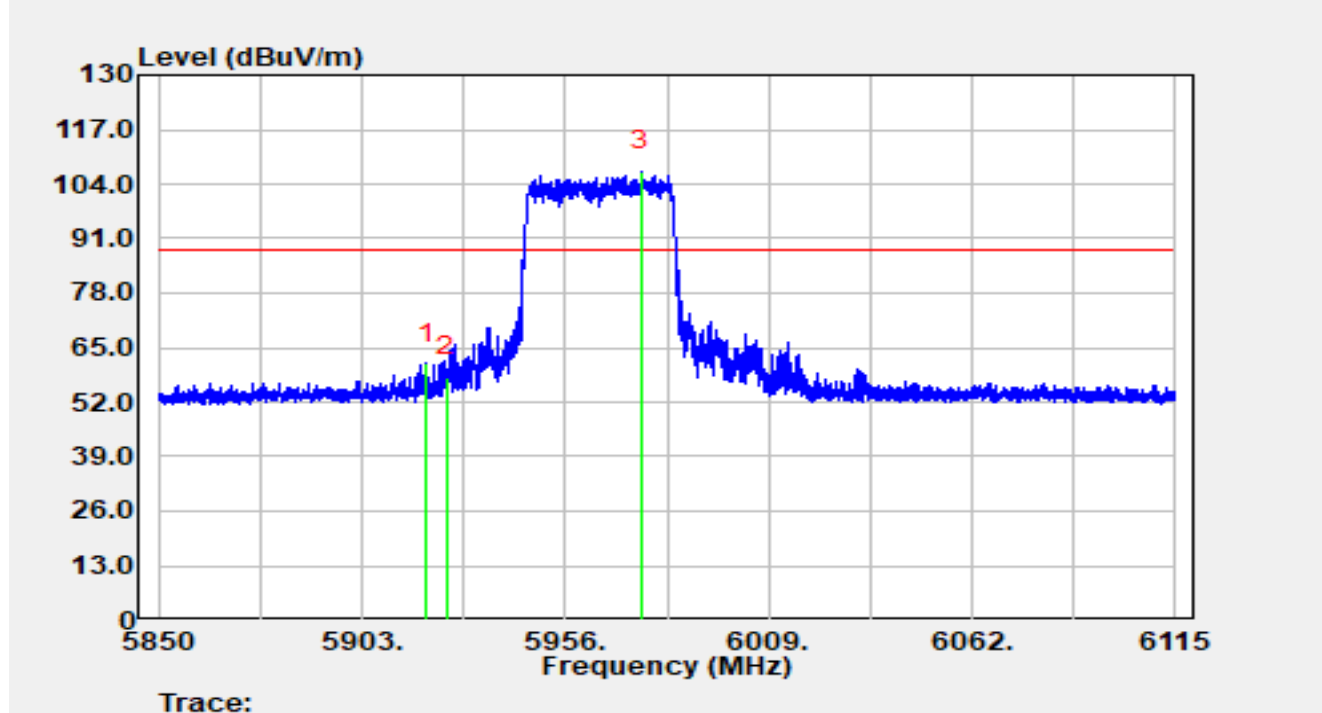


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.91	40.53	20.62	61.15	-27.05	88.20	Peak
2		5925.00	37.39	20.59	57.98	-30.22	88.20	Peak
3		5975.72	86.04	20.94	106.97	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

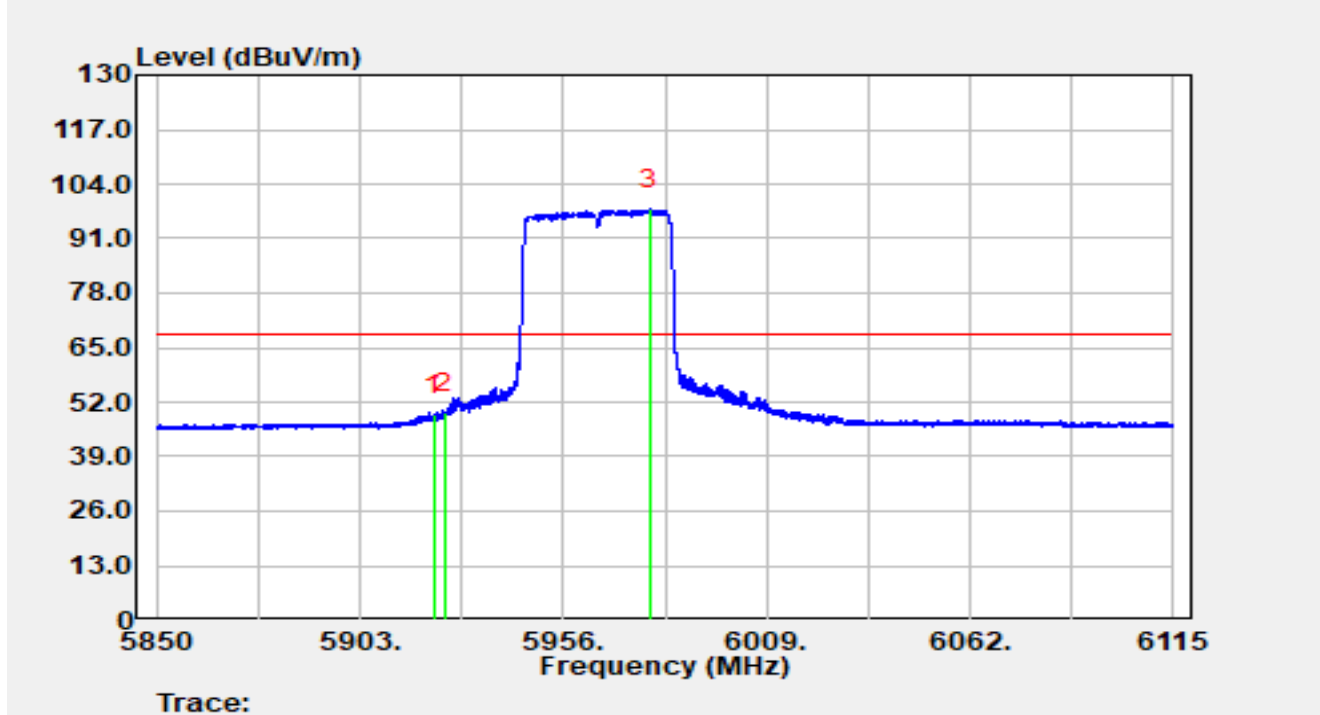


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5922.24	28.36	20.61	48.97	-19.23	68.20	Average
2	*	5925.00	28.74	20.59	49.33	-18.87	68.20	Average
3		5978.34	76.92	20.96	97.88	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 7085 MHz		

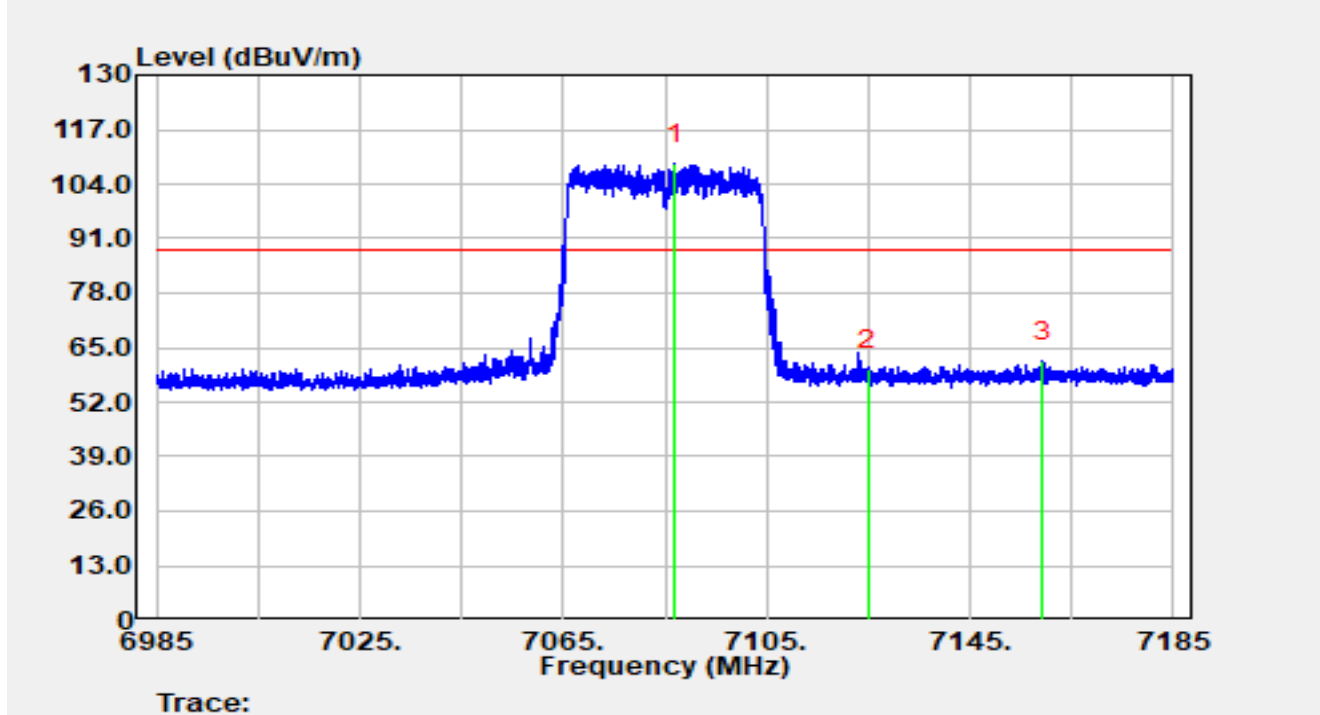


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7086.90	82.80	25.89	108.69	N/A	N/A	Peak
2		7125.00	33.49	26.17	59.66	-28.54	88.20	Peak
3	*	7159.38	35.19	26.49	61.68	-26.52	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 7085 MHz		

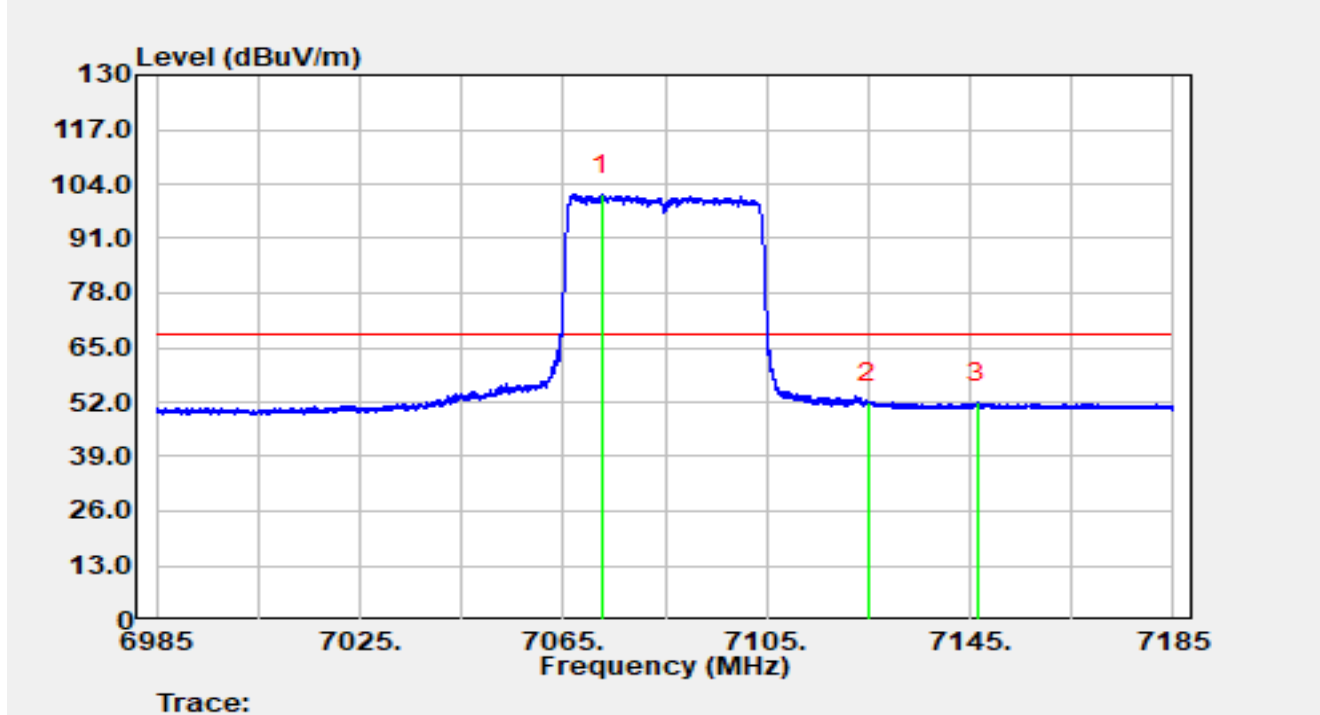


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7072.48	75.29	26.08	101.37	N/A	N/A	Average
2	*	7125.00	25.64	26.17	51.81	-16.39	68.20	Average
3		7146.36	25.30	26.50	51.80	-16.40	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 7085 MHz		

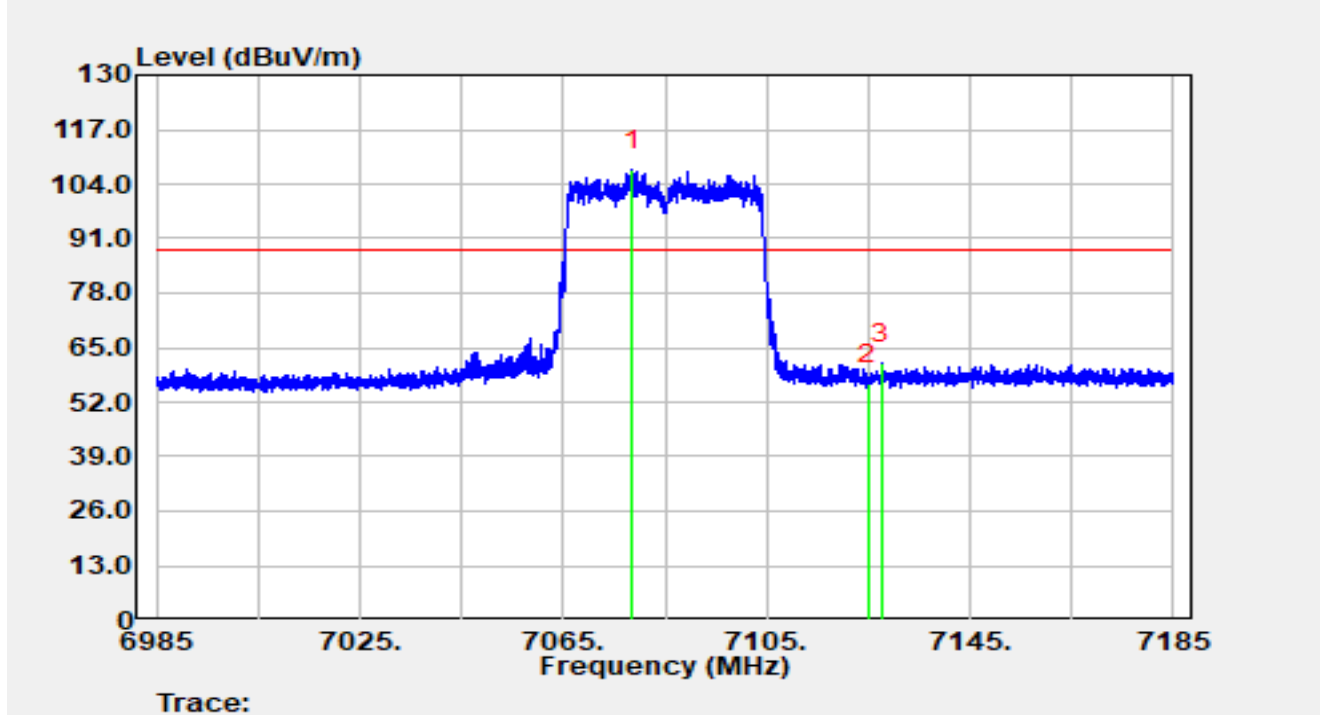


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7078.64	81.35	26.00	107.34	N/A	N/A	Peak
2		7125.00	30.18	26.17	56.35	-31.85	88.20	Peak
3	*	7127.66	34.87	26.23	61.09	-27.11	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 7085 MHz		

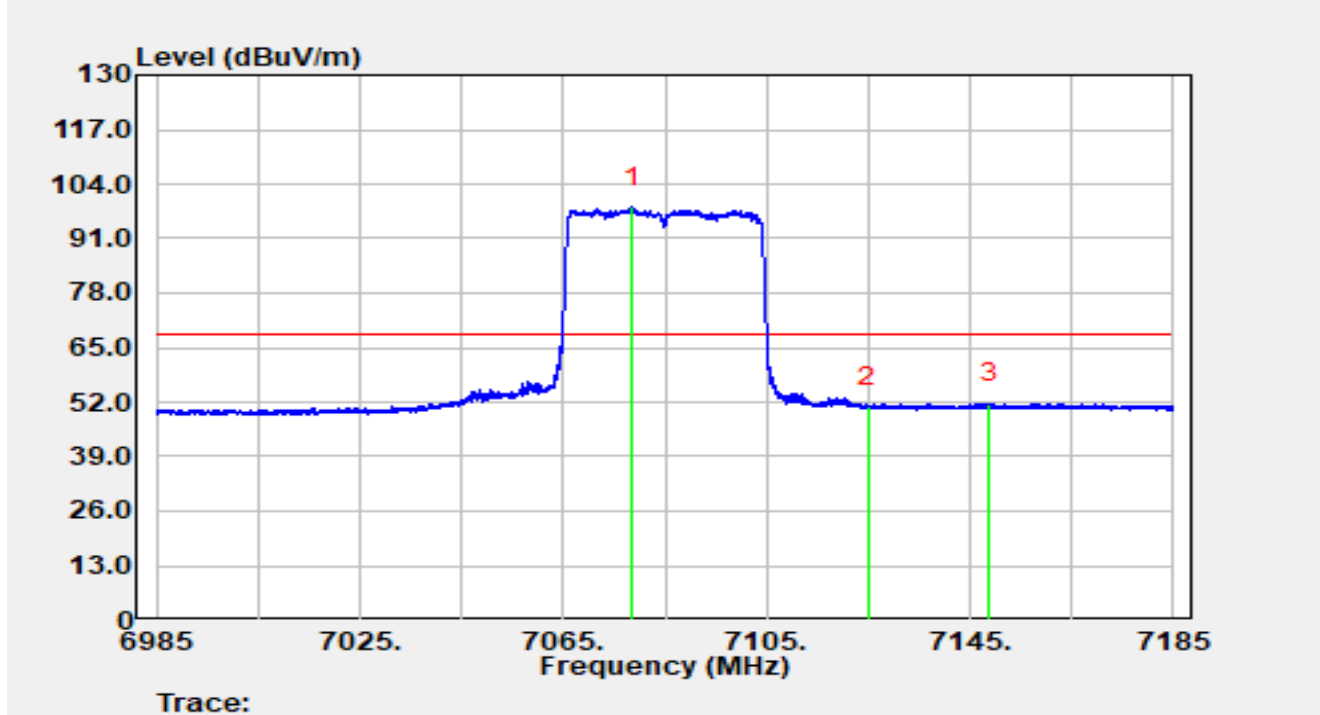


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7078.50	72.44	26.00	98.44	N/A	N/A	Average
2		7125.00	24.65	26.17	50.82	-17.38	68.20	Average
3	*	7148.66	25.08	26.51	51.60	-16.60	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

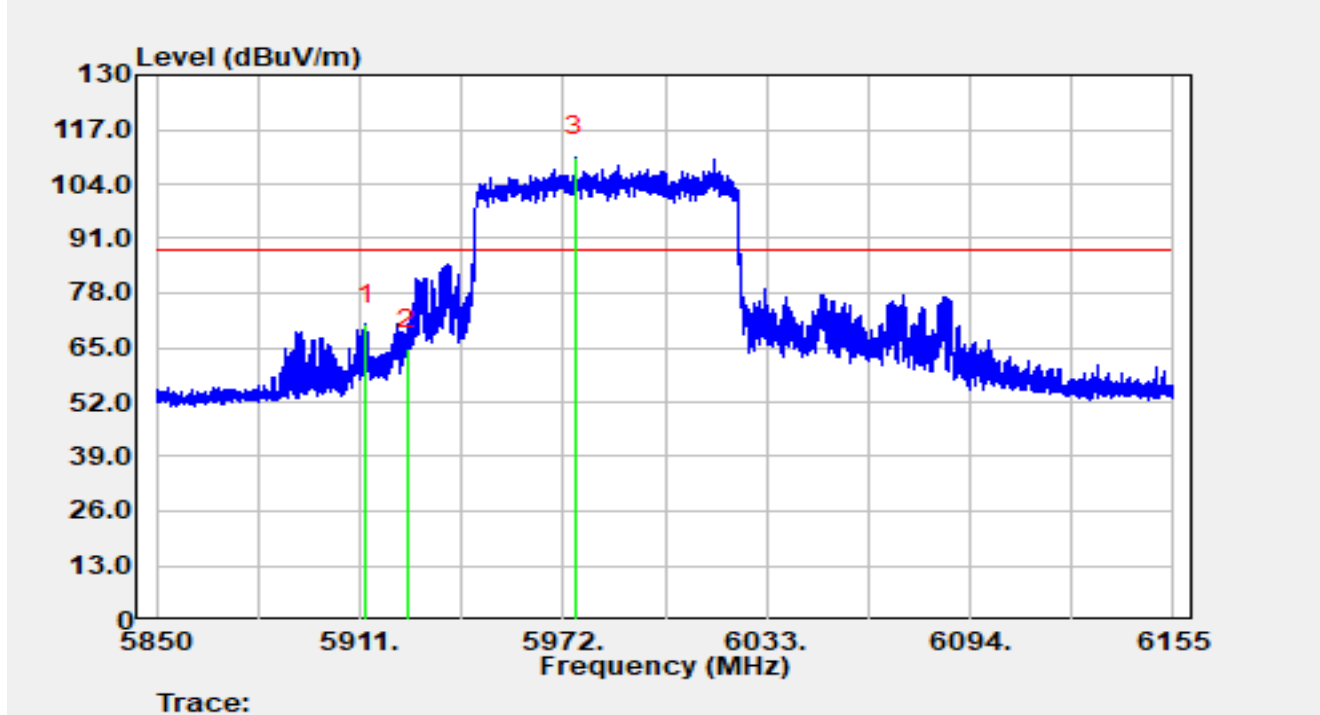


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5912.62	49.87	20.68	70.55	-17.65	88.20	Peak
2		5925.00	43.99	20.59	64.57	-23.63	88.20	Peak
3		5975.48	89.46	20.93	110.39	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

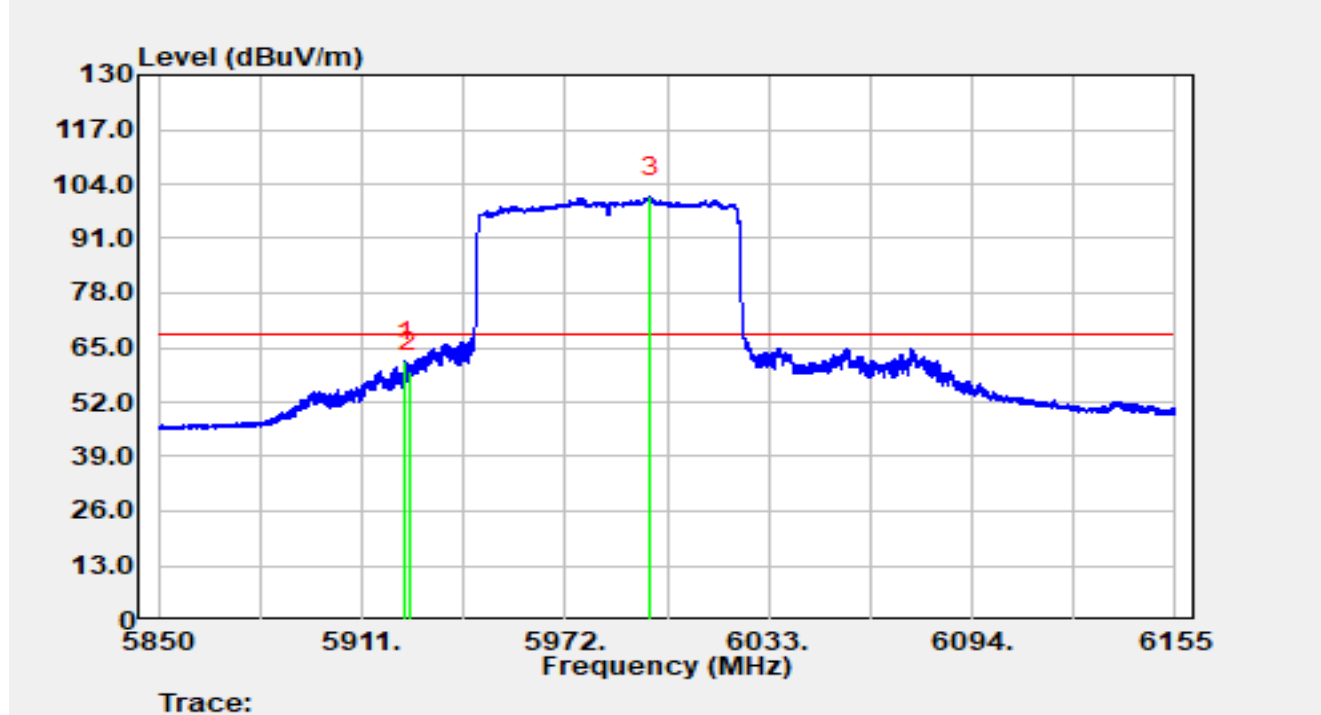


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.99	40.98	20.59	61.58	-6.62	68.20	Average
2		5925.00	38.71	20.59	59.30	-8.90	68.20	Average
3		5997.44	80.09	20.96	101.05	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

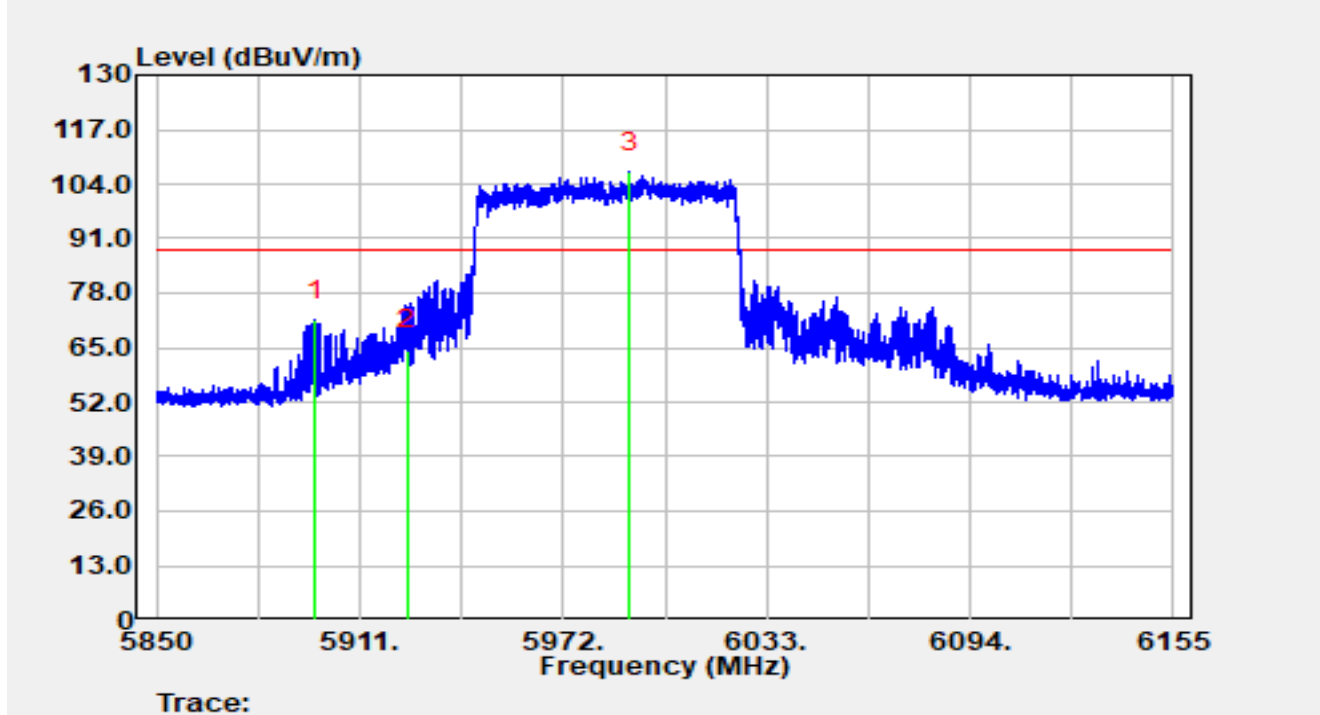


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5897.70	50.68	20.74	71.42	-16.78	88.20	Peak
2		5925.00	43.88	20.59	64.46	-23.74	88.20	Peak
3		5991.73	85.90	20.98	106.87	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

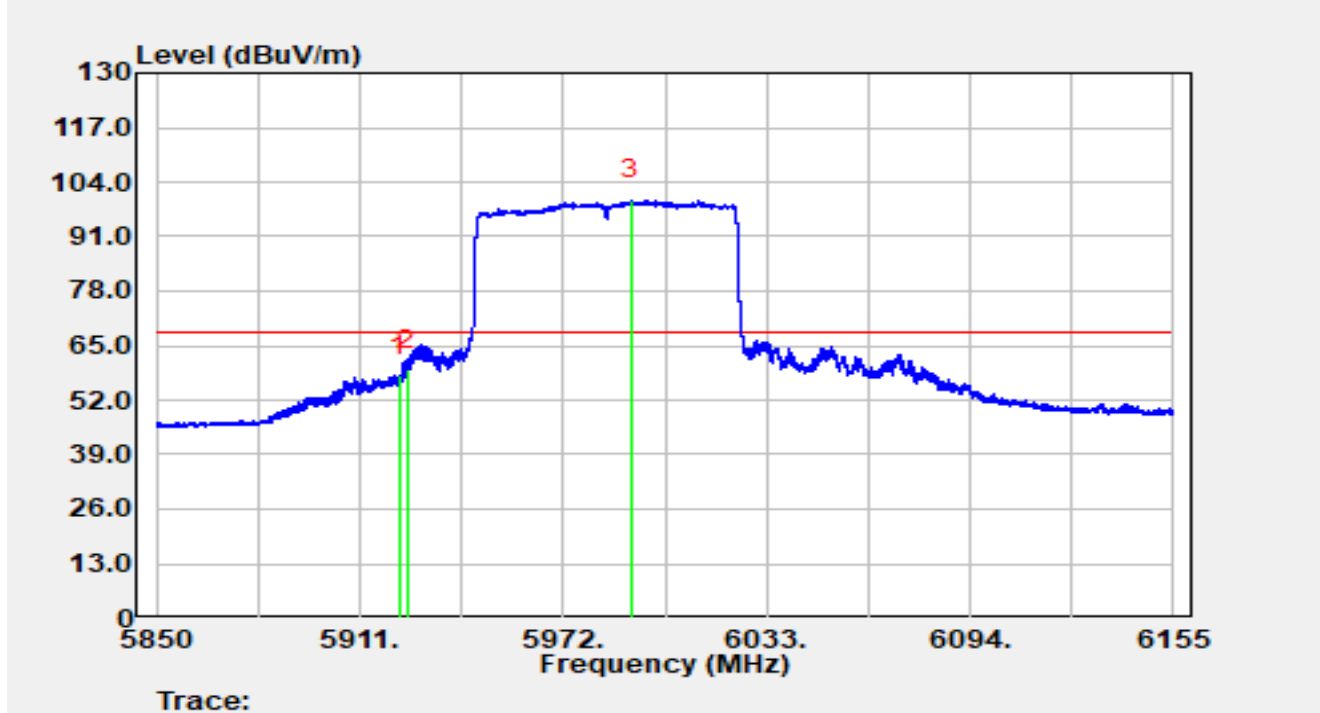


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5922.99	37.19	20.60	57.79	-10.41	68.20	Average
2	*	5925.00	38.69	20.59	59.27	-8.93	68.20	Average
3		5992.31	78.82	20.98	99.80	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-07-31
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 7025 MHz		

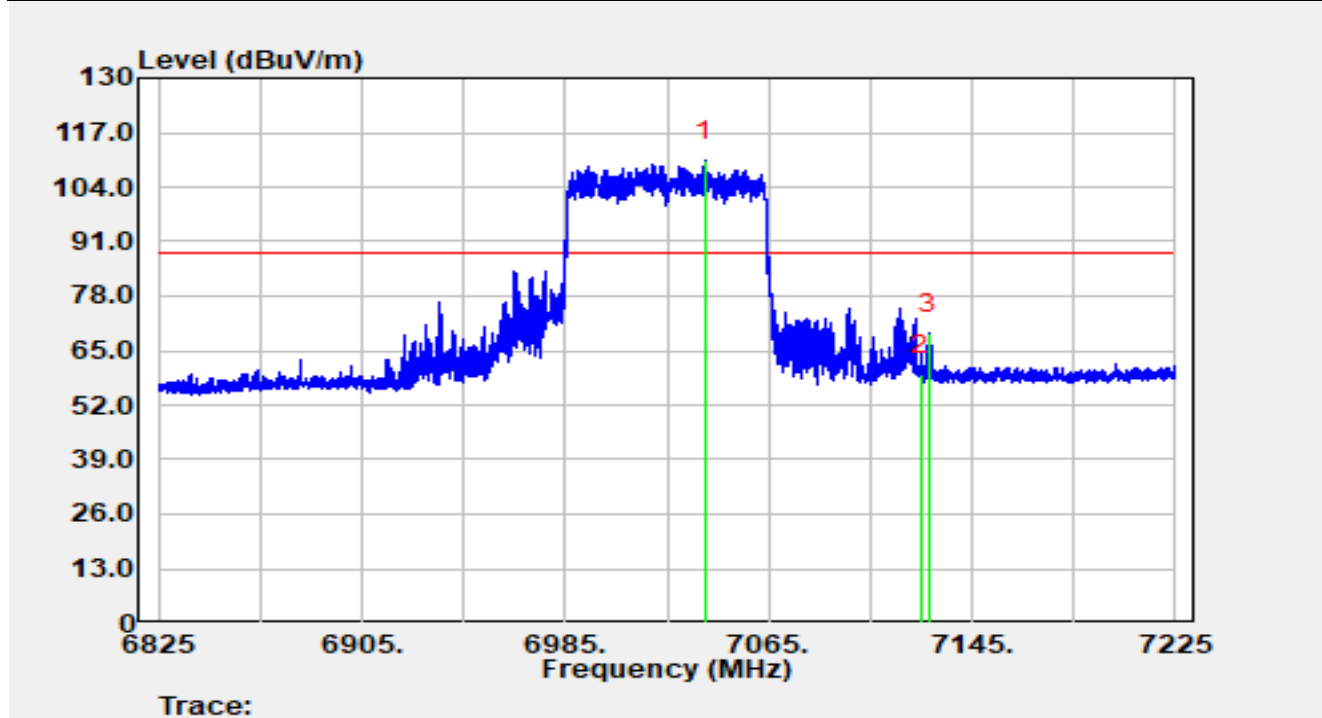


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7039.76	84.25	26.11	110.36	N/A	N/A	Peak
2		7125.00	33.16	26.17	59.33	-28.87	88.20	Peak
3	*	7127.96	42.83	26.24	69.07	-19.13	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-01
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 7025 MHz		

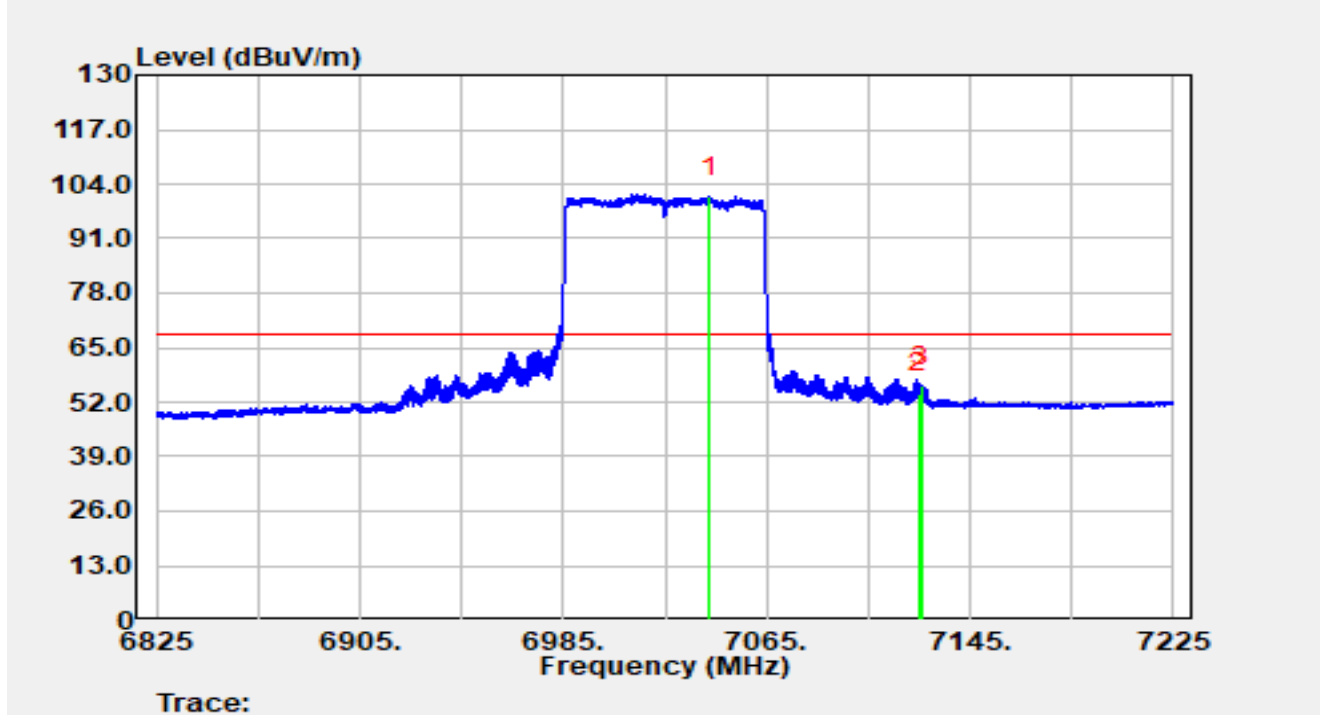


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7042.76	74.73	26.19	100.92	N/A	N/A	Average
2		7125.00	27.85	26.17	54.02	-14.18	68.20	Average
3	*	7126.04	29.65	26.19	55.84	-12.36	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-01
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 7025 MHz		

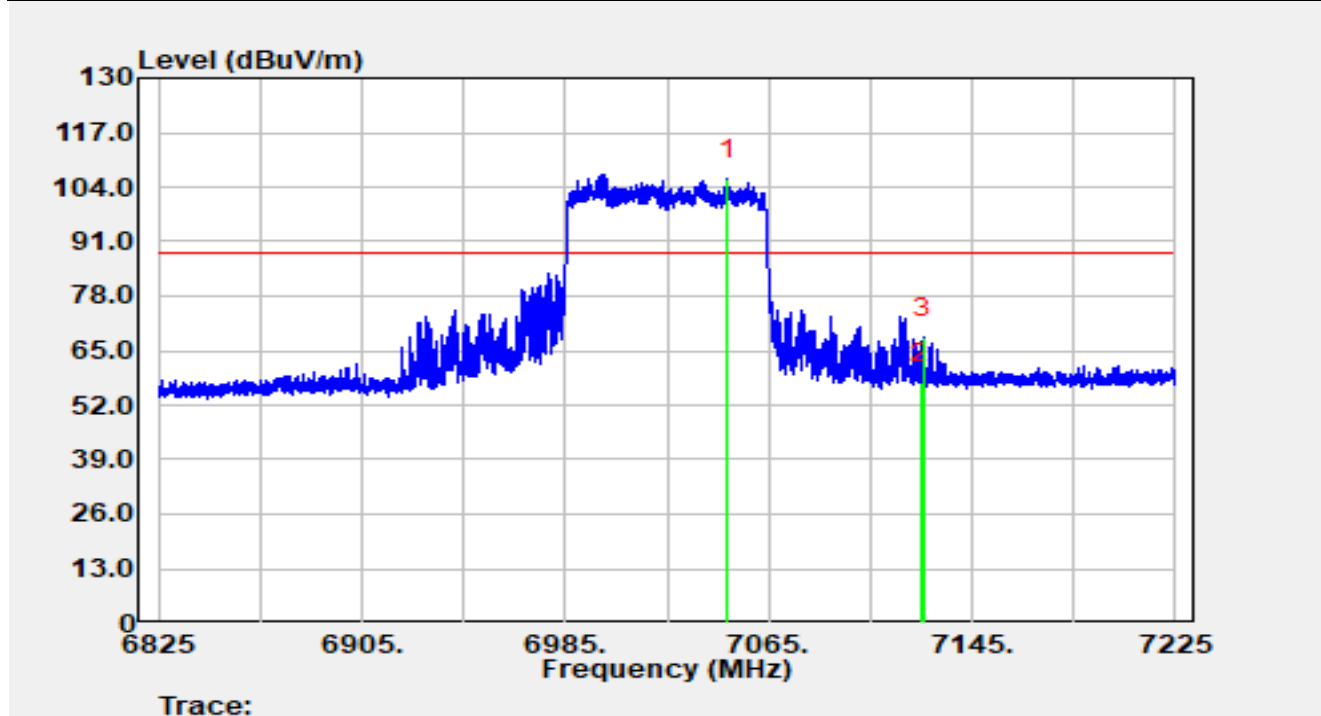


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7048.96	79.55	26.25	105.80	N/A	N/A	Peak
2		7125.00	31.13	26.17	57.30	-30.90	88.20	Peak
3	*	7125.76	41.91	26.18	68.09	-20.11	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-01
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 7025 MHz		

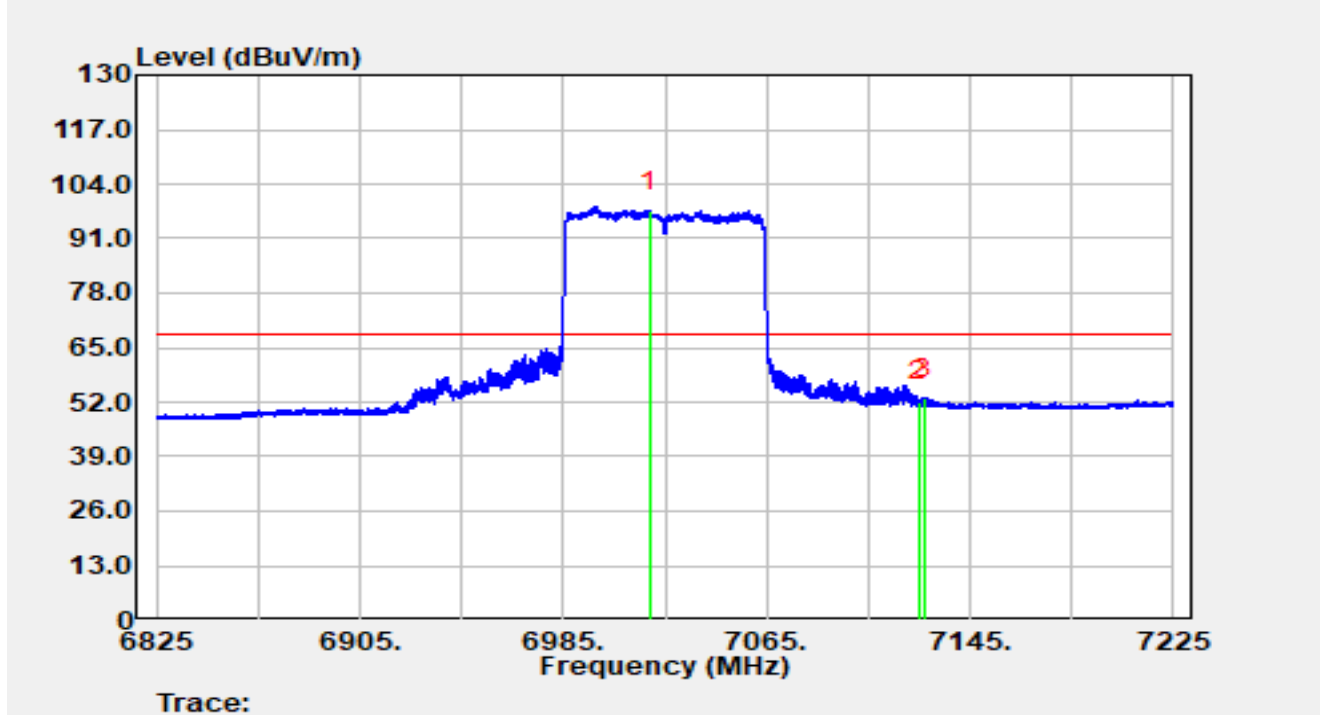


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7018.84	72.03	25.59	97.62	N/A	N/A	Average
2		7125.00	25.92	26.17	52.09	-16.11	68.20	Average
3	*	7127.08	26.58	26.22	52.79	-15.41	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-01
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

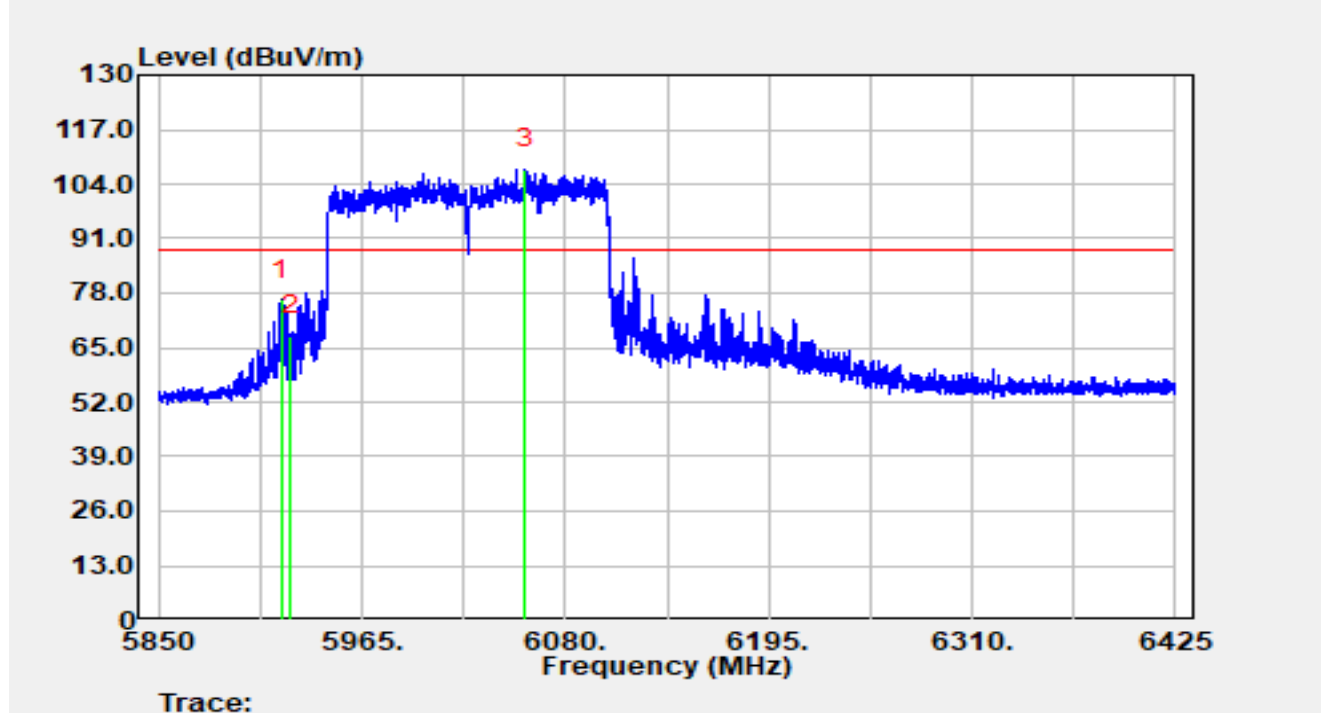


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.17	55.73	20.63	76.36	-11.84	88.20	Peak
2		5925.00	47.30	20.59	67.89	-20.31	88.20	Peak
3		6057.46	86.19	21.37	107.55	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-01
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

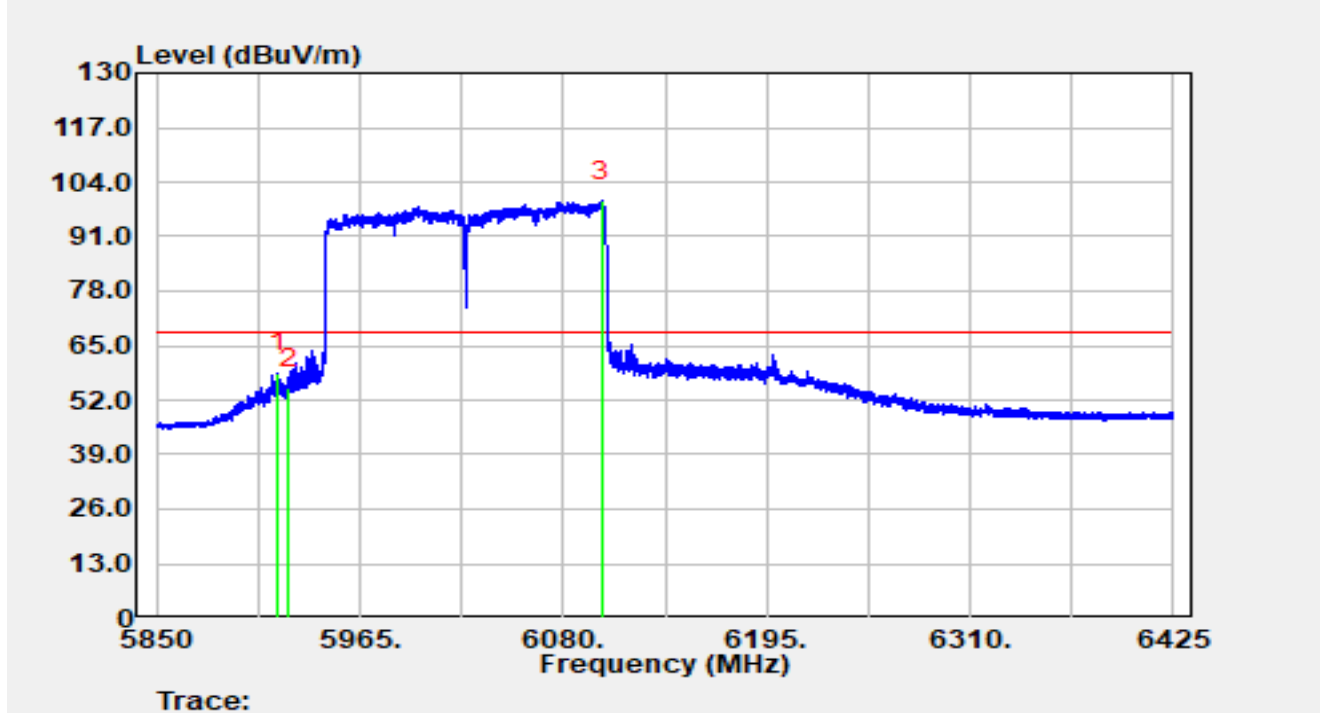


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.77	37.81	20.63	58.45	-9.75	68.20	Average
2		5925.00	34.28	20.59	54.87	-13.33	68.20	Average
3		6101.56	78.11	21.34	99.45	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-01
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

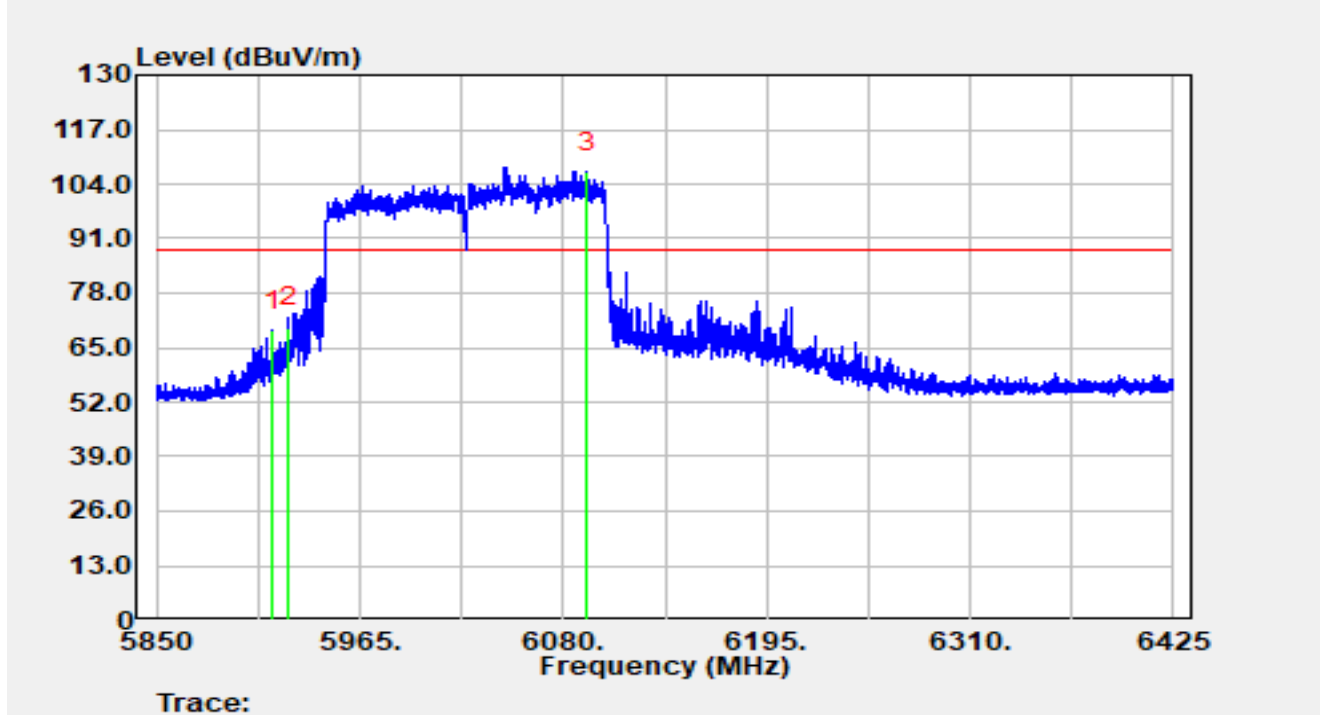


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5915.44	48.32	20.66	68.98	-19.22	88.20	Peak
2	*	5925.00	49.23	20.59	69.82	-18.38	88.20	Peak
3		6093.63	85.34	21.40	106.74	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-01
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

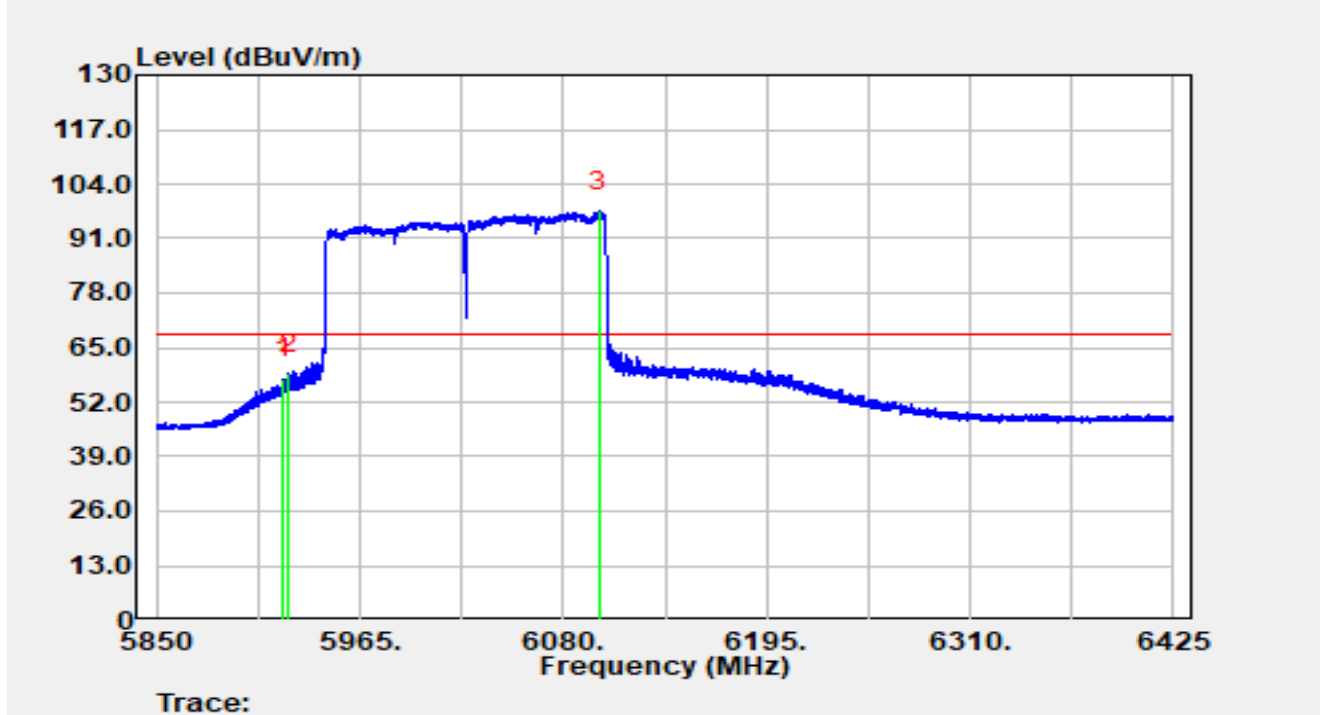


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5921.99	36.89	20.61	57.50	-10.70	68.20	Average
2	*	5925.00	38.24	20.59	58.83	-9.37	68.20	Average
3		6099.90	76.16	21.35	97.51	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-01
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 6985 MHz		

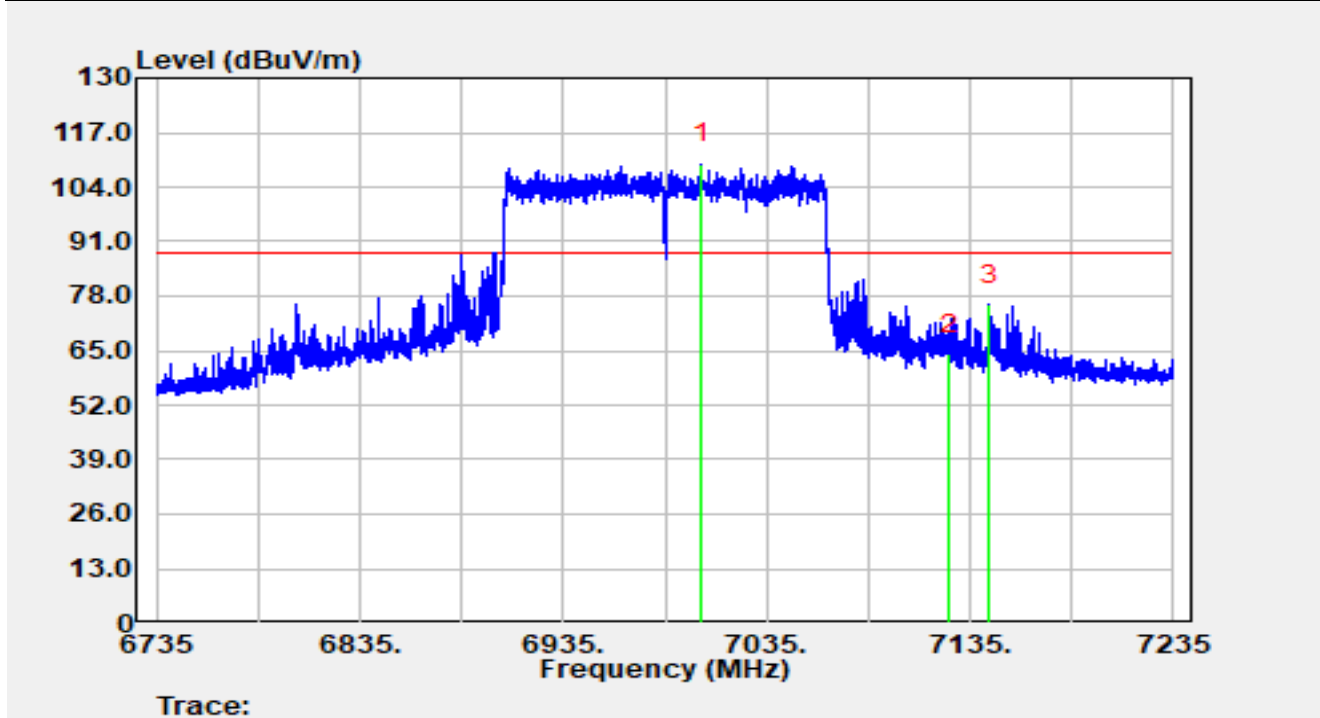


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7003.10	84.12	25.35	109.48	N/A	N/A	Peak
2		7125.00	37.93	26.17	64.10	-24.10	88.20	Peak
3	*	7144.30	49.46	26.47	75.93	-12.27	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-01
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 6985 MHz		

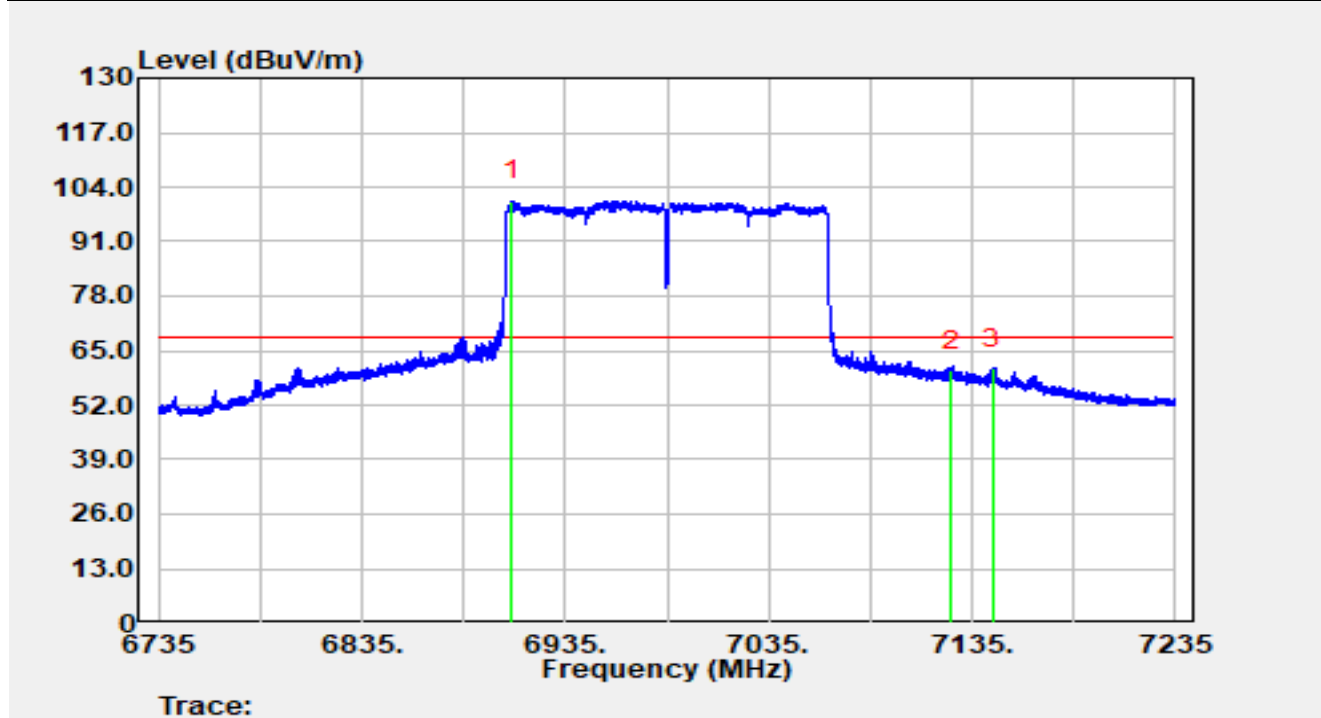


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6908.95	76.15	24.60	100.75	N/A	N/A	Average
2		7125.00	33.94	26.17	60.11	-8.09	68.20	Average
3	*	7144.90	34.24	26.48	60.71	-7.49	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-01
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 6985 MHz		

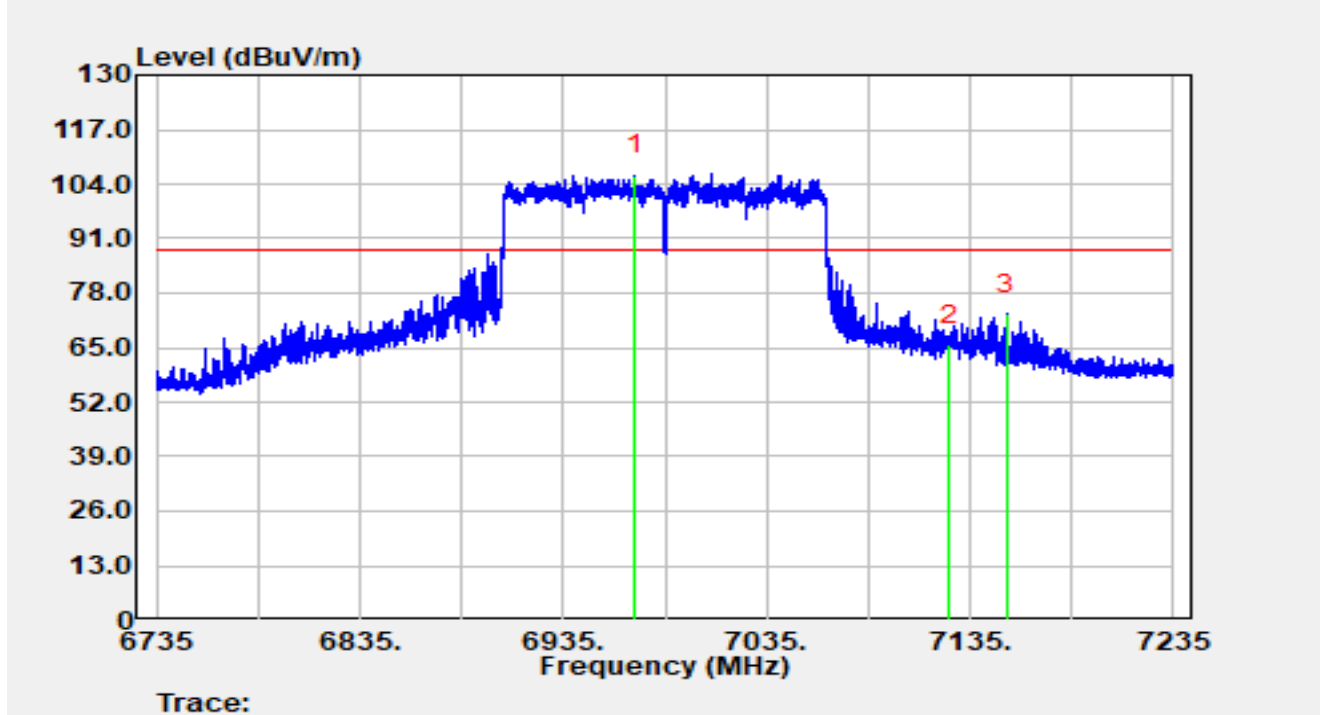


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6970.00	80.81	25.24	106.05	N/A	N/A	Peak
2		7125.00	39.53	26.17	65.69	-22.51	88.20	Peak
3	*	7152.95	46.41	26.50	72.91	-15.29	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-01
Temperature	24.2 °C	Humidity	46.8%
Limit	FCC_6G RE (3 m)	Test Engineer	Dick Shen
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 6985 MHz		

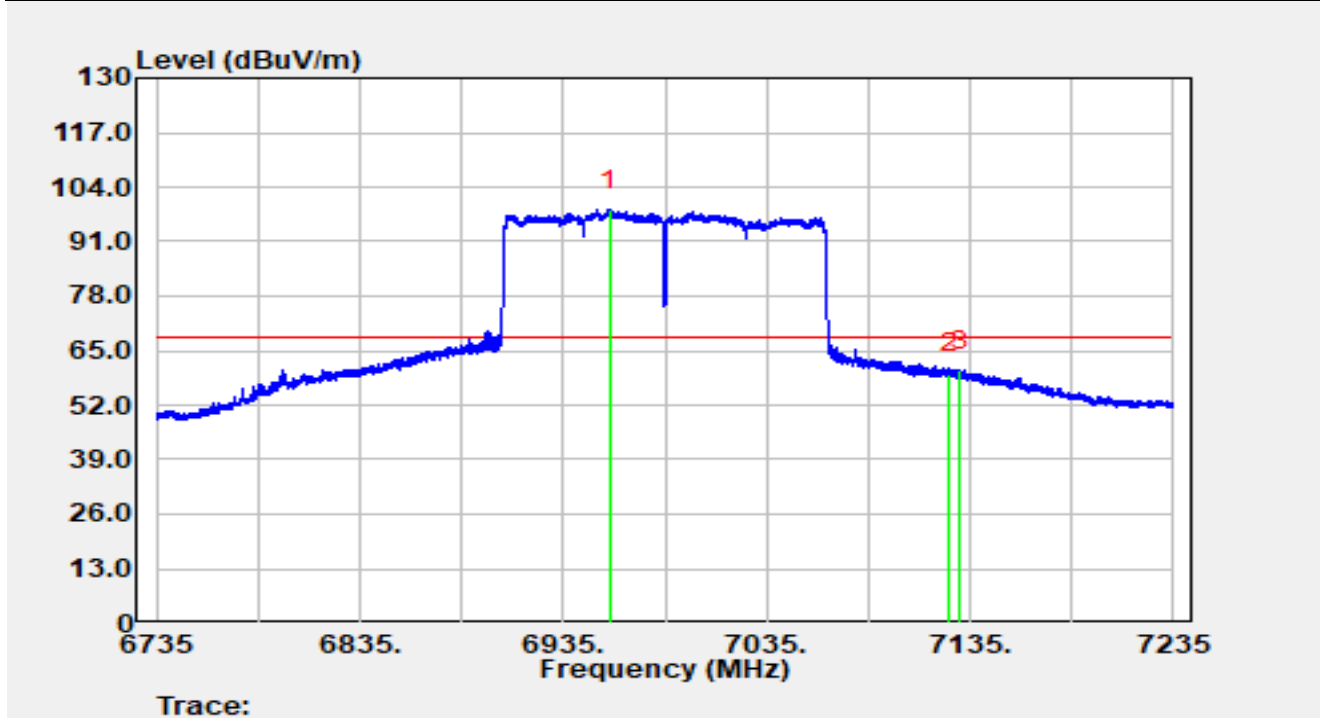


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6957.60	73.45	25.15	98.60	N/A	N/A	Average
2		7125.00	33.36	26.17	59.53	-8.67	68.20	Average
3	*	7130.20	34.03	26.28	60.32	-7.88	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.10 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-08-25
Temperature	28.1 °C	Humidity	58.3%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

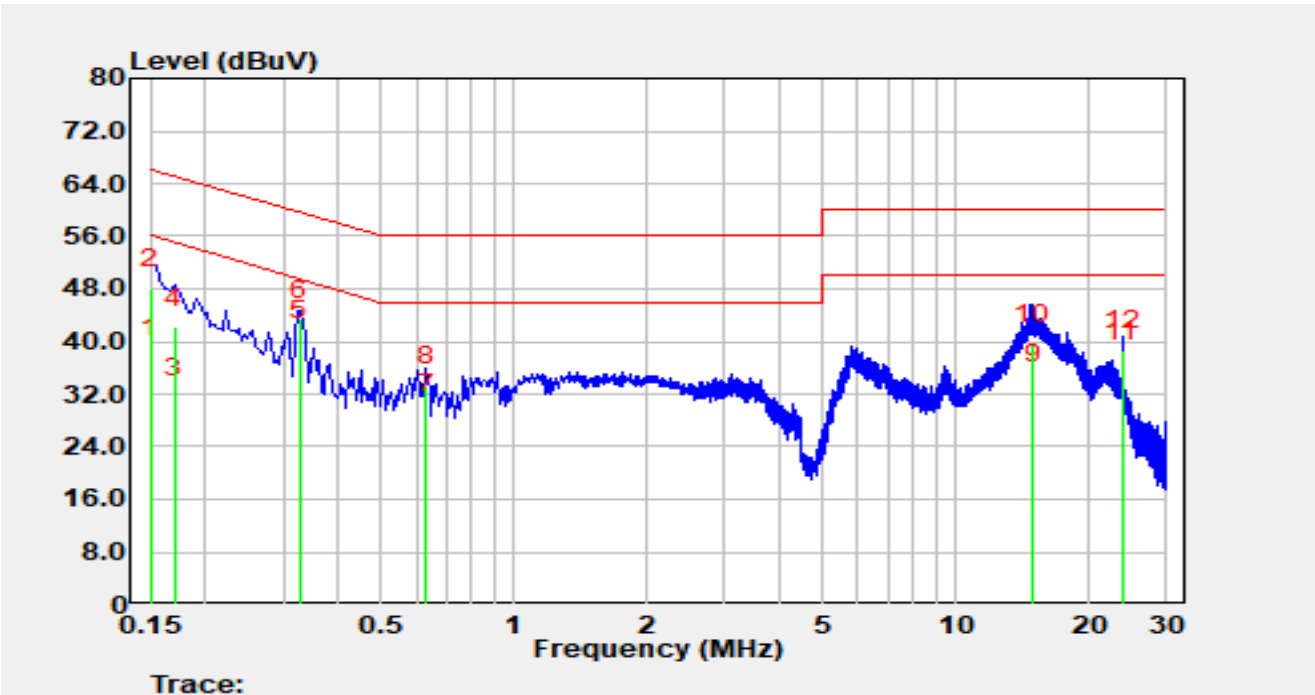


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	28.00	9.67	37.67	-18.33	56.00	Average
2		0.15	38.40	9.67	48.07	-17.93	66.00	QP
3		0.17	21.90	9.68	31.58	-23.38	54.96	Average
4		0.17	32.50	9.68	42.18	-22.78	64.96	QP
5	*	0.33	30.50	9.73	40.23	-9.32	49.55	Average
6		0.33	33.70	9.73	43.43	-16.12	59.55	QP
7		0.63	19.30	9.87	29.17	-16.83	46.00	Average
8		0.63	23.40	9.87	33.27	-22.73	56.00	QP
9		14.92	23.30	10.41	33.71	-16.29	50.00	Average
10		14.92	29.20	10.41	39.61	-20.39	60.00	QP
11		23.90	26.20	10.67	36.87	-13.13	50.00	Average
12		23.90	28.10	10.67	38.77	-21.23	60.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WZ-SR2	Test Date	2025-08-25
Temperature	28.1 °C	Humidity	58.3%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

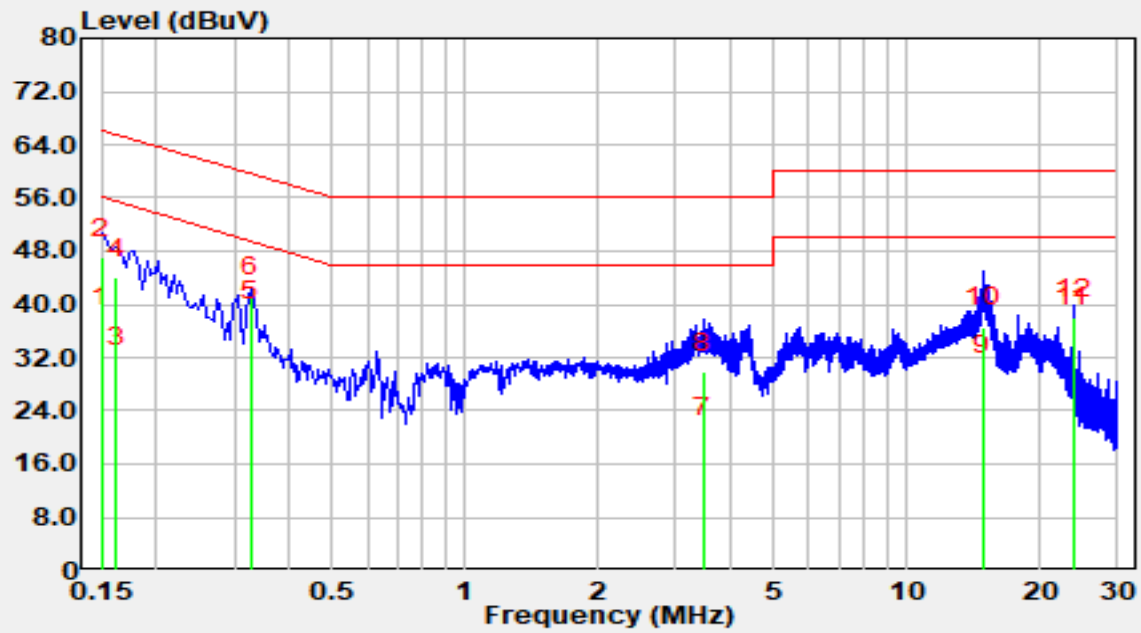

Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	27.00	9.79	36.79	-19.21	56.00	Average
2		0.15	37.30	9.79	47.09	-18.91	66.00	QP
3		0.16	20.80	9.79	30.59	-24.77	55.36	Average
4		0.16	34.20	9.79	43.99	-21.37	65.36	QP
5	*	0.33	27.90	9.83	37.73	-11.82	49.55	Average
6		0.33	31.30	9.83	41.13	-18.42	59.55	QP
7		3.45	9.90	10.17	20.07	-25.93	46.00	Average
8		3.45	19.60	10.17	29.77	-26.23	56.00	QP
9		14.87	18.80	10.54	29.34	-20.66	50.00	Average
10		14.87	26.00	10.54	36.54	-23.46	60.00	QP
11		23.90	25.90	10.80	36.70	-13.30	50.00	Average
12		23.90	27.10	10.80	37.90	-22.10	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1034072-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1034072-UE" file.

_____ The End _____