


Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5210 MHz	

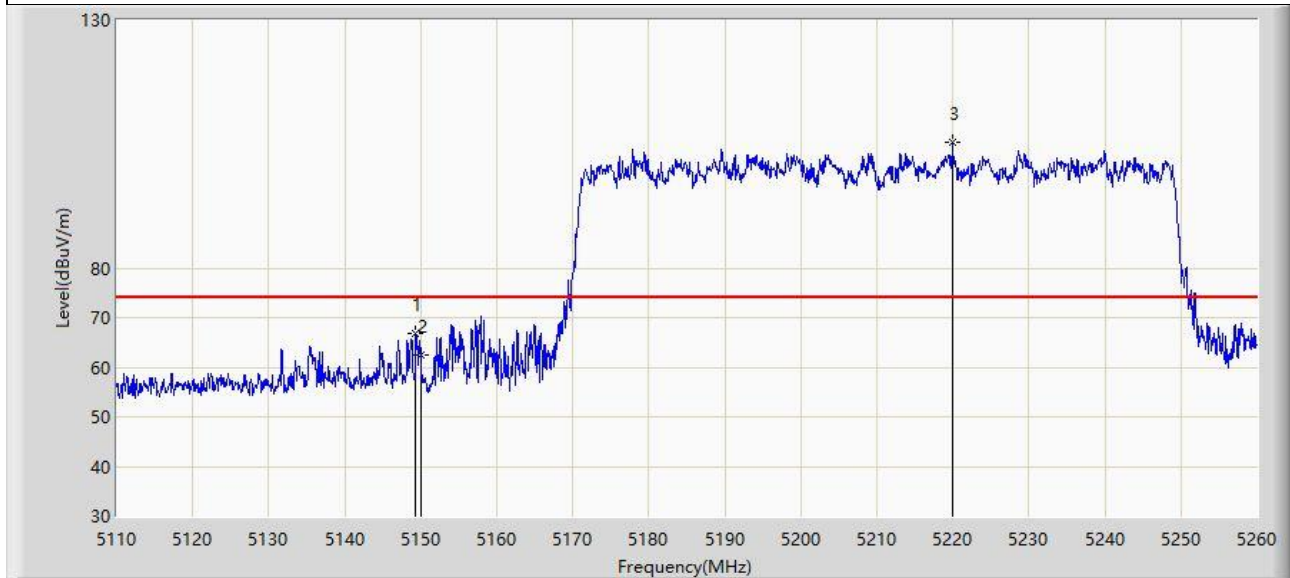


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.375	66.794	63.017	-7.206	74.000	3.778	PK
2		5150.000	62.447	58.667	-11.553	74.000	3.780	PK
3		5219.950	105.299	101.913	N/A	N/A	3.386	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5210 MHz	

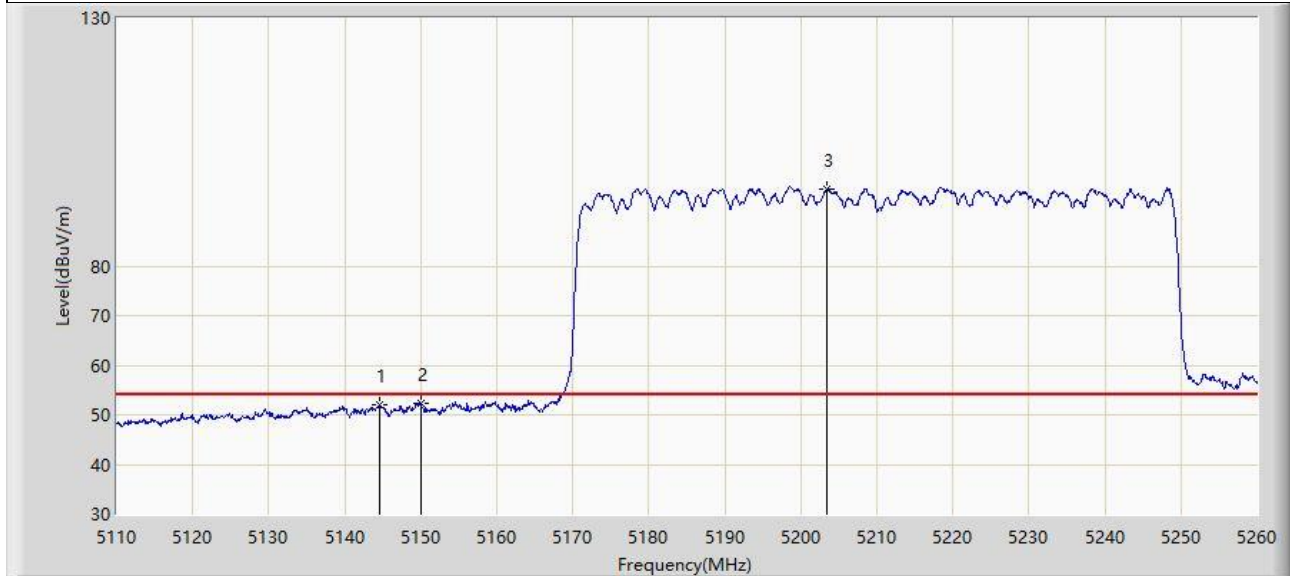


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5144.500	52.008	48.281	-1.992	54.000	3.727	AV
2	*	5150.000	52.202	48.422	-1.798	54.000	3.780	AV
3		5203.375	95.531	92.220	N/A	N/A	3.311	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5210 MHz	

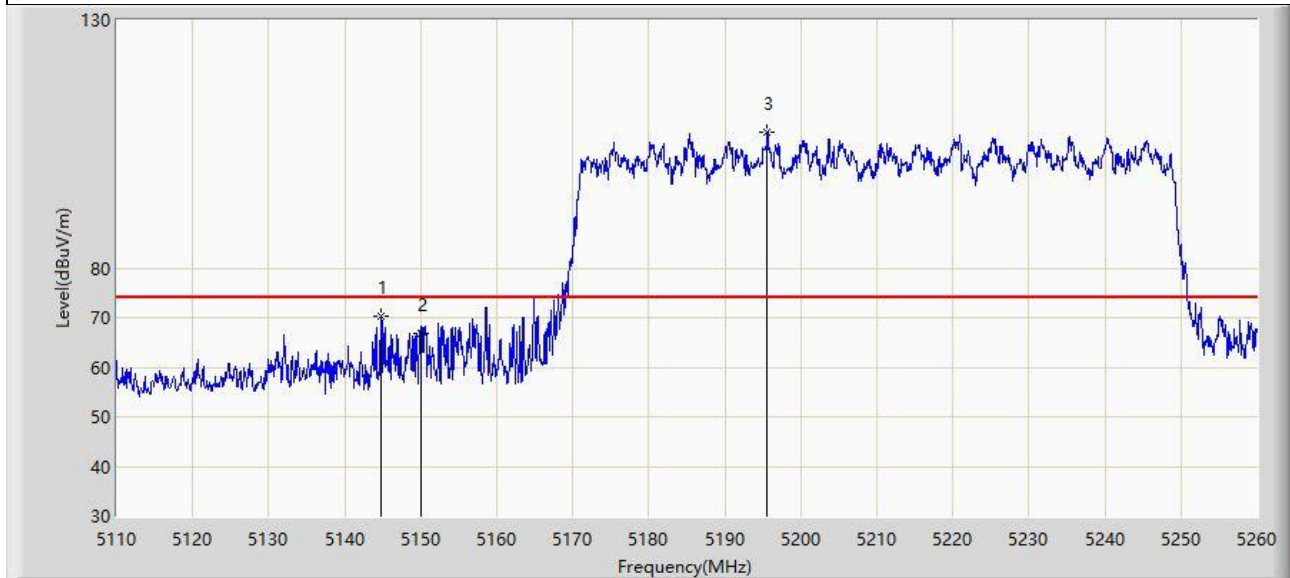


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.800	70.341	66.610	-3.659	74.000	3.731	PK
2		5150.000	66.739	62.959	-7.261	74.000	3.780	PK
3		5195.575	107.282	103.919	N/A	N/A	3.363	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5210 MHz	

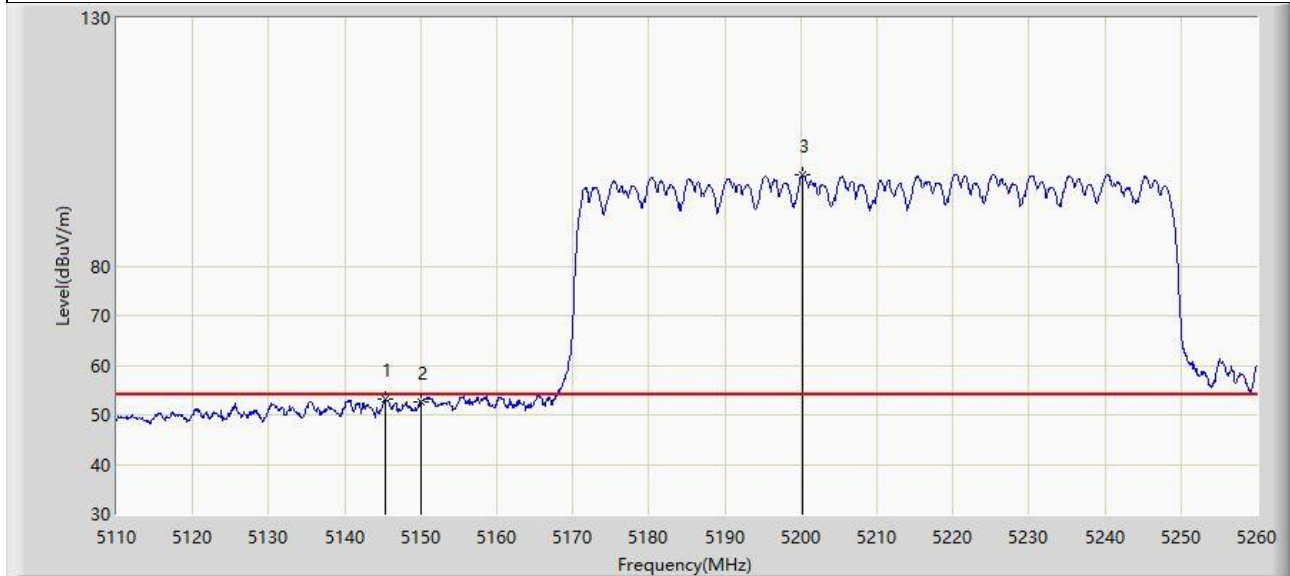


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.400	53.207	49.468	-0.793	54.000	3.739	AV
2		5150.000	52.481	48.701	-1.519	54.000	3.780	AV
3		5200.300	98.304	95.007	N/A	N/A	3.296	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5290 MHz	

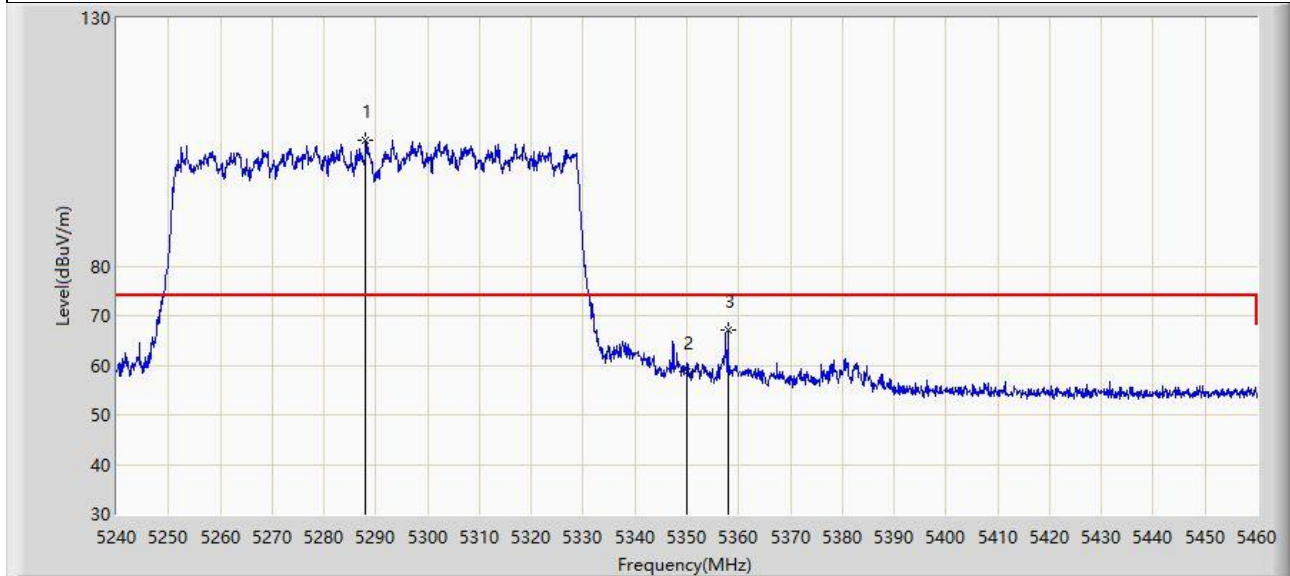


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5288.070	105.393	102.266	N/A	N/A	3.127	PK
2		5350.000	58.745	55.422	-15.255	74.000	3.323	PK
3	*	5357.920	67.004	63.759	-6.996	74.000	3.245	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5290 MHz	

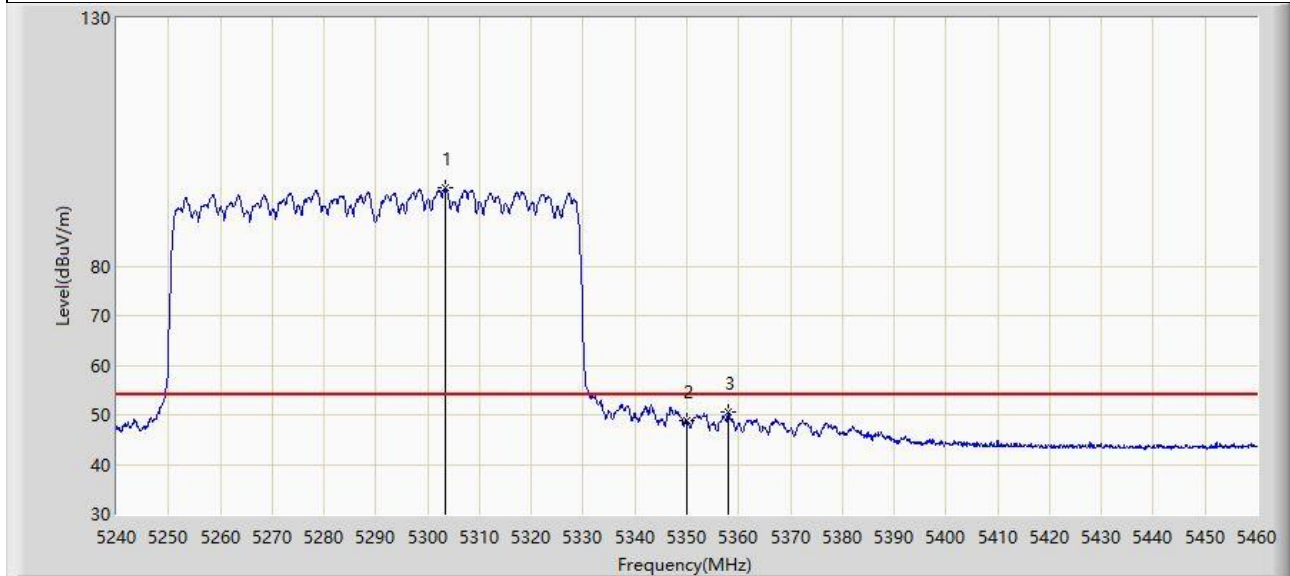


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5303.360	95.716	92.328	N/A	N/A	3.388	AV
2		5350.000	48.925	45.602	-5.075	54.000	3.323	AV
3	*	5358.030	50.449	47.204	-3.551	54.000	3.245	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5290 MHz	

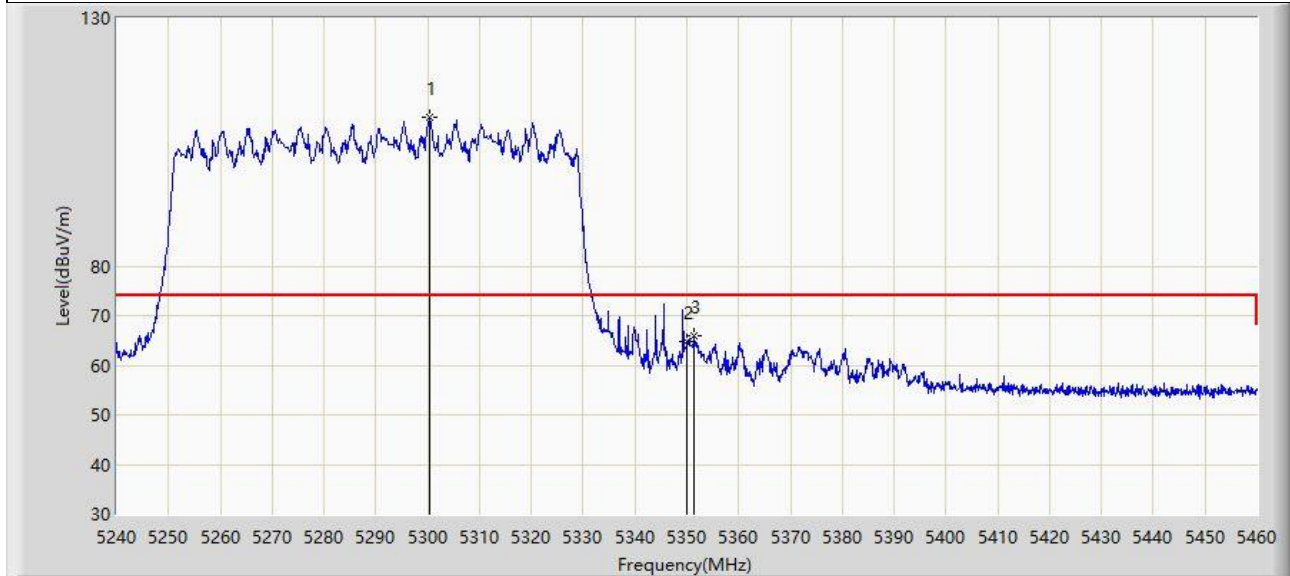


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5300.390	109.985	106.652	N/A	N/A	3.333	PK
2		5350.000	64.842	61.519	-9.158	74.000	3.323	PK
3	*	5351.430	65.876	62.590	-8.124	74.000	3.287	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5290 MHz	

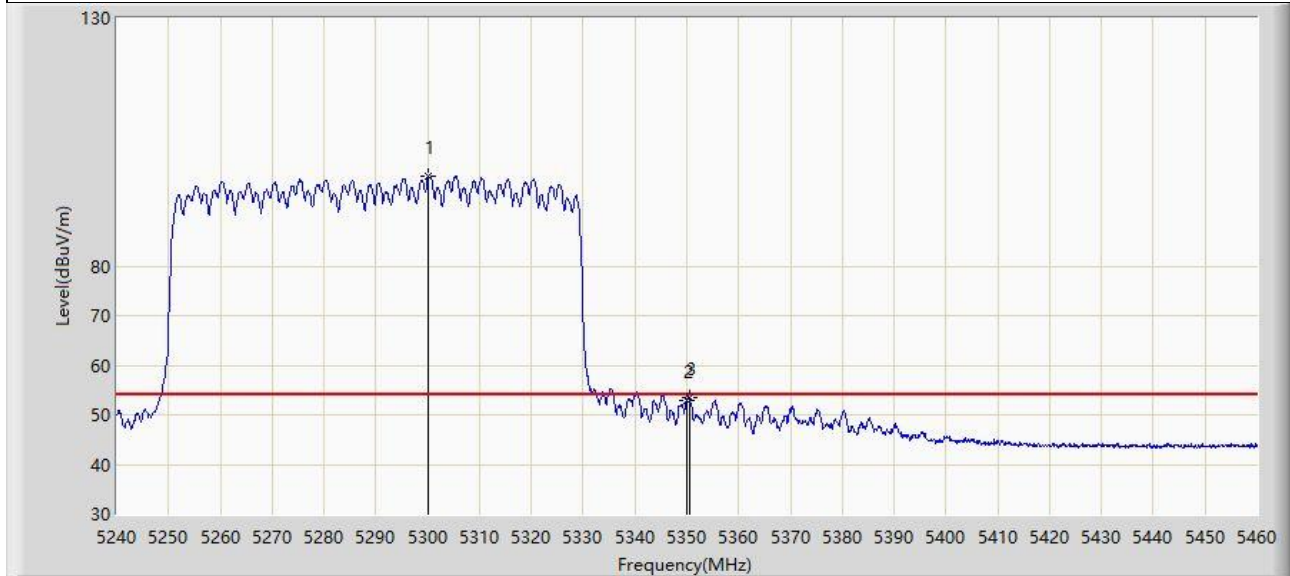


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5300.170	98.187	94.858	N/A	N/A	3.329	AV
2		5350.000	52.943	49.620	-1.057	54.000	3.323	AV
3	*	5350.440	53.436	50.124	-0.564	54.000	3.312	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5530 MHz	

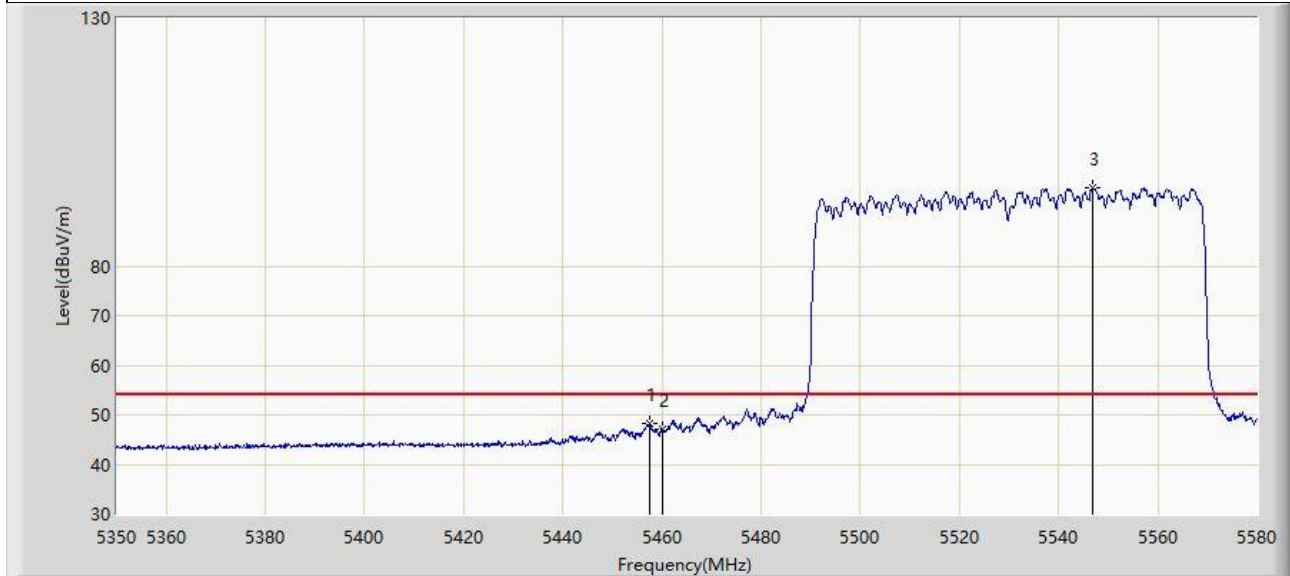


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5457.640	48.142	44.576	-5.858	54.000	3.566	AV
2		5460.000	47.122	43.512	-6.878	54.000	3.610	AV
3		5546.880	95.713	91.810	N/A	N/A	3.903	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5530 MHz	

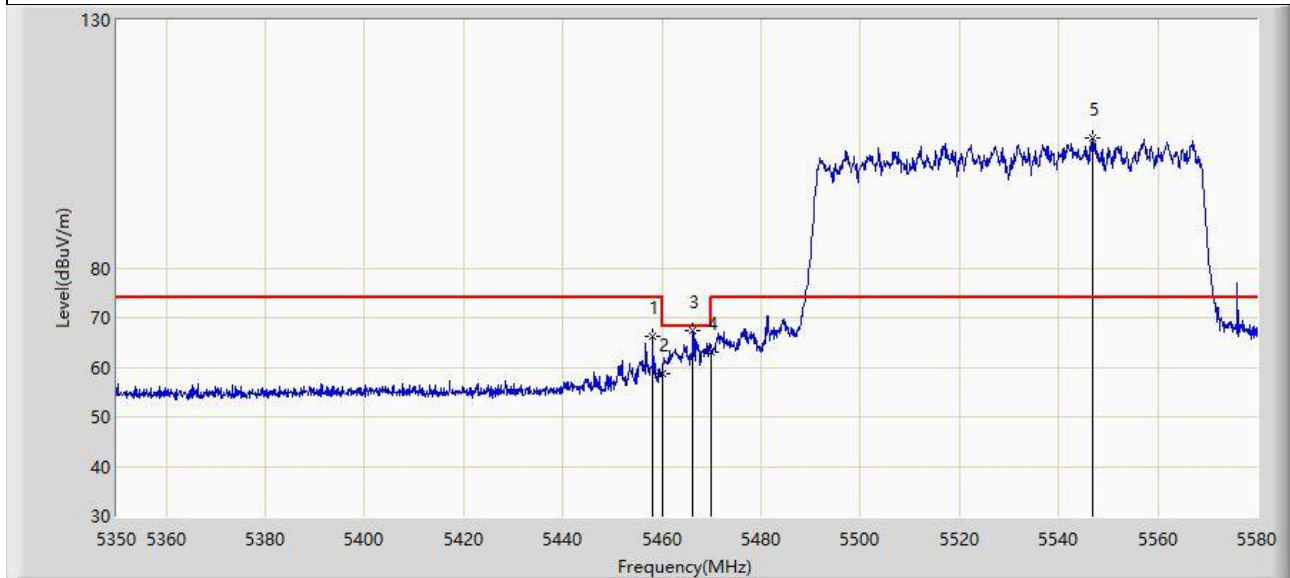


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.215	66.099	62.522	-7.901	74.000	3.577	PK
2		5460.000	58.670	55.060	-15.330	74.000	3.610	PK
3	*	5466.150	67.486	63.760	-0.714	68.200	3.725	PK
4		5470.000	63.094	59.296	-5.106	68.200	3.797	PK
5		5546.765	106.340	102.438	N/A	N/A	3.901	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5530 MHz	

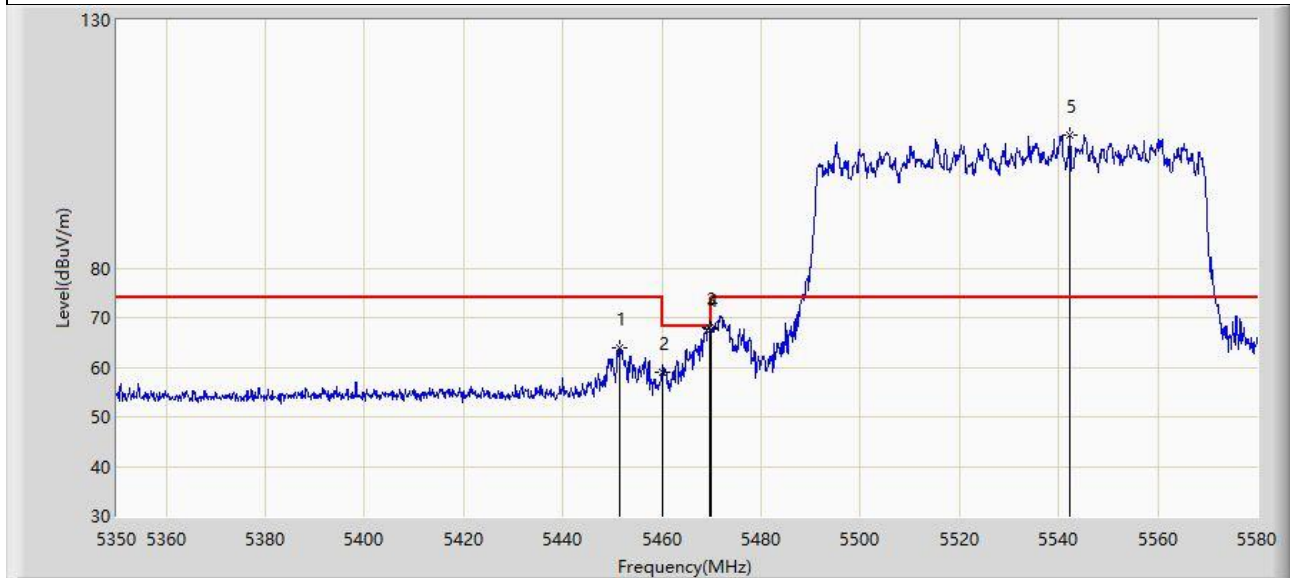


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5451.430	63.846	60.346	-10.154	74.000	3.500	PK
2		5460.000	58.885	55.275	-15.115	74.000	3.610	PK
3	*	5469.600	68.019	64.229	-0.181	68.200	3.790	PK
4		5470.000	67.544	63.746	-0.656	68.200	3.797	PK
5		5542.165	106.722	102.909	N/A	N/A	3.813	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5530 MHz	

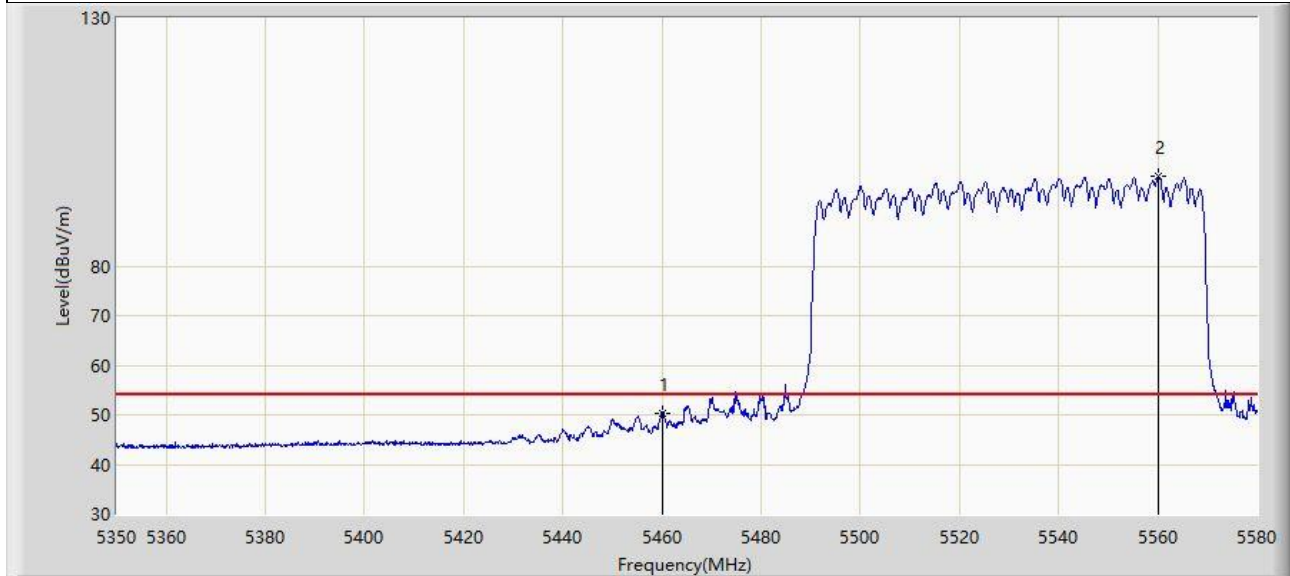


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	50.340	46.730	-3.660	54.000	3.610	AV
2		5560.105	98.131	94.110	N/A	N/A	4.022	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5610 MHz	

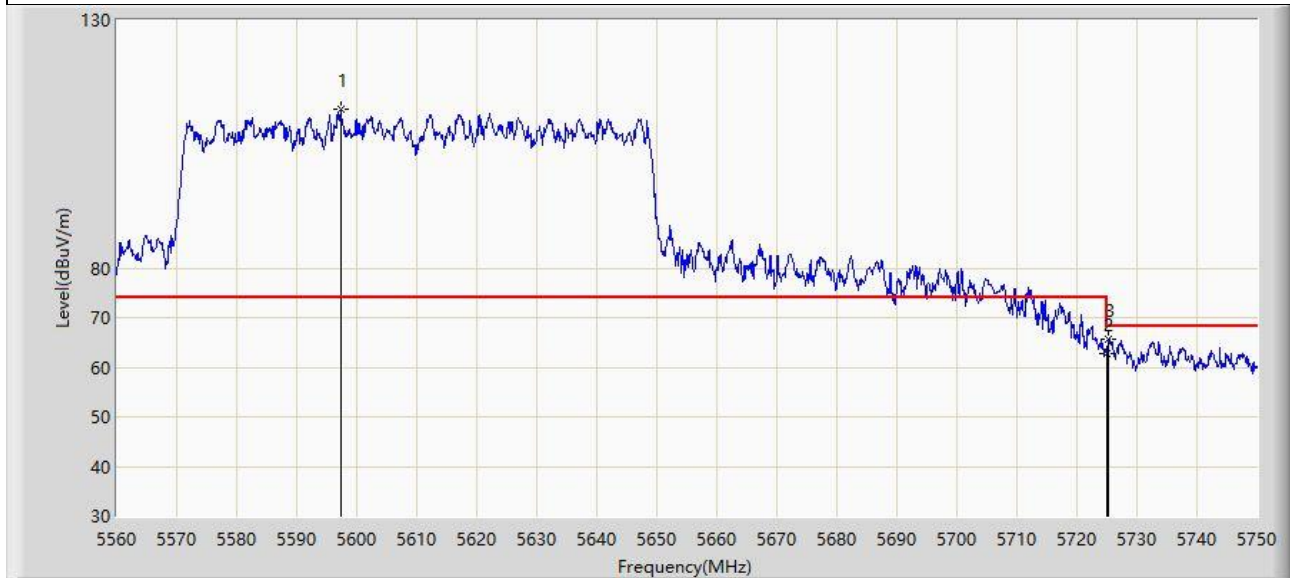


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5597.335	112.025	108.096	N/A	N/A	3.928	PK
2		5725.000	62.895	57.761	-5.305	68.200	5.134	PK
3	*	5725.300	65.747	60.610	-2.453	68.200	5.137	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5610 MHz	

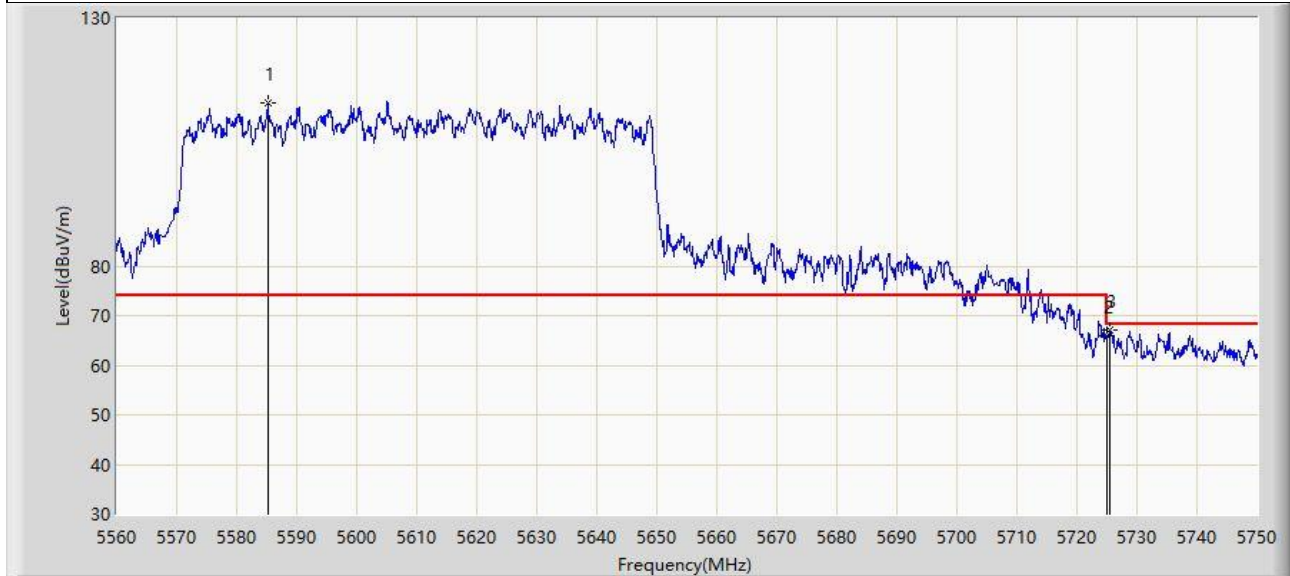


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5585.175	112.921	109.015	N/A	N/A	3.906	PK
2		5725.000	65.839	60.705	-2.361	68.200	5.134	PK
3	*	5725.490	67.243	62.104	-0.957	68.200	5.138	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5775 MHz	

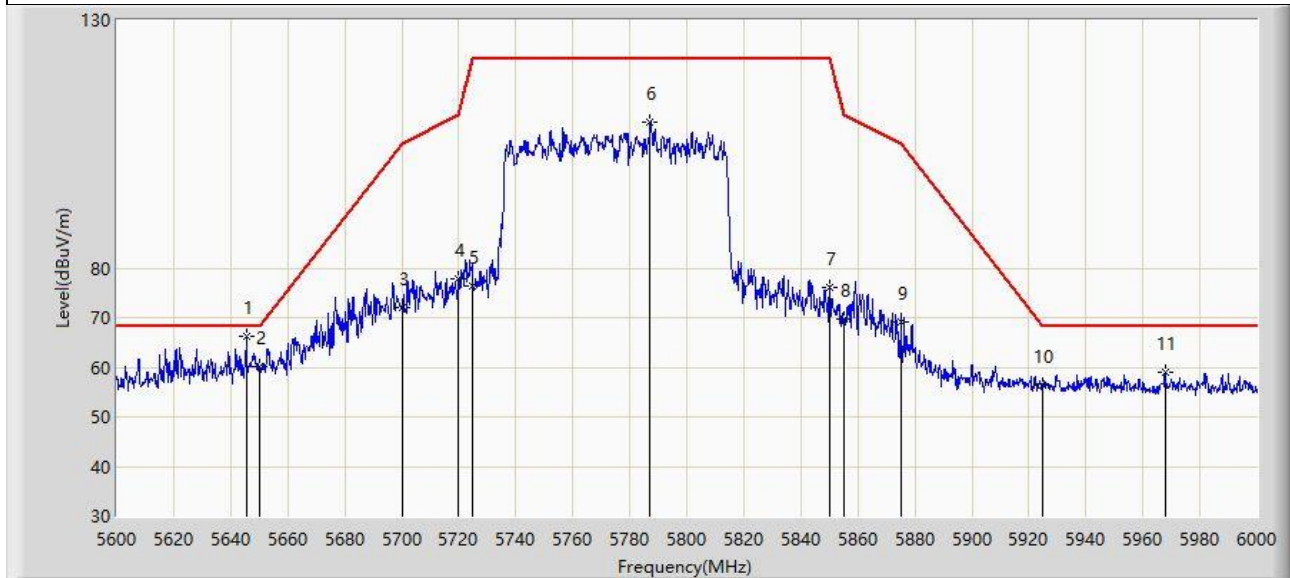


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5645.400	66.092	61.549	-2.108	68.200	4.543	PK
2		5650.000	60.273	55.770	-7.927	68.200	4.502	PK
3		5700.000	72.017	67.154	-33.183	105.200	4.863	PK
4		5720.000	77.705	72.612	-33.095	110.800	5.093	PK
5		5725.000	76.301	71.167	-45.899	122.200	5.134	PK
6		5787.200	109.406	104.060	N/A	N/A	5.346	PK
7		5850.000	76.225	70.813	-45.975	122.200	5.412	PK
8		5855.000	69.806	64.346	-40.994	110.800	5.460	PK
9		5875.000	69.045	63.536	-36.155	105.200	5.509	PK
10		5925.000	56.321	50.812	-11.879	68.200	5.509	PK
11		5967.800	58.892	53.302	-9.308	68.200	5.590	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5775 MHz	

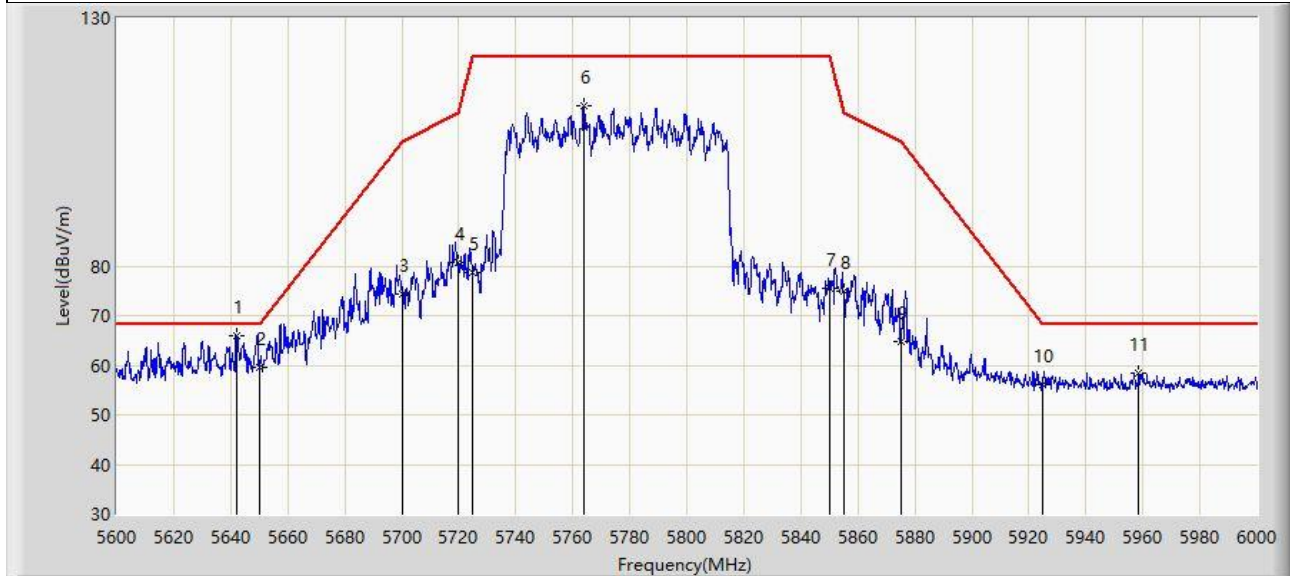


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5642.200	65.929	61.358	-2.271	68.200	4.571	PK
2		5650.000	59.515	55.012	-8.685	68.200	4.502	PK
3		5700.000	74.401	69.538	-30.799	105.200	4.863	PK
4		5720.000	80.653	75.560	-30.147	110.800	5.093	PK
5		5725.000	78.702	73.568	-43.498	122.200	5.134	PK
6		5763.800	112.182	107.095	N/A	N/A	5.087	PK
7		5850.000	75.434	70.022	-46.766	122.200	5.412	PK
8		5855.000	74.899	69.439	-35.901	110.800	5.460	PK
9		5875.000	64.645	59.136	-40.555	105.200	5.509	PK
10		5925.000	56.019	50.510	-12.181	68.200	5.509	PK
11		5958.600	58.467	52.883	-9.733	68.200	5.584	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 5250 MHz	

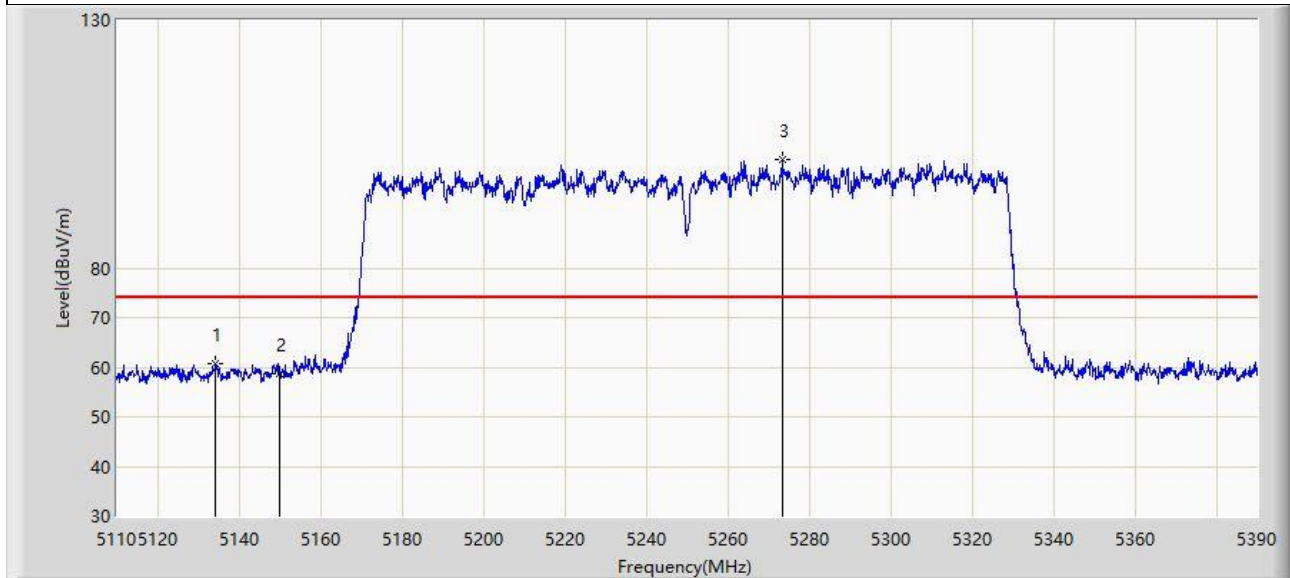


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5134.360	60.750	57.156	-13.250	74.000	3.594	PK
2		5150.000	58.693	54.913	-15.307	74.000	3.780	PK
3		5273.380	101.795	98.715	N/A	N/A	3.080	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 5250 MHz	

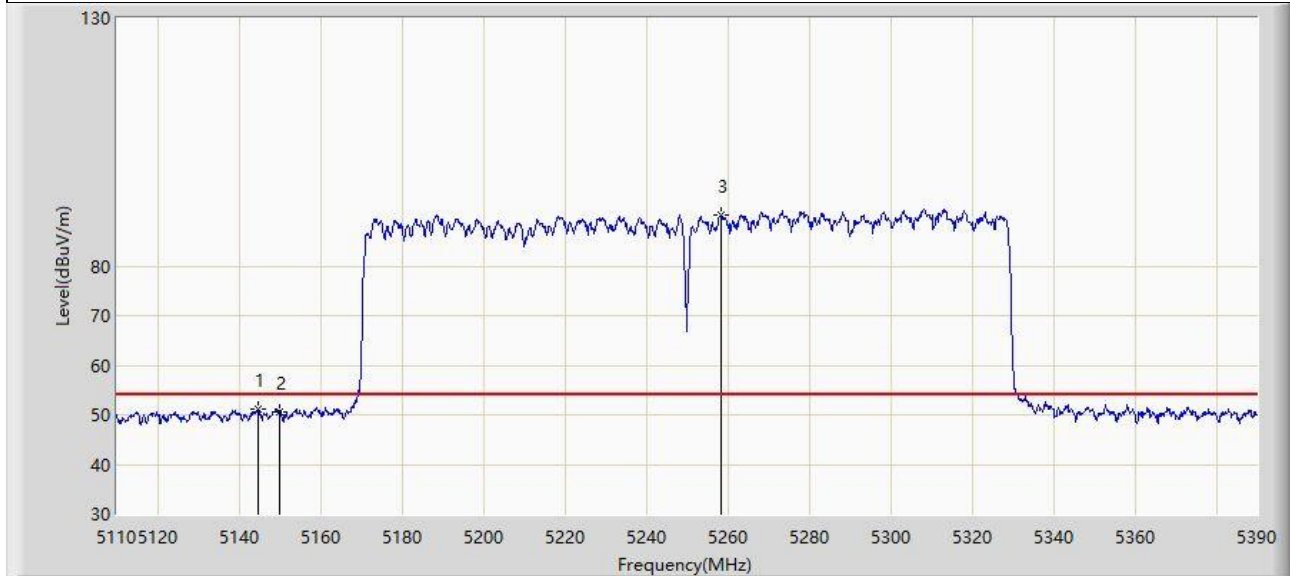


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.720	51.135	47.405	-2.865	54.000	3.730	AV
2		5150.000	50.560	46.780	-3.440	54.000	3.780	AV
3		5258.260	90.267	87.034	N/A	N/A	3.233	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 5250 MHz	

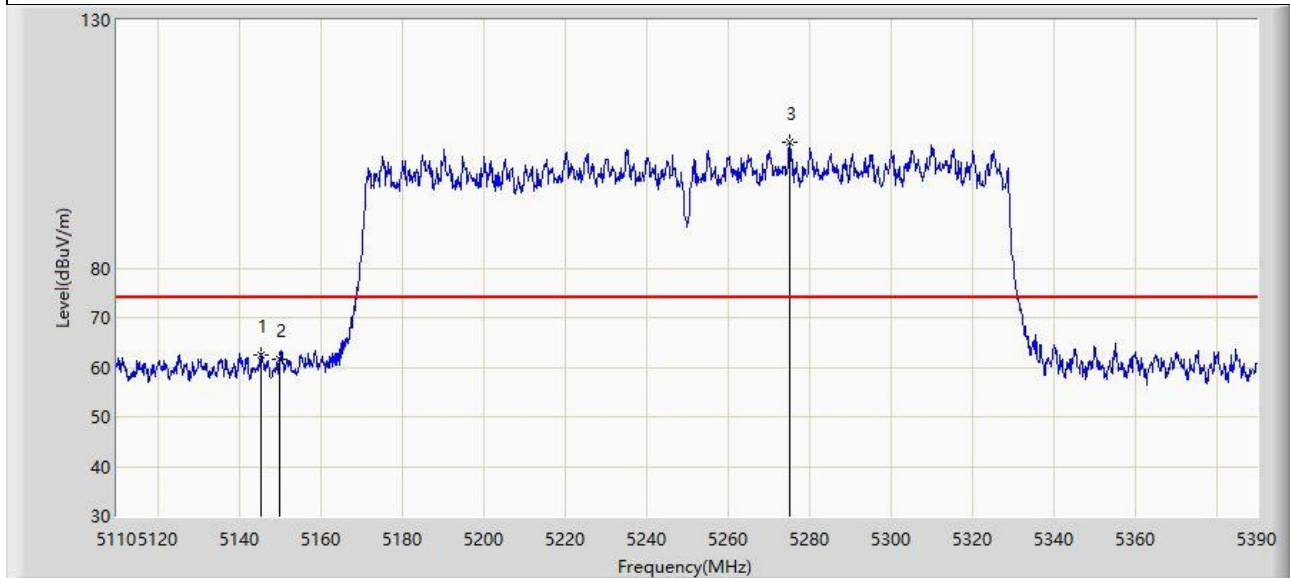


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.280	62.458	58.721	-11.542	74.000	3.737	PK
2		5150.000	61.517	57.737	-12.483	74.000	3.780	PK
3		5275.200	105.222	102.145	N/A	N/A	3.078	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 5250 MHz	

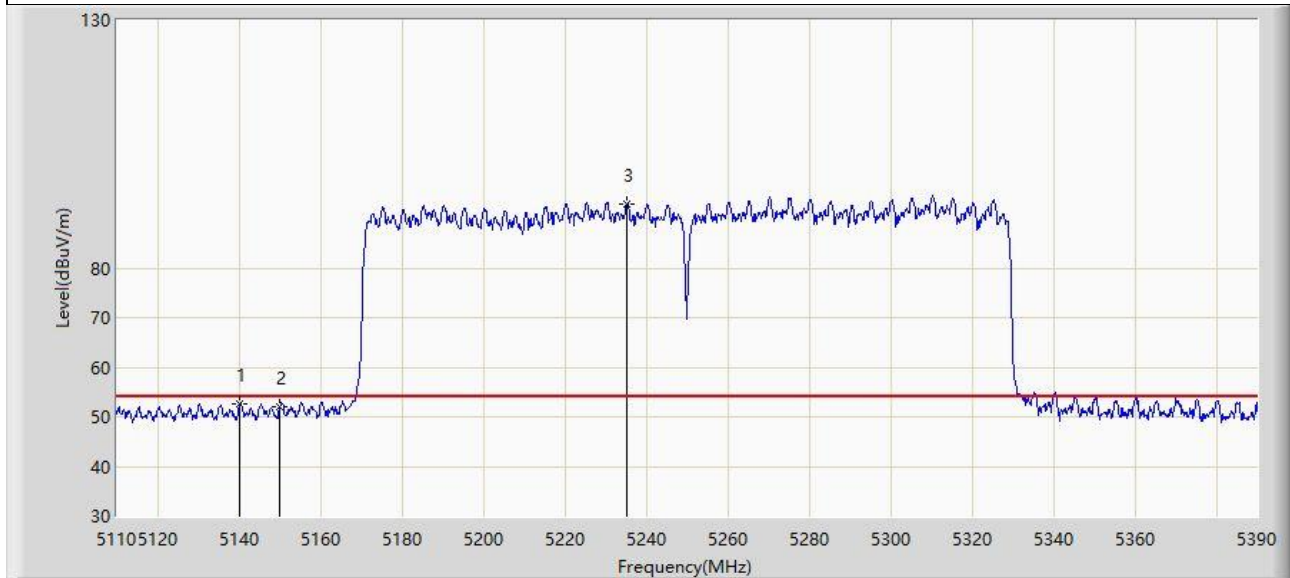


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5140.240	52.649	48.978	-1.351	54.000	3.672	AV
2		5150.000	51.965	48.185	-2.035	54.000	3.780	AV
3		5235.300	93.034	89.524	N/A	N/A	3.511	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570 MHz	

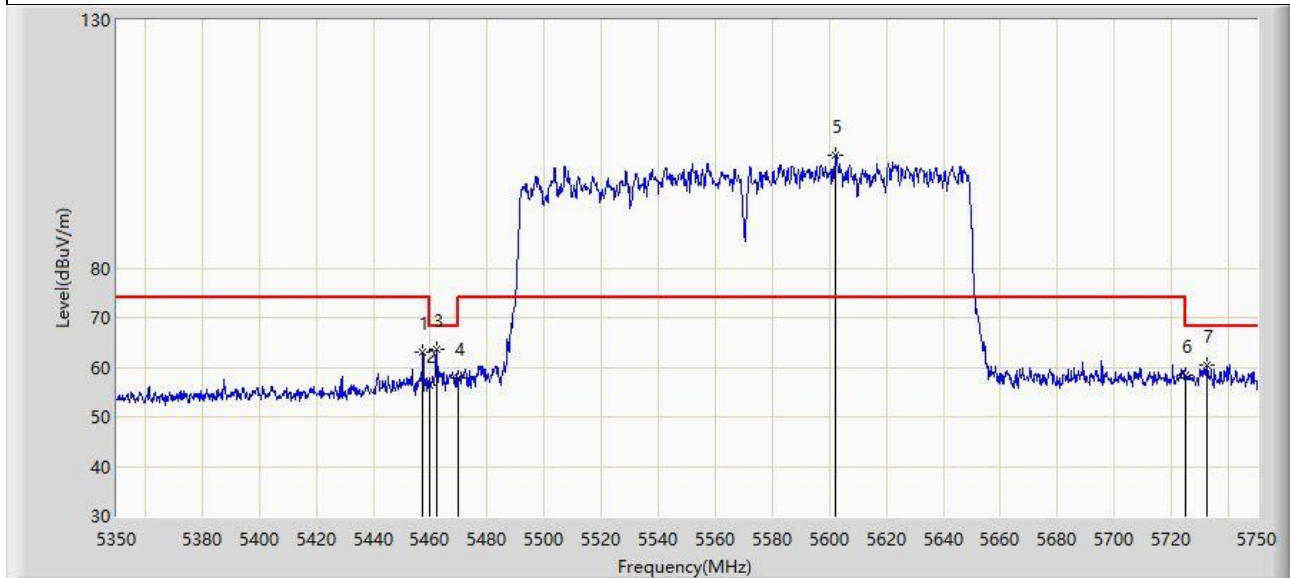


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.400	63.139	59.577	-10.861	74.000	3.562	PK
2		5460.000	56.283	52.673	-17.717	74.000	3.610	PK
3	*	5462.200	63.753	60.101	-4.447	68.200	3.652	PK
4		5470.000	57.915	54.117	-10.285	68.200	3.797	PK
5		5602.200	102.658	98.693	N/A	N/A	3.965	PK
6		5725.000	58.429	53.295	-9.771	68.200	5.134	PK
7		5732.600	60.532	55.461	-7.668	68.200	5.071	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570 MHz	

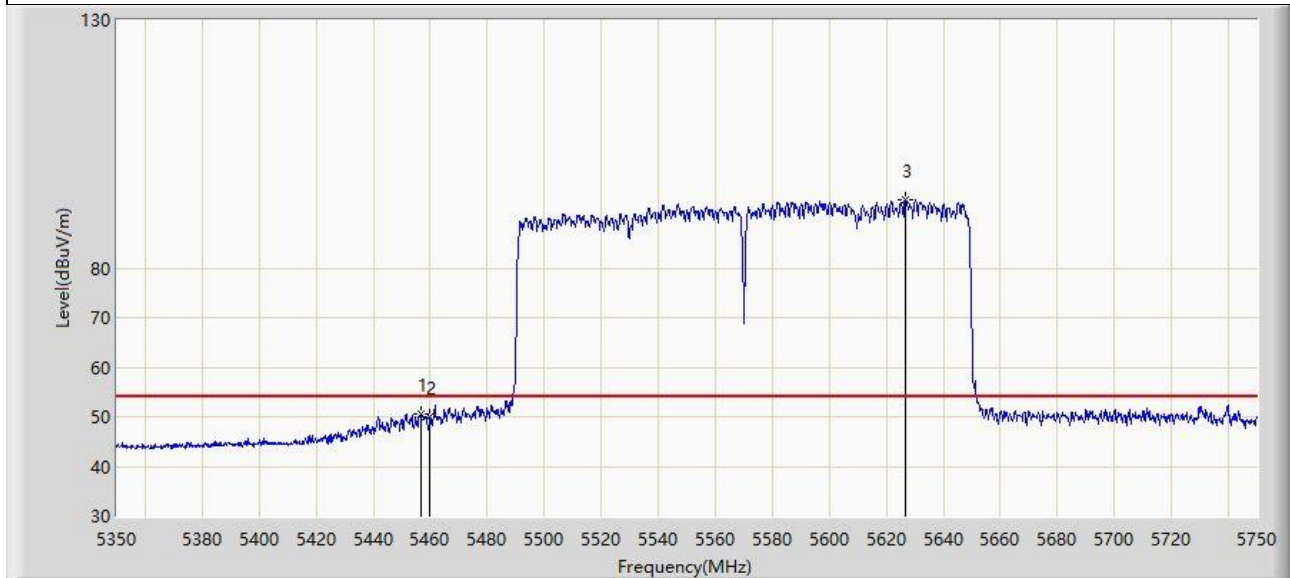


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5456.600	50.652	47.106	-3.348	54.000	3.546	AV
2		5460.000	50.061	46.451	-3.939	54.000	3.610	AV
3		5626.800	93.761	89.313	N/A	N/A	4.448	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570 MHz	

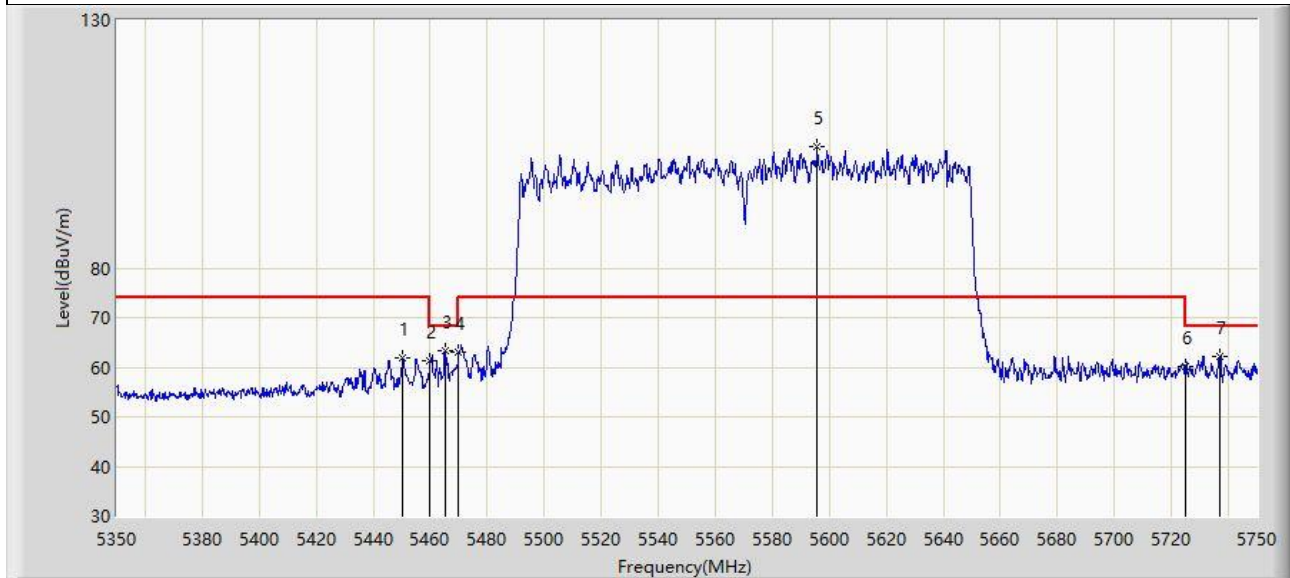


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5450.400	62.001	58.498	-11.999	74.000	3.503	PK
2		5460.000	61.272	57.662	-12.728	74.000	3.610	PK
3	*	5465.200	63.439	59.731	-4.761	68.200	3.707	PK
4		5470.000	62.913	59.115	-5.287	68.200	3.797	PK
5		5595.600	104.432	100.516	N/A	N/A	3.915	PK
6		5725.000	60.164	55.030	-8.036	68.200	5.134	PK
7		5737.200	62.316	57.295	-5.884	68.200	5.021	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570 MHz	

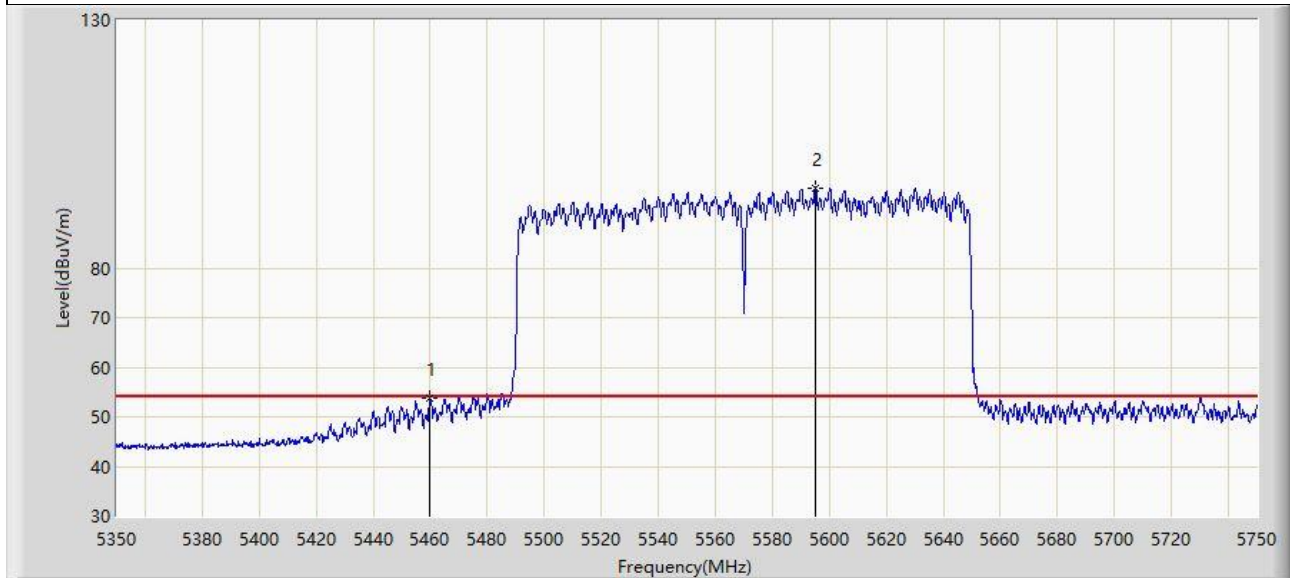

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	53.631	50.021	-0.369	54.000	3.610	AV
2		5595.000	96.032	92.120	N/A	N/A	3.911	AV


Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.9 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-12-05
Temperature	19.6 °C	Humidity	34.2%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by 802.11a at 5180 MHz		

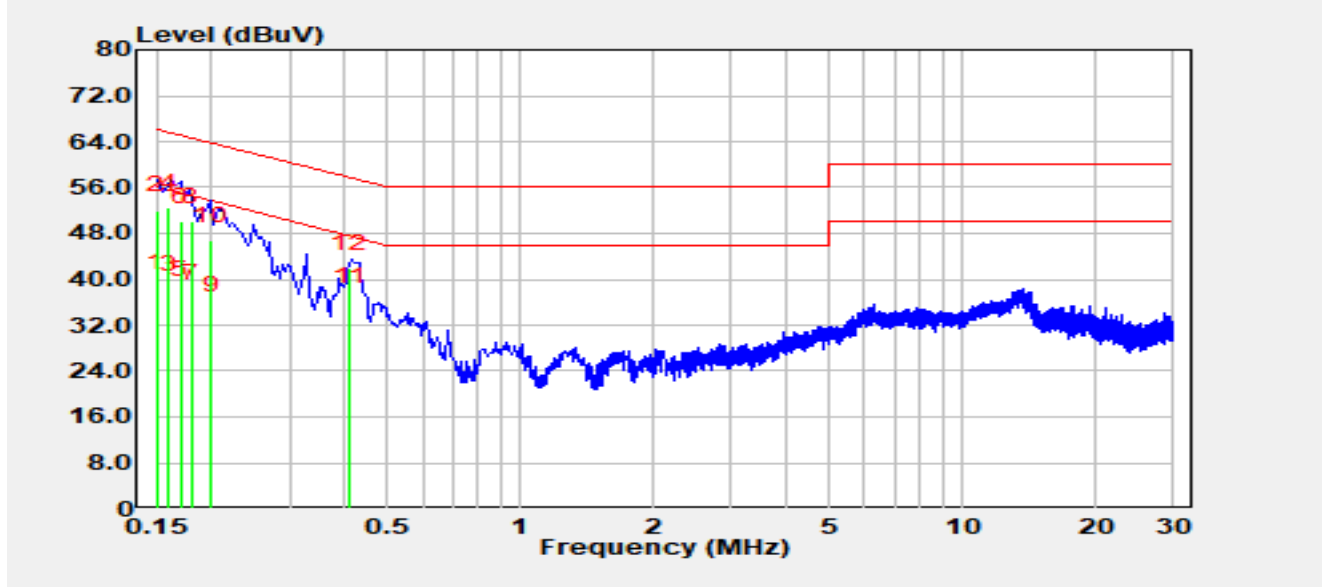


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	28.90	9.67	38.57	-17.43	56.00	Average
2		0.15	42.40	9.67	52.07	-13.93	66.00	QP
3		0.16	28.50	9.67	38.17	-17.29	55.46	Average
4		0.16	42.80	9.67	52.47	-12.99	65.46	QP
5		0.17	27.60	9.68	37.28	-17.68	54.96	Average
6		0.17	40.30	9.68	49.98	-14.98	64.96	QP
7		0.18	27.10	9.68	36.78	-17.71	54.49	Average
8		0.18	40.40	9.68	50.08	-14.41	64.49	QP
9		0.20	25.00	9.69	34.69	-18.92	53.61	Average
10		0.20	37.10	9.69	46.79	-16.82	63.61	QP
11	*	0.41	26.40	9.76	36.16	-11.49	47.65	Average
12		0.41	32.20	9.76	41.96	-15.69	57.65	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2025-12-05
Temperature	19.6 °C	Humidity	34.2%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 802.11a at 5180 MHz		

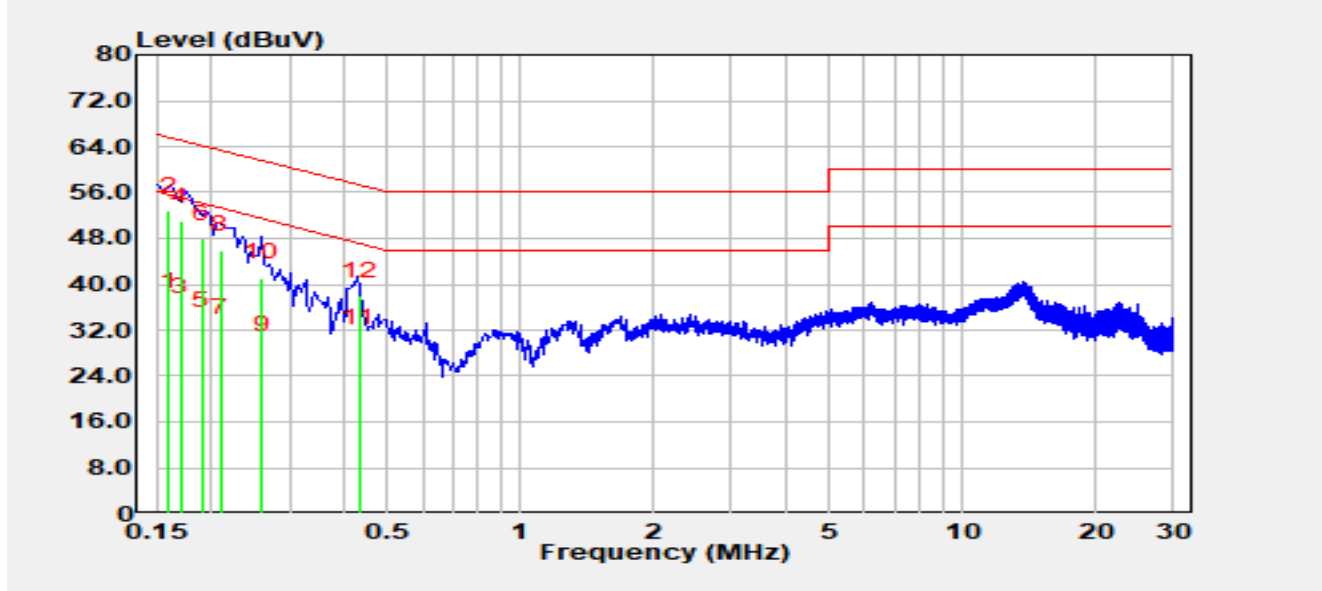

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.16	26.20	9.79	35.99	-19.47	55.46	Average
2	*	0.16	43.00	9.79	52.79	-12.67	65.46	QP
3		0.17	25.40	9.80	35.20	-19.76	54.96	Average
4		0.17	41.10	9.80	50.90	-14.06	64.96	QP
5		0.19	23.00	9.80	32.80	-21.24	54.04	Average
6		0.19	38.20	9.80	48.00	-16.04	64.04	QP
7		0.21	21.90	9.80	31.70	-21.51	53.21	Average
8		0.21	36.20	9.80	46.00	-17.21	63.21	QP
9		0.26	18.60	9.81	28.41	-23.03	51.43	Average
10		0.26	31.40	9.81	41.21	-20.23	61.43	QP
11		0.43	19.90	9.88	29.78	-17.48	47.25	Average
12		0.43	28.10	9.88	37.98	-19.28	57.25	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1044103-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1044103-UE" file.

_____ The End _____