


802.11ac-VHT40 Power Spectral Density - Ant 12

Channel 167 (5835 MHz)



Channel 175 (5875 MHz)

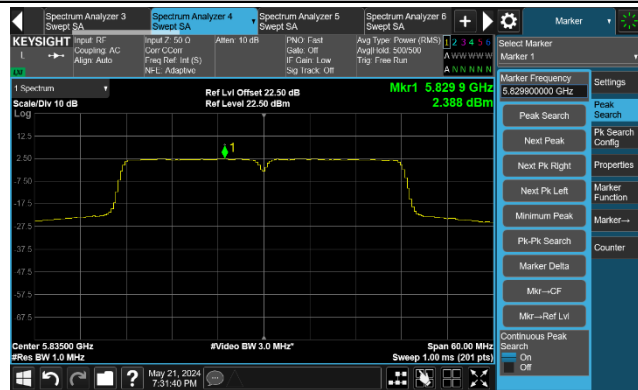

802.11ac-VHT80 Power Spectral Density - Ant 12

Channel 171 (5855 MHz)




802.11ac-VHT160 Power Spectral Density - Ant 12

Channel 163 (5815 MHz)



802.11ax-HE20 Power Spectral Density - Ant 12


Channel 169 (5845 MHz)

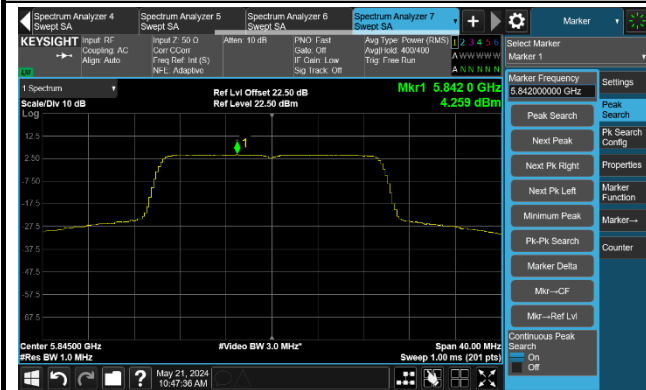

Channel 173 (5865 MHz)



Channel 177 (5885 MHz)

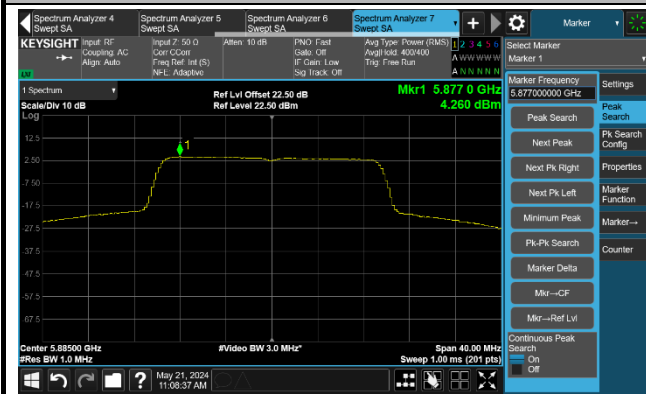


802.11ax-HE40 Power Spectral Density - Ant 12

Channel 167 (5835 MHz)



Channel 175 (5875 MHz)

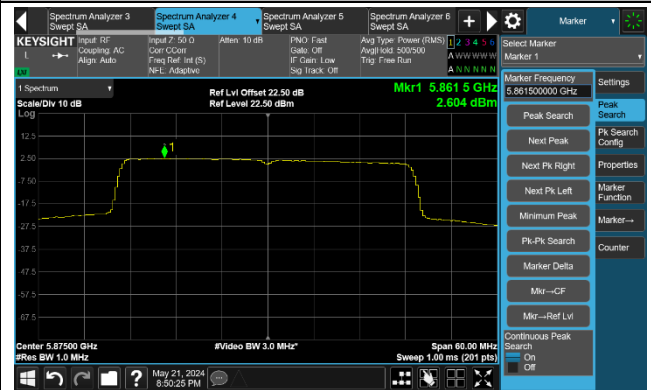

802.11ax-HE80 Power Spectral Density - Ant 12

Channel 171 (5855 MHz)




802.11ax-HE160 Power Spectral Density - Ant 12

Channel 163 (5815 MHz)



802.11be-EHT20 Power Spectral Density - Ant 12


Channel 169 (5845 MHz)

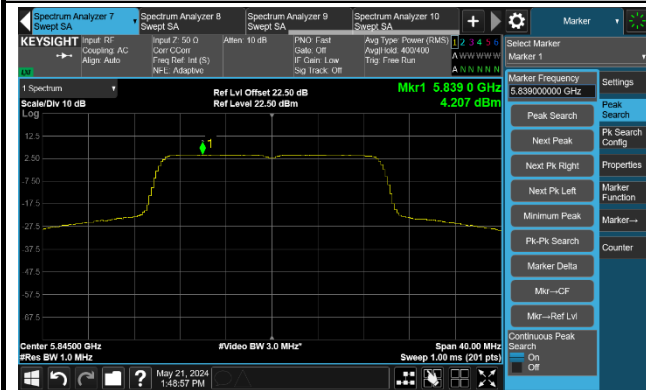

Channel 173 (5865 MHz)



Channel 177 (5885 MHz)

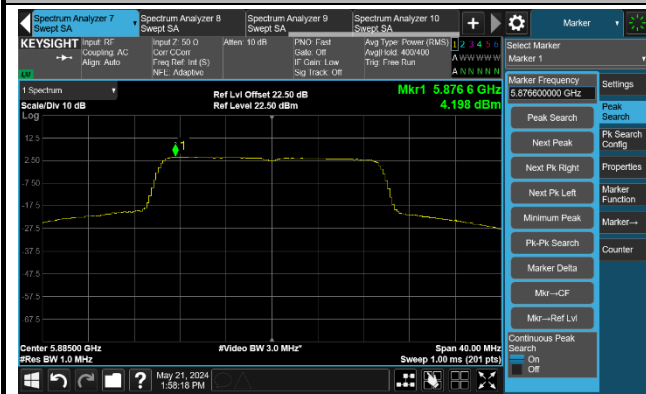


802.11be-EHT40 Power Spectral Density - Ant 12

Channel 167 (5835 MHz)



Channel 175 (5875 MHz)

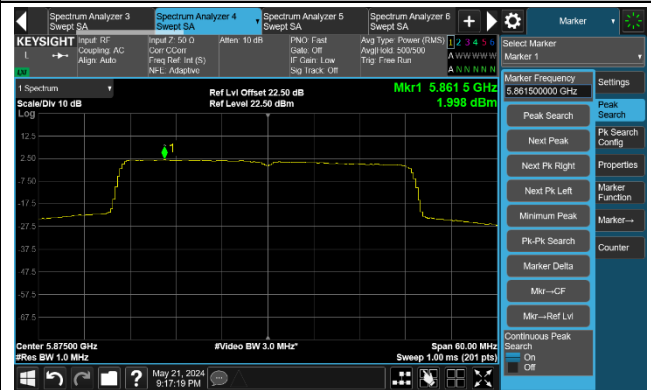

802.11be-EHT80 Power Spectral Density - Ant 12

Channel 171 (5855 MHz)



802.11be-EHT160 Power Spectral Density - Ant 12

Channel 163 (5815 MHz)



A.6 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Luis Yang
Test Date	2025-11-18	Test Mode	5845 MHz (Carrier Mode)

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	9.94	9.97	9.98	9.99
		- 20	10.12	10.08	10.08	10.07
		- 10	8.39	8.17	8.17	8.16
		0	5.18	5.10	5.03	4.99
		+ 10	0.86	0.81	0.78	0.75
		+ 20 (Ref)	-3.27	-3.37	-3.43	-3.49
		+ 30	-8.29	-8.38	-8.45	-8.50
		+ 40	-11.64	-11.80	-11.86	-11.89
		+ 50	-13.37	-13.40	-13.42	-13.43
115	138	+ 20	-5.38	-5.46	-5.65	-5.72
85	102	+ 20	-5.78	-5.82	-5.86	-5.88

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} × 10⁶.

A.7 Radiated Spurious Emission Test Result

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-12 ~ 2024-04-13	Test Mode	802.11a - Channel 169
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	14056.0	46.6	3.0	49.6	108.2	-58.6	Peak	Horizontal
	15875.0	47.9	5.1	53.0	74.0	-21.0	Peak	Horizontal
	15875.0	33.8	5.1	38.9	54.0	-15.1	Average	Horizontal
*	16810.0	45.2	6.9	52.1	108.2	-56.1	Peak	Horizontal
	17898.0	45.2	8.1	53.3	74.0	-20.7	Peak	Horizontal
	17898.0	33.0	8.1	41.1	54.0	-12.9	Average	Horizontal
	10953.5	47.9	-1.4	46.5	74.0	-27.5	Peak	Vertical
*	14056.0	47.5	3.0	50.5	108.2	-57.7	Peak	Vertical
	15467.0	44.6	4.6	49.2	74.0	-24.8	Peak	Vertical
*	16895.0	45.3	6.8	52.1	108.2	-56.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11a - Channel 173
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11735.5	49.6	-1.8	47.8	74.0	-26.2	Peak	Horizontal
*	14226.0	47.5	3.0	50.5	108.2	-57.7	Peak	Horizontal
	15594.5	46.6	4.2	50.8	74.0	-23.2	Peak	Horizontal
*	16912.0	46.7	6.8	53.5	108.2	-54.7	Peak	Horizontal
	8148.5	48.7	-3.4	45.3	74.0	-28.7	Peak	Vertical
	11727.0	49.5	-1.7	47.8	74.0	-26.2	Peak	Vertical
*	14175.0	46.1	3.7	49.8	108.2	-58.4	Peak	Vertical
*	17065.0	46.3	6.2	52.5	108.2	-55.7	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11a - Channel 177
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11778.0	51.9	-1.9	50.0	74.0	-24.0	Peak	Horizontal
*	13733.0	48.1	1.8	49.9	108.2	-58.3	Peak	Horizontal
	15475.5	44.7	4.5	49.2	74.0	-24.8	Peak	Horizontal
*	17039.5	46.1	6.9	53.0	108.2	-55.2	Peak	Horizontal
	11769.5	49.2	-1.9	47.3	74.0	-26.7	Peak	Vertical
*	14081.5	47.5	2.9	50.4	108.2	-57.8	Peak	Vertical
	15475.5	44.8	4.5	49.3	74.0	-24.7	Peak	Vertical
*	17005.5	46.0	6.4	52.4	108.2	-55.8	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ac-VHT20 - Channel 169
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11625.0	48.9	-1.6	47.3	74.0	-26.7	Peak	Horizontal
*	14183.5	47.7	3.2	50.9	108.2	-57.3	Peak	Horizontal
	15535.0	45.8	4.1	49.9	74.0	-24.1	Peak	Horizontal
*	17048.0	46.3	6.6	52.9	108.2	-55.3	Peak	Horizontal
	12101.0	48.4	-1.8	46.6	74.0	-27.4	Peak	Vertical
*	14132.5	47.3	2.9	50.2	108.2	-58.0	Peak	Vertical
	15475.5	46.0	4.5	50.5	74.0	-23.5	Peak	Vertical
*	16980.0	46.6	6.4	53.0	108.2	-55.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ac-VHT20 - Channel 173
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	12084.0	50.1	-1.8	48.3	74.0	-25.7	Peak	Horizontal
*	14056.0	46.5	3.0	49.5	108.2	-58.7	Peak	Horizontal
	15492.5	45.5	4.4	49.9	74.0	-24.1	Peak	Horizontal
*	16878.0	45.0	6.4	51.4	108.2	-56.8	Peak	Horizontal
	11514.5	49.0	-1.6	47.4	74.0	-26.6	Peak	Vertical
*	14158.0	47.6	3.1	50.7	108.2	-57.5	Peak	Vertical
	15458.5	44.9	4.3	49.2	74.0	-24.8	Peak	Vertical
*	16971.5	46.4	6.5	52.9	108.2	-55.3	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ac-VHT20 - Channel 177
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11778.0	51.3	-1.9	49.4	74.0	-24.6	Peak	Horizontal
*	14124.0	47.2	2.9	50.1	108.2	-58.1	Peak	Horizontal
	15484.0	44.4	4.5	48.9	74.0	-25.1	Peak	Horizontal
*	16929.0	45.7	6.8	52.5	108.2	-55.7	Peak	Horizontal
	11336.0	48.8	-1.4	47.4	74.0	-26.6	Peak	Vertical
*	14039.0	48.2	2.7	50.9	108.2	-57.3	Peak	Vertical
	15509.5	45.4	4.1	49.5	74.0	-24.5	Peak	Vertical
*	16912.0	45.3	6.8	52.1	108.2	-56.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ac-VHT40 - Channel 167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11123.5	48.8	-1.4	47.4	74.0	-26.6	Peak	Horizontal
*	14175.0	46.6	3.7	50.3	108.2	-57.9	Peak	Horizontal
	15492.5	44.2	4.4	48.6	74.0	-25.4	Peak	Horizontal
*	17039.5	45.6	6.9	52.5	108.2	-55.7	Peak	Horizontal
	12330.5	48.9	-1.6	47.3	74.0	-26.7	Peak	Vertical
*	14107.0	46.7	2.8	49.5	108.2	-58.7	Peak	Vertical
	15560.5	44.9	4.6	49.5	74.0	-24.5	Peak	Vertical
*	17277.5	45.4	7.3	52.7	108.2	-55.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ac-VHT40 - Channel 175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11752.5	50.0	-1.8	48.2	74.0	-25.8	Peak	Horizontal
*	14226.0	46.8	3.0	49.8	108.2	-58.4	Peak	Horizontal
	15509.5	44.0	4.1	48.1	74.0	-25.9	Peak	Horizontal
*	16946.0	45.5	6.8	52.3	108.2	-55.9	Peak	Horizontal
	11149.0	48.8	-1.4	47.4	74.0	-26.6	Peak	Vertical
*	14217.5	47.5	3.0	50.5	108.2	-57.7	Peak	Vertical
	15518.0	44.3	4.0	48.3	74.0	-25.7	Peak	Vertical
*	17039.5	45.5	6.9	52.4	108.2	-55.8	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ac-VHT80 - Channel 171
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	12203.0	49.4	-1.6	47.8	74.0	-26.2	Peak	Horizontal
*	14056.0	47.2	3.0	50.2	108.2	-58.0	Peak	Horizontal
	15577.5	45.9	4.6	50.5	74.0	-23.5	Peak	Horizontal
*	17311.5	46.7	7.0	53.7	108.2	-54.5	Peak	Horizontal
	11693.0	49.0	-1.6	47.4	74.0	-26.6	Peak	Vertical
*	14175.0	46.5	3.7	50.2	108.2	-58.0	Peak	Vertical
	15654.0	45.0	4.1	49.1	74.0	-24.9	Peak	Vertical
*	17320.0	46.0	7.1	53.1	108.2	-55.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ac-VHT160 - Channel 163
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11608.0	49.6	-1.6	48.0	74.0	-26.0	Peak	Horizontal
*	14166.5	46.5	3.4	49.9	108.2	-58.3	Peak	Horizontal
	15501.0	44.9	4.3	49.2	74.0	-24.8	Peak	Horizontal
*	16971.5	45.7	6.5	52.2	108.2	-56.0	Peak	Horizontal
	11710.0	48.5	-1.6	46.9	74.0	-27.1	Peak	Vertical
*	14243.0	47.6	2.8	50.4	108.2	-57.8	Peak	Vertical
	15424.5	44.4	3.5	47.9	74.0	-26.1	Peak	Vertical
*	16810.0	46.7	6.9	53.6	108.2	-54.6	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ax-HE20 - Channel 169
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11548.5	48.8	-1.7	47.1	74.0	-26.9	Peak	Horizontal
*	14064.5	47.1	2.9	50.0	108.2	-58.2	Peak	Horizontal
	15688.0	45.4	4.8	50.2	74.0	-23.8	Peak	Horizontal
*	16937.5	45.9	6.8	52.7	108.2	-55.5	Peak	Horizontal
	11157.5	49.1	-1.3	47.8	74.0	-26.2	Peak	Vertical
*	13996.5	47.0	2.5	49.5	108.2	-58.7	Peak	Vertical
	15467.0	44.6	4.6	49.2	74.0	-24.8	Peak	Vertical
*	16920.5	46.1	6.8	52.9	108.2	-55.3	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ax-HE20 - Channel 173
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11183.0	49.3	-1.7	47.6	74.0	-26.4	Peak	Horizontal
*	14149.5	47.6	3.0	50.6	108.2	-57.6	Peak	Horizontal
	15441.5	45.2	3.7	48.9	74.0	-25.1	Peak	Horizontal
*	16895.0	45.6	6.8	52.4	108.2	-55.8	Peak	Horizontal
	11616.5	49.0	-1.6	47.4	74.0	-26.6	Peak	Vertical
*	14115.5	47.2	2.9	50.1	108.2	-58.1	Peak	Vertical
	15662.5	46.4	4.3	50.7	74.0	-23.3	Peak	Vertical
*	17379.5	45.9	7.1	53.0	108.2	-55.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ax-HE20 - Channel 177
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	12033.0	50.4	-1.8	48.6	74.0	-25.4	Peak	Horizontal
*	14124.0	47.0	2.9	49.9	108.2	-58.3	Peak	Horizontal
	15467.0	45.2	4.6	49.8	74.0	-24.2	Peak	Horizontal
*	17022.5	45.9	6.9	52.8	108.2	-55.4	Peak	Horizontal
	12228.5	48.8	-1.7	47.1	74.0	-26.9	Peak	Vertical
*	14175.0	47.2	3.7	50.9	108.2	-57.3	Peak	Vertical
	15705.0	46.0	4.9	50.9	74.0	-23.1	Peak	Vertical
*	17124.5	46.9	6.4	53.3	108.2	-54.9	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ax-HE40 - Channel 167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	12177.5	49.1	-1.6	47.5	74.0	-26.5	Peak	Horizontal
*	14251.5	48.0	3.0	51.0	108.2	-57.2	Peak	Horizontal
	15475.5	44.7	4.5	49.2	74.0	-24.8	Peak	Horizontal
*	16920.5	45.3	6.8	52.1	108.2	-56.1	Peak	Horizontal
	11463.5	48.6	-1.6	47.0	74.0	-27.0	Peak	Vertical
*	13979.5	47.3	2.6	49.9	108.2	-58.3	Peak	Vertical
	15560.5	44.9	4.6	49.5	74.0	-24.5	Peak	Vertical
*	17022.5	46.2	6.9	53.1	108.2	-55.1	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ax-HE40 - Channel 175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11999.0	50.1	-1.8	48.3	74.0	-25.7	Peak	Horizontal
*	14234.5	47.4	2.9	50.3	108.2	-57.9	Peak	Horizontal
	15671.0	46.1	4.6	50.7	74.0	-23.3	Peak	Horizontal
*	16895.0	45.5	6.8	52.3	108.2	-55.9	Peak	Horizontal
	11735.5	48.5	-1.8	46.7	74.0	-27.3	Peak	Vertical
*	14175.0	46.9	3.7	50.6	108.2	-57.6	Peak	Vertical
	15467.0	44.8	4.6	49.4	74.0	-24.6	Peak	Vertical
*	17014.0	45.7	6.6	52.3	108.2	-55.9	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ax-HE80 - Channel 171
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10979.0	48.2	-1.4	46.8	74.0	-27.2	Peak	Horizontal
*	14124.0	46.9	2.9	49.8	108.2	-58.4	Peak	Horizontal
	15382.0	46.1	4.0	50.1	74.0	-23.9	Peak	Horizontal
*	17311.5	45.3	7.0	52.3	108.2	-55.9	Peak	Horizontal
	10945.0	47.6	-1.3	46.3	74.0	-27.7	Peak	Vertical
*	13869.0	47.4	2.5	49.9	108.2	-58.3	Peak	Vertical
	15569.0	45.6	4.6	50.2	74.0	-23.8	Peak	Vertical
*	17158.5	46.0	6.6	52.6	108.2	-55.6	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11ax-HE160 - Channel 163
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11140.5	48.2	-1.4	46.8	74.0	-27.2	Peak	Horizontal
*	14132.5	47.2	2.9	50.1	108.2	-58.1	Peak	Horizontal
	15492.5	45.9	4.4	50.3	74.0	-23.7	Peak	Horizontal
*	17039.5	46.0	6.9	52.9	108.2	-55.3	Peak	Horizontal
	11531.5	49.0	-1.5	47.5	74.0	-26.5	Peak	Vertical
*	13792.5	48.2	2.1	50.3	108.2	-57.9	Peak	Vertical
	15722.0	46.3	4.6	50.9	74.0	-23.1	Peak	Vertical
*	17141.5	47.4	6.6	54.0	108.2	-54.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11be-EHT20 - Channel 169
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11208.5	48.6	-1.6	47.0	74.0	-27.0	Peak	Horizontal
*	13019.0	49.4	-0.1	49.3	108.2	-58.9	Peak	Horizontal
	15594.5	46.2	4.2	50.4	74.0	-23.6	Peak	Horizontal
*	17405.0	48.4	7.2	55.6	108.2	-52.6	Peak	Horizontal
	11693.0	48.7	-1.6	47.1	74.0	-26.9	Peak	Vertical
*	14166.5	47.2	3.4	50.6	108.2	-57.6	Peak	Vertical
	15492.5	45.0	4.4	49.4	74.0	-24.6	Peak	Vertical
*	16895.0	45.9	6.8	52.7	108.2	-55.5	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11be-EHT20 - Channel 173
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11429.5	48.9	-1.5	47.4	74.0	-26.6	Peak	Horizontal
*	14234.5	47.8	2.9	50.7	108.2	-57.5	Peak	Horizontal
	15543.5	45.5	4.3	49.8	74.0	-24.2	Peak	Horizontal
*	16920.5	45.5	6.8	52.3	108.2	-55.9	Peak	Horizontal
	11965.0	48.2	-1.8	46.4	74.0	-27.6	Peak	Vertical
*	14132.5	47.4	2.9	50.3	108.2	-57.9	Peak	Vertical
	15713.5	45.8	4.8	50.6	74.0	-23.4	Peak	Vertical
*	17600.5	45.4	7.9	53.3	108.2	-54.9	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11be-EHT20 - Channel 177
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11761.0	49.3	-1.8	47.5	74.0	-26.5	Peak	Horizontal
*	14115.5	47.0	2.9	49.9	108.2	-58.3	Peak	Horizontal
	15875.0	44.9	5.1	50.0	74.0	-24.0	Peak	Horizontal
*	16963.0	45.6	6.7	52.3	108.2	-55.9	Peak	Horizontal
	11837.5	49.6	-1.9	47.7	74.0	-26.3	Peak	Vertical
*	13750.0	48.3	2.0	50.3	108.2	-57.9	Peak	Vertical
	15849.5	45.1	4.4	49.5	74.0	-24.5	Peak	Vertical
*	17039.5	46.1	6.9	53.0	108.2	-55.2	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11be-EHT40 - Channel 167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11897.0	49.6	-1.7	47.9	74.0	-26.1	Peak	Horizontal
*	14158.0	47.5	3.1	50.6	108.2	-57.6	Peak	Horizontal
	15569.0	45.9	4.6	50.5	74.0	-23.5	Peak	Horizontal
*	16580.5	46.1	6.1	52.2	108.2	-56.0	Peak	Horizontal
	11412.5	48.7	-1.5	47.2	74.0	-26.8	Peak	Vertical
*	13886.0	47.9	2.4	50.3	108.2	-57.9	Peak	Vertical
	15492.5	44.6	4.4	49.0	74.0	-25.0	Peak	Vertical
*	16886.5	45.7	6.6	52.3	108.2	-55.9	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11be-EHT40 - Channel 175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11438.0	48.2	-1.4	46.8	74.0	-27.2	Peak	Horizontal
*	13894.5	48.0	2.5	50.5	108.2	-57.7	Peak	Horizontal
	15560.5	45.2	4.6	49.8	74.0	-24.2	Peak	Horizontal
*	16971.5	46.4	6.5	52.9	108.2	-55.3	Peak	Horizontal
	11820.5	49.3	-1.8	47.5	74.0	-26.5	Peak	Vertical
*	14226.0	47.5	3.0	50.5	108.2	-57.7	Peak	Vertical
	15535.0	45.4	4.1	49.5	74.0	-24.5	Peak	Vertical
*	17532.5	46.0	7.6	53.6	108.2	-54.6	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11be-EHT80 - Channel 171
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11599.5	48.7	-1.7	47.0	74.0	-27.0	Peak	Horizontal
*	14107.0	47.3	2.8	50.1	108.2	-58.1	Peak	Horizontal
	15484.0	44.8	4.5	49.3	74.0	-24.7	Peak	Horizontal
*	17056.5	46.9	6.4	53.3	108.2	-54.9	Peak	Horizontal
	11812.0	49.0	-1.8	47.2	74.0	-26.8	Peak	Vertical
*	13716.0	47.2	1.9	49.1	108.2	-59.1	Peak	Vertical
	15552.0	45.4	4.5	49.9	74.0	-24.1	Peak	Vertical
*	16317.0	47.7	5.6	53.3	108.2	-54.9	Peak	Vertical

Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-04-13	Test Mode	802.11be-EHT160 - Channel 163
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11438.0	48.5	-1.4	47.1	74.0	-26.9	Peak	Horizontal
*	13792.5	47.7	2.1	49.8	108.2	-58.4	Peak	Horizontal
	15492.5	45.2	4.4	49.6	74.0	-24.4	Peak	Horizontal
*	17158.5	45.9	6.6	52.5	108.2	-55.7	Peak	Horizontal
	11701.5	48.8	-1.6	47.2	74.0	-26.8	Peak	Vertical
*	14022.0	47.4	2.6	50.0	108.2	-58.2	Peak	Vertical
	15569.0	45.3	4.6	49.9	74.0	-24.1	Peak	Vertical
*	17005.5	46.5	6.4	52.9	108.2	-55.3	Peak	Vertical


Note 1: “*” is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission for 9 kHz ~ 30 MHz:

Test Site: SIP-AC1	Test Date: 2024-04-16
Limit: FCC_Part 15.209_RSE	Engineer: Mero Zhou
Probe: FMZB 1519-60 D_9 kHz - 30 MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5845 MHz	

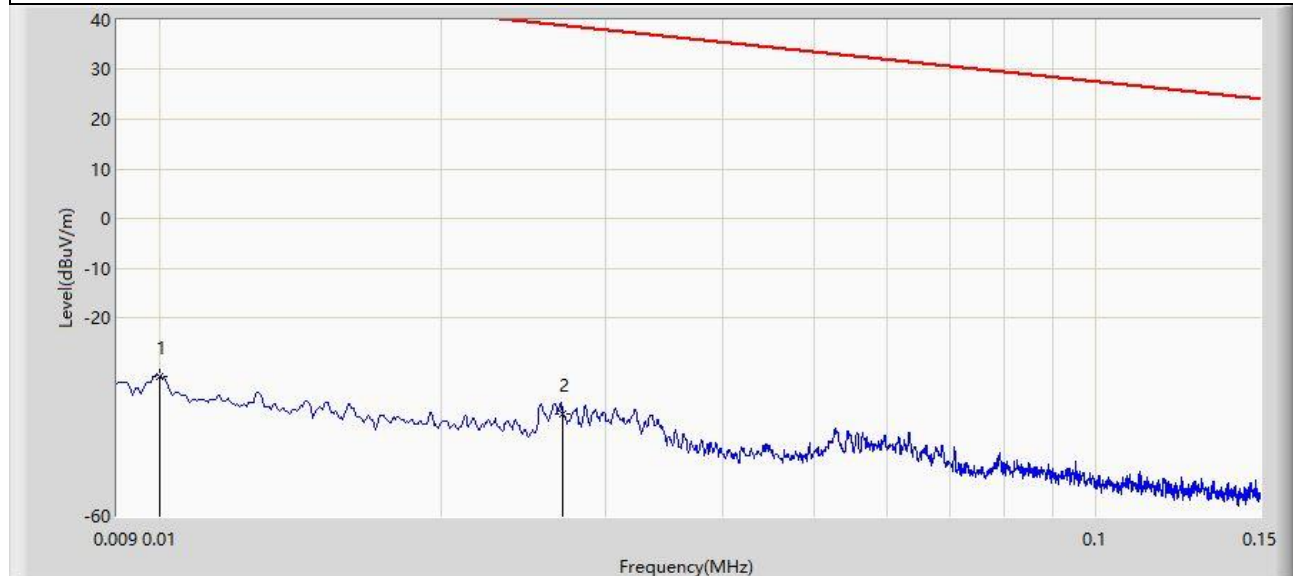

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.010	-31.989	27.925	-79.574	47.585	-59.561	PK
2	*	0.027	-39.488	22.549	-78.451	38.963	-59.561	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + 40 × log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Test Site: SIP-AC1	Test Date: 2024-04-16
Limit: FCC_Part 15.209_RSE	Engineer: Mero Zhou
Probe: FMZB 1519-60 D_9 kHz - 30 MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5845 MHz	

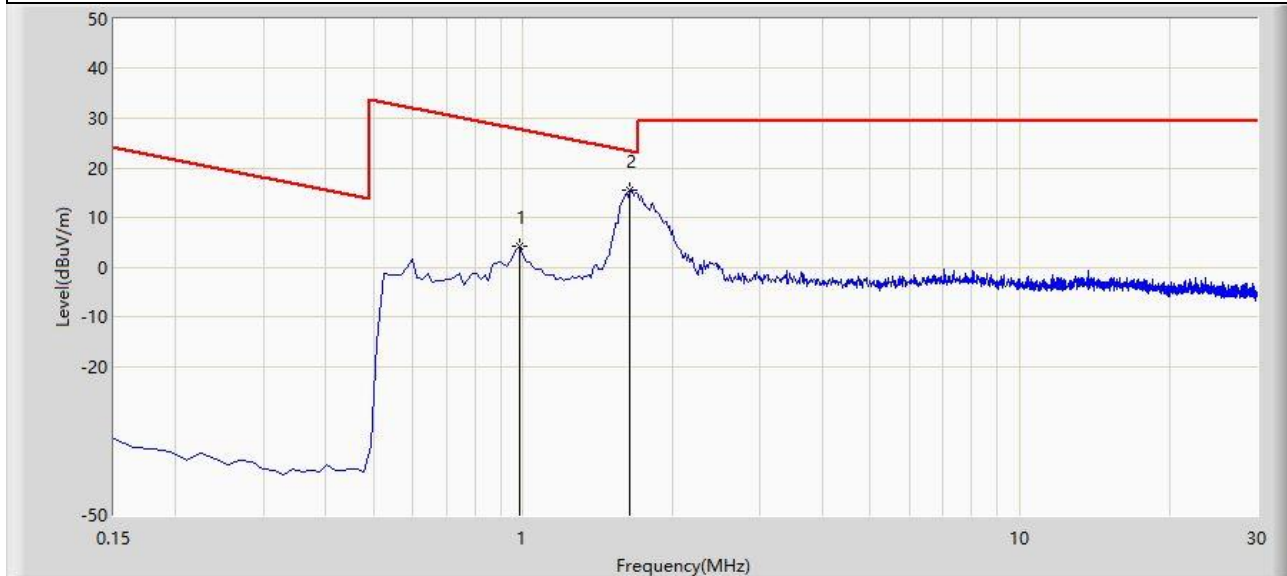

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.986	4.123	24.923	-23.621	27.744	-20.768	PK
2	*	1.643	15.498	36.076	-7.823	23.321	-20.574	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + $40 \times \log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Test Site: SIP-AC1	Test Date: 2024-04-16
Limit: FCC_Part 15.209_RSE	Engineer: Mero Zhou
Probe: FMZB 1519-60 D_9 kHz - 30 MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5845 MHz	

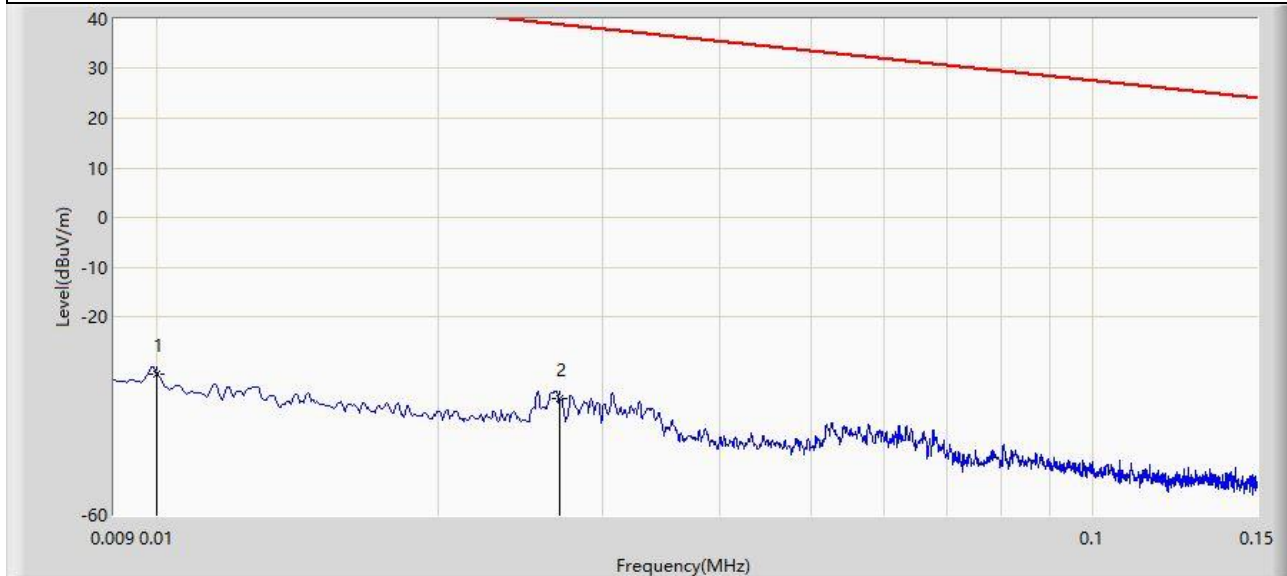

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.010	-31.547	29.474	-79.132	47.585	-59.561	PK
2	*	0.027	-36.470	24.433	-75.433	38.963	-59.561	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + $40 \times \log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Test Site: SIP-AC1	Test Date: 2024-04-16
Limit: FCC_Part 15.209_RSE	Engineer: Mero Zhou
Probe: FMZB 1519-60 D_9 kHz - 30 MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5845 MHz	

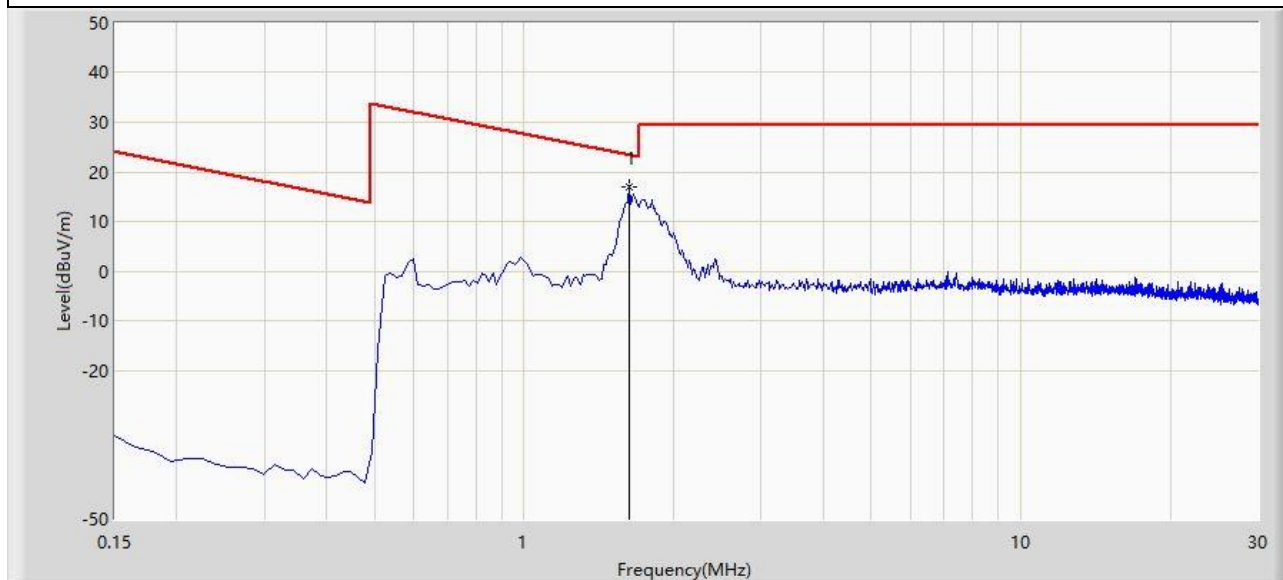

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	1.628	17.074	37.758	-6.326	23.400	-20.579	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + 40 × log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

The Result of Radiated Emission for 30 MHz ~ 1 GHz:

Site: SIP-AC1	Time: 2024-04-15
Limit: FCC_Part15.209_RSE (3 m)	Engineer: Mero Zhou
Probe: VULB 9168_00998_30 MHz-1 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Note: Transmit by 802.11a at 5845 MHz	

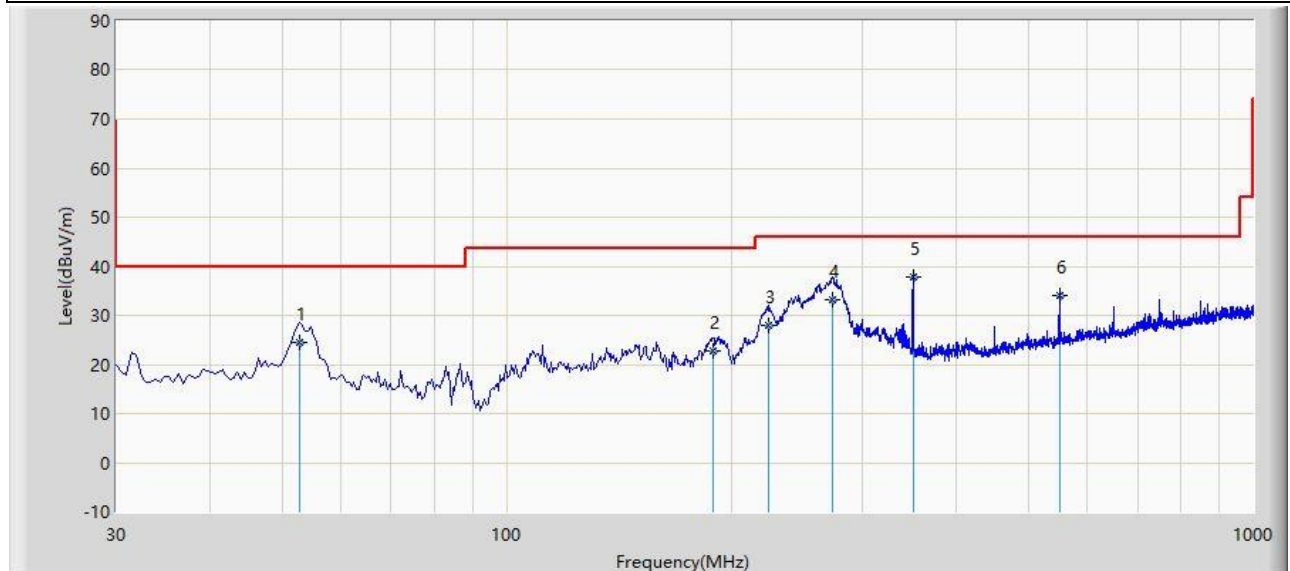


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		52.795	24.394	6.500	-15.606	40.000	17.893	QP
2		189.080	22.833	7.600	-20.667	43.500	15.233	QP
3		224.000	28.060	13.300	-17.940	46.000	14.760	QP
4		272.985	33.143	15.600	-12.857	46.000	17.543	QP
5	*	350.100	37.700	18.300	-8.300	46.000	19.400	QP
6		549.920	34.080	10.300	-11.920	46.000	23.779	QP

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2024-04-15
Limit: FCC_Part15.209_RSE (3 m)	Engineer: Mero Zhou
Probe: VULB 9168_00998_30 MHz-1 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Note: Transmit by 802.11a at 5845 MHz	

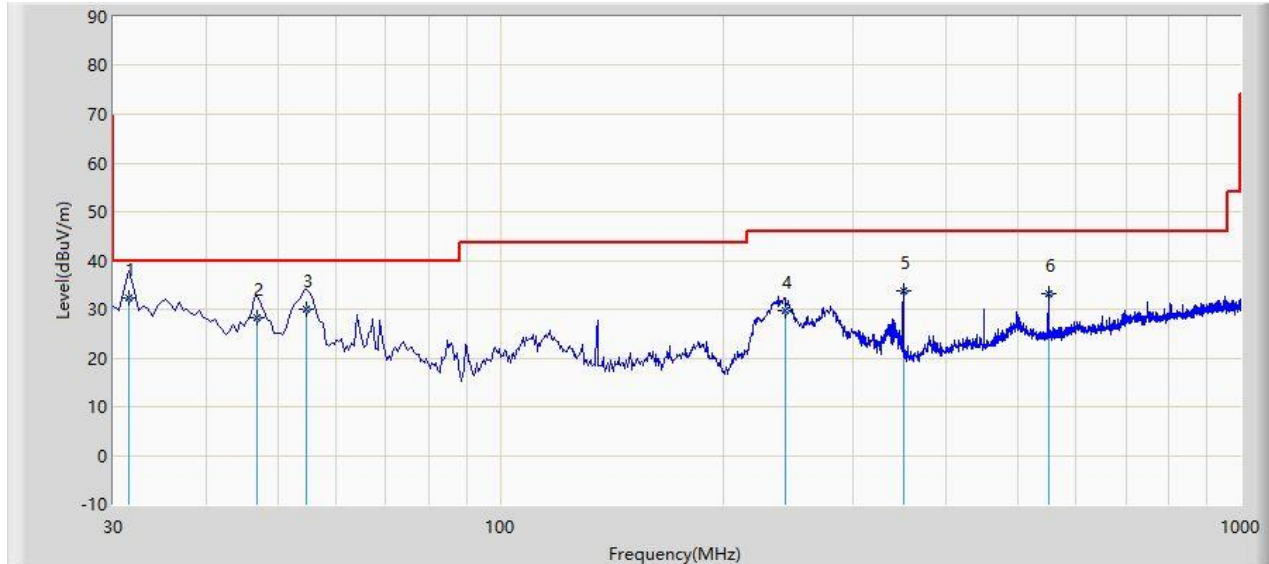

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	31.455	32.255	15.500	-7.745	40.000	16.755	QP
2		46.975	28.258	10.200	-11.742	40.000	18.058	QP
3		54.735	30.136	12.300	-9.864	40.000	17.837	QP
4		242.430	29.669	13.500	-16.331	46.000	16.169	QP
5		350.100	33.900	14.500	-12.100	46.000	19.400	QP
6		549.920	33.080	9.300	-12.920	46.000	23.779	QP


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

The Result of Radiated Emission for 18 ~ 40 GHz:

Site: SIP-AC2	Time: 2024-04-28
Limit: FCC_Part15.209_RSE (3 m)	Engineer: Fusco Pan
Probe: BBHA 9170_00935_18-40 GHz-AC1&AC3	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Note: Transmit by 802.11a at 5845 MHz	

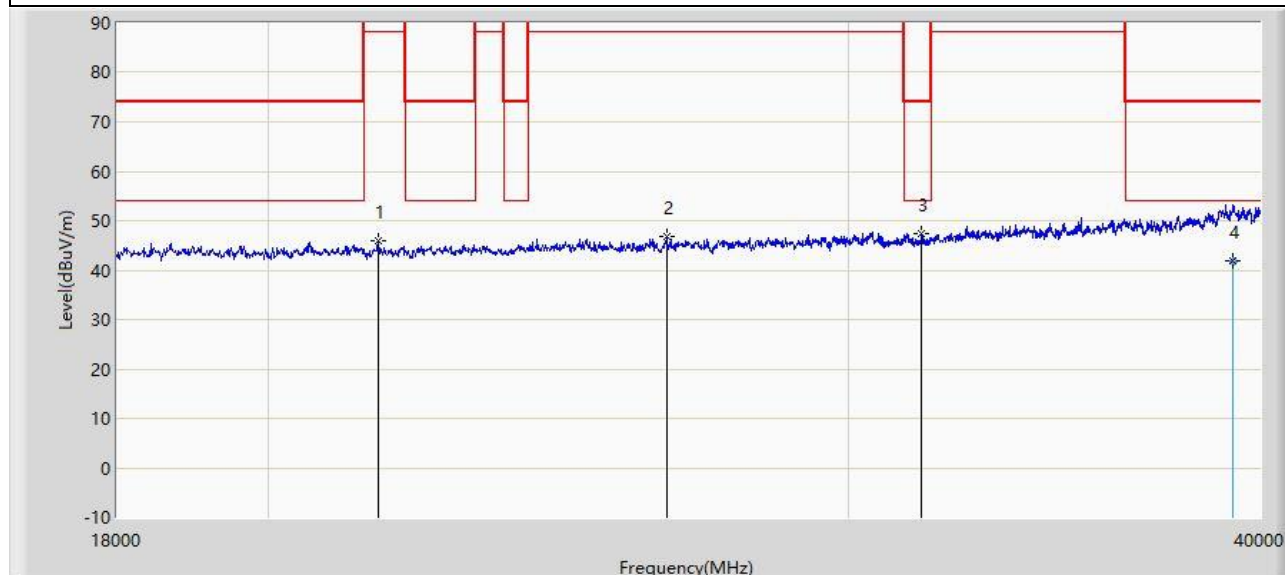

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		21597.000	45.880	56.344	-62.320	108.200	-10.464	PK
2		26426.000	46.675	55.456	-61.525	108.200	-8.781	PK
3		31574.000	47.465	57.305	-26.535	74.000	-9.840	PK
4	*	39241.000	41.905	41.510	-12.095	54.000	0.395	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Site: SIP-AC2	Time: 2024-04-28
Limit: FCC_Part15.209_RSE (3 m)	Engineer: Fusco Pan
Probe: BBHA 9170_00935_18-40 GHz-AC1&AC3	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Note: Transmit by 802.11a at 5845 MHz	

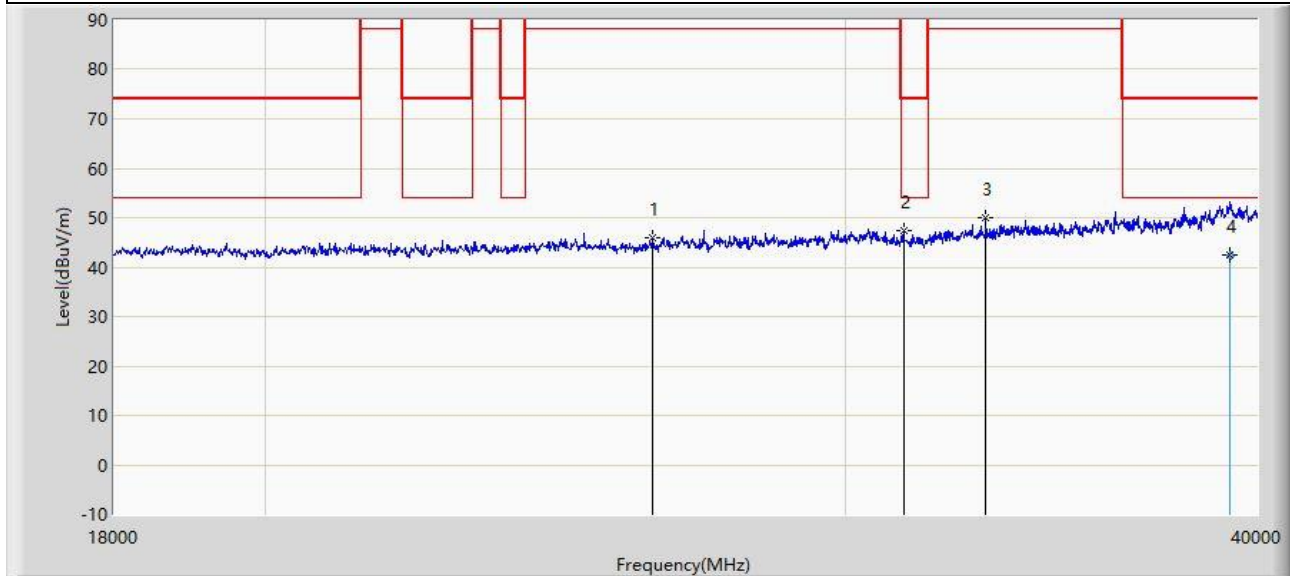

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		26228.000	46.017	55.211	-62.183	108.200	-9.194	PK
2		31255.000	47.388	56.058	-26.612	74.000	-8.670	PK
3		33103.000	49.873	60.060	-58.328	108.200	-10.187	PK
4	*	39252.000	42.418	41.360	-11.582	54.000	1.058	AV

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

A.8 Radiated Restricted Band Edge Test Result

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5845 MHz	

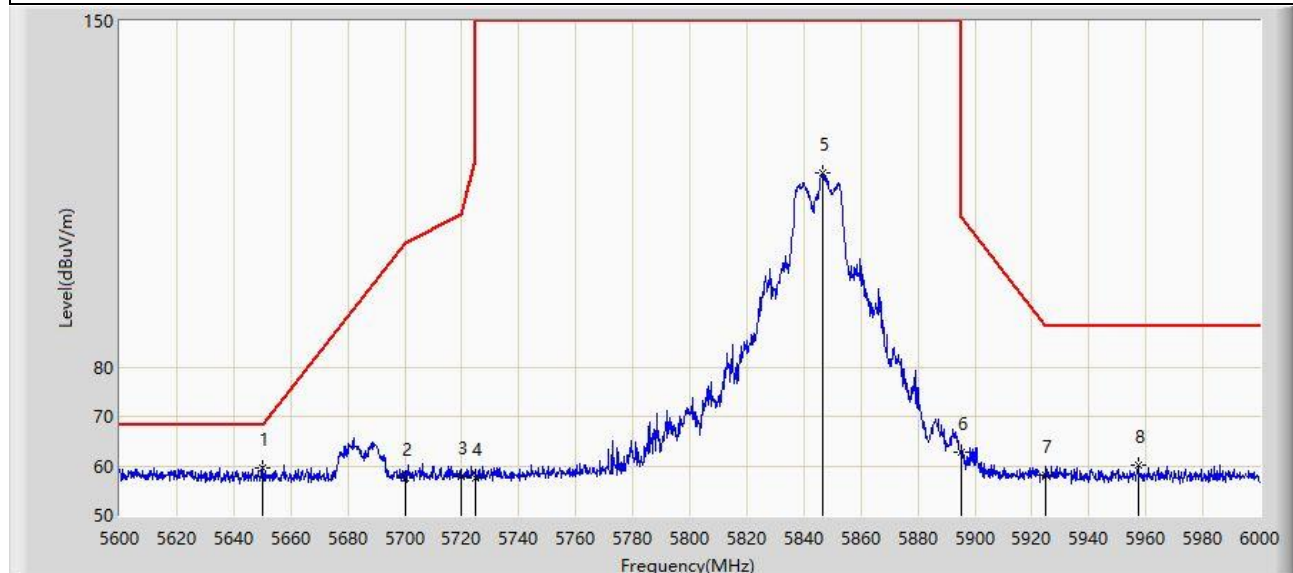


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5650.000	59.628	54.732	-8.572	68.200	4.896	PK
2		5700.000	57.631	52.366	-47.569	105.200	5.265	PK
3		5720.000	57.928	52.837	-52.872	110.800	5.091	PK
4		5725.000	57.471	52.428	-64.729	122.200	5.043	PK
5		5846.800	119.211	113.583	N/A	N/A	5.628	PK
6		5895.000	62.845	57.505	-47.355	110.200	5.340	PK
7		5925.000	58.081	52.527	-30.119	88.200	5.554	PK
8		5957.400	60.067	54.680	-28.133	88.200	5.388	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5845 MHz	

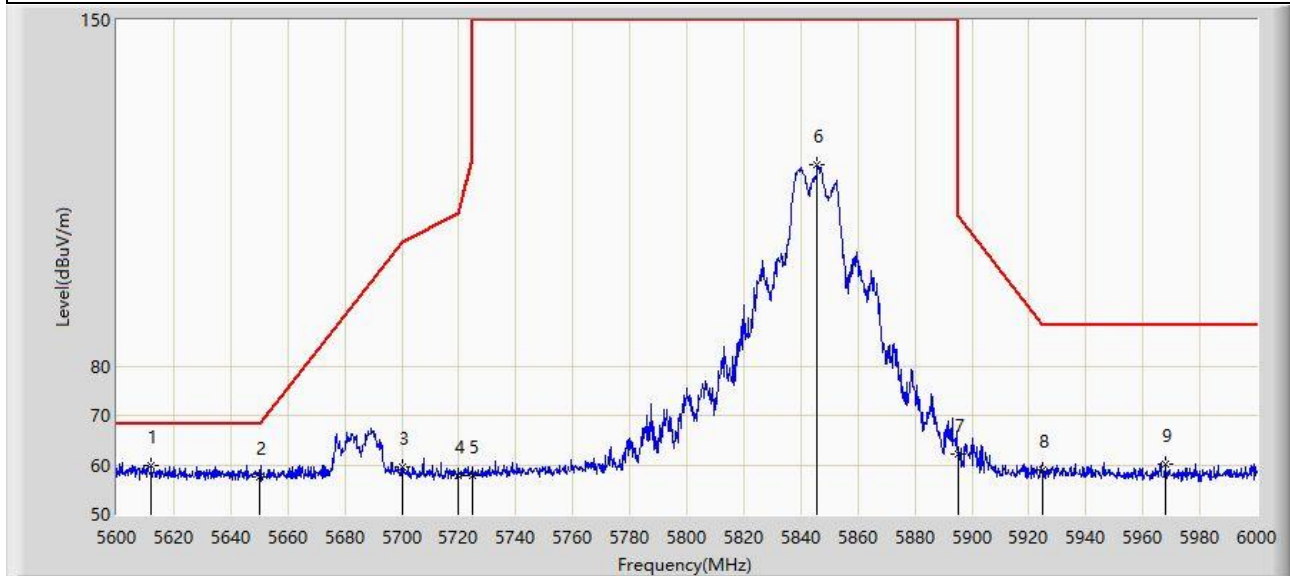

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5612.000	59.891	54.665	-8.309	68.200	5.226	PK
2		5650.000	57.548	52.652	-10.652	68.200	4.896	PK
3		5700.000	59.444	54.179	-45.756	105.200	5.265	PK
4		5720.000	57.797	52.706	-53.003	110.800	5.091	PK
5		5725.000	57.938	52.895	-64.262	122.200	5.043	PK
6		5845.800	120.851	115.214	N/A	N/A	5.637	PK
7		5895.000	62.304	56.964	-47.896	110.200	5.340	PK
8		5925.000	58.973	53.419	-29.227	88.200	5.554	PK
9		5967.800	60.126	54.800	-28.074	88.200	5.325	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5885 MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5639.400	59.932	55.053	-8.268	68.200	4.879	PK
2		5650.000	57.822	52.926	-10.378	68.200	4.896	PK
3		5700.000	57.653	52.388	-47.547	105.200	5.265	PK
4		5720.000	62.191	57.100	-48.609	110.800	5.091	PK
5		5725.000	60.173	55.130	-62.027	122.200	5.043	PK
6		5887.800	116.594	111.256	N/A	N/A	5.338	PK
7		5895.000	100.690	95.350	-9.510	110.200	5.340	PK
8		5925.000	58.422	52.868	-29.778	88.200	5.554	PK
9		5988.800	60.485	55.072	-27.715	88.200	5.414	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5885 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5610.600	60.342	55.086	-7.858	68.200	5.256	PK
2		5650.000	57.157	52.261	-11.043	68.200	4.896	PK
3		5700.000	57.660	52.395	-47.540	105.200	5.265	PK
4		5720.000	63.327	58.236	-47.473	110.800	5.091	PK
5		5725.000	61.822	56.779	-60.378	122.200	5.043	PK
6		5885.800	116.715	111.369	N/A	N/A	5.345	PK
7		5895.000	98.120	92.780	-12.080	110.200	5.340	PK
8		5925.000	59.191	53.637	-29.009	88.200	5.554	PK
9		5982.200	60.524	55.184	-27.676	88.200	5.340	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5845 MHz	

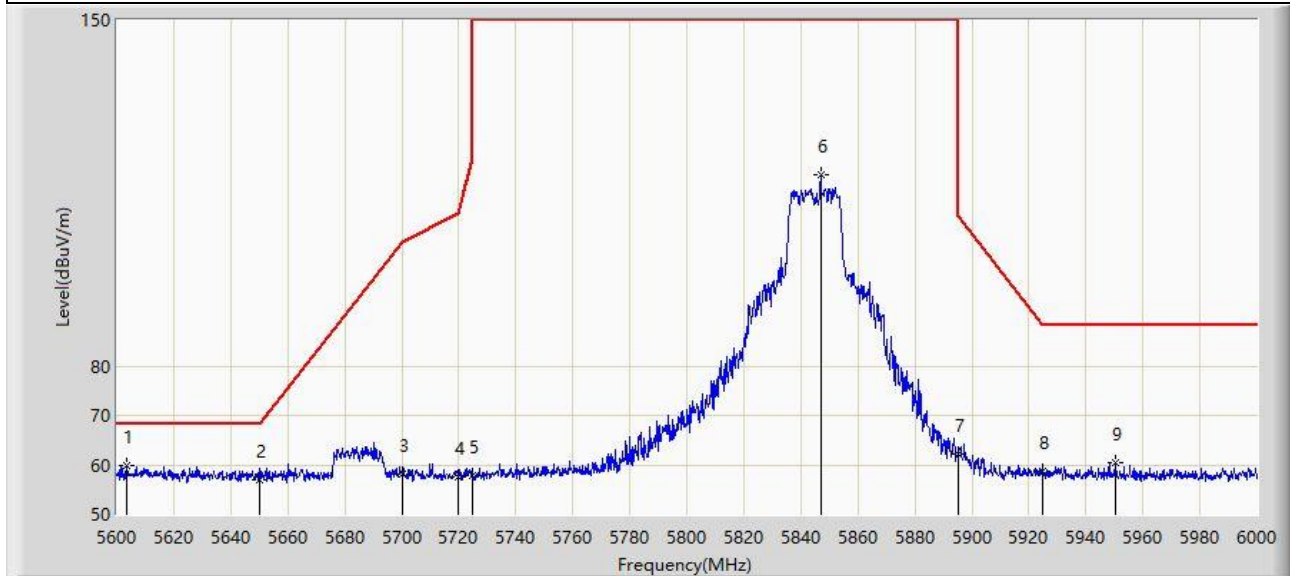


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5603.400	59.797	54.532	-8.403	68.200	5.266	PK
2		5650.000	56.828	51.932	-11.372	68.200	4.896	PK
3		5700.000	57.995	52.730	-47.205	105.200	5.265	PK
4		5720.000	57.408	52.317	-53.392	110.800	5.091	PK
5		5725.000	57.735	52.692	-64.465	122.200	5.043	PK
6		5847.000	118.653	113.027	N/A	N/A	5.625	PK
7		5895.000	62.080	56.740	-48.120	110.200	5.340	PK
8		5925.000	58.701	53.147	-29.499	88.200	5.554	PK
9		5950.600	60.401	54.949	-27.799	88.200	5.452	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5845 MHz	

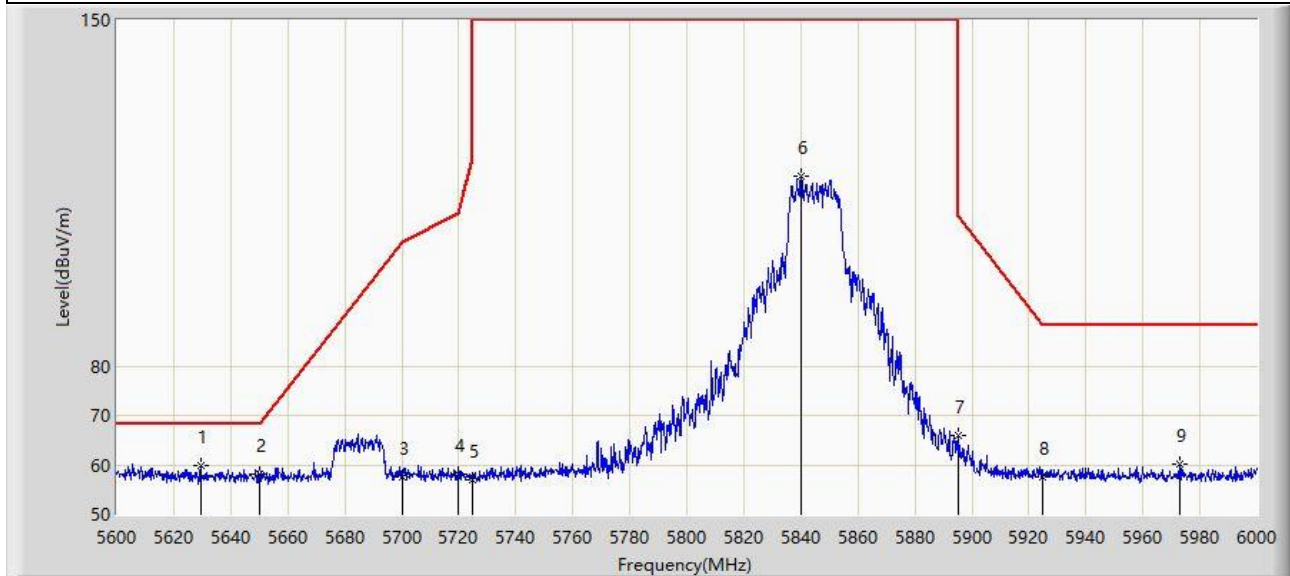


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5629.400	59.981	55.040	-8.219	68.200	4.941	PK
2		5650.000	58.150	53.254	-10.050	68.200	4.896	PK
3		5700.000	57.498	52.233	-47.702	105.200	5.265	PK
4		5720.000	58.108	53.017	-52.692	110.800	5.091	PK
5		5725.000	56.921	51.878	-65.279	122.200	5.043	PK
6		5840.000	118.286	112.714	N/A	N/A	5.571	PK
7		5895.000	65.990	60.650	-44.210	110.200	5.340	PK
8		5925.000	57.446	51.892	-30.754	88.200	5.554	PK
9		5972.800	60.116	54.778	-28.084	88.200	5.338	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5885 MHz	

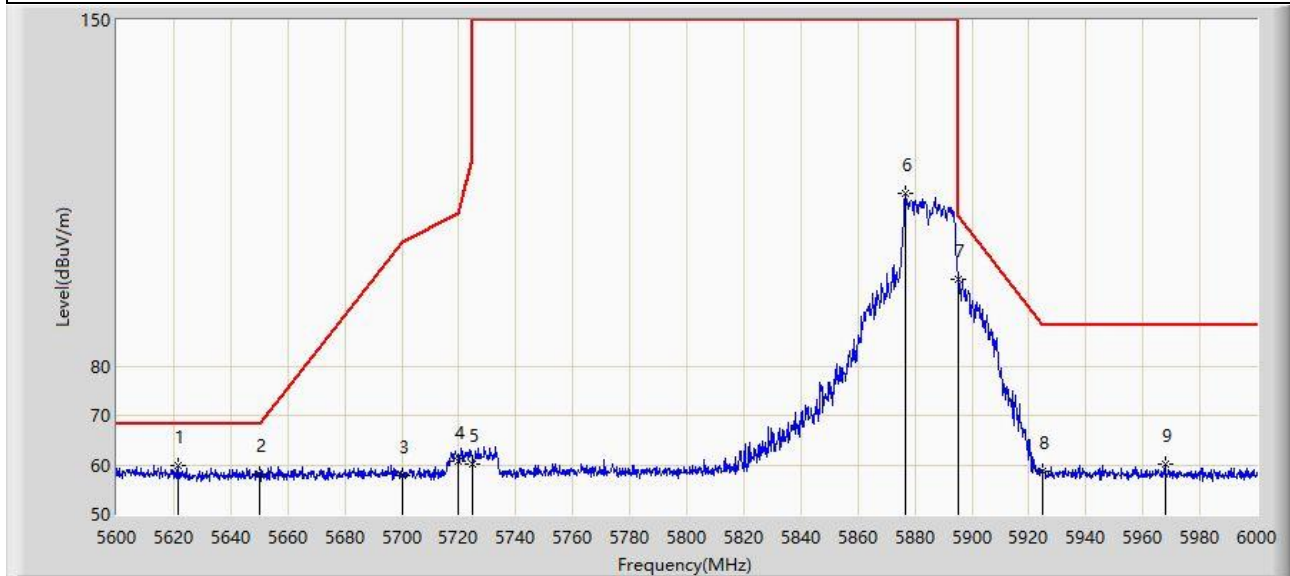


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5621.400	59.940	54.911	-8.260	68.200	5.029	PK
2		5650.000	58.035	53.139	-10.165	68.200	4.896	PK
3		5700.000	57.869	52.604	-47.331	105.200	5.265	PK
4		5720.000	60.788	55.697	-50.012	110.800	5.091	PK
5		5725.000	60.262	55.219	-61.938	122.200	5.043	PK
6		5876.600	114.813	109.400	N/A	N/A	5.413	PK
7		5895.000	97.418	92.078	-12.782	110.200	5.340	PK
8		5925.000	58.605	53.051	-29.595	88.200	5.554	PK
9		5967.800	60.080	54.754	-28.120	88.200	5.325	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5885 MHz	

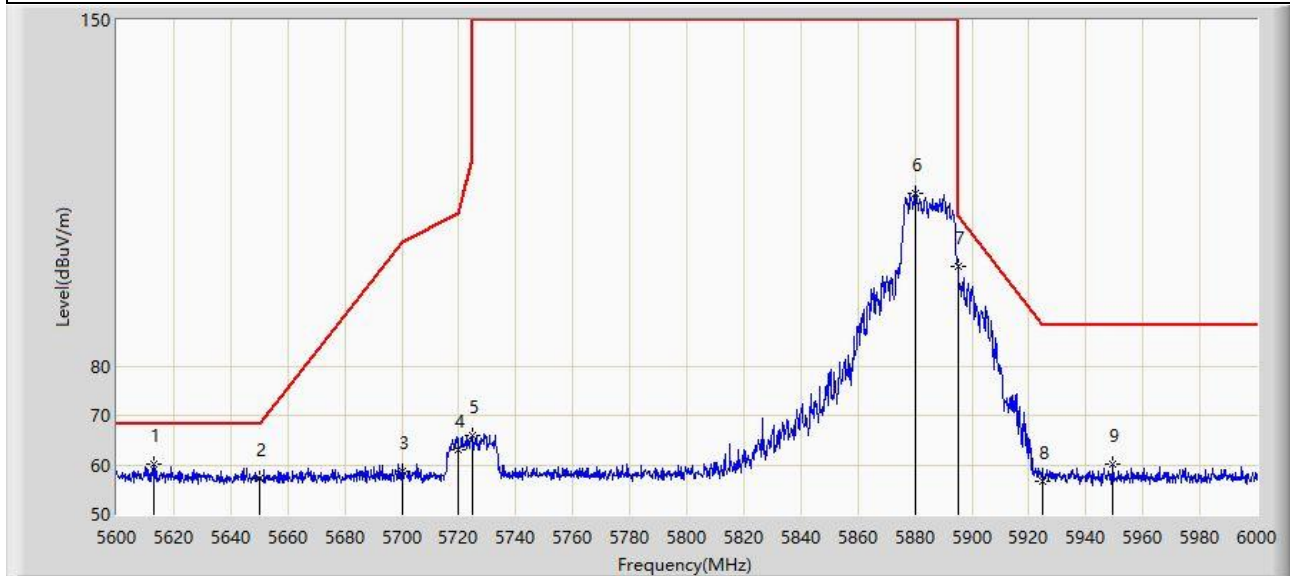


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5613.200	60.025	54.824	-8.175	68.200	5.201	PK
2		5650.000	57.121	52.225	-11.079	68.200	4.896	PK
3		5700.000	58.593	53.328	-46.607	105.200	5.265	PK
4		5720.000	62.945	57.854	-47.855	110.800	5.091	PK
5		5725.000	65.911	60.868	-56.289	122.200	5.043	PK
6		5880.200	115.071	109.703	N/A	N/A	5.369	PK
7		5895.000	100.289	94.949	-9.911	110.200	5.340	PK
8		5925.000	56.806	51.252	-31.394	88.200	5.554	PK
9		5949.400	60.020	54.557	-28.180	88.200	5.463	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5835 MHz	

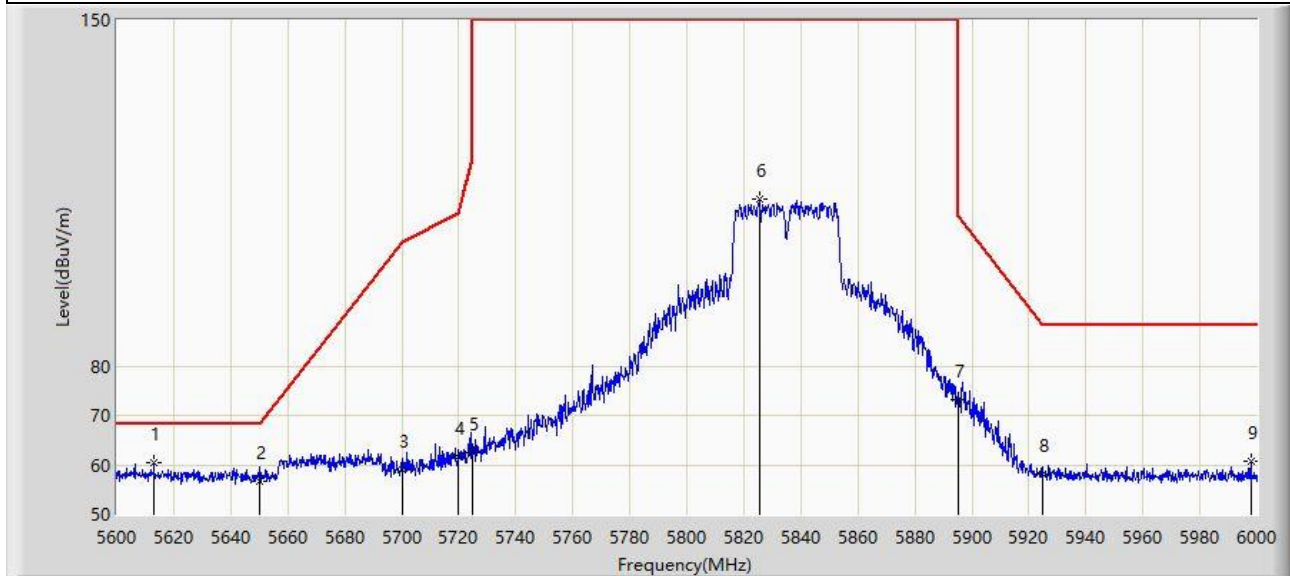


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5613.000	60.509	55.304	-7.691	68.200	5.205	PK
2		5650.000	56.714	51.818	-11.486	68.200	4.896	PK
3		5700.000	59.077	53.812	-46.123	105.200	5.265	PK
4		5720.000	61.511	56.420	-49.289	110.800	5.091	PK
5		5725.000	62.513	57.470	-59.687	122.200	5.043	PK
6		5825.400	113.738	108.380	N/A	N/A	5.358	PK
7		5895.000	73.259	67.919	-36.941	110.200	5.340	PK
8		5925.000	58.230	52.676	-29.970	88.200	5.554	PK
9		5997.800	60.625	55.095	-27.575	88.200	5.530	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5835 MHz	

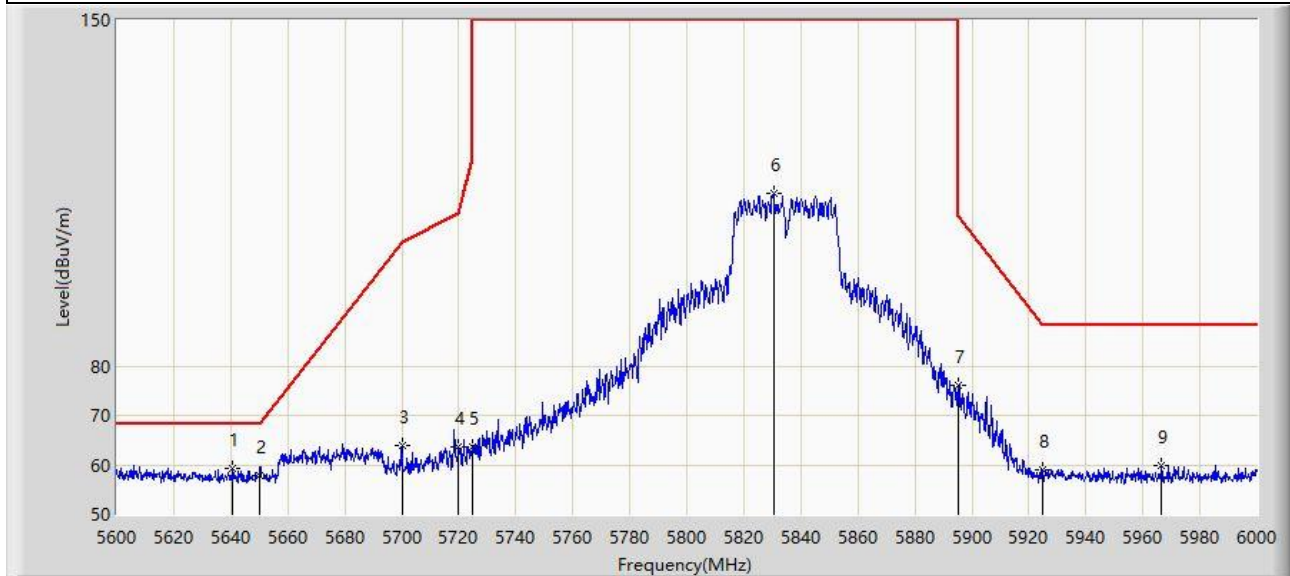


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5640.800	59.397	54.525	-8.803	68.200	4.872	PK
2		5650.000	57.793	52.897	-10.407	68.200	4.896	PK
3		5700.000	63.825	58.560	-41.375	105.200	5.265	PK
4		5720.000	63.555	58.464	-47.245	110.800	5.091	PK
5		5725.000	63.708	58.665	-58.492	122.200	5.043	PK
6		5830.400	114.867	109.463	N/A	N/A	5.404	PK
7		5895.000	76.127	70.787	-34.073	110.200	5.340	PK
8		5925.000	59.017	53.463	-29.183	88.200	5.554	PK
9		5966.600	59.877	54.554	-28.323	88.200	5.323	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5875 MHz	

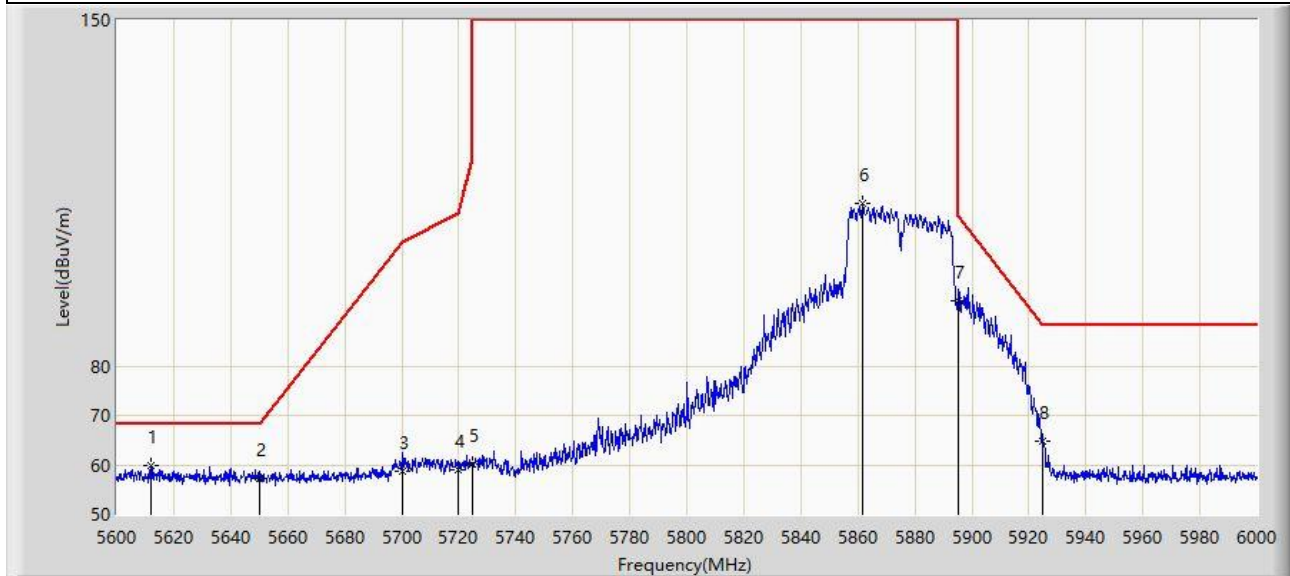


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5611.800	59.861	54.630	-8.339	68.200	5.231	PK
2		5650.000	57.157	52.261	-11.043	68.200	4.896	PK
3		5700.000	58.599	53.334	-46.601	105.200	5.265	PK
4		5720.000	59.084	53.993	-51.716	110.800	5.091	PK
5		5725.000	60.260	55.217	-61.940	122.200	5.043	PK
6		5861.800	112.759	107.174	N/A	N/A	5.585	PK
7		5895.000	93.216	87.876	-16.984	110.200	5.340	PK
8		5925.000	64.895	59.341	-23.305	88.200	5.554	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5875 MHz	

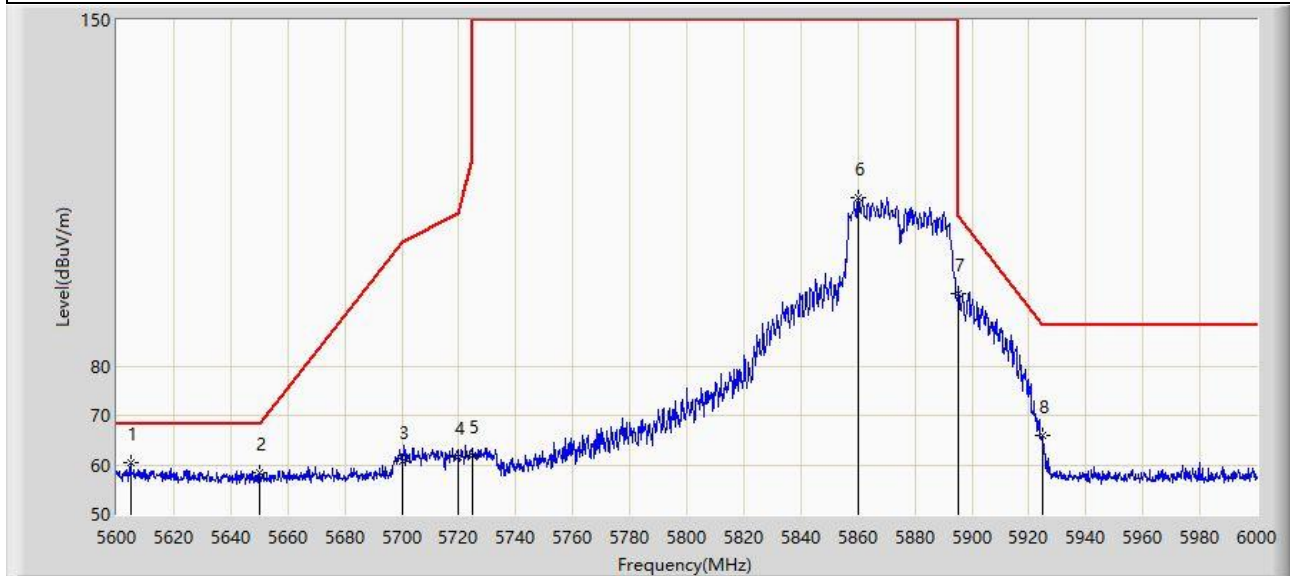


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5604.800	60.333	55.042	-7.867	68.200	5.291	PK
2		5650.000	58.299	53.403	-9.901	68.200	4.896	PK
3		5700.000	60.644	55.379	-44.556	105.200	5.265	PK
4		5720.000	61.579	56.488	-49.221	110.800	5.091	PK
5		5725.000	61.795	56.752	-60.405	122.200	5.043	PK
6		5860.200	114.180	108.596	N/A	N/A	5.583	PK
7		5895.000	94.563	89.223	-15.637	110.200	5.340	PK
8		5925.000	65.828	60.274	-22.372	88.200	5.554	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5855 MHz	

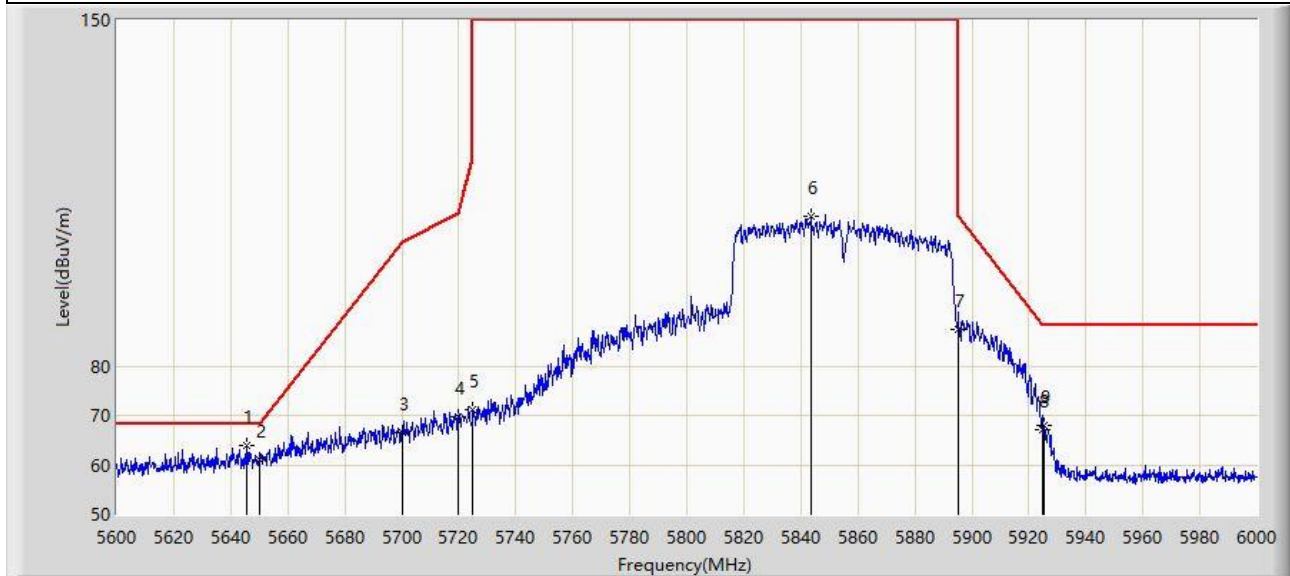


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5645.600	63.900	59.016	-4.300	68.200	4.884	PK
2		5650.000	60.959	56.063	-7.241	68.200	4.896	PK
3		5700.000	66.580	61.315	-38.620	105.200	5.265	PK
4		5720.000	69.781	64.690	-41.019	110.800	5.091	PK
5		5725.000	71.043	66.000	-51.157	122.200	5.043	PK
6		5843.600	110.427	104.804	N/A	N/A	5.624	PK
7		5895.000	87.340	82.000	-22.860	110.200	5.340	PK
8		5925.000	67.227	61.673	-20.973	88.200	5.554	PK
9		5925.200	67.925	62.372	-20.275	88.200	5.552	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5855 MHz	

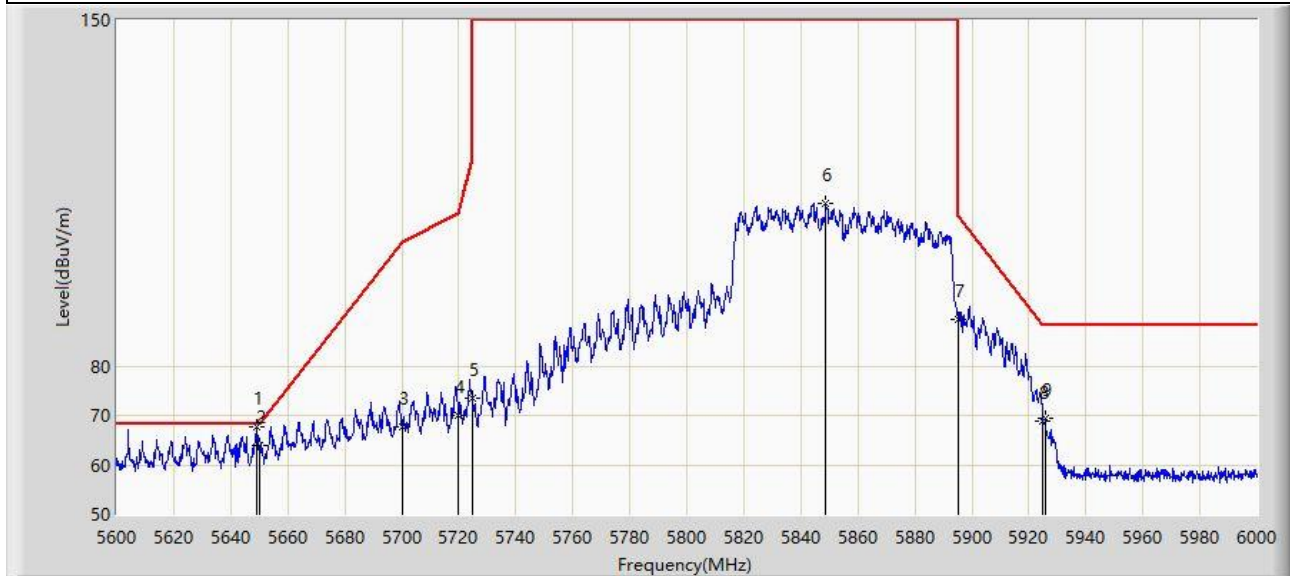


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5649.200	67.600	62.707	-0.600	68.200	4.893	PK
2		5650.000	63.892	58.996	-4.308	68.200	4.896	PK
3		5700.000	67.617	62.352	-37.583	105.200	5.265	PK
4		5720.000	69.881	64.790	-40.919	110.800	5.091	PK
5		5725.000	73.572	68.529	-48.628	122.200	5.043	PK
6		5848.600	112.985	107.373	N/A	N/A	5.612	PK
7		5895.000	89.462	84.122	-20.738	110.200	5.340	PK
8		5925.000	68.790	63.236	-19.410	88.200	5.554	PK
9		5925.800	69.336	63.786	-18.864	88.200	5.550	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-09
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by ac-VHT160 at 5815 MHz	

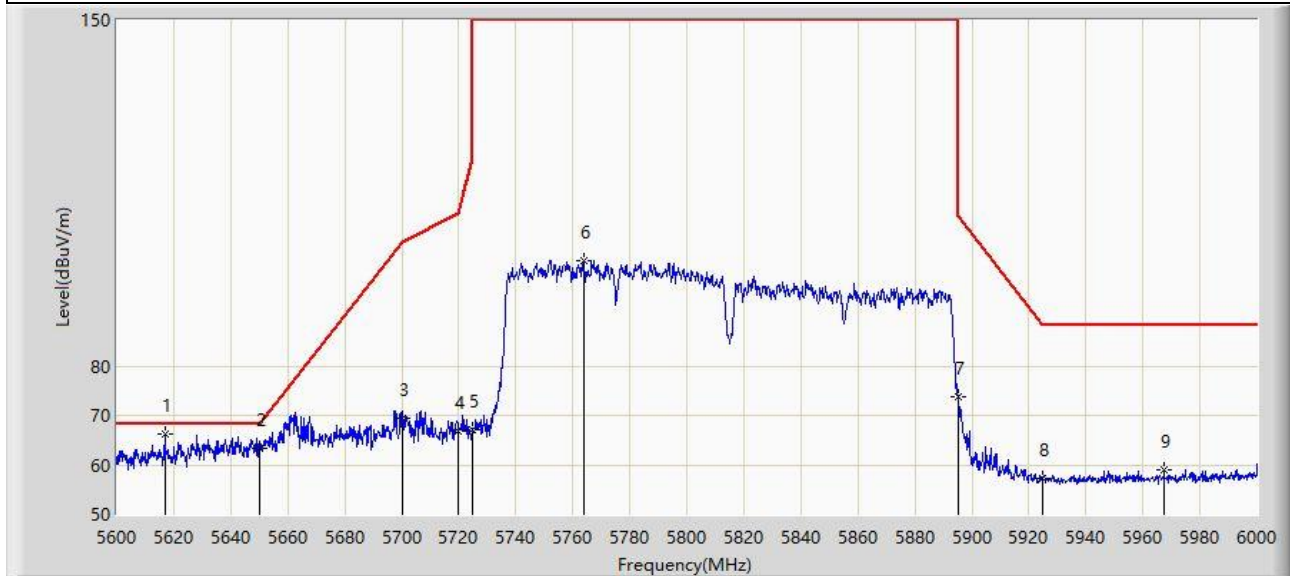


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5616.800	66.350	61.226	-1.850	68.200	5.125	PK
2		5650.000	63.427	58.531	-4.773	68.200	4.896	PK
3		5700.000	69.493	64.228	-35.707	105.200	5.265	PK
4		5720.000	66.751	61.660	-44.049	110.800	5.091	PK
5		5725.000	67.206	62.163	-54.994	122.200	5.043	PK
6		5763.800	101.404	95.998	N/A	N/A	5.406	PK
7		5895.000	73.731	68.391	-36.469	110.200	5.340	PK
8		5925.000	57.125	51.571	-31.075	88.200	5.554	PK
9		5967.400	59.014	53.689	-29.186	88.200	5.325	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-09
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by ac-VHT160 at 5815 MHz	

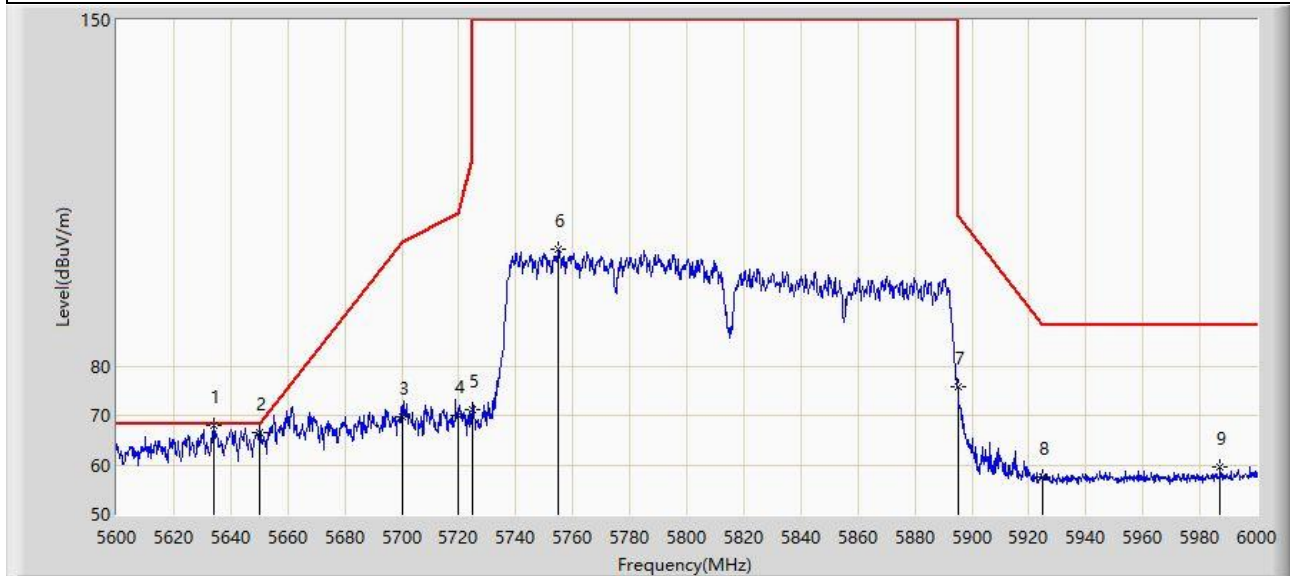


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5634.000	67.905	62.994	-0.295	68.200	4.911	PK
2		5650.000	66.578	61.682	-1.622	68.200	4.896	PK
3		5700.000	69.708	64.443	-35.492	105.200	5.265	PK
4		5720.000	70.072	64.981	-40.728	110.800	5.091	PK
5		5725.000	71.299	66.256	-50.901	122.200	5.043	PK
6		5755.000	103.528	98.175	N/A	N/A	5.353	PK
7		5895.000	75.720	70.380	-34.480	110.200	5.340	PK
8		5925.000	57.592	52.038	-30.608	88.200	5.554	PK
9		5987.200	59.446	54.051	-28.754	88.200	5.395	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5845 MHz	

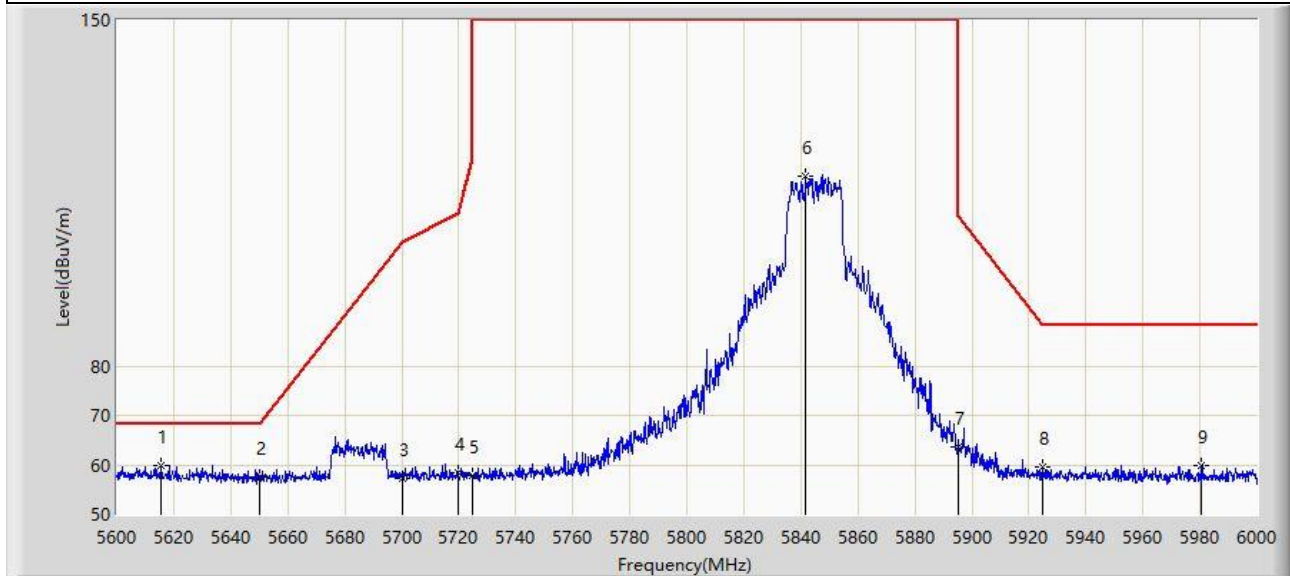


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5615.400	59.987	54.833	-8.213	68.200	5.154	PK
2		5650.000	57.539	52.643	-10.661	68.200	4.896	PK
3		5700.000	57.213	51.948	-47.987	105.200	5.265	PK
4		5720.000	58.365	53.274	-52.435	110.800	5.091	PK
5		5725.000	57.816	52.773	-64.384	122.200	5.043	PK
6		5841.800	118.487	112.890	N/A	N/A	5.597	PK
7		5895.000	63.714	58.374	-46.486	110.200	5.340	PK
8		5925.000	59.443	53.889	-28.757	88.200	5.554	PK
9		5980.600	59.800	54.470	-28.400	88.200	5.330	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5845 MHz	

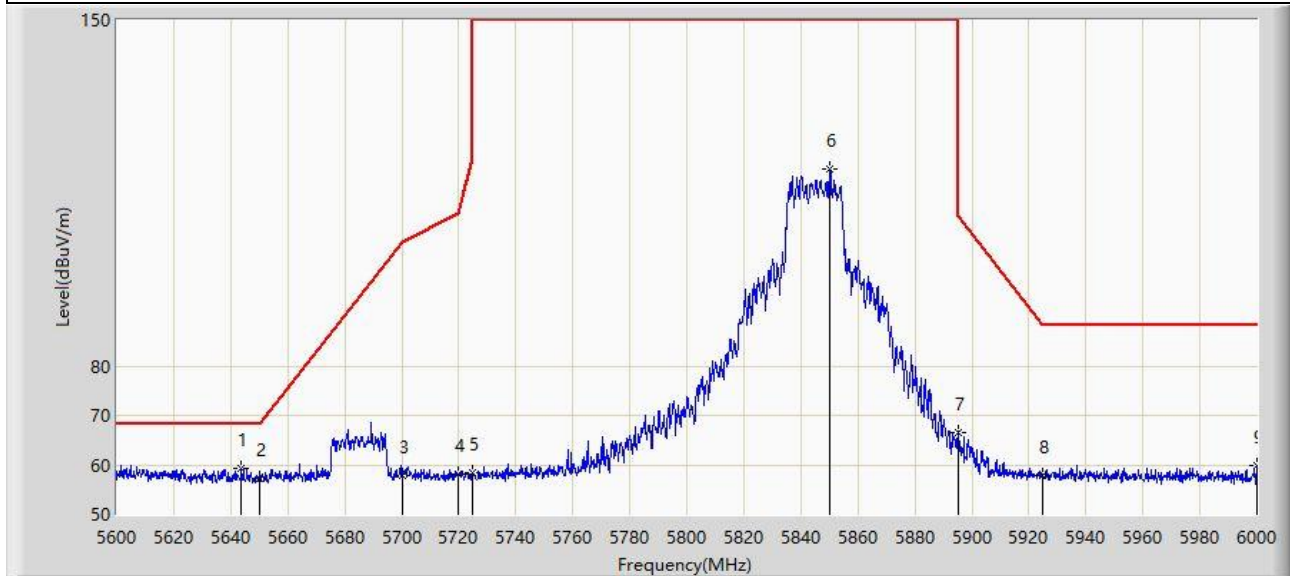


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5643.600	59.363	54.485	-8.837	68.200	4.878	PK
2		5650.000	57.308	52.412	-10.892	68.200	4.896	PK
3		5700.000	57.967	52.702	-47.233	105.200	5.265	PK
4		5720.000	58.215	53.124	-52.585	110.800	5.091	PK
5		5725.000	58.473	53.430	-63.727	122.200	5.043	PK
6		5850.200	119.939	114.341	N/A	N/A	5.599	PK
7		5895.000	66.437	61.097	-43.763	110.200	5.340	PK
8		5925.000	57.968	52.414	-30.232	88.200	5.554	PK
9		6000.000	59.838	54.291	-28.362	88.200	5.546	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5885 MHz	

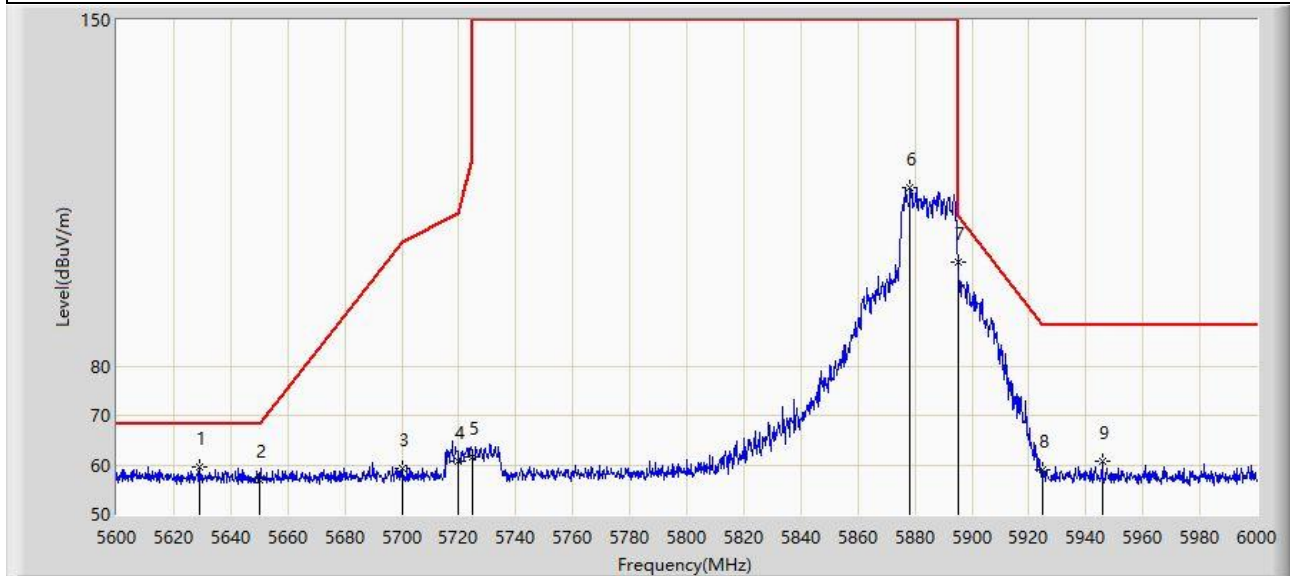


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5629.000	59.481	54.537	-8.719	68.200	4.944	PK
2		5650.000	56.866	51.970	-11.334	68.200	4.896	PK
3		5700.000	59.364	54.099	-45.836	105.200	5.265	PK
4		5720.000	60.683	55.592	-50.117	110.800	5.091	PK
5		5725.000	61.629	56.586	-60.571	122.200	5.043	PK
6		5878.400	116.123	110.740	N/A	N/A	5.383	PK
7		5895.000	101.001	95.661	-9.199	110.200	5.340	PK
8		5925.000	59.059	53.505	-29.141	88.200	5.554	PK
9		5945.800	60.812	55.332	-27.388	88.200	5.481	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5885 MHz	

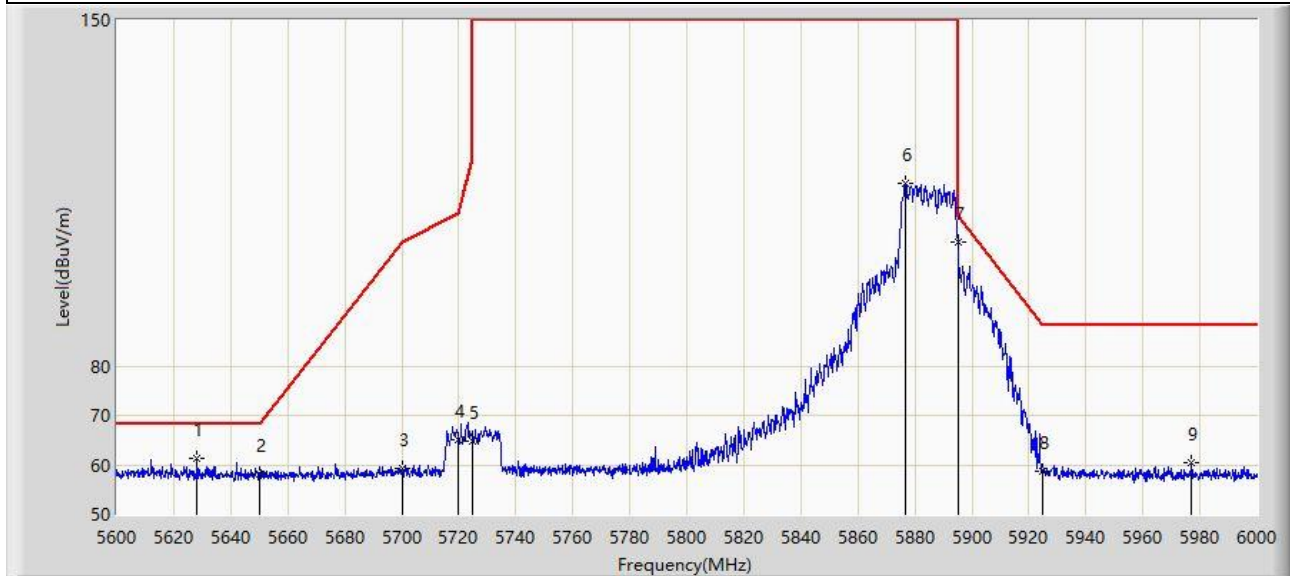


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5628.200	61.181	56.232	-7.019	68.200	4.949	PK
2		5650.000	58.028	53.132	-10.172	68.200	4.896	PK
3		5700.000	59.176	53.911	-46.024	105.200	5.265	PK
4		5720.000	65.011	59.920	-45.789	110.800	5.091	PK
5		5725.000	64.718	59.675	-57.482	122.200	5.043	PK
6		5876.600	117.033	111.620	N/A	N/A	5.413	PK
7	*	5895.000	105.109	99.769	-5.091	110.200	5.340	PK
8		5925.000	58.727	53.173	-29.473	88.200	5.554	PK
9		5977.000	60.510	55.162	-27.690	88.200	5.347	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5835 MHz	

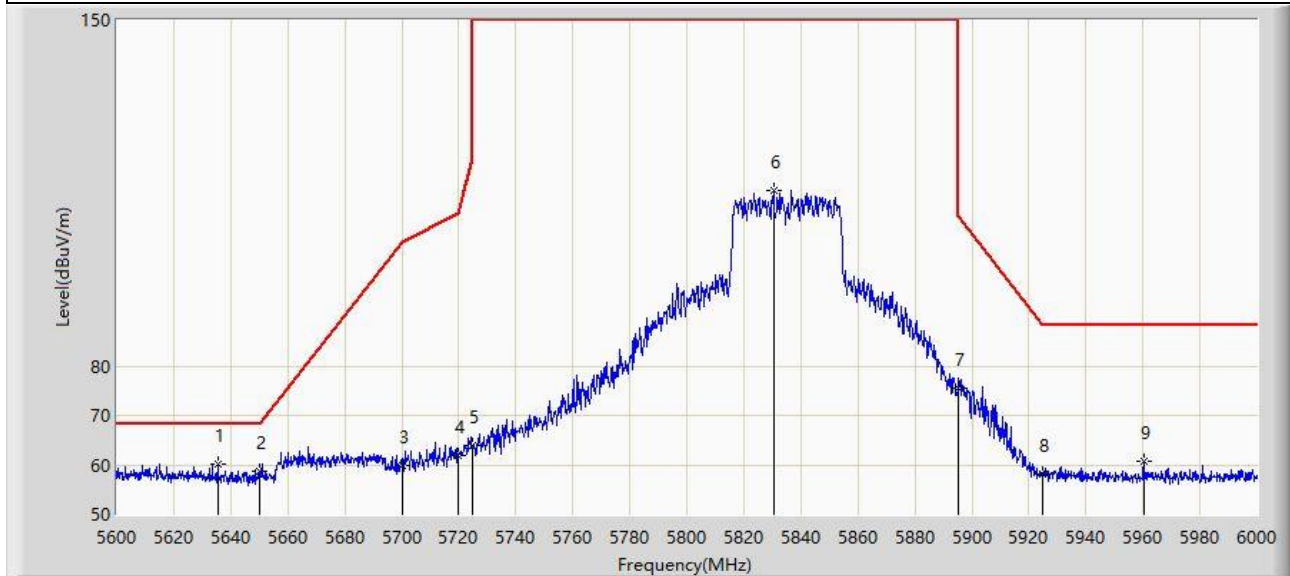


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5635.400	60.042	55.141	-8.158	68.200	4.901	PK
2		5650.000	58.734	53.838	-9.466	68.200	4.896	PK
3		5700.000	59.882	54.617	-45.318	105.200	5.265	PK
4		5720.000	61.971	56.880	-48.829	110.800	5.091	PK
5		5725.000	63.821	58.778	-58.379	122.200	5.043	PK
6		5830.600	115.635	110.227	N/A	N/A	5.409	PK
7		5895.000	75.589	70.249	-34.611	110.200	5.340	PK
8		5925.000	58.056	52.502	-30.144	88.200	5.554	PK
9		5960.200	60.704	55.343	-27.496	88.200	5.361	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5835 MHz	

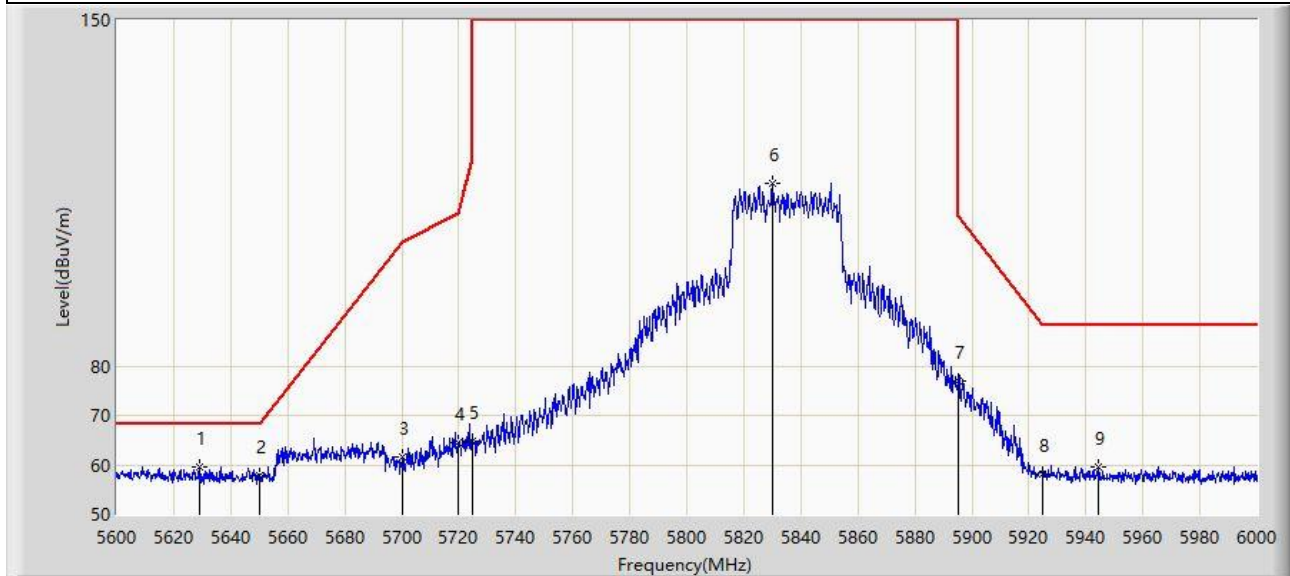


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5629.000	59.581	54.637	-8.619	68.200	4.944	PK
2		5650.000	57.788	52.892	-10.412	68.200	4.896	PK
3		5700.000	61.682	56.417	-43.518	105.200	5.265	PK
4		5720.000	64.395	59.304	-46.405	110.800	5.091	PK
5		5725.000	64.792	59.749	-57.408	122.200	5.043	PK
6		5830.000	116.990	111.595	N/A	N/A	5.395	PK
7		5895.000	76.862	71.522	-33.338	110.200	5.340	PK
8		5925.000	58.155	52.601	-30.045	88.200	5.554	PK
9		5944.200	59.603	54.131	-28.597	88.200	5.472	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5875 MHz	

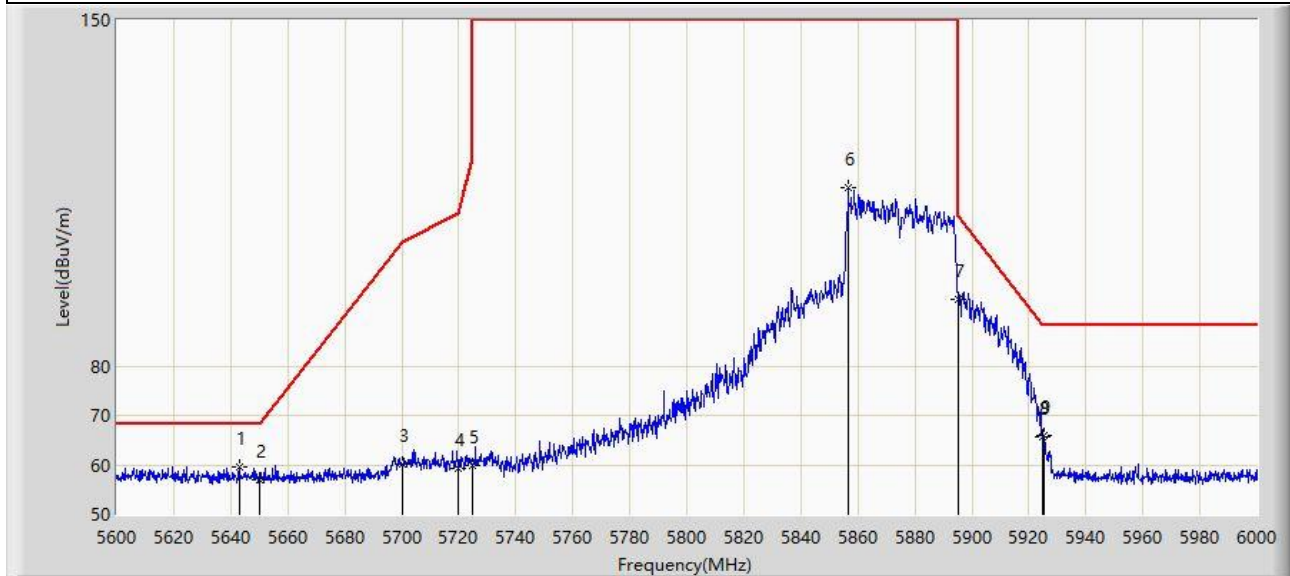


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5643.000	59.600	54.724	-8.600	68.200	4.876	PK
2		5650.000	56.903	52.007	-11.297	68.200	4.896	PK
3		5700.000	60.030	54.765	-45.170	105.200	5.265	PK
4		5720.000	59.408	54.317	-51.392	110.800	5.091	PK
5		5725.000	59.852	54.809	-62.348	122.200	5.043	PK
6		5856.600	115.975	110.393	N/A	N/A	5.582	PK
7		5895.000	93.616	88.276	-16.584	110.200	5.340	PK
8		5925.000	65.719	60.165	-22.481	88.200	5.554	PK
9		5925.200	65.819	60.266	-22.381	88.200	5.552	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5875 MHz	

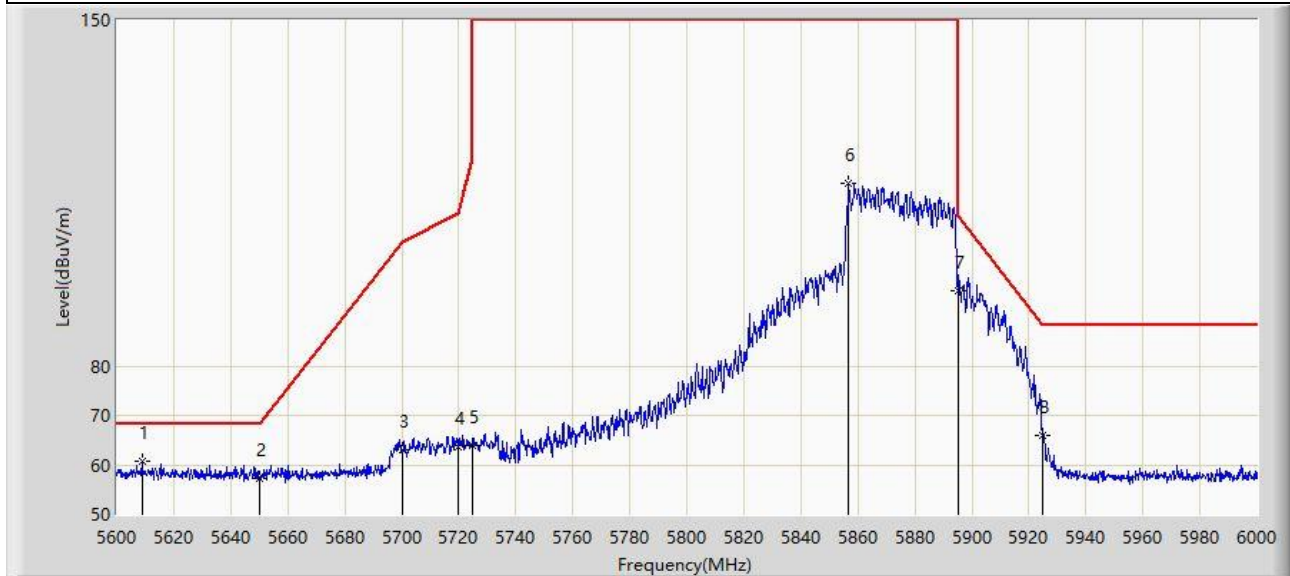


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5608.800	60.591	55.296	-7.609	68.200	5.295	PK
2		5650.000	57.385	52.489	-10.815	68.200	4.896	PK
3		5700.000	63.034	57.769	-42.166	105.200	5.265	PK
4		5720.000	63.532	58.441	-47.268	110.800	5.091	PK
5		5725.000	63.856	58.813	-58.344	122.200	5.043	PK
6		5856.600	117.063	111.481	N/A	N/A	5.582	PK
7		5895.000	95.358	90.018	-14.842	110.200	5.340	PK
8		5925.000	66.066	60.512	-22.134	88.200	5.554	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5855 MHz	

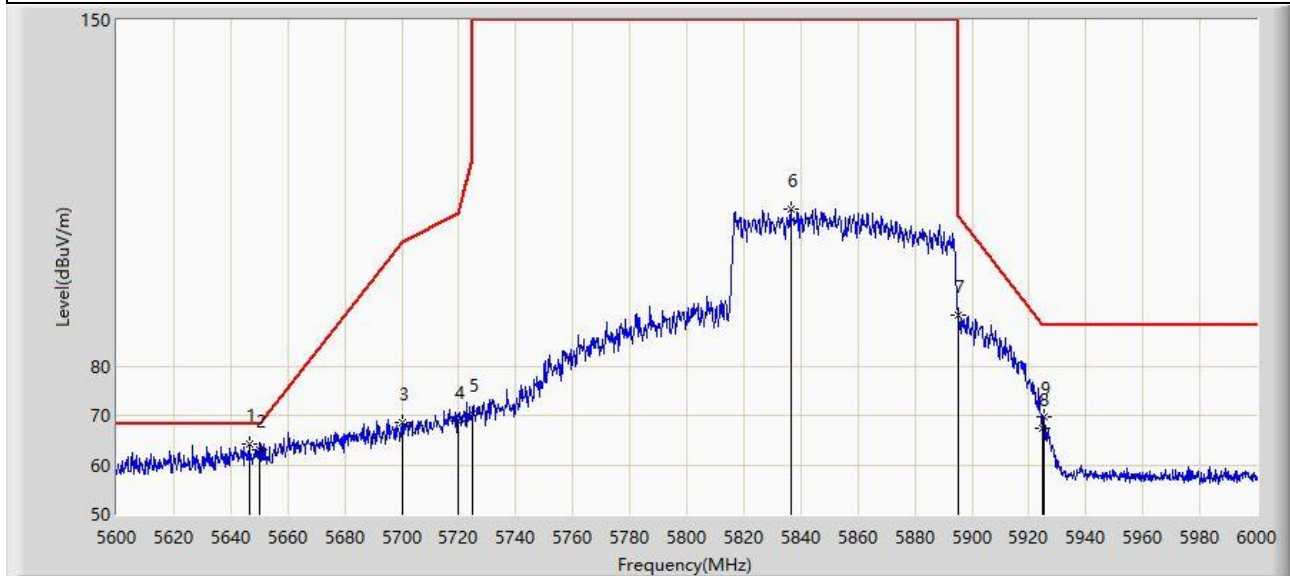


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5646.400	64.177	59.291	-4.023	68.200	4.885	PK
2		5650.000	63.032	58.136	-5.168	68.200	4.896	PK
3		5700.000	68.475	63.210	-36.725	105.200	5.265	PK
4		5720.000	68.877	63.786	-41.923	110.800	5.091	PK
5		5725.000	70.290	65.247	-51.910	122.200	5.043	PK
6		5836.400	111.773	106.253	N/A	N/A	5.520	PK
7		5895.000	90.258	84.918	-19.942	110.200	5.340	PK
8		5925.000	67.501	61.947	-20.699	88.200	5.554	PK
9		5925.200	69.608	64.055	-18.592	88.200	5.552	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5855 MHz	

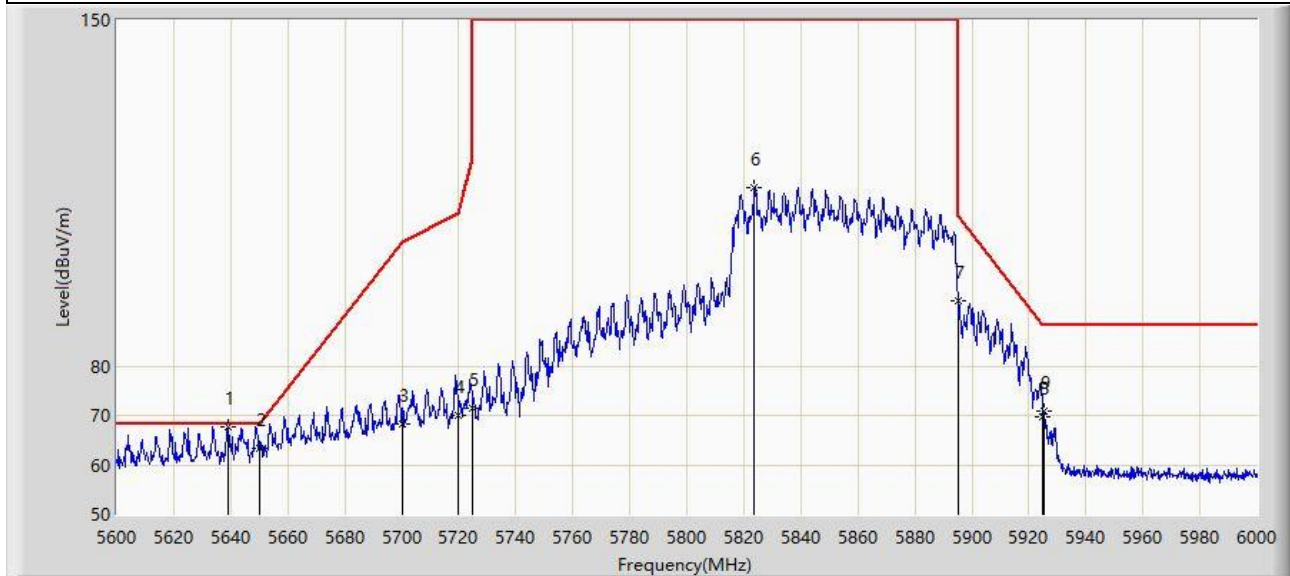


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5639.200	67.789	62.909	-0.411	68.200	4.880	PK
2		5650.000	63.277	58.381	-4.923	68.200	4.896	PK
3		5700.000	68.318	63.053	-36.882	105.200	5.265	PK
4		5720.000	69.928	64.837	-40.872	110.800	5.091	PK
5		5725.000	71.578	66.535	-50.622	122.200	5.043	PK
6		5823.800	116.007	110.645	N/A	N/A	5.363	PK
7		5895.000	93.325	87.985	-16.875	110.200	5.340	PK
8		5925.000	69.671	64.117	-18.529	88.200	5.554	PK
9		5925.200	70.815	65.262	-17.385	88.200	5.552	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-09
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by ax-HE160 at 5815 MHz	

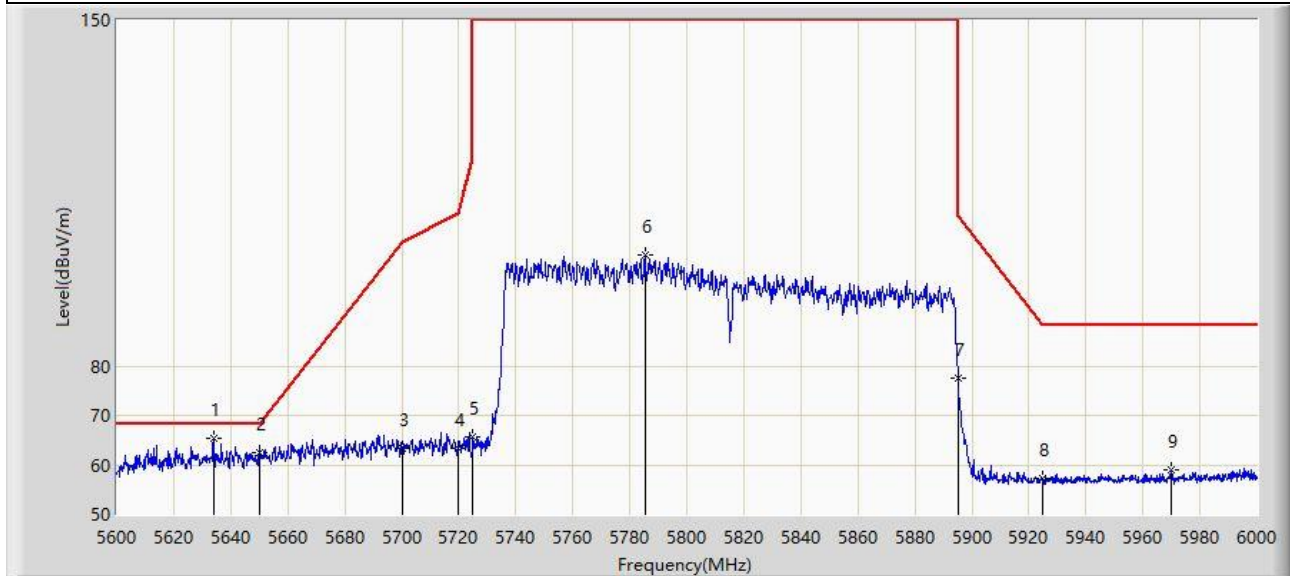


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5634.200	65.365	60.456	-2.835	68.200	4.909	PK
2		5650.000	62.593	57.697	-5.607	68.200	4.896	PK
3		5700.000	63.324	58.059	-41.876	105.200	5.265	PK
4		5720.000	63.309	58.218	-47.491	110.800	5.091	PK
5		5725.000	65.704	60.661	-56.496	122.200	5.043	PK
6		5785.400	102.580	97.244	N/A	N/A	5.337	PK
7		5895.000	77.574	72.234	-32.626	110.200	5.340	PK
8		5925.000	57.181	51.627	-31.019	88.200	5.554	PK
9		5969.800	58.989	53.659	-29.211	88.200	5.330	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-09
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by ax-HE160 at 5815 MHz	

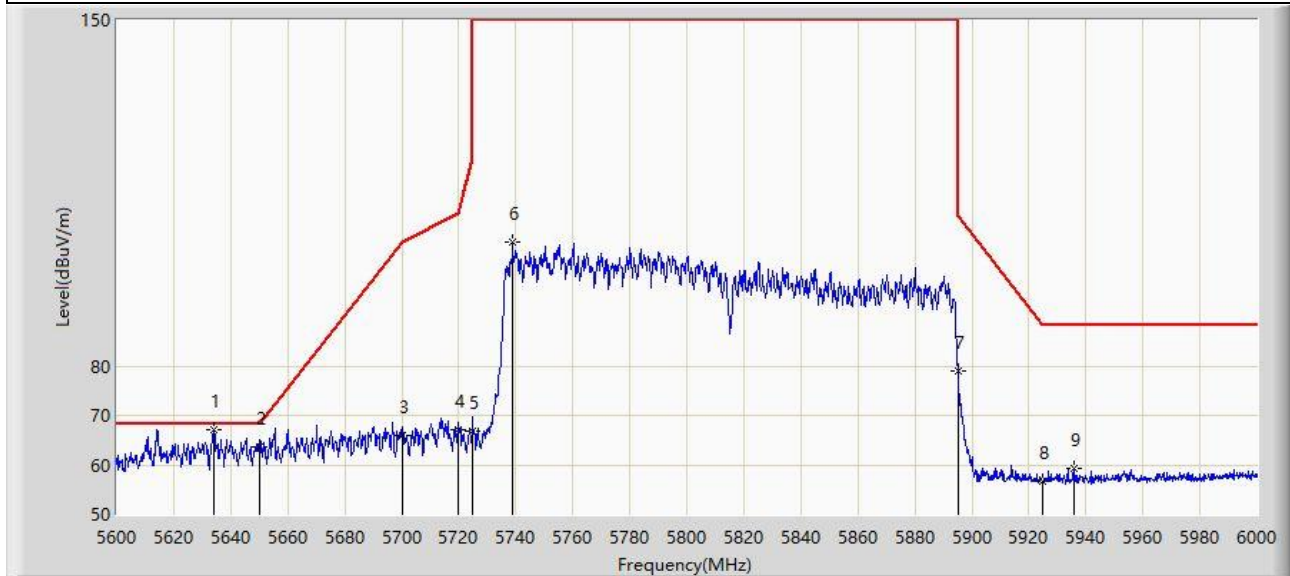


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5634.000	67.184	62.273	-1.016	68.200	4.911	PK
2		5650.000	63.652	58.756	-4.548	68.200	4.896	PK
3		5700.000	66.077	60.812	-39.123	105.200	5.265	PK
4		5720.000	66.964	61.873	-43.836	110.800	5.091	PK
5		5725.000	66.936	61.893	-55.264	122.200	5.043	PK
6		5738.800	105.193	100.022	N/A	N/A	5.171	PK
7		5895.000	79.090	73.750	-31.110	110.200	5.340	PK
8		5925.000	56.743	51.189	-31.457	88.200	5.554	PK
9		5935.600	59.202	53.702	-28.998	88.200	5.499	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5845 MHz	

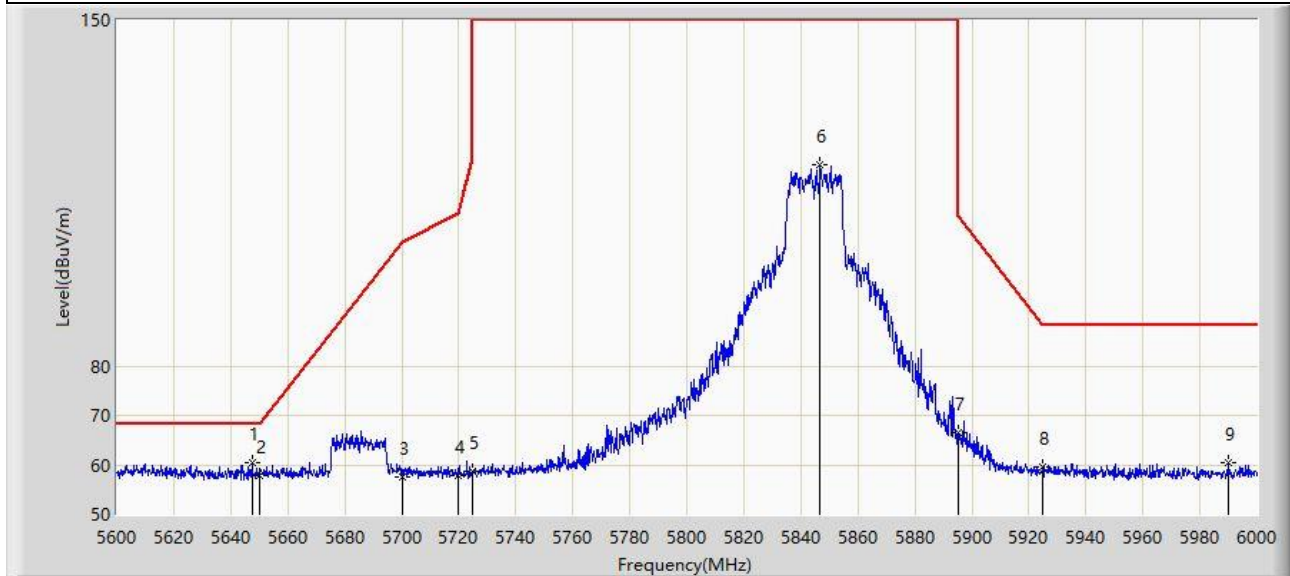


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.400	60.291	55.403	-7.909	68.200	4.889	PK
2		5650.000	57.799	52.903	-10.401	68.200	4.896	PK
3		5700.000	57.670	52.405	-47.530	105.200	5.265	PK
4		5720.000	57.816	52.725	-52.984	110.800	5.091	PK
5		5725.000	58.726	53.683	-63.474	122.200	5.043	PK
6		5846.800	120.723	115.095	N/A	N/A	5.628	PK
7		5895.000	66.466	61.126	-43.734	110.200	5.340	PK
8		5925.000	59.590	54.036	-28.610	88.200	5.554	PK
9		5990.200	60.436	55.007	-27.764	88.200	5.428	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5845 MHz	

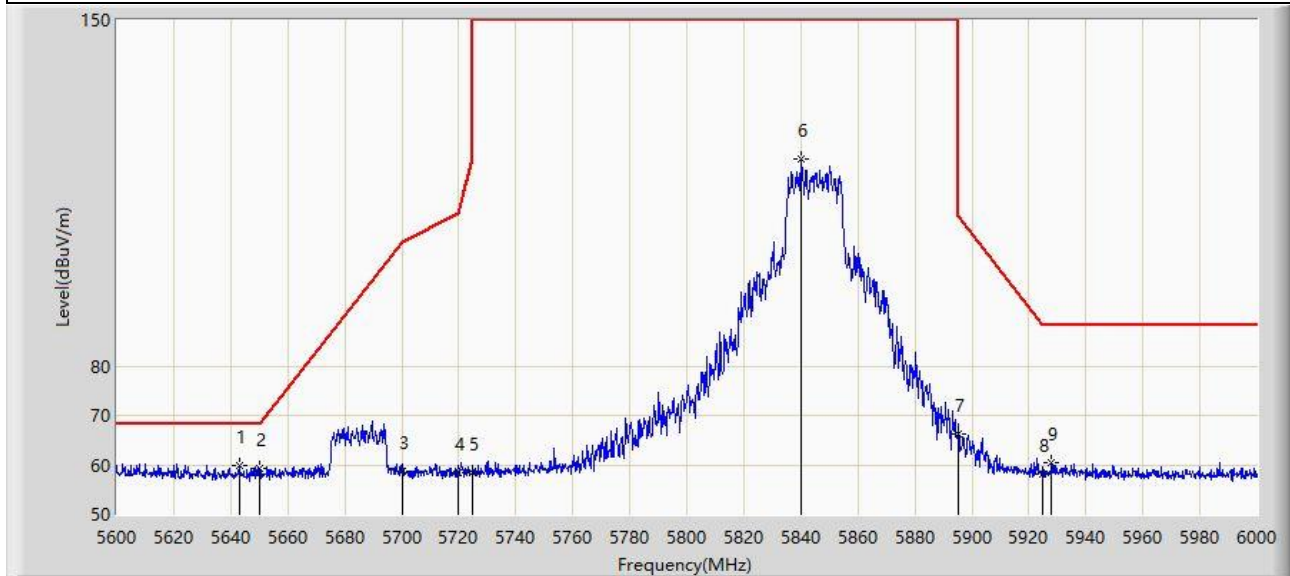


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5643.000	59.858	54.982	-8.342	68.200	4.876	PK
2		5650.000	59.189	54.293	-9.011	68.200	4.896	PK
3		5700.000	58.639	53.374	-46.561	105.200	5.265	PK
4		5720.000	58.542	53.451	-52.258	110.800	5.091	PK
5		5725.000	58.360	53.317	-63.840	122.200	5.043	PK
6		5840.200	121.829	116.255	N/A	N/A	5.575	PK
7		5895.000	66.116	60.776	-44.084	110.200	5.340	PK
8		5925.000	58.011	52.457	-30.189	88.200	5.554	PK
9		5927.800	60.499	54.957	-27.701	88.200	5.542	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5885 MHz	

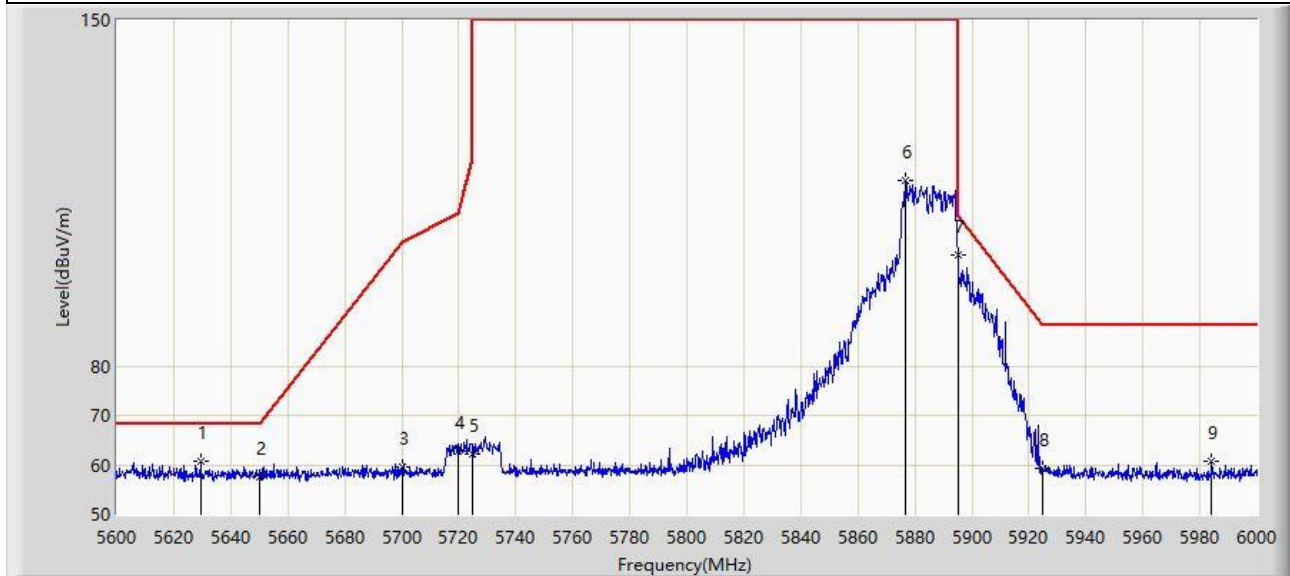


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5629.400	60.719	55.778	-7.481	68.200	4.941	PK
2		5650.000	57.536	52.640	-10.664	68.200	4.896	PK
3		5700.000	59.440	54.175	-45.760	105.200	5.265	PK
4		5720.000	62.768	57.677	-48.032	110.800	5.091	PK
5		5725.000	62.030	56.987	-60.170	122.200	5.043	PK
6		5876.800	117.560	112.151	N/A	N/A	5.409	PK
7		5895.000	102.565	97.225	-7.635	110.200	5.340	PK
8		5925.000	59.387	53.833	-28.813	88.200	5.554	PK
9		5984.200	60.863	55.501	-27.337	88.200	5.362	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5885 MHz	

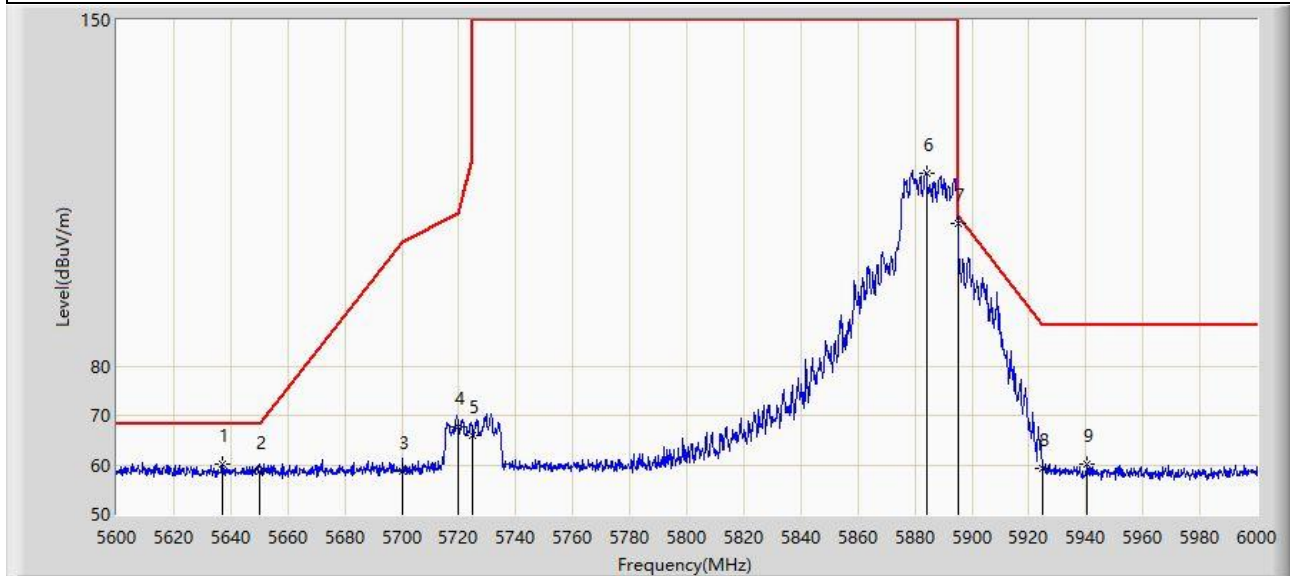


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5637.000	60.207	55.316	-7.993	68.200	4.892	PK
2		5650.000	58.567	53.671	-9.633	68.200	4.896	PK
3		5700.000	58.797	53.532	-46.403	105.200	5.265	PK
4		5720.000	67.808	62.717	-42.992	110.800	5.091	PK
5		5725.000	66.022	60.979	-56.178	122.200	5.043	PK
6		5884.000	118.977	113.624	N/A	N/A	5.353	PK
7	*	5895.000	108.874	103.534	-1.326	110.200	5.340	PK
8		5925.000	59.157	53.603	-29.043	88.200	5.554	PK
9		5940.600	60.154	54.683	-28.046	88.200	5.470	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5835 MHz	

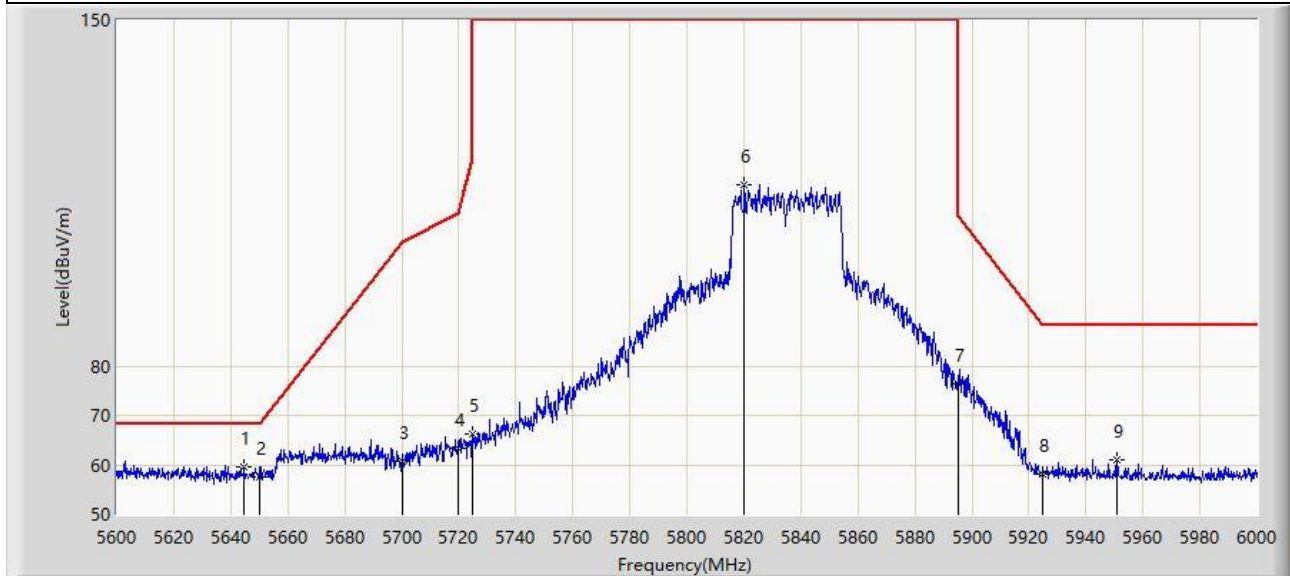


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5644.600	59.675	54.794	-8.525	68.200	4.881	PK
2		5650.000	57.466	52.570	-10.734	68.200	4.896	PK
3		5700.000	60.738	55.473	-44.462	105.200	5.265	PK
4		5720.000	63.231	58.140	-47.569	110.800	5.091	PK
5		5725.000	66.087	61.044	-56.113	122.200	5.043	PK
6		5820.200	116.658	111.287	N/A	N/A	5.372	PK
7		5895.000	76.365	71.025	-33.835	110.200	5.340	PK
8		5925.000	58.232	52.678	-29.968	88.200	5.554	PK
9		5950.800	61.018	55.568	-27.182	88.200	5.450	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5835 MHz	

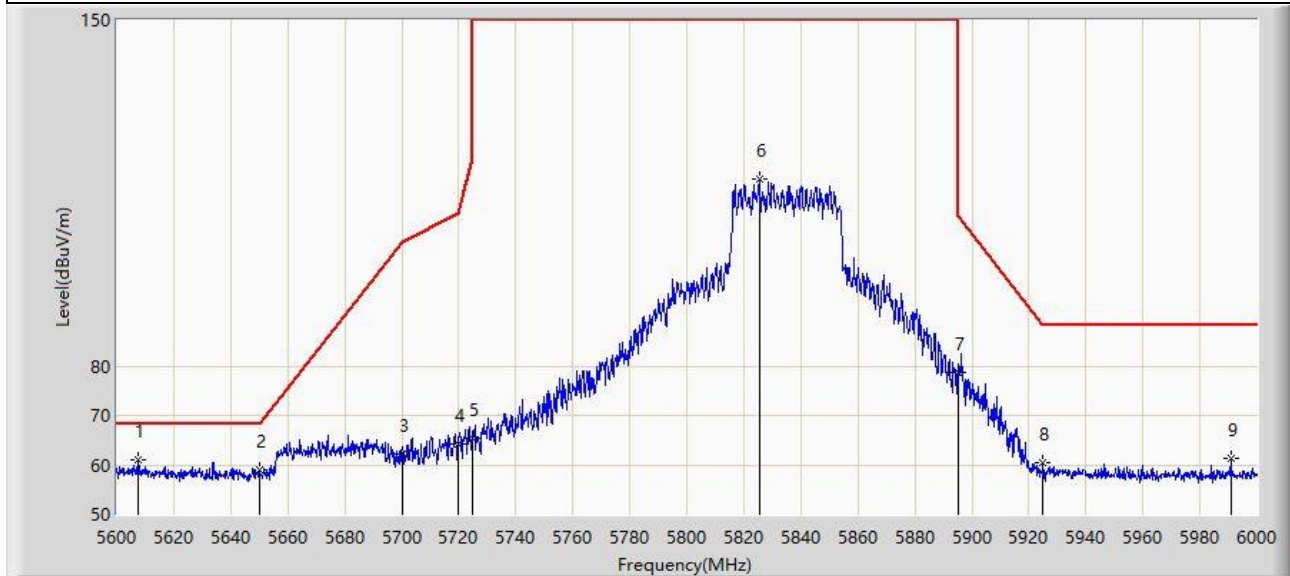


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5607.400	60.881	55.556	-7.319	68.200	5.324	PK
2		5650.000	59.069	54.173	-9.131	68.200	4.896	PK
3		5700.000	62.292	57.027	-42.908	105.200	5.265	PK
4		5720.000	64.312	59.221	-46.488	110.800	5.091	PK
5		5725.000	65.433	60.390	-56.767	122.200	5.043	PK
6		5825.400	117.760	112.402	N/A	N/A	5.358	PK
7		5895.000	78.795	73.455	-31.405	110.200	5.340	PK
8		5925.000	60.313	54.759	-27.887	88.200	5.554	PK
9		5990.800	61.191	55.756	-27.009	88.200	5.436	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5875 MHz	

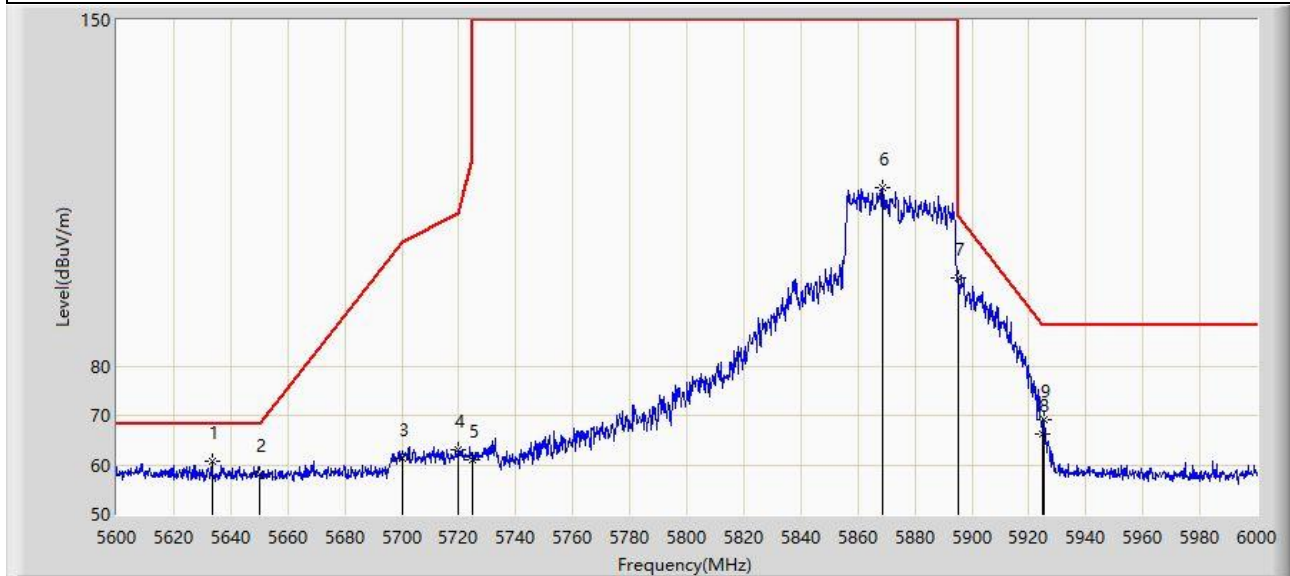


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5633.400	60.712	55.797	-7.488	68.200	4.914	PK
2		5650.000	58.044	53.148	-10.156	68.200	4.896	PK
3		5700.000	61.326	56.061	-43.874	105.200	5.265	PK
4		5720.000	63.087	57.996	-47.713	110.800	5.091	PK
5		5725.000	60.969	55.926	-61.231	122.200	5.043	PK
6		5868.800	116.151	110.621	N/A	N/A	5.531	PK
7		5895.000	97.934	92.594	-12.266	110.200	5.340	PK
8		5925.000	66.143	60.589	-22.057	88.200	5.554	PK
9		5925.400	69.229	63.677	-18.971	88.200	5.552	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5875 MHz	

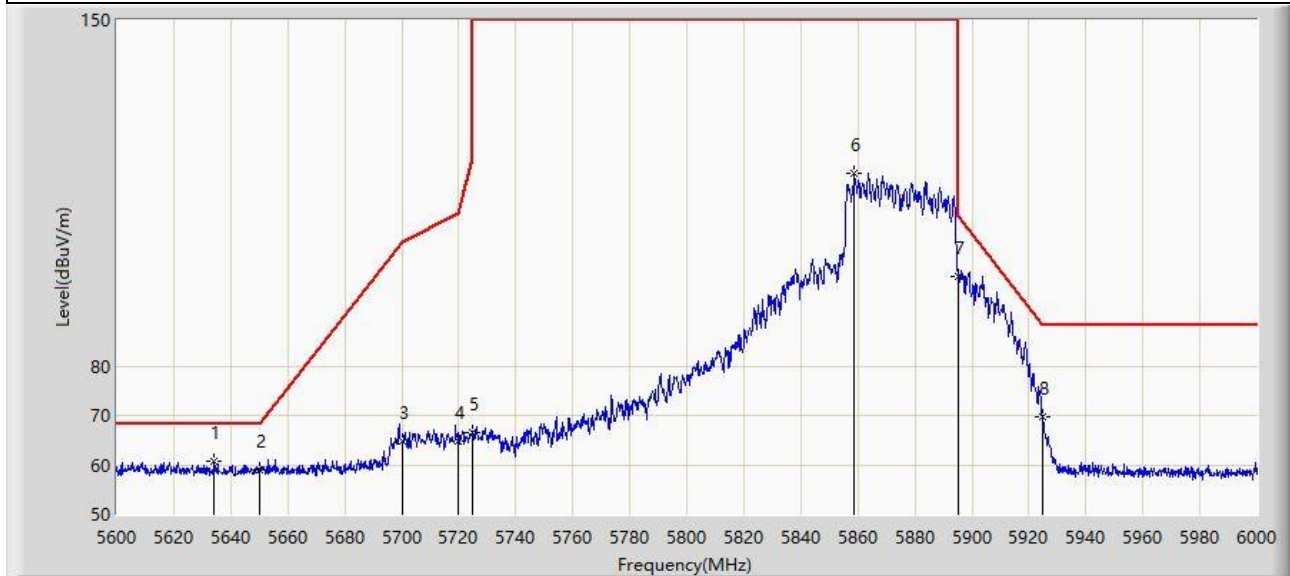


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5634.200	60.768	55.859	-7.432	68.200	4.909	PK
2		5650.000	58.897	54.001	-9.303	68.200	4.896	PK
3		5700.000	64.748	59.483	-40.452	105.200	5.265	PK
4		5720.000	64.904	59.813	-45.896	110.800	5.091	PK
5		5725.000	66.540	61.497	-55.660	122.200	5.043	PK
6		5858.800	118.869	113.286	N/A	N/A	5.583	PK
7		5895.000	98.025	92.685	-12.175	110.200	5.340	PK
8		5925.000	69.754	64.200	-18.446	88.200	5.554	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5855 MHz	

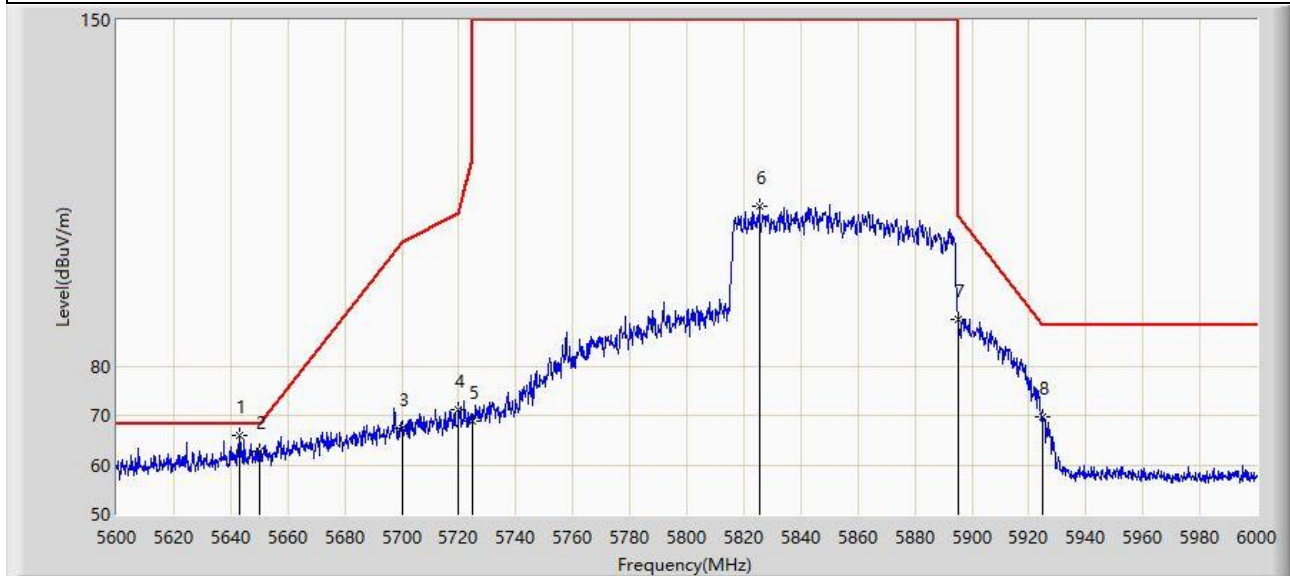


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5643.000	65.803	60.927	-2.397	68.200	4.876	PK
2		5650.000	62.676	57.780	-5.524	68.200	4.896	PK
3		5700.000	67.463	62.198	-37.737	105.200	5.265	PK
4		5720.000	71.160	66.069	-39.640	110.800	5.091	PK
5		5725.000	68.904	63.861	-53.296	122.200	5.043	PK
6		5825.600	112.285	106.927	N/A	N/A	5.358	PK
7		5895.000	89.317	83.977	-20.883	110.200	5.340	PK
8		5925.000	69.854	64.300	-18.346	88.200	5.554	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-14
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5855 MHz	

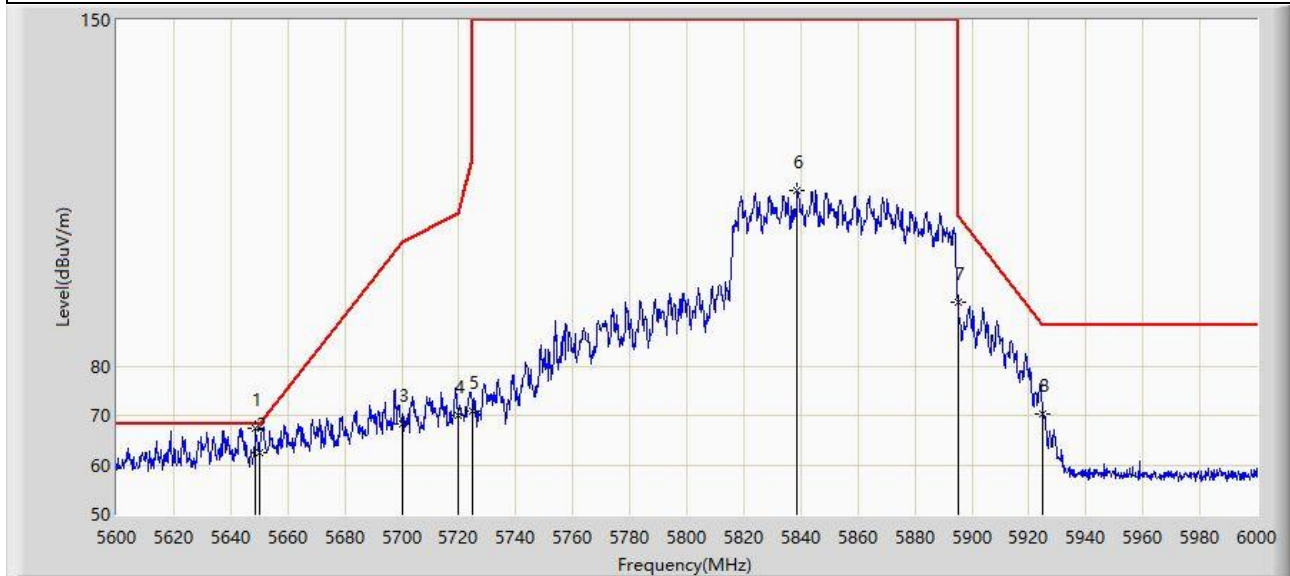


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5648.800	67.372	62.480	-0.828	68.200	4.892	PK
2		5650.000	62.450	57.554	-5.750	68.200	4.896	PK
3		5700.000	68.277	63.012	-36.923	105.200	5.265	PK
4		5720.000	70.085	64.994	-40.715	110.800	5.091	PK
5		5725.000	70.782	65.739	-51.418	122.200	5.043	PK
6		5838.800	115.481	109.927	N/A	N/A	5.555	PK
7		5895.000	93.006	87.666	-17.194	110.200	5.340	PK
8		5925.000	70.318	64.764	-17.882	88.200	5.554	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-09
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 5815 MHz	

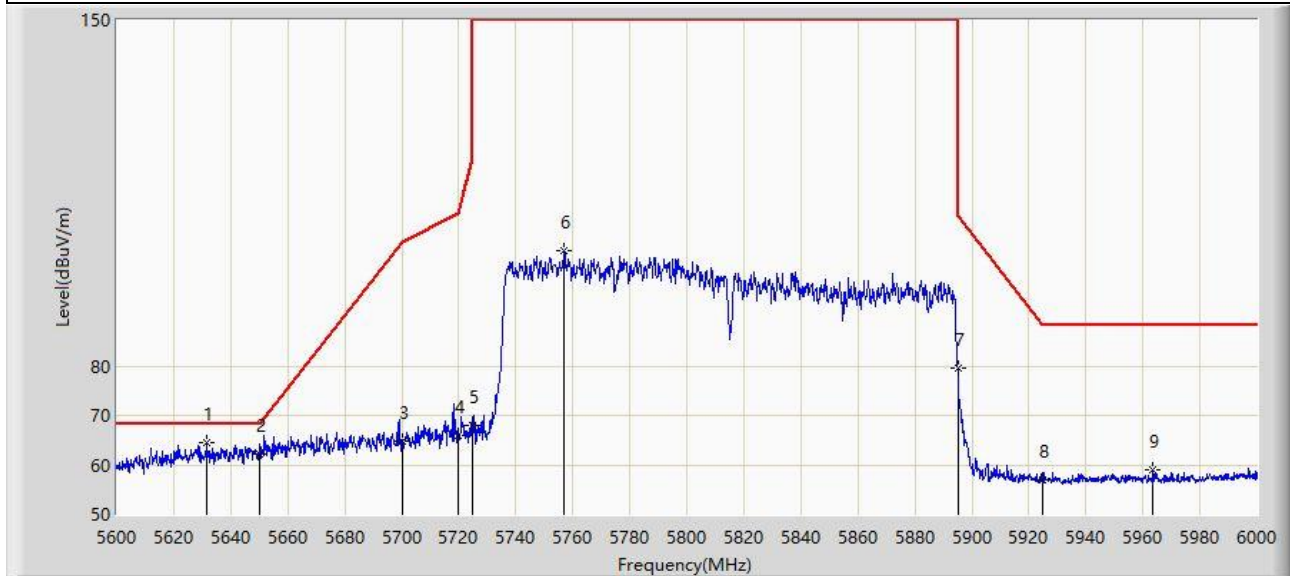


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5631.800	64.621	59.696	-3.579	68.200	4.925	PK
2		5650.000	62.169	57.273	-6.031	68.200	4.896	PK
3		5700.000	64.744	59.479	-40.456	105.200	5.265	PK
4		5720.000	66.071	60.980	-44.729	110.800	5.091	PK
5		5725.000	68.021	62.978	-54.179	122.200	5.043	PK
6		5757.000	103.313	97.936	N/A	N/A	5.378	PK
7		5895.000	79.498	74.158	-30.702	110.200	5.340	PK
8		5925.000	56.885	51.331	-31.315	88.200	5.554	PK
9		5963.600	58.850	53.529	-29.350	88.200	5.321	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-09
Limit: FCC_5.9G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 5815 MHz	

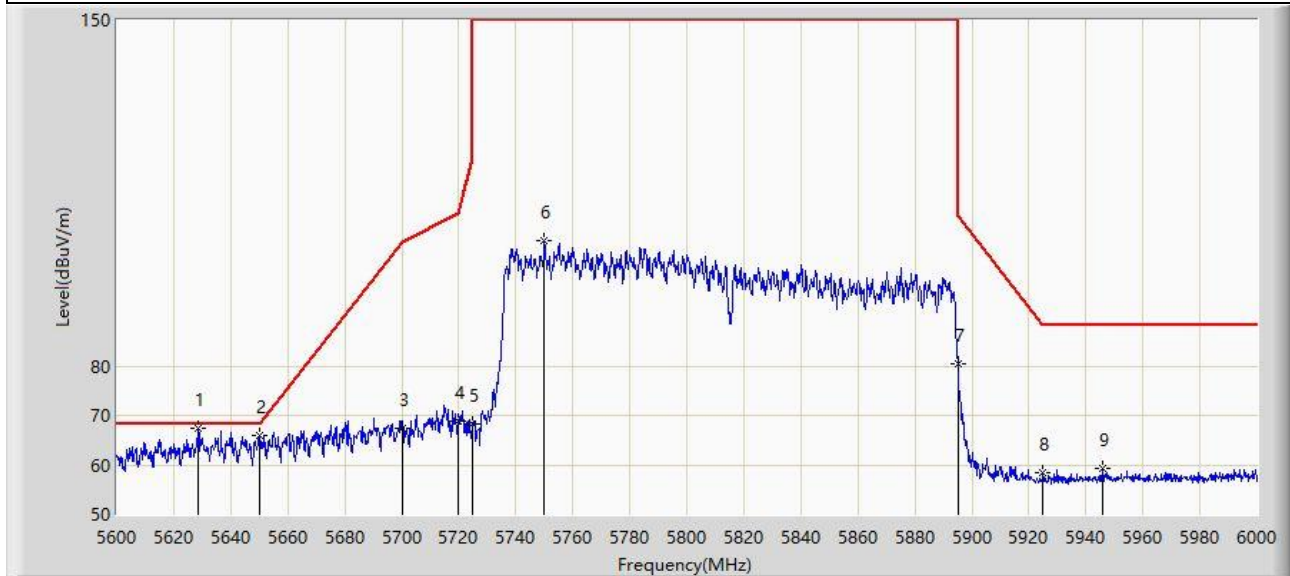

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5628.800	67.388	62.443	-0.812	68.200	4.945	PK
2		5650.000	65.932	61.036	-2.268	68.200	4.896	PK
3		5700.000	67.395	62.130	-37.805	105.200	5.265	PK
4		5720.000	68.905	63.814	-41.895	110.800	5.091	PK
5		5725.000	68.202	63.159	-53.998	122.200	5.043	PK
6		5750.000	105.322	100.029	N/A	N/A	5.292	PK
7		5895.000	80.468	75.128	-29.732	110.200	5.340	PK
8		5925.000	58.470	52.916	-29.730	88.200	5.554	PK
9		5945.800	59.289	53.809	-28.911	88.200	5.481	PK


Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.9 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-12-05
Temperature	19.6 °C	Humidity	34.2%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by 802.11a at 5845 MHz		

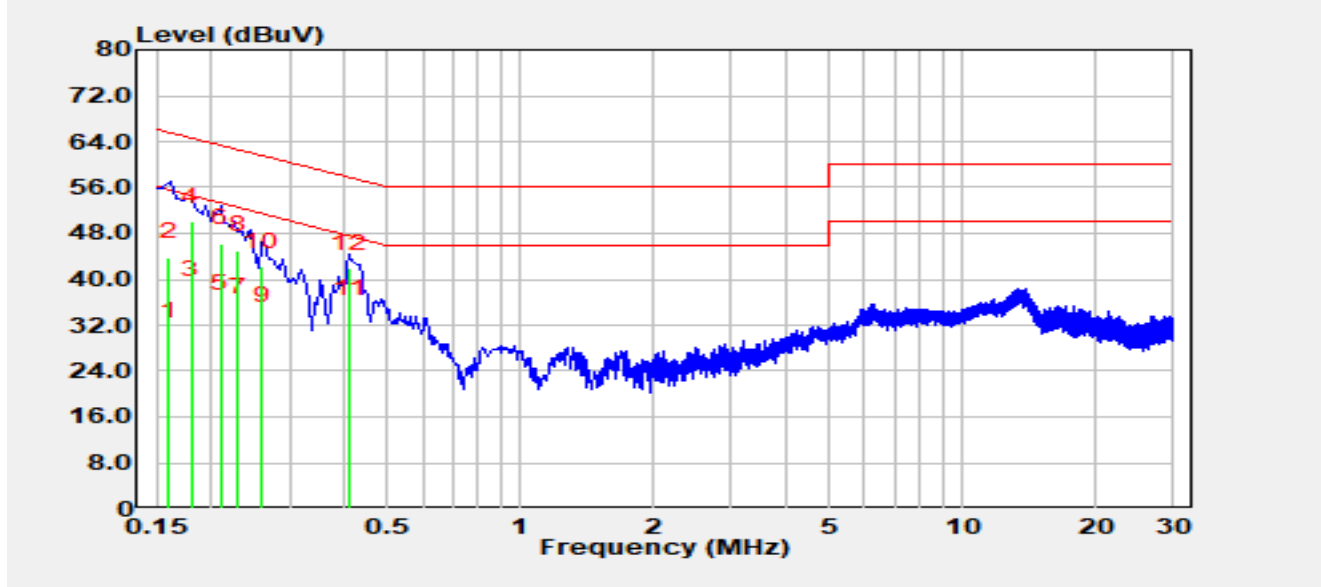


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.16	20.40	9.67	30.07	-25.39	55.46	Average
2		0.16	34.20	9.67	43.87	-21.59	65.46	QP
3		0.18	27.60	9.68	37.28	-17.21	54.49	Average
4		0.18	40.40	9.68	50.08	-14.41	64.49	QP
5		0.21	25.20	9.69	34.89	-18.32	53.21	Average
6		0.21	36.60	9.69	46.29	-16.92	63.21	QP
7		0.23	24.60	9.69	34.29	-18.16	52.45	Average
8		0.23	35.30	9.69	44.99	-17.46	62.45	QP
9		0.26	23.00	9.70	32.70	-18.73	51.43	Average
10		0.26	32.50	9.70	42.20	-19.23	61.43	QP
11	*	0.41	24.20	9.76	33.96	-13.69	47.65	Average
12		0.41	32.20	9.76	41.96	-15.69	57.65	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2025-12-05
Temperature	19.6 °C	Humidity	34.2%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 802.11a at 5845 MHz		

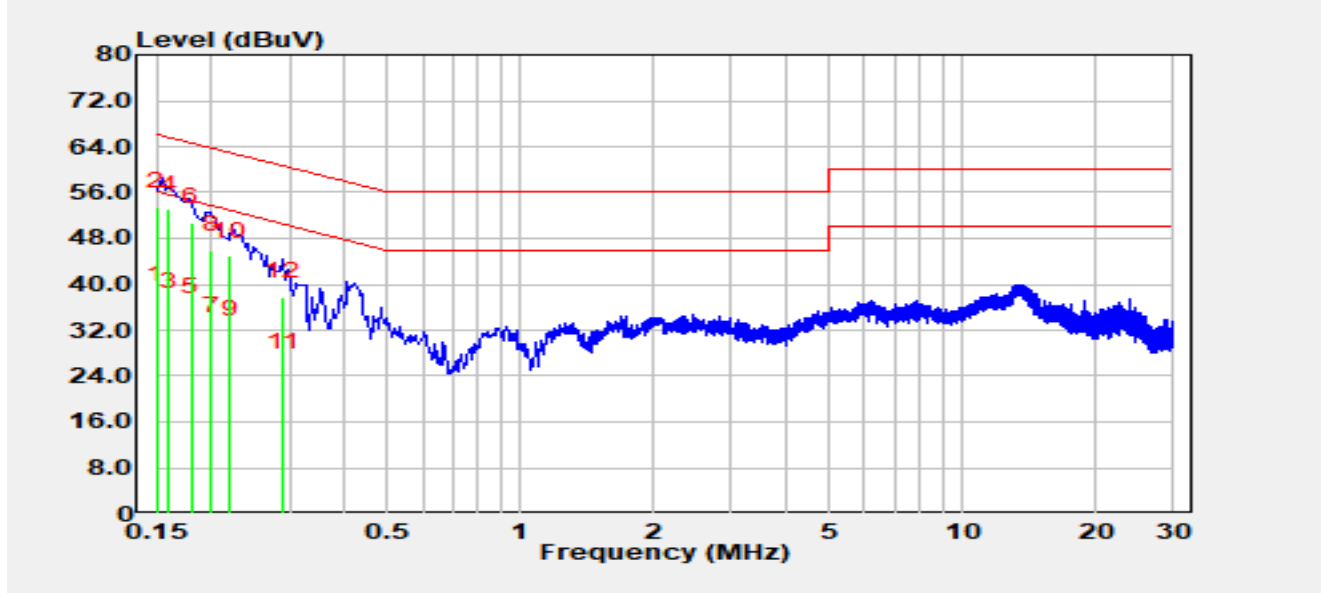

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	27.50	9.79	37.29	-18.71	56.00	Average
2		0.15	43.70	9.79	53.49	-12.51	66.00	QP
3		0.16	26.40	9.79	36.19	-19.27	55.46	Average
4	*	0.16	43.20	9.79	52.99	-12.47	65.46	QP
5		0.18	25.50	9.80	35.30	-19.19	54.49	Average
6		0.18	41.00	9.80	50.80	-13.69	64.49	QP
7		0.20	22.10	9.80	31.90	-21.71	53.61	Average
8		0.20	36.10	9.80	45.90	-17.71	63.61	QP
9		0.22	21.50	9.80	31.30	-21.52	52.82	Average
10		0.22	35.10	9.80	44.90	-17.92	62.82	QP
11		0.29	15.80	9.82	25.62	-24.91	50.52	Average
12		0.29	28.00	9.82	37.82	-22.71	60.52	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1044103-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1044103-UE" file.

_____ The End _____